

**ELEMENT WASHINGTON DC LLC**

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>**PART 27**
CLASS II PERMISSIVE CHANGE REPORT**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

5/11/2025 – 5/14/2025

Test Report Issue Date:

6/20/2025

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2504220045-04.A3L

FCC ID:**A3LSMF966B****APPLICANT:****Samsung Electronics Co., Ltd.****Application Type:**

Class II Permissive Change

Model:

SM-F966B

Additional Model(s):

SM-F966B/DS

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

27

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

Class II Permissive Change:

Please see FCC change document

Original Grant Date:

6/06/2025

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 1 of 37

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities.....	4
2.3	Test Configuration	4
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	TEST RESULTS	9
6.1	Summary	9
6.2	Conducted Output Power Data	11
6.3	Occupied Bandwidth	13
6.4	Band Edge Emissions at Antenna Terminal	18
6.5	Radiated Power (ERP/EIRP).....	27
6.6	Radiated Spurious Emissions Measurements	31
7.0	CONCLUSION.....	37

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 2 of 37

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 3 of 37

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF966B**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

This report is being issued as a Class II Permissive Change due to a pin-to-pin component change that is made. Full details are provided in the change description. The test data in this report demonstrates the continued compliance to Part 27.

Test Device Serial No.: 1737M, 1746M, 1748M, 1747M, 1744M, 1755M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), Wireless Power Transfer, UWB

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 6.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device uses an Adaptive Frame Switching (AFS) mechanism for 700 MHz and 800 MHz bands during certain conditions. With AFS, the Tx pathway can use Ant A only or Ant A + Ant C to improve performance. The results in this report will be formatted according to the following table. For cases that support both Ant A + Ant C and Ant A, only one set of conducted data is provided as AFS does not affect the conducted results regardless of configuration.

This device supports Antenna Switching Diversity (ASDiv) for multiple bands and can operate on two distinct antennas. Either antenna is used according to the DL/UL signal strength in the field to improve signal strength for receiving and transmitting. Testing was done on both antennas and is included in this report.

Band	Ant1	Ant2	Ant3
WCDMA1700	Ant A	-	-
LTE Band 66/4	Ant B	Ant G	-
LTE Band B71, B12, B13	Ant A+C	Ant E	Ant A
NR Band n70, n66	Ant B	Ant G	-
NR Band n71, n12	Ant A+C	Ant E	Ant A

Table 2-1. Antenna Naming Convention

This device supports three folder configurations: one is with folder fully open, one is where the folder is half open (90 degrees), and one is with folder closed. All configurations are tested, and the worst case radiated emissions data is shown in this report.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 4 of 37



2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version FAV0_F966UFAU0AYB3 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 5 of 37

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 6 of 37

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 7 of 37

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	AP2
-	AP1	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	AP2
-	ETS	Conducted Cable Set (40GHz)	2/25/2025	Annual	2/25/2026	ETS
-	LTx4	Licensed Transmitter Cable Set	2/25/2025	Annual	2/25/2026	LTx4
-	LTx5	Licensed Transmitter Cable Set	2/25/2025	Annual	2/25/2026	LTx5
EMCO	3116	Horn Antenna (18-40GHz)	7/5/2023	Biennial	7/5/2025	9203-2178
Espec	ESX-2CA	Environmental Chamber	11/20/2024	Biennial	11/20/2026	17620
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester / CMW A	12/10/2024	Annual	12/10/2025	167286
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/21/2024	Biennial	2/21/2026	A050307

Table 5-1. Test Equipment Calibration Table

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

Component	Serial Number
Keysight Directional Coupler, Model: 87300C	55300518
MCL 6dB Attenuator, Model: BW K62W44+	2013
MegaPhase Cable, Model: TM40-K1K1-36	19026201 002

Table 5-2. LTx4 Conducted Cable Set Components

Component	Serial Number
Keysight Directional Coupler, Model: 87300C	55300519
MCL 6dB Attenuator, Model: BW-K62W44+	1905
MegaPhase Cable, Model: TM40-K1K1-36	19026201 001

Table 5-3. LTx5 Conducted Cable Set Components

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 8 of 37

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF966B
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power*	2.1046(a), 2.1046(c)	N/A	PASS	Section 6.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 6.3
	Conducted Band Edge / Spurious Emissions (LTE Band 4, 66; NR Band n70, n66)	2.1051, 27.53(h)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 6.4
RADIATED	Equivalent Isotropic Radiated Power (LTE Band 4, 66; NR Band n70, n66)	27.50(d)(4)	≤ 1 Watt max. EIRP	PASS	Section 6.5
	Radiated Spurious Emissions (LTE Band 4, 66; NR Band n70, n66)	2.1053, 27.53(h)(1)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 6.6

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 6-1. Summary of Test Results – FCC

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v2.3.0 .
- 5) For the purposes of this report the compliance of antenna 2 [Ant G] was assessed for LTE and NR operation to determine continued compliance in line with a Class II Permissive Change. Please see Table 6-3, Table 6-4, and Table 6-4 for a summary of results detailed in this report compared to that of the original grant.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 9 of 37

FCC Rules	Test Item	Test Case	Units	Limit	Original Grant	C2PC
27	Conducted Output Power	Mid Ch. 1413	dBm	N/A	24.40	24.34
	Occupied Bandwidth	Mid Ch. 1413	MHz	N/A	4.161	4.172
	Conducted Band Edge	Low Ch. 1312	dBm	-13	-21.97	-21.51
		Low Ch. 1312, Extended	dBm	-13	-14.64	-15.02
	EIRP	High Ch. 1513	dBm	30	22.53	22.42
	RSE	High Ch. 1513	dBm	-13	-52.77	-51.87

Table 6-2. Class II Permissive Change - Test Results Summary – WCDMA B4 - Ant2

FCC Rules	Test Item	Test Case	Units	Limit	Original Grant	C2PC
27	Conducted Output Power	Low Ch. 132072, 20MHz, QPSK	dBm	N/A	25.37	25.13
	Occupied Bandwidth	Mid Ch. 132322, 20MHz, QPSK	MHz	N/A	18.047	18.021
	Conducted Band Edge	Low Ch. 131987, 3MHz, QPSK	dBm	-13	-17.64	-17.93
		Low Ch. 131987, 3MHz, QPSK, Extended	dBm	-13	-19.50	-21.06
	EIRP	Mid Ch. 132322, 20MHz, QPSK	dBm	30	23.02	22.99
	RSE	Low Ch. 132072, 20MHz, QPSK	dBm	-13	-50.76	-51.18

Table 6-3. Class II Permissive Change - Test Results Summary - LTE Band 66/4 - Ant2

FCC Rules	Test Item	Test Case	Units	Limit	Original Grant	C2PC
27	Conducted Output Power	Low Ch. 346500, 45MHz, BPSK	dBm	N/A	24.36	24.43
	Occupied Bandwidth	Mid Ch. 349000, 45MHz, BPSK	MHz	N/A	43.295	43.185
	Conducted Band Edge	Low Ch. 343000, 10MHz, BPSK	dBm	-13	-25.20	-25.04
		Low Ch. 343000, 10MHz, BPSK, Extended	dBm	-13	-17.07	-16.78
	EIRP	Low Ch. 346500, 45MHz, BPSK	dBm	30	21.50	22.37
	RSE	Low Ch. 374500, 45MHz, QPSK	dBm	-13	-56.14	-57.12

Table 6-4. Class II Permissive Change - Test Results Summary - NR Band n66 – Ant2

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 10 of 37

6.2 Conducted Output Power Data

Test Overview

All emissions are measured with a callbox connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 6-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 11 of 37

Bandwidth	Channel	Frequency [MHz]	Conducted Power [dBm]
5 MHz	1312	1712.4	23.74
	1413	1732.6	24.34
	1513	1752.6	23.98

Table 6-5. Max Conducted Power Test Results – WCDMA AWS - Ant2

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 50	25.13
		132322	1745.0	1 / 0	24.97
		132572	1770.0	1 / 99	24.64

Table 6-6. Max Conducted Power Test Results - LTE 66/4 - Ant2

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	340500	1702.5	1 / 77	24.43
	QPSK	340500	1702.5	1 / 1	24.44
	16-QAM	340500	1702.5	1 / 77	23.39

Table 6-7. Max Conducted Power Test Results - NR n66 - Ant2

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 12 of 37

6.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

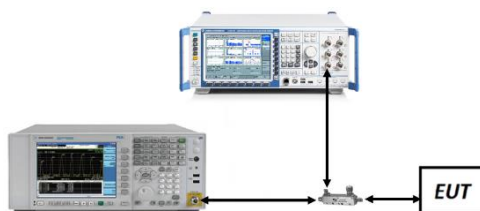



Figure 6-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 13 of 37



WCDMA AWS - ANT2

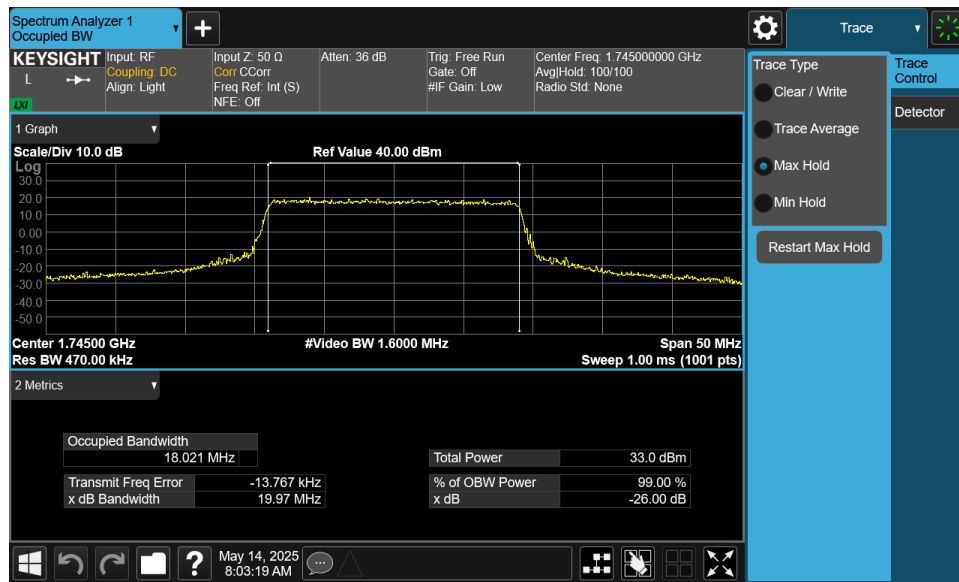

Plot 6-1. Occupied Bandwidth Plot (WCDMA, Ch. 1413 - ANT2)


FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 14 of 37

LTE Band 66/4 - ANT2

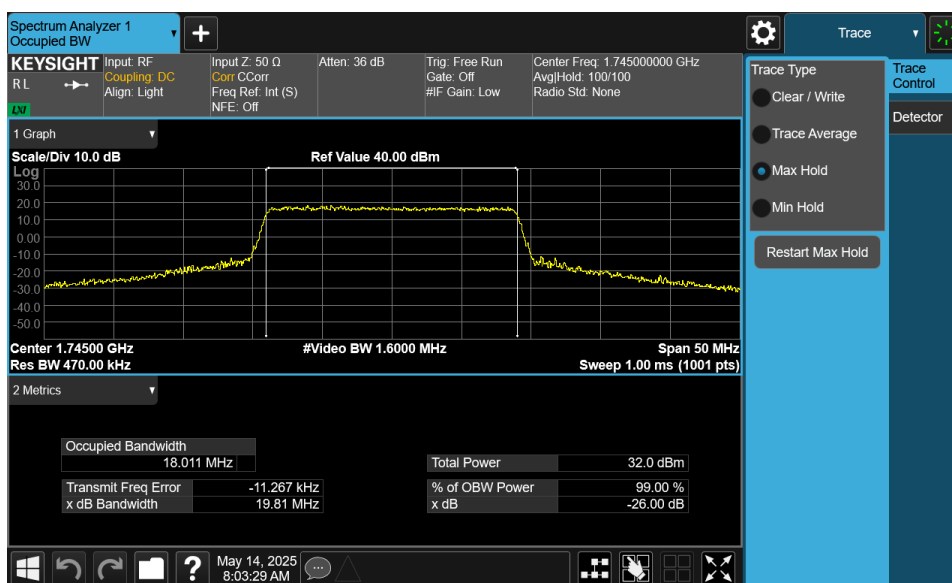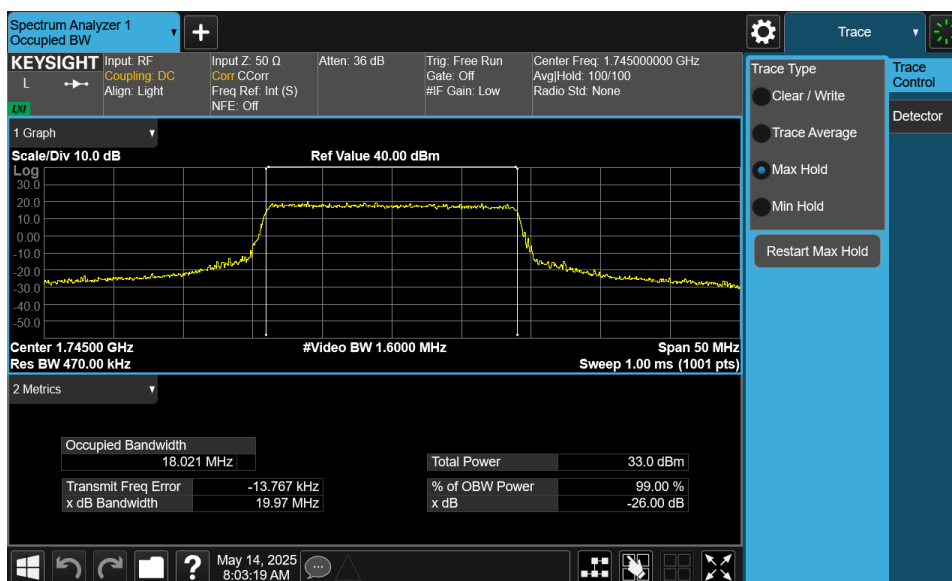


FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 15 of 37

NR Band n66 – ANT2

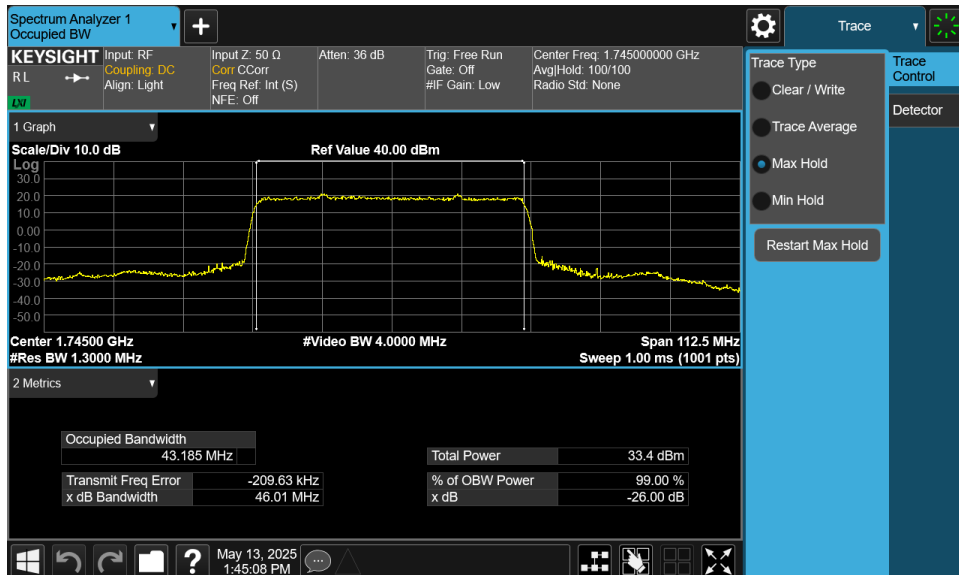


Plot 6-4. Occupied Bandwidth Plot (NR Band n66 - 45.0MHz DFT-s-OFDM BPSK - Full RB – ANT2)

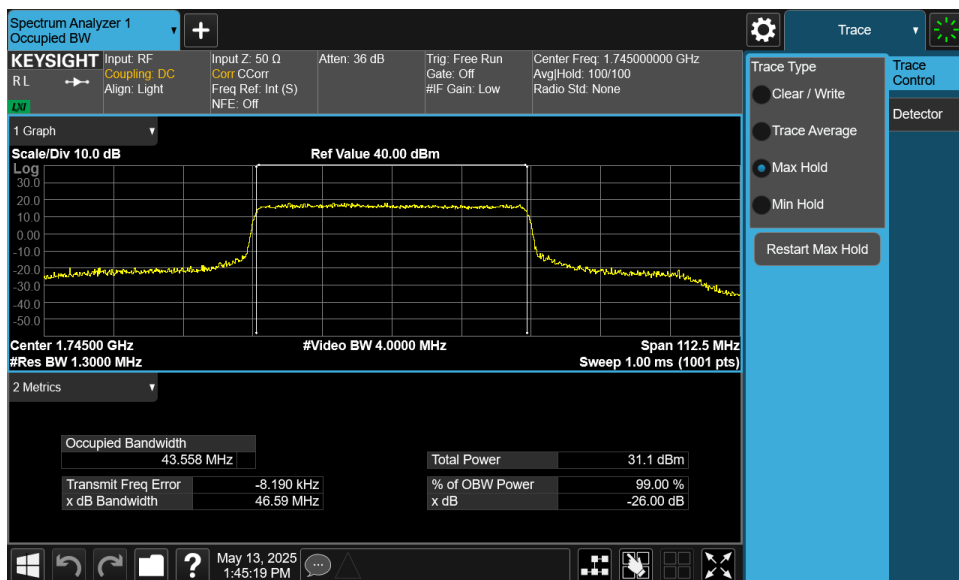

Plot 6-5. Occupied Bandwidth Plot (NR Band n66 - 45.0MHz CP-OFDM QPSK - Full RB – ANT2)

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 16 of 37

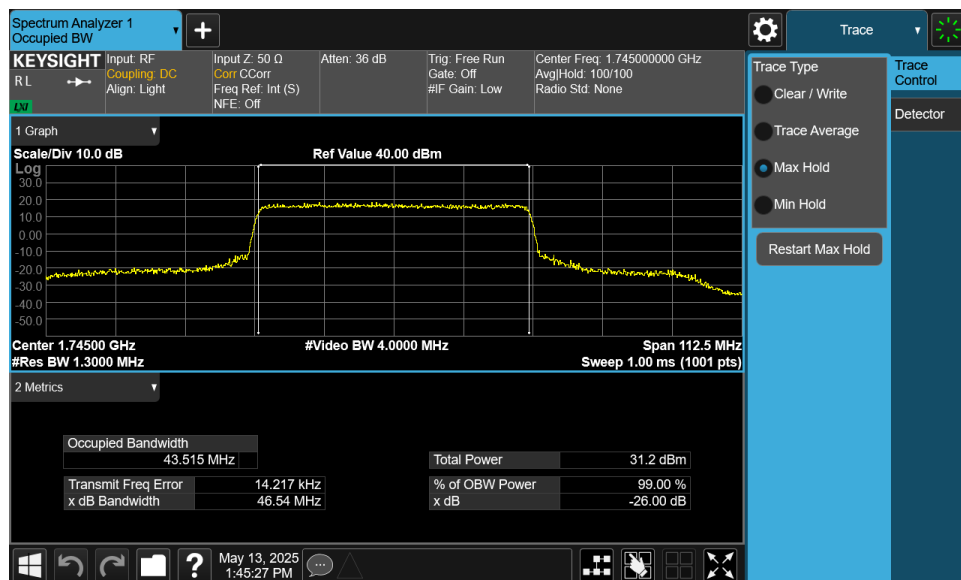

Plot 6-6. Occupied Bandwidth Plot (NR Band n66 - 45.0MHz CP-OFDM 16QAM - Full RB - ANT2)

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 - 5/14/2025	EUT Type: Portable Handset	Page 17 of 37

6.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

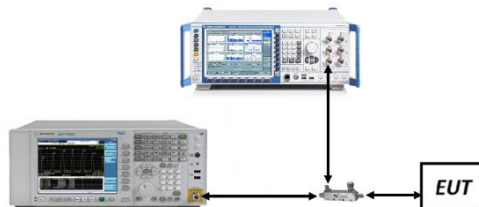


Figure 6-3. Test Instrument & Measurement Setup


FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 18 of 37

Test Notes

1. Per 27.53(h) and RSS-139(5.6) for AWS band operation, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 19 of 37

WCDMA AWS – ANT2

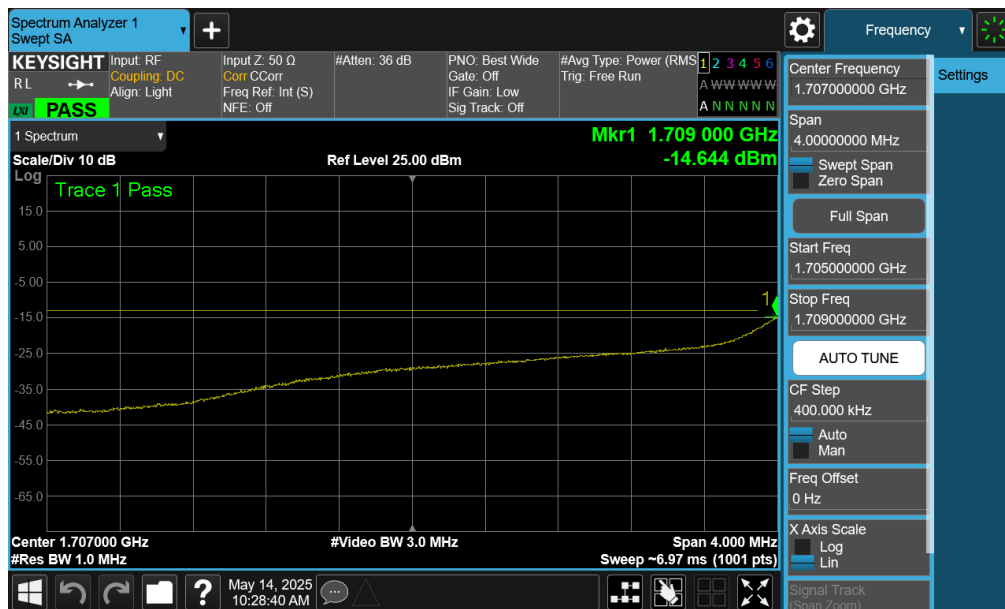

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 20 of 37




Plot 6-9. Upper Band Edge Plot (WCDMA AWS – Ch. 1513 - ANT2)




Plot 6-10. Upper Extended Band Edge Plot (WCDMA AWS – Ch. 1513 - ANT2)

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 21 of 37

LTE Band 66/4 – ANT2

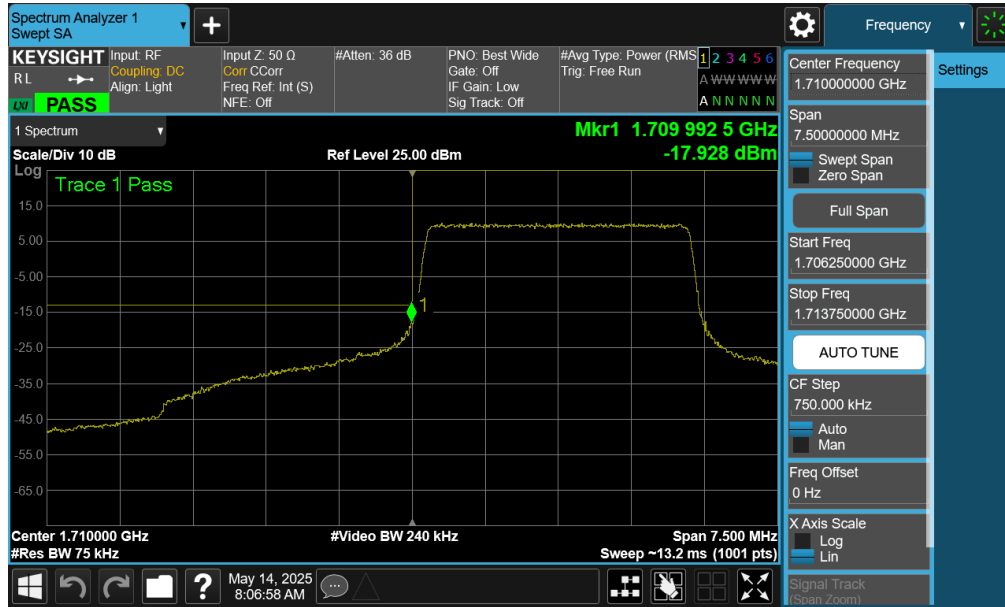


Plot 6-11. Lower Band Edge Plot (LTE Band 66/4 - 3MHz QPSK – Full RB - ANT2)

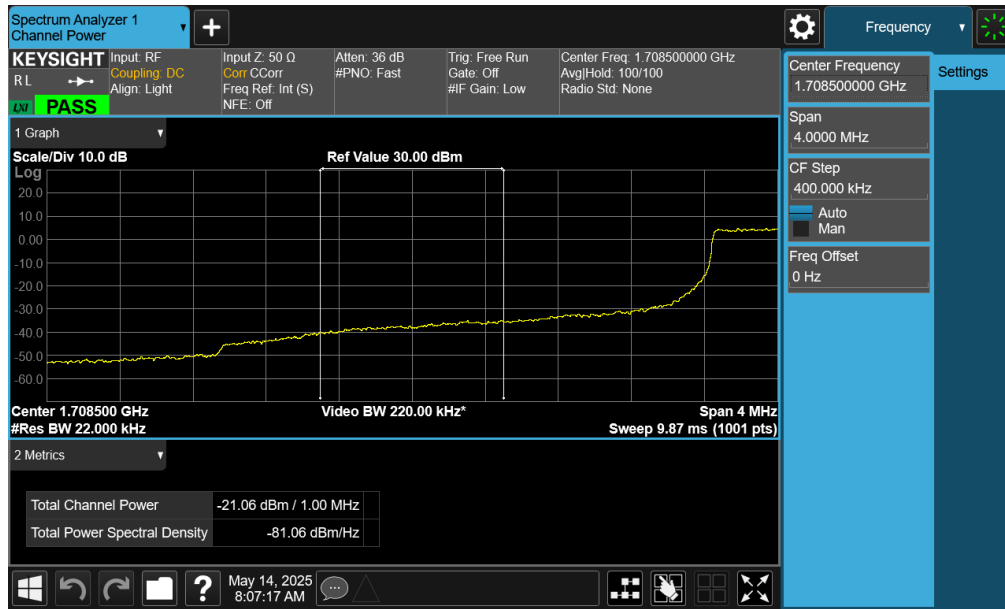

Plot 6-12. Lower Extended Band Edge Plot (LTE Band 66/4 - 3MHz QPSK – Full RB - ANT2)


FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 22 of 37

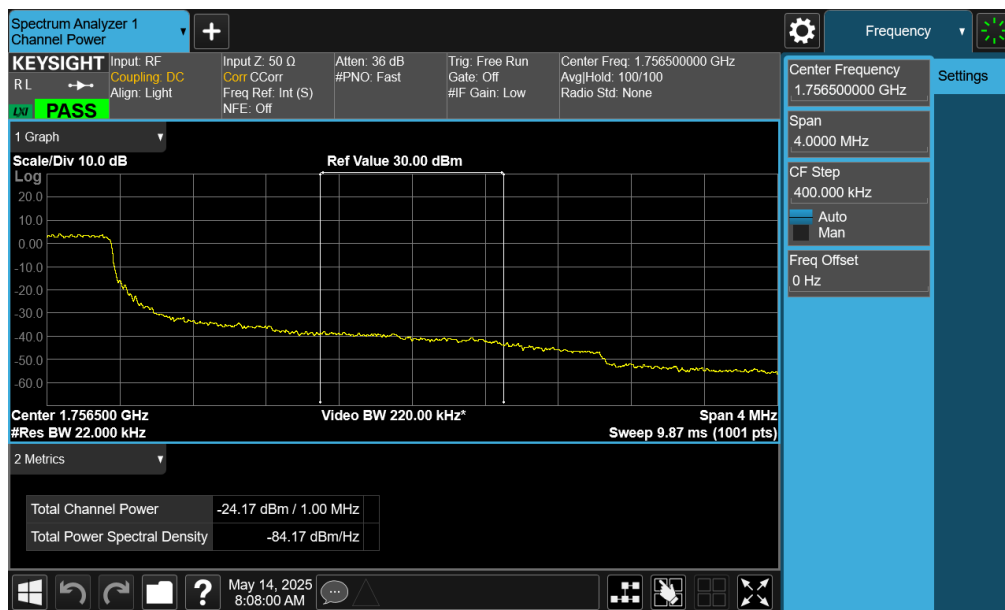

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 23 of 37




Plot 6-15. Upper Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB - ANT2)

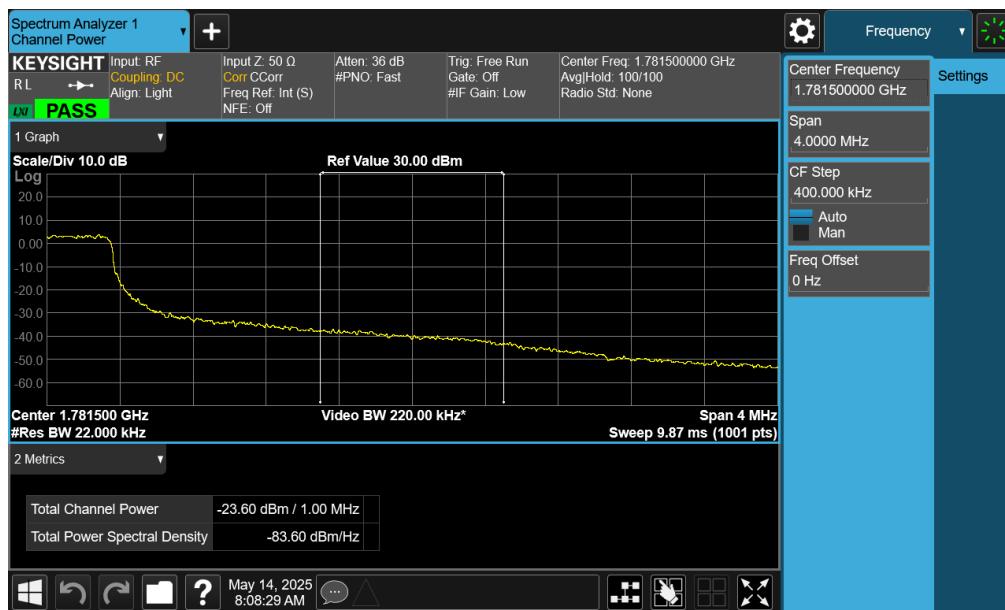


Plot 6-16. Upper Extended Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB - ANT2)

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 24 of 37

NR Band n66 – ANT2


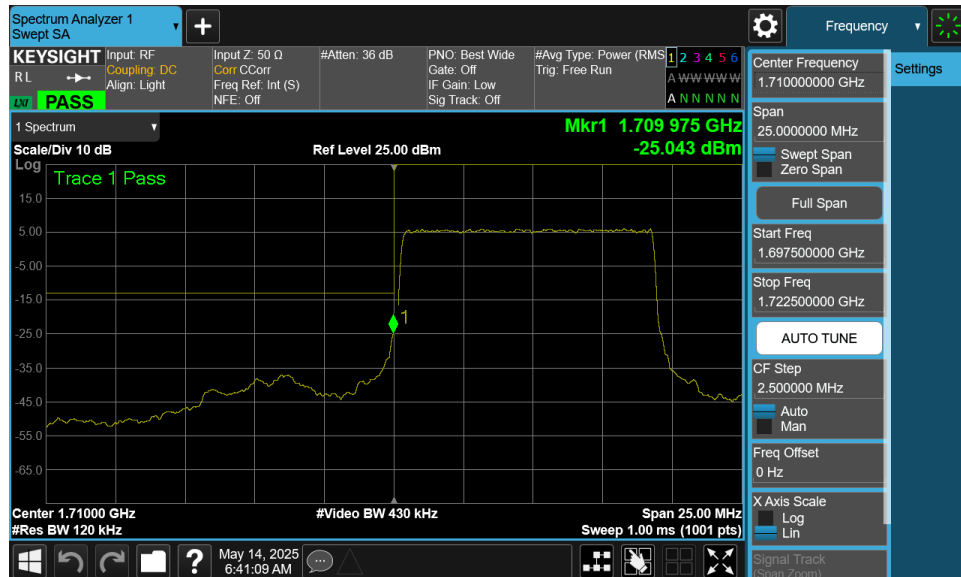


Plot 6-17. Lower Band Edge Plot (NR Band n66 – 10.0MHz - Full RB - ANT2)

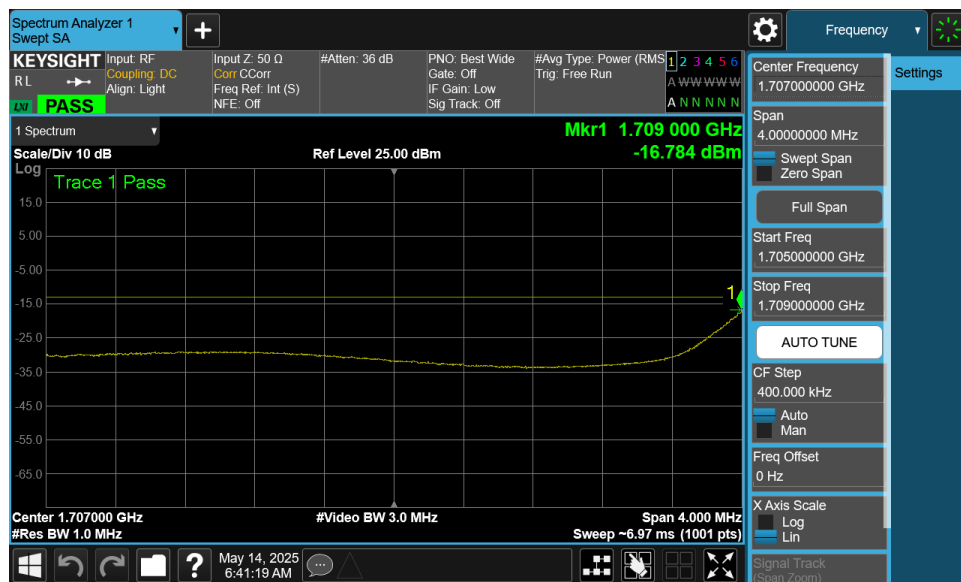

Plot 6-18. Lower Extended Band Edge Plot (NR Band n66 – 10.0MHz - Full RB - ANT2)

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 25 of 37

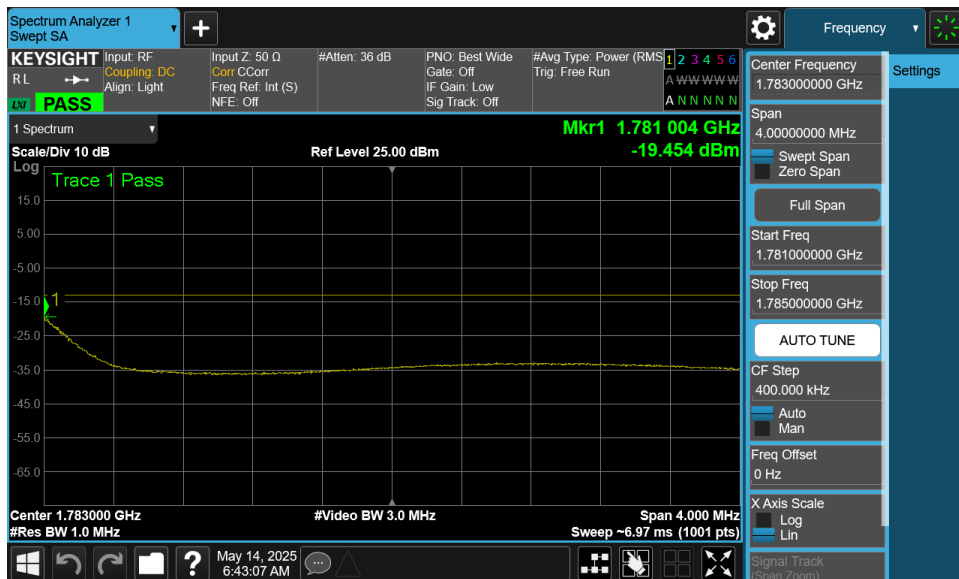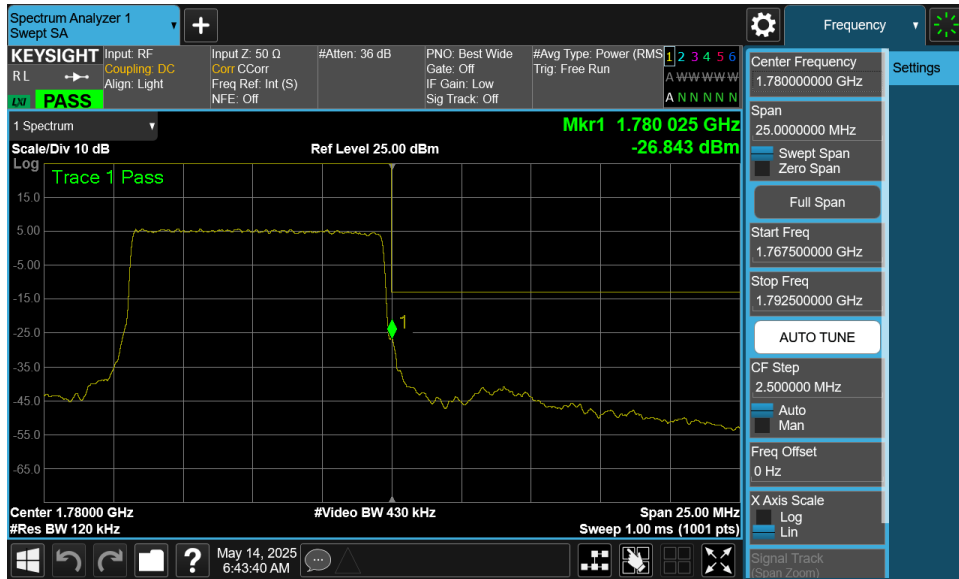

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 26 of 37

6.5 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 27 of 37

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

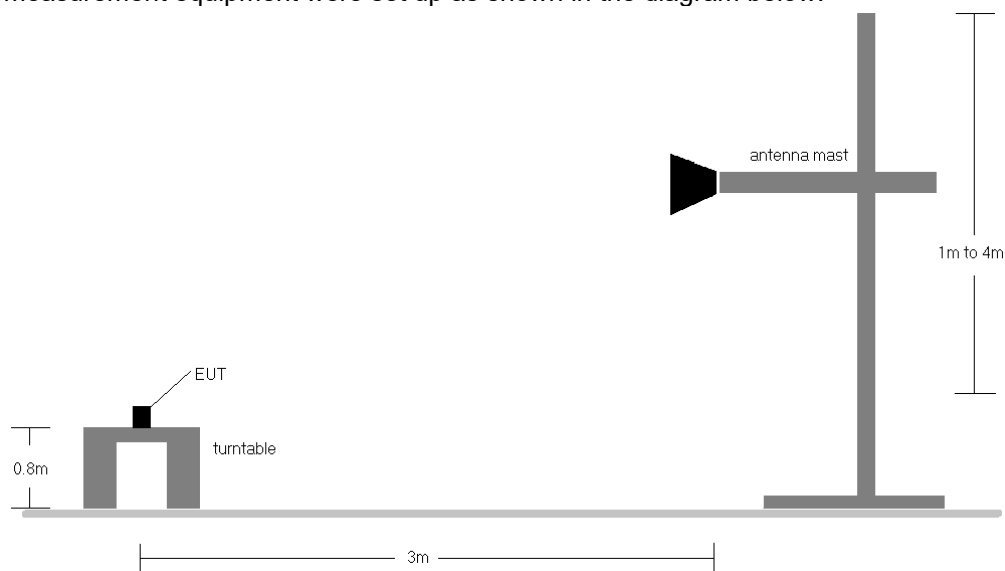


Figure 6-4. Radiated Test Setup <1GHz

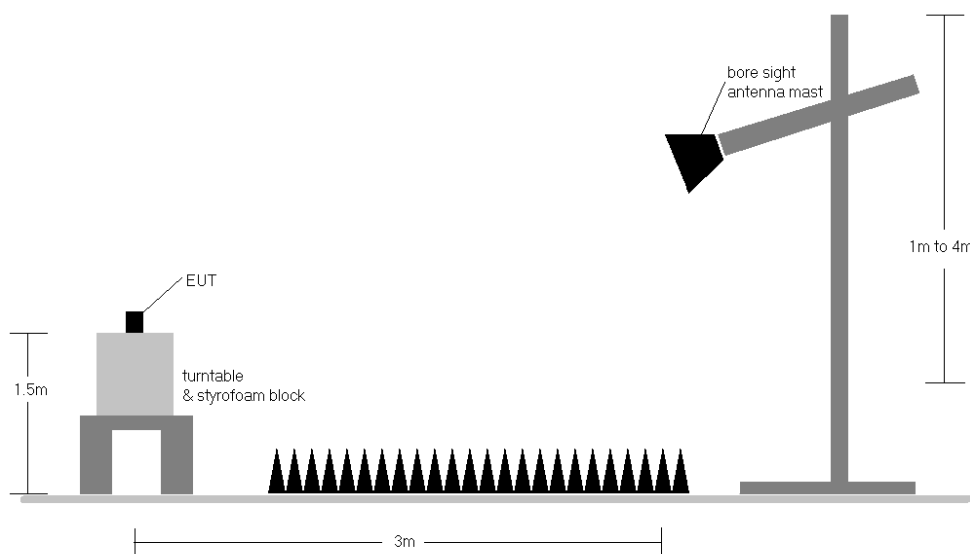


Figure 6-5. Radiated Test Setup >1GHz

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 28 of 37

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 29 of 37

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1752.60	WCDMA1700	H	284	31	19.59	2.83	22.42	0.175	30.00	-7.58

Table 6-8. EIRP Data (WCDMA AWS) – Ant2

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1745.00	H	287	35	2.90	1 / 99	20.09	22.99	0.199	30.00	-7.01

Table 6-9. EIRP Data (LTE Band 66/4) – Ant2

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
15 MHz	$\pi/2$ BPSK	1702.50	H	102	41	2.90	1 / 77	20.84	23.74	0.237	30.00	-6.26
	QPSK	1702.50	H	102	41	2.90	1 / 77	20.78	23.68	0.233	30.00	-6.32

Table 6-10. EIRP Data (NR Band n66) – Ant2

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 30 of 37

6.6 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 31 of 37

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

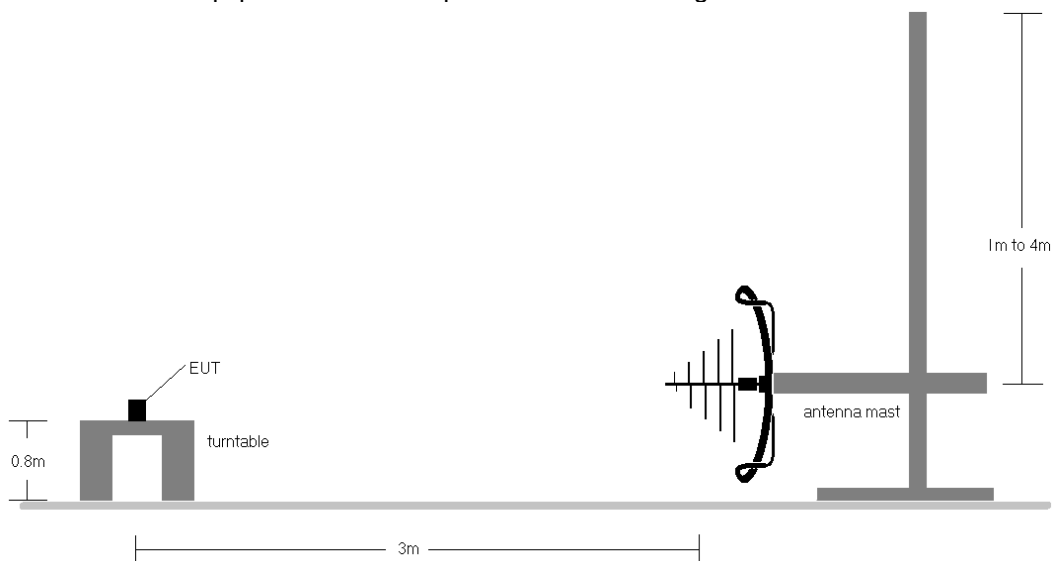


Figure 6-6. Test Instrument & Measurement Setup < 1GHz

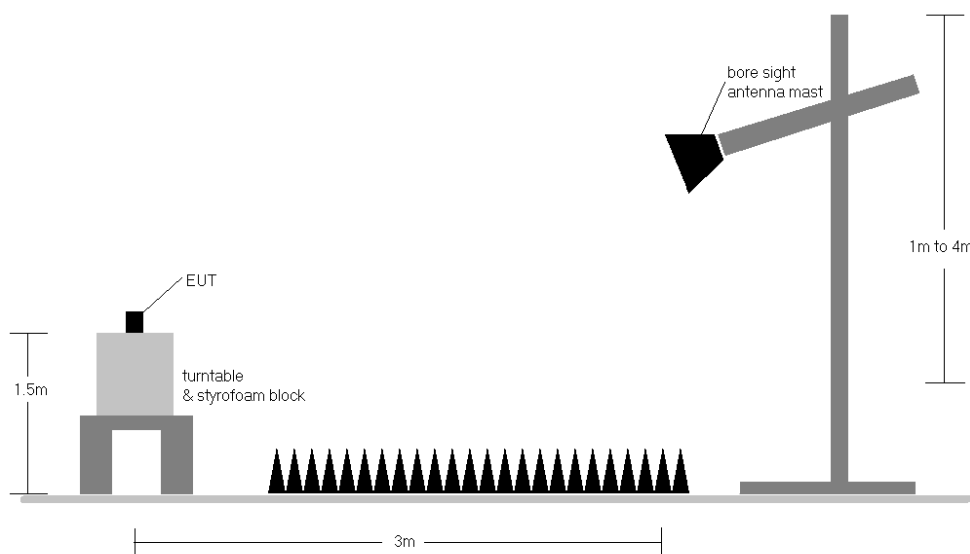


Figure 6-7. Test Instrument & Measurement Setup > 1GHz

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 32 of 37

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 33 of 37



WCDMA AWS – Ant2

Mode:	WCDMA RMC
Channel:	1513
Frequency (MHz):	1752.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3505.20	H	-	-	-73.22	5.51	39.29	-55.97	-13.00	-42.97
5257.80	H	392	204	-70.82	7.20	43.38	-51.87	-13.00	-38.87
7010.40	H	-	-	-76.87	11.71	41.84	-53.42	-13.00	-40.42
8763.00	H	-	-	-77.96	13.84	42.88	-52.38	-13.00	-39.38
10515.60	H	-	-	-78.84	16.42	44.58	-50.68	-13.00	-37.68

Table 6-11. Radiated Spurious Data (WCDMA AWS – High Channel) – Ant2

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 34 of 37



LTE Band 66/4 – Ant2

Bandwidth (MHz):	20
Frequency (MHz):	1720
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5160.00	H	182	319	-70.50	7.58	44.08	-51.18	-13.00	-38.18

Table 6-12. Radiated Spurious Data (LTE Band 66/4 – Low Channel) – Ant2

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 35 of 37

NR Band n66 – Ant2

Bandwidth (MHz):	40
Frequency (MHz):	1730
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5190.00	H	-	-	-76.06	7.20	38.14	-57.12	-13.00	-44.12

Table 6-13. Radiated Spurious Data (NR Band n66 – Low Channel) – Ant2

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 36 of 37

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF966B** complies with all the requirements of Part 27 of the FCC rules. After additional testing it is concluded that the component change detailed in the FCC Change Document does not meaningfully affect compliance.

FCC ID: A3LSMF966B	PART 27 CLASS II PERMISSIVE CHANGE		Approved by: Technical Manager
Test Report S/N: 1M2504220045-04.A3L	Test Dates: 5/11/2025 – 5/14/2025	EUT Type: Portable Handset	Page 37 of 37