ELEMENT WASHINGTON DC LLC
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.381.1520
http://www.element.com

MEASUREMENT REPORT
FCC Part 15.407 802.11ax/be WiFi 6E (OFDMA)

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
02/24/2025 – 05/05/2025
Test Report Issue Date:
5/23/2025
Test Site/Location:
Element lab., Columbia, MD, USA
Test Report Serial No.:
1M2502270019-18-R1.A3L

FCC ID:	**A3LSMF966B**
APPLICANT:	**Samsung Electronics Co., Ltd.**

Application Type:	Certification
Model:	SM-F966B
Additional Model(s):	SM-F966B/DS
EUT Type:	Portable Handset
Frequency Range:	5935 – 7115MHz
Modulation Type:	OFDMA
FCC Classification:	15E 6GHz Low Power Dual Client (6CD)
FCC Rule Part(s):	Part 15 Subpart E (15.407)
Test Procedure(s):	ANSI C63.10-2013, KDB 987594 D02 v03, KDB 648474 D03 v01r04, KDB 484596 D01 v03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2502270019-18-R1.A3L) supersedes and replaces all previously issued test reports on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President

ACCREDITED
CERT #2041.01

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS

1 INTRODUCTION 5
1.1 Scope 5
1.2 Element Test Location 5
1.3 Test Facility / Accreditations 5
2 PRODUCT INFORMATION 6
2.1 Equipment Description 6
2.2 Device Capabilities 6
2.3 Antenna Description 10
2.4 Test Configuration 10
2.5 Software and Firmware 11
2.6 EMI Suppression Device(s) / Modifications 11
3 DESCRIPTION OF TESTS 12
3.1 Evaluation Procedure 12
3.2 AC Line Conducted Emissions 12
3.3 Radiated Emissions 13
3.4 Environmental Conditions 13
4 ANTENNA REQUIREMENTS 14
5 MEASUREMENT UNCERTAINTY 15
6 TEST EQUIPMENT CALIBRATION DATA 16
7 TEST RESULTS 18
7.1 Summary 18
7.2 26dB Bandwidth Measurement 20
7.2.1 MIMO Antenna-1 Bandwidth Measurements - (Partial Tones) 27
7.2.2 MIMO Antenna-1 Bandwidth Measurements - (Full Tones) 35
7.2.3 MIMO Antenna-2 Bandwidth Measurements – (Partial Tones) 39
7.2.4 MIMO Antenna-2 Bandwidth Measurements – (Full Tones) 47
7.3 UNII Output Power Measurement 51
7.4 Maximum Power Spectral Density 74
7.4.1 MIMO Antenna-1 Power Spectral Density Measurements 79
7.4.2 MIMO Antenna-2 Power Spectral Density Measurements 91
7.5 In-Band Emissions 104
7.5.1 MIMO Antenna-1 In-Band Emission Measurements 112
7.5.2 MIMO Antenna-2 In-Band Emission Measurements 124
7.6 Radiated Emission Measurements 136
7.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones) 140
7.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones) 144
7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T) 148
7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T) 149
7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T) 150

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6.6 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T) 151
7.6.7 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T) 152
7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T) 153
7.6.9 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T) 154
7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T) 155
7.6.11 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T) 156
7.6.12 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T) 157
8 CONCLUSION 158

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	Antenna-1		Antenna-2		MIMO	
			Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	5	5935 - 6415	16.98	12.30	7.64	8.83	46.12	16.64
	6	6435 - 6515	2.18	3.39	0.88	-0.55	6.01	7.79
	7	6535 - 6875	11.99	10.79	10.84	10.35	26.04	14.16
	8	6895 - 7115	2.69	4.30	4.08	6.11	12.70	11.04
40	5	5965 - 6405	17.74	12.49	7.62	8.82	43.24	16.36
	6	6445 - 6525	3.71	5.69	1.55	1.91	9.72	9.88
	7	6565 - 6845	11.59	10.64	10.91	10.38	44.07	16.44
	8	6885 - 7085	4.34	6.37	6.38	8.05	20.63	13.14
80	5	5985 - 6385	17.78	12.50	5.96	7.75	44.35	16.47
	6	6465	7.36	8.67	2.97	4.73	18.11	12.58
	7	6545 - 6865	11.59	10.64	9.12	9.60	42.12	16.24
	8	6945 - 7025	8.83	9.46	12.16	10.85	45.47	16.58
160	5	6025 - 6345	14.13	11.50	6.27	7.97	37.53	15.74
	6	6505	7.59	8.80	3.32	5.21	18.91	12.77
	7	6665 - 6825	10.02	10.01	9.95	9.98	36.56	15.63
	8	6985	9.82	9.92	14.86	11.72	43.36	16.37
320	5	6105 - 6265	11.22	10.50	4.91	6.91	31.05	14.92
	6	6425	6.11	7.86	2.65	4.23	15.40	11.88
	7	6585 - 6745	7.96	9.01	7.94	9.00	29.50	14.70
	8	6905	7.96	9.01	11.86	10.74	34.28	15.35

EUT Overview - EIRP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and\\or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.

- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO\\IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).

- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.

- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Electronics Co., Ltd. Portable Handset FCC ID: A3LSMF966B**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band in dual-client (LPI+SP) mode.

The authorization for these models (SM-F966B and SM-F966B/DS) utilize data referencing from FCC ID: A3LSMF966U (Model SM-F966U) as permitted per KDB 484596 D01 v03. Data referencing data test results are included in Appendix A of this report.

Test Device Serial No.: 0080M, 0152M, 0167M, 0154M, 0125M, 0081M, 0307M, 0351M, 0348M, 0347M, 0345M

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, 850/1900 GSM/GPRS/EDGE Multi-Band LTE, MultiBand 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB, SCS

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
2	5935	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11ax/be (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
:	:			:	:		
47	6185			175	6825		
:	:						
79	6345						

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
31	6105	95	6425	127	6585	191	6905
63	6265			159	6745		

Table 2-5. 802.11be (320MHz BW) Frequency / Channel Operations

Notes:

1. 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, 160MHz, and 320MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band	Bandwidth	Tone Type	Tone Size	ANT1		ANT2		MIMO (1+2)	
				Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]
6GHz	20MHz	RU	26T	99.50	N/A	99.54	N/A	98.56	N/A
			52T	99.54	N/A	99.28	N/A	99.11	N/A
			106T	99.08	N/A	98.92	N/A	98.56	N/A
			242T	98.33	N/A	98.07	N/A	98.74	N/A
		MRU	52+26T	99.38	N/A	99.38	N/A	98.58	N/A
			106+26T	98.97	N/A	98.93	N/A	98.67	N/A
	40MHz	RU	26T	99.43	N/A	99.50	N/A	98.31	N/A
			52T	99.50	N/A	99.08	N/A	98.98	N/A
			106T	99.16	N/A	98.96	N/A	98.10	N/A
			242T	98.33	N/A	98.16	N/A	98.84	N/A
			484T	99.11	N/A	99.06	N/A	97.78	0.10
		MRU	52+26T	99.26	N/A	99.43	N/A	99.41	N/A
			106+26T	99.02	N/A	98.24	N/A	98.42	N/A
	80MHz	RU	26T	99.56	N/A	99.17	N/A	98.98	N/A
			52T	99.54	N/A	98.82	N/A	98.90	N/A
			106T	99.20	N/A	99.04	N/A	98.71	N/A
			242T	98.33	N/A	98.24	N/A	98.84	N/A
			484T	99.10	N/A	99.01	N/A	98.58	N/A
			996T	98.02	N/A	98.01	N/A	97.08	0.13
		MRU	52+26T	99.38	N/A	99.37	N/A	99.15	N/A
			106+26T	98.97	N/A	98.93	N/A	99.28	N/A
			484+242T	98.54	N/A	98.61	N/A	97.66	0.10
	160MHz	RU	26T	99.52	N/A	99.39	N/A	98.90	N/A
			52T	99.43	N/A	99.42	N/A	99.28	N/A
			106T	99.20	N/A	99.00	N/A	98.71	N/A
			242T	98.33	N/A	98.16	N/A	99.16	N/A
			484T	99.06	N/A	99.06	N/A	98.31	N/A
			996T	99.01	N/A	98.11	N/A	95.83	0.18
			2x996T	98.20	N/A	98.10	N/A	98.41	N/A
		MRU	52+26T	99.49	N/A	99.39	N/A	99.19	N/A
			106+26T	99.32	N/A	99.34	N/A	98.53	N/A
			484+242T	98.61	N/A	98.54	N/A	96.74	0.14
			996+484T	98.57	N/A	98.49	N/A	97.59	0.11
			966+484+242T	99.63	N/A	99.56	N/A	99.34	N/A
	320MHz	RU	26T	99.50	N/A	99.35	N/A	99.07	N/A
			52T	99.50	N/A	99.48	N/A	99.15	N/A
			106T	99.43	N/A	99.04	N/A	99.01	N/A
			242T	99.52	N/A	98.16	N/A	99.07	N/A
			484T	99.06	N/A	98.96	N/A	98.23	N/A
			996T	98.11	N/A	98.02	N/A	98.14	N/A
			2x996T	98.38	N/A	98.01	N/A	98.22	N/A
			4x996T	99.05	N/A	99.05	N/A	98.23	N/A
		MRU	52+26T	99.28	N/A	99.29	N/A	99.19	N/A
			106+26T	98.97	N/A	98.97	N/A	99.15	N/A
			484+242T	99.35	N/A	99.32	N/A	98.70	N/A
			996+484T	98.42	N/A	98.64	N/A	98.65	N/A
			966+484+242T	97.11	0.13	97.20	0.12	97.46	0.11
			2x996+484T	96.08	0.17	98.66	N/A	97.83	0.10
			3x996T	97.40	0.11	98.54	N/A	98.63	N/A
			3x996+484T	97.03	0.13	98.24	N/A	98.35	N/A

Table 2-6. Measured Duty Cycles

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
6 GHz	11ax	✓	✓	✓	✓	✓	✓
	11be	✓	✓	✓	✓	✓	✓

Table 2-7. Frequency / Channel Operations

✓= Support; × = NOT Support
SISO = Single Input Single Output
SDM = Spatial Diversity Multiplexing – MIMO function
CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index	Spatial Stream	OFDMA (802.11ax)																					OFDMA (802.11be)		
		26T			52T			106T			242T			484T			996T			2x996T			4x996T		
HE		0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3	144.1	136.1	122.5
1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	288.2	272.2	245
2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8	432.4	408.3	367.5
3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	576.5	544.4	490
4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	864.7	816.7	735
5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	1152.9	1088.9	980
6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3	1297.1	1225	1102.5
7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5	1441.2	1361.1	1225
8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	1729.4	1633.3	1470
9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7	1921.6	1814.8	1633.3
10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8	2402	2268.5	2041.7
0	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	288.2	272.2	245
1	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	576.5	544.4	490
2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	864.7	816.7	735
3	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	1152.9	1088.9	980
4	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	1729.4	1633.3	1470
5	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980	2305.9	2177.8	1960
6	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5	2594.1	2450	2205
7	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225	2882.4	2722.2	2450
8	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470	3458.8	3266.7	2940
9	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3	3843.1	3629.6	3266.7
10	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5	4323.5	4083.3	3675
11	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7	4803.9	4537	4083.3

Table 2-8. Supported Data Rates

4. The device supports either Standard Power (SP) or Low Power Indoor (LPI) operation in the following UNII bands:

UNII Band	Standard Power (SP)	Low Power Indoor (LPI)	Very Low Power (VLP)
UNII 5	✓	✓	✓
UNII 6	×	✓	×
UNII 7	✓	✓	✓
UNII 8	×	✓	×

Table 2-9. Power Operation

✓= Support; × = NOT Support

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.3 Antenna Description

The following antenna gains were used for the testing.

Frequency	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]
5925 MHz	-4.49	-8.02
6025 MHz	-4.57	-8.11
6125 MHz	-5.31	-9.35
6225 MHz	-6.77	-10.79
6325 MHz	-6.24	-10.79
6425 MHz	-7.19	-10.74
6525 MHz	-7.13	-11.08
6625MHz	-7.79	-9.93
6725MHz	-7.35	-8.6
6825MHz	-7.43	-6.59
6925MHz	-5.98	-5.99
7025MHz	-6.15	-4.99
7125MHz	-6.53	-4.25

Table 2-10 Antenna Peak Gain per Frequency

	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 – 6425 MHz	-4.49	-8.02	-3.07
6425 – 6525 MHz	-7.13	-10.74	-5.74
6525 – 6875 MHz	-5.98	-5.99	-2.97
6875 – 7125 MHz	-5.98	-4.25	-2.06

Table 2-11. Antenna Peak Gain

2.4 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

This device operates in the 5.925-7.125 GHz band when under control of an indoor access point. Additionally, the device may operate in the 5.925-6.425 GHz and 6.525-6.875 GHz bands when under control of a standard power access point. Power for the EUT may vary depending on whether the device is connected to a standard access point (SP Operation) or a low-power indoor access point (LPI Operation). In cases where these targets differ two data sets have been provided to demonstrate compliance. The worst-case emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: NQ-WC-06 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device supports three folder configurations: one is with folder fully open, one is where the folder is half open (90 degrees), and one is with folder closed. All configurations are tested, and the worst case radiated emissions data is shown in this report.

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Software and Firmware

The test was conducted with firmware version FAV0_F966UFAU0AYB3 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 987594 D02 v03 were used in the measurement of the EUT**.**

Deviation from measurement procedure……..…….....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15ºC to 35ºC. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:
"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached.**
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Contention Based Protocol Conducted Measurements	0.86
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	2/25/2025	Annual	2/25/2026	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	2/25/2025	Annual	2/25/2026	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	2/25/2025	Annual	2/25/2026	WL40-1
-	MD 1M 18-40	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	MD 1M 18-40
-	AP2-001	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	AP2-001
-	ETS-001	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	ETS-001
Agilent	N9038A	MXE EMI Receiver	9/16/2024	Annual	9/16/2025	MY51210133
Agilent	N9020A	MXA Signal Analyzer	3/22/2024	Annual	3/22/2025	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	10/16/2024	Annual	10/16/2025	MY49430494
Anritsu	MA24408A	Microwave Peak Power Sensor	5/21/2024	Annual	5/21/2025	11675
Anritsu	MA24408A	Microwave Peak Power Sensor	4/10/2024	Annual	4/10/2025	12798
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2025	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	7/5/2023	Biennial	7/5/2025	9203-2178
ETS-Lindgren	3116C	Horn Antenna (18-40GHz)	2/27/2023	Biennial	2/27/2025	218893
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	4/9/2024	Annual	4/9/2025	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	2/29/2024	Annual	3/1/2025	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer	9/19/2024	Annual	9/19/2025	MY57141001
Pasternack	NMLC-2	Line Condcuted Emissions Cable	4/2/2024	Annual	4/2/2025	NMLC-2
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	4/15/2024	Biennial	4/15/2026	101058
Rohde & Schwarz	FSW26	Spectrum Analyzer (26.5GHz)	3/8/2024	Annual	3/8/2025	103187
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	11/25/2024	Annual	11/25/2025	100348
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Biennial	4/24/2025	101379
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	4/5/2024	Annual	4/5/2025	101716
Rohde & Schwarz	SMW200A	Vector Signal Generator	4/4/2024	Annual	4/4/2025	109456
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	4/5/2024	Annual	4/5/2025	101716
Rohde & Schwarz	CMX500	5G Radio Communication Tester	N/A			101202
Sunol	JB6	Bi-Log Antenna (20M-6GHz)	3/2/2023	Biennial	3/2/2025	A082816
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107

Table 6-1. Test Equipment Calibration Table

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Component	Serial Number
MegaPhase Cable TM26-S1S1-36	18160103 003
Pasternack 6dB Attenuator PE7005-6	N/A

Table 6-2. WL25-1 Conducted Cable Set Components

Component	Serial Number
MiniCircuirs Cable CBL-2FT-SMSM+	77743
MCL 6dB Attenuator BW-S6W2+	1314

Table 6-3. WL25-2 Conducted Cable Set Components

Component	Serial Number
MegaPhase Cable TM40K1K1-36	18160102 001
MCL 10dB Attenuator BW-K10 2W44+	1902

Table 6-4. WL40-1 Conducted Cable Set Components

Component	Serial Number
Pasternak Cable RG214/U	111815
Sucoflex Cable 106A	246420-001
Rohde & Schwarz SF Unit	102134

Table 6-5. ETS-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utiflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase Cable NC29-N1N1-324	19046401 001
MegaPhase Flex Cable 10511-1	15044701-006
Micro-Coas Utiflex Cable UFB311A-Q-3446-50U50U MFR 64639	231978-002
Micro-Coas Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-001
Micro-Coas Utiflex Cable UFB142A-0-0659-50U50U MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138

Table 6-6. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable TM40-K1K1-30	20233002-004
UTIPLEX Cable	64639 232063-001
Rohde & Schwarz Pre-amp RS-PR1840 18G-40G	9037.7670.02

Table 6-7. MD 1M 18-40 EMC Cable and Switch System Components

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
FCC ID: A3LSMF966B
FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference	Data Referencing?
2.1046, 15.407(a)(12)	Maximum Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.3	Yes
15.407(a)(8), 15.407(a)(7)	Maximum Radiated Output Power	< 24dBm over the frequency band of operation <30dBm over the frequency band of operation when connecting to a standard power access point		PASS	Section 7.3	Yes
2.1049, 15.407(a)(11)	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.		PASS	Section 7.2	Yes
15.407(a)(8), 15.407(a)(7)	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. <17dBm/MHz when operating with a standard power access point		PASS	Section 7.4	Yes
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(6)		PASS	Section 7.5	Yes
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty	RADIATED	PASS	Please see 6CD OFDM report	Yes
15.407(a)(7)	Power Reduction Verification for standard client device	EUT must limit its power to no more than 6dB below its associated standard power access point's authorized transmit power. EUT must distinguish its associated access point as standard or low power and control its power levels accordingly.		PASS	Please see 6CD OFDM report	No
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band		PASS	Section 7.6	Yes
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.6	Yes
15.407	AC Conducted Emissions 150kHz – 30MHz	<FCC 15.207 limits	LINE CONDUCTED	PASS	Please see 6CD OFDM report	Yes

Table 7-1. Summary of Test Results

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Notes:

1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "EMC Software Tool" Version 2.3.0.
5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.6.1.
6) Per 15.407(a)(7), a device operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands must not have the maximum power spectral density exceed 17 dBm/MHz e.i.r.p., must limit the maximum e.i.r.p. over the frequency band of operation not exceed 30 dBm, and must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.
7) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
8) Only one RU index could be selected at a time, so no contiguous or non-contiguous RUs were considered for testing.
9) Data was leveraged from model SM-F966U for the certification of SM-F966B/DS. See Section 9.0 for spot-check results.

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-1. Test Instrument & Measurement Setup

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All cases were investigated; a subset of the taken plots were included to represent relevant settings and measurements.
2. In this section, the bandwidth data tables includes mainly the 26dB bandwidth measurements. In case of 320MHz operation, an occupied bandwidth measurement was included in the table to demonstrate compliance. Thus, all measurements in the tables are 26dB bandwidth measurements except for the 320MHz bandwidth cases which are occupied bandwidth measurements.
3. SP 80/160/320MHz BW share same target as LPI 80/160/320MHz BW, and only the emissions from worst case have been reported

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	5935	2	be (20MHz)	18.52	18.22	16.86	17.21
	6175	45	be (20MHz)	18.46	18.32	17.05	17.32
	6415	93	be (20MHz)	18.39	17.75	17.12	16.97
	5965	3	be (40MHz)	24.61	25.07	22.40	24.75
	6165	43	be (40MHz)	23.16	23.63	21.19	25.91
	6405	91	be (40MHz)	23.39	24.18	21.83	27.00
	5985	7	be (80MHz)	33.83	33.73	34.57	73.97
	6145	39	be (80MHz)	35.14	33.81	31.04	61.19
	6385	87	be (80MHz)	35.57	33.75	32.73	81.01
	6025	15	be (160MHz)	32.48	33.68	83.72	30.75
	6185	47	be (160MHz)	38.44	31.24	93.81	28.04
	6345	79	be (160MHz)	38.89	47.23	33.41	32.03
	6105	31	be (320MHz)	48.18	44.25	42.55	47.65
	6265	63	be (320MHz)	48.28	40.50	42.30	40.70
Band 6	6435	97	be (20MHz)	17.93	18.33	16.93	17.25
	6475	105	be (20MHz)	18.55	18.38	16.33	17.31
	6515	113	be (20MHz)	18.27	18.35	17.07	17.20
	6445	99	be (40MHz)	22.77	24.40	21.46	25.40
	6485	107	be (40MHz)	23.86	24.46	22.98	24.80
	6525	115	be (40MHz)	24.25	24.61	22.19	24.31
	6465	103	be (80MHz)	35.92	35.29	31.44	72.67
	6505	111	be (160MHz)	37.43	30.70	30.34	28.76
Band 5/6/7	6425	95	be (320MHz)	36.49	34.16	35.29	36.28
Band 7	6695	117	be (20MHz)	18.31	17.77	17.08	16.90
	6695	149	be (20MHz)	18.26	18.40	16.55	17.13
	6875	185	be (20MHz)	18.39	18.36	17.20	17.40
	6565	123	be (40MHz)	24.05	24.77	22.15	24.73
	6685	155	be (40MHz)	23.67	25.41	21.63	24.31
	6845	179	be (40MHz)	23.79	25.30	21.38	24.58
	6545	119	be (80MHz)	34.46	34.92	36.01	75.68
	6705	151	be (80MHz)	30.87	35.84	31.67	69.80
	6865	183	be (80MHz)	35.71	35.95	33.32	67.24
	6665	143	be (160MHz)	37.32	36.51	30.10	33.61
	6825	175	be (160MHz)	37.80	29.74	32.08	27.52
Band 6/7	6585	127	be (320MHz)	45.42	41.06	40.73	37.91
Band 7/8	6745	159	be (320MHz)	47.77	45.22	45.35	36.43
Band 8	7115	189	be (20MHz)	18.71	18.42	16.92	17.20
	6995	209	be (20MHz)	18.41	18.55	17.05	17.35
	7115	233	be (20MHz)	18.46	18.12	17.32	17.05
	6885	187	be (40MHz)	23.34	23.60	21.77	26.91
	6965	211	be (40MHz)	23.97	24.61	21.74	22.85
	7085	227	be (40MHz)	24.13	24.38	22.27	23.55
	6945	199	be (80MHz)	28.55	32.80	28.20	68.40
	7025	215	be (80MHz)	28.77	36.48	29.36	62.95
	6985	207	be (160MHz)	39.47	37.02	30.87	32.47
Band 7/8	6905	191	be (320MHz)	38.92	46.85	43.54	37.77

Table 7-2. 26dB Bandwidth Results – 26 Tones – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	MRU Configuration	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	6145	45	be (20MHz)	52+26T	18.36	19.05	16.40	17.24
	6175	45	be (20MHz)	106+26T	20.11	20.42	18.23	17.95
	6145	39	be (80MHz)	484+242T	91.36	89.78	78.61	78.76
	6185	47	be (160MHz)	996+484T	174.06	179.55	157.93	158.70
	6105	31	be (320MHz)	3x996+484T	-	-	314.47	316.55
	6105	31	be (320MHz)	3x996T	-	-	315.61	317.50
	6105	31	be (320MHz)	2x996+484T	-	-	238.18	238.52
Band 6	6475	105	be (20MHz)	52+26T	18.63	18.26	16.90	17.01
	6475	105	be (20MHz)	106+26T	20.04	20.51	18.19	18.18
	6465	103	be (80MHz)	484+242T	90.29	91.02	78.64	78.60
	6505	111	be (160MHz)	996+484T	175.05	176.77	158.36	158.27
Band 5/6/7	6425	95	be (320MHz)	3x996+484T	-	-	315.52	316.16
	6425	95	be (320MHz)	3x996T	-	-	316.08	316.64
	6425	95	be (320MHz)	2x996+484T	-	-	237.40	239.30
Band 7	6695	149	be (20MHz)	52+26T	19.20	17.97	17.29	16.56
	6695	149	be (20MHz)	106+26T	20.61	20.27	18.18	18.19
	6705	151	be (80MHz)	484+242T	92.64	90.55	78.56	78.59
	6665	143	be (160MHz)	996+484T	175.37	176.18	158.32	157.92
Band 7/8	6745	159	be (320MHz)	3x996+484T	-	-	315.44	316.04
	6745	159	be (320MHz)	3x996T	-	-	316.26	316.21
	6745	159	be (320MHz)	2x996+484T	-	-	237.74	237.13
Band 8	6995	209	be (20MHz)	52+26T	18.86	17.97	17.22	16.11
	6995	209	be (20MHz)	106+26T	20.48	20.40	18.27	18.20
	7025	215	be (80MHz)	484+242T	91.04	90.93	78.52	78.63
	6985	207	be (160MHz)	996+484T	175.06	243.97	157.95	158.72
Band 7/8	6905	191	be (320MHz)	3x996+484T	-	-	316.74	316.57
	6905	191	be (320MHz)	3x996T	-	-	316.04	317.63
	6905	191	be (320MHz)	2x996+484T	-	-	237.86	239.79

Table 7-3. 26dB Bandwidth Results – MRU – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	5935	2	be (20MHz)	21.61	21.33	19.18	19.11
	6175	45	be (20MHz)	21.55	21.52	19.20	19.15
	6415	93	be (20MHz)	21.73	21.36	19.18	19.11
	5965	3	be (40MHz)	43.27	42.59	38.30	38.10
	6165	43	be (40MHz)	43.40	43.48	38.14	38.14
	6405	91	be (40MHz)	42.78	42.54	38.22	38.16
	5985	7	be (80MHz)	91.62	88.97	78.21	78.02
	6145	39	be (80MHz)	89.68	89.75	78.05	77.98
	6385	87	be (80MHz)	90.45	88.79	78.11	78.12
	6025	15	be (160MHz)	179.72	186.09	157.58	157.47
	6185	47	be (160MHz)	178.98	180.06	157.51	157.59
	6345	79	be (160MHz)	186.93	172.68	157.58	157.37
	6105	31	be (320MHz)	-	-	314.58	316.58
	6265	63	be (320MHz)	-	-	314.68	315.88
Band 6	6435	97	be (20MHz)	21.65	21.18	19.23	19.12
	6475	105	be (20MHz)	21.60	21.17	19.19	19.15
	6515	113	be (20MHz)	21.63	21.14	19.18	19.12
	6445	99	be (40MHz)	43.04	42.44	38.26	38.12
	6485	107	be (40MHz)	43.05	42.42	38.24	38.12
	6525	115	be (40MHz)	43.31	42.49	38.21	38.12
	6465	103	be (80MHz)	90.28	89.14	78.21	77.92
	6505	111	be (160MHz)	188.06	172.30	157.60	157.16
Band 5/6/7	6425	95	be (320MHz)	-	-	315.02	315.25
Band 7	6695	117	be (20MHz)	21.62	21.50	19.18	19.15
	6695	149	be (20MHz)	21.70	21.27	19.19	19.16
	6875	185	be (20MHz)	21.60	21.40	19.17	19.15
	6565	123	be (40MHz)	42.52	42.82	38.24	38.19
	6685	155	be (40MHz)	43.41	42.11	38.15	38.15
	6845	179	be (40MHz)	42.92	42.82	38.26	38.14
	6545	119	be (80MHz)	90.89	89.39	78.35	78.12
	6705	151	be (80MHz)	90.38	89.78	78.24	78.00
	6865	183	be (80MHz)	91.43	89.69	78.33	77.95
	6665	143	be (160MHz)	188.58	171.44	157.91	157.38
	6825	175	be (160MHz)	182.15	171.84	157.82	157.18
Band 6/7	6585	127	be (320MHz)	-	-	316.19	315.53
Band 7/8	6745	159	be (320MHz)	-	-	316.44	315.29
Band 8	7115	189	be (20MHz)	21.79	21.25	19.21	19.17
	6995	209	be (20MHz)	21.57	21.39	19.18	19.16
	7115	233	be (20MHz)	21.47	21.40	19.22	19.17
	6885	187	be (40MHz)	43.12	43.35	38.19	38.10
	6965	211	be (40MHz)	43.28	42.56	38.25	38.13
	7085	227	be (40MHz)	43.35	42.66	38.24	38.10
	6945	199	be (80MHz)	91.30	88.88	78.22	78.09
	7025	215	be (80MHz)	91.63	89.57	78.28	78.20
	6985	207	be (160MHz)	181.10	243.13	157.90	157.40
Band 7/8	6905	191	be (320MHz)	-	-	315.59	316.54

Table 7-4. 26dB Bandwidth Results – Full Tones – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-3 26dB Bandwidth [MHz]	Antenna-4 26dB Bandwidth [MHz]
Band 5	5935	2	be (20MHz)	18.61	18.24	17.14	15.85
	6175	45	be (20MHz)	18.06	18.39	16.92	16.78
	6415	93	be (20MHz)	18.41	18.17	16.90	16.89
	5965	3	be (40MHz)	23.07	24.01	20.80	21.15
	6165	43	be (40MHz)	23.57	24.96	21.01	21.78
	6405	91	be (40MHz)	24.29	25.34	21.66	21.55
	5985	7	be (80MHz)	35.97	36.08	29.63	29.31
	6145	39	be (80MHz)	32.71	33.35	24.76	29.20
	6385	87	be (80MHz)	29.29	35.13	25.02	24.71
	6025	15	be (160MHz)	35.81	34.67	29.34	30.09
	6185	47	be (160MHz)	37.55	38.06	29.25	31.21
	6345	79	be (160MHz)	37.08	33.25	30.45	29.79
	6105	31	be (320MHz)	39.62	48.82	35.92	53.25
	6265	63	be (320MHz)	50.18	49.70	44.84	43.19
Band 7	6695	117	be (20MHz)	18.29	18.40	17.08	16.72
	6695	149	be (20MHz)	18.59	18.28	17.16	16.86
	6875	181	be (20MHz)	18.42	18.30	17.02	16.91
	6565	123	be (40MHz)	24.48	24.45	21.78	20.74
	6725	155	be (40MHz)	23.47	23.43	21.21	20.03
	6845	179	be (40MHz)	24.19	22.85	21.42	21.23
	6545	135	be (80MHz)	35.32	34.66	24.87	25.17
	6705	151	be (80MHz)	34.15	34.07	25.38	26.05
	6865	167	be (80MHz)	28.86	32.76	24.30	29.56
	6665	143	be (160MHz)	30.72	35.35	28.00	28.24
	6825	175	be (160MHz)	38.42	34.45	32.90	31.33
Band 7/8	6745	159	be (320MHz)	42.63	45.82	41.44	40.64

Table 7-5. 26dB Bandwidth Results – 26 Tones – SP

	Frequency [MHz]	Channel	802.11 MODE	MRU Configuration	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	6175	45	be (20MHz)	52+26T	19.01	18.80	16.42	16.96
	6175	45	be (20MHz)	106+26T	19.86	20.53	18.12	18.32
Band 7	6695	149	be (20MHz)	52+26T	17.89	18.36	16.69	16.94
	6695	149	be (20MHz)	106+26T	19.34	19.63	18.04	18.19

Table 7-6. 26dB Bandwidth Results – MRU – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	5935	2	be (20MHz)	21.75	21.42	19.18	19.18
	6175	45	be (20MHz)	21.41	22.10	19.17	19.21
	6415	93	be (20MHz)	21.47	22.06	19.21	19.24
	5965	3	be (40MHz)	43.23	43.20	38.23	38.11
	6165	43	be (40MHz)	42.72	42.79	38.12	38.19
	6405	91	be (40MHz)	43.71	42.71	38.20	38.18
Band 7	6695	117	be (20MHz)	21.93	21.45	19.16	19.17
	6695	149	be (20MHz)	21.67	22.00	19.19	19.20
	6875	181	be (20MHz)	21.50	21.70	19.14	19.15
	6565	123	be (40MHz)	43.12	41.97	38.24	38.13
	6725	155	be (40MHz)	42.83	42.67	38.21	38.06
	6845	179	be (40MHz)	42.98	42.35	38.14	38.11

Table 7-7. 26dB Bandwidth Results – Full Tones – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.1 MIMO Antenna-1 Bandwidth Measurements - (Partial Tones)

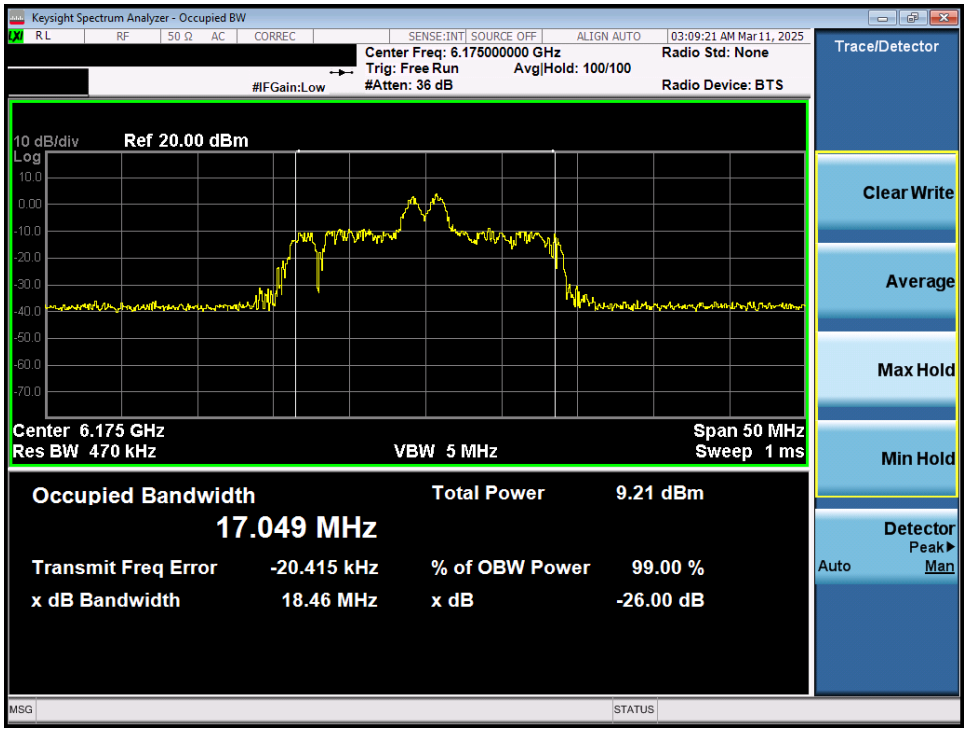

Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

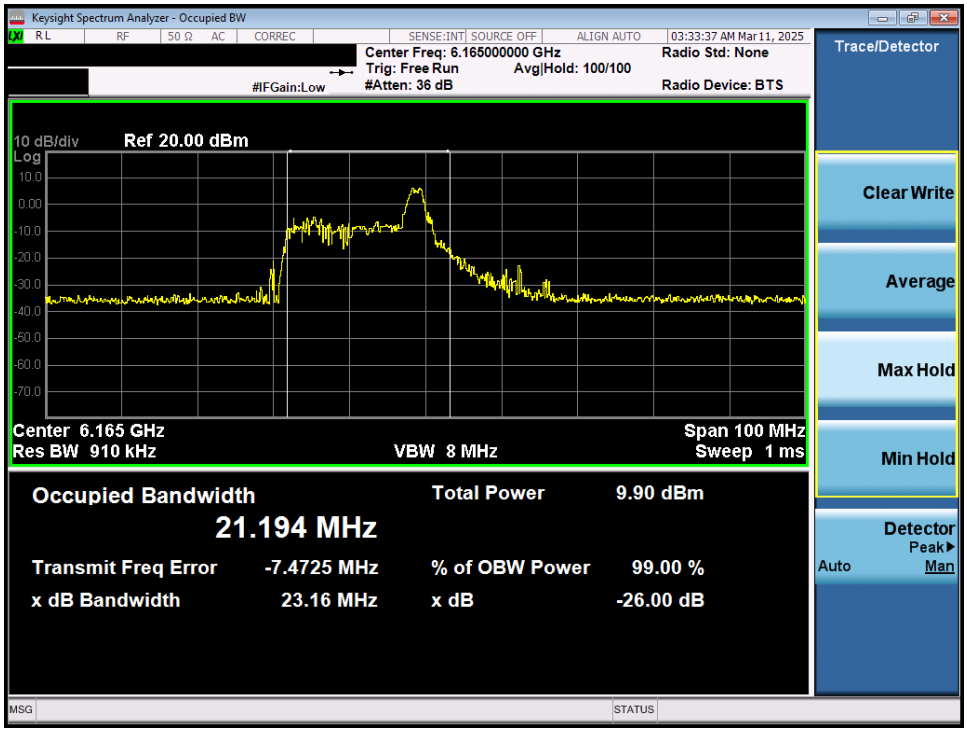

Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

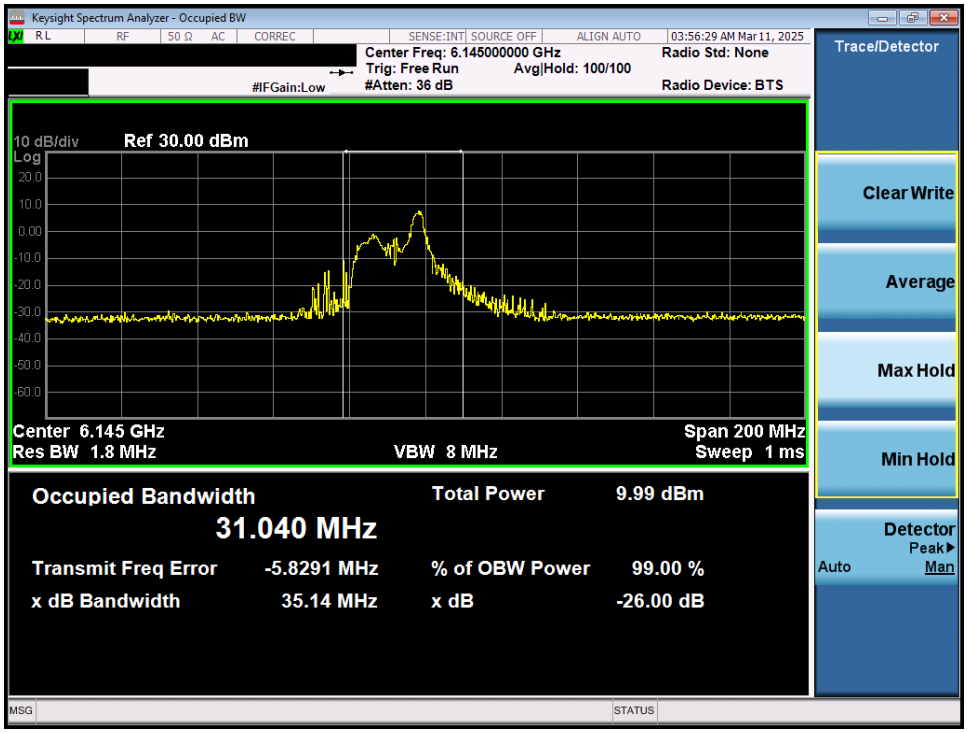

Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

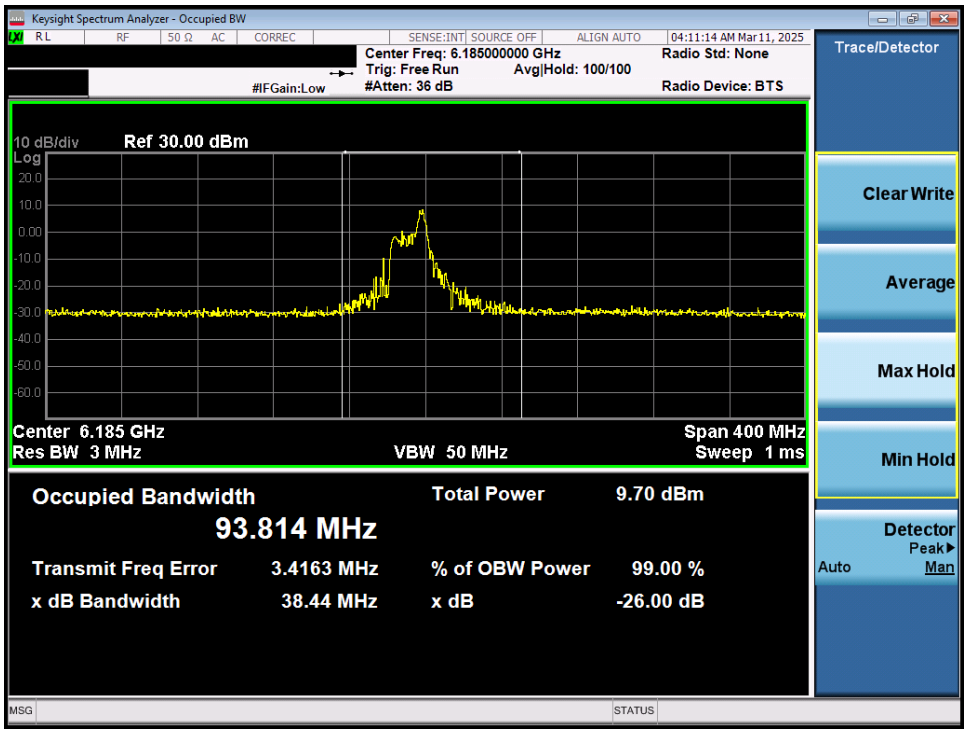

Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

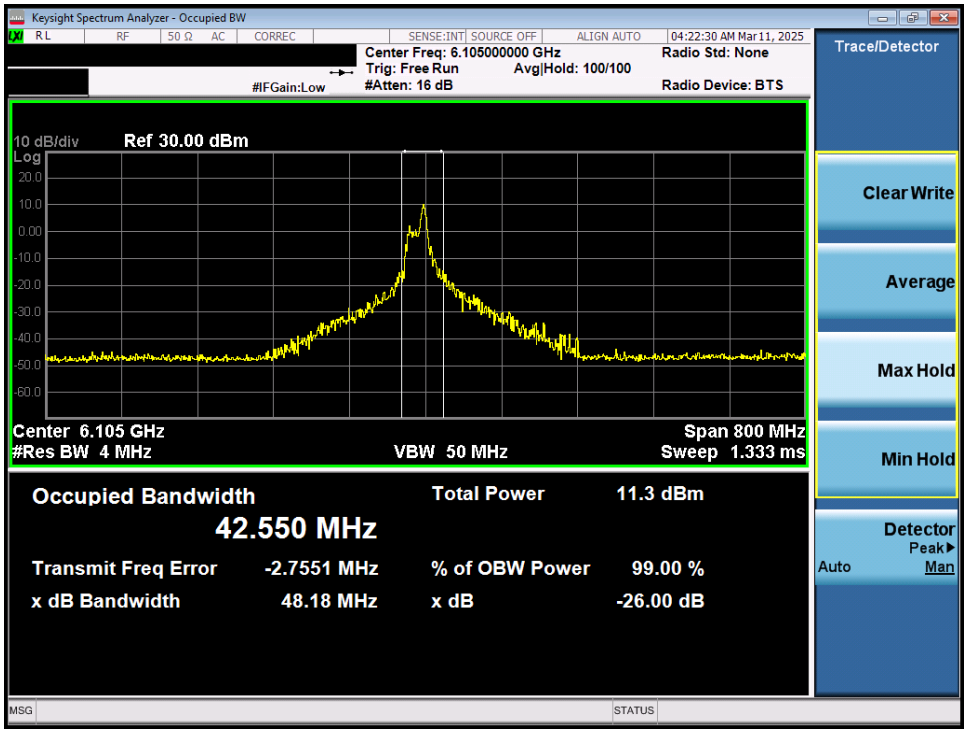

Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

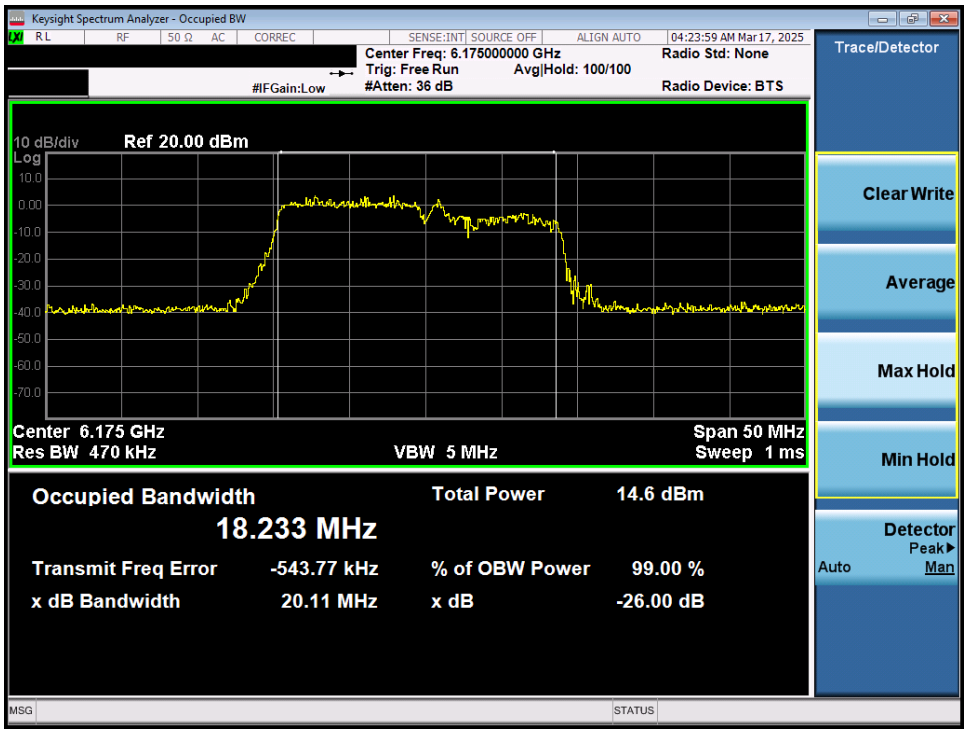

Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

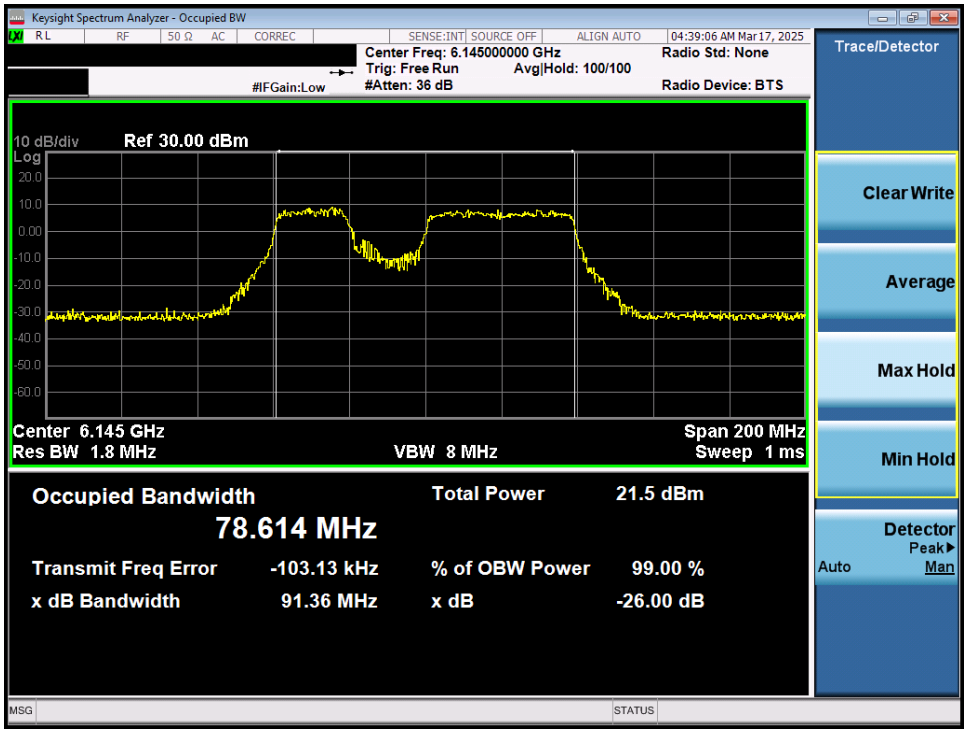

Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) - LPI

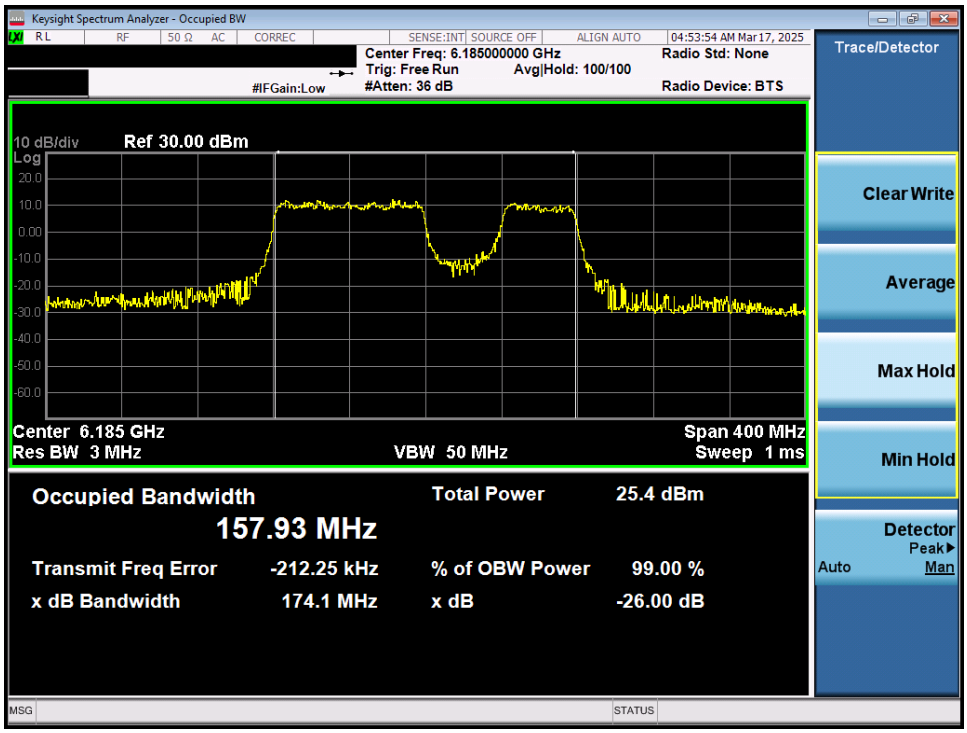

Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

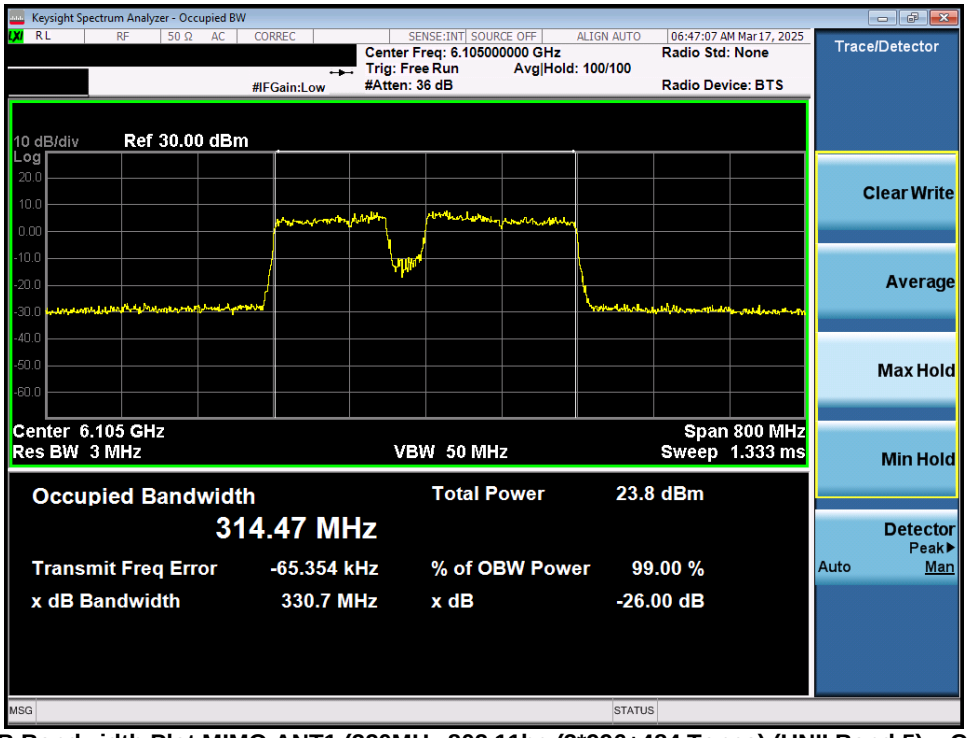

Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11be (3*996+484 Tones) (UNII Band 5) – Ch. 31) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

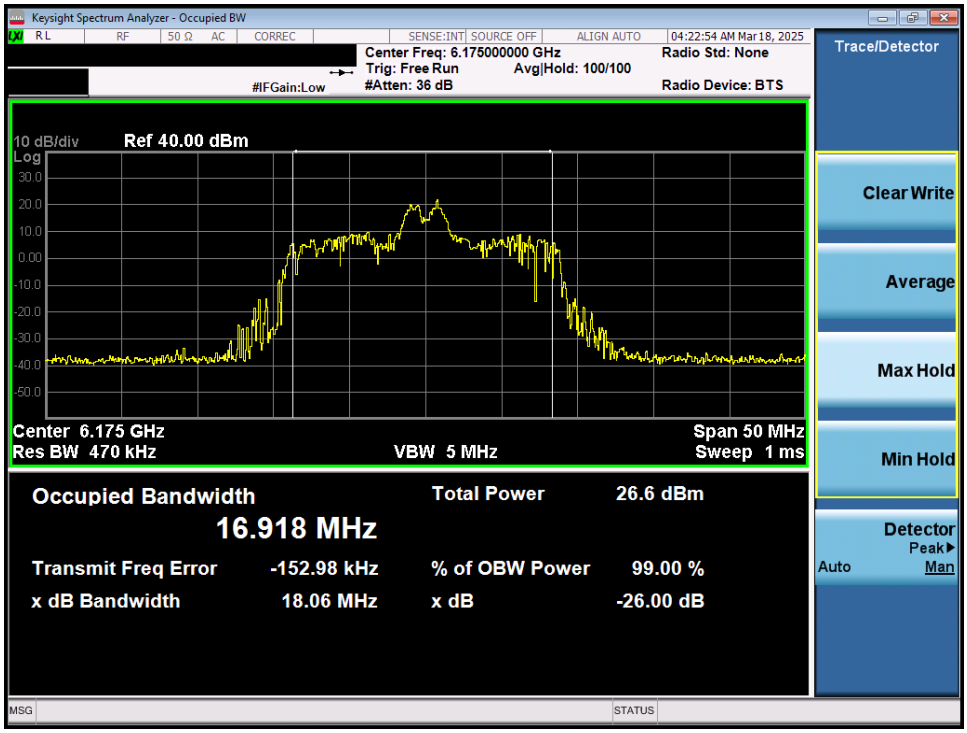

Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) – SP

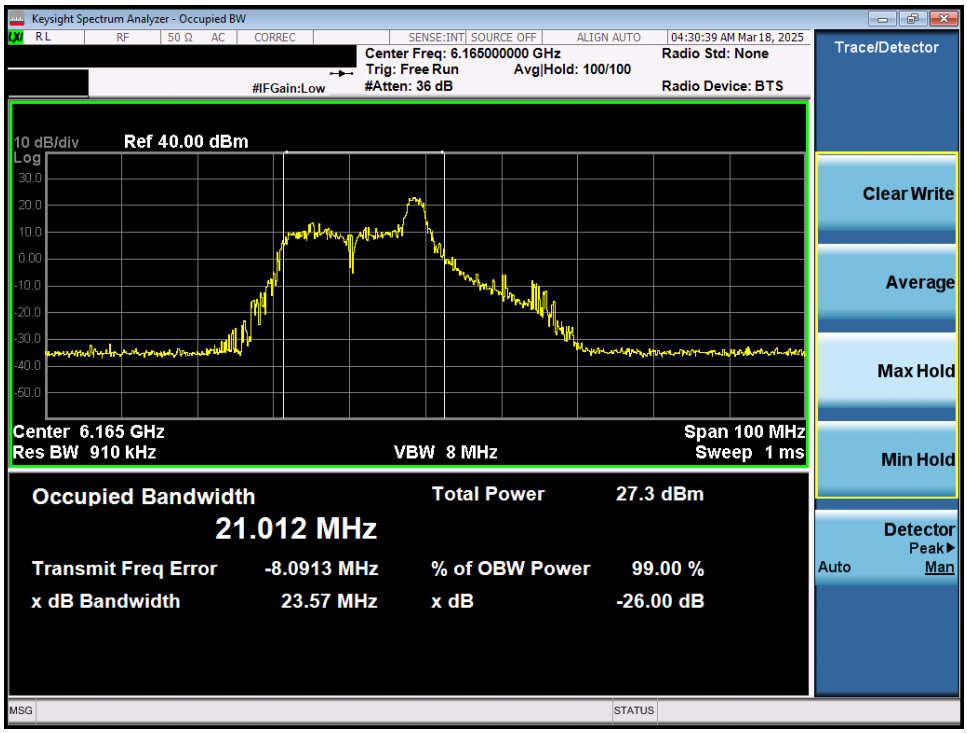

Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

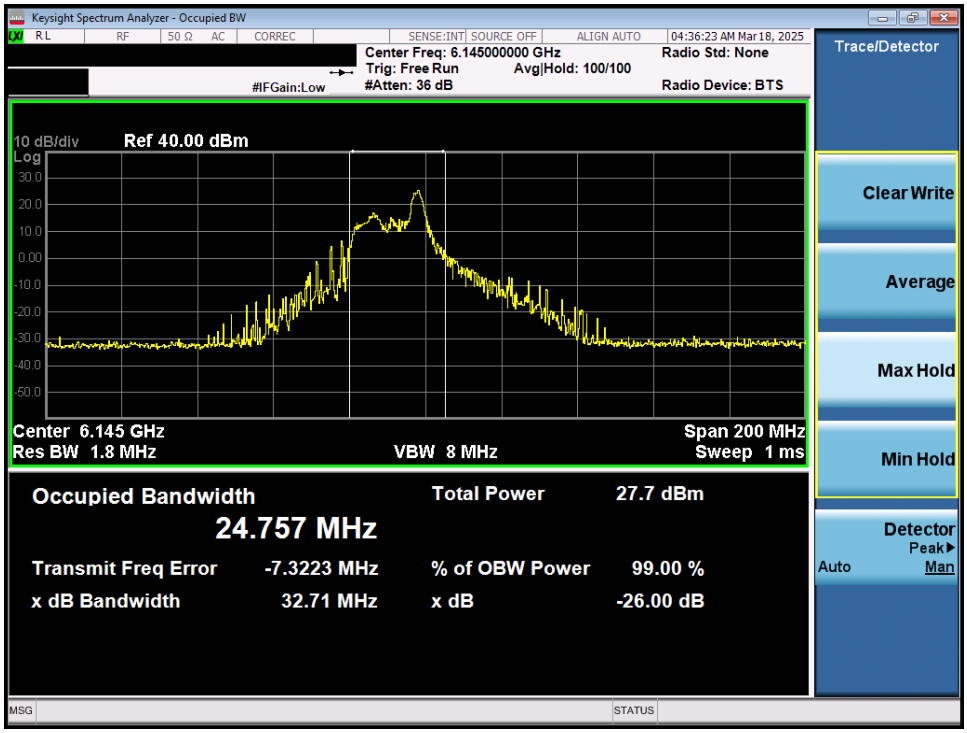

Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

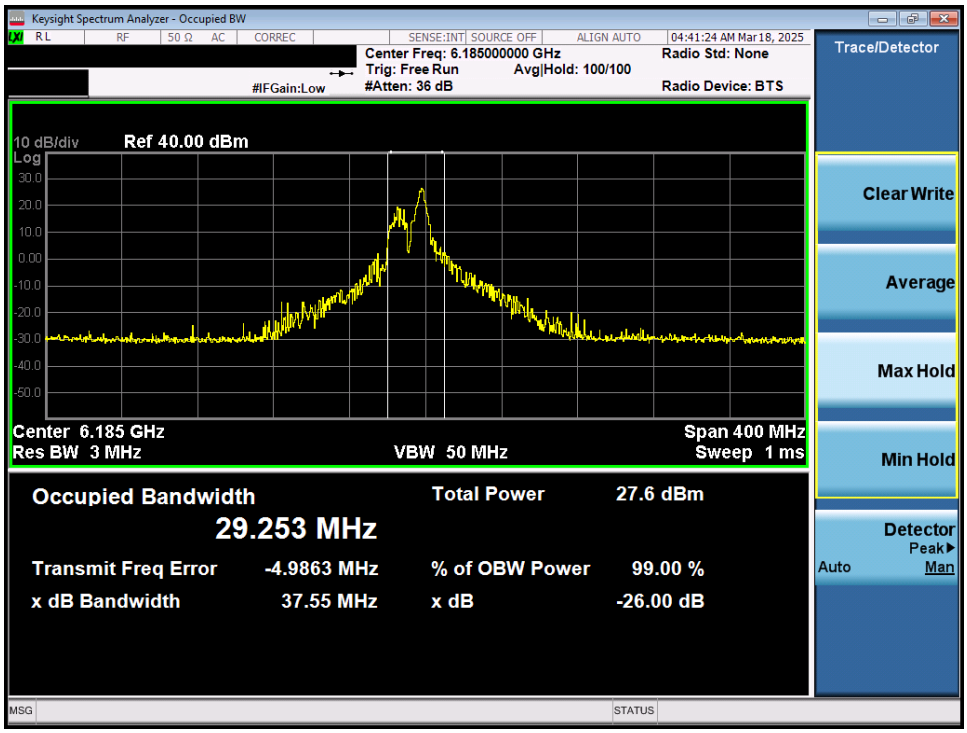

Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

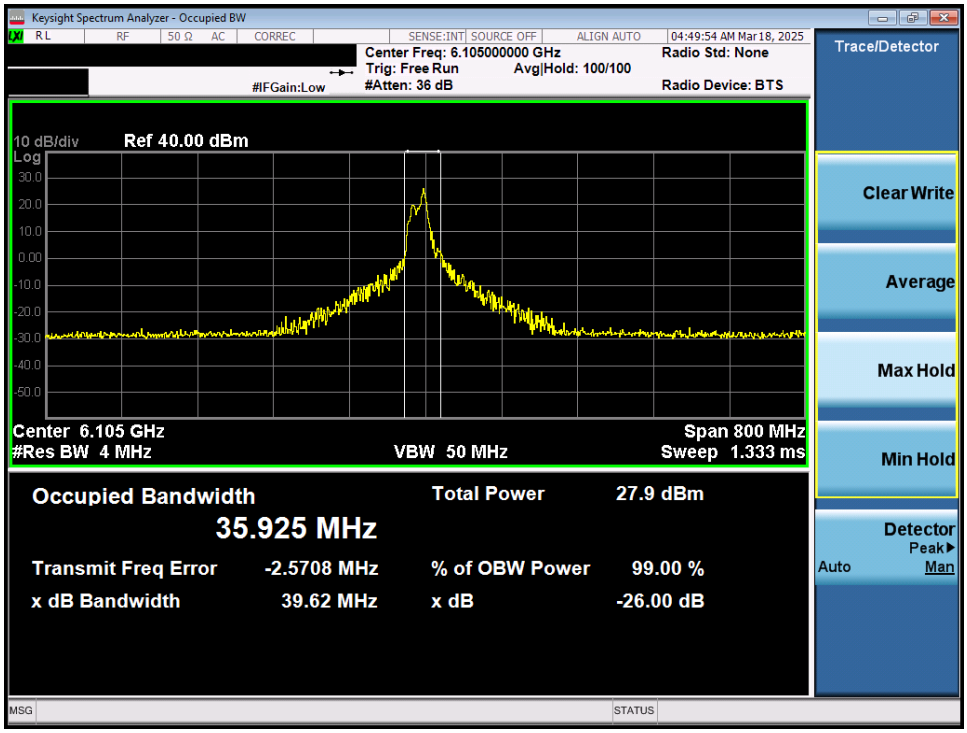

Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - SP

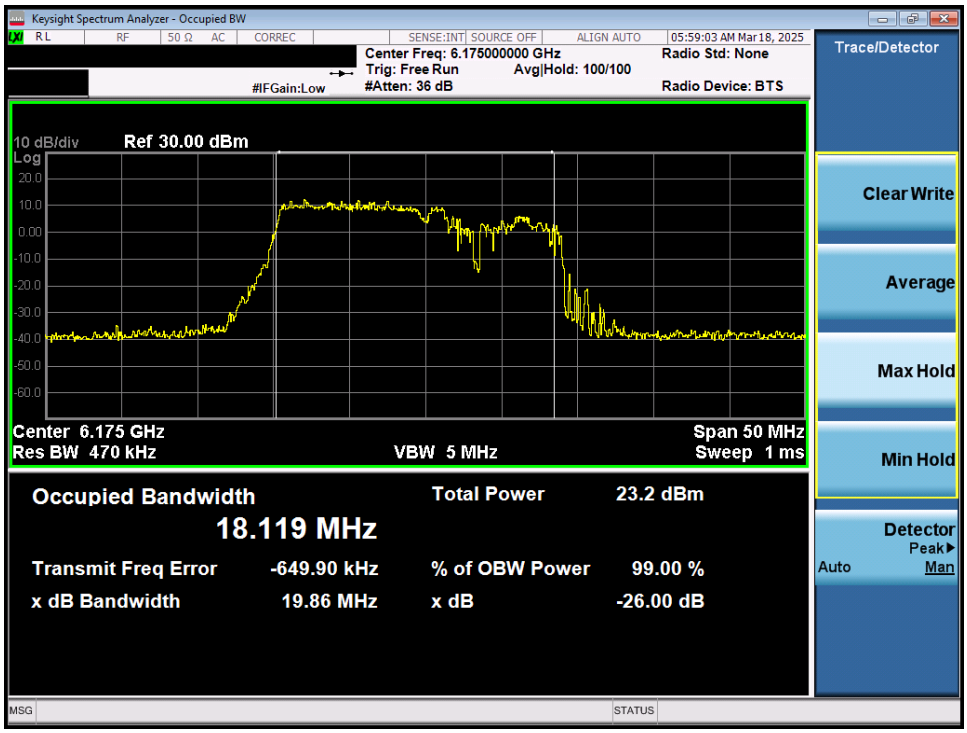

Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.2 MIMO Antenna-1 Bandwidth Measurements - (Full Tones)

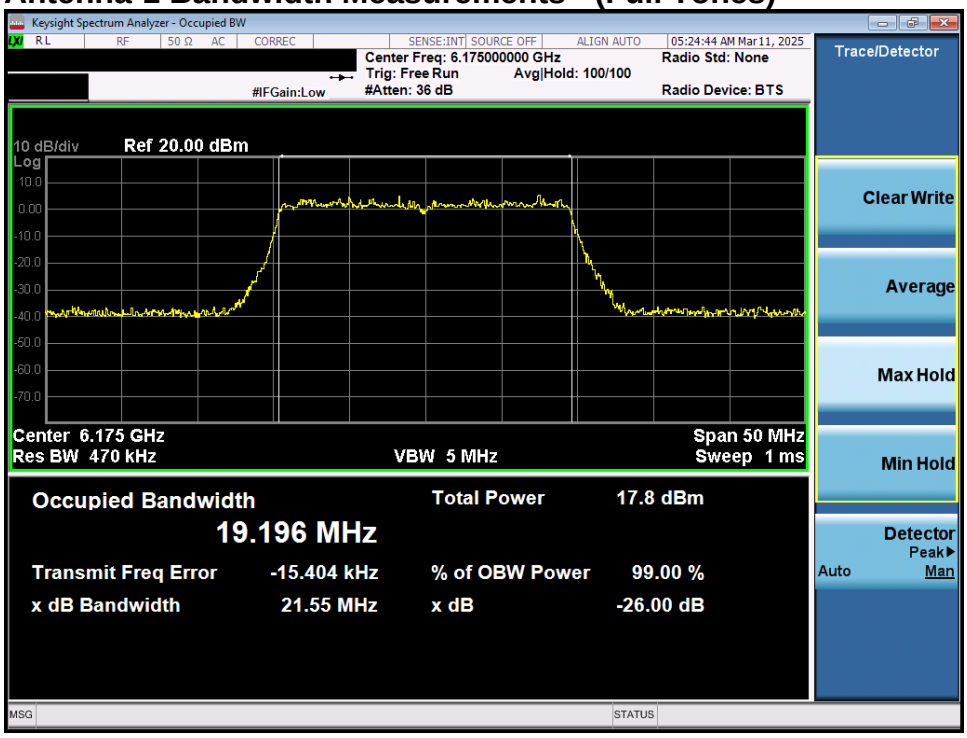

Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) – LPI

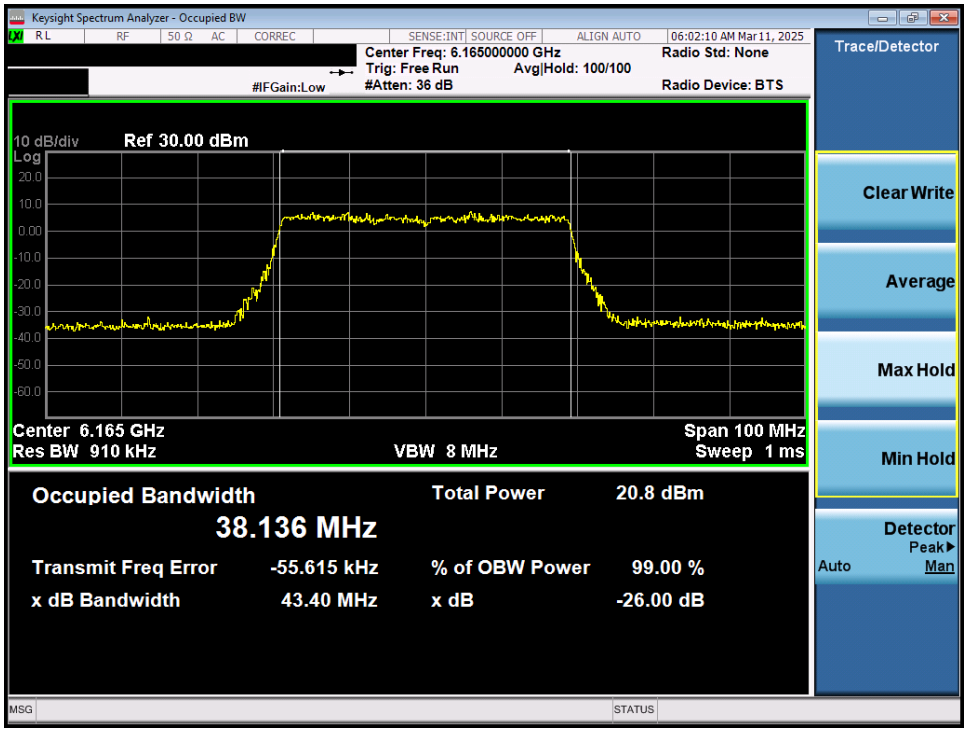

Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

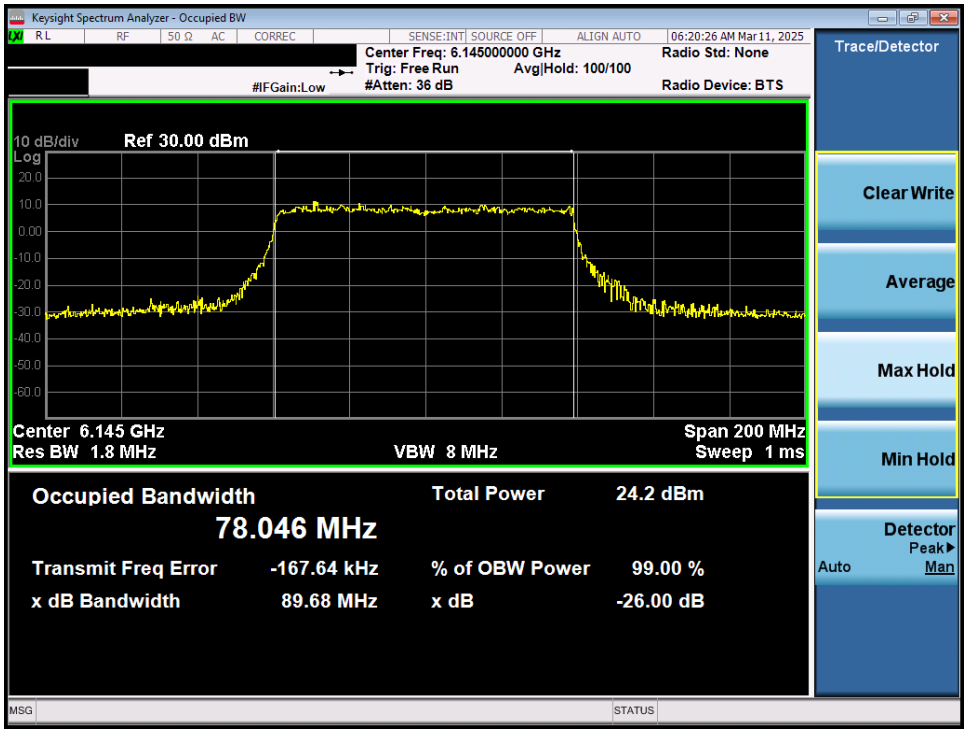

Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI/SP

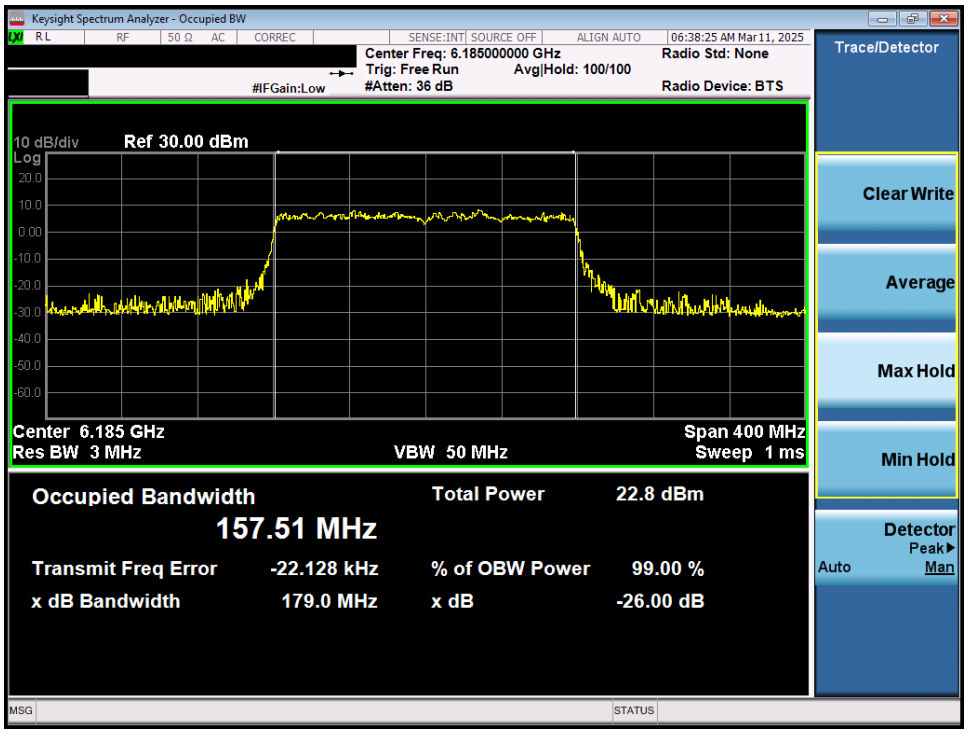

Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

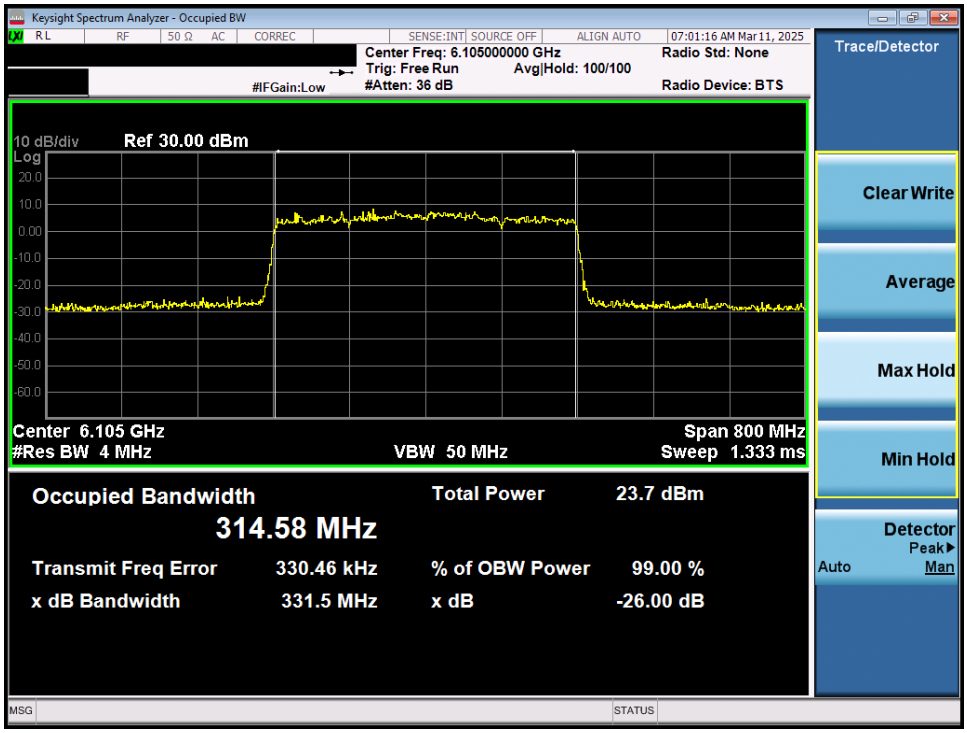

Plot 7-20. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI/SP

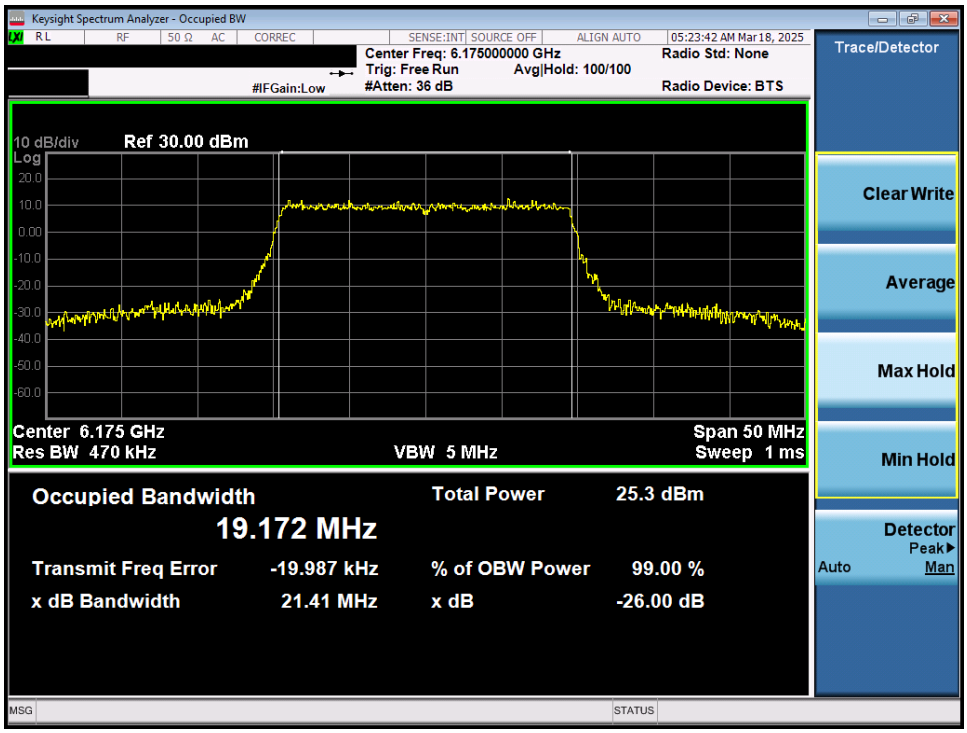

Plot 7-21. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

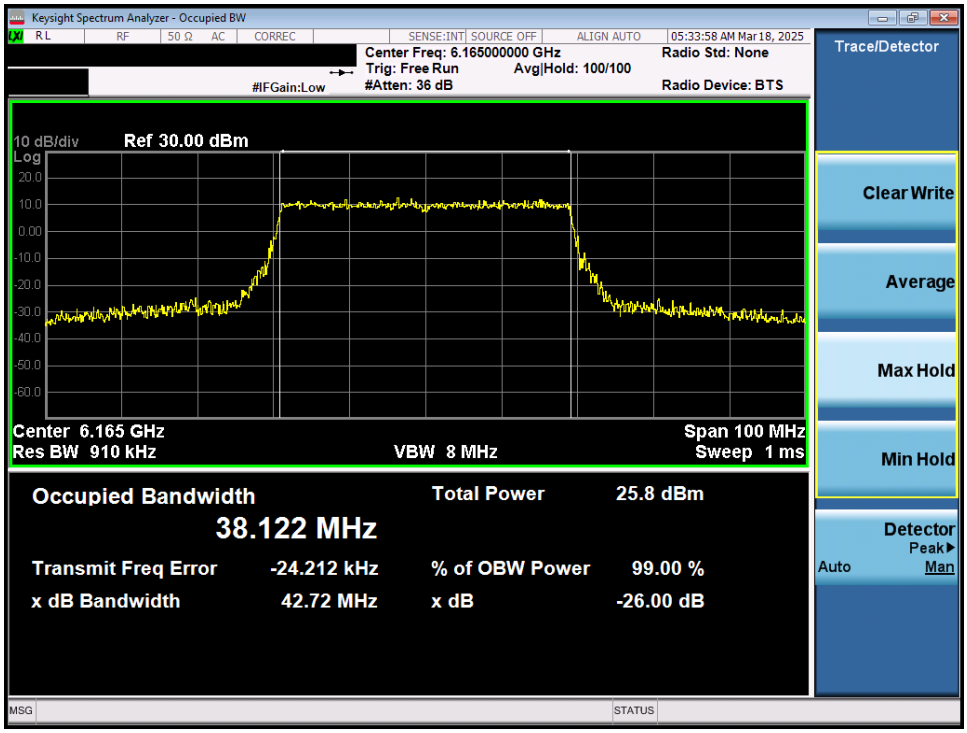

Plot 7-22. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.3 MIMO Antenna-2 Bandwidth Measurements – (Partial Tones)

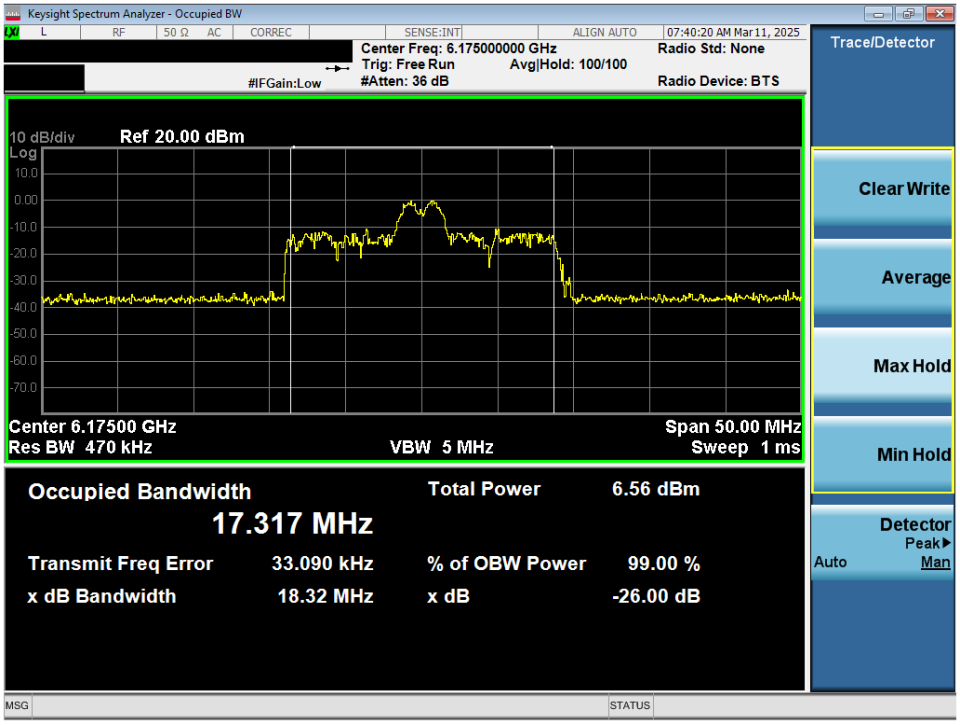

Plot 7-23. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

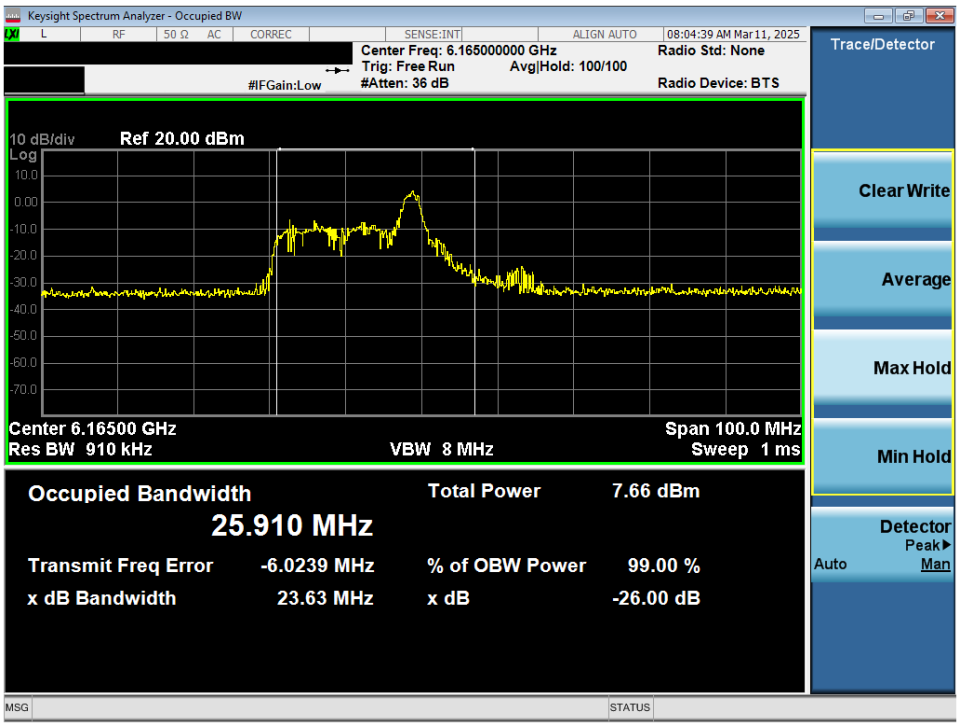

Plot 7-24. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

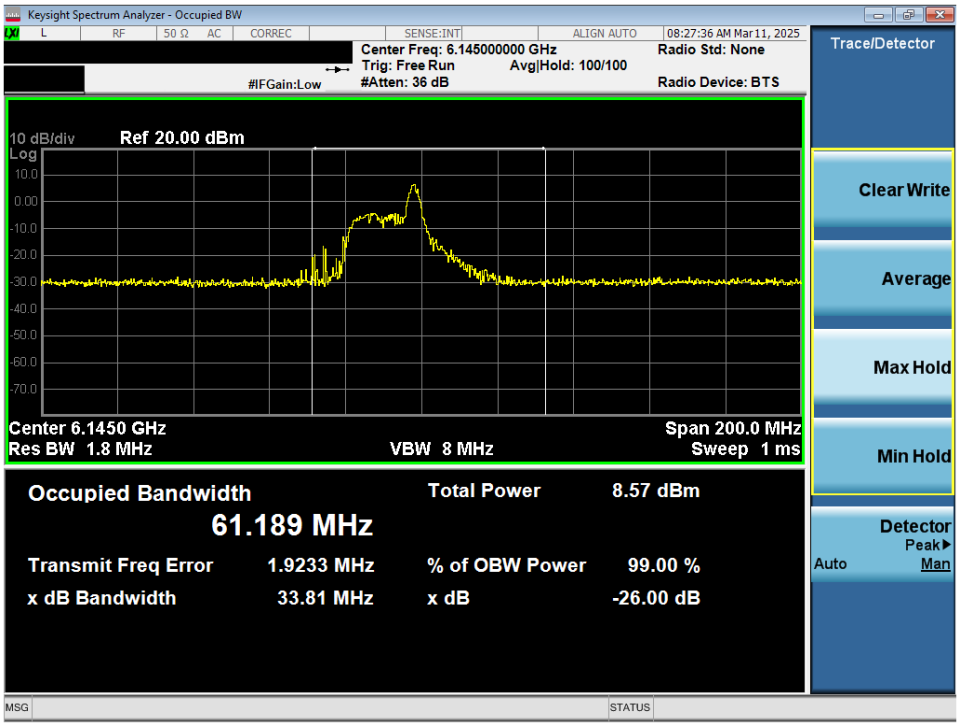

Plot 7-25. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

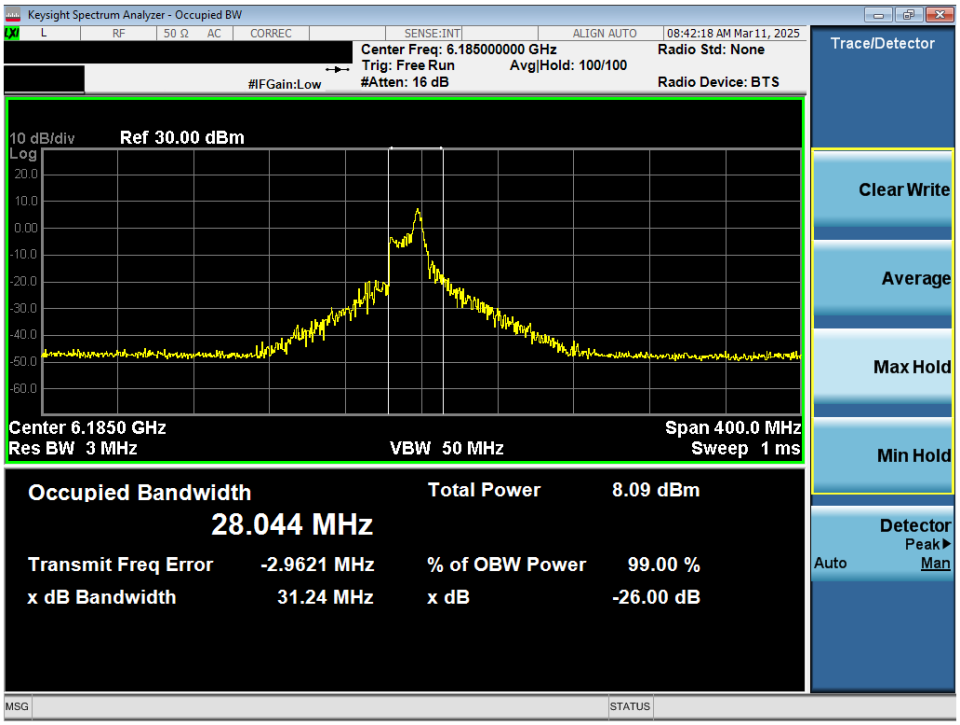

Plot 7-26. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

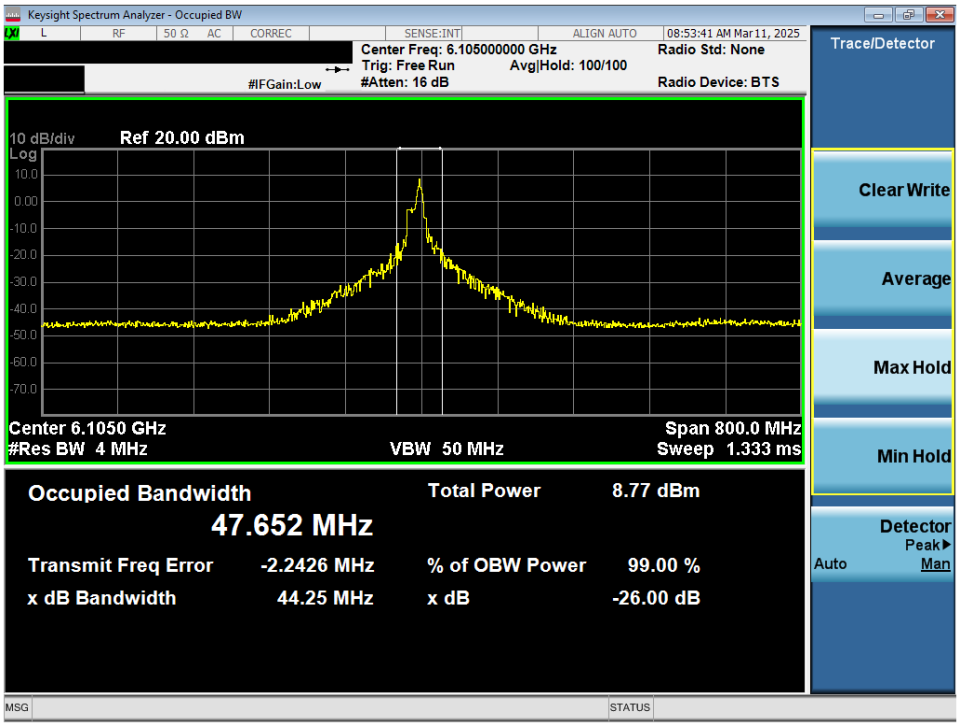

Plot 7-27. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

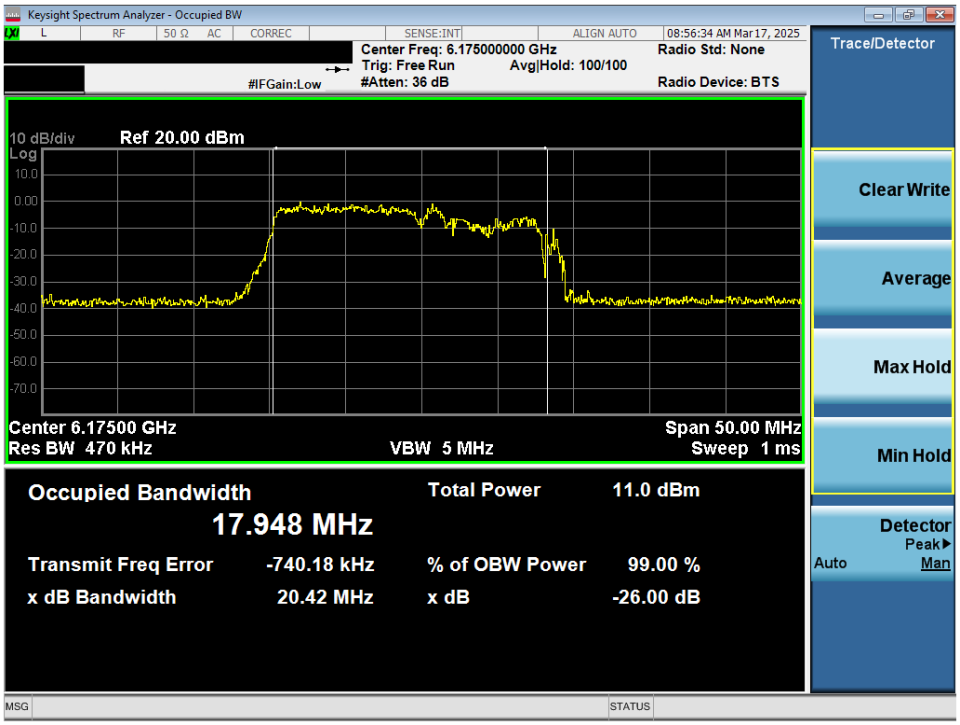

Plot 7-28. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

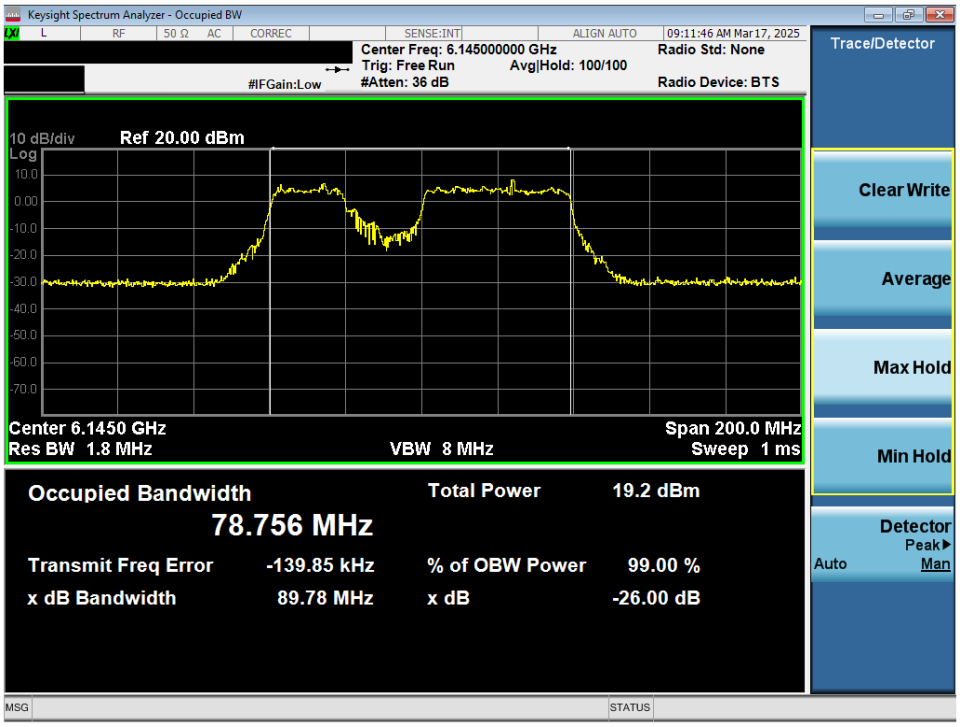

Plot 7-29. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) LPI/SP

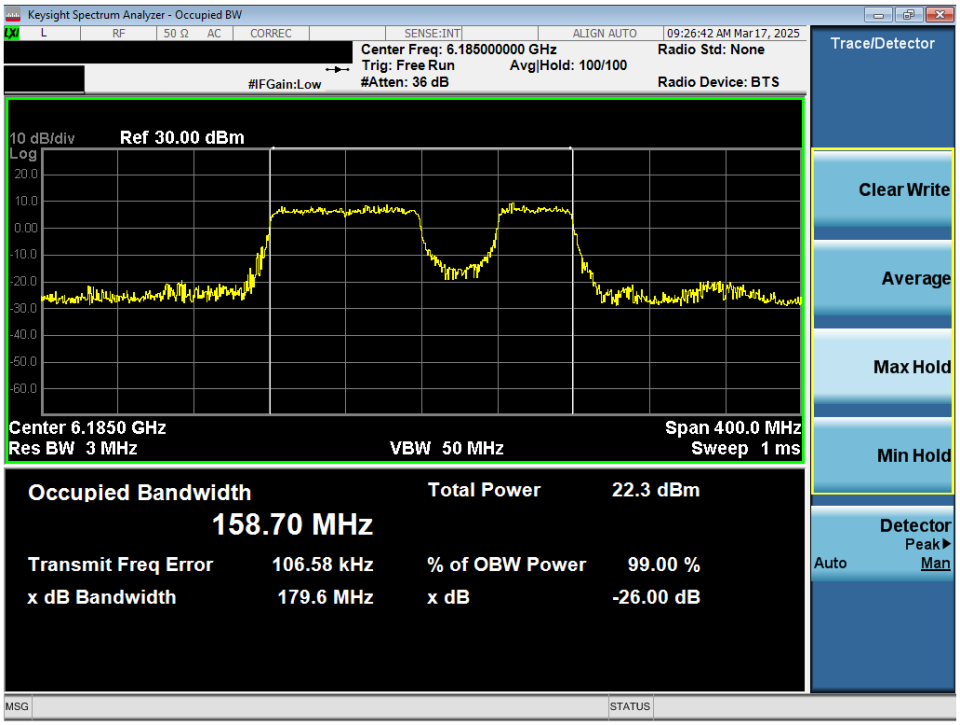

Plot 7-30. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

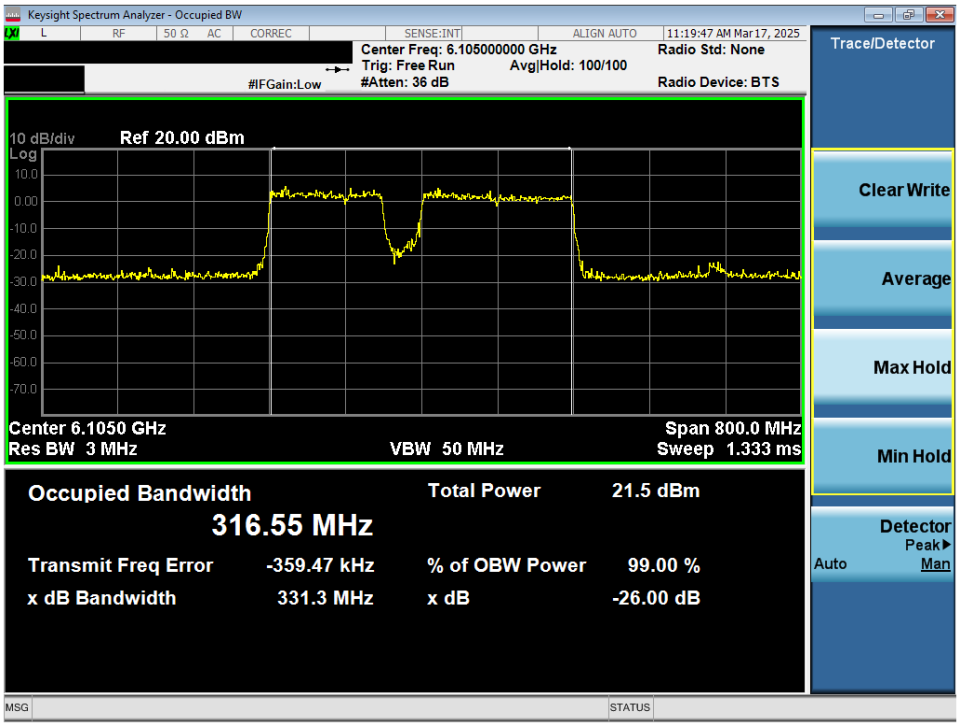

Plot 7-31. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11be (3*996+484 Tones) (UNII Band 5) – Ch. 31) LPI/SP

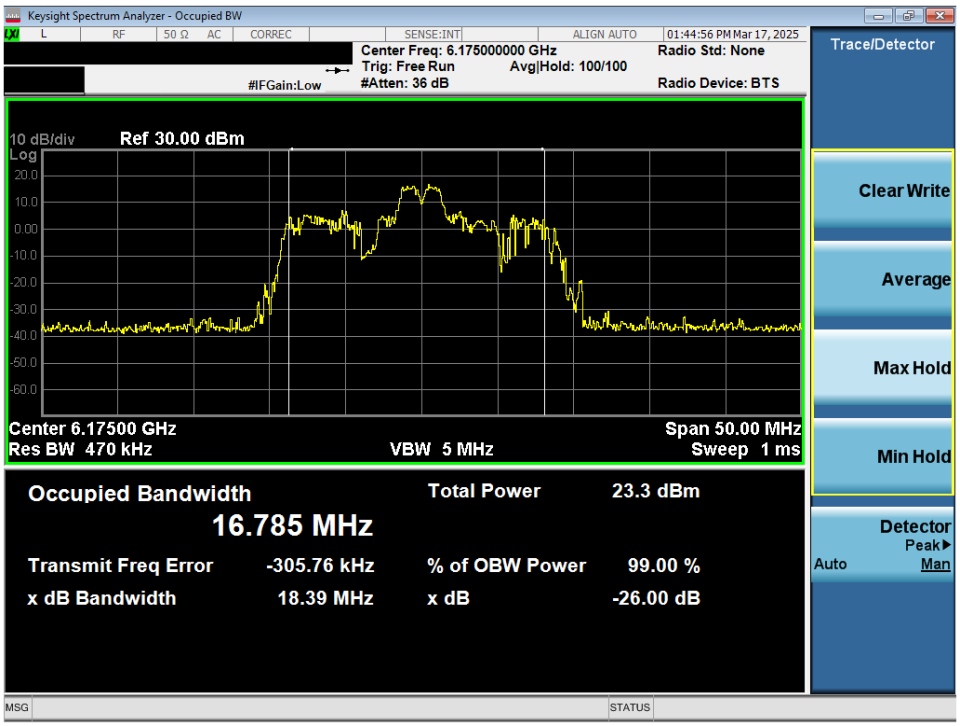

Plot 7-32. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

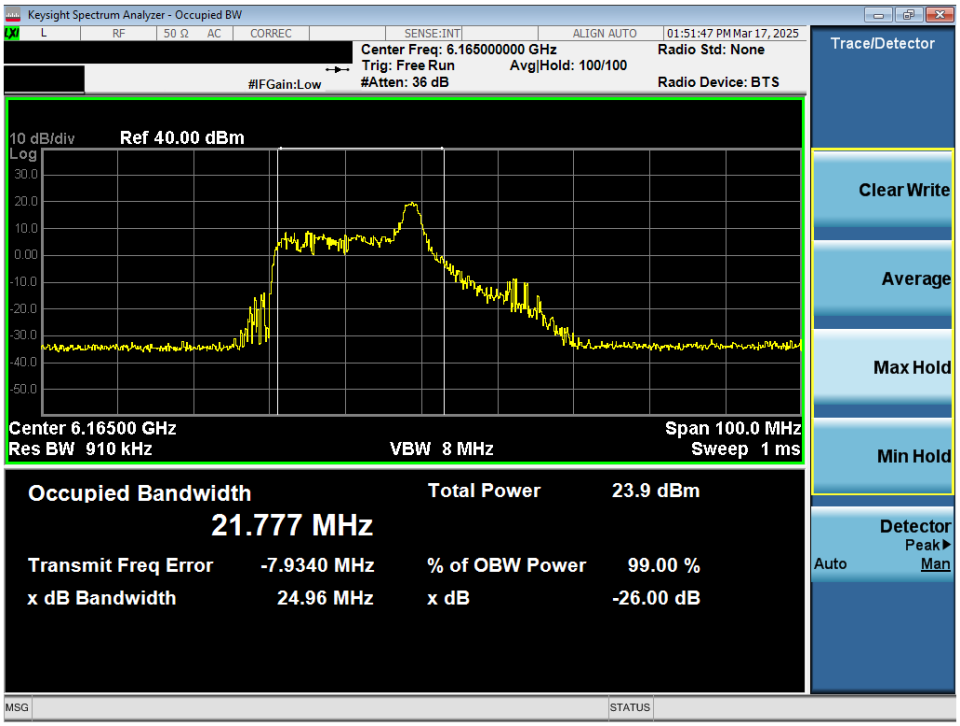

Plot 7-33. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

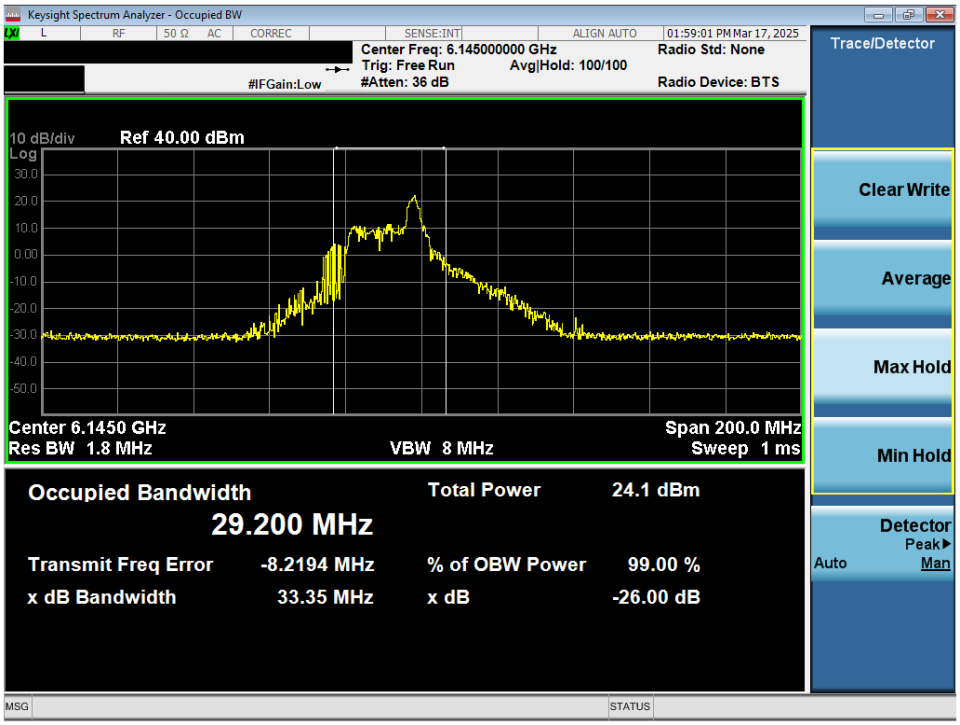

Plot 7-34. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

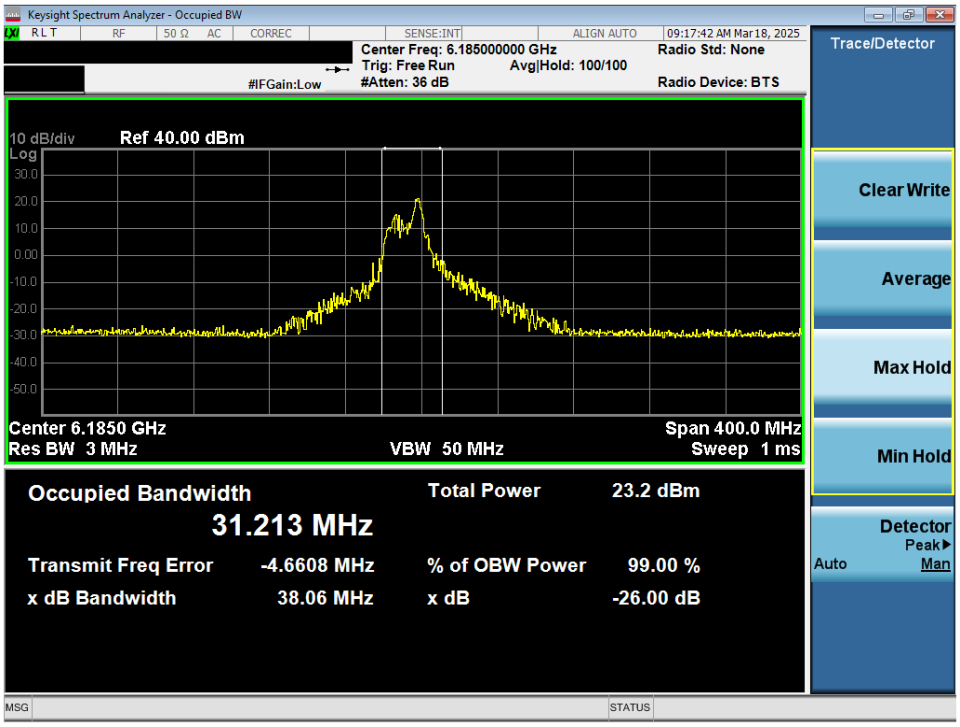

Plot 7-35. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

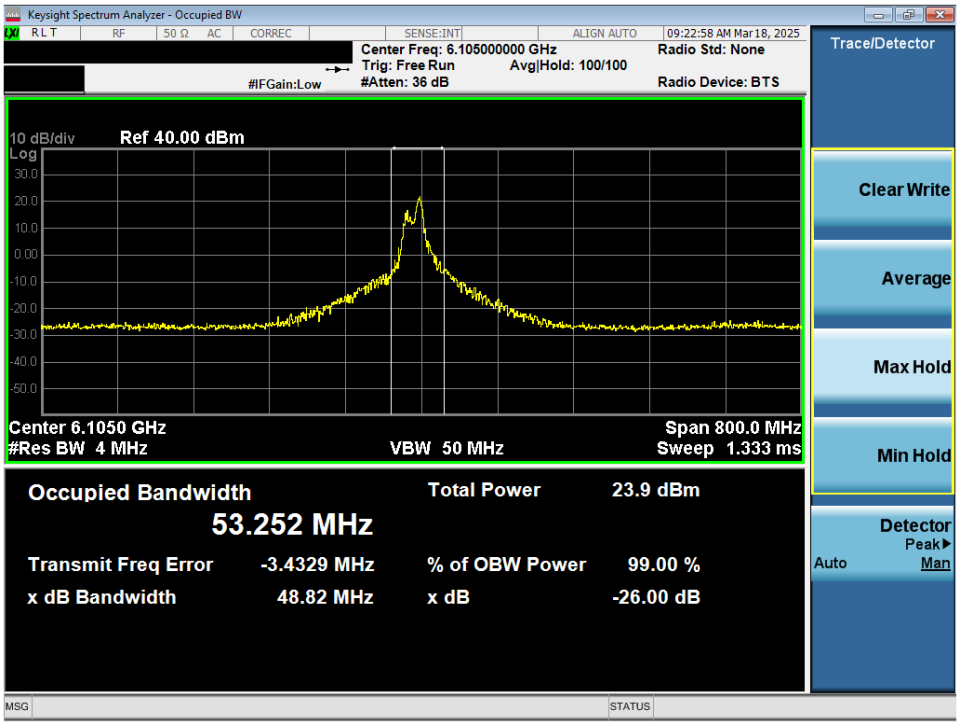

Plot 7-36. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

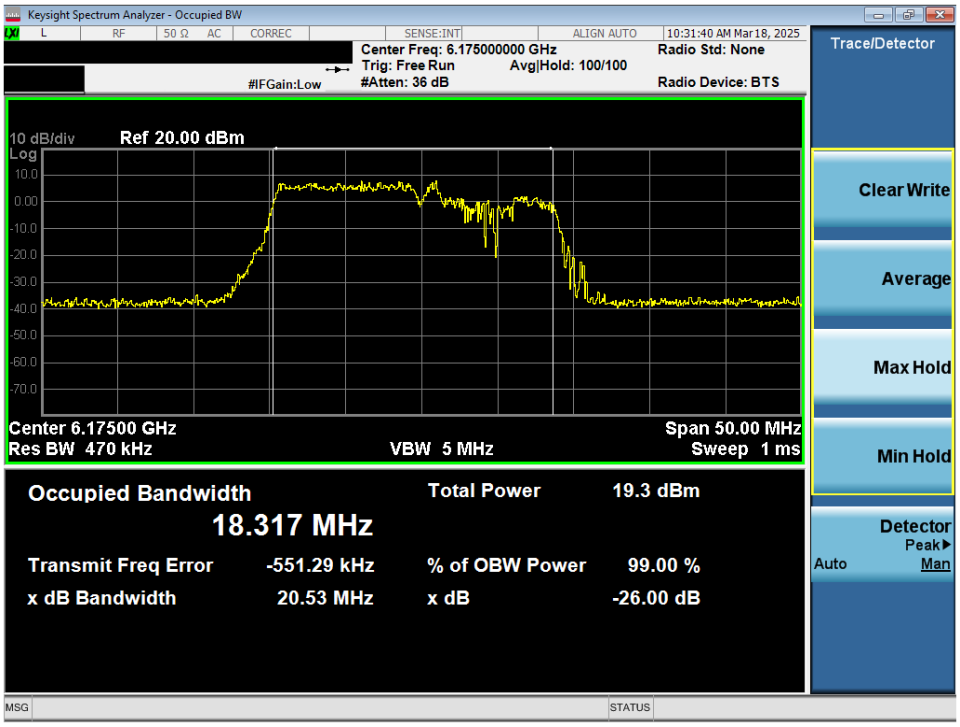

Plot 7-37. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.4 MIMO Antenna-2 Bandwidth Measurements – (Full Tones)

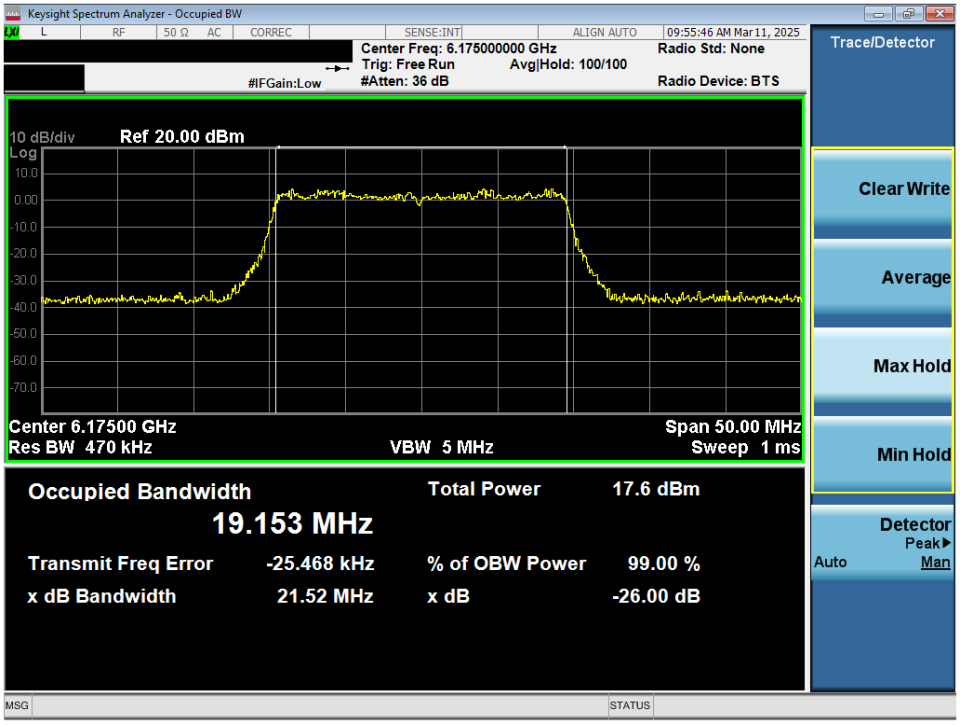

Plot 7-38. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

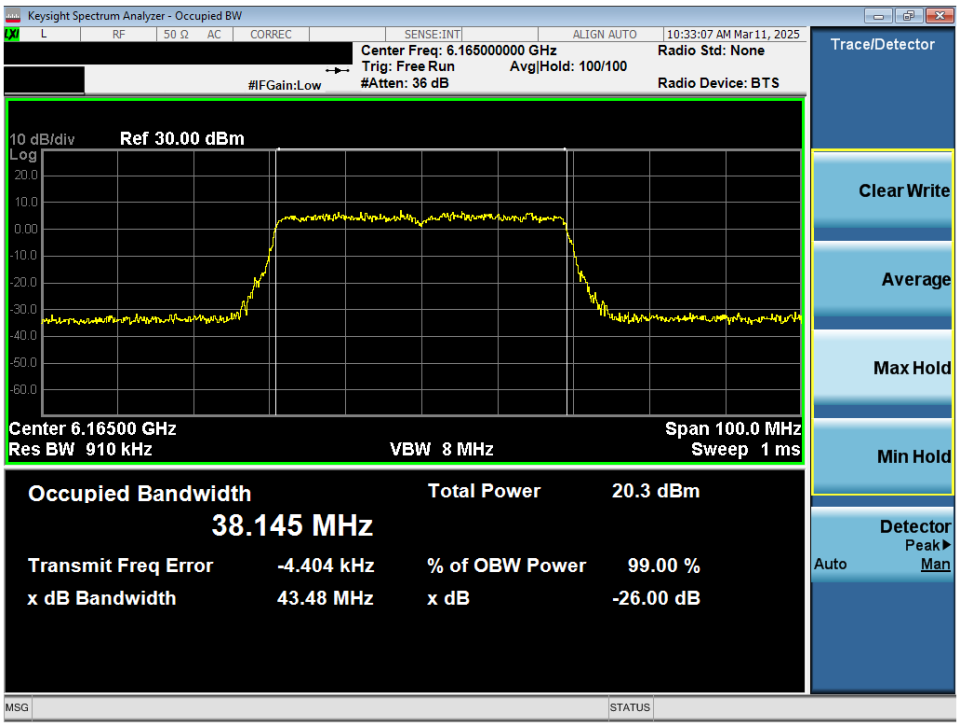

Plot 7-39. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

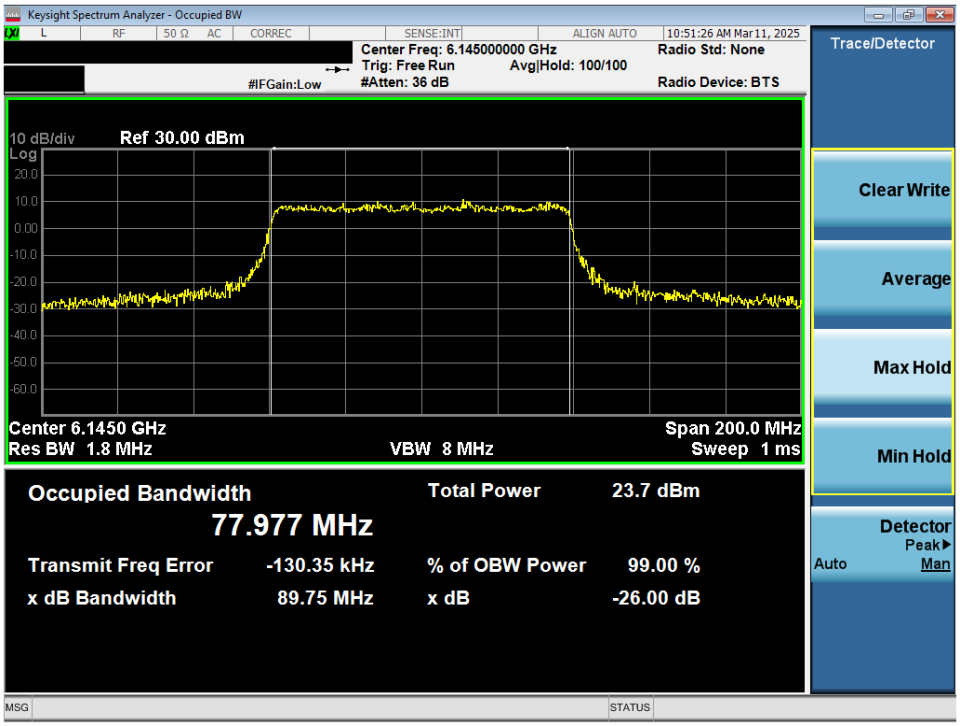

Plot 7-40. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI/SP

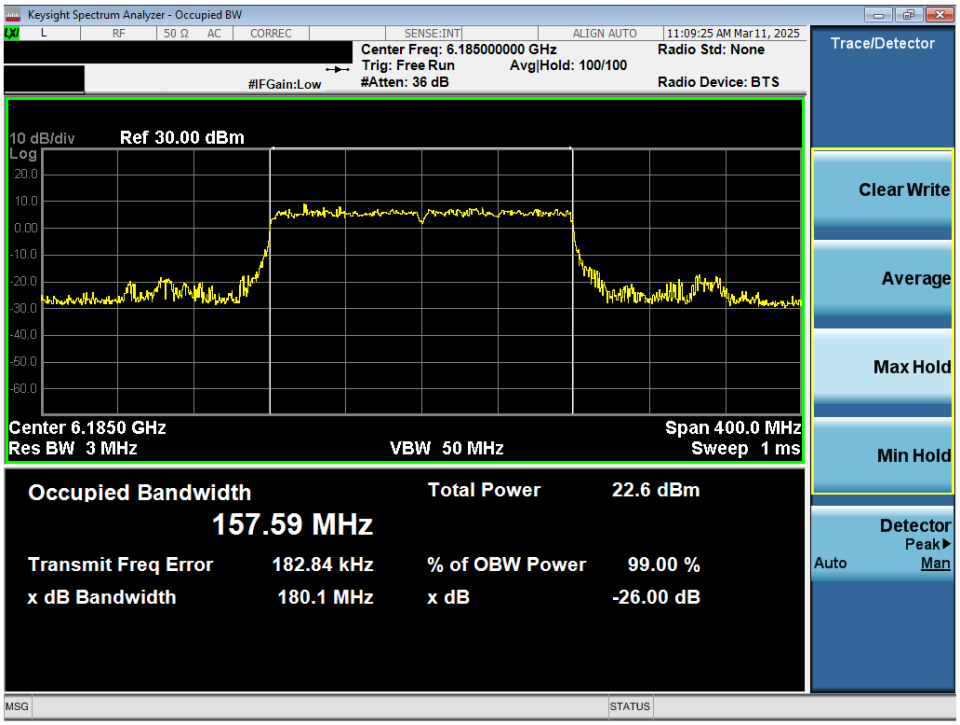

Plot 7-41. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

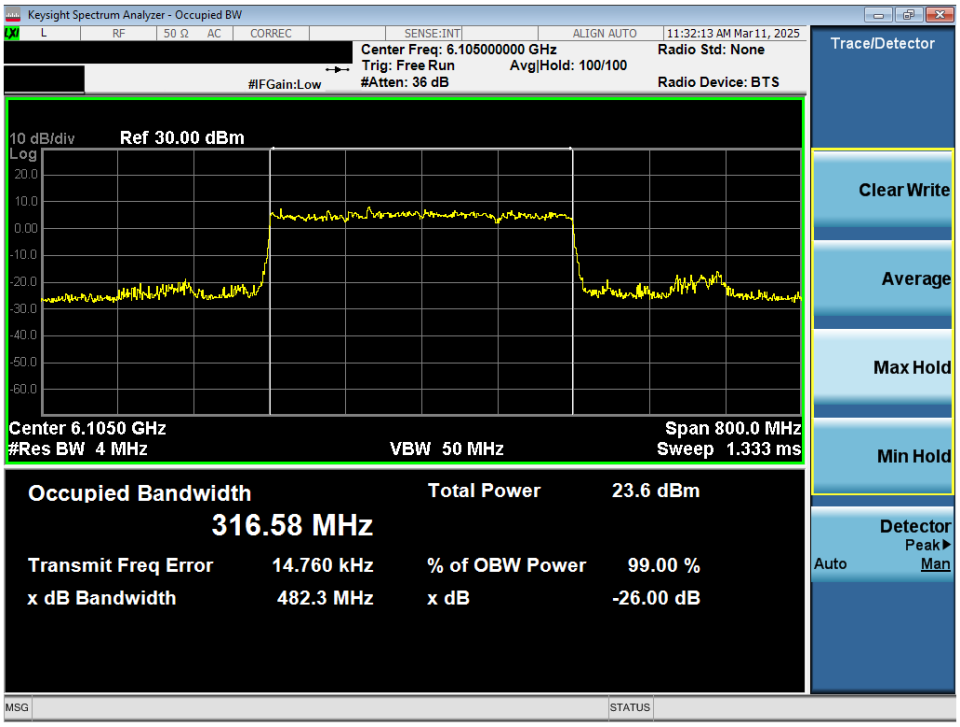

Plot 7-42. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

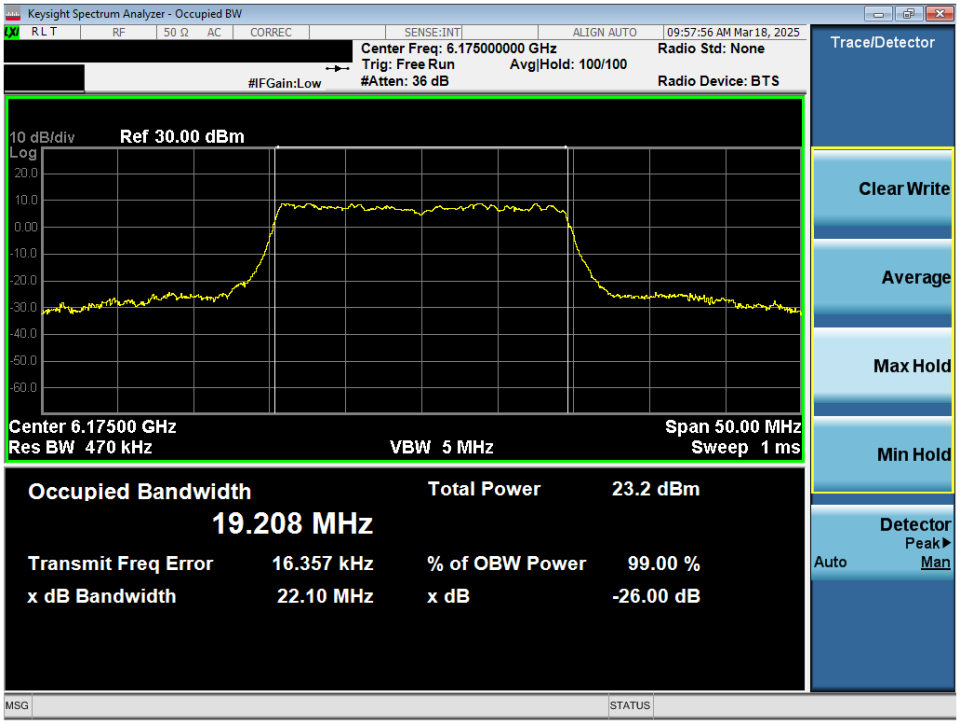

Plot 7-43. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - SP

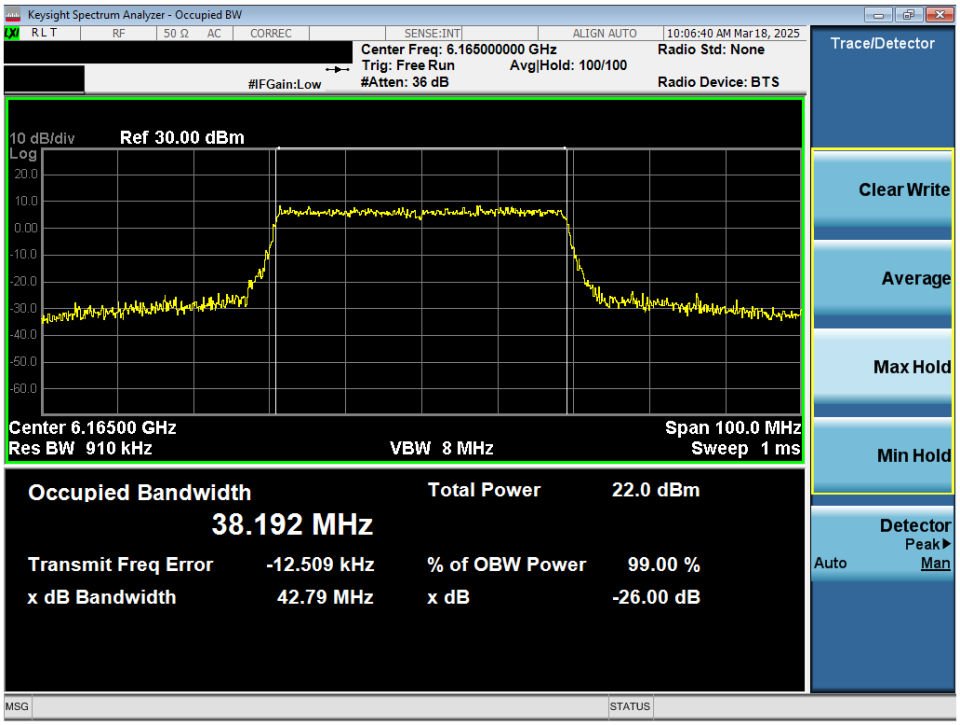

Plot 7-44. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm. For client devices operating under the control of a standard power access point, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

Compliance for this device while operating under the control of either an indoor low power access point or a standard power access point is demonstrated by applying the tighter low power indoor access point limit of 24dBm e.i.r.p. for cases where LPI and SP power targets are identical.
The manufacturer assigns MRU target powers as such:

EHT320 Target power → RU 4*996
EHT160 Target power → RU2*996 / MRU 2*996+484 / MRU 3*996 / MRU3*996+484
EHT80 Target power → RU996 / MRU996+484 / MRU996+484+242
EHT40 Target power → RU484 / MRU 484+242
EHT20 Target power → RU242
RU106 = RU106 / MRU106+26
RU52 = RU52 / MRU 52+26
RU26 = RU26

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (26 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 0	4	8	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	26T	-0.50	-0.79	-0.32	-4.49	-4.81	24.0	-28.81
		6175	45	26T	-0.51	-0.84	-0.28	-4.49	-4.77	24.0	-28.77
		6415	93	26T	-0.42	-0.73	-0.23	-4.49	-4.72	24.0	-28.72
	6	6435	97	26T	-0.31	-0.66	-0.27	-7.13	-7.40	24.0	-31.40
		6475	105	26T	-0.88	-0.28	-0.89	-7.13	-7.41	24.0	-31.41
		6515	113	26T	-0.16	-0.53	-0.05	-7.13	-7.18	24.0	-31.18
	7	6535	117	26T	-0.04	-0.15	-0.01	-5.98	-5.99	24.0	-29.99
		6695	149	26T	-0.41	-0.94	-0.44	-5.98	-6.39	24.0	-30.39
		6875	185	26T	-0.49	-0.09	-0.79	-5.98	-6.07	24.0	-30.07
	8	6895	189	26T	-0.46	-1.04	-0.72	-5.98	-6.44	24.0	-30.44
		6995	209	26T	-0.52	-1.01	-0.60	-5.98	-6.50	24.0	-30.50
		7115	233	26T	-0.49	-0.54	-0.24	-5.98	-6.22	24.0	-30.22

Table 7-8. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 0	4	8	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	26T	-0.13	-0.52	-0.13	-8.02	-8.15	24.0	-32.15
		6175	45	26T	-0.70	-0.63	-0.23	-8.02	-8.25	24.0	-32.25
		6415	93	26T	-0.49	-0.39	-0.09	-8.02	-8.11	24.0	-32.11
	6	6435	97	26T	-0.13	-0.54	-0.22	-10.74	-10.87	24.0	-34.87
		6475	105	26T	-0.43	-0.80	-0.42	-10.74	-11.16	24.0	-35.16
		6515	113	26T	-0.15	-0.57	-0.23	-10.74	-10.89	24.0	-34.89
	7	6535	117	26T	-0.37	-0.32	-0.01	-5.99	-6.00	24.0	-30.00
		6695	149	26T	-0.33	-0.67	-0.15	-5.99	-6.14	24.0	-30.14
		6875	185	26T	-0.16	-0.51	-0.52	-5.99	-6.15	24.0	-30.15
	8	6895	189	26T	-0.01	-0.28	-0.22	-4.25	-4.26	24.0	-28.26
		6995	209	26T	-0.37	-0.19	-0.15	-4.25	-4.40	24.0	-28.40
		7115	233	26T	-0.45	-0.33	-0.36	-4.25	-4.58	24.0	-28.58

Table 7-9. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 0	4	8	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	26T	3.82	3.42	3.9	-4.49	-0.60	24.0	-24.60
		6175	45	26T	11.30	11.39	11.27	-4.49	6.90	24.0	-17.10
		6415	93	26T	11.35	11.46	11.23	-4.49	6.97	24.0	-17.03
	7	6535	117	26T	9.70	9.27	9.72	-5.98	3.74	24.0	-20.26
		6695	149	26T	9.99	9.52	9.88	-5.98	4.01	24.0	-19.99

Table 7-10. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 0	4	8	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	26T	3.91	3.46	3.82	-8.02	-4.11	24.0	-28.11
		6175	45	26T	11.30	11.33	11.24	-8.02	3.31	24.0	-20.69
		6415	93	26T	11.27	10.88	11.22	-8.02	3.25	24.0	-20.75
	7	6535	117	26T	9.88	9.39	9.73	-5.99	3.89	24.0	-20.11
		6695	149	26T	9.78	9.30	9.68	-5.99	3.79	24.0	-20.21

Table 7-11. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (52 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 37	38	40	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	52T	2.89	2.66	2.85	-4.49	-1.60	24.0	-25.60
		6175	45	52T	2.51	2.63	2.82	-4.49	-1.67	24.0	-25.67
		6415	93	52T	2.92	2.51	2.66	-4.49	-1.57	24.0	-25.57
	6	6435	97	52T	2.53	2.14	2.32	-7.13	-4.60	24.0	-28.60
		6475	105	52T	2.72	2.38	2.51	-7.13	-4.41	24.0	-28.41
		6515	113	52T	2.53	2.13	2.43	-7.13	-4.60	24.0	-28.60
	7	6535	117	52T	2.41	2.23	2.45	-5.98	-3.53	24.0	-27.53
		6695	149	52T	2.49	2.16	2.47	-5.98	-3.49	24.0	-27.49
		6875	185	52T	2.40	2.23	2.51	-5.98	-3.47	24.0	-27.47
	8	6895	189	52T	2.37	2.18	2.40	-5.98	-3.58	24.0	-27.58
		6995	209	52T	2.58	2.38	2.62	-5.98	-3.36	24.0	-27.36
		7115	233	52T	2.44	2.54	2.33	-5.98	-3.44	24.0	-27.44

Table 7-12. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 37	38	40	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	52T	2.08	2.41	2.28	-8.02	-5.61	24.0	-29.61
		6175	45	52T	2.37	2.31	2.08	-8.02	-5.65	24.0	-29.65
		6415	93	52T	2.28	2.21	2.45	-8.02	-5.57	24.0	-29.57
	6	6435	97	52T	2.25	2.01	2.01	-10.74	-8.49	24.0	-32.49
		6475	105	52T	2.03	2.11	2.17	-10.74	-8.57	24.0	-32.57
		6515	113	52T	2.30	2.04	2.27	-10.74	-8.44	24.0	-32.44
	7	6535	117	52T	2.24	2.18	2.32	-5.99	-3.67	24.0	-27.67
		6695	149	52T	2.20	2.49	2.29	-5.99	-3.50	24.0	-27.50
		6875	185	52T	2.65	2.93	2.61	-5.99	-3.06	24.0	-27.06
	8	6895	189	52T	2.21	2.87	2.73	-4.25	-1.38	24.0	-25.38
		6995	209	52T	2.05	2.58	2.38	-4.25	-1.67	24.0	-25.67
		7115	233	52T	2.44	2.54	2.33	-4.25	-1.71	24.0	-25.71

Table 7-13. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 37	39	40	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	52T	5.73	5.56	5.8	-4.49	1.31	24.0	-22.69
		6175	45	52T	13.65	13.91	13.59	-4.49	9.42	24.0	-14.58
		6415	93	52T	13.75	13.90	13.55	-4.49	9.41	24.0	-14.59
	7	6535	117	52T	13.81	13.90	13.60	-5.98	7.92	24.0	-16.08
		6695	149	52T	13.75	13.93	13.59	-5.98	7.95	24.0	-16.05

Table 7-14. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 37	39	40	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	52T	5.76	5.56	5.74	-8.02	-2.26	24.0	-26.26
		6175	45	52T	13.60	13.40	13.55	-8.02	5.58	24.0	-18.42
		6415	93	52T	13.60	13.37	13.49	-8.02	5.58	24.0	-18.42
	7	6535	117	52T	13.75	13.45	13.62	-5.99	7.76	24.0	-16.24
		6695	149	52T	13.55	13.18	13.34	-5.99	7.56	24.0	-16.44

Table 7-15. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (106 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 53	Avg Conducted Power (dBm) RU Index 54	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW		5935	2	106T	5.50	5.44	-4.49	1.01	24.0	-22.99
		6175	45	106T	5.60	5.56	-4.49	1.11	24.0	-22.89
		6415	93	106T	5.75	5.59	-4.49	1.26	24.0	-22.74
	6	6435	97	106T	5.48	5.31	-7.13	-1.65	24.0	-25.65
		6475	105	106T	5.67	5.56	-7.13	-1.46	24.0	-25.46
		6515	113	106T	5.56	5.45	-7.13	-1.57	24.0	-25.57
	7	6535	117	106T	5.06	5.08	-5.98	-0.90	24.0	-24.90
		6695	149	106T	5.10	5.18	-5.98	-0.80	24.0	-24.80
		6875	185	106T	5.17	5.25	-5.98	-0.73	24.0	-24.73
	8	6895	189	106T	5.06	5.06	-5.98	-0.92	24.0	-24.92
		6995	209	106T	5.53	5.52	-5.98	-0.45	24.0	-24.45
		7115	233	106T	5.42	5.69	-5.98	-0.29	24.0	-24.29

Table 7-16. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 53	Avg Conducted Power (dBm) RU Index 54	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW		5935	2	106T	5.45	5.12	-8.02	-2.57	24.0	-26.57
		6175	45	106T	5.41	5.00	-8.02	-2.61	24.0	-26.61
		6415	93	106T	5.48	5.04	-8.02	-2.54	24.0	-26.54
	6	6435	97	106T	5.34	4.97	-10.74	-5.40	24.0	-29.40
		6475	105	106T	5.47	5.05	-10.74	-5.27	24.0	-29.27
		6515	113	106T	5.12	5.10	-10.74	-5.62	24.0	-29.62
	7	6535	117	106T	5.25	5.02	-5.99	-0.74	24.0	-24.74
		6695	149	106T	5.38	5.42	-5.99	-0.57	24.0	-24.57
		6875	185	106T	5.48	5.54	-5.99	-0.45	24.0	-24.45
	8	6895	189	106T	5.29	5.53	-4.25	1.28	24.0	-22.72
		6995	209	106T	5.36	5.08	-4.25	1.11	24.0	-22.89
		7115	233	106T	5.29	5.55	-4.25	1.30	24.0	-22.70

Table 7-17. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 53	Avg Conducted Power (dBm) RU Index 54	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	106T	7.94	7.99	-4.49	3.50	24.0	-20.50
		6175	45	106T	13.50	13.52	-4.49	9.03	24.0	-14.97
		6415	93	106T	13.65	13.99	-4.49	9.50	24.0	-14.50
	7	6535	117	106T	13.70	13.50	-5.98	7.72	24.0	-16.28
		6695	149	106T	13.60	13.52	-5.98	7.62	24.0	-16.38

Table 7-18. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 53	Avg Conducted Power (dBm) RU Index 54	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	106T	7.77	7.70	-8.02	-0.25	24.0	-24.25
		6175	45	106T	13.98	13.90	-8.02	5.96	24.0	-18.04
		6415	93	106T	13.49	13.43	-8.02	5.47	24.0	-18.53
	7	6535	117	106T	13.66	13.54	-5.99	7.67	24.0	-16.33
		6695	149	106T	13.35	13.30	-5.99	7.36	24.0	-16.64

Table 7-19. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (242 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 61	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	242T	9.63	-4.49	5.14	24.0	-18.86
		6175	45	242T	10.48	-4.49	5.99	24.0	-18.01
		6415	93	242T	10.71	-4.49	6.22	24.0	-17.78
	6	6435	97	242T	10.41	-7.13	3.28	24.0	-20.72
		6475	105	242T	10.52	-7.13	3.39	24.0	-20.61
		6515	113	242T	10.39	-7.13	3.26	24.0	-20.74
	7	6535	117	242T	10.51	-5.98	4.53	24.0	-19.47
		6695	149	242T	10.03	-5.98	4.05	24.0	-19.95
		6875	185	242T	10.07	-5.98	4.09	24.0	-19.91
	8	6895	189	242T	10.01	-5.98	4.03	24.0	-19.97
		6995	209	242T	10.28	-5.98	4.30	24.0	-19.70
		7115	233	242T	10.23	-5.98	4.25	24.0	-19.75

Table 7-20. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 61	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	242T	9.55	-8.02	1.53	24.0	-22.47
		6175	45	242T	10.25	-8.02	2.23	24.0	-21.77
		6415	93	242T	10.25	-8.02	2.23	24.0	-21.77
	6	6435	97	242T	10.13	-10.74	-0.61	24.0	-24.61
		6475	105	242T	10.17	-10.74	-0.57	24.0	-24.57
		6515	113	242T	10.19	-10.74	-0.55	24.0	-24.55
	7	6535	117	242T	10.38	-5.99	4.39	24.0	-19.61
		6695	149	242T	10.08	-5.99	4.09	24.0	-19.91
		6875	185	242T	10.19	-5.99	4.20	24.0	-19.80
	8	6895	189	242T	10.09	-4.25	5.84	24.0	-18.16
		6995	209	242T	10.36	-4.25	6.11	24.0	-17.89
		7115	233	242T	10.23	-4.25	5.98	24.0	-18.02

Table 7-21. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 61	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	242T	9.66	-4.49	5.17	24.0	-18.83
		6175	45	242T	16.79	-4.49	12.30	24.0	-11.70
		6415	93	242T	16.70	-4.49	12.21	24.0	-11.79
	7	6535	117	242T	16.77	-5.98	10.79	24.0	-13.21
		6695	149	242T	16.77	-5.98	10.79	24.0	-13.21

Table 7-22. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 61	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	242T	9.98	-8.02	1.96	24.0	-22.04
		6175	45	242T	16.85	-8.02	8.83	24.0	-15.17
		6415	93	242T	16.28	-8.02	8.26	24.0	-15.74
	7	6535	117	242T	16.34	-5.99	10.35	24.0	-13.65
		6695	149	242T	16.02	-5.99	10.03	24.0	-13.97

Table 7-23. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (484 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 65	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
40MHz BW	5	5965	3	484T	12.80	-4.49	8.31	24.0	-15.69
		6165	43	484T	12.66	-4.49	8.17	24.0	-15.83
		6405	91	484T	12.89	-4.49	8.40	24.0	-15.60
	6	6445	99	484T	12.82	-7.13	5.69	24.0	-18.31
		6485	107	484T	12.58	-7.13	5.45	24.0	-18.55
		6525	115	484T	12.71	-7.13	5.58	24.0	-18.42
	7	6565	123	484T	12.51	-5.98	6.53	24.0	-17.47
		6725	155	484T	12.04	-5.98	6.06	24.0	-17.94
		6845	179	484T	12.39	-5.98	6.41	24.0	-17.59
	8	6885	187	484T	11.95	-5.98	5.97	24.0	-18.03
		7005	211	484T	12.35	-5.98	6.37	24.0	-17.63
		7085	227	484T	12.21	-5.98	6.23	24.0	-17.77

Table 7-24. SISO ANT1 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 65	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
40MHz BW	5	5965	3	484T	12.86	-8.02	4.84	24.0	-19.16
		6165	43	484T	12.22	-8.02	4.20	24.0	-19.80
		6405	91	484T	12.32	-8.02	4.30	24.0	-19.70
	6	6445	99	484T	12.55	-10.74	1.81	24.0	-22.19
		6485	107	484T	12.47	-10.74	1.73	24.0	-22.27
		6525	115	484T	12.65	-10.74	1.91	24.0	-22.09
	7	6565	123	484T	12.71	-5.99	6.72	24.0	-17.28
		6725	155	484T	12.91	-5.99	6.92	24.0	-17.08
		6845	179	484T	12.53	-5.99	6.54	24.0	-17.46
	8	6885	187	484T	12.11	-4.25	7.86	24.0	-16.14
		7005	211	484T	12.09	-4.25	7.84	24.0	-16.16
		7085	227	484T	12.30	-4.25	8.05	24.0	-15.95

Table 7-25. SISO ANT2 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 65	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
40MHz BW	5	5965	3	484T	16.98	-4.49	12.49	24.0	-11.51
		6165	43	484T	16.60	-4.49	12.11	24.0	-11.89
		6405	91	484T	16.57	-4.49	12.08	24.0	-11.92
	7	6565	123	484T	16.50	-5.98	10.52	24.0	-13.48
		6685	147	484T	16.62	-5.98	10.64	24.0	-13.36

Table 7-26. SISO ANT1 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 65	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
40MHz BW	5	5965	3	484T	16.84	-8.02	8.82	24.0	-15.18
		6165	43	484T	16.65	-8.02	8.63	24.0	-15.37
		6405	91	484T	16.25	-8.02	8.23	24.0	-15.77
	7	6565	123	484T	16.34	-5.99	10.35	24.0	-13.65
		6685	147	484T	16.37	-5.99	10.38	24.0	-13.62

Table 7-27. SISO ANT2 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (996 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 67	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
80MHz BW	5	5985	7	996T	15.86	-4.49	11.37	24.0	-12.63
		6145	39	996T	15.54	-4.49	11.05	24.0	-12.95
		6385	87	996T	15.67	-4.49	11.18	24.0	-12.82
	6	6465	103	996T	15.80	-7.13	8.67	24.0	-15.33
	7	6545	119	996T	15.56	-5.98	9.58	24.0	-14.42
		6705	151	996T	15.15	-5.98	9.17	24.0	-14.83
		6865	183	996T	15.44	-5.98	9.46	24.0	-14.54
	8	6945	199	996T	15.44	-5.98	9.46	24.0	-14.54
		7025	215	996T	15.34	-5.98	9.36	24.0	-14.64

Table 7-28. SISO ANT1 80MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI/SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 67	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
80MHz BW	5	5985	7	996T	15.72	-8.02	7.70	24.0	-16.30
		6145	39	996T	15.45	-8.02	7.43	24.0	-16.57
		6385	87	996T	15.19	-8.02	7.17	24.0	-16.83
	6	6465	103	996T	15.47	-10.74	4.73	24.0	-19.27
	7	6545	119	996T	15.07	-5.99	9.08	24.0	-14.92
		6705	151	996T	15.32	-5.99	9.33	24.0	-14.67
		6865	183	996T	15.07	-5.99	9.08	24.0	-14.92
	8	6945	199	996T	15.06	-4.25	10.81	24.0	-13.19
		7025	215	996T	15.10	-4.25	10.85	24.0	-13.15

Table 7-29. SISO ANT2 80MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (2x996 Tones)

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 68	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
160MHz BW	5	6025	15	2x996T	14.27	-4.49	9.78	24.0	-14.22
		6185	47	2x996T	14.46	-4.49	9.97	24.0	-14.03
		6345	79	2x996T	14.43	-4.49	9.94	24.0	-14.06
	6	6505	111	2x996T	14.55	-7.13	7.42	24.0	-16.58
	7	6665	143	2x996T	14.14	-5.98	8.16	24.0	-15.84
		6825	175	2x996T	14.22	-5.98	8.24	24.0	-15.76
	8	6985	207	2x996T	14.17	-5.98	8.19	24.0	-15.81

Table 7-30. SISO ANT1 160MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI/SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) RU Index 68	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
160MHz BW	5	6025	15	2x996T	14.46	-8.02	6.44	24.0	-17.56
		6185	47	2x996T	14.40	-8.02	6.38	24.0	-17.62
		6345	79	2x996T	14.14	-8.02	6.12	24.0	-17.88
	6	6505	111	2x996T	14.32	-10.74	3.58	24.0	-20.42
	7	6665	143	2x996T	14.04	-5.99	8.05	24.0	-15.95
		6825	175	2x996T	14.59	-5.99	8.60	24.0	-15.40
	8	6985	207	2x996T	14.59	-4.25	10.34	24.0	-13.66

Table 7-31. SISO ANT2 160MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (4x996 Tones)

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 69	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	4x996T	14.32	-4.49	9.83	24.0	-14.17
		6265	63	4x996T	14.44	-4.49	9.95	24.0	-14.05
	6	6425	95	4x996T	14.32	-7.13	7.19	24.0	-16.81
	7	6585	127	4x996T	14.52	-5.98	8.54	24.0	-15.46
		6745	159	4x996T	14.22	-5.98	8.24	24.0	-15.76
	8	6905	191	4x996T	14.69	-5.98	8.71	24.0	-15.29

Table 7-32. SISO ANT1 320MHz BW 802.11be (UNII) Maximum Conducted Output Power – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index 69	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	4x996T	14.32	-8.02	6.30	24.0	-17.70
		6265	63	4x996T	14.44	-8.02	6.42	24.0	-17.58
	6	6425	95	4x996T	14.32	-10.74	3.58	24.0	-20.42
	7	6585	127	4x996T	14.52	-5.99	8.53	24.0	-15.47
		6745	159	4x996T	14.22	-5.99	8.23	24.0	-15.77
	8	6905	191	4x996T	14.69	-4.25	10.44	24.0	-13.56

Table 7-33. SISO ANT2 320MHz BW 802.11be (UNII) Maximum Conducted Output Power – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

SISO Maximum Conducted Output Power Measurements (MRU)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 70	71	72	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	52+26T	2.70	2.96	2.99	-4.49	-1.50	24.0	-25.50
	6	6475	105	52+26T	2.74	2.63	2.68	-7.13	-4.39	24.0	-28.39
	7	6695	149	52+26T	2.57	2.56	2.72	-5.98	-3.26	24.0	-27.26
	8	6995	209	52+26T	2.54	2.90	2.99	-5.98	-2.99	24.0	-26.99

Table 7-34. SISO ANT1 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – LPI

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 70	71	72	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	52+26T	2.94	2.85	2.95	-8.02	-5.07	24.0	-29.07
	6	6475	105	52+26T	2.99	2.88	2.97	-10.74	-7.75	24.0	-31.75
	7	6695	149	52+26T	2.99	2.90	2.91	-5.99	-3.00	24.0	-27.00
	8	6995	209	52+26T	2.55	2.52	2.72	-4.25	-1.53	24.0	-25.53

Table 7-35. SISO ANT2 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – LPI

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 70	71	72	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	52+26T	13.99	13.88	13.50	-4.49	9.50	24.0	-14.50
	7	6695	149	52+26T	13.63	13.50	13.50	-5.98	7.65	24.0	-16.35

Table 7-36. SISO ANT1 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – SP

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 70	71	72	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	52+26T	13.97	13.81	13.95	-8.02	5.95	24.0	-18.05
	7	6695	149	52+26T	13.33	13.22	13.33	-5.99	7.34	24.0	-16.66

Table 7-37. SISO ANT2 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – SP

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 82	83	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	106+26T	5.73	5.74	-4.49	1.25	24.0	-22.75
	6	6475	105	106+26T	5.99	5.92	-7.13	-1.14	24.0	-25.14
	7	6695	149	106+26T	5.89	5.93	-5.98	-0.05	24.0	-24.05
	8	6995	209	106+26T	5.99	5.93	-5.98	0.01	24.0	-23.99

Table 7-38. SISO ANT1 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – LPI

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 82	83	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	106+26T	5.80	5.81	-8.02	-2.21	24.0	-26.21
	6	6475	105	106+26T	5.72	5.73	-10.74	-5.01	24.0	-29.01
	7	6695	149	106+26T	5.99	5.89	-5.99	0.00	24.0	-24.00
	8	6995	209	106+26T	5.78	5.94	-4.25	1.69	24.0	-22.31

Table 7-39. SISO ANT2 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – LPI

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 82	83	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	106+26T	13.96	13.99	-4.49	9.50	24.0	-14.50
	7	6695	149	106+26T	13.52	13.50	-5.98	7.54	24.0	-16.46

Table 7-40. SISO ANT1 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – SP

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 82	83	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	106+26T	13.83	13.90	-8.02	5.88	24.0	-18.12
	7	6695	149	106+26T	13.49	13.46	-5.99	7.50	24.0	-16.50

Table 7-41. SISO ANT2 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 90	91	93	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
80MHz BW	5	5985	7	242+484T	12.99	12.99	12.99	-4.49	8.50	24.0	-15.50
		6145	39	242+484T	12.79	12.85	12.85	-4.49	8.36	24.0	-15.64
		6385	87	242+484T	12.89	12.86	12.95	-4.49	8.46	24.0	-15.54
	6	6465	103	242+484T	12.99	12.60	12.67	-7.13	5.86	24.0	-18.14
	7	6545	119	242+484T	12.99	12.95	12.99	-5.98	7.01	24.0	-16.99
		6705	151	242+484T	12.69	12.77	12.65	-5.98	6.79	24.0	-17.21
		6865	183	242+484T	12.92	12.93	12.89	-5.98	6.95	24.0	-17.05
	8	6945	199	242+484T	12.98	12.99	12.99	-5.98	7.01	24.0	-16.99
		7025	215	242+484T	12.98	12.96	12.98	-5.98	7.00	24.0	-17.00

Table 7-42. SISO ANT1 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 90	91	93	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
80MHz BW	5	5985	7	242+484T	12.99	12.95	12.99	-8.02	4.97	24.0	-19.03
		6145	39	242+484T	12.73	12.68	12.66	-8.02	4.71	24.0	-19.29
		6385	87	242+484T	12.60	12.55	12.58	-8.02	4.58	24.0	-19.42
	6	6465	103	242+484T	12.62	12.65	12.73	-10.74	1.99	24.0	-22.01
	7	6545	119	242+484T	12.92	12.93	12.95	-5.99	6.96	24.0	-17.04
		6705	151	242+484T	12.68	12.75	12.82	-5.99	6.83	24.0	-17.17
		6865	183	242+484T	12.94	12.99	12.96	-5.99	7.00	24.0	-17.00
	8	6945	199	242+484T	12.70	12.66	12.61	-4.25	8.45	24.0	-15.55
		7025	215	242+484T	12.93	12.89	12.73	-4.25	8.68	24.0	-15.32

Table 7-43. SISO ANT2 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – LPI

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 90	91	93	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
80MHz BW	5	5985	7	242+484T	15.64	16.93	17.0	-4.49	12.47	24.0	-11.53
		6145	39	242+484T	15.70	15.51	16.7	-4.49	12.16	24.0	-11.84
		6385	87	242+484T	16.90	16.96	17.0	-4.49	12.50	24.0	-11.50
	7	6545	119	242+484T	16.55	16.55	16.6	-5.98	10.64	24.0	-13.36
		6705	151	242+484T	16.62	16.40	16.5	-5.98	10.64	24.0	-13.36

Table 7-44. SISO ANT1 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 90	91	93	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
80MHz BW	5	5985	7	242+484T	15.69	15.54	15.68	-8.02	7.67	24.0	-16.33
		6145	39	242+484T	15.76	15.60	15.77	-8.02	7.75	24.0	-16.25
		6385	87	242+484T	15.30	15.15	15.28	-8.02	7.28	24.0	-16.72
	7	6545	119	242+484T	15.19	15.11	15.20	-5.99	9.21	24.0	-14.79
		6705	151	242+484T	15.59	15.48	15.06	-5.99	9.60	24.0	-14.40

Table 7-45. SISO ANT2 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 94	95	1094	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
160MHz BW	5	6025	15	996+484T	15.99	15.64	15.68	-4.49	11.50	24.0	-12.50
		6185	47	996+484T	15.65	15.65	15.67	-4.49	11.18	24.0	-12.82
		6345	79	996+484T	15.66	15.72	15.72	-4.49	11.23	24.0	-12.77
	6	6505	111	996+484T	15.84	15.91	15.93	-7.13	8.80	24.0	-15.20
	7	6665	143	996+484T	15.61	15.51	15.99	-5.98	10.01	24.0	-13.99
		6825	175	996+484T	15.81	15.82	15.72	-5.98	9.84	24.0	-14.16
	8	6985	207	996+484T	15.76	15.90	15.88	-5.98	9.92	24.0	-14.08

Table 7-46. SISO ANT1 160MHz BW 802.11be (UNII) Maximum Conducted Output Power (996+484 Tones) – LPI/SP

	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 94	95	1094	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
160MHz BW	5	6025	15	996+484T	15.99	15.99	15.67	-8.02	7.97	24.0	-16.03
		6185	47	996+484T	15.72	15.60	15.60	-8.02	7.70	24.0	-16.30
		6345	79	996+484T	15.81	15.77	15.65	-8.02	7.79	24.0	-16.21
	6	6505	111	996+484T	15.85	15.92	15.95	-10.74	5.21	24.0	-18.79
	7	6665	143	996+484T	15.87	15.74	15.73	-5.99	9.88	24.0	-14.12
		6825	175	996+484T	15.90	15.82	15.97	-5.99	9.98	24.0	-14.02
	8	6985	207	996+484T	15.94	15.97	15.94	-4.25	11.72	24.0	-12.28

Table 7-47. SISO ANT2 160MHz BW 802.11be (UNII) Maximum Conducted Output Power (996+484 Tones) – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 100	101	11102	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	2x996+484T	14.93	14.93	14.70	-4.49	10.44	24.0	-13.56
		6265	63	2x996+484T	14.99	14.99	14.99	-4.49	10.50	24.0	-13.50
	6	6425	95	2x996+484T	14.93	14.97	14.99	-7.13	7.86	24.0	-16.14
	7	6585	127	2x996+484T	14.69	14.64	14.79	-5.98	8.81	24.0	-15.19
		6745	159	2x996+484T	14.99	14.99	14.69	-5.98	9.01	24.0	-14.99
	8	6905	191	2x996+484T	14.98	14.95	14.99	-5.98	9.01	24.0	-14.99

Table 7-48. SISO ANT1 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (2*996+484 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 100	101	11102	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	2x996+484T	14.88	14.93	14.93	-8.02	6.91	24.0	-17.09
		6265	63	2x996+484T	14.75	14.85	14.72	-8.02	6.83	24.0	-17.17
	6	6425	95	2x996+484T	14.60	14.56	14.54	-10.74	3.86	24.0	-20.14
	7	6585	127	2x996+484T	14.84	14.93	14.82	-5.99	8.94	24.0	-15.06
		6745	159	2x996+484T	14.99	14.97	14.99	-5.99	9.00	24.0	-15.00
	8	6905	191	2x996+484T	14.99	14.99	14.79	-4.25	10.74	24.0	-13.26

Table 7-49. SISO ANT2 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (2*996+484 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 104	10104	11104	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	3x996T	14.90	14.76	14.73	-4.49	10.41	24.0	-13.59
		6265	63	3x996T	14.70	14.97	14.99	-4.49	10.50	24.0	-13.50
	6	6425	95	3x996T	14.75	14.88	14.75	-7.13	7.75	24.0	-16.25
	7	6585	127	3x996T	14.63	14.53	14.53	-5.98	8.65	24.0	-15.35
		6745	159	3x996T	14.99	14.82	14.79	-5.98	9.01	24.0	-14.99
	8	6905	191	3x996T	14.85	14.72	14.79	-5.98	8.87	24.0	-15.13

Table 7-50. SISO ANT1 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 104	10104	11104	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	3x996T	14.64	14.78	14.63	-8.02	6.76	24.0	-17.24
		6265	63	3x996T	14.65	14.60	14.60	-8.02	6.63	24.0	-17.37
	6	6425	95	3x996T	14.83	14.92	14.83	-10.74	4.18	24.0	-19.82
	7	6585	127	3x996T	14.64	14.75	14.68	-5.99	8.76	24.0	-15.24
		6745	159	3x996T	14.87	14.82	14.83	-5.99	8.88	24.0	-15.12
	8	6905	191	3x996T	14.60	14.53	14.82	-4.25	10.57	24.0	-13.43

Table 7-51. SISO ANT2 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 105	106	11105	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	3x996+484T	14.66	14.60	14.79	-4.49	10.30	24.0	-13.70
		6265	63	3x996+484T	14.96	14.98	14.99	-4.49	10.50	24.0	-13.50
	6	6425	95	3x996+484T	14.81	14.83	14.87	-7.13	7.74	24.0	-16.26
	7	6585	127	3x996+484T	14.69	14.62	14.58	-5.98	8.71	24.0	-15.29
		6745	159	3x996+484T	14.95	14.95	14.83	-5.98	8.97	24.0	-15.03
	8	6905	191	3x996+484T	14.87	14.86	14.84	-5.98	8.89	24.0	-15.11

Table 7-52. SISO ANT1 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996+484 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm) MRU Index 105	106	11105	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	3x996+484T	14.77	14.82	14.75	-8.02	6.80	24.0	-17.20
		6265	63	3x996+484T	14.89	14.67	14.71	-8.02	6.87	24.0	-17.13
	6	6425	95	3x996+484T	14.97	14.88	14.91	-10.74	4.23	24.0	-19.77
	7	6585	127	3x996+484T	14.69	14.74	14.74	-5.99	8.75	24.0	-15.25
		6745	159	3x996+484T	14.99	14.92	14.99	-5.99	9.00	24.0	-15.00
	8	6905	191	3x996+484T	14.74	14.65	14.61	-4.25	10.49	24.0	-13.51

Table 7-53. SISO ANT2 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996+484 Tones) – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (26 Tones)

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index												
					0			4			8						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
20MHz BW	5	5935	2	26T	-0.67	-1.32	2.03	-1.00	-1.64	1.70	-0.57	-1.23	2.12	-3.07	-0.94	24.0	-24.94
		6175	45	26T	-0.88	-1.62	1.78	-1.27	-1.81	1.48	-0.77	-1.44	1.92	-3.07	-1.15	24.0	-25.15
		6415	93	26T	-0.53	-0.94	2.28	-0.97	-1.27	1.89	-0.44	-0.96	2.32	-3.07	-0.75	24.0	-24.75
	6	6435	97	26T	-0.64	-0.76	2.31	-0.91	-1.18	1.97	-0.43	-0.81	2.39	-5.74	-3.34	24.0	-27.34
		6475	105	26T	-0.10	-0.89	2.53	-0.62	-1.22	2.10	-0.02	-0.91	2.57	-5.74	-3.17	24.0	-27.17
		6515	113	26T	-0.27	-0.62	2.57	-0.70	-1.02	2.15	-0.13	-0.78	2.57	-5.74	-3.17	24.0	-27.17
	7	6535	117	26T	1.03	-0.67	3.27	0.68	-1.15	2.87	1.12	-0.81	3.27	-2.97	0.30	24.0	-23.70
		6695	149	26T	0.40	-1.49	2.57	-0.02	-1.75	2.21	0.15	-1.24	2.52	-2.97	-0.41	24.0	-24.41
		6875	185	26T	0.28	-1.37	2.54	-0.35	-1.69	2.04	-0.04	-1.31	2.38	-2.97	-0.43	24.0	-24.43
	8	6895	189	26T	0.59	-1.03	2.87	-0.08	-1.32	2.35	0.37	-0.85	2.81	-2.06	0.80	24.0	-23.20
		6995	209	26T	0.36	-0.18	3.11	-0.09	-0.55	2.70	0.32	-0.09	3.13	-2.06	1.07	24.0	-22.93
		7115	233	26T	0.38	-0.17	3.12	-0.07	-0.54	2.71	0.34	-0.08	3.15	-2.06	1.08	24.0	-22.92

Table 7-54. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index									
					0			4						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
20MHz BW	5	5935	2	26T	3.18	3.79	6.51	3.18	3.78	6.50	-3.07	3.44	24.0	-20.56
		6175	45	26T	10.61	11.49	14.08	11.31	10.51	13.94	-3.07	11.02	24.0	-12.98
		6415	93	26T	11.29	10.39	13.87	11.48	10.50	14.03	-3.07	11.07	24.0	-12.93
	7	6535	117	26T	9.98	9.01	12.53	9.78	9.56	12.68	-2.97	9.75	24.0	-14.25
		6695	149	26T	9.72	9.22	12.49	9.25	9.17	12.22	-2.97	9.59	24.0	-14.41

Table 7-55. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (52 Tones)

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index												
					37			38			40						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
20MHz BW	5	5935	2	52T	1.84	2.29	5.08	2.16	2.62	5.41	2.42	2.89	5.67	-3.07	2.61	24.0	-21.39
		6175	45	52T	2.54	2.94	5.75	2.08	2.75	5.44	2.35	2.95	5.67	-3.07	2.69	24.0	-21.31
		6415	93	52T	1.95	2.54	5.27	1.95	2.79	5.40	1.79	2.48	5.16	-3.07	2.33	24.0	-21.67
	6	6435	97	52T	1.98	2.82	5.43	1.57	2.58	5.11	1.80	2.75	5.31	-5.74	-0.31	24.0	-24.31
		6475	105	52T	2.32	2.73	5.54	1.89	2.53	5.23	2.04	2.66	5.37	-5.74	-0.20	24.0	-24.20
		6515	113	52T	2.22	2.86	5.56	1.72	2.46	5.12	1.88	2.66	5.30	-5.74	-0.18	24.0	-24.18
	7	6535	117	52T	2.12	2.78	5.47	1.96	2.51	5.25	2.21	2.68	5.46	-2.97	2.50	24.0	-21.50
		6695	149	52T	1.57	2.62	5.14	1.81	2.90	5.40	1.66	2.53	5.13	-2.97	2.42	24.0	-21.58
		6875	185	52T	1.56	2.60	5.12	1.78	2.89	5.38	1.61	2.60	5.14	-2.97	2.41	24.0	-21.59
	8	6895	189	52T	1.30	2.71	5.07	1.69	3.10	5.46	1.49	2.86	5.24	-2.06	3.40	24.0	-20.60
		6995	209	52T	1.18	2.67	5.00	1.47	3.03	5.33	1.21	2.84	5.11	-2.06	3.27	24.0	-20.73
		7115	233	52T	1.22	2.71	5.04	1.51	3.07	5.37	1.25	2.88	5.15	-2.06	3.31	24.0	-20.69

Table 7-56. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index									
					37			38						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
20MHz BW	5	5935	2	52T	5.65	5.94	8.81	5.95	5.49	8.74	-3.07	5.74	24.0	-18.26
		6175	45	52T	13.46	13.21	16.35	13.41	13.52	16.48	-3.07	13.41	24.0	-10.59
		6415	93	52T	13.89	13.52	16.72	13.55	13.88	16.73	-3.07	13.66	24.0	-10.34
	7	6535	117	52T	13.64	13.64	16.65	13.54	13.29	16.43	-2.97	13.68	24.0	-10.32
		6695	149	52T	13.84	13.84	16.85	13.26	13.74	16.52	-2.97	13.88	24.0	-10.12

Table 7-57. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (106 Tones)

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 53 ANT1	53 ANT2	53 MIMO	54 ANT1	54 ANT2	54 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW		5935	2	106T	5.08	5.07	8.09	5.12	5.11	8.13	-3.07	5.06	24.0	-18.94
		6175	45	106T	5.67	5.99	8.84	5.50	5.97	8.75	-3.07	5.78	24.0	-18.22
		6415	93	106T	5.72	5.84	8.79	5.57	5.82	8.71	-3.07	5.72	24.0	-18.28
	6	6435	97	106T	5.84	5.89	8.88	5.67	5.99	8.84	-5.74	3.14	24.0	-20.86
		6475	105	106T	5.53	5.67	8.61	5.38	5.65	8.53	-5.74	2.87	24.0	-21.13
		6515	113	106T	5.38	5.73	8.57	5.18	5.59	8.40	-5.74	2.83	24.0	-21.17
	7	6535	117	106T	5.37	5.87	8.64	5.47	5.87	8.68	-2.97	5.71	24.0	-18.29
		6695	149	106T	4.77	5.78	8.31	4.82	5.77	8.33	-2.97	5.36	24.0	-18.64
		6875	185	106T	4.75	5.77	8.30	4.84	5.82	8.37	-2.97	5.39	24.0	-18.61
	8	6895	189	106T	4.04	5.97	8.12	3.60	5.17	7.47	-2.06	6.06	24.0	-17.94
		6995	209	106T	4.11	5.77	8.03	4.21	5.89	8.14	-2.06	6.08	24.0	-17.92
		7115	233	106T	4.11	5.79	8.04	4.19	5.91	8.14	-2.06	6.08	24.0	-17.92

Table 7-58. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 53 ANT1	53 ANT2	53 MIMO	54 ANT1	54 ANT2	54 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
20MHz BW	5	5935	2	106T	7.98	7.40	10.71	7.60	7.32	10.47	-3.07	7.64	24.0	-16.36
		6175	45	106T	13.73	13.21	16.49	13.15	13.42	16.30	-3.07	13.42	24.0	-10.58
		6415	93	106T	13.29	13.22	16.27	13.21	13.56	16.40	-3.07	13.33	24.0	-10.67
	7	6535	117	106T	13.00	13.44	16.24	13.23	13.33	16.29	-2.97	13.32	24.0	-10.68
		6695	149	106T	13.34	13.11	16.24	13.11	13.41	16.27	-2.97	13.30	24.0	-10.70

Table 7-59. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (242 Tones)

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 61			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					ANT1	ANT2	MIMO				
20MHz BW	5	5935	2	242T	9.56	9.87	12.73	-3.07	9.66	24.0	-14.34
		6175	45	242T	10.55	10.79	13.68	-3.07	10.62	24.0	-13.38
		6415	93	242T	9.94	10.49	13.23	-3.07	10.17	24.0	-13.83
	6	6435	97	242T	10.04	10.66	13.37	-5.74	7.63	24.0	-16.37
		6475	105	242T	10.21	10.80	13.53	-5.74	7.79	24.0	-16.21
		6515	113	242T	10.03	10.83	13.46	-5.74	7.72	24.0	-16.28
	7	6535	117	242T	10.28	10.81	13.56	-2.97	10.59	24.0	-13.41
		6695	149	242T	9.67	10.48	13.10	-2.97	10.13	24.0	-13.87
		6875	185	242T	9.64	10.46	13.08	-2.97	10.10	24.0	-13.90
	8	6895	189	242T	9.52	10.59	13.10	-2.06	11.04	24.0	-12.96
		6995	209	242T	9.43	10.53	13.03	-2.06	10.96	24.0	-13.04
		7115	233	242T	9.50	10.57	13.08	-2.06	11.02	24.0	-12.98

Table 7-60. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 61			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					ANT1	ANT2	MIMO				
20MHz BW	5	5935	2	242T	9.38	9.45	12.43	-3.07	9.36	24.0	-14.64
		6175	45	242T	16.68	16.71	19.71	-3.07	16.64	24.0	-7.36
		6415	93	242T	16.19	16.69	19.46	-3.07	16.39	24.0	-7.61
	7	6535	117	242T	14.22	14.02	17.13	-2.97	14.16	24.0	-9.84
		6695	149	242T	13.79	14.19	17.00	-2.97	14.03	24.0	-9.97

Table 7-61. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (484 Tones)

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 65			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					ANT1	ANT2	MIMO				
40MHz BW	5	5965	3	484T	11.94	12.86	15.43	-3.07	12.37	24.0	-11.63
		6165	43	484T	11.88	12.36	15.14	-3.07	12.07	24.0	-11.93
		6405	91	484T	11.91	12.60	15.28	-3.07	12.21	24.0	-11.79
	6	6445	99	484T	12.02	12.65	15.36	-5.74	9.62	24.0	-14.38
		6485	107	484T	12.11	12.84	15.50	-5.74	9.76	24.0	-14.24
		6525	115	484T	12.23	12.95	15.62	-5.74	9.88	24.0	-14.12
	7	6565	123	484T	12.09	12.86	15.50	-2.97	12.53	24.0	-11.47
		6725	155	484T	12.06	12.71	15.41	-2.97	12.43	24.0	-11.57
		6845	179	484T	11.83	12.72	15.31	-2.97	12.33	24.0	-11.67
	8	6885	187	484T	11.65	12.68	15.21	-2.06	13.14	24.0	-10.86
		7005	211	484T	11.48	12.69	15.14	-2.06	13.08	24.0	-10.92
		7085	227	484T	11.35	12.69	15.08	-2.06	13.02	24.0	-10.98

Table 7-62. MIMO 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 65			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					ANT1	ANT2	MIMO				
40MHz BW	5	5965	3	484T	16.44	16.39	19.43	-3.07	16.36	24.0	-7.64
		6165	43	484T	16.75	16.01	19.40	-3.07	16.34	24.0	-7.66
		6405	91	484T	16.87	15.42	19.22	-3.07	16.15	24.0	-7.85
	7	6565	123	484T	16.99	15.73	19.42	-2.97	16.44	24.0	-7.56
		6685	147	484T	16.52	16.05	19.30	-2.97	16.33	24.0	-7.67

Table 7-63. MIMO 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (996 Tones)

	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 67			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					ANT1	ANT2	MIMO				
80MHz BW	5	5985	7	996T	14.69	15.11	17.92	-3.07	14.85	24.0	-9.15
		6145	39	996T	14.85	15.20	18.04	-3.07	14.97	24.0	-9.03
		6385	87	996T	15.39	15.76	18.59	-3.07	15.52	24.0	-8.48
	6	6465	103	996T	15.06	15.54	18.32	-5.74	12.58	24.0	-11.42
	7	6545	119	996T	15.08	15.59	18.35	-2.97	15.38	24.0	-8.62
		6705	151	996T	15.22	15.49	18.37	-2.97	15.39	24.0	-8.61
		6865	183	996T	14.76	15.48	18.15	-2.97	15.17	24.0	-8.83
	8	6945	199	996T	15.27	15.96	18.64	-2.06	16.58	24.0	-7.42
		7025	215	996T	14.91	15.92	18.45	-2.06	16.39	24.0	-7.61

Table 7-64. MIMO 80MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (2x996 Tones)

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 68 ANT1	ANT2	MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6025	15	2x996T	14.09	14.53	17.33	-3.07	14.26	24.0	-9.74
		6185	47	2x996T	14.20	14.59	17.41	-3.07	14.34	24.0	-9.66
		6345	79	2x996T	14.57	14.97	17.78	-3.07	14.72	24.0	-9.28
	6	6505	111	2x996T	14.44	14.93	17.70	-5.74	11.96	24.0	-12.04
	7	6665	143	2x996T	13.84	14.42	17.15	-2.97	14.18	24.0	-9.82
		6825	175	2x996T	13.89	14.31	17.12	-2.97	14.14	24.0	-9.86
	8	6985	207	2x996T	13.32	14.45	16.93	-2.06	14.87	24.0	-9.13

Table 7-65. MIMO 160MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (4x996 Tones)

320MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) RU Index 69			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					ANT1	ANT2	MIMO				
	5	6105	31	4x996T	14.11	14.72	17.44	-3.07	14.37	24.0	-9.63
		6265	63	4x996T	14.18	14.36	17.28	-3.07	14.21	24.0	-9.79
	6	6425	95	4x996T	14.59	14.55	17.58	-5.74	11.84	24.0	-12.16
	7	6585	127	4x996T	14.66	14.21	17.45	-2.97	14.48	24.0	-9.52
		6745	159	4x996T	14.32	14.98	17.67	-2.97	14.70	24.0	-9.30
	8	6905	191	4x996T	14.01	14.42	17.23	-2.06	15.17	24.0	-8.83

Table 7-66. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Maximum Conducted Output Power Measurements (MRU)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 70 ANT1	70 ANT2	70 MIMO	71 ANT1	71 ANT2	71 MIMO	72 ANT1	72 ANT2	72 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	52+26T	2.76	2.31	5.55	2.58	2.42	5.51	2.63	2.71	5.68	-3.07	2.61	24.0	-21.39
	6	6475	105	52+26T	2.77	2.55	5.67	2.28	2.92	5.62	2.99	2.62	5.82	-5.74	0.08	24.0	-23.92
	7	6695	149	52+26T	2.72	2.54	5.64	2.99	1.93	5.50	2.69	0.75	4.84	-2.97	2.67	24.0	-21.33
	8	6995	209	52+26T	2.50	1.02	4.83	2.82	1.27	5.12	2.89	2.62	5.77	-2.06	3.71	24.0	-20.29

Table 7-67. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – LPI

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 70 ANT1	70 ANT2	70 MIMO	71 ANT1	71 ANT2	71 MIMO	72 ANT1	72 ANT2	72 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	52+26T	13.52	13.05	16.30	13.44	13.11	16.29	13.63	13.21	16.44	-3.07	13.4	24.0	-10.63
	7	6695	149	52+26T	13.48	13.22	16.36	13.49	13.28	16.40	13.70	13.44	16.58	-2.97	13.6	24.0	-10.39

Table 7-68. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – SP

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 82 ANT1	82 ANT2	82 MIMO	83 ANT1	83 ANT2	83 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	106+26T	5.67	5.36	8.53	5.81	5.42	8.63	-3.07	5.56	24.0	-18.44
	6	6475	105	106+26T	5.62	5.28	8.46	5.82	5.50	8.67	-5.74	2.93	24.0	-21.07
	7	6695	149	106+26T	5.98	4.48	8.30	5.59	3.33	7.62	-2.97	5.33	24.0	-18.67
	8	6995	209	106+26T	5.74	4.24	8.06	5.99	5.44	8.73	-2.06	6.67	24.0	-17.33

Table 7-69. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – LPI

20MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 82 ANT1	82 ANT2	82 MIMO	83 ANT1	83 ANT2	83 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6175	45	106+26T	13.27	13.11	16.20	13.54	13.37	16.47	-3.07	13.4	24.0	-10.60
	7	6695	149	106+26T	13.44	13.09	16.28	13.69	13.41	16.56	-2.97	13.6	24.0	-10.41

Table 7-70. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – SP

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 90 ANT1	90 ANT2	90 MIMO	91 ANT1	91 ANT2	91 MIMO	93 ANT1	93 ANT2	93 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	5985	7	242+484T	12.92	12.38	15.67	12.89	12.35	15.64	12.91	12.42	15.68	-3.07	12.62	24.0	-11.38
		6145	39	242+484T	12.85	12.62	15.75	12.87	12.57	15.73	12.89	12.50	15.71	-3.07	12.68	24.0	-11.32
		6385	87	242+484T	12.84	12.59	15.73	12.89	12.61	15.76	12.86	12.63	15.76	-3.07	12.70	24.0	-11.30
	6	6465	103	242+484T	12.99	12.22	15.63	12.99	12.28	15.66	12.99	12.28	15.66	-5.74	9.92	24.0	-14.08
	7	6545	119	242+484T	12.85	11.95	15.43	12.82	11.95	15.42	12.81	12.06	15.46	-2.97	12.49	24.0	-11.51
		6705	151	242+484T	12.81	11.04	15.02	12.68	11.06	14.96	12.67	11.12	14.97	-2.97	12.05	24.0	-11.95
		6865	183	242+484T	12.89	11.32	15.19	12.89	11.36	15.20	12.92	11.29	15.19	-2.97	12.23	24.0	-11.77
	8	6945	199	242+484T	12.88	11.50	15.25	12.86	11.55	15.26	12.96	11.54	15.32	-2.06	13.26	24.0	-10.74
		7025	215	242+484T	12.94	11.85	15.44	12.95	11.84	15.44	12.91	11.70	15.36	-2.06	13.38	24.0	-10.62

Table 7-71. MIMO 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – LPI

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 90 ANT1	90 ANT2	90 MIMO	91 ANT1	91 ANT2	91 MIMO	93 ANT1	93 ANT2	93 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	5985	7	242+484T	16.48	16.23	19.36	16.20	16.18	19.20	16.42	16.21	19.33	-3.07	16.3	24.0	-7.70
		6145	39	242+484T	16.82	16.22	19.54	16.57	16.22	19.41	16.66	16.11	19.40	-3.07	16.5	24.0	-7.53
		6385	87	242+484T	16.86	15.62	19.29	16.87	15.99	19.46	16.74	15.84	19.32	-3.07	16.4	24.0	-7.60
	7	6545	119	242+484T	16.72	15.42	19.13	16.52	15.66	19.12	16.72	15.33	19.09	-2.97	16.2	24.0	-7.85
		6705	151	242+484T	16.11	16.09	19.11	16.21	16.17	19.20	16.26	16.16	19.22	-2.97	16.2	24.0	-7.76

Table 7-72. MIMO 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – SP

160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 94 ANT1	94 ANT2	94 MIMO	95 ANT1	95 ANT2	95 MIMO	1094 ANT1	1094 ANT2	1094 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6025	15	996+484T	15.86	15.37	18.63	15.87	15.42	18.66	15.93	15.42	18.69	-3.07	15.63	24.0	-8.37
		6185	47	996+484T	15.86	15.66	18.77	15.88	15.64	18.77	15.91	15.60	18.77	-3.07	15.71	24.0	-8.29
		6345	79	996+484T	15.83	15.76	18.81	15.80	15.72	18.77	15.87	15.73	18.81	-3.07	15.74	24.0	-8.26
	6	6505	111	996+484T	15.85	14.96	18.44	15.85	14.92	18.42	15.90	15.05	18.51	-5.74	12.77	24.0	-11.23
	7	6665	143	996+484T	15.57	14.62	18.13	15.56	14.59	18.11	15.93	15.23	18.60	-2.97	15.63	24.0	-8.37
		6825	175	996+484T	15.82	14.37	18.17	15.76	14.36	18.13	15.79	14.38	18.15	-2.97	15.19	24.0	-8.81
	8	6985	207	996+484T	15.84	14.94	18.42	15.88	14.91	18.43	15.80	14.91	18.39	-2.06	16.37	24.0	-7.63

Table 7-73. MIMO 160MHz BW 802.11be (UNII) Maximum Conducted Output Power (996+484 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 100 ANT1	100 ANT2	100 MIMO	101 ANT1	101 ANT2	101 MIMO	11102 ANT1	11102 ANT2	11102 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	2x996+484T	14.66	14.62	17.65	14.62	14.60	17.62	14.39	14.69	17.55	-3.07	14.58	24.0	-9.42
		6265	63	2x996+484T	14.97	14.98	17.99	14.98	14.98	17.99	14.82	14.99	17.92	-3.07	14.92	24.0	-9.08
	6	6425	95	2x996+484T	14.63	13.76	17.23	14.57	13.72	17.18	14.56	13.69	17.16	-5.74	11.49	24.0	-12.51
	7	6585	127	2x996+484T	14.59	13.84	17.24	14.65	13.96	17.33	14.73	13.71	17.26	-2.97	14.35	24.0	-9.65
		6745	159	2x996+484T	14.99	14.01	17.54	14.61	13.45	17.08	14.83	13.53	17.24	-2.97	14.56	24.0	-9.44
	8	6905	191	2x996+484T	14.99	13.70	17.40	14.99	13.71	17.41	14.65	13.35	17.06	-2.06	15.35	24.0	-8.65

Table 7-74. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (2*996+484 Tones) – LPI/SP

320MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm) MRU Index 104 ANT1	104 ANT2	104 MIMO	10104 ANT1	10104 ANT2	10104 MIMO	11104 ANT1	11104 ANT2	11104 MIMO	Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
	5	6105	31	3x996T	14.70	14.89	17.81	14.98	14.98	17.99	14.98	14.98	17.99	-3.07	14.92	24.0	-9.08
		6265	63	3x996T	14.62	14.80	17.72	14.78	14.74	17.77	14.78	14.72	17.76	-3.07	14.70	24.0	-9.30
	6	6425	95	3x996T	14.79	14.05	17.45	14.99	14.04	17.55	14.95	14.12	17.57	-5.74	11.83	24.0	-12.17
	7	6585	127	3x996T	14.67	13.59	17.17	14.64	13.85	17.27	14.51	13.79	17.18	-2.97	14.30	24.0	-9.70
		6745	159	3x996T	14.68	13.27	17.04	14.45	13.45	16.99	14.90	13.92	17.45	-2.97	14.47	24.0	-9.53
	8	6905	191	3x996T	14.87	13.60	17.29	14.95	13.63	17.35	14.93	13.45	17.26	-2.06	15.29	24.0	-8.71

Table 7-75. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996 Tones) – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

320MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					MRU Index												
					105			106			11105						
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
	5	6105	31	3x996+484T	14.91	14.99	17.96	14.90	14.99	17.96	14.95	14.99	17.98	-3.07	14.91	24.0	-9.09
		6265	63	3x996+484T	14.81	14.87	17.85	14.76	14.82	17.80	14.86	14.81	17.85	-3.07	14.78	24.0	-9.22
	6	6425	95	3x996+484T	14.94	14.10	17.55	14.92	14.05	17.52	14.99	14.18	17.61	-5.74	11.88	24.0	-12.12
	7	6585	127	3x996+484T	14.69	13.65	17.21	14.66	13.67	17.20	14.58	13.86	17.25	-2.97	14.27	24.0	-9.73
		6745	159	3x996+484T	14.66	13.36	17.07	14.58	13.39	17.04	14.53	13.51	17.06	-2.97	14.09	24.0	-9.91
	8	6905	191	3x996+484T	14.99	13.72	17.41	14.99	13.71	17.41	14.99	13.72	17.41	-2.06	15.35	24.0	-8.65

Table 7-76. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996+484 Tones) – LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Sample MIMO Calculation:

At 5935MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average conducted output power was measured to be -0.57 dBm for Antenna-1 and -1.23 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

(-0.57 dBm + -1.23 dBm) = (0.877 mW + 0.753 mW) = 1.630 mW = 2.12 dBm

Sample Directional Gain Calculation:

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$$

Sample e.i.r.p. Calculation:

At 5935MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average MIMO conducted power was calculated to be 2.12 dBm with directional gain of -3.07 dBi.

e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi)

2.12 dBm + -3.07 dBi = -0.94 dBm

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density.

In the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed −1 dBm e.i.r.p. in any 1-megahertz band. For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm/MHz e.i.r.p.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points ≥ 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-3. Test Instrument & Measurement Setup

Test Notes

SP 80/160/320MHz BW share same target as LPI 80/160/320MHz BW, and only the emissions from worst case have been reported

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	be (20MHz)	-3.96	-5.51	-4.49	-8.02	-1.66	-3.07	-4.72	-1	-3.72
	6175	45	be (20MHz)	-4.21	-5.60	-4.49	-8.02	-1.84	-3.07	-4.90	-1	-3.90
	6415	93	be (20MHz)	-4.92	-6.22	-4.49	-8.02	-2.51	-3.07	-5.58	-1	-4.58
	5965	3	be (40MHz)	-2.91	-4.41	-4.49	-8.02	-0.59	-3.07	-3.65	-1	-2.65
	6165	43	be (40MHz)	-2.86	-4.67	-4.49	-8.02	-0.66	-3.07	-3.72	-1	-2.72
	6405	91	be (40MHz)	-3.39	-4.88	-4.49	-8.02	-1.06	-3.07	-4.12	-1	-3.12
	5985	7	be (80MHz)	-3.26	-5.32	-4.49	-8.02	-1.16	-3.07	-4.23	-1	-3.23
	6145	39	be (80MHz)	-3.09	-4.63	-4.49	-8.02	-0.78	-3.07	-3.85	-1	-2.85
	6385	87	be (80MHz)	-3.99	-4.99	-4.49	-8.02	-1.45	-3.07	-4.52	-1	-3.52
	6025	15	be (160MHz)	-2.71	-4.62	-4.49	-8.02	-0.55	-3.07	-3.61	-1	-2.61
	6185	47	be (160MHz)	-2.92	-4.68	-4.49	-8.02	-0.70	-3.07	-3.77	-1	-2.77
	6345	79	be (160MHz)	-3.40	-5.56	-4.49	-8.02	-1.34	-3.07	-4.41	-1	-3.41
	6105	31	be (320MHz)	-1.79	-3.62	-4.49	-8.02	0.40	-3.07	-2.67	-1	-1.67
	6265	63	be (320MHz)	-2.13	-3.33	-4.49	-8.02	0.32	-3.07	-2.74	-1	-1.74
Band 6	6435	97	be (20MHz)	-4.44	-5.44	-7.13	-10.74	-1.90	-5.74	-7.64	-1	-6.64
	6475	105	be (20MHz)	-4.43	-5.45	-7.13	-10.74	-1.90	-5.74	-7.64	-1	-6.64
	6515	113	be (20MHz)	-4.22	-5.69	-7.13	-10.74	-1.88	-5.74	-7.62	-1	-6.62
	6445	99	be (40MHz)	-3.21	-4.42	-7.13	-10.74	-0.76	-5.74	-6.50	-1	-5.50
	6485	107	be (40MHz)	-3.14	-4.29	-7.13	-10.74	-0.67	-5.74	-6.41	-1	-5.41
	6525	115	be (40MHz)	-2.95	-4.37	-7.13	-10.74	-0.59	-5.74	-6.33	-1	-5.33
	6465	103	be (80MHz)	-3.45	-5.06	-7.13	-10.74	-1.17	-5.74	-6.91	-1	-5.91
	6505	111	be (160MHz)	-3.15	-4.38	-7.13	-10.74	-0.71	-5.74	-6.45	-1	-5.45
Band 5/6/7	6425	95	be (320MHz)	-2.15	-3.77	-7.13	-10.74	0.13	-5.74	-5.61	-1	-4.61
Band 7	6695	117	be (20MHz)	-4.18	-5.36	-5.98	-5.99	-1.72	-2.97	-4.69	-1	-3.69
	6695	149	be (20MHz)	-3.14	-5.15	-5.98	-5.99	-1.02	-2.97	-3.99	-1	-2.99
	6875	185	be (20MHz)	-3.99	-5.88	-5.98	-5.99	-1.82	-2.97	-4.80	-1	-3.80
	6565	123	be (40MHz)	-2.63	-4.45	-5.98	-5.99	-0.44	-2.97	-3.41	-1	-2.41
	6725	155	be (40MHz)	-1.83	-4.20	-5.98	-5.99	0.15	-2.97	-2.82	-1	-1.82
	6845	179	be (40MHz)	-2.38	-4.75	-5.98	-5.99	-0.40	-2.97	-3.37	-1	-2.37
	6545	119	be (80MHz)	-3.74	-4.95	-5.98	-5.99	-1.29	-2.97	-4.27	-1	-3.27
	6705	151	be (80MHz)	-3.02	-4.72	-5.98	-5.99	-0.77	-2.97	-3.75	-1	-2.75
	6865	183	be (80MHz)	-2.95	-4.97	-5.98	-5.99	-0.84	-2.97	-3.81	-1	-2.81
	6665	143	be (160MHz)	-3.03	-4.99	-5.98	-5.99	-0.89	-2.97	-3.87	-1	-2.87
	6825	175	be (160MHz)	-3.50	-4.78	-5.98	-5.99	-1.08	-2.97	-4.05	-1	-3.05
Band 6/7	6585	127	be (320MHz)	-1.16	-3.62	-5.98	-5.99	0.79	-2.97	-2.18	-1	-1.18
Band 7/8	6745	159	be (320MHz)	-1.15	-3.13	-5.98	-5.99	0.98	-2.97	-1.99	-1	-0.99
Band 8	6895	189	be (20MHz)	-4.57	-5.93	-5.98	-4.25	-2.19	-2.06	-4.25	-1	-3.25
	6995	209	be (20MHz)	-3.88	-5.31	-5.98	-4.25	-1.53	-2.06	-3.59	-1	-2.59
	7115	233	be (20MHz)	-4.00	-4.35	-5.98	-4.25	-1.16	-2.06	-3.22	-1	-2.22
	6885	187	be (40MHz)	-2.93	-4.61	-5.98	-4.25	-0.68	-2.06	-2.74	-1	-1.74
	6965	211	be (40MHz)	-3.37	-4.18	-5.98	-4.25	-0.75	-2.06	-2.81	-1	-1.81
	7085	227	be (40MHz)	-2.44	-3.82	-5.98	-4.25	-0.07	-2.06	-2.13	-1	-1.13
	6945	199	be (80MHz)	-3.08	-4.89	-5.98	-4.25	-0.88	-2.06	-2.94	-1	-1.94
	7025	215	be (80MHz)	-3.34	-5.01	-5.98	-4.25	-1.09	-2.06	-3.15	-1	-2.15
	6985	207	be (160MHz)	-3.66	-4.75	-5.98	-4.25	-1.16	-2.06	-3.22	-1	-2.22
Band 7/8	6985	191	be (320MHz)	-4.03	-4.11	-5.98	-4.25	-1.06	-2.06	-3.12	-1	-2.12

Table 7-77. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (26 Tones) – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	MRU Cases	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	DCCF [dB]	EIRP Density [dBm/MHz]	EIRP Density Limit [dBm/MHz]	Margin [dB]
Band 5	6175	45	be (20MHz)	52+26T	-4.55	-7.08	-4.49	-8.02	-2.62	-3.07	0.00	-5.69	-1	-4.69
	6175	45	be (20MHz)	106+26T	-3.26	-6.45	-4.49	-8.02	-1.56	-3.07	0.00	-4.63	-1	-3.63
	6145	39	be (80MHz)	484+242T	-3.42	-6.29	-4.49	-8.02	-1.61	-3.07	0.10	-4.58	-1	-3.58
	6185	47	be (160MHz)	996+484T	-3.00	-5.51	-4.49	-8.02	-1.07	-3.07	0.11	-4.02	-1	-3.02
	6105	31	be (320MHz)	2x996+484T	-5.76	-9.02	-4.49	-8.02	-4.08	-3.07	0.00	-7.15	-1	-6.15
	6105	31	be (320MHz)	3x996T	-6.62	-9.57	-4.49	-8.02	-4.84	-3.07	0.00	-7.90	-1	-6.90
	6105	31	be (320MHz)	2x996+484T	-5.76	-9.02	-7.13	-10.74	-4.08	-5.74	0.10	-9.72	-1	-8.72
Band 6	6475	105	be (20MHz)	52+26T	-0.38	-3.71	-7.13	-10.74	1.28	-5.74	0.00	-4.46	-1	-3.46
	6475	105	be (20MHz)	106+26T	-2.60	-5.80	-7.13	-10.74	-0.90	-5.74	0.00	-6.64	-1	-5.64
	6465	103	be (80MHz)	484+242T	-2.67	-6.41	-7.13	-10.74	-1.14	-5.74	0.10	-6.78	-1	-5.78
	6505	111	be (160MHz)	996+484T	-1.78	-5.12	-7.13	-10.74	-0.13	-5.74	0.11	-5.75	-1	-4.75
Band 5/6/7	6425	95	be (320MHz)	3x996+484T	-5.40	-8.60	-7.13	-10.74	-3.70	-5.74	0.00	-9.44	-1	-8.44
	6425	95	be (320MHz)	3x996T	-5.64	-9.37	-5.98	-5.99	-4.11	-2.97	0.00	-7.08	-1	-6.08
	6425	95	be (320MHz)	2x996+484T	-5.40	-8.60	-5.98	-5.99	-3.70	-2.97	0.10	-6.58	-1	-5.58
Band 7	6695	149	be (20MHz)	52+26T	-2.26	-3.55	-5.98	-5.99	0.16	-2.97	0.00	-2.82	-1	-1.82
	6695	149	be (20MHz)	106+26T	-4.13	-5.69	-5.98	-5.99	-1.83	-2.97	0.00	-4.81	-1	-3.81
	6705	151	be (80MHz)	484+242T	-4.27	-5.46	-5.98	-5.99	-1.81	-2.97	0.10	-4.69	-1	-3.69
	6665	143	be (160MHz)	996+484T	-4.66	-5.00	-5.98	-5.99	-1.82	-2.97	0.11	-4.69	-1	-3.69
Band 7/8	6745	159	be (320MHz)	3x996+484T	-6.35	-8.28	-5.98	-5.99	-4.20	-2.97	0.00	-7.17	-1	-6.17
	6745	159	be (320MHz)	3x996T	-7.87	-8.70	-5.98	-4.25	-5.25	-2.06	0.00	-7.32	-1	-6.32
	6745	159	be (320MHz)	2x996+484T	-6.35	-8.28	-5.98	-4.25	-4.20	-2.06	0.10	-6.16	-1	-5.16
Band 8	6995	209	be (20MHz)	52+26T	-5.10	-5.09	-6.78	-5.41	-2.08	-3.06	0.00	-5.14	-1	-4.14
	6995	209	be (20MHz)	106+26T	-4.45	-4.76	-5.98	-4.25	-1.59	-2.06	0.00	-3.65	-1	-2.65
	7025	215	be (80MHz)	484+242T	-4.83	-4.93	-5.98	-4.25	-1.87	-2.06	0.10	-3.83	-1	-2.83
	6985	207	be (160MHz)	996+484T	-4.16	-4.45	-5.98	-4.25	-1.29	-2.06	0.11	-3.24	-1	-2.24
Band 7/8	6905	191	be (320MHz)	3x996+484T	-7.00	-7.86	-6.78	-5.41	-4.40	-3.06	0.00	-7.46	-1	-6.46
	6905	191	be (320MHz)	3x996T	-7.54	-9.02	-6.78	-5.41	-5.21	-3.06	0.00	-8.27	-1	-7.27
	6905	191	be (320MHz)	2x996+484T	-7.00	-7.86	-6.78	-5.41	-4.40	-3.06	0.10	-7.36	-1	-6.36

Table 7-78. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (MRU Cases) – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	DCCF [dB]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	be (20MHz)	-1.48	-1.57	-4.49	-8.02	1.49	-3.07	0.00	-1.58	-1	-0.58
	6175	45	be (20MHz)	-1.30	-1.82	-4.49	-8.02	1.46	-3.07	0.00	-1.61	-1	-0.61
	6415	93	be (20MHz)	-1.90	-1.93	-4.49	-8.02	1.09	-3.07	0.00	-1.97	-1	-0.97
	5965	3	be (40MHz)	-2.18	-2.32	-4.49	-8.02	0.76	-3.07	0.10	-2.21	-1	-1.21
	6165	43	be (40MHz)	-1.92	-2.59	-4.49	-8.02	0.77	-3.07	0.10	-2.20	-1	-1.20
	6405	91	be (40MHz)	-1.58	-1.70	-4.49	-8.02	1.37	-3.07	0.10	-1.59	-1	-0.59
	5985	7	be (80MHz)	-2.32	-3.06	-4.49	-8.02	0.33	-3.07	0.13	-2.60	-1	-1.60
	6145	39	be (80MHz)	-2.13	-2.62	-4.49	-8.02	0.64	-3.07	0.13	-2.29	-1	-1.29
	6385	87	be (80MHz)	-1.91	-2.26	-4.49	-8.02	0.93	-3.07	0.13	-2.00	-1	-1.00
	6025	15	be (160MHz)	-6.54	-7.35	-4.49	-8.02	-3.91	-3.07	0.00	-6.98	-1	-5.98
	6185	47	be (160MHz)	-6.46	-7.01	-4.49	-8.02	-3.72	-3.07	0.00	-6.79	-1	-5.79
	6345	79	be (160MHz)	-6.31	-6.67	-4.49	-8.02	-3.48	-3.07	0.00	-6.54	-1	-5.54
	6105	31	be (320MHz)	-8.34	-8.99	-4.49	-8.02	-5.64	-3.07	0.00	-8.71	-1	-7.71
	6265	63	be (320MHz)	-8.18	-7.71	-4.49	-8.02	-4.92	-3.07	0.00	-7.99	-1	-6.99
Band 6	6435	97	be (20MHz)	-1.66	-1.84	-7.13	-10.74	1.26	-5.74	0.00	-4.48	-1	-3.48
	6475	105	be (20MHz)	-1.73	-1.48	-7.13	-10.74	1.41	-5.74	0.00	-4.33	-1	-3.33
	6515	113	be (20MHz)	-1.24	-1.36	-7.13	-10.74	1.71	-5.74	0.00	-4.03	-1	-3.03
	6445	99	be (40MHz)	-1.34	-1.87	-7.13	-10.74	1.41	-5.74	0.10	-4.22	-1	-3.22
	6485	107	be (40MHz)	-1.32	-1.42	-7.13	-10.74	1.64	-5.74	0.10	-4.00	-1	-3.00
	6525	115	be (40MHz)	-1.28	-1.26	-7.13	-10.74	1.74	-5.74	0.10	-3.89	-1	-2.89
	6465	103	be (80MHz)	-2.24	-2.06	-7.13	-10.74	0.86	-5.74	0.13	-4.75	-1	-3.75
	6505	111	be (160MHz)	-6.45	-6.72	-7.13	-10.74	-3.57	-5.74	0.00	-9.31	-1	-8.31
Band 5/6/7	6425	95	be (320MHz)	-8.18	-8.49	-7.13	-10.74	-5.32	-5.74	0.00	-11.06	-1	-10.06
Band 7	6695	117	be (20MHz)	-1.04	-1.31	-5.98	-5.99	1.83	-2.97	0.00	-1.14	-1	-0.14
	6695	149	be (20MHz)	-1.33	-1.12	-5.98	-5.99	1.79	-2.97	0.00	-1.18	-1	-0.18
	6875	185	be (20MHz)	-2.17	-1.98	-5.98	-5.99	0.94	-2.97	0.00	-2.03	-1	-1.03
	6565	123	be (40MHz)	-2.01	-1.76	-5.98	-5.99	1.13	-2.97	0.10	-1.75	-1	-0.75
	6725	155	be (40MHz)	-1.64	-1.82	-5.98	-5.99	1.28	-2.97	0.10	-1.59	-1	-0.59
	6845	179	be (40MHz)	-1.89	-1.64	-5.98	-5.99	1.25	-2.97	0.10	-1.63	-1	-0.63
	6545	119	be (80MHz)	-2.01	-1.79	-5.98	-5.99	1.11	-2.97	0.13	-1.73	-1	-0.73
	6705	151	be (80MHz)	-2.07	-1.97	-5.98	-5.99	0.99	-2.97	0.13	-1.85	-1	-0.85
	6865	183	be (80MHz)	-2.59	-2.03	-5.98	-5.99	0.71	-2.97	0.13	-2.14	-1	-1.14
	6665	143	be (160MHz)	-7.36	-6.80	-5.98	-5.99	-4.06	-2.97	0.00	-7.04	-1	-6.04
	6825	175	be (160MHz)	-7.07	-6.65	-5.98	-5.99	-3.85	-2.97	0.00	-6.82	-1	-5.82
Band 6/7	6585	127	be (320MHz)	-8.58	-8.14	-5.98	-5.99	-5.34	-2.97	0.00	-8.32	-1	-7.32
Band 7/8	6745	159	be (320MHz)	-8.47	-8.07	-5.98	-5.99	-5.25	-2.97	0.00	-8.23	-1	-7.23
Band 8	6895	189	be (20MHz)	-2.35	-1.81	-5.98	-4.25	0.94	-2.06	0.00	-1.12	-1	-0.12
	6995	209	be (20MHz)	-2.83	-1.89	-5.98	-4.25	0.68	-2.06	0.00	-1.38	-1	-0.38
	7115	233	be (20MHz)	-2.51	-2.11	-5.98	-4.25	0.71	-2.06	0.00	-1.35	-1	-0.35
	6885	187	be (40MHz)	-2.37	-1.88	-5.98	-4.25	0.89	-2.06	0.10	-1.07	-1	-0.07
	6965	211	be (40MHz)	-2.56	-1.91	-5.98	-4.25	0.79	-2.06	0.10	-1.17	-1	-0.17
	7085	227	be (40MHz)	-2.49	-1.85	-5.98	-4.25	0.85	-2.06	0.10	-1.11	-1	-0.11
	6945	199	be (80MHz)	-2.49	-2.20	-5.98	-4.25	0.67	-2.06	0.13	-1.27	-1	-0.27
	7025	215	be (80MHz)	-2.88	-2.06	-5.98	-4.25	0.56	-2.06	0.13	-1.37	-1	-0.37
	6985	207	be (160MHz)	-8.40	-6.66	-5.98	-4.25	-4.43	-2.06	0.00	-6.49	-1	-5.49
Band 7/8	6905	191	be (320MHz)	-8.74	-8.22	-5.98	-4.25	-5.46	-2.06	0.00	-7.52	-1	-6.52

Table 7-79. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (Full Tones) – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	be (20MHz)	13.80	12.28	-4.49	-8.02	16.12	-3.07	13.05	17	-3.95
	6175	45	be (20MHz)	14.19	11.12	-4.49	-8.02	15.93	-3.07	12.86	17	-4.14
	6415	93	be (20MHz)	14.59	11.33	-4.49	-8.02	16.27	-3.07	13.20	17	-3.80
	5965	3	be (40MHz)	14.79	12.87	-4.49	-8.02	16.94	-3.07	13.88	17	-3.12
	6165	43	be (40MHz)	15.09	12.07	-4.49	-8.02	16.85	-3.07	13.78	17	-3.22
	6405	91	be (40MHz)	15.15	12.11	-4.49	-8.02	16.90	-3.07	13.83	17	-3.17
	5985	7	be (80MHz)	14.57	12.40	-4.49	-8.02	16.63	-3.07	13.56	17	-3.44
	6145	39	be (80MHz)	14.87	11.92	-4.49	-8.02	16.65	-3.07	13.58	17	-3.42
	6385	87	be (80MHz)	15.12	11.81	-4.49	-8.02	16.78	-3.07	13.71	17	-3.29
	6025	15	be (160MHz)	14.82	11.38	-4.49	-8.02	16.44	-3.07	13.38	17	-3.62
	6185	47	be (160MHz)	14.64	11.36	-4.49	-8.02	16.32	-3.07	13.25	17	-3.75
	6345	79	be (160MHz)	14.80	10.83	-4.49	-8.02	16.26	-3.07	13.20	17	-3.80
	6105	31	be (320MHz)	14.39	10.74	-4.49	-8.02	15.95	-3.07	12.89	17	-4.11
	6265	63	be (320MHz)	14.52	11.03	-4.49	-8.02	16.13	-3.07	13.06	17	-3.94
Band 7	6695	117	be (20MHz)	13.03	11.40	-5.98	-5.99	15.30	-2.97	12.33	17	-4.67
	6695	149	be (20MHz)	12.63	11.41	-5.98	-5.99	15.07	-2.97	12.10	17	-4.90
	6875	181	be (20MHz)	12.86	11.65	-5.98	-5.99	15.30	-2.97	12.33	17	-4.67
	6565	123	be (40MHz)	13.74	12.31	-5.98	-5.99	16.09	-2.97	13.12	17	-3.88
	6725	155	be (40MHz)	13.59	13.05	-5.98	-5.99	16.34	-2.97	13.36	17	-3.64
	6845	179	be (40MHz)	13.78	12.76	-5.98	-5.99	16.31	-2.97	13.34	17	-3.66
	6545	135	be (80MHz)	12.52	12.04	-5.98	-5.99	15.30	-2.97	12.32	17	-4.68
	6705	151	be (80MHz)	14.05	12.78	-5.98	-5.99	16.47	-2.97	13.50	17	-3.50
	6865	167	be (80MHz)	13.69	12.44	-5.98	-5.99	16.12	-2.97	13.15	17	-3.85
	6665	143	be (160MHz)	12.72	11.54	-5.98	-5.99	15.18	-2.97	12.21	17	-4.79
	6825	175	be (160MHz)	13.30	12.19	-5.98	-5.99	15.79	-2.97	12.81	17	-4.19
Band 7/8	6745	159	be (320MHz)	13.45	11.75	-5.98	-5.99	15.69	-2.97	12.72	17	-4.28

Table 7-80. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (26 Tones) – SP

	Frequency [MHz]	Channel	802.11 MODE	MRU Cases	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	EIRP Density [dBm/MHz]	EIRP Density Limit [dBm/MHz]	Margin [dB]
Band 5	6175	45	be (20MHz)	52+26T	7.90	3.79	-4.49	-8.02	9.32	-5.91	3.42	17	-13.58
	6175	45	be (20MHz)	106+26T	5.98	1.69	-4.49	-8.02	7.36	-5.91	1.45	17	-15.55
Band 7	6695	149	be (20MHz)	52+26T	6.43	4.50	-5.98	-5.99	8.58	-5.98	2.60	17	-14.40
	6695	149	be (20MHz)	106+26T	4.16	2.54	-5.98	-5.99	6.43	-5.98	0.45	17	-16.55

Table 7-81. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (MRU Cases) – SP

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	DCCF [dB]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	be (20MHz)	6.12	3.56	-4.49	-8.02	8.04	-3.07	0.00	4.97	17	-12.03
	6175	45	be (20MHz)	6.26	2.34	-4.49	-8.02	7.74	-3.07	0.00	4.67	17	-12.33
	6415	93	be (20MHz)	6.81	2.33	-4.49	-8.02	8.13	-3.07	0.00	5.07	17	-11.93
	5965	3	be (40MHz)	2.86	0.45	-4.49	-8.02	4.83	-3.07	0.10	1.86	17	-15.14
	6165	43	be (40MHz)	3.02	-0.64	-4.49	-8.02	4.58	-3.07	0.10	1.61	17	-15.39
	6405	91	be (40MHz)	4.03	-0.75	-4.49	-8.02	5.28	-3.07	0.10	2.31	17	-14.69
Band 7	6695	117	be (20MHz)	6.16	2.94	-5.98	-5.99	7.85	-2.97	0.00	4.88	17	-12.12
	6695	149	be (20MHz)	4.61	3.09	-5.98	-5.99	6.93	-2.97	0.00	3.95	17	-13.05
	6875	181	be (20MHz)	4.96	3.52	-5.98	-5.99	7.31	-2.97	0.00	4.34	17	-12.66
	6565	123	be (40MHz)	2.92	-0.27	-5.98	-5.99	4.62	-2.97	0.10	1.75	17	-15.25
	6725	155	be (40MHz)	1.53	0.56	-5.98	-5.99	4.08	-2.97	0.10	1.21	17	-15.79
	6845	179	be (40MHz)	2.06	0.18	-5.98	-5.99	4.23	-2.97	0.10	1.36	17	-15.64

Table 7-82. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (Full Tones) – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.1 MIMO Antenna-1 Power Spectral Density Measurements

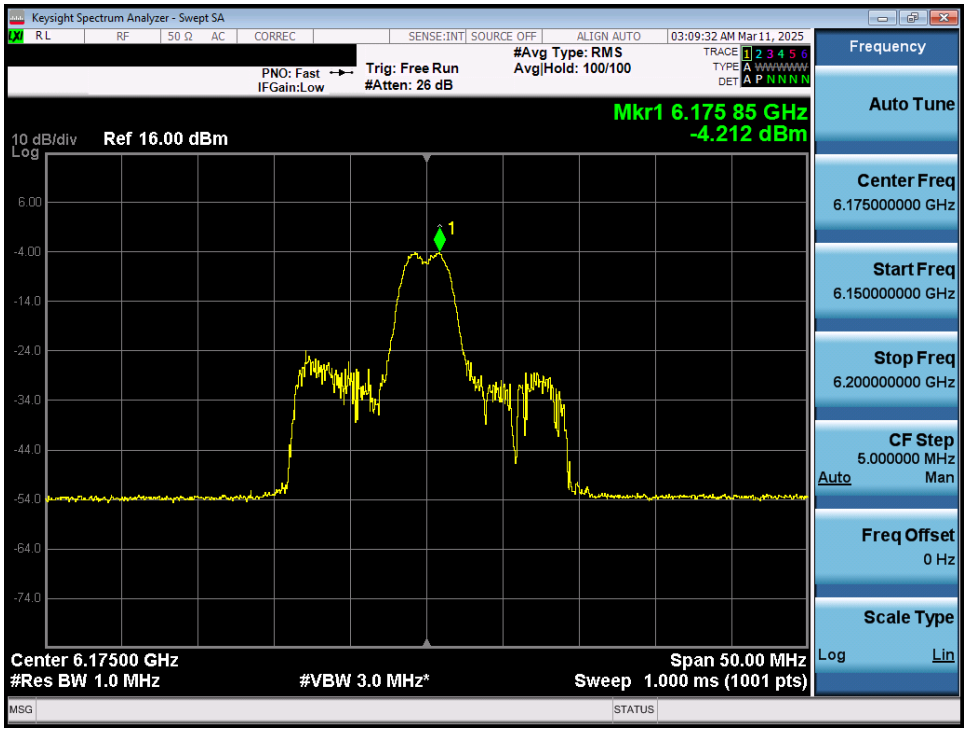

Plot 7-45. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

Plot 7-46. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

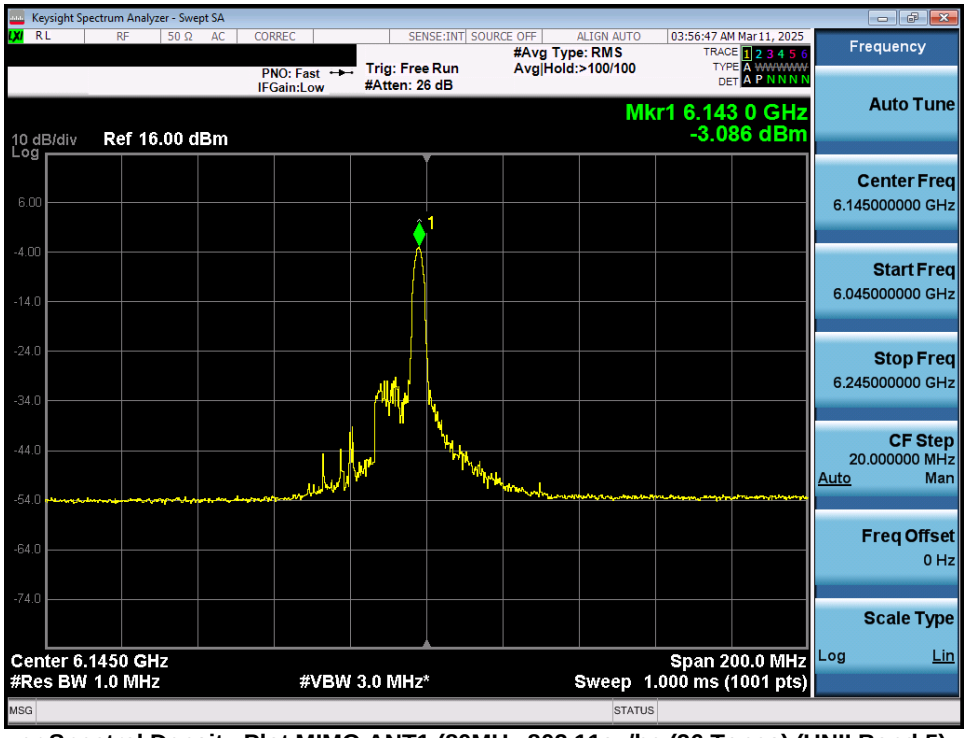

Plot 7-47. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

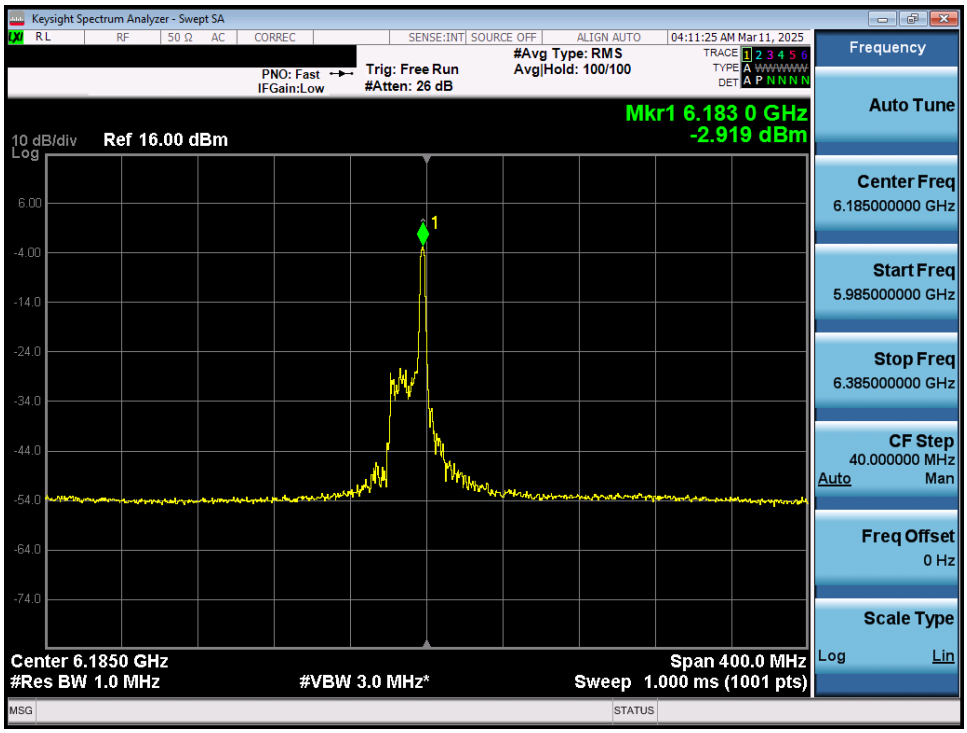

Plot 7-48. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

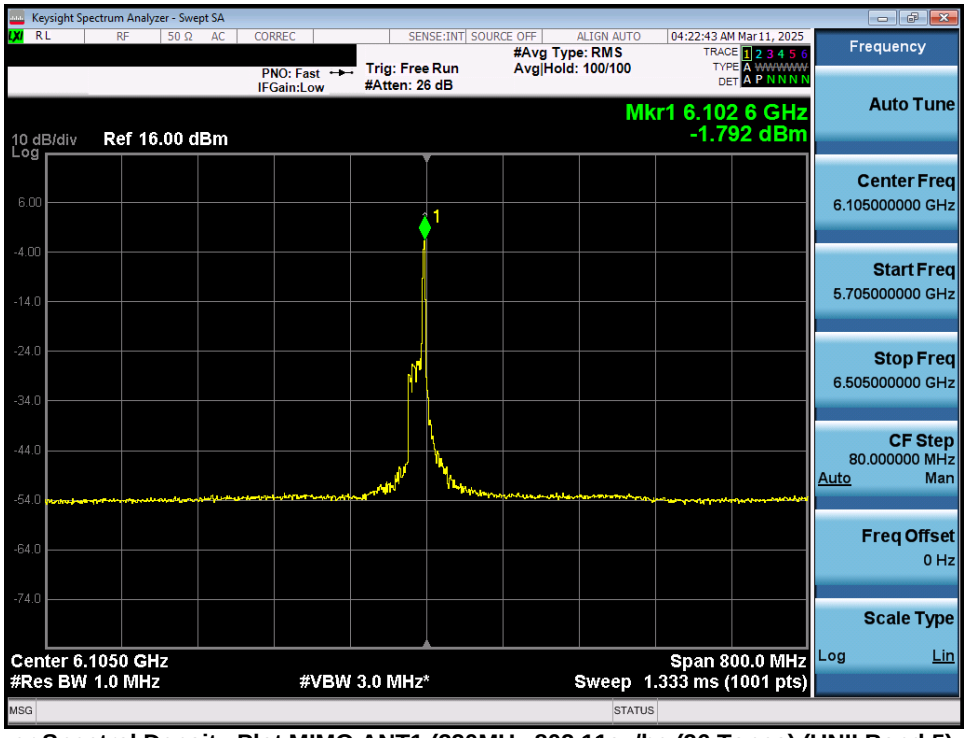

Plot 7-49. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

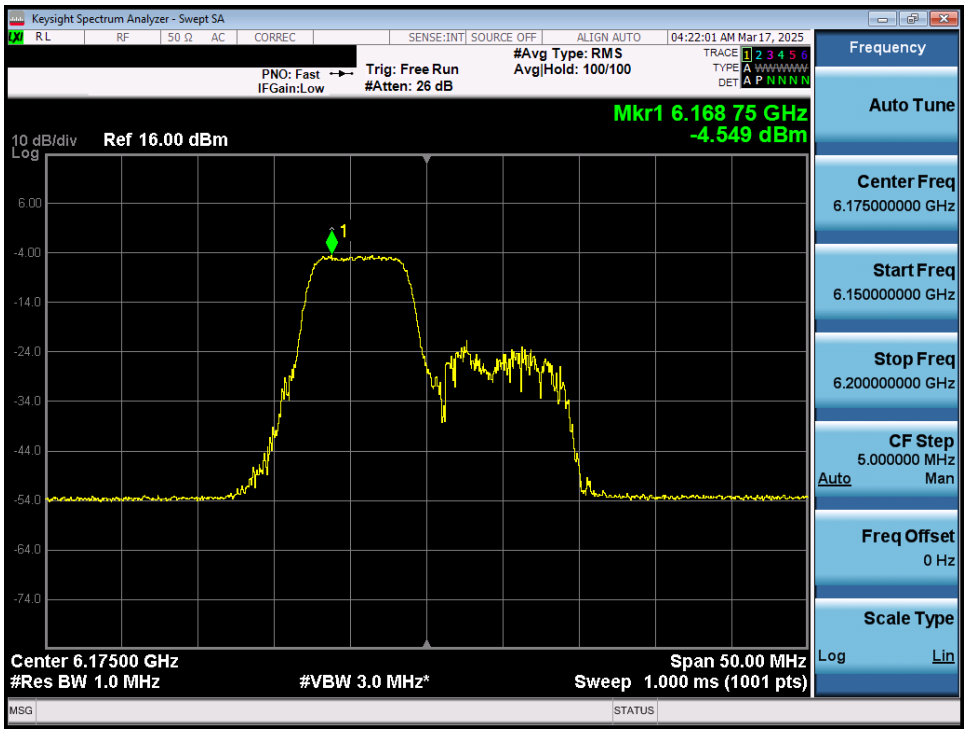

Plot 7-50. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11be (52+26 Tones) (UNII Band 5) – Ch. 45) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

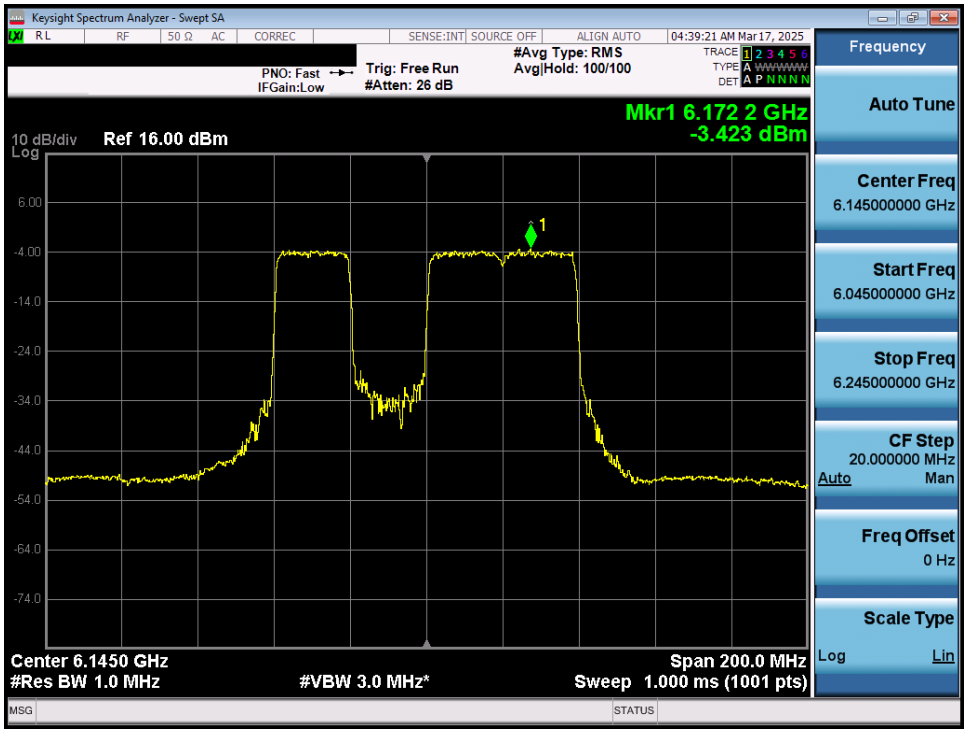

Plot 7-51. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) LPI/SP

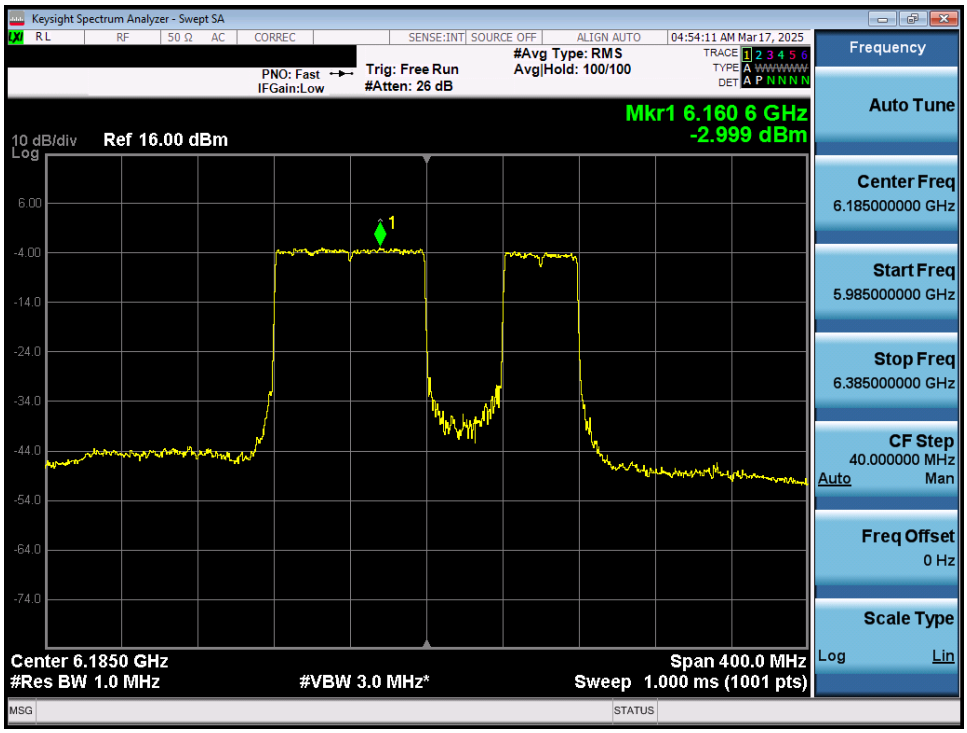

Plot 7-52. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

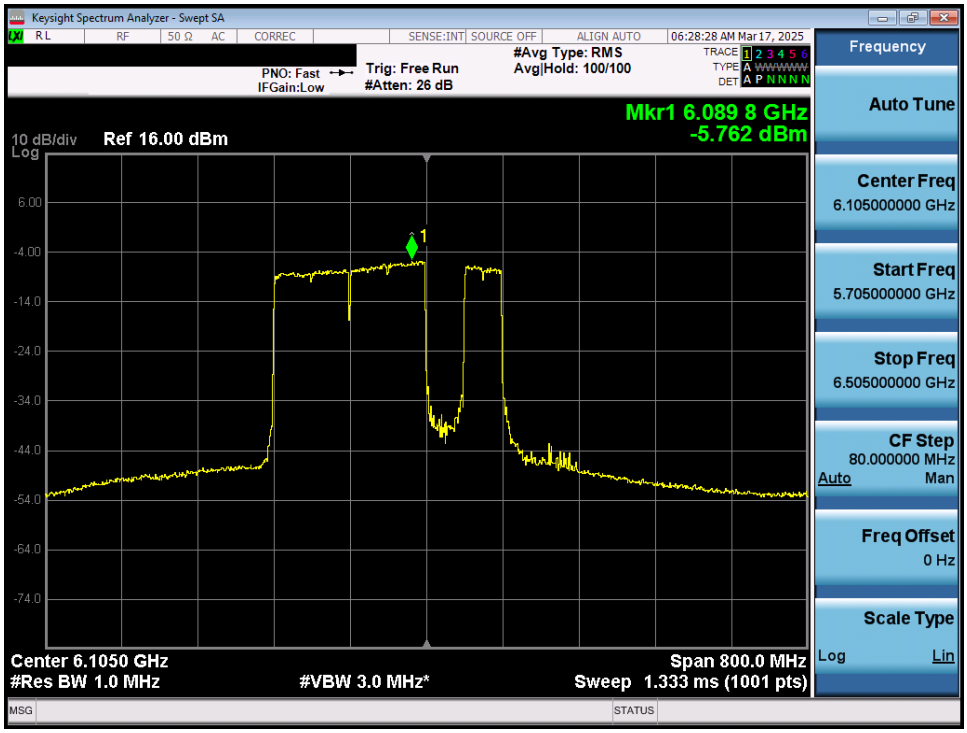

Plot 7-53. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11be (UNII Band 5) – Ch. 31) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Plot 7-54. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - SP

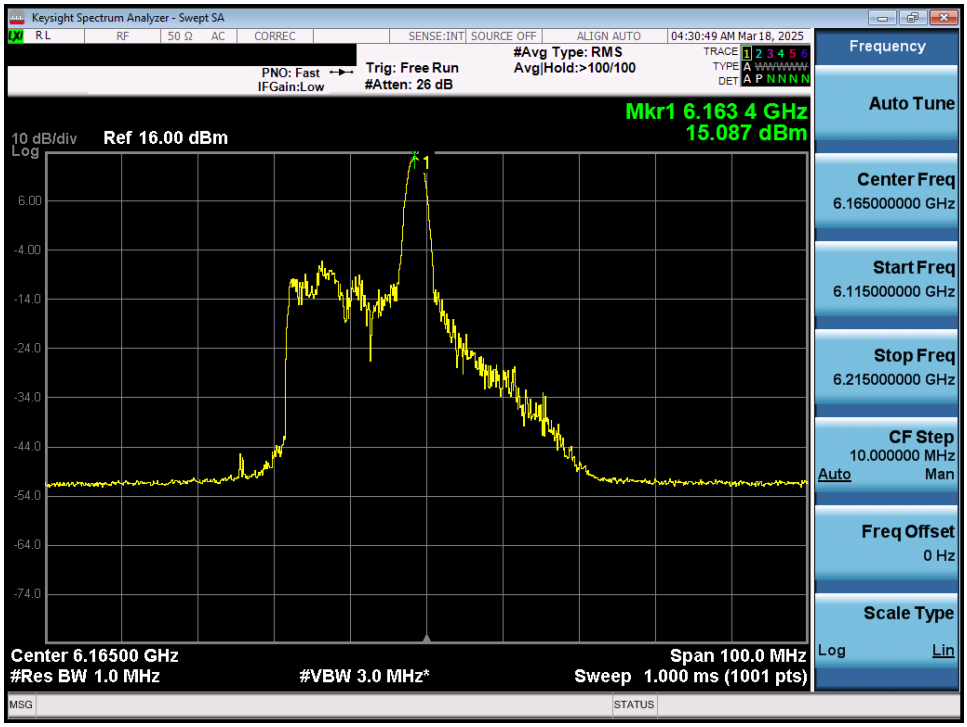

Plot 7-55. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

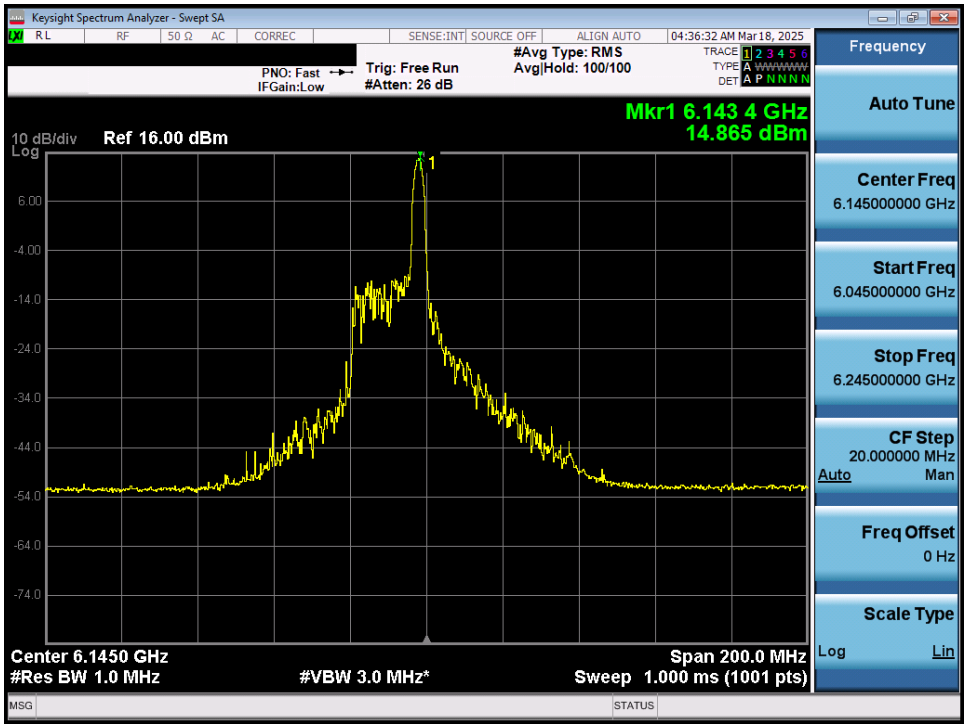

Plot 7-56. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

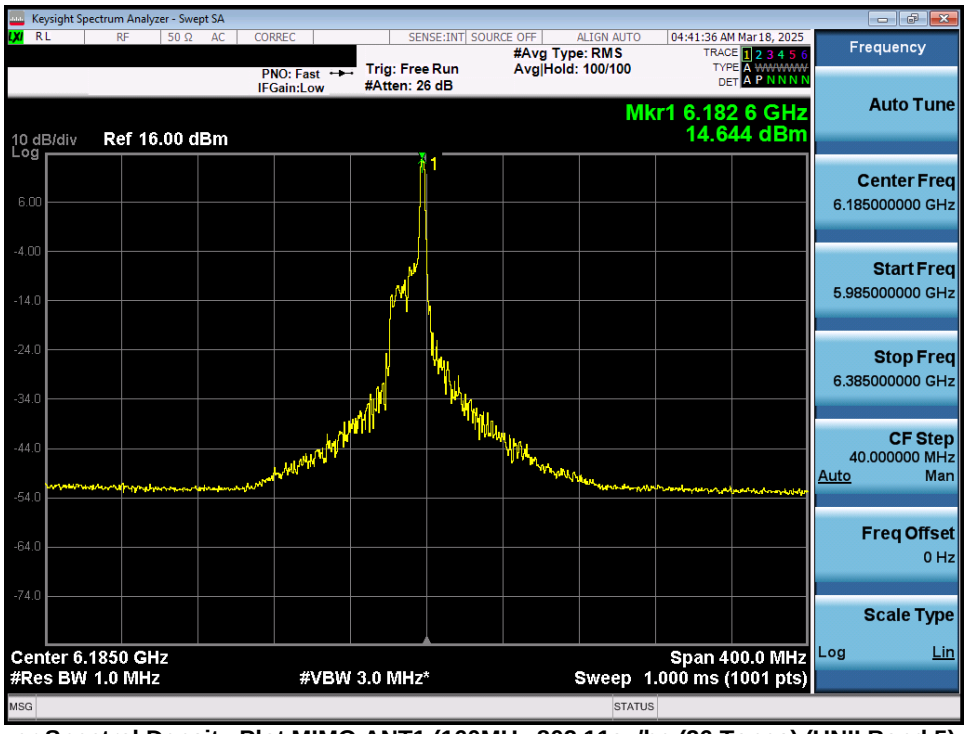

Plot 7-57. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

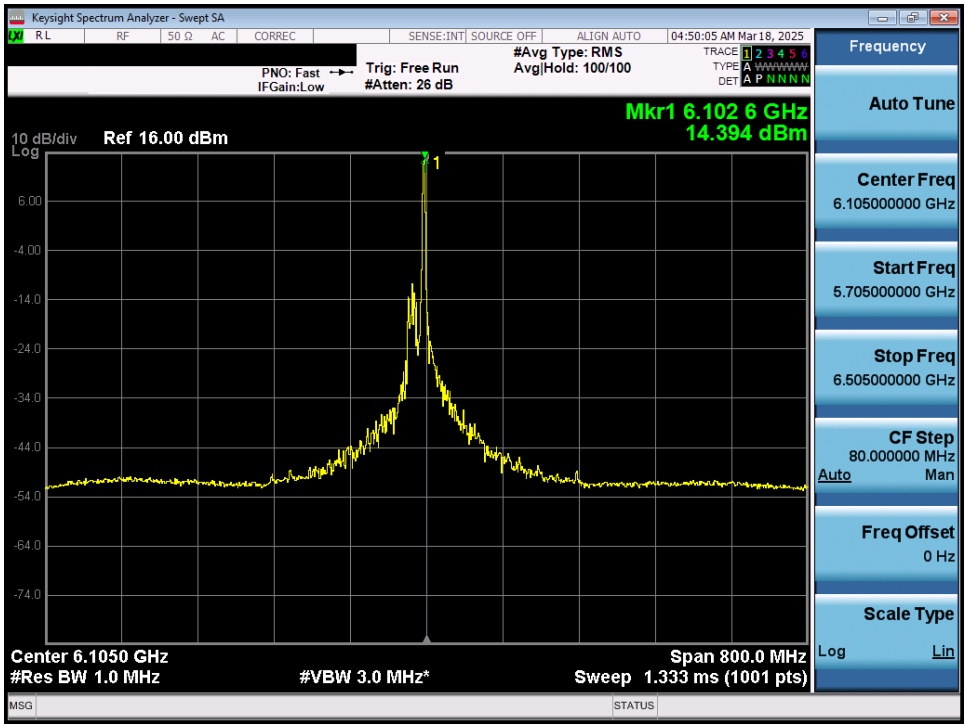

Plot 7-58. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - SP

Plot 7-59. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11be (52+26 Tones) (UNII Band 5) – Ch. 45) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

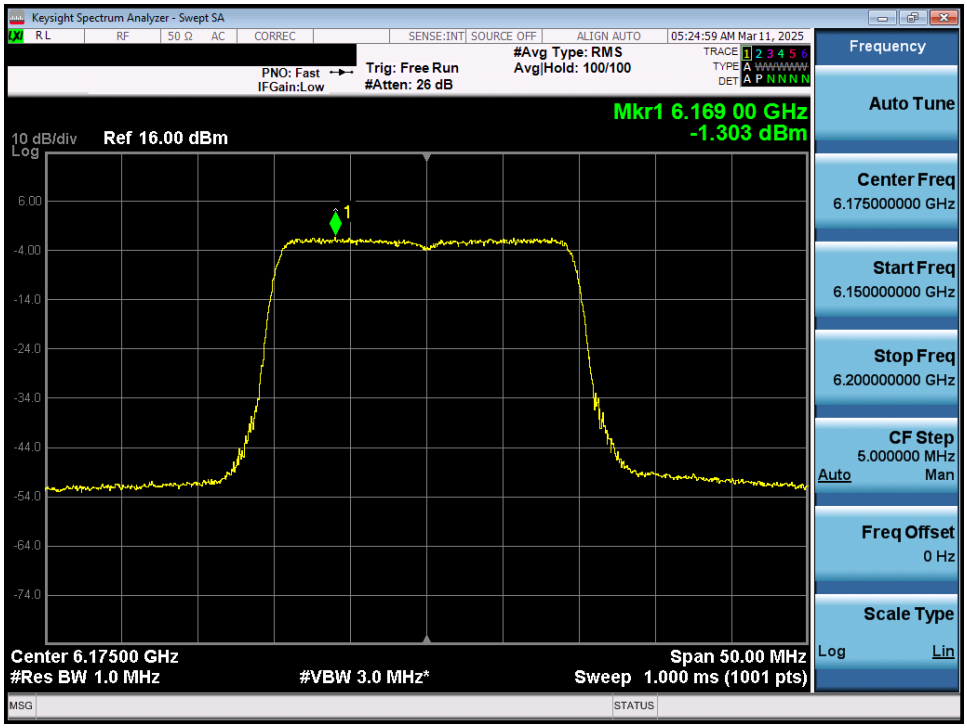

Plot 7-60. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

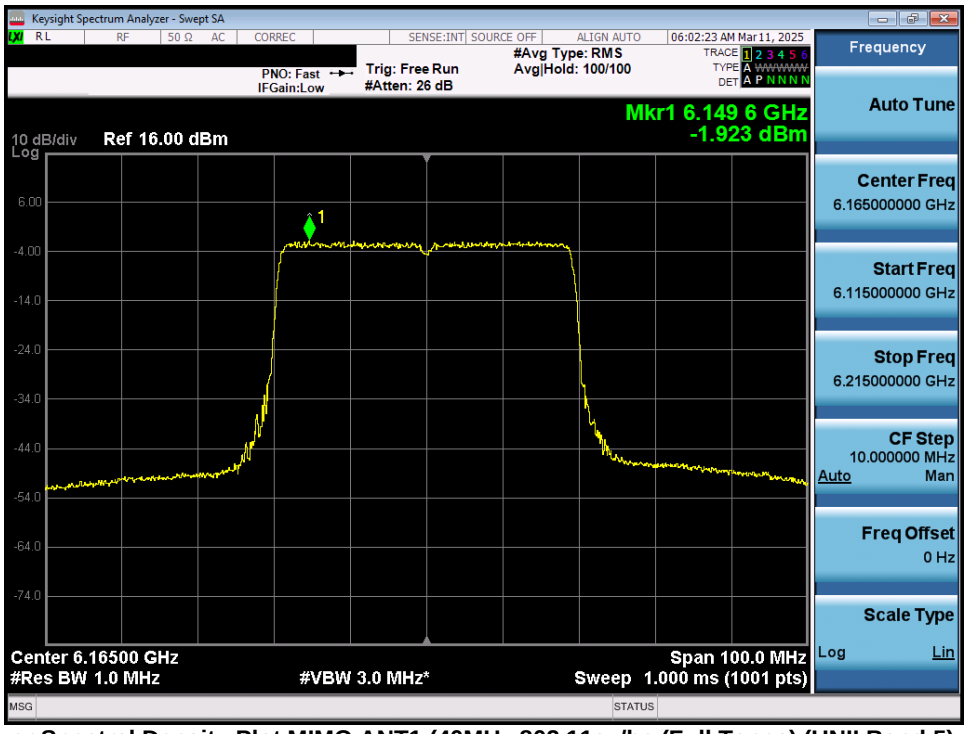

Plot 7-61. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

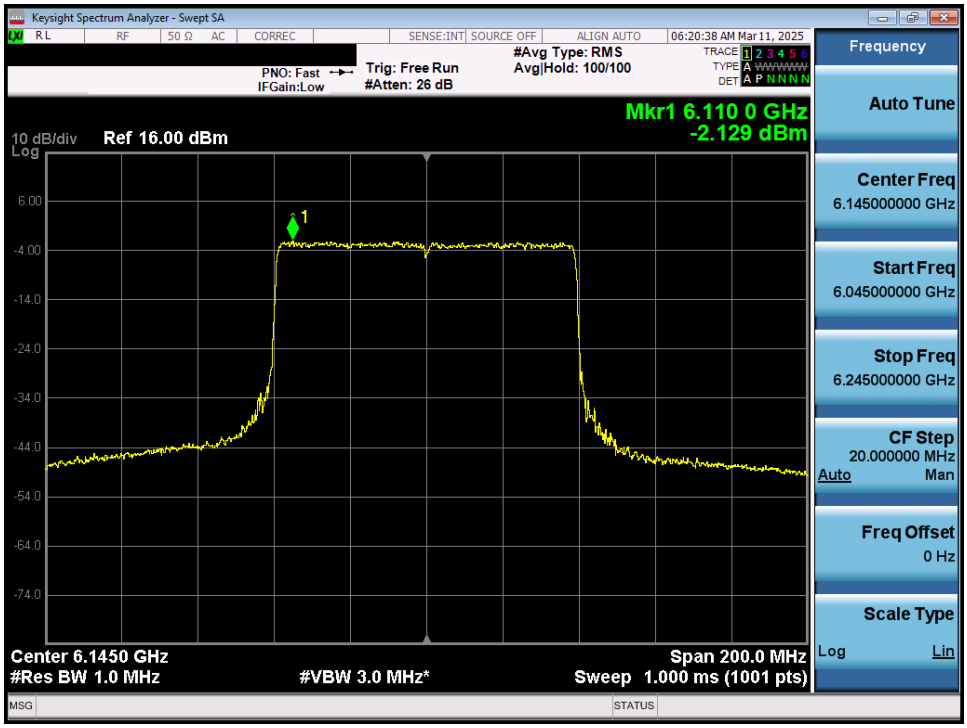

Plot 7-62. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI/SP

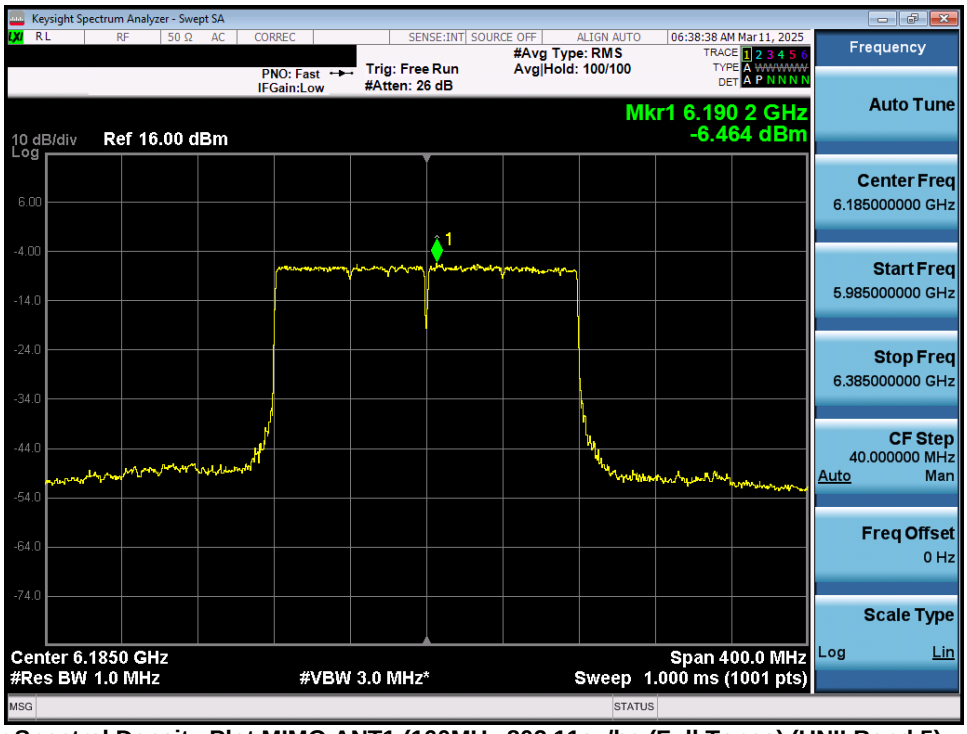

Plot 7-63. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

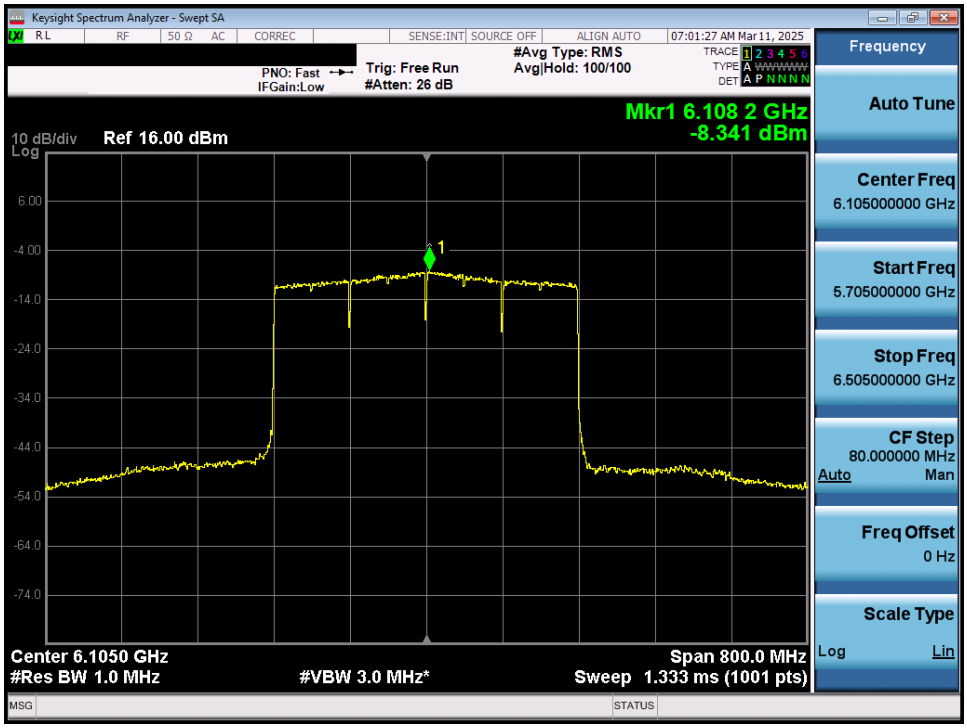

Plot 7-64. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

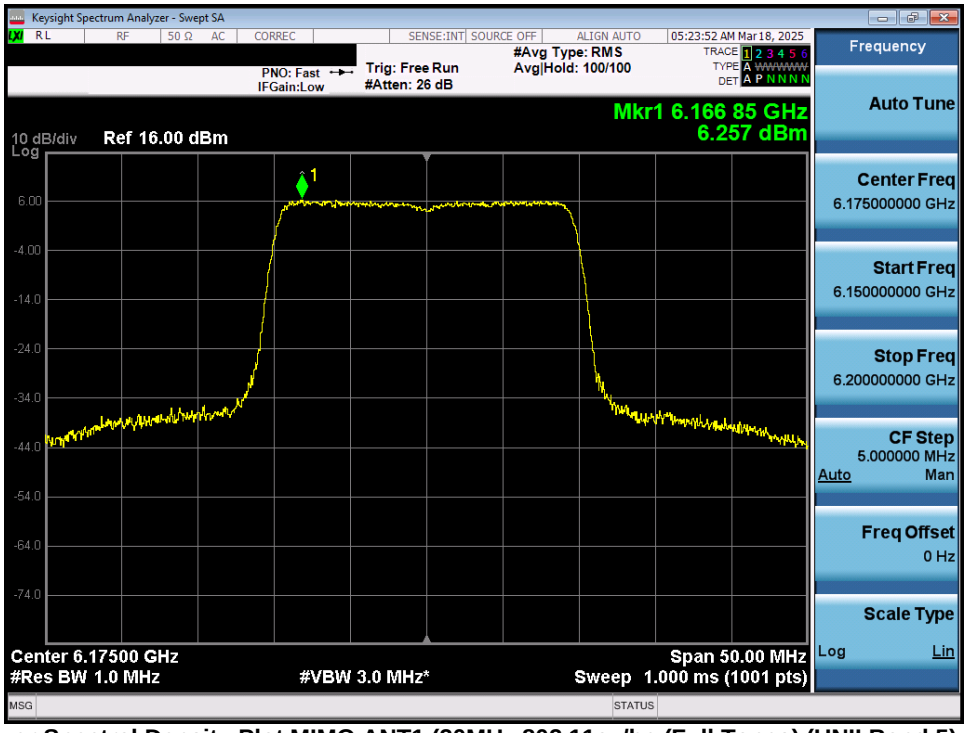

Plot 7-65. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - SP

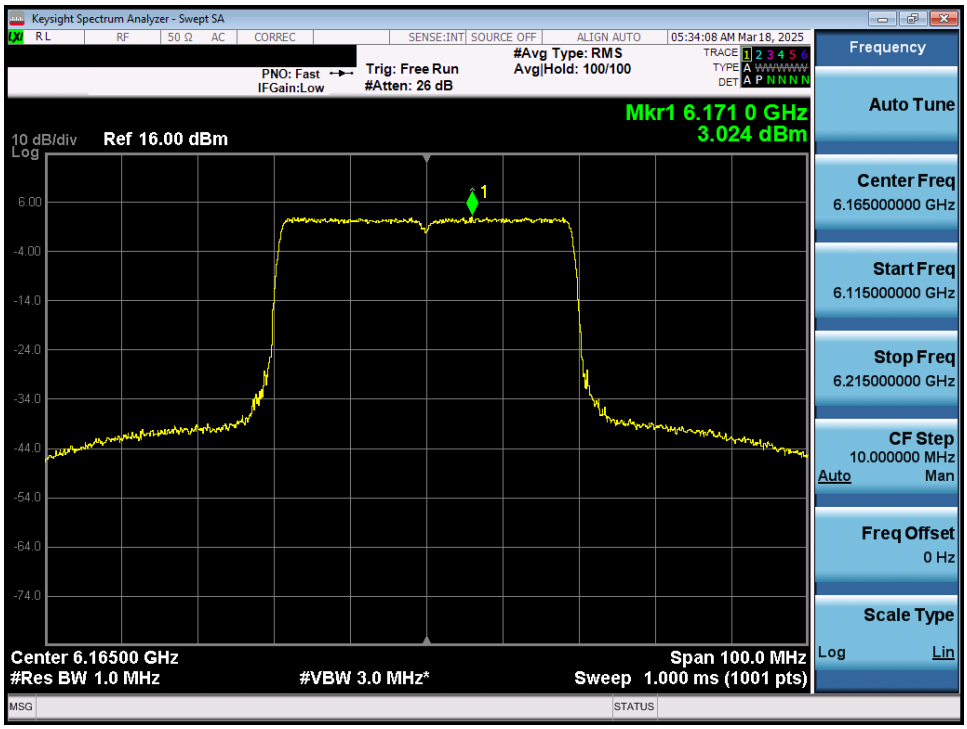

Plot 7-66. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.2 MIMO Antenna-2 Power Spectral Density Measurements

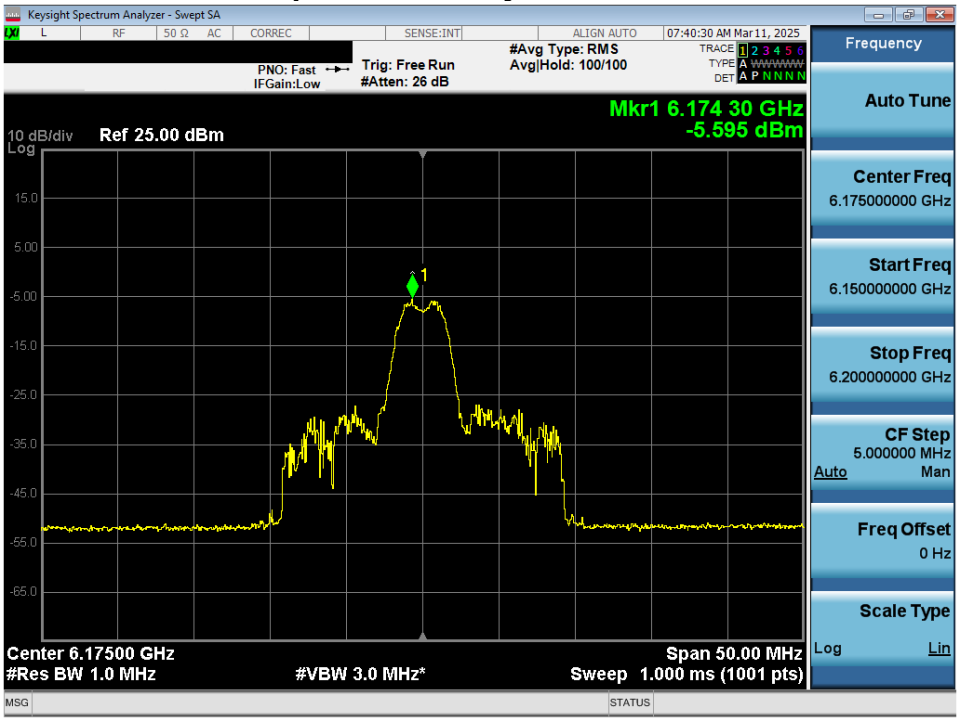

Plot 7-67. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

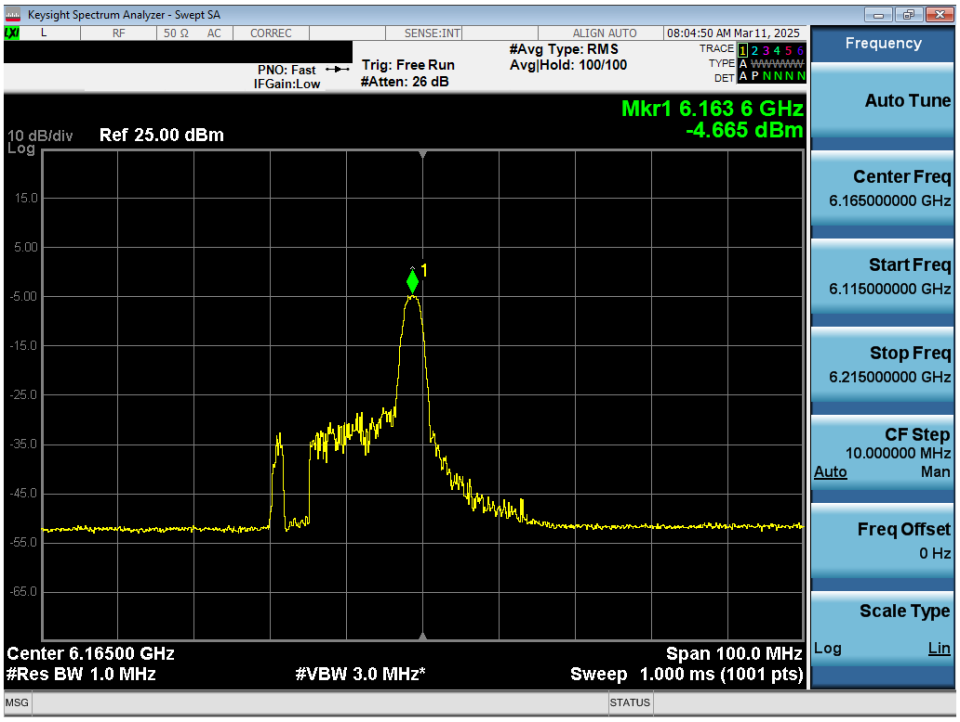

Plot 7-68. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

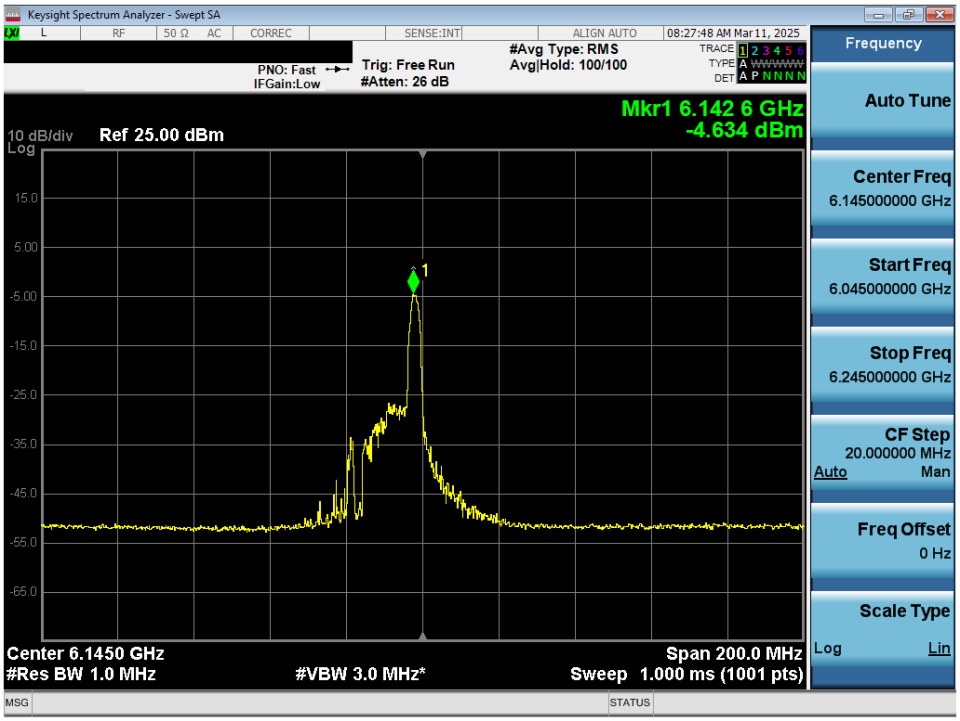

Plot 7-69. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

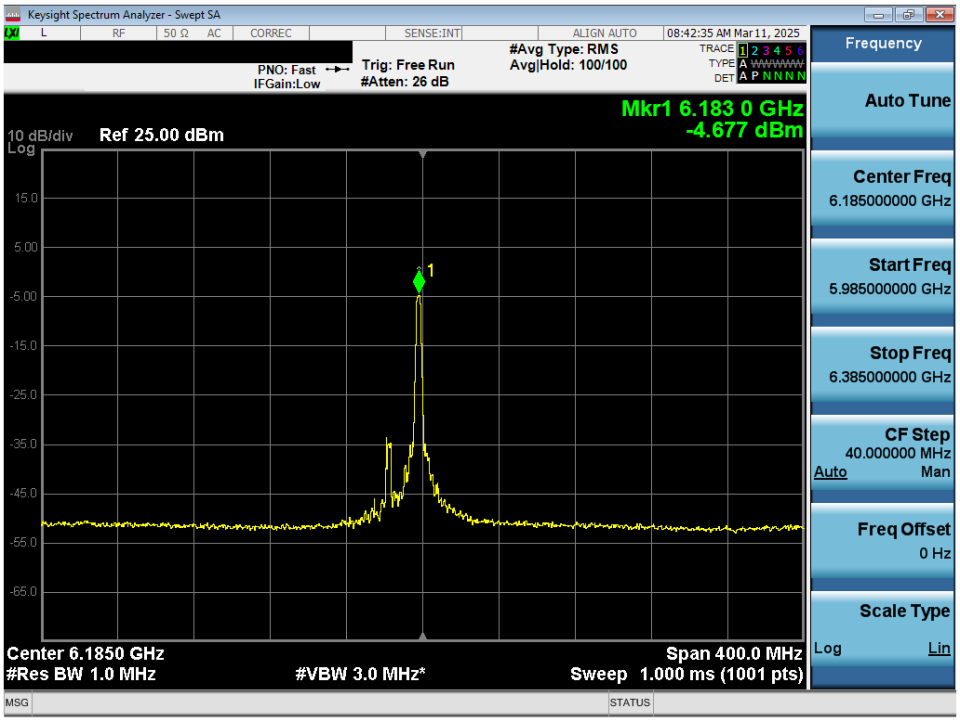

Plot 7-70. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

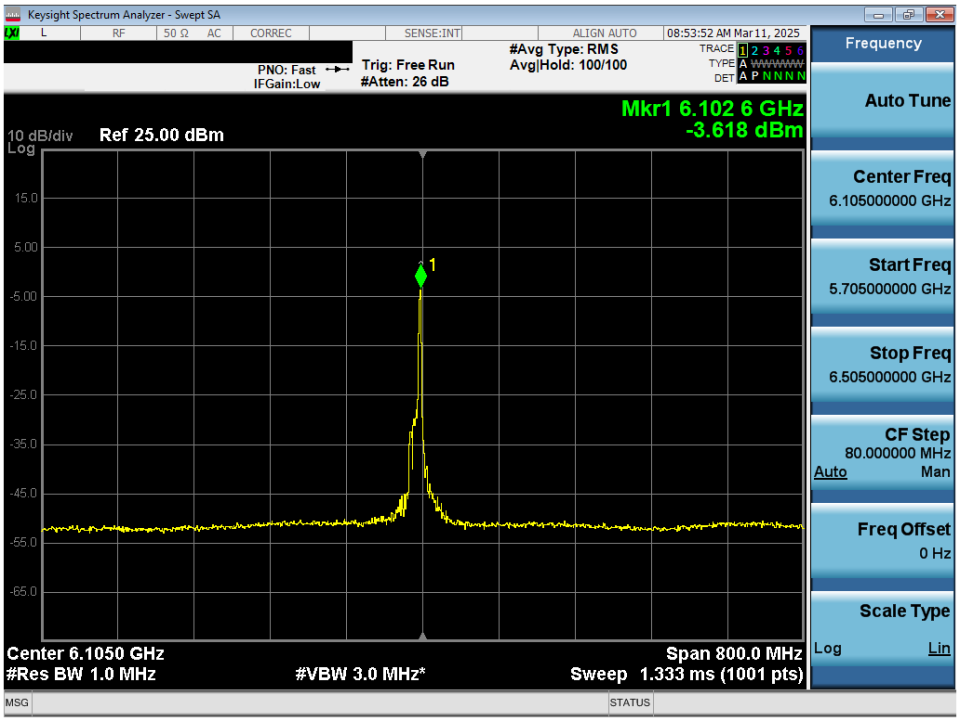

Plot 7-71. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

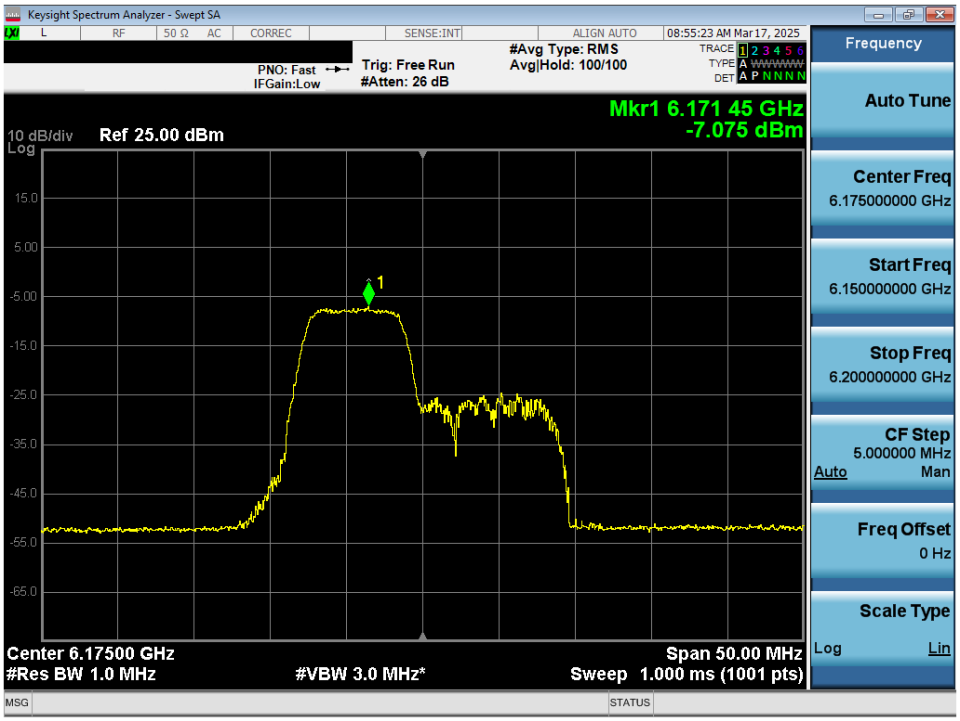

Plot 7-72. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11be (52+26 Tones) (UNII Band 5) – Ch. 45) - LPI

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

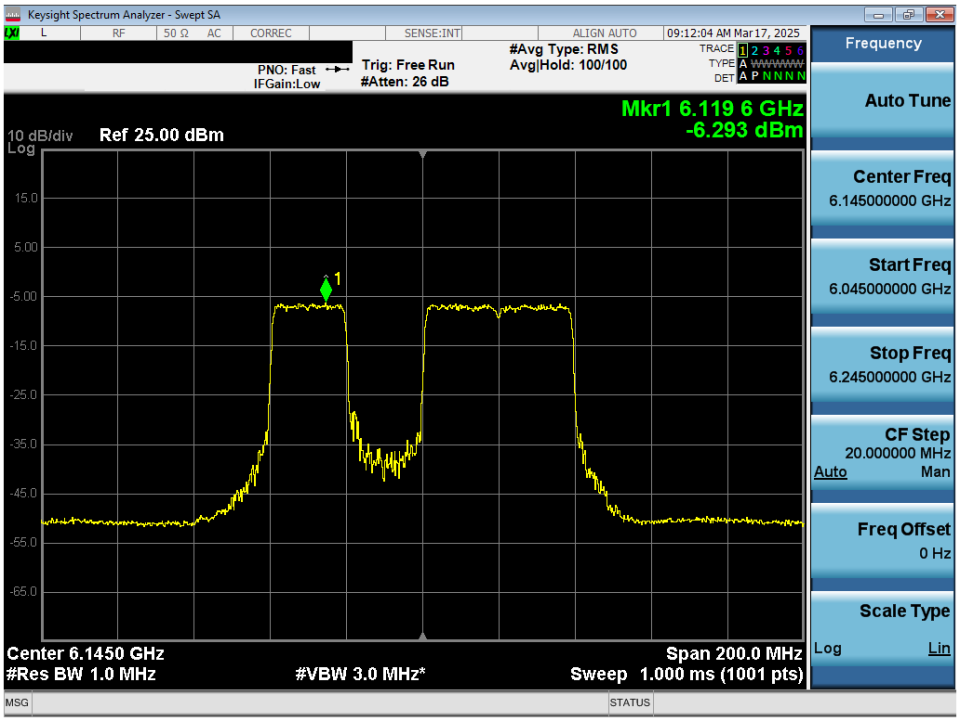

Plot 7-73. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) LPI/SP

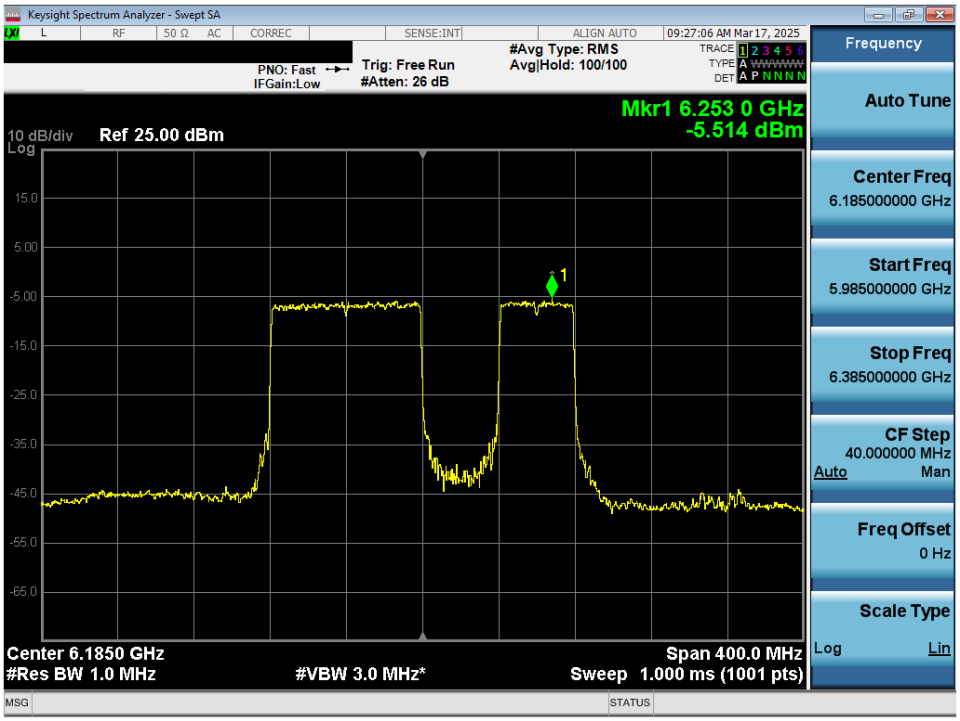

Plot 7-74. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

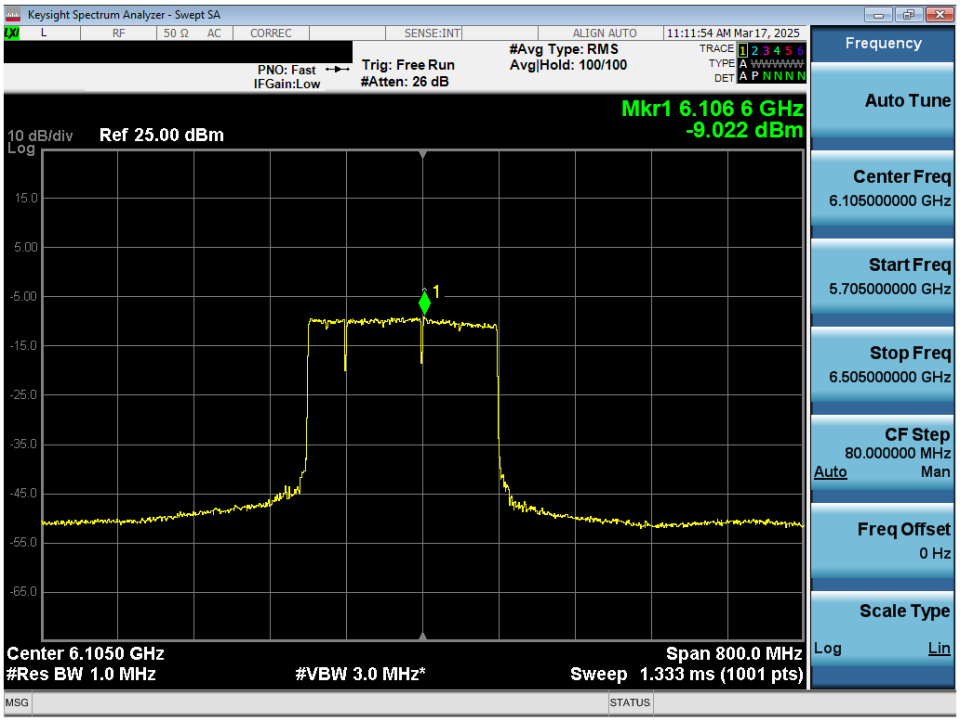

Plot 7-75. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11be (UNII Band 5) – Ch. 31) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

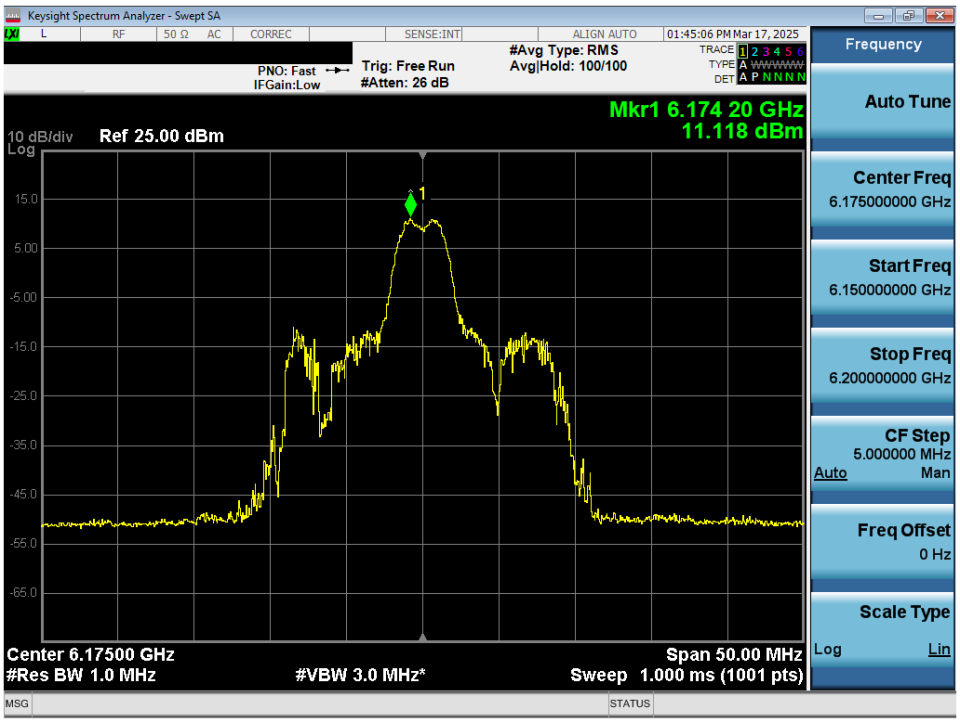

Plot 7-76. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - SP

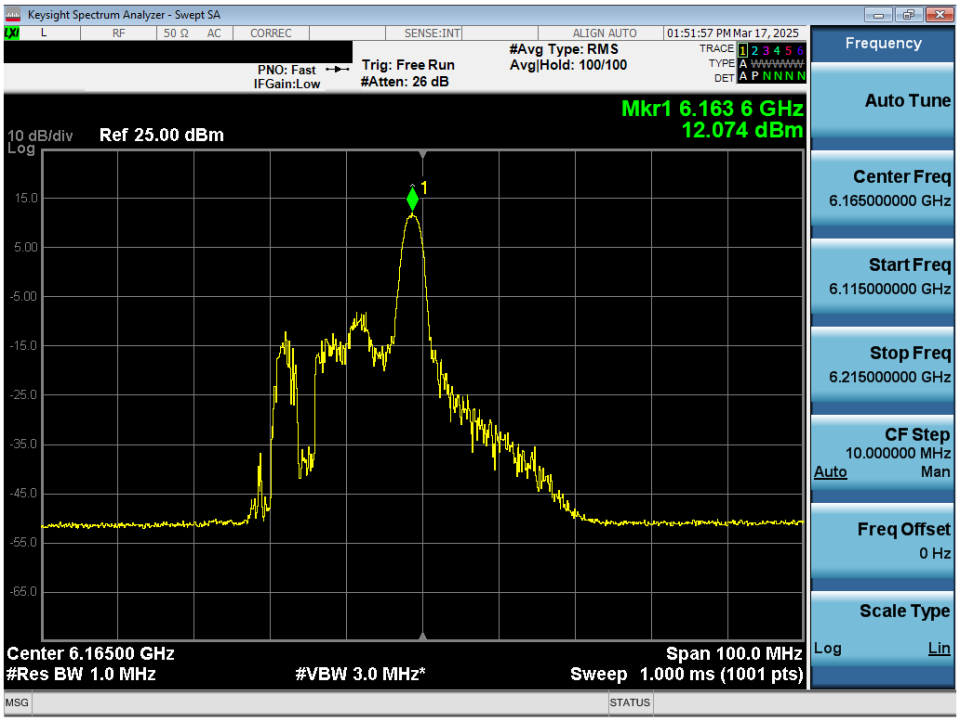

Plot 7-77. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

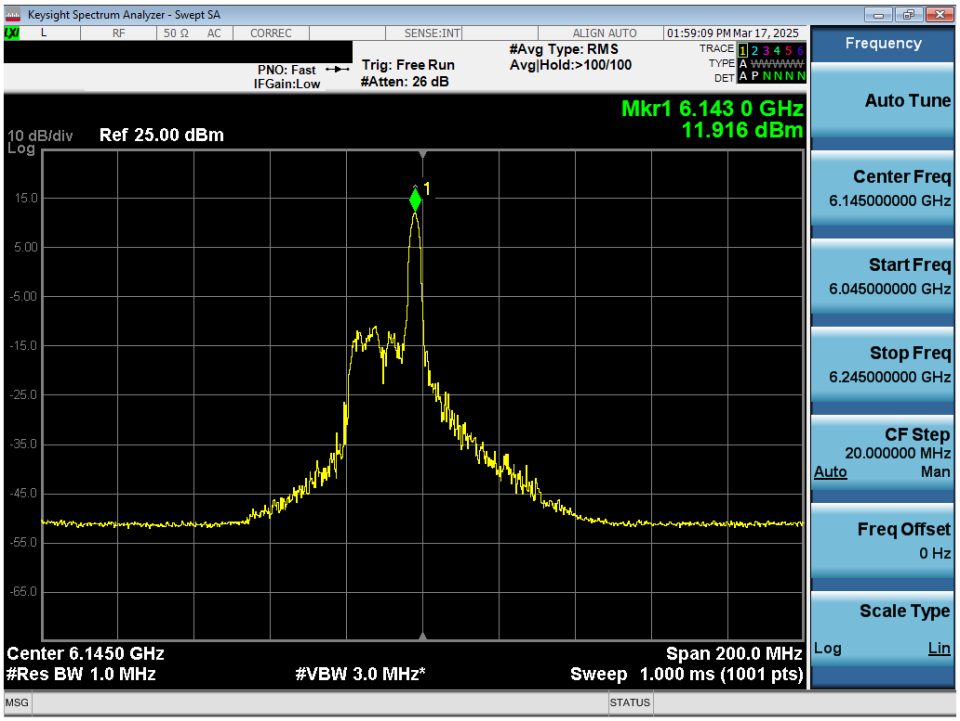

Plot 7-78. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

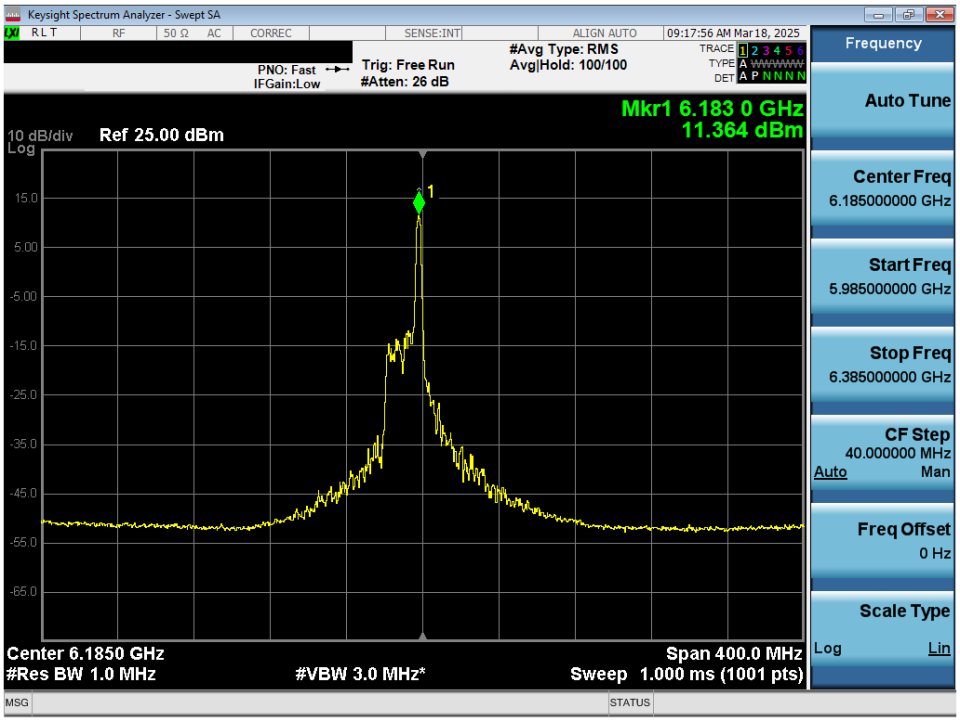

Plot 7-79. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

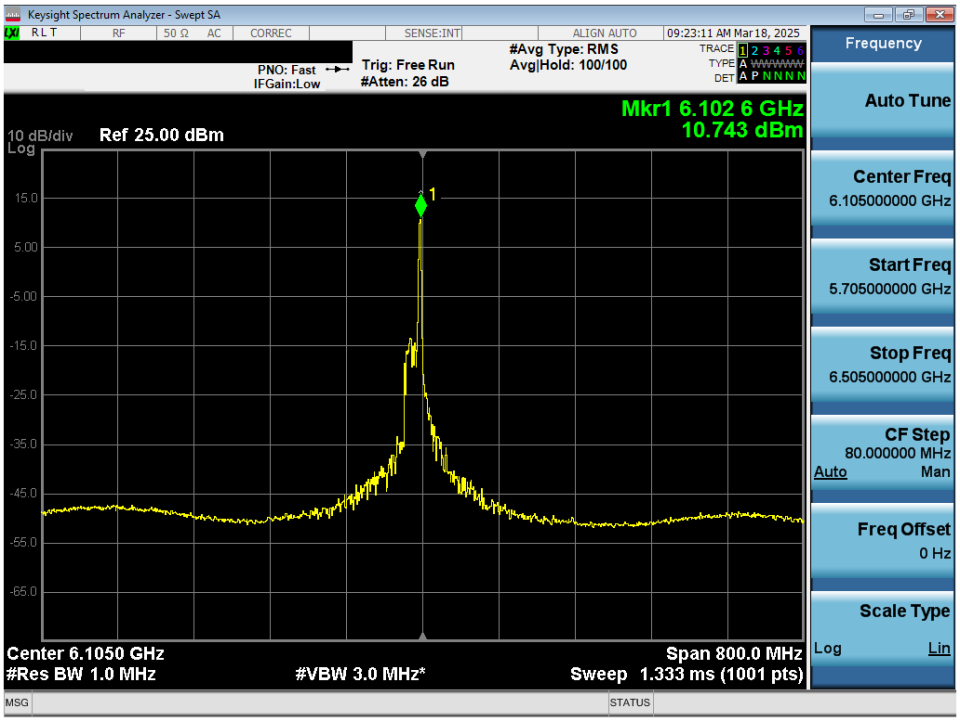

Plot 7-80. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - SP

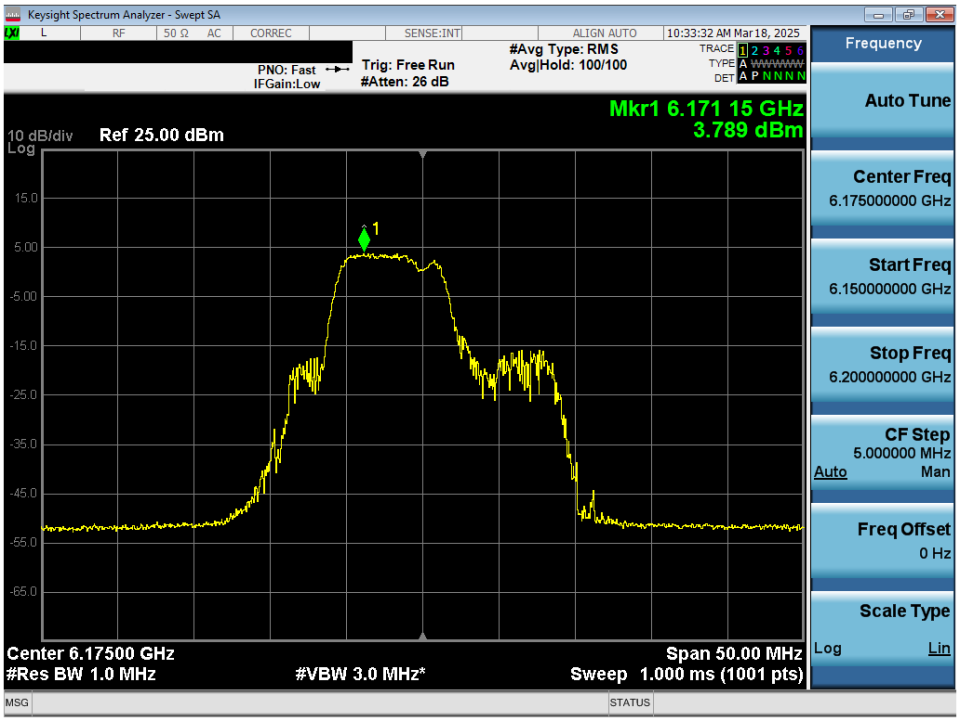

Plot 7-81. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11be (52+26 Tones) (UNII Band 5) – Ch. 45) - SP

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

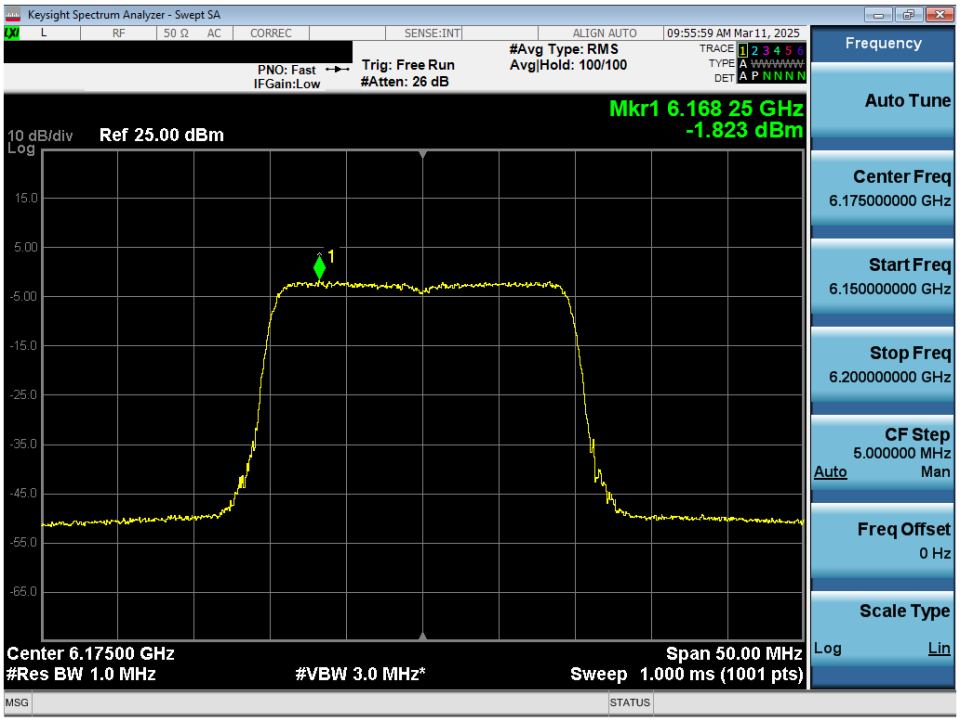

Plot 7-82. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

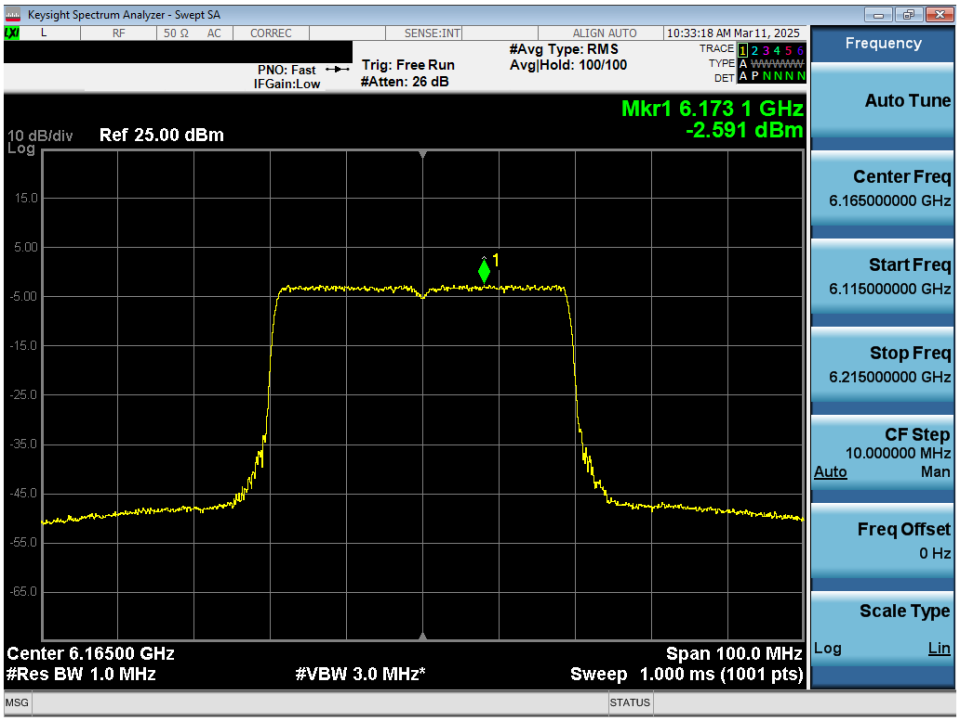

Plot 7-83. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

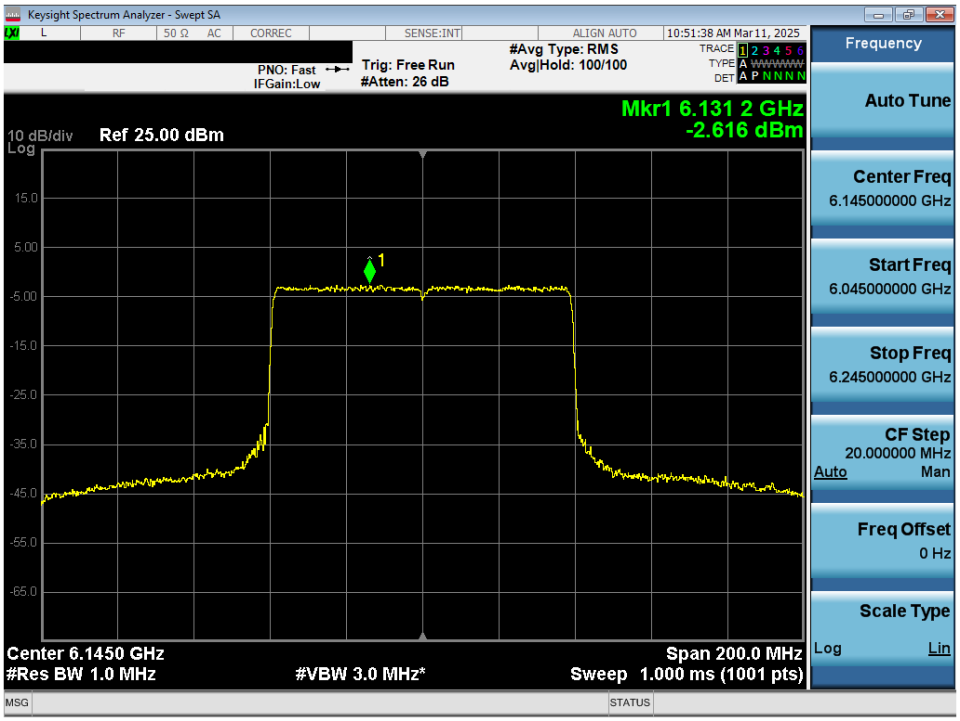

Plot 7-84. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI/SP

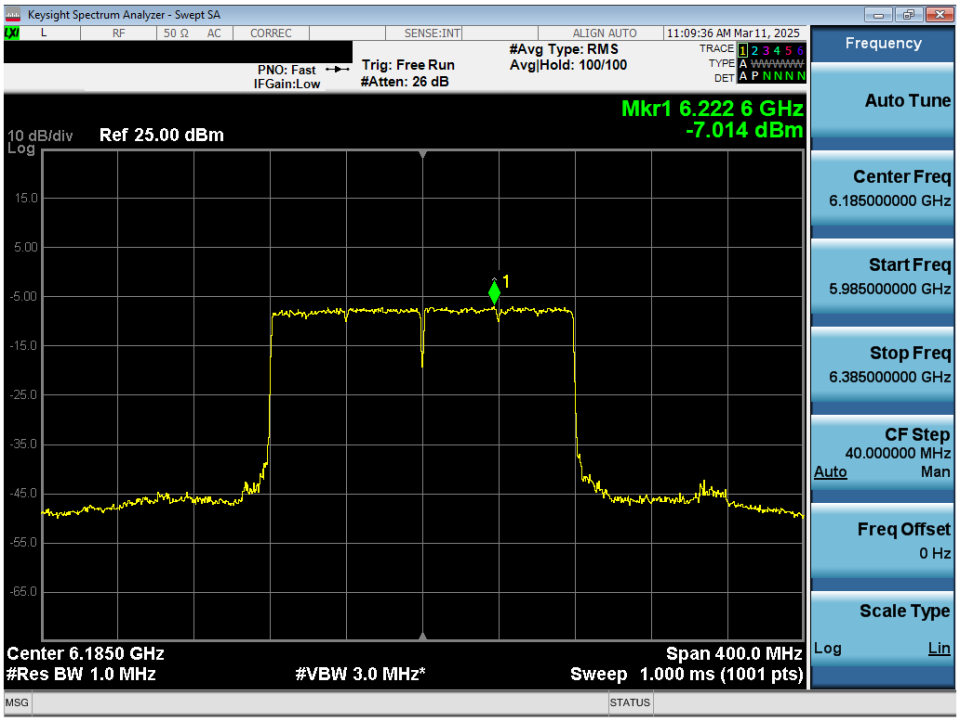

Plot 7-85. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Plot 7-86. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

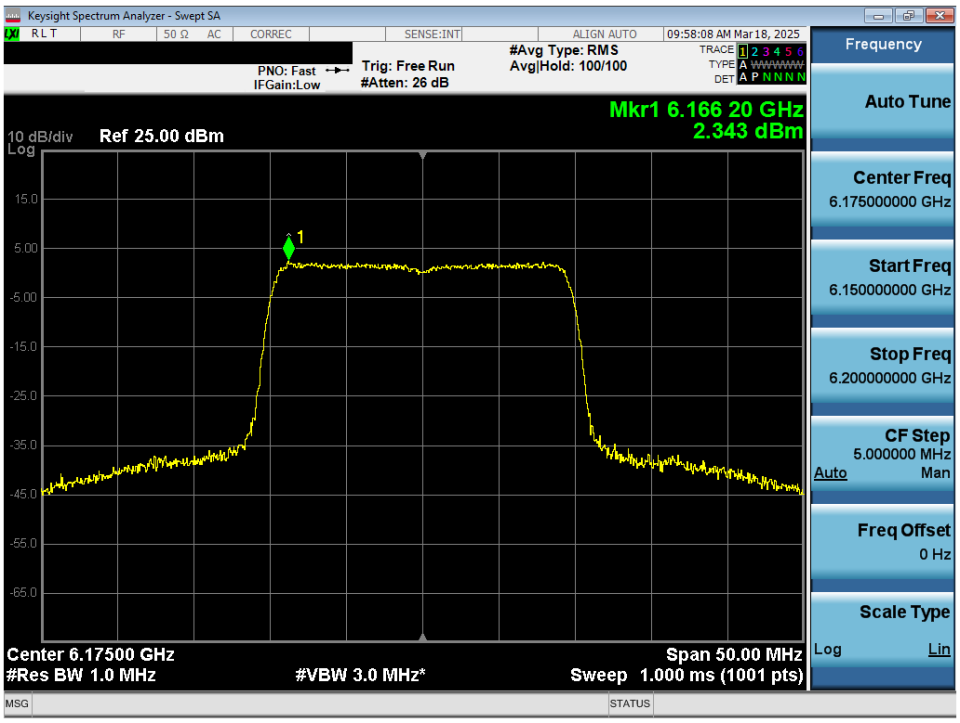

Plot 7-87. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - SP

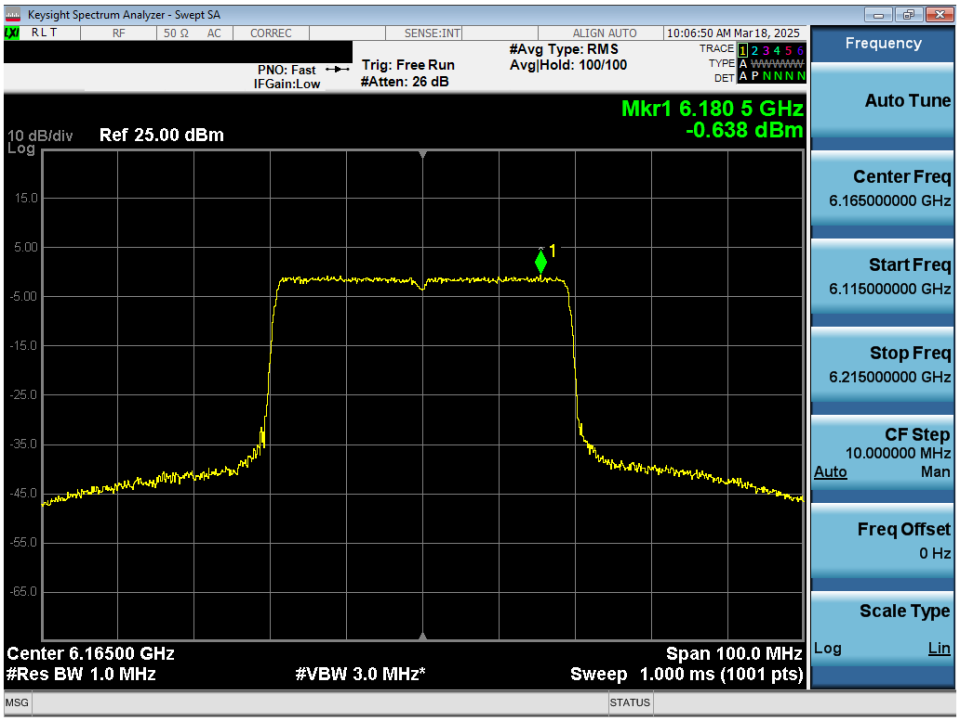

Plot 7-88. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5935MHz in 802.11ax (20MHz BW) mode, the average conducted power spectral density was measured to be -3.96 dBm for Antenna-1 and -5.51 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

(-3.96 dBm + -5.51 dBm) = (0.402 mW + 0.281 mW) = 0.683 mW = -1.66 dBm

Sample e.i.r.p Power Spectral Density Calculation:

At 5935 MHz in 802.11ax (20MHz BW) mode, the average MIMO power density was calculated to be -1.66 dBm with directional gain of -3.07 dBi.

e.i.r.p. Power Spectral Density(dBm) = Power Spectral Density (dBm) + Ant gain (dBi)

-1.66 dBm + -3.07 dBi = -4.72 dBm

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 In-Band Emissions

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

Test Procedure Used

KDB 987594 D02 v03

Test Settings

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
    a) Set the span to encompass the entire 26 dB EBW of the signal.
    b) Set RBW = same RBW used for 26 dB EBW measurement.
    c) Set VBW ≥ 3 X RBW
    d) Number of points in sweep ≥ [2 X span / RBW].
    e) Sweep time = auto.
    f) Detector = RMS (i.e., power averaging)
    g) Trace average at least 100 traces in power averaging (rms) mode.
    h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
    a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
    b) Suppressed by 28 dB at one channel bandwidth from the channel center.
    c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	be (20MHz)	PASS	PASS
	6175	45	be (20MHz)	PASS	PASS
	6415	93	be (20MHz)	PASS	PASS
	5965	3	be (40MHz)	PASS	PASS
	6165	43	be (40MHz)	PASS	PASS
	6405	91	be (40MHz)	PASS	PASS
	5985	7	be (80MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6385	87	be (80MHz)	PASS	PASS
	6025	15	be (160MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6345	79	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 6	6435	97	be (20MHz)	PASS	PASS
	6475	105	be (20MHz)	PASS	PASS
	6515	113	be (20MHz)	PASS	PASS
	6445	99	be (40MHz)	PASS	PASS
	6485	107	be (40MHz)	PASS	PASS
	6525	115	be (40MHz)	PASS	PASS
	6465	103	be (80MHz)	PASS	PASS
	6505	111	be (160MHz)	PASS	PASS
Band 5/6/7	6425	95	be (320MHz)	PASS	PASS
Band 7	6695	117	be (20MHz)	PASS	PASS
	6695	149	be (20MHz)	PASS	PASS
	6875	185	be (20MHz)	PASS	PASS
	6565	123	be (40MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6845	179	be (40MHz)	PASS	PASS
	6545	119	be (80MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6865	183	be (80MHz)	PASS	PASS
	6665	143	be (160MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 6/7	6585	127	be (320MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS
Band 8	6895	189	be (20MHz)	PASS	PASS
	6995	209	be (20MHz)	PASS	PASS
	7115	233	be (20MHz)	PASS	PASS
	6885	187	be (40MHz)	PASS	PASS
	6965	211	be (40MHz)	PASS	PASS
	7085	227	be (40MHz)	PASS	PASS
	6945	199	be (80MHz)	PASS	PASS
	7025	215	be (80MHz)	PASS	PASS
	6985	207	be (160MHz)	PASS	PASS
Band 7/8	6985	191	be (320MHz)	PASS	PASS

Table 7-83. In Band Emissions Results Measurements (26 Tones) – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	be (20MHz)	PASS	PASS
	6175	45	be (20MHz)	PASS	PASS
	6415	93	be (20MHz)	PASS	PASS
	5965	3	be (40MHz)	PASS	PASS
	6165	43	be (40MHz)	PASS	PASS
	6405	91	be (40MHz)	PASS	PASS
	5985	7	be (80MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6385	87	be (80MHz)	PASS	PASS
	6025	15	be (160MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6345	79	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 6	6435	97	be (20MHz)	PASS	PASS
	6475	105	be (20MHz)	PASS	PASS
	6515	113	be (20MHz)	PASS	PASS
	6445	99	be (40MHz)	PASS	PASS
	6485	107	be (40MHz)	PASS	PASS
	6525	115	be (40MHz)	PASS	PASS
	6465	103	be (80MHz)	PASS	PASS
	6505	111	be (160MHz)	PASS	PASS
Band 5/6/7	6425	95	be (320MHz)	PASS	PASS
Band 7	6695	117	be (20MHz)	PASS	PASS
	6695	149	be (20MHz)	PASS	PASS
	6875	185	be (20MHz)	PASS	PASS
	6565	123	be (40MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6845	179	be (40MHz)	PASS	PASS
	6545	119	be (80MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6865	183	be (80MHz)	PASS	PASS
	6665	143	be (160MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 6/7	6585	127	be (320MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS
Band 8	6895	189	be (20MHz)	PASS	PASS
	6995	209	be (20MHz)	PASS	PASS
	7115	233	be (20MHz)	PASS	PASS
	6885	187	be (40MHz)	PASS	PASS
	6965	211	be (40MHz)	PASS	PASS
	7085	227	be (40MHz)	PASS	PASS
	6945	199	be (80MHz)	PASS	PASS
	7025	215	be (80MHz)	PASS	PASS
	6985	207	be (160MHz)	PASS	PASS
Band 7/8	6985	191	be (320MHz)	PASS	PASS

Table 7-84. In Band Emissions Results Measurements (Full Tones) – LPI

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	6175	45	be (20MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
Band 6	6475	105	be (20MHz)	PASS	PASS
	6465	103	be (80MHz)	PASS	PASS
	6505	111	be (160MHz)	PASS	PASS
Band 5/6/7	6425	95	be (320MHz)	PASS	PASS
Band 7	6695	149	be (20MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 6/7	6585	127	be (320MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS
Band 8	6995	209	be (20MHz)	PASS	PASS
	6965	211	be (40MHz)	PASS	PASS
	6945	199	be (80MHz)	PASS	PASS
	6985	207	be (160MHz)	PASS	PASS
Band 7/8	6905	191	be (320MHz)	PASS	PASS

Table 7-85. In Band Emissions Results Measurements (MRU) – LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	be (20MHz)	PASS	PASS
	6175	45	be (20MHz)	PASS	PASS
	6415	93	be (20MHz)	PASS	PASS
	5965	3	be (40MHz)	PASS	PASS
	6165	43	be (40MHz)	PASS	PASS
	6405	91	be (40MHz)	PASS	PASS
	5985	7	be (80MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6385	87	be (80MHz)	PASS	PASS
	6025	15	be (160MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6345	79	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 7	6695	117	be (20MHz)	PASS	PASS
	6695	149	be (20MHz)	PASS	PASS
	6875	185	be (20MHz)	PASS	PASS
	6565	123	be (40MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6845	179	be (40MHz)	PASS	PASS
	6545	119	be (80MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6865	183	be (80MHz)	PASS	PASS
	6665	143	be (160MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS

Table 7-86. In Band Emissions Results Measurements (26 Tones) – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	be (20MHz)	PASS	PASS
	6175	45	be (20MHz)	PASS	PASS
	6415	93	be (20MHz)	PASS	PASS
	5965	3	be (40MHz)	PASS	PASS
	6165	43	be (40MHz)	PASS	PASS
	6405	91	be (40MHz)	PASS	PASS
	5985	7	be (80MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6385	87	be (80MHz)	PASS	PASS
	6025	15	be (160MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6345	79	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 7	6695	117	be (20MHz)	PASS	PASS
	6695	149	be (20MHz)	PASS	PASS
	6875	185	be (20MHz)	PASS	PASS
	6565	123	be (40MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6845	179	be (40MHz)	PASS	PASS
	6545	119	be (80MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6865	183	be (80MHz)	PASS	PASS
	6665	143	be (160MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS

Table 7-87. In Band Emissions Results Measurements (Full Tones) – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	6175	45	be (20MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 7	6695	149	be (20MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS

Table 7-88. In Band Emissions Results Measurements (MRU) – SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5.1 MIMO Antenna-1 In-Band Emission Measurements

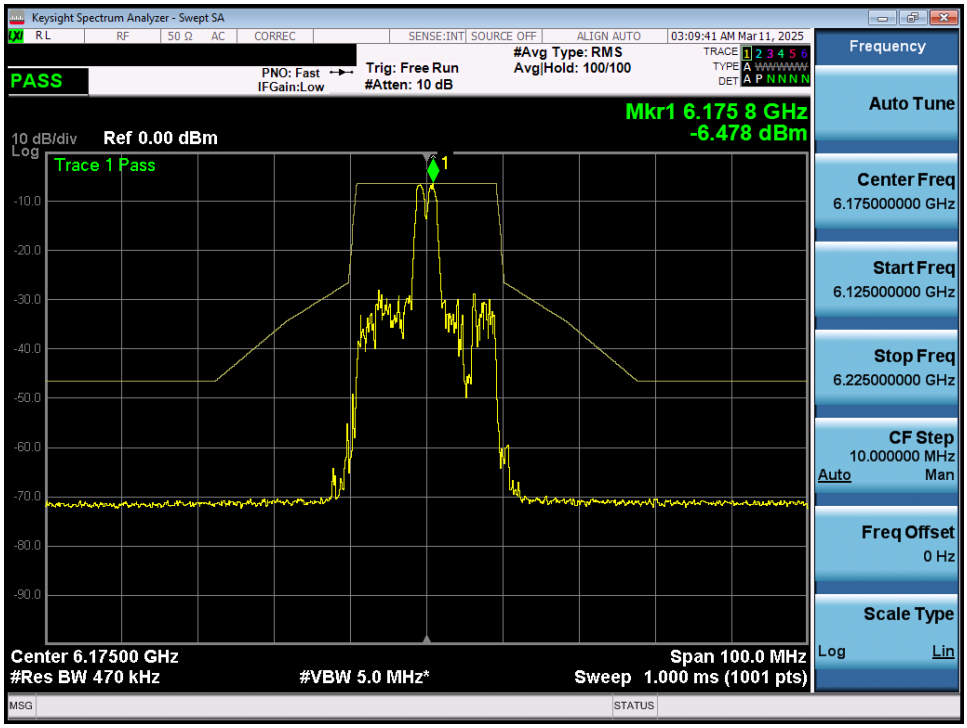

Plot 7-89. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

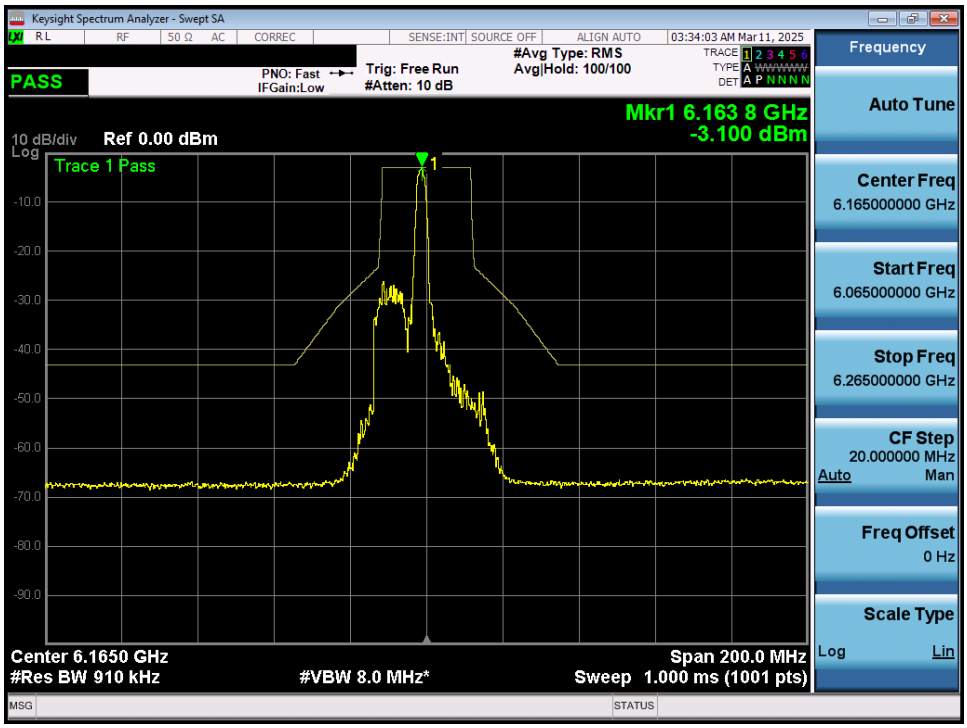

Plot 7-90. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

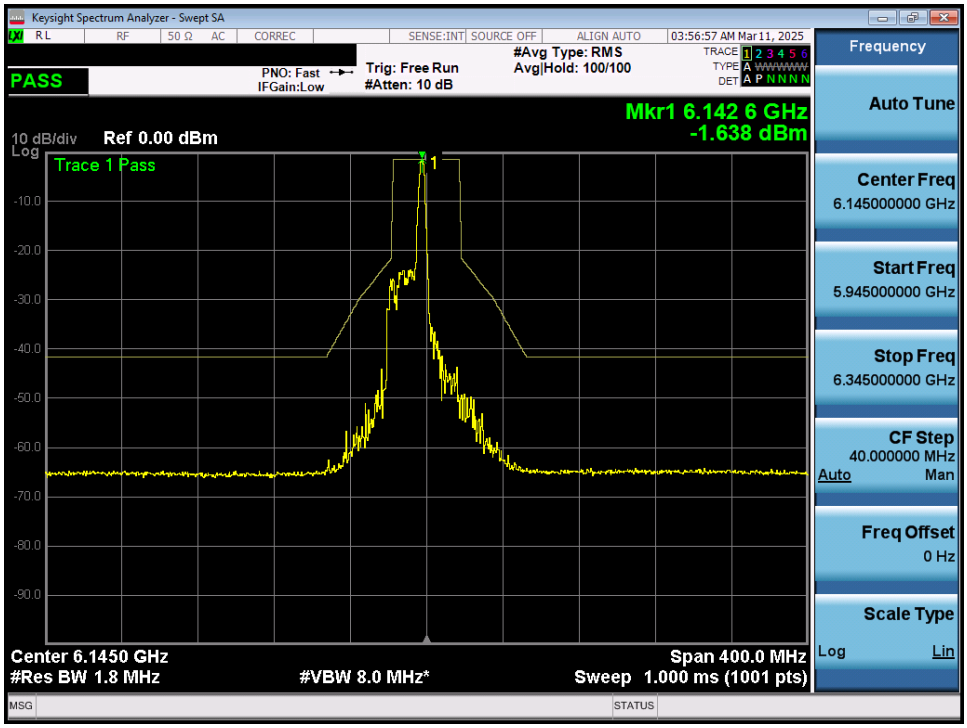

Plot 7-91. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

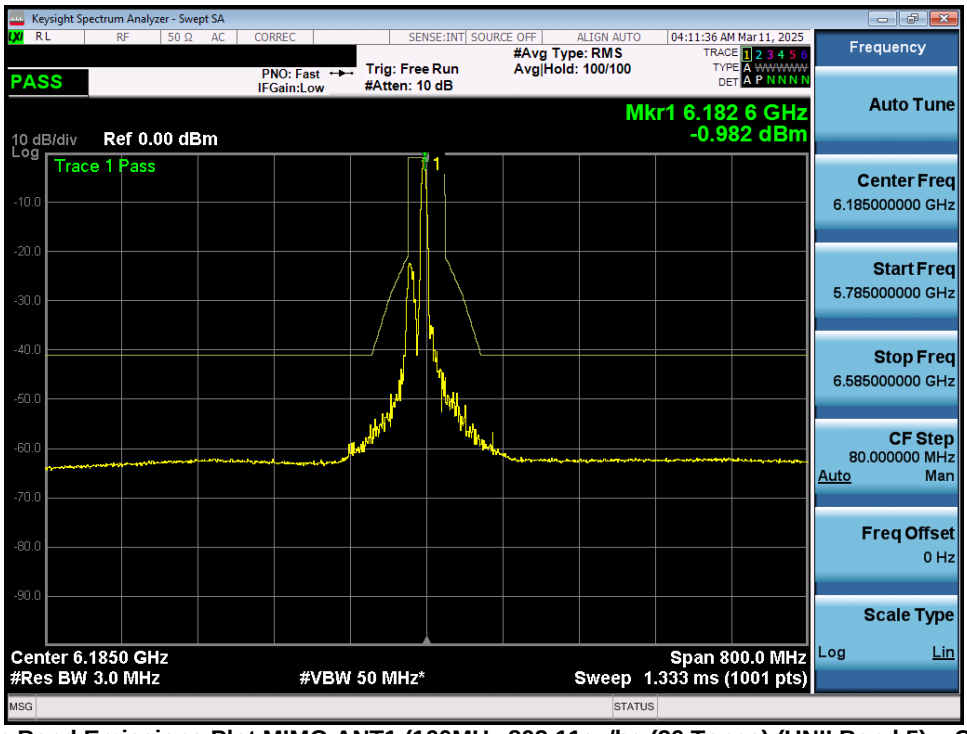

Plot 7-92. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

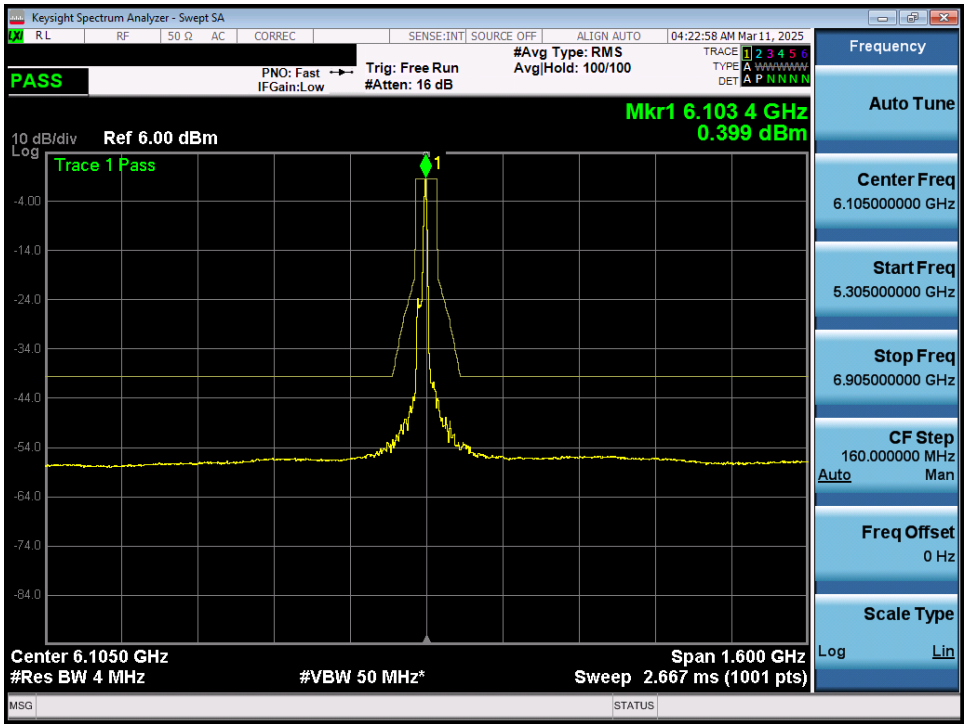

Plot 7-93. In Band Emissions Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

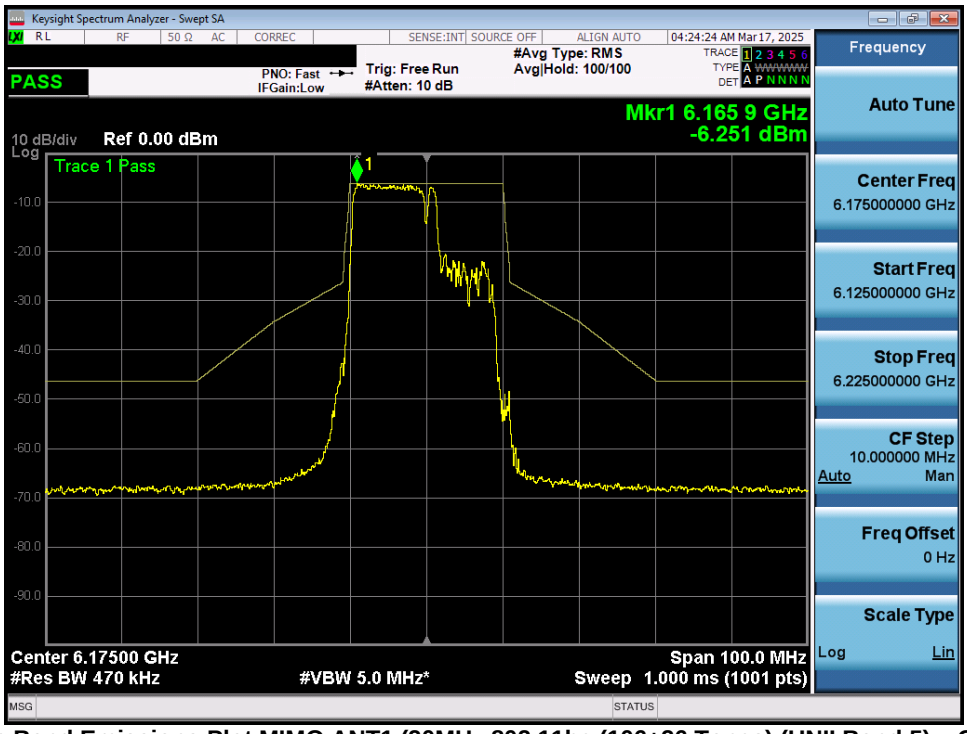

Plot 7-94. In Band Emissions Plot MIMO ANT1 (20MHz 802.11be (106+26 Tones) (UNII Band 5) – Ch. 45) - LPI

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

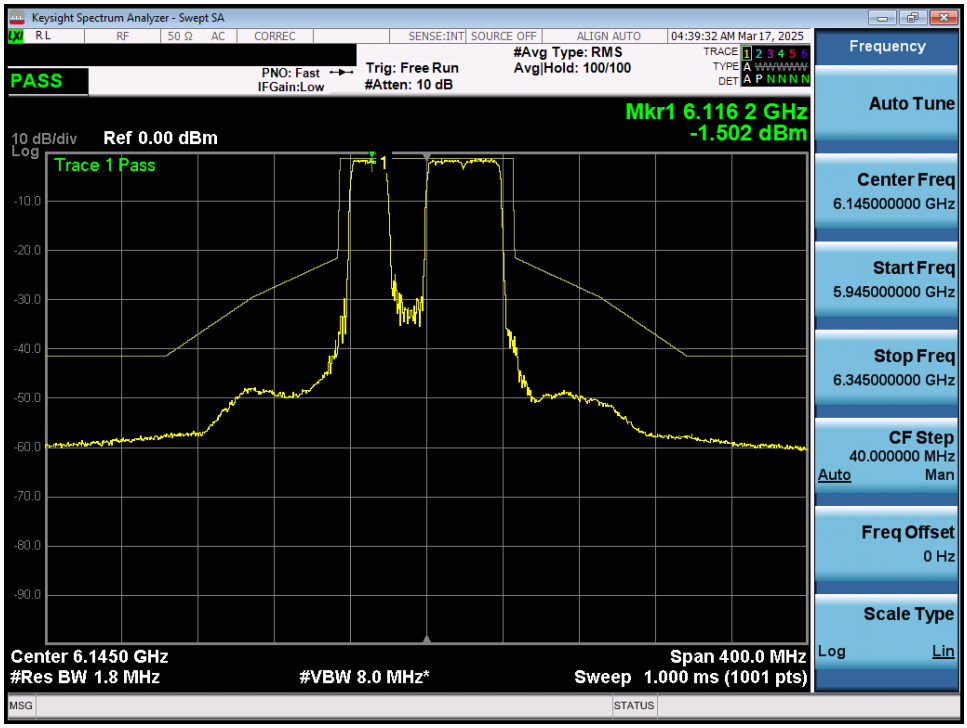

Plot 7-95. In Band Emissions Plot MIMO ANT1 (80MHz 802.11be (484+242 Tones) (UNII Band 5) – Ch. 39) LPI/SP

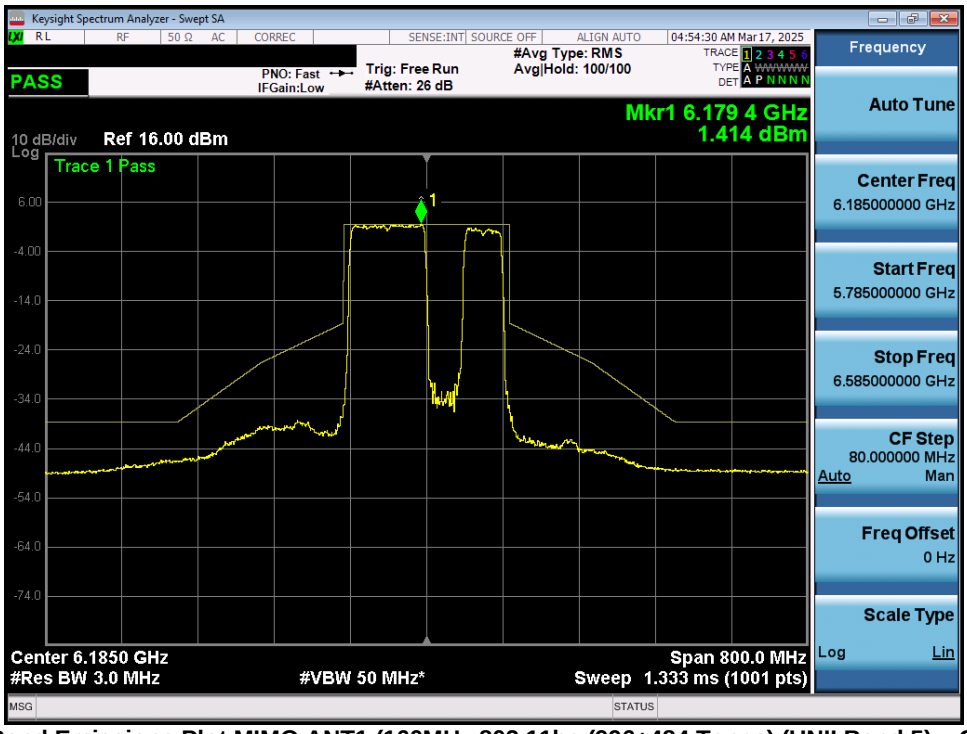

Plot 7-96. In Band Emissions Plot MIMO ANT1 (160MHz 802.11be (996+484 Tones) (UNII Band 5) – Ch. 47) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

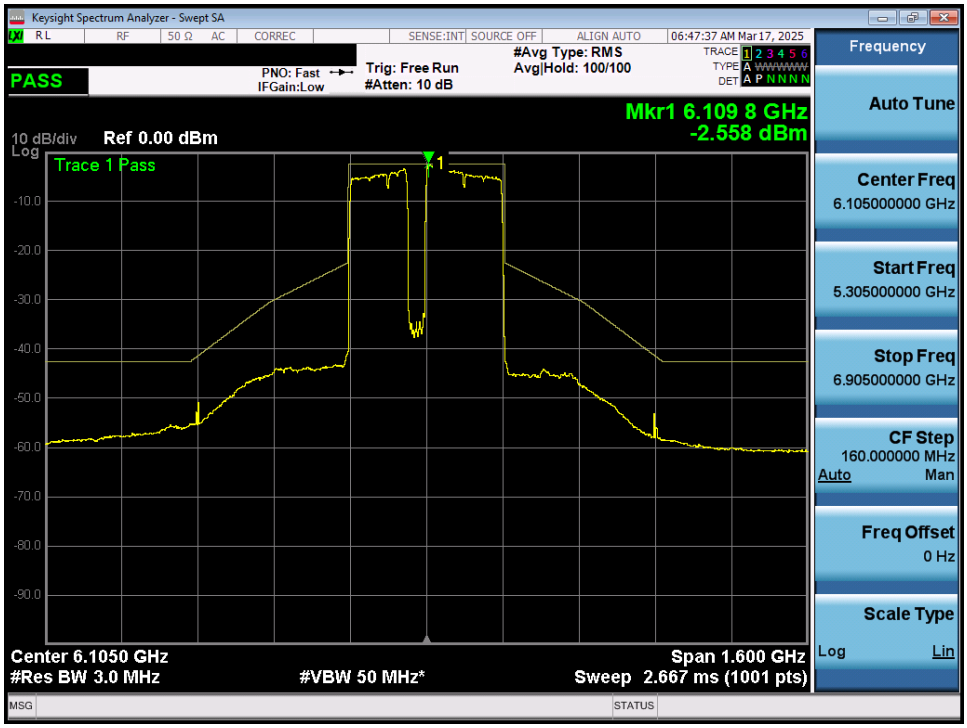

Plot 7-97. In Band Emissions Plot MIMO ANT1 (320MHz 802.11be (3*996+484 Tones) (UNII Band 5) – Ch. 31) LPI/SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

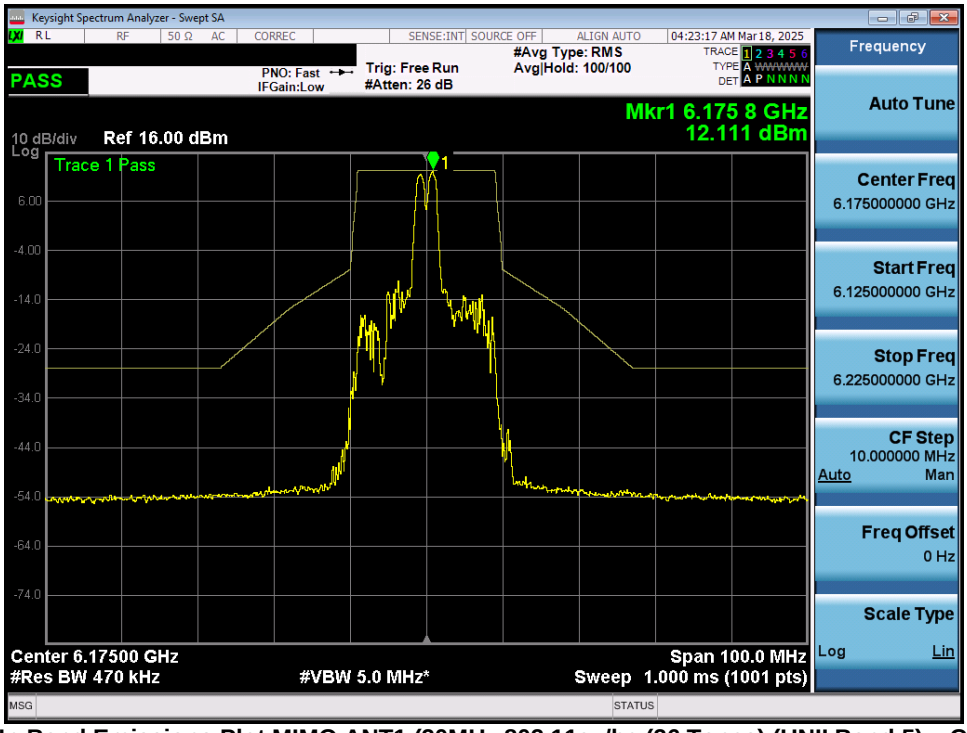

Plot 7-98. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - SP

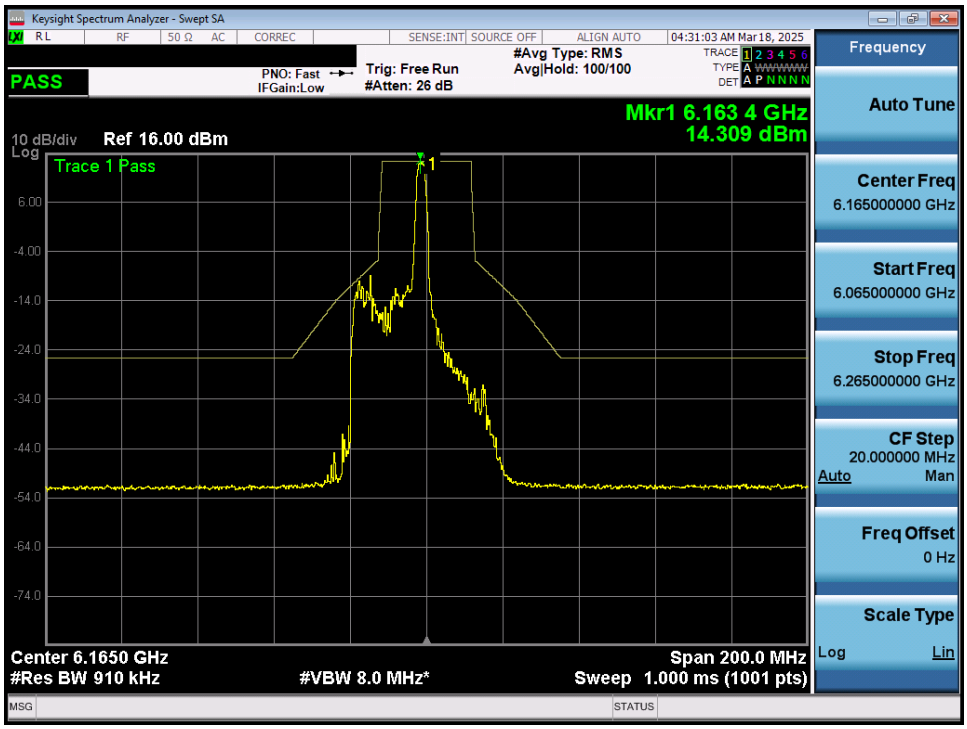

Plot 7-99. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

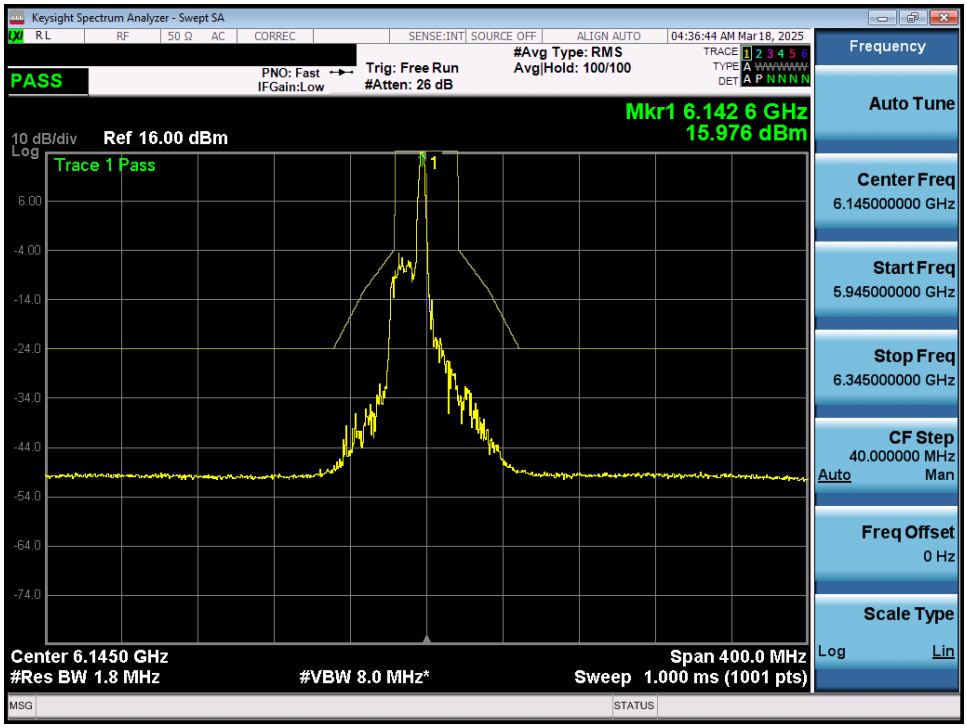

Plot 7-100. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - SP

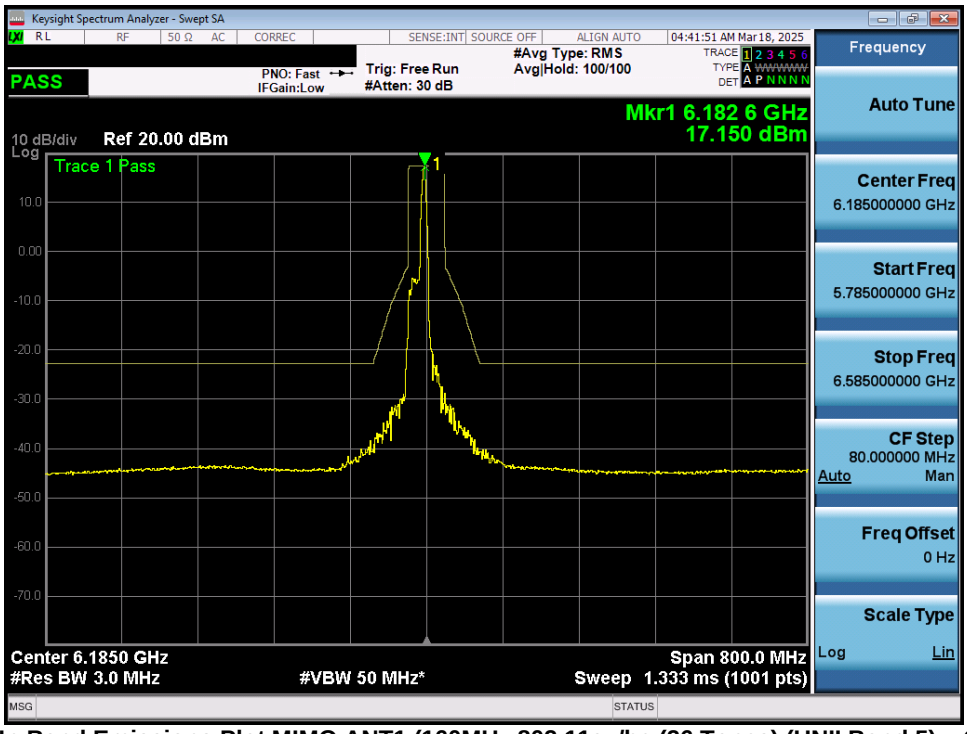

Plot 7-101. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - SP

© 2025 ELEMENT V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.