

HEARING AID COMPATIBILITY

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 16677, Korea

Date of Testing:
03/24/2025 – 04/11/2025
Test Site/Location:
Element Washington DC LLC,
Columbia, MD, USA
Test Report Serial No.:
1M2502210015-31.A3L
Date of Issue:
04/30/2025

FCC ID: A3LSMF966U

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: RF Emissions Testing
Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2019
285076 D01 HAC Guidance v06r02
285076 D02 T-Coil testing for CMRS IP v04
DUT Type: Portable Handset
Model: SM-F966U
Additional Model(s): SM-F966U1
Test Device Serial No.: Pre-Production Sample [S/N: 2206R]

C63.19-2019 HAC Verdict: PASS

This wireless portable device has been shown to be hearing-aid compatible as specified in ANSI/IEEE Std. C63.19-2019 and has been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested. North America bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


RJ Ortaez
Executive Vice President



FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 1 of 66

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION.....	4
3.	ANSI/IEEE C63.19-2019 PERFORMANCE REQUIRMENTS	6
4.	RF SYSTEM SPECIFICATIONS	7
5.	TEST PROCEDURE	12
6.	CONDUCTED POWER CONFIGURATIONS AND TARGETS	13
7.	JUSTIFICATION OF HELD TO EAR MODES TESTED	61
8.	EQUIPMENT LIST.....	62
9.	MEASUREMENT UNCERTAINTY	63
10.	CONCLUSION.....	64
11.	REFERENCES	65

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 2 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index
- Volume Control, receive volume control performance
- Volume Control, receive distortion and noise performance
- Volume Control, receive acoustic frequency response performance

The hearing aid may be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.

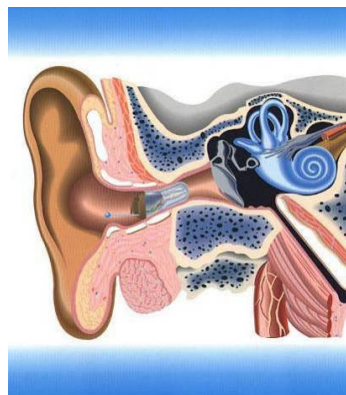


Figure 1-1 Hearing Aid *in-vitu*

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 3 of 66

2. DUT DESCRIPTION

FCC ID: A3LSMF966U
Manufacturer: Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 16677, Korea
Model: SM-F966U
Additional Model(s): SM-F966U1
Serial Number: 2206R
Antenna Configurations: Internal Antenna
DUT Type: Portable Handset

I. LTE/NR Band Selection

This device supports LTE/NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of a band falls completely within a band with a larger transmission frequency range, both bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range. However, overlapped LTE bands which are anchor bands for dual connectivity (EN-DC) scenarios between LTE and NR were evaluated as independent LTE bands.

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset	Page 4 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

**Table 2-1
HAC Air Interfaces**

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service
GSM	850	VO	No ¹	Yes: WIFI or BT	CMRS Voice
	1900				
	GPRS/EDGE	VD	No ¹	Yes: WIFI or BT	Google Meet
UMTS	850	VD	No ¹	Yes: WIFI or BT	CMRS Voice
	1700				
	1900				
	HSPA	VD	No ¹	Yes: WIFI or BT	Google Meet
LTE (FDD)	680 (B71)	VD	No ¹	Yes: NR, WIFI or BT	VoLTE, Google Meet
	700 (B12)				
	780 (B13)				
	790 (B14)				
	850 (B5)				
	850 (B26)				
	1700 (B4)				
	1700 (B66)				
	1900 (B2)				
	1900 (B25)				
	2300 (B30)				
	2500 (B7)				
LTE (TDD)	2600 (B38)	VD	No ¹	Yes: NR, WIFI or BT	VoLTE, Google Meet
	2600 (B41)				
	3600 (B48)				
LTE NTN	1640 (B255)	DT	No	N/A	N/A
NR (FDD)	680 (n71)	VD	No ¹	Yes: LTE, WIFI or BT	VoNR, Google Meet
	700 (n12)				
	700 (n14)				
	850 (n5)				
	850 (n26)				
	1700 (n70)				
	1700 (n66)				
	1900 (n2)				
	1900 (n25)				
	2300 (n30)				
2500 (n7)					
NR (TDD)	2600 (n38)	VD	No ¹	Yes: LTE, WIFI or BT	VoNR, Google Meet
	2600 (n41)				
	3500 (n77, DoD)				
	3500 (n78, DoD)				
	3600 (n48)				
	3750 (n78)				
	3800 (n77)				
	24500 (n258)				
	28000 (n261)				
39000 (n260)	No ²				
WIFI	2450	VD	No ¹	Yes: GSM, UMTS, LTE, or NR	VoWIFI, Google Meet
	5200 (U-NII 1)				
	5300 (U-NII 2A)				
	5500 (U-NII 2C)				
	5800 (U-NII 3)				
	5900 (U-NII 4)				
	6175 (U-NII 5)				
	6475 (U-NII 6)				
	6700 (U-NII 7)				
7000 (U-NII 8)	No ^{1,3}				
	No ⁴				
BT	2450	DT	No	Yes: GSM, UMTS, LTE, or NR	N/A
Type Transport VO = Voice Only DT = Digital Data - Not intended for Voice Services VD = CMRS and/or IP Voice over Data Transport			Notes: 1. Evaluated for WD RF peak power level requirements. 2. NR FR2 bands are currently outside the scope of ANSI C63.19 and FCC HAC regulations therefore they were not evaluated. 3. WIFI U-NII band 5 was evaluated for operations which are entirely below 6GHz. Operations partially or entirely above 6GHz were not evaluated due to equipment limitations and being outside of the current scope of ANSI C63.19 and FCC HAC regulations. 4. WIFI U-NII bands 6 through 8 were not evaluated due to being outside of the current scope of ANSI C63.19 and FCC HAC regulations.		

FCC ID: A3LSMF966U		HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 5 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

3. ANSI/IEEE C63.19-2019 PERFORMANCE REQUIREMENTS

I. WD EMISSIONS Requirements

The ANSI Standard provides guidance on measuring the potential for wireless device (WD) RF emissions to cause audio frequency interference in a hearing aid. When the performance requirements of the Standard below are met, the WD demonstrates compliance to emission requirements for operation in close proximity with a hearing aid. The WD may demonstrate compliance by meeting any of the four requirements listed below for each of its operating bands.

Frequency Range (MHz)	RF _{AIPL} (dBm)
<960	29
960-2000	26
>2000	25

Table 3-1
WD RF audio interference power level requirements

Frequency Range (MHz)	RF _{Peak Power} (dBm)
<960	35
960-2000	32
>2000	31

Table 3-2
WD RF peak power level requirements

Frequency Range (MHz)	RF _{AIL} (dB(V/m))
<960	39
960-2000	36
>2000	35

Table 3-3
WD RF audio interference level requirements

Frequency Range (MHz)	RF _{Peak} (dB(V/m))
<960	29
960-2000	26
>2000	25

Table 3-4
WD RF peak near-field level requirements

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 6 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

4. RF SYSTEM SPECIFICATIONS

Description of test system for measurement of near-field RF audio interference level

EF3DV3 E-Field Probe Description

Construction:	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration:	In air from 30 MHz to 6.0 GHz (absolute accuracy $\pm 5.1\%$, $k=2$)
Frequency:	30 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity:	± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 4.0 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.5 mm





Figure 4-1
E-field Free-space
Probe

Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

The electric field probes have an irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement").

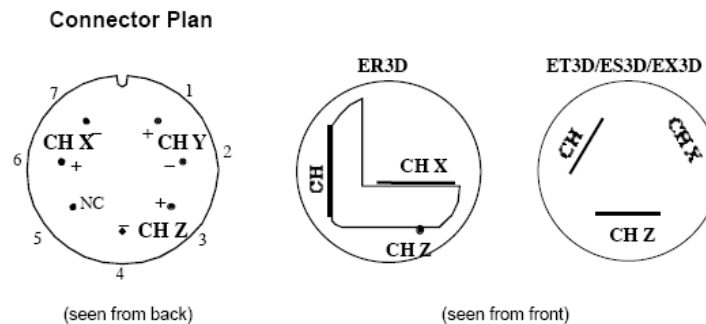

The antistatic shielding inside the probe is connected to the probe connector case.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 7 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Instrumentation Chain

Equation 1


Conversion of Connector Voltage u_i to E-Field E_i

$$E_i = \sqrt{\frac{u_i + (u_i^2 \cdot CF)/(DCP)}{Norm_i \cdot ConvF}}$$

whereby

E_i : electric field in V/m
 u_i : voltage of channel i at the connector in μV
 $Norm_i$: sensitivity of channel i in $\mu V/(V/m)^2$
 $ConvF$: enhancement factor in liquid ($ConvF=1$ for Air)
 DCP : diode compression point in μV
 CF : signal crest factor (peak power/average power)

Conditions of Calibration

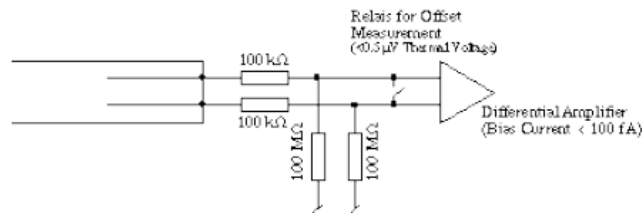

Please note:

- a lower input impedance of the amplifier will result in different sensitivity factors $Norm_i$ and DCP
- larger bias currents will cause higher offset

Probe Response to Frequency

The E-field sensors have inherently a very flat frequency response. They are calibrated with a number of frequencies resulting in a common calibration factor, with the frequency behavior documented in the calibration certificate (See also below).

Frequency Response of E-Field

(TEM-Cell: if110 EXX, Waveguide R22)



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Figure 4-2 E-Field Probe Frequency Response

SPEAG Robotic System

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 8 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

E-field measurements are performed using the DASY6 automated dosimetric assessment system. The DASY6 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel CORE i7 computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).



Figure 4-3
SPEAG Robotic System

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the computer with operating system and RF Measurement Software DASY6 v1.2.4 (with HAC Extension), A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 9 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



Figure 4-4
SPEAG Robotic System Diagram

DASY6 Instrumentation Chain

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

- with
- V_i

U_i

cf

dcp_i

= compensated signal of channel i

= input signal of channel i

= crest factor of exciting field

= diode compression point

(i = x, y, z)

(i = x, y, z)

(DASY parameter)

(DASY parameter)

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 10 of 66

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 $\mu V / (V/m)^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

The measurement/integration time per point, as specified by the system manufacturer is >500ms.

The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500ms and a probe response time of <5 ms. In the current implementation, DASY6 waits longer than 100ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

Environmental Conditions

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 11 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

5. TEST PROCEDURE

I. PEAK POWER LEVEL EVALUATION

To demonstrate hearing aid compliance with the ANSI standard C63.19-2019, an evaluation was performed using the peak power level requirements detailed in Table 3-2. Conducted power measurements were performed to verify maximum target power levels for all relevant operating bands/modes. An evaluation of each applicable air interface was performed to ensure compliance for each band.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 12 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

6. CONDUCTED POWER CONFIGURATIONS AND TARGETS

I. Procedures Used to Establish RF Signal for HAC Testing

The handset was configured to transmit the required air interface in a shielded chamber. Measurements were taken with a fully charged battery.

II. HAC Target Powers

All applicable modes supported by the device have their held-to-ear conducted power targets listed below and were used for the individual mode evaluations in Section 7. All conducted power targets have a tolerance of +1.0dB and -1.5dB unless otherwise noted. For WIFI modes, the overall maximum power amongst all bands per IEEE standards is listed.

III. RF Conducted Power Measurement Setup and Conditions

Output Power Verification

Maximum output power is verified for all applicable test channels for all air interfaces which require HAC compliance. See Table 6-1 for air interface specific settings of transmit power parameters.

Table 6-1
Power Control Parameters and Settings by Air Interface

Air Interface:	Parameter Name:	Parameter Set To:
GSM	PCL	GSM850: "5"; GSM1900: "0"
UMTS	TPC	"All 1's"
LTE	TPC	"Max Power"
NR	PLS	"Max Power"
WIFI	PLS	Mfr Specified

The general setup for conducted powers included in Tables 6-11 to 6-77 is shown in Figure 6-1 below. The power measurement equipment could be a base station simulator, signal analyzer, or power meter depending on the applicable air interface.

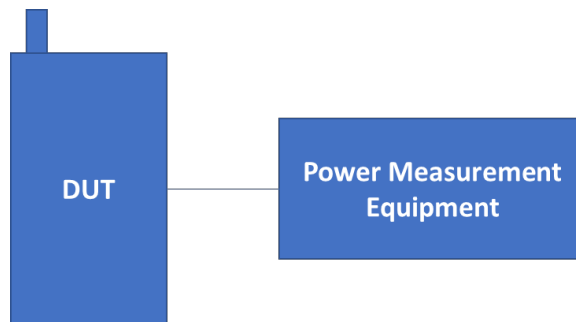


Figure 6-1
Power Measurement Setup

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset	Page 13 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

IV. GSM Target Powers

Table 6-2
GSM Conducted Power Targets

Band	Modulated Average Output Power (in dBm)	
	Voice	Data
GSM/EDGE 850	32.5	27.0
GSM/EDGE 1900	30.0	26.0

V. UMTS Target Powers

Table 6-3
UMTS Conducted Power Targets

Band	Modulated Average Output Power (in dBm)	
	3GPP WCDMA Rel 99	3GPP HSUPA Rel 6
UMTS V	24.3	23.3
UMTS IV	23.5	22.5
UMTS II	23.8	22.8

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 14 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

VI. LTE FDD Target Powers

Table 6-4
LTE FDD Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
LTE Band 71	24.2
LTE Band 12	24.2
LTE Band 13	24.5
LTE Band 14	24.5
LTE Band 5	24.0
LTE Band 26	24.5
LTE Band 4	24.5
LTE Band 66	24.5
LTE Band 2	24.0
LTE Band 25	24.0
LTE Band 30	24.0
LTE Band 7	24.0

VII. LTE TDD Target Powers

Table 6-5
LTE TDD Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
LTE Band 38	24.0
LTE Band 41 PC3	24.0
LTE Band 48	23.0

Table 6-6
LTE TDD Uplink Carrier Aggregation Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
LTE Band 48	23.0

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 15 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

VIII. NR FDD Target Powers

Table 6-7
NR FDD Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
NR Band n71	24.0
NR Band n12	24.0
NR Band n14	24.0
NR Band n26	24.0
NR Band n5	24.0
NR Band n70	23.5
NR Band n66	24.0
NR Band n2	24.0
NR Band n25	24.0
NR Band n7	23.0
NR Band n30	23.0

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 16 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

IX. NR TDD Target Powers

Table 6-8
NR TDD Conducted Power Targets

Band	Modulated Average Output Power (in dBm)
NR Band n38	24.0
NR Band n41 PC2	26.0
NR Band n41 PC1.5 UL MIMO	29.0
NR Band n48	23.5
NR Band n77 PC2	26.0
NR Band n77 PC1.5 UL MIMO	29.0
NR Band n78	26.0

X. WIFI Target Powers

Table 6-9
IEEE 802.11a/b/g/n/ac/ax/be Reduced Average RF Power Targets

Band	Modulated Average Output Power (in dBm)
WLAN - 2.4GHz	22.0
WLAN - 5GHz	20.0
WLAN - RSDB/DBS	24.1

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 17 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

XI. Conducted Power Measurements

Table 6-10
GSM850 Conducted Powers – Ant A

Band	Channel	GSM [dBm] CS (1 Slot)	EDGE [dBm] 1 Tx Slot
GSM 850	128	32.05	26.29
	190	32.40	25.90
	251	32.26	26.54

Table 6-11
GSM850 Conducted Powers – Ant E

Band	Channel	GSM [dBm] CS (1 Slot)	EDGE [dBm] 1 Tx Slot
GSM 850	128	32.31	25.77
	190	32.58	25.58
	251	32.49	26.19

Table 6-12
GSM1900 Conducted Powers – Ant B

Band	Channel	GSM [dBm] CS (1 Slot)	EDGE [dBm] 1 Tx Slot
GSM 1900	512	29.77	25.32
	661	29.79	25.18
	810	29.76	25.51

Table 6-13
UMTS Conducted Powers – Ant A

Mode	3GPP 34.121 Subtest	Cellular Band [dBm]		
		4132	4183	4233
WCDMA	12.2 kbps RMC	24.79	24.61	24.39
	12.2 kbps AMR	24.73	24.55	24.31
HSUPA	Subtest 1	23.90	23.66	23.45

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 18 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-14
UMTS Conducted Powers – Ant E

Mode	3GPP 34.121 Subtest	Cellular Band [dBm]		
		4132	4183	4233
WCDMA	12.2 kbps RMC	24.27	23.95	23.74
	12.2 kbps AMR	24.16	23.95	23.79
HSUPA	Subtest 1	23.47	23.20	22.94

Table 6-15
UMTS Conducted Powers – Ant B

Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]		
		1312	1412	1513	9262	9400	9538
WCDMA	12.2 kbps RMC	23.26	23.19	23.24	23.10	23.37	23.68
	12.2 kbps AMR	23.28	23.18	23.22	23.15	23.36	23.66
HSUPA	Subtest 1	22.23	22.22	22.24	22.16	22.38	22.62

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 19 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-12
LTE Band 71 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	133222	673.0	1 / 0	24.91
		133297	680.5	1 / 0	24.63
		133372	688.0	1 / 0	24.55
	16-QAM	133222	673.0	1 / 0	23.84
		133297	680.5	1 / 0	23.80
		133372	688.0	1 / 0	23.86
15 MHz	QPSK	133197	670.5	1 / 37	24.94
		133297	680.5	1 / 0	24.56
		133397	690.5	1 / 37	24.42
	16-QAM	133197	670.5	1 / 37	24.02
		133297	680.5	1 / 0	23.78
		133397	690.5	1 / 37	23.52
10 MHz	QPSK	133172	668.0	1 / 0	24.94
		133297	680.5	1 / 0	24.66
		133422	693.0	1 / 49	24.36
	16-QAM	133172	668.0	1 / 0	24.20
		133297	680.5	1 / 0	23.73
		133422	693.0	1 / 49	23.51
5 MHz	QPSK	133147	665.5	1 / 12	25.07
		133297	680.5	1 / 0	24.65
		133447	695.5	1 / 12	24.39
	16-QAM	133147	665.5	1 / 12	24.11
		133297	680.5	1 / 0	23.61
		133447	695.5	1 / 12	23.44

Table 6-17
LTE Band 71 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	133222	673.0	1 / 0	25.07
		133297	680.5	1 / 0	24.91
		133372	688.0	1 / 50	24.70
	16-QAM	133222	673.0	1 / 0	24.33
		133297	680.5	1 / 0	24.18
		133372	688.0	1 / 50	23.72
15 MHz	QPSK	133197	670.5	1 / 0	25.16
		133297	680.5	1 / 0	24.94
		133397	690.5	1 / 37	24.64
	16-QAM	133197	670.5	1 / 0	24.03
		133297	680.5	1 / 0	23.90
		133397	690.5	1 / 37	23.76
10 MHz	QPSK	133172	668.0	1 / 25	25.15
		133297	680.5	1 / 25	24.98
		133422	693.0	1 / 25	24.67
	16-QAM	133172	668.0	1 / 25	24.24
		133297	680.5	1 / 25	24.04
		133422	693.0	1 / 25	23.61
5 MHz	QPSK	133147	665.5	1 / 24	25.18
		133297	680.5	1 / 0	24.82
		133447	695.5	1 / 12	24.78
	16-QAM	133147	665.5	1 / 12	24.45
		133297	680.5	1 / 0	23.84
		133447	695.5	1 / 12	23.57

FCC ID: A3LSMF966U		HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 20 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-18
LTE Band 12 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23060	704.0	1 / 0	24.38
		23095	707.5	1 / 0	24.28
		23130	711.0	1 / 25	24.25
	16-QAM	23060	704.0	1 / 0	23.58
		23095	707.5	1 / 0	23.48
		23130	711.0	1 / 25	23.63
5 MHz	QPSK	23035	701.5	1 / 12	24.52
		23095	707.5	1 / 12	24.28
		23155	713.5	1 / 24	24.50
	16-QAM	23035	701.5	1 / 12	23.79
		23095	707.5	1 / 12	23.26
		23155	713.5	1 / 24	23.62
3 MHz	QPSK	23025	700.5	1 / 0	24.42
		23095	707.5	1 / 0	24.14
		23165	714.5	1 / 7	24.48
	16-QAM	23025	700.5	1 / 0	23.84
		23095	707.5	1 / 0	23.27
		23165	714.5	1 / 7	23.61
1.4 MHz	QPSK	23017	699.7	1 / 3	24.46
		23095	707.5	1 / 3	24.04
		23173	715.3	1 / 3	24.36
	16-QAM	23017	699.7	1 / 3	23.50
		23095	707.5	1 / 3	23.28
		23173	715.3	1 / 3	23.61

Table 6-19
LTE Band 12 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23060	704.0	1 / 0	24.40
		23095	707.5	1 / 0	24.33
		23130	711.0	1 / 49	24.33
	16-QAM	23060	704.0	1 / 0	23.58
		23095	707.5	1 / 0	23.56
		23130	711.0	1 / 49	23.44
5 MHz	QPSK	23035	701.5	1 / 12	24.58
		23095	707.5	1 / 0	24.29
		23155	713.5	1 / 12	24.51
	16-QAM	23035	701.5	1 / 12	23.81
		23095	707.5	1 / 0	23.42
		23155	713.5	1 / 12	23.56
3 MHz	QPSK	23025	700.5	1 / 0	24.51
		23095	707.5	1 / 7	24.23
		23165	714.5	1 / 7	24.39
	16-QAM	23025	700.5	1 / 0	23.68
		23095	707.5	1 / 7	23.45
		23165	714.5	1 / 7	23.72
1.4 MHz	QPSK	23017	699.7	1 / 0	24.69
		23095	707.5	1 / 5	24.23
		23173	715.3	1 / 5	24.52
	16-QAM	23017	699.7	1 / 0	23.70
		23095	707.5	1 / 5	23.29
		23173	715.3	1 / 5	23.50

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 21 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-20
LTE Band 13 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23230	782.0	1 / 0	25.13
	16-QAM	23230	782.0	1 / 0	24.11
5 MHz	QPSK	23205	779.5	1 / 12	25.19
		23230	782.0	1 / 12	25.02
		23255	784.5	1 / 12	24.81
	16-QAM	23205	779.5	1 / 12	24.15
		23230	782.0	1 / 12	24.12
		23255	784.5	1 / 12	24.13

Table 6-21
LTE Band 13 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23230	782.0	1 / 25	24.41
	16-QAM	23230	782.0	1 / 25	23.60
5 MHz	QPSK	23205	779.5	1 / 12	24.61
		23230	782.0	1 / 12	24.42
		23255	784.5	1 / 0	24.28
	16-QAM	23205	779.5	1 / 12	23.96
		23230	782.0	1 / 12	23.72
		23255	784.5	1 / 0	23.63

Table 6-22
LTE Band 14 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23330	793.0	1 / 25	24.78
	16-QAM	23330	793.0	1 / 25	23.86
5 MHz	QPSK	23305	790.5	1 / 12	24.71
		23330	793.0	1 / 12	24.67
		23355	795.5	1 / 12	24.72
	16-QAM	23305	790.5	1 / 12	23.88
		23330	793.0	1 / 12	23.95
		23355	795.5	1 / 12	23.85

Table 6-23
LTE Band 14 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23330	793.0	1 / 25	24.04
	16-QAM	23330	793.0	1 / 25	23.12
5 MHz	QPSK	23305	790.5	1 / 0	24.08
		23330	793.0	1 / 12	24.17
		23355	795.5	1 / 0	24.07
	16-QAM	23305	790.5	1 / 0	23.04
		23330	793.0	1 / 12	23.39
		23355	795.5	1 / 0	23.20

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 22 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-24
LTE Band 26/5 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15MHz (E)	QPSK	26865	831.5	1 / 0	24.97
		26915	836.5	1 / 0	24.87
		26965	841.5	1 / 0	24.91
	16QAM	26865	831.5	1 / 0	24.16
10 MHz	QPSK	26840	829.0	1 / 25	25.10
		26915	836.5	1 / 25	24.99
		26990	844.0	1 / 25	24.74
	16QAM	26840	829.0	1 / 25	24.33
5 MHz	QPSK	26815	826.5	1 / 24	24.82
		26915	836.5	1 / 12	24.93
		27015	846.5	1 / 12	24.72
	16QAM	26815	826.5	1 / 24	24.15
3 MHz	QPSK	26805	825.5	1 / 14	24.86
		26915	836.5	1 / 14	25.00
		27025	847.5	1 / 7	24.65
	16QAM	26805	825.5	1 / 14	24.05
1.4 MHz	QPSK	26797	824.7	1 / 5	24.93
		26915	836.5	1 / 0	24.81
		27033	848.3	1 / 0	24.61
	16QAM	26915	836.5	1 / 5	24.15

Table 6-25
LTE Band 26/5 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15MHz (E)	QPSK	26865	831.5	1 / 37	24.88
		26915	836.5	1 / 37	24.96
		26965	841.5	1 / 37	24.82
	16QAM	26915	836.5	1 / 37	23.67
10 MHz	QPSK	26840	829.0	1 / 25	24.81
		26915	836.5	1 / 25	24.79
		26990	844.0	1 / 0	24.51
	16QAM	26915	836.5	1 / 25	23.77
5 MHz	QPSK	26815	826.5	1 / 12	24.91
		26915	836.5	1 / 12	24.81
		27015	846.5	1 / 0	24.67
	16QAM	26915	836.5	1 / 12	23.89
3 MHz	QPSK	26805	825.5	1 / 0	24.79
		26915	836.5	1 / 7	24.68
		27025	847.5	1 / 7	24.49
	16QAM	26915	836.5	1 / 7	23.73
1.4 MHz	QPSK	26797	824.7	1 / 3	24.62
		26915	836.5	1 / 0	24.46
		27033	848.3	1 / 0	24.29
	16QAM	26915	836.5	1 / 0	23.70

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 23 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-26
LTE Band 66/4 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 50	24.22
		132322	1745.0	1 / 50	24.21
		132572	1770.0	1 / 99	24.60
	16-QAM	132072	1720.0	1 / 50	23.57
		132322	1745.0	1 / 50	23.47
		132572	1770.0	1 / 99	23.75
15 MHz	QPSK	132047	1717.5	1 / 74	24.37
		132322	1745.0	1 / 0	24.51
		132597	1772.5	1 / 74	24.51
	16-QAM	132047	1717.5	1 / 74	23.53
		132322	1745.0	1 / 0	23.32
		132597	1772.5	1 / 74	23.87
10 MHz	QPSK	132022	1715.0	1 / 25	24.23
		132322	1745.0	1 / 25	24.33
		132622	1775.0	1 / 49	24.42
	16-QAM	132022	1715.0	1 / 25	23.44
		132322	1745.0	1 / 25	23.60
		132622	1775.0	1 / 49	23.67
5 MHz	QPSK	131997	1712.5	1 / 12	24.21
		132322	1745.0	1 / 24	24.35
		132647	1777.5	1 / 0	24.60
	16-QAM	131997	1712.5	1 / 12	23.71
		132322	1745.0	1 / 24	23.67
		132647	1777.5	1 / 0	23.95
3 MHz	QPSK	131987	1711.5	1 / 14	24.36
		132322	1745.0	1 / 0	24.20
		132657	1778.5	1 / 7	24.60
	16-QAM	131987	1711.5	1 / 14	23.78
		132322	1745.0	1 / 0	23.50
		132657	1778.5	1 / 7	23.95
1.4 MHz	QPSK	131979	1710.7	1 / 5	24.31
		132322	1745.0	1 / 3	24.34
		132665	1779.3	1 / 0	24.45
	16-QAM	131979	1710.7	1 / 5	23.59
		132322	1745.0	1 / 3	23.48
		132665	1779.3	1 / 0	23.96

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 24 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-27
LTE Band 66/4 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 50	25.37
		132322	1745.0	1 / 0	25.03
		132572	1770.0	1 / 99	24.93
	16-QAM	132072	1720.0	1 / 50	24.61
		132322	1745.0	1 / 0	24.32
		132572	1770.0	1 / 99	23.80
15 MHz	QPSK	132047	1717.5	1 / 0	25.46
		132322	1745.0	1 / 0	25.16
		132597	1772.5	1 / 74	24.91
	16-QAM	132047	1717.5	1 / 0	24.63
		132322	1745.0	1 / 0	24.28
		132597	1772.5	1 / 74	23.60
10 MHz	QPSK	132022	1715.0	1 / 49	25.37
		132322	1745.0	1 / 0	24.97
		132622	1775.0	1 / 0	24.80
	16-QAM	132022	1715.0	1 / 49	24.45
		132322	1745.0	1 / 0	24.12
		132622	1775.0	1 / 0	24.06
5 MHz	QPSK	131997	1712.5	1 / 12	25.34
		132322	1745.0	1 / 12	25.03
		132647	1777.5	1 / 12	24.82
	16-QAM	131997	1712.5	1 / 12	24.85
		132322	1745.0	1 / 12	24.17
		132647	1777.5	1 / 12	24.16
3 MHz	QPSK	131987	1711.5	1 / 0	25.48
		132322	1745.0	1 / 7	25.04
		132657	1778.5	1 / 7	24.83
	16-QAM	131987	1711.5	1 / 0	24.49
		132322	1745.0	1 / 7	24.11
		132657	1778.5	1 / 7	24.05
1.4 MHz	QPSK	131979	1710.7	1 / 5	25.43
		132322	1745.0	1 / 3	24.85
		132665	1779.3	1 / 5	24.70
	16-QAM	131979	1710.7	1 / 5	24.67
		132322	1745.0	1 / 3	24.21
		132665	1779.3	1 / 5	24.06

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 25 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-28
LTE Band 25/2 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	26140	1860.0	1 / 99	23.77
		26365	1882.5	1 / 50	23.75
		26590	1905.0	1 / 50	23.92
	16-QAM	26590	1905.0	1 / 50	23.05
15 MHz	QPSK	26115	1857.5	1 / 37	23.74
		26365	1882.5	1 / 37	23.74
		26615	1907.5	1 / 37	23.98
	16-QAM	26615	1907.5	1 / 37	22.93
10 MHz	QPSK	26090	1855.0	1 / 25	23.63
		26365	1882.5	1 / 25	23.67
		26640	1910.0	1 / 49	23.89
	16-QAM	26640	1910.0	1 / 49	22.91
5 MHz	QPSK	26065	1852.5	1 / 24	23.64
		26365	1882.5	1 / 0	23.68
		26665	1912.5	1 / 0	23.93
	16-QAM	26665	1912.5	1 / 0	22.93
3 MHz	QPSK	26055	1851.5	1 / 7	23.50
		26365	1882.5	1 / 7	23.62
		26675	1913.5	1 / 7	23.79
	16-QAM	26675	1913.5	1 / 7	22.98
1.4 MHz	QPSK	26047	1850.7	1 / 0	23.42
		26365	1882.5	1 / 5	23.53
		26683	1914.3	1 / 3	23.58
	16-QAM	26683	1914.3	1 / 3	22.74

Table 6-29
LTE Band 25/2 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	26140	1860.0	1 / 50	24.97
		26365	1882.5	1 / 0	24.94
		26590	1905.0	1 / 99	24.73
	16-QAM	26365	1882.5	1 / 0	24.37
15 MHz	QPSK	26115	1857.5	1 / 74	24.93
		26365	1882.5	1 / 37	24.98
		26615	1907.5	1 / 74	24.87
	16-QAM	26365	1882.5	1 / 37	23.92
10 MHz	QPSK	26090	1855.0	1 / 25	24.93
		26365	1882.5	1 / 25	24.93
		26640	1910.0	1 / 25	24.98
	16-QAM	26365	1882.5	1 / 25	24.24
5 MHz	QPSK	26065	1852.5	1 / 12	24.95
		26365	1882.5	1 / 12	24.97
		26665	1912.5	1 / 12	24.93
	16-QAM	26365	1882.5	1 / 12	24.34
3 MHz	QPSK	26055	1851.5	1 / 7	24.98
		26365	1882.5	1 / 7	24.99
		26675	1913.5	1 / 7	24.99
	16-QAM	26365	1882.5	1 / 7	24.32
1.4 MHz	QPSK	26047	1850.7	1 / 5	24.86
		26365	1882.5	1 / 5	24.95
		26683	1914.3	1 / 5	24.81
	16-QAM	26365	1882.5	1 / 5	24.02

FCC ID: A3LSMF966U		HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 26 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-30
LTE Band 30 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	27710	2310.0	1 / 25	23.99
	16-QAM	27710	2310.0	1 / 25	23.06
5 MHz	QPSK	27685	2307.5	1 / 0	23.82
		27710	2310.0	1 / 12	23.75
		27735	2312.5	1 / 0	24.00
	16-QAM	27685	2307.5	1 / 0	22.80
		27710	2310.0	1 / 12	23.06
		27735	2312.5	1 / 0	22.98

Table 6-31
LTE Band 30 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	27710	2310.0	1 / 25	24.33
	16-QAM	27710	2310.0	1 / 25	23.58
5 MHz	QPSK	27685	2307.5	1 / 12	24.40
		27710	2310.0	1 / 12	24.38
		27735	2312.5	1 / 12	24.36
	16-QAM	27685	2307.5	1 / 12	23.70
		27710	2310.0	1 / 12	23.54
		27735	2312.5	1 / 12	23.52

Table 6-32
LTE Band 7 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	20850	2510.0	1 / 99	23.72
		21100	2535.0	1 / 0	23.51
		21350	2560.0	1 / 50	23.54
	16-QAM	20850	2510.0	1 / 99	23.01
		21100	2535.0	1 / 0	22.87
		21350	2560.0	1 / 50	22.56
15 MHz	QPSK	20825	2507.5	1 / 37	23.61
		21100	2535.0	1 / 0	23.61
		21375	2562.5	1 / 0	23.44
	16-QAM	20825	2507.5	1 / 37	22.95
		21100	2535.0	1 / 0	22.76
		21375	2562.5	1 / 0	22.44
10 MHz	QPSK	20800	2505.0	1 / 49	23.77
		21100	2535.0	1 / 25	23.72
		21400	2565.0	1 / 49	23.50
	16-QAM	20800	2505.0	1 / 49	22.88
		21100	2535.0	1 / 25	22.81
		21400	2565.0	1 / 49	22.72
5 MHz	QPSK	20775	2502.5	1 / 24	23.71
		21100	2535.0	1 / 0	23.66
		21425	2567.5	1 / 12	23.72
	16-QAM	20775	2502.5	1 / 24	22.98
		21100	2535.0	1 / 0	22.88
		21425	2567.5	1 / 12	22.56

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 27 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-33
LTE Band 7 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	20850	2510.0	1 / 0	23.95
		21100	2535.0	1 / 0	23.94
		21350	2560.0	1 / 50	23.86
	16-QAM	20850	2510.0	1 / 0	23.27
		21100	2535.0	1 / 0	23.12
		21350	2560.0	1 / 50	23.35
15 MHz	QPSK	20825	2507.5	1 / 0	23.96
		21100	2535.0	1 / 74	23.96
		21375	2562.5	1 / 37	23.90
	16-QAM	20825	2507.5	1 / 0	22.99
		21100	2535.0	1 / 74	22.91
		21375	2562.5	1 / 37	23.21
10 MHz	QPSK	20800	2505.0	1 / 49	23.98
		21100	2535.0	1 / 49	23.99
		21400	2565.0	1 / 0	23.98
	16-QAM	20800	2505.0	1 / 49	22.78
		21100	2535.0	1 / 49	22.87
		21400	2565.0	1 / 0	22.88
5 MHz	QPSK	20775	2502.5	1 / 0	23.97
		21100	2535.0	1 / 0	23.92
		21425	2567.5	1 / 24	23.92
	16-QAM	20775	2502.5	1 / 0	23.24
		21100	2535.0	1 / 0	23.25
		21425	2567.5	1 / 24	23.22

Table 6-34
LTE Band 41/38 Power Class 3 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 50	24.20
		40620	2593.0	1 / 50	24.16
		41490	2680.0	1 / 50	24.90
	16-QAM	39750	2506.0	1 / 50	22.94
		40620	2593.0	1 / 50	23.00
		41490	2680.0	1 / 50	24.13
15 MHz	QPSK	39725	2503.5	1 / 37	24.05
		40620	2593.0	1 / 0	24.16
		41515	2682.5	1 / 0	24.96
	16-QAM	39725	2503.5	1 / 37	23.16
		40620	2593.0	1 / 0	23.03
		41515	2682.5	1 / 0	24.00
10 MHz	QPSK	39700	2501.0	1 / 0	24.00
		40620	2593.0	1 / 0	24.35
		41540	2685.0	1 / 49	24.59
	16-QAM	39700	2501.0	1 / 0	22.90
		40620	2593.0	1 / 0	23.12
		41540	2685.0	1 / 49	23.29
5 MHz	QPSK	39675	2498.5	1 / 24	24.05
		40620	2593.0	1 / 0	24.28
		41565	2687.5	1 / 12	24.96
	16-QAM	39675	2498.5	1 / 24	23.11
		40620	2593.0	1 / 0	23.38
		41565	2687.5	1 / 12	24.26

FCC ID: A3LSMF966U		HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 28 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-35
LTE Band 41/38 Power Class 3 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 0	24.55
		40620	2593.0	1 / 0	24.55
		41490	2680.0	1 / 0	24.88
	16-QAM	39750	2506.0	1 / 0	23.42
		40620	2593.0	1 / 0	24.22
		41490	2680.0	1 / 0	23.95
15 MHz	QPSK	39725	2503.5	1 / 37	24.62
		40620	2593.0	1 / 0	24.72
		41515	2682.5	1 / 0	24.98
	16-QAM	39725	2503.5	1 / 37	23.52
		40620	2593.0	1 / 0	23.61
		41515	2682.5	1 / 0	24.27
10 MHz	QPSK	39700	2501.0	1 / 0	24.61
		40620	2593.0	1 / 0	24.86
		41540	2685.0	1 / 25	24.93
	16-QAM	39700	2501.0	1 / 0	23.60
		40620	2593.0	1 / 49	23.93
		41540	2685.0	1 / 25	24.12
5 MHz	QPSK	39675	2498.5	1 / 0	24.52
		40620	2593.0	1 / 0	24.89
		41565	2687.5	1 / 12	24.77
	16-QAM	39675	2498.5	1 / 0	23.53
		40620	2593.0	1 / 0	23.73
		41565	2687.5	1 / 12	23.99

Table 6-36
LTE Band 48 Conducted Powers – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	55340	3560.0	1 / 1	23.90
		55990	3625.0	1 / 1	23.42
		56640	3690.0	1 / 49	22.64
	16-QAM	55340	3560.0	1 / 1	22.85
		55990	3625.0	1 / 1	22.47
		56640	3690.0	1 / 49	21.69
15 MHz	QPSK	55315	3557.5	1 / 1	23.98
		55990	3625.0	1 / 1	23.07
		56665	3692.5	1 / 36	22.68
	16-QAM	55315	3557.5	1 / 1	22.10
		55990	3625.0	1 / 1	22.01
		56665	3692.5	1 / 36	20.08
10 MHz	QPSK	55290	3555.0	1 / 1	23.92
		55990	3625.0	1 / 22	23.24
		56690	3695.0	1 / 22	22.82
	16-QAM	55290	3555.0	1 / 1	22.73
		55990	3625.0	1 / 22	22.73
		56690	3695.0	1 / 22	22.10
5 MHz	QPSK	55265	3552.5	1 / 5	23.40
		55990	3625.0	1 / 5	23.66
		56715	3697.5	1 / 5	22.96
	16-QAM	55265	3552.5	1 / 5	22.05
		55990	3625.0	1 / 5	22.51
		56715	3697.5	1 / 5	22.14

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 29 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-37
LTE Band 48 Conducted Powers – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	55340	3560.0	1 / 1	23.28
		55990	3625.0	1 / 1	23.05
		56640	3690.0	1 / 1	23.21
	16-QAM	55340	3560.0	1 / 1	22.66
		55990	3625.0	50 / 0	21.40
		56640	3690.0	1 / 1	21.92
15 MHz	QPSK	55315	3557.5	1 / 1	23.58
		55990	3625.0	1 / 25	23.26
		56665	3692.5	1 / 25	23.45
	16-QAM	55315	3557.5	1 / 1	22.75
		55990	3625.0	1 / 25	21.69
		56665	3692.5	1 / 25	21.60
10 MHz	QPSK	55290	3555.0	1 / 1	23.73
		55990	3625.0	1 / 49	23.34
		56690	3695.0	1 / 49	23.09
	16-QAM	55290	3555.0	1 / 1	22.76
		55990	3625.0	1 / 49	22.34
		56690	3695.0	1 / 49	22.26
5 MHz	QPSK	55265	3552.5	1 / 1	23.41
		55990	3625.0	1 / 1	22.94
		56715	3697.5	1 / 1	23.55
	16-QAM	55265	3552.5	1 / 1	22.47
		55990	3625.0	1 / 1	21.07
		56715	3697.5	1 / 1	22.36

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 30 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-38
NR Band 71 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
35 MHz	$\pi/2$ BPSK	136100	680.5	1 / 1	24.39
	QPSK	136100	680.5	1 / 1	24.43
	16-QAM	136100	680.5	1 / 1	23.16
30 MHz	$\pi/2$ BPSK	135600	678.0	1 / 1	24.46
		136100	680.5	1 / 1	24.39
		136600	683.0	1 / 1	24.30
	QPSK	135600	678.0	1 / 1	24.43
		136100	680.5	1 / 1	24.39
		136600	683.0	1 / 1	24.37
	16-QAM	135600	678.0	1 / 1	23.21
		136100	680.5	1 / 1	23.29
		136600	683.0	1 / 1	23.17
25 MHz	$\pi/2$ BPSK	135100	675.5	1 / 1	24.52
		136100	680.5	1 / 1	24.37
		137100	685.5	1 / 1	24.40
	QPSK	135100	675.5	1 / 1	24.55
		136100	680.5	1 / 1	24.45
		137100	685.5	1 / 1	24.38
	16-QAM	135100	675.5	1 / 1	23.30
		136100	680.5	1 / 1	23.19
		137100	685.5	1 / 1	23.28
20 MHz	$\pi/2$ BPSK	134600	673.0	1 / 1	24.31
		136100	680.5	1 / 1	24.32
		137600	688.0	1 / 1	24.18
	QPSK	134600	673.0	1 / 1	24.31
		136100	680.5	1 / 1	24.28
		137600	688.0	1 / 1	24.22
	16-QAM	134600	673.0	1 / 1	23.11
		136100	680.5	1 / 1	23.15
		137600	688.0	1 / 1	23.02
15 MHz	$\pi/2$ BPSK	134100	670.5	1 / 1	24.33
		136100	680.5	1 / 1	24.32
		138100	690.5	1 / 1	24.03
	QPSK	134100	670.5	1 / 1	24.33
		136100	680.5	1 / 1	24.24
		138100	690.5	1 / 1	24.10
	16-QAM	134100	670.5	1 / 1	23.13
		136100	680.5	1 / 1	23.15
		138100	690.5	1 / 1	22.93
10 MHz	$\pi/2$ BPSK	133600	668.0	1 / 1	24.34
		136100	680.5	1 / 1	24.21
		138600	693.0	1 / 1	23.85
	QPSK	133600	668.0	1 / 1	24.37
		136100	680.5	1 / 1	24.16
		138600	693.0	1 / 1	23.90
	16-QAM	133600	668.0	1 / 1	23.19
		136100	680.5	1 / 1	23.13
		138600	693.0	1 / 1	22.76
5 MHz	$\pi/2$ BPSK	133100	665.5	1 / 12	24.43
		136100	680.5	1 / 12	24.19
		139100	695.5	1 / 23	23.93
	QPSK	133100	665.5	1 / 12	24.47
		136100	680.5	1 / 1	24.30
		139100	695.5	1 / 23	24.07
	16-QAM	133100	665.5	1 / 1	23.26
		136100	680.5	1 / 1	23.14
		139100	695.5	1 / 1	23.00

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 31 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-39
NR Band 71 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
35 MHz	$\pi/2$ BPSK	136100	680.5	1 / 94	24.97
	QPSK	136100	680.5	1 / 1	24.91
	16-QAM	136100	680.5	1 / 94	23.89
30 MHz	$\pi/2$ BPSK	135600	678.0	1 / 80	24.38
		136100	680.5	1 / 1	24.54
		136600	683.0	1 / 1	24.41
	QPSK	135600	678.0	1 / 1	24.55
		136100	680.5	1 / 1	24.44
		136600	683.0	1 / 1	24.43
	16-QAM	135600	678.0	1 / 1	23.39
		136100	680.5	1 / 1	23.36
		136600	683.0	1 / 1	23.23
25 MHz	$\pi/2$ BPSK	135100	675.5	1 / 1	24.61
		136100	680.5	1 / 1	24.43
		137100	685.5	1 / 1	24.41
	QPSK	135100	675.5	1 / 1	24.61
		136100	680.5	1 / 1	24.48
		137100	685.5	1 / 1	24.45
	16-QAM	135100	675.5	1 / 1	23.37
		136100	680.5	1 / 1	23.26
		137100	685.5	1 / 1	23.31
20 MHz	$\pi/2$ BPSK	134600	673.0	1 / 1	24.37
		136100	680.5	1 / 1	24.30
		137600	688.0	1 / 1	24.27
	QPSK	134600	673.0	1 / 1	24.40
		136100	680.5	1 / 1	24.33
		137600	688.0	1 / 1	24.23
	16-QAM	134600	673.0	1 / 1	23.20
		136100	680.5	1 / 1	23.19
		137600	688.0	1 / 1	23.14
15 MHz	$\pi/2$ BPSK	134100	670.5	1 / 39	24.34
		136100	680.5	1 / 1	24.44
		138100	690.5	1 / 1	24.18
	QPSK	134100	670.5	1 / 1	24.44
		136100	680.5	1 / 1	24.31
		138100	690.5	1 / 1	24.19
	16-QAM	134100	670.5	1 / 1	23.20
		136100	680.5	1 / 1	23.15
		138100	690.5	1 / 1	22.98
10 MHz	$\pi/2$ BPSK	133600	668.0	1 / 26	24.37
		136100	680.5	1 / 1	24.32
		138600	693.0	1 / 1	23.99
	QPSK	133600	668.0	1 / 1	24.42
		136100	680.5	1 / 1	24.38
		138600	693.0	1 / 1	23.99
	16-QAM	133600	668.0	1 / 1	23.28
		136100	680.5	1 / 1	23.16
		138600	693.0	1 / 1	22.75
5 MHz	$\pi/2$ BPSK	133100	665.5	1 / 12	24.35
		136100	680.5	1 / 1	24.25
		139100	695.5	1 / 23	23.98
	QPSK	133100	665.5	1 / 12	24.56
		136100	680.5	1 / 1	24.35
		139100	695.5	1 / 23	24.11
	16-QAM	133100	665.5	1 / 1	23.39
		136100	680.5	1 / 1	23.30
		139100	695.5	1 / 1	23.04

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
Page 32 of 66		

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-40
NR Band 12 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	141300	706.5	1 / 1	23.94
		141500	707.5	1 / 1	23.96
		141700	708.5	1 / 1	23.84
	QPSK	141300	706.5	1 / 1	23.98
		141500	707.5	1 / 1	23.97
		141700	708.5	1 / 1	23.93
	16-QAM	141300	706.5	1 / 1	22.84
		141500	707.5	1 / 1	22.80
		141700	708.5	1 / 1	22.80
10 MHz	$\pi/2$ BPSK	140800	704.0	1 / 1	23.86
		141500	707.5	1 / 1	23.83
		142200	711.0	1 / 50	23.83
	QPSK	140800	704.0	1 / 26	23.94
		141500	707.5	1 / 1	23.96
		142200	711.0	1 / 1	23.81
	16-QAM	140800	704.0	1 / 1	22.71
		141500	707.5	1 / 1	22.74
		142200	711.0	1 / 1	22.77
5 MHz	$\pi/2$ BPSK	140300	701.5	1 / 12	23.78
		141500	707.5	1 / 12	23.82
		142700	713.5	1 / 1	23.70
	QPSK	140300	701.5	1 / 12	23.90
		141500	707.5	1 / 12	23.89
		142700	713.5	1 / 12	23.69
	16-QAM	140300	701.5	1 / 1	22.71
		141500	707.5	1 / 1	22.73
		142700	713.5	1 / 1	22.69

Table 6-41
NR Band 12 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	141300	706.5	1 / 1	24.31
		141500	707.5	1 / 1	24.31
		141700	708.5	1 / 1	24.48
	QPSK	141300	706.5	1 / 1	24.40
		141500	707.5	1 / 39	24.34
		141700	708.5	1 / 1	24.59
	16-QAM	141300	706.5	1 / 1	23.25
		141500	707.5	1 / 39	23.06
		141700	708.5	1 / 1	23.37
10 MHz	$\pi/2$ BPSK	140800	704.0	1 / 1	24.44
		141500	707.5	1 / 26	24.43
		142200	711.0	1 / 1	24.39
	QPSK	140800	704.0	1 / 26	24.45
		141500	707.5	1 / 1	24.33
		142200	711.0	1 / 1	24.53
	16-QAM	140800	704.0	1 / 1	23.54
		141500	707.5	1 / 1	23.14
		142200	711.0	1 / 1	23.29
5 MHz	$\pi/2$ BPSK	140300	701.5	1 / 12	24.43
		141500	707.5	1 / 12	24.31
		142700	713.5	1 / 1	24.22
	QPSK	140300	701.5	1 / 23	24.40
		141500	707.5	1 / 1	24.21
		142700	713.5	1 / 12	24.37
	16-QAM	140300	701.5	1 / 12	23.30
		141500	707.5	1 / 12	23.33
		142700	713.5	1 / 12	23.17

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 33 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-42
NR Band 14 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	$\pi/2$ BPSK	23330	793.0	1 / 1	24.77
	QPSK	23330	793.0	1 / 1	24.77
	16-QAM	23330	793.0	1 / 1	23.63
5 MHz	$\pi/2$ BPSK	23305	790.5	1 / 12	24.71
		23330	793.0	1 / 12	24.45
		23355	795.5	1 / 12	24.55
	QPSK	23305	790.5	1 / 1	24.77
		23330	793.0	1 / 12	24.73
		23355	795.5	1 / 1	24.42
	16-QAM	23305	790.5	1 / 1	23.83
		23330	793.0	1 / 12	23.61
		23355	795.5	1 / 12	23.71

Table 6-43
NR Band 14 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	$\pi/2$ BPSK	23330	793.0	1 / 1	24.49
	QPSK	23330	793.0	1 / 1	24.47
	16-QAM	23330	793.0	1 / 1	23.26
5 MHz	$\pi/2$ BPSK	23305	790.5	1 / 12	24.55
		23330	793.0	1 / 12	24.51
		23355	795.5	1 / 23	24.53
	QPSK	23305	790.5	1 / 1	24.58
		23330	793.0	1 / 1	24.48
		23355	795.5	1 / 12	24.45
	16-QAM	23305	790.5	1 / 1	23.70
		23330	793.0	1 / 12	23.67
		23355	795.5	1 / 23	23.39

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 34 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-44
NR Band 26/5 Conducted Powers – Ant A

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	$\pi/2$ BPSK	166800	834.0	1 / 1	24.03
		167300	836.5	1 / 1	23.95
		167800	839.0	1 / 1	23.95
	QPSK	166800	834.0	1 / 1	24.01
		167300	836.5	1 / 1	23.97
		167800	839.0	1 / 1	23.99
	16-QAM	167800	839.0	1 / 1	22.86
15 MHz	$\pi/2$ BPSK	166300	831.5	1 / 1	24.08
		167300	836.5	1 / 1	23.97
		168300	841.5	1 / 1	23.92
	QPSK	166300	831.5	1 / 1	24.10
		167300	836.5	1 / 1	23.98
		168300	841.5	1 / 1	23.94
	16-QAM	168300	841.5	1 / 1	22.89
10 MHz	$\pi/2$ BPSK	165800	829.0	1 / 1	24.16
		167300	836.5	1 / 1	24.01
		168800	844.0	1 / 1	23.89
	QPSK	165800	829.0	1 / 1	24.11
		167300	836.5	1 / 1	24.06
		168800	844.0	1 / 1	23.90
	16-QAM	165800	829.0	1 / 1	23.06
5 MHz	$\pi/2$ BPSK	165300	826.5	1 / 12	24.02
		167300	836.5	1 / 1	24.03
		169300	846.5	1 / 12	23.81
	QPSK	165300	826.5	1 / 1	23.92
		167300	836.5	1 / 1	24.01
		169300	846.5	1 / 1	23.89
	16-QAM	169300	846.5	1 / 1	22.86

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 35 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-45
NR Band 26/5 Conducted Powers – Ant E

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	$\pi/2$ BPSK	166800	834.0	1 / 1	23.83
		167300	836.5	1 / 53	23.77
		167800	839.0	1 / 1	23.79
	QPSK	166800	834.0	1 / 1	23.79
		167300	836.5	1 / 1	23.79
		167800	839.0	1 / 1	23.83
	16-QAM	167300	836.5	1 / 1	22.61
15 MHz	$\pi/2$ BPSK	166300	831.5	1 / 1	23.89
		167300	836.5	1 / 39	23.80
		168300	841.5	1 / 77	23.71
	QPSK	166300	831.5	1 / 1	23.96
		167300	836.5	1 / 39	23.81
		168300	841.5	1 / 39	23.73
	16-QAM	166300	831.5	1 / 1	22.89
10 MHz	$\pi/2$ BPSK	165800	829.0	1 / 1	23.93
		167300	836.5	1 / 1	23.79
		168800	844.0	1 / 26	23.65
	QPSK	165800	829.0	1 / 1	23.94
		167300	836.5	1 / 1	23.82
		168800	844.0	1 / 1	23.73
	16-QAM	165800	829.0	1 / 1	22.83
5 MHz	$\pi/2$ BPSK	165300	826.5	1 / 12	23.91
		167300	836.5	1 / 12	23.83
		169300	846.5	1 / 12	23.71
	QPSK	165300	826.5	1 / 12	23.97
		167300	836.5	1 / 12	23.85
		169300	846.5	1 / 12	23.76
	16-QAM	165300	826.5	1 / 1	22.90

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 36 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-46
NR Band 70 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	340500	1702.5	1 / 39	23.58
	QPSK	340500	1702.5	1 / 39	23.50
	16-QAM	340500	1702.5	1 / 1	22.32
10 MHz	$\pi/2$ BPSK	340000	1700.0	1 / 1	23.56
		340500	1702.5	1 / 26	23.49
		341000	1705.0	1 / 50	23.41
	QPSK	340000	1700.0	1 / 50	23.45
		340500	1702.5	1 / 26	23.45
		341000	1705.0	1 / 50	23.42
	16-QAM	340000	1700.0	1 / 1	21.73
		340500	1702.5	1 / 1	22.17
		341000	1705.0	1 / 1	21.74
5 MHz	$\pi/2$ BPSK	339500	1697.5	1 / 1	23.40
		340500	1702.5	1 / 12	23.46
		341500	1707.5	1 / 23	23.52
	QPSK	339500	1697.5	1 / 1	23.29
		340500	1702.5	1 / 1	23.51
		341500	1707.5	1 / 1	23.50
	16-QAM	339500	1697.5	1 / 1	22.19
		340500	1702.5	1 / 1	22.53
		341500	1707.5	1 / 1	22.47

Table 6-47
NR Band 70 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	340500	1702.5	1 / 77	24.12
	QPSK	340500	1702.5	1 / 1	24.11
	16-QAM	340500	1702.5	1 / 77	23.11
10 MHz	$\pi/2$ BPSK	340000	1700.0	1 / 50	23.97
		340500	1702.5	1 / 50	24.04
		341000	1705.0	1 / 26	24.14
	QPSK	340000	1700.0	1 / 50	24.15
		340500	1702.5	1 / 26	24.13
		341000	1705.0	1 / 50	24.05
	16-QAM	340000	1700.0	1 / 50	22.81
		340500	1702.5	1 / 26	22.68
		341000	1705.0	1 / 26	23.01
5 MHz	$\pi/2$ BPSK	339500	1697.5	1 / 23	24.17
		340500	1702.5	1 / 1	24.12
		341500	1707.5	1 / 23	24.09
	QPSK	339500	1697.5	1 / 1	24.11
		340500	1702.5	1 / 12	24.06
		341500	1707.5	1 / 12	24.04
	16-QAM	339500	1697.5	1 / 23	22.89
		340500	1702.5	1 / 1	23.06
		341500	1707.5	1 / 23	22.93

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 37 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-48
NR Band 66 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
45 MHz	π/2 BPSK	346500	1732.5	1 / 1	24.33
		349000	1745.0	1 / 121	23.96
		351500	1757.5	1 / 240	24.04
	QPSK	346500	1732.5	1 / 1	24.36
		349000	1745.0	1 / 121	23.83
		351500	1757.5	1 / 240	24.08
	16-QAM	346500	1732.5	1 / 1	23.28
		349000	1745.0	1 / 121	22.64
		351500	1757.5	1 / 240	23.00
40 MHz	π/2 BPSK	346000	1730.0	1 / 214	24.07
		349000	1745.0	1 / 108	24.25
		352000	1760.0	1 / 1	24.05
	QPSK	346000	1730.0	1 / 214	24.03
		349000	1745.0	1 / 108	24.22
		352000	1760.0	1 / 1	23.99
	16-QAM	346000	1730.0	1 / 1	22.45
		349000	1745.0	1 / 1	22.81
		352000	1760.0	1 / 1	23.01
35 MHz	π/2 BPSK	346000	1727.5	1 / 1	24.23
		349000	1745.0	1 / 1	24.01
		352000	1762.5	1 / 94	24.06
	QPSK	346000	1727.5	1 / 1	24.25
		349000	1745.0	1 / 1	24.04
		352000	1762.5	1 / 94	23.92
	16-QAM	346000	1727.5	1 / 1	23.30
		349000	1745.0	1 / 1	22.78
		352000	1762.5	1 / 94	22.77
30 MHz	π/2 BPSK	345000	1725.0	1 / 158	24.20
		349000	1745.0	1 / 80	24.26
		353000	1765.0	1 / 1	24.22
	QPSK	345000	1725.0	1 / 158	24.16
		349000	1745.0	1 / 80	24.21
		353000	1765.0	1 / 80	24.18
	16-QAM	345000	1725.0	1 / 1	22.76
		349000	1745.0	1 / 1	22.93
		353000	1765.0	1 / 1	23.04
25 MHz	π/2 BPSK	344500	1722.5	1 / 131	23.81
		349000	1745.0	1 / 66	24.34
		353500	1767.5	1 / 66	24.26
	QPSK	344500	1722.5	1 / 131	23.95
		349000	1745.0	1 / 66	24.22
		353500	1767.5	1 / 1	24.17
	16-QAM	344500	1722.5	1 / 1	22.37
		349000	1745.0	1 / 1	23.09
		353500	1767.5	1 / 1	23.00
	π/2 BPSK	349000	1745.0	1 / 53	24.05
		354000	1770.0	1 / 53	23.92
		344000	1720.0	1 / 104	23.84
	QPSK	349000	1745.0	1 / 53	23.97
		354000	1770.0	1 / 53	23.85
		344000	1720.0	1 / 1	22.31
	16-QAM	349000	1745.0	1 / 1	22.75
		354000	1770.0	1 / 1	22.67
		343500	1717.5	1 / 77	23.92
20 MHz	π/2 BPSK	349000	1745.0	1 / 1	24.06
		354500	1772.5	1 / 1	23.97
		343500	1717.5	1 / 77	23.89
	QPSK	349000	1745.0	1 / 1	24.10
		354500	1772.5	1 / 1	23.91
		343500	1717.5	1 / 1	22.20
	16-QAM	349000	1745.0	1 / 1	23.11
		354500	1772.5	1 / 1	22.83
		343000	1715.0	1 / 26	23.87
15 MHz	π/2 BPSK	349000	1745.0	1 / 1	23.99
		355000	1775.0	1 / 1	23.96
		343000	1715.0	1 / 1	23.77
	QPSK	349000	1745.0	1 / 1	23.97
		355000	1775.0	1 / 1	23.97
		343000	1715.0	1 / 1	22.75
	16-QAM	349000	1745.0	1 / 1	22.91
		355000	1775.0	1 / 1	22.73
		342500	1712.5	1 / 23	23.74
10 MHz	π/2 BPSK	349000	1745.0	1 / 12	24.00
		355500	1777.5	1 / 1	23.90
		342500	1712.5	1 / 1	23.77
	QPSK	349000	1745.0	1 / 1	23.99
		355500	1777.5	1 / 1	23.76
		342500	1712.5	1 / 1	22.69
	16-QAM	349000	1745.0	1 / 1	22.88
		355500	1777.5	1 / 1	22.77
		342500	1712.5	1 / 1	22.77
5 MHz	π/2 BPSK	349000	1745.0	1 / 1	24.01
		352000	1762.5	1 / 94	24.06
		346000	1727.5	1 / 1	24.25
	QPSK	349000	1745.0	1 / 1	24.04
		352000	1762.5	1 / 94	23.92
		346000	1727.5	1 / 1	24.25
	16-QAM	349000	1745.0	1 / 1	22.78
		352000	1762.5	1 / 94	22.77
		346000	1727.5	1 / 1	24.25

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 38 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-49
NR Band 66 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
45 MHz	π/2 BPSK	346500	1732.5	1 / 1	24.96
		349000	1745.0	1 / 1	24.73
		351500	1757.5	1 / 1	24.46
	QPSK	346500	1732.5	1 / 1	24.91
		349000	1745.0	1 / 1	24.81
		351500	1757.5	1 / 1	24.42
	16-QAM	346500	1732.5	1 / 1	23.97
		349000	1745.0	1 / 1	23.80
		351500	1757.5	1 / 1	23.37
40 MHz	π/2 BPSK	346000	1730.0	1 / 1	24.10
		349000	1745.0	1 / 214	24.21
		352000	1760.0	1 / 214	24.08
	QPSK	346000	1730.0	1 / 1	24.14
		349000	1745.0	1 / 214	24.16
		352000	1760.0	1 / 214	24.21
	16-QAM	346000	1730.0	1 / 1	22.93
		349000	1745.0	1 / 1	22.94
		352000	1760.0	1 / 1	22.74
35 MHz	π/2 BPSK	346000	1727.5	1 / 1	24.80
		349000	1745.0	1 / 1	24.08
		352000	1762.5	1 / 94	24.14
	QPSK	346000	1727.5	1 / 1	24.76
		349000	1745.0	1 / 1	24.07
		352000	1762.5	1 / 94	24.22
	16-QAM	346000	1727.5	1 / 1	23.62
		349000	1745.0	1 / 1	23.06
		352000	1762.5	1 / 94	23.12
30 MHz	π/2 BPSK	345000	1725.0	1 / 1	24.08
		349000	1745.0	1 / 158	24.18
		353000	1765.0	1 / 80	24.26
	QPSK	345000	1725.0	1 / 158	24.27
		349000	1745.0	1 / 158	24.26
		353000	1765.0	1 / 158	24.26
	16-QAM	345000	1725.0	1 / 1	23.02
		349000	1745.0	1 / 1	22.95
		353000	1765.0	1 / 1	23.03
25 MHz	π/2 BPSK	344500	1722.5	1 / 1	24.23
		349000	1745.0	1 / 1	24.22
		353500	1767.5	1 / 131	24.21
	QPSK	344500	1722.5	1 / 1	24.26
		349000	1745.0	1 / 131	24.23
		353500	1767.5	1 / 1	24.29
	16-QAM	344500	1722.5	1 / 1	22.99
		349000	1745.0	1 / 1	22.94
		353500	1767.5	1 / 1	22.96
20 MHz	π/2 BPSK	344000	1720.0	1 / 53	23.92
		349000	1745.0	1 / 104	23.99
		354000	1770.0	1 / 53	24.11
	QPSK	344000	1720.0	1 / 53	23.98
		349000	1745.0	1 / 104	23.99
		354000	1770.0	1 / 53	24.12
	16-QAM	344000	1720.0	1 / 1	22.76
		349000	1745.0	1 / 1	22.65
		354000	1770.0	1 / 1	22.73
15 MHz	π/2 BPSK	343500	1717.5	1 / 1	24.00
		349000	1745.0	1 / 39	24.06
		354500	1772.5	1 / 77	24.13
	QPSK	343500	1717.5	1 / 1	24.11
		349000	1745.0	1 / 77	24.06
		354500	1772.5	1 / 1	24.10
	16-QAM	343500	1717.5	1 / 1	22.93
		349000	1745.0	1 / 1	22.72
		354500	1772.5	1 / 1	22.83
10 MHz	π/2 BPSK	343000	1715.0	1 / 26	24.04
		349000	1745.0	1 / 26	23.94
		355000	1775.0	1 / 50	24.07
	QPSK	343000	1715.0	1 / 1	24.09
		349000	1745.0	1 / 50	23.96
		355000	1775.0	1 / 26	24.17
	16-QAM	343000	1715.0	1 / 1	22.82
		349000	1745.0	1 / 1	22.73
		355000	1775.0	1 / 1	22.87
5 MHz	π/2 BPSK	342500	1712.5	1 / 12	24.00
		349000	1745.0	1 / 12	23.99
		355500	1777.5	1 / 12	24.03
	QPSK	342500	1712.5	1 / 12	23.96
		349000	1745.0	1 / 12	23.98
		355500	1777.5	1 / 12	24.07
	16-QAM	342500	1712.5	1 / 1	22.79
		349000	1745.0	1 / 1	22.81
		355500	1777.5	1 / 1	22.91

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
Page 39 of 66		

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-50
NR Band 25/2 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	374000	1870.0	1 / 214	24.11
		376500	1882.5	1 / 214	24.05
		379000	1895.0	1 / 108	24.06
	QPSK	374000	1870.0	1 / 214	24.06
		376500	1882.5	1 / 108	23.97
		379000	1895.0	1 / 108	24.09
	16-QAM	374000	1870.0	1 / 1	22.37
35 MHz	$\pi/2$ BPSK	372000	1865.0	1 / 158	24.11
		376500	1882.5	1 / 158	24.05
		381000	1900.0	1 / 80	24.06
	QPSK	372000	1865.0	1 / 158	24.06
		376500	1882.5	1 / 80	23.97
		381000	1900.0	1 / 80	24.09
	16-QAM	372000	1865.0	1 / 1	22.37
30 MHz	$\pi/2$ BPSK	372000	1865.0	1 / 158	23.95
		376500	1882.5	1 / 158	24.01
		381000	1900.0	1 / 1	24.13
	QPSK	372000	1865.0	1 / 158	23.95
		376500	1882.5	1 / 158	23.99
		381000	1900.0	1 / 1	24.08
	16-QAM	372000	1865.0	1 / 1	22.47
25 MHz	$\pi/2$ BPSK	372000	1862.5	1 / 131	23.82
		376500	1882.5	1 / 66	24.04
		381000	1902.5	1 / 66	24.11
	QPSK	372000	1862.5	1 / 131	23.73
		376500	1882.5	1 / 131	24.01
		381000	1902.5	1 / 1	24.08
	16-QAM	372000	1862.5	1 / 1	22.45
20 MHz	$\pi/2$ BPSK	372000	1860.0	1 / 104	23.50
		376500	1882.5	1 / 53	23.91
		381000	1905.0	1 / 1	23.96
	QPSK	372000	1860.0	1 / 104	23.45
		376500	1882.5	1 / 104	23.85
		381000	1905.0	1 / 1	23.95
	16-QAM	372000	1860.0	1 / 1	22.28
15 MHz	$\pi/2$ BPSK	371500	1857.5	1 / 1	23.44
		376500	1882.5	1 / 39	23.85
		381500	1907.5	1 / 1	23.92
	QPSK	371500	1857.5	1 / 1	23.49
		376500	1882.5	1 / 77	23.85
		381500	1907.5	1 / 1	23.88
	16-QAM	371500	1857.5	1 / 1	22.42
10 MHz	$\pi/2$ BPSK	371000	1855.0	1 / 1	23.48
		376500	1882.5	1 / 26	23.82
		382000	1910.0	1 / 50	23.85
	QPSK	371000	1855.0	1 / 1	23.47
		376500	1882.5	1 / 26	23.83
		382000	1910.0	1 / 50	23.81
	16-QAM	376500	1882.5	1 / 1	22.59
5 MHz	$\pi/2$ BPSK	370500	1852.5	1 / 1	23.53
		376500	1882.5	1 / 1	23.89
		382500	1912.5	1 / 1	23.81
	QPSK	370500	1852.5	1 / 1	23.55
		376500	1882.5	1 / 1	23.95
		382500	1912.5	1 / 1	23.84
	16-QAM	370500	1852.5	1 / 1	22.36

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 40 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-51
NR Band 25/2 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	374000	1870.0	1 / 108	24.97
		376500	1882.5	1 / 108	24.97
		379000	1895.0	216 / 0	25.01
	QPSK	374000	1870.0	1 / 108	24.79
		376500	1882.5	1 / 108	24.87
		379000	1895.0	1 / 108	24.96
	16-QAM	376500	1882.5	1 / 108	23.89
35 MHz	$\pi/2$ BPSK	372000	1865.0	1 / 158	24.97
		376500	1882.5	1 / 158	24.82
		381000	1900.0	1 / 80	24.82
	QPSK	372000	1865.0	1 / 158	24.90
		376500	1882.5	1 / 80	24.80
		381000	1900.0	1 / 80	24.78
	16-QAM	381000	1900.0	1 / 1	23.74
		381000	1900.0	1 / 1	23.74
30 MHz	$\pi/2$ BPSK	372000	1865.0	1 / 80	24.98
		376500	1882.5	1 / 80	24.94
		381000	1900.0	1 / 80	24.99
	QPSK	372000	1865.0	1 / 1	24.92
		376500	1882.5	1 / 158	24.84
		381000	1900.0	1 / 158	24.99
	16-QAM	381000	1900.0	1 / 158	24.00
		381000	1900.0	1 / 158	24.00
25 MHz	$\pi/2$ BPSK	372000	1862.5	128 / 0	24.98
		376500	1882.5	1 / 131	24.96
		381000	1902.5	1 / 131	24.97
	QPSK	372000	1862.5	1 / 131	24.97
		376500	1882.5	1 / 131	24.97
		381000	1902.5	1 / 1	24.75
	16-QAM	376500	1882.5	1 / 131	23.77
		376500	1882.5	1 / 131	23.77
20 MHz	$\pi/2$ BPSK	372000	1860.0	100 / 0	24.88
		376500	1882.5	1 / 104	24.85
		381000	1905.0	1 / 1	24.95
	QPSK	372000	1860.0	1 / 104	24.84
		376500	1882.5	1 / 104	24.79
		381000	1905.0	1 / 104	24.91
	16-QAM	381000	1905.0	1 / 104	23.86
		381000	1905.0	1 / 104	23.86
15 MHz	$\pi/2$ BPSK	371500	1857.5	1 / 77	24.88
		376500	1882.5	1 / 77	24.98
		381500	1907.5	1 / 77	24.96
	QPSK	371500	1857.5	1 / 1	24.95
		376500	1882.5	1 / 1	24.96
		381500	1907.5	1 / 1	24.87
	16-QAM	376500	1882.5	1 / 1	23.86
		376500	1882.5	1 / 1	23.86
10 MHz	$\pi/2$ BPSK	371000	1855.0	1 / 1	24.92
		376500	1882.5	1 / 1	24.89
		382000	1910.0	50 / 0	24.94
	QPSK	371000	1855.0	1 / 26	24.58
		376500	1882.5	1 / 1	24.83
		382000	1910.0	1 / 50	24.93
	16-QAM	382000	1910.0	1 / 50	23.98
		382000	1910.0	1 / 50	23.98
5 MHz	$\pi/2$ BPSK	370500	1852.5	25 / 0	24.95
		376500	1882.5	25 / 0	24.98
		382500	1912.5	25 / 0	24.94
	QPSK	370500	1852.5	1 / 23	24.54
		376500	1882.5	1 / 23	24.76
		382500	1912.5	1 / 23	24.86
	16-QAM	382500	1912.5	1 / 23	23.75
		382500	1912.5	1 / 23	23.75

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 41 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-52
NR Band 30 Conducted Powers – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	$\pi/2$ BPSK	27710	2310.0	1 / 1	23.31
	QPSK	27710	2310.0	1 / 26	23.28
	16-QAM	27710	2310.0	1 / 1	22.27
5 MHz	$\pi/2$ BPSK	27685	2307.5	1 / 12	23.37
		27710	2310.0	1 / 1	23.34
		27735	2312.5	1 / 12	23.27
	QPSK	27685	2307.5	1 / 23	23.03
		27710	2310.0	1 / 23	23.41
		27735	2312.5	1 / 1	23.28
	16-QAM	27685	2307.5	1 / 23	22.14
		27710	2310.0	1 / 12	22.31
		27735	2312.5	1 / 1	22.38

Table 6-53
NR Band 30 Conducted Powers – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	$\pi/2$ BPSK	27710	2310.0	1 / 1	23.77
	QPSK	27710	2310.0	1 / 26	23.81
	16-QAM	27710	2310.0	1 / 26	22.64
5 MHz	$\pi/2$ BPSK	27685	2307.5	1 / 1	23.90
		27710	2310.0	1 / 12	23.80
		27735	2312.5	1 / 12	23.96
	QPSK	27685	2307.5	1 / 1	23.72
		27710	2310.0	1 / 12	23.74
		27735	2312.5	1 / 12	23.93
	16-QAM	27685	2307.5	1 / 1	22.88
		27710	2310.0	1 / 12	22.83
		27735	2312.5	1 / 12	22.62

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 42 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-54
NR Band 7 Conducted Powers (50MHz through 25MHz) – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
50 MHz	$\pi/2$ BPSK	505000	2525.0	1 / 135	23.06
		507000	2535.0	1 / 135	22.71
		509000	2545.0	1 / 1	22.95
	QPSK	505000	2525.0	1 / 135	22.93
		507000	2535.0	1 / 135	22.62
		509000	2545.0	1 / 1	22.77
	16-QAM	505000	2525.0	1 / 135	21.67
		507000	2535.0	1 / 135	21.33
		509000	2545.0	1 / 1	21.42
	64-QAM	505000	2525.0	1 / 135	20.50
		507000	2535.0	1 / 135	20.07
		509000	2545.0	1 / 1	20.08
	256-QAM	505000	2525.0	1 / 135	18.43
		507000	2535.0	1 / 135	18.16
		509000	2545.0	1 / 1	18.24
40 MHz	$\pi/2$ BPSK	504000	2520.0	1 / 1	22.97
		507000	2535.0	1 / 1	22.86
		510000	2550.0	1 / 1	22.88
	QPSK	504000	2520.0	1 / 1	22.79
		507000	2535.0	1 / 1	22.68
		510000	2550.0	1 / 1	22.69
	16-QAM	504000	2520.0	1 / 1	21.56
		507000	2535.0	1 / 1	21.68
		510000	2550.0	1 / 1	21.73
	64-QAM	504000	2520.0	1 / 1	20.23
		507000	2535.0	1 / 1	20.51
		510000	2550.0	1 / 1	20.03
	256-QAM	504000	2520.0	1 / 1	18.30
		507000	2535.0	1 / 1	18.29
		510000	2550.0	1 / 1	18.07
30 MHz	$\pi/2$ BPSK	503000	2515.0	1 / 1	23.04
		507000	2535.0	1 / 1	23.06
		511000	2555.0	1 / 80	22.78
	QPSK	503000	2515.0	1 / 1	22.68
		507000	2535.0	1 / 1	22.91
		511000	2555.0	1 / 80	22.59
	16-QAM	503000	2515.0	1 / 1	21.62
		507000	2535.0	1 / 1	21.50
		511000	2555.0	1 / 80	21.59
	64-QAM	503000	2515.0	1 / 1	20.21
		507000	2535.0	1 / 1	20.28
		511000	2555.0	1 / 80	20.10
	256-QAM	503000	2515.0	1 / 1	18.39
		507000	2535.0	1 / 1	18.21
		511000	2555.0	1 / 80	18.05
25 MHz	$\pi/2$ BPSK	502500	2512.5	1 / 1	23.05
		507000	2535.0	1 / 1	22.92
		511500	2557.5	1 / 66	22.84
	QPSK	502500	2512.5	1 / 1	22.78
		507000	2535.0	1 / 1	22.72
		511500	2557.5	1 / 66	22.56
	16-QAM	502500	2512.5	1 / 1	21.48
		507000	2535.0	1 / 1	21.43
		511500	2557.5	1 / 66	21.34
	64-QAM	502500	2512.5	1 / 1	20.79
		507000	2535.0	1 / 1	20.15
		511500	2557.5	128 / 0	19.92
	256-QAM	502500	2512.5	1 / 1	18.57
		507000	2535.0	1 / 1	18.55
		511500	2557.5	1 / 66	18.09

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 43 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-55
NR Band 7 Conducted Powers (20MHz through 5MHz) – Ant B

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	$\pi/2$ BPSK	502000	2510.0	1 / 104	22.98
		507000	2535.0	1 / 1	22.88
		512000	2560.0	1 / 1	22.49
	QPSK	502000	2510.0	1 / 104	22.77
		507000	2535.0	1 / 1	22.54
		512000	2560.0	1 / 1	22.46
	16-QAM	502000	2510.0	1 / 104	21.64
		507000	2535.0	1 / 1	21.48
		512000	2560.0	1 / 1	21.44
	64-QAM	502000	2510.0	1 / 104	20.19
		507000	2535.0	1 / 1	20.31
		512000	2560.0	1 / 1	20.19
	256-QAM	502000	2510.0	1 / 104	18.12
		507000	2535.0	1 / 1	17.90
		512000	2560.0	1 / 1	17.96
15 MHz	$\pi/2$ BPSK	501500	2507.5	1 / 77	22.63
		507000	2535.0	1 / 39	22.91
		512500	2562.5	1 / 1	22.39
	QPSK	501500	2507.5	1 / 77	22.14
		507000	2535.0	1 / 39	22.51
		512500	2562.5	1 / 1	22.24
	16-QAM	501500	2507.5	1 / 77	21.41
		507000	2535.0	1 / 39	21.54
		512500	2562.5	1 / 1	21.15
	64-QAM	501500	2507.5	1 / 77	20.16
		507000	2535.0	1 / 39	20.32
		512500	2562.5	1 / 1	19.70
	256-QAM	501500	2507.5	1 / 77	18.17
		507000	2535.0	1 / 39	18.20
		512500	2562.5	1 / 1	17.70
10 MHz	$\pi/2$ BPSK	501000	2505.0	1 / 1	22.92
		507000	2535.0	1 / 26	22.56
		513000	2565.0	1 / 1	22.32
	QPSK	501000	2505.0	1 / 1	22.61
		507000	2535.0	1 / 26	22.48
		513000	2565.0	1 / 1	22.27
	16-QAM	501000	2505.0	1 / 1	21.54
		507000	2535.0	1 / 26	21.32
		513000	2565.0	1 / 1	21.22
	64-QAM	501000	2505.0	1 / 1	19.96
		507000	2535.0	1 / 26	19.95
		513000	2565.0	1 / 1	19.68
	256-QAM	501000	2505.0	1 / 1	18.22
		507000	2535.0	1 / 26	17.93
		513000	2565.0	1 / 1	17.73
5 MHz	$\pi/2$ BPSK	500500	2502.5	1 / 23	22.89
		507000	2535.0	1 / 23	22.60
		513500	2567.5	1 / 1	22.54
	QPSK	500500	2502.5	1 / 23	22.73
		507000	2535.0	1 / 23	22.44
		513500	2567.5	1 / 1	22.40
	16-QAM	500500	2502.5	1 / 23	21.73
		507000	2535.0	1 / 23	21.04
		513500	2567.5	1 / 1	21.45
	64-QAM	500500	2502.5	1 / 23	20.46
		507000	2535.0	1 / 23	19.87
		513500	2567.5	1 / 1	19.71
	256-QAM	500500	2502.5	25 / 0	17.97
		507000	2535.0	1 / 23	17.88
		513500	2567.5	25 / 0	17.66

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 44 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-56
NR Band 7 Conducted Powers (50MHz through 25MHz) – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
50 MHz	π/2 BPSK	505000	2525.0	1 / 268	23.32
		507000	2535.0	1 / 268	23.47
		509000	2545.0	1 / 135	23.36
	QPSK	505000	2525.0	1 / 268	23.17
		507000	2535.0	1 / 268	23.35
		509000	2545.0	1 / 135	23.24
	16-QAM	505000	2525.0	1 / 268	22.13
		507000	2535.0	1 / 268	22.16
		509000	2545.0	1 / 135	22.05
	64-QAM	505000	2525.0	270 / 0	20.70
		507000	2535.0	1 / 268	20.91
		509000	2545.0	1 / 135	20.83
40 MHz	π/2 BPSK	505000	2525.0	1 / 268	18.88
		507000	2535.0	1 / 268	18.84
		509000	2545.0	1 / 135	18.80
	QPSK	505000	2525.0	1 / 268	18.88
		507000	2535.0	1 / 268	18.84
		509000	2545.0	1 / 135	18.80
	16-QAM	505000	2525.0	1 / 268	18.88
		507000	2535.0	1 / 268	18.84
		509000	2545.0	1 / 135	18.80
	256-QAM	505000	2525.0	1 / 268	18.88
		507000	2535.0	1 / 268	18.84
		509000	2545.0	1 / 135	18.80
30 MHz	π/2 BPSK	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	QPSK	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	16-QAM	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	64-QAM	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
25 MHz	π/2 BPSK	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	QPSK	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	16-QAM	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	64-QAM	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80
	256-QAM	505000	2525.0	1 / 268	18.80
		507000	2535.0	1 / 268	18.80
		509000	2545.0	1 / 135	18.80

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 45 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-57
NR Band 7 Conducted Powers (20MHz through 5MHz) – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	$\pi/2$ BPSK	502000	2510.0	1 / 1	23.35
		507000	2535.0	1 / 53	23.31
		512000	2560.0	1 / 1	23.41
	QPSK	502000	2510.0	1 / 1	23.27
		507000	2535.0	1 / 53	23.27
		512000	2560.0	1 / 1	23.27
	16-QAM	502000	2510.0	1 / 1	22.17
		507000	2535.0	1 / 53	21.98
		512000	2560.0	1 / 1	22.25
	64-QAM	502000	2510.0	1 / 1	20.85
		507000	2535.0	1 / 53	20.78
		512000	2560.0	1 / 1	20.72
	256-QAM	502000	2510.0	1 / 1	18.83
		507000	2535.0	1 / 53	18.69
		512000	2560.0	1 / 1	18.85
15 MHz	$\pi/2$ BPSK	501500	2507.5	1 / 1	23.39
		507000	2535.0	1 / 39	23.44
		512500	2562.5	1 / 1	23.37
	QPSK	501500	2507.5	1 / 1	23.17
		507000	2535.0	1 / 39	23.37
		512500	2562.5	1 / 1	23.31
	16-QAM	501500	2507.5	1 / 1	22.23
		507000	2535.0	1 / 39	22.54
		512500	2562.5	1 / 1	22.35
	64-QAM	501500	2507.5	1 / 1	20.72
		507000	2535.0	1 / 39	20.91
		512500	2562.5	1 / 1	20.83
	256-QAM	501500	2507.5	75 / 0	18.70
		507000	2535.0	1 / 39	18.69
		512500	2562.5	1 / 1	18.80
10 MHz	$\pi/2$ BPSK	501000	2505.0	1 / 26	23.38
		507000	2535.0	1 / 26	23.46
		513000	2565.0	1 / 1	23.41
	QPSK	501000	2505.0	1 / 26	23.31
		507000	2535.0	1 / 26	23.38
		513000	2565.0	1 / 1	23.30
	16-QAM	501000	2505.0	1 / 26	22.26
		507000	2535.0	1 / 26	22.25
		513000	2565.0	1 / 1	22.14
	64-QAM	501000	2505.0	1 / 26	20.80
		507000	2535.0	1 / 26	20.80
		513000	2565.0	1 / 1	20.88
	256-QAM	501000	2505.0	1 / 26	19.15
		507000	2535.0	1 / 26	18.93
		513000	2565.0	1 / 1	18.84
5 MHz	$\pi/2$ BPSK	500500	2502.5	1 / 23	23.39
		507000	2535.0	1 / 1	23.50
		513500	2567.5	1 / 12	23.34
	QPSK	500500	2502.5	1 / 23	23.22
		507000	2535.0	1 / 1	23.45
		513500	2567.5	1 / 12	23.06
	16-QAM	500500	2502.5	1 / 23	22.45
		507000	2535.0	1 / 1	22.11
		513500	2567.5	1 / 12	22.26
	64-QAM	500500	2502.5	1 / 23	20.99
		507000	2535.0	1 / 1	21.15
		513500	2567.5	1 / 12	20.76
	256-QAM	500500	2502.5	1 / 23	18.81
		507000	2535.0	1 / 1	18.98
		513500	2567.5	1 / 12	18.65

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 46 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-58
NR Band 41 Power Class 2 Conducted Powers (100MHz through 45MHz) – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	509202	2546.01	1 / 136	26.56
		518598	2592.99	1 / 271	26.51
		528000	2640.00	1 / 136	26.31
	QPSK	509202	2546.01	1 / 136	25.67
		518598	2592.99	1 / 271	26.11
		528000	2640.00	1 / 136	25.52
	16-QAM	518598	2592.99	1 / 271	25.12
90 MHz	$\pi/2$ BPSK	508200	2541.00	1 / 122	26.68
		518598	2592.99	1 / 243	26.56
		528996	2644.98	1 / 122	26.49
	QPSK	508200	2541.00	1 / 122	25.72
		518598	2592.99	1 / 243	25.76
		528996	2644.98	1 / 122	25.60
	16-QAM	518598	2592.99	1 / 243	24.89
80 MHz	$\pi/2$ BPSK	507204	2536.02	1 / 215	26.67
		518598	2592.99	1 / 215	26.51
		529998	2649.99	1 / 1	26.58
	QPSK	507204	2536.02	1 / 108	25.96
		518598	2592.99	1 / 215	25.79
		529998	2649.99	1 / 108	25.65
	16-QAM	518598	2592.99	1 / 215	24.86
70 MHz	$\pi/2$ BPSK	506202	2531.01	1 / 94	26.65
		518598	2592.99	1 / 187	26.67
		531000	2655.00	1 / 187	26.64
	QPSK	506202	2531.01	1 / 94	26.00
		518598	2592.99	1 / 187	25.77
		531000	2655.00	1 / 1	26.32
	16-QAM	506202	2531.01	1 / 94	25.01
60 MHz	$\pi/2$ BPSK	505200	2526.00	1 / 160	26.64
		518598	2592.99	1 / 1	26.54
		531996	2659.98	1 / 1	26.62
	QPSK	505200	2526.00	1 / 81	26.09
		518598	2592.99	1 / 160	25.60
		531996	2659.98	1 / 1	25.80
	16-QAM	505200	2526.00	1 / 160	25.12
50 MHz	$\pi/2$ BPSK	504204	2521.02	1 / 131	26.89
		518598	2592.99	1 / 1	26.63
		532998	2664.99	1 / 1	26.88
	QPSK	504204	2521.02	1 / 131	26.13
		518598	2592.99	1 / 131	25.65
		532998	2664.99	1 / 1	25.96
	16-QAM	504204	2521.02	1 / 131	25.12
45 MHz	$\pi/2$ BPSK	503703	2518.50	1 / 117	26.88
		518598	2592.99	1 / 1	26.58
		533449	2667.50	1 / 1	26.92
	QPSK	503703	2518.50	1 / 117	26.41
		518598	2592.99	1 / 1	25.48
		533449	2667.50	1 / 1	26.03
	16-QAM	503703	2518.50	1 / 117	25.35

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 47 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-59
NR Band 41 Power Class 2 Conducted Powers (40MHz through 10MHz) – Ant G

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	503202	2516.01	1 / 104	26.76
		518598	2592.99	1 / 1	26.55
		534000	2670.00	1 / 1	26.70
	QPSK	503202	2516.01	1 / 104	26.22
		518598	2592.99	1 / 104	25.57
		534000	2670.00	1 / 1	25.91
	16-QAM	503202	2516.01	1 / 104	25.40
35 MHz	$\pi/2$ BPSK	502701	2513.50	1 / 90	26.85
		518598	2592.99	1 / 1	26.59
		534448	2672.50	1 / 1	26.57
	QPSK	502701	2513.50	1 / 90	26.11
		518598	2592.99	1 / 90	25.57
		534448	2672.50	1 / 1	25.80
	16-QAM	502701	2513.50	1 / 90	25.47
30 MHz	$\pi/2$ BPSK	502200	2511.00	1 / 76	26.85
		518598	2592.99	1 / 76	26.68
		534996	2674.98	1 / 1	26.79
	QPSK	502200	2511.00	1 / 76	26.35
		518598	2592.99	1 / 76	25.50
		534996	2674.98	1 / 1	25.85
	16-QAM	502200	2511.00	1 / 76	25.35
25 MHz	$\pi/2$ BPSK	501702	2508.50	1 / 63	26.76
		518598	2592.99	1 / 63	26.58
		535497	2677.50	1 / 1	26.79
	QPSK	501702	2508.50	1 / 63	26.35
		518598	2592.99	1 / 63	25.43
		535497	2677.50	1 / 1	25.72
	16-QAM	501702	2508.50	1 / 63	25.41
20 MHz	$\pi/2$ BPSK	501204	2506.02	1 / 25	26.57
		518598	2592.99	1 / 49	26.48
		535998	2679.99	1 / 1	26.72
	QPSK	501204	2506.02	1 / 49	26.37
		518598	2592.99	1 / 49	25.56
		535998	2679.99	1 / 1	25.94
	16-QAM	501204	2506.02	1 / 25	25.12
15 MHz	$\pi/2$ BPSK	500706	2503.50	1 / 1	26.74
		518598	2592.99	1 / 36	26.41
		536449	2682.50	1 / 1	26.57
	QPSK	500706	2503.50	1 / 36	26.08
		518598	2592.99	1 / 36	25.56
		536449	2682.50	1 / 36	25.54
	16-QAM	500706	2503.50	1 / 1	24.97
10 MHz	$\pi/2$ BPSK	500208	2501.00	1 / 12	26.56
		518598	2592.99	1 / 12	26.01
		537000	2685.00	1 / 22	26.35
	QPSK	500208	2501.00	1 / 22	25.74
		518598	2592.99	1 / 12	25.09
		537000	2685.00	1 / 12	25.32
	16-QAM	500208	2501.00	1 / 12	24.82

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 48 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-61
NR Band 48 Conducted Powers – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	TT/2 BPSK	638000	3570.0	1 / 104	23.89
		641666	3625.0	1 / 104	23.61
		645332	3680.0	1 / 53	24.27
	QPSK	638000	3570.0	1 / 53	23.88
		641666	3625.0	1 / 1	23.67
		645332	3680.0	1 / 53	24.06
	16-QAM	638000	3570.0	1 / 104	22.96
		641666	3625.0	1 / 1	22.68
		645332	3680.0	1 / 53	22.86
30 MHz	TT/2 BPSK	637666	3565.0	1 / 76	23.75
		641666	3625.0	1 / 76	24.11
		645666	3685.0	1 / 76	24.14
	QPSK	637666	3565.0	1 / 1	23.78
		641666	3625.0	1 / 76	23.93
		645666	3685.0	1 / 76	24.08
	16-QAM	637666	3565.0	1 / 1	22.78
		641666	3625.0	1 / 76	23.20
		645666	3685.0	1 / 76	22.96
20 MHz	TT/2 BPSK	637334	3560.0	1 / 1	24.20
		641666	3625.0	1 / 49	23.85
		646000	3690.0	1 / 49	24.06
	QPSK	637334	3560.0	1 / 1	24.22
		641666	3625.0	1 / 49	23.81
		646000	3690.0	1 / 49	24.07
	16-QAM	637334	3560.0	1 / 1	23.30
		641666	3625.0	1 / 49	22.93
		646000	3690.0	1 / 49	23.03
15 MHz	TT/2 BPSK	637166	3557.5	1 / 1	24.09
		641666	3625.0	1 / 36	23.86
		646166	3692.5	1 / 1	24.13
	QPSK	637166	3557.5	1 / 1	24.26
		641666	3625.0	1 / 1	23.87
		646166	3692.5	1 / 1	24.15
	16-QAM	637166	3557.5	1 / 1	23.11
		641666	3625.0	1 / 1	22.83
		646166	3692.5	1 / 1	22.88
10 MHz	TT/2 BPSK	637000	3555.0	1 / 1	24.38
		641666	3625.0	1 / 22	23.97
		646332	3695.0	1 / 1	24.23
	QPSK	637000	3555.0	1 / 1	24.34
		641666	3625.0	1 / 1	24.01
		646332	3695.0	1 / 12	24.17
	16-QAM	637000	3555.0	1 / 1	23.45
		641666	3625.0	1 / 1	22.66
		646332	3695.0	1 / 22	23.34

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 49 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-62
NR Band 78 Power Class 2 Conducted Powers (100MHz through 50MHz) – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 1	26.23
		636666	3549.99	1 / 1	26.23
		640000	3600.00	1 / 1	25.68
	QPSK	633334	3500.01	1 / 1	26.09
		636666	3549.99	1 / 1	25.95
		640000	3600.00	1 / 271	25.53
	16-QAM	633334	3500.01	1 / 1	25.03
		636666	3549.99	1 / 1	25.00
		640000	3600.00	1 / 1	24.19
90 MHz	$\pi/2$ BPSK	633000	3495.00	1 / 1	26.21
		636666	3549.99	1 / 1	26.11
		640332	3604.98	1 / 243	25.76
	QPSK	633000	3495.00	1 / 1	26.17
		636666	3549.99	1 / 1	26.03
		640332	3604.98	1 / 243	25.59
	16-QAM	633000	3495.00	1 / 1	24.90
		636666	3549.99	1 / 1	24.99
		640332	3604.98	1 / 1	24.31
80 MHz	$\pi/2$ BPSK	632668	3490.02	1 / 1	26.08
		636666	3549.99	1 / 1	26.02
		640666	3609.99	1 / 215	25.64
	QPSK	632668	3490.02	1 / 1	26.09
		636666	3549.99	1 / 1	25.95
		640666	3609.99	1 / 215	25.53
	16-QAM	632668	3490.02	1 / 1	25.03
		636666	3549.99	1 / 1	25.00
		640666	3609.99	1 / 1	24.19
70 MHz	$\pi/2$ BPSK	632334	3485.01	1 / 1	26.17
		636666	3549.99	1 / 1	26.00
		641000	3615.00	1 / 187	25.46
	QPSK	632334	3485.01	1 / 1	26.07
		636666	3549.99	1 / 1	26.02
		641000	3615.00	1 / 1	25.44
	16-QAM	632334	3485.01	1 / 1	24.92
		636666	3549.99	1 / 1	24.91
		641000	3615.00	1 / 1	24.32
60 MHz	$\pi/2$ BPSK	632000	3480.00	1 / 1	26.04
		636666	3549.99	1 / 1	25.85
		641332	3619.98	1 / 1	25.41
	QPSK	632000	3480.00	1 / 1	25.89
		636666	3549.99	1 / 1	25.80
		641332	3619.98	1 / 1	25.31
	16-QAM	632000	3480.00	1 / 1	24.93
		636666	3549.99	1 / 1	24.83
		641332	3619.98	1 / 1	24.13
50 MHz	$\pi/2$ BPSK	631668	3475.02	1 / 1	26.22
		636666	3549.99	1 / 1	26.08
		641666	3624.99	1 / 66	25.63
	QPSK	631668	3475.02	1 / 1	26.11
		636666	3549.99	1 / 66	25.99
		641666	3624.99	1 / 66	25.57
	16-QAM	631668	3475.02	1 / 1	25.06
		636666	3549.99	1 / 1	24.93
		641666	3624.99	1 / 1	24.25

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset	Page 50 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-53
NR Band 78 Power Class 2 Conducted Powers (40MHz through 10MHz) – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	631334	3470.01	1 / 1	26.09
		636666	3549.99	1 / 1	25.97
		642000	3630.00	1 / 53	25.52
	QPSK	631334	3470.01	1 / 1	26.00
		636666	3549.99	1 / 1	25.89
		642000	3630.00	1 / 53	25.44
	16-QAM	631334	3470.01	1 / 1	24.91
		636666	3549.99	1 / 1	24.65
		642000	3630.00	1 / 1	24.31
30 MHz	$\pi/2$ BPSK	631000	3465.00	1 / 1	26.17
		636666	3549.99	1 / 39	25.98
		642332	3634.98	1 / 39	25.59
	QPSK	631000	3465.00	1 / 1	26.04
		636666	3549.99	1 / 1	25.89
		642332	3634.98	1 / 76	25.46
	16-QAM	631000	3465.00	1 / 1	25.07
		636666	3549.99	1 / 1	24.90
		642332	3634.98	1 / 1	24.34
25 MHz	$\pi/2$ BPSK	630834	3462.51	1 / 32	26.17
		636666	3549.99	1 / 1	26.05
		642500	3637.50	1 / 32	25.62
	QPSK	630834	3462.51	1 / 1	26.04
		636666	3549.99	1 / 1	25.99
		642500	3637.50	1 / 32	25.44
	16-QAM	630834	3462.51	1 / 1	25.00
		636666	3549.99	1 / 1	24.84
		642500	3637.50	1 / 1	24.18
20 MHz	$\pi/2$ BPSK	630668	3460.02	1 / 1	25.89
		636666	3549.99	1 / 1	25.94
		642666	3639.99	1 / 49	25.39
	QPSK	630668	3460.02	1 / 1	25.87
		636666	3549.99	1 / 1	25.86
		642666	3639.99	1 / 49	25.32
	16-QAM	630668	3460.02	1 / 1	24.72
		636666	3549.99	1 / 1	24.74
		642666	3639.99	1 / 1	24.20
15 MHz	$\pi/2$ BPSK	630500	3457.50	1 / 19	25.89
		636666	3549.99	1 / 36	25.89
		642833	3642.50	1 / 1	25.48
	QPSK	630500	3457.50	1 / 19	25.75
		636666	3549.99	1 / 36	25.83
		642833	3642.50	1 / 36	25.37
	16-QAM	630500	3457.50	1 / 1	24.70
		636666	3549.99	1 / 1	24.57
		642833	3642.50	1 / 1	24.11
10 MHz	$\pi/2$ BPSK	630336	3455.04	1 / 1	25.93
		636666	3549.99	1 / 1	25.99
		643000	3645.00	1 / 22	25.45
	QPSK	630336	3455.04	1 / 1	25.81
		636666	3549.99	1 / 22	25.84
		643000	3645.00	1 / 22	25.41
	16-QAM	630336	3455.04	1 / 1	24.75
		636666	3549.99	1 / 1	24.64
		643000	3645.00	1 / 1	24.30

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 51 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-64
NR Band 77 Power Class 2 Conducted Powers (100MHz through 50MHz) – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	650000	3750.00	1 / 271	25.93
		656000	3840.00	1 / 271	26.20
		662000	3930.00	1 / 271	26.36
	QPSK	650000	3750.00	1 / 1	25.76
		656000	3840.00	1 / 271	26.15
		662000	3930.00	1 / 271	26.34
	16-QAM	650000	3750.00	1 / 1	24.45
		656000	3840.00	1 / 1	24.66
		662000	3930.00	1 / 1	24.93
90 MHz	$\pi/2$ BPSK	649668	3745.02	1 / 243	25.92
		656000	3840.00	1 / 243	26.21
		662332	3934.98	1 / 243	26.42
	QPSK	649668	3745.02	1 / 1	25.84
		656000	3840.00	1 / 243	26.19
		662332	3934.98	1 / 243	26.31
	16-QAM	649668	3745.02	1 / 1	24.71
		656000	3840.00	1 / 1	24.74
		662332	3934.98	1 / 1	25.05
80 MHz	$\pi/2$ BPSK	649334	3740.01	1 / 215	25.87
		656000	3840.00	1 / 215	26.20
		662666	3939.99	1 / 215	26.33
	QPSK	649334	3740.01	1 / 1	25.76
		656000	3840.00	1 / 215	26.15
		662666	3939.99	1 / 215	26.34
	16-QAM	649334	3740.01	1 / 1	24.45
		656000	3840.00	1 / 1	24.66
		662666	3939.99	1 / 1	24.93
70 MHz	$\pi/2$ BPSK	649000	3735.00	1 / 1	25.72
		656000	3840.00	1 / 187	26.07
		663000	3945.00	1 / 187	26.24
	QPSK	649000	3735.00	1 / 1	25.74
		656000	3840.00	1 / 187	26.05
		663000	3945.00	1 / 187	26.23
	16-QAM	649000	3735.00	1 / 1	24.48
		656000	3840.00	1 / 1	24.80
		663000	3945.00	1 / 1	24.97
60 MHz	$\pi/2$ BPSK	648668	3730.02	1 / 160	25.66
		656000	3840.00	1 / 160	25.89
		663332	3949.98	1 / 81	26.19
	QPSK	648668	3730.02	1 / 160	25.66
		656000	3840.00	1 / 160	25.85
		663332	3949.98	1 / 1	26.11
	16-QAM	648668	3730.02	1 / 1	24.40
		656000	3840.00	1 / 1	24.61
		663332	3949.98	1 / 1	25.06
50 MHz	$\pi/2$ BPSK	648334	3725.01	1 / 131	25.74
		656000	3840.00	1 / 66	26.12
		663666	3954.99	1 / 131	26.38
	QPSK	648334	3725.01	1 / 1	25.71
		656000	3840.00	1 / 131	26.10
		663666	3954.99	1 / 131	26.33
	16-QAM	648334	3725.01	1 / 1	24.70
		656000	3840.00	1 / 1	24.80
		663666	3954.99	1 / 1	24.98

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset	Page 52 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-65
NR Band 77 Power Class 2 Conducted Powers (40MHz through 10MHz) – Ant F

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	648000	3720.00	1 / 53	25.75
		656000	3840.00	1 / 53	25.88
		664000	3960.00	1 / 104	26.21
	QPSK	648000	3720.00	1 / 53	25.66
		656000	3840.00	1 / 104	25.86
		664000	3960.00	1 / 104	26.14
	16-QAM	648000	3720.00	1 / 1	24.57
		656000	3840.00	1 / 1	24.69
		664000	3960.00	1 / 1	24.83
30 MHz	$\pi/2$ BPSK	647668	3715.02	1 / 1	25.67
		656000	3840.00	1 / 1	25.95
		664332	3964.98	1 / 76	26.32
	QPSK	647668	3715.02	1 / 1	25.63
		656000	3840.00	1 / 76	25.91
		664332	3964.98	1 / 76	26.19
	16-QAM	647668	3715.02	1 / 1	24.55
		656000	3840.00	1 / 1	24.79
		664332	3964.98	1 / 1	25.02
25 MHz	$\pi/2$ BPSK	647500	3712.50	1 / 32	25.81
		656000	3840.00	1 / 63	25.99
		664500	3967.50	1 / 63	26.26
	QPSK	647500	3712.50	1 / 32	25.76
		656000	3840.00	1 / 63	25.94
		664500	3967.50	1 / 32	26.13
	16-QAM	647500	3712.50	1 / 1	24.54
		656000	3840.00	1 / 1	24.73
		664500	3967.50	1 / 1	24.91
20 MHz	$\pi/2$ BPSK	647334	3710.01	1 / 25	25.63
		656000	3840.00	1 / 1	25.86
		664666	3969.99	1 / 49	26.21
	QPSK	647334	3710.01	1 / 49	25.59
		656000	3840.00	1 / 1	25.78
		664666	3969.99	1 / 25	26.06
	16-QAM	647334	3710.01	1 / 1	24.51
		656000	3840.00	1 / 1	24.77
		664666	3969.99	1 / 1	24.94
15 MHz	$\pi/2$ BPSK	647168	3707.52	1 / 1	25.69
		656000	3840.00	1 / 1	25.91
		664832	3972.48	1 / 19	26.22
	QPSK	647168	3707.52	1 / 1	25.65
		656000	3840.00	1 / 36	25.78
		664832	3972.48	1 / 36	26.15
	16-QAM	647168	3707.52	1 / 1	24.53
		656000	3840.00	1 / 1	24.74
		664832	3972.48	1 / 1	25.11
10 MHz	$\pi/2$ BPSK	647000	3705.00	1 / 22	25.71
		656000	3840.00	1 / 22	25.92
		664332	3975.00	1 / 22	26.24
	QPSK	647000	3705.00	1 / 22	25.65
		656000	3840.00	1 / 22	25.88
		664332	3975.00	1 / 22	26.19
	16-QAM	647000	3705.00	1 / 1	24.44
		656000	3840.00	1 / 1	24.78
		664332	3975.00	1 / 1	25.03

FCC ID: A3LSMF966U	 element	HAC (RF EMISSIONS) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset		Page 53 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-66
2.4GHz 802.11b WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	19.65
2437	6	19.99
2462	11	19.81

Table 6-67
2.4GHz 802.11g WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	17.63
2437	6	17.80
2462	11	17.25

Table 6-68
2.4GHz 802.11n WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	17.99
2437	6	17.67
2462	11	17.05

Table 6-69
2.4GHz 802.11ac WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	17.99
2437	6	17.65
2462	11	17.04

Table 6-70
2.4GHz 802.11ax SU WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	17.98
2437	6	17.99
2462	11	17.49

Table 6-71
2.4GHz 802.11be WLAN Conducted Powers

Freq. [MHz]	Channel	Conducted Power [dBm]
2412	1	17.65
2437	6	17.70
2462	11	17.35

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 54 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-72
5GHz 20MHz BW 802.11a WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	17.49
	5200	40	17.11
	5220	44	17.11
	5240	48	17.14
UNII-2A	5260	52	17.23
	5280	56	17.26
	5300	60	17.20
	5320	64	17.20
UNII-2C	5500	100	17.12
	5600	120	17.11
	5620	124	17.03
	5720	144	17.23
UNII-3	5745	149	17.21
	5785	157	17.24
	5825	165	17.14
UNII-4	5845	169	17.35
	5865	173	17.34
	5885	177	17.38

Table 6-73
5GHz 20MHz BW 802.11n WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	17.12
	5200	40	17.20
	5220	44	17.29
	5240	48	17.28
UNII-2A	5260	52	17.35
	5280	56	17.34
	5300	60	17.37
	5320	64	17.33
UNII-2C	5500	100	17.26
	5600	120	17.22
	5620	124	17.24
	5720	144	17.35
UNII-3	5745	149	17.29
	5785	157	17.29
	5825	165	17.30
UNII-4	5845	169	17.49
	5865	173	17.49
	5885	177	17.41

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 55 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-74
5GHz 20MHz BW 802.11ac WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	17.10
	5200	40	17.15
	5220	44	17.24
	5240	48	17.26
UNII-2A	5260	52	17.27
	5280	56	17.29
	5300	60	17.27
	5320	64	17.27
UNII-2C	5500	100	17.21
	5600	120	17.21
	5620	124	17.14
	5720	144	17.30
UNII-3	5745	149	17.26
	5785	157	17.26
	5825	165	17.25
UNII-4	5845	169	17.50
	5865	173	17.43
	5885	177	17.41

Table 6-75
5GHz 20MHz BW 802.11ax WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	17.29
	5200	40	17.40
	5220	44	17.47
	5240	48	17.48
UNII-2A	5260	52	17.00
	5280	56	17.04
	5300	60	17.52
	5320	64	17.01
UNII-2C	5500	100	17.41
	5600	120	17.42
	5620	124	17.38
	5720	144	17.02
UNII-3	5745	149	17.50
	5785	157	17.52
	5825	165	17.46
UNII-4	5845	169	17.15
	5865	173	17.11
	5885	177	17.07

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 56 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-76
5GHz 20MHz BW 802.11be WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5180	36	17.30
	5200	40	17.38
	5220	44	17.46
	5240	48	17.48
UNII-2A	5260	52	17.55
	5280	56	17.57
	5300	60	17.55
	5320	64	17.02
UNII-2C	5500	100	17.42
	5600	120	17.42
	5620	124	17.38
	5720	144	17.01
UNII-3	5745	149	17.45
	5785	157	17.50
	5825	165	17.49
UNII-4	5845	169	17.13
	5865	173	17.08
	5885	177	17.06

Table 6-77
5GHz 40MHz BW 802.11n WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	9.54
	5230	46	17.47
UNII-2A	5270	54	17.10
	5310	62	11.12
UNII-2C	5510	102	12.97
	5590	118	17.57
	5630	126	17.46
	5710	142	17.19
UNII-3	5755	151	17.07
	5795	159	17.10
UNII-4	5835	167	17.29
	5875	175	17.32

Table 6-78
5GHz 40MHz BW 802.11ac WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	9.55
	5230	46	17.29
UNII-2A	5270	54	17.52
	5310	62	11.11
UNII-2C	5510	102	13.04
	5590	118	17.22
	5630	126	17.06
	5710	142	17.32
UNII-3	5755	151	17.11
	5795	159	17.25
UNII-4	5835	167	17.04
	5875	175	17.11

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 57 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-79
5GHz 40MHz BW 802.11ax WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	9.22
	5230	46	17.59
UNII-2A	5270	54	17.27
	5310	62	10.62
UNII-2C	5510	102	12.54
	5590	118	17.09
	5630	126	17.07
	5710	142	17.31
UNII-3	5755	151	17.20
	5795	159	17.28
UNII-4	5835	167	17.42
	5875	175	17.45

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 58 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-80
5GHz 40MHz BW 802.11be WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	9.11
	5230	46	17.47
UNII-2A	5270	54	17.10
	5310	62	10.63
UNII-2C	5510	102	12.57
	5590	118	16.94
	5630	126	16.92
	5710	142	17.15
UNII-3	5755	151	17.03
	5795	159	17.11
UNII-4	5835	167	17.23
	5875	175	17.26

Table 6-81
5GHz 80MHz BW 802.11ac WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.34
UNII-2A	5290	58	10.54
UNII-2C	5530	106	13.66
	5610	122	17.22
	5690	138	17.38
UNII-3	5775	155	14.26
UNII-4	5885	171	14.48

Table 6-82
5GHz 80MHz BW 802.11ax WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.41
UNII-2A	5290	58	10.36
UNII-2C	5530	106	13.16
	5610	122	17.04
	5690	138	17.11
UNII-3	5775	155	14.51
UNII-4	5885	171	14.70

Table 6-83
5GHz 80MHz BW 802.11be WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	10.47
UNII-2A	5290	58	10.33
UNII-2C	5530	106	13.33
	5610	122	17.21
	5690	138	17.09
UNII-3	5775	155	14.14
UNII-4	5885	171	14.29

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 59 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 6-84
5GHz 160MHz BW 802.11ac WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1/2A	5250	50	12.48
UNII-2C	5570	114	14.62
UNII-3/4	5815	163	17.21

Table 6-85
5GHz 160MHz BW 802.11ax WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1/2A	5250	50	12.11
UNII-2C	5570	114	14.63
UNII-3/4	5815	163	17.09

Table 6-86
5GHz 160MHz BW 802.11be WLAN Conducted Powers

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1/2A	5250	50	12.11
UNII-2C	5570	114	14.56
UNII-3/4	5815	163	17.09

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 60 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

7. JUSTIFICATION OF HELD TO EAR MODES TESTED

I. Analysis of RF Air Interface Technologies

An analysis was performed, following the guidance of §4.7 of the ANSI standard, of the RF air interface technologies being evaluated. For this analysis, the stated peak power levels were verified to be within the requirements detailed in Table 3-2.

II. Individual Mode Evaluations

Table 7-1
Peak power levels of individual air interfaces evaluated for emission compliance

Air Interface	Peak Power*** [dBm]	Peak Power Level Margin [dB]	Emission Compliance
GSM - GSM850	33.50	1.50	PASS
GSM - GSM1900	31.00	1.00	PASS
GSM - EDGE850	28.00	7.00	PASS
GSM - EDGE1900	27.00	5.00	PASS
UMTS - RMC	25.30	9.70	PASS
UMTS - AMR	25.30	9.70	PASS
UMTS - HSPA	24.30	10.70	PASS
LTE FDD	25.50	9.50	PASS
LTE TDD - Band 41 (PC3)	25.00	6.00	PASS
LTE TDD - Band 48	24.00	7.00	PASS
LTE TDD - Uplink Carrier Aggregation	24.00	7.00	PASS
NR FDD	25.00	10.00	PASS
NR TDD - n41 PC2	27.00	4.00	PASS
NR TDD - n41 PC1.5 UL MIMO**	30.00	1.00	PASS
NR TDD - n48	24.50	6.50	PASS
NR TDD - n77 PC2	27.00	4.00	PASS
NR TDD - n77 PC1.5 UL MIMO**	30.00	1.00	PASS
WIFI - 2.4GHz	23.00	8.00	PASS
WIFI - 5GHz	21.00	10.00	PASS
Simultaneous 2.4GHz and 5GHz WIFI Operations*	24.00	7.00	PASS

* Note: This value is calculated as the linear sum of the worst-case power for each band and antenna combination while in simultaneous 2.4GHz and 5GHz operation. This calculation is conservative and for use in this investigation only.

** Note: NR TDD was additionally evaluated at a higher power level due to PC1.5 UL MIMO operations.

***Note: The peak power level represents the maximum allowable limit, set at +1 dB above the specified conducted power target.

III. WD RF Peak power level conclusions

Per ANSI C63.19-2019, all applicable air interfaces demonstrate compliance to the peak power requirements shown in Table 3-2 of this report.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 61 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8. EQUIPMENT LIST

Table 8-1
Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Keysight Technologies	N9020A	MXA Signal Analyzer	2/7/2025	Annual	2/7/2026	MY53421544
Amplifier Research	15S1G6	Amplifier	N/A	CBT*	N/A	433978
Anritsu	MA24106A	USB Power Sensor	5/2/2024	Annual	5/2/2025	2205501
Control Company	4040	Digital Thermometer	4/15/2024	Biennial	4/15/2026	240310265
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	N/A	CBT*	N/A	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	N/A	CBT*	N/A	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	N/A	CBT*	N/A	1226
Pasternack	PE2237-20	Bidirectional Coupler	N/A	CBT*	N/A	N/A
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/9/2023	Biennial	8/9/2025	162125
Rohde & Schwarz	CMW500	Radio Communication Tester	8/10/2023	Biennial	8/10/2025	140144
Rohde & Schwarz	CMX500	Radio Communication Tester	11/11/2024	Annual	11/11/2025	100298
Seekonk	NC-100	Torque Wrench (8" lb)	N/A		N/A	21053

Calibration traceable to the National Institute of Standards and Technology (NIST).

***Note: CBT (Calibrated Before Testing).** Prior to testing, the measurement paths containing a cable, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 62 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9. MEASUREMENT UNCERTAINTY

Table 9-1
Uncertainty Estimation Table

Wireless Communications Device Near-Field Measurement Uncertainty Estimation							
Uncertainty Component	Data (dB)	Data Type	Prob. Dist.	Divisor	CI (E)	Unc. (dB)	Notes/Comments
Measurement System							
RF System Reflections	0.50	Tolerance	N	1.00	1	0.50	* Refl. < -20 dB
Field Probe Calibration	0.21	Tolerance	N	1.00	1	0.21	
Field Probe Isotropy	0.01	Tolerance	N	1.00	1	0.01	
Field Probe Frequency Response	0.135	Tolerance	N	1.00	1	0.14	
Field Probe Linearity	0.013	Tolerance	N	1.00	1	0.01	
Modulation Interference Factor	0.20	Tolerance	R	1.73	1	0.12	Applicable for M-rating testing
Boundary Effects	0.105	Accuracy	R	1.73	1	0.06	*
Probe Positioning Accuracy	0.20	Accuracy	R	1.73	1	0.12	*
Probe Positioner	0.050	Accuracy	R	1.73	1	0.03	*
Extrapolation/Interpolation	0.045	Tolerance	R	1.73	1	0.03	*
Resolution to 2mm error	0.21	Tolerance	N	1.00	1	0.21	
System Detection Limit	0.05	Tolerance	R	1.73	1	0.03	*
Readout Electronics	0.015	Tolerance	N	1.00	1	0.02	*
Integration Time	0.11	Tolerance	R	1.73	1	0.06	*
Response Time	0.033	Tolerance	R	1.73	1	0.02	*
Phantom Thickness	0.10	Tolerance	R	1.73	1	0.06	*
System Repeatability (Field x 2=power)	0.17	Tolerance	N	1.00	1	0.17	*
Test Sample Related							
Device Positioning Vertical	0.2	Tolerance	R	1.73	1	0.12	*
Device Positioning Lateral	0.045	Tolerance	R	1.73	1	0.03	*
Device Holder and Phantom	0.1	Tolerance	R	1.73	1	0.06	*
Power Drift	0.21	Tolerance	R	1.73	1	0.12	
Combined Standard Uncertainty (k=1)						0.66	16.3%
Expanded Uncertainty [95% confidence]						1.31	32.6%
Expanded Uncertainty [95% confidence] on Field						0.66	16.3%

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.
2. * Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid immunity tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 63 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10. CONCLUSION

The measurements indicate that the referenced wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19-2019 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 64 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

11. REFERENCES

1. ANSI C63.19-2019, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, August 2019
2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v06r02," September 19, 2022
3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v04," February 23, 2022
4. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
9. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
10. Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
13. Decker, W. F., Crawford, M. L., and Wilson, W. A., "Construction of a Large Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Feb. 1979.
14. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
15. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 65 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

16. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
17. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
18. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
19. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
20. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
21. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
25. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMF966U	 HAC (RF EMISSIONS) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-31.A3L	Test Dates: 03/24/2025 – 04/11/2025	DUT Type: Portable Handset
		Page 66 of 66

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.