

HEARING AID COMPATIBILITY

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 16677, Korea

Date of Testing:
03/31/2025 – 04/10/2025
Test Site/Location:
Element Washington DC LLC,
Columbia, MD, USA
Test Report Serial No.:
1M2502210015-33.A3L
Date of Issue:
04/29/2025

FCC ID: A3LSMF966U

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: Volume Control Testing
Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2019
ANSI/TIA-5050-2018
285076 D01 HAC Guidance v06
285076 D04 Volume Control v01
DUT Type: Portable Handset
Model: SM-F966U
Additional Model(s): SM-F966U1
Test Device Serial No.: Sample [S/N: 0582M]

HAC Compliance: PASS

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2019 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


RJ Ortanez
Executive Vice President





FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 1 of 74

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION.....	4
3.	ANSI C63.19-2019 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	FCC 2G & 3G MEASUREMENTS.....	18
6.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	20
7.	VONR TEST SYSTEM SETUP AND DUT CONFIGURATION.....	22
8.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	25
9.	INTERIM WAIVER DA 23-914	27
10.	VOLUME CONTROL TEST SUMMARY	28
11.	MEASUREMENT UNCERTAINTY	33
12.	EQUIPMENT LIST	34
13.	TEST DATA.....	35
14.	CALIBRATION CERTIFICATES.....	62
15.	CONCLUSION.....	69
16.	REFERENCES	70
17.	TEST SETUP PHOTOGRAPHS	72

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 2 of 74

1. INTRODUCTION

On July 10th, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that percentage, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Ambient Conditions

1. Ambient temperature: 23 °C ± 5 °C
2. Relative humidity (RH): 0% < RH < 80%
3. Baseband magnetic ambient noise: >10 dB below the measurement level, where applicable

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

4. RF Electric-field emissions
5. T-coil mode, magnetic-signal strength in the audio band
6. T-coil mode, magnetic-signal frequency response through the audio band
7. T-coil mode, magnetic-signal and noise articulation index
8. Volume Control, receive conversational gain performance
9. Volume Control, receive distortion and noise performance
10. Volume Control, receive acoustic frequency response performance

The hearing aid must be measured for:


- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid *in-vitu*

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 3 of 74

2. DUT DESCRIPTION


FCC ID: A3LSMF966U
Applicant: Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 16677, Korea
Model: SM-F966U
Additional Model(s): SM-F966U1
Serial Number: 0582M
HW Version: REV1.0
SW Version: F966U.001
Antenna: Internal Antenna
DUT Type: Portable Handset

I. Band Selection

This device supports LTE/NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of a band falls completely within a band with a larger transmission frequency range, both bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range.


II. Device Configuration

Please note the two device configurations evaluated with the DUT are referred to as 'FOLDER – OPEN' for the unfolded configuration and 'FOLDER - CLOSED' for the folded configuration of the device. 'FOLDER - Closed' configuration is considered by the manufacturer to be the default usage scenario of the device for held-to-ear calling. There is only one earpiece located on the front side of the device with the smaller LED screen. The side of the device with the larger LED screen in unfolded configuration does not have an earpiece and is not evaluated as a held-to-ear configuration. The 'FOLDER - CLOSED' configuration evaluates the device as a typical bar phone while the 'FOLDER - OPEN' configuration evaluates the device in the larger unfolded configuration with earpiece held to ear. FOLDER-OPEN was additionally tested to ensure acoustic consistency with the fully tested FOLDER-CLOSED configuration.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 4 of 74

**Table 2-1
HAC Air Interfaces**

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name(s) of Voice Service(s)	Supported Codec(s)	Volume Control Evaluated	Test Category		
								Conversational Gain	Distortion	Frequency Response
GSM	850	VO	Yes ¹	Yes: WIFI or BT	CMRS Voice	EFR	Yes	FR V1, FR V2, HR V1	N/A	
	1900									
	GPRS/EDGE	VD	No ¹	Yes: WIFI or BT	Google Meet	OPUS ⁵	No	N/A		
UMTS	850	VD	Yes ¹	Yes: WIFI or BT	CMRS Voice	AMR	Yes	NB AMR, WB AMR	N/A	
	1700									
	1900									
	HSPA	VD	No ¹	Yes: WIFI or BT	Google Meet	OPUS ⁵	No	N/A		
LTE (FDD)	680 (B71)	VD	Yes ^{1,2}	Yes: NR, WIFI or BT	VoLTE, Google Meet	VoLTE: AMR, EVS Google Meet: OPUS ⁵	Yes	NB AMR, WB AMR, NB EVS, WB EVS	NB EVS 24.4KBPS, WB EVS 128.0KBPS	NB EVS 24.4KBPS, WB EVS 128.0KBPS
	700 (B12)									
	780 (B13)									
	790 (B14)									
	850 (B5)									
	850 (B26)									
	1700 (B4)									
	1700 (B66)									
	1900 (B2)									
	1900 (B25)									
	2300 (B30)									
	2500 (B7)									
LTE (TDD)	2600 (B41)	VD	Yes ^{1,2}	Yes: NR, WIFI or BT	VoLTE, Google Meet	VoLTE: AMR, EVS Google Meet: OPUS ⁵	Yes	NB AMR, WB AMR, NB EVS, WB EVS	NB EVS 24.4KBPS, WB EVS 128.0KBPS	NB EVS 24.4KBPS, WB EVS 128.0KBPS
	2600 (B38)									
	3600 (B48)									
LTE NTN	1640 (B255)	DT	No	N/A						
NR (FDD)	680 (n71)	VD	Yes ^{1,2}	Yes: LTE, WIFI or BT	VoNR, Google Meet	VoNR: AMR, EVS Google Meet: OPUS ⁵	Yes	NB AMR, WB AMR, NB EVS, WB EVS	NB EVS 24.4KBPS, WB EVS 128.0KBPS	NB EVS 24.4KBPS, WB EVS 128.0KBPS
	700 (n12)									
	790 (n14)									
	850 (n26)									
	850 (n5)									
	1700 (n70)									
	1700 (n66)									
	1900 (n2)									
	1900 (n25)									
	2300 (n30)									
	2500 (n7)									
NR (TDD)	2600 (n41)	VD	Yes ^{1,2}	Yes: LTE, WIFI or BT	VoNR, Google Meet	VoNR: AMR, EVS Google Meet: OPUS ⁵	Yes	NB AMR, WB AMR, NB EVS, WB EVS	NB EVS 24.4KBPS, WB EVS 128.0KBPS	NB EVS 24.4KBPS, WB EVS 128.0KBPS
	2600 (n38)									
	3500 (n77, DoD)									
	3500 (n78, DoD)									
	3600 (n78)									
	3600 (n48)		No ⁶	Yes: LTE, WIFI or BT	VoNR, Google Meet	VoNR: AMR, EVS Google Meet: OPUS ⁵	No	N/A		
	3700 (n77)									
	3700 (n78)									
	24500 (n258)									
	28000 (n261)									
	39000 (n260)									
WIFI	2450	VD	Yes ¹	Yes: GSM, UMTS, LTE, or NR	VoWIFI, Google Meet	VoWIFI: AMR, EVS Google Meet: OPUS ⁵	Yes	NB AMR, WB AMR, NB EVS, WB EVS	NB EVS 24.4KBPS, WB EVS 128.0KBPS	NB EVS 24.4KBPS, WB EVS 128.0KBPS
	5200 (U-NII 1)									
	5300 (U-NII 2A)									
	5500 (U-NII 2C)									
	5800 (U-NII 3)									
	5900 (U-NII 4)		Yes ^{1,2,3}							
	6175 (U-NII 5)									
	6475 (U-NII 6)									
	6700 (U-NII 7)									
	7000 (U-NII 8)									
BT	2450	DT	No	Yes: GSM, UMTS, LTE, or NR	N/A					
Type Transport:			Notes:							
VO = Voice Only			1. According to FCC guidance and waiver DA 23-914, all CMRS codecs supported by the model are tested for Conversational Gain.							
DT = Digital Data - Not intended for Voice Services			2. According to FCC guidance and waiver DA 23-914, manufacturer has chosen NB EVS 24.4KBPS and WB EVS 128KBPS audio codecs and bitrate supported on this device for Frequency Response and Distortion evaluation.							
VD = CMRS and/or IP Voice over Data Transport			3. WIFI U-NII band 5 was evaluated for operations which are entirely below 6 GHz. Operations partially or entirely above 6 GHz were not evaluated due to equipment limitations and being outside of the current scope of ANSI C63.19 and FCC HAC regulations.							
			4. WIFI U-NII bands 6 through 8 were not evaluated due to being outside the scope of ANSI C63.19 and FCC HAC regulations.							
			5. According to FCC guidance, AMR and EVS codecs were chosen for Volume Control evaluation. Other supported codecs were not evaluated.							
			6. n258, n260, and n261 are currently outside the scope of ANSI C63.19 and FCC HAC regulations therefore they were not evaluated.							

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 5 of 74	

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

3. ANSI C63.19-2019 PERFORMANCE CATEGORIES

I. Acoustic Coupling Requirements

According to ANSI C63.19-2019 §7, devices shall comply with ANSI/TIA-5050-2018 in order to comply with C63.19-2019. No additional requirements are imposed, and no special allowances are made regarding testing in compliance with ANSI/TIA-5050-2018.

II. ANSI/TIA-5050-2018 Volume Control

All Volume Control requirements (i.e., Receive Conversational Gain, Receive Distortion and Noise, and Receive Frequency Response) shall be met for at least one volume control setting for narrowband as well as wideband (as applicable) per §5. All testing shall be performed with both a 2N mounting force and an 8N mounting force. The passing volume control setting may be different between narrowband and wideband tests as well as between 2N and 8N tests, but the setting may not change within a test in order to pass the separate performance criteria.

Note: The test data margins indicate a margin from the limit for compliance.

1. Receive Conversational Gain Performance

With a mounting force of 8N, the DUT shall have a Receive Conversational Gain of $\geq 18\text{dB}$ per §5.1.1, and with a mounting force of 2N, the DUT shall have a Receive Conversational Gain of $\geq 6\text{dB}$ per ANSI/TIA-5050-2018 §5.1.1.

2. Receive Distortion and Noise Performance

With a mounting force of 8N and 2N, the Pulsed Noise Signal-to-Distortion and Noise Ratio (PN-SDNR) of the DUT shall be $\geq 20\text{dB}$ when tested over the applicable 1/3 octave band center frequencies per ANSI/TIA-5050-2018 §5.2.1. For narrowband, the applicable 1/3 octave band center frequencies are from 400Hz to 3.15kHz; for wideband, the applicable 1/3 octave band center frequencies are from 250Hz to 5kHz.

3. Receive Acoustic Frequency Response Performance

With a mounting force of 8N and 2N, the Receive Acoustic Frequency Response, as measured at the DRP in 1/12 octave bands and after translation to the diffuse field or free field, shall fall between the applicable upper and lower limits per ANSI/TIA-5050-2018 §5.3.1. See below for narrowband limits (Table 3-1 and Figure 3-1) and wideband limits (Table 3-2 and Figure 3-2).


FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 6 of 74

Table 3-1
Narrowband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
300	-6	100	+6
3400	-6	4000	+6

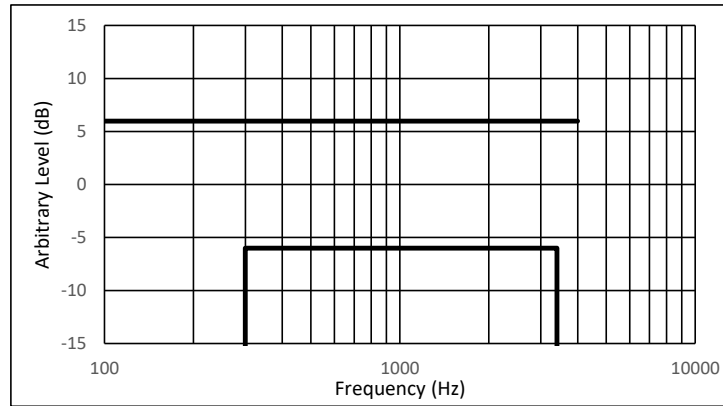


Figure 3-1
Narrowband Receive Frequency Response Limits

Table 3-2
Wideband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
200	-10	100	+6
300	-6	1000	+6
5000	-6	2000	+8
6000	-12	8000	+8

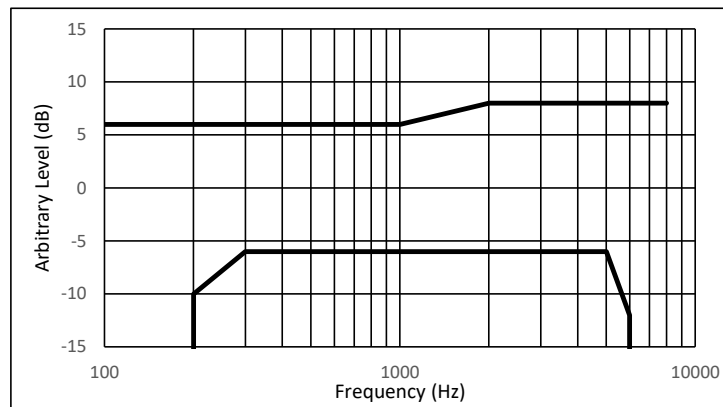



Figure 3-2
Wideband Receive Frequency Response Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 7 of 74

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an RF-shielded chamber:

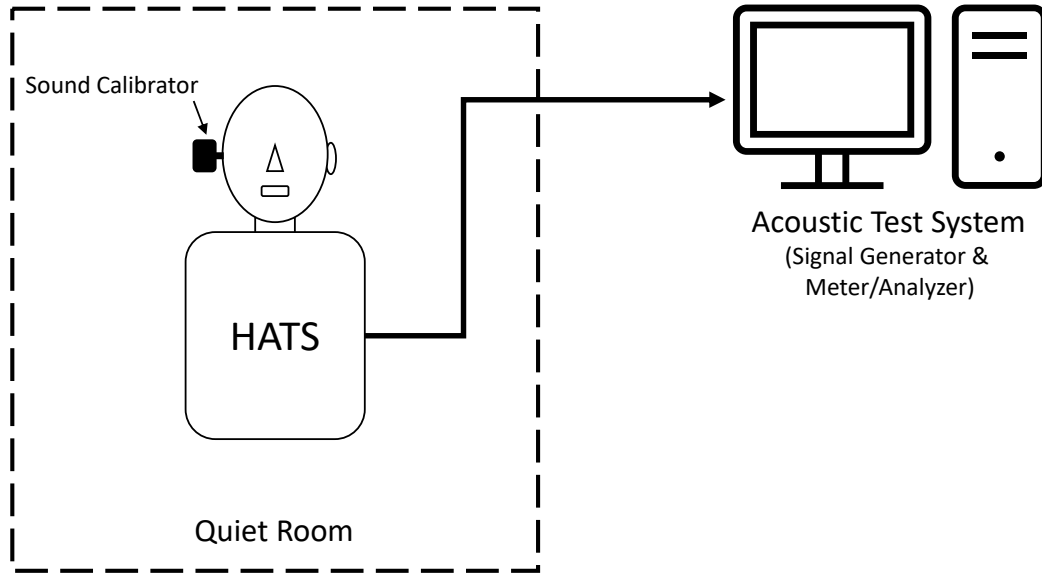


Figure 4-1
Verification Setup with Sound Calibrator

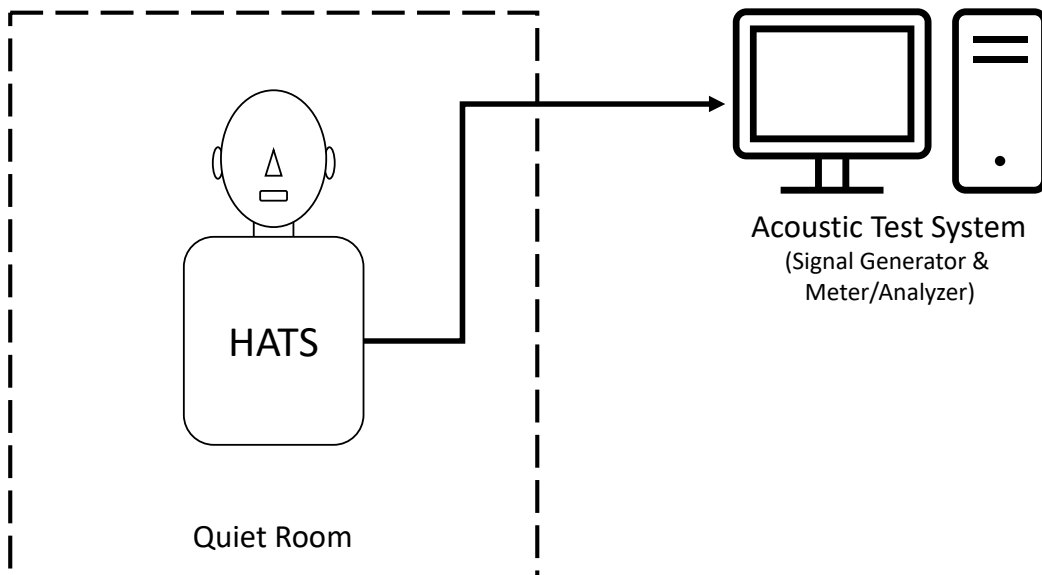



Figure 4-2
Ambient Noise Verification Setup

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 8 of 74

II. Head and Torso Simulator

Manufacturer:	Brüel & Kjær
Model:	Type 4128-D
Frequency Response:	Conforms to ITU-T Rec. P.58 up to 16 kHz
Ear Simulator:	ITU-T Rec. P.57 Type 3.3- based calibrated ear simulator complying with ITU-T Rec. P.57
Ear Simulator Output:	7-core, 3 m cable terminated with a Lemo® (1B) plug
Pressure-field Response:	± 1 dB from 5 Hz to 7 kHz ± 3 dB from 3.15 Hz to 20 kHz
Typical Noise Level	19 dBA at DRP
Pinna Simulator:	Compliant with ITU-T Rec. P.58
Total Head and Torso Height:	695mm
HATS Dimensions:	Main dimensions comply with the dimensional requirements of ITU-T Rec. P.58
Handset Positioner:	Brüel & Kjær Type 4606
Positioner Angles:	Variable positions; $\angle A$ adjustable from $+15^\circ$ to $+35^\circ$, $\angle B$ adjustable from $+30^\circ$ to -10° , $\angle C$ adjustable from $+20^\circ$ to -20° ; 0.5° resolution
Applied Ear Force:	Mounting force can be adjusted from 0 to 18 N



Figure 4-3
Heat and Torso Simulator
(with Handset Positioner)

III. IEEE Std 269 Uncompressed Real Male Speech

Manufacturer:	IEEE
Active Frequency Range:	100 Hz – 8 kHz
Stimulus Type:	Multi-talker speech signal, four male speakers
Single Sample Duration:	12 seconds
Activity Level:	84%

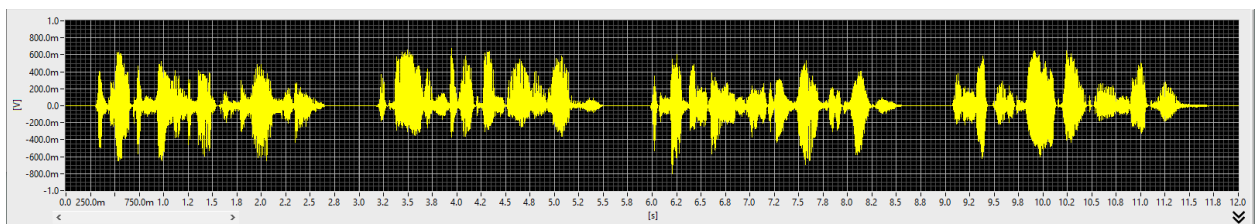



Figure 4-4
Temporal Characteristic of full IEEE 269

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 9 of 74

Volume Control Measurement Block Diagrams:


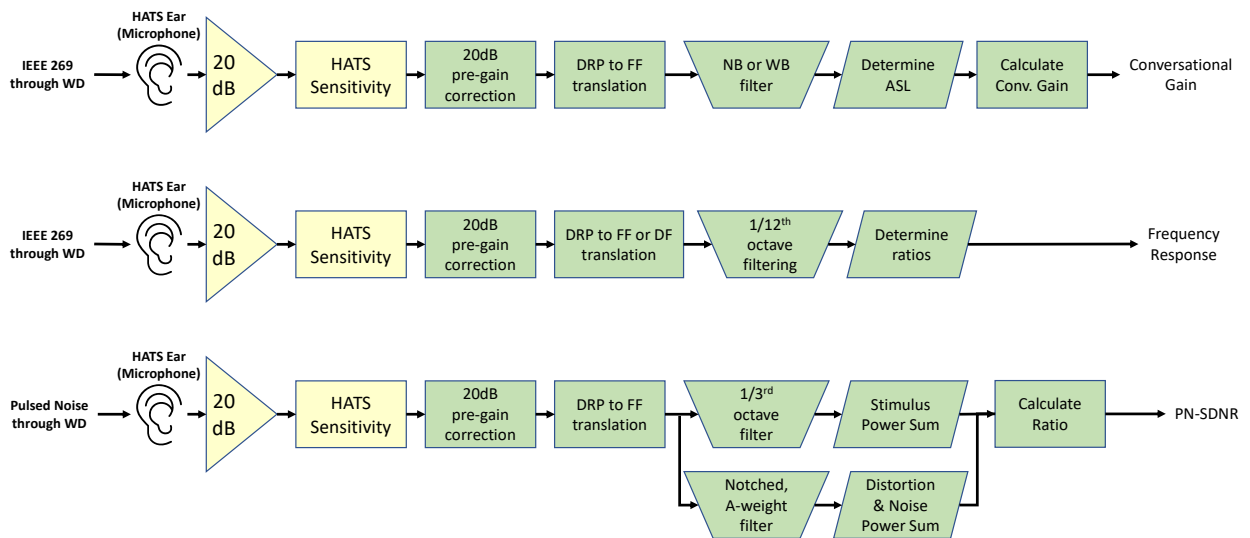


Figure 4-5 Acoustic Measurement Processing Steps

IV. Test Procedure

1. Ambient Noise Check per ANSI/TIA-5050-2018 §3.1 (See Figure 4-2)
 - a. Ambient noise was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/12 octave filtering.
 - b. “A-weighting” was applied to the measurements per the definition of a “quiet room” in ANSI/TIA-5050-2018. Below is the verification of the system processing A-weighting between system input to output within 0.5 dB of the theoretical result:

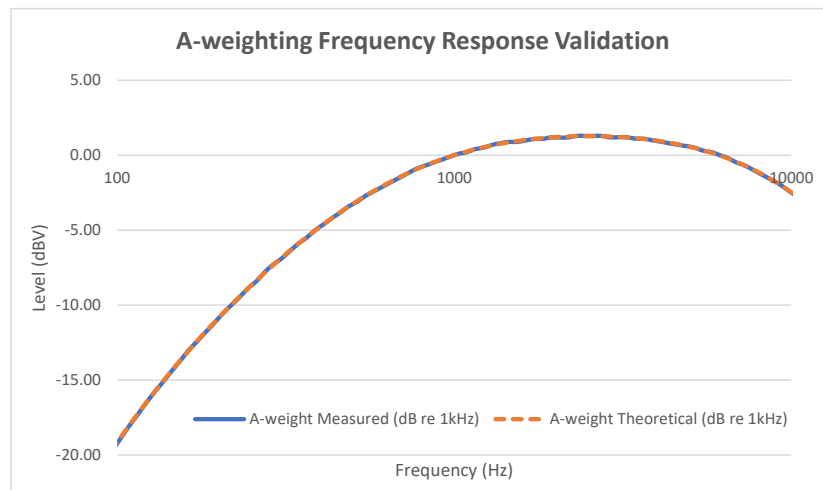

**Figure 4-6
A-weighting Frequency Response Validation**


FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 10 of 74

Table 4-1
A-weighting Frequency Response Validation

f (Hz)	A-weight Measured (dB re 1kHz)	A-weight Theoretical (dB re 1kHz)	Deviation (dB)	f (Hz)	A-weight Measured (dB re 1kHz)	A-weight Theoretical (dB re 1kHz)	Deviation (dB)
97.2	-19.63	-19.54	-0.09	1030	0.10	0.09	0.01
103	-18.81	-18.74	-0.07	1090	0.20	0.25	-0.05
109	-18.01	-17.97	-0.04	1150	0.40	0.38	0.02
115	-17.31	-17.26	-0.05	1220	0.50	0.52	-0.02
122	-16.51	-16.50	-0.01	1300	0.70	0.66	0.04
130	-15.71	-15.70	-0.01	1370	0.80	0.76	0.04
137	-15.11	-15.06	-0.05	1450	0.89	0.85	0.04
145	-14.41	-14.38	-0.03	1540	0.89	0.94	-0.05
154	-13.71	-13.68	-0.03	1630	0.99	1.02	-0.03
163	-13.01	-13.04	0.03	1730	1.09	1.08	0.01
173	-12.40	-12.38	-0.02	1830	1.09	1.14	-0.05
183	-11.80	-11.77	-0.03	1940	1.19	1.18	0.01
194	-11.20	-11.16	-0.04	2050	1.18	1.22	-0.04
205	-10.60	-10.60	0.00	2180	1.19	1.24	-0.05
218	-10.00	-9.98	-0.02	2300	1.29	1.26	0.03
230	-9.50	-9.46	-0.04	2440	1.29	1.27	0.02
244	-8.90	-8.90	0.00	2590	1.29	1.27	0.02
259	-8.40	-8.35	-0.05	2740	1.29	1.26	0.03
274	-7.80	-7.84	0.04	2900	1.19	1.24	-0.05
290	-7.30	-7.35	0.05	3070	1.20	1.22	-0.02
307	-6.90	-6.86	-0.04	3250	1.20	1.18	0.02
325	-6.40	-6.39	-0.01	3450	1.10	1.13	-0.03
345	-5.90	-5.90	0.00	3650	1.10	1.08	0.02
365	-5.50	-5.46	-0.04	3870	1.00	1.01	-0.01
387	-5.00	-5.02	0.02	4100	0.90	0.93	-0.03
410	-4.60	-4.59	-0.01	4340	0.80	0.84	-0.04
434	-4.20	-4.19	-0.01	4600	0.70	0.73	-0.03
460	-3.80	-3.79	-0.01	4870	0.61	0.61	0.00
487	-3.40	-3.42	0.02	5160	0.51	0.48	0.03
516	-3.10	-3.05	-0.05	5460	0.31	0.33	-0.02
546	-2.70	-2.71	0.01	5790	0.21	0.16	0.05
579	-2.40	-2.37	-0.03	6130	0.01	-0.02	0.03
613	-2.10	-2.05	-0.05	6490	-0.19	-0.22	0.03
649	-1.80	-1.75	-0.05	6880	-0.49	-0.45	-0.04
688	-1.50	-1.47	-0.03	7290	-0.69	-0.70	0.01
729	-1.20	-1.20	0.00	7720	-0.99	-0.97	-0.02
772	-0.90	-0.94	0.04	8180	-1.30	-1.26	-0.04
818	-0.70	-0.71	0.01	8660	-1.59	-1.58	-0.01
866	-0.50	-0.49	-0.01	9170	-1.89	-1.92	0.03
917	-0.30	-0.28	-0.02	9720	-2.29	-2.30	0.01
972	-0.10	-0.09	-0.01	10300	-2.69	-2.70	0.01

- c. The ambient room noise is a power sum of the A-weighted spectrum from 100-10,000 Hz. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level. Therefore, the setup in this step was used to verify the power sum post-processing for measurements. See below block diagram:

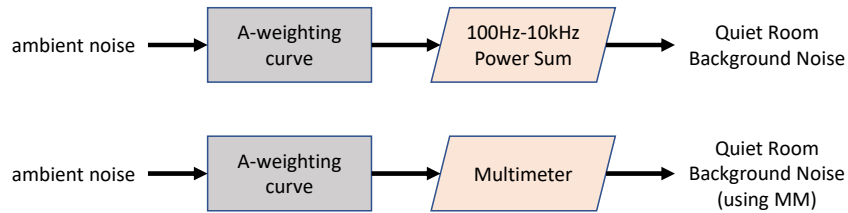



Figure 4-7
Power Sum Validation Block Diagram

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset		Page 11 of 74

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

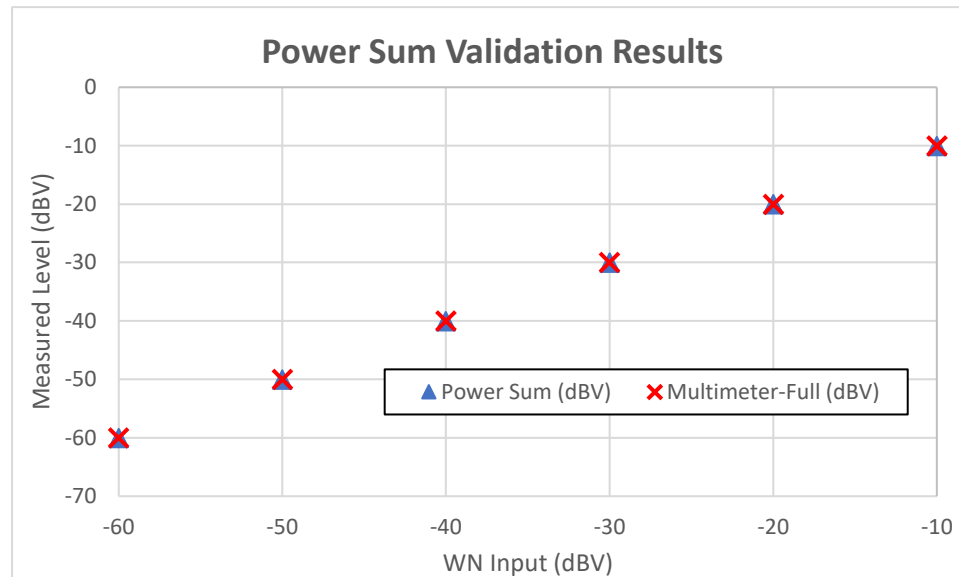



Figure 4-8
Power Sum Validation Results


Table 4-2
Power Sum Validation Results

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.05	-60.03	0.02
-50	-50.04	-50.03	0.01
-40	-40.04	-40.02	0.02
-30	-30.04	-30.02	0.02
-20	-20.05	-20.03	0.02
-10	-10.05	-10.03	0.02


- d. The maximum room noise inside the quiet room was recorded and verified to be less than or equal to 40dBA.
2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the HATS, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. HATS Sensitivity Verification
A pure tone of 1kHz was applied into the HATS ear (microphone) using a calibrated sound calibrator. The sound calibrator generates an expected sound pressure level of 97.1dB SPL at the HATS ear which was used to verify the measured signal from the HATS. This measured value was verified to be within ± 0.2 dB of the 97.1dB SPL expected value (see Page 32).
3. Measurement Test Setup
 - a. Positioning DUT in HATS

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 12 of 74

- i. According to ANSI/TIA-5050-2018 §4.2, a HATS which is ITU-T P.58 compliant and an ear simulator which is ITU-T P.57 type 3.3 compliant are used for Volume Control testing.
 - ii. Per ANSI/TIA-5050-2018 §4.3, the DUT is positioned on the HATS in the standard test position according to IEEE Std 269 or, alternatively, a recommended test position specified by the manufacturer. Manufacturer recommended positions must comply with the recommended test position requirements in IEEE Std 269 and, if used, are noted in this report.
 - iii. The DUT is mounted such that a certain force, in Newtons (N), is applied when the DUT is placed against the artificial pinna. ANSI/TIA-5050-2018 specifies a mounting force of either 2N or 8N, depending on the test. Mounting force is indicated for each test in this report.
 - b. Speech Signal Setup and Analysis
 - i. For testing in this report, the test signal is the uncompressed real male speech as published with IEEE Std 269 unless otherwise specified.
 - ii. The test signal is used with an Active Speech Level (ASL) of -20dBm0, and analysis is performed with 1/12 octave bands averaged over one complete sequence of the test signal unless otherwise specified.
 - iii. The acoustic listener reference point for testing is the Free Field (FF) for Receive Conversational Gain and PN-SDNR measurements. For Receive Frequency Response (FR) measurements, the acoustic listener reference point is either the Free Field (FF) or the Diffuse Field (DF); the chosen acoustic listener reference point for FR measurements in this report is indicated for each test.
 - iv. Per the Spring 2021 TCB Workshop, all supported audio voice codecs are tested for the DUT. For each codec, narrowband and wideband modes are tested if supported. For narrowband modes, a source coding bit-rate of 12.2 kbps, or the closest available setting, is used. For wideband modes, a source coding bit-rate of 12.65 kbps, or the closest available setting, is used.
 - c. DUT Radio Configuration
 - i. Each supported codec may be tested with any air interface which supports the codec being tested. Air interfaces used for testing in this report are noted with each test.
- 4. Measurement Data Analysis
 - a. Receive Conversational Gain
 - i. With the DUT at its maximum volume control setting and tone control set such that the DUT meets the FR requirements, the test signal is applied to the DUT, and the resulting acoustic output is measured at the Drum Reference Point (DRP). A lower volume setting may be used if needed to meet the PN-SDNR requirements.
 - ii. The appropriate post processing is applied according to the system processing chain shown in Figure 4-5, and the Receive Conversational Gain is determined.
 - iii. Receive Conversational Gain is tested with both 8N and 2N mounting forces.
 - b. PN-SDNR
 - i. The DUT is tested for Receive Distortion and Noise using PN-SDNR which is the ratio of the signal power to the full, A-weighted distortion and noise power of the DUT output (in dB).
 - ii. The pulsed noise stimulus signal is a combination of the real speech test signal followed by a series of pink noise pulses from a 1/3 octave band. A stimulus signal is generated for each 1/3 octave band centered within the applicable frequency range for either narrowband or wideband.
 - iii. Each stimulus signal is applied to the DUT, and the resulting acoustic output is measured at the DRP.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 13 of 74

- iv. The appropriate post-processing is applied according to the system-processing chain shown in Figure 4-5, and the PN-SDNR is determined by subtracting the full, A-weighted distortion and noise power, from the signal power. This process is repeated to determine the PN-SDNR for all applicable 1/3 octave band frequencies.
 - v. PN-SDNR is tested with both 8N and 2N mounting force and may be repeated at volume levels below maximum if needed to get passing results. Note that Receive Conversational Gain must still receive passing results while at the lower volume level if such a lower level is used for PN-SDNR compliance.
- c. Receive Frequency Response
- i. Receive Frequency Response (FR) is measured with respect to the appropriate curves from either Figure 3-1, for narrowband modes, or Figure 3-2, for wideband modes. The measurement is taken over one full sequence of the test signal, although a delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing is applied according to the system-processing chain shown in Figure 4-5, and the FR is determined. All 1/12 octave band center frequencies are plotted and aligned with respect to the applicable mask in a floating, or best fit, fashion.
 - iii. FR is tested with both 8N and 2N mounting forces and may be repeated with tone control settings other than default if needed to get passing results. Note that Receive Conversational Gain must still receive passing results while using the non-default tone control settings if such non-default settings are used for FR compliance.
- d. Speech Signal Setup to Base Station Simulator
- i. See Section 6 and 8 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE) and Voice Over WIFI (VoWIFI) testing.
 - ii. See Section 7 for more information regarding CMX500 audio level settings for Voice Over NR (VoNR).
- e. WD Radio Configuration Selection
- i. The device was chosen to be tested in the default test configuration (See Section 5 for more information regarding worst-case configurations for GSM and UMTS. LTE configuration information can be found in Section 6. NR configuration information can be found in Section 7. WIFI configuration information can be found in Section 8).

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 14 of 74

V. Test Setup

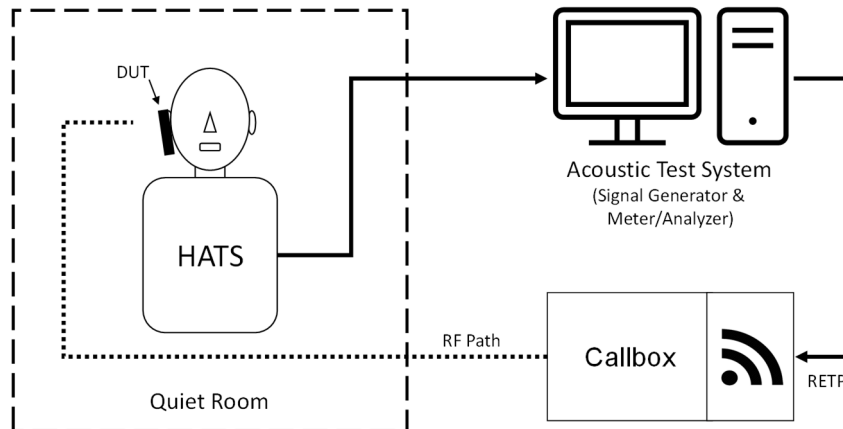


Figure 4-9
Volume Control Test Setup


Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. Deviation from ANSI/TIA-5050-2018 Test Procedure

Deviation from ANSI/TIA-5050-2018 Test Procedure to indicate guidance in FCC HAC waiver was followed.

VII. Air Interface Technologies Tested

According to ANSI/TIA-5050-2018, any air interface which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications may be chosen for Volume Control testing. According to the Spring 2021 TCB Workshop, all voice codecs supported by the DUT must be tested for Volume Control. The air interfaces used during testing were chosen such that all voice codecs supported by the DUT were able to be tested. See Table 2-1 for more details regarding which modes were tested.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 15 of 74

VIII. Wireless Device Channels and Frequencies

1. 2G/3G (GSM/UMTS) Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. The middle channel for each supported band was tested to confirm that results between bands are substantially similar. More information on default test configuration chosen for testing can be found in Section 5.

Table 4-3
Center Channels and Frequencies

Test frequencies & associated channels	
Channel	Frequency (MHz)
Cellular 850	
190 (GSM)	836.60
4183 (UMTS)	836.60
AWS 1750	
1412 (UMTS)	1730.40
PCS 1900	
661 (GSM)	1880
9400 (UMTS)	1880

2. 4G (LTE) Modes


The middle channel for every band was tested for Receive Conversational Gain to confirm that the band configuration for VoLTE over IMS does not substantially affect the results. The default band was additionally tested for Receive Frequency Response and Receive Distortion and Noise. More information on default LTE test configuration chosen for testing can be found in Section 6. See Tables 10-6 and 10-7 for full Volume Control evaluation.

3. 5G (NR) Modes

The middle channel for every band was tested for Receive Conversational Gain to confirm that the band configuration for VoNR over IMS does not substantially affect the results. The default band was additionally tested for Receive Frequency Response and Receive Distortion and Noise. More information on default NR test configuration chosen for testing can be found in Section 7. See Tables 10-8 and 10-9 for full Volume Control evaluation.

4. WIFI

The middle channel for each IEEE 802.11 standard was tested for Receive Conversational Gain to confirm that the standard and data rate configuration for VoWIFI over IMS does not substantially affect the results. The 2.4GHz IEEE802.11b was additionally tested for Receive Frequency Response and Receive Distortion and Noise. More information on default WIFI test configuration chosen for testing can be found in Section 8. See Tables 10-10 and 10-11 for full Volume Control evaluation.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 16 of 74

IX. Test Flow

The flow diagram below was followed:

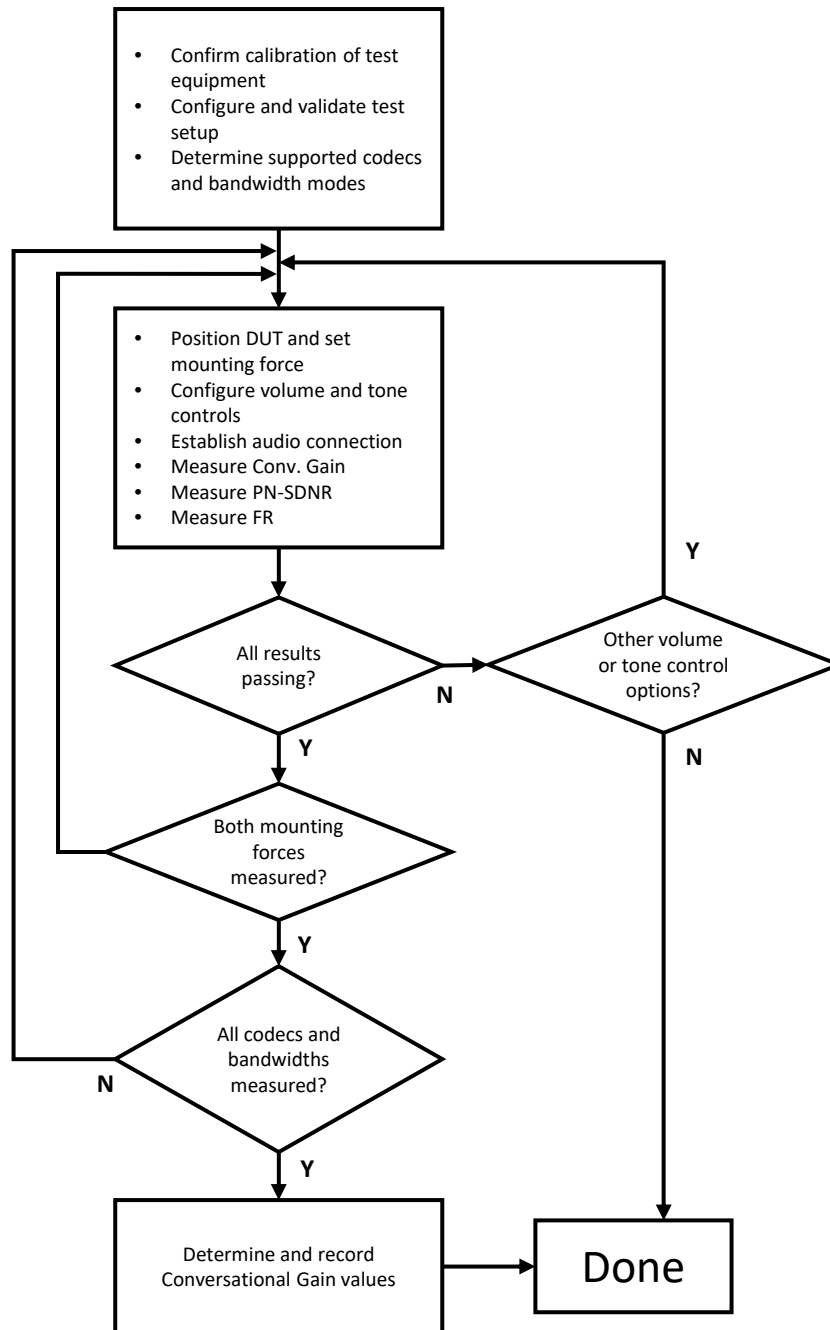



Figure 4-10
C63.19 Volume Control Test Process

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 17 of 74

5. FCC 2G & 3G MEASUREMENTS

I. Test System Setup for CMRS Voice T-coil Testing

1. Equipment Setup

The general test setup used for CMRS Voice is shown below. The callbox used when performing CMRS Voice Volume Control measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

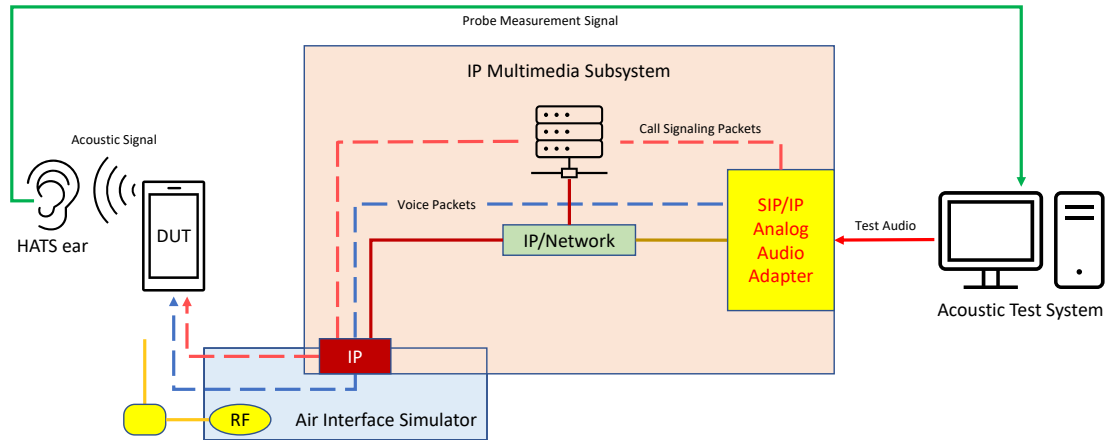



Figure 5-1
Test Setup for VoLTE over IMS Volume Control Measurements

2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for CMRS Voice Volume Control testing is -20dBm0 (ASL) and shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full-scale levels resulted in the -20dBm0 (ASL) speech input level to the DUT for the CMRS Voice connection.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 18 of 74

II. GSM Test Configurations

1. Band Configuration

An investigation was performed to ensure the GSM band used for testing does not substantially affect the measurement results. GSM EFR FR V1 codec was used for this evaluation. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. See below table for comparisons between different bands:

Table 5-1
GSM Results by Band

Mode	Antenna Configuration	Channel	HAC Mode	Mounting Force (N)	Traffic Mode	Codec Bandwidth	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
GSM850	ANT A	190	On	2	FR V1	NB	MAX -1	35.87	13.11	6.00	7.11	PASS
	ANT E							35.87	14.01	6.00	8.01	PASS
GSM1900	ANT B	512	On	2	FR V1	NB	MAX -1	35.87	13.57	6.00	7.57	PASS

1. Mute off; Backlight off; Max Volume-1; Max Contrast
2. Power Control Bits = GSM850: PCL=0, GSM1900: PCL=0;

III. UMTS Test Configurations


1. Band Configuration

An investigation was performed to ensure that UMTS band used for testing does not substantially affect the measurement results. NB AMR 23.85kbps codec was used for this evaluation. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. See below table for comparisons between different bands:

Table 5-2
UMTS Results by Radio Configuration

Mode	Channel	Antenna Configuration	HAC Mode	Mounting Force (N)	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
UMTS V	4183	ANT A	On	2	NB	23.85	MAX -1	35.87	13.93	6.00	7.93	Pass
		ANT E						35.87	14.28	6.00	8.28	Pass
UMTS IV	1412	ANT B	On	2	NB	23.85	MAX -1	35.87	13.91	6.00	7.91	Pass
UMTS II	9400	ANT B	On	2	NB	23.85	MAX -1	35.87	14.19	6.00	8.19	Pass

1. Mute off; Backlight off; Max Volume-1; Max Contrast
2. Power Control Bits = "All Up"

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 19 of 74

6. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS Volume Control measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

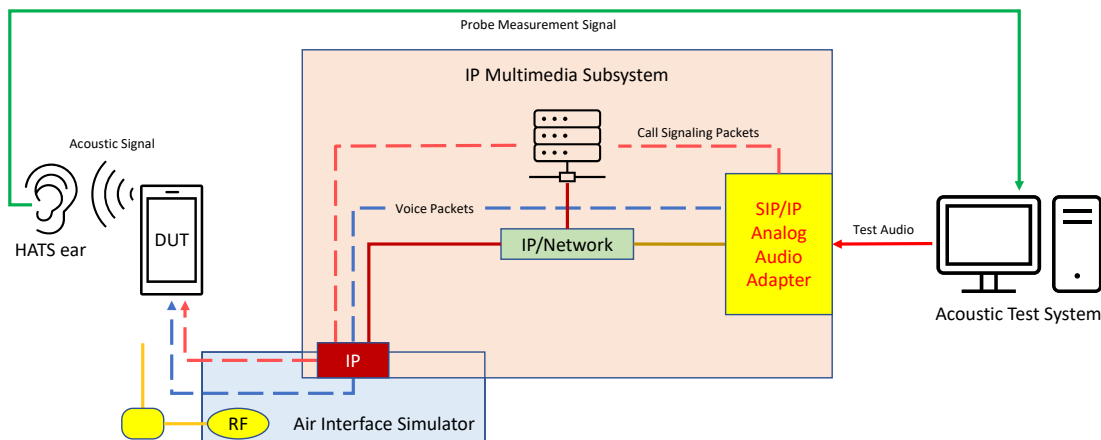



Figure 6-1
Test Setup for VoLTE over IMS Volume Control Measurements

2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for VoLTE over IMS Volume Control testing is -20dBm0 (ASL) and shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full-scale levels resulted in the -20dBm0 (ASL) speech input level to the DUT for the VoLTE over IMS connection.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 20 of 74

II. DUT Configuration for VoLTE over IMS Volume Control Testing

1. Radio Configuration

An investigation was performed to ensure the modulation and RB configuration used for testing do not substantially affect the measurement results. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. QPSK, 1RB, 0RB offset was used as the default testing configuration for the handset given the results of this investigation. See below table for comparison between different radio configurations:

Table 6-1
VoLTE over IMS Results by Radio Configuration


Mode	RF Bandwidth (MHz)	Radio Configuration (Modulation/RB/0RB offset)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Rate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
LTE Band 66	20	QPSK/1RB/0RB offset	132322	On	2	EVS	NB	24.40	MAX -1	DF	35.87	6.33	3.58	13.88	6.00	7.88	PASS
		16QAM/1RB/0RB offset								DF	35.87	8.48	3.34	13.78	6.00	7.78	PASS
		64QAM/1RB/0RB offset								DF	31.81	7.30	2.62	13.40	6.00	7.40	PASS
		256QAM/1RB/0RB offset								FF	31.81	11.47	2.71	13.27	6.00	7.27	PASS
		QPSK/1RB/50RB offset								DF	35.87	6.26	3.47	13.60	6.00	7.60	PASS
		QPSK/1RB/99RB offset								DF	35.87	7.67	3.55	13.44	6.00	7.44	PASS
		QPSK/50RB/0RB offset								DF	35.87	6.42	3.57	13.80	6.00	7.80	PASS
		QPSK/50RB/25RB offset								DF	35.87	8.23	3.49	14.13	6.00	8.13	PASS
		QPSK/50RB/50RB offset								DF	35.87	6.85	3.56	13.46	6.00	7.46	PASS
		QPSK/100RB/0RB offset								DF	35.87	9.03	3.22	13.41	6.00	7.41	PASS

2. Band Configuration

An investigation was performed to ensure the LTE band used for testing does not substantially affect the measurement results. NB EVS 24.40KBPS codec was used for evaluation. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. LTE B66 ANT B was used as the default test band for VoLTE over IMS Volume Control testing given the results of this investigation. See below table for comparisons between different bands:

Table 6-2
VoLTE over IMS Results by Band

Mode	Antenna Configuration	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance												
LTE Band 71	A	20	133297	On	2	EVS	NB	24.40	MAX -1	35.87	13.60	6.00	7.60	PASS												
	E									35.87	13.87	6.00	7.87	PASS												
LTE Band 12	A	10	23095							35.87	14.06	6.00	8.06	PASS												
	E									35.87	13.70	6.00	7.70	PASS												
LTE Band 13	A	10	23230							35.87	13.52	6.00	7.52	PASS												
	E									35.87	13.38	6.00	7.38	PASS												
LTE Band 14	A	10	23330							35.87	13.37	6.00	7.37	PASS												
	E									35.87	13.44	6.00	7.44	PASS												
LTE Band 5	A	10	20525							35.87	13.58	6.00	7.58	PASS												
	E									35.87	14.06	6.00	8.06	PASS												
LTE Band 26	A	15	26865							35.87	13.99	6.00	7.99	PASS												
	E									35.87	13.79	6.00	7.79	PASS												
LTE Band 4	B	20	20175							On	2	EVS	NB	24.40	MAX -1	35.87	13.57	6.00	7.57	PASS						
	G															35.87	13.89	6.00	7.89	PASS						
	B															35.87	13.60	6.00	7.60	PASS						
LTE Band 66	G	20	132322													35.87	13.47	6.00	7.47	PASS						
	B															35.87	13.47	6.00	7.47	PASS						
LTE Band 2	B	20	18900													On	2	EVS	NB	24.40	MAX -1	35.87	14.09	6.00	8.09	PASS
	G									35.87	13.46	6.00	7.46	PASS												
LTE Band 25	B	20	26365							35.87	13.67	6.00	7.67	PASS												
	G									35.87	14.18	6.00	8.18	PASS												
LTE Band 30	B	10	27710							On	2	EVS	NB	24.40	MAX -1							35.87	13.48	6.00	7.48	PASS
	G																					35.87	13.40	6.00	7.40	PASS
LTE Band 7	B	20	21100													35.87	13.84	6.00	7.84	PASS						
	G															35.87	13.49	6.00	7.49	PASS						
LTE Band 41 (PC3)	B	20	40620													35.87	13.99	6.00	7.99	PASS						
	G															35.87	13.88	6.00	7.88	PASS						
LTE Band 48	F	20	55990													35.87	13.93	6.00	7.93	PASS						
	C															35.87	14.15	6.00	8.15	PASS						

FCC ID: A3LSMF966U	 HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset
		Page 21 of 74

7. VONR TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoNR over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoNR over IMS is shown below. The callboxes used when performing VoNR over IMS Volume Control measurements are a CMX500 and CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server. The CMX500 provided the baseband signal to perform NR signaling. An external USB audio interface is used to perform the A/D conversion and ensure proper speech input level to the DUT.

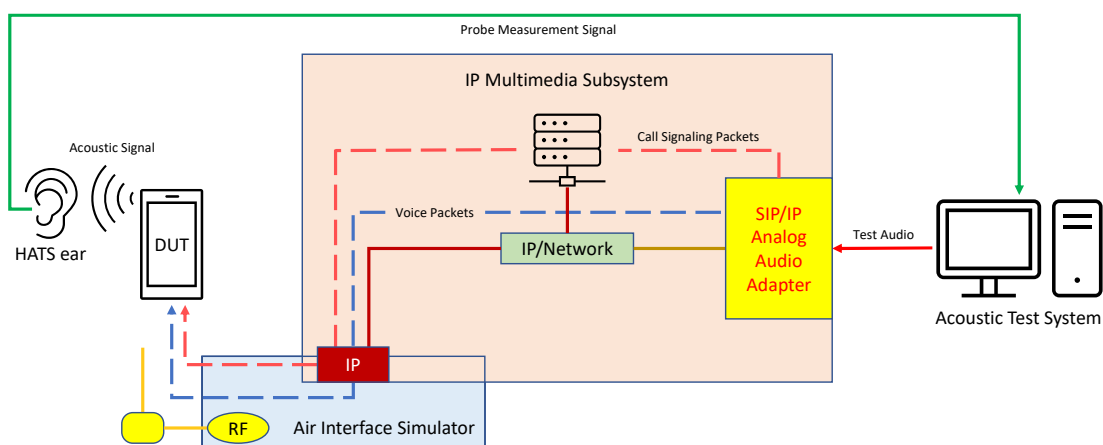



Figure 7-1
Test Setup for VoNR over IMS Volume Control Measurements

2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for VoNR over IMS Volume Control testing is -20dBm0 (ASL) and shall be used for the normal speech input level. The acoustic test system was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 (ASL) speech input level to the DUT for the VoNR over IMS connection.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 22 of 74

II. DUT Configuration for VoNR over IMS Volume Control Testing

1. Radio Configuration


An investigation was performed to ensure the waveform, modulation, and RB configuration used for testing do not substantially affect the measurement results. The effects of waveform, modulation, and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. CP-OFDM, QPSK, 216RB, 0RB offset was used as the default testing configuration for the handset given the results of this investigation. See below table for comparison between different radio configurations:

Table 7-1
VoNR over IMS Results by Radio Configuration – CP-OFDM

Mode	Waveform	Radio Configuration (Modulation/RB/RB offset)	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dB)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
NR n66	CP-OFDM	QPSK/1RB/1RB offset	40	349000	On	2	EVS	NB	24.40	MAX-1	DF	32.34	7.68	3.57	13.22	6.00	7.22	PASS
		16QAM/1RB/1RB offset									DF	32.34	10.86	3.40	13.24	6.00	7.24	PASS
		64QAM/1RB/1RB offset									DF	32.34	8.67	3.31	13.55	6.00	7.55	PASS
		256QAM/1RB/1RB offset									DF	32.34	8.84	3.47	13.78	6.00	7.78	PASS
		QPSK/1RB/108RB offset									DF	32.34	7.73	3.51	13.22	6.00	7.22	PASS
		QPSK/1RB/214RB offset									DF	32.34	7.48	3.49	13.03	6.00	7.03	PASS
		QPSK/108RB/0RB offset									DF	32.34	8.32	3.45	13.14	6.00	7.14	PASS
		QPSK/108RB/54RB offset									DF	32.34	7.15	3.13	13.12	6.00	7.12	PASS
		QPSK/108RB/108RB offset									DF	32.34	8.32	3.40	13.41	6.00	7.41	PASS
		QPSK/216RB/0RB offset									DF	32.34	7.12	3.22	13.77	6.00	7.77	PASS
											DF	32.34						
											DF	32.34						

Table 7-2
VoNR over IMS Results by Radio Configuration – DFT-s-OFDM

Mode	Waveform	Radio Configuration (Modulation/RB/RB offset)	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dB)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	FCC Margin from Limit (dB)	Compliance
NR n66	DFT-s-OFDM	BPSK/1RB/1RB offset	40	349000	On	2	EVS	NB	24.40	MAX-1	DF	32.34	7.41	3.39	13.78	6.00	7.78	PASS
		QPSK/1RB/1RB offset									DF	32.34	8.02	3.53	13.63	6.00	7.63	PASS
		16QAM/1RB/1RB offset									DF	32.34	10.09	3.19	13.19	6.00	7.19	PASS
		64QAM/1RB/1RB offset									DF	32.34	10.62	3.50	13.16	6.00	7.16	PASS
		256QAM/1RB/1RB offset									DF	32.34	7.26	3.52	13.18	6.00	7.18	PASS
		QPSK/1RB/108RB offset									DF	32.34	8.54	3.38	13.93	6.00	7.93	PASS
		QPSK/1RB/214RB offset									DF	32.34	7.56	3.50	13.52	6.00	7.52	PASS
		QPSK/108RB/0RB offset									DF	32.34	8.52	3.29	13.61	6.00	7.61	PASS
		QPSK/108RB/54RB offset									DF	32.34	8.33	3.48	13.64	6.00	7.64	PASS
		QPSK/108RB/108RB offset									DF	32.34	9.05	3.45	13.15	6.00	7.15	PASS
		QPSK/216RB/0RB offset									DF	32.34	3.33	2.53	13.83	6.00	7.83	PASS
											DF	32.34						


FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 23 of 74

2. Band Configuration

An investigation was performed to ensure the NR band used for testing does not substantially affect the measurement results. NB EVS 24.40KBPS codec was used for evaluation. The effects of band configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. NR n66 ANTENNA Config B was used as the default test band for VoNR over IMS Volume Control testing given the results of this investigation. See below table for comparisons between different bands:

Table 7-3
VoNR over IMS Results by Band

Mode	Antenna Config	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate	Ambient Noise (dBA)	Conversational Gain (CG) (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
NR n71	A	35	136100	On	2	EVS	NB	24.40	32.34	13.10	6.00	7.10	PASS
	E								32.34	13.13	6.00	7.13	PASS
NR n12	A	15	141500						32.34	13.56	6.00	7.56	PASS
	E								32.34	13.14	6.00	7.14	PASS
NR n14	A	10	158600						32.34	13.13	6.00	7.13	PASS
	E								32.34	13.09	6.00	7.09	PASS
NR n26	A	20	166300						32.34	13.48	6.00	7.48	PASS
	E								32.34	13.54	6.00	7.54	PASS
NR n70	B	15	340500	On	2	EVS	NB	24.40	32.34	13.54	6.00	7.54	PASS
	G								32.34	13.49	6.00	7.49	PASS
NR n66	B	40	349000						32.34	13.78	6.00	7.78	PASS
	G								32.34	13.49	6.00	7.49	PASS
NR n25	B	40	376500	On	2	EVS	NB	24.40	32.34	13.11	6.00	7.11	PASS
	G								32.34	13.09	6.00	7.09	PASS
NR n30	B	10	462000	On	2	EVS	NB	24.40	32.34	13.40	6.00	7.40	PASS
	G								32.34	13.05	6.00	7.05	PASS
NR n7	B	40	507000						32.34	13.54	6.00	7.54	PASS
	G								32.34	13.21	6.00	7.21	PASS
NR n41 (PC2)	G	40	518598						32.34	13.94	6.00	7.94	PASS
	B								32.34	13.08	6.00	7.08	PASS
NR n77 DoD (PC2)	F	100	633334						32.34	13.39	6.00	7.39	PASS
	C								32.34	13.73	6.00	7.73	PASS
NR n77 C (PC2)	F	40	656000						32.34	13.27	6.00	7.27	PASS
	C								32.34	13.14	6.00	7.14	PASS
NR n48	F	40	641668						32.34	13.86	6.00	7.86	PASS
	C								32.34	13.76	6.00	7.76	PASS

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 24 of 74

8. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS is shown below. The callbox used when performing VoWIFI over IMS Volume Control measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

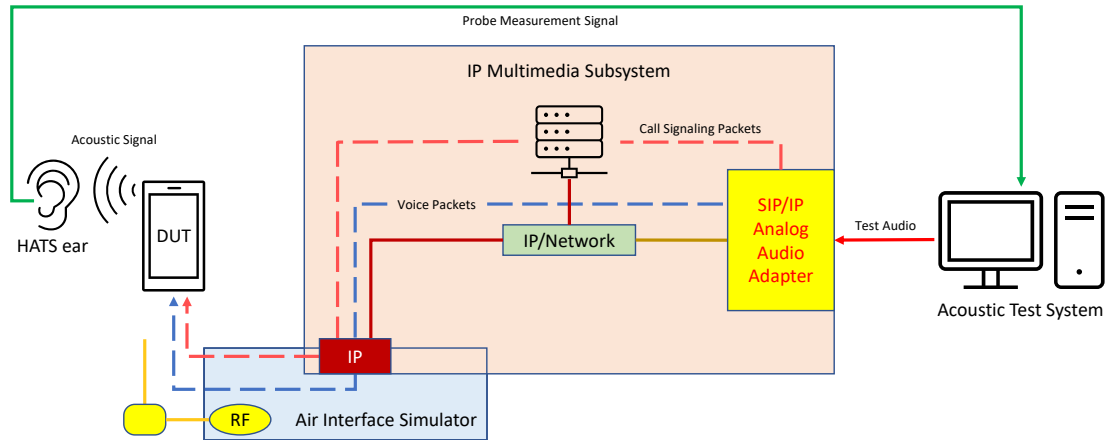



Figure 8-1
Test Setup for VoLTE over IMS Volume Control Measurements

2. Audio Level Settings

According to ANSI/TIA-5050-2018, the appropriate audio level to be used for VoWIFI over IMS Volume Control testing is -20dBm0 (ASL) and shall be used for the normal speech input level. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full-scale levels resulted in the -20dBm0 (ASL) speech input level to the DUT for the VoWIFI over IMS connection.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 25 of 74

II. DUT Configuration for VoWiFi over IMS Volume Control Testing

1. IEEE Standard Configuration

An investigation was performed to ensure the IEEE standard used for testing does not substantially affect the measurement results. The effects of IEEE standard were found to be independent of WIFI data rate; therefore, only one data rate was used for each IEEE standard in this investigation. IEEE 802.11b was used as the default testing configuration for the handset given the results of this investigation. See below table for comparison between different radio configurations:

Table 8-1
VoWiFi over IMS Results by IEEE Standard


Mode	Band	RF Bandwidth (MHz)	U-NI Band	Channel	HAC Mode	Mourning Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
IEEE 802.11b	2.4GHz	20	N/A	6	On	2	EVS	NB	24.40	MAX -1	DF	32.34	7.22	3.03	13.74	6.00	7.74	PASS
IEEE 802.11g											DF	32.34	3.12	3.12	14.06	6.00	8.06	PASS
IEEE 802.11n											DF	32.34	6.60	3.10	13.80	6.00	7.80	PASS
IEEE 802.11ac											DF	32.34	8.37	3.22	14.00	6.00	8.00	PASS
IEEE 802.11ax (SU)											DF	32.34	6.83	3.15	14.04	6.00	8.04	PASS
IEEE 802.11ax (RU)											DF	32.34	7.51	3.35	13.29	6.00	7.29	PASS
IEEE 802.11be (SU)											DF	32.34	3.35	3.41	13.86	6.00	7.66	PASS
IEEE 802.11be (RU)											DF	32.34	10.98	3.36	13.51	6.00	7.51	PASS
IEEE 802.11a	5GHz	20	1	40	On	2	EVS	NB	24.40	MAX -1	DF	32.34	2.74	2.87	13.35	6.00	7.35	PASS
IEEE 802.11n											DF	32.34	9.66	3.27	13.48	6.00	7.48	PASS
IEEE 802.11ac											DF	32.34	10.36	3.67	13.87	6.00	7.87	PASS
IEEE 802.11ax (SU)											DF	32.34	8.09	3.30	13.24	6.00	7.24	PASS
IEEE 802.11ax (RU)											DF	32.34	11.42	3.18	13.38	6.00	7.38	PASS
IEEE 802.11be (SU)											DF	32.34	6.31	3.46	13.26	6.00	7.26	PASS
IEEE 802.11be (RU)											DF	32.34	7.91	3.32	13.28	6.00	7.28	PASS

2. Data Rate Configuration

An investigation was performed to ensure the WIFI data rate used for testing does not substantially affect the measurement results. The effects of data rate configuration were found to be independent of IEEE standard; therefore, only one IEEE standard was used for this investigation. 1Mbps was used as the default WIFI data rate for VoWiFi over IMS Volume Control testing given the results of this investigation. See below table for comparisons between different bands:


Table 8-2
VoWiFi over IMS Results by Data Rate

Mode	Band	RF Bandwidth (MHz)	Data Rate (Mbps)	Channel	HAC Mode	Mourning Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
IEEE 802.11b	2.4GHz	20	1	6	On	2	EVS	NB	24.40	MAX -1	DF	35.87	6.95	3.43	13.76	6.00	7.76	PASS
			2								DF	35.87	6.39	3.12	13.27	6.00	7.27	PASS
			5.5								DF	35.87	8.14	3.59	13.84	6.00	7.84	PASS
			11								DF	35.87	10.51	3.55	13.33	6.00	7.33	PASS

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 26 of 74

9. INTERIM WAIVER DA 23-914

- A. Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the Volume Control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:
- B. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a Receive Conversational Gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing.
- C. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a Receive Conversational Gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of Receive Conversational Gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing.
- D. For all other narrowband and wideband codecs not evaluated in 1.a. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Receive Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for Receive Conversational Gain and documented in the test report at the 2N and 8N levels with a gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate. The handset volume setting used to comply with 1.a. shall be used for these other CMRS codec evaluations.
- E. Any other codec for voice services embedded in the handset, not identified in section I and II above are not required to comply or demonstrate in the test reports for Receive Conversational Gain.
- F. Under the waiver, the manufacturer has chosen NB-EVS 24.4kbps and WB-EVS 128kbps audio codec bitrates for full evaluation.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 27 of 74


10. VOLUME CONTROL TEST SUMMARY

Table 10-1
Consolidated Tabled Results

	Conversational Gain (CG) (dB)		FR Margin (dB)	Distortion Value (dB)	C63.19 Compliance
	2N	8N*			
GSM	13.1	14.9	-	-	Pass
UMTS	13.4	14.6	-	-	Pass
LTE	13.2	15.0	1.5	6.2	Pass
NR	12.7	14.5	1.5	3.3	Pass
WLAN	13.5	15.1	1.40	2.7	Pass

* The requirement that a handset achieve at least an 18 dB Receive Conversational Gain with 8N has been waived under the waiver conditions of DA-23-914.

1. Receive Conversational Gain with Hearing Aid: 13 dB
2. Receive Conversational Gain without Hearing Aid: 14 dB

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 28 of 74

I. Raw Handset Data

Table 10-2
Raw Data Results for GSM – EFR – Folder Closed

Mode	Channel	HAC Mode	Mounting Force (N)	Traffic Mode	Codec Bandwidth	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
GSM850	128	On	2	FR V1	NB	MAX -1	35.87	13.70	6.00	7.70	PASS
				FR V2			35.87	13.41	6.00	7.41	PASS
				HR V1			35.87	14.42	6.00	8.42	PASS
			8	FR V1			35.87	14.88	6.00	8.88	PASS
				FR V2			35.87	15.64	6.00	9.64	PASS
				HR V1			35.87	15.50	6.00	9.50	PASS

Table 10-3
Raw Data Results for GSM – EFR – Folder Open

Mode	Channel	HAC Mode	Mounting Force (N)	Traffic Mode	Codec Bandwidth	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
GSM850	128	On	2	FR V1	NB	MAX -1	32.34	13.26	6.00	7.26	PASS
	128	On	8	FR V1	NB	MAX -1	32.34	15.16	6.00	9.16	PASS

Table 10-4
Raw Data Results for UMTS – Folder Closed


Mode	Channel	Mounting Force (N)	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
UMTS V	4183	2	NB	4.75	MAX -1	35.87	13.76	6.00	7.76	PASS
				12.20		35.87	13.98	6.00	7.98	PASS
			WB	6.60		35.87	13.95	6.00	7.95	PASS
				12.65		35.87	13.94	6.00	7.94	PASS
				23.85		35.87	13.90	6.00	7.90	PASS
				4.75		35.87	15.29	6.00	9.29	PASS
		8	NB	12.20		35.87	15.31	6.00	9.31	PASS
				6.60		35.87	16.01	6.00	10.01	PASS
			WB	12.65		35.87	15.52	6.00	9.52	PASS
				23.85		35.87	16.06	6.00	10.06	PASS

Table 10-5
Raw Data Results for UMTS – Folder Open

Mode	Channel	Mounting Force (N)	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	Ambient Noise (dBA)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
UMTS V	4183	2	NB	12.20	MAX -1	32.34	13.36	6.00	7.36	PASS
		8				32.34	14.60	6.00	8.60	PASS

Table 10-6
Raw Data Results for VoLTE – Folder Closed

Mode	RF Bandwidth (MHz)	Radio Configuration (Modulation/RB/RB offset)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Transition	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
LTE Band 25	20	QPSK1RB/ORB offset	28365	On	2	AMR	NB	4.75	MAX -1	-	35.87	-	-	14.07	6.00	8.07	PASS
								12.20		-	35.87	-	-	14.48	6.00	8.48	PASS
								4.75		-	35.87	-	-	15.32	6.00	9.32	PASS
								12.20		-	35.87	-	-	15.19	6.00	9.19	PASS
							WB	6.60		-	35.87	-	-	14.81	6.00	8.81	PASS
								12.65		-	35.87	-	-	14.36	6.00	8.36	PASS
								23.85		-	35.87	-	-	15.02	6.00	9.02	PASS
								6.60		-	35.87	-	-	15.69	6.00	9.69	PASS
								12.65		-	35.87	-	-	15.97	6.00	9.97	PASS
								23.85		-	35.87	-	-	16.11	6.00	10.11	PASS
					2	EVS	NB	5.90		-	35.87	-	-	14.39	6.00	8.39	PASS
								13.20		-	35.87	-	-	14.45	6.00	8.45	PASS
								24.40		DF	35.87	8.40	3.62	14.08	6.00	8.08	PASS
								5.90		-	35.87	-	-	15.06	6.00	9.06	PASS
								13.20		-	35.87	-	-	15.59	6.00	9.59	PASS
								24.40		DF	35.87	7.30	3.73	14.96	6.00	8.96	PASS
							WB	5.90		-	35.87	-	-	14.54	6.00	8.54	PASS
								24.40		-	35.87	-	-	14.44	6.00	8.44	PASS
								128.00		FF	35.87	9.88	2.55	14.61	6.00	8.61	PASS
								5.90		-	35.87	-	-	15.64	6.00	9.64	PASS
								24.40		-	35.87	-	-	15.30	6.00	9.30	PASS
								128.00		DF	35.87	9.78	2.06	15.70	6.00	9.70	PASS

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset		Page 29 of 74

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-7
Raw Data Results for VoLTE – Folder Open

Mode	RF Bandwidth (MHz)	Radio Configuration (Modulation/RB/RB offset)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance	
LTE Band 25	20	QPSK/1RB/ORB offset	26365	On	2	EVS	NB	24.40	MAX-1	DF	32.34	6.24	3.25	13.18	6.00	7.18	PASS	
					8					DF	32.34	9.39	3.28	15.07	6.00	9.07	PASS	
					2					FF	32.34	9.06	2.10	14.11	6.00	8.11	PASS	
					8					DF	32.34	9.94	1.54	15.75	6.00	9.75	PASS	
					2	EVS	WB	128.00		DF	32.34	6.24	3.25	13.18	6.00	7.18	PASS	
					8					DF	32.34	9.39	3.28	15.07	6.00	9.07	PASS	
					2					FF	32.34	9.06	2.10	14.11	6.00	8.11	PASS	
					8					DF	32.34	9.94	1.54	15.75	6.00	9.75	PASS	

Table 10-8
Raw Data Results for VoNR – Folder Closed

Mode	Waveform	Radio Configuration (Modulation/RB/RB offset)	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
NR n66	CP-OFDM	QPSK/216RB/ORB offset	40	349000	On	2	AMR	NB	4.75	MAX -1	-	32.34	-	-	13.64	6.00	7.64	PASS
						2			12.20		-	32.34	-	-	13.99	6.00	7.93	PASS
						8			4.75		-	32.34	-	-	14.87	6.00	8.87	PASS
						2			12.20		-	32.34	-	-	14.91	6.00	8.91	PASS
						8			6.60		-	32.34	-	-	14.00	6.00	8.00	PASS
						2		WB	12.65		-	32.34	-	-	14.23	6.00	8.23	PASS
						8			23.85		-	32.34	-	-	14.37	6.00	8.37	PASS
						2			6.60		-	32.34	-	-	15.62	6.00	9.62	PASS
						8			12.65		-	32.34	-	-	15.55	6.00	9.55	PASS
						2	EVS	NB	23.85		-	32.34	-	-	15.23	6.00	9.23	PASS
						8			9.90		-	32.34	-	-	13.61	6.00	7.61	PASS
						2			13.20		-	32.34	-	-	13.97	6.00	7.97	PASS
						8			24.40		DF	32.34	8.35	3.18	13.79	6.00	7.79	PASS
						2		WB	5.90		-	32.34	-	-	15.14	6.00	9.14	PASS
						8			13.20		-	32.34	-	-	15.21	6.00	9.21	PASS
						2			24.40		DF	32.34	10.55	3.59	14.81	6.00	8.81	PASS
						8			5.90		-	32.34	-	-	13.95	6.00	7.95	PASS
						2	EVS	NB	13.20		-	32.34	-	-	14.13	6.00	8.13	PASS
						8			128.00		FF	32.34	9.37	2.82	13.70	6.00	7.70	PASS
						2		WB	13.20		-	32.34	-	-	15.39	6.00	9.39	PASS
						8			128.00		-	32.34	-	-	15.54	6.00	9.54	PASS
						2			128.00		DF	32.34	9.30	2.14	15.92	6.00	9.92	PASS
						8			128.00		DF	32.34	9.30	2.14	15.92	6.00	9.92	PASS

Table 10-9
Raw Data Results for VoNR – Folder Open


Mode	Waveform	Radio Configuration (Modulation/RB/RB offset)	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance	
NR n66	CP-OFDM	QPSK/216RB/ORB offset	40	349000	On	2	EVS	NB	24.40	MAX -1	DF	32.34	7.03	3.46	12.74	6.00	6.74	PASS	
						8		DF	32.34		7.00	3.14	14.54	6.00	8.54	PASS			
						2		WB			DF	32.34	9.09	1.86	13.69	6.00	7.69	PASS	
						8					DF	32.34	9.05	1.52	14.66	6.00	8.66	PASS	

Table 10-10
Raw Data Results for VoWiFi – Folder Closed

Mode	Band	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
IEEE 802.11b	2.4GHz	20	6	On	2	AMR	NB	4.75	MAX -1	-	35.87	-	-	13.51	6.00	7.51	PASS
					8			12.20		-	35.87	-	-	13.80	6.00	7.80	PASS
					2		WB	4.75		-	35.87	-	-	15.55	6.00	9.55	PASS
					8			12.20		-	35.87	-	-	15.69	6.00	9.69	PASS
					2		WB	6.60		-	35.87	-	-	14.04	6.00	8.04	PASS
					8			12.65		-	35.87	-	-	14.04	6.00	8.04	PASS
					2		WB	23.85		-	35.87	-	-	14.15	6.00	8.15	PASS
					8			6.60		-	35.87	-	-	15.83	6.00	9.83	PASS
					2	EVS	NB	12.65		-	35.87	-	-	15.53	6.00	9.53	PASS
					8			23.85		-	35.87	-	-	16.27	6.00	10.27	PASS
					2		WB	5.90		-	35.87	-	-	13.90	6.00	7.90	PASS
					8			13.20		-	35.87	-	-	13.47	6.00	7.47	PASS
					2		WB	24.40		DF	35.87	7.49	3.58	13.75	6.00	7.75	PASS
					8			5.90		-	35.87	-	-	15.08	6.00	9.08	PASS
					2		WB	13.20		-	35.87	-	-	15.64	6.00	9.64	PASS
					8			24.40		DF	35.87	7.33	3.37	15.55	6.00	9.55	PASS
					2		WB	5.90		-	35.87	-	-	14.22	6.00	8.22	PASS
					8			24.40		-	35.87	-	-	14.15	6.00	8.15	PASS
					2		WB	128.00		FF	35.87	9.24	2.48	14.34	6.00	8.34	PASS
					8			5.90		-	35.87	-	-	15.76	6.00	9.76	PASS
					2		WB	24.40		-	35.87	-	-	15.32	6.00	9.32	PASS
					8			128.00		DF	35.87	9.05	2.21	16.33	6.00	10.33	PASS

Table 10-11
Raw Data Results for VoWiFi – Folder Open

Mode	Band	RF Bandwidth (MHz)	Channel	HAC Mode	Mounting Force (N)	Codec Type	Codec Bandwidth	Codec Bitrate (kbps)	Volume Level	DRP Translation	Ambient Noise (dBA)	Distortion Margin (dB)	FR Margin (dB)	Conversational Gain (dB)	FCC CG Limit (dB)	CG Margin (dB)	Compliance
IEEE 802.11b	2.4GHz	20	6	On	2	EVS	NB	24.40	MAX -1	DF	32.34	7.07	3.26	13.76	6.00	7.76	PASS
					8					DF	32.34	6.44	3.21	15.08	6.00	9.08	PASS
					2		WB	128.00		DF	32.34	7.50	2.08	13.56	6.00	7.56	PASS
					8					DF	32.34	8.94	1.38	15.49	6.00	9.49	PASS

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 30 of 74

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

II. Test Notes

A. General

1. DUT Condition: Mute off; Backlight off; Max Volume -1; Max Contrast
2. Test Signal: IEEE Std 269 uncompressed real male speech
3. Hearing Aid Mode: On (Menu Path: **Phone→Call Settings→Other Call Settings→Hearing aid compatibility**)
4. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
5. The FCC Margin from Limit column indicates a margin from the FCC limit for compliance.
6. FOLDER-OPEN was additionally tested to ensure acoustic consistency with the fully tested FOLDER-CLOSED configuration.

B. GSM

1. Power Configuration: GSM850: PCL=0, GSM1900: PCL=0;
2. Vocoder Configuration: EFR (GSM); FR V1, FR V2, HR V1

C. UMTS

4. Power Configuration: TPC = "All 1's"
5. Vocoder Configuration:
 - a. AMR-NB: 4.75kbps, 12.2kbps
 - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps

D. Voice over LTE


1. Power Configuration: TPC = "Max Power"
2. Radio Configuration: QPSK, 1RB, 0RB offset
3. Vocoder Configuration:
 - a. AMR-NB: 4.75kbps, 12.2kbps
 - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps
 - c. EVS-NB: 5.9kbps, 13.2kbps, 24.4kbps
 - d. EVS-WB: 5.9kbps, 24.4kbps, 128kbps

E. Voice over NR

1. Power Configuration: TPC = "Max Power"
2. Radio Configuration: CP-OFDM, QPSK, 216RB, 0RB offset
3. Vocoder Configuration:
 - a. AMR-NB: 4.75kbps, 12.2kbps
 - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps
 - c. EVS-NB: 5.9kbps, 13.2kbps, 24.4kbps
 - d. EVS-WB: 5.9kbps, 13.2kbps, 128kbps

F. Voice over WIFI


1. Radio Configuration: IEEE 802.11b: DSSS, 1Mbps
2. Vocoder Configuration:
 - a. AMR-NB: 4.75kbps, 12.2kbps
 - b. AMR-WB: 6.60kbps, 12.65kbps, 23.85kbps
 - c. EVS-NB: 5.9kbps, 13.2kbps, 24.4kbps
 - d. EVS-WB: 5.9kbps, 24.4kbps, 128kbps

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 31 of 74

III. Volume Control Verification Test Results

Table 10-12
Verification Results Table

Date of Testing	Test Location	Air Interface Equipment	Acoustical Calibrator	HATS Sens. [dB]	Ambient Noise (dBA)
03/31/2025	Whisper1	CMW500	2343018	96.92	35.87
04/07/2025	Whisper1	CMW500	2343018	96.90	32.34

FCC ID: A3LSMF966U	 HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset
		Page 32 of 74

11. MEASUREMENT UNCERTAINTY


Table 11-1
Uncertainty Estimation Table

Receive Volume Control Requirement	Expanded uncertainty (k=2), 95% confidence level (dB)
Receive Conversational Gain	0.33
Receive Frequency Response (FF)	0.23
Receive Frequency Response (DF)	0.19
Receive Distortion and Noise	0.81

Notes:

- Test equipment is calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipment has traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.


Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. The above uncertainties were estimated experimentally using the techniques contained in NIS 81 and NIS 3003.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 33 of 74


12. EQUIPMENT LIST

**Table 12-1
Equipment List**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Listen	SoundConnect	Microphone Power Supply	1/8/2025	Biennial	1/8/2027	0899-PS150
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	1/8/2025	Biennial	1/8/2027	23792992
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/15/2024	Annual	10/15/2026	162125
Rohde & Schwarz	CMW500	Radio Communication Tester	8/10/2024	Annual	8/10/2025	140144
Rohde & Schwarz	CMX500	Radio Communication Tester	N/A		N/A	100298
Rosenberger	32W006-016	Torque Wrench	4/2/2024	Biennial	4/2/2026	N/A
YellowTec	YT4211	USB Audio Interface	N/A		N/A	20000365
Bruel & Kjaer (HBK)	4128-D	Head and Torso Simulator	4/29/2024	Biennial	4/29/2026	1947220
Bruel & Kjaer (HBK)	4231	Acoustical Calibrator Type 4231 with UA1546	4/29/2024	Biennial	4/29/2026	2343018
Bruel & Kjaer (HBK)	DZ-9769	Artificial Ear	9/15/2022	Triennial	9/15/2025	SBM553623

FCC ID: A3LSMF966U	 element	HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 34 of 74

13. TEST DATA

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 35 of 74



Element Hearing-Aid Compatibility Facility

Whisper Room 1 / HATS

Type: HATS 4128

Serial: 1947220

Measurement Standard: ANSI C63.19-2019

Equipment:

- Head and Torso Simulator Type 4128: SN: 1947220; Calibrated: 4/29/2024
- Acoustical Calibrator Type 4231 W/ UA1546: SN 2343018; Calibrated: 4/29/2024

System Verification CMRS

Ambient Noise Level Check (Analysis)	35.87 dB	✓	Maximum	40.0
Ambient Noise Level Check (RTA)	33.34 dB	✓	Maximum	40.0
Ambient Noise Level Check (Voltmeter)	30.37 dB	✓	Maximum	40.0
CMW500 0dBm0 Level Check	1.001 V	✓	Max/Min	1.0/0.9
HATS Sensitivity Check	96.92 dB	✓	Max/Min	97.3/96.9

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 36 of 74

4/7/2025



Element Hearing-Aid Compatibility Facility

Whisper Room 1 / HATS

Type: HATS 4128
Serial: 1947220


Measurement Standard: ANSI C63.19-2019

Equipment:

- Head and Torso Simulator Type 4128: SN: 1947220; Calibrated: 4/29/2024
- Acoustical Calibrator Type 4231 W/ UA1546: SN 2343018; Calibrated: 4/29/2024

System Verification CMRS

Ambient Noise Level Check (Analysis)	31.78 dB	✓	Maximum	40.0
Ambient Noise Level Check (RTA)	32.34 dB	✓	Maximum	40.0
Ambient Noise Level Check (Voltmeter)	31.69 dB	✓	Maximum	40.0
CMW500 0dBm0 Level Check	999m V	✓	Max/Min	1.0/0.9
HATS Sensitivity Check	96.9 dB	✓	Max/Min	97.3/96.9

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 37 of 74

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Narrowband
- Mounting Force: 2N
- DUT Orientation: Folder Closed

Frequency Response DF

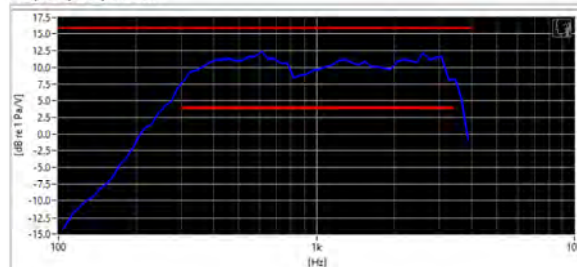

Distortion

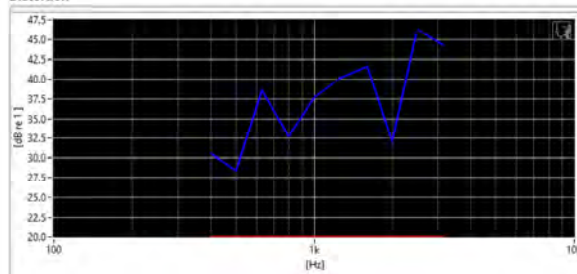

Results DF

Conversational Gain (2N)	14.08 dB	✓	Minimum	6
Distortion Value (NB)	28.4 dB	✓	Minimum	20
Distortion Margin (NB)	8.4 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.62 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 38 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M


Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018

Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024

Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Narrowband
- Mounting Force: 8N
- DUT Orientation: Folder Closed

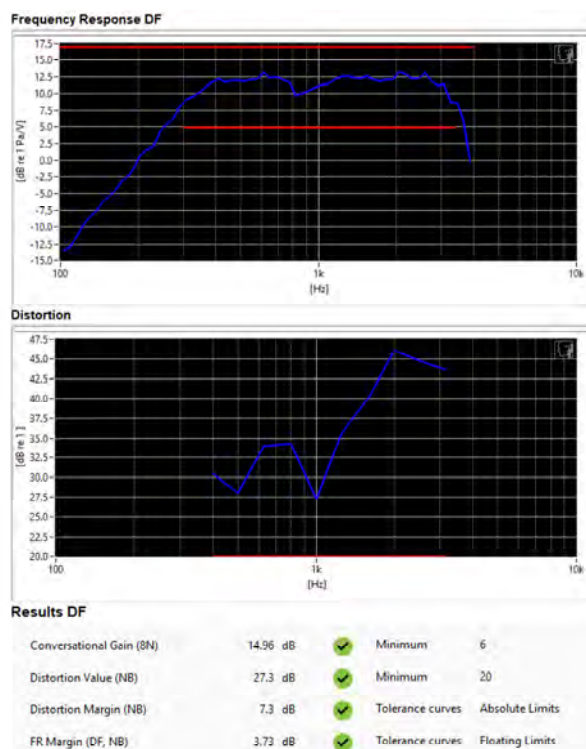

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 39 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M


Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018

Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024

Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Wideband
- Mounting Force: 2N
- DUT Orientation: Folder Closed

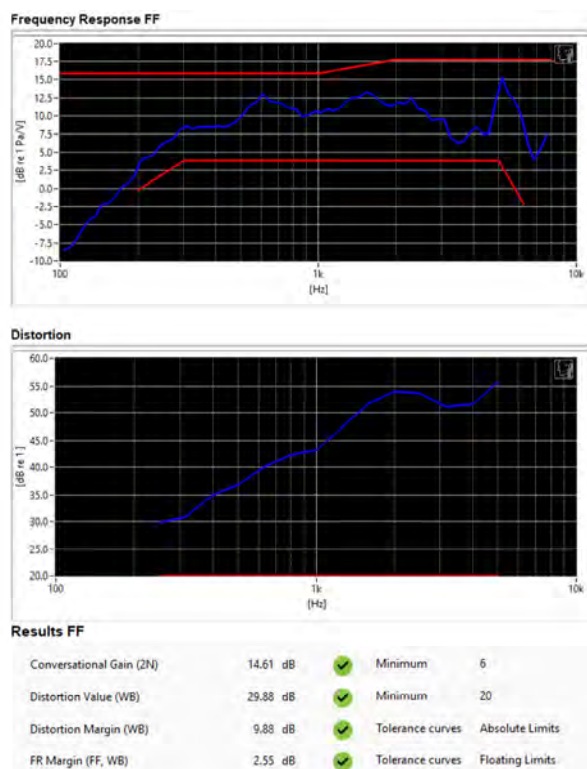

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 40 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Wideband
- Mounting Force: 8N
- DUT Orientation: Folder Closed

Frequency Response DF

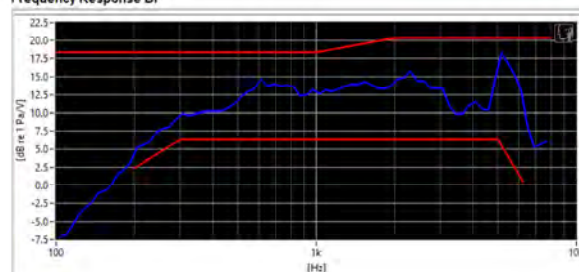

Distortion

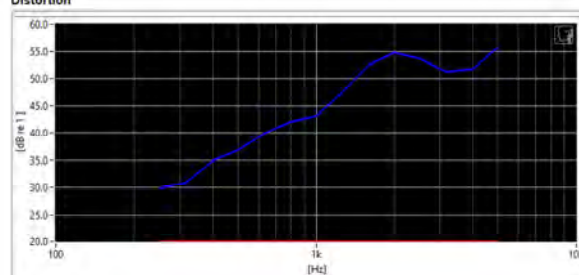

Results DF

Conversational Gain (8N)	15.7 dB	✓	Minimum	6
Distortion Value (WB)	29.78 dB	✓	Minimum	20
Distortion Margin (WB)	9.78 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	2.06 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 41 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Narrowband
- Mounting Force: 2N
- DUT Orientation: Folder Open

Frequency Response DF

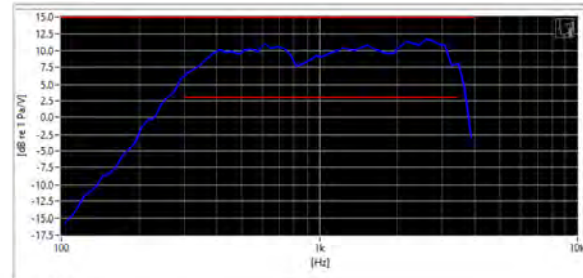

Distortion

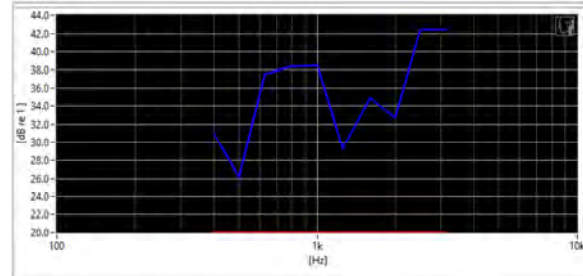

Results DF

Conversational Gain (2N)	13.18 dB	✓	Minimum	6
Distortion Value (NB)	26.24 dB	✓	Minimum	20
Distortion Margin (NB)	6.24 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.25 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 42 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Narrowband
- Mounting Force: 8N
- DUT Orientation: Folder Open

Frequency Response DF

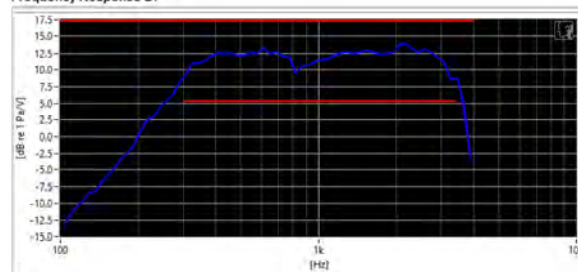

Distortion

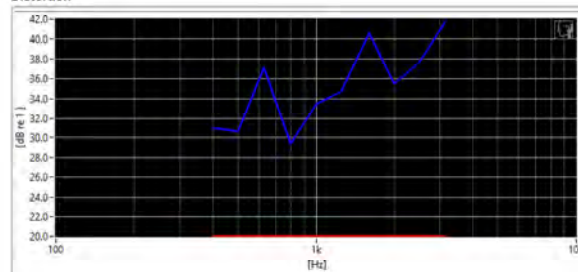

Results DF

Conversational Gain (BN)	15.07 dB	✓	Minimum	6
Distortion Value (NB)	29.39 dB	✓	Minimum	20
Distortion Margin (NB)	9.39 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.28 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 43 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Wideband
- Mounting Force: 2N
- DUT Orientation: Folder Open

Frequency Response DF

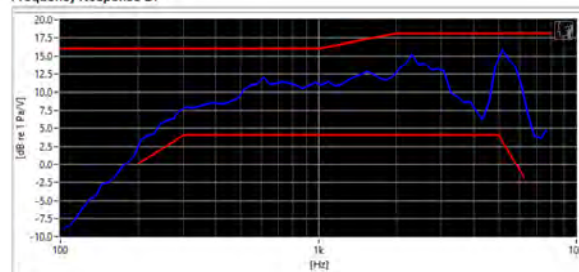

Distortion

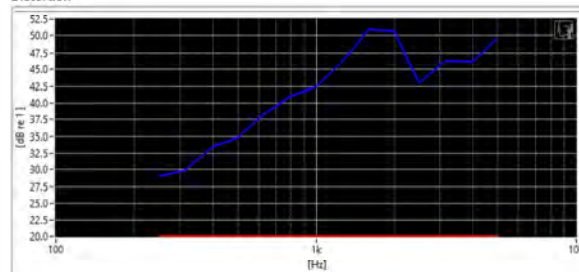

Results DF

Conversational Gain (2N)	14.11 dB	✓	Minimum	6
Distortion Value (WB)	29.06 dB	✓	Minimum	20
Distortion Margin (WB)	9.06 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	2.1 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 44 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: LTE Band 25
- Bandwidth: 20MHz
- Channel: 26365
- Codec Bandwidth: Wideband
- Mounting Force: 8N
- DUT Orientation: Folder Open

Frequency Response DF

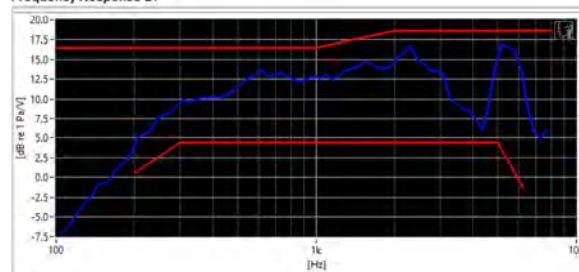

Distortion

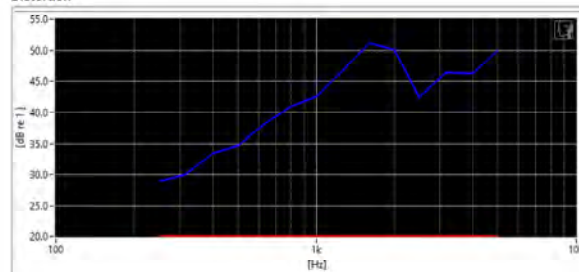

Results DF

Conversational Gain (BN)	15.75 dB	✓	Minimum	6
Distortion Value (WB)	28.94 dB	✓	Minimum	20
Distortion Margin (WB)	8.94 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	1.54 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 45 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Narrowband
- Mounting Force: 2N
- DUT Orientation: Folder Closed

Frequency Response DF

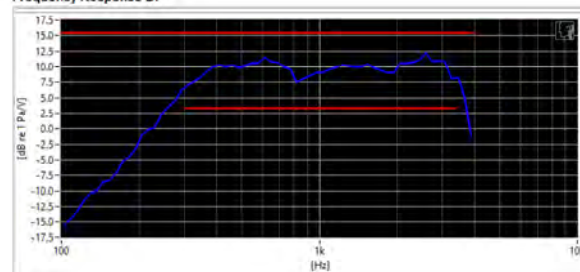

Distortion

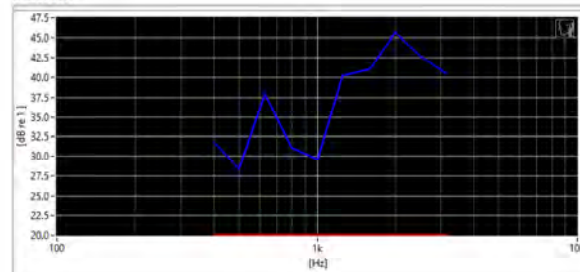

Results DF

Conversational Gain (2N)	13.79 dB	✓	Minimum	6
Distortion Value (NB)	28.35 dB	✓	Minimum	20
Distortion Margin (NB)	8.35 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.18 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 46 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Narrowband
- Mounting Force: 8N
- DUT Orientation: Folder Closed

Frequency Response DF

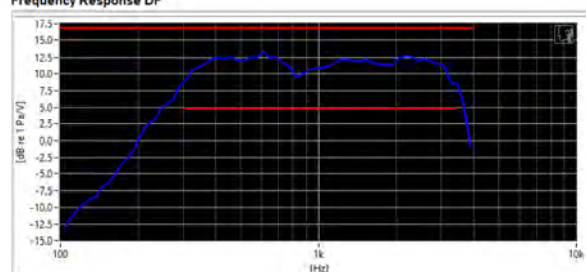

Distortion

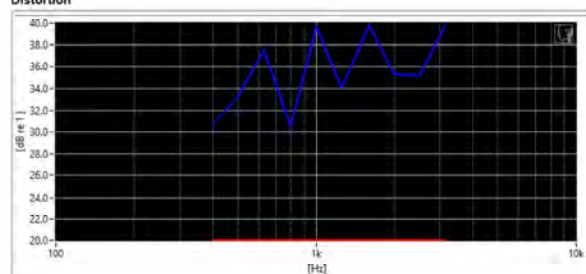

Results DF

Conversational Gain (8N)	14.81 dB	✓	Minimum	6
Distortion Value (NB)	30.55 dB	✓	Minimum	20
Distortion Margin (NB)	10.55 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.59 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 47 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Wideband
- Mounting Force: 2N
- DUT Orientation: Folder Closed

Frequency Response FF

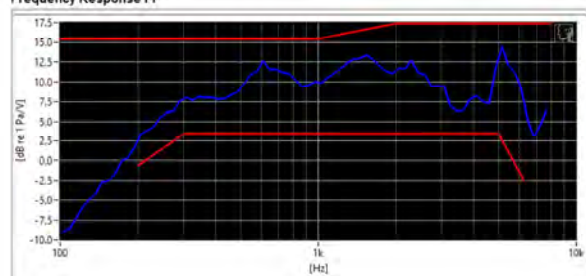

Distortion

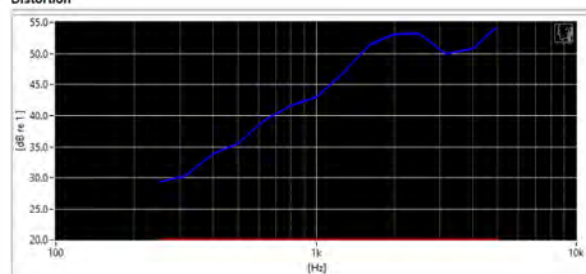

Results FF

Conversational Gain (2N)	13.7 dB	✓	Minimum	6
Distortion Value (WB)	29.37 dB	✓	Minimum	20
Distortion Margin (WB)	9.37 dB	✓	Tolerance curves	Absolute Limits
FR Margin (FF, WB)	2.82 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 48 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset
Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Wideband
- Mounting Force: 8N
- DUT Orientation: Folder Closed

Frequency Response DF

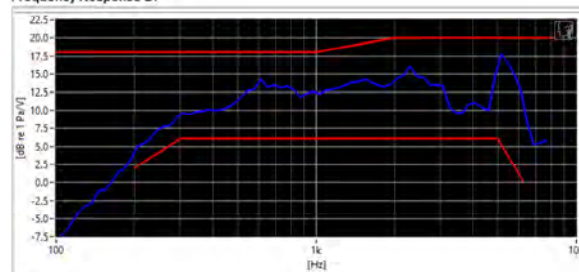

Distortion

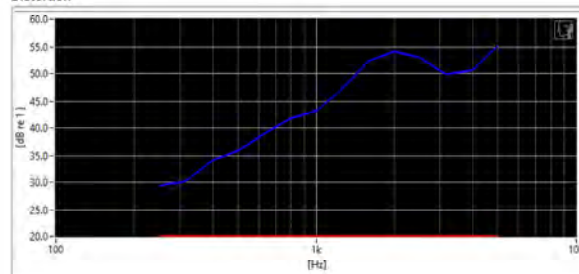

Results DF

Conversational Gain (BN)	15.92 dB	✓	Minimum	6
Distortion Value (WB)	29.3 dB	✓	Minimum	20
Distortion Margin (WB)	9.3 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	2.14 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 49 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset
Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Narrowband
- Mounting Force: 2N
- DUT Orientation: Folder Open

Frequency Response DF

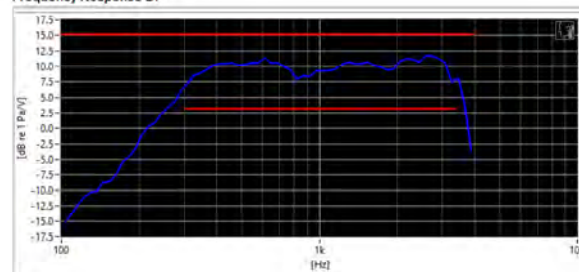

Distortion

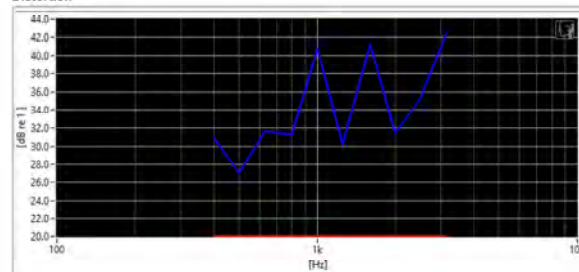

Results DF

Conversational Gain (2N)	12.74 dB	✓	Minimum	6
Distortion Value (NB)	27.03 dB	✓	Minimum	20
Distortion Margin (NB)	7.03 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.46 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 50 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset
Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Narrowband
- Mounting Force: 8N
- DUT Orientation: Folder Open

Frequency Response DF

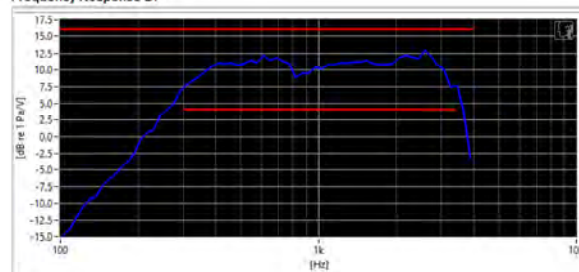

Distortion

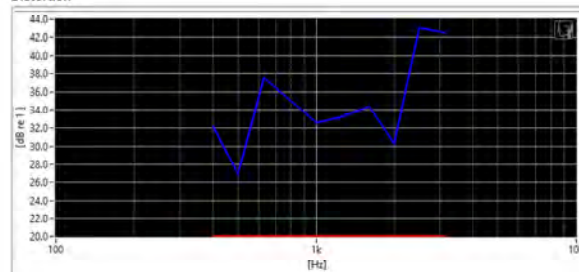

Results DF

Conversational Gain (BN)	14.54 dB	✓	Minimum	6
Distortion Value (NB)	27 dB	✓	Minimum	20
Distortion Margin (NB)	7 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.14 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 51 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset
Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Wideband
- Mounting Force: 2N
- DUT Orientation: Folder Open

Frequency Response DF

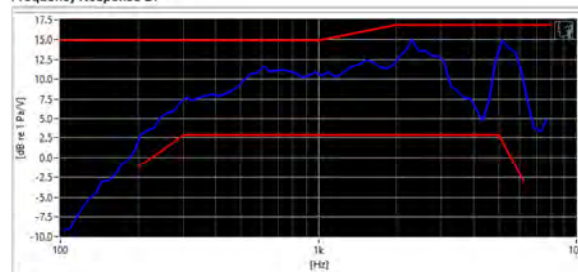

Distortion

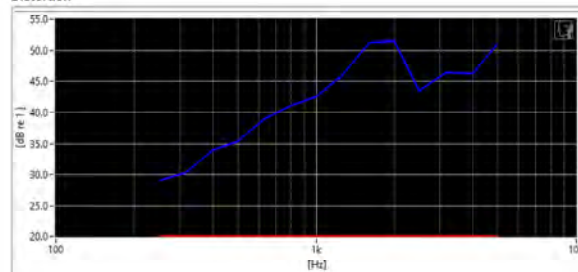

Results DF

Conversational Gain (2N)	13.69 dB	✓	Minimum	6
Distortion Value (WB)	29.09 dB	✓	Minimum	20
Distortion Margin (WB)	9.09 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	1.86 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 52 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset
Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: NR Band n66
- Bandwidth: 40MHz
- Channel: 349000
- Codec Bandwidth: Wideband
- Mounting Force: 8N
- DUT Orientation: Folder Open

Frequency Response DF

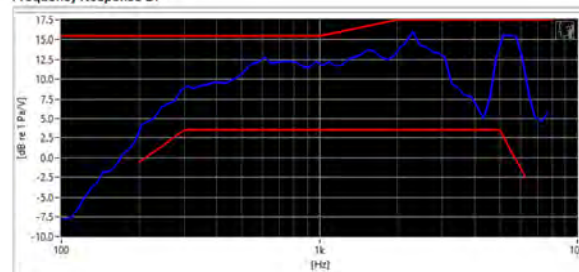

Distortion

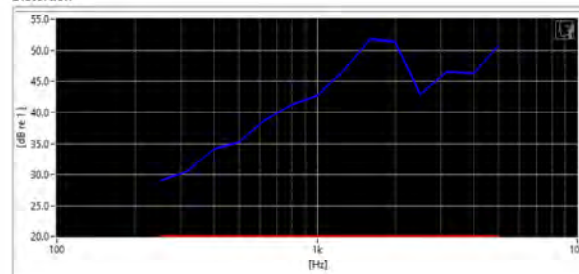

Results DF

Conversational Gain (BN)	14.66 dB	✓	Minimum	6
Distortion Value (WB)	29.05 dB	✓	Minimum	20
Distortion Margin (WB)	9.05 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	1.52 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 53 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Narrowband
- Mounting Force: 2N
- DUT Orientation: Folder Closed

Frequency Response DF

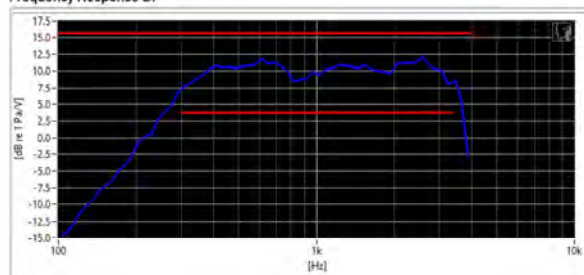

Distortion

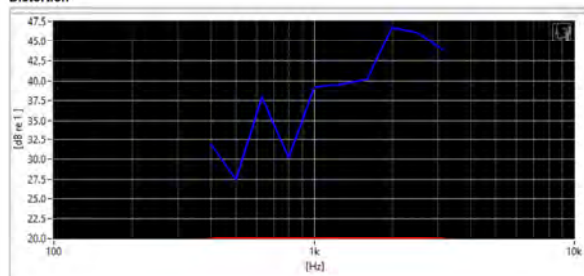

Results DF

Conversational Gain (2N)	13.75 dB	✓	Minimum	6
Distortion Value (NB)	27.49 dB	✓	Minimum	20
Distortion Margin (NB)	7.49 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.58 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 54 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Narrowband
- Mounting Force: 8N
- DUT Orientation: Folder Closed

Frequency Response DF

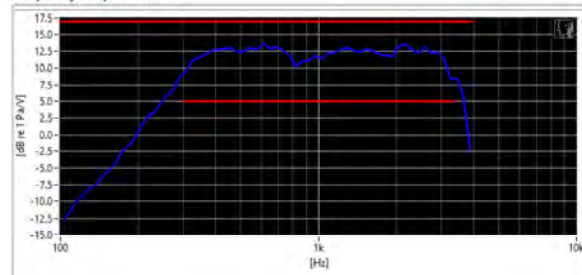

Distortion

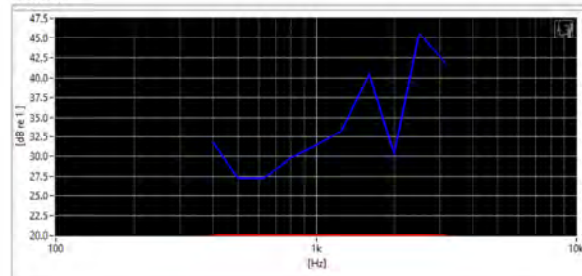

Results DF

Conversational Gain (8N)	15.55 dB	✓	Minimum	6
Distortion Value (NB)	27.33 dB	✓	Minimum	20
Distortion Margin (NB)	7.33 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.37 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 55 of 74	



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Wideband
- Mounting Force: 2N
- DUT Orientation: Folder Closed

Frequency Response FF

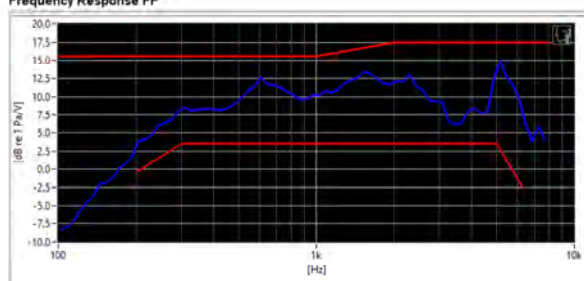

Distortion

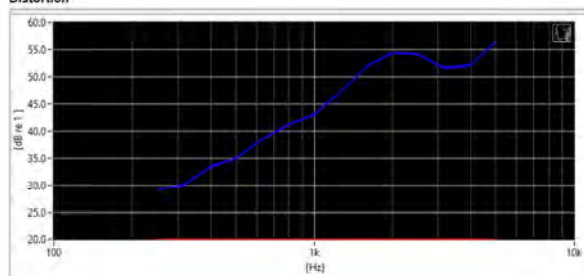

Results FF

Conversational Gain (2N)	14.34 dB	✓	Minimum	6
Distortion Value (WB)	29.24 dB	✓	Minimum	20
Distortion Margin (WB)	9.24 dB	✓	Tolerance curves	Absolute Limits
FR Margin (FF, WB)	2.48 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 56 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Wideband
- Mounting Force: 8N
- DUT Orientation: Folder Closed

Frequency Response DF

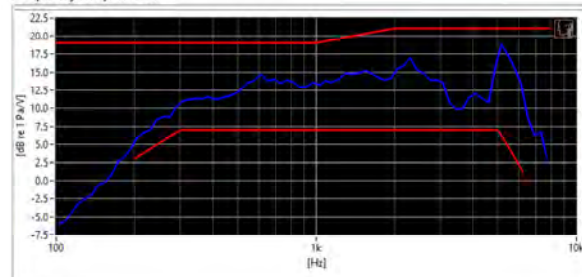

Distortion

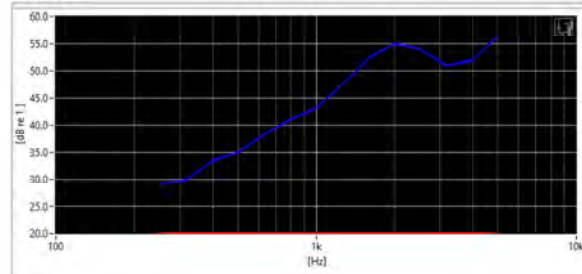

Results DF

Conversational Gain (8N)	16.33 dB	✓	Minimum	6
Distortion Value (WB)	29.05 dB	✓	Minimum	20
Distortion Margin (WB)	9.05 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	2.21 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 57 of 74



ELEMENT Hearing-Aid Compatibility Facility


Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018

Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Narrowband
- Mounting Force: 2N
- DUT Orientation: Folder Open

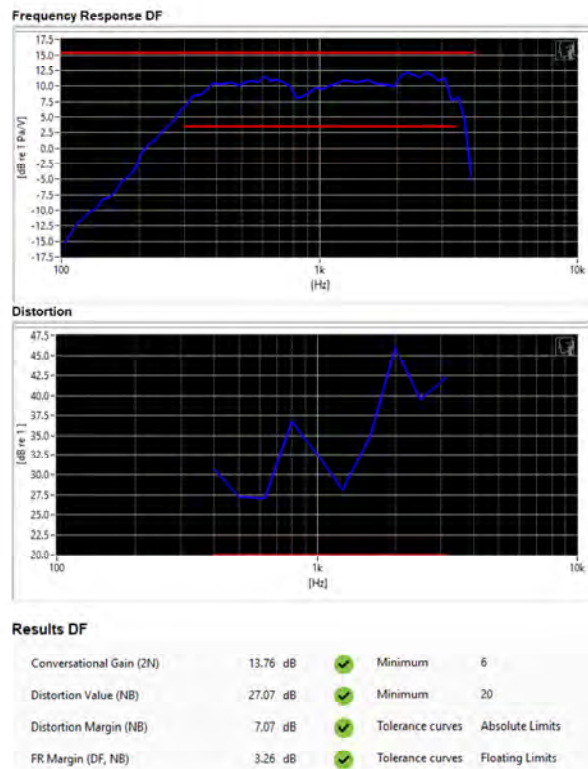

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 58 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Narrowband
- Mounting Force: 8N
- DUT Orientation: Folder Open

Frequency Response FF

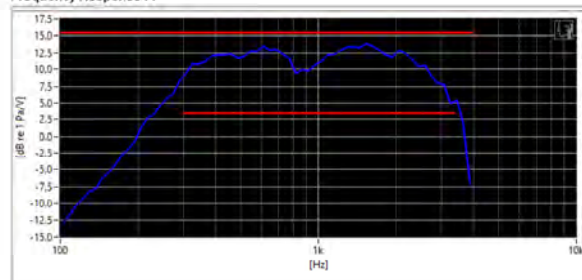

Distortion

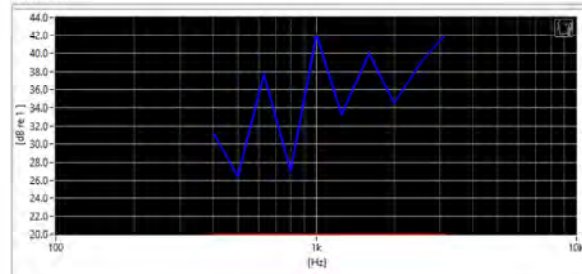

Results DF

Conversational Gain (BN)	15.08 dB	✓	Minimum	6
Distortion Value (NB)	26.44 dB	✓	Minimum	20
Distortion Margin (NB)	6.44 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, NB)	3.21 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 59 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset
Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Wideband
- Mounting Force: 2N
- DUT Orientation: Folder Open

Frequency Response DF

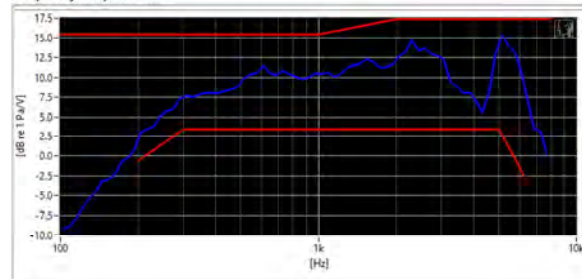

Distortion

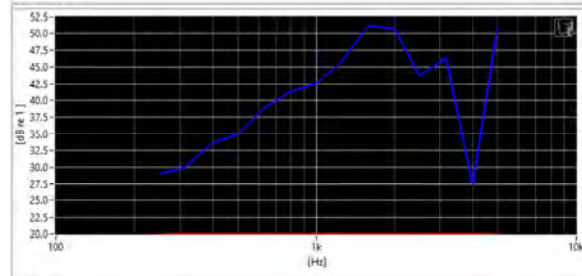

Results DF

Conversational Gain (2N)	13.56 dB	✓	Minimum	6
Distortion Value (WB)	27.5 dB	✓	Minimum	20
Distortion Margin (WB)	7.5 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	2.08 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 60 of 74



ELEMENT Hearing-Aid Compatibility Facility

DUT: A3LSMF966U

Type: Portable Handset

Serial: 0582M

Measurement Standard: ANSI C63.19-2019; ANSI/TIA-5050-2018


Equipment:

- Head and Torso Simulator: Bruel & Kjaer Model 4128 – SN: 1947220; Calibrated: 04/29/2024
- Ear Simulator: Bruel & Kjaer Model 4158 – SN: 18862222; Calibrated: 4/29/2024


Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Bandwidth: 20MHz
- Channel: 6
- Codec Bandwidth: Wideband
- Mounting Force: 8N
- DUT Orientation: Folder Open

Frequency Response DF

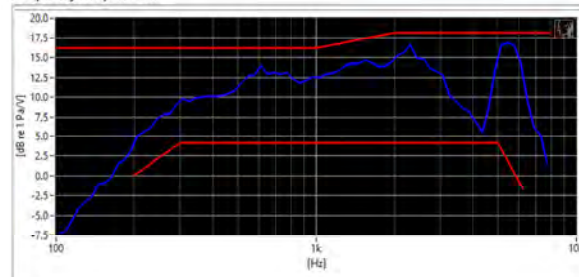

Distortion

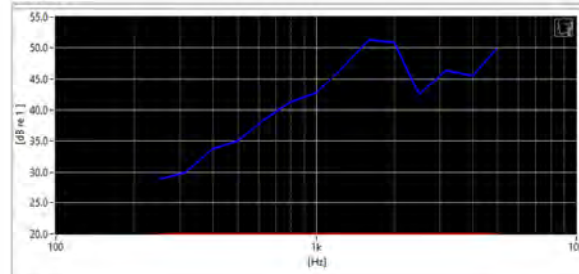


Results DF

Conversational Gain (8N)	15.49 dB	✓	Minimum	6
Distortion Value (WB)	28.94 dB	✓	Minimum	20
Distortion Margin (WB)	8.94 dB	✓	Tolerance curves	Absolute Limits
FR Margin (DF, WB)	1.38 dB	✓	Tolerance curves	Floating Limits

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT		Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 61 of 74	

14. CALIBRATION CERTIFICATES

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 62 of 74

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

The Hottinger Brüel & Kjær Inc. Calibration Laboratory
3079 Premiere Parkway Suite 120
Duluth, GA 30097
Telephone: 770-209-6907
Fax: 770-447-4033
Website address: <http://www.hbkworld.com>

The Hottinger Brüel and Kjær Inc.
Service Center is Certified to ISO 9001:2015

CERTIFICATE OF CALIBRATION
No.: 178939-101

Calibration Of:

Model Number : 4128-C-001 Serial Number: 1947220

Customer:

Element Materials Technology
7185 Oakland Mills Rd
Columbia, Maryland 21046

TK
5/6/24 ✓

CALIBRATION CONDITIONS:

Environment conditions
Air temperature : 22 °C
Air pressure: 98.3 kPa
Relative Humidity: 47 % RH

SPECIFICATIONS:

This document certifies that the instrument as listed under "Model Number" has been calibrated and unless otherwise indicated under "Final Data", meets acceptance criteria as prescribed by the referenced Procedure. Statements of compliance, where applicable, are based on calibration results falling within specified criteria with no reduction by the uncertainty of the measurements. The calibration of the listed instrumentation was accomplished using a test system which conforms with the requirements of ISO/IEC 17025, ANSI/NCSL Z540-1, and guidelines of ISO 10012-1. For "as received" and "final" data, see the attached page(s). Items marked with one asterisk (*) are not covered by the scope of the current A2LA accreditation. This Certificate and attached data pages shall not be reproduced, except in full, without written approval of the Hottinger Brüel & Kjær Inc. Calibration Laboratory-Duluth, GA. Results relate only to the items tested. The Instrumentation has been calibrated using Measurement Standards with values traceable to the National Institute of Standards and Technology, National Measurement Institutes or derived from natural physical constants

PROCEDURE:

The calibration was performed according to procedure number : 4128 DP Rev. 7.21

RESULTS:

"As Received" Physical Condition: Acceptable for Calibration

"As Received" Data: "As Received" = "Final Data"


"Final Data": Within Acceptance Criteria

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k=2$ providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from standards, calibration method, effect of environmental conditions and any short term contribution from the device under calibration.

Date of Calibration: 29-Apr-2024


Certificate issued: 29-Apr-2024

John Avitabile



Calibration Technician

Meshaun Hobbs
Quality Representative

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 63 of 74

CERTIFICATE OF CALIBRATION

No.: 178939-101

Page 2 of 2

Hottinger Brüel & Kjær Inc. Calibration
Laboratory

RESULTS:

Rev 7.21


I. Bruel & Kjaer Torso Model 4128-C-001, Serial Number: 1947220.

As Received Data		Final Data		As Received = Final Data	X
------------------	--	------------	--	--------------------------	---

	Acceptance Criteria	Actual
A. Speaker and Speaker Assembly Mechanical Check.	Pass/Fail	Pass
B. Protection Circuit	Acceptance Criteria	Actual
1. 6.4 VRMS 750 Hertz Input	Signal remains for more than 30 Seconds	Pass
2. 7.5 VRMS 750 Hertz Input	Signal disappears in 12 Seconds Pass/Fail	Pass
C. Ear Simulator		
1. See enclosed Calibration Results for 4158, serial number: 1886222	Calibration Results Included Yes/No/NA	Yes
2. See enclosed Calibration Results for 4159, serial number:	Calibration Results Included Yes/No/NA	N/A

Reference Standards:

Model	Serial Number	Trace Number	Cal Due	Interval (mo)
HP 3458A	2823A03931	497514	30Nov24	12
HP 5315A	2032A04440	494379	31Jul24	12

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 64 of 74

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



The Hottinger Brüel & Kjær Inc. Calibration Laboratory
3079 Premiere Parkway Suite 120
Duluth, GA 30097
Telephone: 770-209-6907
Fax: 770-447-4033
Web site address: <http://www.hbkworld.com>



Calibration
Certificate
1568.01

CERTIFICATE OF CALIBRATION

No.: 178939-401

Page 1 of 2

CALIBRATION OF:

Microphone: Brüel & Kjær Type 4158/2669/UA1345 Serial No. 1886222/2025786

CUSTOMER:

Element Materials Technology
7185 Oakland Mills Rd
Columbia, MD 21046

CALIBRATION CONDITIONS:

Environment conditions: Air temperature: 22.7 °C
Air pressure: 97.861 kPa
Relative Humidity: 48.7 %RH
Applied polarization voltage: 200 Vdc

TH
5/6/24 ✓

SPECIFICATIONS: This document certifies that the instrument as listed under "Type" has been calibrated and unless otherwise indicated under "Final Data", meets acceptance criteria as prescribed by the referenced Procedure. Hottinger Brüel & Kjær Inc. utilizes a simple acceptance decision rule as defined by ILAC G8 with measurement uncertainty value which will not exceed 50% of the tolerance. The calibration of the listed transducer was accomplished using a test system which conforms to the requirements of ISO/IEC 17025, ANSI/NCSL Z540-1, and guidelines of ISO 10012-1. For "as received" and "final" data, see the attached page(s). Items marked with one asterisk (*) are not covered by the scope of the current A2LA accreditation. This Certificate and attached data pages shall not be reproduced, except in full, without written approval of the Hottinger Brüel & Kjær Inc. Calibration Laboratory-Duluth, GA. Results relate only to the items tested. The transducer has been calibrated using Measurement Standards with values traceable to the National Institute of Standards and Technology, National Measurement Institutes or derived from natural physical constants.

PROCEDURE: The measurements have been performed with the assistance of the Hottinger Brüel & Kjær Inc. Microphone Calibration System B&K 9721 with application software WT9649 and WT9650 version 5.3.0.11 using calibration procedure: 4158-2669-UA1345-S251; IH10108 Rev 01.12

RESULTS:

☒ "As Received" Data: Within Acceptance Criteria ☐ "As Received" Data: Outside Acceptance Criteria
☒ "Final" Data : Within Acceptance Criteria ☐ "Final" Data : Outside Acceptance Criteria

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k=2$ providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from standards, calibration method, effect of environmental conditions and any short-term contribution from the device under calibration.

Date of Calibration: May 1, 2024

Certificate issued: May 1, 2024

Can Phan

Meshaun Hobbs

Calibration Technician

Quality Representative

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 65 of 74

CERTIFICATE OF CALIBRATION

No.: 178939-401

Type: 4158/2669/UA1345
1886222/2025786

Serial No.:

Page 2 of 2

Sensitivity

Nominal sensitivity: -38 dB re. 1V/Pa +/- 2 dB
Sensitivity at calibration conditions: -38.30 dB re. 1V/Pa or 12.16 mV/Pa
Sensitivity at reference conditions: -38.33 dB re. 1V/Pa or 12.13 mV/Pa
Uncertainty: +/- 0.08 dB
Correction factor K at reference conditions: 12.33 dB
Calibration Frequency: 251.19 Hz

Reference Conditions:

Pressure: 101.3 kPa
Temperature: 23 °C
Relative Humidity: 50%

Traceable references

Type	Serial no	Cal. date	Due date	Calibrated by	Trace number
4180	2602426	2023-02-10	2025-02-28	DPLA	M2. 10-1562-2.1

Condition "As Received":

Good


Comments:

This Preamplifier predates the availability of TEDS.

Acoustic Pressure Response Results *

The results in this table are not covered by the current A2LA Scope of Accreditation *

Frequency in Hertz	Sound Pressure Level in dB	IEC 711 Tolerance in dB	Actual Result in dB
100	-0.3	± 0.5	-0.40
125	-0.2	± 0.5	-0.33
160	-0.2	± 0.5	-0.22
200	-0.1	± 0.4	-0.16
250	-0.1	± 0.4	-0.11
315	-0.1	± 0.4	-0.06
400	0	± 0.4	-0.03
500	Ref	Ref	0.00
630	0.1	± 0.4	0.05
800	0.2	± 0.4	0.38
1,000	1.6	± 0.5	1.56
1,250	3.3	± 0.5	3.42
1,600	4.5	± 0.5	4.57
2,000	5.2	± 0.6	5.16
2,500	6	± 0.6	5.95
3,150	6.9	± 0.7	7.02
4,000	8	± 0.8	8.19
5,000	9.3	± 1.0	9.17
6,300	11.4	± 1.0	10.77
8,000	13.7	± 1.5	12.58
10,000	18	± 2.0	16.81

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 66 of 74



The Hottinger Brüel & Kjær Inc. Calibration Laboratory
3079 Premiere Parkway Suite 120
Duluth, GA 30097
Telephone: 770-209-6907
Fax: 770-447-4033
Web site address: <http://www.hbkworld.com>



Calibration
Certificate
1568.01

CERTIFICATE OF CALIBRATION

No.: 178939-701

Page 1 of 2

CALIBRATION OF:

Calibrator: Brüel & Kjær Type 4231 Serial No.: 2343018
IEC Class: 1

CUSTOMER:

Element Materials Technology
7185 Oakland Mills Rd
Columbia, Maryland 21046

TK
5/6/24 ✓

CALIBRATION CONDITIONS:

Environment conditions: Air temperature: 22.4 °C
Air pressure: 98.35 kPa
Relative Humidity: 47.7 %RH

SPECIFICATIONS: This document certifies that the acoustic calibrator as listed under "Type" has been calibrated and unless otherwise indicated under "Final Data", meets acceptance criteria as prescribed by the referenced Procedure. Hottinger Brüel & Kjær Inc. utilizes a simple acceptance decision rule as defined by ILAC G8 with measurement uncertainty value which will not exceed 50% of the tolerance. The calibration of the listed transducer was accomplished using a test system which conforms to the requirements of ISO/IEC 17025, ANSI/NCSL Z540-1, and guidelines of ISO 10012-1. For "as received" and "final" data, see the attached page(s). Items marked with one asterisk (*) are not covered by the scope of the current A2LA accreditation. This Certificate and attached data pages shall not be reproduced, except in full, without written approval of the Hottinger Brüel & Kjær Inc. Calibration Laboratory-Duluth, GA. Results relate only to the items tested. The transducer has been calibrated using Measurement Standards with values traceable to the National Institute of Standards and Technology, National Measurement Institutes or derived from natural physical constants. The acoustic calibrator has been calibrated in accordance with the requirements as specified in IEC60942.

PROCEDURE: The measurements have been performed with the assistance of Hottinger Brüel & Kjær Inc. acoustic calibrator calibration application Software version 2.3.4 Type 7794 using calibration procedure 4231 Complete

RESULTS:

☒ "As Received" Data: Within Acceptance Criteria ☐ "As Received" Data: Outside Acceptance Criteria
☒ "Final" Data : Within Acceptance Criteria ☐ "Final" Data : Outside Acceptance Criteria

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the calibrator under calibration.

Date of Calibration: April 29, 2024

Certificate issued: April 29, 2024

Can Phan
Calibration Technician

Meshaun Hobbs
Quality Representative

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 67 of 74

CERTIFICATE OF CALIBRATION

No.: 178939-701

Type: 4231

Serial No.: 2343018

Page 2 of 2

Sound Pressure Levels

All stated values are valid at environmental reference conditions

Nominal Level [dB]	Accept Limit Lower [dB]	Accept Limit Upper [dB]	Measured Level [dB]	Measurement Uncertainty [dB]
94	93.80	94.20	93.99	0.12
114	113.80	114.20	114.03	0.12

Frequency

Nominal Frequency [Hz]	Accept Limit Lower [Hz]	Accept Limit Upper [Hz]	Measured Frequency [Hz]	Measurement Uncertainty [Hz]
1000	999.00	1001.00	999.98	0.10

Total Distortion*

Distortion mode: ☒ TD* ☐ THD*

Calibration Level [dB]*	Accept Limit [%]*	Measured Distortion [%]*	Measurement Uncertainty [%]*
94	1.00	0.56	0.13
114	1.00	0.16	0.13

Environmental Reference Conditions:

Pressure: 101.3 kPa, Temperature: 23 °C, Relative Humidity: 50%

Instrument List


Type	Description	Serial no	Cal. date	Due date	Calibrated by	Trace number
3560	PULSE Analyzer	2723320	2023-10-19	2024-10-18	GK	CAS-664166-V3L2K7-801
9545	Transfer Microphone	3	2023-10-31	2024-10-30	MH	CAS-664166-V3L2K7-403
4228	Reference Sound Source	1618502	2023-04-19	2025-04-30	WS	CAS-632564-L2S0L9-708

During the calibration the calibrator has been loaded by the load volume of the Transfer Microphone. The load volumes for a number of different types of Transfer Microphones are listed in the table below.

For Brüel & Kjær Pistonphones types 4220 and 4228 the result of the SPL calibration has been corrected to be valid for a load volume of 1333 mm³. For all other types the result is valid with the actual load volume.

Transfer Microphone Type	Fulfils standard IEC 61094-1 LS	Fulfils standard IEC 61094-4 WS	Load Volume 1" (1/2" mic including DP-0776)	Load Volume 1/2"
4180	yes	yes	1126 mm ³	43 mm ³
4192	-	yes	1273 mm ³	190 mm ³
9545	-	-	1333 mm ³	-


Condition "As Received": Good

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 68 of 74

15. CONCLUSION


The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.


FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 69 of 74

16. REFERENCES

- ANSI C63.19-2019, "American National Standard Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids," IEEE, New York, NY, August 2019
- ANSI/TIA-5050-2018, "Communications Products – Receive Volume Control Requirements for Wireless (Mobile) Devices," Telecommunications Industry Association, Arlington, VA, January 2018
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v06r04," September 29, 2023
- FCC Office of Engineering and Technology KDB, "285076 D04 Volume Control v02," September 29, 2023
- FCC Office of Engineering and Technology KDB, "285076 D05 CG Interim Waiver DA 23-914 v01," September 29, 2023
- FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
- FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- ANSI/IEEE Std 269-2010, "IEEE Standard Methods for Measuring Transmission Performance of Analog and Digital Telephone Sets, Handsets, and Headsets," IEEE, 2010
- ANSI/IEEE Std 1652-2016, "IEEE Standard for Translating Head and Torso Simulator Measurements from Eardrum to Other Acoustic Reference Points," IEEE, 2016
- ITU-T Recommendation P.56, "Objective measurement of active speech level," ITU, December 2011
- ITU-T Recommendation P.57, "Artificial ears," ITU December 2011
- ITU-T Recommendation P.58, "Head and torso simulator for telephonometry," ITU, May 2013
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," *Wireless Telephones and Hearing Aids: New Challenges for Audiology*, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Byrne, D. and Dillon, H., "The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid," *Ear and Hearing* 7:257-265, 1986.
- EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 70 of 74

- EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- EHIMA GSM Project Final Report, "Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity." Technical-Audiological Laboratory and Telecom Denmark, 1995.
- HAMPIS Report, "Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference," October 1999.
- "Hearing Aids/GSM," Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- IEEE 100, "The Authoritative Dictionary of IEEE Standards Terms," Seventh Edition.
- Joyner, K. H, et. al., "Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard," National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., "Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM)," NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- McCandless, G. A., and Lyregaard, P. E., "Prescription of Gain/Output (POGO) for Hearing Aids," Hearing Instruments 1:16-21, 1983
- Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones," IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMF966U		HAC (VOLUME CONTROL) TEST REPORT	Approved by: Technical Manager
Filename: 1M2502210015-33.A3L	Test Dates: 03/31/2025 - 04/10/2025	DUT Type: Portable Handset	Page 71 of 74