




NR Band n48 – Ant G

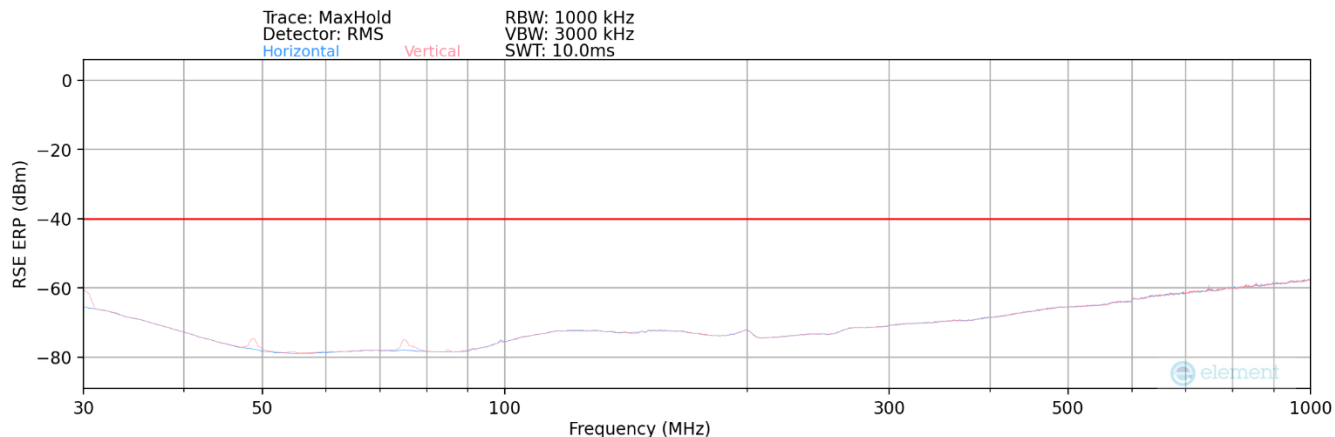

Plot 7-184. Radiated Spurious Plot (NR Band n48 – Ant G)

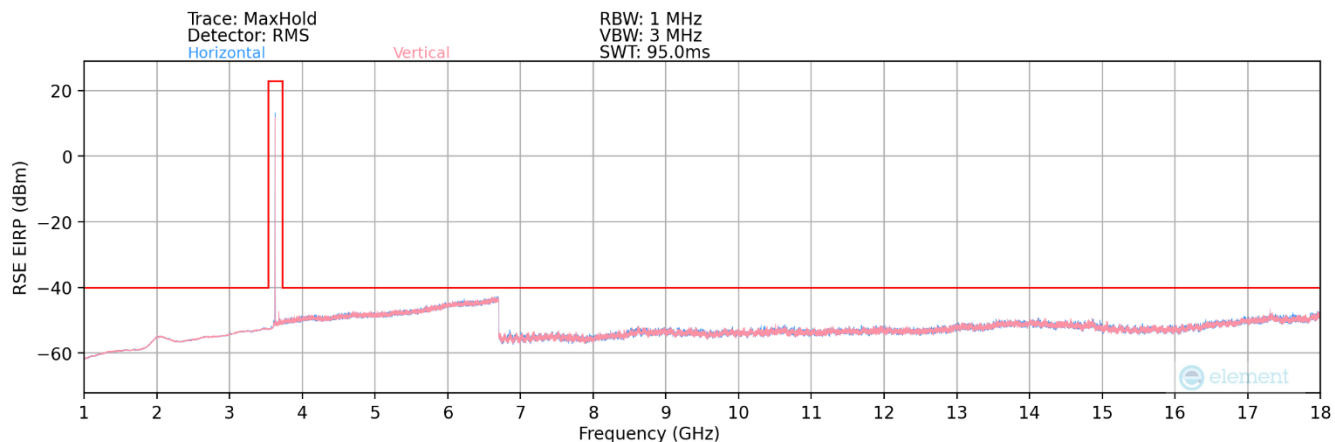


Plot 7-185. Radiated Spurious Plot (NR Band n48 – Ant G)

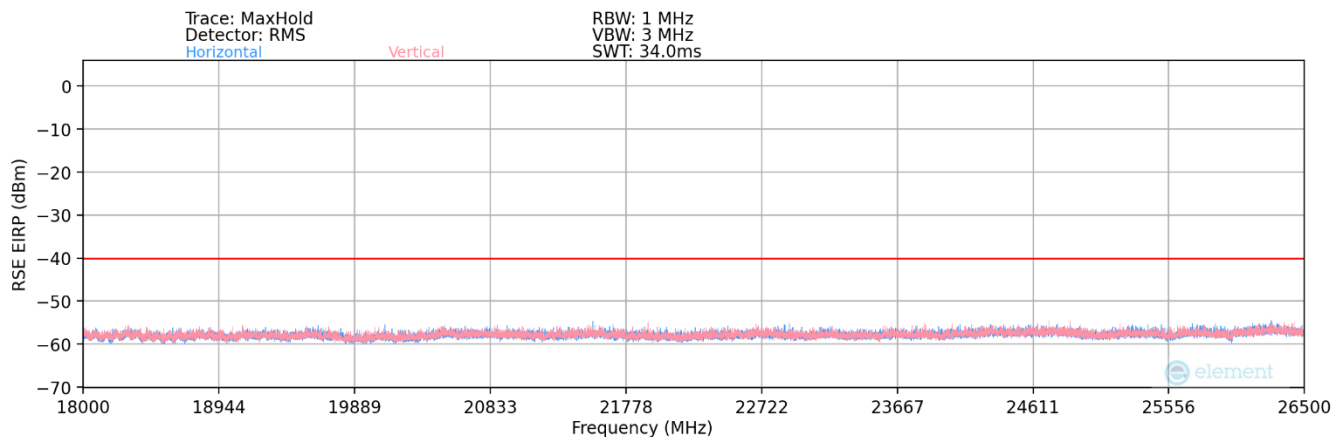

Plot 7-186. Radiated Spurious Plot (NR Band n48 – Ant G)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 165 of 201

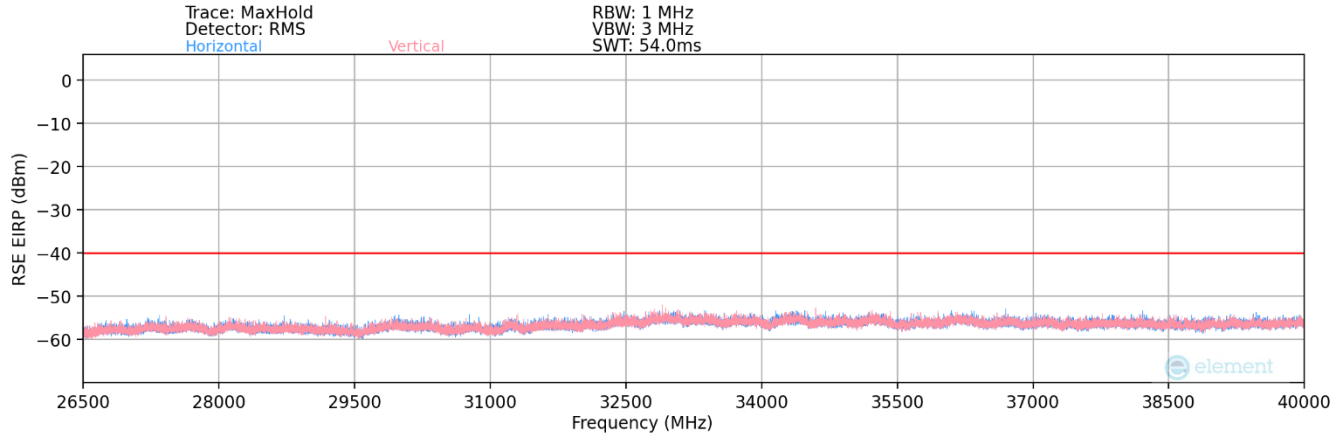

Plot 7-187. Radiated Spurious Plot (NR Band n48 – Ant G)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
300.00	V	-	-	-82.80	21.22	45.42	-51.99	-40.00	-11.99

Table 7-71. Radiated Spurious Data (NR Band n48 – Mid Channel - Ant G)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	V	-	-	-77.46	9.93	39.47	-55.79	-40.00	-15.79
10710.00	V	-	-	-78.58	13.11	41.53	-53.73	-40.00	-13.73
14280.00	V	-	-	-79.28	15.55	43.27	-51.99	-40.00	-11.99

Table 7-72. Radiated Spurious Data (NR Band n48 – Low Channel - Ant G)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	V	-	-	-76.14	9.31	40.17	-55.09	-40.00	-15.09
10875.00	V	-	-	-78.31	12.69	41.38	-53.88	-40.00	-13.88
14500.00	V	-	-	-78.74	15.58	43.84	-51.42	-40.00	-11.42

Table 7-73. Radiated Spurious Data (NR Band n48 – Mid Channel - Ant G)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 166 of 201


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	V	-	-	-76.87	9.22	39.35	-55.91	-40.00	-15.91
11040.00	V	-	-	-78.40	12.67	41.27	-53.99	-40.00	-13.99
14720.00	V	-	-	-78.74	15.05	43.31	-51.95	-40.00	-11.95


Table 7-74. Radiated Spurious Data (NR Band n48 – High Channel - Ant G)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 167 of 201


NR Band n48 – Ant A

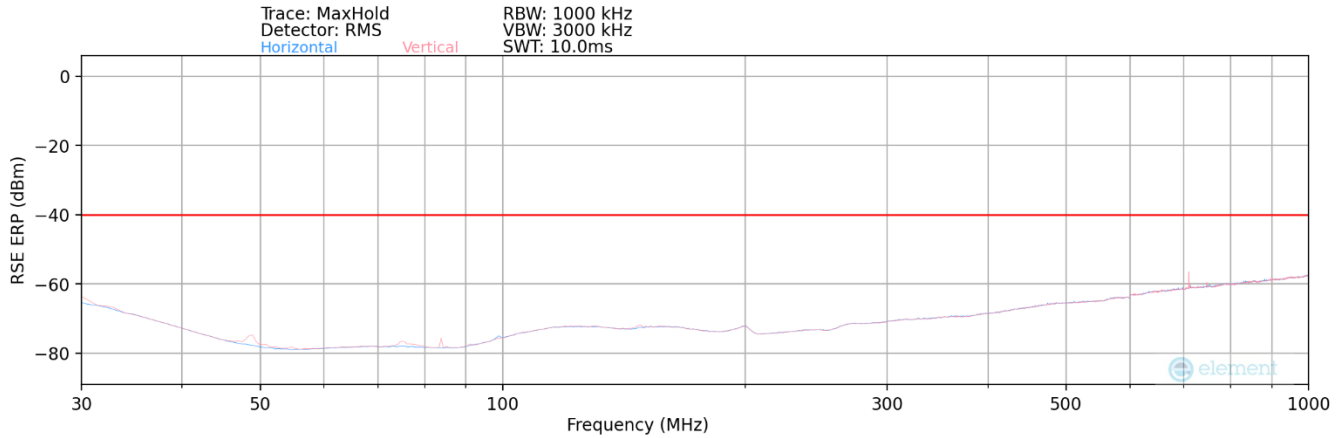

Plot 7-188. Radiated Spurious Plot (NR Band n48 – Ant A)

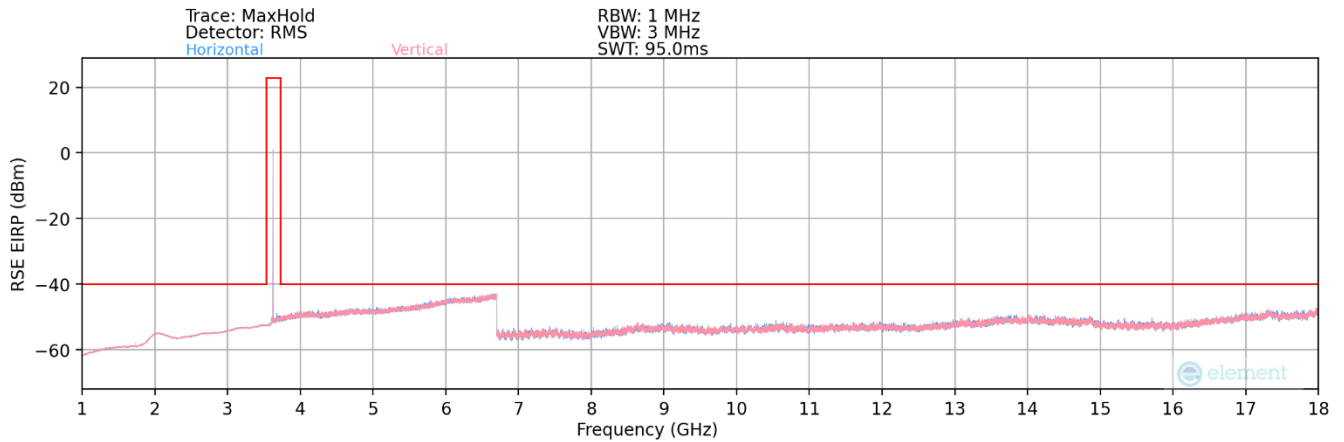


Plot 7-189. Radiated Spurious Plot (NR Band n48 – Ant A)

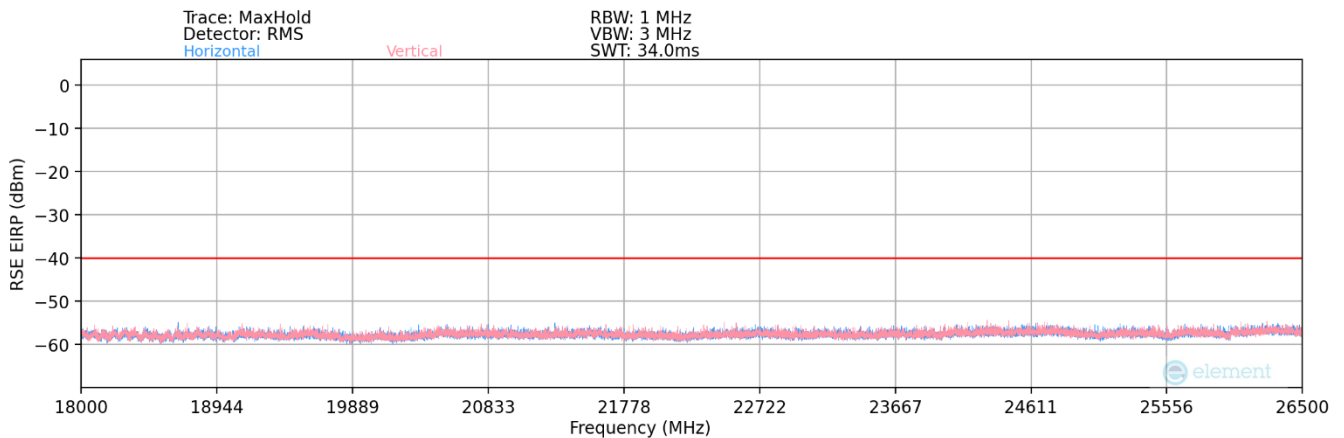

Plot 7-190. Radiated Spurious Plot (NR Band n48 – Ant A)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 168 of 201

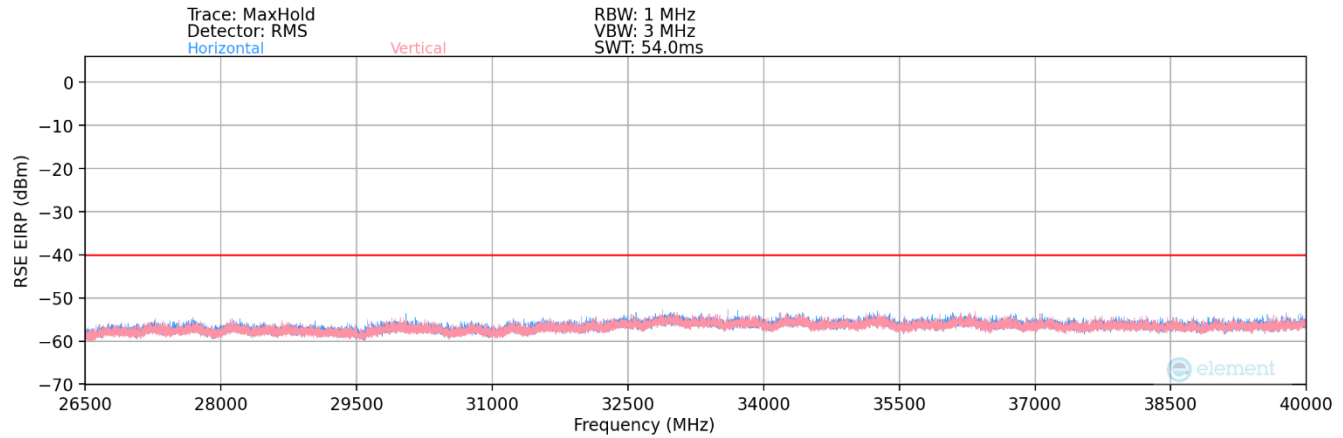

Plot 7-191. Radiated Spurious Plot (NR Band n48 – Ant A)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
705.00	V	-	-	-82.19	28.81	53.62	-43.79	-40.00	-3.79

Table 7-75. Radiated Spurious Data (NR Band n48 – Mid Channel - Ant A)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	V	-	-	-77.03	10.02	39.99	-55.27	-40.00	-15.27
10710.00	V	-	-	-78.07	12.54	41.47	-53.78	-40.00	-13.78
14280.00	V	-	-	-78.40	15.08	43.68	-51.58	-40.00	-11.58

Table 7-76. Radiated Spurious Data (NR Band n48 – Low Channel - Ant A)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	V	-	-	-76.44	9.31	39.87	-55.39	-40.00	-15.39
10875.00	V	-	-	-78.43	12.69	41.26	-54.00	-40.00	-14.00
14500.00	V	-	-	-78.38	15.58	44.20	-51.06	-40.00	-11.06

Table 7-77. Radiated Spurious Data (NR Band n48 – Mid Channel - Ant A)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 169 of 201


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	V	-	-	-76.64	9.22	39.58	-55.68	-40.00	-15.68
11040.00	V	-	-	-78.45	12.67	41.22	-54.04	-40.00	-14.04
14720.00	V	-	-	-78.78	15.05	43.27	-51.99	-40.00	-11.99


Table 7-78. Radiated Spurious Data (NR Band n48 – High Channel - Ant A)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 170 of 201


LTE Band 48 – Ant C

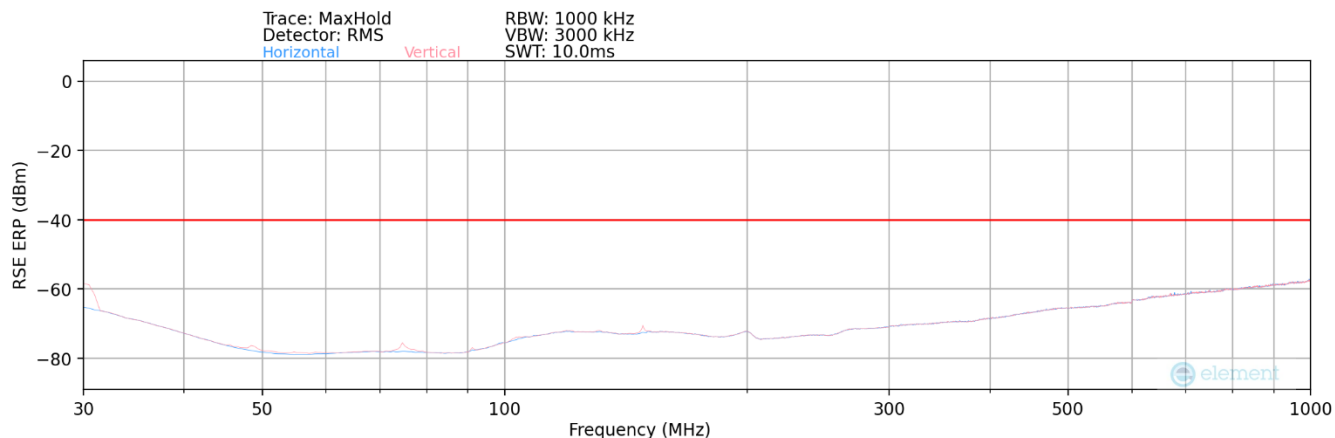

Plot 7-192. Radiated Spurious Plot (LTE Band 48 – Ant C)

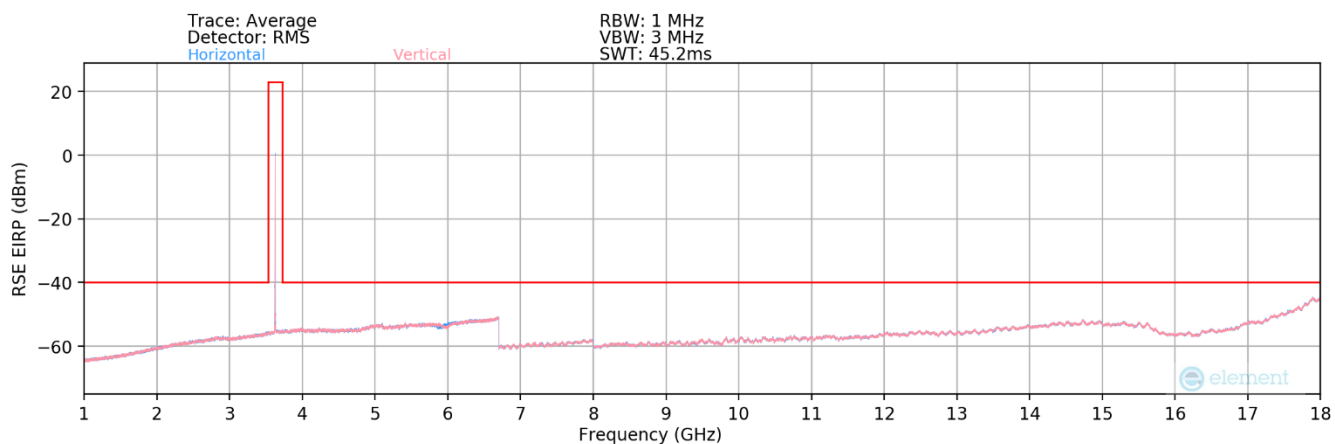


Plot 7-193. Radiated Spurious Plot (LTE Band 48 – Ant C)

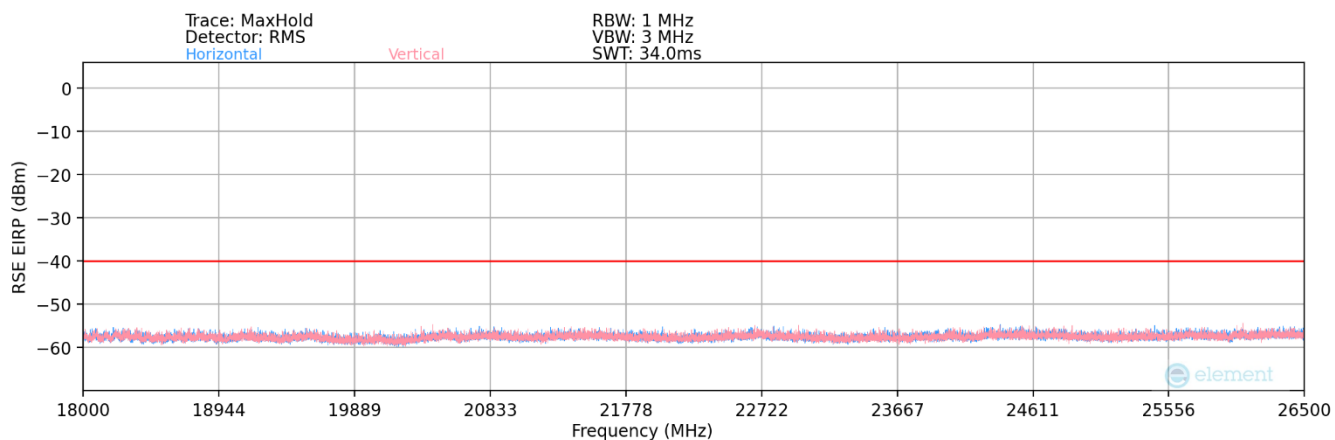

Plot 7-194. Radiated Spurious Plot (LTE Band 48 – Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 171 of 201

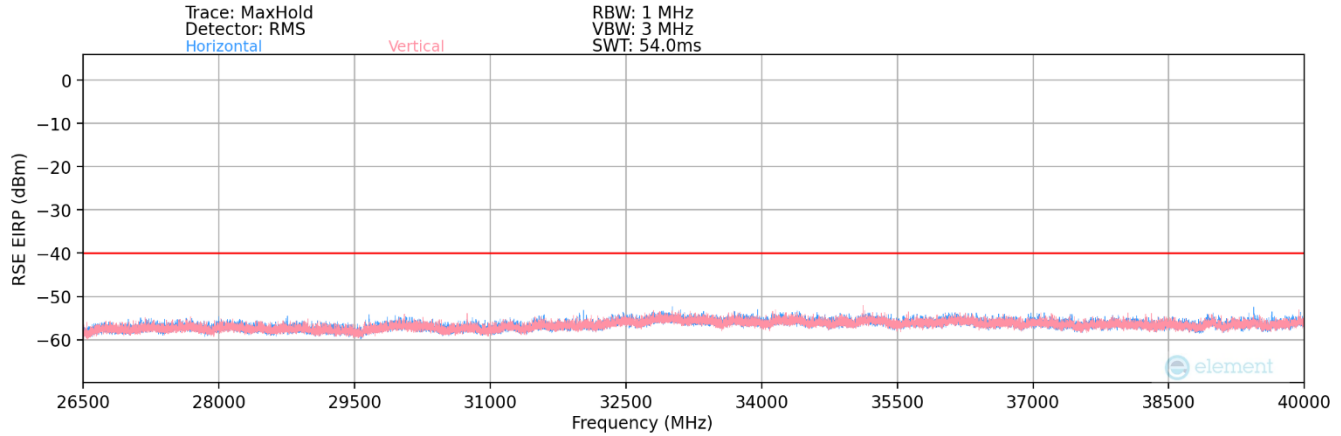

Plot 7-195. Radiated Spurious Plot (LTE Band 48 – Ant C)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
300.00	H	-	-	-82.81	21.22	45.41	-52.00	-40.00	-12.00

Table 7-79. Radiated Spurious Data (LTE Band 48 – Mid Channel - Ant C)

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.00	H	-	-	-76.38	6.71	37.33	-57.93	-40.00	-17.93
10680.00	H	-	-	-78.60	11.26	39.66	-55.60	-40.00	-15.60
14240.00	H	-	-	-80.10	16.48	43.38	-51.88	-40.00	-11.88

Table 7-80. Radiated Spurious Data (LTE Band 48 – Low Channel - Ant C)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-76.77	7.07	37.30	-57.96	-40.00	-17.96
10875.00	H	-	-	-78.03	11.02	39.99	-55.26	-40.00	-15.26
14500.00	H	-	-	-79.95	17.19	44.24	-51.02	-40.00	-11.02

Table 7-81. Radiated Spurious Data (LTE Band 48 – Mid Channel - Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 172 of 201


Bandwidth (MHz):	20
Frequency (MHz):	3690.0
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	H	-	-	-76.66	7.06	37.40	-57.86	-40.00	-17.86
11070.00	H	-	-	-78.46	11.93	40.47	-54.79	-40.00	-14.79
14760.00	H	-	-	-80.10	18.29	45.19	-50.07	-40.00	-10.07


Table 7-82. Radiated Spurious Data (LTE Band 48 – High Channel - Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 173 of 201


ULCA LB48 – Ant C

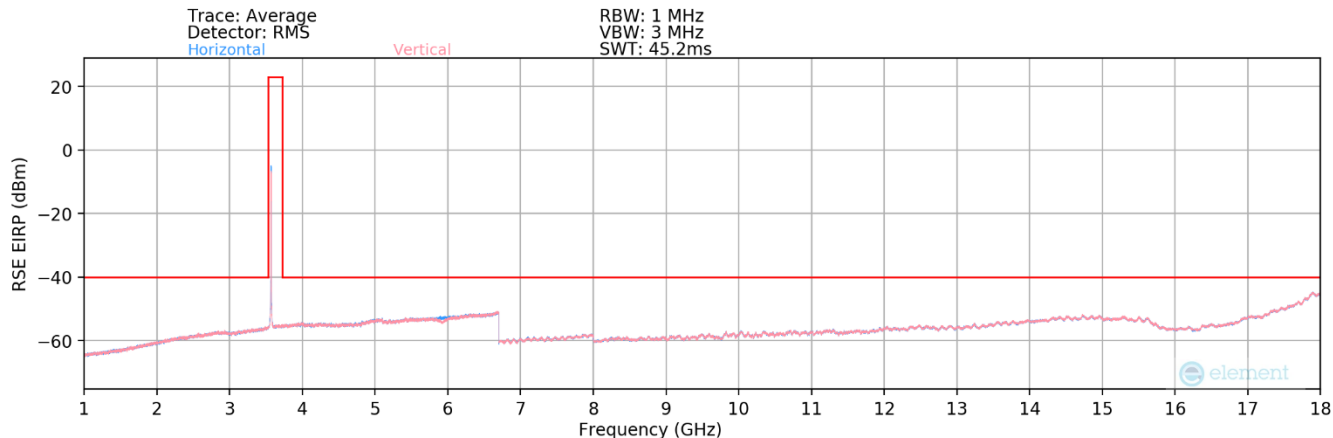

Plot 7-196. Radiated Spurious Plot (ULCA LB48 – Ant C – Low Channel)

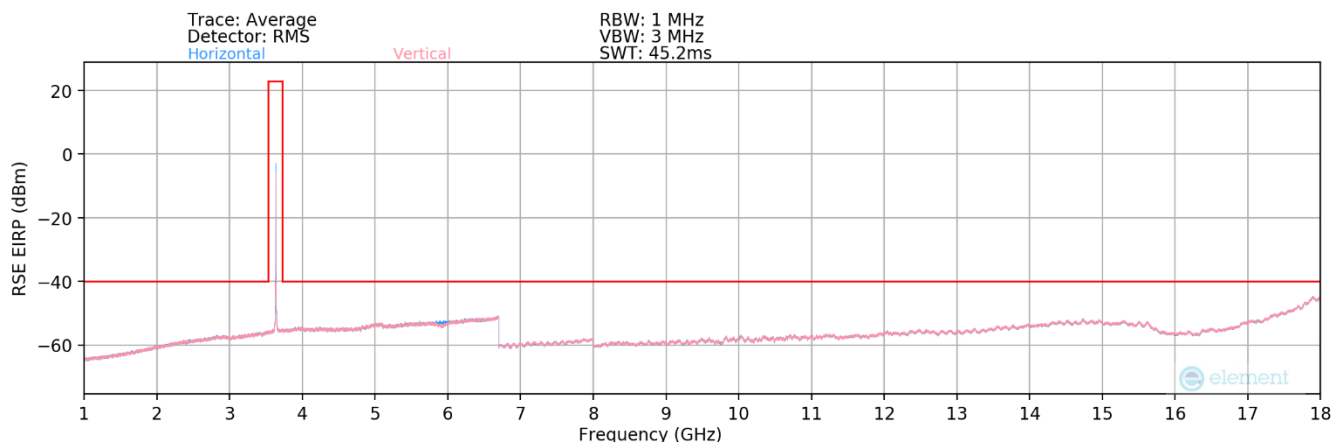


Plot 7-197. Radiated Spurious Plot (ULCA LB48 – Ant C – Mid Channel)

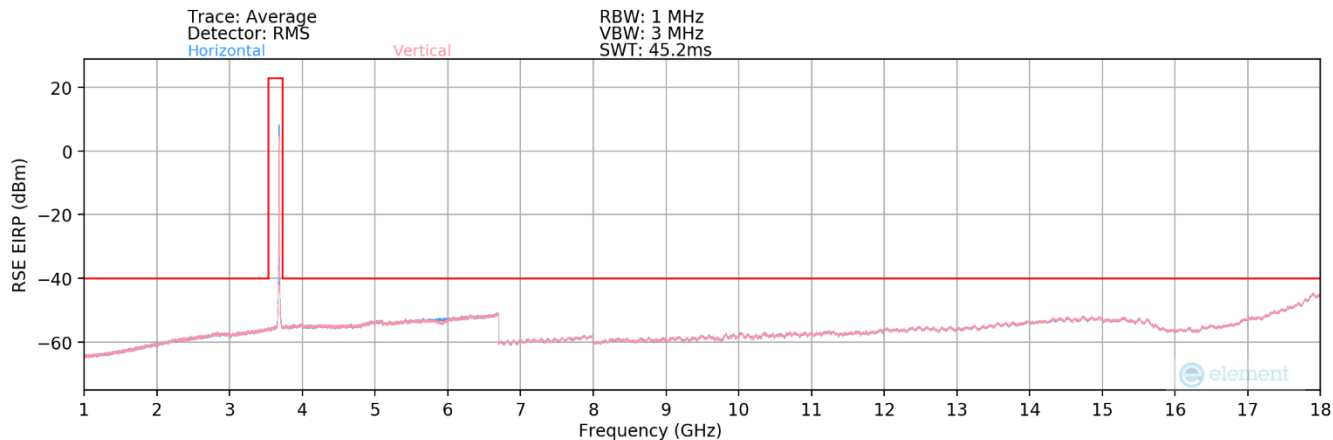


Plot 7-198. Radiated Spurious Plot (ULCA LB48 – Ant C – High Channel)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 174 of 201

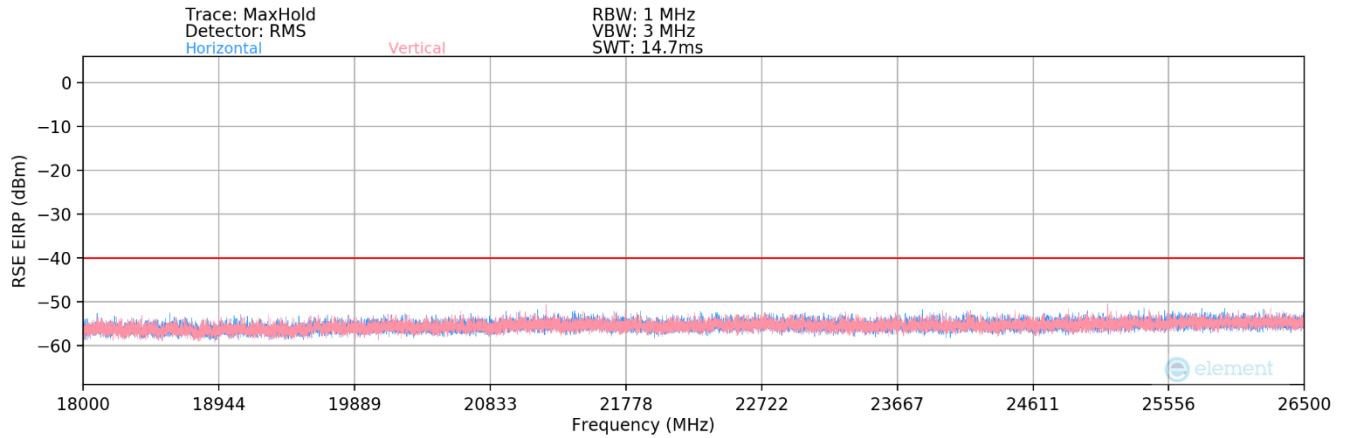

Plot 7-199. Radiated Spurious Plot (ULCA LB48 – Ant C – Mid Channel)

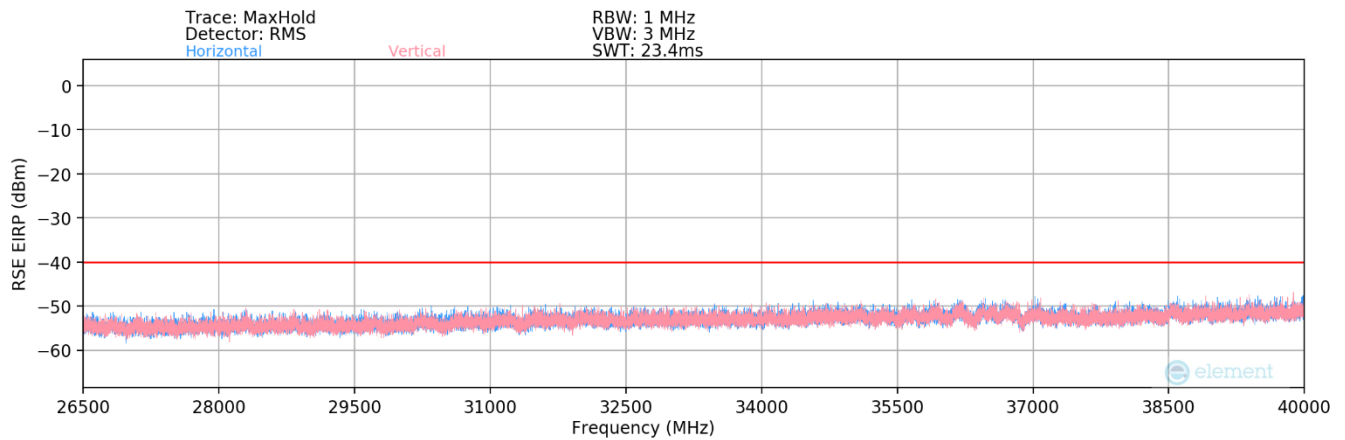

Plot 7-200. Radiated Spurious Plot (ULCA LB48 – Ant C – Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3560.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3579.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.00	H	-	-	-76.89	6.71	36.82	-58.44	-40.00	-18.44
10680.00	H	-	-	-78.85	11.26	39.41	-55.85	-40.00	-15.85
14240.00	H	-	-	-80.09	16.48	43.39	-51.87	-40.00	-11.87

Table 7-83. Radiated Spurious Data (ULCA LB48 – Low Channel - Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset			Page 175 of 201

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3625.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3644.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-76.72	7.07	37.35	-57.91	-40.00	-17.91
10875.00	H	-	-	-78.30	11.02	39.72	-55.53	-40.00	-15.53
14500.00	H	-	-	-79.91	17.19	44.28	-50.98	-40.00	-10.98

Table 7-84. Radiated Spurious Data (ULCA LB48 – Mid Channel - Ant C)


PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	3690.0
PCC RB / Offset:	1 / 0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	3670.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	H	-	-	-76.70	7.06	37.36	-57.90	-40.00	-17.90
11070.00	H	-	-	-78.43	11.93	40.50	-54.76	-40.00	-14.76
14760.00	H	-	-	-80.15	18.29	45.14	-50.12	-40.00	-10.12


Table 7-85. Radiated Spurious Data (ULCA LB48 – High Channel - Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 176 of 201


NR Band n48 – Switching Ant C

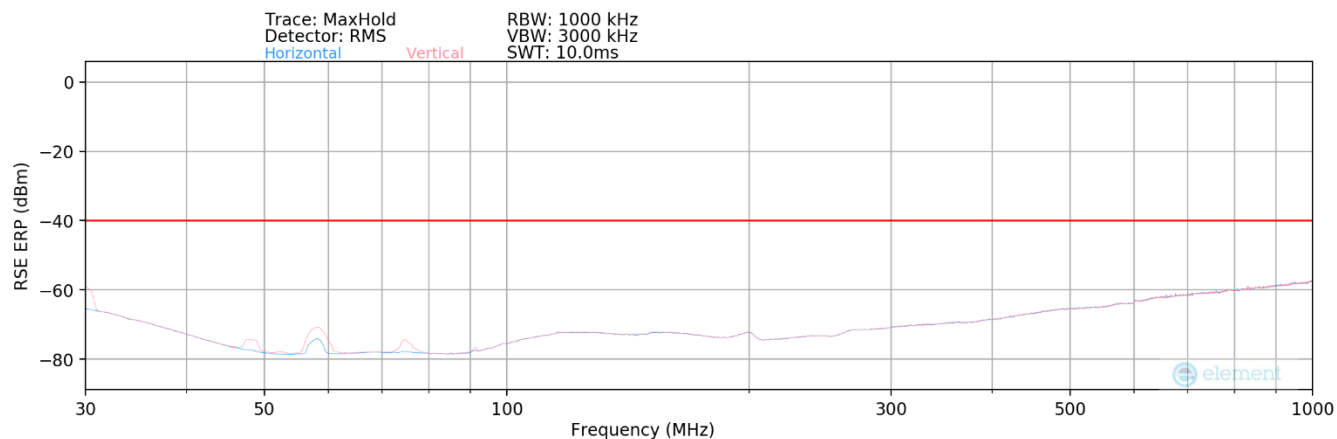

Plot 7-201. Radiated Spurious Plot (NR Band n48 – Switching Ant C)

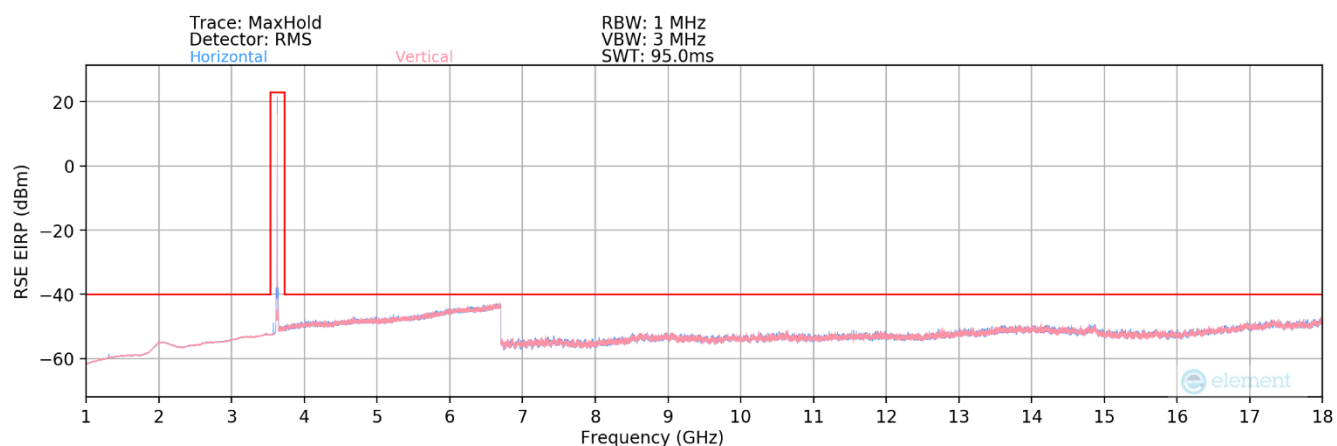


Plot 7-202. Radiated Spurious Plot (NR Band n48 – Switching Ant C)

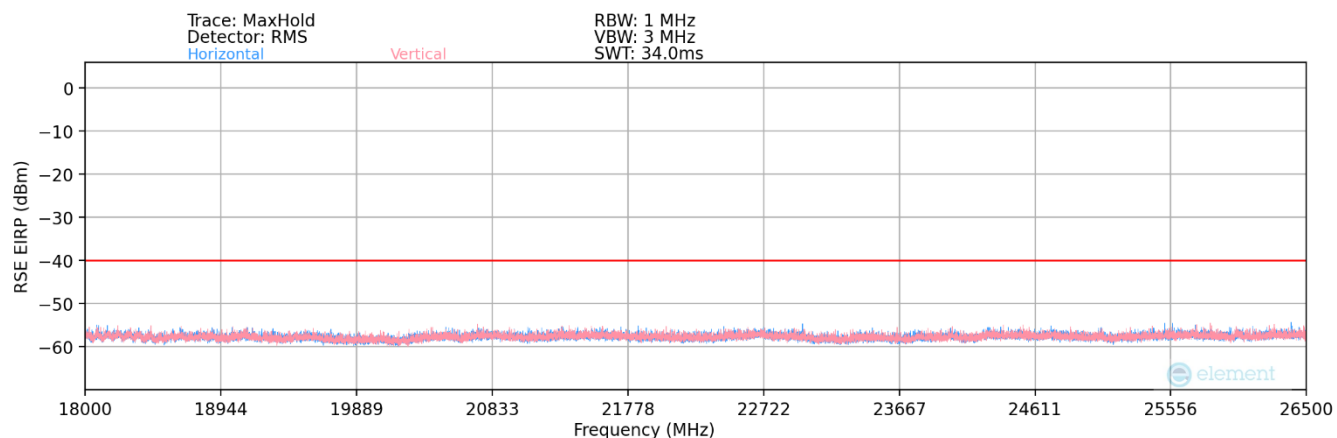

Plot 7-203. Radiated Spurious Plot (NR Band n48 – Switching Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 177 of 201

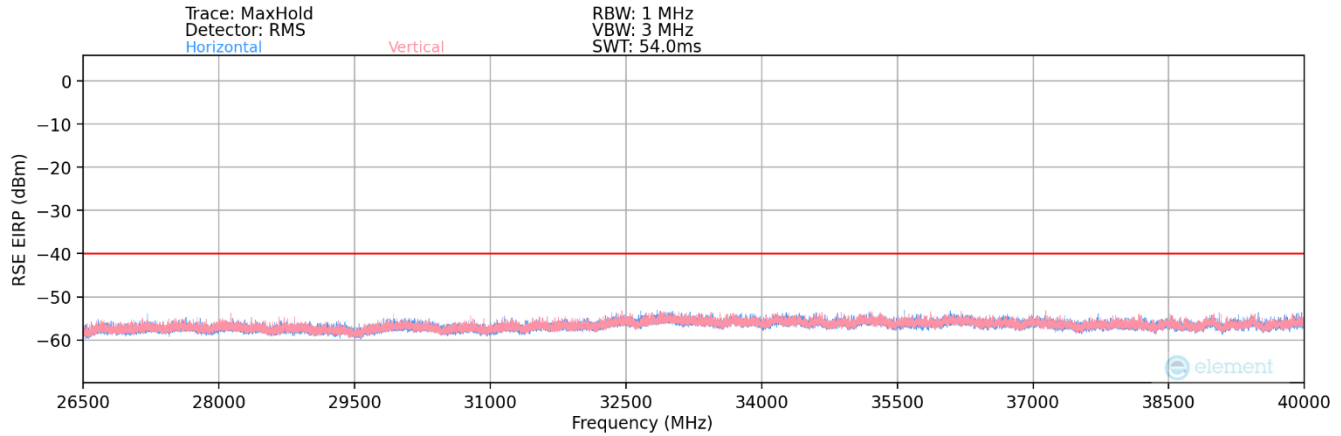

Plot 7-204. Radiated Spurious Plot (NR Band n48 – Switching Ant C)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
57.85	V	-	-	-85.54	14.18	35.64	-61.77	-40.00	-21.77
74.30	V	-	-	-85.66	14.78	36.12	-61.29	-40.00	-21.29
703.58	H	-	-	-85.32	28.92	50.60	-46.81	-40.00	-6.81

Table 7-86. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant C)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	H	-	-	-78.08	9.93	38.85	-56.41	-40.00	-16.41
10710.00	H	-	-	-79.41	13.11	40.70	-54.56	-40.00	-14.56
14280.00	H	-	-	-80.04	15.55	42.51	-52.75	-40.00	-12.75

Table 7-87. Radiated Spurious Data (NR Band n48 – Low Channel - Switching Ant C)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-76.97	9.31	39.34	-55.92	-40.00	-15.92
10875.00	H	-	-	-79.03	12.69	40.66	-54.60	-40.00	-14.60
14500.00	H	-	-	-80.17	15.58	42.41	-52.85	-40.00	-12.85

Table 7-88. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 178 of 201


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	-	-	-77.24	9.22	38.98	-56.28	-40.00	-16.28
11040.00	H	-	-	-79.36	12.67	40.31	-54.95	-40.00	-14.95
14720.00	H	-	-	-80.13	15.05	41.92	-53.34	-40.00	-13.34


Table 7-89. Radiated Spurious Data (NR Band n48 – High Channel - Switching Ant C)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 179 of 201


NR Band n48 – Switching Ant F

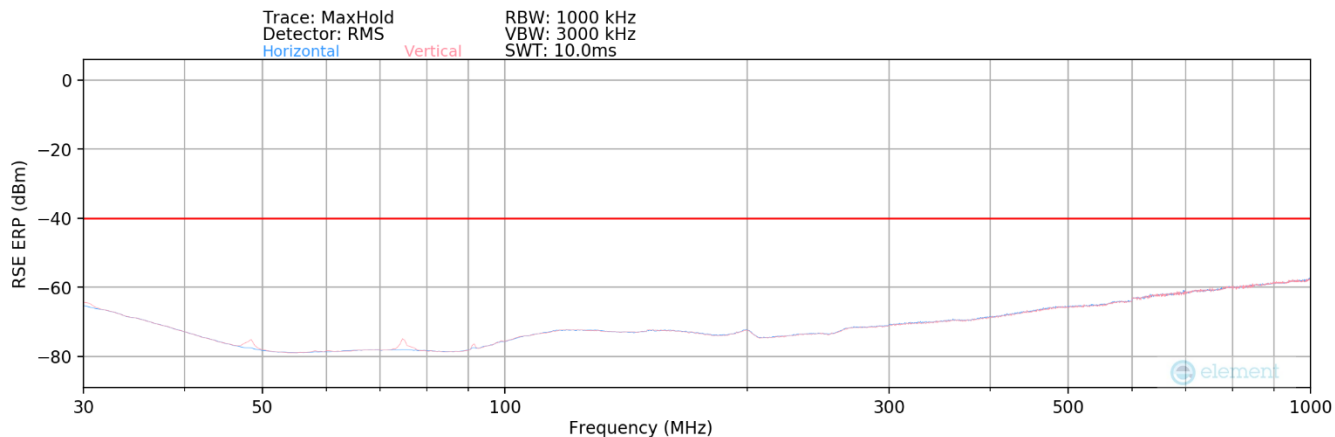

Plot 7-205. Radiated Spurious Plot (NR Band n48 – Switching Ant F)

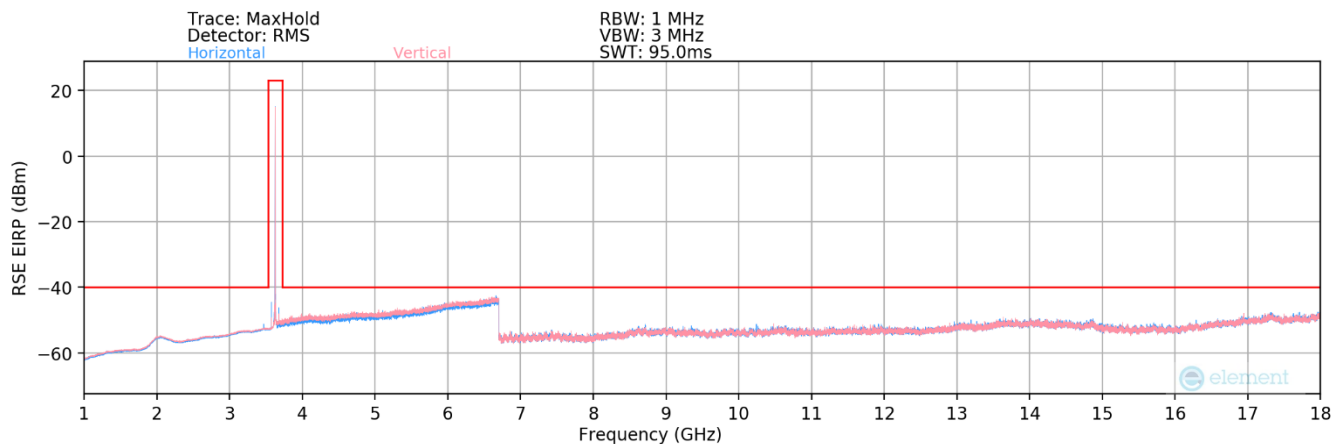


Plot 7-206. Radiated Spurious Plot (NR Band n48 – Switching Ant F)

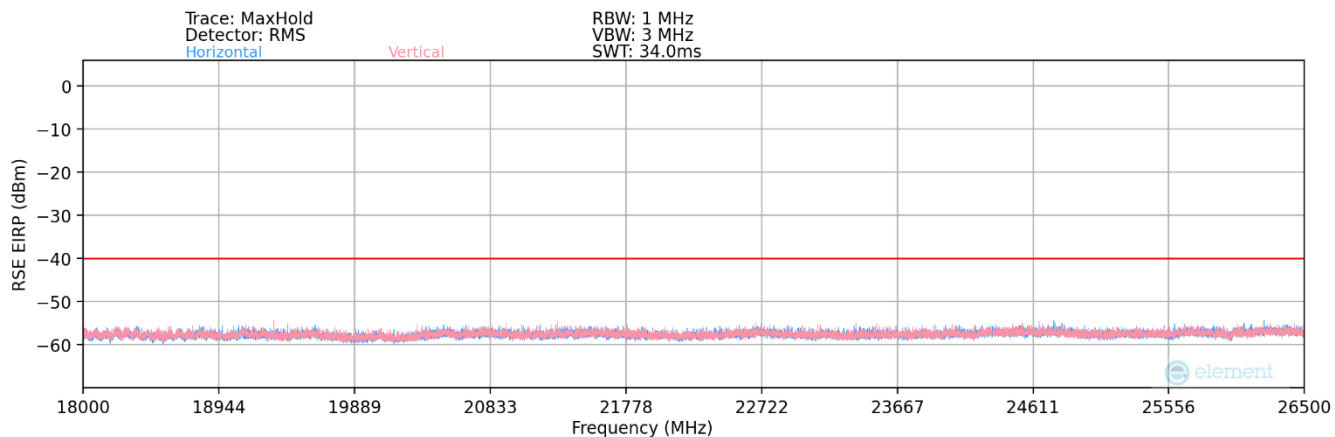

Plot 7-207. Radiated Spurious Plot (NR Band n48 – Switching Ant F)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 180 of 201

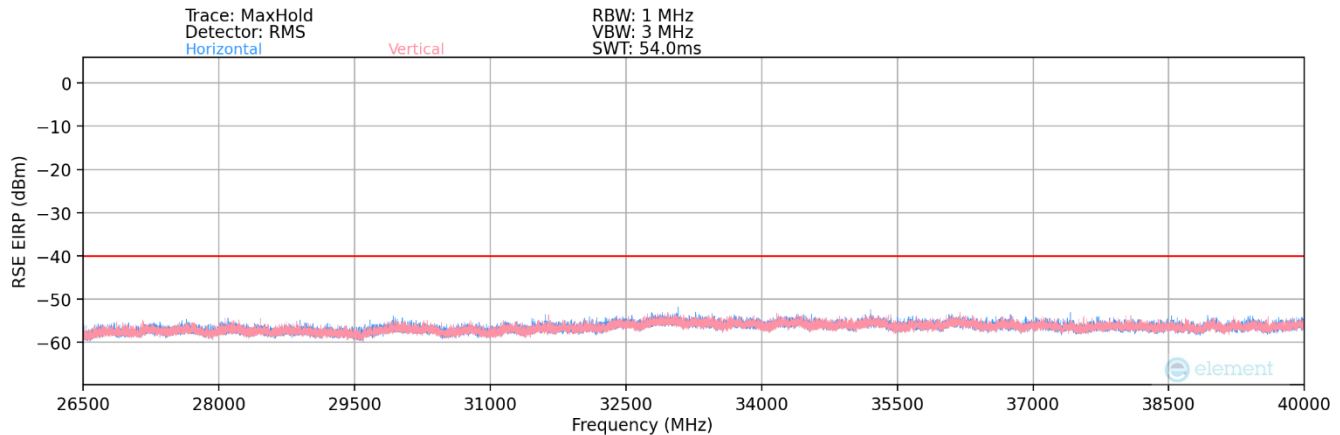

Plot 7-208. Radiated Spurious Plot (NR Band n48 – Switching Ant F)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
75.30	V	-	-	-85.20	14.76	36.56	-60.85	-40.00	-20.85
545.30	H	-	-	-85.55	26.32	47.77	-49.64	-40.00	-9.64

Table 7-90. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant F)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	H	-	-	-78.25	10.02	38.77	-56.49	-40.00	-16.49
10710.00	H	-	-	-79.28	12.54	40.26	-54.99	-40.00	-14.99
14280.00	H	-	-	-80.30	15.08	41.78	-53.48	-40.00	-13.48

Table 7-91. Radiated Spurious Data (NR Band n48 – Low Channel - Switching Ant F)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-76.87	9.31	39.44	-55.82	-40.00	-15.82
10875.00	H	-	-	-79.27	12.69	40.42	-54.84	-40.00	-14.84
14500.00	H	-	-	-80.32	15.58	42.26	-53.00	-40.00	-13.00

Table 7-92. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant F)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 181 of 201


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	-	-	-77.05	9.22	39.17	-56.09	-40.00	-16.09
11040.00	H	-	-	-79.40	12.67	40.27	-54.99	-40.00	-14.99
14720.00	H	-	-	-80.48	15.05	41.57	-53.69	-40.00	-13.69


Table 7-93. Radiated Spurious Data (NR Band n48 – High Channel - Switching Ant F)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 182 of 201


NR Band n48 – Switching Ant A

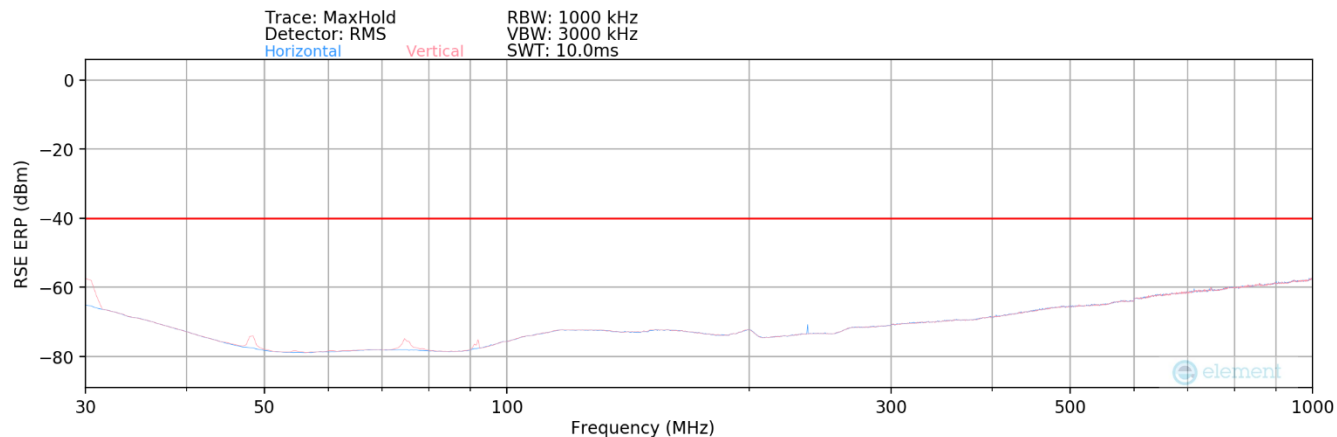

Plot 7-209. Radiated Spurious Plot (NR Band n48 – Switching Ant A)

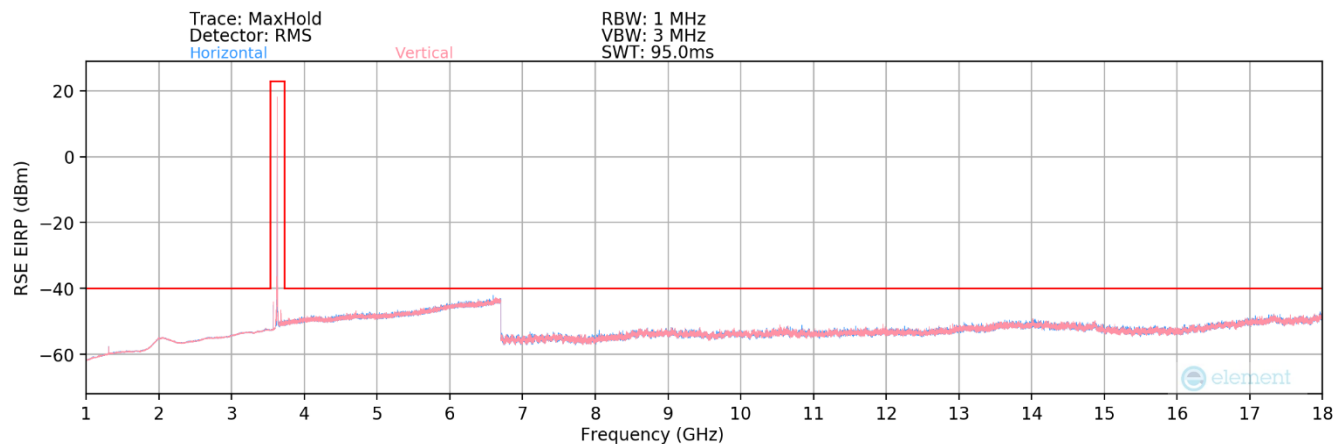


Plot 7-210. Radiated Spurious Plot (NR Band n48 – Switching Ant A)

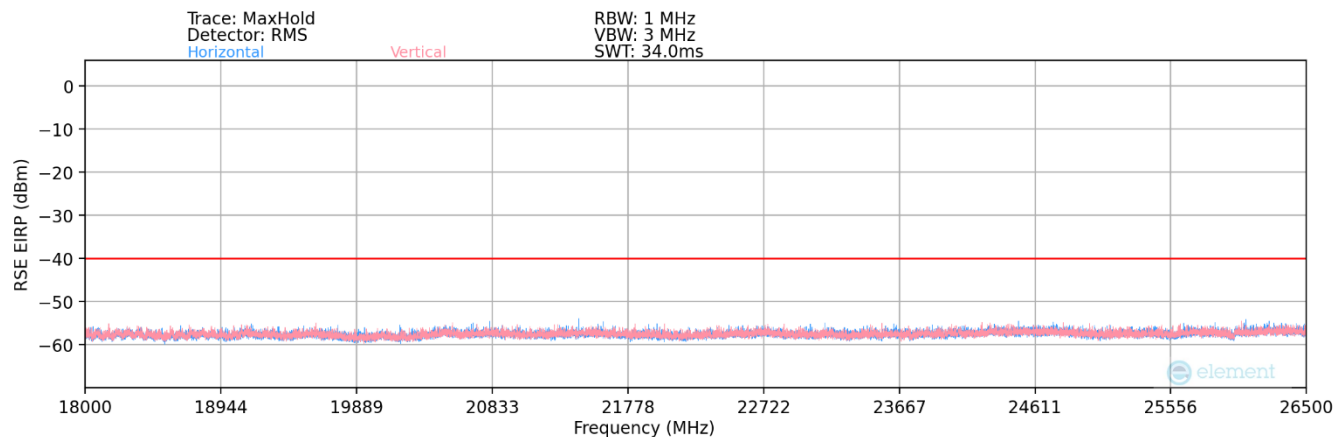

Plot 7-211. Radiated Spurious Plot (NR Band n48 – Switching Ant A)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 183 of 201

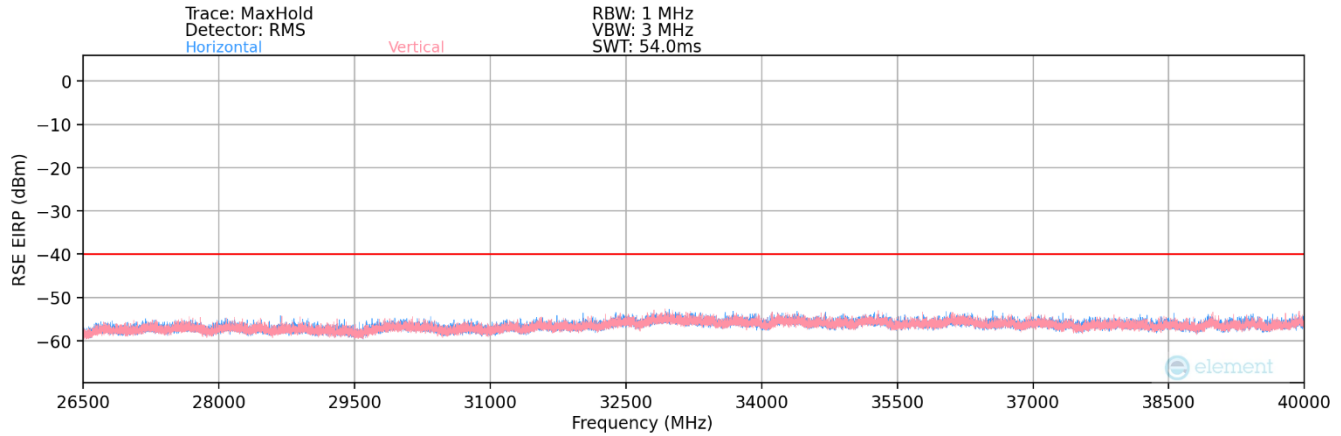

Plot 7-212. Radiated Spurious Plot (NR Band n48 – Switching Ant A)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
230.20	H	-	-	-85.22	18.51	40.29	-57.12	-40.00	-17.12

Table 7-94. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant A)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	H	-	-	-78.33	9.93	38.60	-56.66	-40.00	-16.66
10710.00	H	-	-	-79.64	13.11	40.47	-54.79	-40.00	-14.79
14280.00	H	-	-	-80.34	15.55	42.21	-53.05	-40.00	-13.05

Table 7-95. Radiated Spurious Data (NR Band n48 – Low Channel - Switching Ant A)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-77.10	9.31	39.21	-56.05	-40.00	-16.05
10875.00	H	-	-	-79.16	12.69	40.53	-54.73	-40.00	-14.73
14500.00	H	-	-	-80.36	15.58	42.22	-53.04	-40.00	-13.04

Table 7-96. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant A)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 184 of 201


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	-	-	-77.34	9.83	39.49	-55.77	-40.00	-15.77
11040.00	H	-	-	-79.25	12.52	40.27	-54.99	-40.00	-14.99
14720.00	H	-	-	-80.42	15.11	41.69	-53.57	-40.00	-13.57


Table 7-97. Radiated Spurious Data (NR Band n48 – High Channel - Switching Ant A)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 185 of 201


NR Band n48 – Switching Ant G

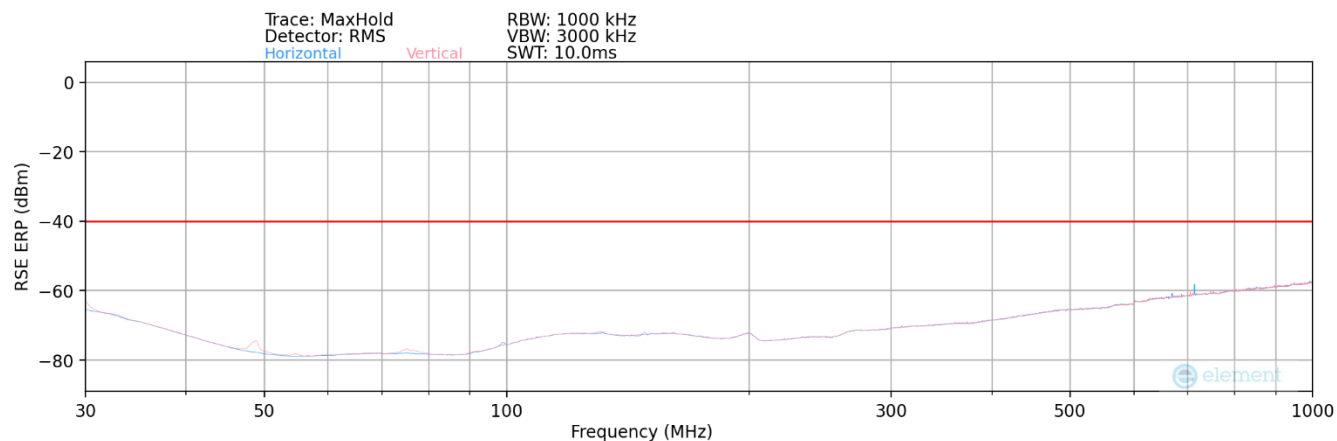

Plot 7-213. Radiated Spurious Plot (NR Band n48 – Switching Ant G)

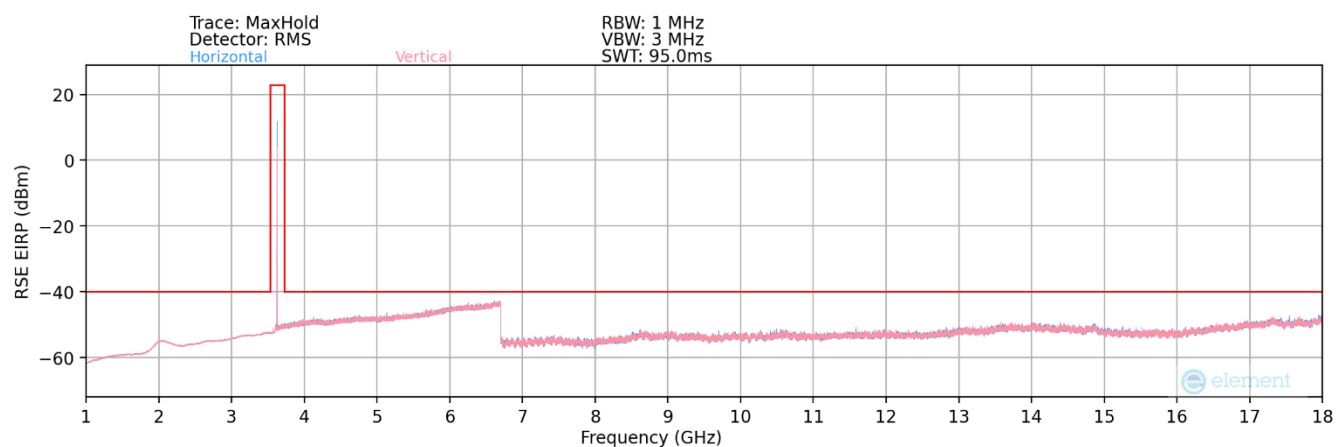


Plot 7-214. Radiated Spurious Plot (NR Band n48 – Switching Ant G)

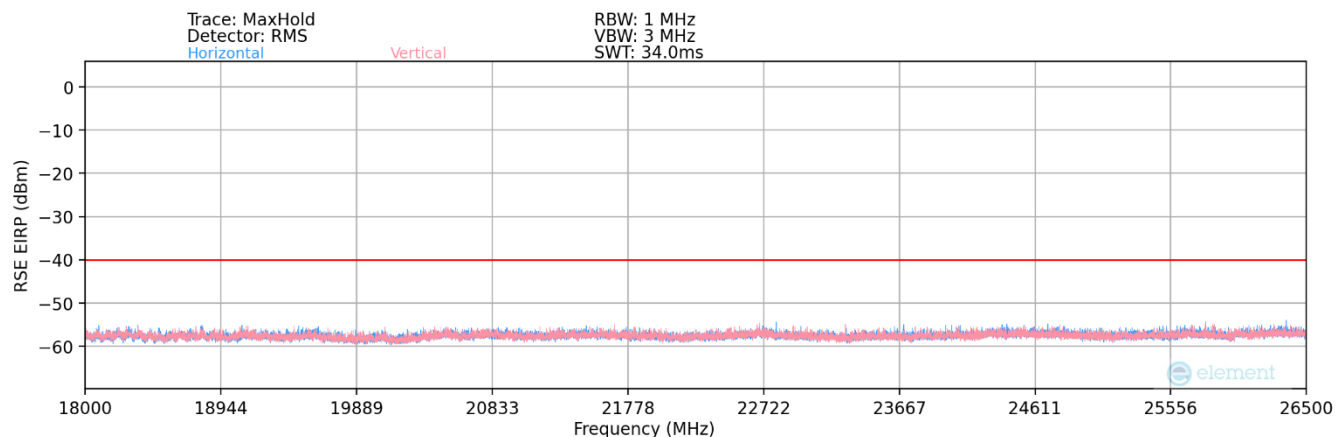

Plot 7-215. Radiated Spurious Plot (NR Band n48 – Switching Ant G)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 186 of 201

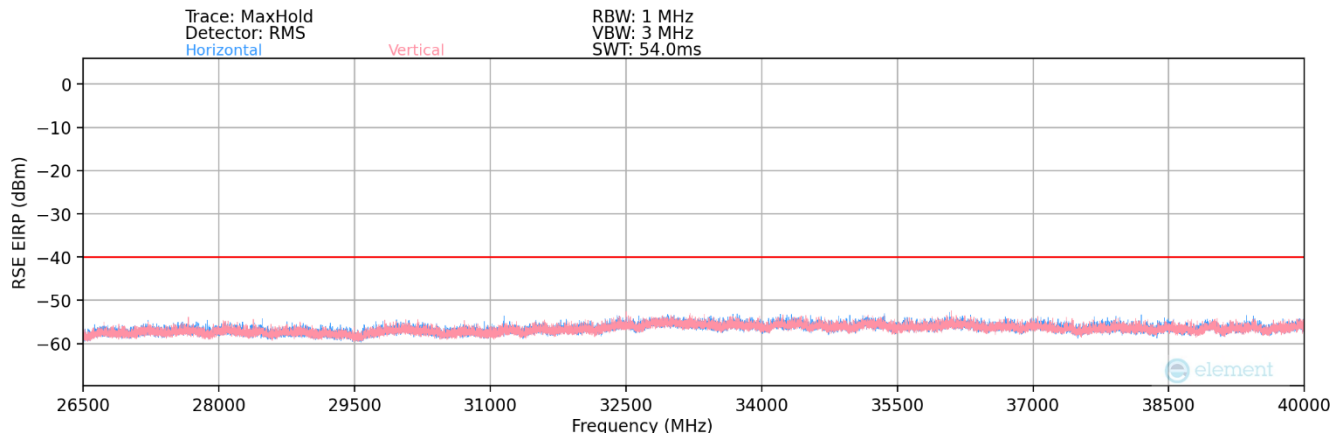

Plot 7-216. Radiated Spurious Plot (NR Band n48 – Switching Ant G)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
710.00	V	-	-	-82.43	29.08	53.65	-43.76	-40.00	-3.76

Table 7-98. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant G)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	V	-	-	-77.41	9.93	39.52	-55.74	-40.00	-15.74
10710.00	V	-	-	-78.53	13.11	41.58	-53.68	-40.00	-13.68
14280.00	V	-	-	-78.53	15.55	44.02	-51.24	-40.00	-11.24

Table 7-99. Radiated Spurious Data (NR Band n48 – Low Channel - Switching Ant G)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	V	-	-	-76.12	9.31	40.19	-55.07	-40.00	-15.07
10875.00	V	-	-	-78.28	12.69	41.41	-53.85	-40.00	-13.85
14500.00	V	-	-	-78.89	15.58	43.69	-51.57	-40.00	-11.57

Table 7-100. Radiated Spurious Data (NR Band n48 – Mid Channel - Switching Ant G)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 187 of 201

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	V	-	-	-76.49	9.83	40.34	-54.92	-40.00	-14.92
11040.00	V	-	-	-78.15	12.52	41.37	-53.89	-40.00	-13.89
14720.00	V	-	-	-79.32	15.11	42.79	-52.47	-40.00	-12.47

Table 7-101. Radiated Spurious Data (NR Band n48 – High Channel - Switching Ant G)

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 188 of 201

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 189 of 201

LTE Band 48

LTE Band 48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		4.436	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.436	- 30	3,625,094,932	2,399	0.0000662
		- 20	3,625,089,721	-2,812	-0.0000776
		- 10	3,625,091,686	-848	-0.0000234
		0	3,625,096,470	3,937	0.0001086
		+ 10	3,625,091,586	-948	-0.0000261
		+ 20 (Ref)	3,625,092,533	0	0.0000000
		+ 30	3,625,096,644	4,111	0.0001134
		+ 40	3,625,095,164	2,631	0.0000726
		+ 50	3,625,093,983	1,450	0.0000400
Battery Endpoint	3.67	+ 20	3,625,092,202	-332	-0.0000091

Table 7-102. LTE Band 48 Frequency Stability Data

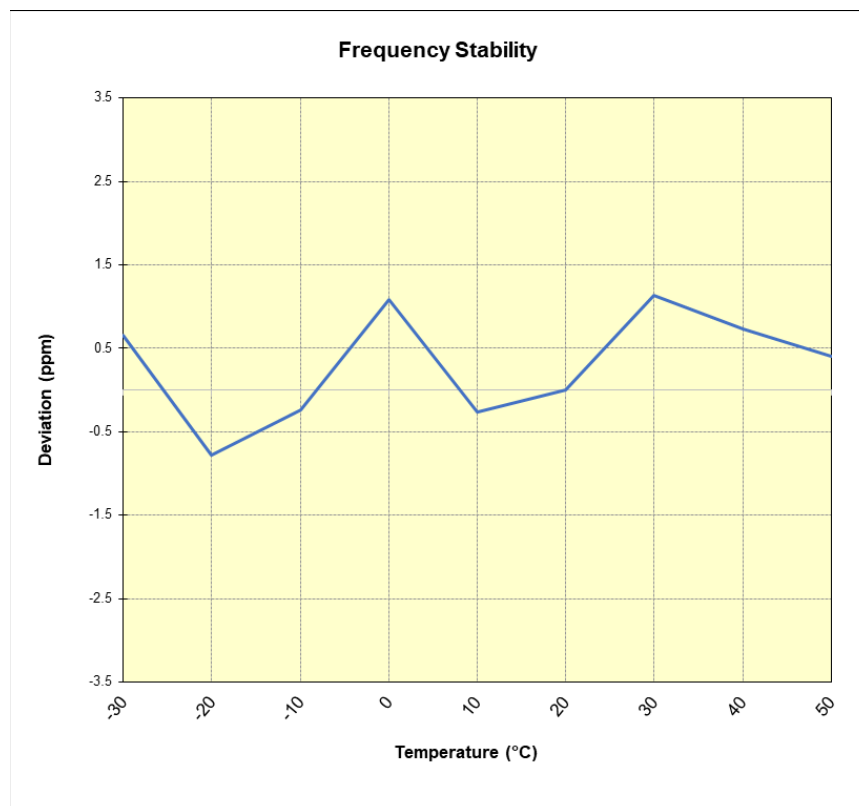


Plot 7-217. LTE Band 48 Frequency Stability Chart

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 190 of 201

Frequency Stability / Temperature Variation

NR Band n48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		4.436	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.436	- 30	3,625,172,529	4,824	0.0001331
		- 20	3,625,171,376	3,671	0.0001013
		- 10	3,625,170,526	2,821	0.0000778
		0	3,625,168,592	887	0.0000245
		+ 10	3,625,168,604	898	0.0000248
		+ 20 (Ref)	3,625,167,705	0	0.0000000
		+ 30	3,625,167,845	140	0.0000039
		+ 40	3,625,169,470	1,765	0.0000487
		+ 50	3,625,171,635	3,930	0.0001084
Battery Endpoint	3.67	+ 20	3,625,167,543	-162	-0.0000045

Table 7-103. NR Band n48 Frequency Stability Data

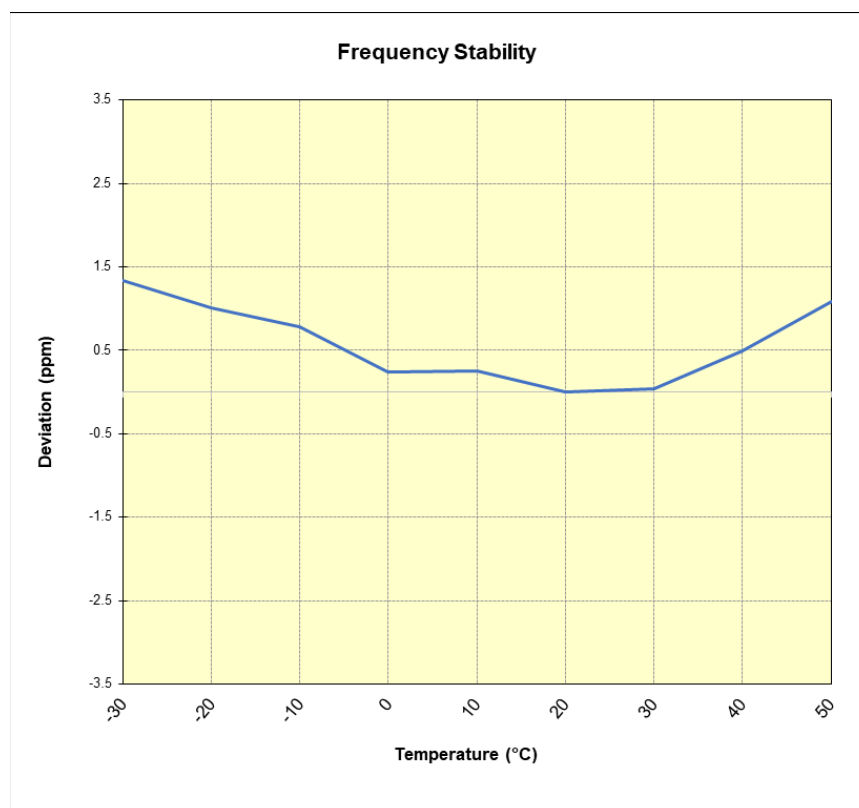

Plot 7-218. NR Band n48 Frequency Stability Chart

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 191 of 201

7.9 End User Device Additional Requirement (CBSD Protocol)

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified LTE CBSD (Ruckus FCC ID: S9GQ910US00) or to a certified NR CBSD (FCC ID: PIDAV2700) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03, WINNF-18-IN-00178 v1.0.0.00

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.


1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.

Test Notes

The EUT is an End User Device.


FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 192 of 201

Run#1: LTE Band 48

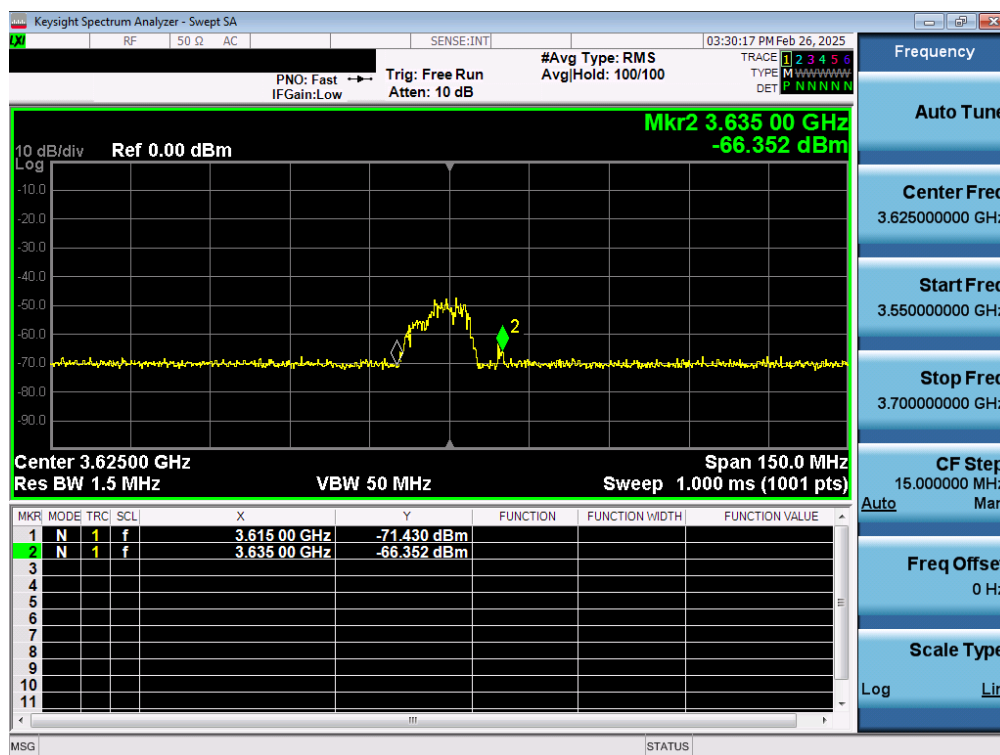

Plot 7-219. Run#1 End User Device Frequency of Operations

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 193 of 201

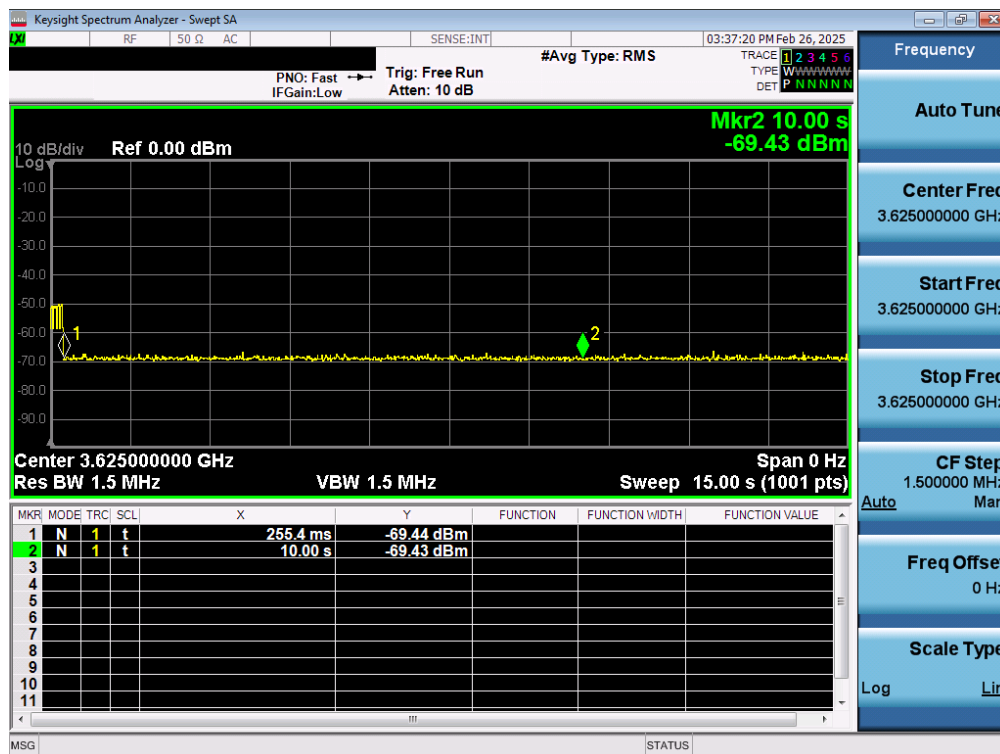

Plot 7-220. Run#1 End User Device Discontinues Operations within 10s

Note:


Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 194 of 201

V11.2 09/11/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

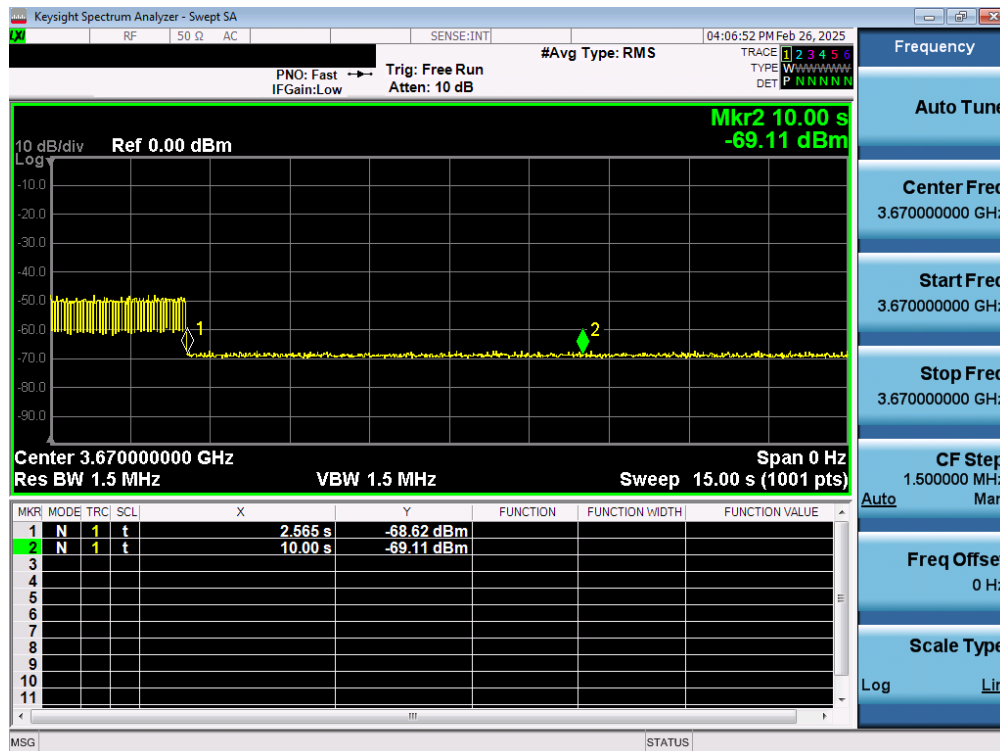

Plot 7-226. Run#2 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 200 of 201

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF966U** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

FCC ID: A3LSMF966U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2502210015-14.A3L	Test Dates: 2/24/2025 - 4/28/2025	EUT Type: Portable Handset	Page 201 of 201