

CERTIFICATION TEST REPORT

Report Number. : S-4792147575-E15V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-F971U, SM-F971U1

FCC ID : A3LSMF971U

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII
a/b/g/n/ac/ax/be, NFC, WPT, UWB and NB-NTN

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
2026-04-17

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2026-04-17	Initial issue	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. DECISION RULE	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM E-FIELD STRENGTH	7
5.3. PRELIMINARY TEST CONFIGURATIONS	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. MODIFICATIONS	9
5.6. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. APPLICABLE LIMITS AND TEST RESULTS	12
7.1. RADIATED EMISSIONS	12
7.2. AC MAINS LINE CONDUCTED EMISSIONS	14

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT, UWB and NB-NTN

MODEL NUMBER: SM-F971U, SM-F971U1

SERIAL NUMBER: R3GL10KMFCP (RADIATED);

DATE TESTED: 2026-04-01 ~ 2026-04-17

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2020.
4. KDB 680106 D01 Wireless Power Transfer v04

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☐	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☐	Chamber 3(3m semi-anechoic chamber)
☐	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9 kHz to 30 MHz	1.84 dB
Radiated Disturbance, 9 kHz to 30 MHz	2.41 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.78 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT


The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT, UWB and NB-NTN. This test report addresses the DCD(wireless low power transmitter) operational mode.

5.2. MAXIMUM E-FIELD STRENGTH

Fundamental Frequency (kHz)	Test Case	E-Field (300m distance) FCC (dBuV/m)
110 - 148	2	-3.32

5.3. PRELIMINARY TEST CONFIGURATIONS

Worst case of antenna axis:

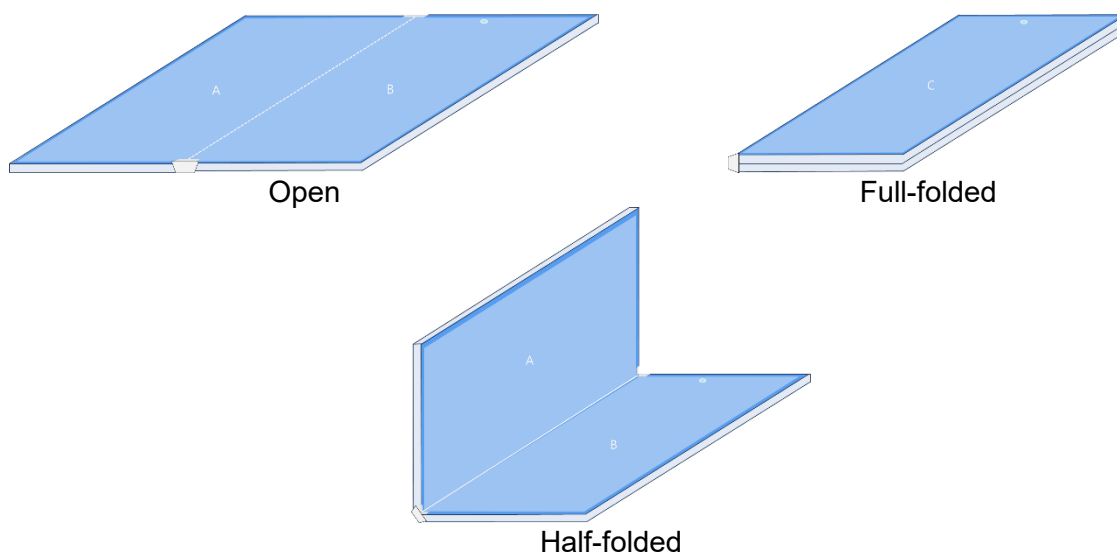

Power sharing mode	
Foldable condition	EUT axis
Open	Y

5.4. WORST-CASE CONFIGURATION AND MODE

Mode	Test Case	Description
Power sharing mode	1	Charging from EUT to Phone
	2	Charging from EUT(Charging from TA) to Phone
	3	Charging from EUT to Phone (Cross position)
	4	Charging from EUT(Charging from TA) to Phone (Cross position)
	5	Charging from EUT to Wearable device
	6	Charging from EUT(Charging from TA) to Wearable device

For radiated test, test case 1/3/5, the EUT can operate the power sharing mode when battery level is over 30%. Because test results are not different between fully charged status and battery level 30% status(EUT condition), test were performed fully charged condition.

Also according to current client device's(Phone and Wearable device) battery level, test results are different. Because the test results were worst when the battery level was 1%~20%, tests were performed when the battery level was 1%~20%.(Client device)

During radiated test for test case 1/3/5, the EUT didn't connected AC adapter, but for AC line conducted test for all test case was performed with connected with AC adapter.

For power sharing mode, test results of case 2 is worst case so this test report described test case 2.

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-T2510	N/A	N/A
Data Cable	SAMSUNG	EP-DN980	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is installed in a typical configuration. Charging from EUT.


TEST SETUP DIAGRAM

NOTE : Test case 1/3/5, EUT did not connected with Travel adapter(AC Main) in below set-up diagram for radiated test.


- Test Case 1 and 2 : Charging Phone

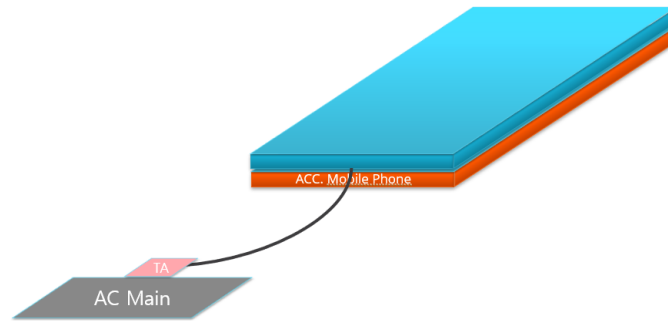

- Test Case 3 and 4 : Charging Phone(Cross position)

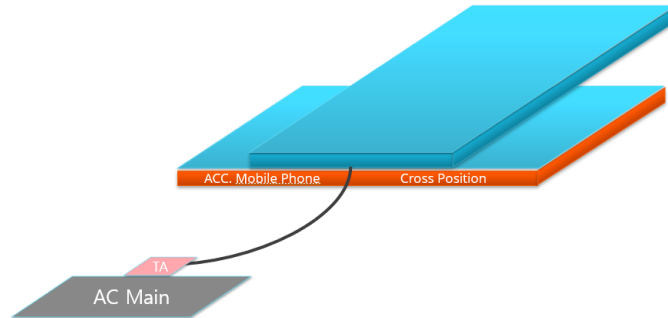

- Test Case 5 and 6 : Charging Wearable device

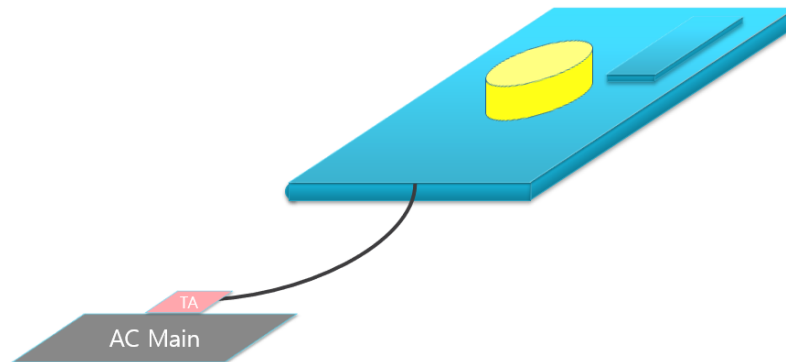

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	845	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	749	2026-08-12
Preamplifier, 1000 MHz	Sonoma	310N	341282	2026-07-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	2026-07-21
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2026-07-21
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030A	MY54170614	2026-07-21
EMI Test Receiver, 40 GHz	R&S	ESU40	100439	2026-07-21
EMI Test Receiver, 40 GHz	R&S	ESU40	100457	2026-07-21
EMI Test Receiver, 3 GHz	R&S	ESR 3	101832	2026-11-11
DC Power Supply	Agilent / HP	E3640A	MY54226395	2026-07-23
Temperature Chamber	ESPEC	SH-642	93001109	2026-07-21
LISN	R&S	ENV216	101836	2026-07-22
LISN	R&S	ENV216	101837	2026-07-22
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2E	101308	2027-10-27
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2020

The EUT was tested from 9 kHz up to 30MHz.

- a) Set the RBW = 100 Hz for the emissions below 150kHz
9 kHz for the emissions between 150kHz and 30MHz
(The minimum RBW setting value for the Spectrum analyzer is 10 kHz)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Sweep time = Auto;
- d) Detector = Peak;
- e) Trace mode = Max Hold;

LIMIT

FCC §15.209 (a)

ICES-001 Section 6.2, IC RSS-216 6.2.2, and IC RSS-GEN Sections 8.9 and 8.10.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		


RESULTS

The EUT belongs to Test Case 2.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 300 m open field test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

RADIATED EMISSIONS 9 kHz to 30 MHz(Power sharing mode Test Case 2)

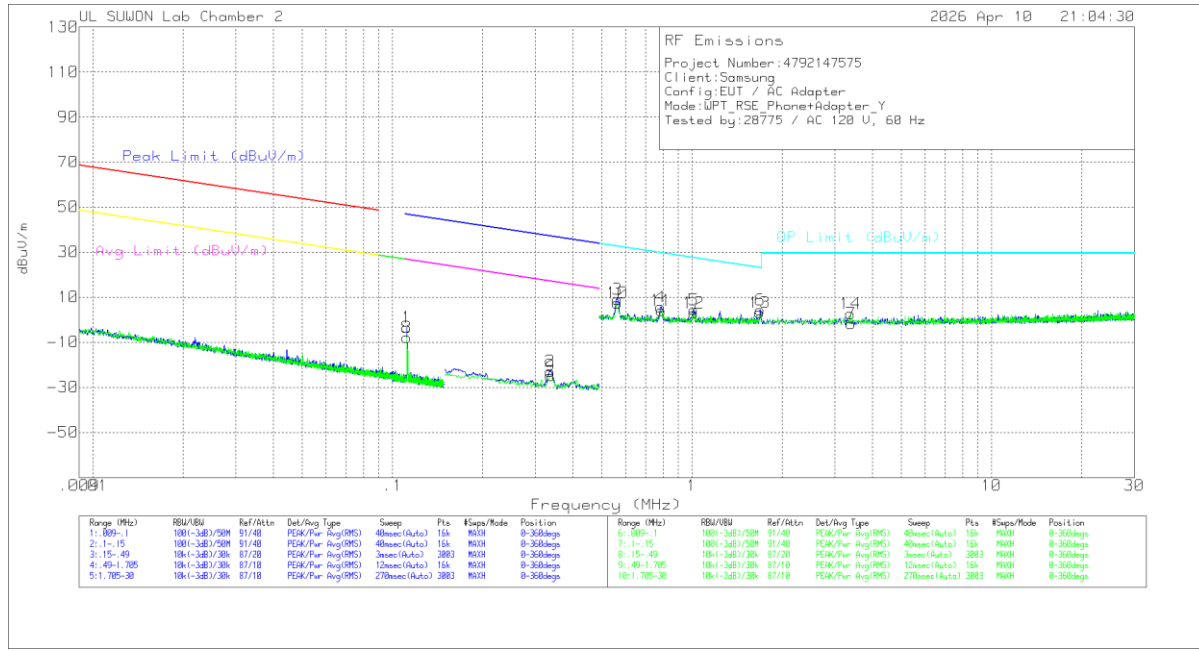

TEST DATA

Trace Markers

Face on

Marker	Frequen cy [MHz]	Meter Reading [dBuV]	Det	Antenna Factor[dB/m]	Cable Loss [dB]	Dist Corr 300m [dB]	Corrected Reading [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Avg Limit [dBuV/m]	Margin [dB]	Azimuth (Degs)
**1	.11181	55.88	Pk	20.5	.3	-80	-3.32	46.66	-49.98	26.66	-29.98	0-360
2	.33668	36.33	Pk	20.5	.3	-80	-22.87	37.07	-59.94	17.07	-39.94	0-360

Marker	Frequency [MHz]	Meter Reading [dBuV]	Det	Antenna Factor[dB/m]	Cable Loss [dB]	Dist Corr 30m[dB]	Corrected Reading [dBuV/m]	QP Limit [dBuV/m]	Margin [dB]	Azimuth (Degs)
3	.5641	28.26	Pk	20.5	.3	-40	9.06	32.58	-23.52	0-360
4	.78515	24.89	Pk	20.5	.3	-40	5.69	29.72	-24.03	0-360
5	1.01413	23.74	Pk	20.5	.3	-40	4.54	27.5	-22.96	0-360
6	1.68837	23.41	Pk	20.5	.4	-40	4.31	23.08	-18.77	0-360
7	3.4015	17.31	Pk	20.6	.4	-40	-1.69	29.5	-31.19	0-360

Face off

Marker	Frequen cy [MHz]	Meter Reading [dBuV]	Det	Antenna Factor[dB/m]	Cable Loss [dB]	Dist Corr 300m [dB]	Corrected Reading [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Avg Limit [dBuV/m]	Margin [dB]	Azimuth (Degs)
**8	.11187	51.33	Pk	20.5	.3	-80	-7.87	46.65	-54.52	26.65	-34.52	0-360
9	.33679	34.33	Pk	20.5	.3	-80	-24.87	37.06	-61.93	17.06	-41.93	0-360

Marker	Frequency [MHz]	Meter Reading [dBuV]	Det	Antenna Factor[dB/m]	Cable Loss [dB]	Dist Corr 30m[dB]	Corrected Reading [dBuV/m]	QP Limit [dBuV/m]	Margin [dB]	Azimuth (Degs)
10	.56254	26.72	Pk	20.5	.3	-40	7.52	32.6	-25.08	0-360
11	.79092	23.33	Pk	20.5	.3	-40	4.13	29.65	-25.52	0-360
12	1.01277	22.21	Pk	20.5	.3	-40	3.01	27.51	-24.5	0-360
13	1.68255	22.28	Pk	20.5	.4	-40	3.18	23.11	-19.93	0-360
14	3.38265	21.76	Pk	20.6	.4	-40	2.76	29.5	-26.74	0-360

Pk - Peak detector

**Fundamental

Note : Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

7.2. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2020

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

LIMIT

FCC §15.207 (a)

Frequency range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50
*Decreases with the logarithm of the frequency.		


RESULTS

The EUT belongs to Test Case 2(worst).

WORST EMISSIONS (Power sharing mode Test Case 2)

Line-L1 .15 - 30MHz

LINE 1 RESULTS

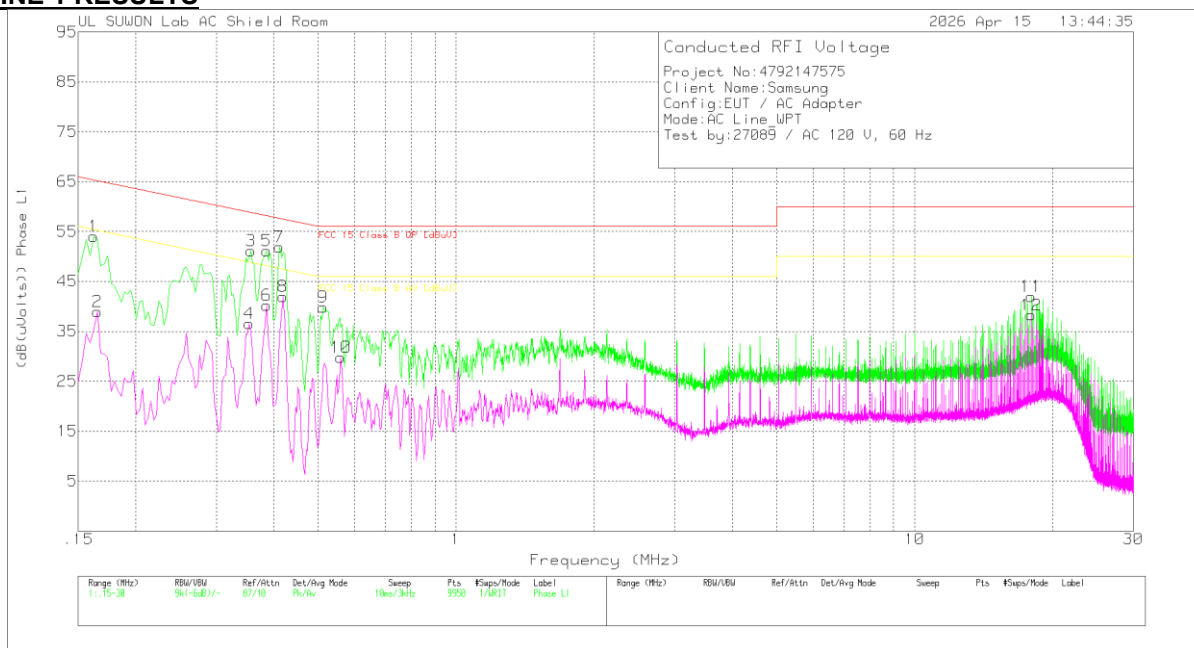

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency [MHz]	Meter Reading [dBuV]	Det	101836_With EX_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
1	.162	44.07	Pk	9.9	.1	54.07	65.36	-11.29	-	-
2	.165	28.95	Av	9.9	.1	38.95	-	-	55.21	-16.26
3	.357	41.23	Pk	9.8	.1	51.13	58.8	-7.67	-	-
4	.354	26.67	Av	9.8	.1	36.57	-	-	48.87	-12.3
5	.387	41.28	Pk	9.8	.1	51.18	58.13	-6.95	-	-
6	.387	30.34	Av	9.8	.1	40.24	-	-	48.13	-7.89
7	.411	42.01	Pk	9.8	.1	51.91	57.63	-5.72	-	-
8	.42	32.09	Av	9.8	.1	41.99	-	-	47.45	-5.46
9	.513	29.82	Pk	9.9	.1	39.82	56	-16.18	-	-
10	.561	19.89	Av	9.8	.1	29.79	-	-	46	-16.21
11	17.964	31.63	Pk	10.1	.3	42.03	60	-17.97	-	-
12	17.961	27.88	Av	10.1	.3	38.28	-	-	50	-11.72

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Range 1: Phase L1 .15 - 30MHz

Frequency [MHz]	Meter Reading [dBuV]	Det	101836_With EX_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
.35625	39.07	Qp	9.8	.1	48.97	58.82	-9.85	-	-
.38625	39.42	Qp	9.8	.1	49.32	58.14	-8.82	-	-
.41175	38.38	Qp	9.8	.1	48.28	57.61	-9.33	-	-
.41925	39.69	Qp	9.8	.1	49.59	57.46	-7.87	-	-

Qp - Quasi-Peak detector

Line-L2 .15 - 30MHz

LINE 2 RESULTS

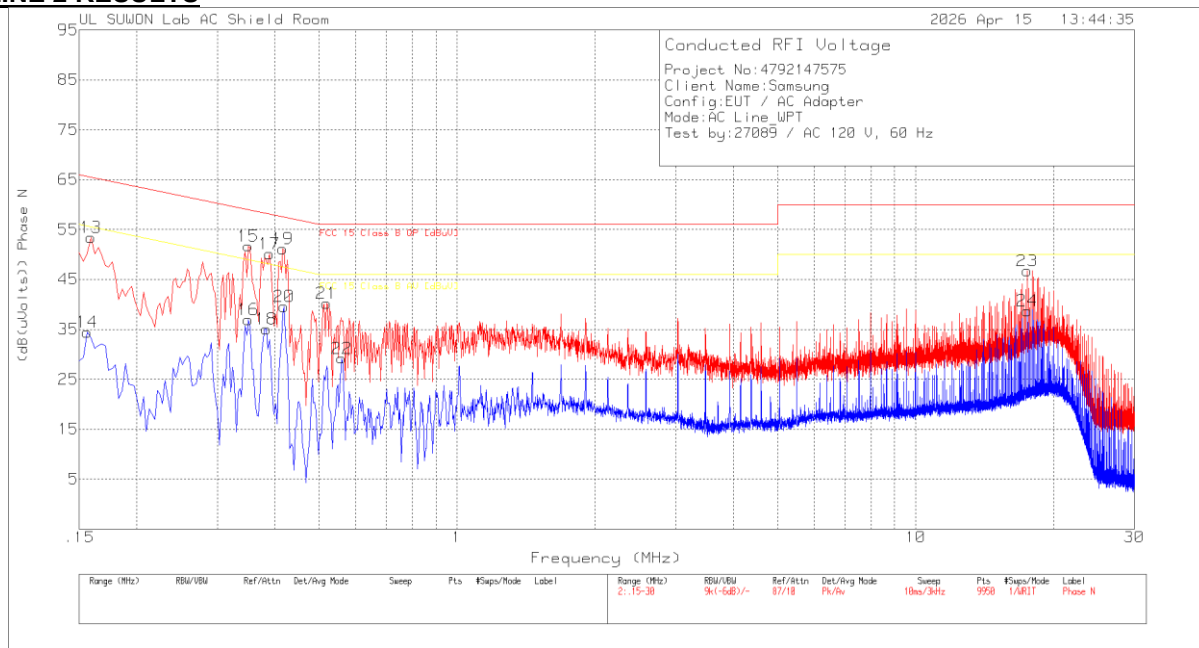

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency [MHz]	Meter Reading [dBuV]	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
13	.159	43.54	Pk	9.8	.1	53.44	65.52	-12.08	-	-
14	.156	24.51	Av	9.8	.1	34.41	-	-	55.67	-21.26
15	.351	41.81	Pk	9.8	.1	51.71	58.94	-7.23	-	-
16	.351	27.08	Av	9.8	.1	36.98	-	-	48.94	-11.96
17	.39	40.23	Pk	9.8	.1	50.13	58.06	-7.93	-	-
18	.384	25.16	Av	9.8	.1	35.06	-	-	48.19	-13.13
19	.417	41.26	Pk	9.8	.1	51.16	57.51	-6.35	-	-
20	.42	29.73	Av	9.8	.1	39.63	-	-	47.45	-7.82
21	.519	30.23	Pk	9.9	.1	40.23	56	-15.77	-	-
22	.561	19.32	Av	9.8	.1	29.22	-	-	46	-16.78
23	17.511	36.2	Pk	10.2	.3	46.7	60	-13.3	-	-
24	17.511	28.22	Av	10.2	.3	38.72	-	-	50	-11.28

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency [MHz]	Meter Reading [dBuV]	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
.35175	38.87	Qp	9.8	.1	48.77	58.92	-10.15	-	-
.38925	38.47	Qp	9.8	.1	48.37	58.08	-9.71	-	-
.41715	39.64	Qp	9.8	.1	49.54	57.5	-7.96	-	-
.41925	39.53	Qp	9.8	.1	49.43	57.46	-8.03	-	-

Qp - Quasi-Peak detector

END OF TEST REPORT