



HARMONICS AND SPURIOUS EMISSIONS (WORST CASE: 6 CHANNEL)

CH 6 RESULTS

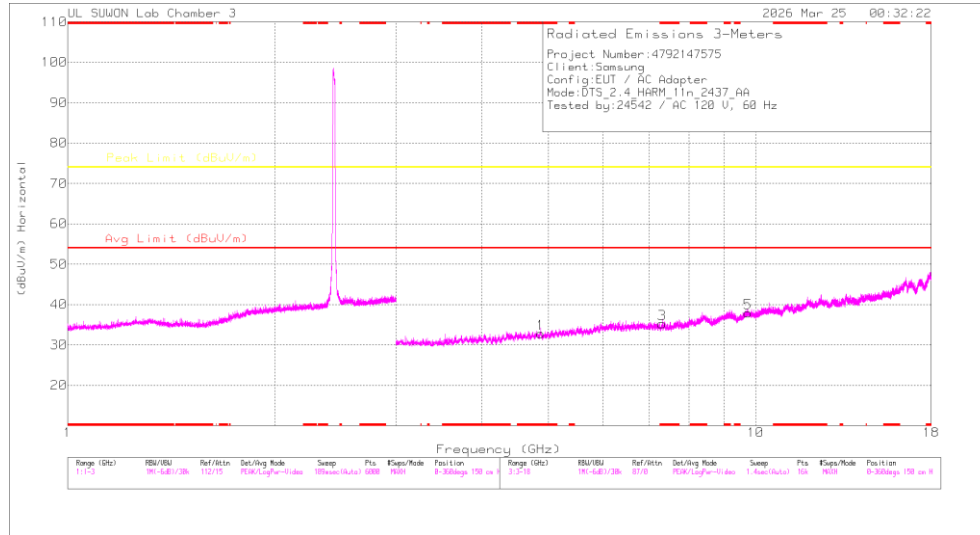

HORIZONTAL

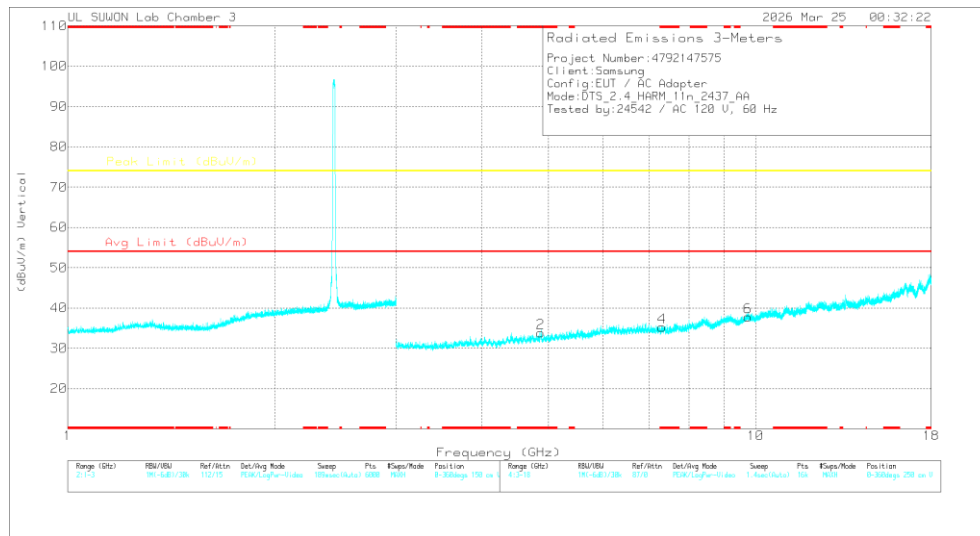

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Factor (dB/m)	3GHz_HP_Pat h Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.8722	40.58	PK2	34.2	-30.7	0	44.08	-	-	74	-29.92	144	157	H
* 4.87102	29.17	MAV1	34.2	-30.7	.11	32.78	54	-21.22	-	-	144	157	H
* 4.86759	41.66	PK2	34.2	-30.6	0	45.26	-	-	74	-28.74	336	398	V
* 4.8748	29.65	MAV1	34.2	-30.7	.11	33.26	54	-20.74	-	-	336	398	V
* 7.31458	34.97	PK2	35.8	-25.3	0	45.47	-	-	74	-28.53	0	100	H
* 7.31489	34.46	PK2	35.8	-25.3	0	44.96	-	-	74	-29.04	0	100	V
9.74408	31.49	PK2	36.9	-21.3	0	47.09	-	-	74	-26.91	0	100	H
9.7464	31.9	PK2	36.9	-21.3	0	47.5	-	-	74	-26.5	0	100	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB/m]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	MIMO	* 4.81651	39.78	PK2	34.30	-30.20	0.00	43.88	-	-	74.00	-30.12	150	155	H
		* 4.8231	28.02	MAv1	34.30	-30.10	0.11	32.33	54.00	-21.67	-	-	150	155	H
		* 4.82357	40.90	PK2	34.30	-30.10	0.00	45.10	-	-	74.00	-28.90	339	384	V
		* 4.82302	28.93	MAv1	34.30	-30.10	0.11	33.24	54.00	-20.76	-	-	339	384	V
		7.238	34.68	PK2	35.80	-25.70	0.00	44.78	-	-	74.00	-29.22	0	100	H
		7.238	35.19	PK2	35.80	-25.70	0.00	45.29	-	-	74.00	-28.71	0	100	V
		9.652	31.29	PK2	36.80	-21.40	0.00	46.69	-	-	74.00	-27.31	0	100	H
		9.646	32.15	PK2	36.80	-21.40	0.00	47.55	-	-	74.00	-26.45	0	100	V
2437	MIMO	* 4.8722	40.58	PK2	34.20	-30.70	0.00	44.08	-	-	74.00	-29.92	144	157	H
		* 4.87102	29.17	MAv1	34.20	-30.70	0.11	32.78	54.00	-21.22	-	-	144	157	H
		* 4.86759	41.66	PK2	34.20	-30.60	0.00	45.26	-	-	74.00	-28.74	336	398	V
		* 4.8748	29.65	MAv1	34.20	-30.70	0.11	33.26	54.00	-20.74	-	-	336	398	V
		* 7.31458	34.97	PK2	35.80	-25.30	0.00	45.47	-	-	74.00	-28.53	0	100	H
		* 7.31489	34.46	PK2	35.80	-25.30	0.00	44.96	-	-	74.00	-29.04	0	100	V
		9.744	31.49	PK2	36.90	-21.30	0.00	47.09	-	-	74.00	-26.91	0	100	H
		9.746	31.90	PK2	36.90	-21.30	0.00	47.50	-	-	74.00	-26.50	0	100	V
2462	MIMO	* 4.91835	40.39	PK2	34.20	-30.90	0.00	43.69	-	-	74.00	-30.31	147	172	H
		* 4.91956	28.85	MAv1	34.20	-30.90	0.11	32.26	54.00	-21.74	-	-	147	172	H
		* 4.92058	40.50	PK2	34.20	-30.90	0.00	43.80	-	-	74.00	-30.20	332	366	V
		* 4.9229	29.16	MAv1	34.20	-30.90	0.11	32.57	54.00	-21.43	-	-	332	366	V
		* 7.3849	33.77	PK2	35.70	-24.70	0.00	44.77	-	-	74.00	-29.23	0	100	H
		* 7.38616	34.05	PK2	35.70	-24.70	0.00	45.05	-	-	74.00	-28.95	0	100	V
		9.850	31.62	PK2	37.10	-21.40	0.00	47.32	-	-	74.00	-26.68	0	100	H
		9.845	32.14	PK2	37.10	-21.50	0.00	47.74	-	-	74.00	-26.26	0	100	V


Note1. PK2 - KDB558074 Method: Maximum Peak / MAv1 - KDB558074 Option 1 Maximum RMS Average

Note2. * - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

10.1.4. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 2.4 GHz BAND

2TX MIMO(ANT1 + ANT2)

BANDEDGE (11 CHANNEL, SU)

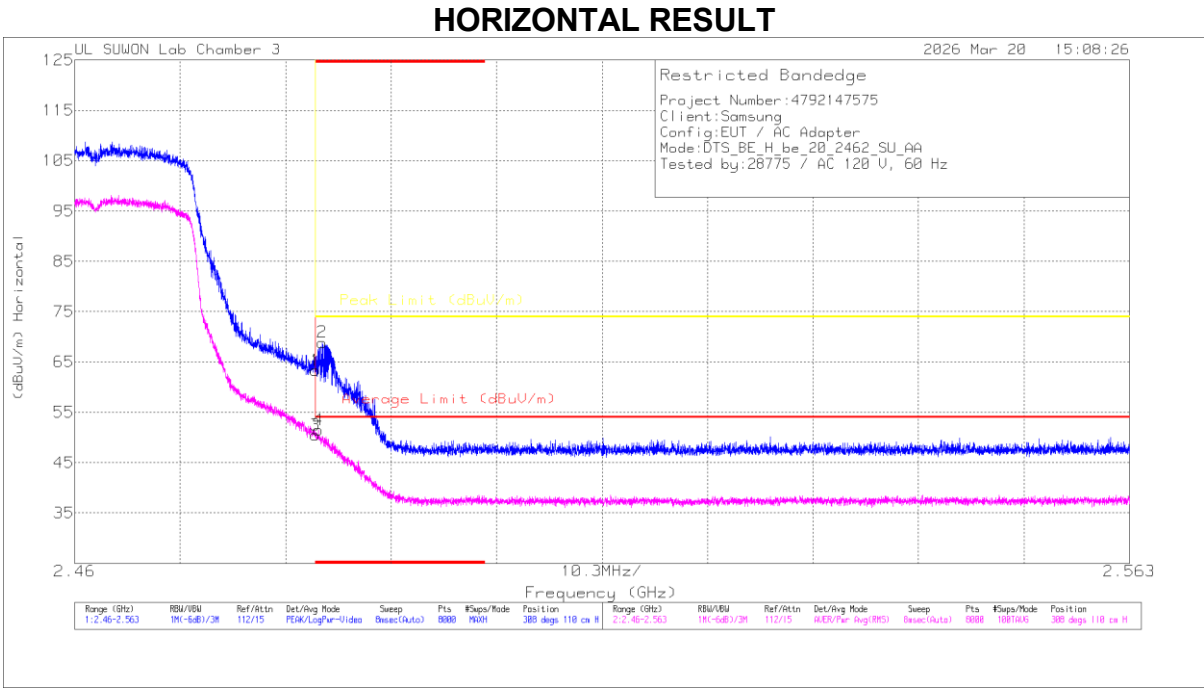

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	Antenna_Factor (dBm)	10dB_Path Loss(dB)	DC Cor (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	55.79	Pk	32.4	-24.9	0	63.29	-	-	74	-10.71	308	110	H
2	* 2.48418	61.39	Pk	32.4	-24.9	0	68.89	-	-	74	-5.11	308	110	H
3	* 2.4835	42.96	RMS	32.4	-24.9	0	50.46	54	-3.54	-	-	308	110	H
4	* 2.4838	44.03	RMS	32.4	-24.9	0	51.53	54	-2.47	-	-	308	110	H

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE TEST DATA


Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB/m]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412 RU mode 52 Tone Offset 37	MIMO	* 2.39	44.20	Pk	32.10	-24.90	0.00	51.40	-	-	74.00	-22.60	309	117	H
		* 2.38994	45.32	Pk	32.10	-24.90	0.00	52.52	-	-	74.00	-21.48	309	117	H
		* 2.39	31.42	RMS	32.10	-24.90	0.00	38.62	54.00	-15.38	-	-	309	117	H
		* 2.38962	32.31	RMS	32.10	-24.90	0.00	39.51	54.00	-14.49	-	-	309	117	H
2412 MRU mode 106 + 26 Tone Offset 82	MIMO	* 2.39	51.49	Pk	32.10	-24.90	0.00	58.69	-	-	74.00	-15.31	313	140	H
		* 2.38933	53.21	Pk	32.10	-24.90	0.00	60.41	-	-	74.00	-13.59	313	140	H
		* 2.39	32.39	RMS	32.10	-24.90	0.00	39.59	54.00	-14.41	-	-	313	140	H
		* 2.38962	35.47	RMS	32.10	-24.90	0.00	42.67	54.00	-11.33	-	-	313	140	H
		* 2.39	41.65	Pk	32.10	-24.90	0.00	48.85	-	-	74.00	-25.15	97	392	V
		* 2.38893	43.12	Pk	32.10	-24.90	0.00	50.32	-	-	74.00	-23.68	97	392	V
		* 2.39	30.78	RMS	32.10	-24.90	0.00	37.98	54.00	-16.02	-	-	97	392	V
		* 2.38937	31.90	RMS	32.10	-24.90	0.00	39.10	54.00	-14.90	-	-	97	392	V
2412 SU mode	MIMO	* 2.39	60.37	Pk	32.10	-24.90	0.00	67.57	-	-	74.00	-6.43	314	138	H
		* 2.38994	59.79	Pk	32.10	-24.90	0.00	66.99	-	-	74.00	-7.01	314	138	H
		* 2.39	42.65	RMS	32.10	-24.90	0.00	49.85	54.00	-4.15	-	-	314	138	H
		* 2.3893	43.16	RMS	32.10	-24.90	0.00	50.36	54.00	-3.64	-	-	314	138	H
2457 SU mode	MIMO	* 2.4835	50.78	Pk	32.40	-24.90	0.00	58.28	-	-	74.00	-15.72	308	109	H
		* 2.48363	54.75	Pk	32.40	-24.90	0.00	62.25	-	-	74.00	-11.75	308	109	H
		* 2.4835	37.58	RMS	32.40	-24.90	0.00	45.08	54.00	-8.92	-	-	308	109	H
		* 2.48356	38.42	RMS	32.40	-24.90	0.00	45.92	54.00	-8.08	-	-	308	109	H
2462 RU mode 52 Tone Offset 40	MIMO	* 2.4835	41.37	Pk	32.40	-24.90	0.00	48.87	-	-	74.00	-25.13	309	111	H
		* 2.48532	47.60	Pk	32.40	-24.90	0.00	55.10	-	-	74.00	-18.90	309	111	H
		* 2.4835	31.43	RMS	32.40	-24.90	0.00	38.93	54.00	-15.07	-	-	309	111	H
		* 2.48559	32.59	RMS	32.40	-24.80	0.00	40.19	54.00	-13.81	-	-	309	111	H
2462 MRU mode 106 + 26 Tone Offset 83	MIMO	* 2.4835	45.89	Pk	32.40	-24.90	0.00	53.39	-	-	74.00	-20.61	311	103	H
		* 2.48555	54.04	Pk	32.40	-24.80	0.00	61.64	-	-	74.00	-12.36	311	103	H
		* 2.4835	31.74	RMS	32.40	-24.90	0.00	39.24	54.00	-14.76	-	-	311	103	H
		* 2.48577	34.03	RMS	32.40	-24.80	0.00	41.63	54.00	-12.37	-	-	311	103	H
2462 SU mode	MIMO	* 2.4835	55.79	Pk	32.40	-24.90	0.00	63.29	-	-	74.00	-10.71	308	110	H
		* 2.48418	61.39	Pk	32.40	-24.90	0.00	68.89	-	-	74.00	-5.11	308	110	H
		* 2.4835	42.96	RMS	32.40	-24.90	0.00	50.46	54.00	-3.54	-	-	308	110	H
		* 2.4838	44.03	RMS	32.40	-24.90	0.00	51.53	54.00	-2.47	-	-	308	110	H
		* 2.4835	44.87	Pk	32.40	-24.90	0.00	52.37	-	-	74.00	-21.63	112	362	V
		* 2.48412	46.46	Pk	32.40	-24.90	0.00	53.96	-	-	74.00	-20.04	112	362	V
		* 2.4835	34.25	RMS	32.40	-24.90	0.00	41.75	54.00	-12.25	-	-	112	362	V
		* 2.4838	35.24	RMS	32.40	-24.90	0.00	42.74	54.00	-11.26	-	-	112	362	V
2467 RU mode 52 Tone Offset 40	MIMO	* 2.4835	46.81	Pk	32.40	-24.90	0.00	54.31	-	-	74.00	-19.69	306	100	H
		* 2.48364	48.33	Pk	32.40	-24.90	0.00	55.83	-	-	74.00	-18.17	306	100	H
		* 2.4835	31.02	RMS	32.40	-24.90	0.00	38.52	54.00	-15.48	-	-	306	100	H
		* 2.48359	31.77	RMS	32.40	-24.90	0.00	39.27	54.00	-14.73	-	-	306	100	H
2467 MRU mode 106 + 26 Tone Offset 83	MIMO	* 2.4835	43.63	Pk	32.40	-24.90	0.00	51.13	-	-	74.00	-22.87	306	100	H
		* 2.48363	44.17	Pk	32.40	-24.90	0.00	51.67	-	-	74.00	-22.33	306	100	H
		* 2.4835	31.04	RMS	32.40	-24.90	0.00	38.54	54.00	-15.46	-	-	306	100	H
		* 2.48627	31.45	RMS	32.40	-24.80	0.00	39.05	54.00	-14.95	-	-	306	100	H
2467 SU mode	MIMO	* 2.4835	42.98	Pk	32.40	-24.90	0.00	50.48	-	-	74.00	-23.52	309	108	H
		* 2.48481	45.36	Pk	32.40	-24.90	0.00	52.86	-	-	74.00	-21.14	309	108	H
		* 2.4835	30.38	RMS	32.40	-24.90	0.00	37.88	54.00	-16.12	-	-	309	108	H
		* 2.48651	31.70	RMS	32.40	-24.80	0.00	39.30	54.00	-14.70	-	-	309	108	H
2472 RU mode 52 Tone Offset 40	MIMO	* 2.4835	52.51	Pk	32.40	-24.90	0.00	60.01	-	-	74.00	-13.99	307	108	H
		* 2.48354	51.51	Pk	32.40	-24.90	0.00	59.01	-	-	74.00	-14.99	307	108	H
		* 2.4835	32.46	RMS	32.40	-24.90	0.00	39.96	54.00	-14.04	-	-	307	108	H
		* 2.48353	33.83	RMS	32.40	-24.90	0.00	41.33	54.00	-12.67	-	-	307	108	H
		* 2.4835	47.19	Pk	32.40	-24.90	0.00	54.69	-	-	74.00	-19.31	255	325	V
		* 2.48351	48.39	Pk	32.40	-24.90	0.00	55.89	-	-	74.00	-18.11	255	325	V
		* 2.4835	32.34	RMS	32.40	-24.90	0.00	39.84	54.00	-14.16	-	-	255	325	V
		* 2.48366	32.52	RMS	32.40	-24.90	0.00	40.02	54.00	-13.98	-	-	255	325	V
2472 MRU mode 106 + 26 Tone Offset 83	MIMO	* 2.4835	46.66	Pk	32.40	-24.90	0.00	54.16	-	-	74.00	-19.84	304	108	H
		* 2.48354	48.05	Pk	32.40	-24.90	0.00	55.55	-	-	74.00	-18.45	304	108	H
		* 2.4835	31.32	RMS	32.40	-24.90	0.00	38.82	54.00	-15.18	-	-	304	108	H
		* 2.48351	31.83	RMS	32.40	-24.90	0.00	39.33	54.00	-14.67	-	-	304	108	H
2472 SU mode	MIMO	* 2.4835	45.71	Pk	32.40	-24.90	0.00	53.21	-	-	74.00	-20.79	305	108	H
		* 2.48502	48.62	Pk	32.40	-24.90	0.00	56.12	-	-	74.00	-17.88	305	108	H
		* 2.4835	30.41	RMS	32.40	-24.90	0.00	37.91	54.00	-16.09	-	-	305	108	H
		* 2.48577	31.65	RMS	32.40	-24.80	0.00	39.25	54.00	-14.75	-	-	305	108	H

Note1. Pk - Peak detector, RMS - RMS detector


Note2. * - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

HARMONICS AND SPURIOUS EMISSIONS (WORST CASE: 6 CHANNEL, 37RU)

CH 6 RESULTS

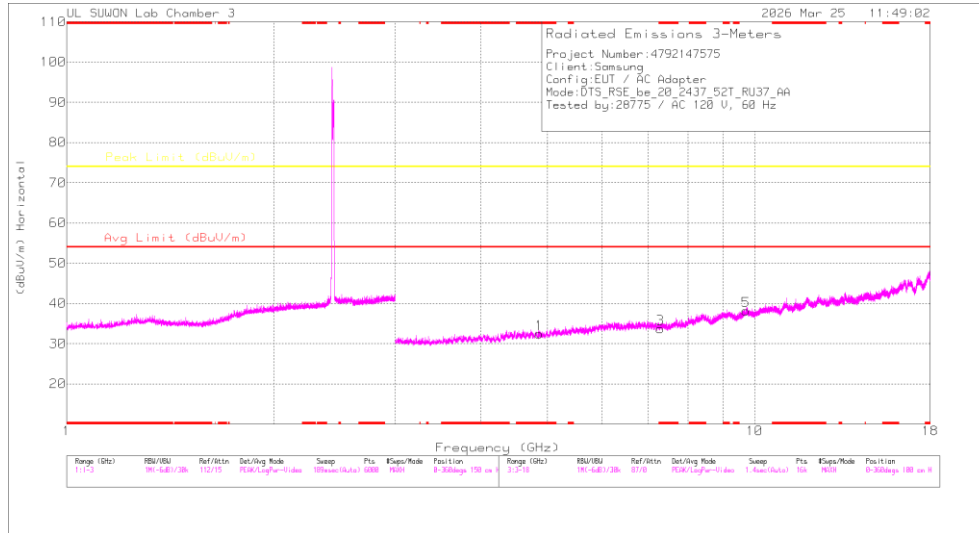

HORIZONTAL

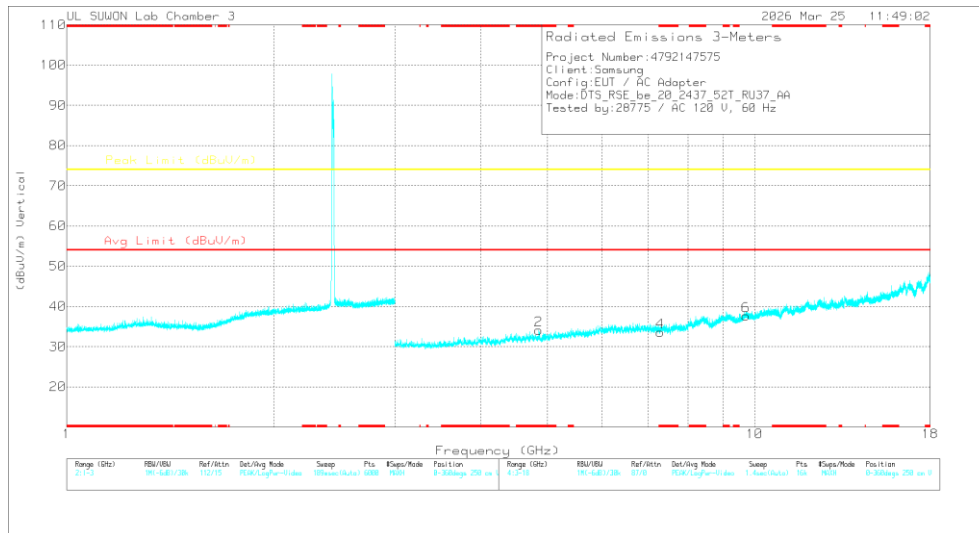

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Factor (dBm)	3GHz_HP_Pat h Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.86172	40.01	PK2	34.2	-30.6	0	43.61	-	-	74	-30.39	145	120	H
* 4.86008	28.86	MAV1	34.2	-30.6	0	32.46	54	-21.54	-	-	145	120	H
* 4.86116	41.64	PK2	34.2	-30.6	0	45.24	-	-	74	-28.76	332	354	V
* 4.85914	30.13	MAV1	34.2	-30.6	0	33.73	54	-20.27	-	-	332	354	V
* 7.29284	34	PK2	35.8	-25.5	0	44.3	-	-	74	-29.7	0	100	H
* 7.2882	34.09	PK2	35.8	-25.5	0	44.39	-	-	74	-29.61	0	100	V
9.72131	32.01	PK2	36.9	-21.2	0	47.71	-	-	74	-26.29	0	100	H
9.71596	31.81	PK2	36.9	-21.1	0	47.61	-	-	74	-26.39	0	100	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average


HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB/m]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412 RU mode 52 Tone offset 40	MIMO	* 4.8393	39.07	PK2	34.20	-30.40	0.00	42.87	-	-	74.00	-31.13	144	122	H
		* 4.83864	28.07	MAv1	34.20	-30.40	0.00	31.87	54.00	-22.13	-	-	144	122	H
		* 4.84106	40.35	PK2	34.20	-30.40	0.00	44.15	-	-	74.00	-29.85	331	357	V
		* 4.8391	29.02	MAv1	34.20	-30.40	0.00	32.82	54.00	-21.18	-	-	331	357	V
		* 7.25477	34.53	PK2	35.80	-25.60	0.00	44.73	-	-	74.00	-29.27	0	100	H
		* 7.261	34.43	PK2	35.80	-25.70	0.00	44.53	-	-	74.00	-29.47	0	100	V
		9.684	31.58	PK2	36.90	-21.30	0.00	47.18	-	-	74.00	-26.82	0	100	H
		9.675	31.66	PK2	36.80	-21.30	0.00	47.16	-	-	74.00	-26.84	0	100	V
2437 RU mode 52 Tone offset 37	MIMO	* 4.86172	40.01	PK2	34.20	-30.60	0.00	43.61	-	-	74.00	-30.39	145	120	H
		* 4.86008	28.86	MAv1	34.20	-30.60	0.00	32.46	54.00	-21.54	-	-	145	120	H
		* 4.86116	41.64	PK2	34.20	-30.60	0.00	45.24	-	-	74.00	-28.76	332	354	V
		* 4.85914	30.13	MAv1	34.20	-30.60	0.00	33.73	54.00	-20.27	-	-	332	354	V
		* 7.29284	34.00	PK2	35.80	-25.50	0.00	44.30	-	-	74.00	-29.70	0	100	H
		* 7.2882	34.09	PK2	35.80	-25.50	0.00	44.39	-	-	74.00	-29.61	0	100	V
		9.721	32.01	PK2	36.90	-21.20	0.00	47.71	-	-	74.00	-26.29	0	100	H
		9.716	31.81	PK2	36.90	-21.10	0.00	47.61	-	-	74.00	-26.39	0	100	V
2462 RU mode 52 Tone offset 40	MIMO	* 4.93726	39.54	PK2	34.30	-30.70	0.00	43.14	-	-	74.00	-30.86	147	113	H
		* 4.93902	28.22	MAv1	34.30	-30.70	0.00	31.82	54.00	-22.18	-	-	147	113	H
		* 4.93804	40.06	PK2	34.30	-30.60	0.00	43.76	-	-	74.00	-30.24	329	362	V
		* 4.93822	29.06	MAv1	34.30	-30.60	0.00	32.76	54.00	-21.24	-	-	329	362	V
		* 7.40439	33.60	PK2	35.70	-24.70	0.00	44.60	-	-	74.00	-29.40	0	100	H
		* 7.4097	33.41	PK2	35.70	-24.70	0.00	44.41	-	-	74.00	-29.59	0	100	V
		9.876	32.19	PK2	37.10	-21.50	0.00	47.79	-	-	74.00	-26.21	0	100	H
		9.877	32.13	PK2	37.10	-21.50	0.00	47.73	-	-	74.00	-26.27	0	100	V


Note1. PK2 - KDB558074 Method: Maximum Peak / MAv1 - KDB558074 Option 1 Maximum RMS Average

Note2. * - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band

10.2. WORST CASE BELOW 1 GHZ

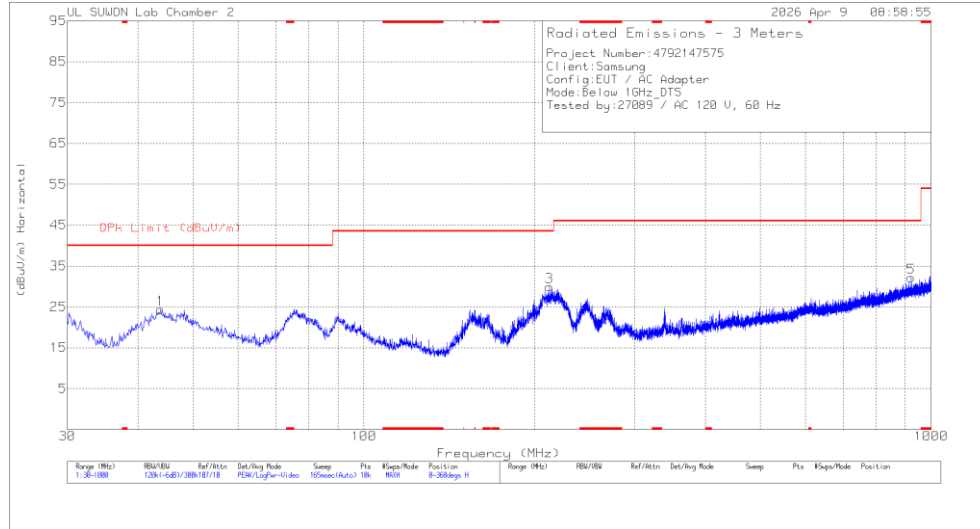

HORIZONTAL

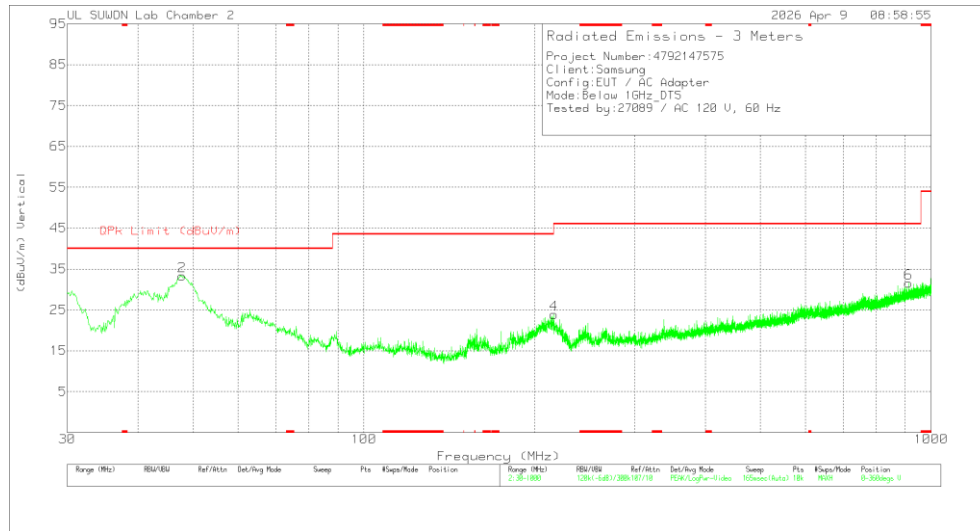

VERTICAL

Below 1GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Factor (dB/m)	Below_1G_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	43.774	36.73	Pk	19.4	-31.7	0	24.43	40	-15.57	0-360	300	H
3	212.554	43.95	Pk	16.7	-30.7	0	29.95	43.52	-13.57	0-360	100	H
5	921.43	32.02	Pk	28.1	-27.9	0	32.22	46.02	-13.8	0-360	300	H
2	47.848	45.34	Pk	19.7	-31.7	0	33.34	40	-6.66	0-360	100	V
4	216.24	37.7	Pk	16.9	-30.7	0	23.9	46.02	-22.12	0-360	100	V
6	912.506	31.44	Pk	28	-27.9	0	31.54	46.02	-14.48	0-360	100	V

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Factor (dB/m)	Below_1G_Path Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
47.848	40.26	Qp	19.7	-31.7	.12	28.38	40	-11.62	328	102	V

Qp - Quasi-Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1.1. AC Power Line

LINE 1 RESULTS

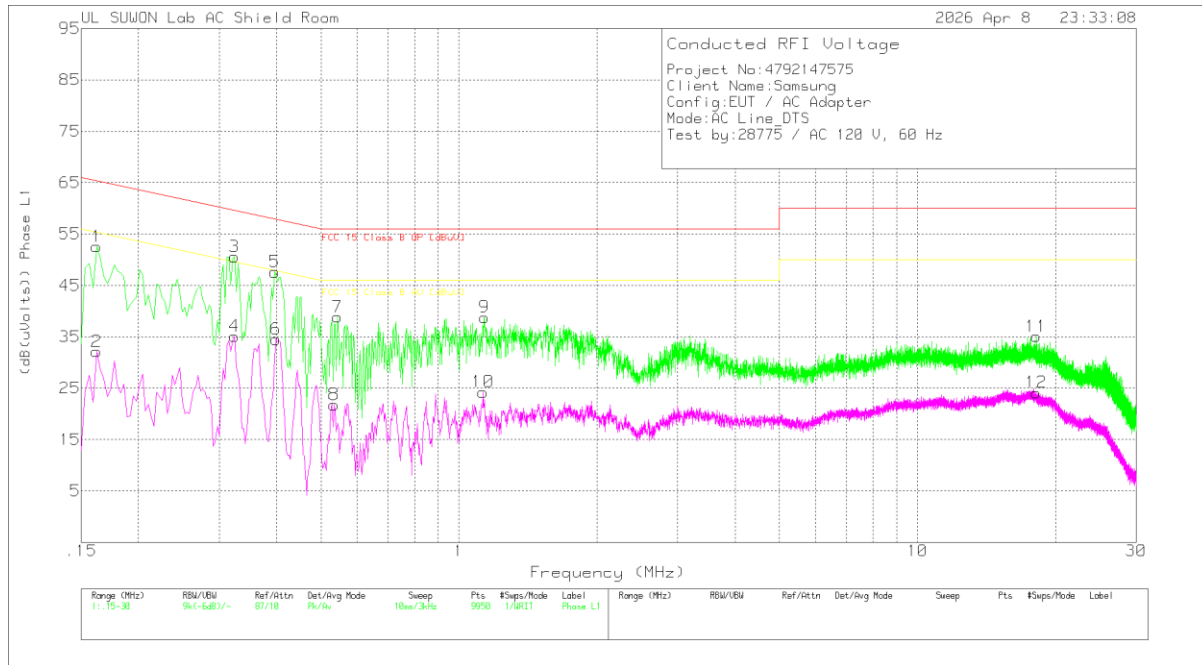

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency [MHz]	Meter Reading [dBuV]	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
1	.162	42.55	Pk	9.9	.1	52.55	65.36	-12.81	-	-
2	.162	22.14	Av	9.9	.1	32.14	-	-	55.36	-23.22
3	.324	40.77	Pk	9.7	.1	50.57	59.6	-9.03	-	-
4	.324	25.29	Av	9.7	.1	35.09	-	-	49.6	-14.51
5	.396	37.72	Pk	9.8	.1	47.62	57.94	-10.32	-	-
6	.399	24.65	Av	9.8	.1	34.55	-	-	47.87	-13.32
7	.543	28.85	Pk	9.9	.1	38.85	56	-17.15	-	-
8	.534	11.79	Av	9.9	.1	21.79	-	-	46	-24.21
9	1.137	29.01	Pk	9.7	.1	38.81	56	-17.19	-	-
10	1.128	14.45	Av	9.7	.1	24.25	-	-	46	-21.75
11	18.174	24.67	Pk	10.1	.3	35.07	60	-24.93	-	-
12	18.147	13.73	Av	10.1	.3	24.13	-	-	50	-25.87

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency [MHz]	Meter Reading [dBuV]	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
.32325	29.07	Qp	9.7	.1	38.87	59.62	-20.75	-	-

Qp - Quasi-Peak detector

LINE 2 RESULTS

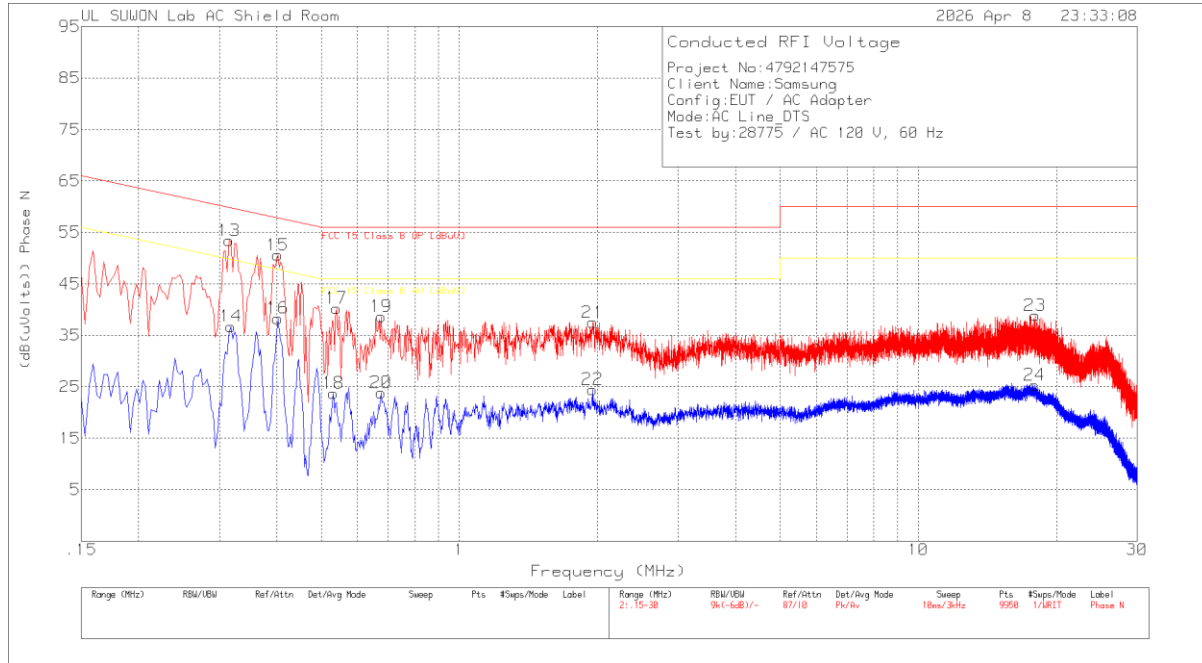

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency [MHz]	Meter Reading [dBuV]	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
13	.315	43.59	Pk	9.7	.1	53.39	59.84	-6.45	-	-
14	.318	26.92	Av	9.7	.1	36.72	-	-	49.76	-13.04
15	.402	40.68	Pk	9.8	.1	50.58	57.81	-7.23	-	-
16	.402	28.41	Av	9.8	.1	38.31	-	-	47.81	-9.5
17	.54	30.23	Pk	9.9	.1	40.23	56	-15.77	-	-
18	.531	13.73	Av	9.9	.1	23.73	-	-	46	-22.27
19	.675	28.74	Pk	9.8	.1	38.64	56	-17.36	-	-
20	.675	13.94	Av	9.8	.1	23.84	-	-	46	-22.16
21	1.953	27.7	Pk	9.7	.1	37.5	56	-18.5	-	-
22	1.95	14.69	Av	9.7	.1	24.49	-	-	46	-21.51
23	17.967	28.34	Pk	10.2	.3	38.84	60	-21.16	-	-
24	17.934	14.82	Av	10.2	.3	25.32	-	-	50	-24.68

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency [MHz]	Meter Reading [dBuV]	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin [dB]	FCC 15 Class B AV [dBuV]	Margin [dB]
.31575	29.01	Qp	9.7	.1	38.81	59.82	-21.01	-	-
.40125	20.13	Qp	9.8	.1	30.03	57.83	-27.8	-	-

Qp - Quasi-Peak detector

END OF TEST REPORT