

CERTIFICATION TEST REPORT

Report Number. : S-4792147635-E8V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SC-57G, SCG41

FCC ID : A3LSMF971JPN

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE,
DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT and UWB

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2026-05-22

Prepared by:

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Presented By
V1	2026-05-22	Initial issue	Myeongjun Kwon

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULES	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. TEST RESULTS SUMMARY	14
8. MEASUREMENT METHODS	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 20 dB BANDWIDTH	17
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	17
9.2.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION	17
9.3. HOPPING FREQUENCY SEPARATION	20
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	21
9.3.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION	21
9.4. NUMBER OF HOPPING CHANNELS	22
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	23
9.4.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION	25
9.5. AVERAGE TIME OF OCCUPANCY	27
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	28
9.5.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION	32
9.6. OUTPUT POWER	36
9.6.1. BASIC DATA RATE GFSK MODULATION	36

9.6.2.	ENHANCED DATA RATE $\pi/4$ -DQPSK MODULATION.....	36
9.6.3.	ENHANCED DATA RATE 8DPSK MODULATION.....	36
9.6.4.	BASIC DATA RATE GFSK MODULATION (DUAL)	37
9.6.1.	ENHANCED DATA RATE $\pi/4$ -DQPSK MODULATION (DUAL).....	37
9.6.2.	ENHANCED DATA RATE 8DPSK MODULATION (DUAL).....	37
9.6.3.	OUTPUT POWER PLOTS.....	38
9.7.	AVERAGE POWER.....	44
9.7.1.	BASIC DATA RATE GFSK MODULATION.....	44
9.7.2.	ENHANCED DATA RATE $\pi/4$ -DQPSK MODULATION	44
9.7.3.	ENHANCED DATA RATE 8DPSK MODULATION.....	44
9.7.4.	BASIC DATA RATE GFSK MODULATION (DUAL).....	45
9.7.5.	ENHANCED DATA RATE $\pi/4$ -DQPSK MODULATION (DUAL).....	45
9.7.6.	ENHANCED DATA RATE 8DPSK MODULATION (DUAL).....	45
9.8.	CONDUCTED SPURIOUS EMISSIONS.....	46
9.8.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	47
9.8.2.	BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION	51
10.	RADIATED TEST RESULTS	55
10.1.	TRANSMITTER ABOVE 1 GHz.....	57
10.1.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	57
10.1.2.	BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION.....	61
10.2.	WORST CASE BELOW 1 GHz	65
11.	AC POWER LINE CONDUCTED EMISSIONS	66
11.1.	AC Power Line	67

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT and UWB

MODEL NUMBER: SC-57G, SCG41

SERIAL NUMBER: R3GL3081M2H (CONDUCTED);
R3GL3080E7Z, R3GL3080EJF, R3GL3080CVJ (RADIATED);

DATE TESTED: 2026-03-31 – 2026-05-22

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Myeongjun Kwon
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. KDB 662911 D01 v02r01
5. ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☒	Chamber 3(3m semi-anechoic chamber)
☐	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{AC Corrected Reading (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Extension Cord} \\ &\text{Loss (dB)} + \text{Cable Loss (dB)} \\ 44.72 \text{ dBuV} &= 34.72 \text{ dBuV} + 9.9 \text{ dB} + 0.1 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
RF Output Power	0.70 dB
Time	0.62 %
Occupied Bandwidth	0.04 %
Hopping Frequency Separation	2.8×10^3 Hz
Frequency Range	6.6×10^3 Hz
Conducted Spurious Emissions	2.00 dB
Conducted Disturbance, 9 kHz to 30 MHz	1.84 dB
Radiated Disturbance, 9 kHz to 30 MHz	2.41 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.78 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.25 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.07 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT and UWB. This test report addresses the DSS(Bluetooth) operational mode.

Representative model	Comparison Criteria	Derivative model
		SCG41
SC-57G	Hardware	Identical
	Software	UI modified according to Service Provider specifications

The SC-57G model was used as the representative model for final testing. All test results in this report apply to both the representative model and its derivative variants.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna 1

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	17.49	56.10
		Average	17.17	52.11
	Enhanced Pi/4-DQPSK	Peak	16.45	44.16
		Average	13.62	22.99
	Enhanced 8DPSK	Peak	17.10	51.29
		Average	13.73	23.60

Antenna 2

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	18.24	66.68
		Average	17.96	62.53
	Enhanced Pi/4-DQPSK	Peak	17.14	51.76
		Average	14.22	26.40
	Enhanced 8DPSK	Peak	17.51	56.36
		Average	14.33	27.08

Antenna Dual mode

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	16.32	42.82
		Average	16.11	40.84
	Enhanced Pi/4-DQPSK	Peak	15.52	35.66
		Average	13.01	20.00
	Enhanced 8DPSK	Peak	15.85	38.46
		Average	13.05	20.17

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore, this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band[MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain[dBi]
DSS 2400 – 2483.5	-6.99	-4.25	-2.50

Directional gain for the MIMO operations is determined using KDB 662911 D01 Multiple Transmitter Output section F (2)(d)(1) for *Unequal antenna gains, with equal transmit powers*. The gain is calculated using the formula for correlated transmissions across the two transmit antennas.

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi.

Sample calculation for this device with $N_{ANT} = 2$


Directional gain = $10 \log[(10^{-6.99/20} + 10^{-4.25/20})^2 / 2] = -2.50$ dBi

“SUB1” and “SUB5” as indicated in antenna specification are written as ANT1 and ANT2 in this report.

5.4. WORST-CASE CONFIGURATION AND MODE

Both Bluetooth Diversity mode and DUAL mode have been investigated and confirmed.

The fundamentals of the EUT were investigated in three orthogonal orientations X, Y and Z. It was determined that below table's orientation was the worst-case orientation.

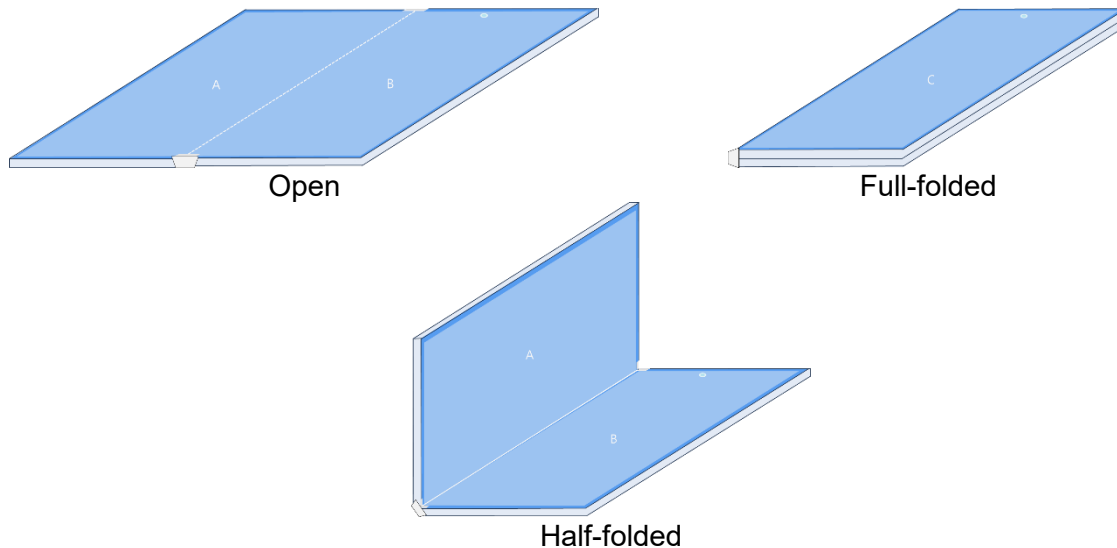

Worst-case		ANT1	ANT2	DUAL
Axis	Band-Edge	Y (Open)	Y (Half-Folded)	X (Open)
	Spurious	Z (Open)	Y (Half-Folded)	X (Half-Folded)

For conducted power test, both Diversity and DUAL mode were tested and reported. Only Conducted power was reported for Dual mode because no noticeable emissions were detected in other test items.

Radiated and power line conducted tests were performed with EUT connected to AC power adapter as the worst-case configuration. Radiated harmonics spurious 1~18 GHz Low/Mid/High channels, 18-26GHz were performed with the EUT set at the Diversity and DUAL mode. Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For Radiated band-edge and spurious test, tests were performed on Diversity mode and DUAL mode.

All radiated and power line conducted tests were performed attached with travel adapter for the worst-case condition mode.

GFSK, Pi/4-DQPSK, 8DPSK average Power are all investigated, The GFSK & 8DPSK Power are the worst case. Testing is based on this mode to showing compliance.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-T2510	N/A	N/A
Data Cable	SAMSUNG	EP-DN980	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. Test software enables BT communications.


SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

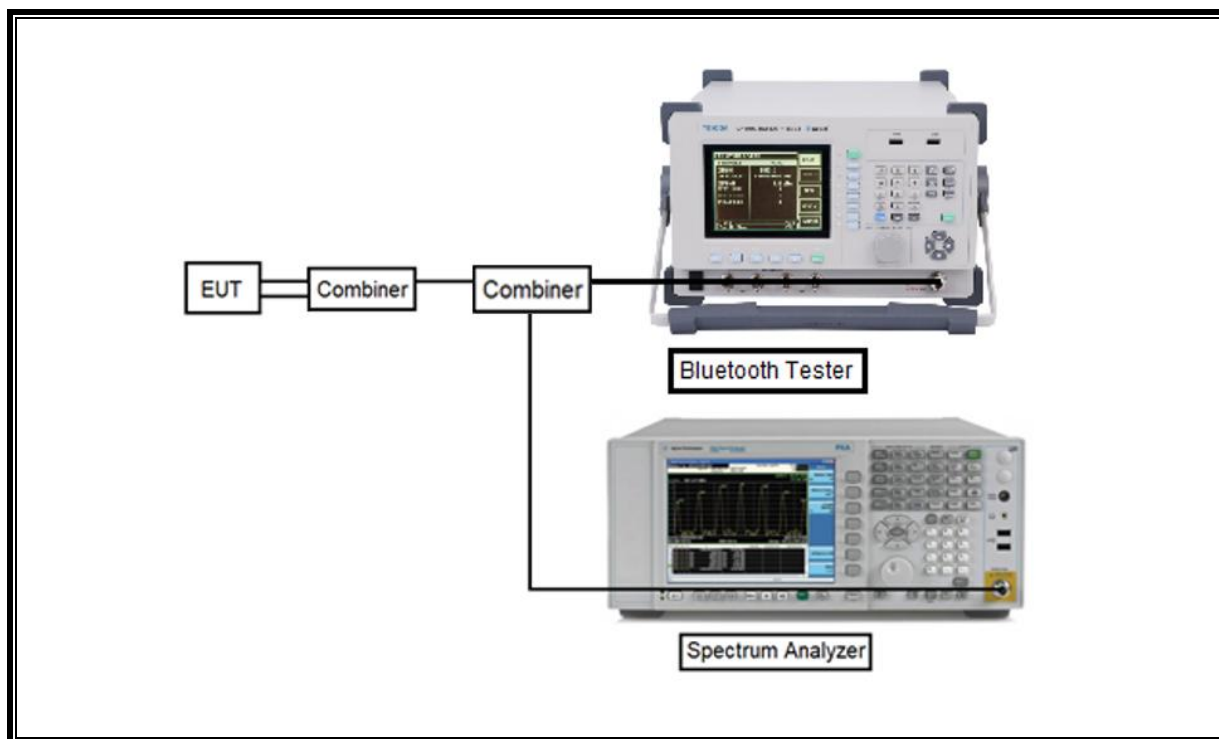

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

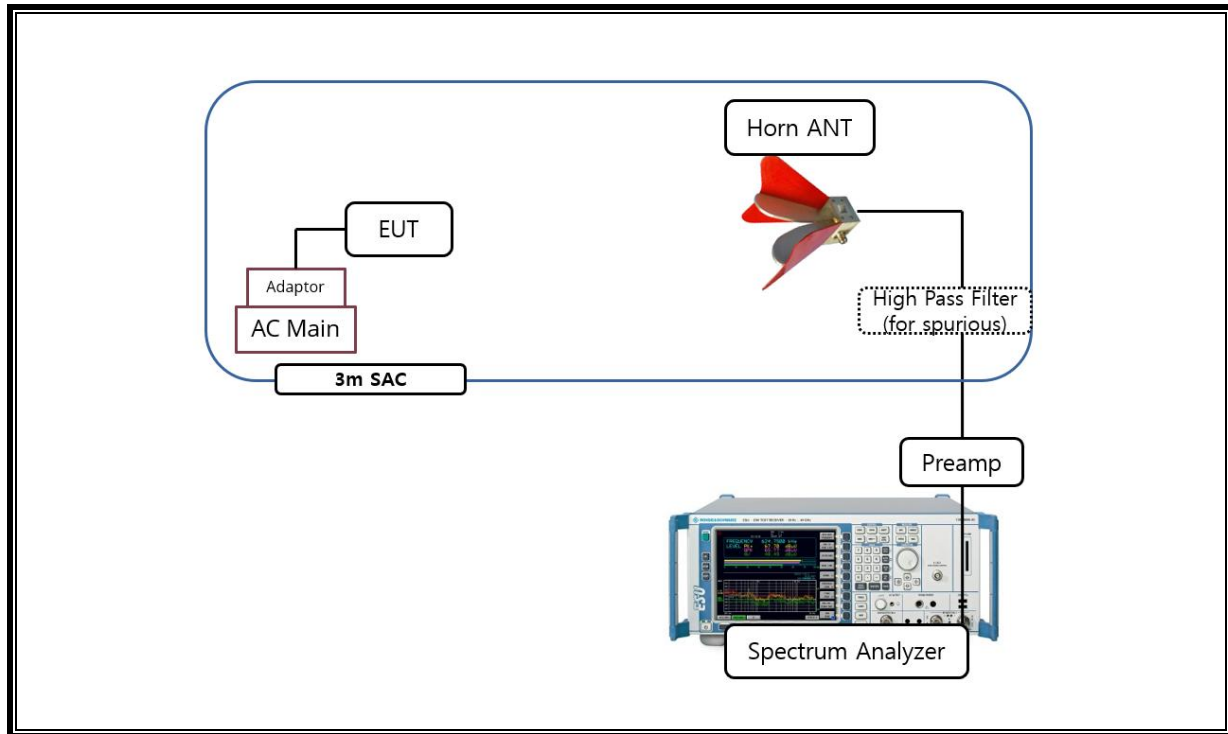

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP) Below 1GHz

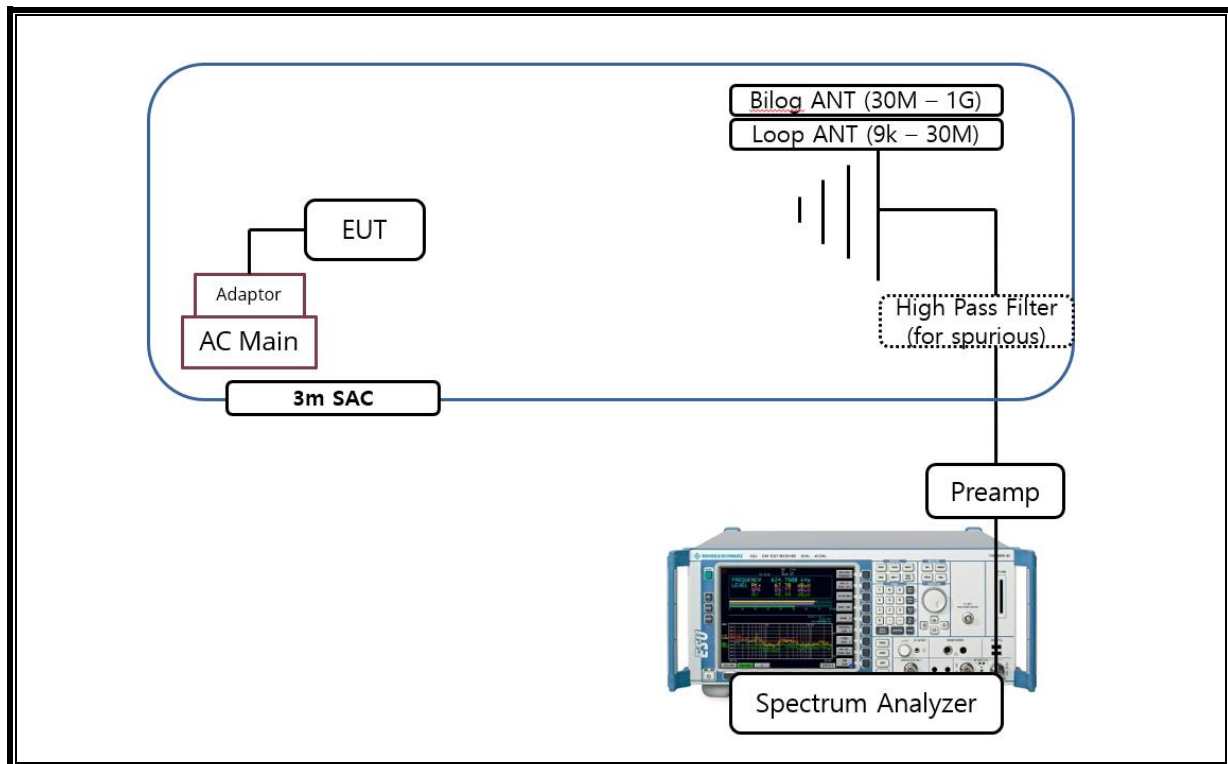

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	750	2026-07-30
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2E	101308	2027-10-27
Antenna, Horn, 18 GHz	ETS	3117	00168724	2026-07-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	2026-07-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2026-07-23
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2027-07-23
Preamplifier	ETS	3116C-PA	00168841	2026-07-28
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2026-07-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2026-07-21
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-182020	28451	2026-07-21
Preamplifier, 18 GHz	B&Z Technologies, LLC	BZR-01001800-231040-181515	23576	2026-07-22
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2026-07-21
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY60070693	2027-01-07
RF Switching Unit	TA Engineering	TA-018S-16	SW-1	N/A
Average Power Sensor	Agilent / HP	U2000A	MY54270007	2026-07-22
Average Power Sensor	Agilent / HP	U2000A	MY54260010	2026-07-22
Bluetooth Tester	TESCOM	MTP300A	MTP300A010266	2026-07-22
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2026-07-22
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2026-12-29
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2027-01-06
Attenuator	PASTERNAK	PE7087-10	A009	2026-07-22
Attenuator	PASTERNAK	PE7087-10	A001	2026-07-22
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2026-07-21
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2026-07-21
EMI Test Receive, 3 GHz	R&S	ESR 3	101832	2026-11-11
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2026-07-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2026-07-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2026-07-21
LISN	R&S	ENV216	101836	2026-07-22
Termination	WEINSCHEL	M1406A	T08	2026-07-22
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	Complies
15.247 (b)(1)	TX conducted output power	< 21 dBm		Complies
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		Complies
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Complies
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4 s		Complies
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Complies

8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW: ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION: ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS: ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY: ANSI C63.10, Section 7.8.4

OUTPUT POWER: ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.7

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 7.8.8

Out-of-band EMISSIONS IN RESTRICTED BANDS: ANSI C63.10, Section 7.8.8

AC Power Line Conducted Emission: ANSI C63.10-2020, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

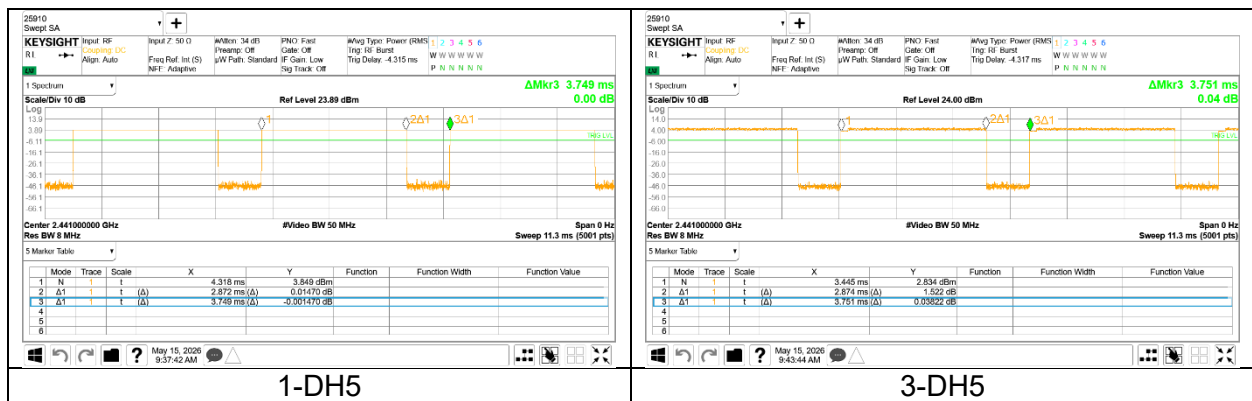

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	1/T Minimum VBW [kHz]
2 400 ~ 2 483.5 MHz Band				
BDR	2.872	3.749	76.61	0.35
EDR	2.874	3.751	76.62	0.35

Note: Due to All diversity and Dual mode have the same duty cycle, the duty cycle of ANT1 is reported in the table above.

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. The sweep time is coupled.


RESULTS


9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	948.5
	39	2 441	949.3
	78	2 480	951.8
ANT2	0	2 402	946.6
	39	2 441	947.2
	78	2 480	948.2
Worst			946.6

9.2.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION

Antenna	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	1324.0
	39	2 441	1329.0
	78	2 480	1306.0
ANT2	0	2 402	1310.0
	39	2 441	1302.0
	78	2 480	1335.0
Worst			1302.0

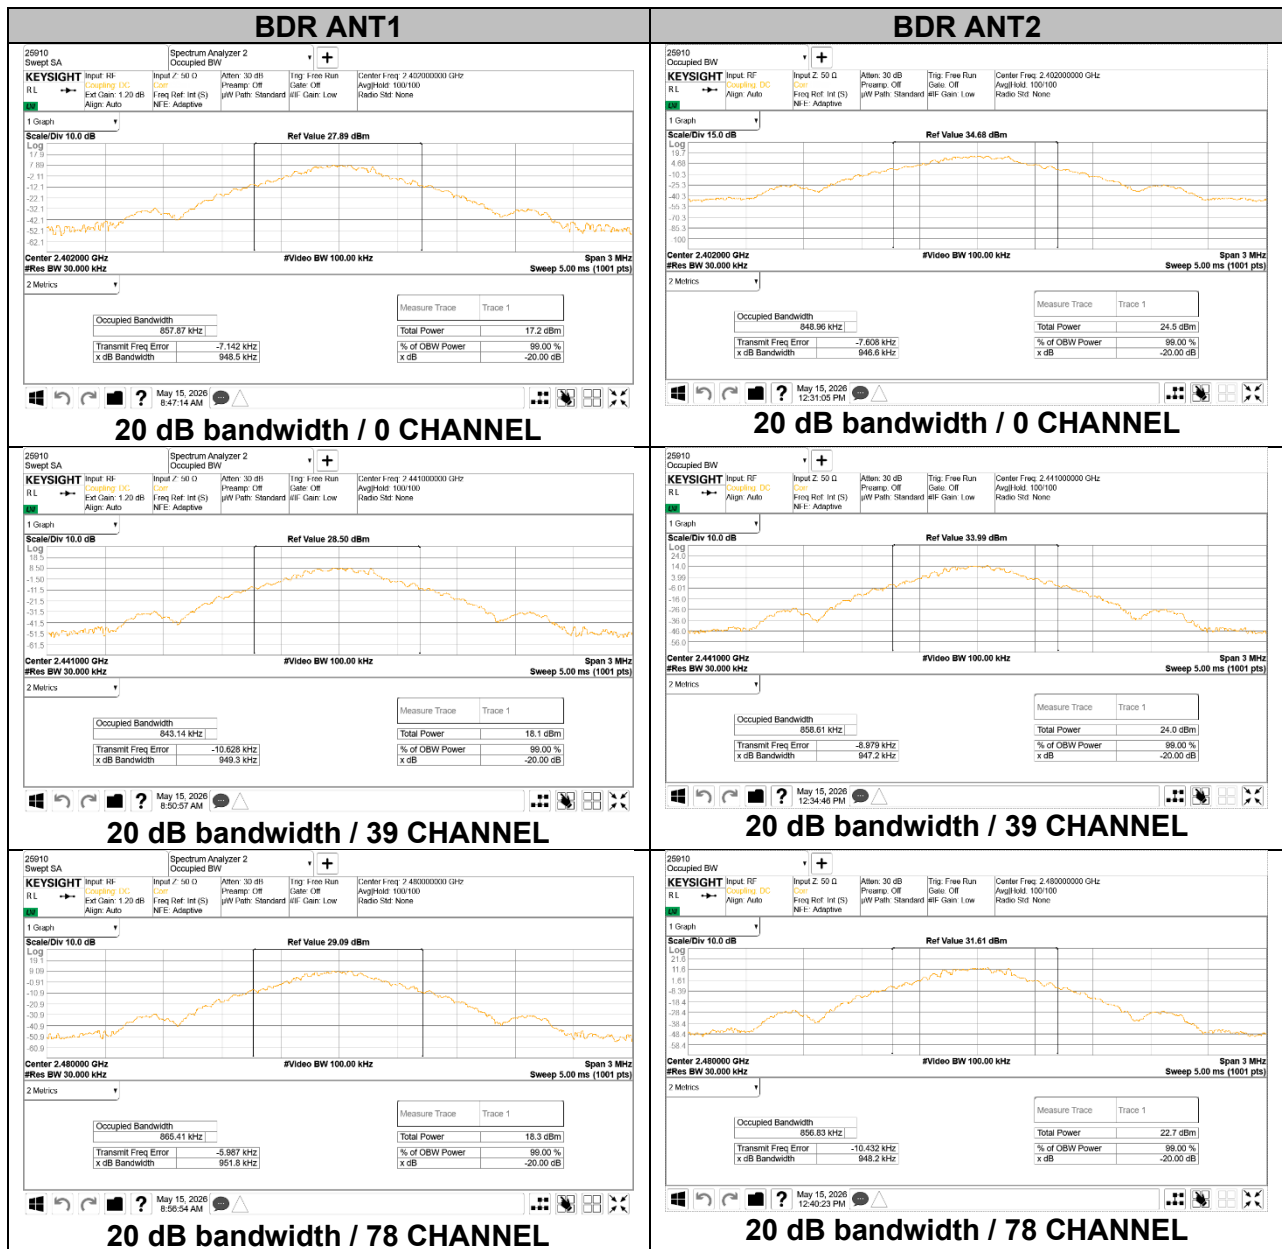

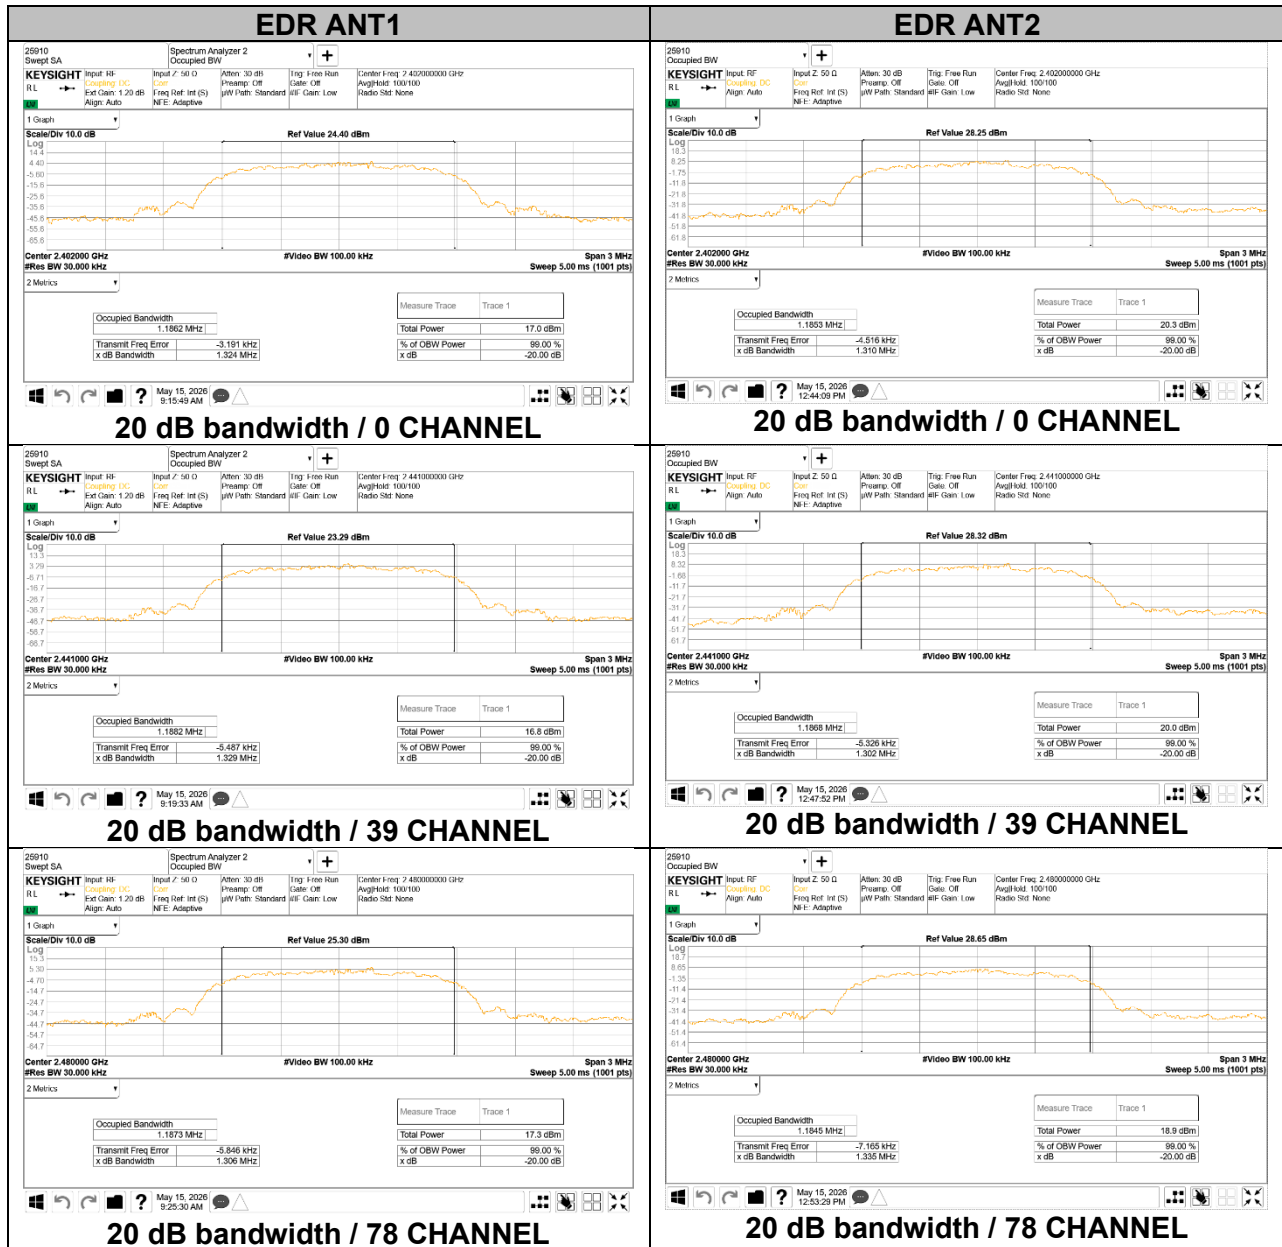

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. The VBW is set to $VBW \geq RBW$. The sweep time is coupled.

RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

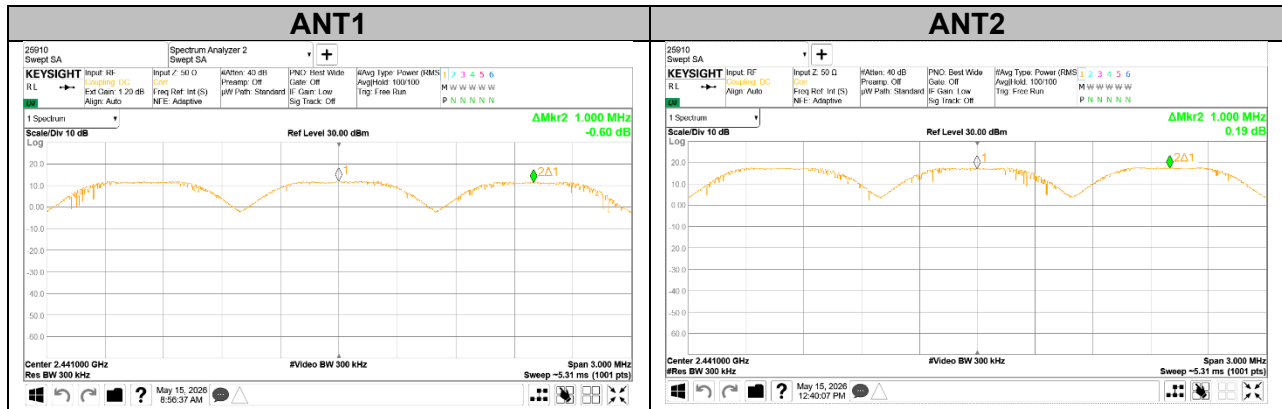

9.3.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION

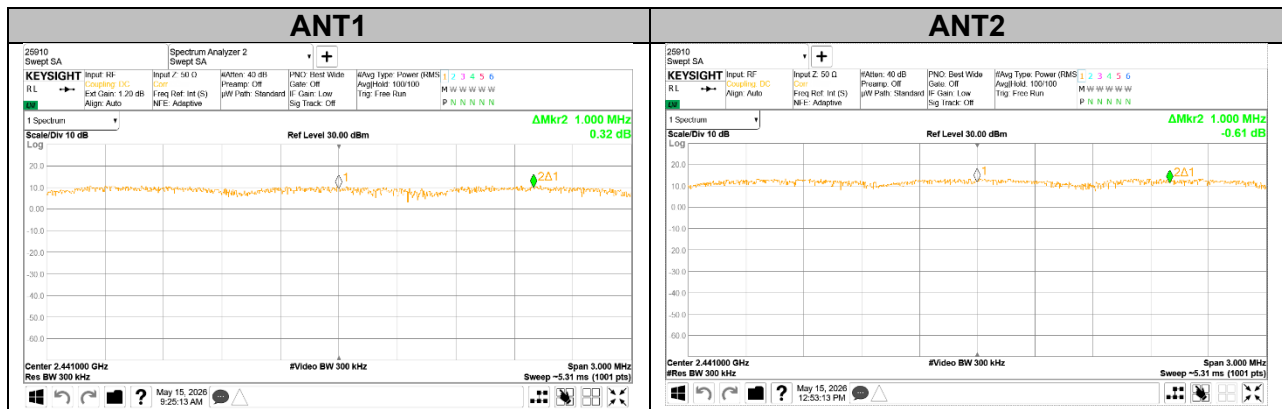

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 channels are observed


9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

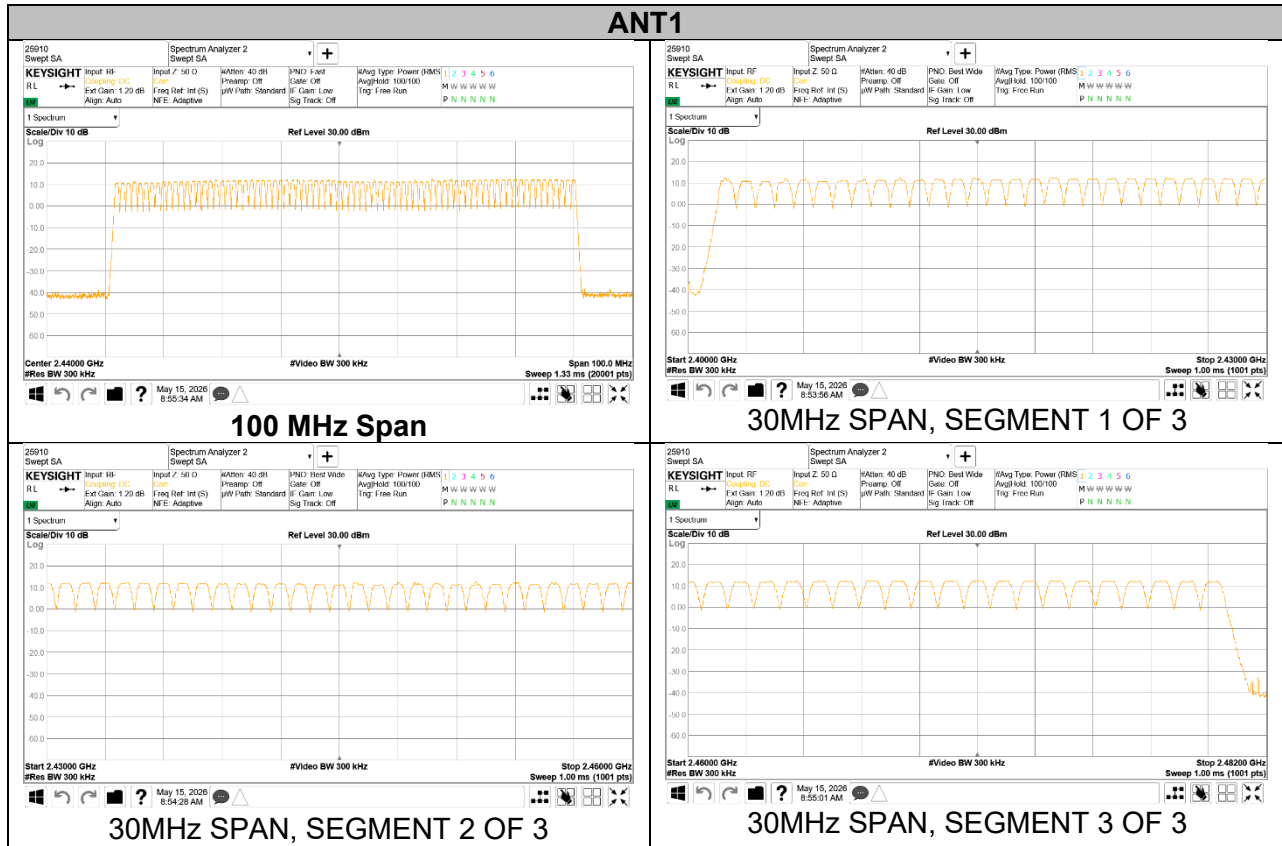

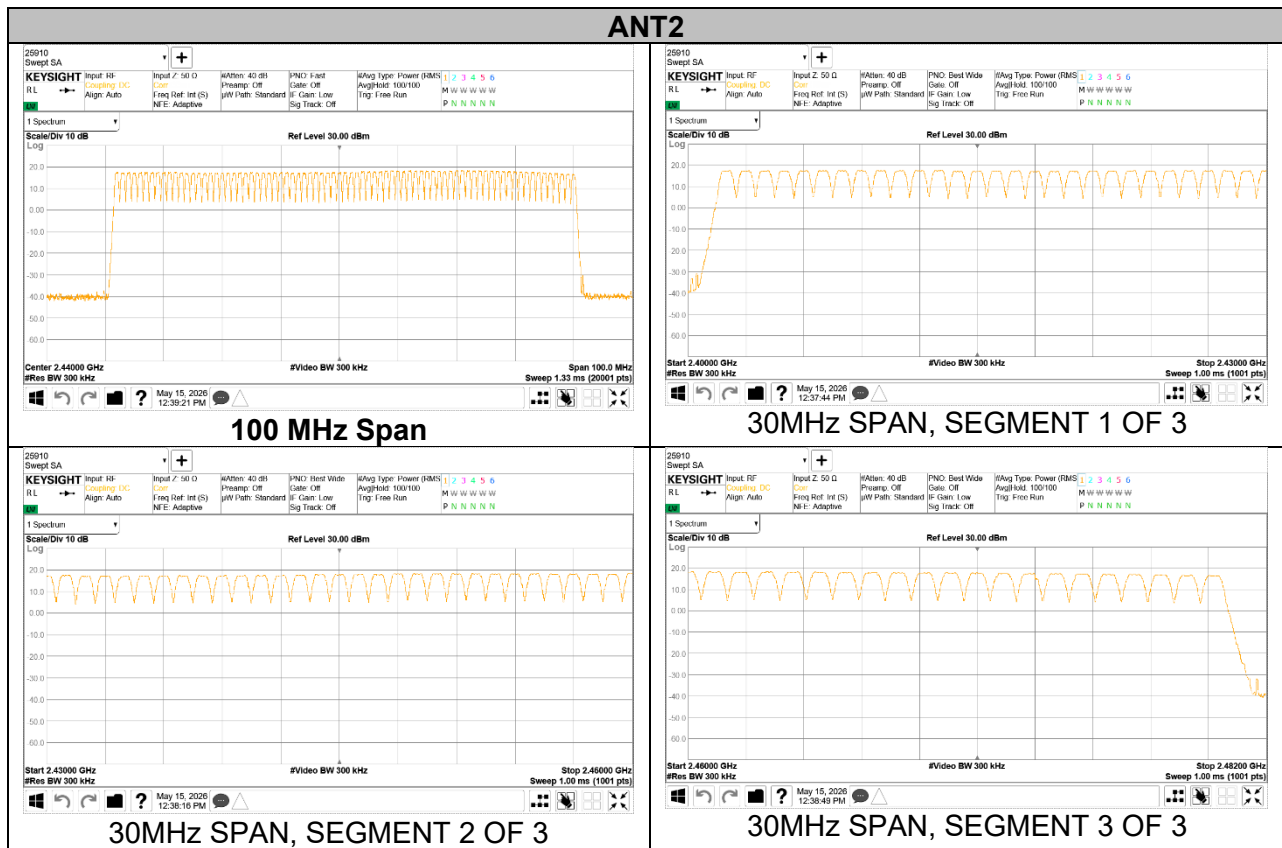

9.4.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION

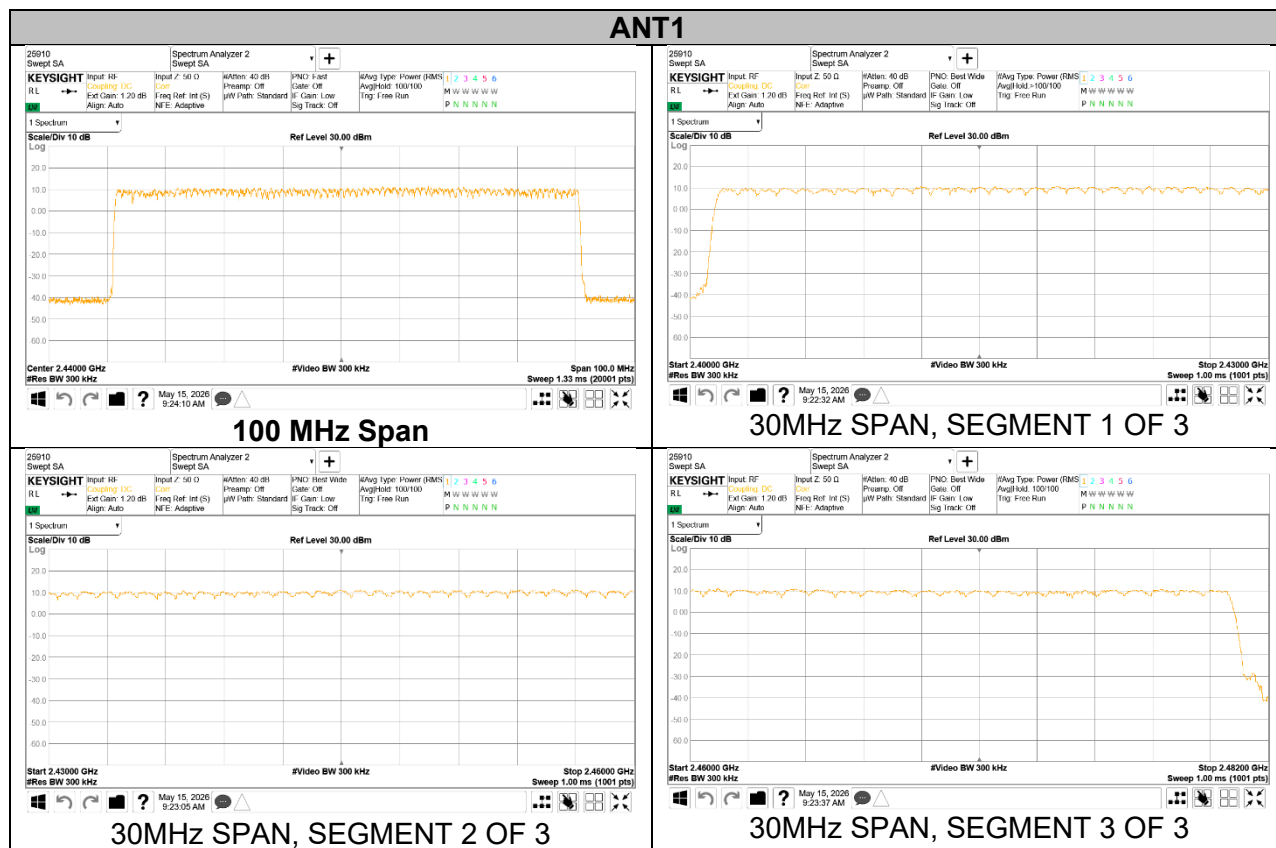

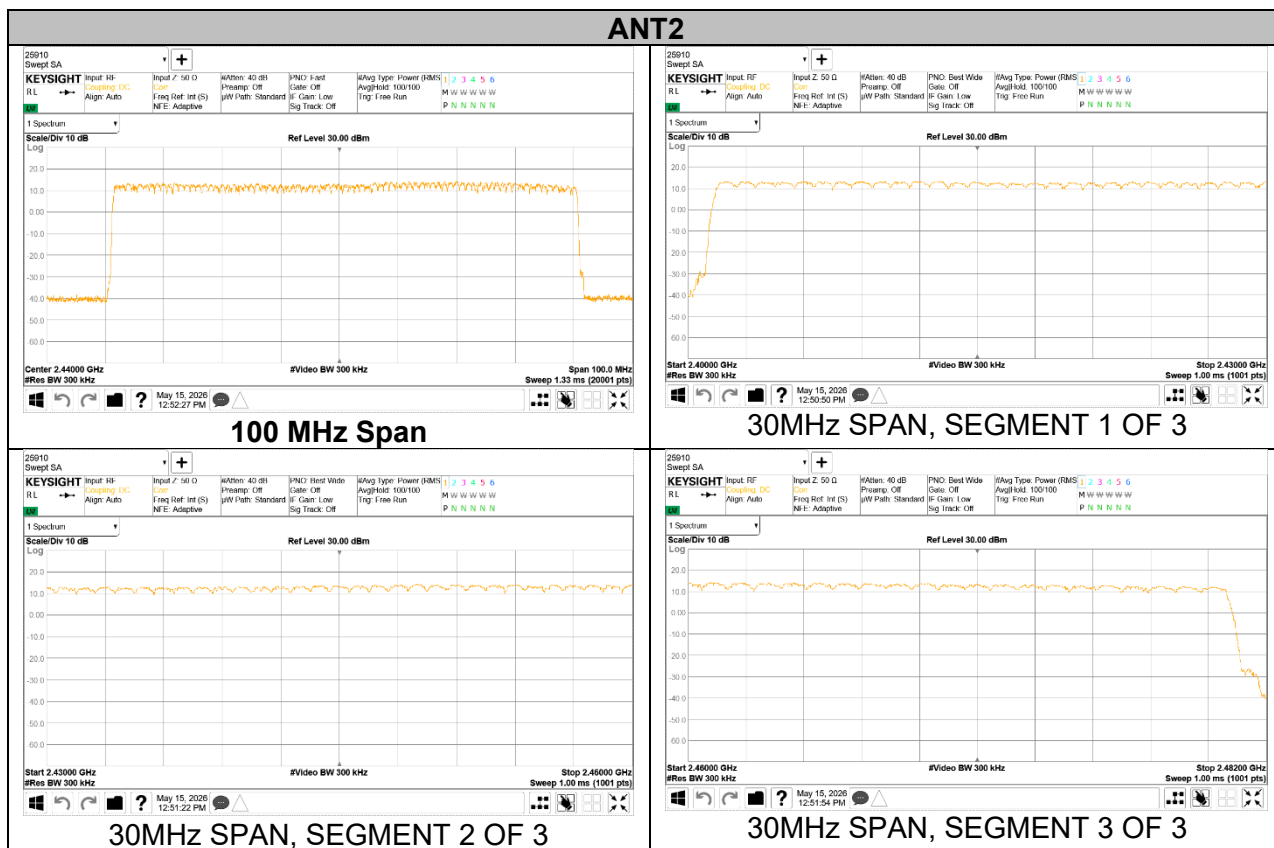

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal ANT1					
DH1	0.381	31	0.118	0.4	-0.282
DH3	1.626	14	0.228	0.4	-0.172
DH5	2.863	12	0.344	0.4	-0.056
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH ANT1					
DH1	0.381	8	0.030	0.4	-0.370
DH3	1.626	4	0.057	0.4	-0.343
DH5	2.863	3	0.086	0.4	-0.314

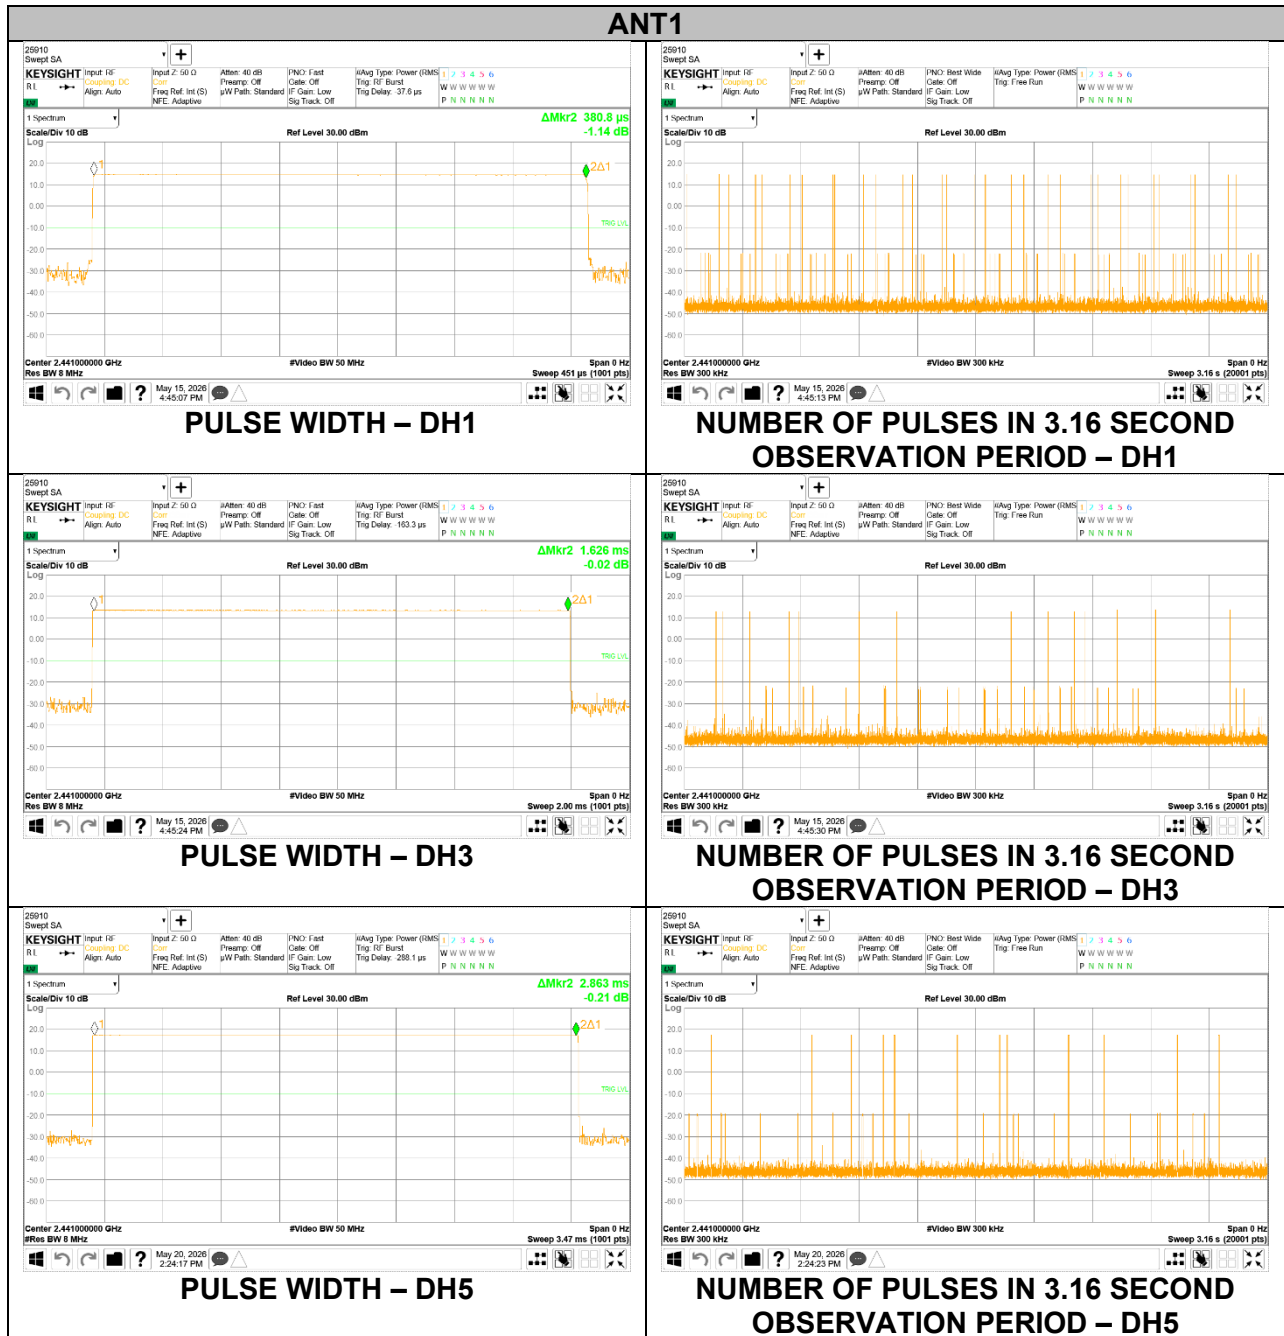


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal ANT2					
DH1	0.381	31	0.118	0.4	-0.282
DH3	1.626	12	0.195	0.4	-0.205
DH5	2.863	8	0.229	0.4	-0.171
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH ANT2					
DH1	0.381	8	0.029	0.4	-0.371
DH3	1.626	3	0.049	0.4	-0.351
DH5	2.863	2	0.057	0.4	-0.343




9.5.2. BLUETOOTH ENHANCED DATA RATE 8DPSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8DPSK Normal ANT1					
DH1	0.384	32	0.123	0.4	-0.277
DH3	1.624	15	0.244	0.4	-0.156
DH5	2.863	6	0.172	0.4	-0.228
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8DPSK AFH ANT1					
DH1	0.384	8	0.031	0.4	-0.369
DH3	1.624	4	0.061	0.4	-0.339
DH5	2.863	2	0.043	0.4	-0.357



DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8DPSK Normal ANT2					
DH1	0.385	32	0.123	0.4	-0.277
DH3	1.624	20	0.325	0.4	-0.075
DH5	2.867	5	0.143	0.4	-0.257
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8DPSK AFH ANT2					
DH1	0.385	8	0.031	0.4	-0.369
DH3	1.624	5	0.081	0.4	-0.319
DH5	2.867	1	0.036	0.4	-0.364



9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

The peak conducted output power limit is 0.125 W (21 dBm) since Bluetooth AFH mode can be used at least 20 non-overlapping hopping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	17.36	21.00	-3.64
	39	2 441	17.22		-3.78
	78	2 480	17.49		-3.51
ANT2	0	2 402	18.24		-2.76
	39	2 441	17.93		-3.07
	78	2 480	17.80		-3.20
Worst			18.24		-2.76

9.6.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	16.19	21.00	-4.81
	39	2 441	16.45		-4.55
	78	2 480	16.23		-4.77
ANT2	0	2 402	17.14		-3.86
	39	2 441	16.88		-4.12
	78	2 480	16.63		-4.37
Worst			17.14		-3.86

9.6.3. ENHANCED DATA RATE 8DPSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	16.89	21.00	-4.11
	39	2 441	17.10		-3.90
	78	2 480	16.84		-4.16
ANT2	0	2 402	17.51		-3.49
	39	2 441	17.26		-3.74
	78	2 480	17.01		-3.99
Worst			17.51		-3.49

9.6.4. BASIC DATA RATE GFSK MODULATION (DUAL)

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
DUAL ANT1	0	2 402	13.41	21.00	
	39	2 441	11.67		
	78	2 480	13.66		
DUAL ANT2	0	2 402	13.20		
	39	2 441	13.19		
	78	2 480	10.12		
DUAL ANT1+2	0	2 402	16.32		-4.68
	39	2 441	15.51		-5.49
	78	2 480	15.25		-5.75
Worst			16.32		-4.68

9.6.1. ENHANCED DATA RATE Pi/4-DQPSK MODULATION (DUAL)


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
DUAL ANT1	0	2 402	13.23	21.00	
	39	2 441	11.76		
	78	2 480	12.94		
DUAL ANT2	0	2 402	11.65		
	39	2 441	12.82		
	78	2 480	9.83		
DUAL ANT1+2	0	2 402	15.52		-5.48
	39	2 441	15.33		-5.67
	78	2 480	14.67		-6.33
Worst			15.52		-5.48


9.6.2. ENHANCED DATA RATE 8DPSK MODULATION (DUAL)


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
DUAL ANT1	0	2 402	13.53	21.00	
	39	2 441	12.11		
	78	2 480	13.39		
DUAL ANT2	0	2 402	12.02		
	39	2 441	13.14		
	78	2 480	10.00		
DUAL ANT1+2	0	2 402	15.85		-5.15
	39	2 441	15.67		-5.33
	78	2 480	15.03		-5.97
Worst			15.85		-5.15


9.6.3. OUTPUT POWER PLOTS


PEAK OUTPUT POWER

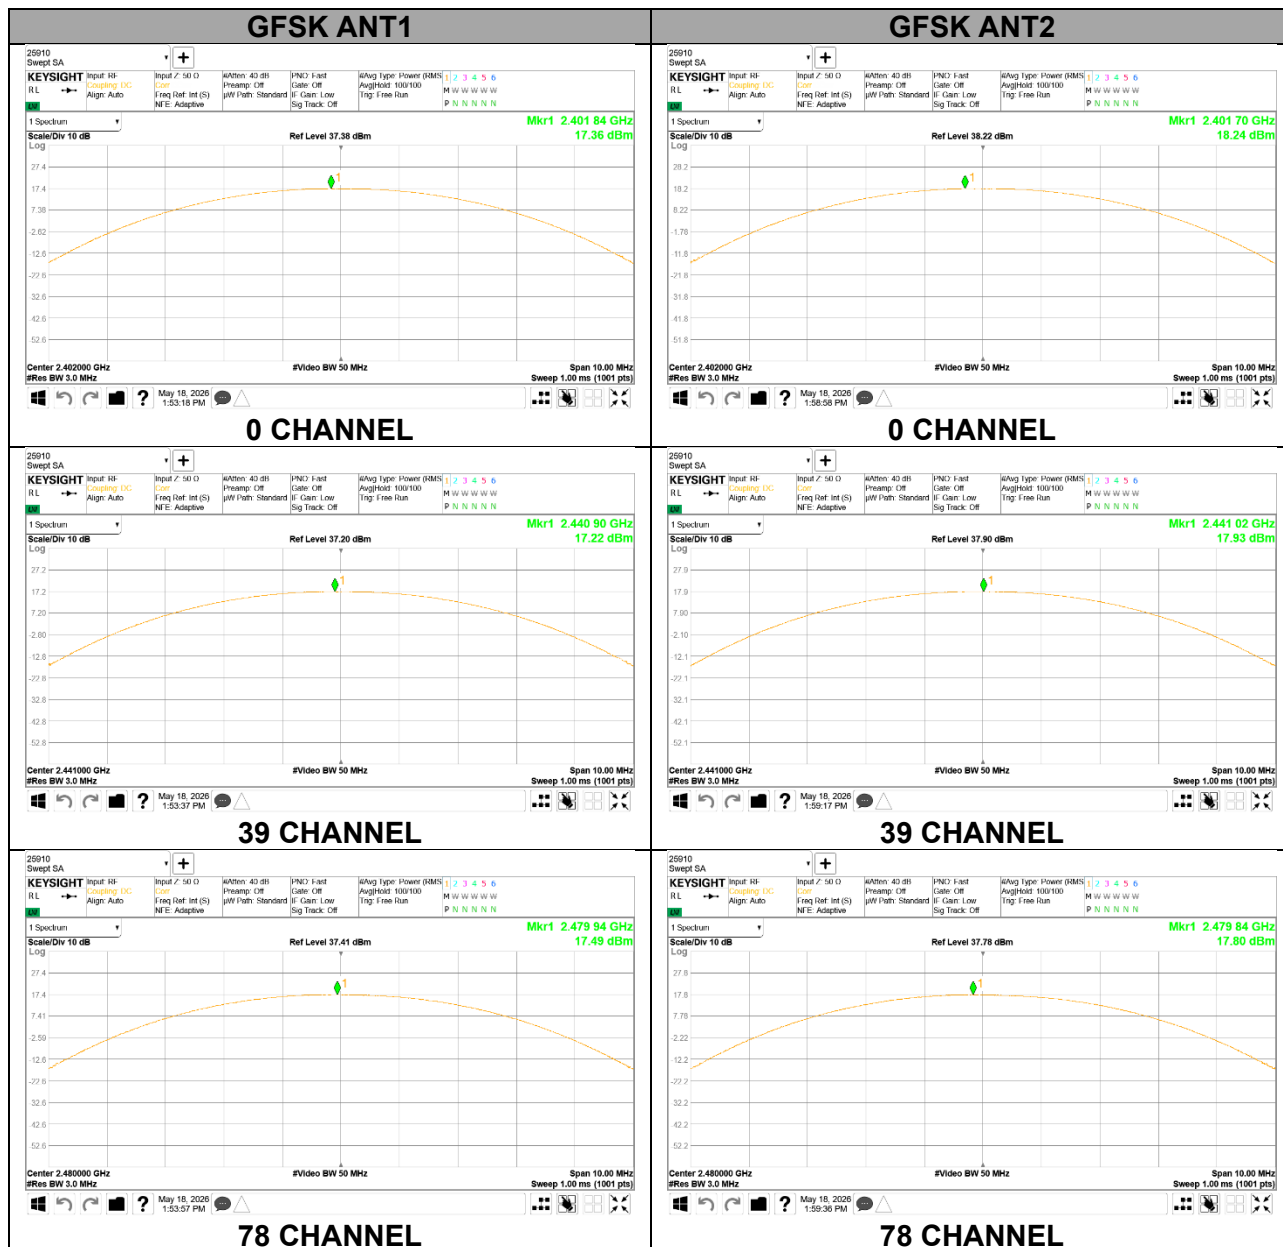


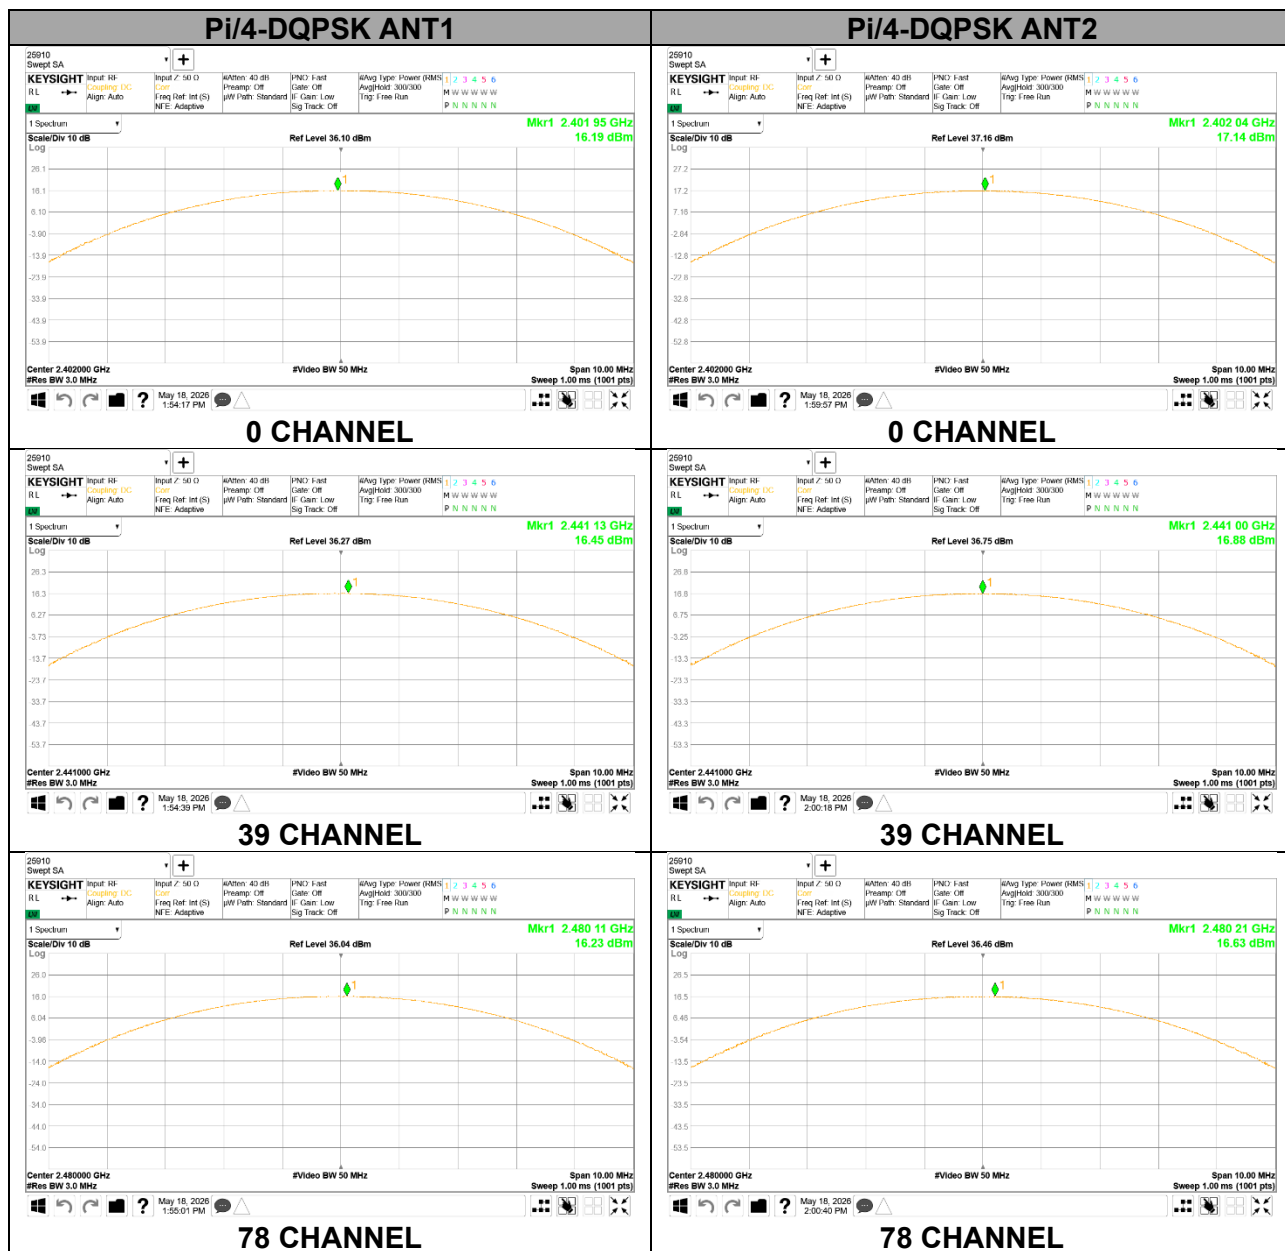



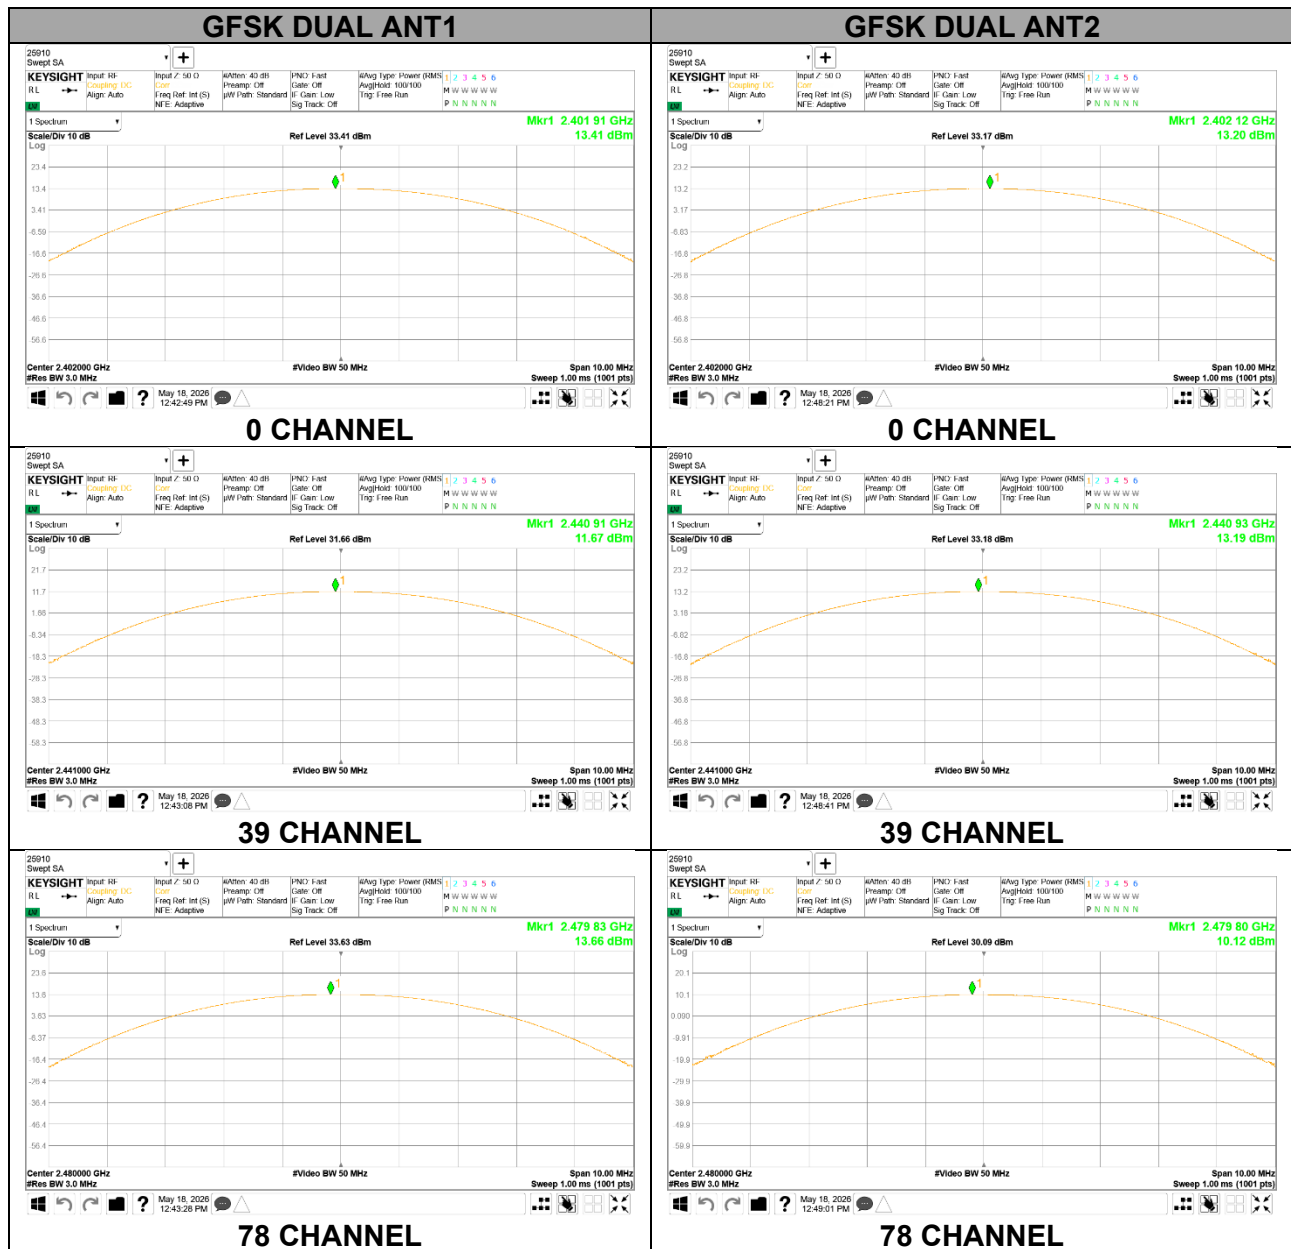



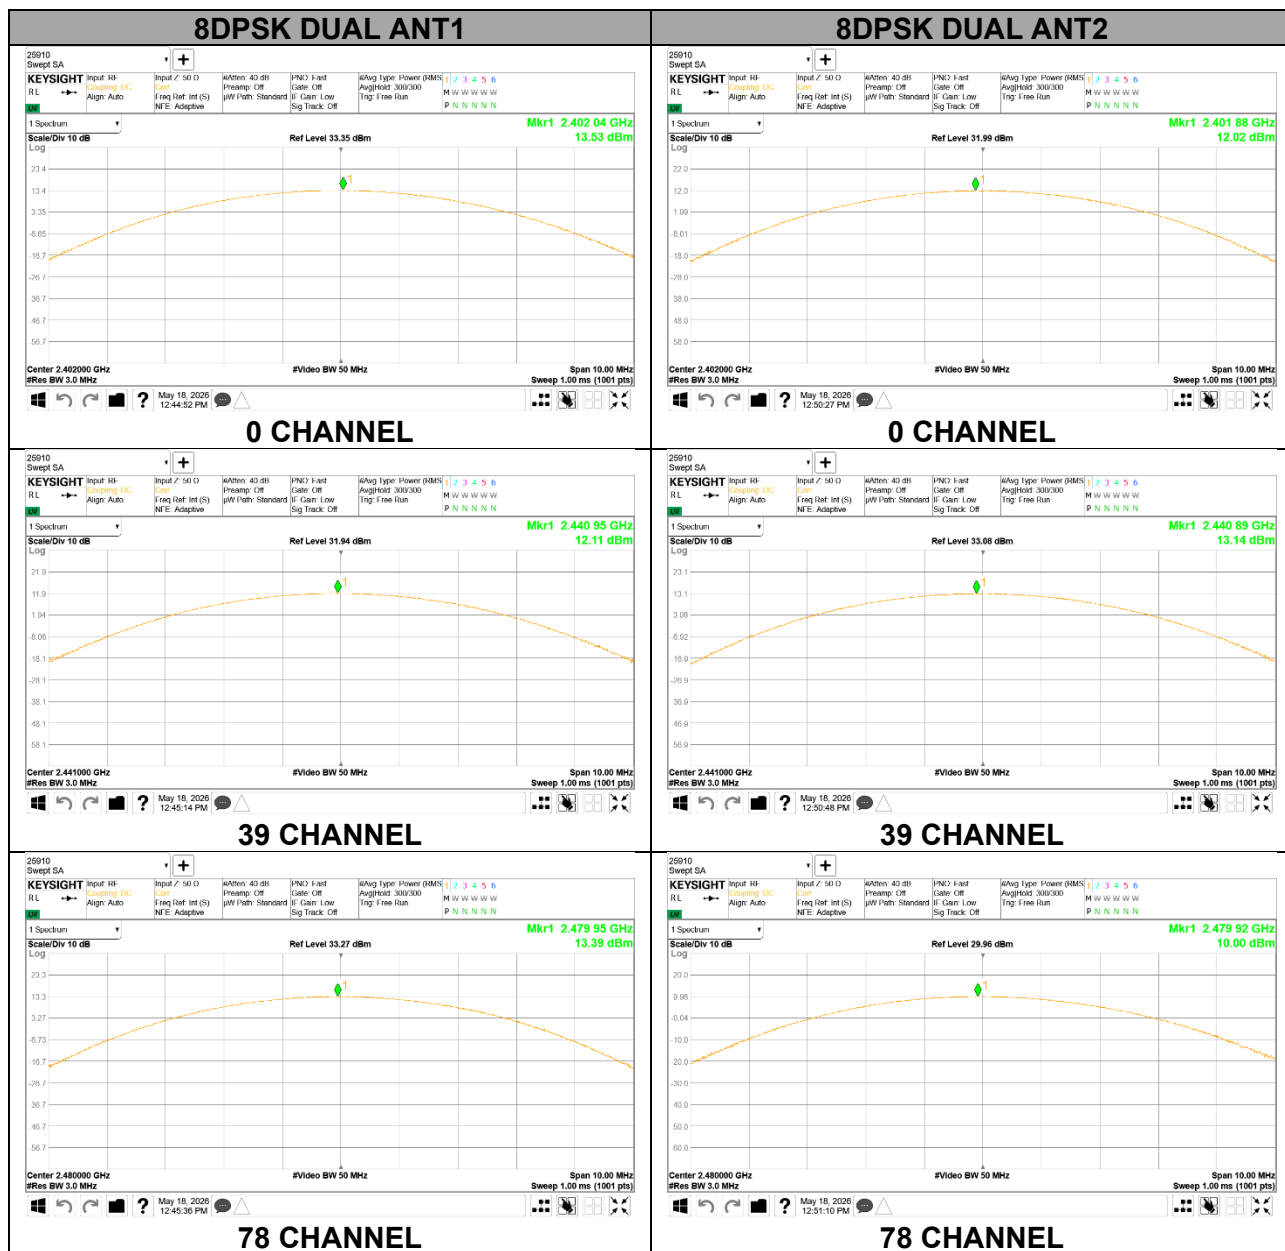

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.
The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.7.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	17.169	52.107
	39	2 441	16.990	50.003
	78	2 480	17.042	50.606
ANT2	0	2 402	17.961	62.532
	39	2 441	17.648	58.184
	78	2 480	17.267	53.297

9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	13.352	21.637
	39	2 441	13.615	22.988
	78	2 480	13.433	22.044
ANT2	0	2 402	14.216	26.400
	39	2 441	13.964	24.912
	78	2 480	13.676	23.313

9.7.3. ENHANCED DATA RATE 8DPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	13.509	22.434
	39	2 441	13.729	23.599
	78	2 480	13.534	22.563
ANT2	0	2 402	14.327	27.083
	39	2 441	14.044	25.375
	78	2 480	13.757	23.752

9.7.4. BASIC DATA RATE GFSK MODULATION (DUAL)

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
DUAL ANT1	0	2 402	13.277	
	39	2 441	11.501	
	78	2 480	13.518	
DUAL ANT2	0	2 402	12.917	
	39	2 441	13.085	
	78	2 480	9.947	
DUAL ANT1+2	0	2 402	16.111	40.842
	39	2 441	15.375	34.476
	78	2 480	15.100	32.359

9.7.5. ENHANCED DATA RATE PI/4-DQPSK MODULATION (DUAL)

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
DUAL ANT1	0	2 402	10.871	
	39	2 441	9.072	
	78	2 480	10.259	
DUAL ANT2	0	2 402	8.912	
	39	2 441	10.417	
	78	2 480	7.746	
DUAL ANT1+2	0	2 402	13.011	20.005
	39	2 441	12.807	19.084
	78	2 480	12.192	16.566

9.7.6. ENHANCED DATA RATE 8DPSK MODULATION (DUAL)

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
DUAL ANT1	0	2 402	10.897	
	39	2 441	9.107	
	78	2 480	10.291	
DUAL ANT2	0	2 402	8.963	
	39	2 441	10.467	
	78	2 480	7.782	
DUAL ANT1+2	0	2 402	13.047	20.170
	39	2 441	12.850	19.277
	78	2 480	12.226	16.694

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


See the next page.

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING – ANT1

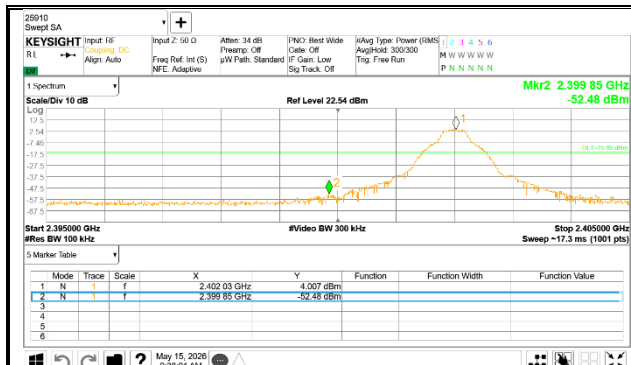


0 CHANNEL BANDEDGE

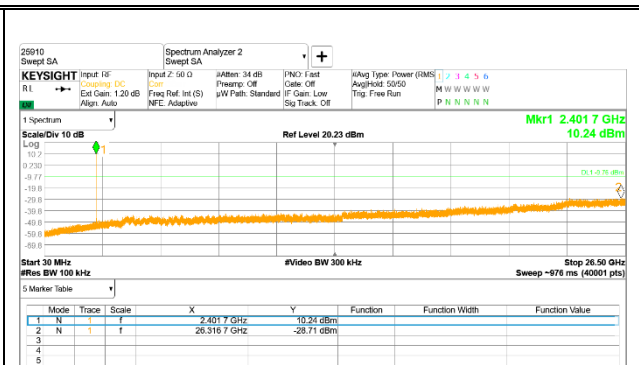


OUT-OF-BAND 0 CHANNEL

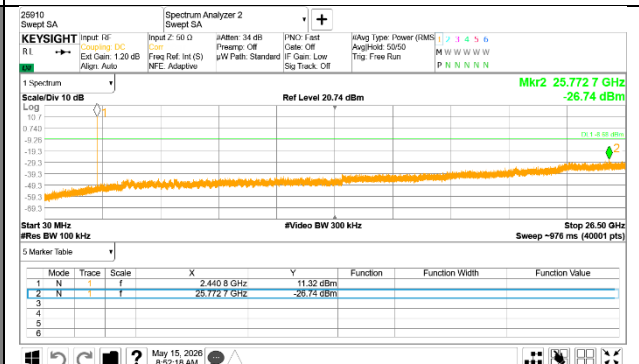

OUT-OF-BAND 39 CHANNEL

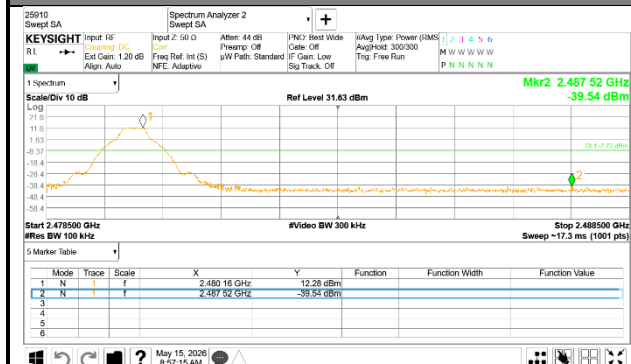


78 CHANNEL BANDEDGE

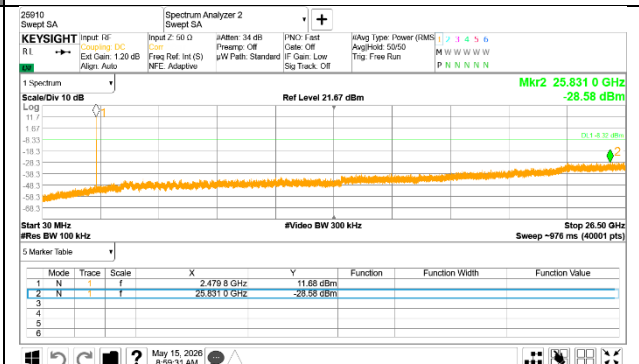


OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT1

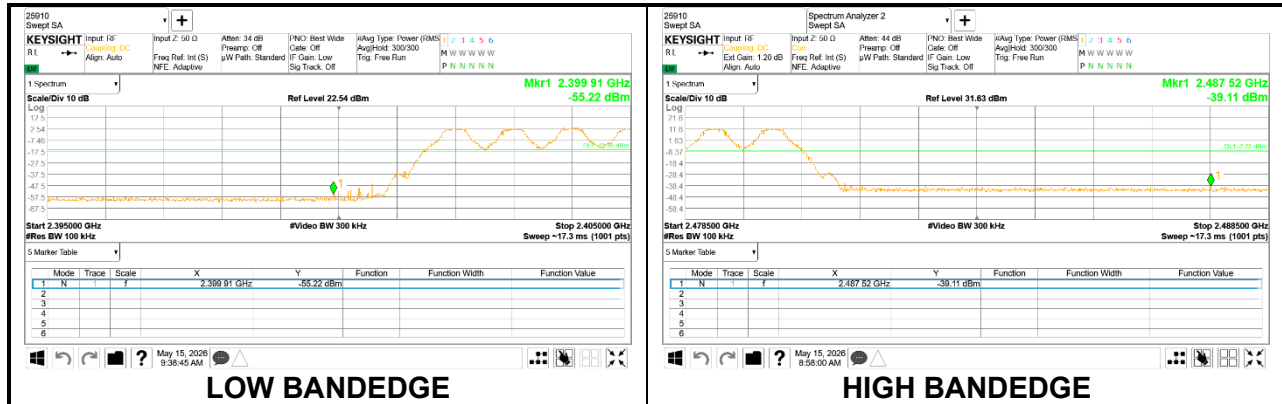

SPURIOUS EMISSIONS, NON-HOPPING – ANT2

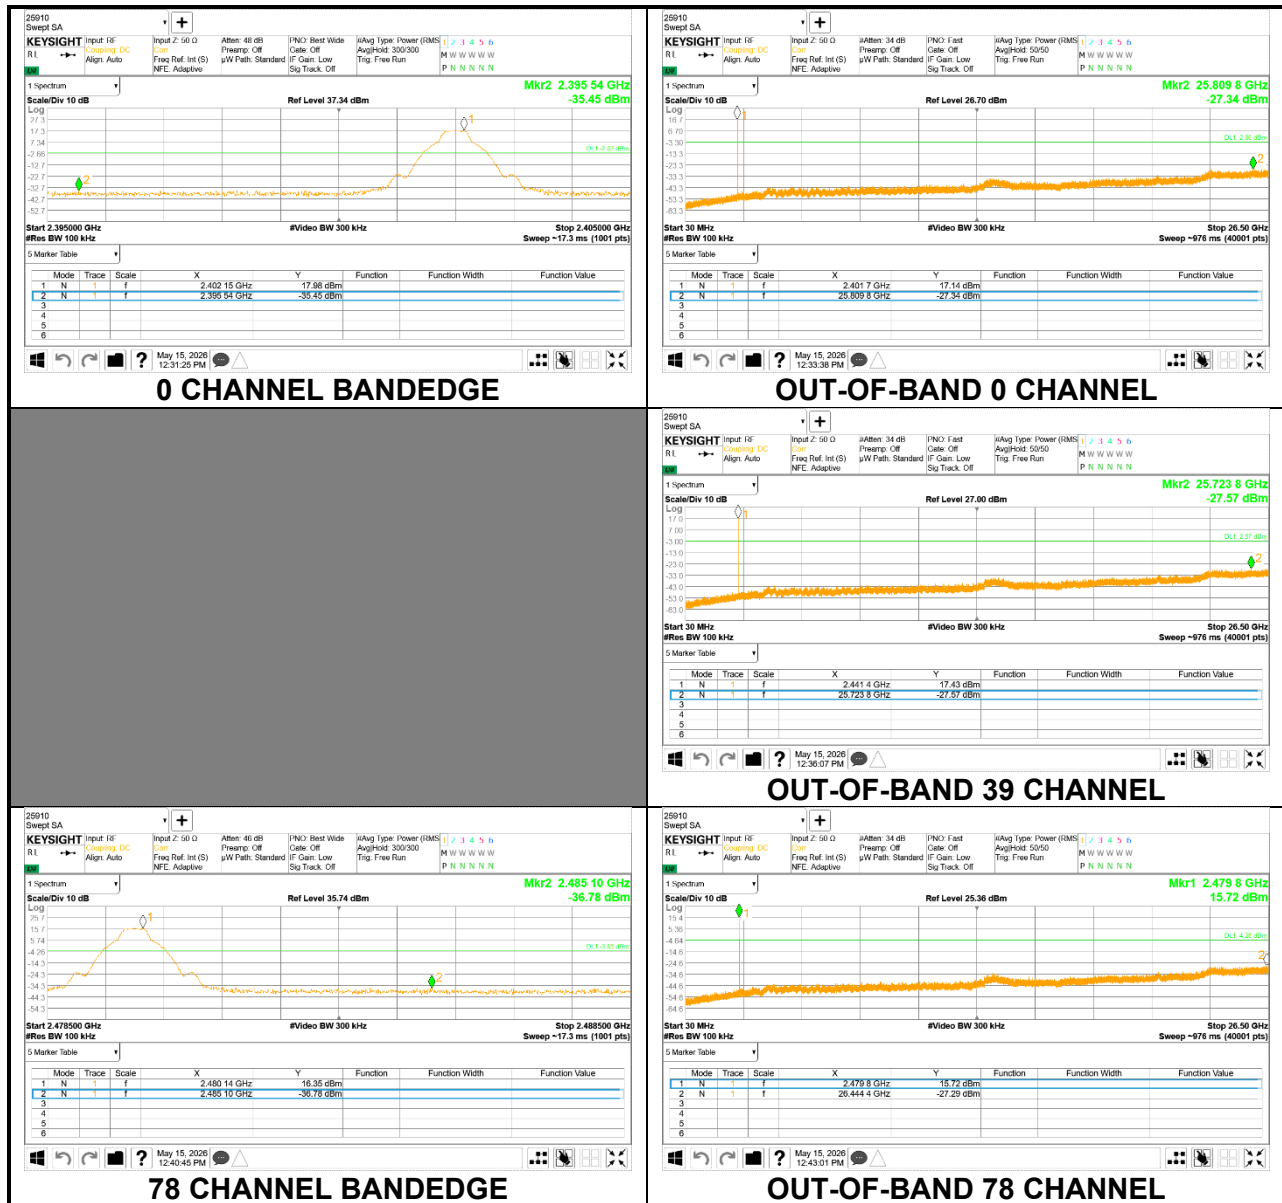

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT2

