

Appendix A: SAR Test Plots

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0047M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, BACK, 5.00	GSM 850	GSM: Voice, GMSK, 1 slot(s), 10021	A+C	Ch. 128	824.200	9.17, 8.94,9.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-01	21.8	21	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	0.893	44.0	EX3DV4 – SN7836, 2025-09-15	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.639
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.37
M2/M1 [%]	76.4
Dist 3dB Peak [mm]	7.7

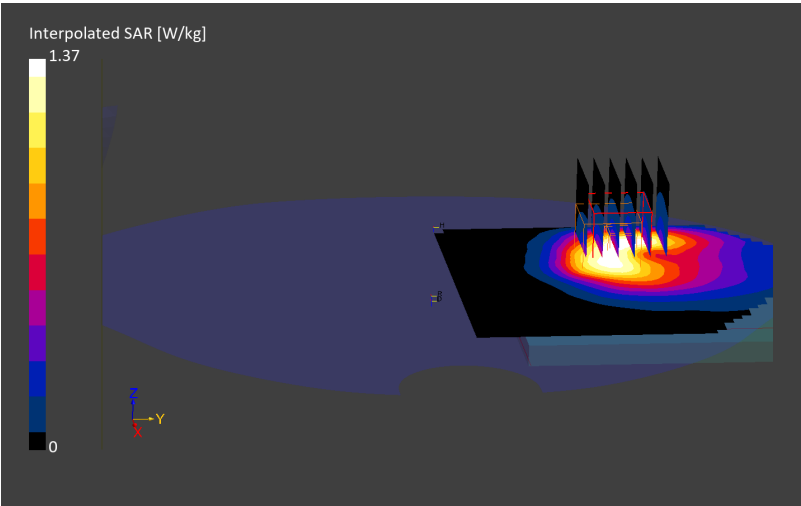

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0047M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Hotspot	Flat, BACK, 5.00	GSM 850	GSM: Data, GSMK, 4 slot(s), 10028	E	Ch. 190	836.600	9.17, 8.94,9.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-01	21.8	21	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	0.897	44.0	EX3DV4 – SN7836, 2025-09-15	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	7.5 x 7.5	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.563
Power Drift [dB]	-0.05
Peak SAR (Extrapolated) [W/kg]	1.24
M2 /M1 [%]	74.9
Dist 3dB Peak [mm]	9.7

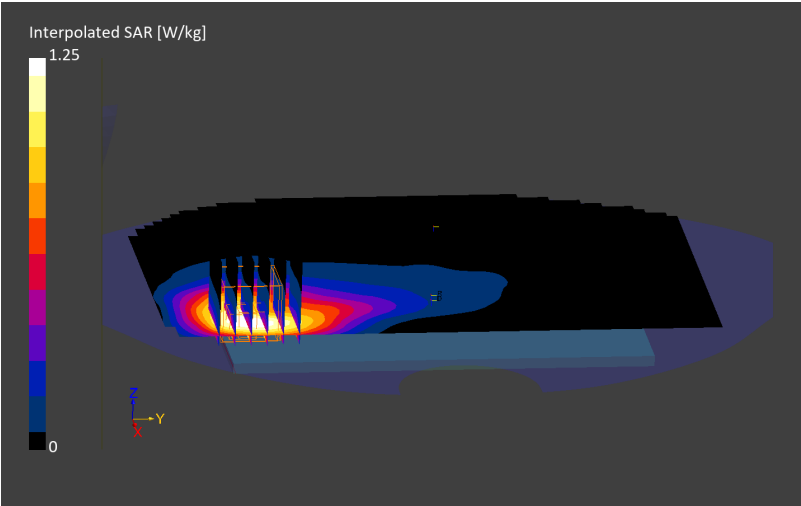

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0017M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, BACK, 5.00	GSM 1900	GSM: Voice, GMSK, 1 slot(s), 10021	B	Ch. 810	1909.800	7.23, 6.96,6.94

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-27	23.2	22.4	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.45	41.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.59
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.39
M2/M1 [%]	77.0
Dist 3dB Peak [mm]	6.0

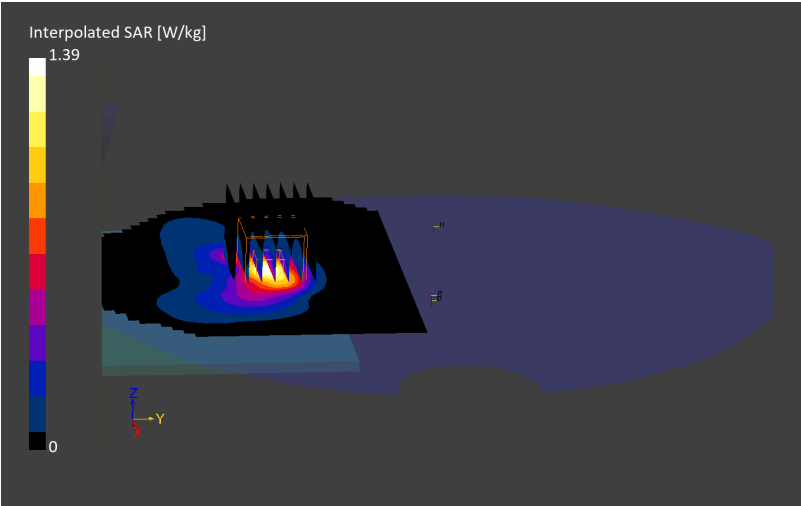

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0017M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 5	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	E	Ch. 4183	836.600	9.48, 9.32,9.02

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.1	20.8	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.905	44.0	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.84
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.86
M2/M1 [%]	75.1
Dist 3dB Peak [mm]	9.4

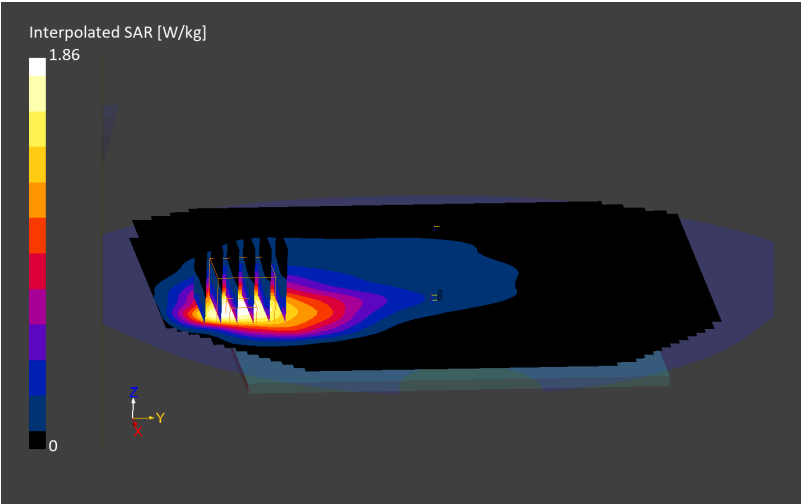

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0023M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 4	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	G	Ch. 1513	1752.600	7.68, 7.4,7.37

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-22	20.6	19.8	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.33	41.0	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.808
Power Drift [dB]	-0.11
Peak SAR (Extrapolated) [W/kg]	1.55
M2 /M1 [%]	82.5
Dist 3dB Peak [mm]	7.2

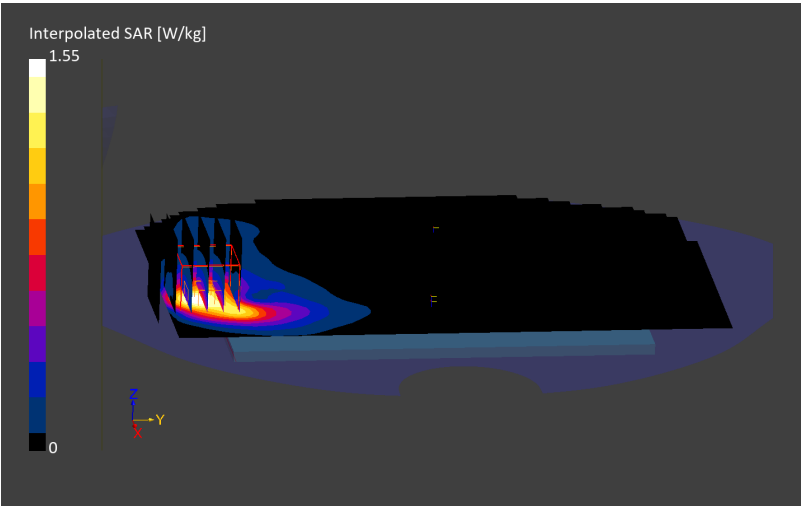

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0838S

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 2	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	G	Ch. 9538	1907.600	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-08	22.8	21.5	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.42	40.5	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	40.0 x 40.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.73
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.56
M2/M1 [%]	79.7
Dist 3dB Peak [mm]	6.4

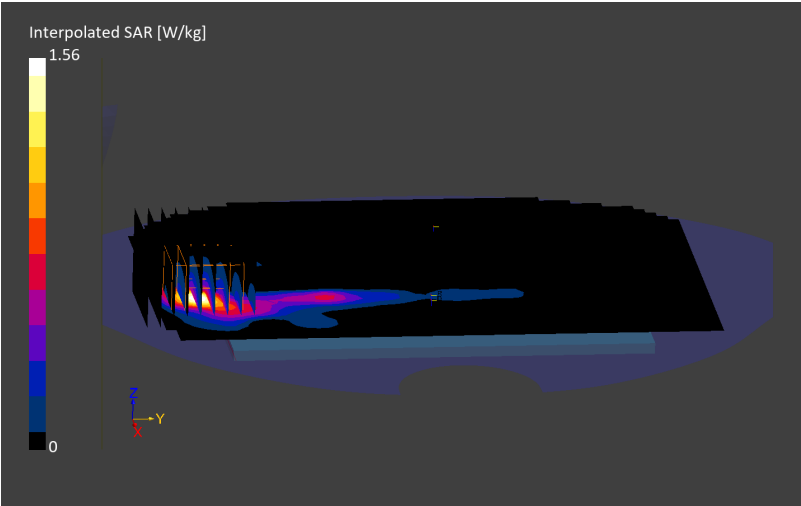

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0047M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 12	LTE-FDD: 10.0 MHz, QPSK, 1 RB (Low), 10175	A+C	Ch. 23095	707.500	9.2, 9.96,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.872	43.5	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.65
Power Drift [dB]	-0.08
Peak SAR (Extrapolated) [W/kg]	1.52
M2 /M1 [%]	72.2
Dist 3dB Peak [mm]	7.1

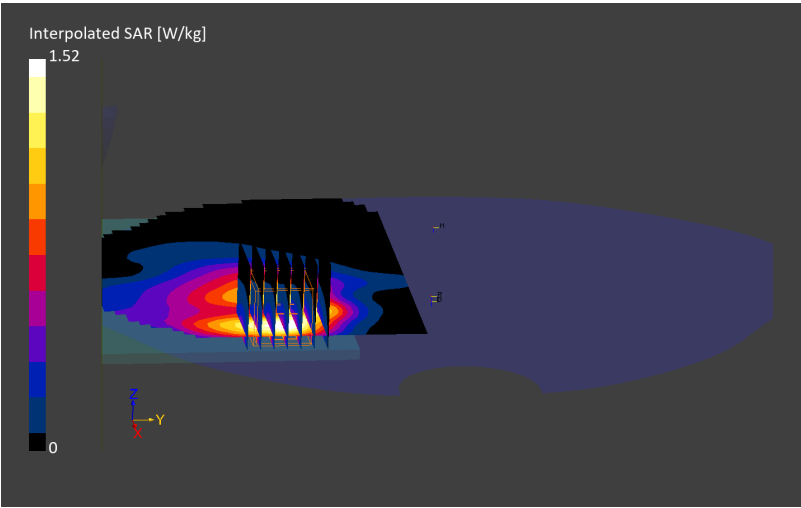

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0047M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 13	LTE-FDD: 10.0 MHz, QPSK, 50% RB (Low), 10154	A+C	Ch. 23230	782.000	9.2, 9.96,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.895	43.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.588
Power Drift [dB]	0.07
Peak SAR (Extrapolated) [W/kg]	1.29
M2/M1 [%]	74.8
Dist 3dB Peak [mm]	8.1

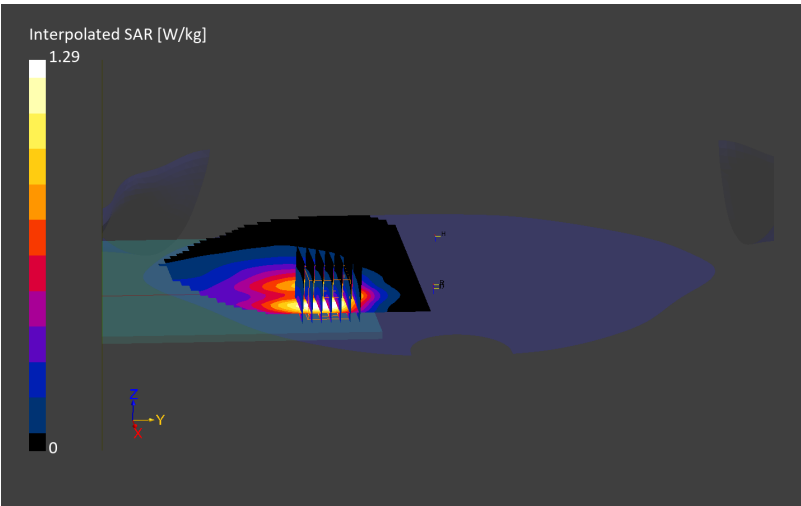

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0047M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 26	LTE-FDD: 15.0 MHz, QPSK, 100% RB (Mid), 10311	E	Ch. 26865	831.500	9.05, 9.79,8.99

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.909	43.1	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.728
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.65
M2/M1 [%]	73.6
Dist 3dB Peak [mm]	10.0

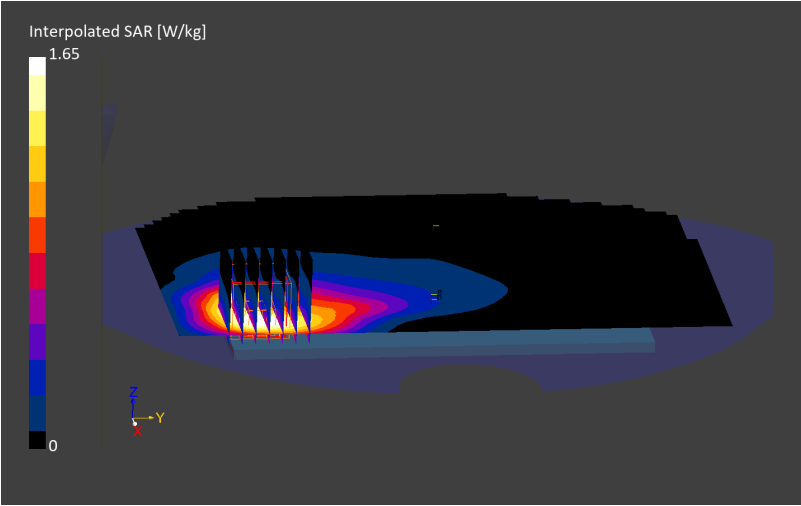

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0042M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 66	LTE-FDD: 20.0 MHz, QPSK, 100% RB, 10100	G	Ch. 132572	1770.000	7.51, 7.49,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	22.6	20.5	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.30	39.6	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 35.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.763
Power Drift [dB]	0.19
Peak SAR (Extrapolated) [W/kg]	1.52
M2/M1 [%]	80.1
Dist 3dB Peak [mm]	7.3

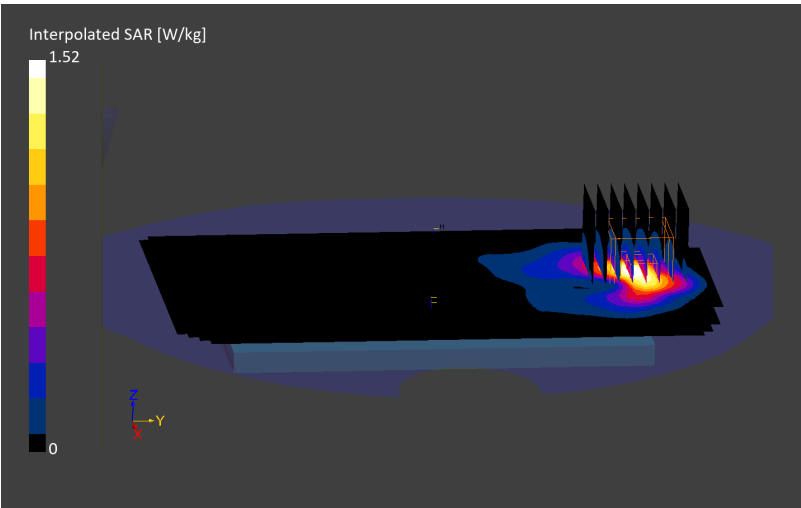

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0042M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 25	LTE-FDD: 20.0 MHz, QPSK, 50% RB (Mid), 10297	G	Ch. 26140	1860.000	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	22.6	20.5	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.36	39.4	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	38.4 x 38.4 x 45.0
Grid Steps [mm]	10.0 x 10.0	4.8 x 4.8 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.862
Power Drift [dB]	0.19
Peak SAR (Extrapolated) [W/kg]	1.77
M2/M1 [%]	80.8
Dist 3dB Peak [mm]	6.5

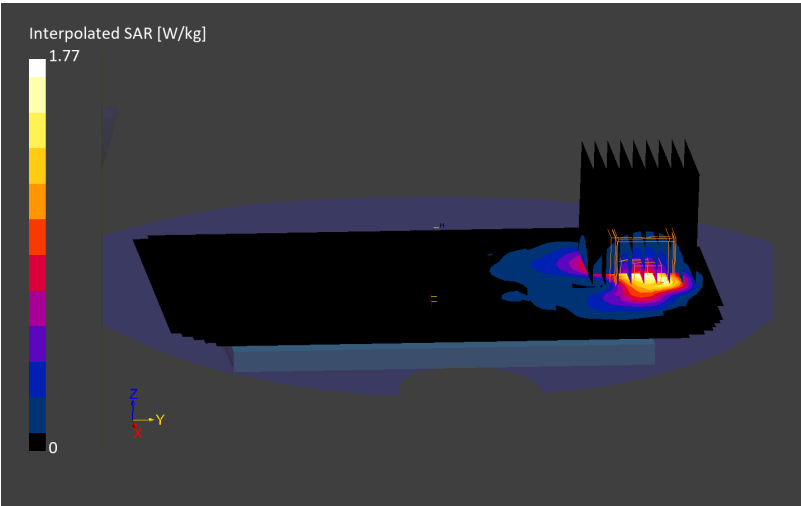

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0042M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 41	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 1, SSC: 4, 1 RB (Mid), 10172	G	Ch. 41490	2680.000	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.3	20	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.97	38.9	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.864
Power Drift [dB]	-0.01
Peak SAR (Extrapolated) [W/kg]	1.94
M2/M1 [%]	79.7
Dist 3dB Peak [mm]	6.8

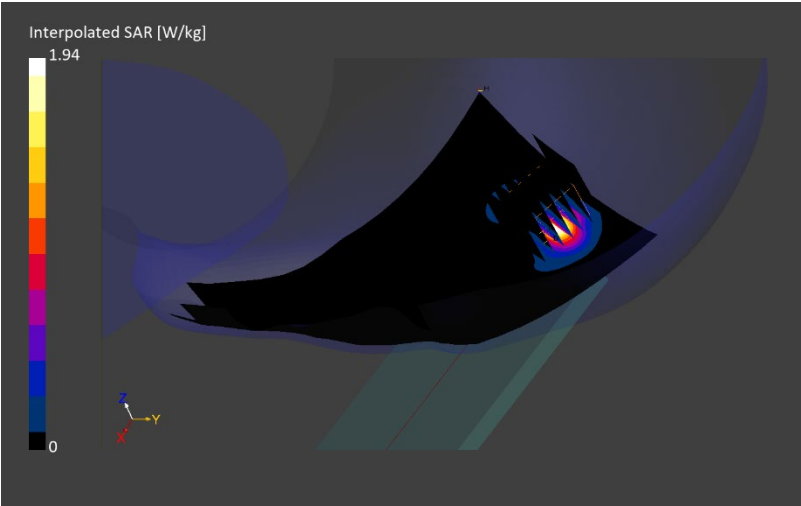

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0042M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 41	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 1, SSC: 4, 50% RB (Mid), 10151	B	Ch. 40620	2593.000	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.3	20	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.90	39.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.564
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.31
M2/M1 [%]	77.8
Dist 3dB Peak [mm]	5.7

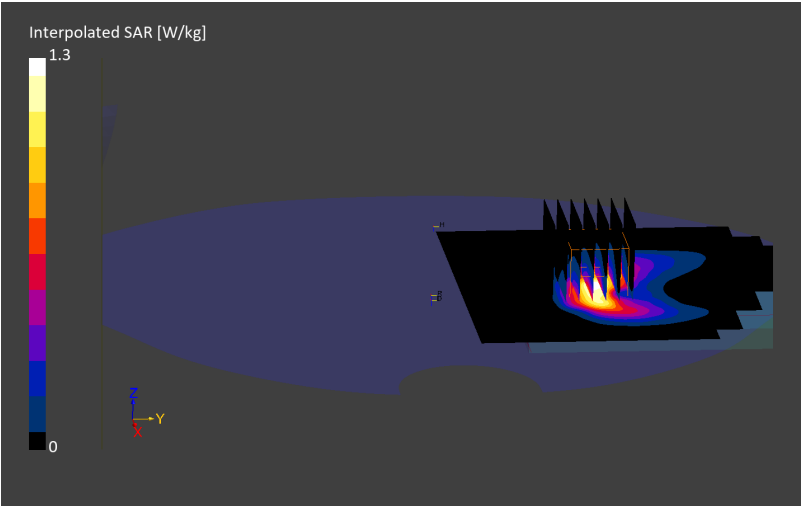

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0017M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n71	NR FR1 FDD: DFT-s-OFDM, 35.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 1000248	A+C	Ch. 136100	680.500	9.51, 9.27,10.14

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-01	21.8	21	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	0.844	44.4	EX3DV4 – SN7836, 2025-09-15	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.612
Power Drift [dB]	-0.06
Peak SAR (Extrapolated) [W/kg]	1.33
M2/M1 [%]	74.6
Dist 3dB Peak [mm]	7.7

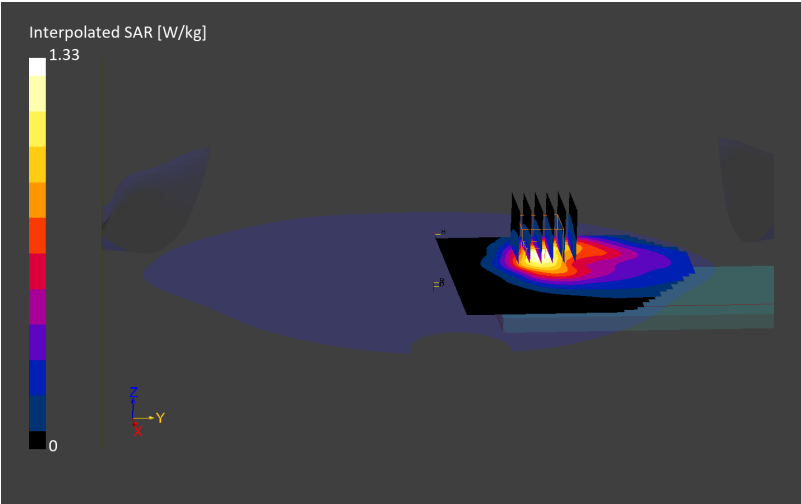

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0047M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n5	NR FR1 FDD: DFT-s-OFDM, 20.0 MHz, QPSK, 15 kHz, 100% RB, 10947	E	Ch. 167300	836.500	9.17, 8.94,9.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-01	21.8	21	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	0.897	44.0	EX3DV4 – SN7836, 2025-09-15	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.809
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	1.81
M2/M1 [%]	76.7
Dist 3dB Peak [mm]	9.0

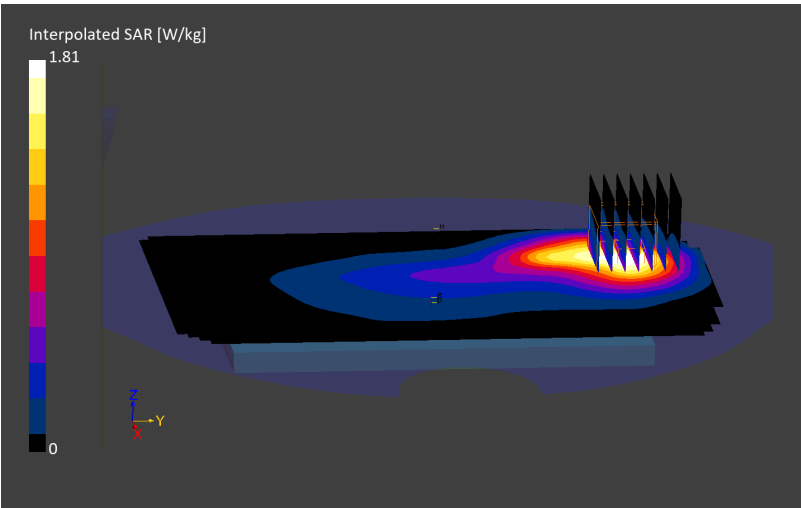

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0037M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n66	NR FR1 FDD: DFT-s-OFDM, 45.0 MHz, QPSK, 15 kHz, 100% RB (Mid), 1000336	G	Ch. 349000	1745.000	7.68, 7.4,7.37

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-25	21.5	21.5	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.28	38.8	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.793
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	1.57
M2/M1 [%]	80.6
Dist 3dB Peak [mm]	7.0

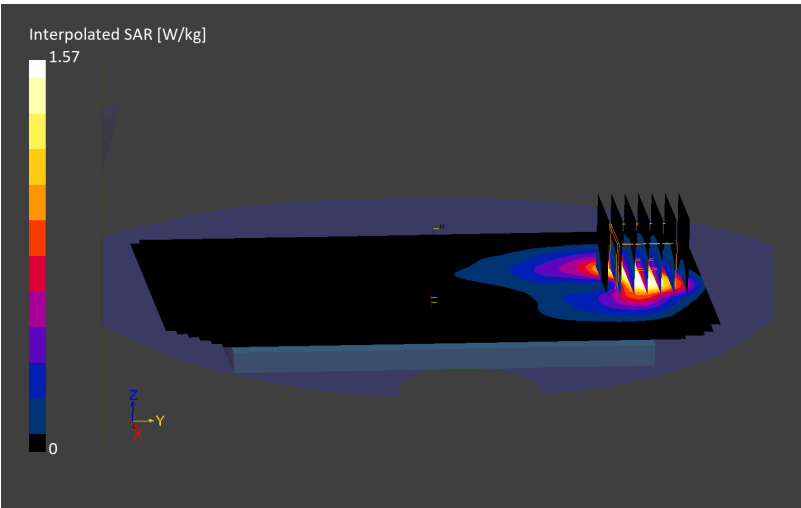

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0017M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n25	NR FR1 FDD: DFT-s-OFDM, 40.0 MHz, QPSK, 15 kHz, 100% RB, 10950	G	Ch. 376500	1882.500	7.23, 6.96,6.94

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-22	20.6	19.8	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.40	40.8	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.776
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.62
M2/M1 [%]	76.1
Dist 3dB Peak [mm]	7.2

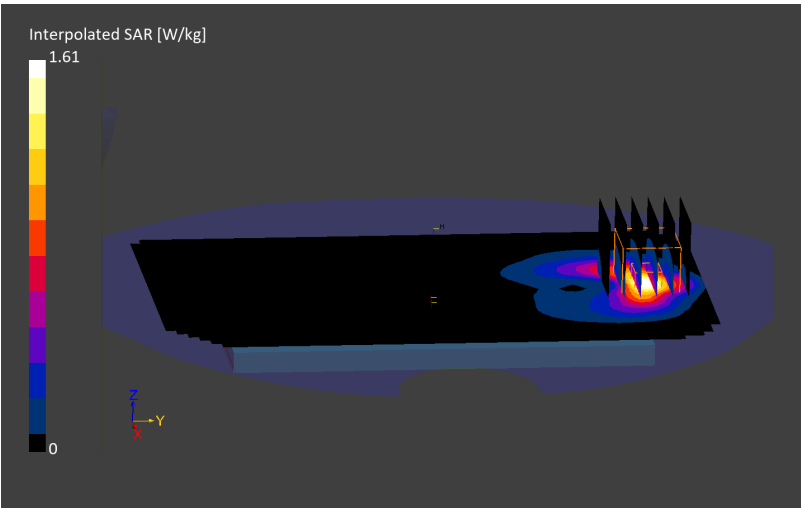

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0042M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	NR Band n41 PC2 Switching	Custom: CW, 1	G	Ch. 518598	2592.990	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.3	20	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.90	39.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	36.8 x 36.8 x 31.2
Grid Steps [mm]	10.0 x 10.0	4.6 x 4.6 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.778
Power Drift [dB]	-0.12
Peak SAR (Extrapolated) [W/kg]	1.73
M2/M1 [%]	85.1
Dist 3dB Peak [mm]	5.6

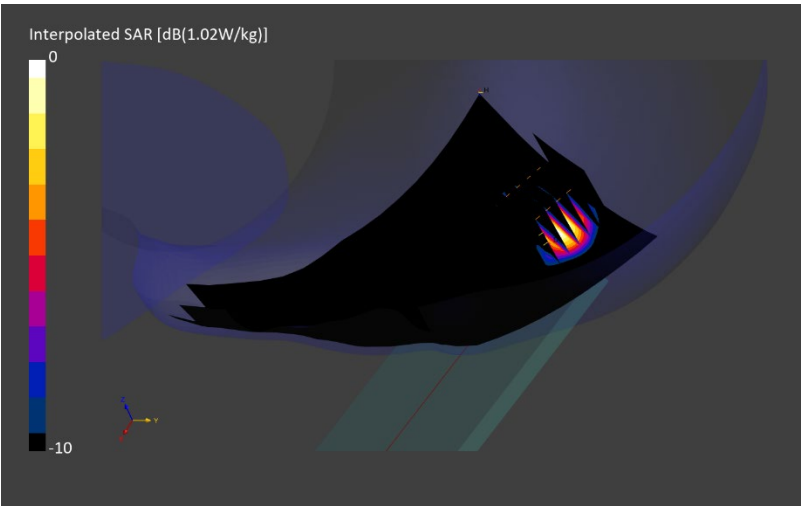

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0042M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n41	Custom: CW, 1	B	Ch. 518598	2592.990	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.3	20	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.90	39.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.514
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.16
M2/M1 [%]	78.1
Dist 3dB Peak [mm]	6.4

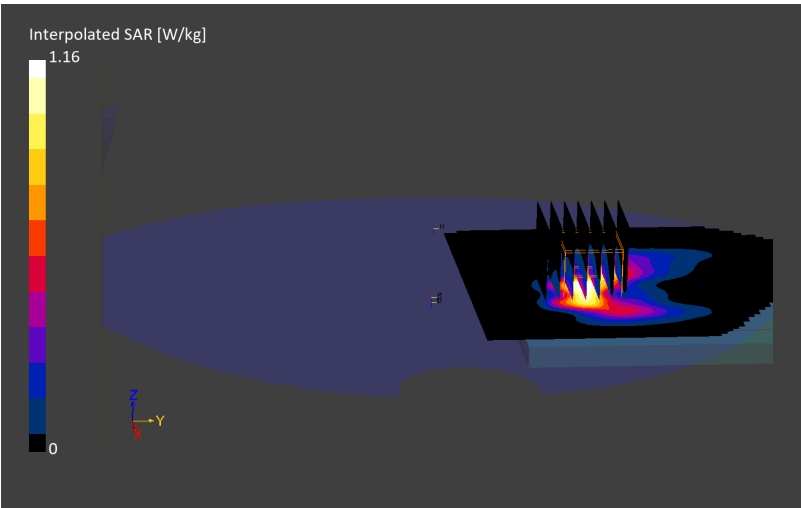

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0017M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n77	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 50% RB (Low), 10917	F	Ch. 650000	3750.000	6.2, 5.97,5.95

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-08	22.1	21.3	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	3.00	39.5	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.87
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	2.51
M2/M1 [%]	71.8
Dist 3dB Peak [mm]	5.7

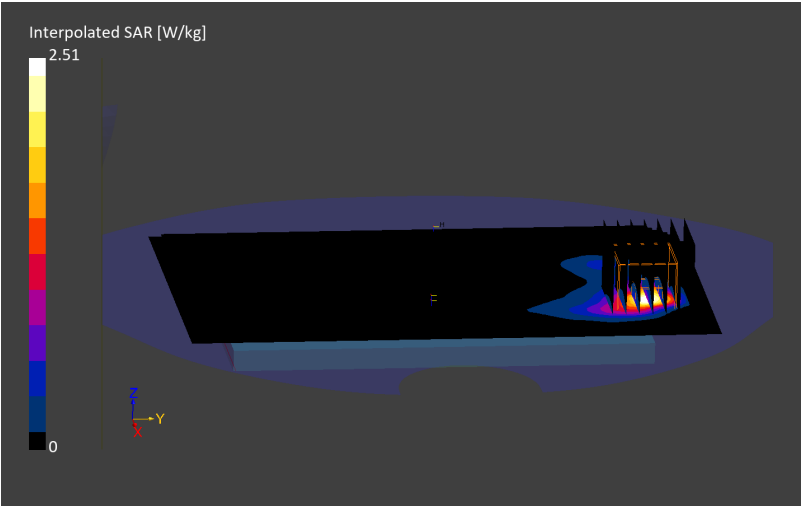

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	2.4 GHz WIFI	WiFi (802.11b): DSSS, DBPSK, 1.0 Mbps, 99.9% DC, 10415	MIMO	Ch. 11	2462.000	6.94, 6.68,6.66

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.2	19.7	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.76	38.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.825
Power Drift [dB]	0.07
Peak SAR (Extrapolated) [W/kg]	1.75
M2/M1 [%]	76.3
Dist 3dB Peak [mm]	8.7

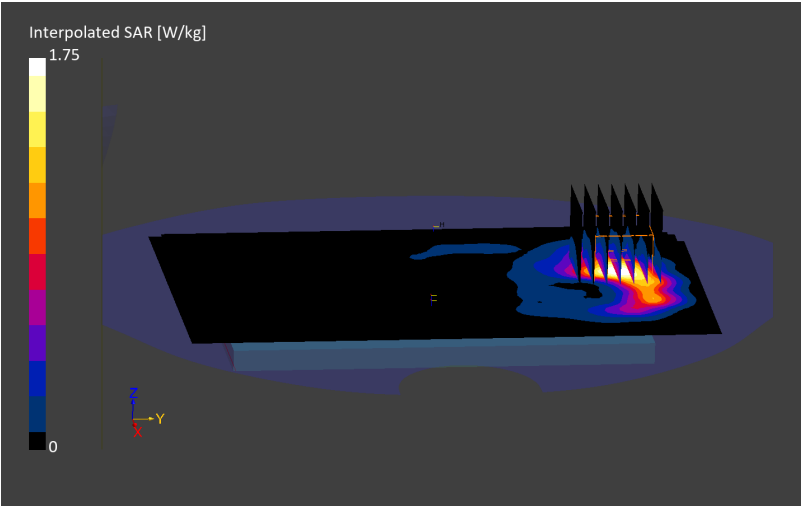

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 90.0% DC, 10626	MIMO (F&E)	Ch. 138	5690.000	5.08, 5.49,5.05

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.9	21.5	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	5.03	34.1	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	7.5 x 7.5	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.536
Power Drift [dB]	0.12
Peak SAR (Extrapolated) [W/kg]	2.50
M2/M1 [%]	59.8
Dist 3dB Peak [mm]	5.7

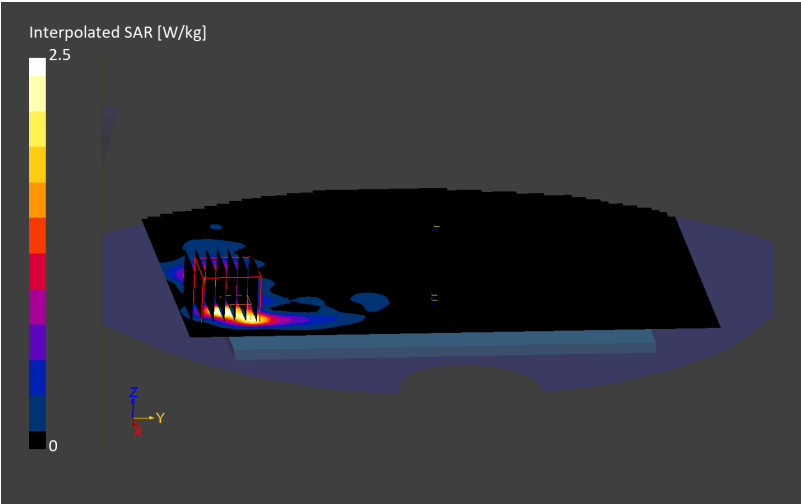

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 90.0% DC, 10626	F	Ch. 42	5210.000	5.43, 5.87,5.39

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.9	21.5	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	4.51	35.0	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.244
Power Drift [dB]	0.12
Peak SAR (Extrapolated) [W/kg]	1.06
M2/M1 [%]	59.1
Dist 3dB Peak [mm]	6.3

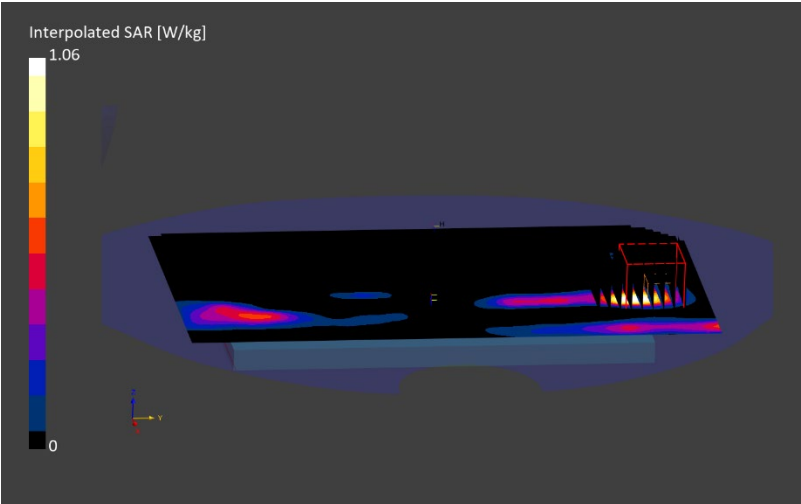

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	6 GHz WIFI	WiFi (802.11ax): HE160, MCS0 (72.0 Mbps), 98.0% DC, 10755	MIMO (F&E)	Ch. 207	6985.000	5.23, 5.66,5.2

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-15	22.3	21.3	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	6.51	31.7	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	23.8 x 23.8 x 22.9
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.626
Power Drift [dB]	-0.17
Peak SAR (Extrapolated) [W/kg]	3.46
M2/M1 [%]	51.5
Dist 3dB Peak [mm]	5.2

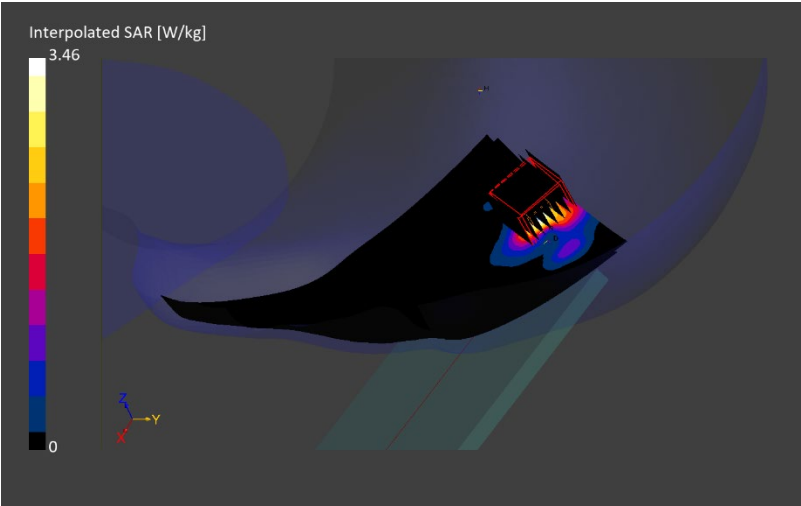

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, FRONT, 5.00	6 GHz WIFI	WiFi (802.11ax): HE80, MCS0 (36.0 Mbps), 100.0% DC, 10731	E	Ch. 215	7025.000	5.23, 5.66,5.2

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-15	22.3	21.3	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	6.51	31.7	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.346
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	2.06
M2/M1 [%]	50.6
Dist 3dB Peak [mm]	4.9

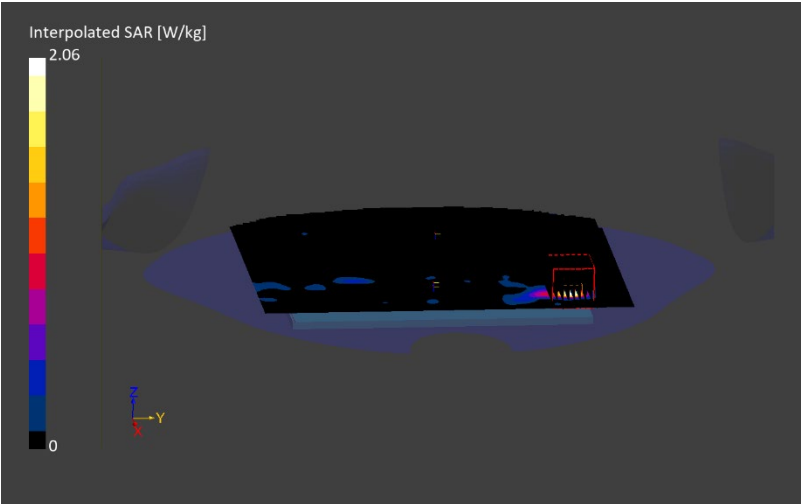

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	RightHead, CHEEK, 0.00	2.4 GHz Bluetooth LE	Bluetooth: LE, Test, GFSK, 1 0670	F	Ch. 37	2402.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.77	41.2	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	7.5 x 7.5	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.777
Power Drift [dB]	0.16
Peak SAR (Extrapolated) [W/kg]	1.80
M2/M1 [%]	76.9
Dist 3dB Peak [mm]	5.9

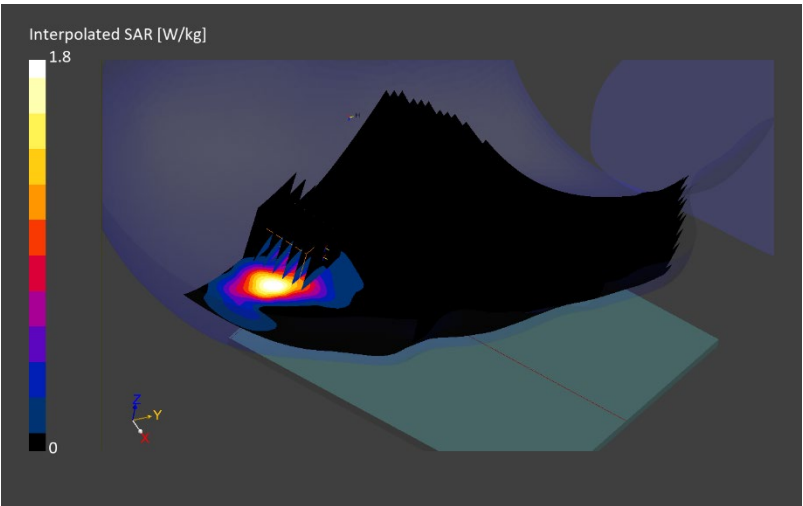

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0003M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	2.4 GHz Bluetooth LE	Bluetooth: LE, Test, GFSK, 10670	H	Ch. 39	2480.000	6.94, 6.68,6.66

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.2	19.7	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.78	38.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	7.5 x 7.5	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.402
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	0.979
M2/M1 [%]	75.3
Dist 3dB Peak [mm]	6.8

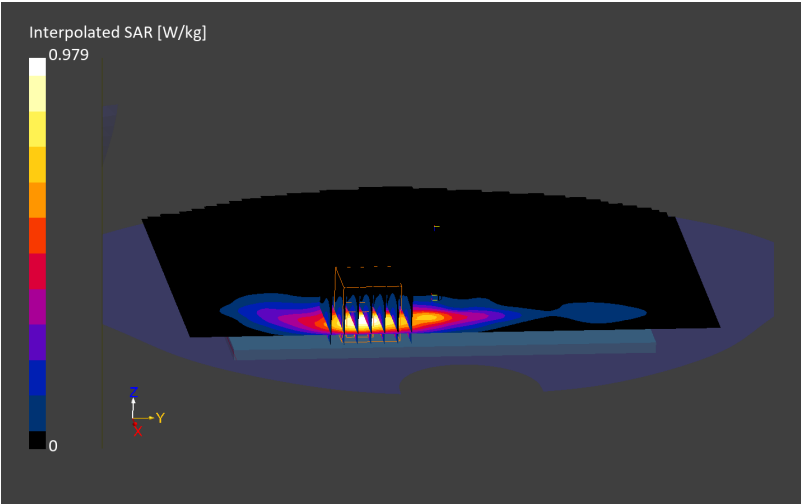

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 1772M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, BACK, 0.00	UWB	Custom: UWB, 2	F	Ch. 9	7987.200	5.67, 5.65,5.33

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-14	23	22.3	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	8.22	32.7	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	105.0 x 195.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.009
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	3.05
M2/M1 [%]	N/A
Dist 3dB Peak [mm]	0.9

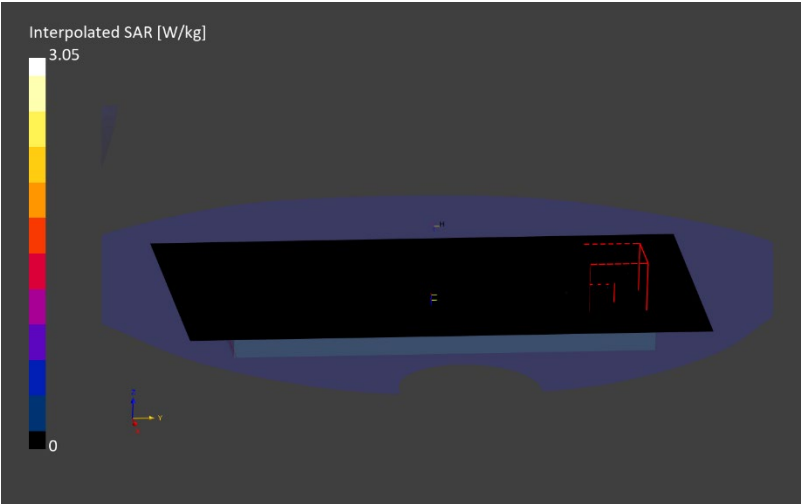

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0039M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, BACK, 0.00	NFC	CW, 0	NFC	N/A	13.600	14.3, 16.56, 15.27

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-15	22.6	20.3	16.4.0.5005	ELI V8.0 – 2216	Head Simulating Liquid	0.697	53.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	36.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.006
Power Drift [dB]	0.18
Peak SAR (Extrapolated) [W/kg]	0.095
M2/M1 [%]	57.0
Dist 3dB Peak [mm]	4.8

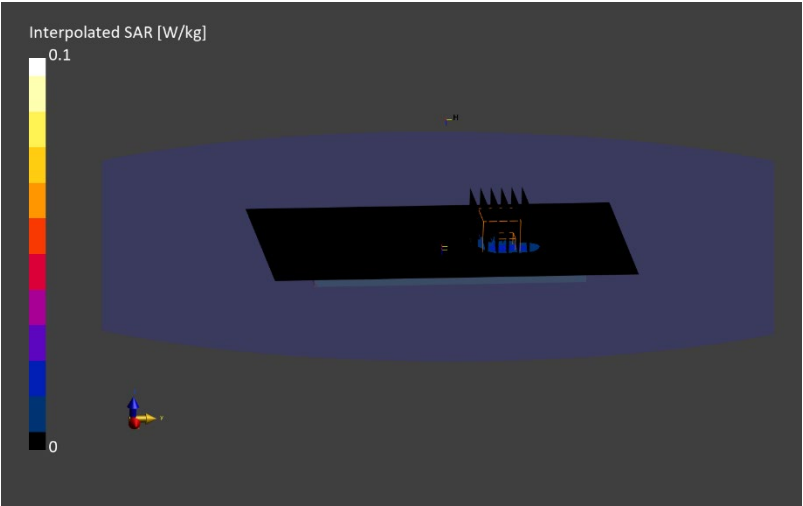

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Open; SN: 0003M

Verification Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal	Ant.	Channel Number	Frequency [MHz]
Open	FRONT, 2.00	6 GHz WIFI	WLAN	E	7	5985.0

Test Setup


Test Date	Measurement SW	Probe, Cal. Date	DAE, Cal. Date
2026-04-27	3.2.2.2358	EUmmWV4 - SN9690_F1-55GHz - 2025-09-17	DAE4ip Sn1839 - 2025-09-15

Scans Setup

Grid Extents [mm]	Grid Steps [lambda]	Sensor Surface Distance [mm]
40.0x40.0	0.04238508241820993x0.04238508241820993	2.0

Measurement Results

Averaging Area [cm²]	Power Drift [dB]	E _{max} [V/m]	psPD _n + [W/m²]	psPD _{tot} + [W/m²]
4.00	-0.06	85.3	2.17	4.86

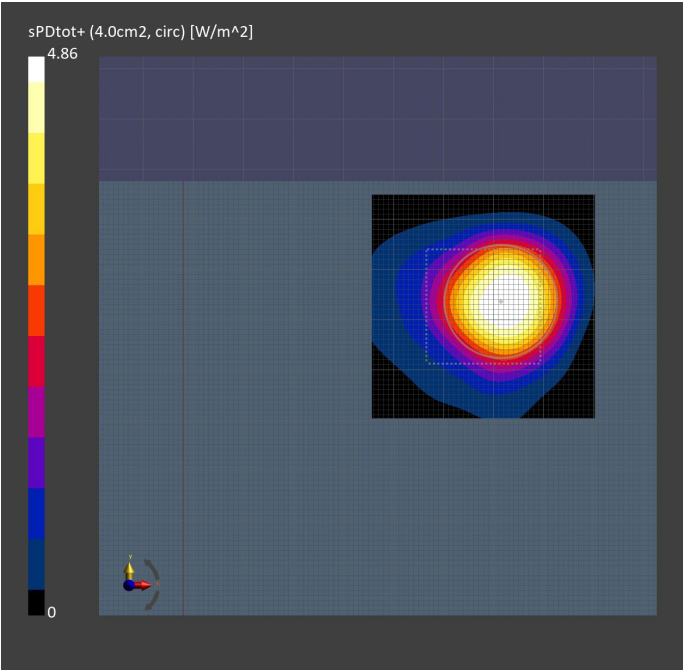

RF SAFETY LABORATORY

DUT: A3LSMF976B Folder Closed; SN: 1772M

Verification Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal	Ant.	Channel Number	Frequency [MHz]
Phablet	BACK, 2.00	UWB	CW	F	5	6489.6

Test Setup

Test Date	Measurement SW	Probe, Cal. Date	DAE, Cal. Date
2026-04-27	3.2.2.2358	EUmmWV4 – SN9690_F1-55GHz – 2025-09-17	DAE4ip Sn1839 – 2025-09-15

Scans Setup

Grid Extents [mm]	Grid Steps [lambda]	Sensor Surface Distance [mm]
40.0x40.0	0.04418670375280564x0.04418670375280564	2.0

Measurement Results

Averaging Area [cm²]	Power Drift [dB]	E _{max} [V/m]	psPDn+ [W/m²]	psPDtot+ [W/m²]
4.00	-0.03	14.7	0.271	0.349

