

Appendix A: SAR Test Plots

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, BACK, 5.00	GSM 850	GSM: Voice, GMSK, 1 slot(s), 10021	A+C	Ch. 128	824.200	9.48, 9.32,9.02

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-15	21.8	20.3	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.873	43.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.725
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	1.38
M2 /M1 [%]	78.3
Dist 3dB Peak [mm]	8.8

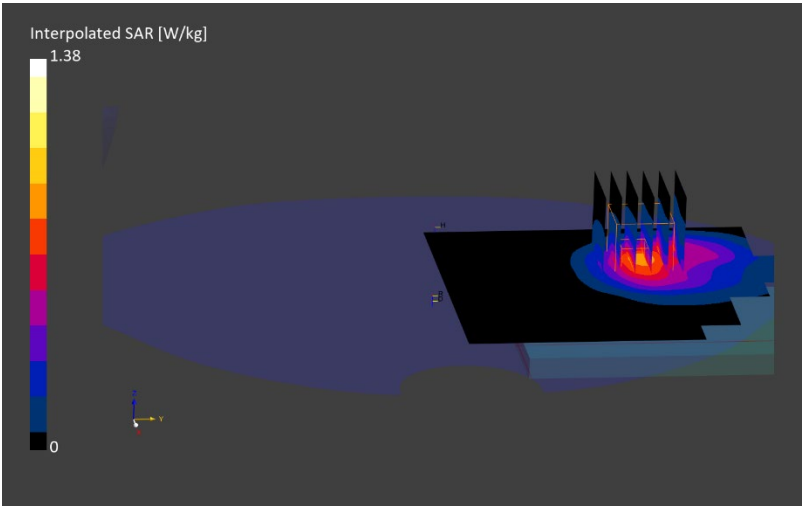

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, BACK, 5.00	GSM 1900	GSM: Voice, GMSK, 1 slot(s), 10021	B	Ch. 810	1909.800	7.59, 7.46,7.22

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.42	41.9	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	36.0 x 32.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	4.0 x 4.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.567
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.22
M2/M1 [%]	79.6
Dist 3dB Peak [mm]	6.4

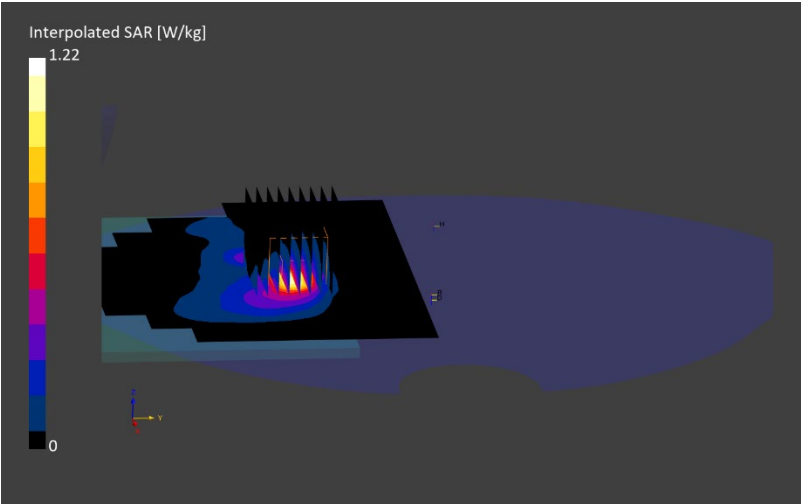

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 5	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	A	Ch. 4183	836.600	9.05, 9.79,8.99

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-26	22.1	21.8	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.874	44.5	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	4.0 x 4.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.784
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	1.66
M2/M1 [%]	76.6
Dist 3dB Peak [mm]	7.4

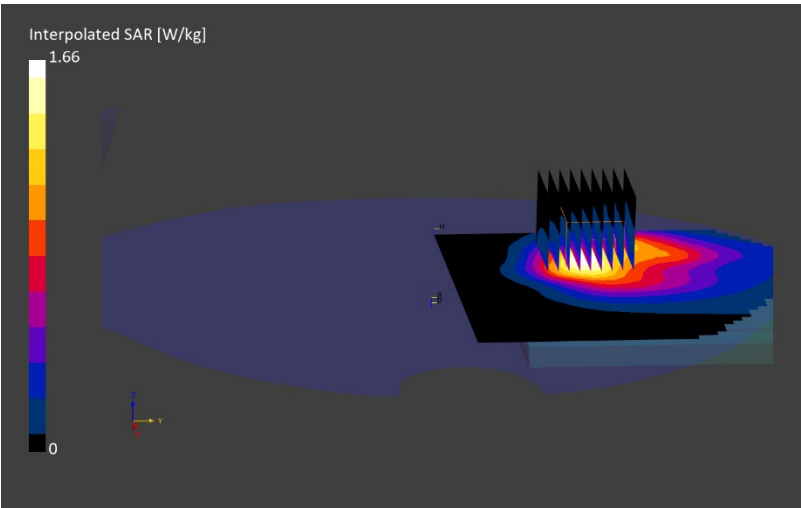

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1870M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 12	LTE-FDD: 10.0 MHz, QPSK, 1 RB (Low), 10175	A+C	Ch. 23095	707.500	9.62, 9.46,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.1	20.8	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.858	44.4	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	36.0 x 36.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.595
Power Drift [dB]	-0.06
Peak SAR (Extrapolated) [W/kg]	1.24
M2/M1 [%]	76.0
Dist 3dB Peak [mm]	8.1

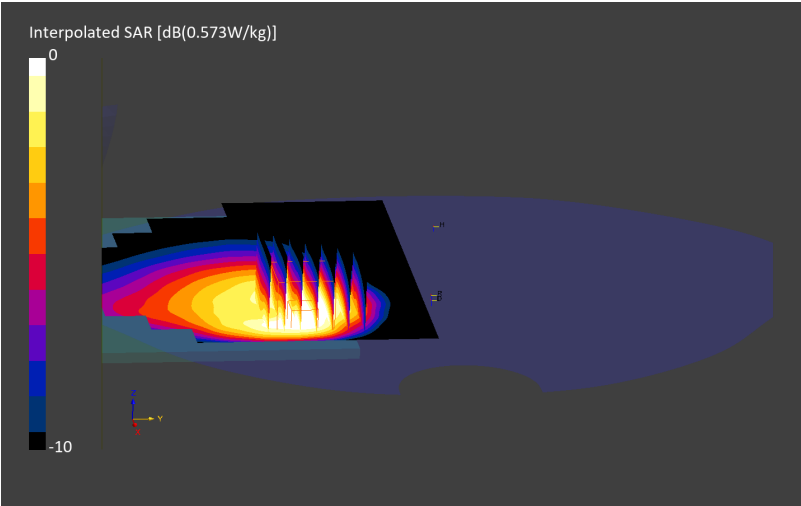

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1870M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 13	LTE-FDD: 10.0 MHz, QPSK, 50% RB (Low), 10154	A+C	Ch. 23230	782.000	9.62, 9.46,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.1	20.8	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.885	44.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.752
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.53
M2/M1 [%]	79.4
Dist 3dB Peak [mm]	8.1

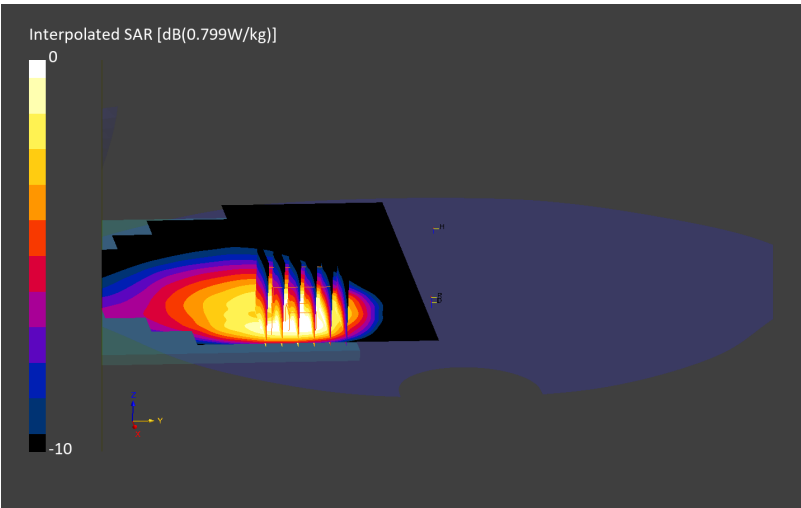

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1870M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 5	LTE-FDD: 10.0 MHz, QPSK, 50% RB (Low), 10154	A+C	Ch. 20525	836.500	9.48, 9.32,9.02

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.1	20.8	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.905	44.0	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	42.0 x 42.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.796
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.62
M2/M1 [%]	78.1
Dist 3dB Peak [mm]	8.8

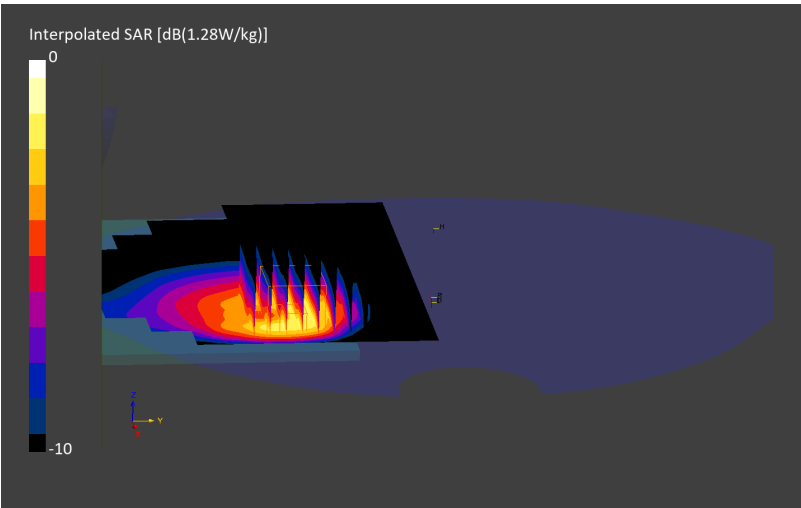

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 66	LTE-FDD: 20.0 MHz, QPSK, 100% RB, 10100	G	Ch. 132572	1770.000	7.68, 7.4,7.37

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-27	23.2	22.4	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.37	41.6	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.935
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.89
M2/M1 [%]	80.1
Dist 3dB Peak [mm]	7.2

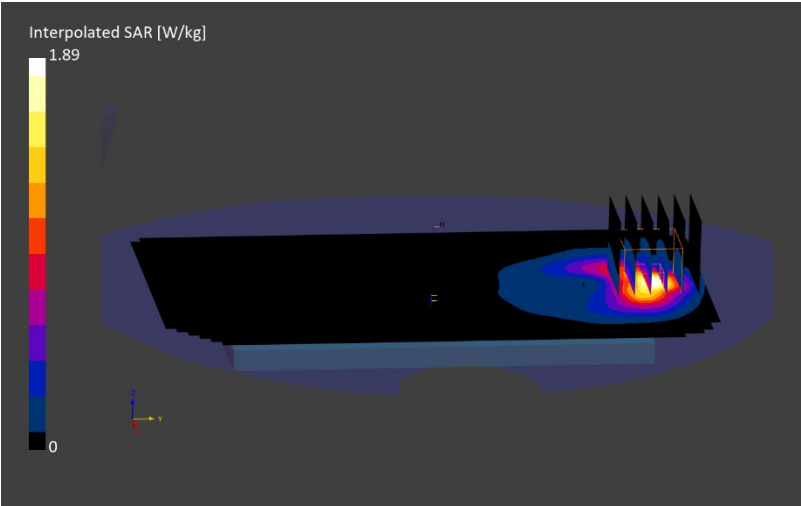

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1839M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 25	LTE-FDD: 20.0 MHz, QPSK, 50% RB (Mid), 10297	G	Ch. 26140	1860.000	7.59, 7.46,7.22

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-06-01	20.8	21	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.34	39.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.788
Power Drift [dB]	-0.01
Peak SAR (Extrapolated) [W/kg]	1.54
M2/M1 [%]	81.1
Dist 3dB Peak [mm]	7.1

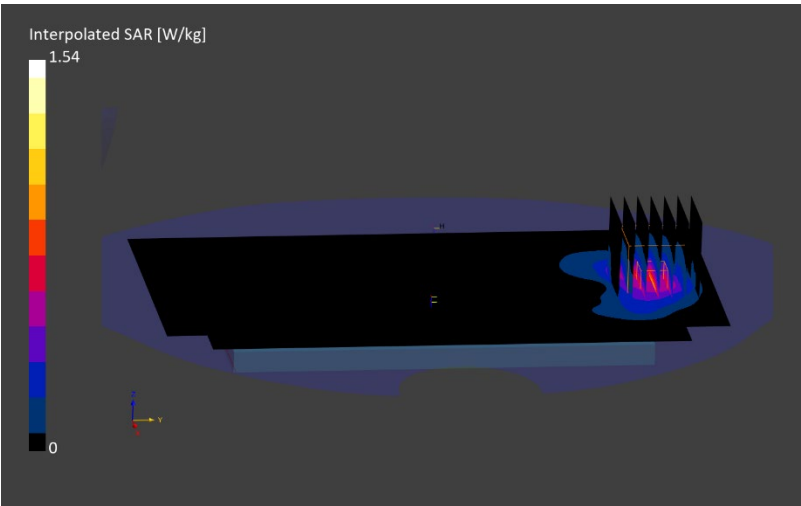

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 41	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 0, SSC: 7, 1 RB (Mid), 10435	G	Ch. 41490	2680.000	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.99	40.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.869
Power Drift [dB]	0.12
Peak SAR (Extrapolated) [W/kg]	1.90
M2/M1 [%]	77.8
Dist 3dB Peak [mm]	7.1

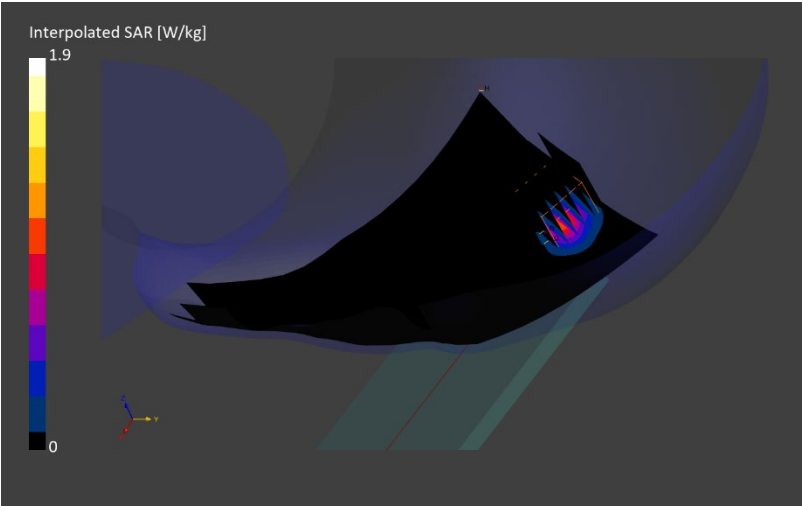

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 41	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 0, SSC: 7, 50% RB (High), 10494	B	Ch. PCC: 40620 SCC: 40818	PCC: 2593.000	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.92	40.9	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	35.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.616
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.39
M2 /M1 [%]	78.2
Dist 3dB Peak [mm]	5.9

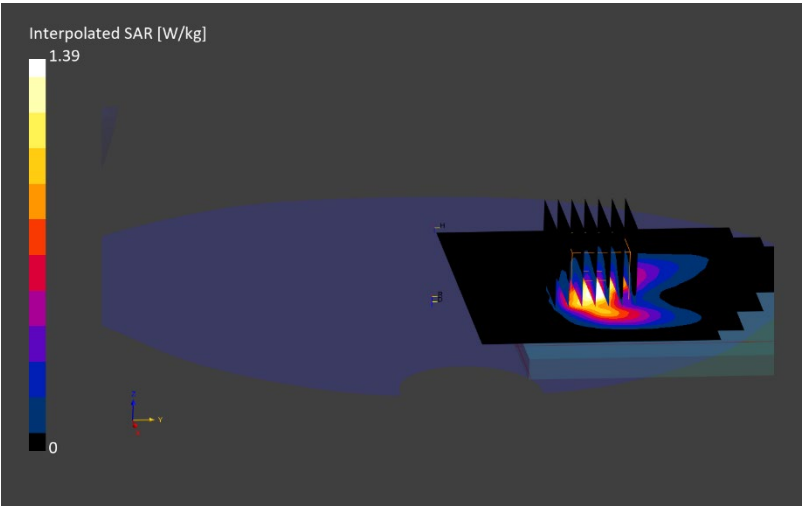

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n5	NR FR1 FDD: DFT-s-OFDM, 20.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 10939	A+C	Ch. 167300	836.500	9.48, 9.32,9.02

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-15	21.8	20.3	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.877	43.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.611
Power Drift [dB]	0.03
Peak SAR (Extrapolated) [W/kg]	1.20
M2/M1 [%]	77.2
Dist 3dB Peak [mm]	8.5

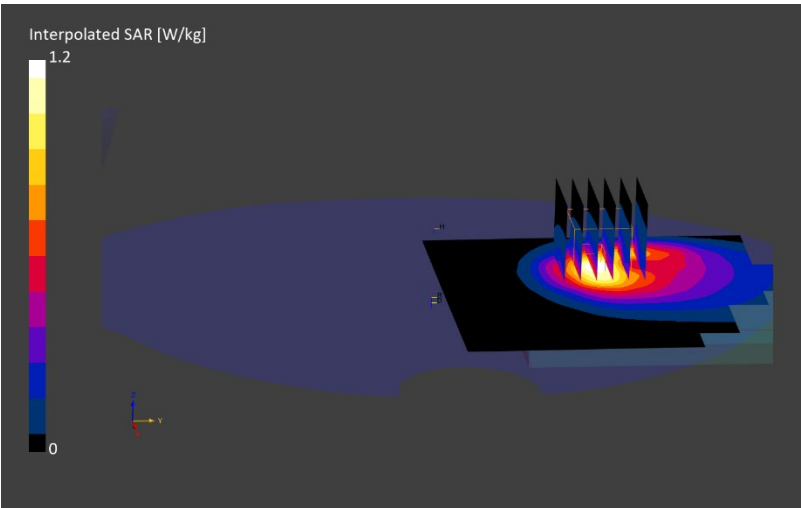

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1870M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n66	NR FR1 FDD: DFT-s-OFDM, 45.0 MHz, QPSK, 15 kHz, 100% RB (Mid), 1000336	G	Ch. 349000	1745.000	7.78, 7.65, 7.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-22	22.4	20.2	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.32	41.7	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.678
Power Drift [dB]	0.03
Peak SAR (Extrapolated) [W/kg]	1.32
M2/M1 [%]	80.2
Dist 3dB Peak [mm]	7.3

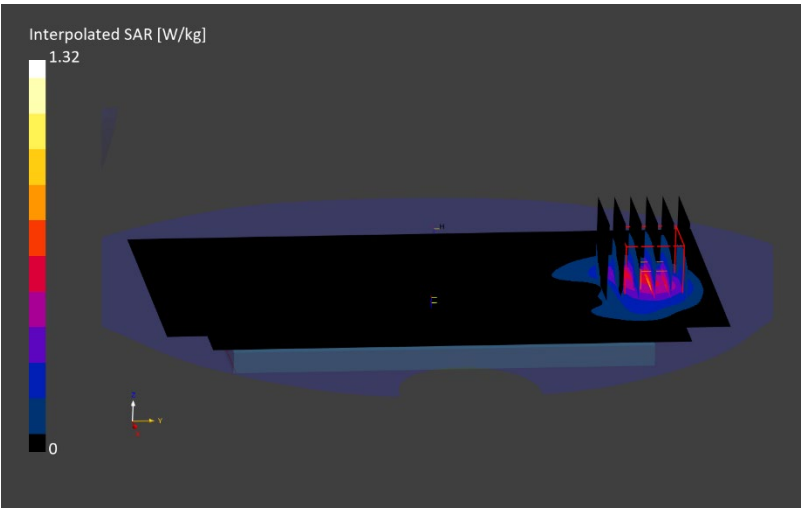

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	NR Band n41	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 100% RB, 10868	G	Ch. 518598	2592.990	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.92	40.9	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.686
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.50
M2/M1 [%]	77.9
Dist 3dB Peak [mm]	7.1

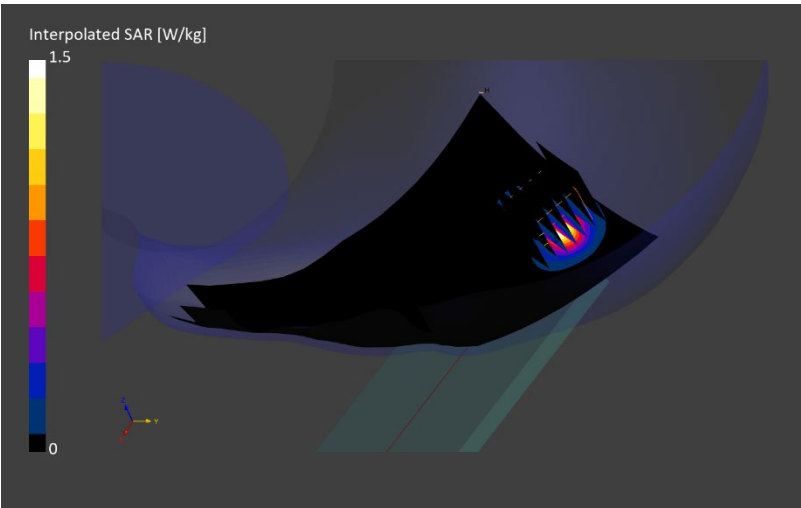

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1799M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n41	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 50% RB (Low), 10917	B	Ch. 518598	2592.990	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.92	40.9	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.517
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.09
M2/M1 [%]	79.2
Dist 3dB Peak [mm]	6.1

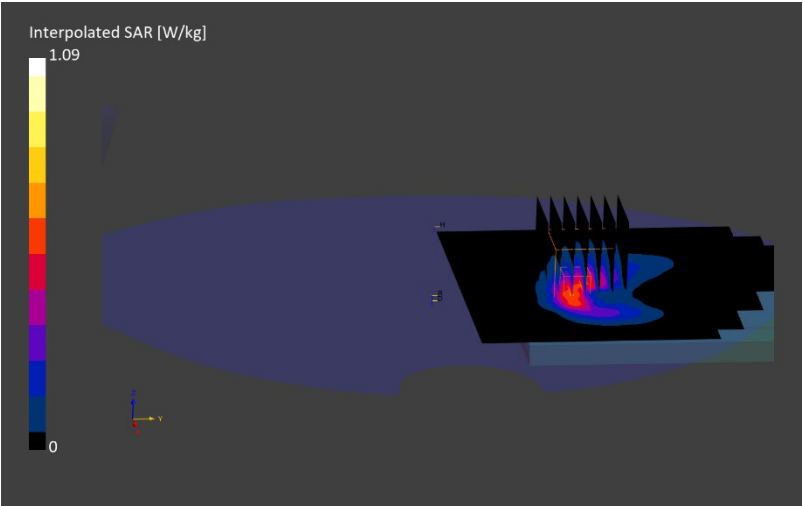

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1858M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	RightHead, CHEEK, 0.00	2.4 GHz WIFI	WiFi (802.11n): HT20 Mixed, MCS0 (6.5 Mbps), 99.4% DC, 10196	MIMO (H&F)	Ch. 11	2462.000	7.39, 7.44,7.43

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-20	22.3	21.5	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	1.87	42.2	EX3DV4 – SN7971, 2026-04-14	DAE4ip Sn1862, 2026-01-08

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.45
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	0.937
M2/M1 [%]	81.3
Dist 3dB Peak [mm]	7.1

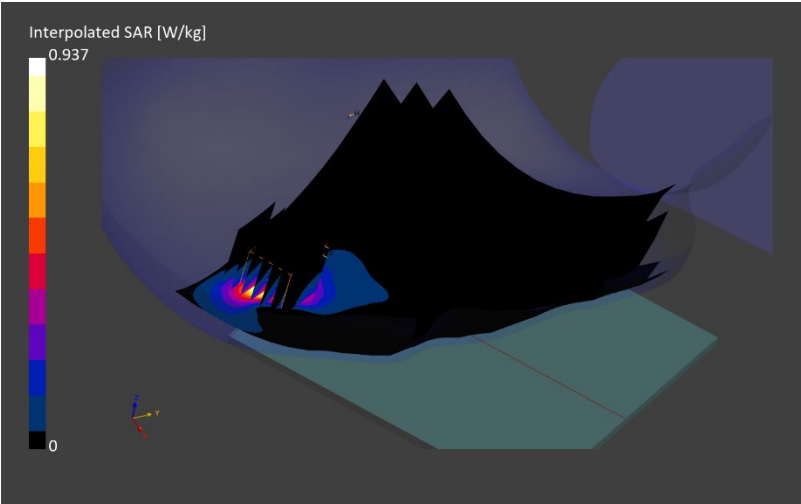

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1818M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	2.4 GHz WIFI	WiFi (802.11b): DSSS, DBPSK, 1.0 Mbps, 99.9% DC, 10415	F	Ch. 11	2462.000	6.8, 6.79,6.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-27	23.5	23	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.82	39.9	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.798
Power Drift [dB]	0.09
Peak SAR (Extrapolated) [W/kg]	1.87
M2/M1 [%]	76.5
Dist 3dB Peak [mm]	7.0

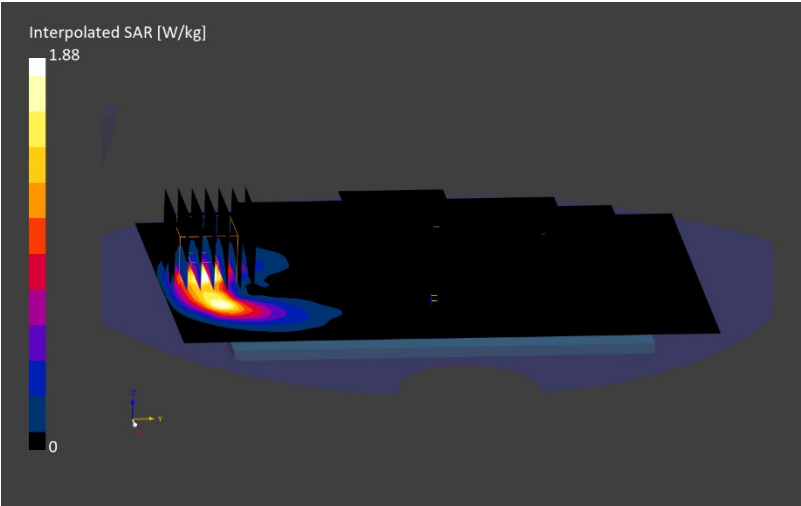

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 0818M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 99.0% DC, 10544	F	Ch. 42	5210.000	5.43, 5.87,5.39

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.9	21.5	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	4.51	35.0	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	15.0 x 15.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.285
Power Drift [dB]	-0.15
Peak SAR (Extrapolated) [W/kg]	1.20
M2/M1 [%]	62.0
Dist 3dB Peak [mm]	6.1

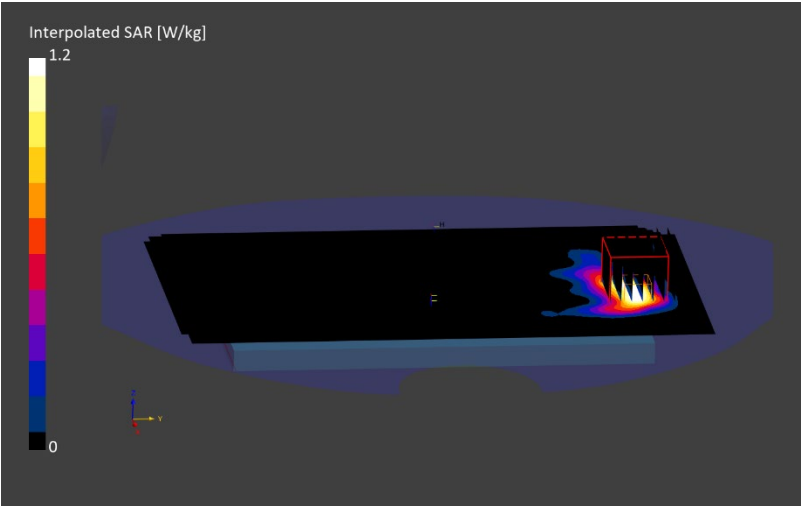

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 0858M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 99.0% DC, 10544	E	Ch. 58	5290.000	5.43, 5.87,5.39

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-13	21.9	21.5	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	4.60	34.9	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.832
Power Drift [dB]	-0.11
Peak SAR (Extrapolated) [W/kg]	3.42
M2/M1 [%]	62.0
Dist 3dB Peak [mm]	6.6

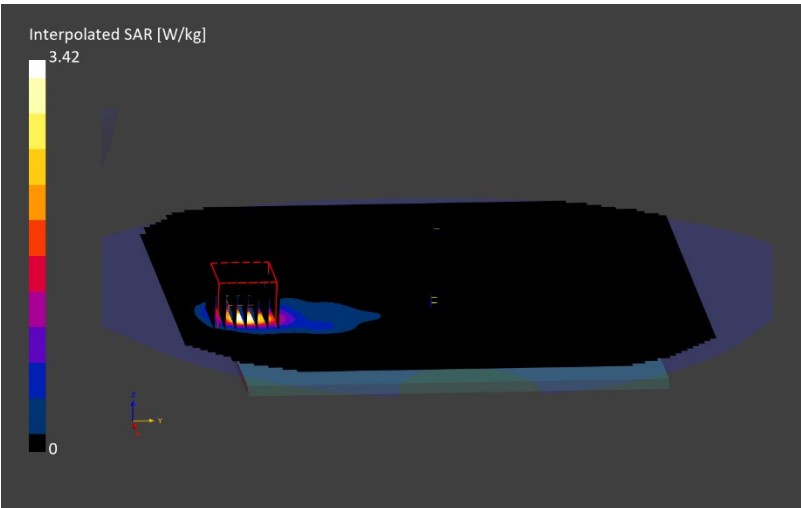

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 0858M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	6 GHz WIFI	WiFi (802.11ax): HE160, MCS0 (72.0 Mbps), 98.0% DC, 10755	MIMO (F&E)	Ch. 207	6985.000	5.23, 5.66,5.2

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-15	22.3	21.3	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	6.51	31.7	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	23.8 x 23.8 x 22.9
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.752
Power Drift [dB]	-0.12
Peak SAR (Extrapolated) [W/kg]	12.5
M2/M1 [%]	50.2
Dist 3dB Peak [mm]	4.8

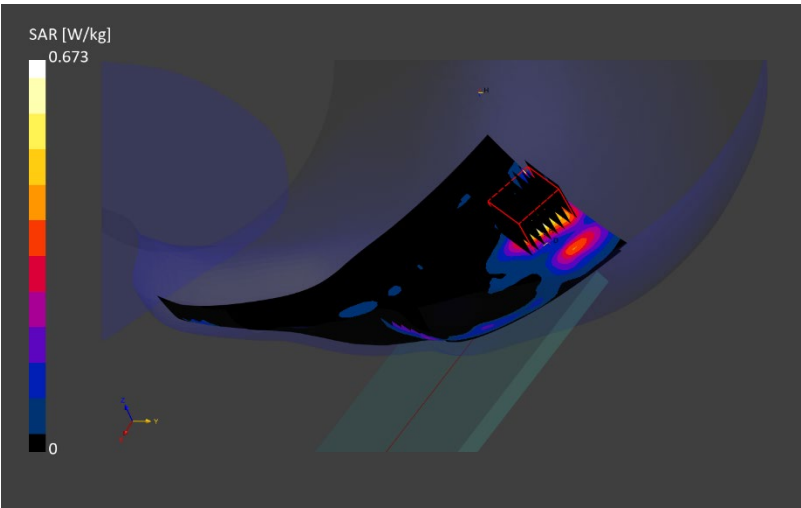

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 0858M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, FRONT, 5.00	6 GHz WIFI	WiFi (802.11ax): HE80, MCS0 (36.0 Mbps), 100.0% DC, 10731	E	Ch. 215	7025.000	5.23, 5.66,5.2

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-15	22.3	21.3	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	6.51	31.7	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.276
Power Drift [dB]	-0.03
Peak SAR (Extrapolated) [W/kg]	1.72
M2/M1 [%]	49.4
Dist 3dB Peak [mm]	5.0

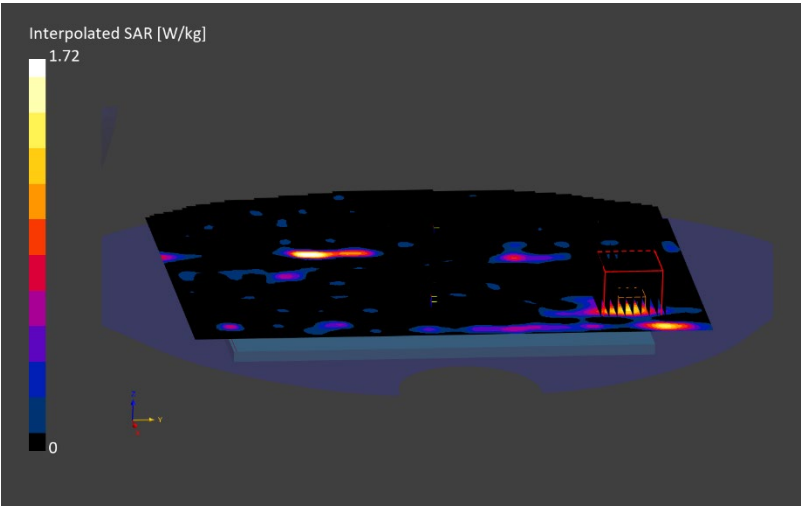

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1818M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	RightHead, CHEEK, 0.00	2.4 GHz Bluetooth	Bluetooth: BR, DH5, GFSK, 10032	MIMO (H&F)	Ch. 39	2441.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-11	22.5	22.2	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.73	39.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.286
Power Drift [dB]	-0.05
Peak SAR (Extrapolated) [W/kg]	0.553
M2/M1 [%]	84.0
Dist 3dB Peak [mm]	6.4

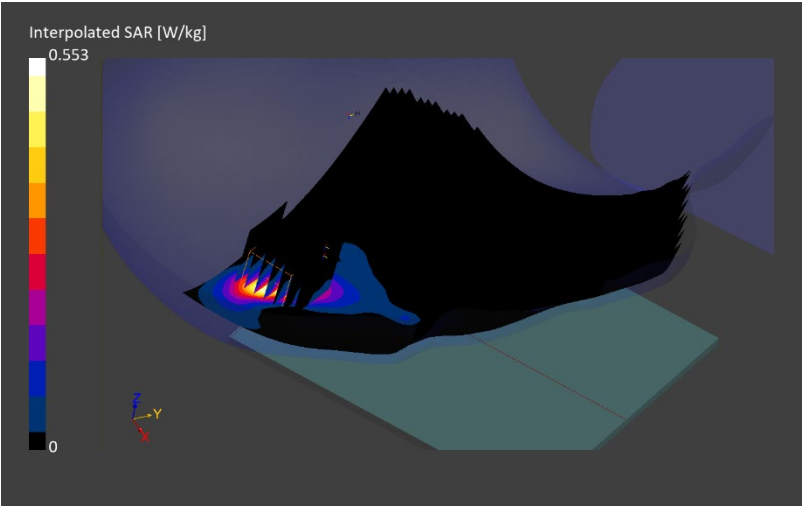

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1818M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	2.4 GHz Bluetooth	Bluetooth: BR, DH5, GFSK, 10032	F	Ch. 78	2480.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-06	22.5	21.9	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.77	38.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.319
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	0.694
M2/M1 [%]	79.3
Dist 3dB Peak [mm]	7.3

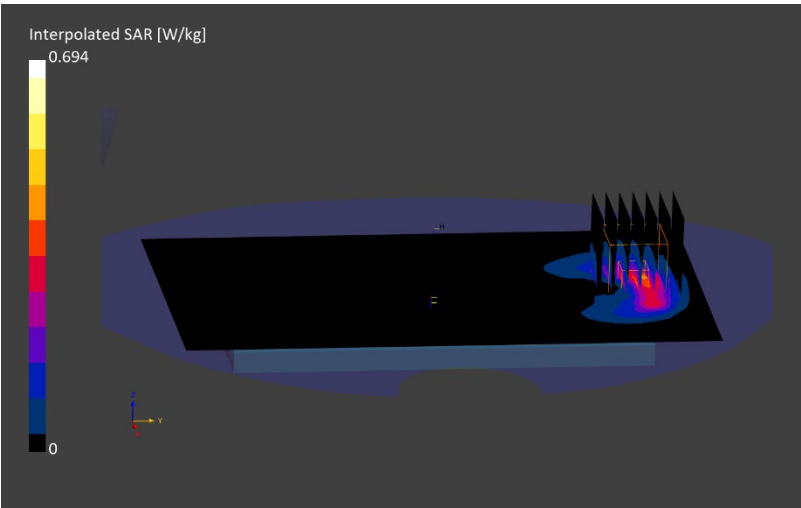

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1818M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, EDGE TOP, 0.00	2.4 GHz Bluetooth	Bluetooth: BR, DH5, GFSK, 10032	F	Ch. 78	2480.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-06	22.5	21.9	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.77	38.8	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	3.0 x 3.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.995
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	11.3
M2/M1 [%]	59.6
Dist 3dB Peak [mm]	4.2

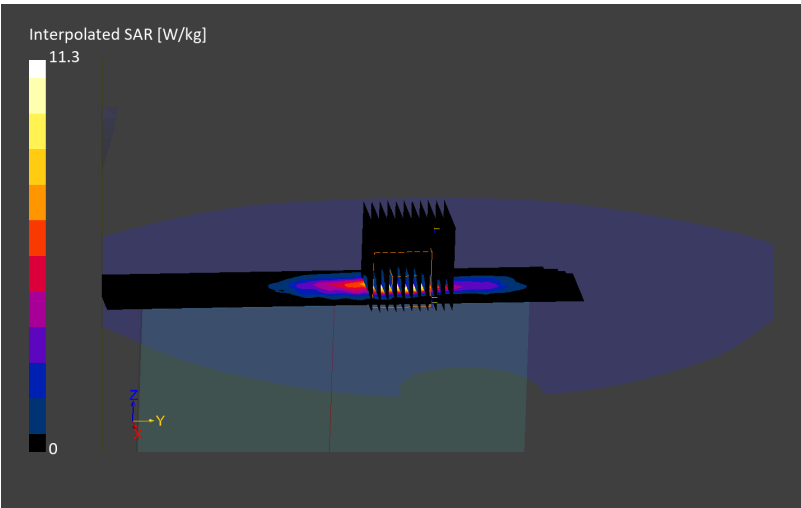

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Open; SN: 1921M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, BACK, 0.00	UWB	Custom: UWB, 2	F	Ch. 9	7987.200	5.67, 5.65,5.33

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-14	23	22.3	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	8.22	32.7	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.005
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	2.08
M2/M1 [%]	5.8
Dist 3dB Peak [mm]	1.2

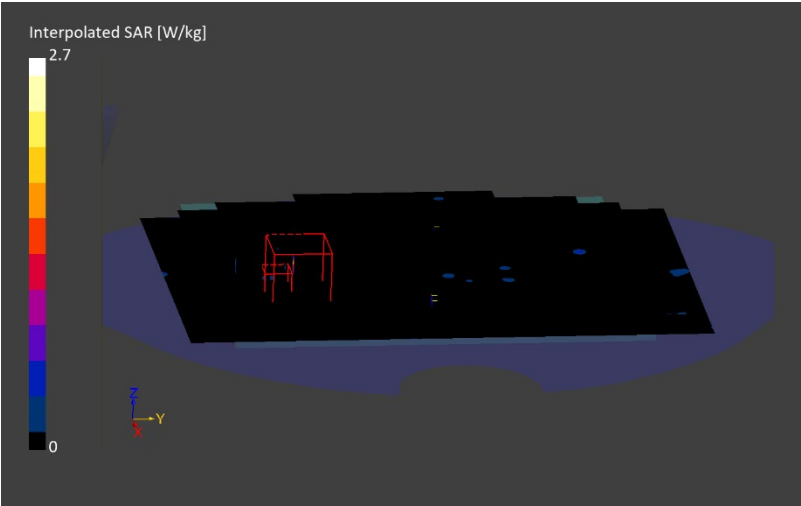

RF SAFETY LABORATORY

DUT: A3LSMF976JPN Folder Closed; SN: 1839M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, BACK, 0.00	NFC	CW, 0	NFC	N/A	13.600	14.3, 16.56, 15.27

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-22	23.1	23.6	17.0.4.7034	ELI V8.0 – 2216	Head Simulating Liquid	0.762	51.4	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0
Power Drift [dB]	-0.11
Peak SAR (Extrapolated) [W/kg]	0.001
M2/M1 [%]	63.5
Dist 3dB Peak [mm]	2.4

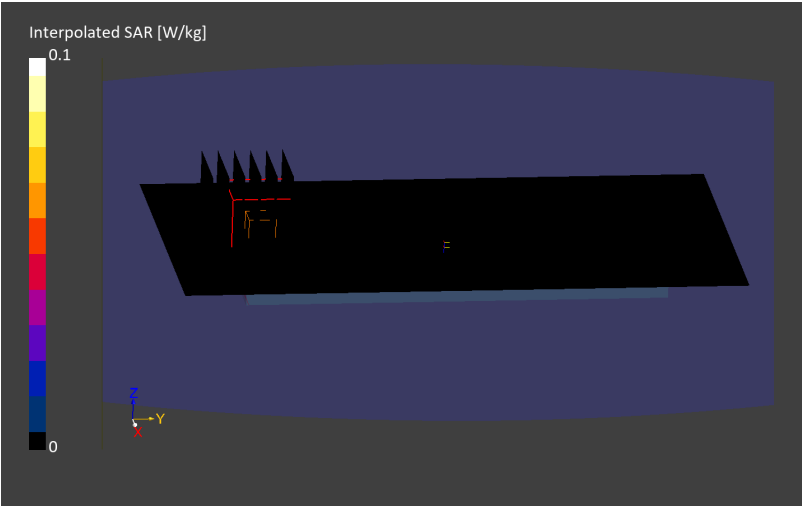

RF SAFETY LABORATORY

DUT: A3LSMF976JPN; SN: 1858M

Verification Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal	Ant.	Channel Number	Frequency [MHz]
Open	EDGE TOP, 2.00	6 GHz WIFI	WLAN	F	55	6225.0

Test Setup


Test Date	Measurement SW	Probe, Cal. Date	DAE, Cal. Date
2026-05-04	3.2.2.2358	EUmmWV4 - SN9690_F1-55GHz - 2025-09-17	DAE4ip Sn1839 - 2025-09-15

Scans Setup

Grid Extents [mm]	Grid Steps [lambda]	Sensor Surface Distance [mm]
35.0x35.0	0.04238508241820993x0.04238508241820993	2.0

Measurement Results

Averaging Area [cm²]	Power Drift [dB]	E _{max} [V/m]	psPDn+ [W/m²]	psPDtot+ [W/m²]
4.00	0.08	105	3.43	5.59

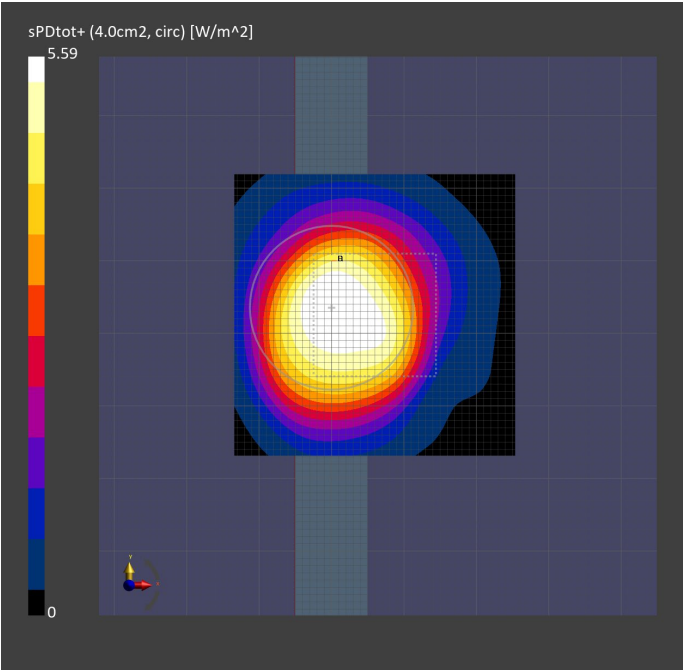

RF SAFETY LABORATORY

DUT: A3LSMF976JPN; SN: 1921M

Verification Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal	Ant.	Channel Number	Frequency [MHz]
Phablet	EDGE TOP, 2.00	UWB	CW	F	9	7987.2

Test Setup

Test Date	Measurement SW	Probe, Cal. Date	DAE, Cal. Date
2026-05-04	3.2.2.2358	EUmmWV4 - SN9690_F1-55GHz - 2025-09-17	DAE4ip Sn1839 - 2025-09-15

Scans Setup

Grid Extents [mm]	Grid Steps [lambda]	Sensor Surface Distance [mm]
35.0x35.0	0.05438363538806848x0.05438363538806848	2.0

Measurement Results

Averaging Area [cm²]	Power Drift [dB]	E _{max} [V/m]	psPD _n + [W/m²]	psPD _{tot} + [W/m²]
4.00	0.02	21.9	0.366	0.472

