

TEST REPORT

Report Number: R16238088-E31

Applicant : Samsung Electronics Co Ltd
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

MODEL : SC-56G, SCG39

FCC ID : A3LSMF976JPN

EUT Description : GSM/WCDMA/LTE/NR/SCS Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be,
UWB, WPT and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 11
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-06-03

Prepared by:
UL LLC
12 Laboratory Dr.
Durham, NC 27713, U.S.A.
TEL: (919) 549-1400



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2026-06-03	Initial Issue	Chandler Stanley

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES.....	6
4.3. MEASUREMENT UNCERTAINTY.....	6
4.4. SAMPLE CALCULATION	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM ELECTRIC FIELD STENGTH.....	7
5.3. WORST-CASE CONFIGURATION AND MODE.....	7
5.4. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	9
7. 20 dB BANDWIDTH	11
7.1.1. CONFIG 4.....	11
8. RADIATED EMISSION TEST RESULTS.....	12
8.1. LIMITS AND PROCEDURE.....	12
8.2. FCC IC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz	
13	
8.2.1. CONFIG 4.....	13
8.3. FCC IC TX SPURIOUS EMISSIONS FROM 30 TO 1000 MHz.....	14
8.3.1. CONFIG 4.....	14
9. AC MAINS LINE CONDUCTED EMISSIONS.....	16
9.1. CONFIG 4.....	17
10. SETUP PHOTOS	19
END OF TEST REPORT	19

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Samsung Electronics Co Ltd
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

EUT DESCRIPTION: GSM/WCDMA/LTE/NR/SCS Phone + BT/BLE, DTS/UNII
a/b/g/n/ac/ax/be, UWB, WPT and NFC

MODEL: SC-56G, SCG39

SERIAL NUMBER: ZD22376M

SAMPLE RECEIPT DATE: 2026-04-15

DATE TESTED: 2026-05-13 to 2026-05-14

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies
ISED RSS-210 Issue 11, Annex B	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies


UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. government.

Approved & Released
For UL LLC By:

Prepared By:



Brian Kiewra
Project Engineer
Consumer, Medical and IT Segment
UL LLC



Chandler Stanley
Engineer Project Associate
Consumer, Medical and IT Segment
UL LLC

2. TEST METHODOLOGY

This report contains data provided by the customer which can impact the validity of results. UL LLC. is only responsible for correctly integrating customer-provided data with measurements performed by UL LLC.

The tests documented in this report were performed in accordance with:

- FCC CFR 47 Part 2
- FCC CFR 47 Part 15
- FCC ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024
- ISED ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
- KDB 414788 D01 Radiated Test Site v01r01
- RSS-GEN Issue 5 + A1 + A2
- RSS-210 Issue 11 Annex B.6

3. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building: 12 Laboratory Dr Durham, NC 27713, U.S.A	US0067	2180C	825374
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A		27265	

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/NR/SCS Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, UWB, WPT and NFC. This report covers WPT testing.

5.2. MAXIMUM ELECTRIC FIELD STENGTH

The transmitter has maximum peak radiated electric and magnetic field strength as follows:

Fundamental Frequency (kHz)	Mode	E field (300m distance) FCC (dBuV/m)
110-148	Charging Config 4	6.31

5.3. WORST-CASE CONFIGURATION AND MODE

The EUT has a WPT charger operating between 110-148 kHz. Testing on the EUT was performed in the following configurations:

Config	Mode	Descriptions
1	Server: Charging Phone (parallel)	EUT charging phone in parallel position
2	Server: Charging Phone (parallel offset)	EUT charging phone in parallel offset position
3	Server: Charging Phone (perpendicular)	EUT charging phone in perpendicular position
4	Server: Charging Phone (perpendicular offset)	EUT charging phone in perpendicular offset position
5	Server: Charging Earbuds	EUT charging earbuds
6	Server: Charging Watch	EUT charging watch

For all radiated emissions tests, all configurations were investigated. Configuration 4 showed worst case emissions; therefore, all final radiated emissions testing was performed in configuration 4.

This report covers 2 models, the model differences and the representative model is shown below:

Representative Model	Difference	Derivative Model
		SCG39
SC-56G	Hardware	Same as SC-56G
	Software	Different UI

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Power Adapter	Sony	XQZ-UC11-010-236-21	NA	NA
Phone Being Charged by EUT for WPT	Samsung	SM-F976U	ZBK0207M	NA
Earbuds	AKG	SM-R510	RF2WC06149E	NA
Watch	Samsung	SM-R930	RFAWC1HMHPX	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB-C	1	USB-C	Shielded	<3m	EUT to power adapter

TEST SETUP

The EUT is placed into configuration 4. The EUT was left charging another device throughout the duration of the test.

SETUP DIAGRAM

Refer to Setup Photo Exhibit R16238088-EP1c for setup diagrams and photos.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted Room 2					
90410	Spectrum Analyzer MY54410168	Keysight Technologies	N9030A	2025-07-10	2026-07-10
245765	Environmental Meter 240072452	Control Company	06-662-4	2026-03-10	2027-03-10
SOFTEMI	Antenna Port Software	UL	Version 2024.2.23	-	-
NA	Near Field Probe Kit	EMC Test Systems	7405	NA	NA

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
0.009-30MHz					
65682	Active Loop Antenna	ETS-Lindgren	6502	2025-10-14	2027-10-14
30-1000 MHz					
159203	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2026-04-09	2028-04-09
Gain-Loss Chains					
91975	Gain-loss string: 0.009-30MHz	Various	Various	2025-05-31	2026-05-31
91978	Gain-loss string: 25-1000MHz	Various	Various	2025-05-31	2026-05-31
Receiver & Software					
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2025-05-12	2026-05-31
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Additional Equipment used					
239540	Environmental Meter	Fisher Scientific	15-077-963	2025-08-05	2027-08-05

Note: All equipment was in calibration at the time of tests.

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2026-05-11	2027-05-11
179892	Environmental Meter	Fisher Scientific	15-077-963	2025-08-05	2026-08-06
80391	LISN, 50-ohm/50-uH, 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50-25-2-01-550V	2025-08-01	2026-08-01
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2025-07-30	2026-07-30
52859	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2026-05-11	2027-05-11
PS214	AC Power Source	Elgar	CW2501M	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Miscellaneous (if needed)					
84681	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2026-05-11	2027-05-11

Note: All equipment was in calibration at the time of tests.

7. 20 dB BANDWIDTH

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1-5% of the 20dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 20dB bandwidth function is utilized.


Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW. A minimum RBW of 100Hz is maintained per C63.10 Amendment 1 guidelines for operation in this frequency range.

RESULTS

7.1.1. CONFIG 4

Configuration	Frequency (kHz)	20 dB (kHz)
4	110-148	1.056

Tested By: 85502

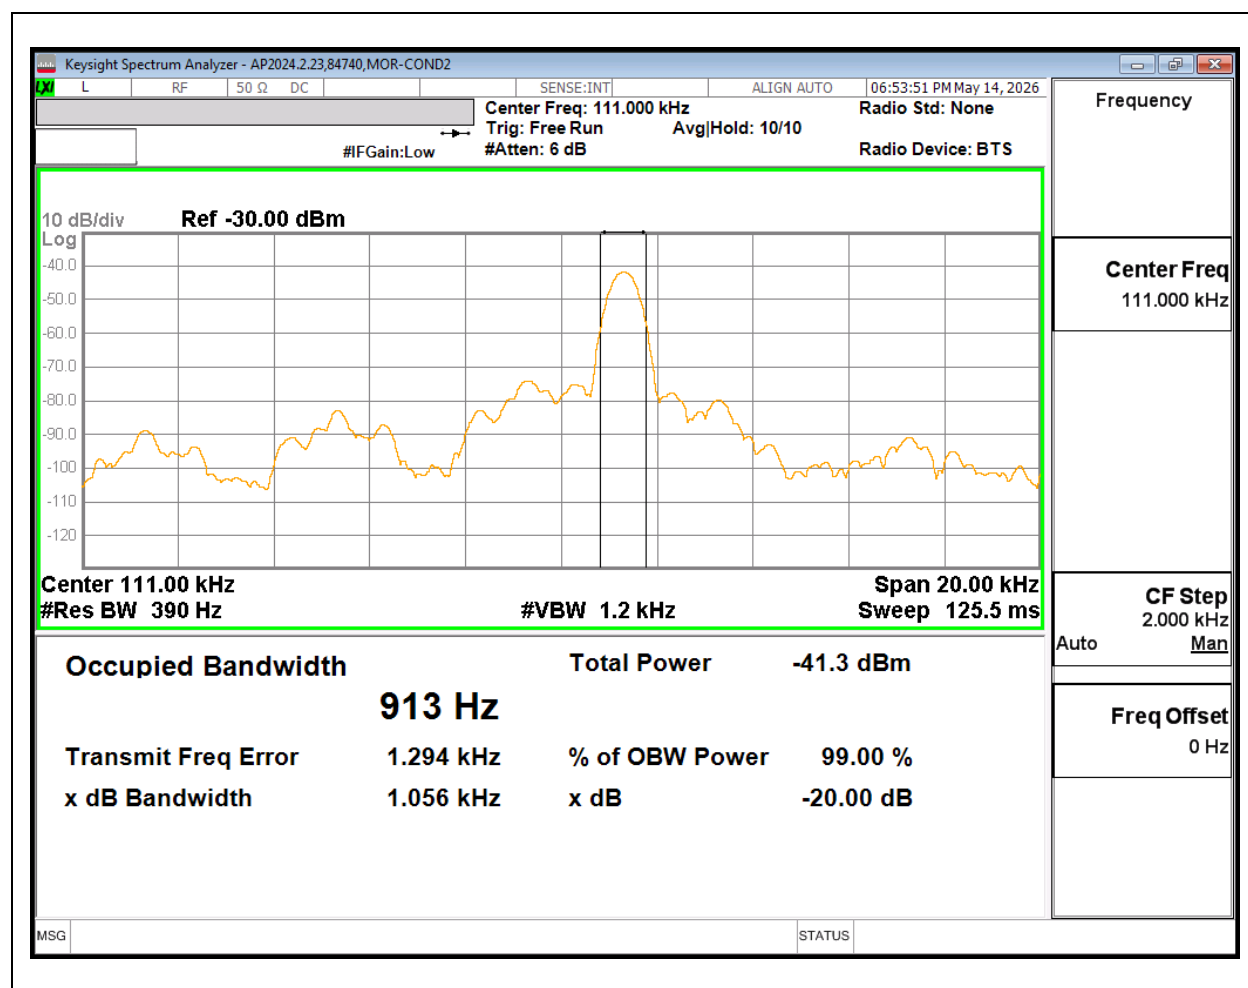

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

FCC §15.209 (a)

ICES-001 Section 6.2, IC RSS-216 6.2.2, and IC RSS-GEN Sections 8.9 and 8.10.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

RESULTS

8.2. FCC IC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

Note: All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz – 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits was 40*Log (test distance / specification distance).

8.2.1. CONFIG 4

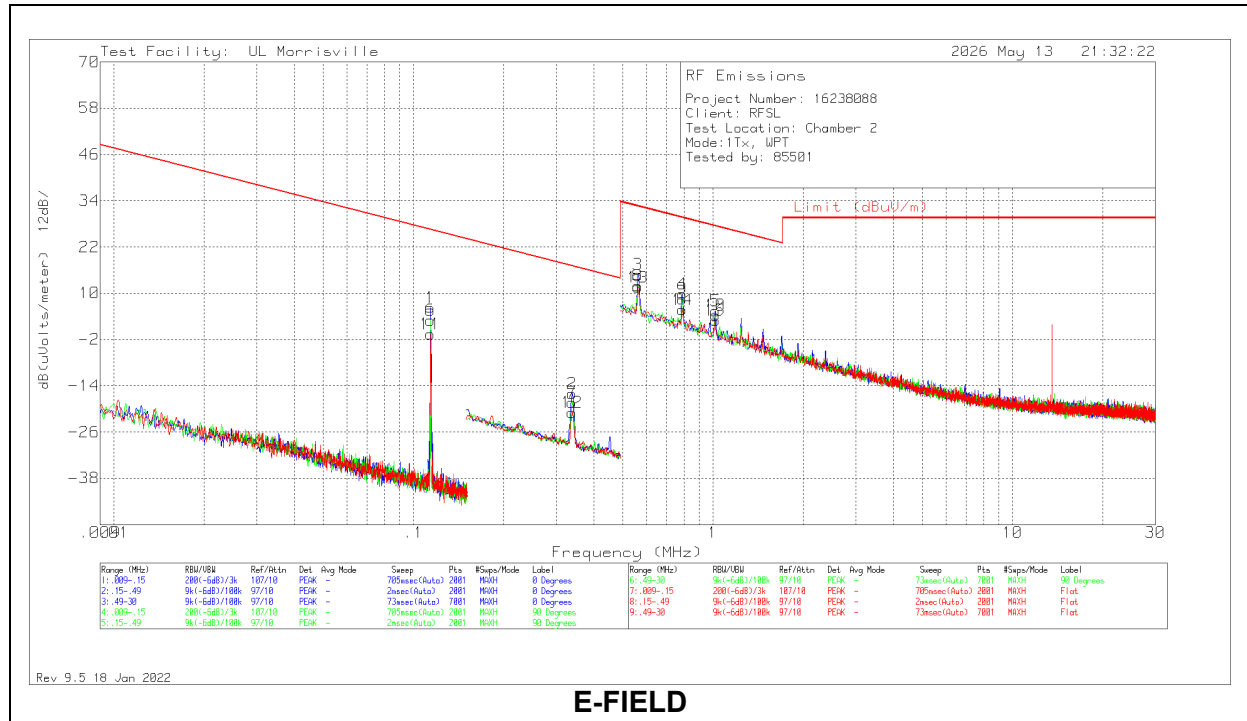

DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
*1	.1139	75.11	Pk	11.1	.1	-80	6.31	-	-	-	0-360	0 degs
*6	.1139	71.77	Pk	11.1	.1	-80	2.97	-	-	-	0-360	90 degs
*11	.1139	68.25	Pk	11.1	.1	-80	-5.55	-	-	-	0-360	Flat
12	.3387	48.03	Pk	10.9	.1	-80	-20.97	17.01	37.01	-37.98	0-360	Flat
7	.3389	50.67	Pk	10.9	.1	-80	-18.33	17	37	-35.33	0-360	90 degs
2	.339	52.98	Pk	10.9	.1	-80	-16.02	17	37	-33.02	0-360	0 degs
3	.5617	43.77	Pk	11	.1	-40	14.87	32.61	-	-17.74	0-360	0 degs
8	.5617	40.87	Pk	11	.1	-40	11.97	32.61	-	-20.64	0-360	90 degs
13	.5617	40.43	Pk	11	.1	-40	11.53	32.61	-	-21.08	0-360	Flat
4	.7893	38.68	Pk	11	.1	-40	9.78	29.66	-	-19.88	0-360	0 degs
9	.7893	37.44	Pk	11	.1	-40	8.54	29.66	-	-21.12	0-360	90 degs
14	.7893	34.58	Pk	11	.1	-40	5.68	29.66	-	-23.98	0-360	Flat
5	1.017	34.39	Pk	11	.1	-40	5.49	27.46	-	-21.97	0-360	0 degs
10	1.017	33.18	Pk	11	.1	-40	4.28	27.46	-	-23.18	0-360	90 degs
15	1.017	31.93	Pk	11	.1	-40	3.03	27.46	-	-24.43	0-360	Flat

Pk - Peak detector

* - Fundamental

8.3. FCC IC TX SPURIOUS EMISSIONS FROM 30 TO 1000 MHz

8.3.1. CONFIG 4

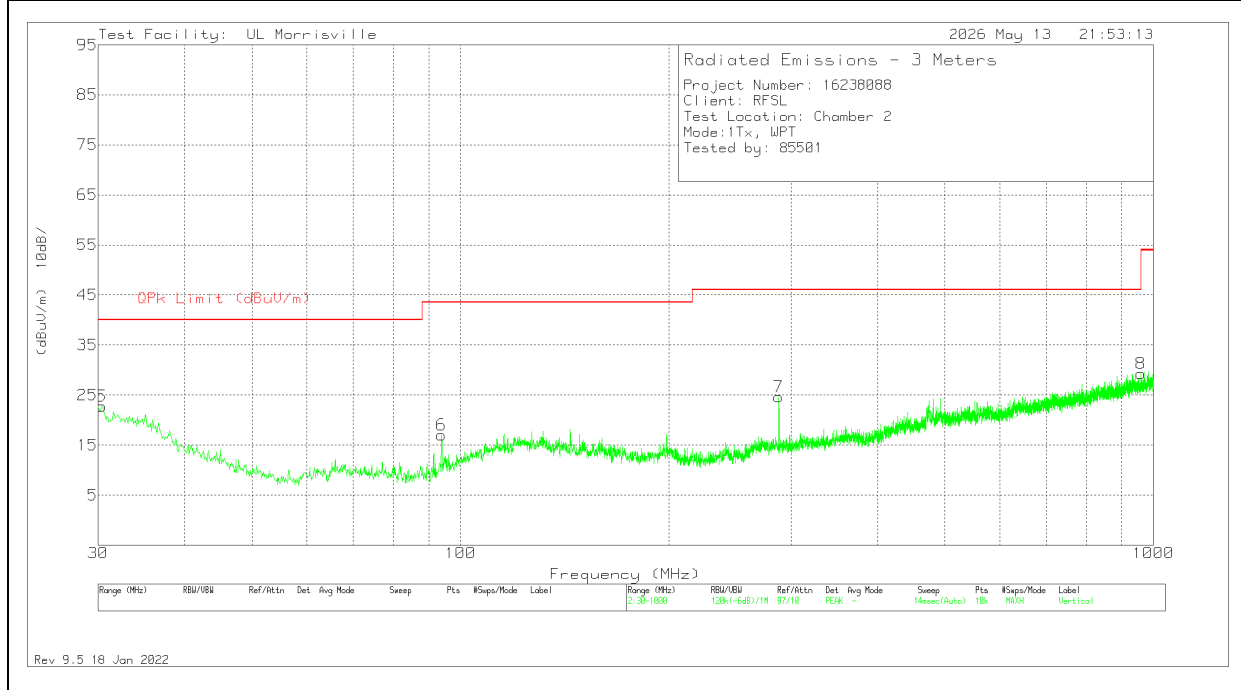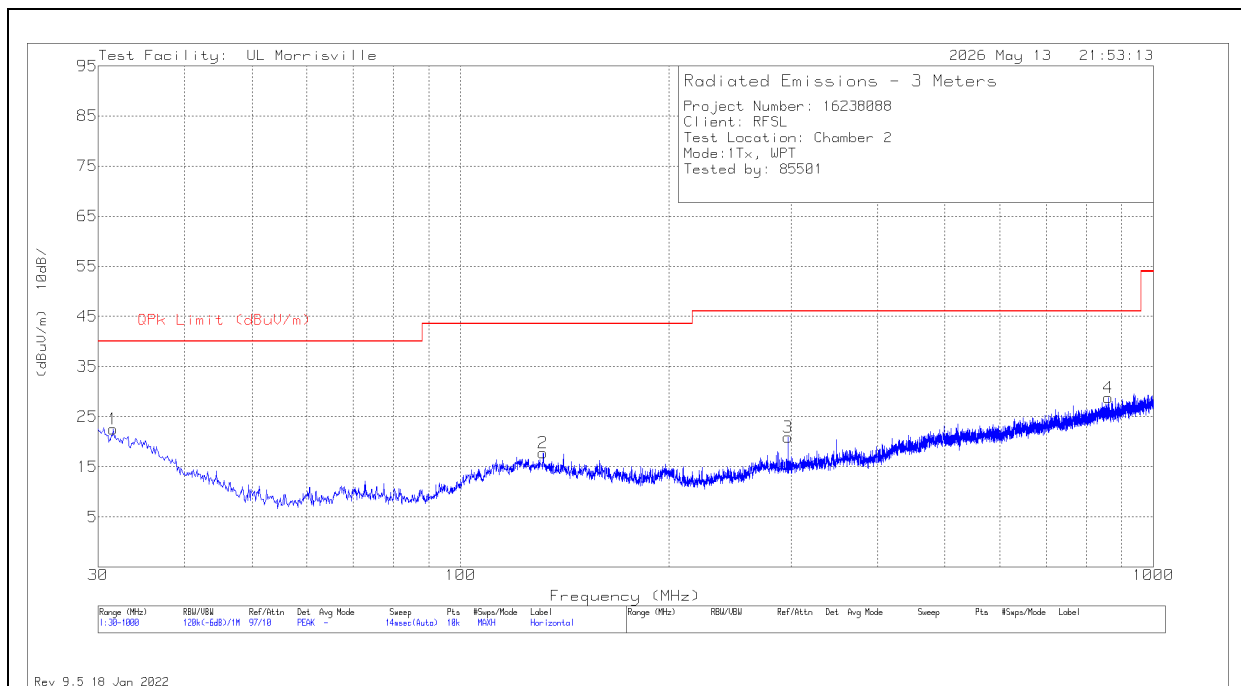

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	159203 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	30.388	27.11	Pk	27	-31.3	22.81	40	-17.19	0-360	199	V
1	31.552	28.32	Pk	26.2	-32	22.52	40	-17.48	0-360	101	H
6	93.923	33.2	Pk	14.7	-30.9	17	43.52	-26.52	0-360	199	V
2	131.656	28.3	Pk	19.7	-30.2	17.8	43.52	-25.72	0-360	101	H
7	288.02	35.04	Pk	19.4	-29.8	24.64	46.02	-21.38	0-360	199	V
3	297.041	31.47	Pk	19.4	-30	20.87	46.02	-25.15	0-360	101	H
4	861.29	27.31	Pk	27.9	-26.4	28.81	46.02	-17.21	0-360	399	H
8	958.29	25.86	Pk	28.9	-25.5	29.26	46.02	-16.76	0-360	299	V

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)
RSS-Gen 8.8

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

9.1. CONFIG 4

LINE 1 RESULTS

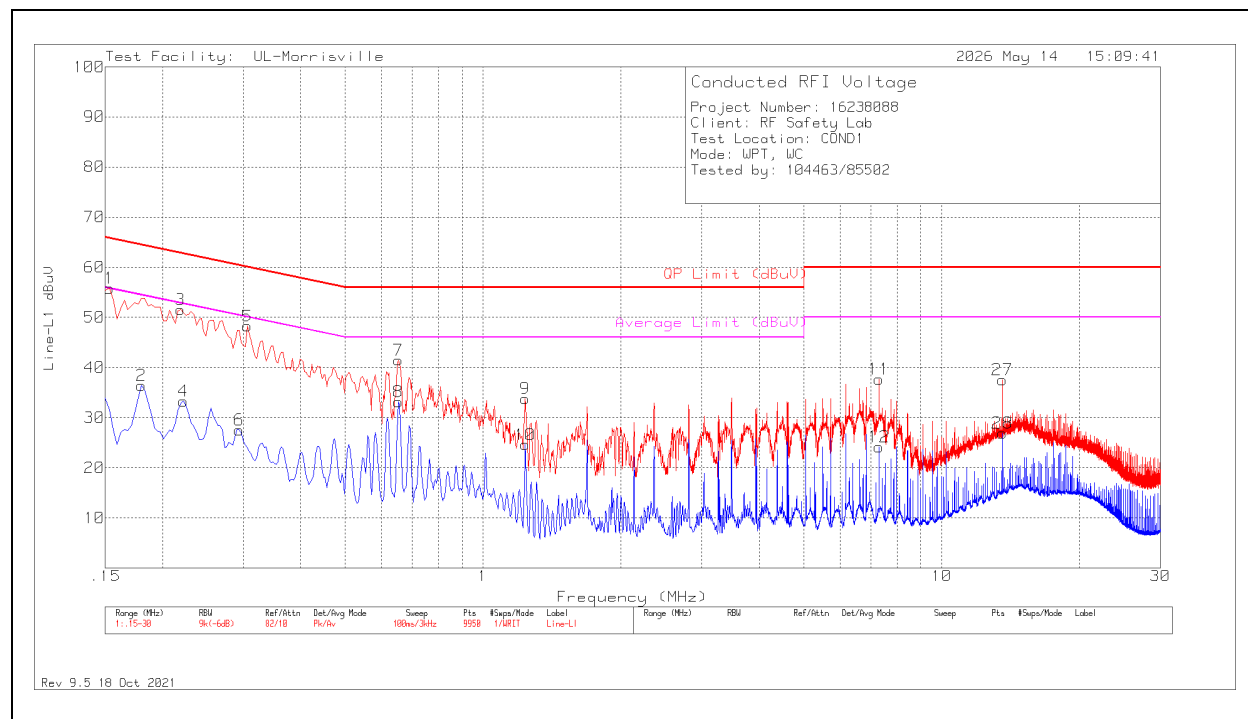

WORST EMISSIONS


Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	45.81	Pk	.2	9.8	55.81	65.84	-10.03	-	-
2	.18	26.45	Av	.2	9.8	36.45	-	-	54.49	-18.04
3	.219	41.71	Pk	.1	9.8	51.61	62.86	-11.25	-	-
4	.222	23.34	Av	.1	9.8	33.24	-	-	52.74	-19.5
5	.306	38.35	Pk	.1	9.8	48.25	60.08	-11.83	-	-
6	.294	17.6	Av	.1	9.8	27.5	-	-	50.41	-22.91
7	.654	31.68	Pk	0	9.8	41.48	56	-14.52	-	-
8	.654	23.36	Av	0	9.8	33.16	-	-	46	-12.84
9	1.236	24.02	Pk	0	9.8	33.82	56	-22.18	-	-
10	1.236	14.79	Av	0	9.8	24.59	-	-	46	-21.41
11	7.302	27.71	Pk	0	10	37.71	60	-22.29	-	-
12	7.302	14.15	Av	0	10	24.15	-	-	50	-25.85
27	13.563	27.34	Pk	.1	10.1	37.54	60	-22.46	-	-
28	13.563	16.68	Av	.1	10.1	26.88	-	-	50	-23.12

Pk - Peak detector

Av - Average detection

Note: Markers 27 and 28 are caused by badge readers in the lab.

LINE 2 RESULTS

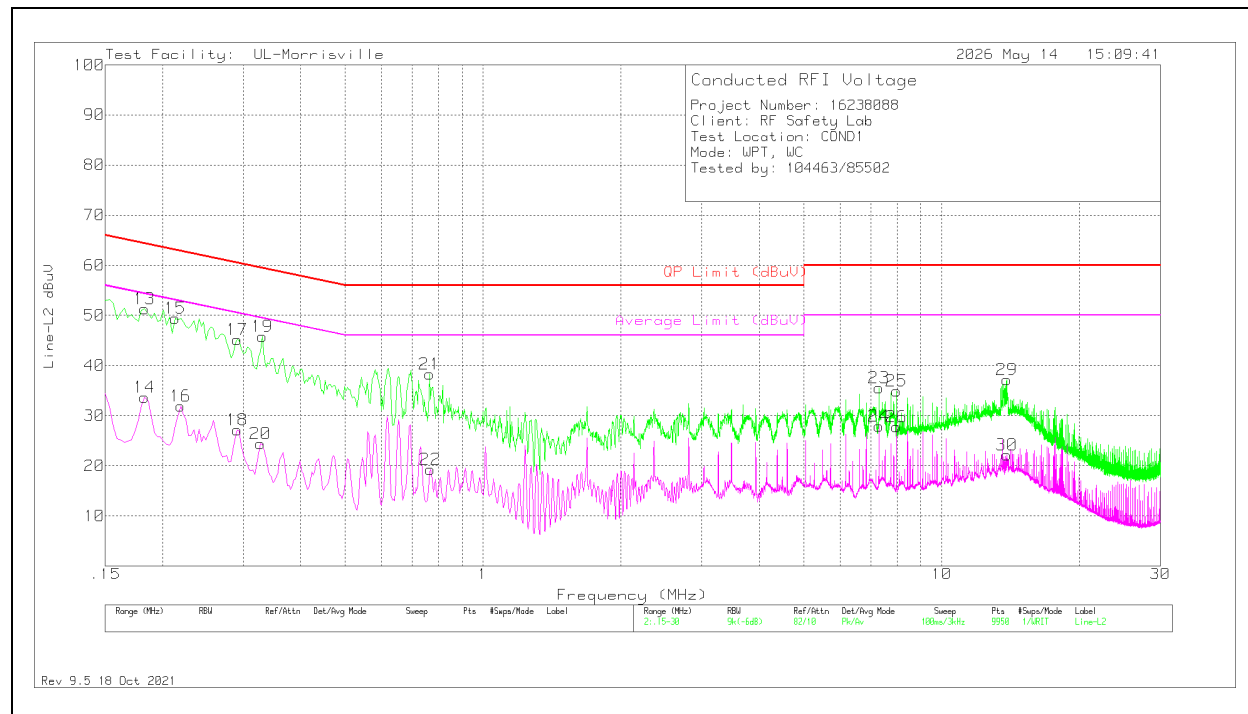

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.183	41.28	Pk	.2	9.8	51.28	64.35	-13.07	-	-
14	.183	23.63	Av	.2	9.8	33.63	-	-	54.35	-20.72
15	.213	39.53	Pk	.1	9.8	49.43	63.09	-13.66	-	-
16	.219	22.01	Av	.1	9.8	31.91	-	-	52.86	-20.95
17	.291	35.27	Pk	.1	9.8	45.17	60.5	-15.33	-	-
18	.291	17.26	Av	.1	9.8	27.16	-	-	50.5	-23.34
19	.33	35.95	Pk	.1	9.8	45.85	59.45	-13.6	-	-
20	.327	14.54	Av	.1	9.8	24.44	-	-	49.53	-25.09
21	.765	28.53	Pk	0	9.8	38.33	56	-17.67	-	-
22	.768	9.42	Av	0	9.8	19.22	-	-	46	-26.78
23	7.299	25.57	Pk	0	10	35.57	60	-24.43	-	-
24	7.299	17.88	Av	0	10	27.88	-	-	50	-22.12
25	7.974	24.95	Pk	0	10	34.95	60	-25.05	-	-
26	7.974	17.79	Av	0	10	27.79	-	-	50	-22.21
29	13.878	26.93	Pk	.1	10.1	37.13	60	-22.87	-	-
30	13.884	12	Av	.1	10.1	22.2	-	-	50	-27.8

Pk - Peak detector

Av - Average detection

10. SETUP PHOTOS

Refer to Setup Photo Exhibit R16238088-EP1c for setup diagrams and photos.

END OF TEST REPORT