

Appendix A: SAR Test Plots

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, CHEEK, 0.00	GSM 850	GSM: Voice, GMSK, 1 slot(s), 10021	E	Ch. 251	848.800	9.05, 9.79,8.99

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-02	22	19.8	17.0.2.6775	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.880	44.2	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.54
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.04
M2/M1 [%]	73.6
Dist 3dB Peak [mm]	7.3

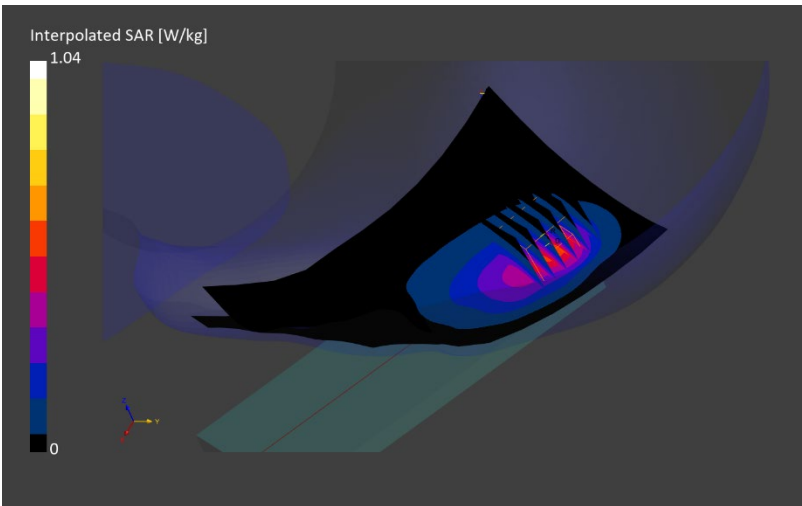

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0203M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, BACK, 5.00	GSM 850	GSM: Voice, GMSK, 1 slot(s), 10021	A+C	Ch. 128	824.200	9.05, 8.71,8.68

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	23.9	20.5	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.858	39.5	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.733
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.58
M2/M1 [%]	75.7
Dist 3dB Peak [mm]	8.7

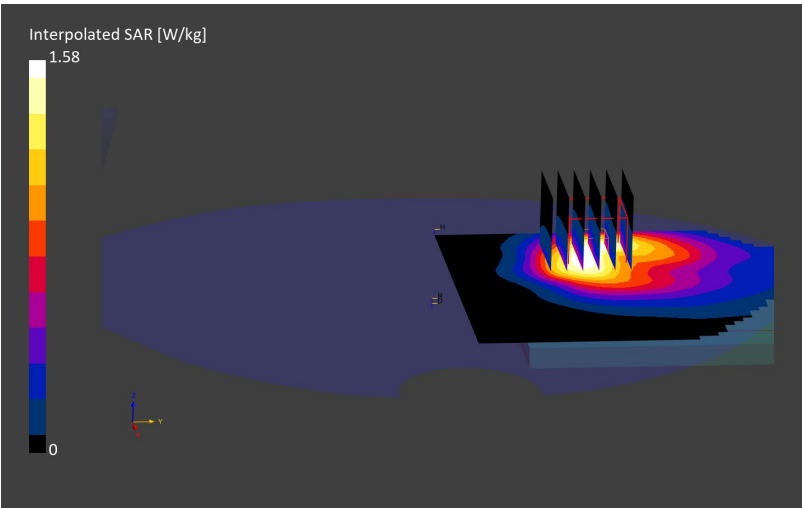

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0246M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Hotspot	Flat, BACK, 5.00	GSM 850	GSM: Data, GSMK, 4 slot(s), 10028	E	Ch. 190	836.600	9.48, 9.32,9.02

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	24.3	22.1	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.921	42.7	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.68
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.54
M2/M1 [%]	75.5
Dist 3dB Peak [mm]	7.3

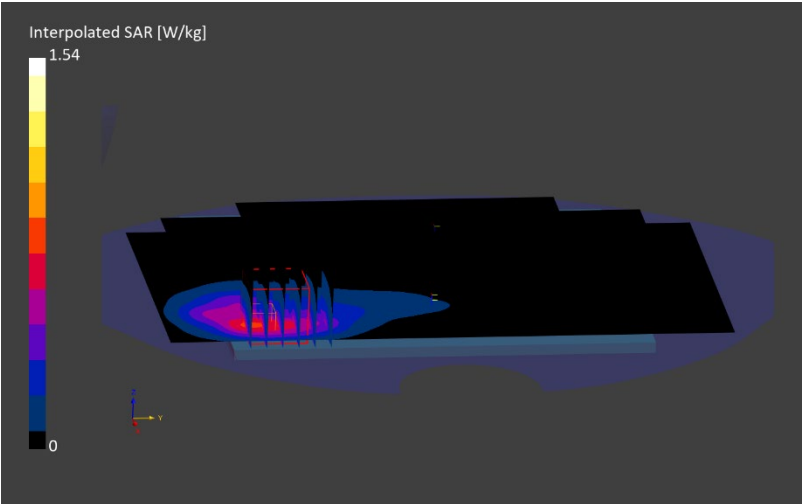

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Right Head, CHEEK, 0.00	GSM 1900	GSM: Voice, GMSK, 1 slot(s), 10021	B	Ch. 810	1909.800	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	22.2	19.1	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.37	39.7	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	42.0 x 42.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.043
Power Drift [dB]	-0.09
Peak SAR (Extrapolated) [W/kg]	0.241
M2/M1 [%]	30.3
Dist 3dB Peak [mm]	1.9

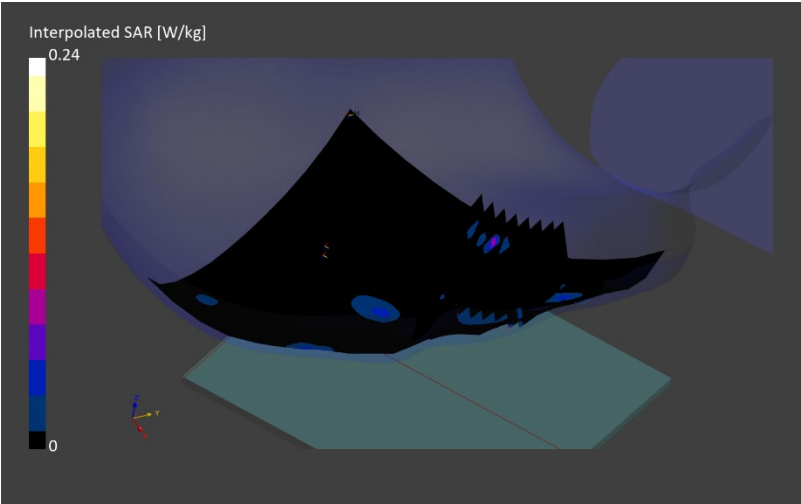

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, BACK, 5.00	GSM 1900	GSM: Voice, GMSK, 1 slot(s), 10021	B	Ch. 810	1909.800	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	22.6	20.5	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.39	39.4	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	35.7 x 35.7 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.1 x 5.1 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.598
Power Drift [dB]	0.06
Peak SAR (Extrapolated) [W/kg]	1.35
M2/M1 [%]	77.4
Dist 3dB Peak [mm]	6.2

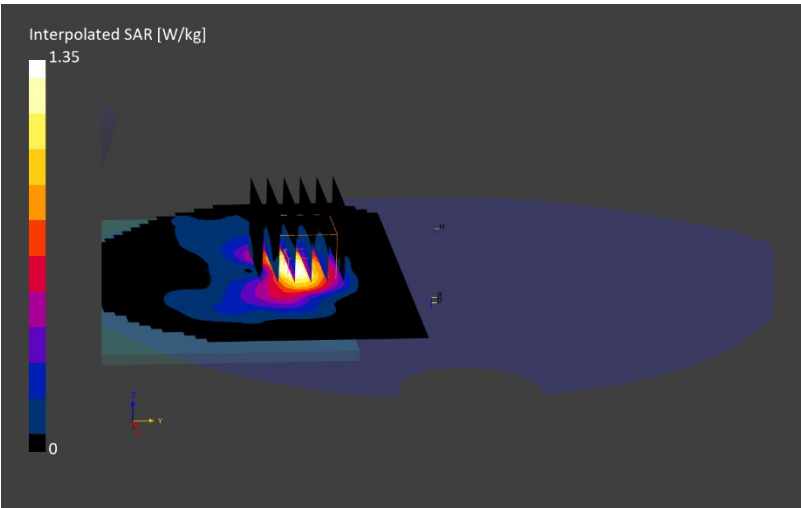

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Hotspot	Flat, FRONT, 5.00	GSM 1900	GSM: Data, GSMK, 4 slot(s), 10028	B	Ch. 810	1909.800	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	22.2	19.1	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.37	39.7	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.48
Power Drift [dB]	-0.03
Peak SAR (Extrapolated) [W/kg]	0.972
M2/M1 [%]	83.3
Dist 3dB Peak [mm]	7.2

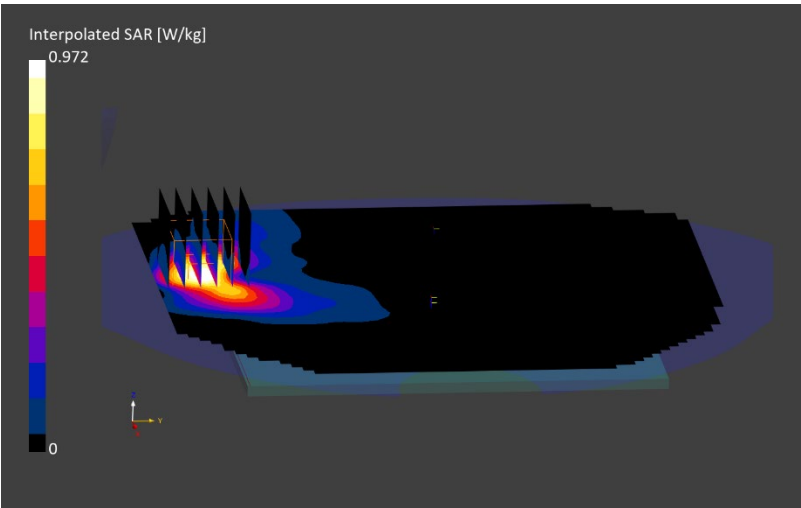

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, CHEEK, 0.00	UMTS Band 5	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	E	Ch. 4132	826.400	9.05, 9.79,8.99

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-02	22	19.8	17.0.2.6775	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.871	44.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.666
Power Drift [dB]	-0.03
Peak SAR (Extrapolated) [W/kg]	1.45
M2/M1 [%]	73.8
Dist 3dB Peak [mm]	8.4

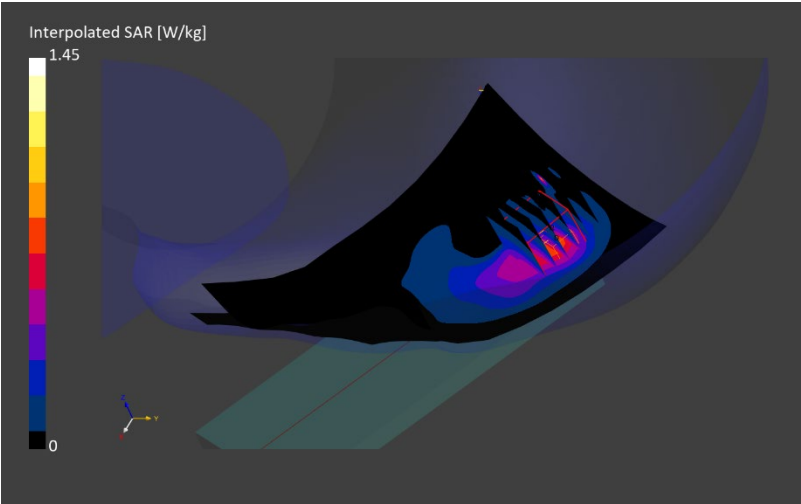

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 5	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	E	Ch. 4183	836.600	9.05, 8.71,8.68

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-10	22.1	20.9	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.905	43.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.915
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	2.08
M2/M1 [%]	74.6
Dist 3dB Peak [mm]	8.5

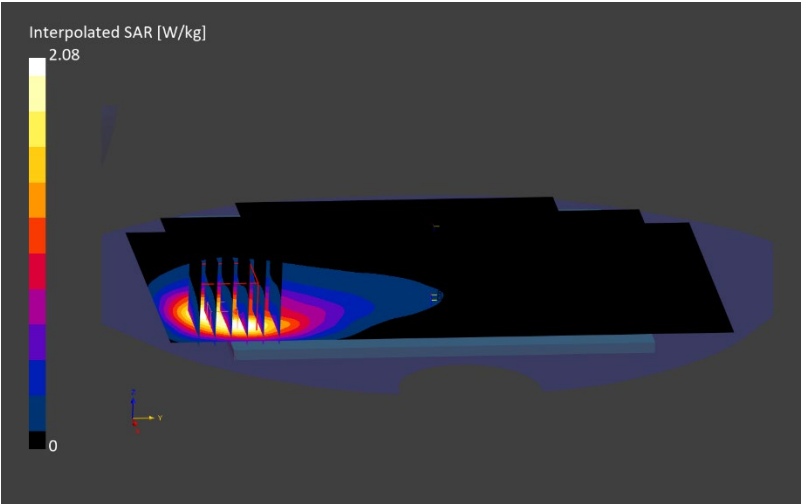

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0263M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	UMTS Band 4	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	G	Ch. 1513	1752.600	7.51, 7.49,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.2	19.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.27	38.3	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.64
Power Drift [dB]	-0.03
Peak SAR (Extrapolated) [W/kg]	1.10
M2/M1 [%]	85.5
Dist 3dB Peak [mm]	9.2

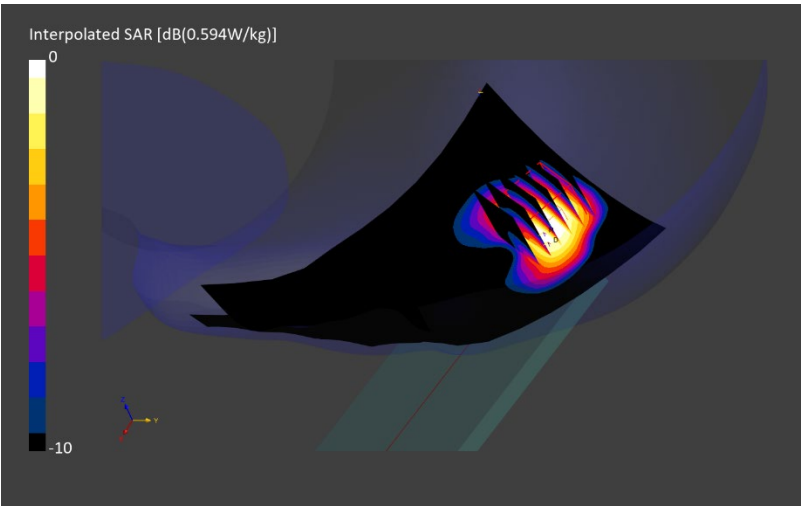

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0263M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 4	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	G	Ch. 1513	1752.600	7.51, 7.49,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.2	19.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.27	38.3	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.831
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.60
M2/M1 [%]	82.6
Dist 3dB Peak [mm]	7.1

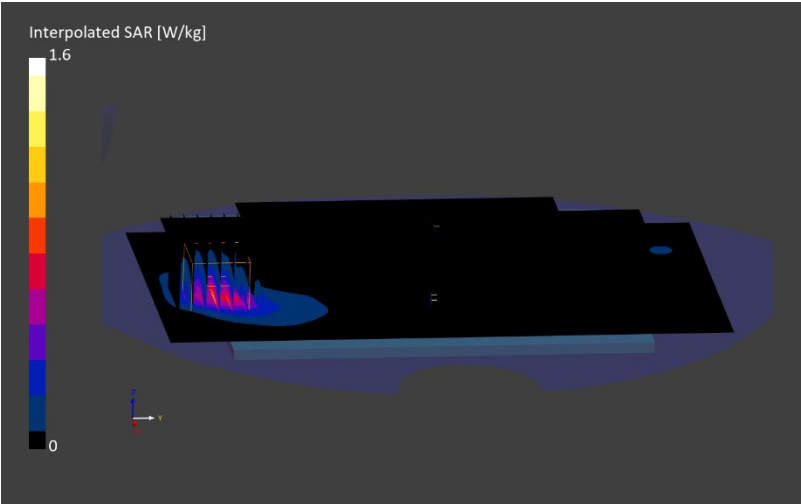

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0263M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, TILT, 0.00	UMTS Band 2	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	G	Ch. 9400	1880.000	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.2	19.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.35	38.1	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.808
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	1.45
M2/M1 [%]	85.1
Dist 3dB Peak [mm]	7.3

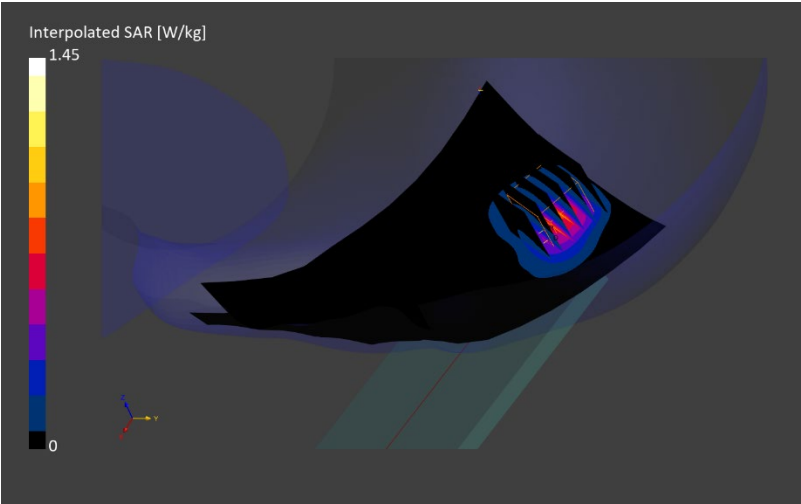

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0263M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	UMTS Band 2	UMTS-FDD: Rel. 99, RMC, QPSK, 5.0 MHz, 10011	G	Ch. 9538	1907.600	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.2	19.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.36	38.0	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.813
Power Drift [dB]	0.03
Peak SAR (Extrapolated) [W/kg]	1.69
M2/M1 [%]	80.7
Dist 3dB Peak [mm]	6.8

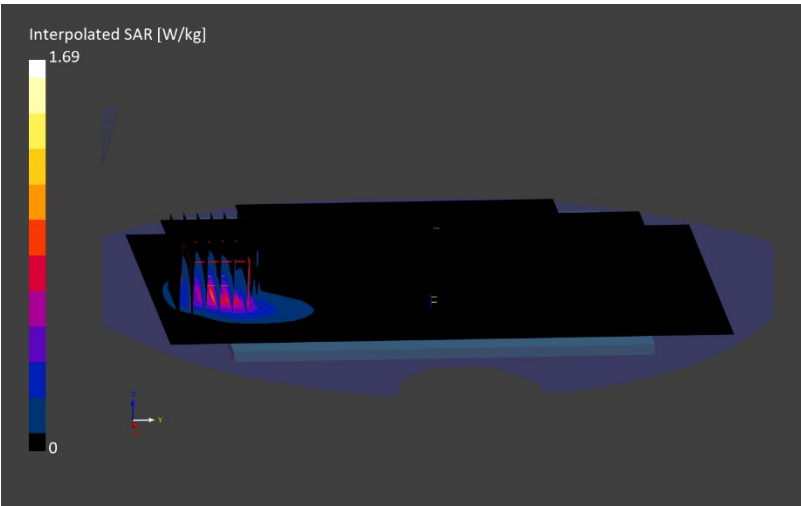

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 71	LTE-FDD: 20.0 MHz, QPSK, 1 RB (Mid), 10169	E	Ch. 133297	680.500	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-02	22.4	19.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.818	45.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.255
Power Drift [dB]	-0.05
Peak SAR (Extrapolated) [W/kg]	0.569
M2/M1 [%]	72.5
Dist 3dB Peak [mm]	10.7

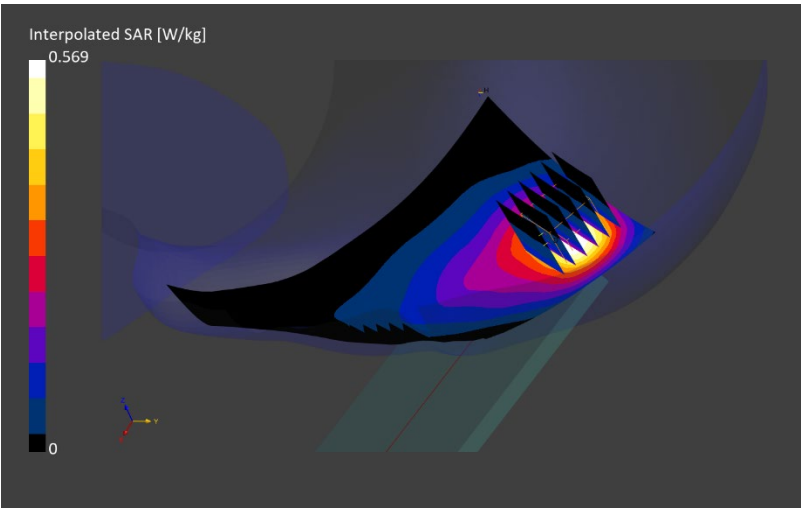

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0206M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 71	LTE-FDD: 20.0 MHz, QPSK, 1 RB (Mid), 10169	E	Ch. 133297	680.500	9.62, 9.46,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	23.5	20.5	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.834	41.6	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.639
Power Drift [dB]	-0.01
Peak SAR (Extrapolated) [W/kg]	1.56
M2/M1 [%]	70.4
Dist 3dB Peak [mm]	8.5

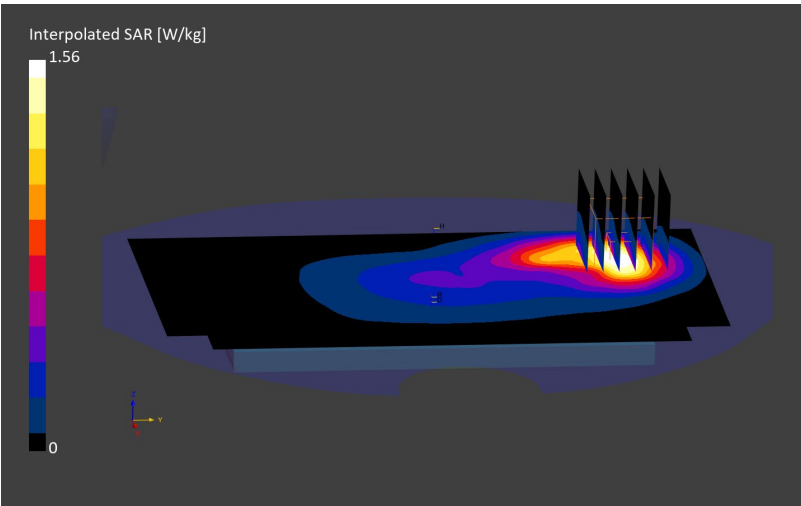

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, Cheek, 0.00	LTE Band 12	LTE-FDD: 10.0 MHz, QPSK, 1 RB (High), 10175	E	Ch. 23095	707.500	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-02	22.4	19.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.827	45.3	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.383
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	0.639
M2/M1 [%]	79.4
Dist 3dB Peak [mm]	15.4

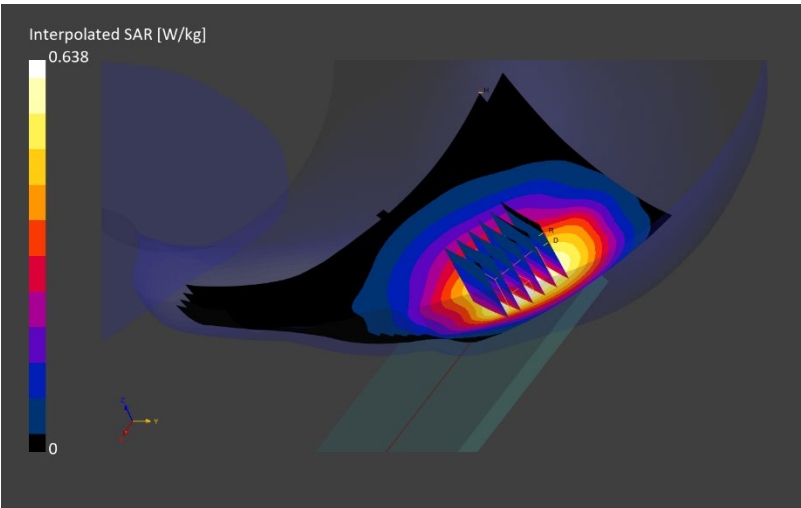

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 12	LTE-FDD: 10.0 MHz, QPSK, 50% RB (High), 10154	A+C	Ch. 23095	707.500	9.2, 9.96,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.872	43.5	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.731
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.74
M2/M1 [%]	71.9
Dist 3dB Peak [mm]	7.7

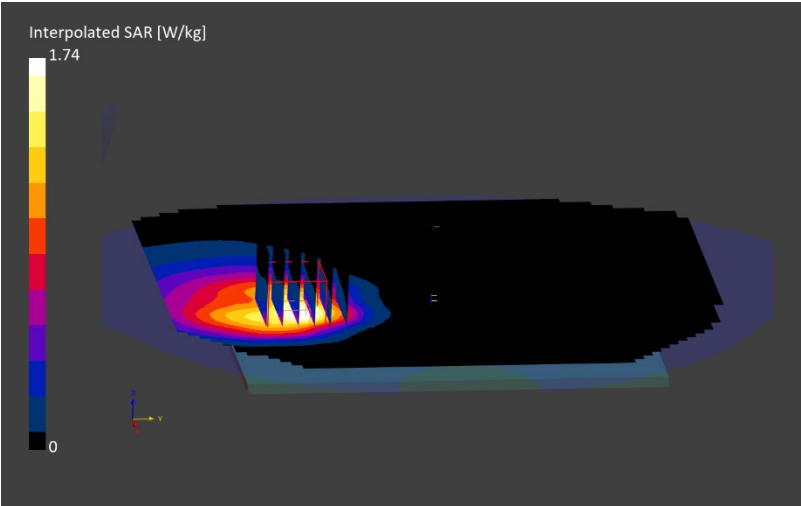

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, CHEEK, 0.00	LTE Band 13	LTE-FDD: 10.0 MHz, QPSK, 1 RB (High), 10175	E	Ch. 23230	782.000	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	24.3	20.9	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.860	41.6	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.337
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	0.467
M2/M1 [%]	89.5
Dist 3dB Peak [mm]	13.0

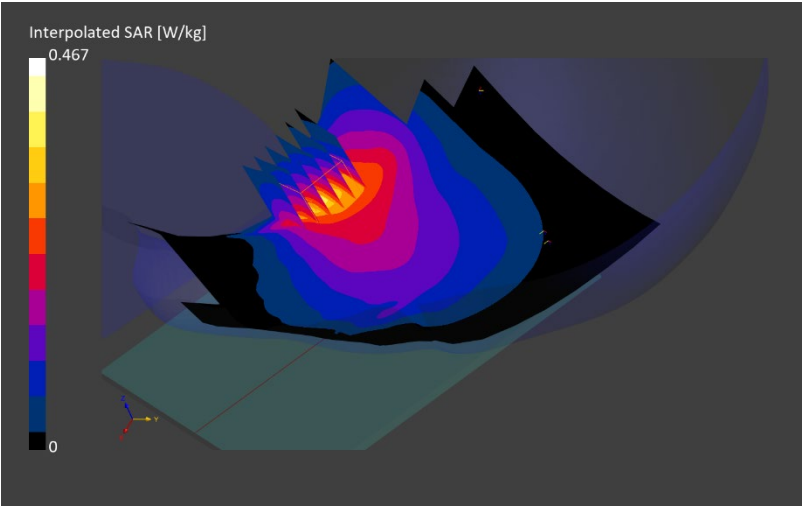

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 13	LTE-FDD: 10.0 MHz, QPSK, 50% RB (Low), 10154	A+C	Ch. 23230	782.000	9.2, 9.96,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.895	43.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.726
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.61
M2/M1 [%]	75.7
Dist 3dB Peak [mm]	7.6

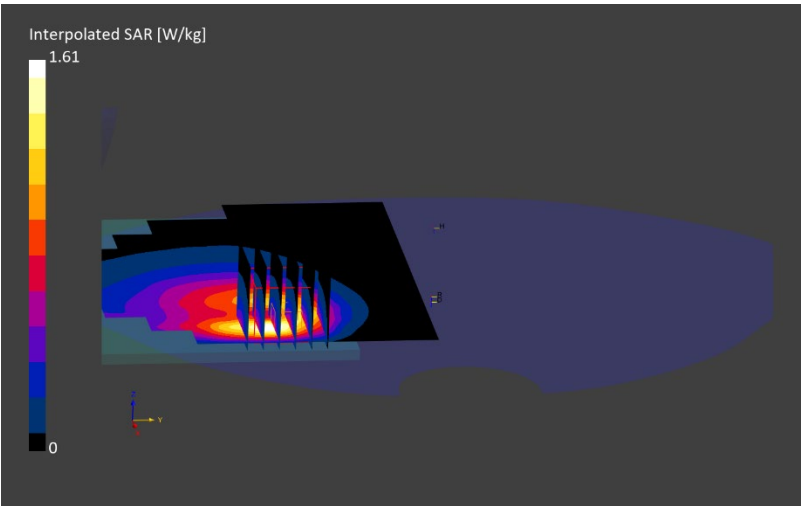

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, CHEEK, 0.00	LTE Band 14	LTE-FDD: 10.0 MHz, QPSK, 1 RB (Low), 10175	E	Ch. 23330	793.000	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	24.3	20.9	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.864	41.5	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.328
Power Drift [dB]	-0.05
Peak SAR (Extrapolated) [W/kg]	0.462
M2/M1 [%]	87.6
Dist 3dB Peak [mm]	12.1

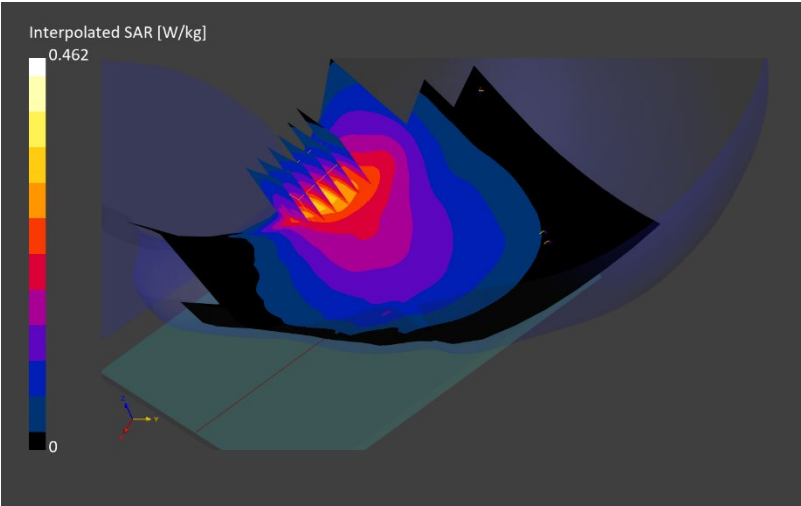

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 14	LTE-FDD: 10.0 MHz, QPSK, 1 RB (Mid), 10175	A+C	Ch. 23330	793.000	9.2, 9.96,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.898	43.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.662
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	1.43
M2/M1 [%]	76.5
Dist 3dB Peak [mm]	7.6

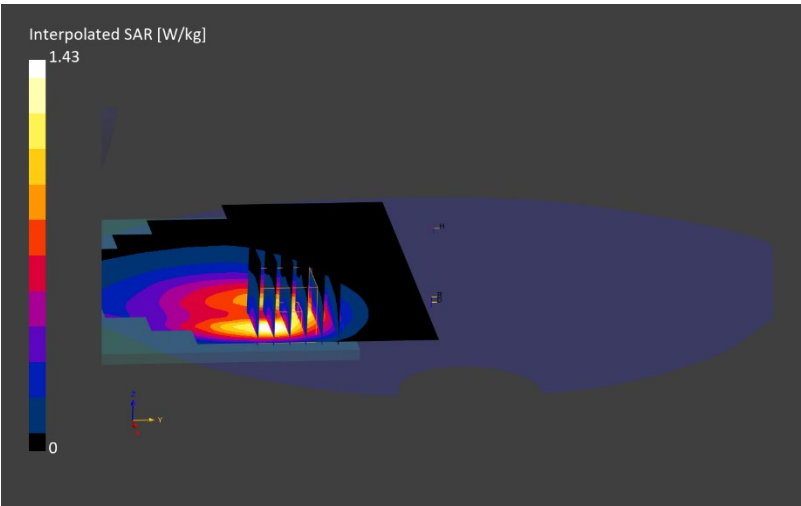

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, CHEEK, 0.00	LTE Band 26	LTE-FDD: 15.0 MHz, QPSK, 1 RB (Mid), 10181	E	Ch. 26865	831.500	9.05, 8.71,8.68

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-02	22.4	19.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.872	45.0	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.465
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	0.804
M2/M1 [%]	76.8
Dist 3dB Peak [mm]	17.1

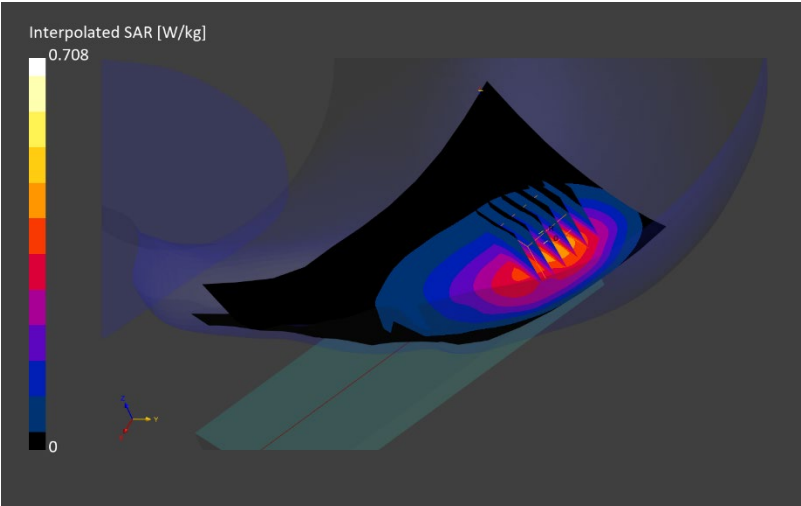

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 26	LTE-FDD: 15.0 MHz, QPSK, 50% RB (Low), 10160	A+C	Ch. 26865	831.500	9.05, 9.79,8.99

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.909	43.1	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.829
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.81
M2/M1 [%]	76.2
Dist 3dB Peak [mm]	7.6

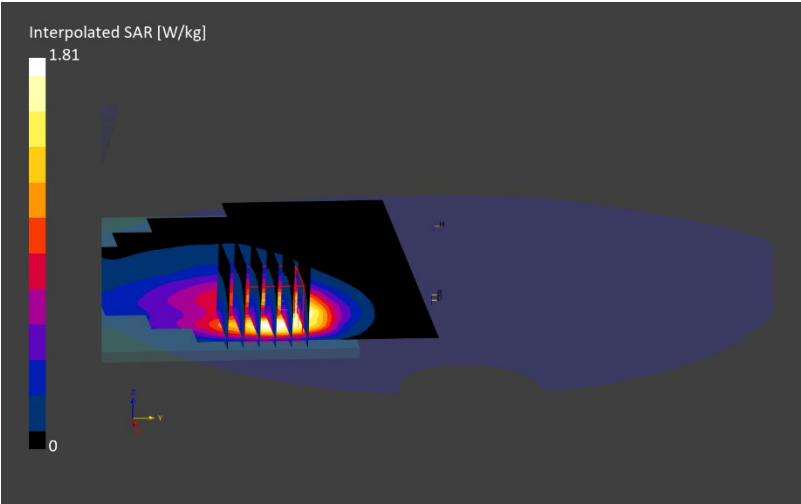

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 66	LTE-FDD: 20.0 MHz, QPSK, 1 RB (Mid), 10169	G	Ch. 132572	1770.000	7.78, 7.65,7.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-09	23.7	23	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.35	39.3	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.736
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	1.21
M2/M1 [%]	91.1
Dist 3dB Peak [mm]	8.5

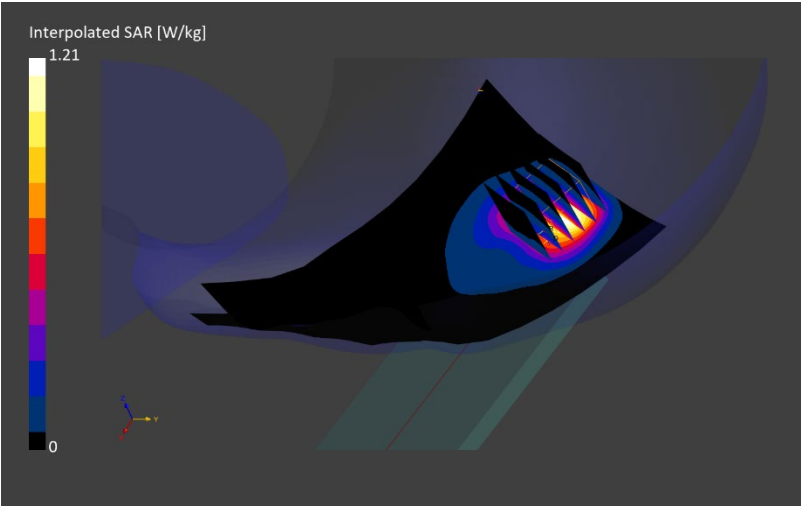

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 66	LTE-FDD: 20.0 MHz, QPSK, 100% RB, 10100	G	Ch. 132572	1770.000	7.51, 7.49,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-03	24.5	22	17.0.2.6775	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.36	42.1	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	31.8 x 31.8 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.3 x 5.3 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.78
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	1.64
M2/M1 [%]	77.8
Dist 3dB Peak [mm]	6.8

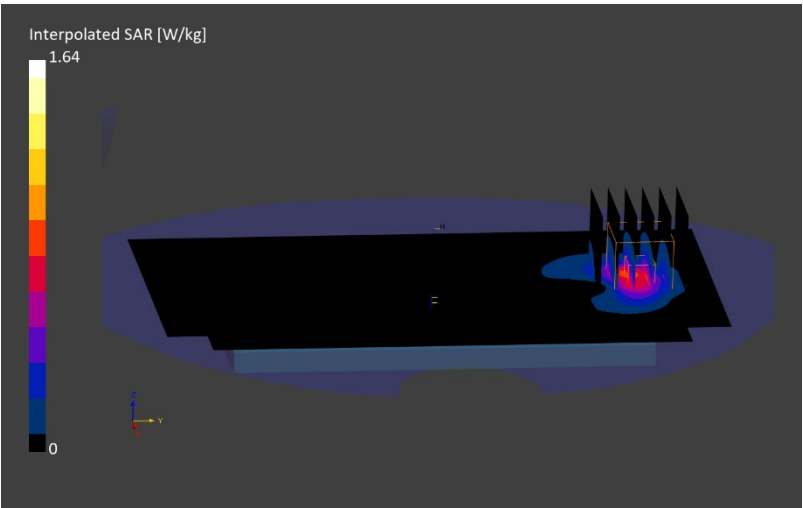

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 25	LTE-FDD: 20.0 MHz, QPSK, 1 RB (Mid), 10169	G	Ch. 26140	1860.000	7.59, 7.46,7.22

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-09	23.7	23	17.0.2.6775	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.40	39.2	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	39.2 x 39.2 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.6 x 5.6 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.944
Power Drift [dB]	-0.12
Peak SAR (Extrapolated) [W/kg]	1.68
M2/M1 [%]	84.3
Dist 3dB Peak [mm]	8.2

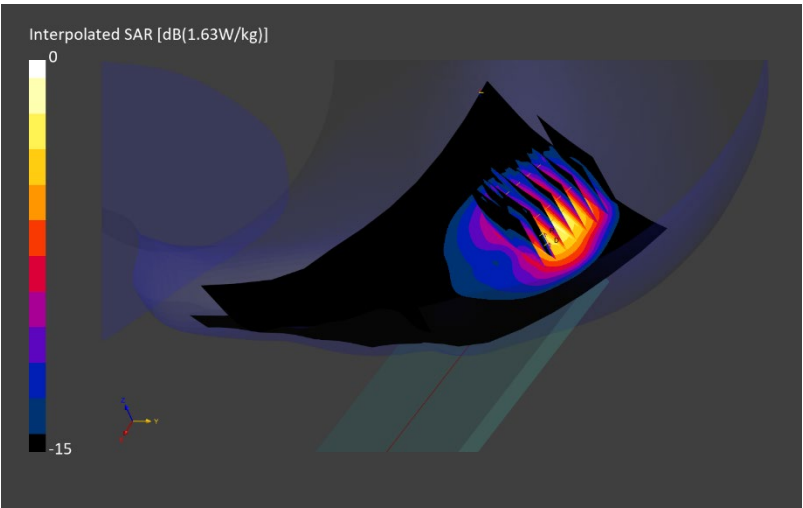

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 25	LTE-FDD: 20.0 MHz, QPSK, 50% RB (Mid), 10297	G	Ch. 26140	1860.000	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.2	19.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.33	38.1	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.857
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	1.68
M2/M1 [%]	79.7
Dist 3dB Peak [mm]	7.0

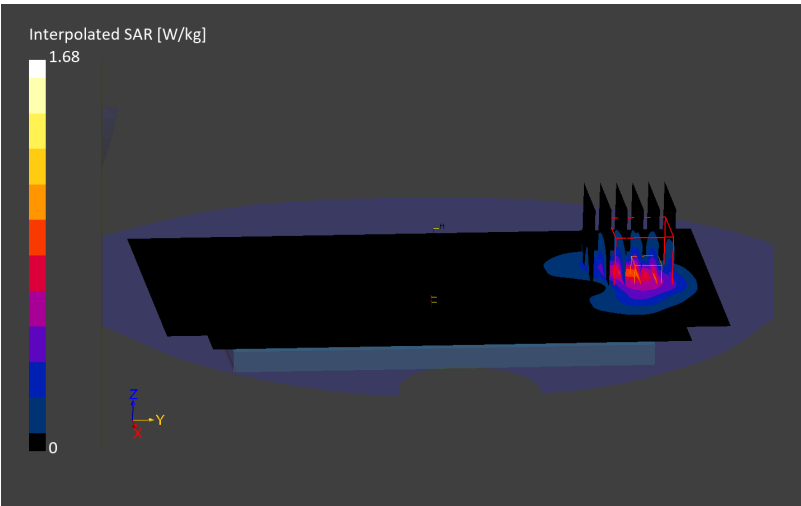

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, TILT, 0.00	LTE Band 30	LTE-FDD: 10.0 MHz, QPSK, 1 RB (Low), 10175	G	Ch. 27710	2310.000	7.11, 7.69,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-11	21.9	21.9	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.69	38.5	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	40.0 x 40.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.504
Power Drift [dB]	0.1
Peak SAR (Extrapolated) [W/kg]	1.20
M2/M1 [%]	70.6
Dist 3dB Peak [mm]	6.7

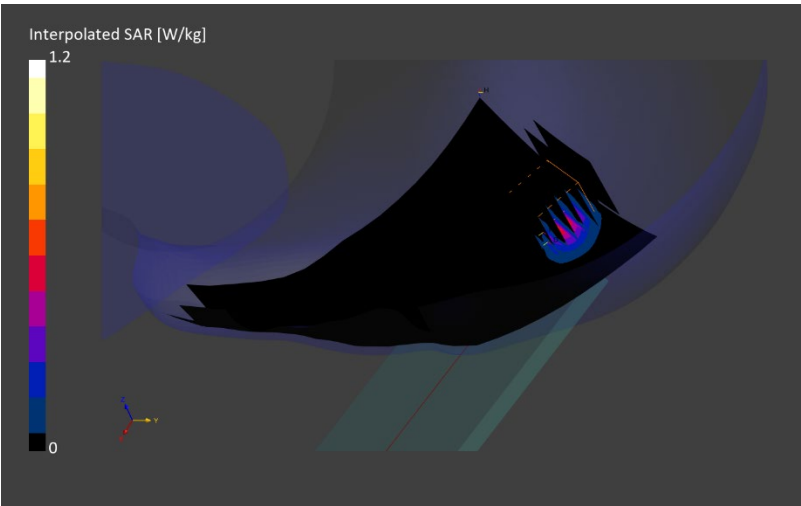

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 30	LTE-FDD: 10.0 MHz, QPSK, 100% RB, 10108	G	Ch. 27710	2310.000	7.11, 7.69,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.3	20.8	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.64	38.2	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.634
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.43
M2/M1 [%]	78.0
Dist 3dB Peak [mm]	6.0

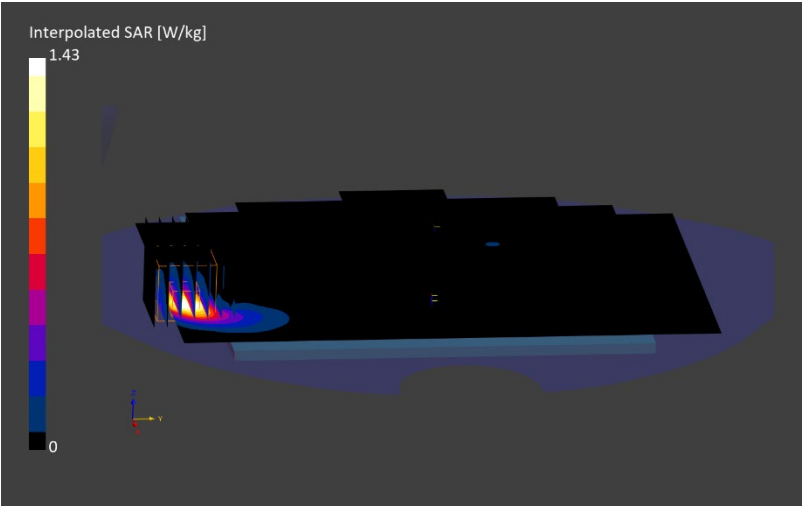

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 7	LTE-FDD: 20.0 MHz, QPSK, 50% RB (Low), 10297	G	Ch. PCC: 21350 SCC: 21152	2560.000	7.07, 6.81,6.79

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-11	23.2	21.1	17.0.2.6775	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.85	37.9	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.94
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	2.05
M2/M1 [%]	82.7
Dist 3dB Peak [mm]	6.1

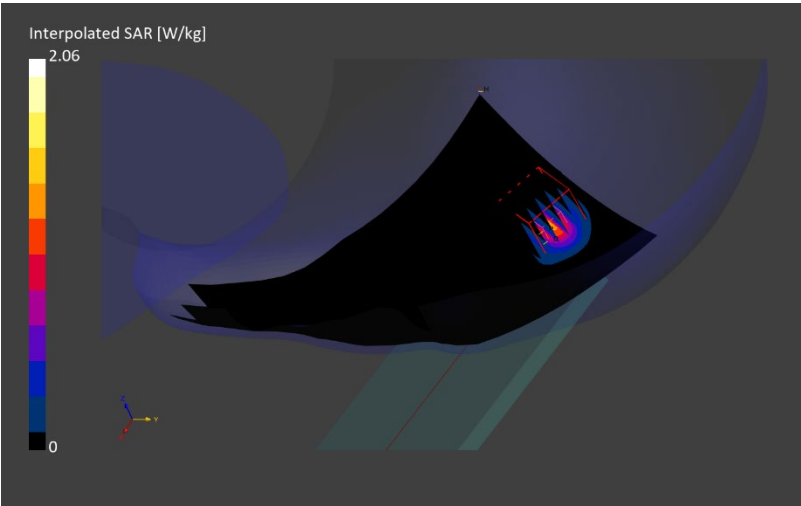

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 7	LTE-FDD: 20.0 MHz, QPSK, 1 RB (High), 10169	G	Ch. PCC: 20850 SCC: 21048	2510.000	7.07, 6.81,6.79

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-06	22.7	22	17.0.2.6775	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.85	38.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.668
Power Drift [dB]	-0.01
Peak SAR (Extrapolated) [W/kg]	1.48
M2/M1 [%]	78.6
Dist 3dB Peak [mm]	6.4

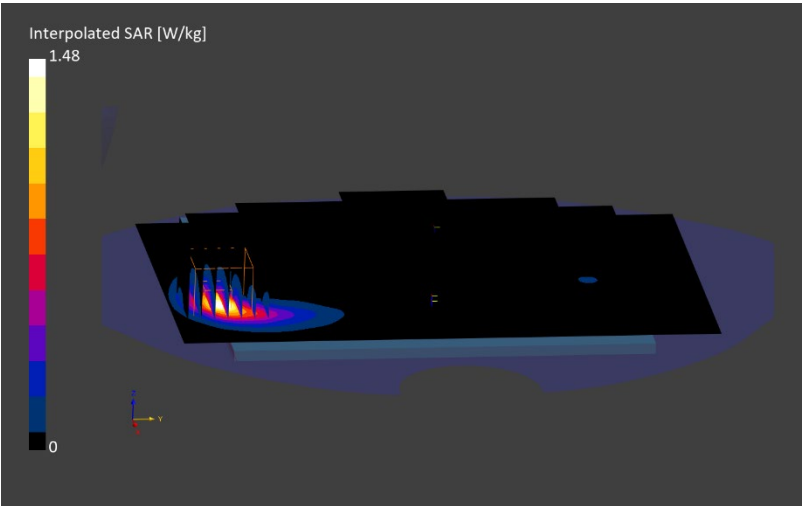

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0206M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	LTE Band 41	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 0, SSC: 7, 1 RB (Mid), 10435	G	Ch. 41490	2680.000	7.07, 6.81,6.79

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-11	23.2	21.1	17.0.2.6775	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.94	37.7	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.772
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	1.87
M2/M1 [%]	75.2
Dist 3dB Peak [mm]	5.1

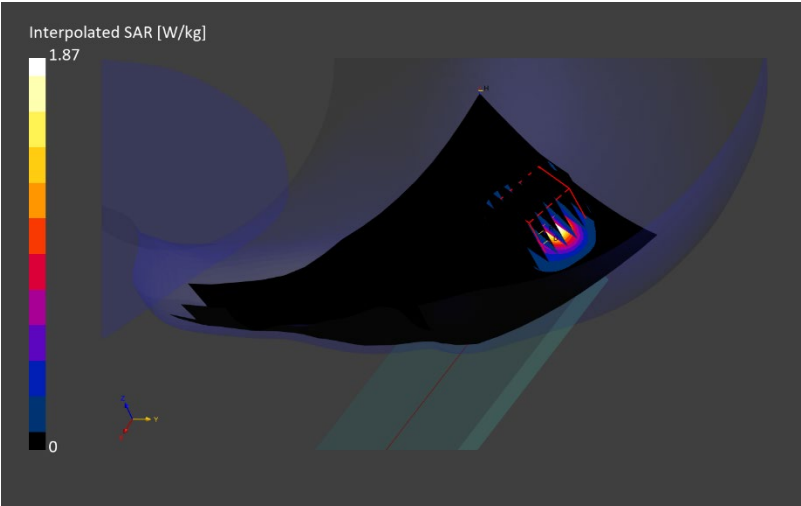

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 41	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 0, SSC: 7, 50% RB (Low), 10494	G	Ch. 39750	2506.000	7.07, 6.81,6.79

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-06	22.7	22	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.84	38.4	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.54
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	1.21
M2/M1 [%]	77.9
Dist 3dB Peak [mm]	6.4

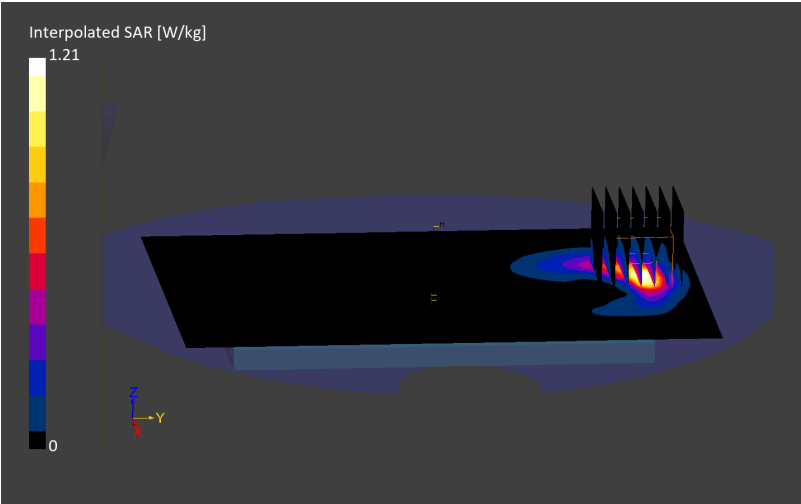

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Right Head, TILT, 0.00	LTE Band 48	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 0, SSC: 7, 50% RB (Mid), 10494	F	Ch. 56640	3690.000	6.48, 6.27,6.59

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-09	22.6	22.4	17.0.2.6775	Twin-SAM V8.0 – 2233	Head Simulating Liquid	2.90	38.5	EX3DV4 – SN7971, 2026-01-13	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.501
Power Drift [dB]	-0.04
Peak SAR (Extrapolated) [W/kg]	1.32
M2/M1 [%]	75.0
Dist 3dB Peak [mm]	7.1

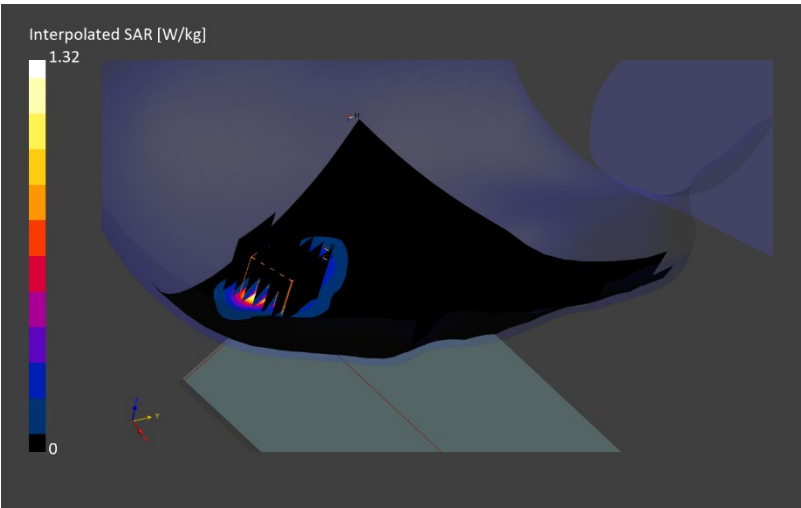

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	LTE Band 48	LTE-TDD: 20.0 MHz, QPSK, UL/DL CFG: 0, SSC: 7, 1 RB (Mid), 10435	F	Ch. 56207	3646.700	6.48, 6.27,6.59

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-09	22.6	22.4	17.0.2.6775	Twin-SAM V8.0 – 2233	Head Simulating Liquid	2.86	38.6	EX3DV4 – SN7971, 2026-01-13	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.498
Power Drift [dB]	-0.06
Peak SAR (Extrapolated) [W/kg]	1.43
M2/M1 [%]	72.5
Dist 3dB Peak [mm]	5.7

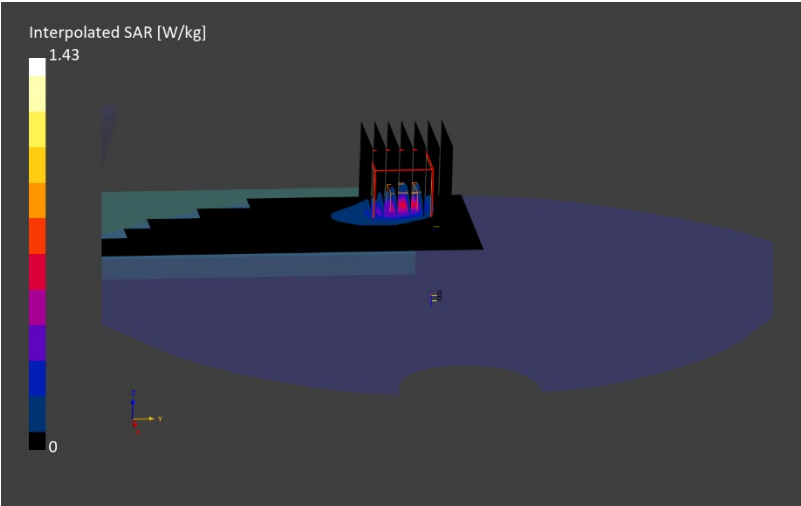

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, CHEEK, 0.00	NR Band n71	NR FR1 FDD: DFT-s-OFDM, 35.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 1000248	E	Ch. 136100	680.500	9.49, 9.19,9.65

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-04	21.9	20.9	17.0.2.6775	Twin-SAM V8.0 – 2233	Head Simulating Liquid	0.846	44.1	EX3DV4 – SN7971, 2026-01-13	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.248
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	0.519
M2/M1 [%]	71.6
Dist 3dB Peak [mm]	17.2

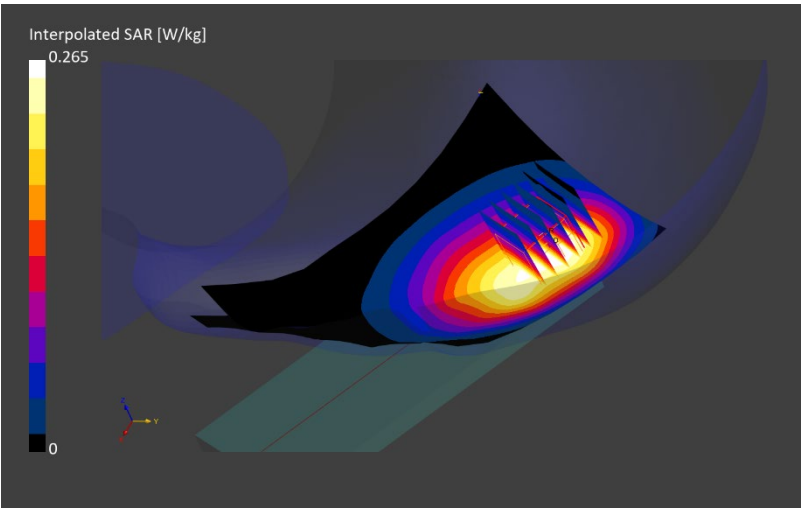

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n71	NR FR1 FDD: DFT-s-OFDM, 35.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 1000248	E	Ch. 136100	680.500	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	24	22.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.816	39.7	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.668
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.61
M2/M1 [%]	71.1
Dist 3dB Peak [mm]	8.5

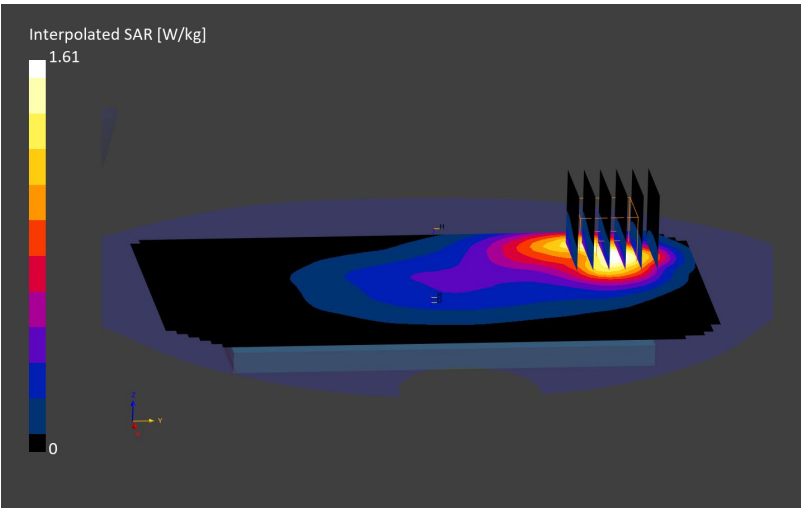

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, CHEEK, 0.00	NR Band n12	NR FR1 FDD: DFT-s-OFDM, 15.0 MHz, QPSK, 15 kHz, 1 RB (Low), 10930	E	Ch. 141500	707.500	9.49, 9.19,9.65

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-02	21.1	20.2	17.0.2.6775	Twin-SAM V8.0 – 2233	Head Simulating Liquid	0.838	45.2	EX3DV4 – SN7971, 2026-01-13	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.303
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	0.470
M2/M1 [%]	81.0
Dist 3dB Peak [mm]	> 15.0

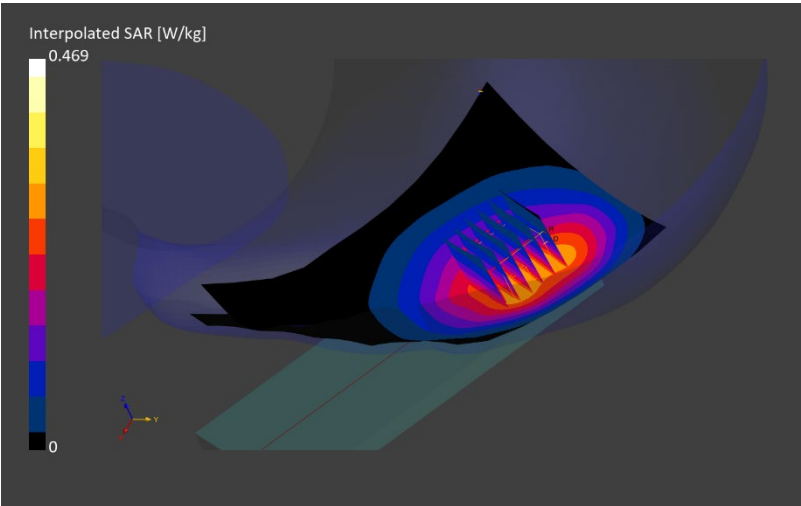

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n12	NR FR1 FDD: DFT-s-OFDM, 15.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 10938	E	Ch. 141500	707.500	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	24	22.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.824	39.6	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 36.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.802
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.91
M2/M1 [%]	71.6
Dist 3dB Peak [mm]	8.7

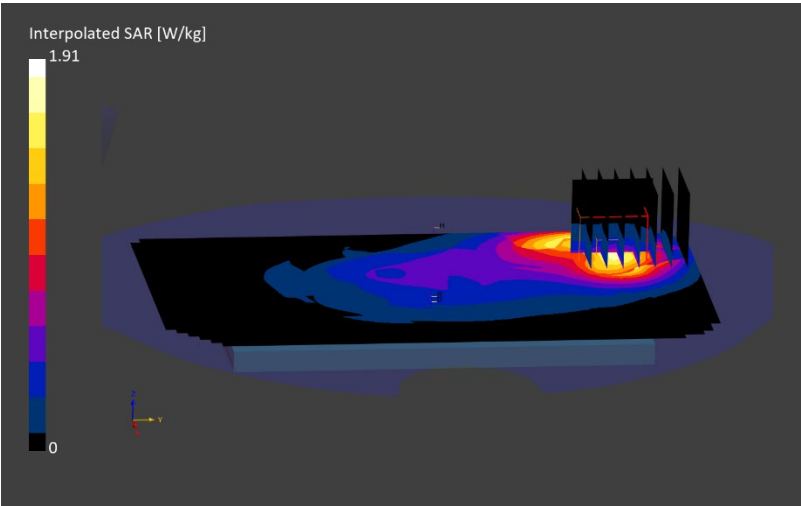

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, CHEEK, 0.00	NR Band n14	NR FR1 FDD: DFT-s-OFDM, 10.0 MHz, QPSK, 15 kHz, 1 RB (Low), 10929	E	Ch. 158600	793.000	9.62, 9.46,9.15

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	24.7	21.8	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	0.852	39.6	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.305
Power Drift [dB]	0.1
Peak SAR (Extrapolated) [W/kg]	0.425
M2/M1 [%]	89.0
Dist 3dB Peak [mm]	13.0

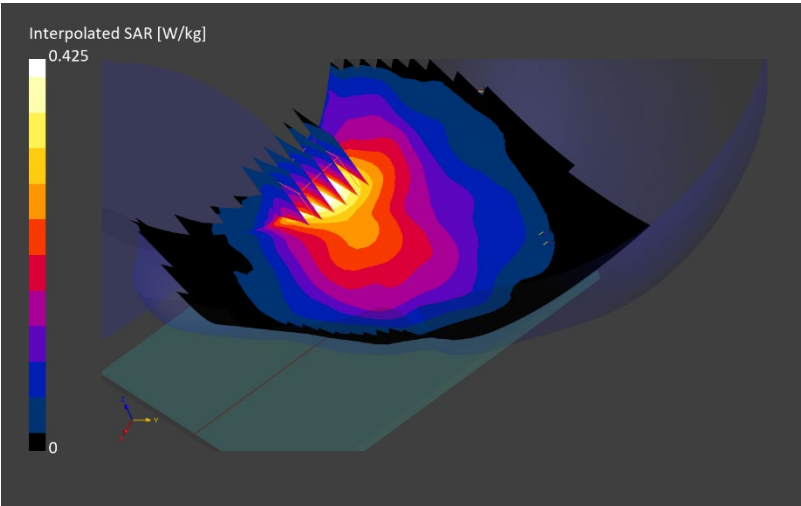

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0203M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n14	NR FR1 FDD: DFT-s-OFDM, 10.0 MHz, QPSK, 15 kHz, 1 RB (Low), 10929	A+C	Ch. 158600	793.000	9.29, 8.95,8.92

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	23.9	20.5	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.848	39.6	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.722
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	1.64
M2/M1 [%]	73.7
Dist 3dB Peak [mm]	8.7

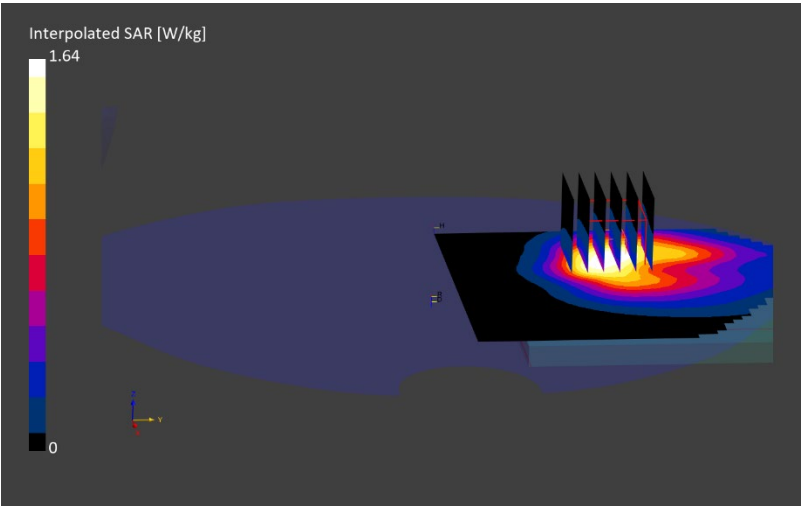

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, CHEEK, 0.00	NR Band n26	NR FR1 FDD: DFT-s-OFDM, 20.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 10939	E	Ch. 166300	831.500	9.05, 8.71,8.68

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	24	22.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	0.865	39.2	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.437
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	0.793
M2/M1 [%]	77.3
Dist 3dB Peak [mm]	11.9

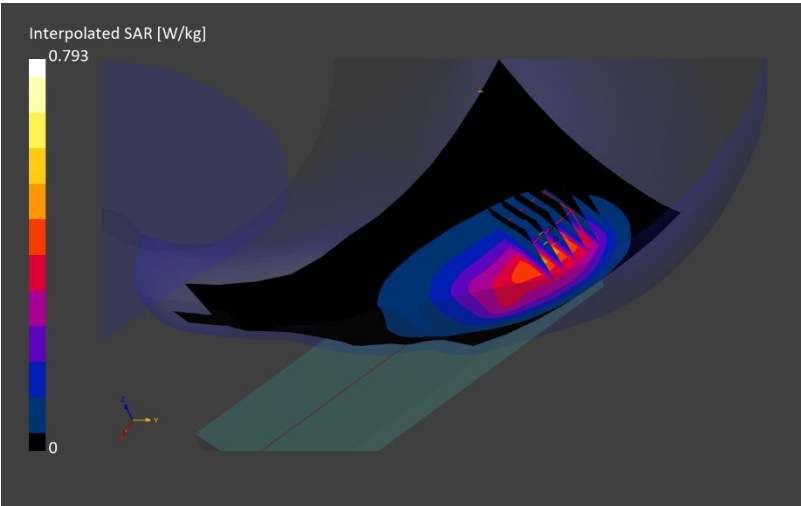

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n26	NR FR1 FDD: DFT-s-OFDM, 20.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 10939	E	Ch. 166300	831.500	9.05, 9.79,8.99

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	24.1	22.1	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	0.909	43.1	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.89
Power Drift [dB]	0.08
Peak SAR (Extrapolated) [W/kg]	2.10
M2/M1 [%]	73.8
Dist 3dB Peak [mm]	8.5

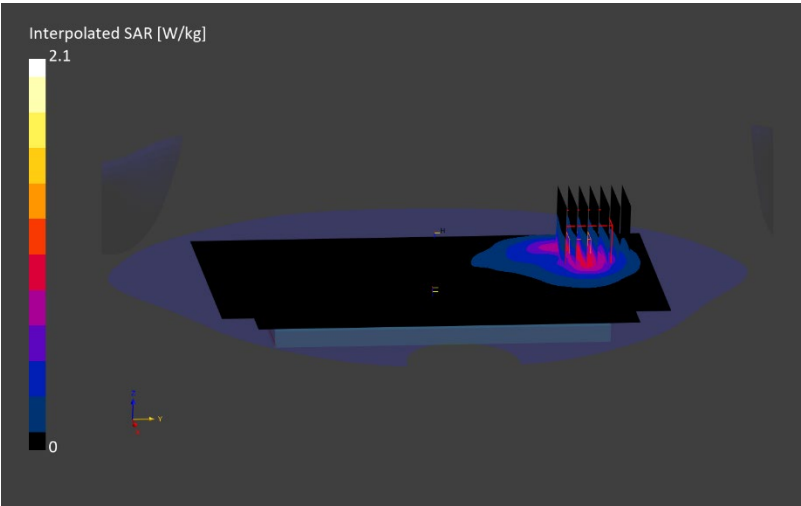

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, TILT, 0.00	NR Band n70	NR FR1 FDD: DFT-s-OFDM, 15.0 MHz, QPSK, 15 kHz, 1 RB (Mid), 10930	G	Ch. 340500	1702.500	7.51, 7.49,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-18	22.6	20.5	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.26	39.7	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.558
Power Drift [dB]	-0.1
Peak SAR (Extrapolated) [W/kg]	0.955
M2/M1 [%]	86.6
Dist 3dB Peak [mm]	7.3

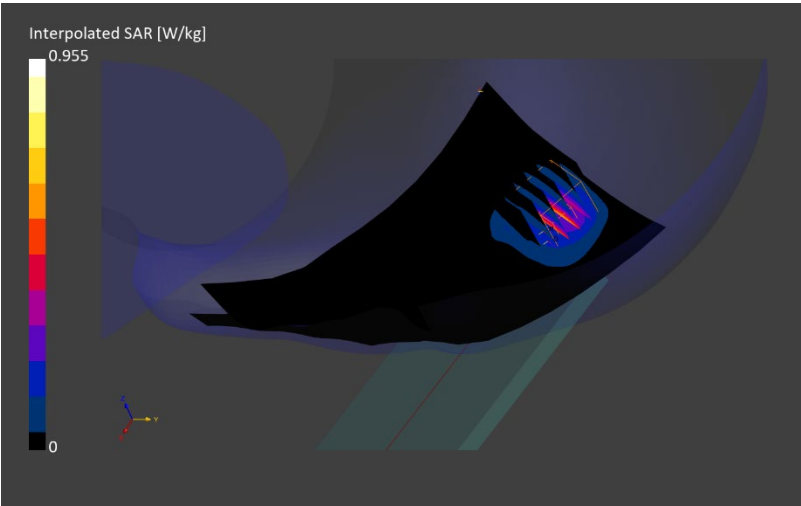

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n70	NR FR1 FDD: DFT-s-OFDM, 15.0 MHz, QPSK, 15 kHz, 1 RB (High), 10930	G	Ch. 340500	1702.500	7.51, 7.49,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-11	21.7	20.7	17.0.2.6775	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.27	38.6	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	39.2 x 39.2 x 31.2
Grid Steps [mm]	15.0 x 15.0	5.6 x 5.6 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.676
Power Drift [dB]	-0.01
Peak SAR (Extrapolated) [W/kg]	1.36
M2/M1 [%]	80.1
Dist 3dB Peak [mm]	5.8

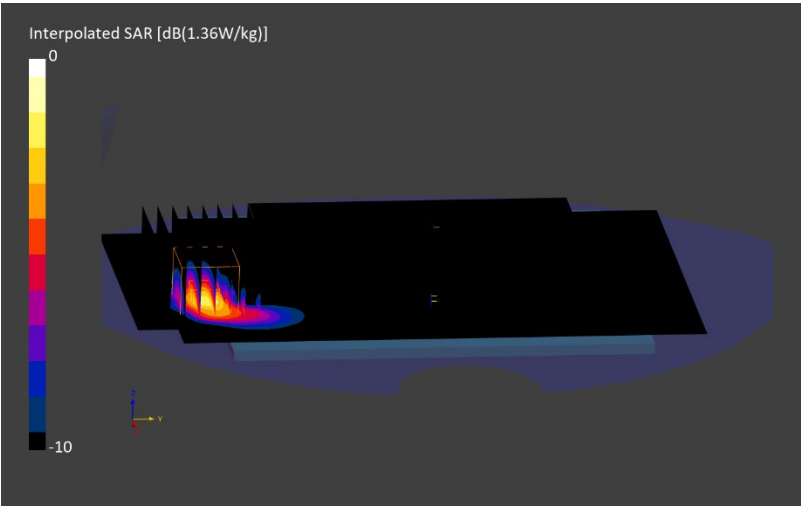

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	NR Band n66	NR FR1 FDD: DFT-s-OFDM, 45.0 MHz, QPSK, 15 kHz, 1 RB (High), 1000334	G	Ch. 349000	1745.000	7.78, 7.65,7.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-06	22.7	21.1	17.0.2.6775	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.30	39.0	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.678
Power Drift [dB]	-0.11
Peak SAR (Extrapolated) [W/kg]	1.17
M2/M1 [%]	85.0
Dist 3dB Peak [mm]	7.6

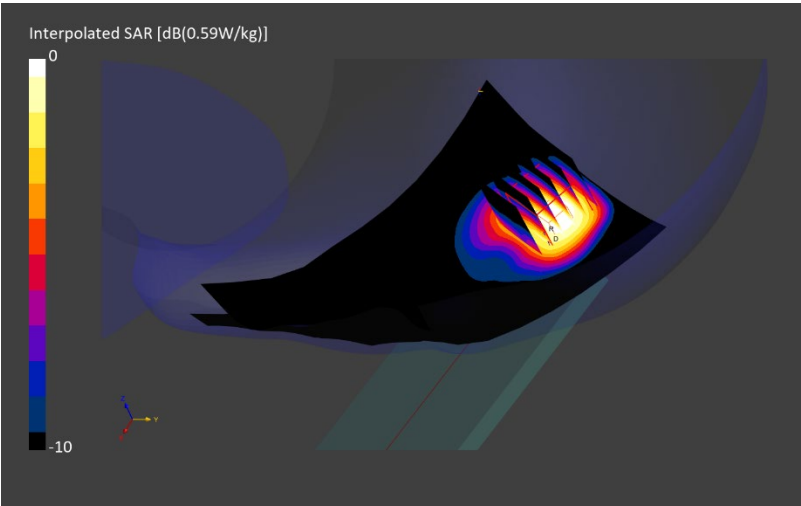

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n66	NR FR1 FDD: DFT-s-OFDM, 45.0 MHz, QPSK, 15 kHz, 100% RB (Mid), 1000336	G	Ch. 349000	1745.000	7.78, 7.65,7.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-06	22.7	21.1	17.0.2.6775	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.30	39.0	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.67
Power Drift [dB]	0.03
Peak SAR (Extrapolated) [W/kg]	1.30
M2/M1 [%]	81.7
Dist 3dB Peak [mm]	7.3

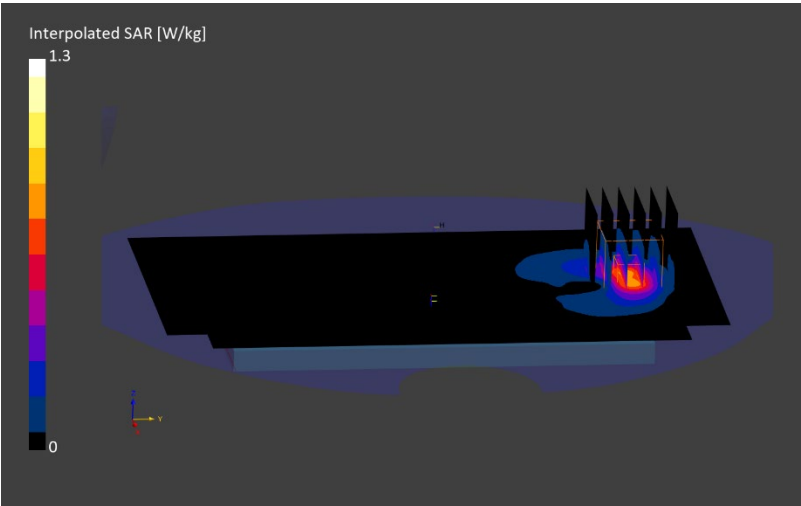

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, TILT, 0.00	NR Band n25	NR FR1 FDD: DFT-s-OFDM, 40.0 MHz, QPSK, 15 kHz, 100% RB, 10950	G	Ch. 376500	1882.500	7.19, 7.17,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-16	22.2	19.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.35	38.1	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.811
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.47
M2/M1 [%]	82.7
Dist 3dB Peak [mm]	7.3

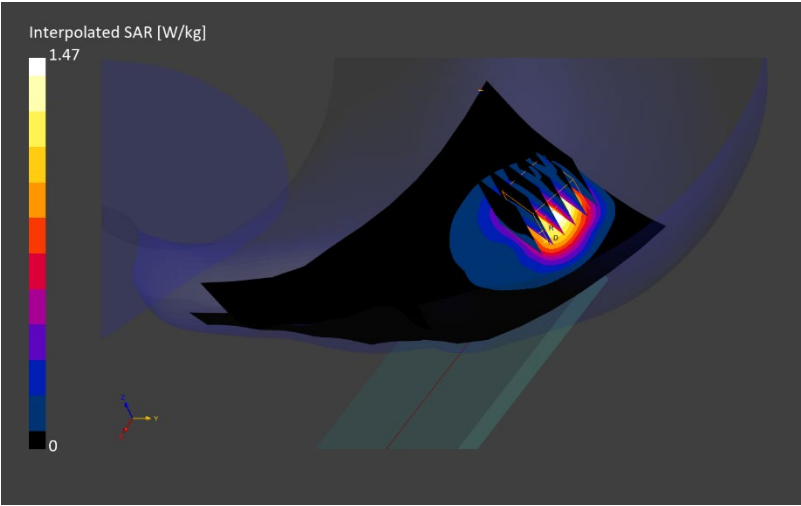

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0250M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n25	NR FR1 FDD: DFT-s-OFDM, 40.0 MHz, QPSK, 15 kHz, 50% RB (High), 10942	G	Ch. 376500	1882.500	7.59, 7.46,7.22

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-06	22.7	21.1	17.0.2.6775	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.38	38.9	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.811
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.68
M2/M1 [%]	80.7
Dist 3dB Peak [mm]	7.2

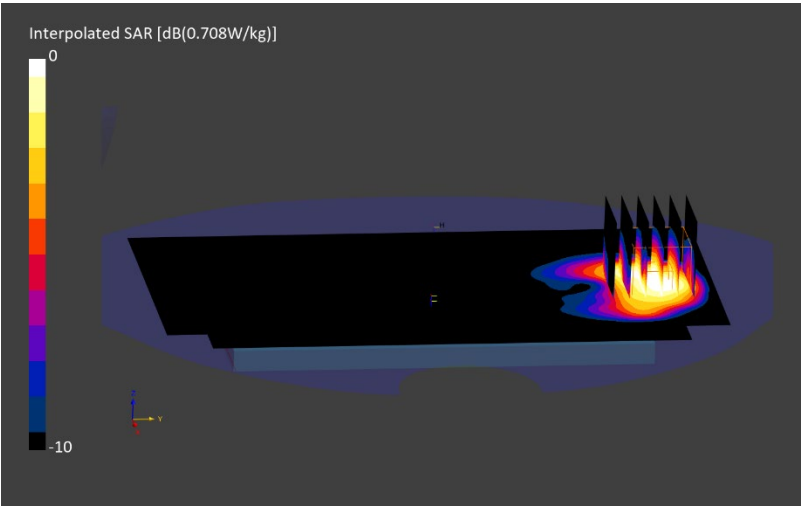

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, TILT, 0.00	NR Band n30	NR FR1 FDD: DFT-s-OFDM, 10.0 MHz, QPSK, 15 kHz, 1 RB (High), 10929	G	Ch. 462000	2310.000	7.11, 7.69,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-06	22.2	20.8	17.0.2.6775	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.71	39.6	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.443
Power Drift [dB]	0.03
Peak SAR (Extrapolated) [W/kg]	0.939
M2/M1 [%]	79.4
Dist 3dB Peak [mm]	6.1

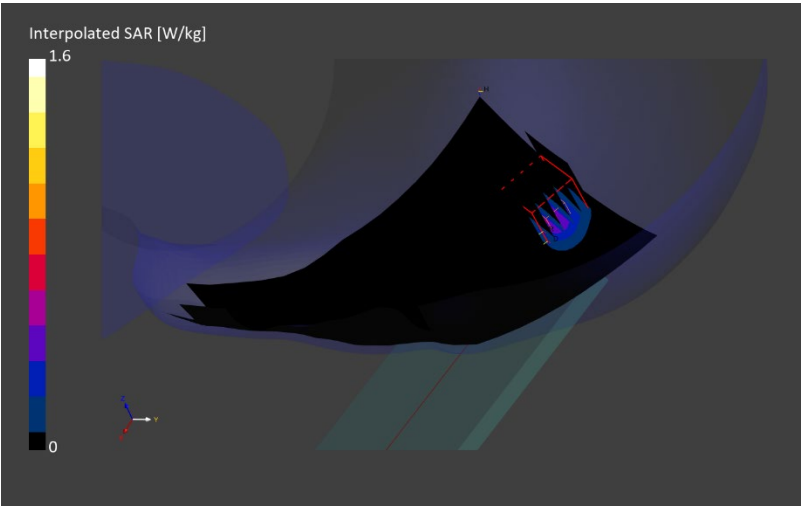

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n30	NR FR1 FDD: DFT-s-OFDM, 10.0 MHz, QPSK, 15 kHz, 50% RB (Low), 10937	G	Ch. 462000	2310.000	7.11, 7.69,7.07

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-04	22.4	20.4	17.0.2.6775	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.71	40.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.64
Power Drift [dB]	-0.09
Peak SAR (Extrapolated) [W/kg]	1.47
M2/M1 [%]	77.5
Dist 3dB Peak [mm]	6.0

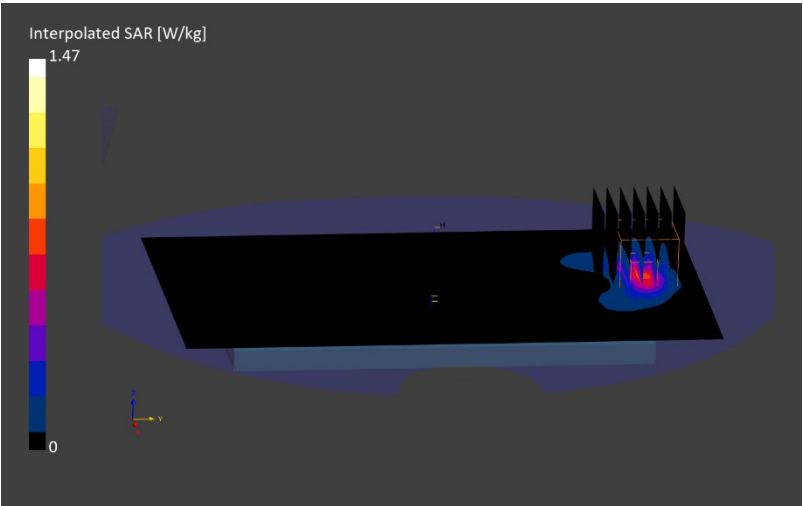

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0247M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	NR Band n7	NR FR1 FDD: DFT-s-OFDM, 50.0 MHz, QPSK, 15 kHz, 50% RB (Low), 10943	G	Ch. 507000	2535.000	7.07, 6.81,6.79

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-09	23.9	21.9	17.0.2.6775	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.83	37.1	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.419
Power Drift [dB]	0.03
Peak SAR (Extrapolated) [W/kg]	0.931
M2/M1 [%]	80.0
Dist 3dB Peak [mm]	6.1

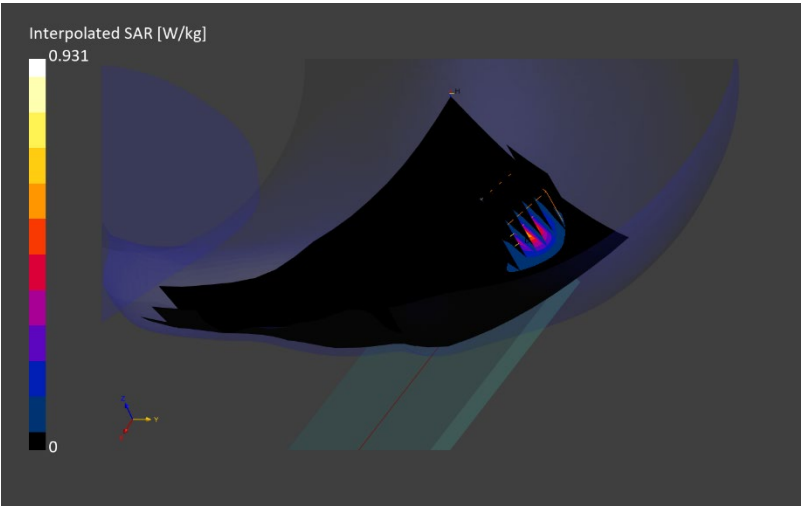

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n7	NR FR1 FDD: DFT-s-OFDM, 50.0 MHz, QPSK, 15 kHz, 50% RB (Mid), 10943	G	Ch. 507000	2535.000	6.82, 7.38,6.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	22.8	21.7	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.79	37.2	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.583
Power Drift [dB]	0.06
Peak SAR (Extrapolated) [W/kg]	1.30
M2/M1 [%]	78.6
Dist 3dB Peak [mm]	7.0

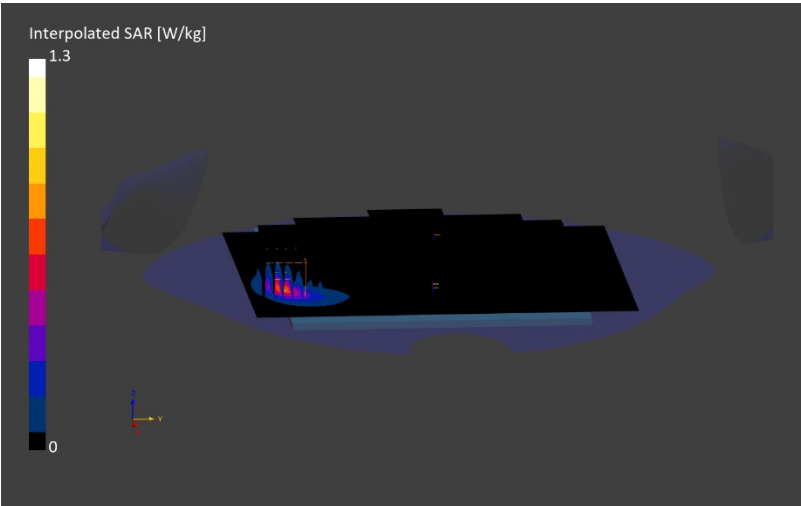

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0204M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Left Head, TILT, 0.00	NR Band n41 PC2 Default	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 1 RB (Low), 10866	G	Ch. 518598	2592.990	6.82, 7.38,6.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	22.8	21.7	17.0.4.7034	Twin-SAM V8.0 – 2165	Head Simulating Liquid	1.84	37.1	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.835
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	1.82
M2/M1 [%]	80.1
Dist 3dB Peak [mm]	6.1

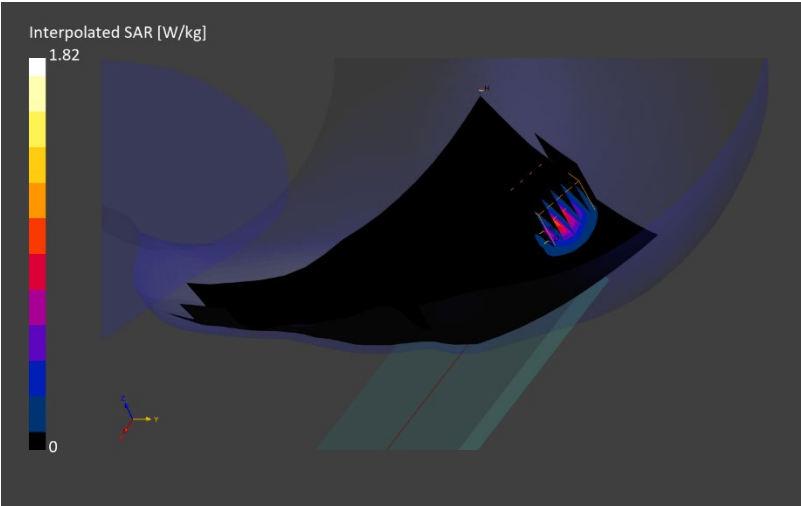

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot NR Band n41 PC1.5 UL-MIMO	Flat, BACK, 5.00	Ch. 518598	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 1 RB (Low), 10866	G in MIMO	1 RB	2592.990	7.12, 7.0,6.77

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-30	20.3	20	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.90	39.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	200.0 x 220.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.691
Power Drift [dB]	-0.01
Peak SAR (Extrapolated) [W/kg]	1.51
M2/M1 [%]	78.6
Dist 3dB Peak [mm]	6.8

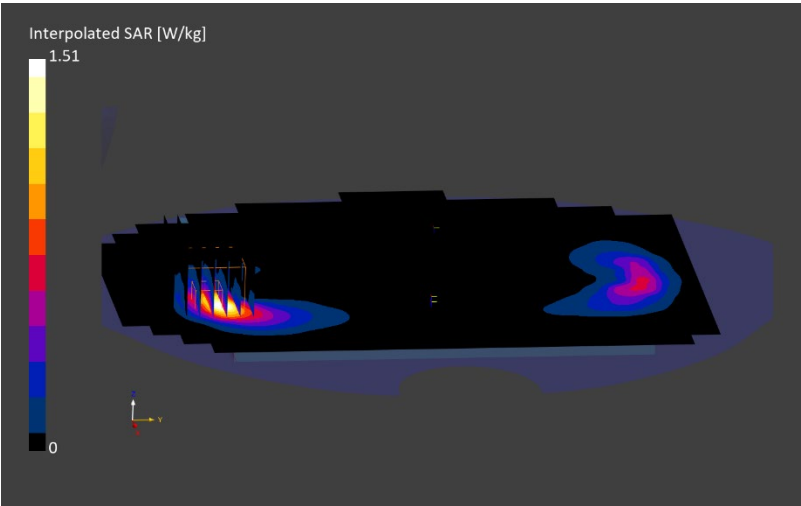

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0243M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	RightHead, CHEEK, 0.00	NR Band n48 Default	NR FR1 TDD: DFT-s-OFDM, 40.0 MHz, QPSK, 30 kHz, 100.0% DC, 1 RB (Low), 10903	F	Ch. 645332	3679.975	6.2, 5.97,5.95

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-08	22.1	21.3	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	2.93	39.6	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.678
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.72
M2/M1 [%]	75.7
Dist 3dB Peak [mm]	7.1

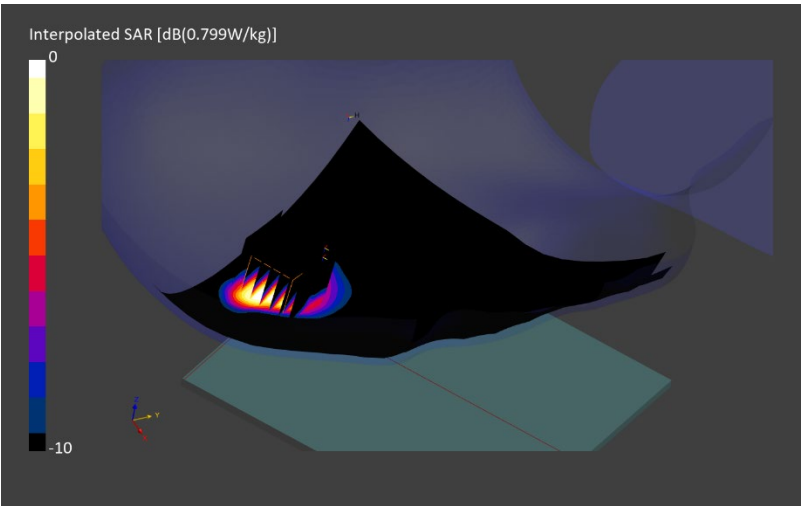

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n48	NR FR1 TDD: DFT-s-OFDM, 40.0 MHz, QPSK, 30 kHz, 100.0% DC, 1 RB (Low), 10903	F	Ch. 638000	3569.995	6.53, 6.32,6.64

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-11	21.9	21.7	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	2.80	38.1	EX3DV4 – SN7971, 2026-01-13	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.654
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.82
M2/M1 [%]	73.6
Dist 3dB Peak [mm]	6.1

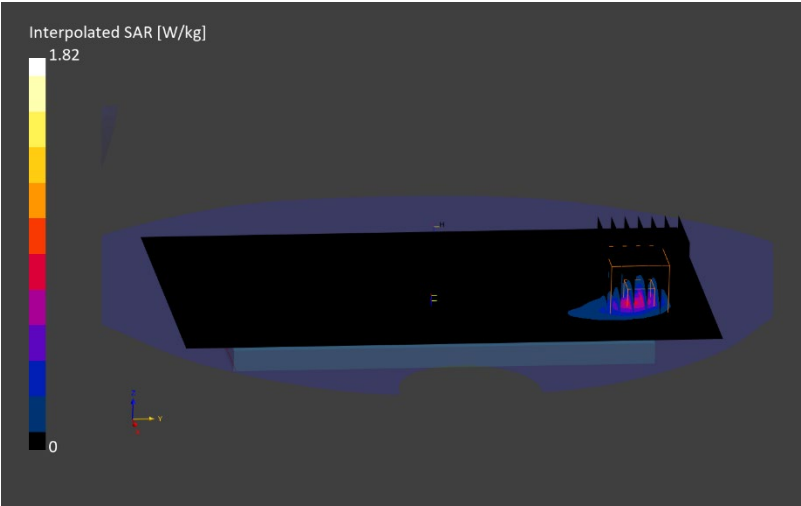

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Right Head, TILT, 0.00	NR Band n77 PC2 Default	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 1 RB (High), 10866	F	Ch. 662000	3930.000	6.4, 6.2,6.51

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-13	22.6	21.5	17.0.4.7034	Twin-SAM V8.0 – 2233	Head Simulating Liquid	3.06	38.6	EX3DV4 – SN7971, 2026-01-13	DAE4ip Sn1934, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.718
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	1.99
M2/M1 [%]	73.0
Dist 3dB Peak [mm]	7.1

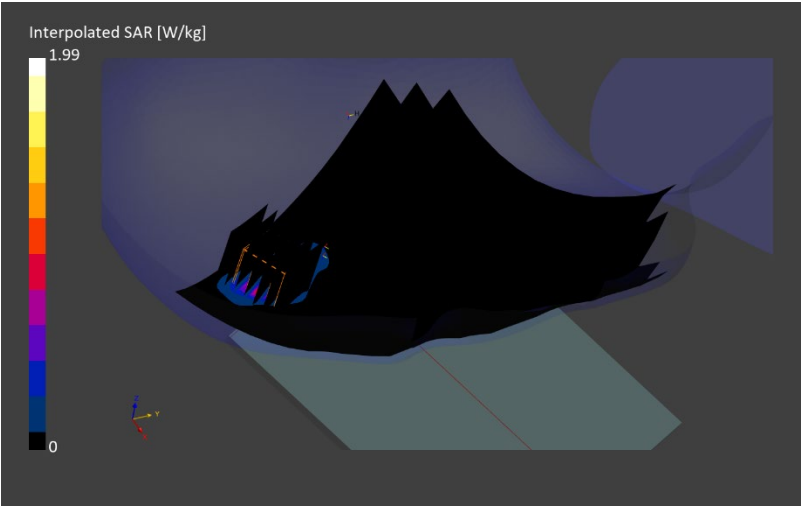

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0206M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	NR Band n77	NR FR1 TDD: DFT-s-OFDM, 100.0 MHz, QPSK, 30 kHz, 100.0% DC, 100% RB, 10868	F in MIMO	Ch. 662000	3930.000	6.18, 5.95,5.93

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-08	22.1	21.3	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	3.18	39.2	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	35.0 x 35.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.854
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	2.54
M2/M1 [%]	71.4
Dist 3dB Peak [mm]	6.4

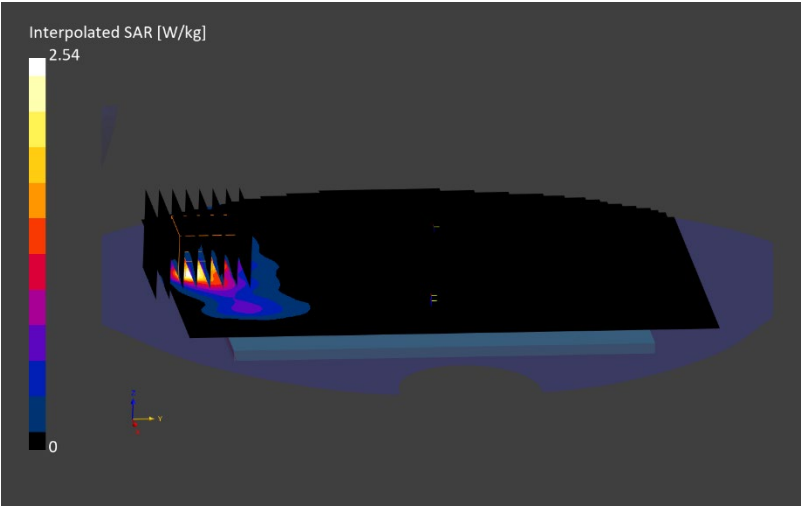

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0222M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, EDGE TOP, 0.00	NTN L-Band Band 255	Custom: NTN 1 RB, 1	G	Ch. 261505	1626.600	7.94, 7.8,7.55

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-08	22.1	20.6	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.23	40.4	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 180.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	4.0 x 15.0	3.0 x 3.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	1.82
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	11.7
M2/M1 [%]	74.6
Dist 3dB Peak [mm]	4.2

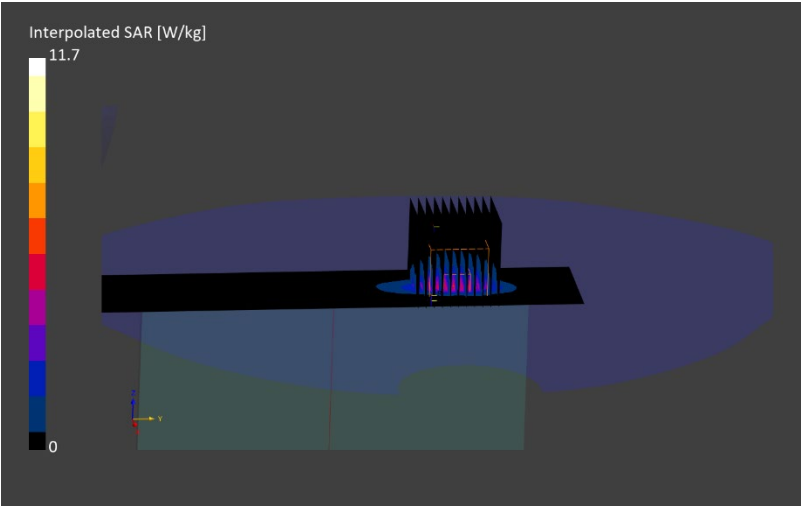

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0252M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	2.4 GHz WIFI	WiFi (802.11b): DSSS, DBPSK, 1.0 Mbps, 99.9% DC, 10415	MIMO	Ch. 11	2462.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-23	20.5	19.9	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.75	37.7	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.543
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.18
M2/M1 [%]	81.9
Dist 3dB Peak [mm]	5.1

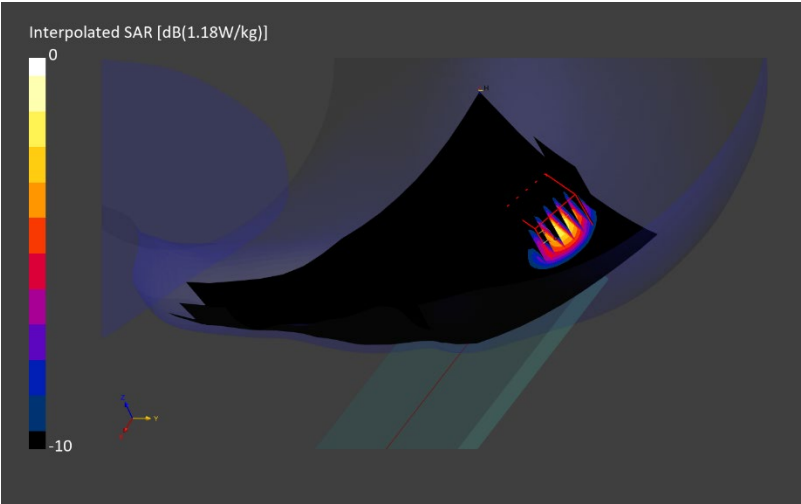

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0252M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	2.4 GHz WIFI	WiFi (802.11b): DSSS, DBPSK, 1.0 Mbps, 99.9% DC, 10415	MIMO	Ch. 11	2462.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	22.5	20.7	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.72	37.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.709
Power Drift [dB]	-0.08
Peak SAR (Extrapolated) [W/kg]	1.39
M2/M1 [%]	83.3
Dist 3dB Peak [mm]	9.3

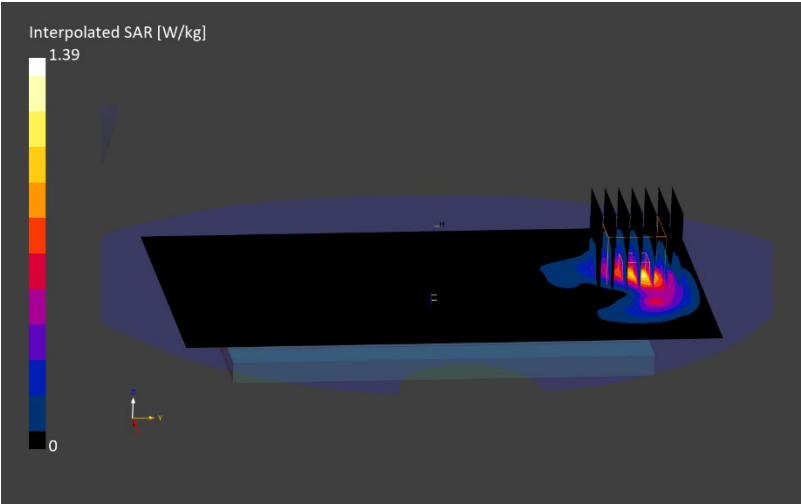

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 90.0% DC, 10626	MIMO	Ch. 171	5855.000	4.69, 4.67,4.41

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	22.1	21.1	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	5.09	32.3	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.407
Power Drift [dB]	0.13
Peak SAR (Extrapolated) [W/kg]	2.46
M2/M1 [%]	57.5
Dist 3dB Peak [mm]	7.2

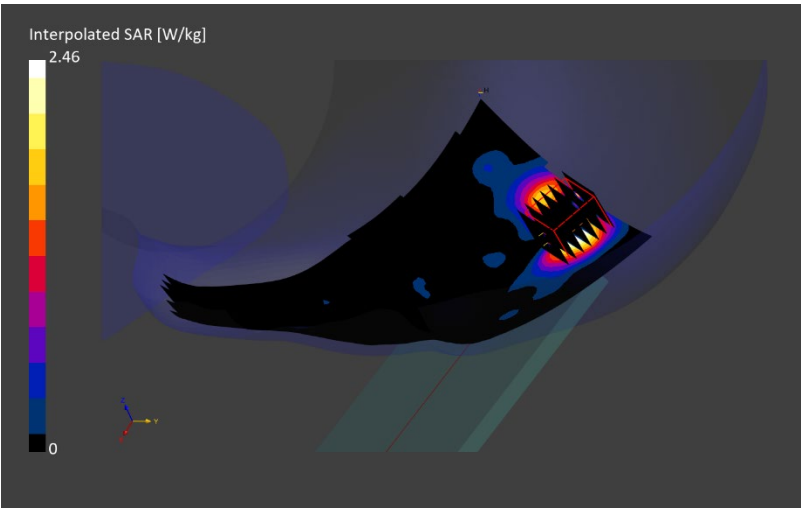

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, FRONT, 5.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 90.0% DC, 1 0626	MIMO	Ch. 122	5610.000	4.73, 4.72,4.45

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	22.1	21.1	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	4.81	32.7	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.598
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	2.58
M2/M1 [%]	58.5
Dist 3dB Peak [mm]	6.9

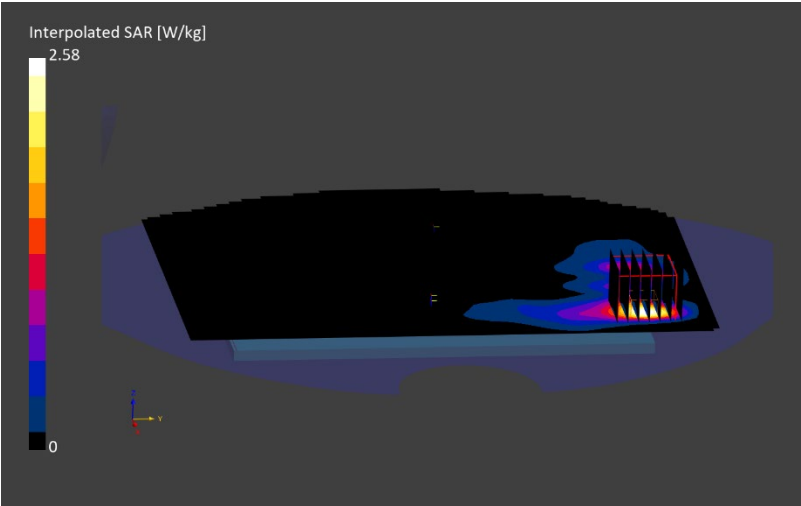

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Hotspot	Flat, FRONT, 5.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 90.0% DC, 1 0626	MIMO	Ch. 155	5775.000	4.8, 4.78,4.52

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	22.1	21.1	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	5.00	32.4	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	15.0 x 15.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.57
Power Drift [dB]	-0.02
Peak SAR (Extrapolated) [W/kg]	2.65
M2/M1 [%]	55.8
Dist 3dB Peak [mm]	5.8

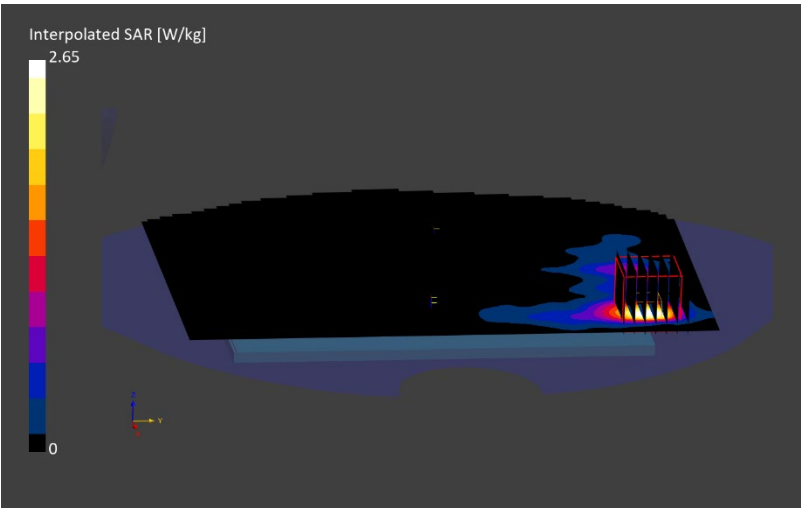

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, FRONT, 0.00	5 GHz WIFI	WiFi (802.11ac): VHT80, MCS0 (29.3 Mbps), 90.0% DC, 10626	MIMO	Ch. 171	5855.000	4.69, 4.67,4.41

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	22.1	21.1	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	5.09	32.3	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 210.0	28.8 x 32.4 x 22.9
Grid Steps [mm]	15.0 x 15.0	3.6 x 3.6 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	1.04
Power Drift [dB]	0.07
Peak SAR (Extrapolated) [W/kg]	22.8
M2/M1 [%]	57.9
Dist 3dB Peak [mm]	4.4

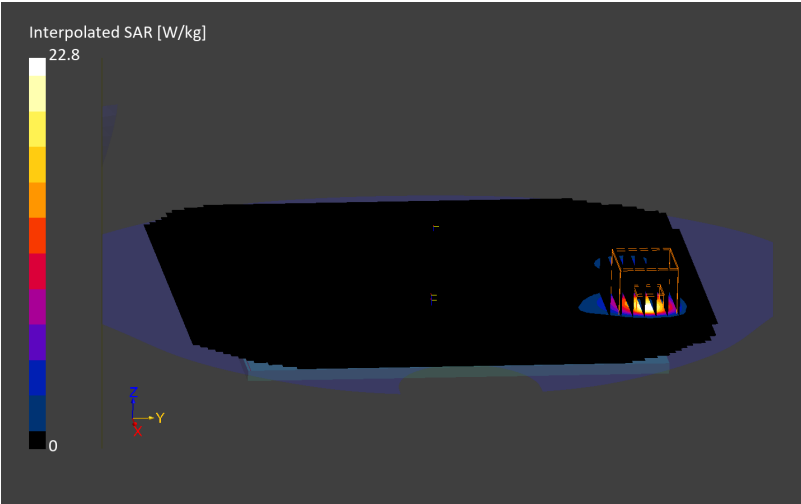

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	LeftHead, TILT, 0.00	6 GHz WIFI	WiFi (802.11ax): HE160, MCS0 (72.0 Mbps), 98.0% DC, 10755	MIMO	Ch. 207	6985.000	5.08, 5.07,4.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-01	22.4	21.7	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	6.69	33.4	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 187.0	23.8 x 23.8 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.678
Power Drift [dB]	0.13
Peak SAR (Extrapolated) [W/kg]	3.45
M2/M1 [%]	49.6
Dist 3dB Peak [mm]	6.3

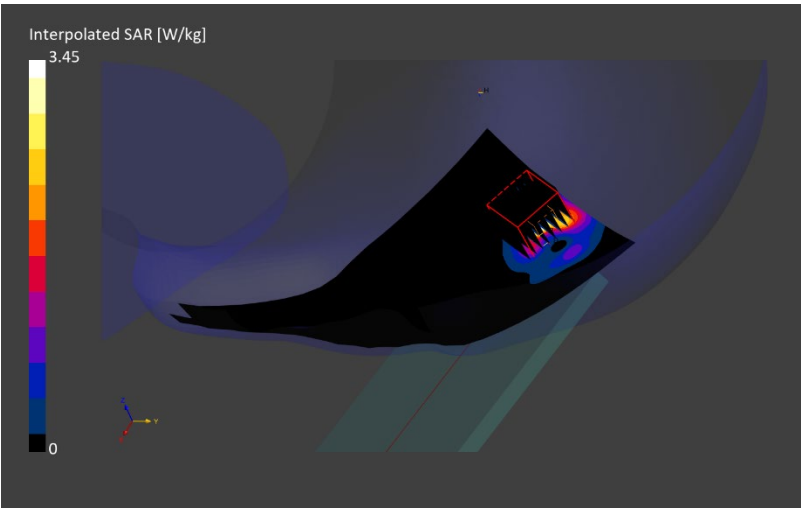

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn	Flat, FRONT, 5.00	6 GHz WIFI	WiFi (802.11ax): ET80, MCS0 (36.0 Mbps), 100.0% DC, 10731	MIMO	Ch. 215	7025.000	5.08, 5.07,4.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-25	22.2	21.9	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	6.86	34.9	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 195.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	7.5 x 7.5	3.0 x 3.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.337
Power Drift [dB]	0.15
Peak SAR (Extrapolated) [W/kg]	1.92
M2/M1 [%]	50.2
Dist 3dB Peak [mm]	5.0

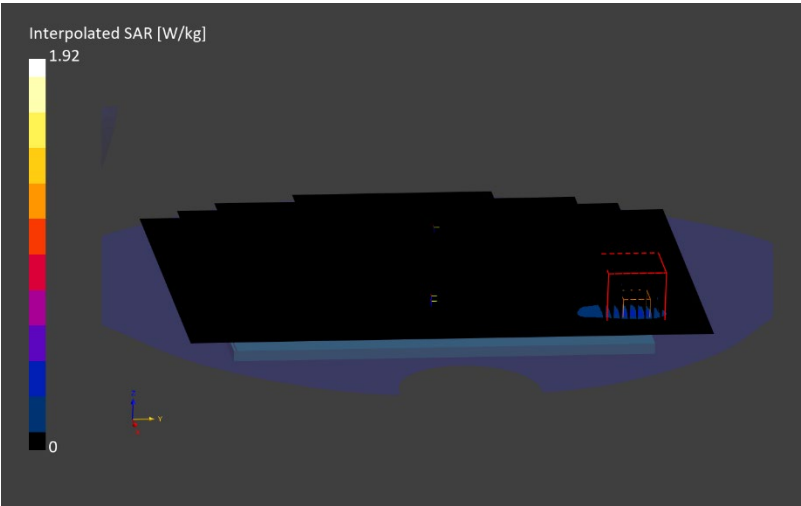

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0502M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, FRONT, 0.00	6 GHz WIFI	WiFi (802.11ax): ET80, MCS0 (36.0 Mbps), 100.0% DC, 10731	MIMO	Ch. 7	5985.000	5.08, 5.07,4.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-25	22.2	21.9	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	5.57	36.6	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	23.2 x 23.2 x 22.9
Grid Steps [mm]	10.0 x 10.0	2.9 x 2.9 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.514
Power Drift [dB]	0.06
Peak SAR (Extrapolated) [W/kg]	11.8
M2/M1 [%]	57.2
Dist 3dB Peak [mm]	4.3

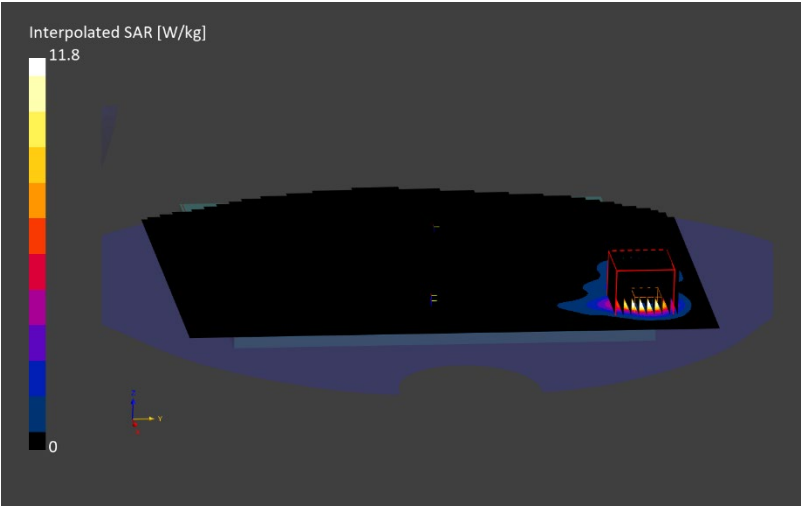

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0252M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	RightHead, CHEEK, 0.00	2.4 GHz Bluetooth LE	Bluetooth: LE, Test, GFSK, 10670	F	Ch. 37	2402.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-20	22.5	20.7	17.0.4.7034	Twin-SAM V8.0 - 2238	Head Simulating Liquid	1.67	37.1	EX3DV4 - SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	40.0 x 40.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.705
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	1.48
M2/M1 [%]	83.2
Dist 3dB Peak [mm]	7.3

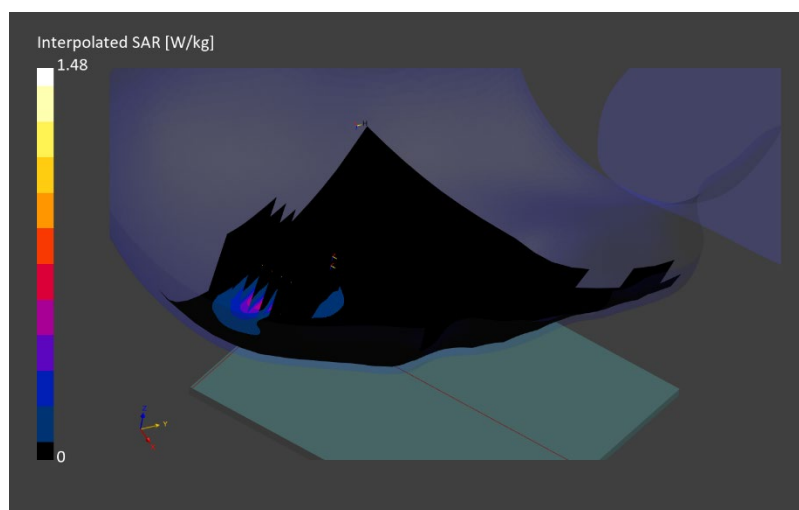

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0252M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Body-worn/Hotspot	Flat, BACK, 5.00	2.4 GHz Bluetooth LE	Bluetooth: LE, Test, GFSK, 10670	F	Ch. 39	2480.000	7.22, 7.1,6.87

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-16	22.8	21.4	17.0.4.7034	Twin-SAM V8.0 – 2238	Head Simulating Liquid	1.83	41.1	EX3DV4 – SN7969, 2026-01-13	DAE4ip Sn1933, 2026-01-07

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 200.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.674
Power Drift [dB]	0.01
Peak SAR (Extrapolated) [W/kg]	1.49
M2/M1 [%]	79.6
Dist 3dB Peak [mm]	6.1

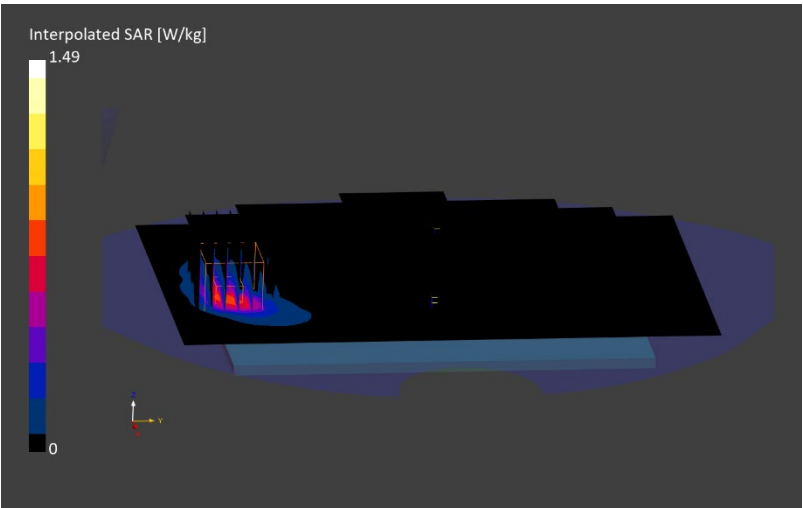

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0252M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, EDGE TOP, 0.00	2.4 GHz Bluetooth LE	Bluetooth: LE, Test, GFSK, 10670	F	Ch. 37	2402.000	6.94, 6.68,6.66

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-26	21.8	20.2	17.0.4.7034	Twin-SAM V8.0 – 2164	Head Simulating Liquid	1.73	37.8	EX3DV4 – SN7853, 2025-11-07	DAE4ip Sn1844, 2025-11-05

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 180.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	4.0 x 10.0	3.0 x 3.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	1.61
Power Drift [dB]	0.02
Peak SAR (Extrapolated) [W/kg]	19.8
M2/M1 [%]	62.2
Dist 3dB Peak [mm]	4.1

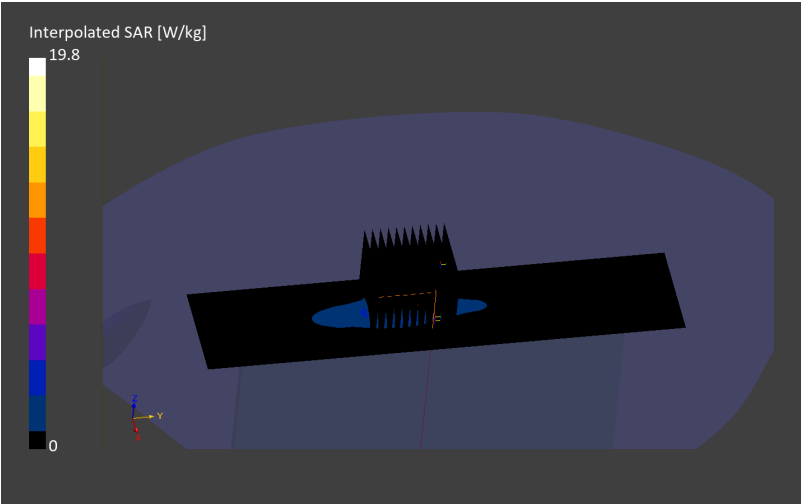

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Open; SN: 0054M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, BACK, 0.00	UWB	Custom: UWB, 2	f'	Ch. 5	6489.600	5.08, 5.07,4.78

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-04-14	23	22.3	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	6.36	35.4	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	187.0 x 187.0	23.8 x 23.8 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.4
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.047
Power Drift [dB]	0.17
Peak SAR (Extrapolated) [W/kg]	2.11
M2/M1 [%]	N/A
Dist 3dB Peak [mm]	0.7

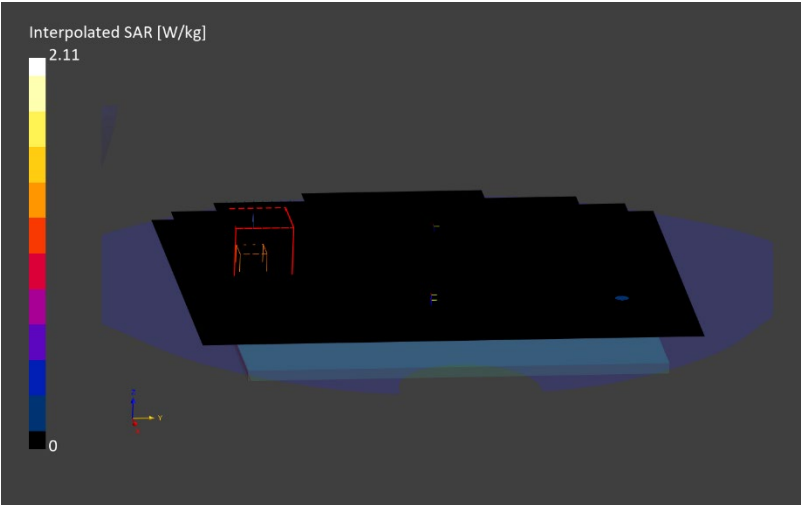

RF SAFETY LABORATORY

DUT: A3LSMF976U Folder Closed; SN: 0215M

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Phablet	Flat, BACK, 0.00	NFC	CW, 0	NFC	N/A	13.600	14.3, 16.56,15.27

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-03-15	22.6	20.3	16.4.0.5005	ELI V8.0 – 2216	Head Simulating Liquid	0.697	53.3	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	36.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.006
Power Drift [dB]	0.06
Peak SAR (Extrapolated) [W/kg]	0.095
M2/M1 [%]	57.3
Dist 3dB Peak [mm]	4.8

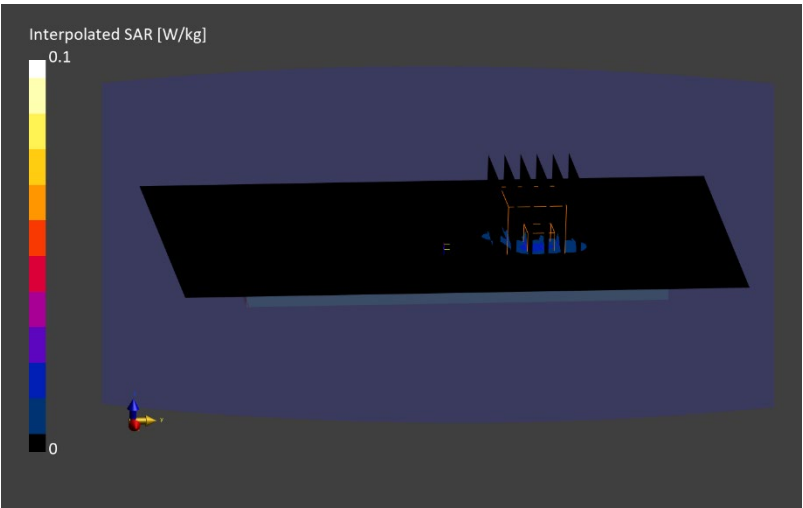

RF SAFETY LABORATORY

DUT: A3LSMF976U; SN: 0256M

Verification Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal	Ant.	Channel Number	Frequency [MHz]
Open	FRONT, 2.00	6 GHz WIFI	WLAN	MIMO (F&E)	7	5985.0

Test Setup


Test Date	Measurement SW	Probe, Cal. Date	DAE, Cal. Date
2026-04-17	3.2.2.2358	EUmmWV4 - SN9690_F1-55GHz - 2025-09-17	DAE4ip Sn1839 - 2025-09-15

Scans Setup

Grid Extents [mm]	Grid Steps [lambda]	Sensor Surface Distance [mm]
40.0x40.0	0.04075095875871267x0.04075095875871267	2.0

Measurement Results

Averaging Area [cm²]	Power Drift [dB]	E _{max} [V/m]	psPD _n + [W/m²]	psPD _{tot} + [W/m²]
4.00	0.01	84.9	2.58	5.26

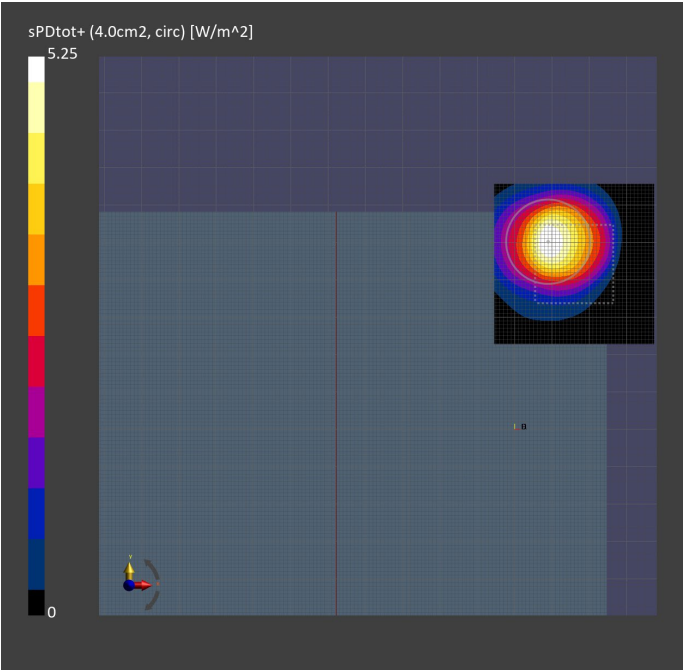

RF SAFETY LABORATORY

DUT: A3LSMF976U; SN: 0054M

Verification Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal	Ant.	Channel Number	Frequency [MHz]
Phablet	LEFT, 2.00	UWB	CW	F	6489600	6489.6

Test Setup

Test Date	Measurement SW	Probe, Cal. Date	DAE, Cal. Date
2026-04-17	3.2.2.2358	EUmmWV4 - SN9690_F1-55GHz - 2025-09-17	DAE4ip Sn1839 - 2025-09-15

Scans Setup

Grid Extents [mm]	Grid Steps [lambda]	Sensor Surface Distance [mm]
40.0x40.0	0.04418670375280564x0.04418670375280564	2.0

Measurement Results

Averaging Area [cm²]	Power Drift [dB]	E _{max} [V/m]	psPDn+ [W/m²]	psPDtot+ [W/m²]
4.00	-0.13	14.9	0.298	0.420

