

TEST REPORT

Report Number: R16238088-E8a

Applicant : Samsung Electronics Co Ltd
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

Model(s) : SM-F976U, SM-F976U1

FCC ID : A3LSMF976U

EUT Description : GSM/WCDMA/LTE/NR/SCS/NTN Phone + BT/BLE, DTS/UNII
a/b/g/n/ac/ax/be, UWB, WPT and NFC

Test Standard(s) : FCC 47 CFR PART 2, PART 27

Date Of Issue:
2026-04-29

Prepared by:
UL LLC
12 Laboratory Dr.
Durham, NC 27713 USA
TEL: (919) 549-1400



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2026-04-29	Initial Review	Noah Bennett

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. SUMMARY OF TEST RESULTS	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES	7
5.3. MEASUREMENT UNCERTAINTY	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST	8
6.1. DESCRIPTION OF EUT	8
6.2. MAXIMUM OUTPUT POWER	8
6.3. WORST-CASE CONFIGURATION AND MODE	9
6.4. DESCRIPTION OF TEST SETUP	10
7. TEST AND MEASUREMENT EQUIPMENT	11
8. CONDUCTED TEST RESULTS	15
8.1. OCCUPIED BANDWIDTH	15
8.1.1. 5G NR n70	16
8.2. EMISSION MASK AND ADJACENT CHANNEL POWER	17
8.2.1. 5G NR n70	18
8.3. OUT OF BAND EMISSIONS	20
8.3.1. 5G NR n70	21
8.4. FREQUENCY STABILITY	22
8.4.1. 5G NR n70 (BPSK 15MHz BANDWIDTH)	23
8.5. PEAK-TO-AVERAGE POWER RATIO	24
8.5.1. 5G NR n70	24
9. RADIATED TEST RESULTS	25
9.1.1. 5GNR n70	27
9.2. FIELD STRENGTH OF SPURIOUS RADIATION	29
9.2.1. 5G NR n70	32

10. **SETUP PHOTOS**.....**33**

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Samsung Electronics Co Ltd
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

EUT DESCRIPTION: GSM/WCDMA/LTE/NR/SCS/NTN Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be,
UWB, WPT and NFC

SERIAL NUMBERS: ZBK0208M, ZBD0487M, ZAT0031M, ZBK0219M, ZBK0213M, ZAQ0548M,
ZB30741M

SAMPLE RECEIVE DATE: 2026-03-09

DATE TESTED: 2026-03-09 thru 2026-04-14

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 2, Part 27	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.

Approved & Released
For UL LLC By:

Prepared By:



Bob Delisi
Principle Engineer
Consumer, Medical and IT Segment
UL LLC



Noah Bennett
Engineer Project Associate
Consumer, Medical and IT Segment
UL LLC

2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact on the validity of results. UL LLC is only responsible for correctly integrating customer-provided data with measurements performed by UL LLC.

Requirement Description	Requirement Clause Number (FCC)	Result	Remarks
Equivalent Isotropic Radiated Power	27.50 (d) (4)	Complies	-
Occupied Bandwidth	2.1049	Complies	-
Band Edge and Emission Mask	2.1051, 27.53 (h)	Complies	-
Out of Band Emissions	2.1051, 27.53 (h)	Complies	-
Frequency Stability	2.1055, 27.54	Complies	-
Peak-to-Average Ratio	27.50 (d) (5)	Complies	-
Field Strength of Spurious Radiation	2.1053, 27.53 (h)	Complies	-

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following. FCC published lists of [measurement procedures](#) for compliance testing.

- ANSI C63.26:2015
- FCC 47 CFR Part 2, Part 27
- [FCC KDB 971168 D01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01](#): Determining ERP and EIRP

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A.	US0067	27265	825374

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/NR/SCS/NTN Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, UWB, WPT and NFC.

Model differences:

Representative Model	Difference	Derivative Model
		SM-F976U1
SM-F976U	Hardware	Same as SM-F976U
	Software	Different UI

The EUT supports the following LTE and 5G NR Bands and their antenna configurations:

Mode and Bands	Config 0	Config 1
5G NR n70	B	G

6.2. MAXIMUM OUTPUT POWER.

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.2

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the tables below contain the highest of all configurations average conducted and peak EIRP output powers as follows:

5G NR n70

Part 27								
EIRP Limit (W)		1.00						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	EIRP Average (dBm)	EIRP Average (W)	99% BW (MHz)	99% BW (kHz)	Emission Designator
5.0	BPSK	1697.5	1707.5	22.87	0.194	4.5156	4515.6	4M52G7W
	16QAM			21.86	0.153	4.523	4523	4M52D7W
10.0	BPSK	1700.0	1705.0	22.83	0.192	8.9804	8980	8M98G7W
	16QAM			22.82	0.191	9.0104	9010	9M01D7W
15.0	BPSK	1702.5	1702.5	22.73	0.187	13.486	13486	13M5G7W
	16QAM			21.68	0.147	13.546	13546	13M5D7W

6.3. WORST-CASE CONFIGURATION AND MODE

This report covers the following technologies:

- 5G NR n70

For 5G NRs, conducted spurious emission tests were conducted on wider bandwidth with inner 1RB since this is the worst bandwidth and the highest output power.

BPSK modulation applied only for 5G NR frequencies and has the same tune up power as QPSK modulations.

The DFT-s-OFDM and CP-OFDM waveforms were investigated, and DFT-s-OFDM was found to be the worst case.

The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. Then, QPSK and BPSK were observed as the worst mode to LTE bands and 5G NR bands respectively and set for all conducted and radiated. Output power measurements were measured on BPSK, QPSK, 16QAM, 64QAM, and 256QAM modulations. For testing purposes emissions on Section 9 were measured while QPSK/BPSK was set at or above target power for all bands. Conducted tests were performed on the worst-case antenna port because it has the highest conducted power. The worst-case antenna port is shown in the table below.

5G NR Bands	Worst case Antenna Port
5G NR 70	Ant B

The EUT was investigated in three orthogonal orientations X/Y/Z and with the EUT in an open / folded / closed state on all available antennas to determine the worst-case orientation. The following table exhibits the worst-case orientation. The full tests of the EUT have made upon the orientations shown in the table below.

Frequency Range	ANT B	ANT G
1695 – 1710 MHz	Open, X	Open, X

Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found with less than 20dB of margin from 9kHz to 30MHz, 30MHz-1GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GHz WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

6.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Power Adapter	Sony	XQZ-UC11-010-236-21	NA	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB-C	1	USB-C	Shielded	<3m	Phone to power adapter

TEST SETUP

The EUT was connected to a base station simulator and set to transmit at max power for 5G NR testing

SETUP DIAGRAM

Please see R16238088-EP1 for Setup Diagrams and Setup Photos.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

NOTES:

- * Testing is completed before equipment expiration date.
- **Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	0.009-30MHz				
8939	Passive Loop Antenna	EMCO	EM-6872	2024-11-18	2026-11-18
8940	Passive Loop Antenna	EMCO	EM-6871	2024-11-18	2026-11-18
	30-1000 MHz				
90628	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2026-02-09	2028-02-09
	1-18 GHz				
206211	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2024-04-09	2026-04-30
	18-40 GHz				
204704	Horn Antenna, 18-26.5GHz	Com Power	AH-826	2025-07-15	2027-07-15
204705	Horn Antenna, 26-40GHz	Com Power	AH-640	2025-11-19	2027-11-19
	Gain-Loss Chains				
207638	Gain-loss string: 0.009-30MHz	Various	Various	2025-06-13	2026-06-13
207639	Gain-loss string: 25-1000MHz	Various	Various	2025-06-13	2026-06-13
207640	Gain-loss string: 1-18GHz	Various	Various	2025-06-13	2026-06-13
225795	Gain-loss string: 18-40GHz	Various	Various	2025-06-13	2026-06-13
	Receiver & Software				
197954	Spectrum Analyzer	Rohde & Schwarz	ESW44	2025-04-21	2026-04-30
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
241204	Environmental Meter	Fisher Scientific	15-077-963	2025-08-05	2027-08-05
213025	Wideband Radio Communications Tester	Rohde and Schwarz	CMW500	N/A	N/A

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
208720	Wideband Radio Communications Tester	Rohde and Schwarz	CMW500	N/A	N/A
21725	Radio Communications Tester	Rohde and Schwarz	CMX500	N/A	N/A
212167	Wideband Radio Communications Tester	Anritsu	MT8821C	N/A	N/A
169108*	1.85-1.97GHz notch filter, 2W, Fhigh = 9GHz	Micro-Tronics	BRM50714-01	2025-03-13	2026-03-31

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
86408	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2025-07-15	2027-07-15
	Gain-Loss Chains				
91977	Gain-loss string: 1-18GHz	Various	Various	2025-05-31	2026-05-31
	Receiver & Software				
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2025-07-29	2026-07-29
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
239540	Environmental Meter	Fisher Scientific	15-077-963	2025-08-05	2027-08-05
213025	Wideband Radio Communications Tester	Rohde and Schwarz	CMW500	N/A	N/A
169108 (BRF010)*	1.85-1.97GHz notch filter, 2W, Fhigh = 9GHz	Micro-Tronics	BRM50714-01	2025-03-13	2026-03-31

Wireless Conducted Measurement Equipment.

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	Additional Equipment used				
90411	Spectrum Analyzer MY54490314	Keysight Technologies	N9030A	2026-03-03	2027-03-03
90416	Spectrum Analyzer MY54490254	Keysight Technologies	N9030A	2025-07-31	2026-07-31
212967	Wideband Radio Communications Tester 170733	Rohde and Schwarz	CMW500	2026-02-13	2027-02-13
212166	Wideband Radio Communications Tester	Anritsu	MT8000A	2026-02-23	2027-02-23
262469	Humidity and Temperature Probe	Control Company	15-077-963	2025-04-28	2026-04-30

Test Equipment Used - Wireless Conducted Attenuators, Cables, and Couplers

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	Attenuators				
226569	2.92mm Coaxial 10dB Attenuator 40GHz	Fairview Microwave	SA4014-10	2025-09-02	2026-09-02
226554	20dB Attenuator	CentricRF	C18S2-20	2026-04-01	2027-04-01
226552	20dB Attenuator	CentricRF	C18S2-20	2026-04-01	2027-04-01
	Cables				
246257	SMA Cable	Huber + Suhner	104PEA	2025-09-05	2026-09-05
	Couplers				
238018 (CPL003-SAR)	Ultra-Wideband Directional Coupler 0.5-18GHz	Mini-Circuits	ZUDC10-183+	2025-04-48	2026-04-30

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

There is no limit required, and power is the same for low, middle and high channel; therefore, only middle channel was tested.

5G NR n70

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
5G NR n70	5MHz, QPSK	25/0	1702.5	4.5156	5.114
	5MHz, 16QAM			4.5230	5.187
	10MHz, QPSK	50/0		8.9804	9.843
	10MHz, 16QAM			9.0104	9.859
	15MHz, QPSK	75/0		13.486	14.65
	15MHz, 16QAM			13.546	14.55
	15MHz, QPSK	1/1		0.2370	0.3838

8.1.1. 5G NR n70



8.2. EMISSION MASK AND ADJACENT CHANNEL POWER

LIMITS

FCC: §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Spectrum Emission Mask plots, the spectrum analyzer is configured to sweep with a moving integration window, the width of which can be adjusted to different sizes across the sweep. The window width is configured to be greater than or equal to the required reference bandwidth. The center frequencies of the integration window for the different integration windows was set such that the upper and lower edges of the windows are aligned with the transition points in the reference bandwidths. This is achieved by setting the start / stop frequencies of the window with an offset equal to the reference bandwidth / 2 from the transition point.


The transmitter output was connected to a base station simulator and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

1. Set the spectrum analyzer span to include the block edge frequency.
2. Set a marker to point the corresponding band edge frequency in each test case.
3. Set display line at required limit.
4. Set resolution bandwidth to at least 1% of emission bandwidth.

RESULTS

8.2.1. 5G NR n70

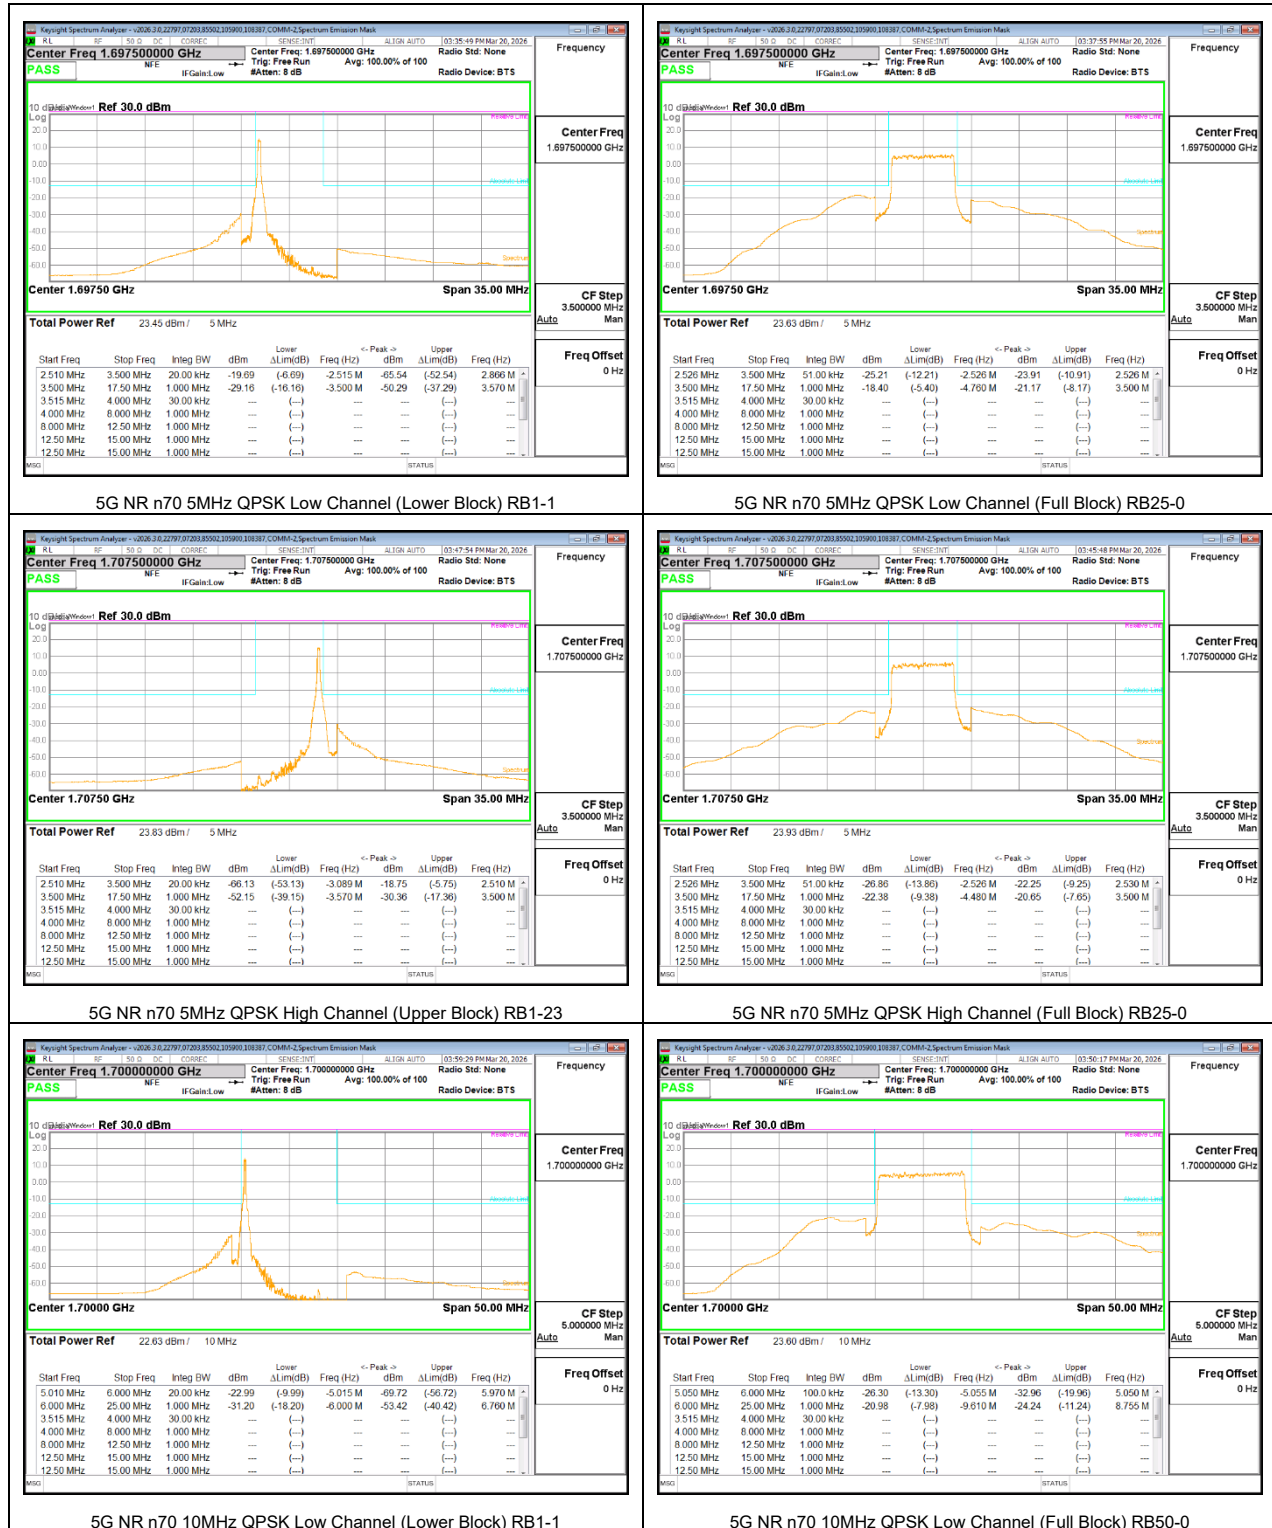



8.3. OUT OF BAND EMISSIONS

LIMITS

FCC: §27.53 (h)

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.


For each out of band emissions measurement:

- Set display line at -13 dBm, -25dBm and -40dBm according to the band Limit
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)

RESULTS

BPSK with 1RB is the highest power and PSD to all bandwidth. 1RB has the same frequency and power to all bandwidth. Therefore, BPSK with 1RB and wider bandwidths results are reported as worst case for 5G NRs.

8.3.1. 5G NR n70

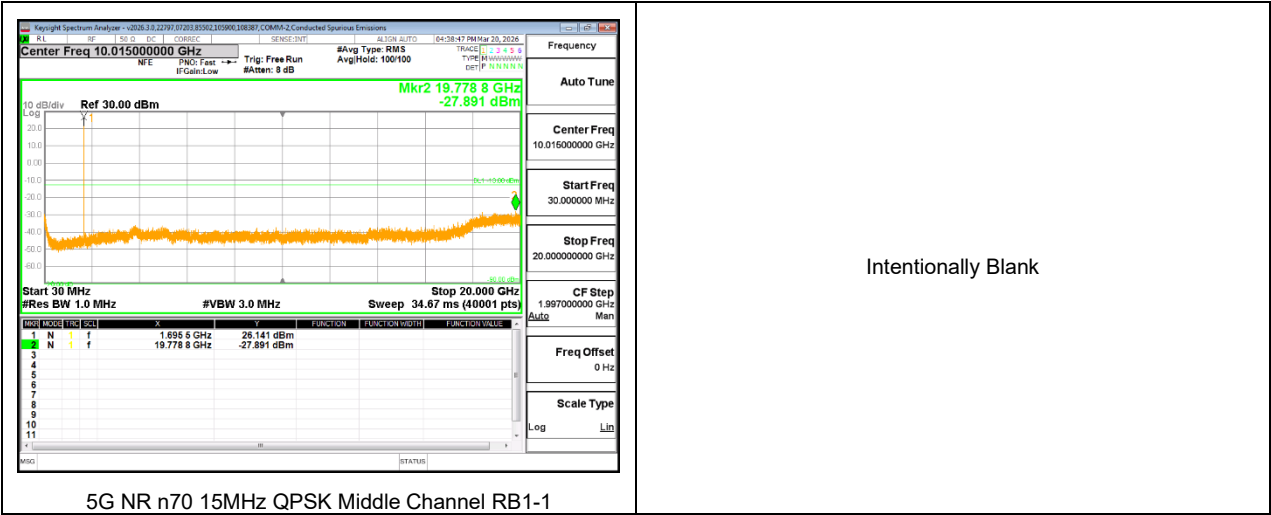

8.4. FREQUENCY STABILITY

LIMITS

FCC: §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use base station simulator with Frequency Error measurement capability.

Use base station simulator with Frequency Error measurement capability.

- Temp. = -30°C to +50°C
- Voltage = (85% - 100%)

Normal, 3.89VDC

End Voltage, 3.69VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

RESULTS

See the following pages.

8.4.1. 5G NR n70 (BPSK 15MHz BANDWIDTH)

Test Engineer ID:		105900/84740	Test Date:		2026-03-04 to 2026-04-09	
Band	70	Frequency Range		Frequency Error Reading (Hz)	Limit	
Condition		1695	1710		Frequency Stability (ppm)	Within Authorized Frequency Block (Hz)
		Freq Reading @ Low End (MHz)	Freq Reading @ High End (MHz)			
Temperature	Voltage					
Normal (20°C)	Normal	1684.6125	1724.6750			
Extreme (50°C)		1684.6125	1724.6750	-0.0035	0.000	Yes
Extreme (40°C)		1684.6125	1724.6750	0.0012	0.000	Yes
Extreme (30°C)		1684.6125	1724.6750	-0.0036	0.000	Yes
Extreme (10°C)		1684.6125	1724.6750	-0.0029	0.000	Yes
Extreme (0°C)		1684.6125	1724.6750	-0.0037	0.000	Yes
Extreme (-10°C)		1684.6125	1724.6750	0.0004	0.000	Yes
Extreme (-20°C)		1684.6125	1724.6750	-0.0031	0.000	Yes
Extreme (-30°C)		1684.6125	1724.6750	-0.0016	0.000	Yes
20°C	End Point Voltage	1684.6125	1724.6750	0.0016	0.000	Yes

8.5. PEAK-TO-AVERAGE POWER RATIO

LIMIT

FCC: §27.50 (d) (5)

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

RESULT

Config 0 to measure as the worst case; full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average power ratio criteria.

Test Method

The EUT was connected to a wideband power sensor for peak and average power.

8.5.1. 5G NR n70

Test Engineer ID:		105900/84740	Test Date:		2026-03-26			
Band	Bandwidth (MHz)	Frequency (MHz)	RB Allocation	RB OffSet	Modulation	Conducted Power (dBm)		Peak-to-Average Power Ratio (dB)
						Peak	Average	
5G NR n70	5MHz	1702.5	25	0	QPSK	26.41	23.5	2.91
					16QAM	26.15	21.87	4.28
	10MHz		50	0	QPSK	26.32	23.48	2.84
					16QAM	26.15	21.82	4.33
	15MHz		75	0	QPSK	26.34	23.45	2.89
					16QAM	26.16	21.79	4.37
Duty Cycle Correction Factor (dB) =								
Peak-to-Average Power Ratio= Peak Reading - Average Reading - Duty Cycle Correction Factor								

9. RADIATED TEST RESULTS

Radiated measurement using the Field Strength Method

Using the test configuration shown in Figure 6 below, the radiated emissions is measured directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits. As stated in 5.5.1 of ANSI C63.26-2015, the field strength measurement method using a test site validated to the requirements of ANSI C63.4 is an alternative to the substitution measurement.

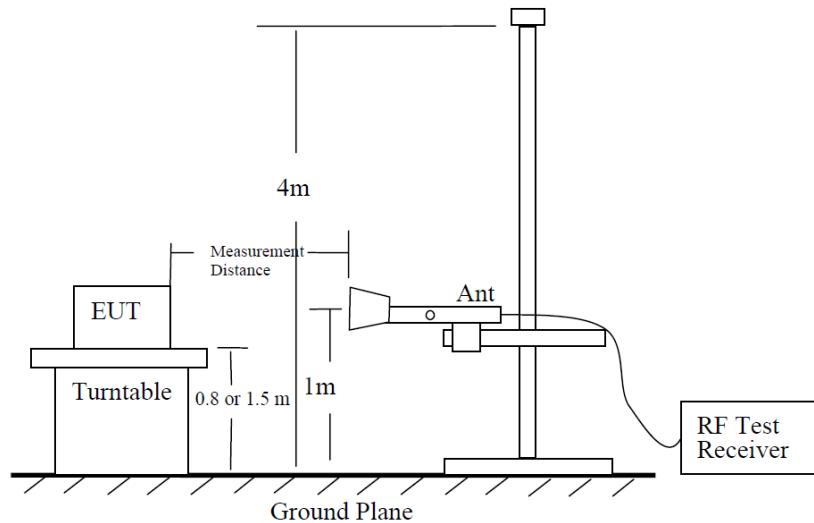


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

Radiated Power Measurement Calculation According to ANSI C63.26-2015

- a) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- b) $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$.
- c) $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$; where D is the measurement distance (in the far field region) in m.
- d) $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.

So, from d)

The measuring distance is usually at 3m, then $20 \cdot \log(3) = 9.5424$

Then, $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 9.5424 - 104.8 = E \text{ (dB}\mu\text{V/m)} - 95.2576$

Note: Confidence check of each chamber is performed daily to see if any degradation from expected/normal reading reference data. Ambient check of each chamber is performed monthly.

9.1. EFFECTIVE RADIATED POWER EIRP

RULE PART(S)

FCC: §2.1046, §27.50

LIMITS

27.50(d) - (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.2

For average power measurements:

- a) Set span to at least 1.5 times the OBW;
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz;
- c) Set VBW $\geq 3 \times$ RBW;
- d) Set number of points in sweep $\geq 2 \times$ span / RBW;
- e) Sweep time = auto-couple;
- f) Detector = RMS (power averaging);
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

9.1.1. 5GNR n70

Freq (MHz)	Band/Bandwidth	RB Size-Offset	Modulation (Of EUT)	EIRP (W)	EIRP _{DUT} (dBm)	Limit (dBm)	Margin (dB)
1697.500	n70 / 5MHz (ANT B)	RB1-1	BPSK	0.145	21.61	30.00	-8.39
1702.500		RB1-12	BPSK	0.144	21.57	30.00	-8.43
1707.500		RB1-23	BPSK	0.155	21.89	30.00	-8.11
1697.500		RB1-1	16QAM	0.105	20.21	30.00	-9.79
1702.500		RB1-12	16QAM	0.118	20.73	30.00	-9.27
1707.500		RB1-23	16QAM	0.107	20.30	30.00	-9.70
1700.000	n70 / 10MHz (ANT B)	RB1-1	BPSK	0.154	21.87	30.00	-8.13
1702.500		RB1-26	BPSK	0.157	21.96	30.00	-8.04
1705.000		RB1-50	BPSK	0.155	21.91	30.00	-8.09
1700.000		RB1-1	16QAM	0.112	20.49	30.00	-9.51
1702.500		RB1-26	16QAM	0.112	20.48	30.00	-9.52
1705.000		RB1-50	16QAM	0.107	20.28	30.00	-9.72
1702.500	n70 / 15MHz (ANT B)	RB1-1	QPSK	0.132	21.22	30.00	-8.78
1702.500		RB1-39	QPSK	0.155	21.89	30.00	-8.11
1702.500		RB1-77	QPSK	0.148	21.69	30.00	-8.31
1702.500		RB1-1	16QAM	0.102	20.08	30.00	-9.92
1702.500		RB1-39	16QAM	0.112	20.49	30.00	-9.51
1702.500		RB1-77	16QAM	0.103	20.11	30.00	-9.89

CONFIG 0

Freq (MHz)	Band/Bandwidth	RB Size-Offset	Modulation (Of EUT)	EIRP (W)	EIRP _{DUT} (dBm)	Limit (dBm)	Margin (dB)
1697.500	n70 / 5MHz (ANT B)	RB1-1	BPSK	0.194	22.87	30.00	-7.13
1702.500		RB1-12	BPSK	0.191	22.82	30.00	-7.18
1707.500		RB1-23	BPSK	0.192	22.84	30.00	-7.16
1697.500		RB1-1	16QAM	0.090	19.55	30.00	-10.45
1702.500		RB1-12	16QAM	0.153	21.86	30.00	-8.14
1707.500		RB1-23	16QAM	0.147	21.66	30.00	-8.34
1700.000	n70 / 10MHz (ANT B)	RB1-1	BPSK	0.191	22.81	30.00	-7.19
1702.500		RB1-26	BPSK	0.192	22.83	30.00	-7.17
1705.000		RB1-50	BPSK	0.191	22.82	30.00	-7.18
1700.000		RB1-1	16QAM	0.081	19.10	30.00	-10.90
1702.500		RB1-26	16QAM	0.152	21.82	30.00	-8.18
1705.000		RB1-50	16QAM	0.144	21.59	30.00	-8.41
1702.500	n70 / 15MHz (ANT B)	RB1-1	QPSK	0.148	21.71	30.00	-8.29
1702.500		RB1-39	QPSK	0.162	22.10	30.00	-7.90
1702.500		RB1-77	QPSK	0.187	22.73	30.00	-7.27
1702.500		RB1-1	16QAM	0.121	20.83	30.00	-9.17
1702.500		RB1-39	16QAM	0.135	21.31	30.00	-8.69
1702.500		RB1-77	16QAM	0.147	21.68	30.00	-8.32

CONFIG 1

9.2. FIELD STRENGTH OF SPURIOUS RADIATION

TEST PROCEDURE

KDB 971168 D01 /D02

All tests above 1GHz were done with a Resolution Bandwidth of 1MHz, and a Video Bandwidth of 3MHz


LIMITS

FCC: §27.53 (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

RESULTS

Example Plot

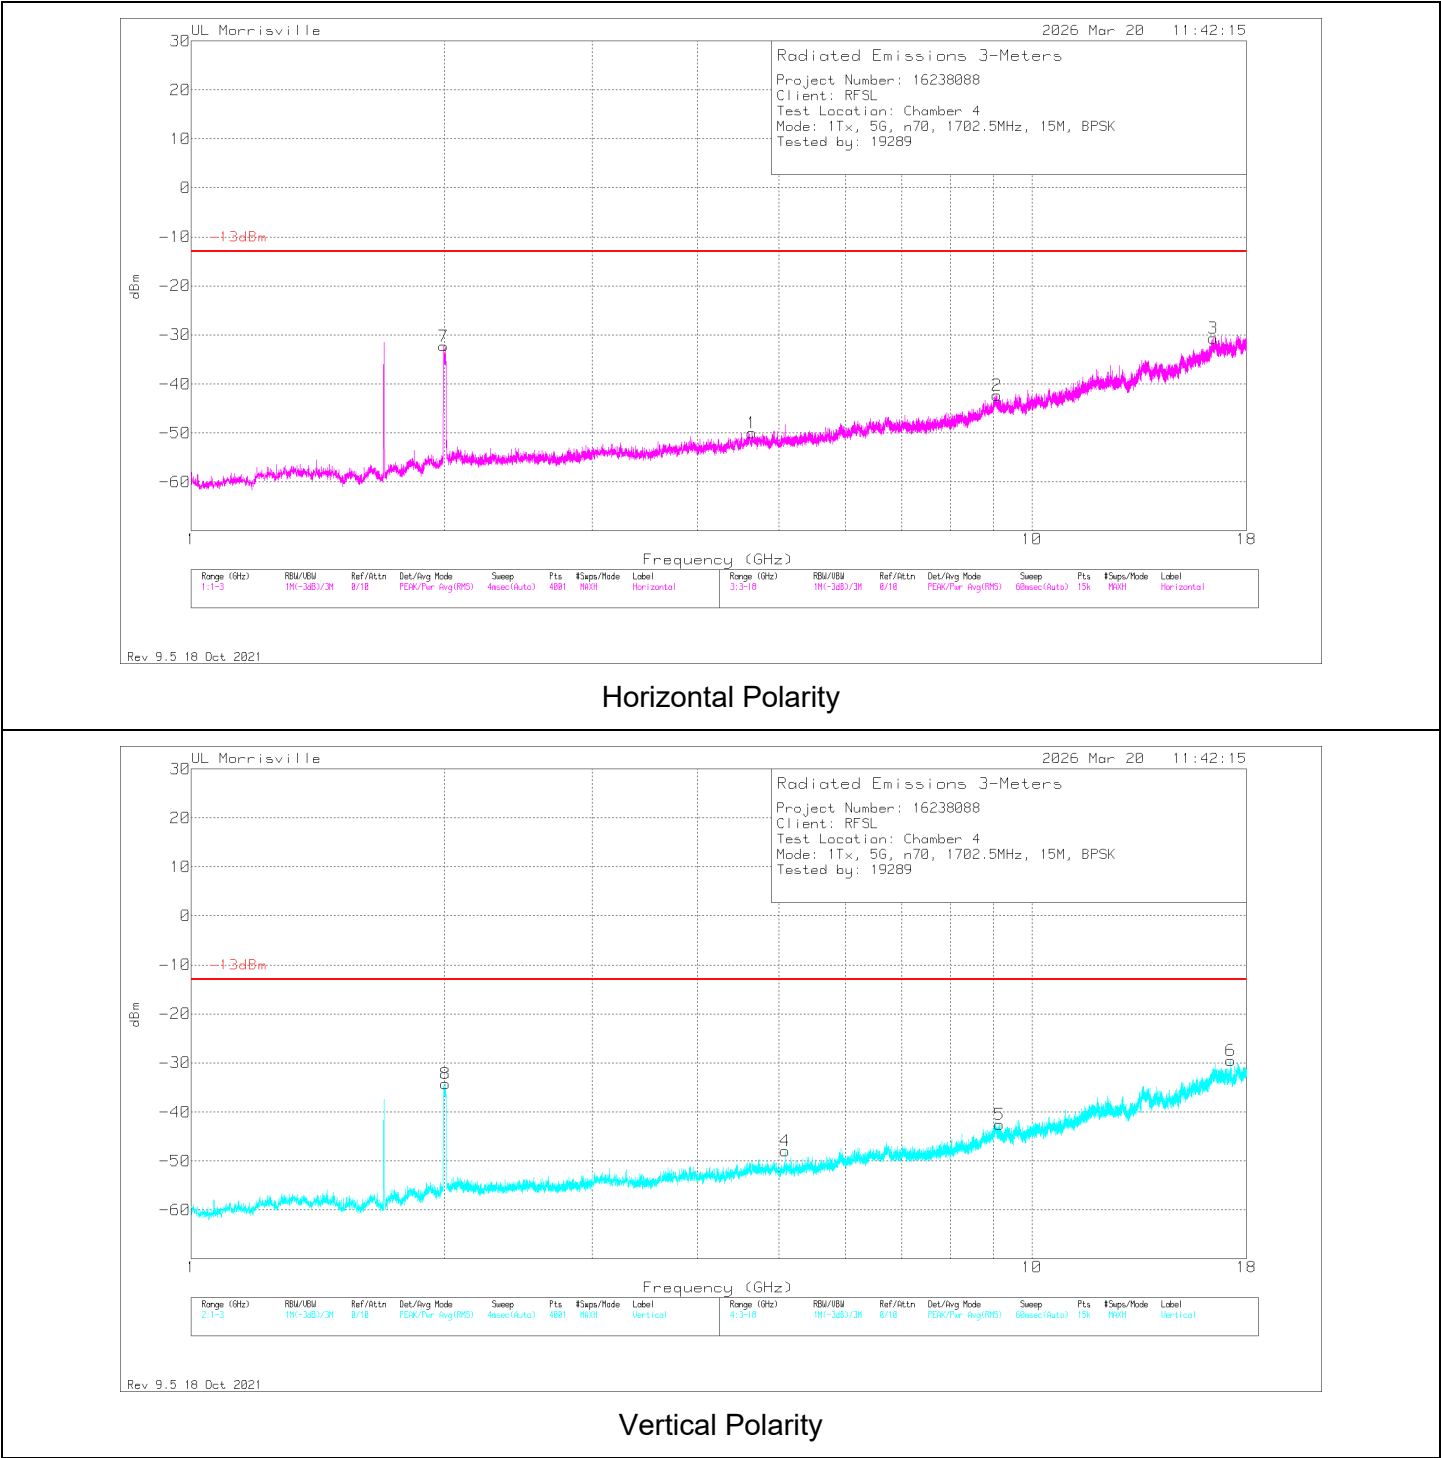

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	CF (dB)	Filter (dB)	Corrected Reading dBm	-13dBm	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7*	1.9975	-41.46	Pk	31.4	-35.7	11.8	1.7	-32.26	-	-	0-360	100	H
8*	2.007	-43.44	Pk	31.5	-35.8	11.8	1.7	-34.24	-	-	0-360	200	V
1	4.646	-64.95	Pk	34.2	-31	11.8	0	-49.95	-13	-36.95	0-360	100	H
4	5.086	-62.88	Pk	34.2	-31	11.8	0	-47.88	-13	-34.88	0-360	300	V
2	9.084	-66.45	Pk	36	-23.7	11.8	0	-42.35	-13	-29.35	0-360	100	H
5	9.152	-66.08	Pk	36.2	-24.5	11.8	0	-42.58	-13	-29.58	0-360	300	V
3	16.424	-65.8	Pk	41.1	-17.8	11.8	0	-30.7	-13	-17.7	0-360	100	H
6	17.242	-66	Pk	41	-16.3	11.8	0	-29.5	-13	-16.5	0-360	300	V

Pk - Peak detector

*- Downlink

9.2.1. 5G NR n70

5G NR n70 (BPSK 15.0MHZ BANDWIDTH, ANT A (Config 0))

Project #:	16238088
Date:	2026-03-20
Test Engineer:	19289
Configuration:	EUT Only
Mode	5G NR n70 BPSK 15MHz
Chamber #:	Chamber 4

Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	CF (dB)	Filter (dB)	Corrected Reading dBm	-13dBm	Margin (dB)	Polarity
Mid Channel, 1702.5MHz										
2.002*	-43.1	Pk	31.4	-35.8	11.8	1.7	-34	-	-	H
2.007*	-43.58	Pk	31.5	-35.8	11.8	1.7	-34.38	-	-	V
5.086	-64.77	Pk	34.2	-31	11.8	0	-49.77	-13	-36.77	H
5.086	-60.39	Pk	34.2	-31	11.8	0	-45.39	-13	-32.39	V
9.067	-66.52	Pk	36	-23.5	11.8	0	-42.22	-13	-29.22	V
12.813	-65.72	Pk	39.1	-20.9	11.8	0	-35.72	-13	-22.72	H
16.498	-65.52	Pk	41.2	-17.7	11.8	0	-30.22	-13	-17.22	V
16.503	-65.67	Pk	41.2	-17.6	11.8	0	-30.27	-13	-17.27	H

Pk - Peak detector

*- Downlink

5G NR n70 (BPSK 15.0MHZ BANDWIDTH, ANT F(Config 1))

Project #:	16238088
Date:	2026-03-20
Test Engineer:	19289
Configuration:	EUT Only
Mode	5G NR n70 BPSK 15MHz
Chamber #:	Chamber 4

Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	CF (dB)	Filter (dB)	Corrected Reading dBm	-13dBm	Margin (dB)	Polarity
Mid Channel, 1702.5MHz										
1.9975*	-41.46	Pk	31.4	-35.7	11.8	1.7	-32.26	-	-	H
2.007*	-43.44	Pk	31.5	-35.8	11.8	1.7	-34.24	-	-	V
4.646	-64.95	Pk	34.2	-31	11.8	0	-49.95	-13	-36.95	H
5.086	-62.88	Pk	34.2	-31	11.8	0	-47.88	-13	-34.88	V
9.084	-66.45	Pk	36	-23.7	11.8	0	-42.35	-13	-29.35	H
9.152	-66.08	Pk	36.2	-24.5	11.8	0	-42.58	-13	-29.58	V
16.424	-65.8	Pk	41.1	-17.8	11.8	0	-30.7	-13	-17.7	H
17.242	-66	Pk	41	-16.3	11.8	0	-29.5	-13	-16.5	V

Pk - Peak detector

*- Downlink

10. SETUP PHOTOS

Please see R16238088-EP1 for Setup Diagrams and Setup Photos.

END OF REPORT