



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G130E

FCC ID: A3LSMG130E

REPORT NUMBER: 14I17842-1

ISSUE DATE: May 30, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
--	5/30/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY.....	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4.	DESCRIPTION OF TEST SETUP.....	9
6.	TEST AND MEASUREMENT EQUIPMENT	12
7.	Summary Table.....	13
8.	RF POWER OUTPUT VERIFICATION.....	14
8.1.	GSM/GPRS/EDGE	14
8.1.1.	GSM OUTPUT POWER RESULT.....	15
9.	LIMITS AND CONDUCTED RESULTS.....	16
9.1.	OCCUPIED BANDWIDTH	16
9.1.1.	OCCUPIED BANDWIDTH RESULTS	17
9.1.2.	OCCUPIED BANDWIDTH PLOTS.....	18
9.2.	BAND EDGE EMISSIONS	20
9.2.1.	BAND EDGE PLOTS	21
9.3.	OUT OF BAND EMISSIONS.....	22
9.3.1.	OUT OF BAND EMISSIONS RESULT	23
9.3.2.	OUT OF BAND EMISSIONS PLOTS	24
9.4.	FREQUENCY STABILITY.....	26
9.4.1.	FREQUENCY STABILITY RESULTS	27
10.	RADIATED TEST RESULTS	28
10.1.	RADIATED POWER (ERP & EIRP).....	28
10.1.1.	ERP/EIRP Results.....	28

10.1.2.	ERP/EIRP DATA.....	29
10.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	31
10.2.1.	SPURIOUS RADIATION DATA.....	32
11.	SETUP PHOTOS	34

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM Phone + Bluetooth & WLAN 2.4GHz b/g/n
MODEL: SM-G130E
SERIAL NUMBER: RV1F50PX3TT
DATE TESTED: May 21 - 30, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. **Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24

3. FACILITIES AND ACCREDITATION

Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☒ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss(between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss(between the SG and substitution antenna)}$$

$$(\text{Path loss} = \text{Signal generator output} - \text{PSA reading with substitution antenna})$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a LTE Phone Bluetooth NFC capability that is manufactured by (xxx)

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Peak(dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
GSM850	824~849	GMSK	32.0	1584.89		
	824~849	GPRS	32.0	1584.89	24.41	276.06
GSM1900	1850~1910	GMSK	29.6	912.01		
	1850~1910	GPRS	29.6	912.01	30.74	1185.77

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-4.42
GSM1900, 1850~1910MHz	0.62

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA-U90CBC	N/A	N/A
Earphone	Samsung	GH59	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

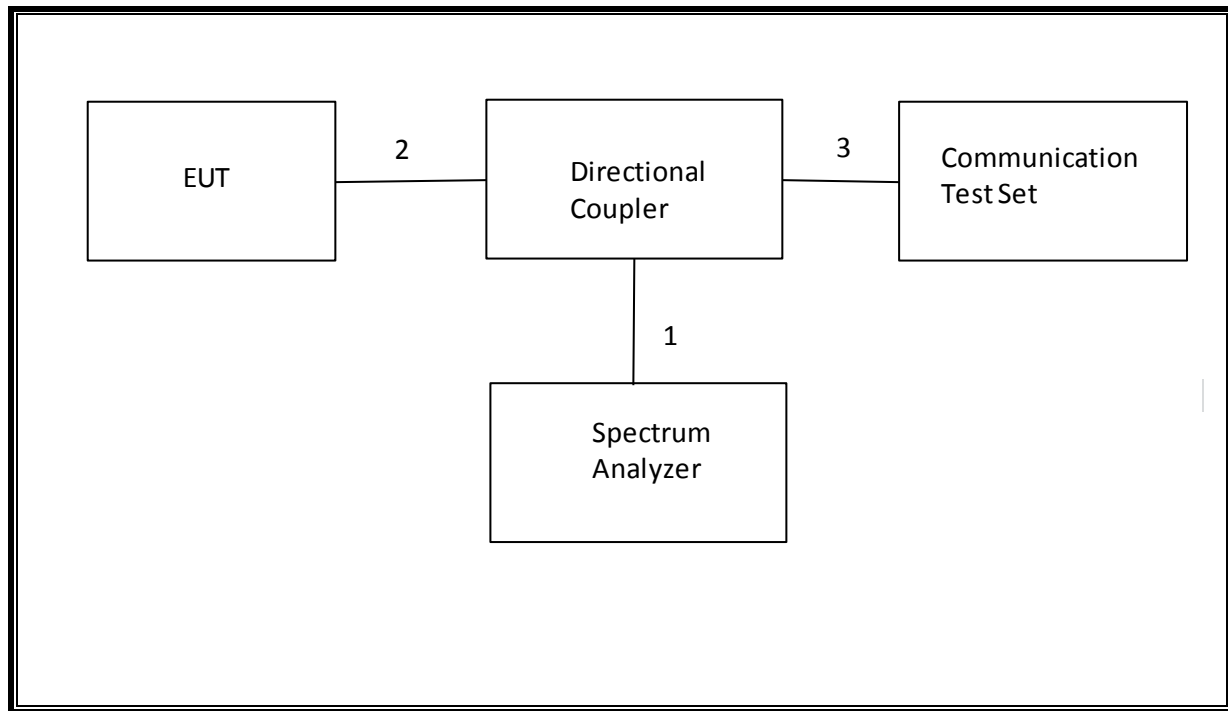
I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

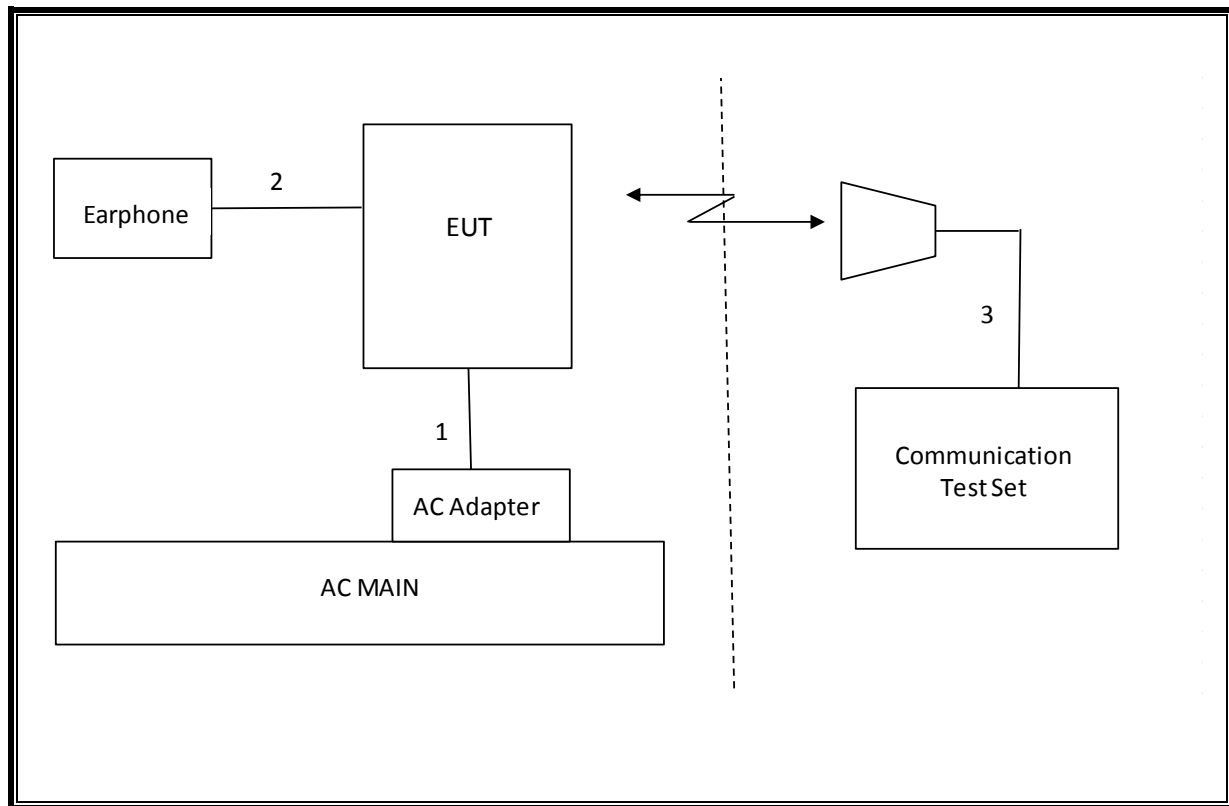
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	09/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/14
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	250.2KHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-22.772dBm
2.1046	N/A	Conducted output power	N/A		Pass	32dBm
22.355 24.235 90.213	RSS-132(4.3) RSS-133(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.01PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	24.411dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	30.7386dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-28dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	31.8			
		190	836.6	31.9			
		251	848.8	32.0			
	GPRS	128	824.2	31.8	29.3	27.5	26.2
		190	836.6	31.9	29.4	27.7	26.3
		251	848.8	32.0	29.6	27.9	26.5
GSM1900	GMSK	512	1850.2	29.6			
		661	1880	29.3			
		810	1909.8	29.6			
	GPRS	512	1850.2	29.6	26.8	25.1	23.9
		661	1880	29.3	26.6	24.8	23.7
		810	1909.8	29.6	26.8	25.0	23.8

9. LIMITS AND CONDUCTED RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

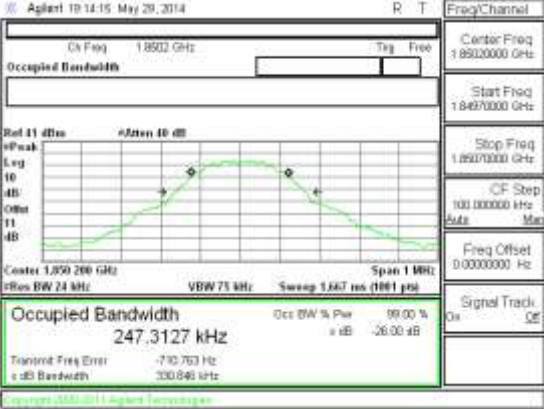
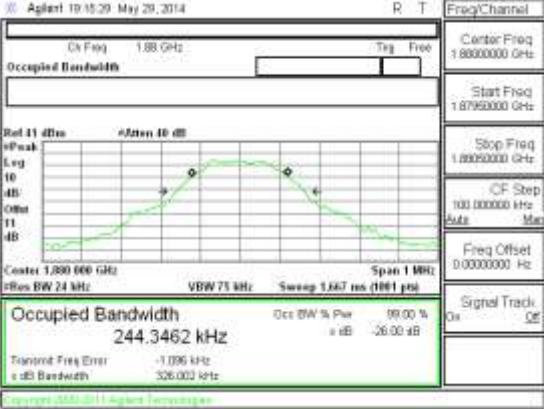
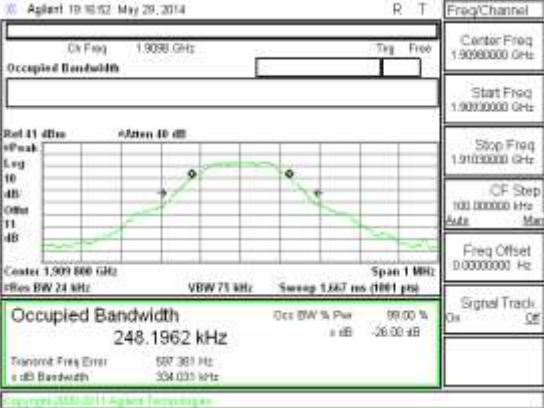
The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

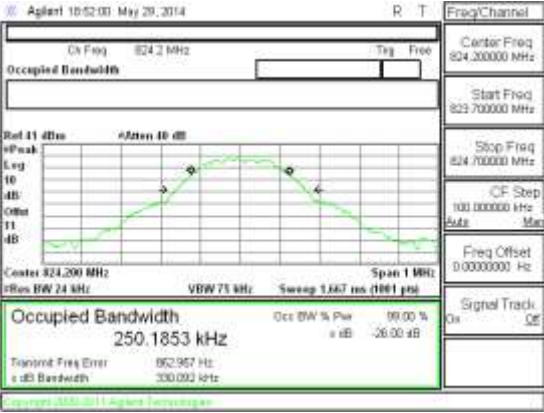
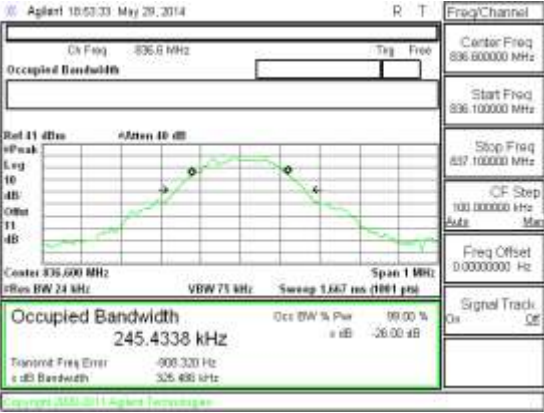
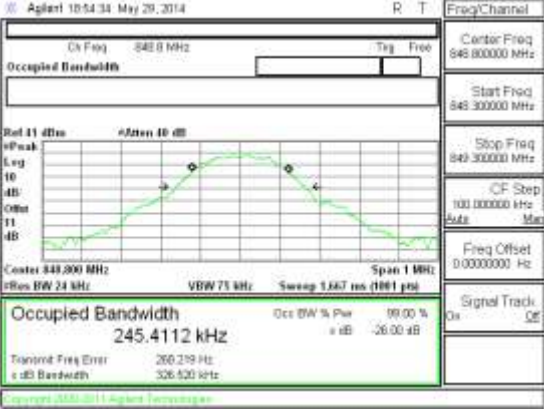
(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

9.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	250.2	330.1
		190	836.6	245.4	325.5
		251	848.8	245.4	326.5
GSM1900	GPRS	512	1850.2	247.3	330.8
		661	1880	244.3	326.0
		810	1909.8	248.2	334.0

9.1.2. OCCUPIED BANDWIDTH PLOTS

Band GSM1900 GPRS	 Agilent 19-14-15: May 29, 2014 Ch Freq: 1.850 GHz Center Freq: 1.8500000 GHz Start Freq: 1.8450000 GHz Stop Freq: 1.8550000 GHz CF Step: 100.00000 kHz Freq Offset: 0.0000000 Hz Occupied Bandwidth: 247.3127 kHz Occ BW % Pow: 99.00 % dB: -26.00 dB Signal Track: Off Band GSM1900 GPRS OBW Low channel	 Agilent 19-15-29: May 29, 2014 Ch Freq: 1.88 GHz Center Freq: 1.8800000 GHz Start Freq: 1.8750000 GHz Stop Freq: 1.8850000 GHz CF Step: 100.00000 kHz Freq Offset: 0.0000000 Hz Occupied Bandwidth: 244.3462 kHz Occ BW % Pow: 99.00 % dB: -26.00 dB Signal Track: Off Band GSM1900 GPRS OBW Mid channel
Band GSM1900 GPRS	 Agilent 19-16-52: May 29, 2014 Ch Freq: 1.908 GHz Center Freq: 1.9080000 GHz Start Freq: 1.9030000 GHz Stop Freq: 1.9130000 GHz CF Step: 100.00000 kHz Freq Offset: 0.0000000 Hz Occupied Bandwidth: 248.1962 kHz Occ BW % Pow: 99.00 % dB: -26.00 dB Signal Track: Off Band GSM1900 GPRS OBW High channel	

Band GSM850 GPRS	 Agilent 18:52:03: May 29, 2014 Center Freq 824.2 MHz Occupied Bandwidth 250.1853 kHz Band GSM850 GPRS OBW Low channel	 Agilent 18:53:33: May 29, 2014 Center Freq 836.6 MHz Occupied Bandwidth 245.4338 kHz Band GSM850 GPRS OBW Mid channel
Band GSM850 GPRS	 Agilent 18:54:34: May 29, 2014 Center Freq 848.8 MHz Occupied Bandwidth 245.4112 kHz Band GSM850 GPRS OBW High channel	

9.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

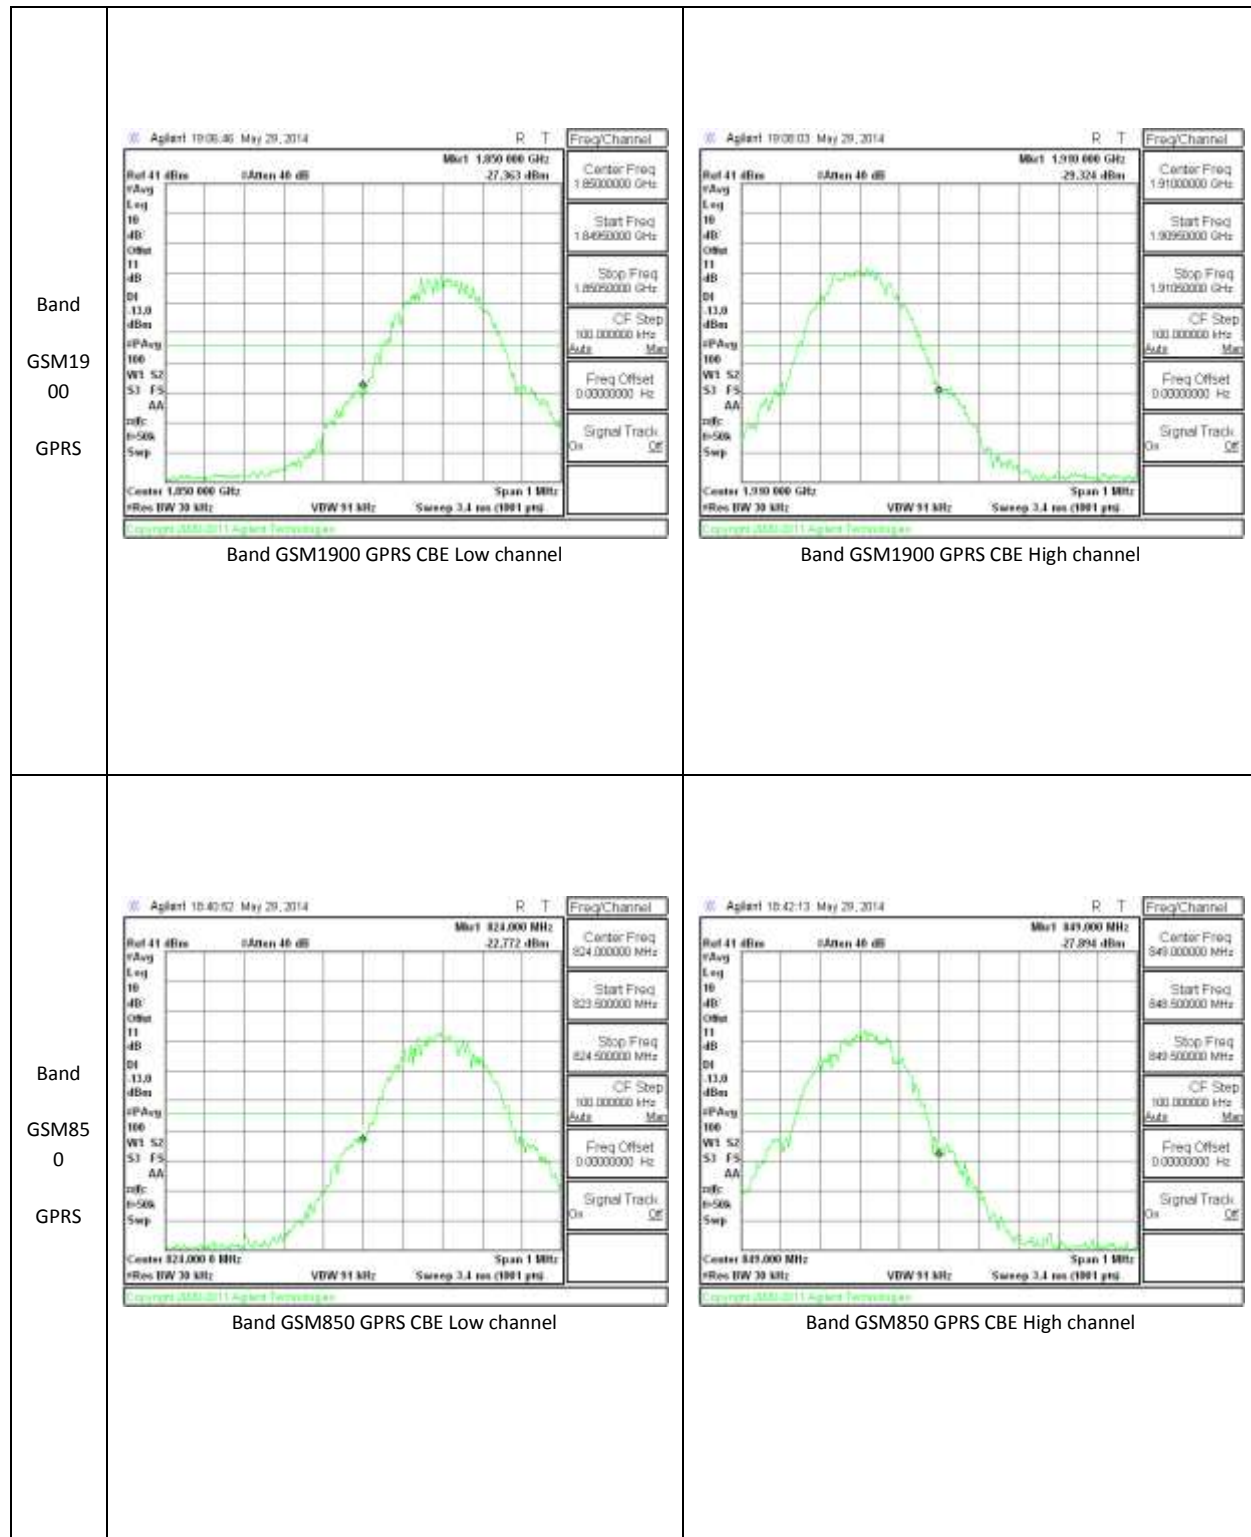
TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

9.2.1.BAND EDGE PLOTS



9.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

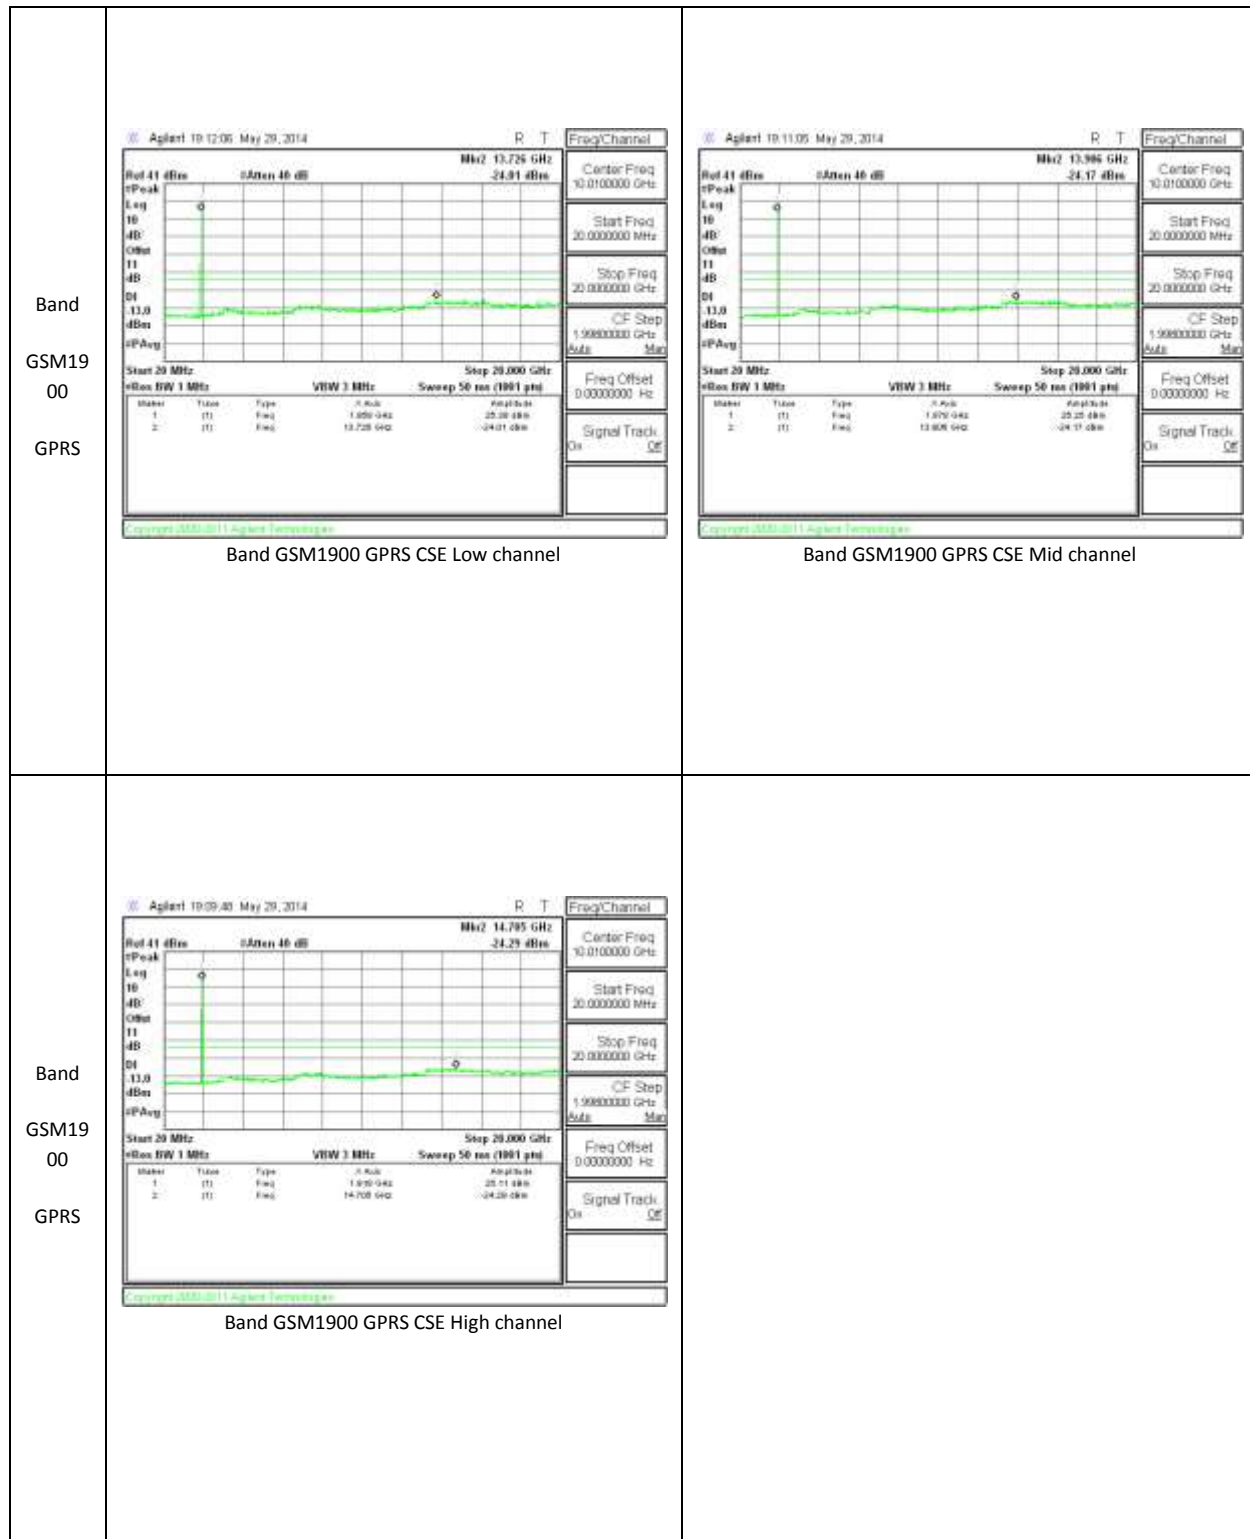
The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

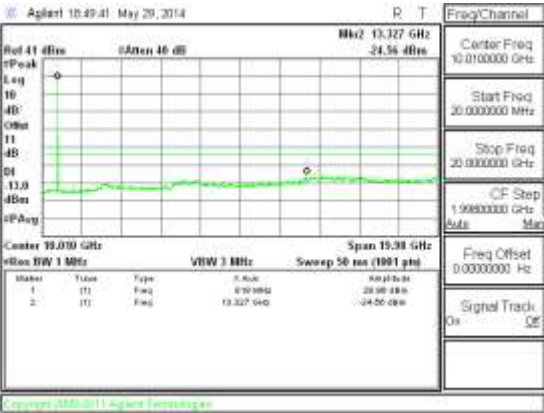
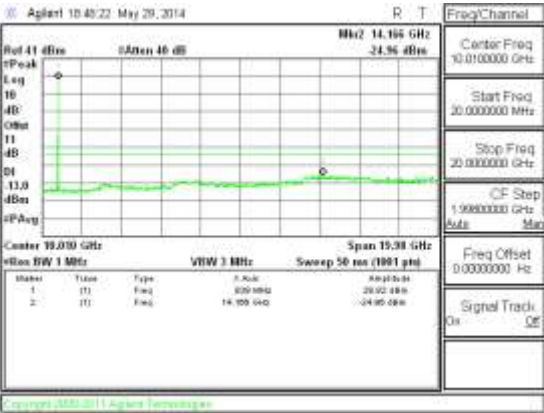
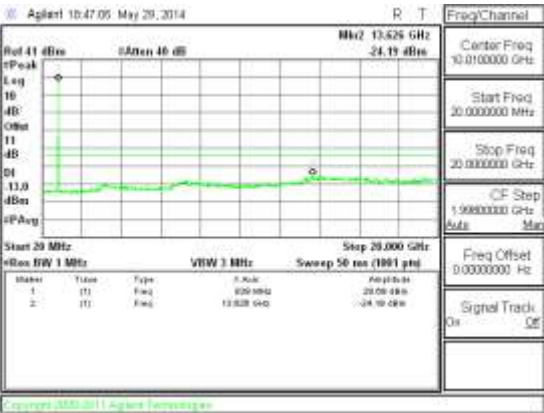
RESULTS

9.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-24.56	-13	-11.56
		836.6	-24.96	-13	-11.96
		848.8	-24.19	-13	-11.19
GSM1900	GPRS	1850.2	-24.01	-13	-11.01
		1880	-24.17	-13	-11.17
		1909.8	-24.29	-13	-11.29

9.3.2. OUT OF BAND EMISSIONS PLOTS



Band GSM850 GPRS	 Agilent 10.49.41 May 29, 2014 Center Freq 10.010 GHz Span 15.00 GHz Start Freq 20.000000 MHz Stop Freq 20.000000 GHz CF Step 1.9000000 GHz Freq Offset 0.0000000 Hz Signal Track Off Copyright (C) 2011 Agilent Technologies	 Agilent 10.49.22 May 29, 2014 Center Freq 10.010 GHz Span 15.00 GHz Start Freq 20.000000 MHz Stop Freq 20.000000 GHz CF Step 1.9000000 GHz Freq Offset 0.0000000 Hz Signal Track Off Copyright (C) 2011 Agilent Technologies
Band GSM850 GPRS	 Agilent 10.47.09 May 29, 2014 Center Freq 10.010 GHz Span 15.00 GHz Start Freq 20.000000 MHz Stop Freq 20.000000 GHz CF Step 1.9000000 GHz Freq Offset 0.0000000 Hz Signal Track Off Copyright (C) 2011 Agilent Technologies	 Agilent 10.47.09 May 29, 2014 Center Freq 10.010 GHz Span 15.00 GHz Start Freq 20.000000 MHz Stop Freq 20.000000 GHz CF Step 1.9000000 GHz Freq Offset 0.0000000 Hz Signal Track Off Copyright (C) 2011 Agilent Technologies

9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

9.4.1. FREQUENCY STABILITY RESULTS

CELL, GPRS MODULATION – MID CHANNEL

Reference Frequency: Cellular Mid Channel 836.599989MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599985	0.005	2.5
3.80	40	836.599990	-0.001	2.5
3.80	30	836.599987	0.002	2.5
3.80	20	836.599989	0	2.5
3.80	10	836.599991	-0.002	2.5
3.80	0	836.599993	-0.005	2.5
3.80	-10	836.599996	-0.008	2.5
3.80	-20	836.599987	0.002	2.5
3.80	-30	836.599985	0.005	2.5

Reference Frequency: Cellular Mid Channel 836.599989MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.599989	0	2.5
4.30	20	836.599981	0.010	2.5
3.30	20	836.599993	-0.005	2.5

PCS, GPRS MODULATION – MID CHANNEL

Reference Frequency: PCS Mid Channel 1879.999983MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999986	-0.002	2.5
3.80	40	1879.999985	-0.001	2.5
3.80	30	1879.999987	-0.002	2.5
3.80	20	1879.999983	0	2.5
3.80	10	1879.999989	-0.003	2.5
3.80	0	1879.999982	0.001	2.5
3.80	-10	1879.999989	-0.003	2.5
3.80	-20	1879.999981	0.001	2.5
3.80	-30	1879.999975	0.004	2.5

Reference Frequency: PCS Mid Channel 1879.999983 MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999983	0.00000	2.5
4.20	20	1879.999980	0.00160	2.5
3.30	20	1879.999984	-0.00053	2.5

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

TEST RESULTS

10.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	29.013	796.71
		661	1880	30.7386	1185.39
		810	1909.8	27.353	543.63

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	24.408	275.93
		190	836.6	24.133	259
		251	848.8	24.411	276.12

10.1.2. ERP/EIRP DATA

Band GSM19 00 GPRS	High Frequency Fundamental Measurement Compliance Certification Services Chamber F								
	Company:		Samsung						
	Project #:		14I17842						
	Date:		05/27/14						
	Test Engineer:		O. Stoelting						
	Configuration:		EUT ONLY, Y Position						
	Mode:		GPRS 1900MHz						
	Test Equipment:								
	Receiving: T120, and Chamber F SMA Cables								
	Substitution: Horn T344 Substitution, 20ft SMA Cable (234224002) Warehouse								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1.850	26.3	V	2.47	5.20	29.01	33.0	-4.0	
	1.850	26.1	H	2.47	5.20	28.87	33.0	-4.1	
	Mid Ch								
	1.880	28.2	V	2.49	5.03	30.74	33.0	-2.3	
	1.880	26.0	H	2.49	5.03	28.54	33.0	-4.5	
	High Ch								
	1.910	24.9	V	2.52	4.95	27.35	33.0	-5.6	
	1.910	24.7	H	2.52	4.95	27.18	33.0	-5.8	
	Rev. 3.17.11								

Band GSM850 GPRS	High Frequency Substitution Measurement Compliance Certification Services Chamber A Company: Samsung Project #: 14I17842 Date: 05/29/14 Test Engineer: O. Stoelting Configuration: EUT, X Position Mode: GRPS 850MHz Test Equipment: Receiving: T130, and Chamber A N-type Cable. Substitution: Dipole S/N: T416, 5ft SMA Cable. <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td></tr> <tr> <td>824.20</td><td>17.96</td><td>V</td><td>0.5</td><td>0.0</td><td>17.46</td><td>38.5</td><td>-21.0</td><td></td></tr> <tr> <td>824.20</td><td>24.91</td><td>H</td><td>0.5</td><td>0.0</td><td>24.41</td><td>38.5</td><td>-14.0</td><td></td></tr> <tr> <td colspan="9">Mid Ch</td></tr> <tr> <td>836.60</td><td>17.95</td><td>V</td><td>0.5</td><td>0.0</td><td>17.45</td><td>38.5</td><td>-21.0</td><td></td></tr> <tr> <td>836.60</td><td>24.63</td><td>H</td><td>0.5</td><td>0.0</td><td>24.13</td><td>38.5</td><td>-14.3</td><td></td></tr> <tr> <td colspan="9">High Ch</td></tr> <tr> <td>848.80</td><td>18.58</td><td>V</td><td>0.5</td><td>0.0</td><td>18.08</td><td>38.5</td><td>-20.4</td><td></td></tr> <tr> <td>848.80</td><td>24.91</td><td>H</td><td>0.5</td><td>0.0</td><td>24.41</td><td>38.5</td><td>-14.0</td><td></td></tr> </tbody> </table> Rev. 3.17.11	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.20	17.96	V	0.5	0.0	17.46	38.5	-21.0		824.20	24.91	H	0.5	0.0	24.41	38.5	-14.0		Mid Ch									836.60	17.95	V	0.5	0.0	17.45	38.5	-21.0		836.60	24.63	H	0.5	0.0	24.13	38.5	-14.3		High Ch									848.80	18.58	V	0.5	0.0	18.08	38.5	-20.4		848.80	24.91	H	0.5	0.0	24.41	38.5	-14.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																			
Low Ch																																																																																											
824.20	17.96	V	0.5	0.0	17.46	38.5	-21.0																																																																																				
824.20	24.91	H	0.5	0.0	24.41	38.5	-14.0																																																																																				
Mid Ch																																																																																											
836.60	17.95	V	0.5	0.0	17.45	38.5	-21.0																																																																																				
836.60	24.63	H	0.5	0.0	24.13	38.5	-14.3																																																																																				
High Ch																																																																																											
848.80	18.58	V	0.5	0.0	18.08	38.5	-20.4																																																																																				
848.80	24.91	H	0.5	0.0	24.41	38.5	-14.0																																																																																				

10.2. FIELD STRENGTH OF SPURIOUS RADIATION**RULE PART(S)**

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

RESULTS

10.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14I17842									
Date:	05/29/14									
Test Engineer:	O. Stoelting									
Configuration:	Y-pos. EUT w/ ac charger & HS									
Mode:	GPRS 1900									
Chamber Pre-amplifier Filter Limit 5m Chamber A T343 8449B Filter 1 Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1900 GPRS	Low Ch, 1850MHz									
	3.700	-20.6	V	3.0	35.4	1.0	-55.0	-13.0	-42.0	
	5.550	-24.6	V	3.0	34.7	1.0	-58.3	-13.0	-45.3	
	7.400	-25.3	V	3.0	34.9	1.0	-59.2	-13.0	-46.2	
	3.700	-16.5	H	3.0	35.4	1.0	-50.9	-13.0	-37.9	
	5.550	-19.5	H	3.0	34.7	1.0	-53.3	-13.0	-40.3	
	7.400	-24.3	H	3.0	34.9	1.0	-58.2	-13.0	-45.2	
	Mid Ch, 1880.0MHz									
	3.760	-23.8	V	3.0	35.3	1.0	-58.1	-13.0	-45.1	
	5.640	-25.0	V	3.0	34.7	1.0	-58.7	-13.0	-45.7	
	7.520	-24.1	V	3.0	34.9	1.0	-58.1	-13.0	-45.1	
	3.760	-26.1	H	3.0	35.3	1.0	-60.4	-13.0	-47.4	
	5.640	-24.5	H	3.0	34.7	1.0	-58.3	-13.0	-45.3	
	7.520	-23.4	H	3.0	34.9	1.0	-57.3	-13.0	-44.3	
	High Ch, 1909.8 MHz									
	3.820	-20.8	V	3.0	35.3	1.0	-55.1	-13.0	-42.1	
	5.729	-23.2	V	3.0	34.7	1.0	-56.9	-13.0	-43.9	
	7.639	-24.5	V	3.0	35.0	1.0	-58.5	-13.0	-45.5	
3.820	-16.1	H	3.0	35.3	1.0	-50.4	-13.0	-37.4		
5.729	-24.1	H	3.0	34.7	1.0	-57.9	-13.0	-44.9		
7.639	-23.7	H	3.0	35.0	1.0	-57.6	-13.0	-44.6		
Rev. 03.03.09										

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14117842
Date: 05/29/14
Test Engineer: O. Stoelting
Configuration: EUT X Position, AC Charger and headphone
Mode: GPRS 850

Chamber	Pre-amplifier	Filter	Limit
5m Chamber A	T34 8449B	Filter 1	Part 22

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850	Low Ch, 824.2MHz									
	1.648	8.4	V	3.0	37.4	1.0	-28.0	-13.0	-15.0	
	2.473	-8.0	V	3.0	36.4	1.0	-43.4	-13.0	-30.4	
	3.297	-22.9	V	3.0	35.8	1.0	-57.7	-13.0	-44.7	
	1.648	6.9	H	3.0	37.4	1.0	-29.5	-13.0	-16.5	
	2.473	-18.7	H	3.0	36.4	1.0	-54.1	-13.0	-41.1	
GPRS	3.297	-27.7	H	3.0	35.8	1.0	-62.5	-13.0	-49.5	
	Mid Ch, 836.6MHz									
	1.673	6.2	V	3.0	37.3	1.0	-30.1	-13.0	-17.1	
	2.510	-12.0	V	3.0	36.4	1.0	-47.3	-13.0	-34.3	
	3.346	-25.5	V	3.0	35.8	1.0	-60.2	-13.0	-47.2	
	1.673	6.5	H	3.0	37.3	1.0	-29.8	-13.0	-16.8	
	2.510	-10.7	H	3.0	36.4	1.0	-46.0	-13.0	-33.0	
	3.346	-29.0	H	3.0	35.8	1.0	-63.7	-13.0	-50.7	
	High Ch, 848.8MHz									
	1.698	-6.2	V	3.0	37.3	1.0	-42.5	-13.0	-29.5	
	2.547	-17.0	V	3.0	36.3	1.0	-52.4	-13.0	-39.4	
	3.395	-26.7	V	3.0	35.7	1.0	-61.4	-13.0	-48.4	
	1.698	-3.1	H	3.0	37.3	1.0	-39.4	-13.0	-26.4	
	2.547	-7.7	H	3.0	36.3	1.0	-43.1	-13.0	-30.1	
3.395	-25.7	H	3.0	35.7	1.0	-60.4	-13.0	-47.4		

Rev. 03.03.09

Note: No other emissions were detected above the system noise floor.