



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth & WLAN2.4GHZb/g/n

MODEL NUMBER: SM-G3502L

FCC ID: A3LSMG3502L

REPORT NUMBER: 13I16699-4, Revision A

ISSUE DATE: January 9, 2014

Prepared for

SAMSUNG ELECTRONICS CO., LTD.

416, MAETAN 3-DONG, YEONGTONG-GU

SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by

UL VERIFICATION SERVICES INC.

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	1/3/14	Initial	P. Kim
A	1/9/14	Updated antenna information; Updated section 8.2 statement	P. Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	Error! Bookmark not defined.
5.5. WORST-CASE CONFIGURATION AND MODE.....	8
5.6. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH.....	13
8.1.1. BASIC DATA RATE GFSK MODULATION.....	13
8.1.1. ENHANCED DATA RATE 8PSK MODULATION.....	13
8.2. HOPPING FREQUENCY SEPARATION	18
8.3. NUMBER OF HOPPING CHANNELS.....	20
8.4. AVERAGE TIME OF OCCUPANCY.....	23
8.5. OUTPUT POWER	27
8.5.1. BASIC DATA RATE GFSK MODULATION.....	27
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	27
8.6. AVERAGE POWER.....	32
8.6.1. BASIC DATA RATE GFSK MODULATION.....	32
8.6.2. ENHANCED DATA RATE 8PSK MODULATION	32
8.7. CONDUCTED SPURIOUS EMISSIONS.....	33
8.7.1. BASIC DATA RATE GFSK MODULATION.....	34
8.7.1. ENHANCED DATA RATE 8PSK MODULATION	38
9. RADIATED TEST RESULTS	42
9.1. LIMITS AND PROCEDURE	42

9.2.	TRANSMITTER ABOVE 1 GHz	43
9.2.1.	BASIC DATA RATE GFSK MODULATION.....	43
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	57
9.3.	WORST-CASE BELOW 1 GHz	71
10.	AC POWER LINE CONDUCTED EMISSIONS	74
11.	SETUP PHOTOS	78

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, South Korea

EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & WLAN2.4GHZb/g/n

MODEL: SM-G3502L

SERIAL NUMBER: FK-385-A, FK-385-B, FK-385-C, FK-385-D, FK-385-E

DATE TESTED: December 18, 2013 – January 3, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WiSE PROGRAM MANAGER
UL Verification Services Inc.

STEVEN TRAN
WiSE LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & WLAN2.4GHZb/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.27	10.64
2402 - 2480	Enhanced 8PSK	10.67	11.67

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 2.29 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G3502L	FK-385-A	N/A
Earphone	Samsung	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

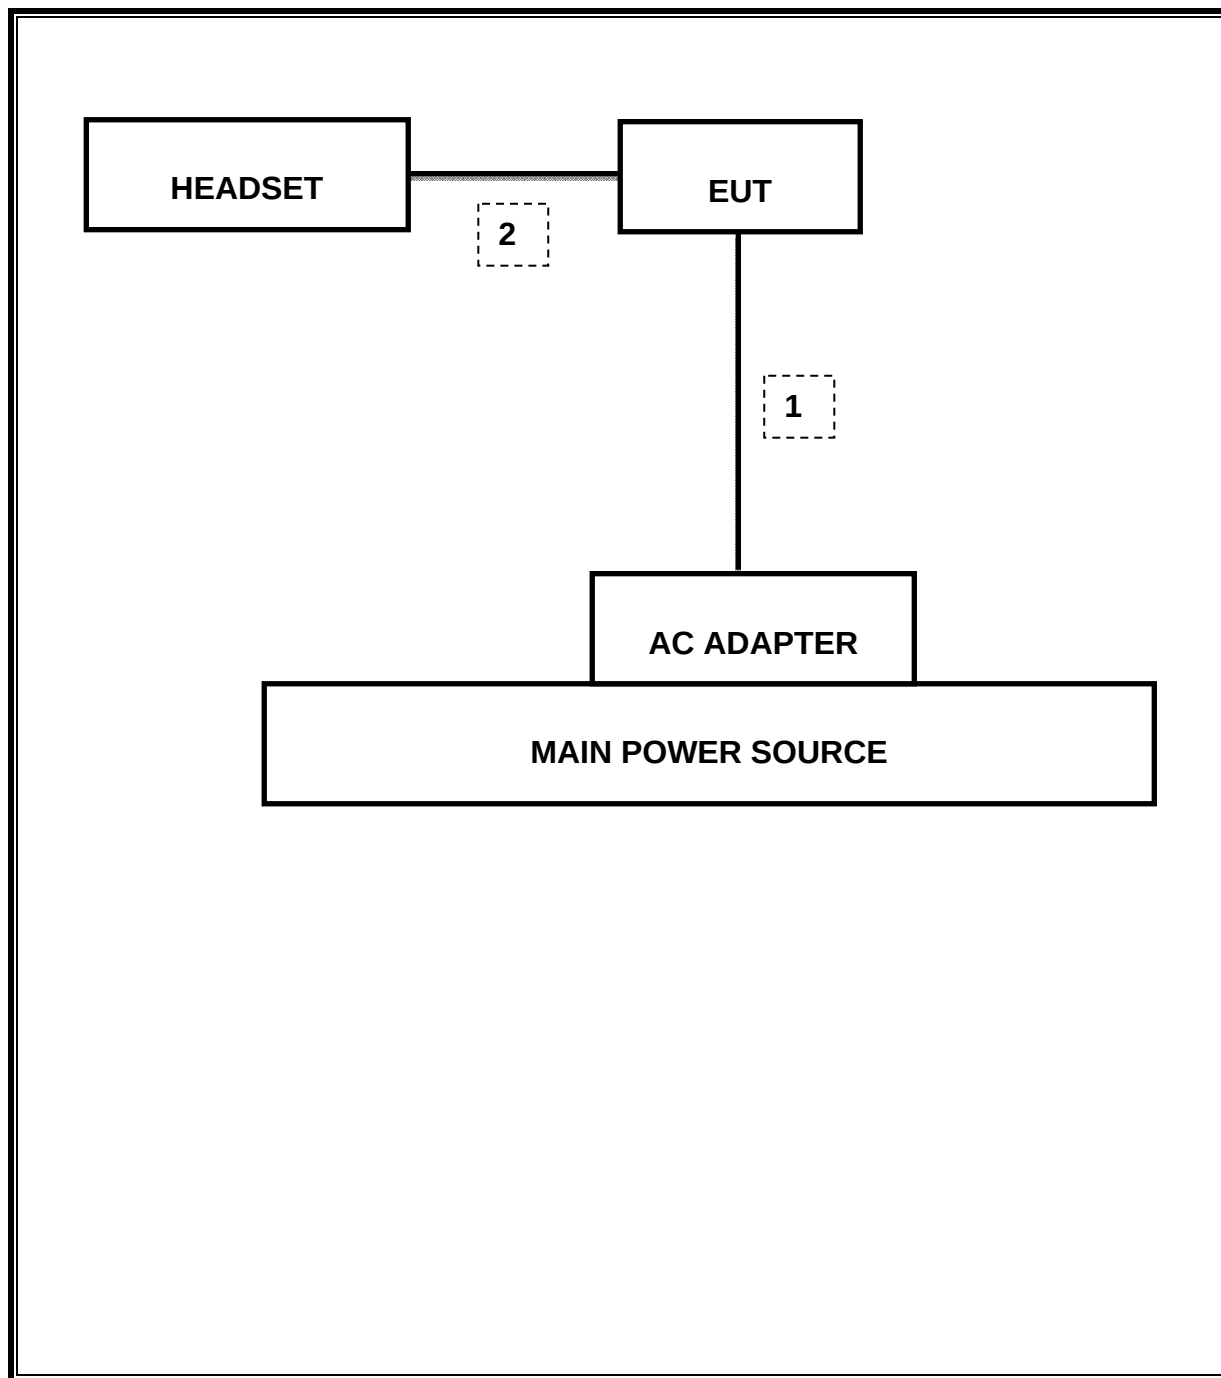

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	03/23/13	02/13/14
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/13	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/13	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/13	01/28/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/13	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/13	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/13	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/13	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/13	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/13	01/14/14
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR	CNR

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.1923 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-60.73 dBc
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	10.67 dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.29 s
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	29.52 dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	41.429 dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9368	0.9036
Middle	2441	1.037	0.9222
High	2480	0.9074	0.8887
Worst		1.037	0.9222

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.302	1.1923
Middle	2441	1.244	1.174
High	2480	1.296	1.1874
Worst		1.302	1.1923


GFSK BANDWIDTH

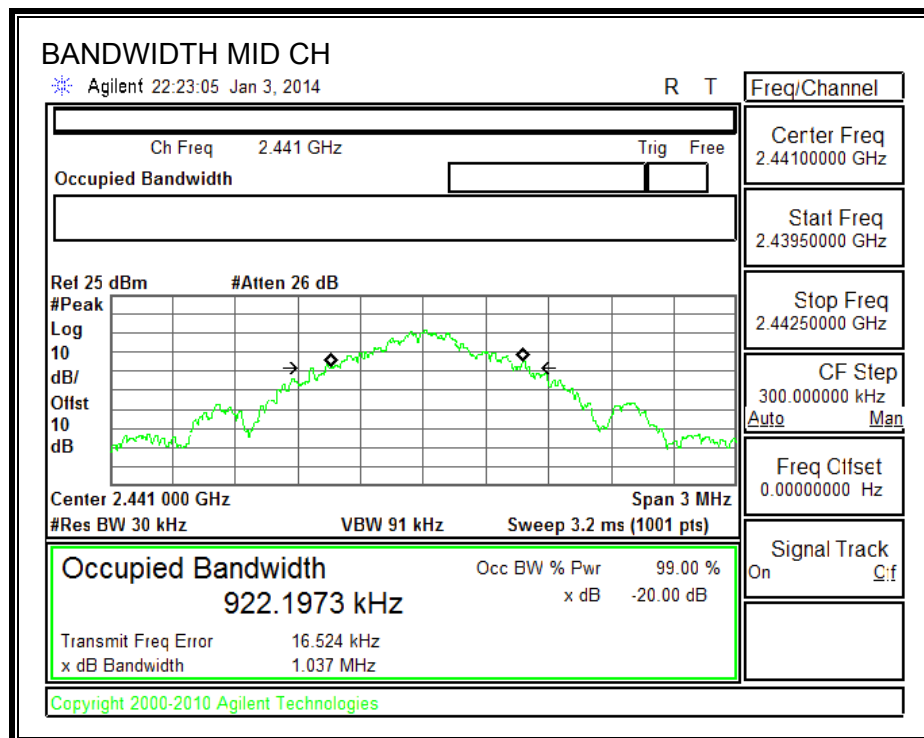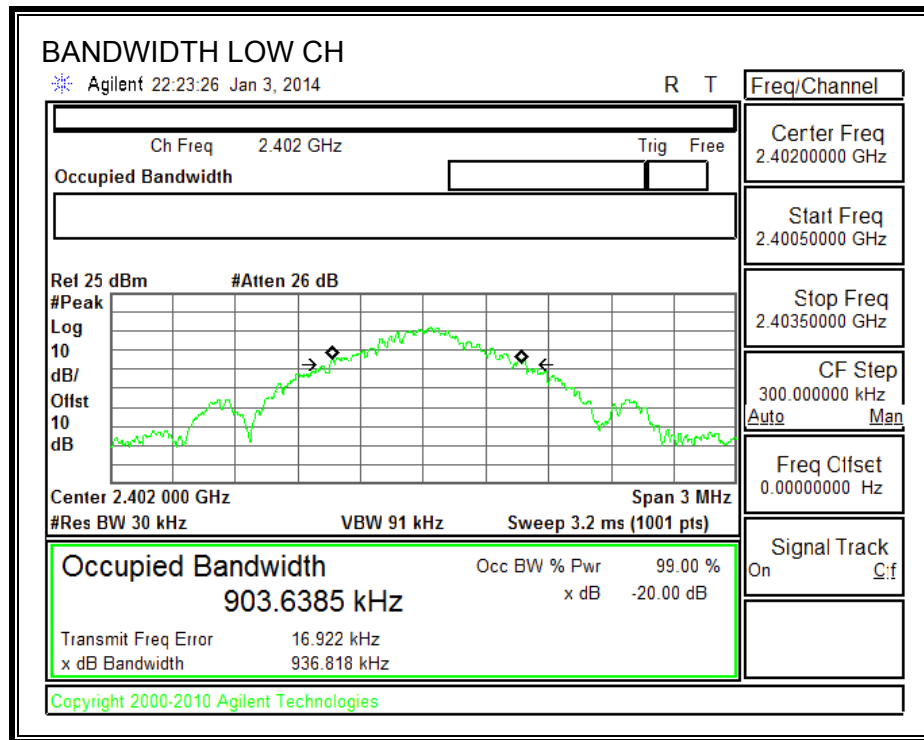

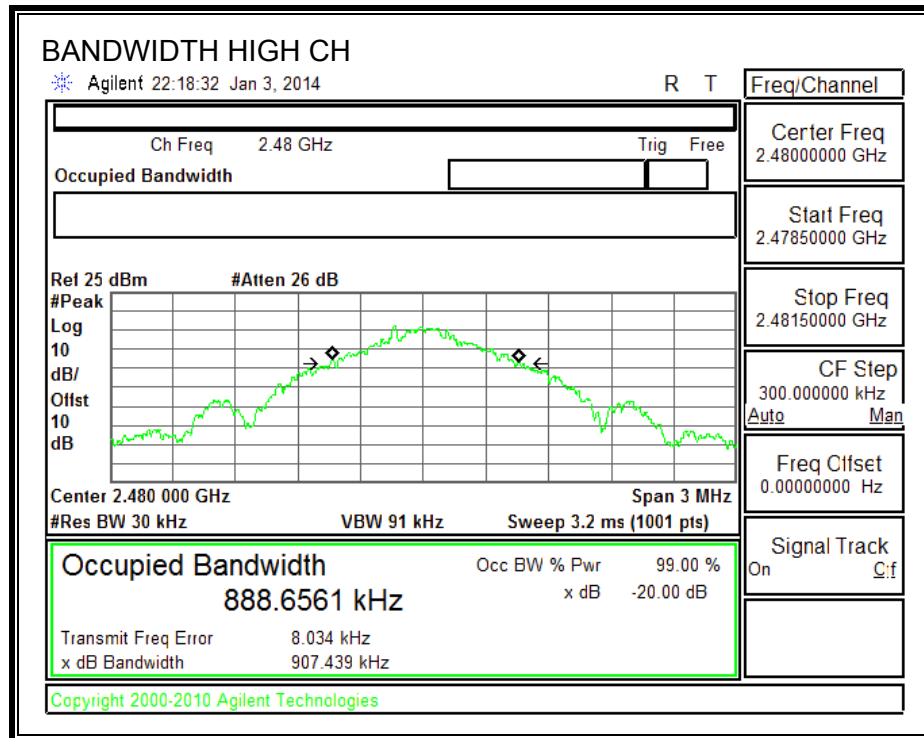

QPSK BANDWIDTH

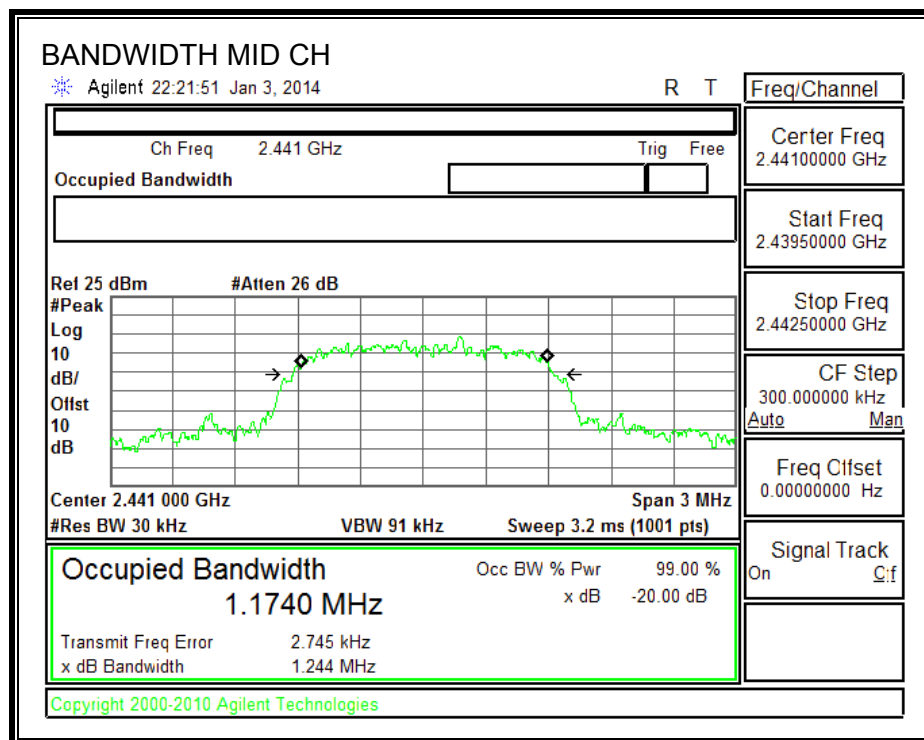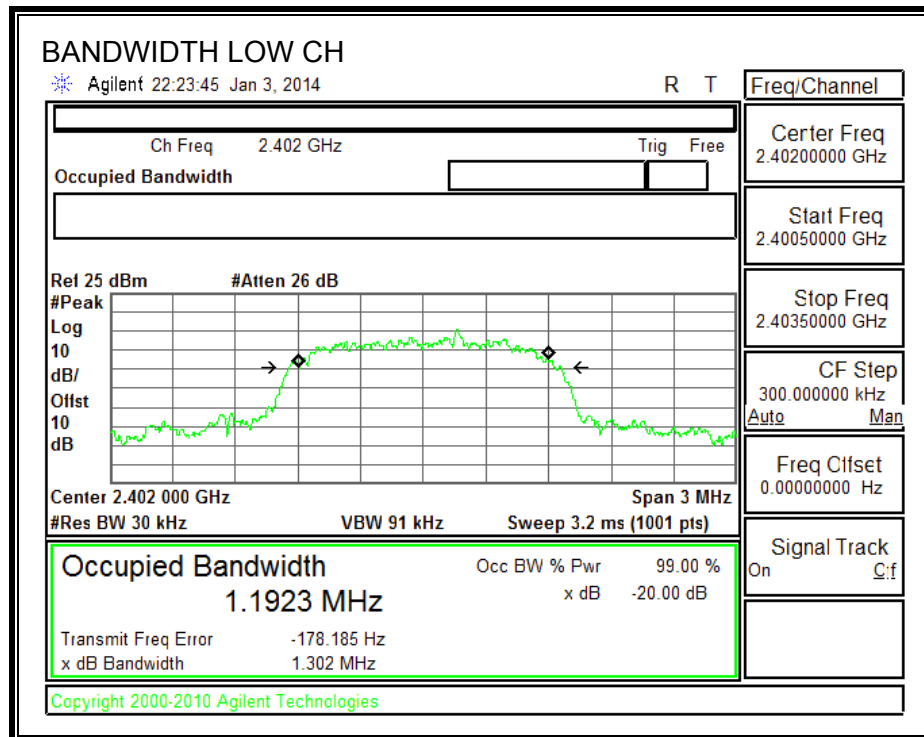

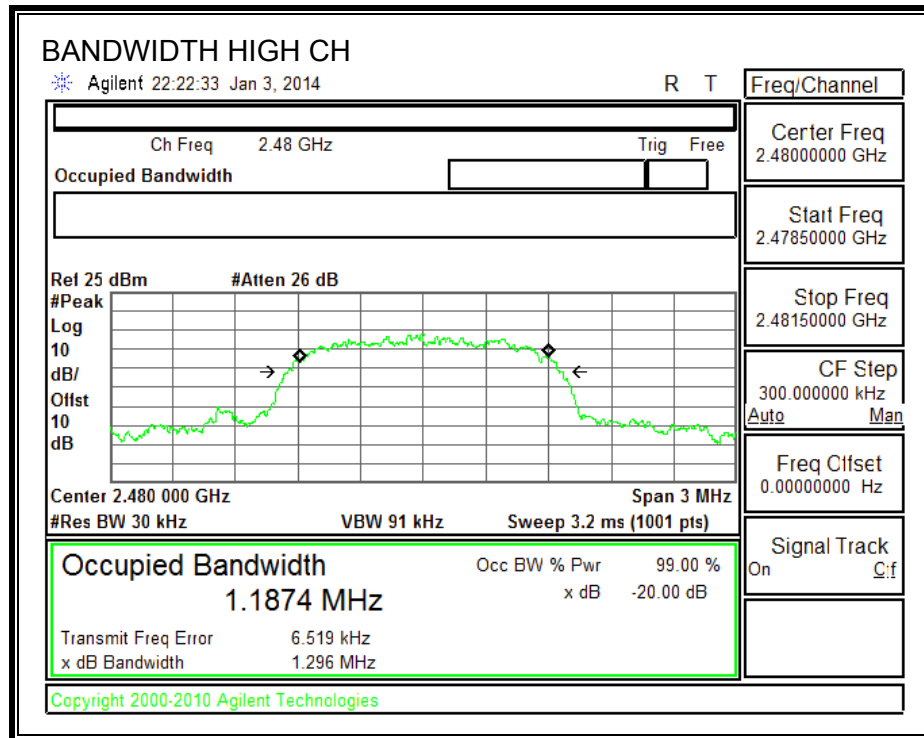

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

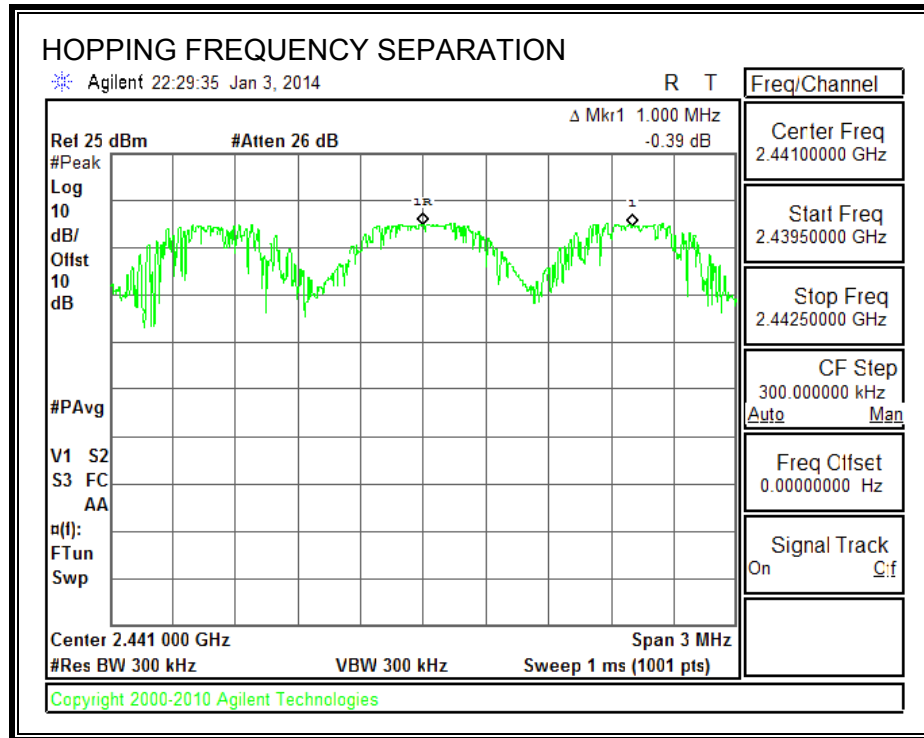

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

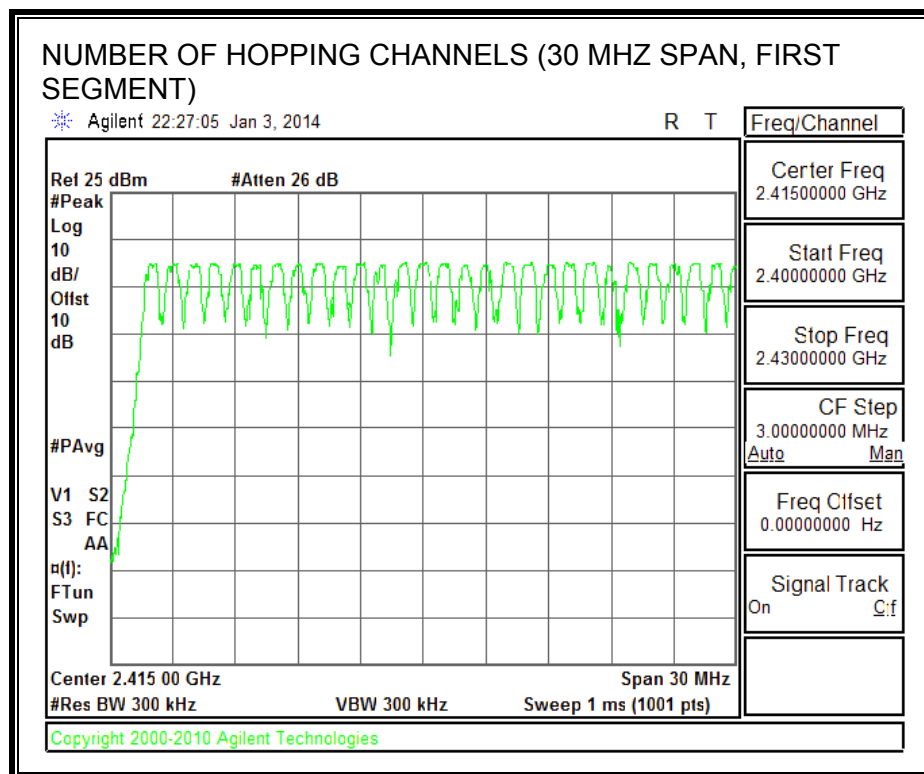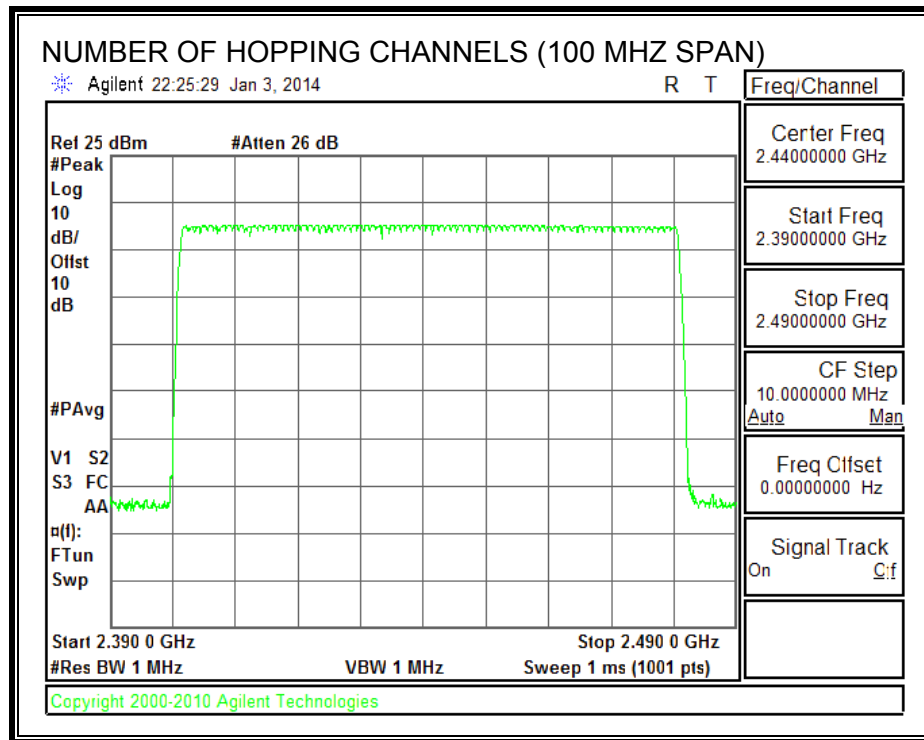

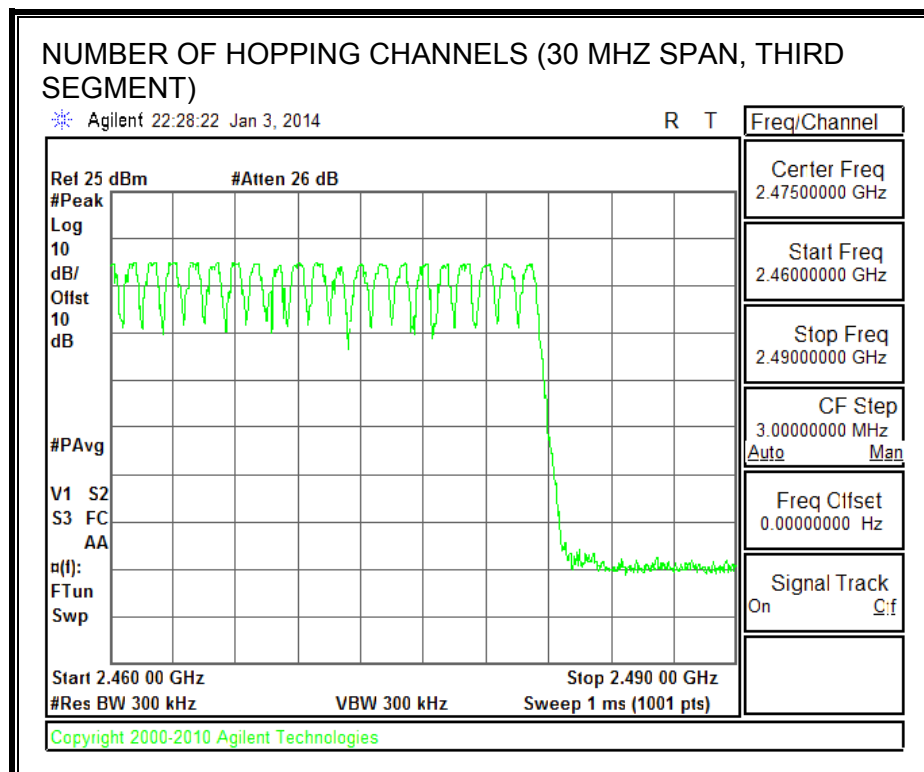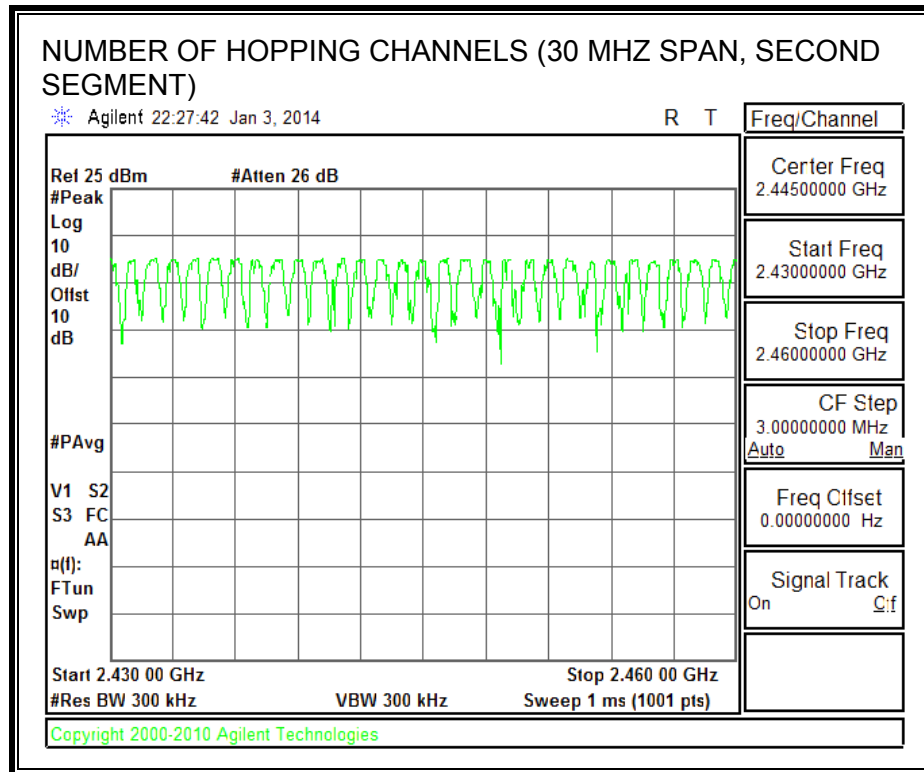

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.



The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.



For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.388	31	0.120	0.4	-0.280
DH3	1.645	10	0.165	0.4	-0.236
DH5	2.898	10	0.290	0.4	-0.110
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.388	8	0.031	0.4	-0.369
DH3	1.645	3	0.049	0.4	-0.351
DH5	2.898	3	0.087	0.4	-0.313

Note: 8PSK mode is using the same packet timing and data same as GFSK.

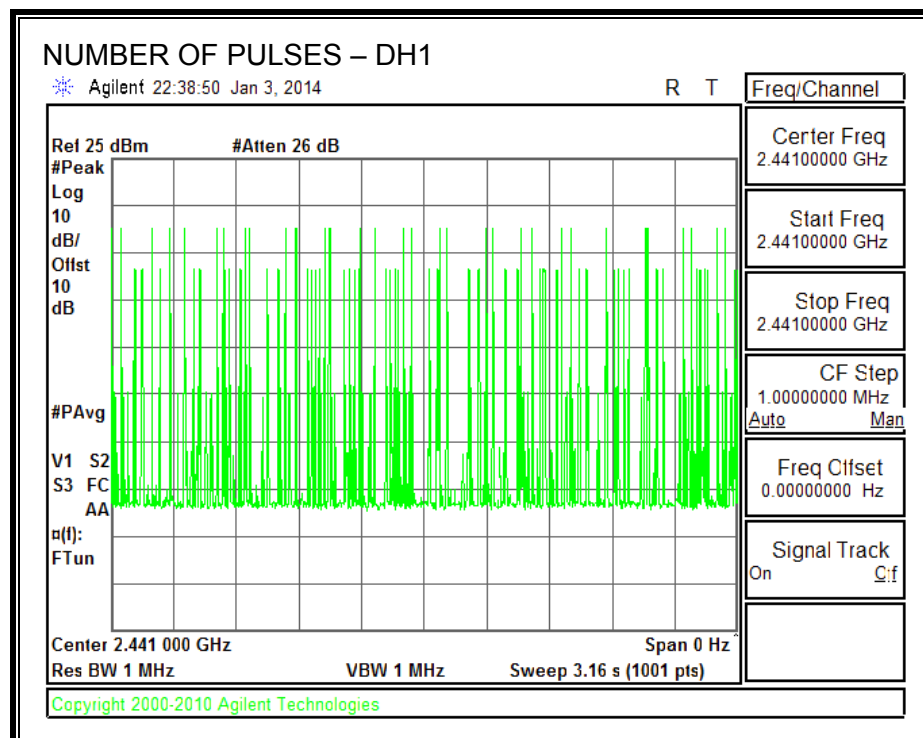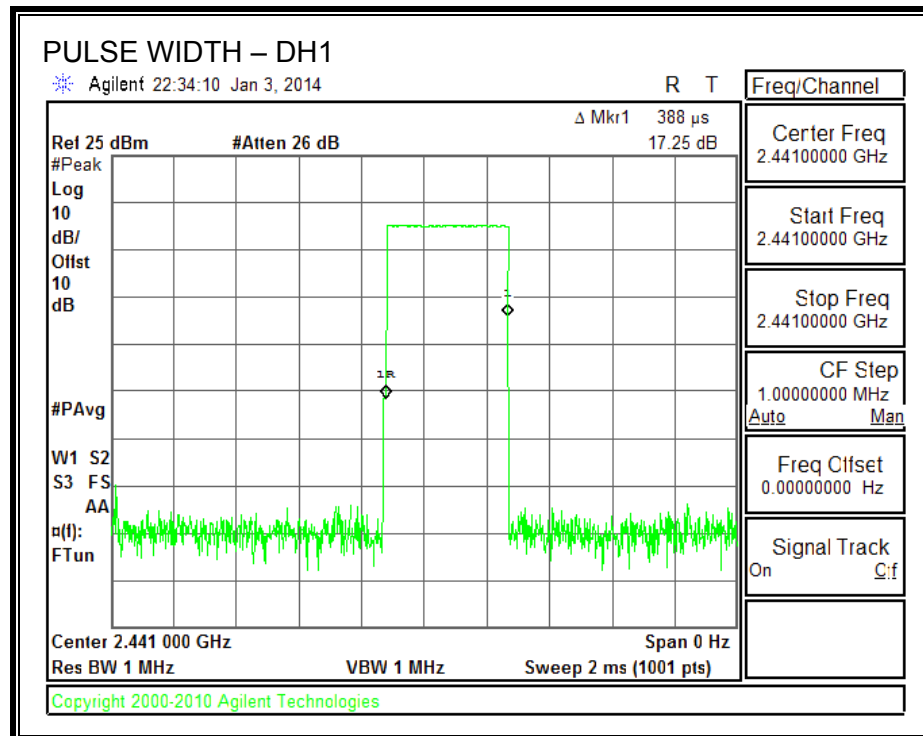


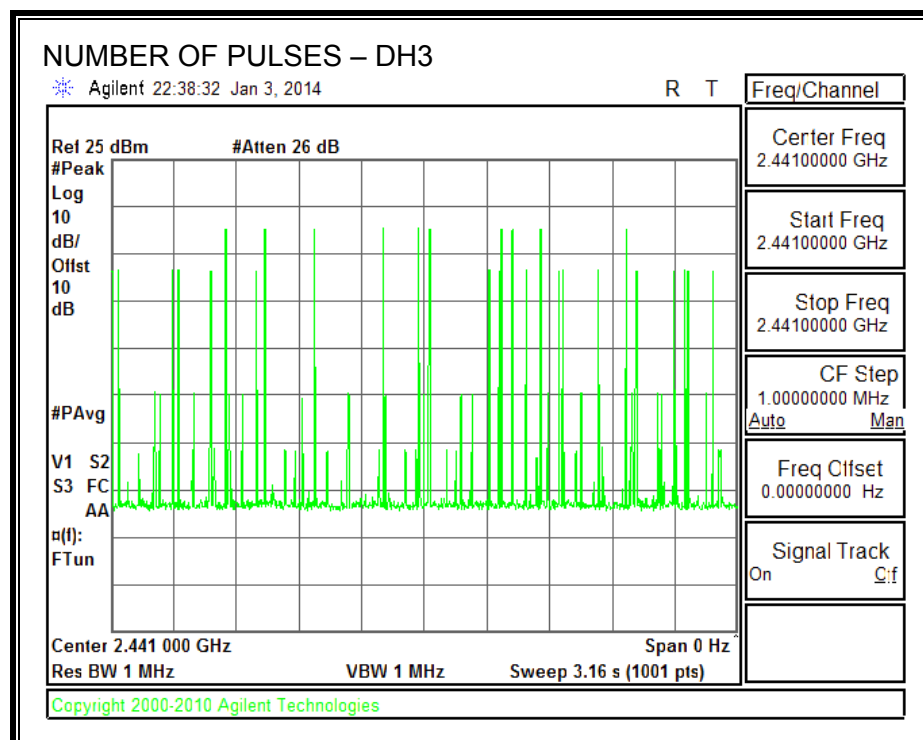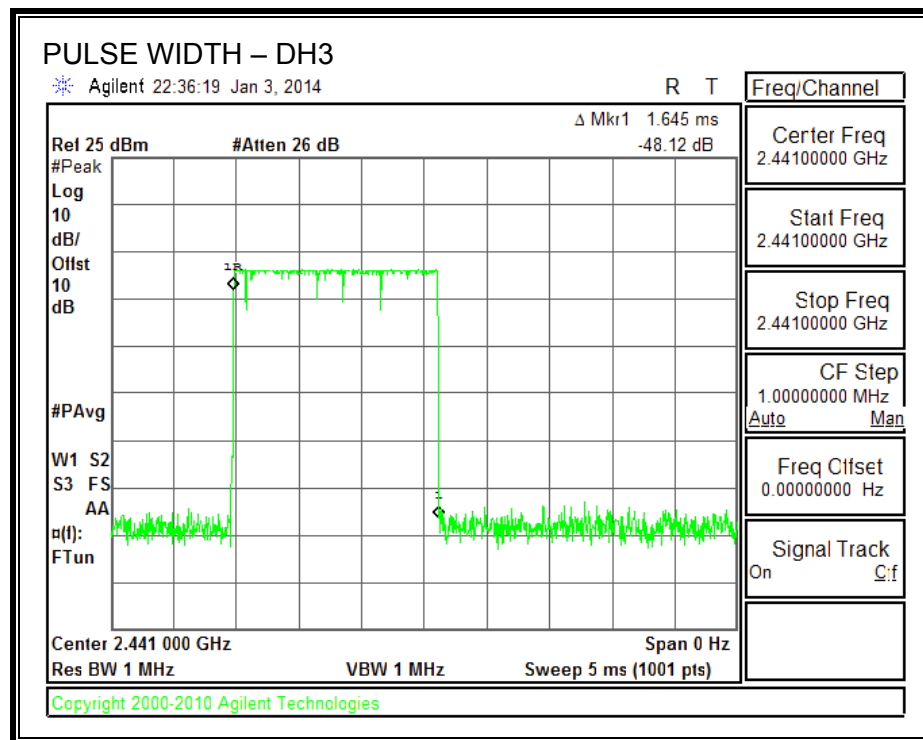

PULSE WIDTH – DH5

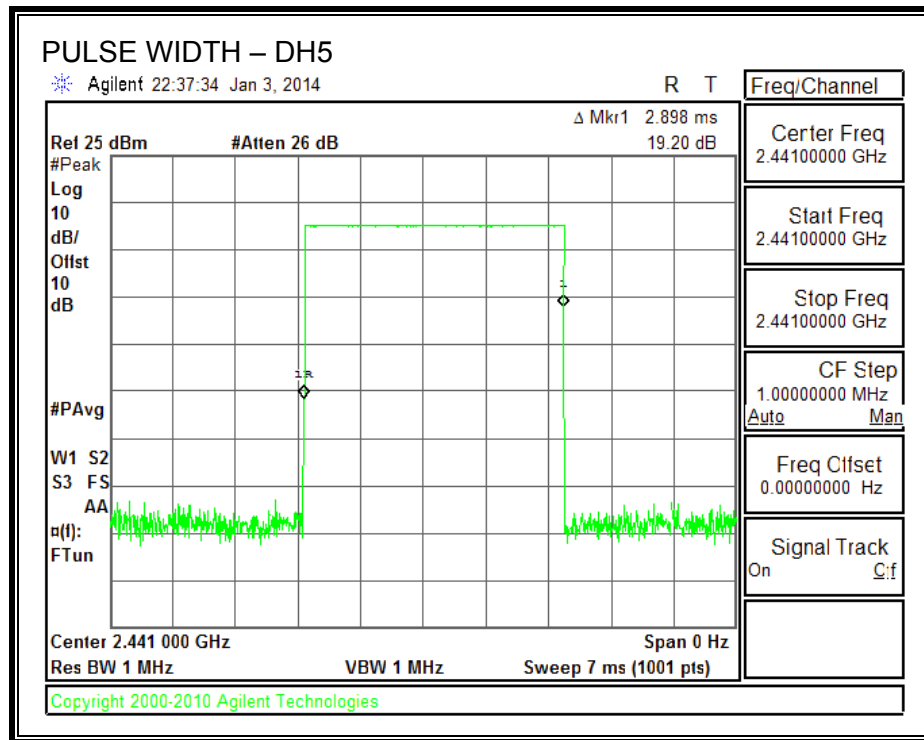

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

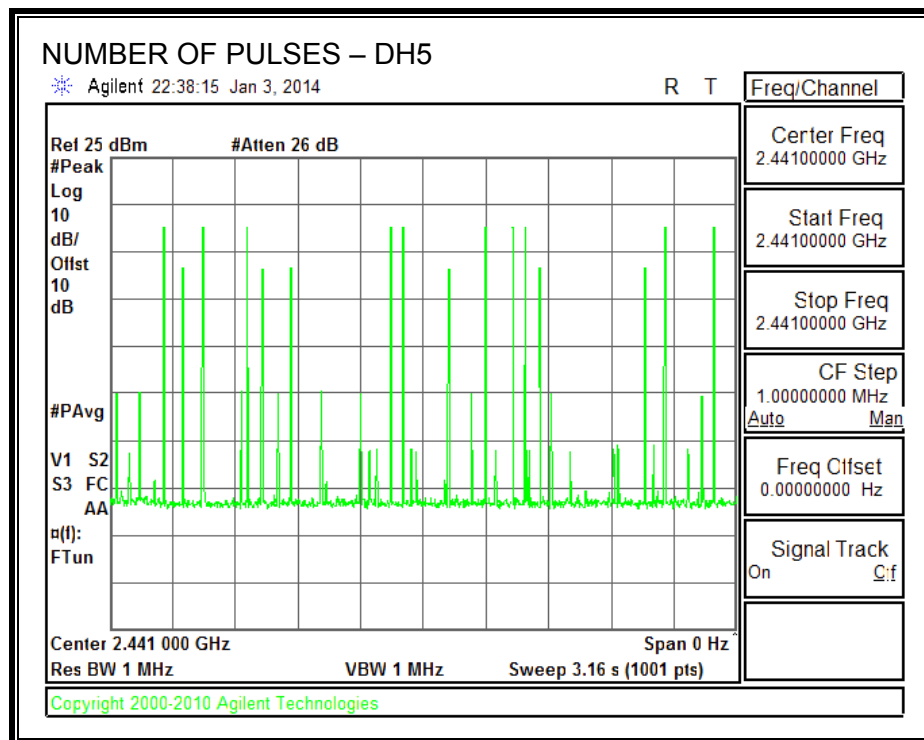

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.12	21	-10.88
Middle	2441	10.27	21	-10.73
High	2480	9.85	21	-11.15
Worst		10.27		-10.73

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.54	21	-10.46
Middle	2441	10.67	21	-10.33
High	2480	10.25	21	-10.75
Worst		10.67		-10.33


GFSK OUTPUT POWER

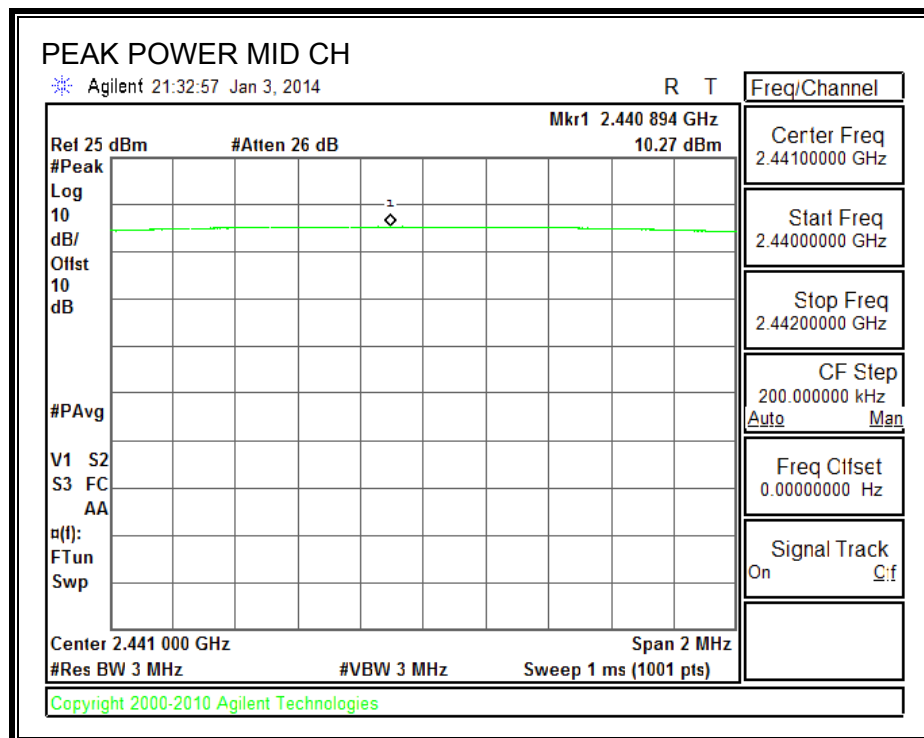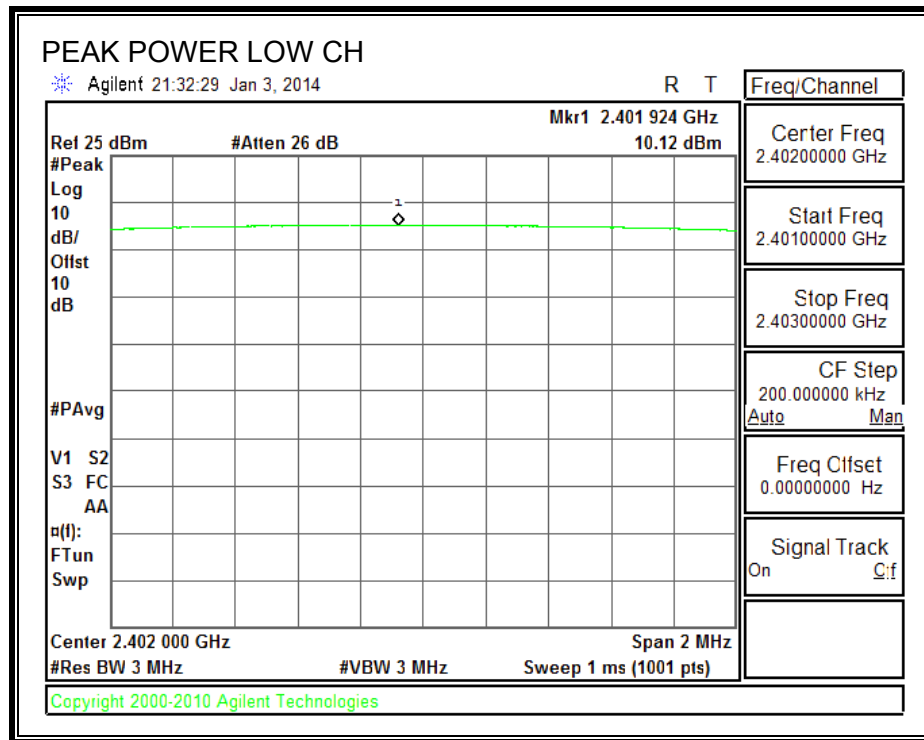

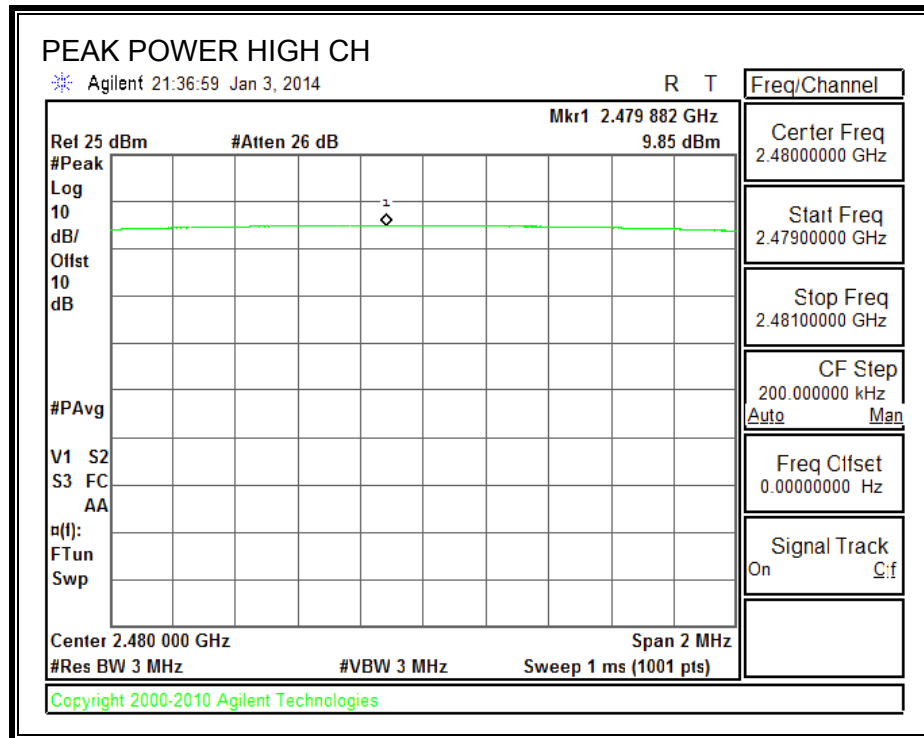

8PSK OUTPUT POWER

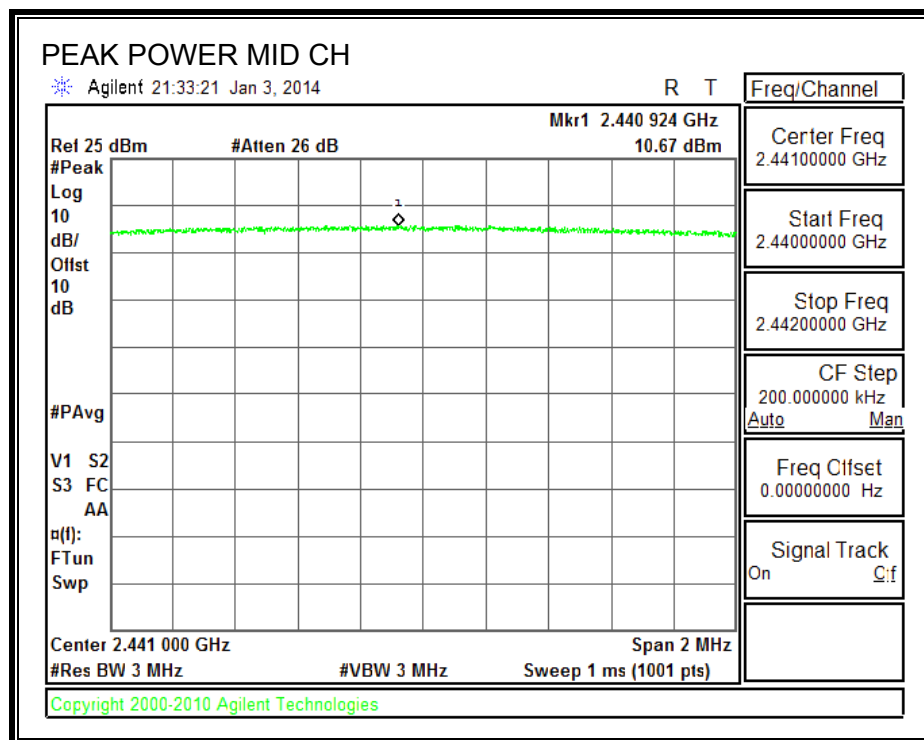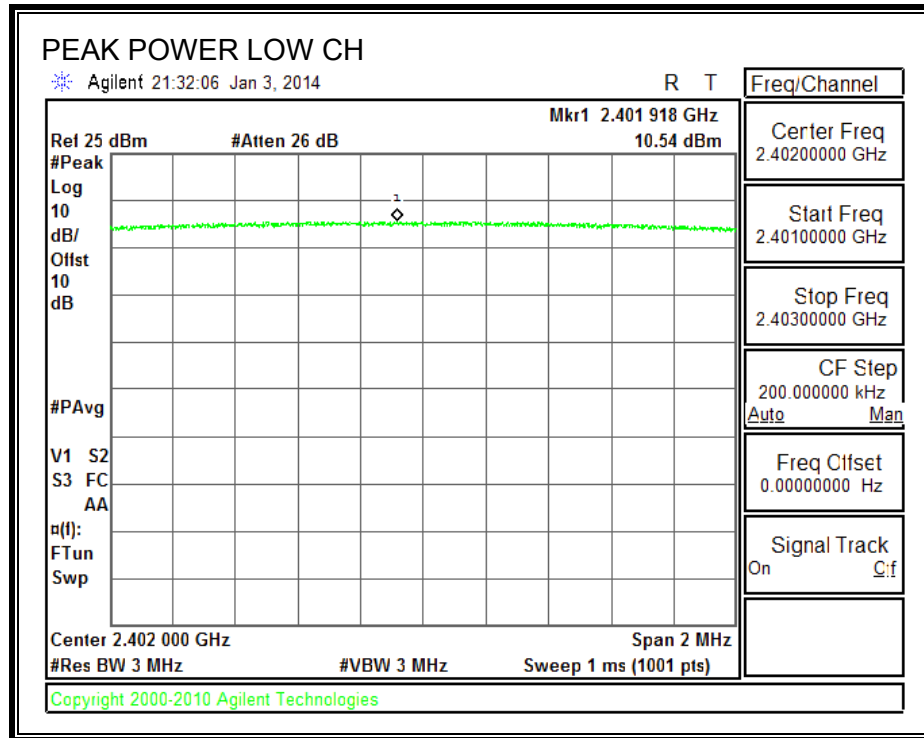

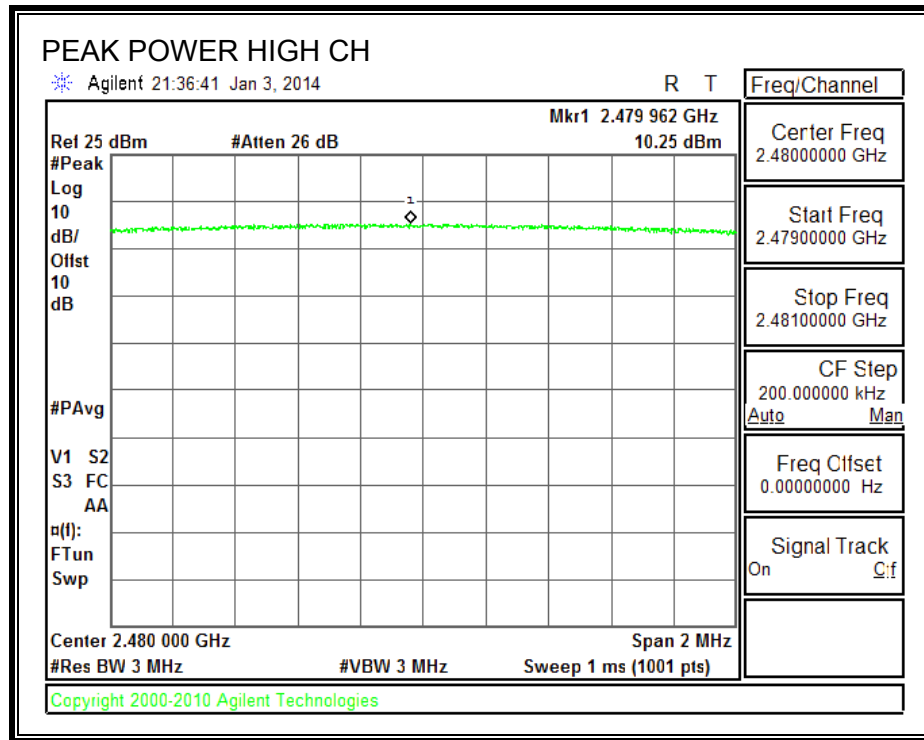

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.20
Middle	2441	9.90
High	2480	9.70
Worst		10.20

8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.70
Middle	2441	7.40
High	2480	7.20
Worst		7.70

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

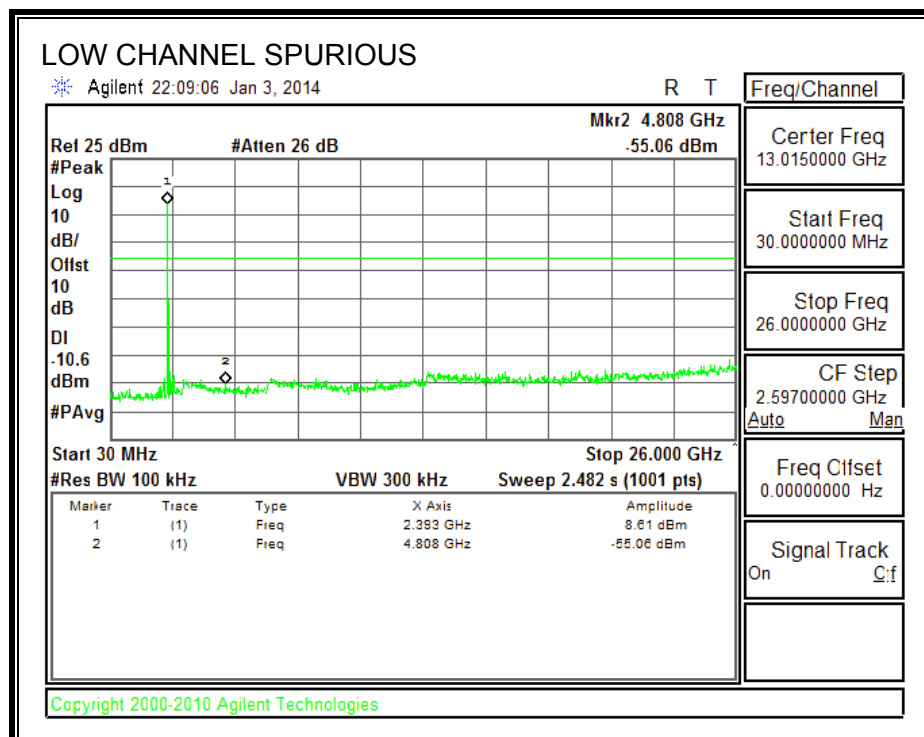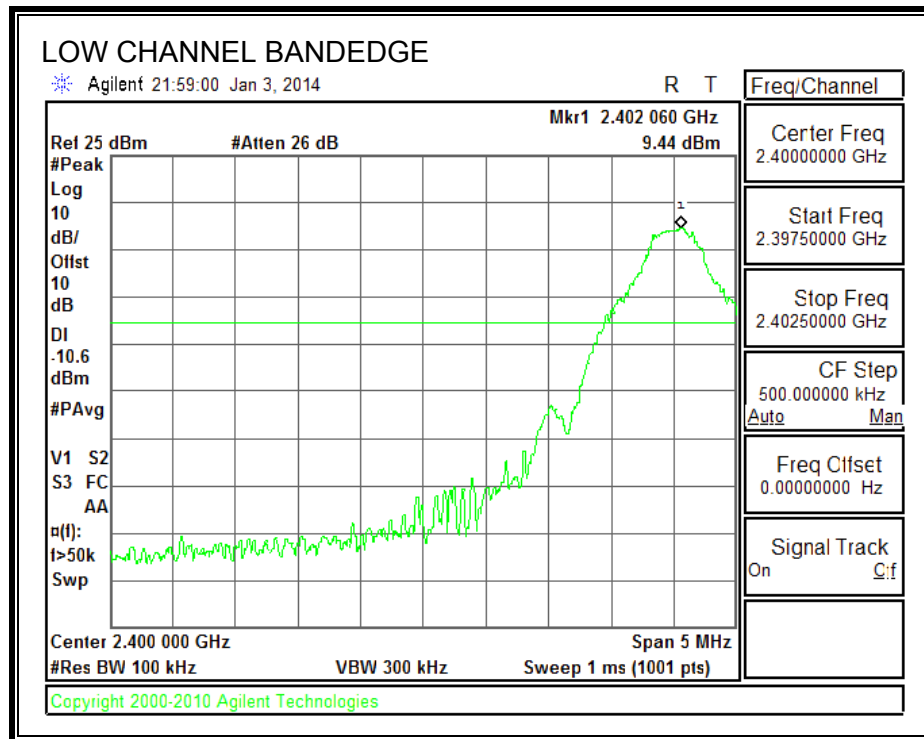



SPURIOUS EMISSIONS, MID CHANNEL

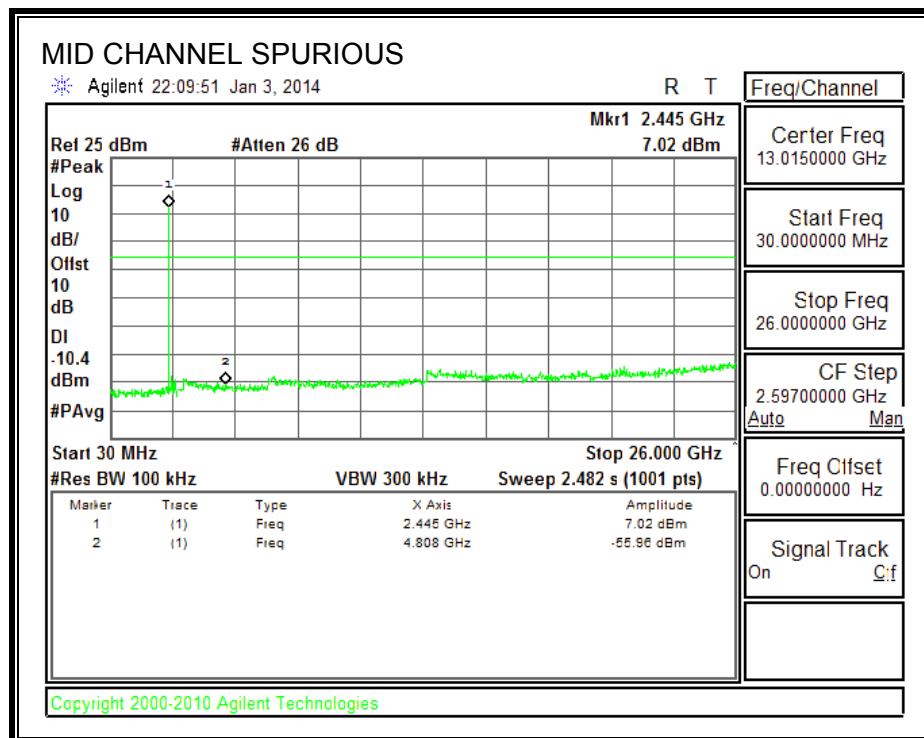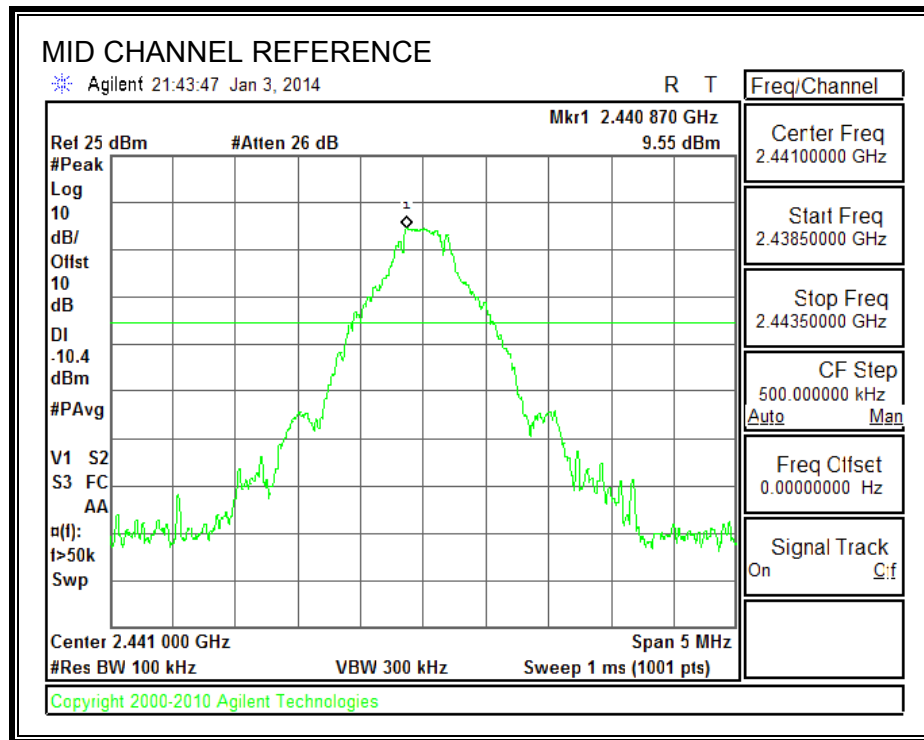

SPURIOUS EMISSIONS, HIGH CHANNEL

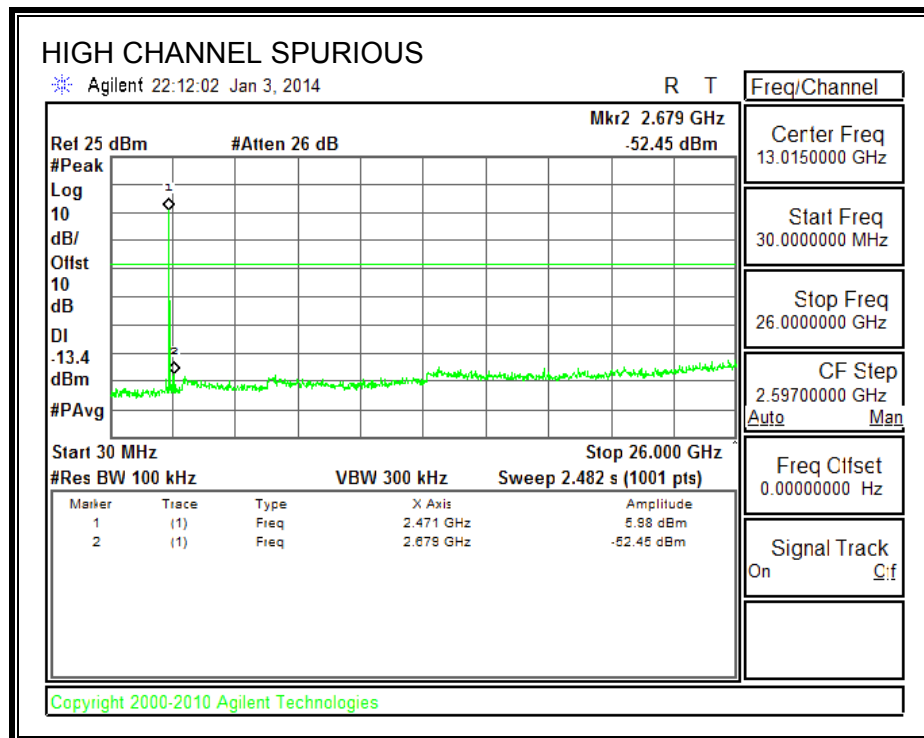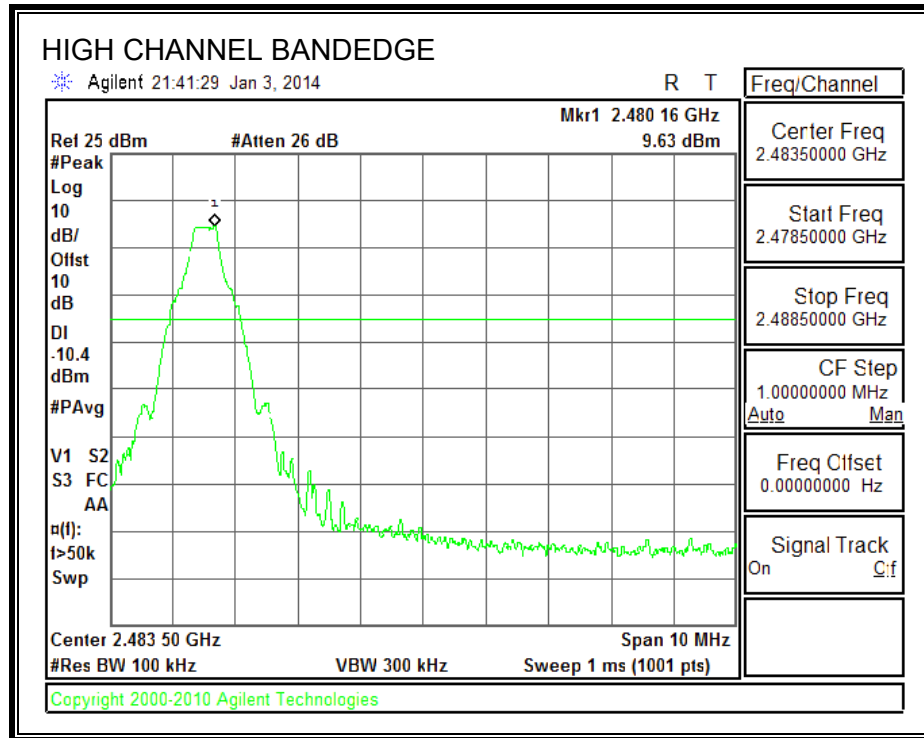



SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

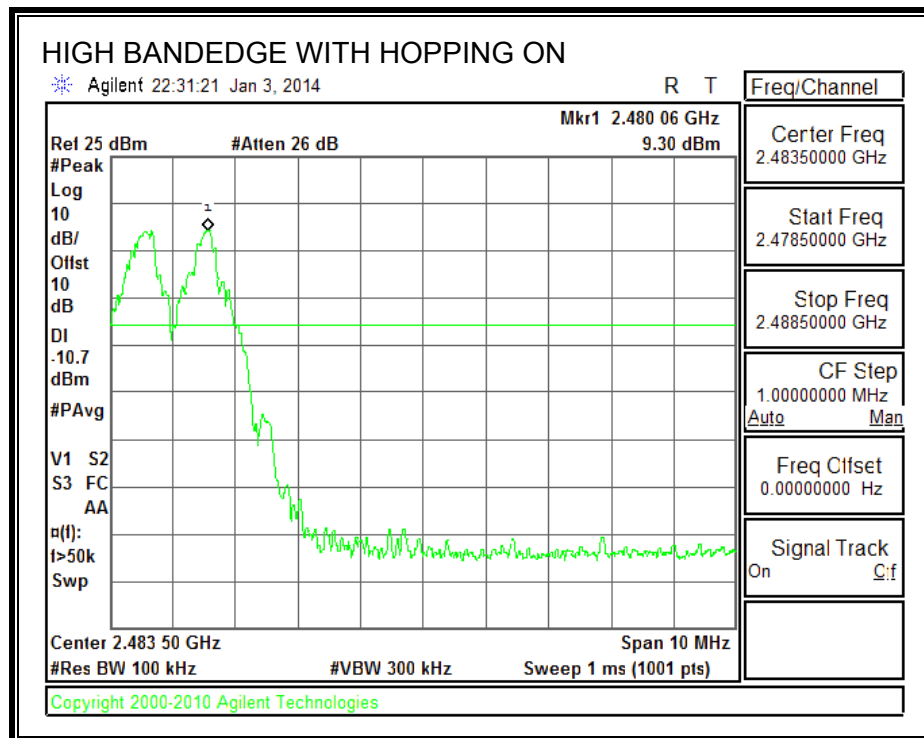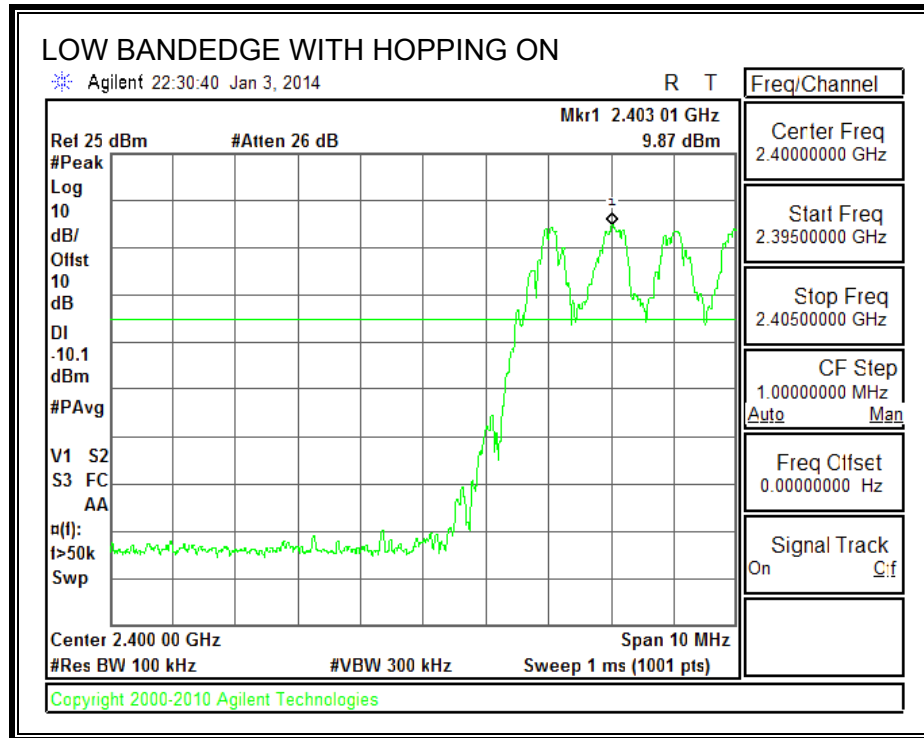



8.7.1. ENHANCED DATA RATE 8PSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL


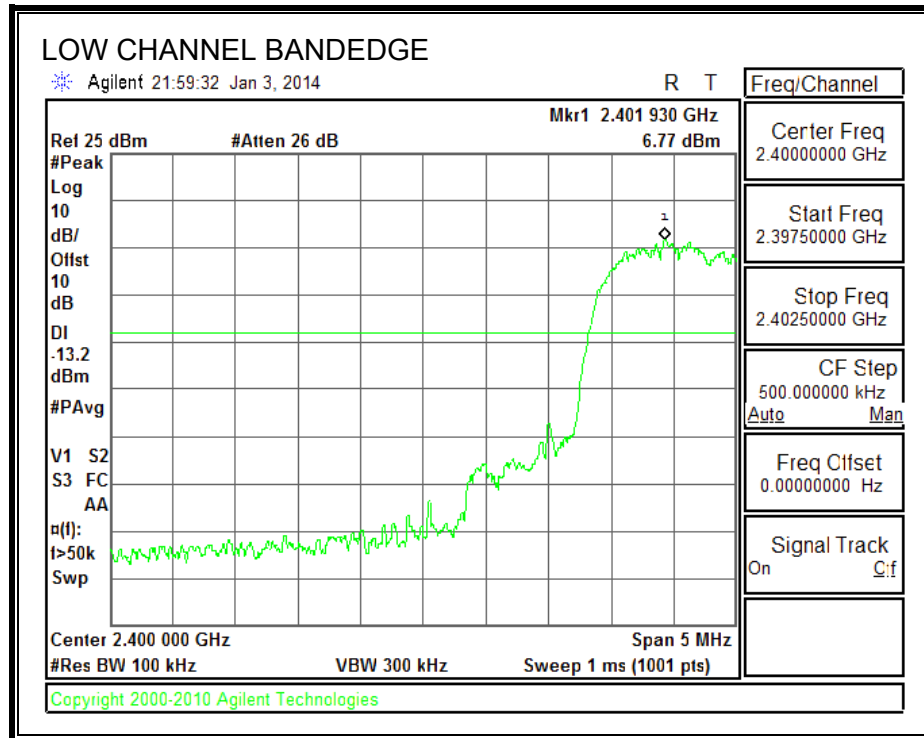


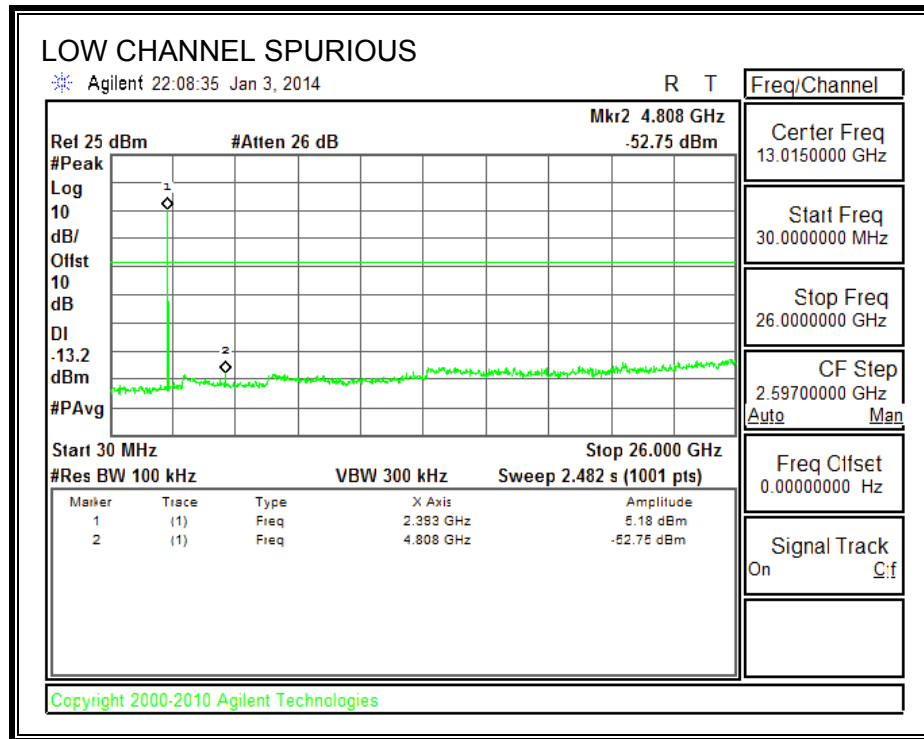

SPURIOUS EMISSIONS, MID CHANNEL

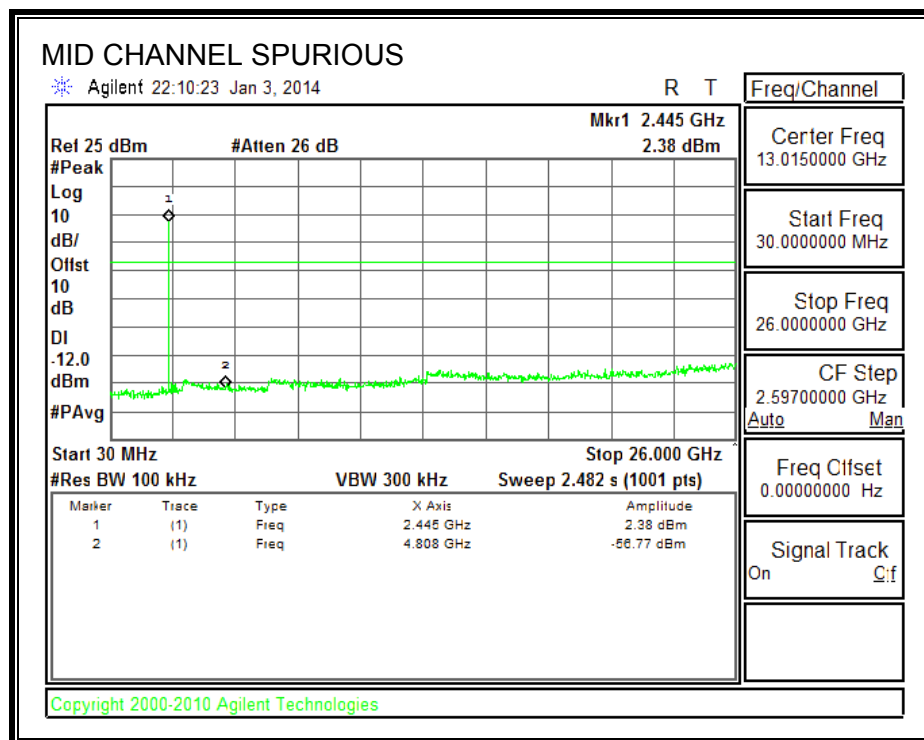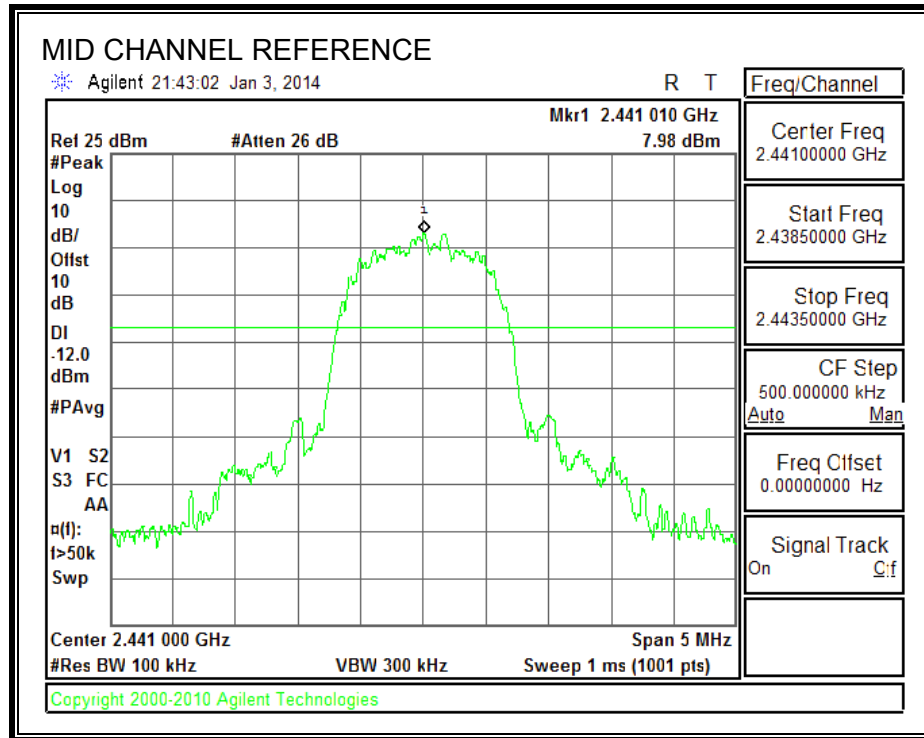

SPURIOUS EMISSIONS, HIGH CHANNEL

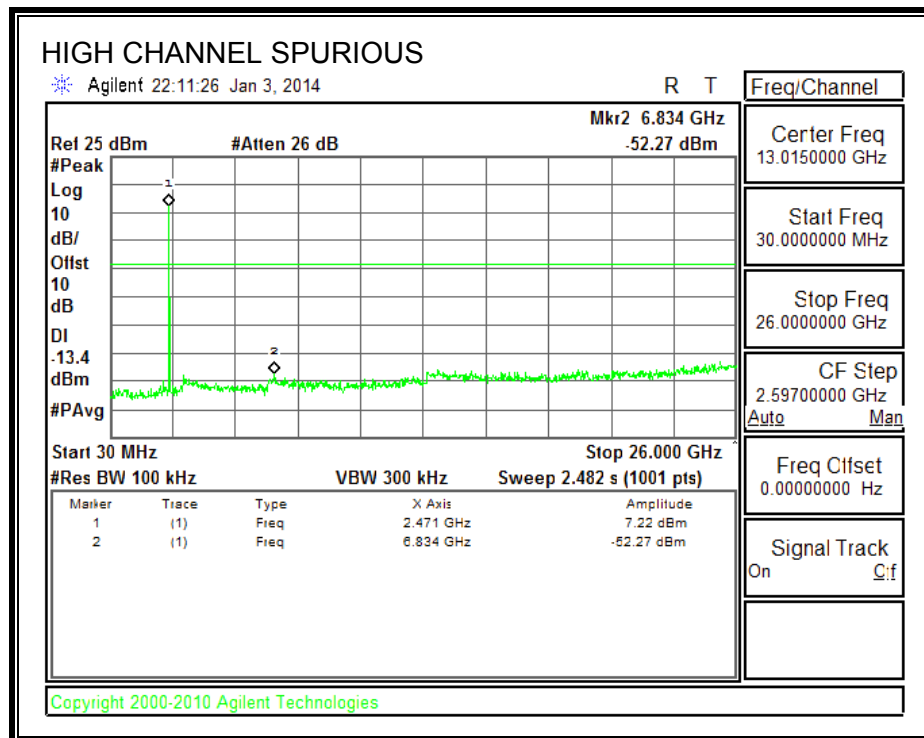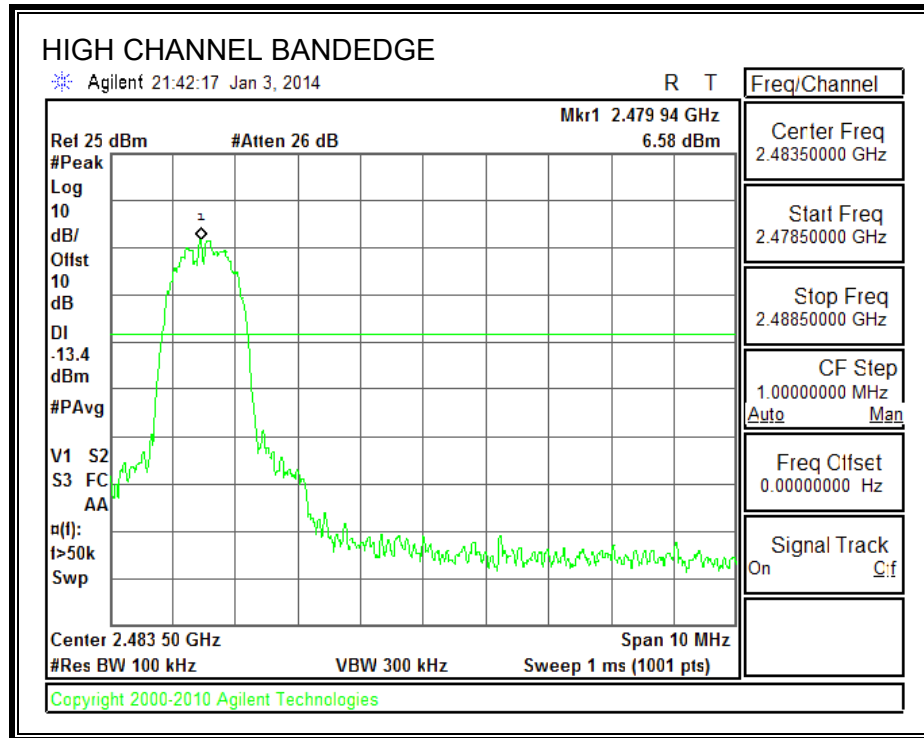

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. GFSK = $1/T = 360\text{Hz}$.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz


9.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

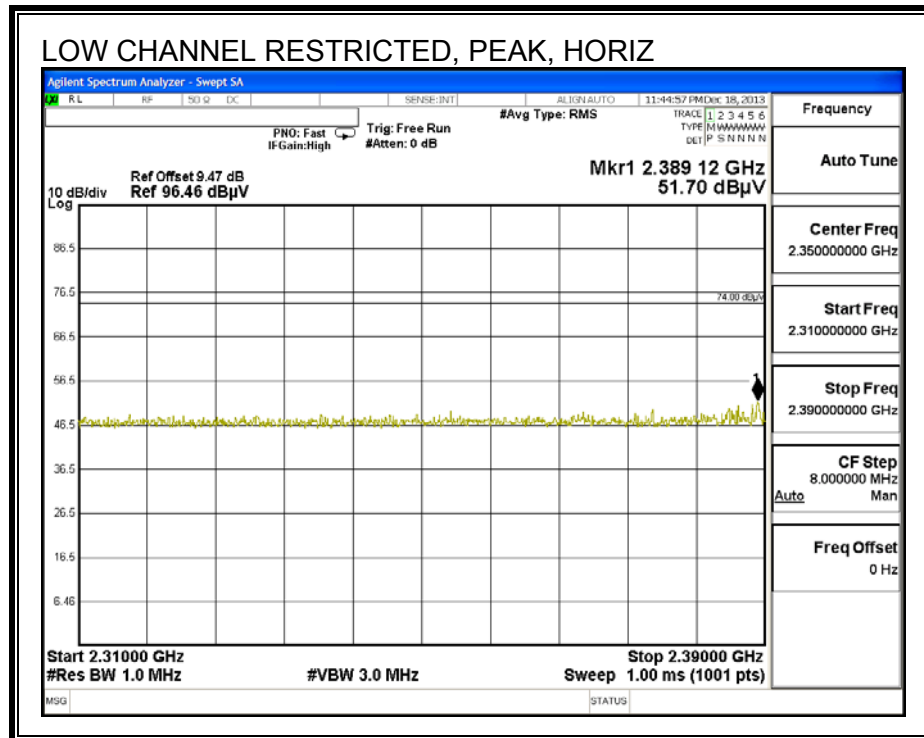

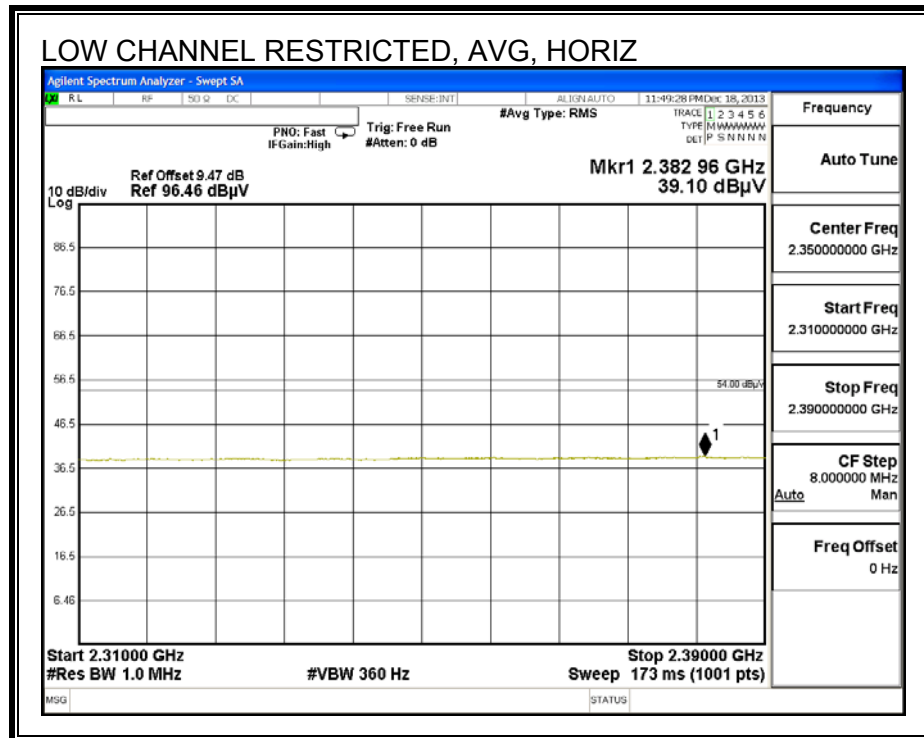



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

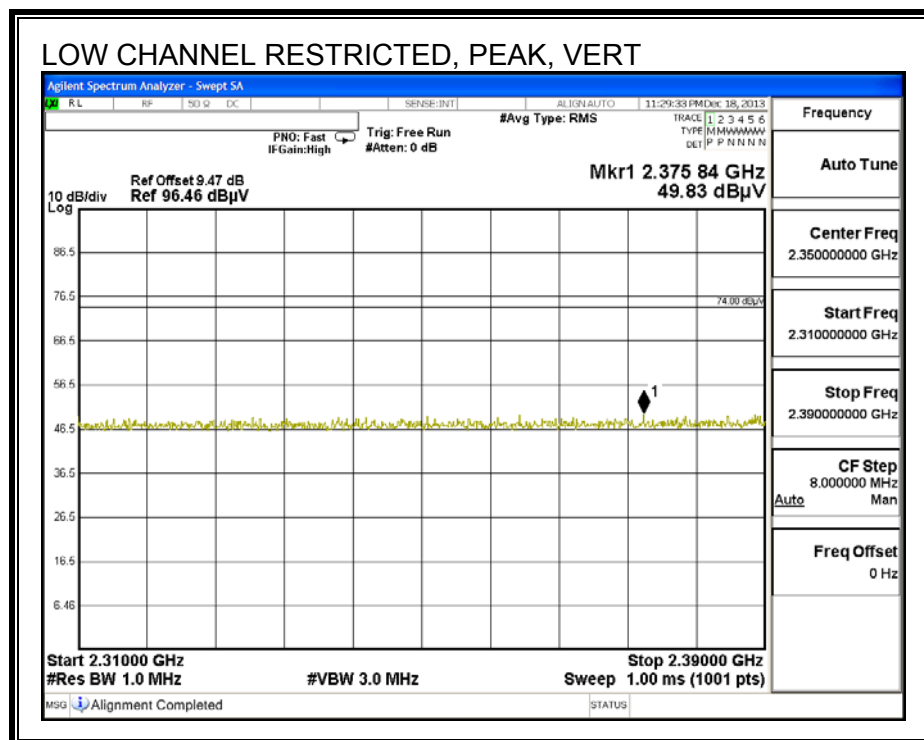

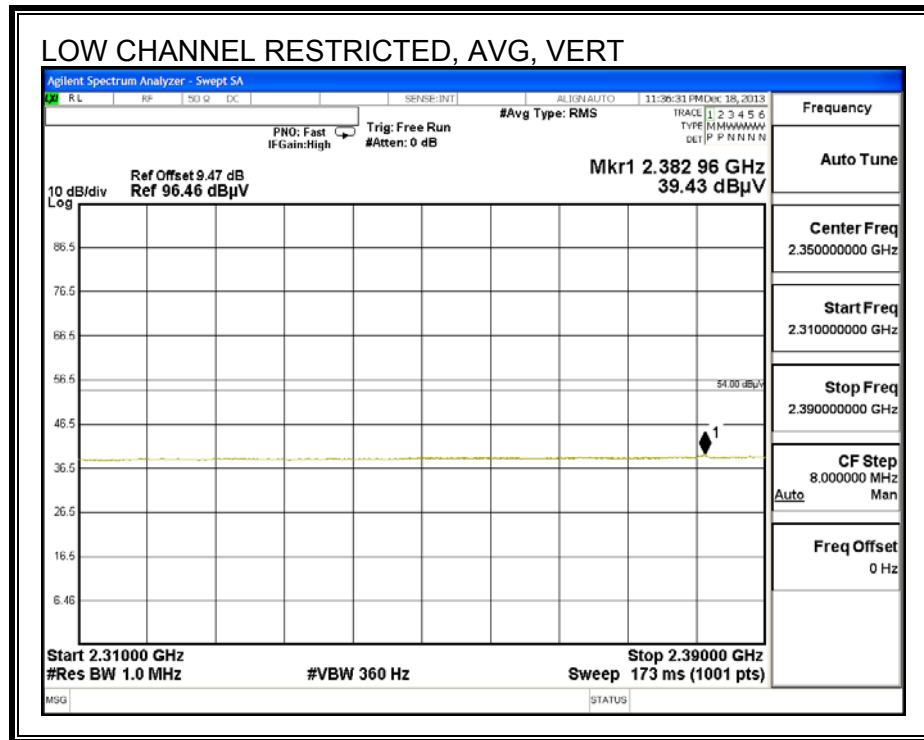



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

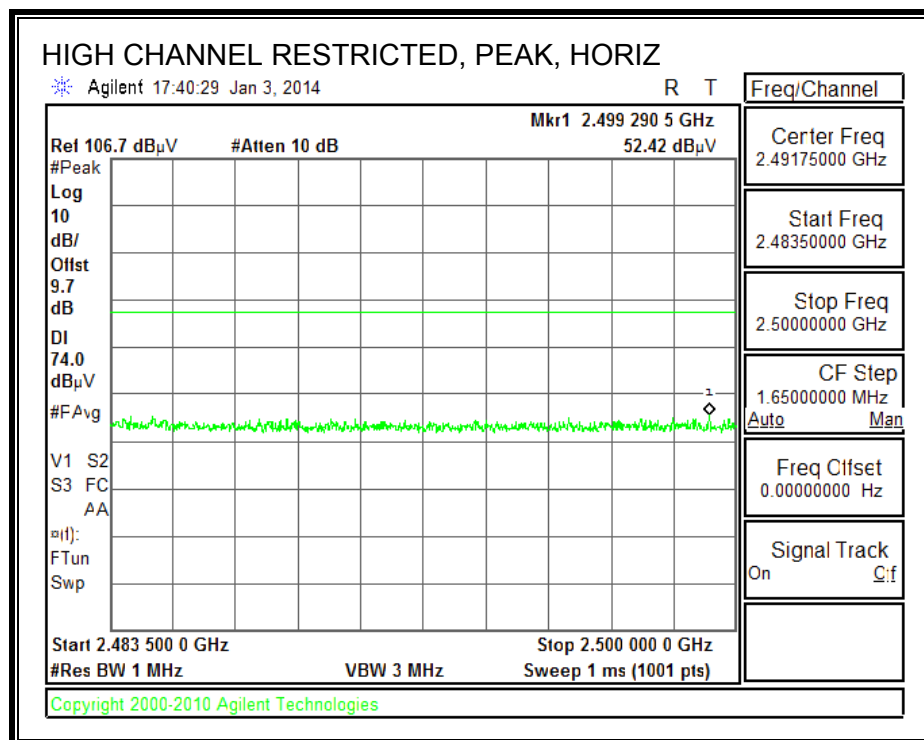

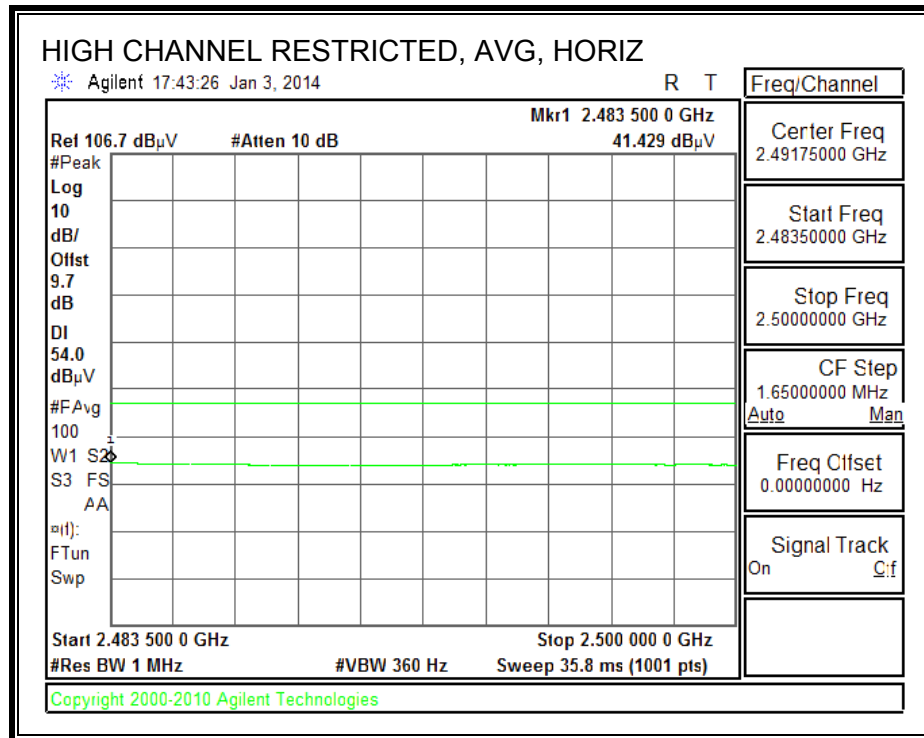


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

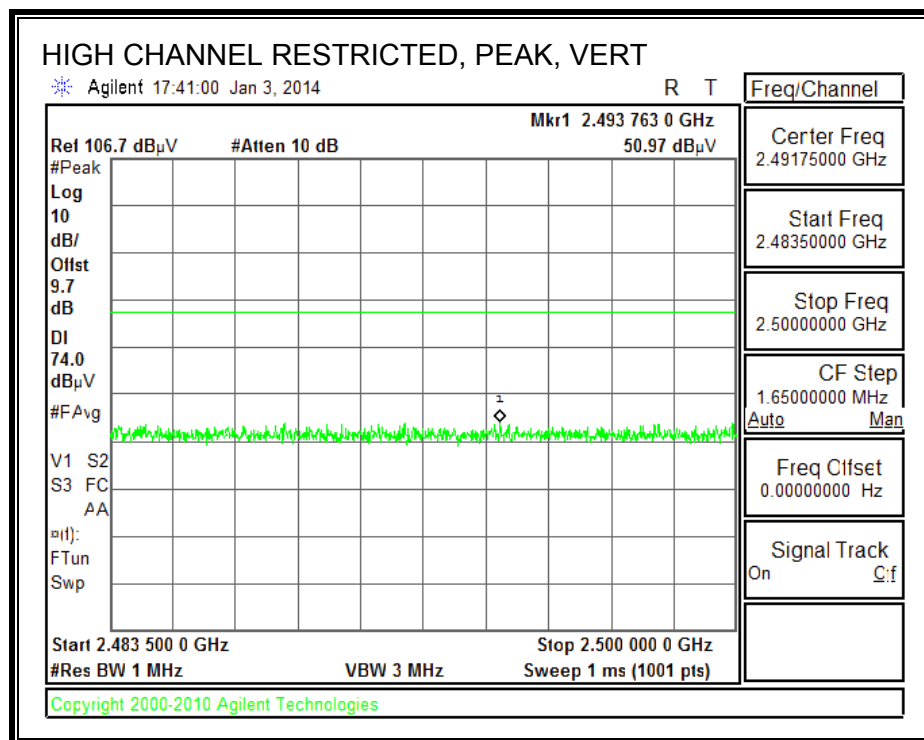

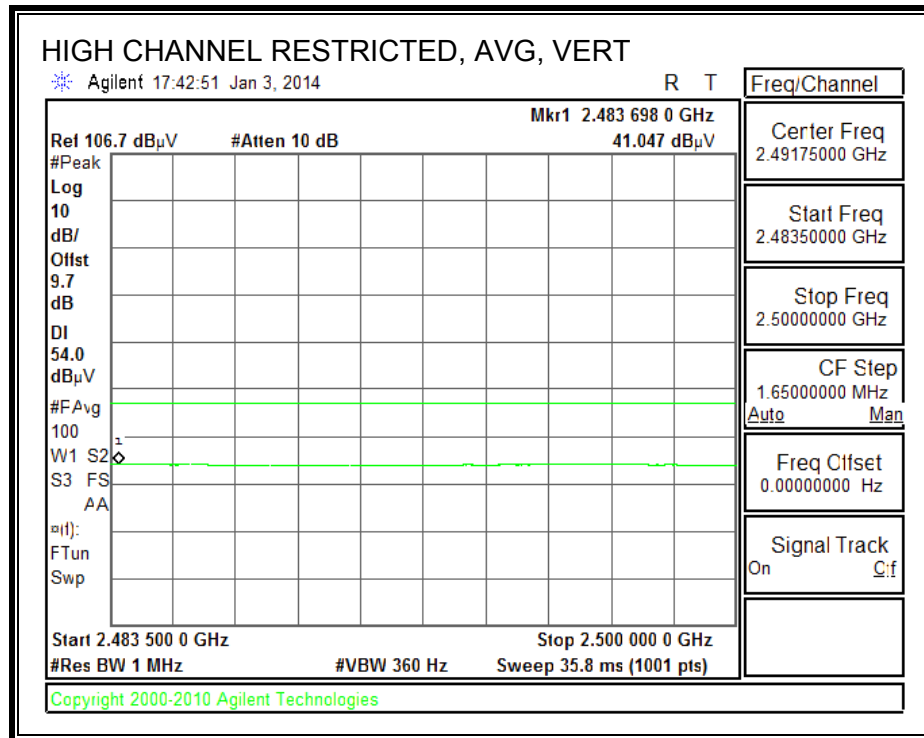


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

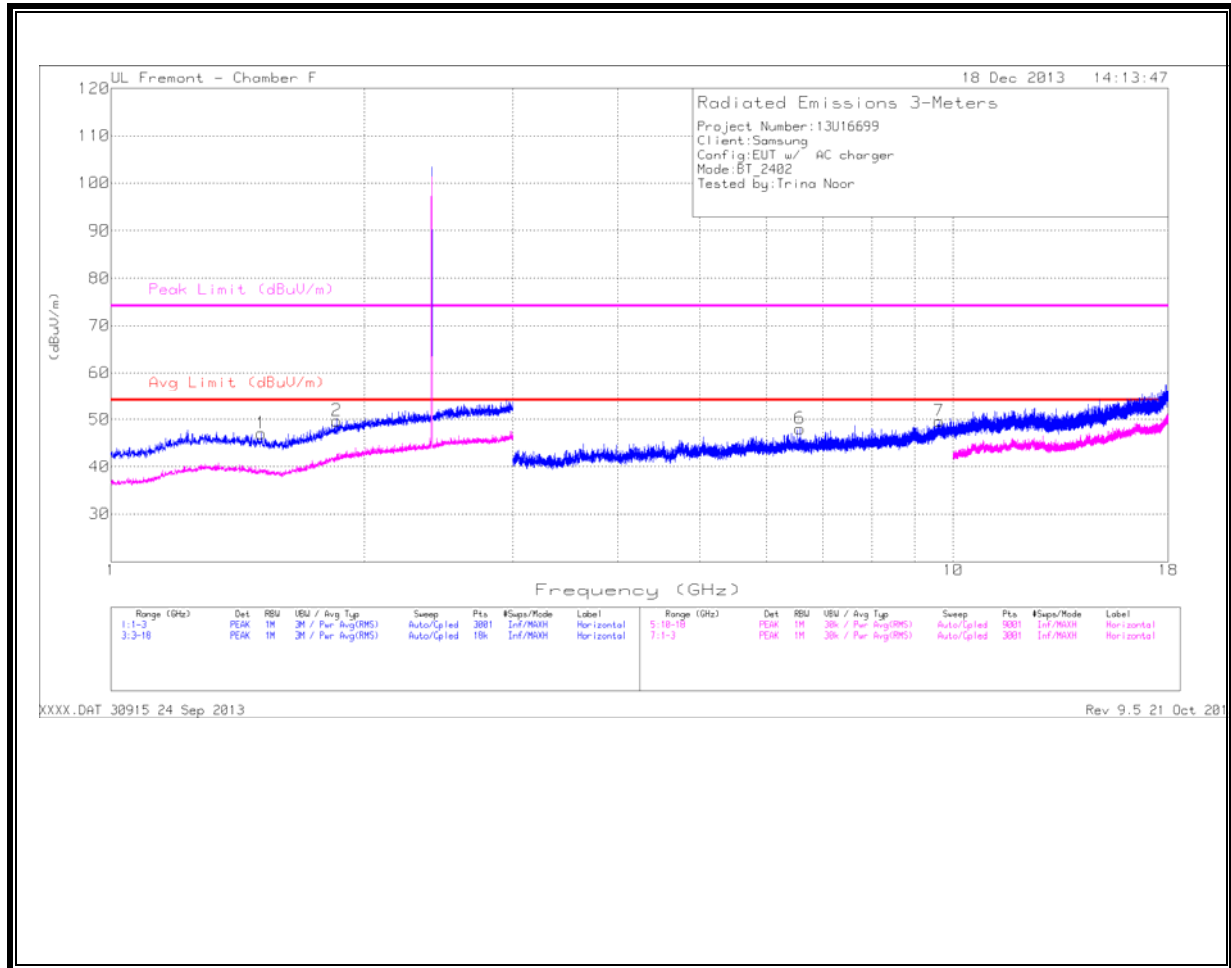

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

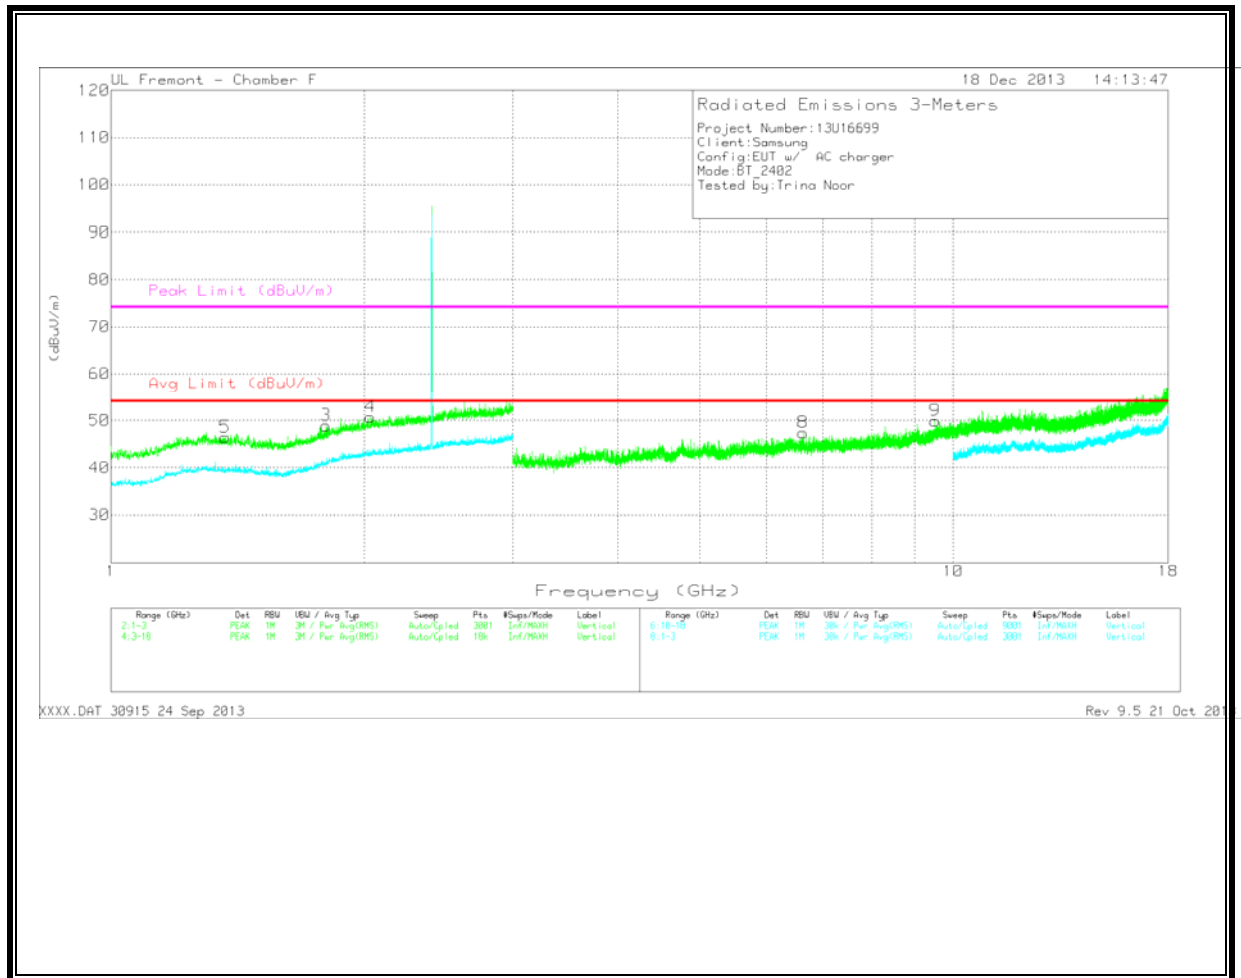

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb I/10dB Pad	Correct ed Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	1.366	41.41	PK	29.5	-24.5	46.41	53.97	-7.56	74	-27.59	0-360	201	V
1	1.508	42.63	PK	28.7	-24.3	47.03	53.97	-6.94	74	-26.97	0-360	100	H
3	1.8	42.2	PK	30.2	-23.5	48.9	53.97	-5.07	74	-25.1	0-360	201	V
2	1.854	42.11	PK	30.7	-23.1	49.71	53.97	-4.26	74	-24.29	0-360	100	H
4	2.033	42.11	PK	31.6	-23	50.71	53.97	-3.26	74	-23.29	0-360	201	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb I/3GHz HPF	Correct ed Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	6.578	39.15	PK	35.8	-26.9	48.05	53.97	-5.92	74	-25.95	0-360	100	H
8	6.633	38.38	PK	35.8	-26.8	47.38	53.97	-6.59	74	-26.62	0-360	200	V
9	9.516	35.62	PK	37.2	-22.9	49.92	53.97	-4.05	74	-24.08	0-360	200	V
7	9.629	34.54	PK	37.3	-22.2	49.64	53.97	-4.33	74	-24.36	0-360	199	H


PK - Peak detector

MID CHANNEL
HORIZONTAL

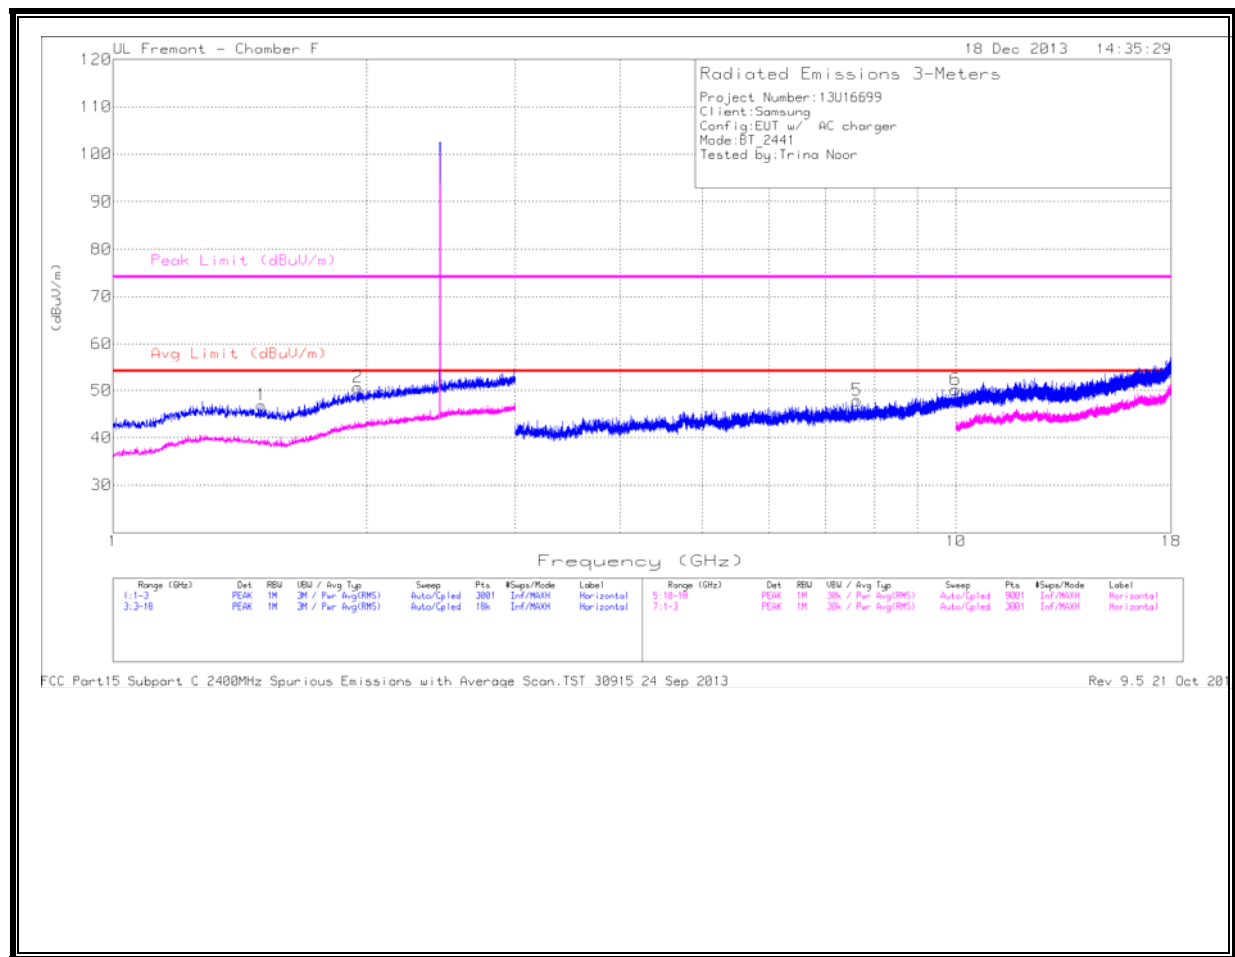

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

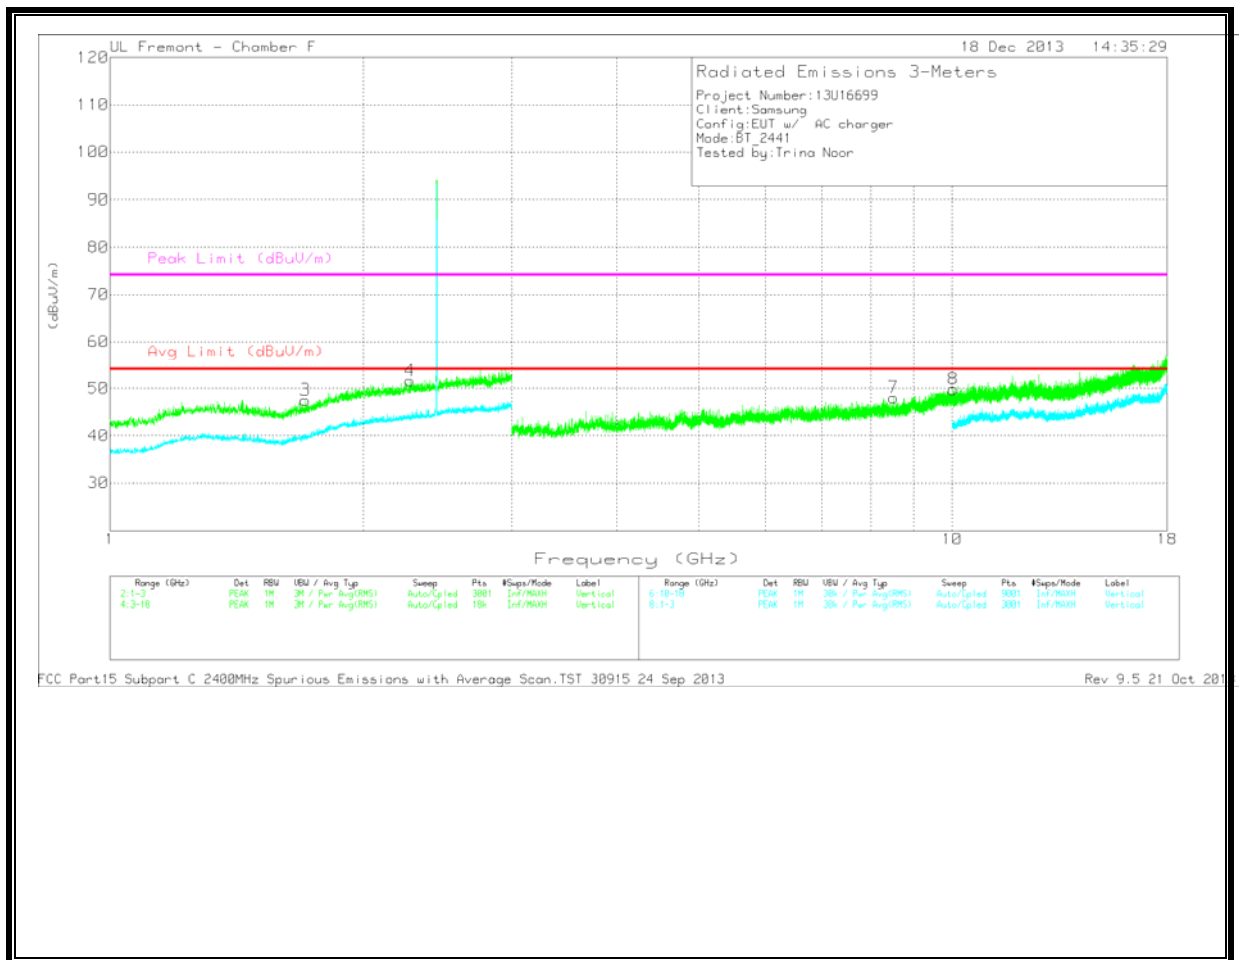

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb I/10dB Pad	Correct ed Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.501	42.47	PK	28.7	-24.3	46.87	53.97	-7.1	74	-27.13	0-360	100	H
3	1.706	42.29	PK	29	-23.8	47.49	53.97	-6.48	74	-26.51	0-360	101	V
2	1.952	42.62	PK	31.4	-23.4	50.62	53.97	-3.35	74	-23.38	0-360	100	H
4	2.27	42.09	PK	31.9	-22.4	51.59	53.97	-2.38	74	-22.41	0-360	200	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb I/3GHz HPF	Correct ed Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	7.63	37.65	PK	35.9	-25.7	47.85	53.97	-6.12	74	-26.15	0-360	199	H
7	8.521	37.09	PK	36	-25.1	47.99	53.97	-5.98	74	-26.01	0-360	200	V
6	9.985	34.35	PK	37.6	-21.8	50.15	53.97	-3.82	74	-23.85	0-360	100	H
8	10.027	34.51	PK	37.6	-22.3	49.81	53.97	-4.16	74	-24.19	0-360	101	V


PK - Peak detector

HIGH CHANNEL
HORIZONTAL

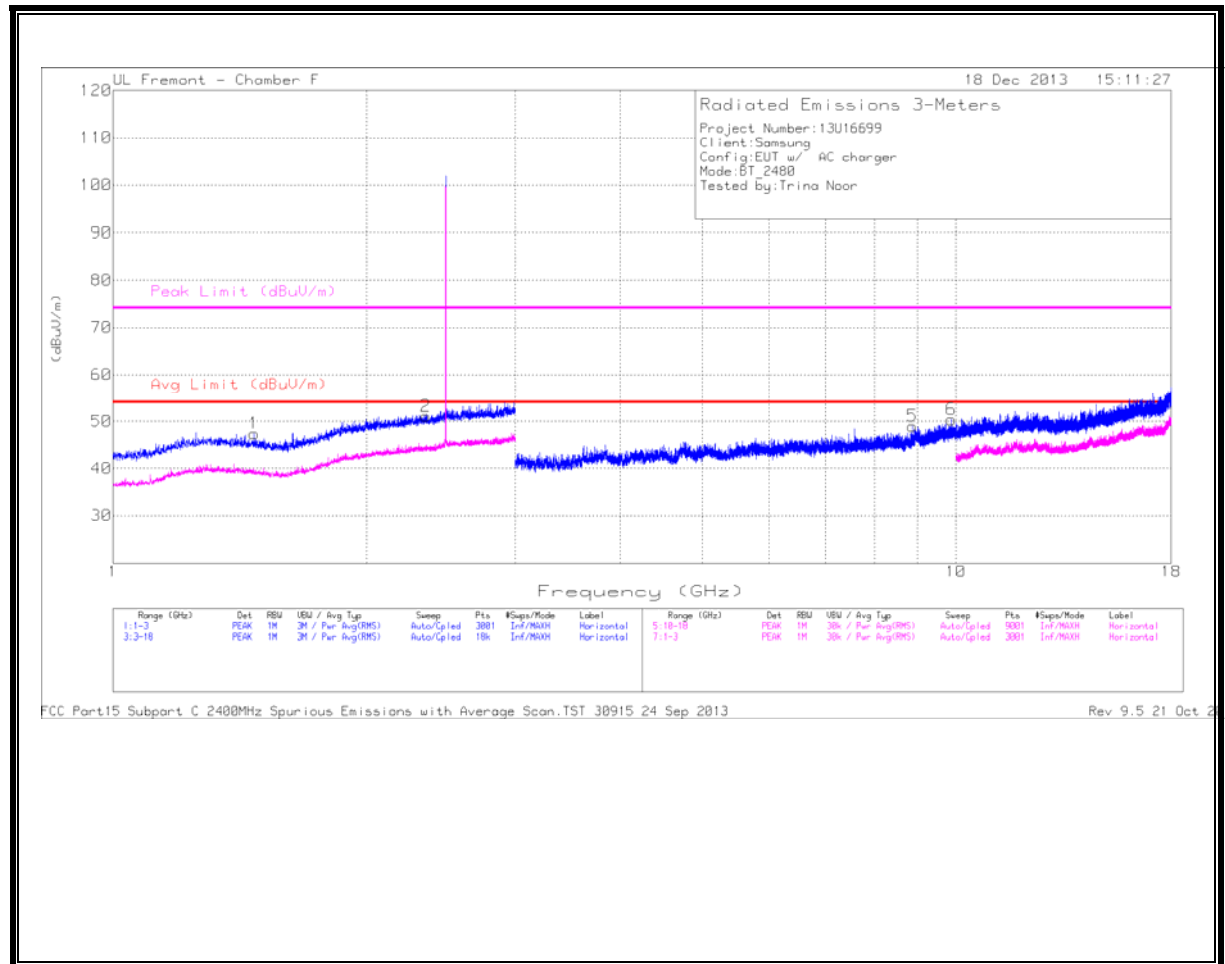

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

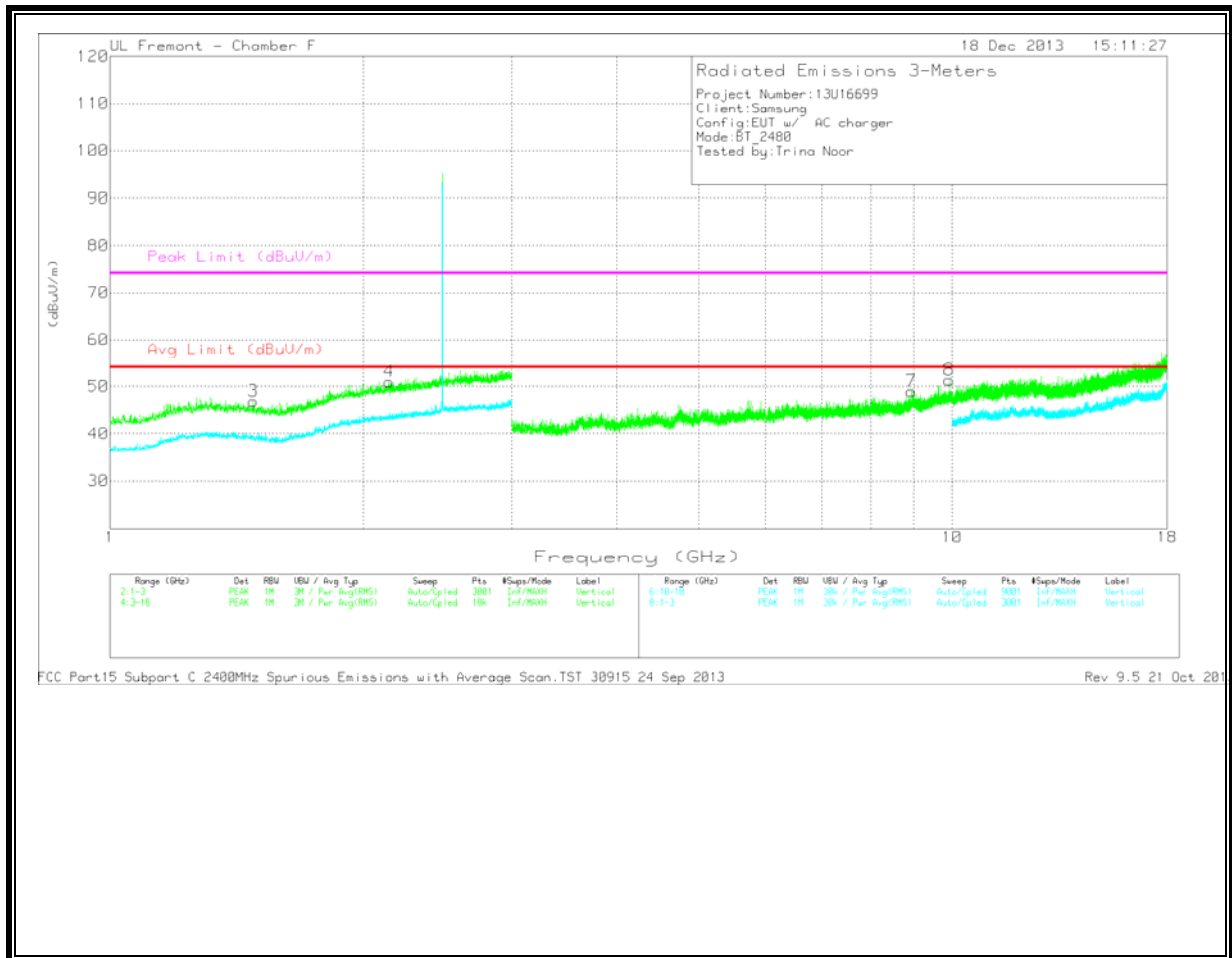

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb I/10dB Pad	Correct ed Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.471	42.69	PK	28.9	-24.2	47.39	53.97	-6.58	74	-26.61	0-360	199	H
3	1.479	42.34	PK	28.8	-24.3	46.84	53.97	-7.13	74	-27.16	0-360	101	V
4	2.145	42.08	PK	31.7	-22.8	50.98	53.97	-2.99	74	-23.02	0-360	101	V
2	2.351	41.35	PK	32.1	-22.4	51.05	53.97	-2.92	74	-22.95	0-360	199	H


PK - Peak detector


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb I/3GHz HPF	Correct ed Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	8.876	36.84	PK	36.3	-24.2	48.94	53.97	-5.03	74	-25.06	0-360	100	H
7	8.947	35.85	PK	36.3	-23.2	48.95	53.97	-5.02	74	-25.05	0-360	101	V
6	9.88	35.38	PK	37.6	-22.6	50.38	53.97	-3.59	74	-23.62	0-360	199	H
8	9.92	35.65	PK	37.6	-21.9	51.35	53.97	-2.62	74	-22.65	0-360	101	V

PK - Peak detector


9.2.2. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

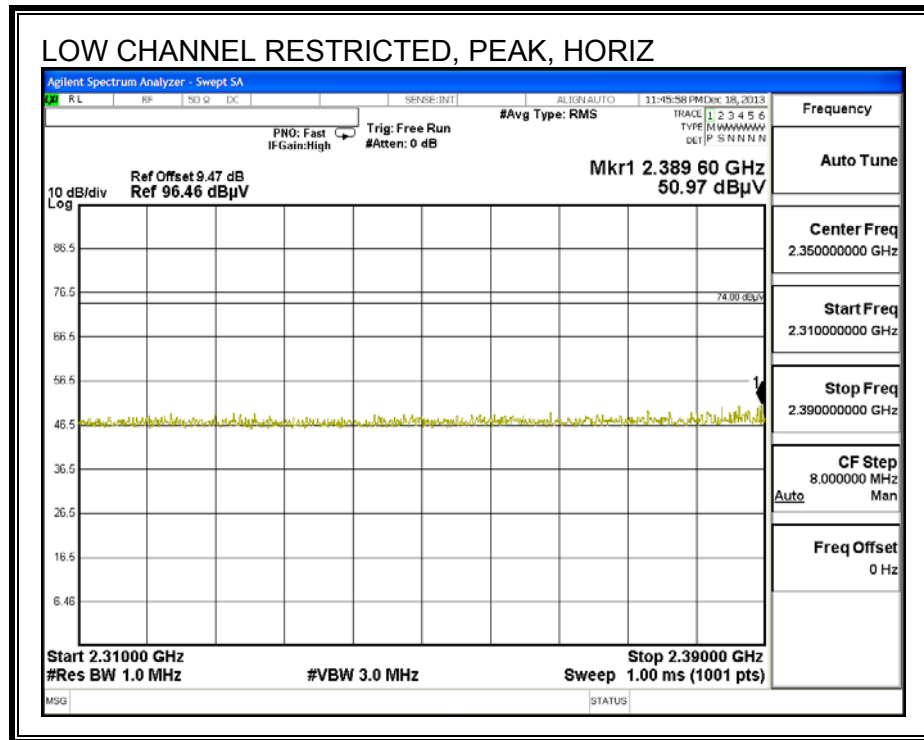

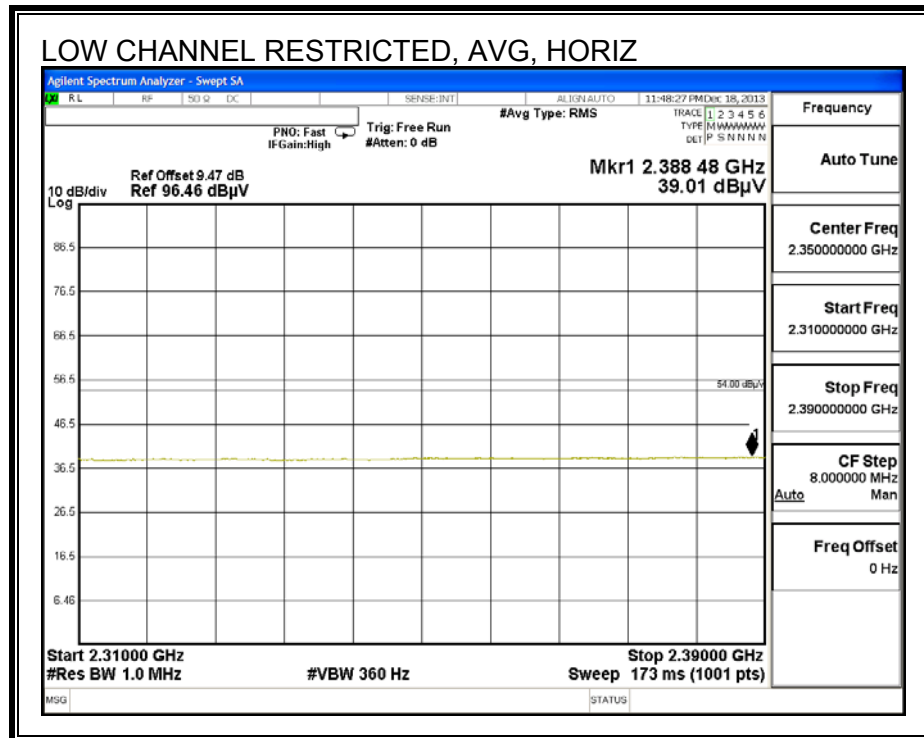



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

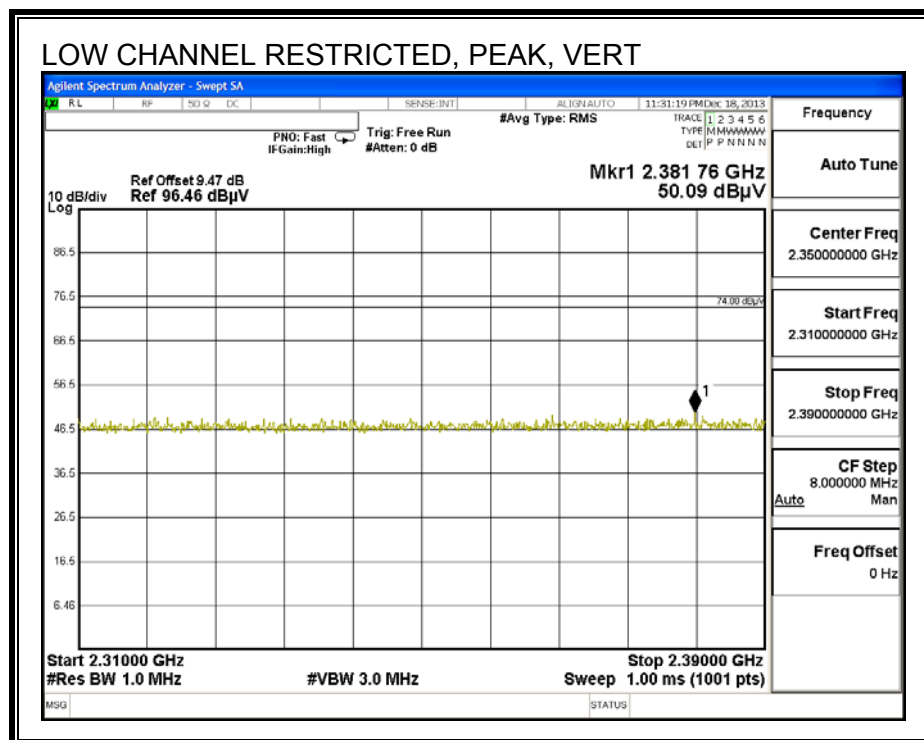

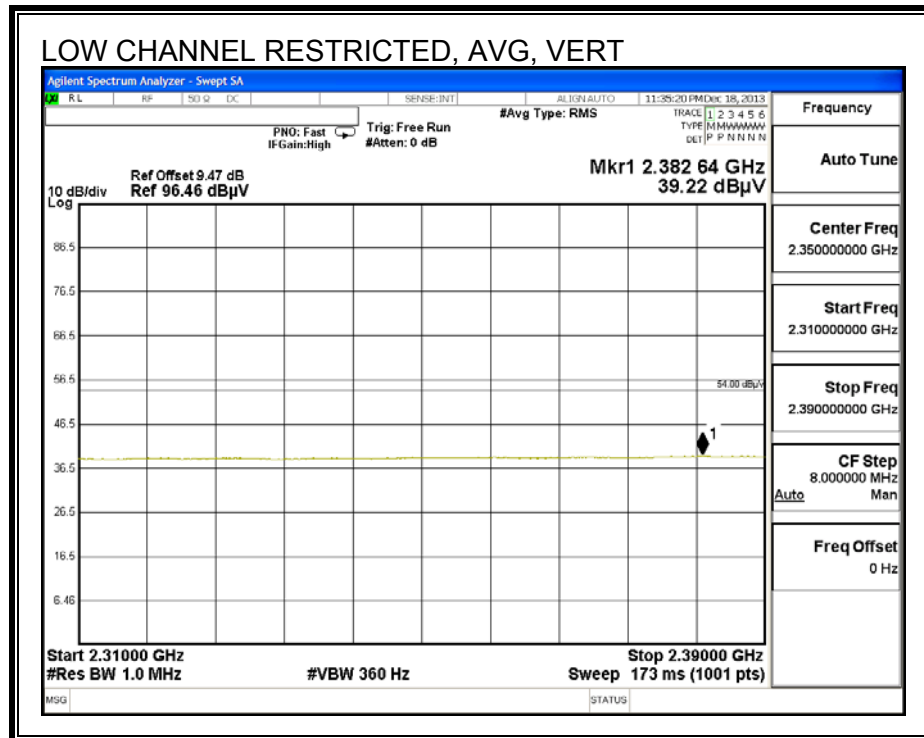



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

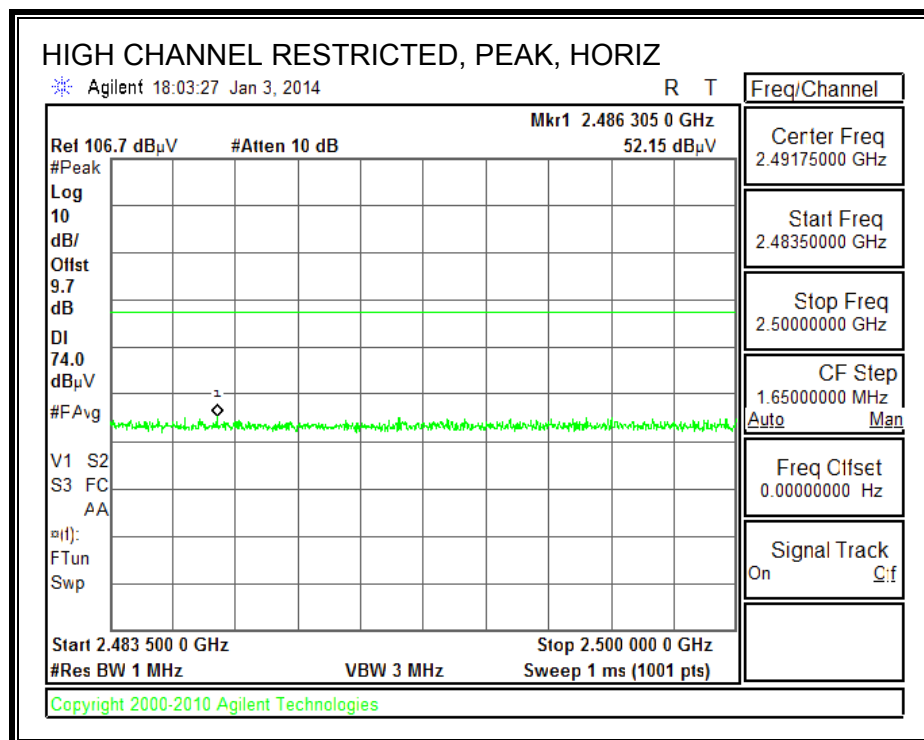

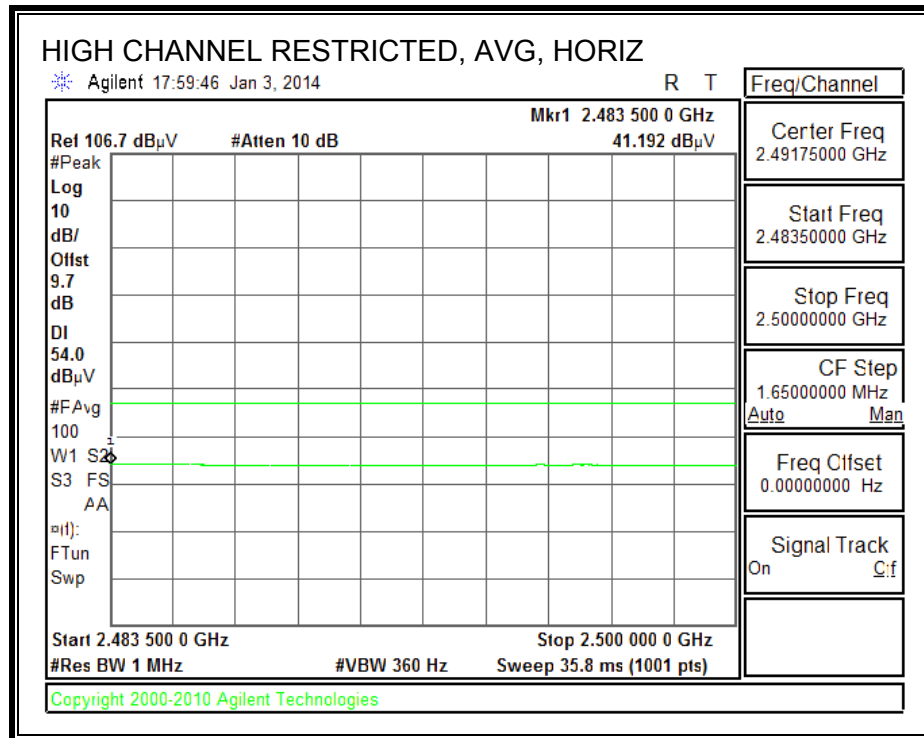


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

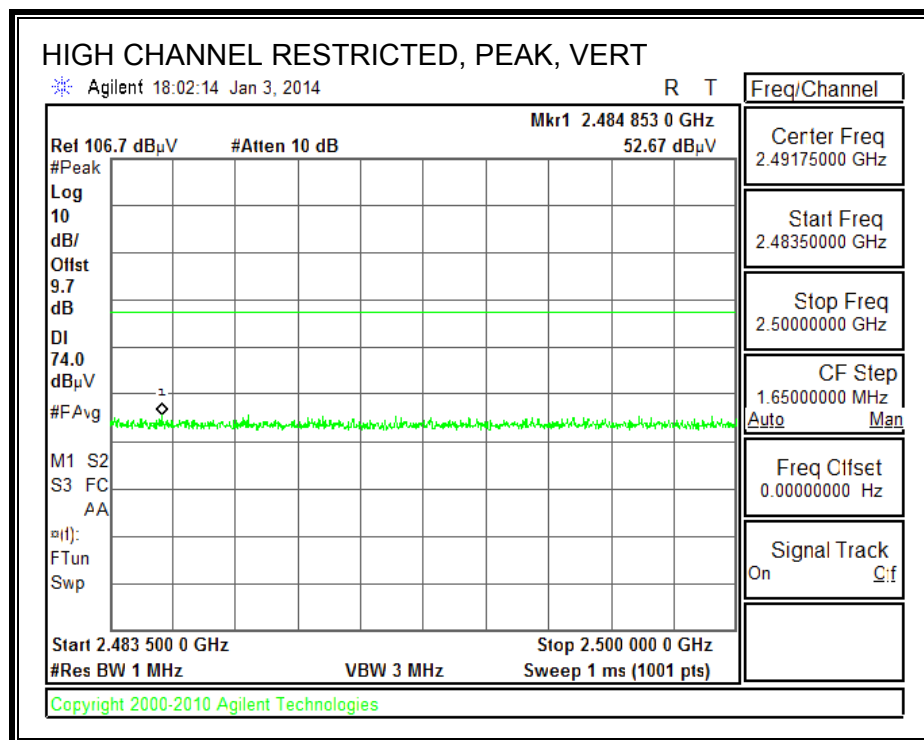

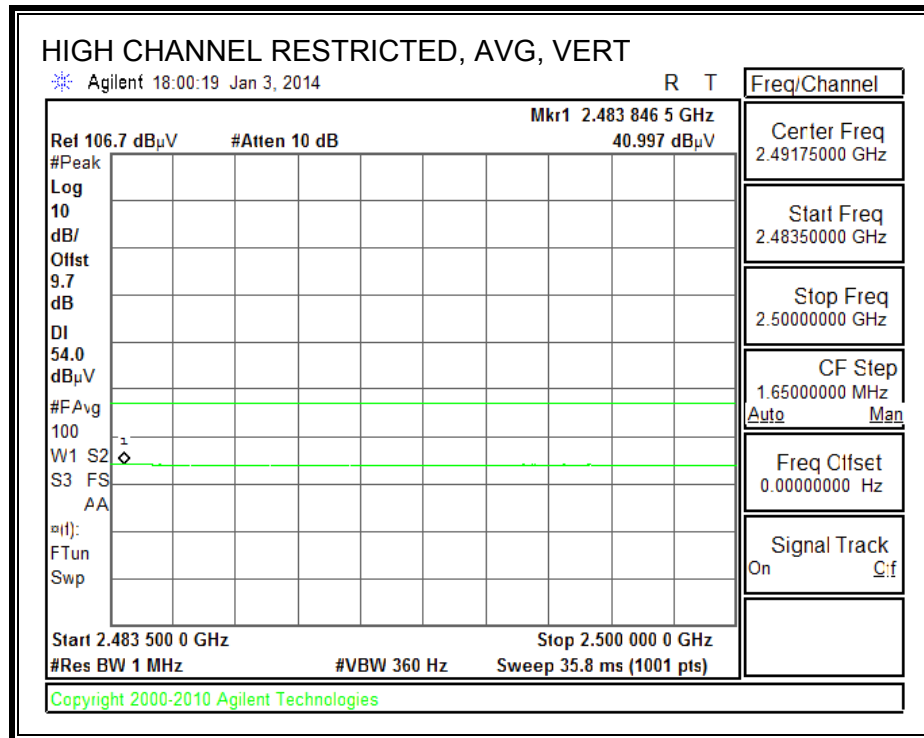


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

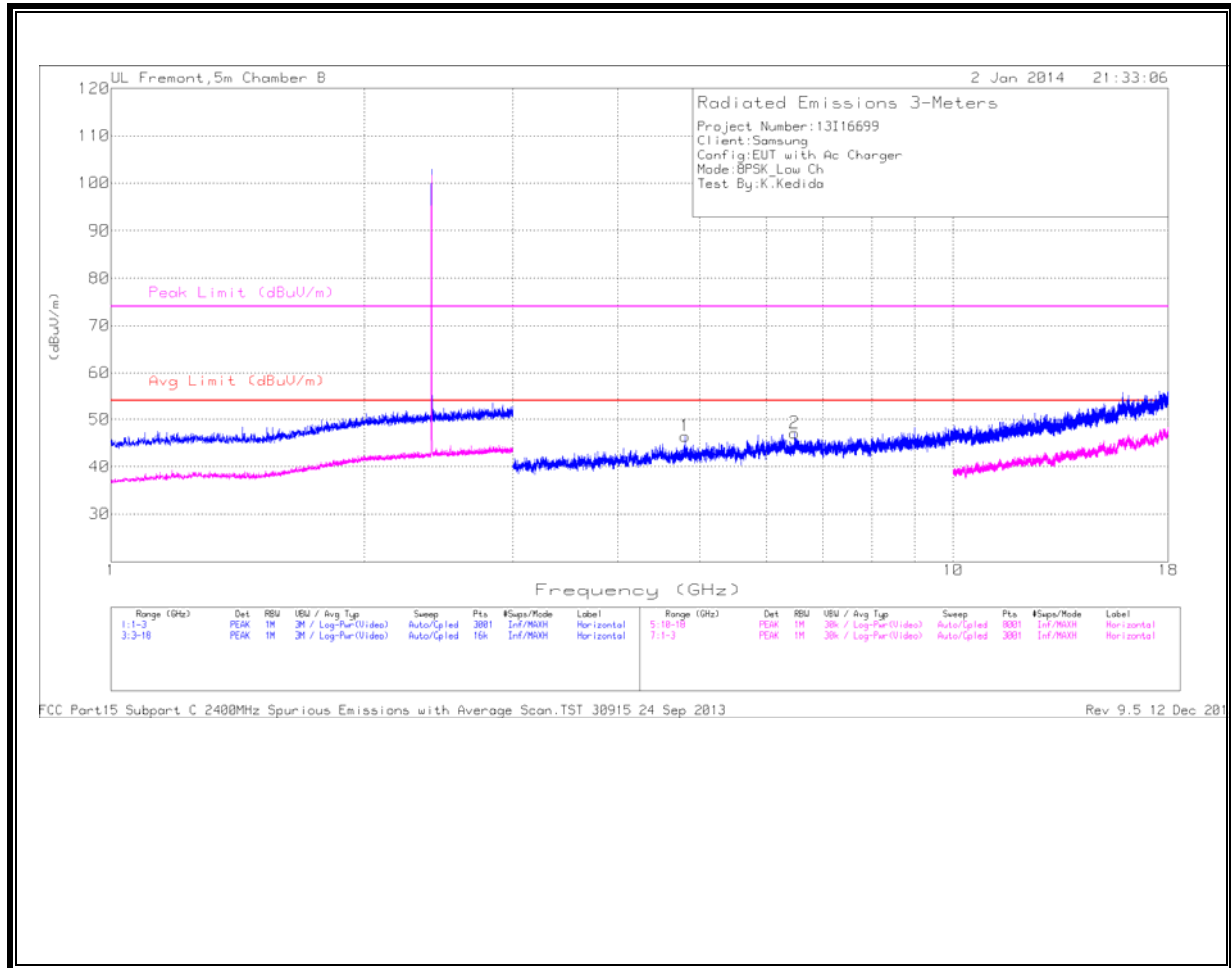

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

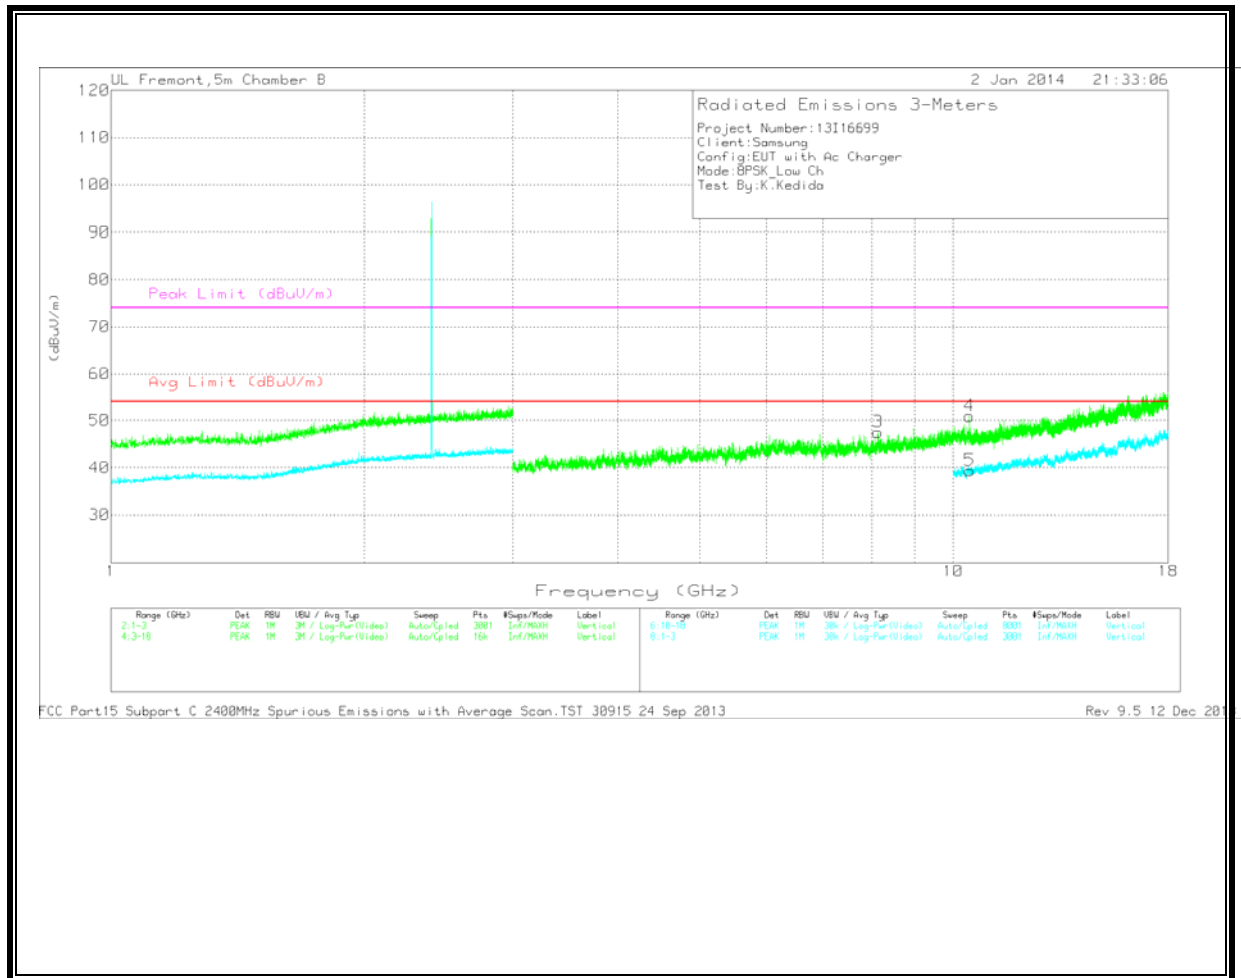

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.804	40.55	PK	34.7	-28.8	46.45	53.97	-7.52	74	-27.55	0-360	99	H
2	6.484	39.61	PK	35.9	-28.4	47.11	53.97	-6.86	74	-26.89	0-360	201	H
3	8.139	37.82	PK	36.1	-26.4	47.52	53.97	-6.45	74	-26.48	0-360	202	V
4	10.456	36.01	PK	38.2	-23.3	50.91	53.97	-3.06	74	-23.09	0-360	99	V
5	10.459	24.49	Avg	38.2	-23.3	39.39	53.97	-14.58	74	-34.61	0-360	99	V

PK - Peak detector


Avg - Video bandwidth < Resolution bandwidth

MID CHANNEL
HORIZONTAL

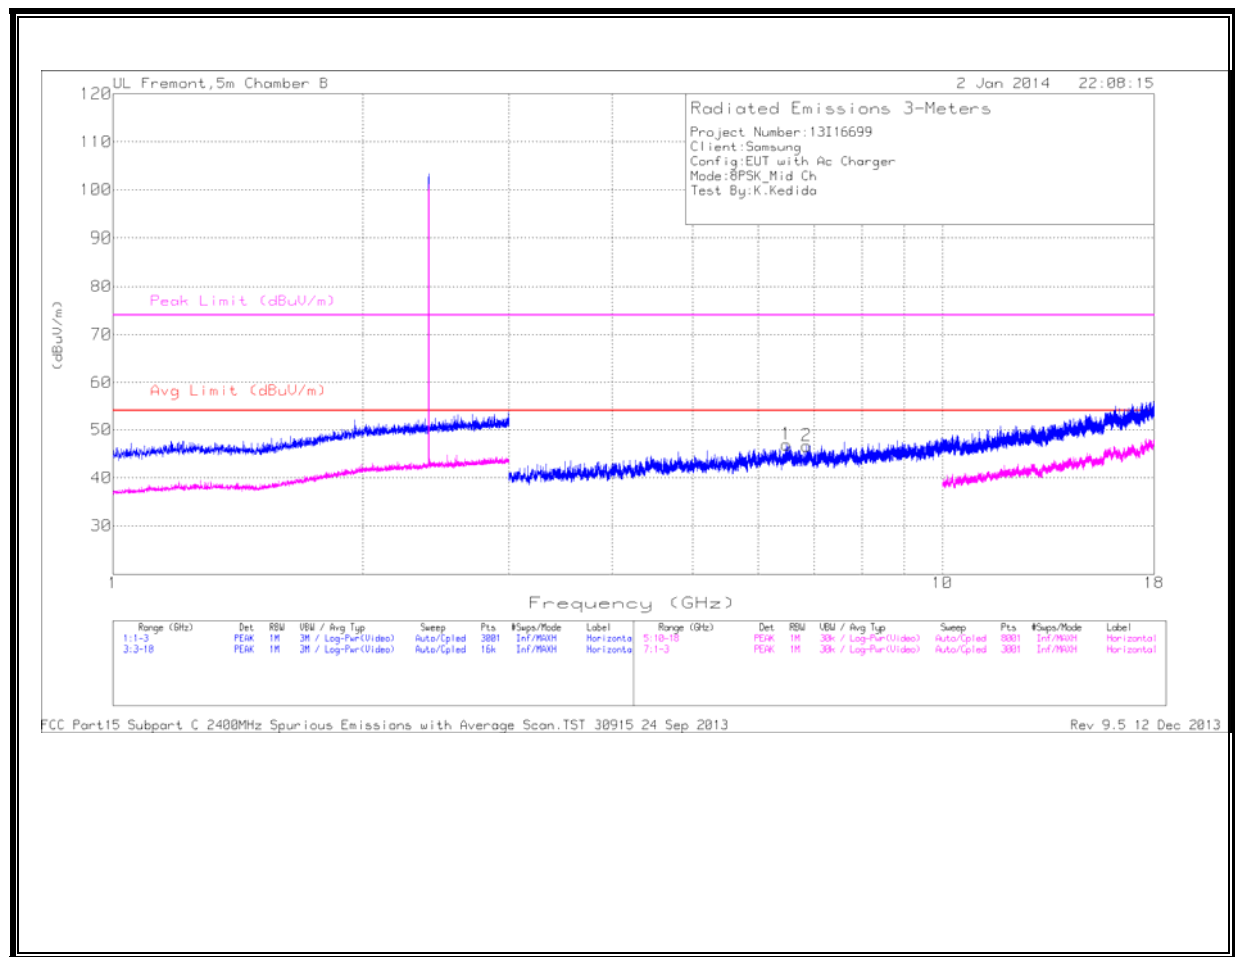


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

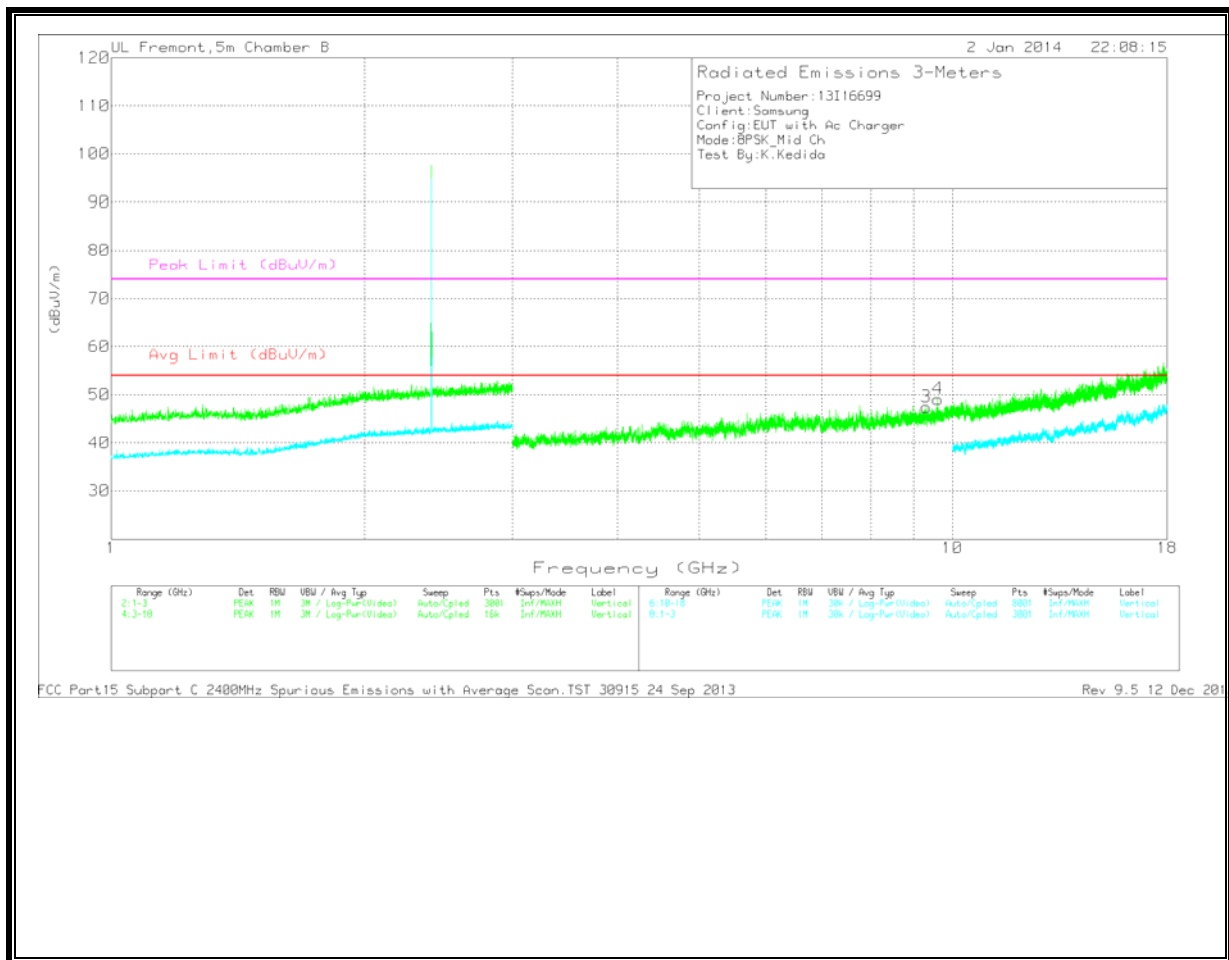


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

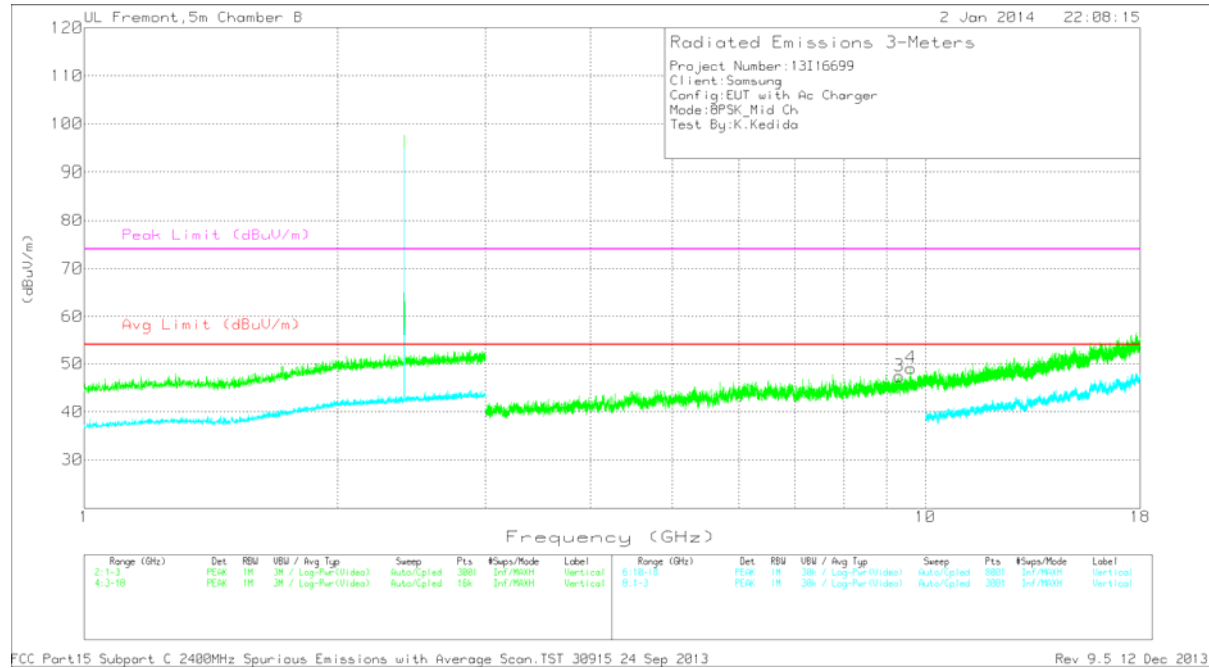


HIGH CHANNEL
HORIZONTAL

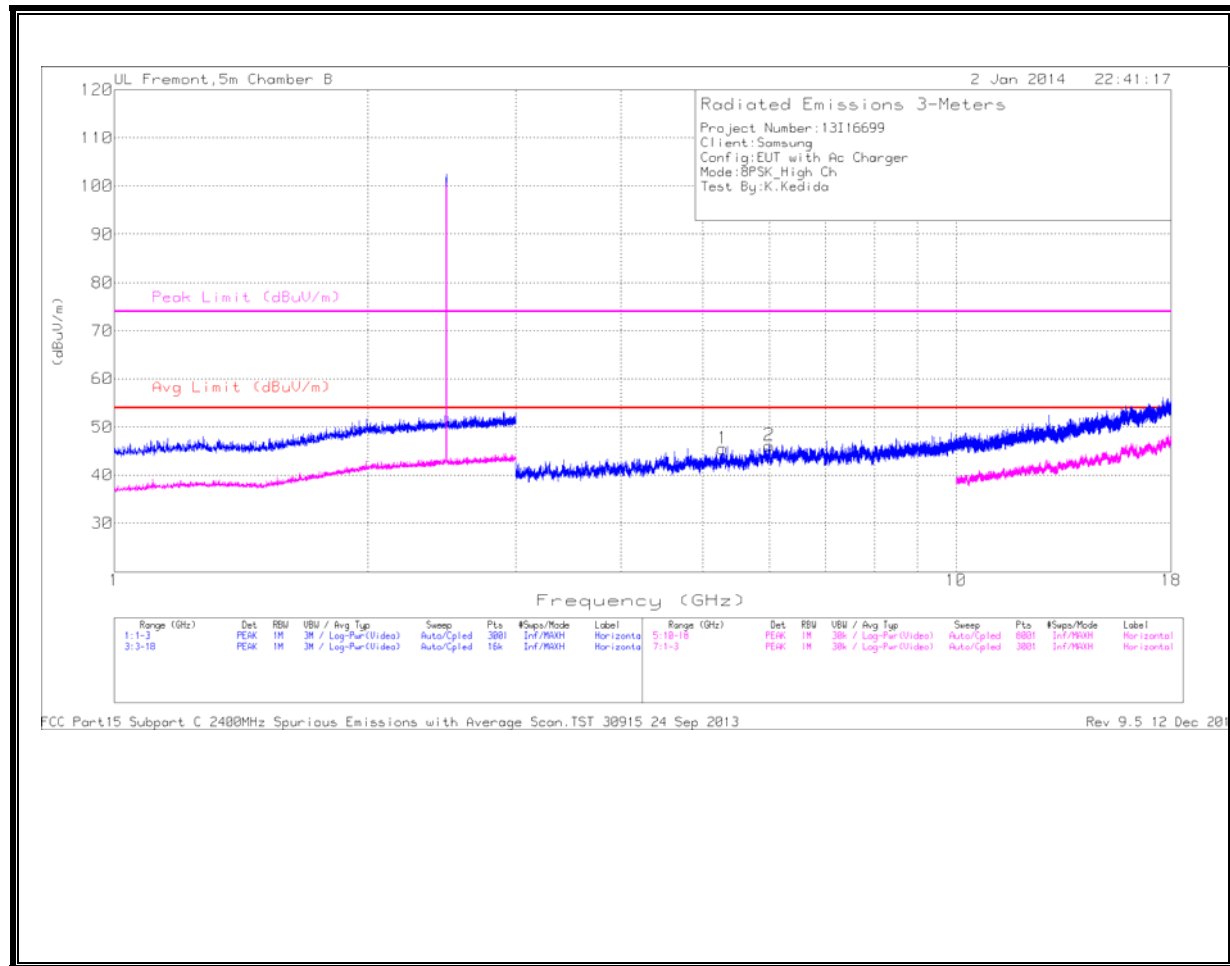

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

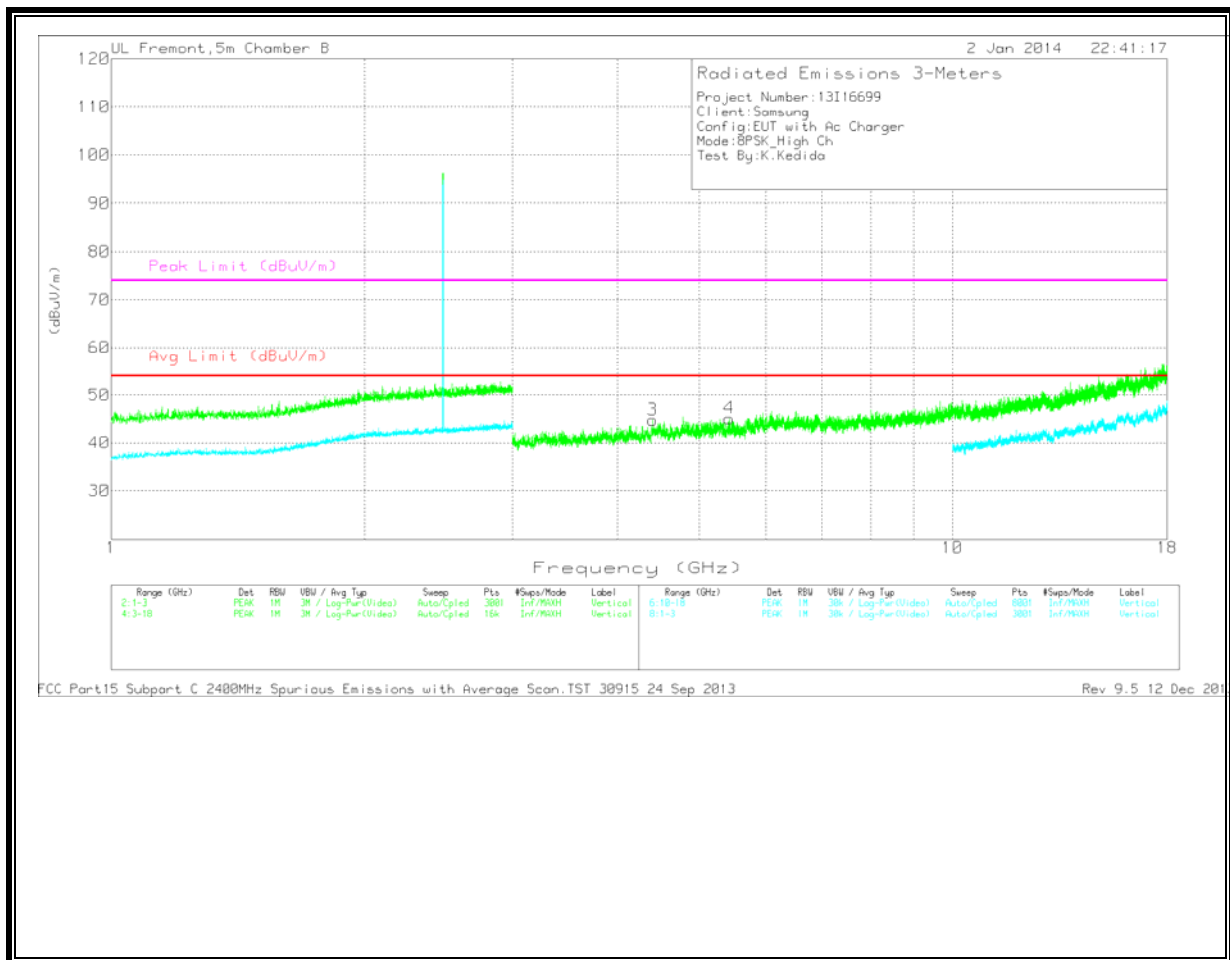

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA
Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.429	39.28	PK	34.9	-29.1	45.08	53.97	-8.89	74	-28.92	0-360	99	V
3	4.403	40.28	PK	34.3	-29.8	44.78	53.97	-9.19	74	-29.22	0-360	202	V
1	5.282	40.16	PK	34.9	-29.5	45.56	53.97	-8.41	74	-28.44	0-360	202	H
2	5.994	38.85	PK	35.9	-28.6	46.15	53.97	-7.82	74	-27.85	0-360	202	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep
2013 Rev 9.5 12 Dec 2013

9.3. WORST-CASE BELOW 1 GHz

GFASK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

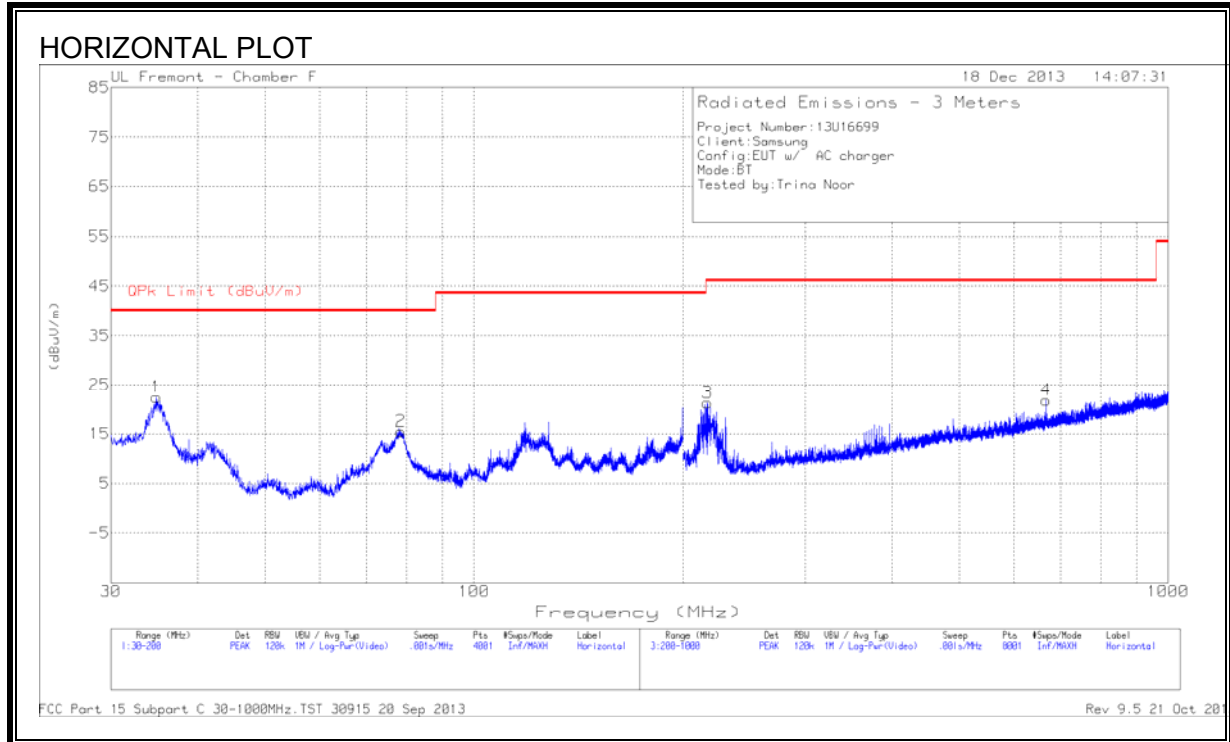

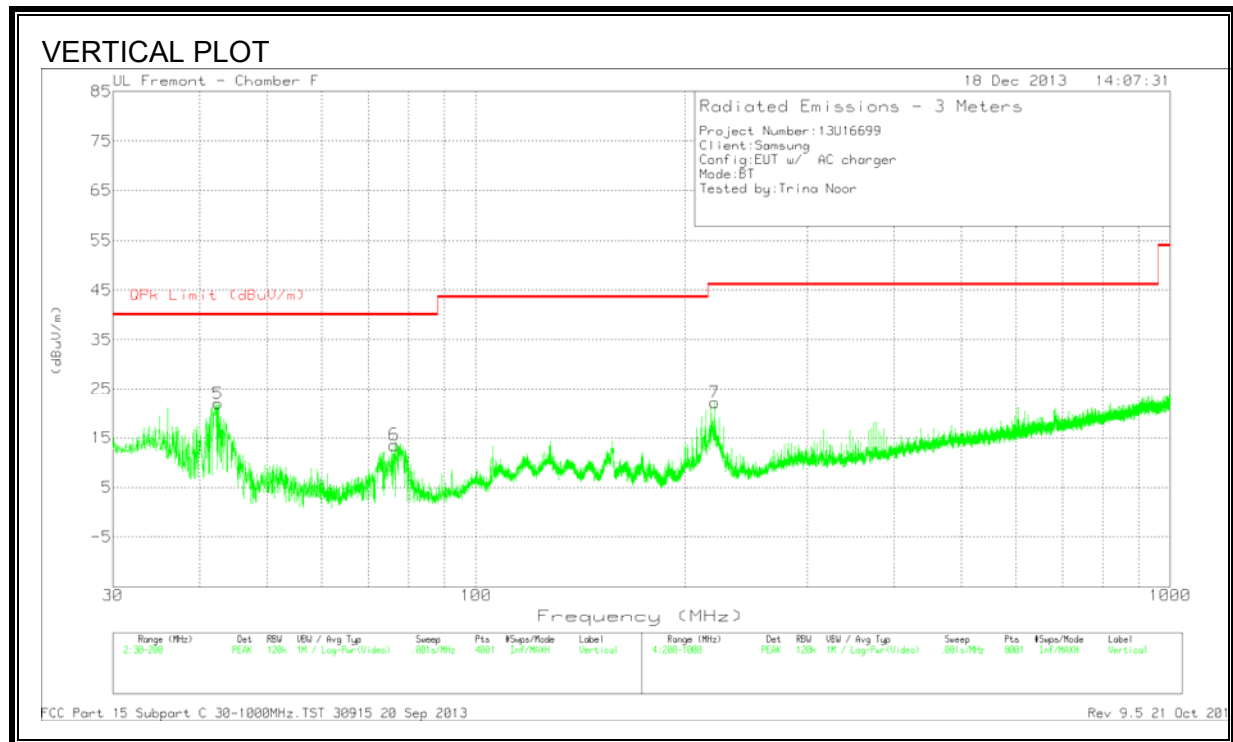

DATA
Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	34.8875	36.8	PK	17.8	-32.1	22.5	40	-17.5	0-360	200	H
5	42.495	41.94	PK	12	-32	21.94	40	-18.06	0-360	100	V
6	76.2825	37.32	PK	7.9	-31.7	13.52	40	-26.48	0-360	100	V
2	78.4925	39.39	PK	7.8	-31.7	15.49	40	-24.51	0-360	400	H
3	216.9	41.64	PK	10.7	-31	21.34	46.02	-24.68	0-360	200	H
7	220.8	42.37	PK	10.8	-31	22.17	46.02	-23.85	0-360	100	V
4	666.7	32.16	PK	19.8	-30.1	21.86	46.02	-24.16	0-360	300	H

PK - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 20 Sep 2013 Rev 9.5 21 Oct 2013

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.15	49.81	PK	.1	0	49.91	66	-16.09	-	-
2	.15	26.75	Av	.1	0	26.85	-	-	56	-29.15
3	.35	40.46	PK	.1	0	40.56	59	-18.44	-	-
4	.35	29.42	Av	.1	0	29.52	-	-	49	-19.48
5	2.46	35.36	PK	.1	.1	35.56	56	-20.44	-	-
6	2.46	22.87	Av	.1	.1	23.07	-	-	46	-22.93
7	6.09	39.44	PK	.1	.1	39.64	60	-20.36	-	-
8	6.09	24.79	Av	.1	.1	24.99	-	-	50	-25.01
9	18.83	32.48	PK	.2	.2	32.88	60	-27.12	-	-
10	18.83	18.06	Av	.2	.2	18.46	-	-	50	-31.54

Line-L2 .15 - 30MHz


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
11	.1545	50.15	PK	.1	0	50.25	65.8	-15.55	-	-
12	.1545	23.32	Av	.1	0	23.42	-	-	55.8	-32.38
13	.348	40.76	PK	.1	0	40.86	59	-18.14	-	-
14	.348	22.04	Av	.1	0	22.14	-	-	49	-26.86
15	2.7645	33.78	PK	.1	.1	33.98	56	-22.02	-	-
16	2.7645	18.83	Av	.1	.1	19.03	-	-	46	-26.97
17	18.8295	36.84	PK	.3	.2	37.34	60	-22.66	-	-
18	18.8295	18.95	Av	.3	.2	19.45	-	-	50	-30.55

PK - Peak detector

Av - average detection

LINE 1 RESULTS

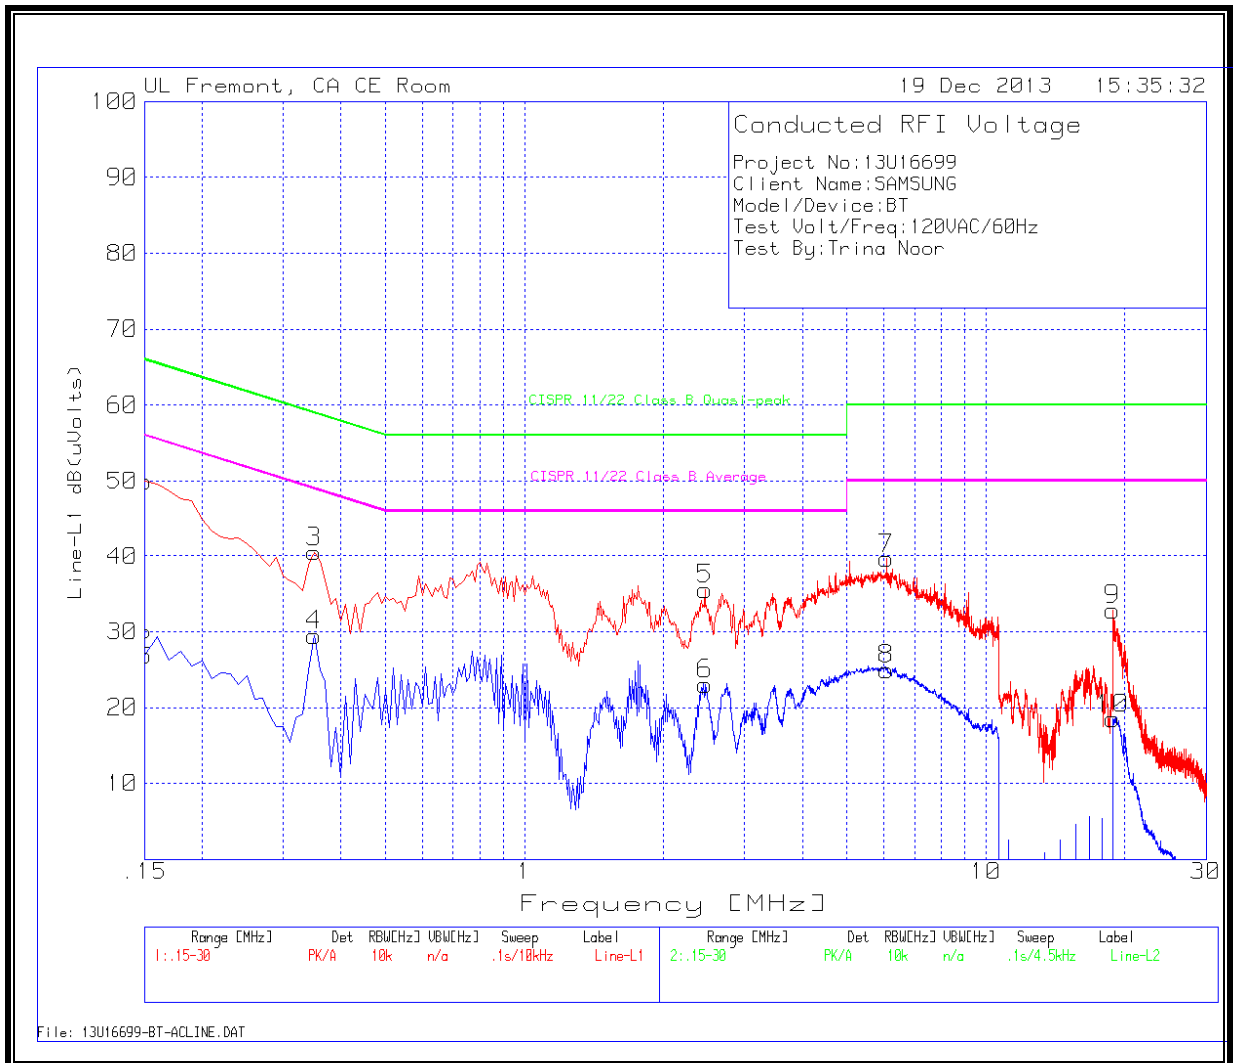

LINE 2 RESULTS

