



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

GSM Phone + Bluetooth & DTS 2.4GHz b/g/n

MODEL NUMBER: SM-G350E

FCC ID: A3LSMG350E

REPORT NUMBER: 14I17784-2

ISSUE DATE: MAY 19, 2014

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY
GYEONGGI-DO, 443-742, SOUTH KOREA

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/19/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. SUMMARY TABLE	13
8. ANTENNA PORT TEST RESULTS	14
8.1. 20 dB AND 99% BANDWIDTH	14
8.1.1. BASIC DATA RATE GFSK MODULATION	14
8.1.1. ENHANCED DATA RATE 8PSK MODULATION	14
8.2. HOPPING FREQUENCY SEPARATION	23
8.3. NUMBER OF HOPPING CHANNELS.....	25
8.4. AVERAGE TIME OF OCCUPANCY.....	28
8.5. OUTPUT POWER.....	32
8.5.1. BASIC DATA RATE GFSK MODULATION	32
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	32
8.6. AVERAGE POWER	37
8.6.1. BASIC DATA RATE GFSK MODULATION	37
8.6.2. DATA RATE PI/4-DQPSK MODULATION	37
8.6.3. ENHANCED DATA RATE 8PSK MODULATION	38
8.7. CONDUCTED SPURIOUS EMISSIONS.....	39
8.7.1. BASIC DATA RATE GFSK MODULATION	40
8.7.1. ENHANCED DATA RATE 8PSK MODULATION	44
9. RADIATED TEST RESULTS.....	48
9.1. LIMITS AND PROCEDURE	48

9.2.	TRANSMITTER ABOVE 1 GHz	49
9.2.1.	BASIC DATA RATE GFSK MODULATION	49
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	62
9.3.	WORST-CASE BELOW 1 GHz.....	75
10.	AC POWER LINE CONDUCTED EMISSIONS	78
11.	SETUP PHOTOS	82

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM Phone + Bluetooth & DTS 2.4GHz b/g/n
MODEL: SM-G350E
SERIAL NUMBER: FL-179-D (Conducted); FL-179-B (Radiated)
DATE TESTED: MAY 9 - 19, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☒ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM Phone + Bluetooth & DTS 2.4GHz b/g/n.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	9.11	8.15
2402 - 2480	Enhanced 8PSK	8.94	7.83

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.24dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	ETA0U10EBE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

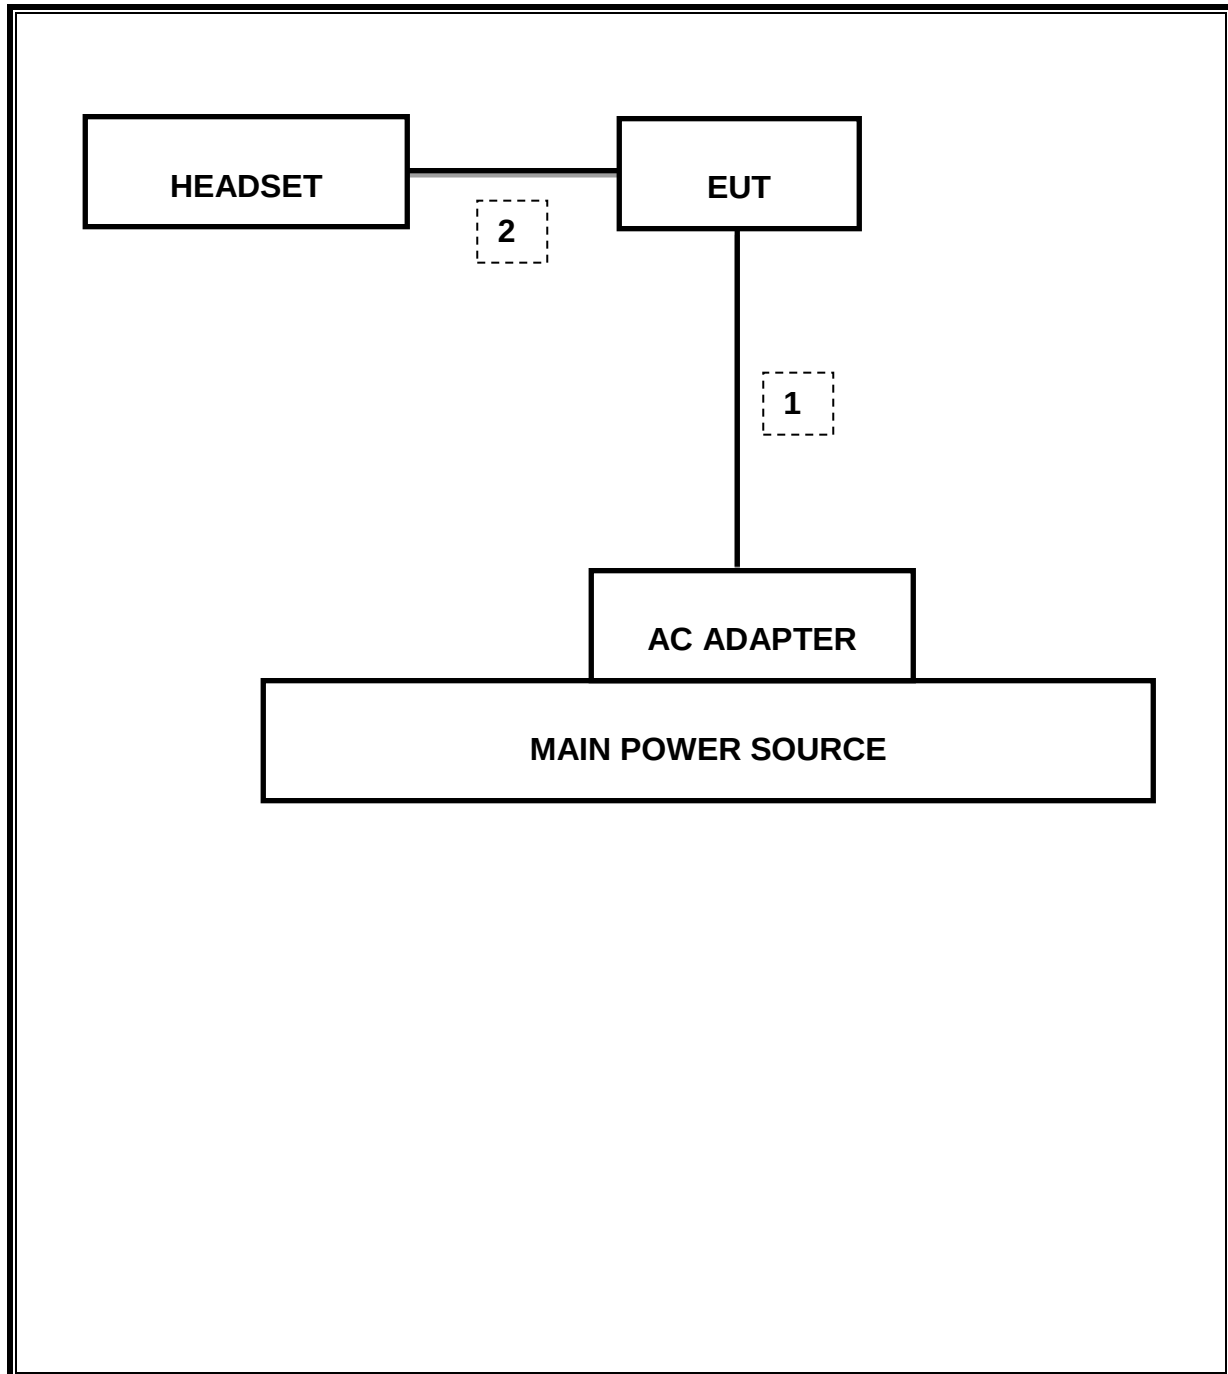

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	0.909KHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-46.26dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	9.11dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.259sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	43.61dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	46.2dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq$ 1% of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.926	0.909
Middle	2441	0.927	0.904
High	2480	0.926	0.907
Worst		0.927	0.909

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.343	1.224
Middle	2441	1.224	1.233
High	2480	1.222	1.226
Worst		1.343	1.233


GFSK 20 dB BANDWIDTH

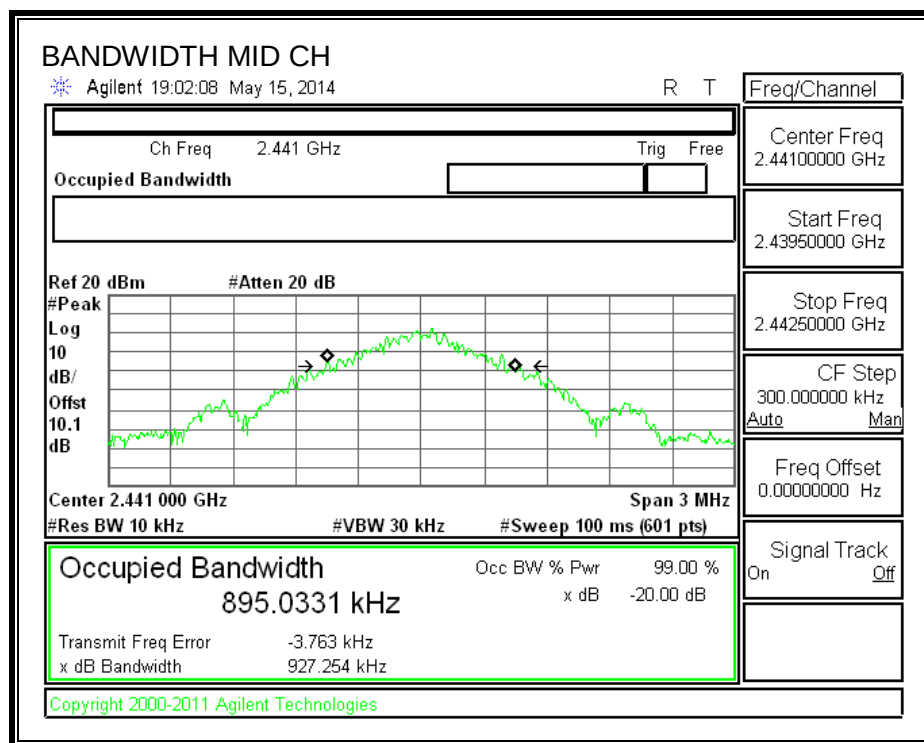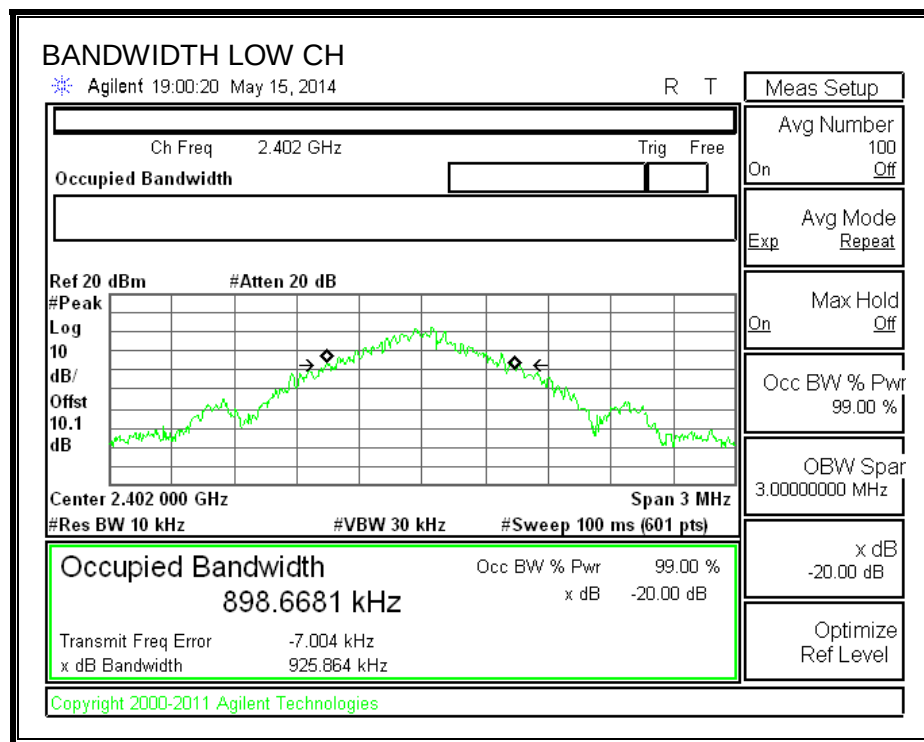


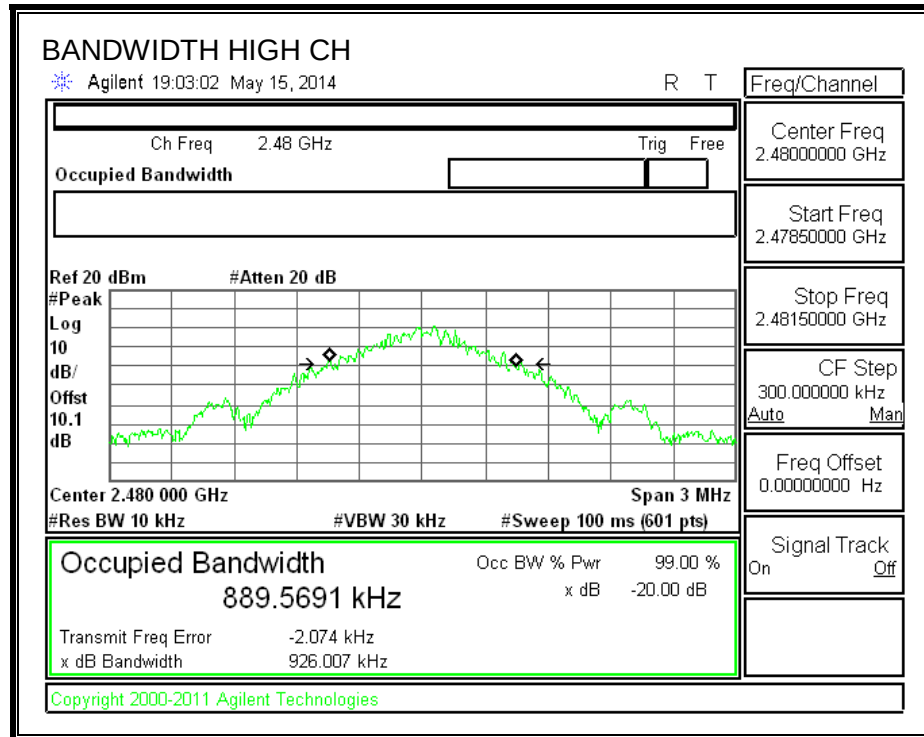



GFSK 99% BANDWIDTH

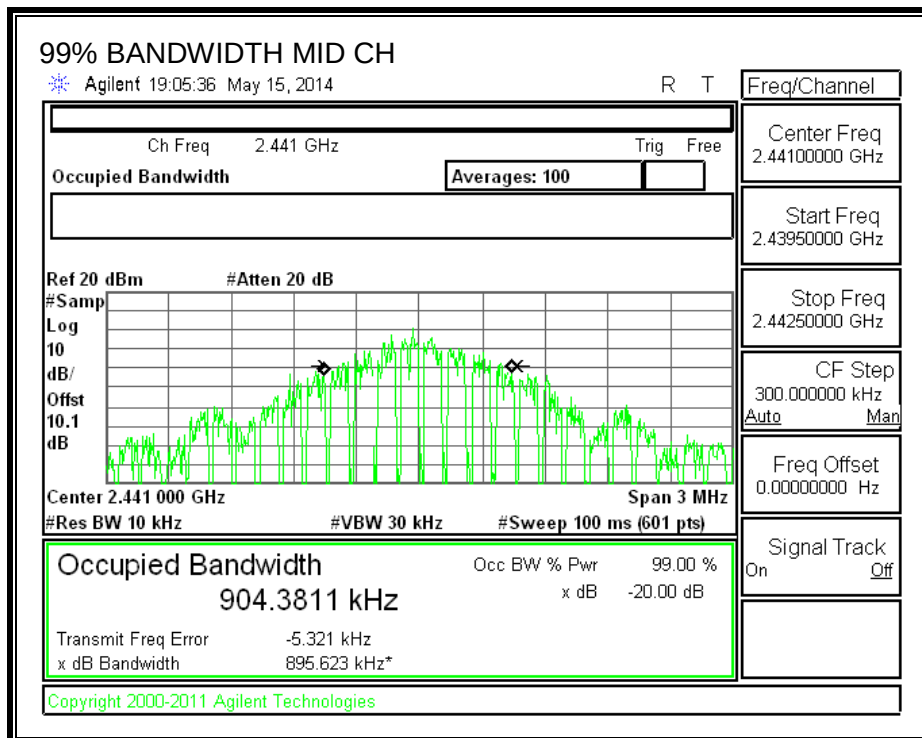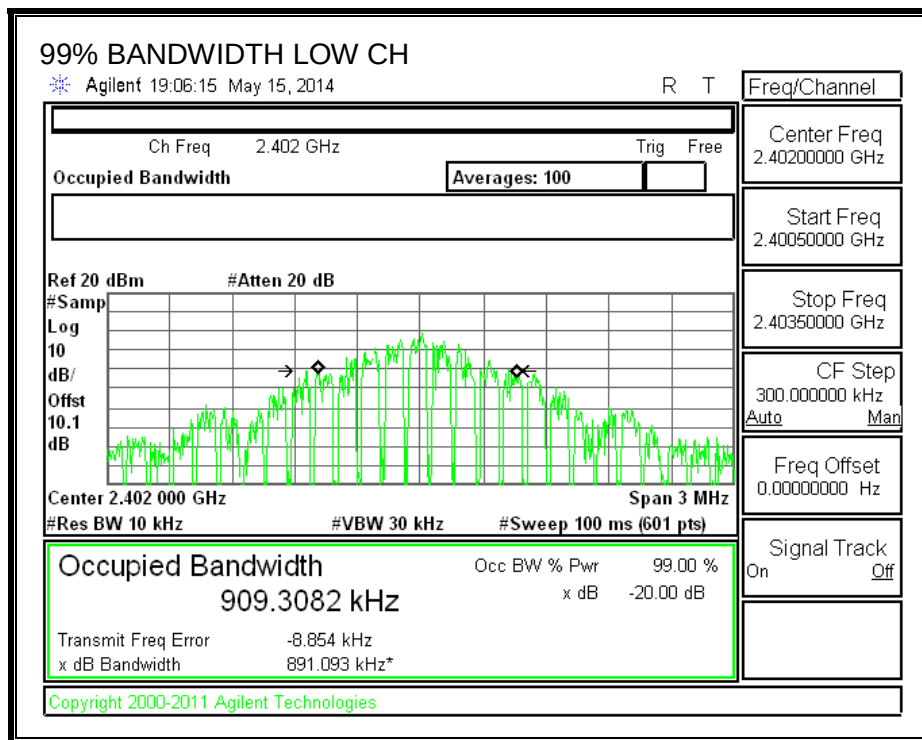


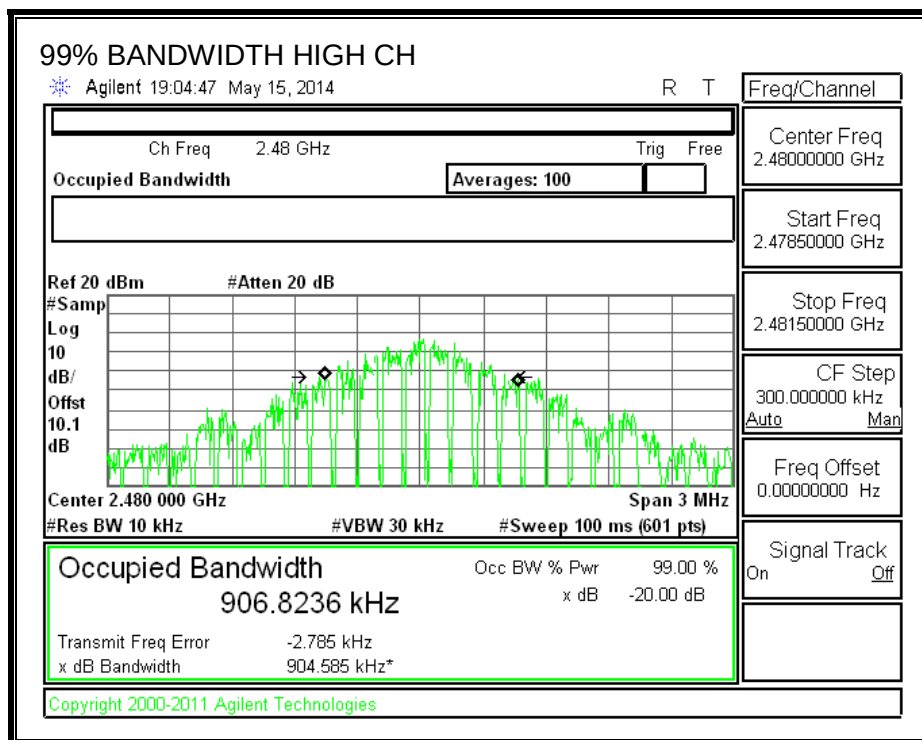



8PSK 20 dB BANDWIDTH

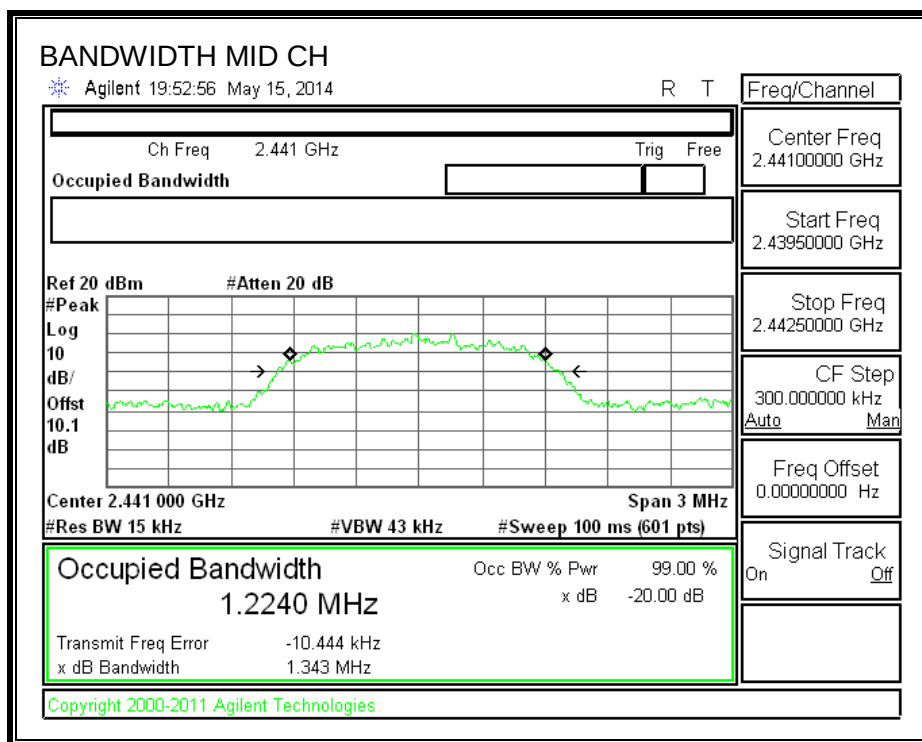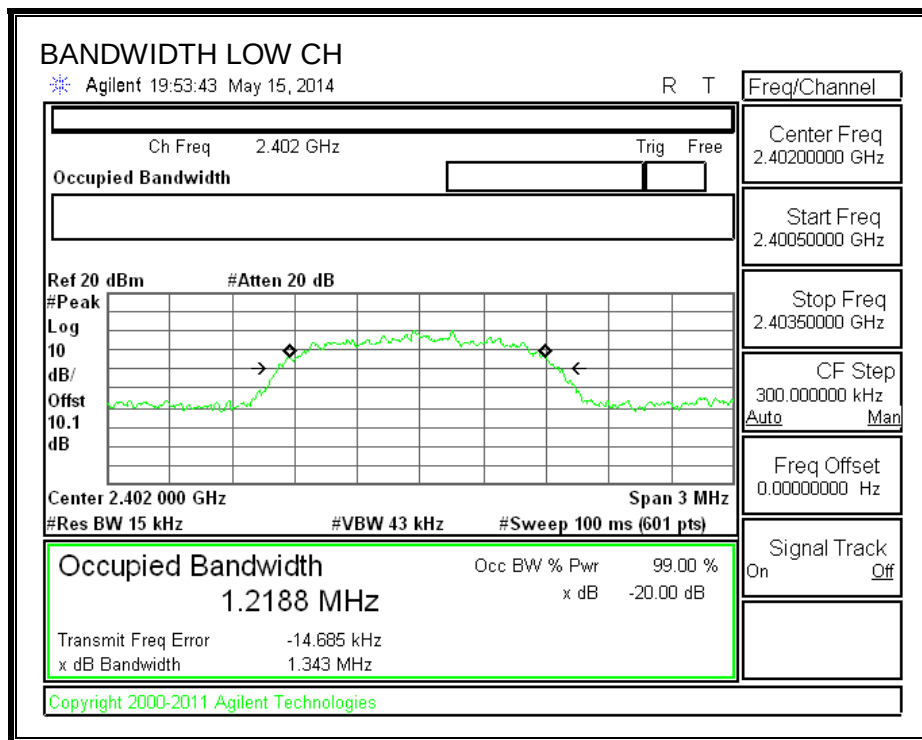

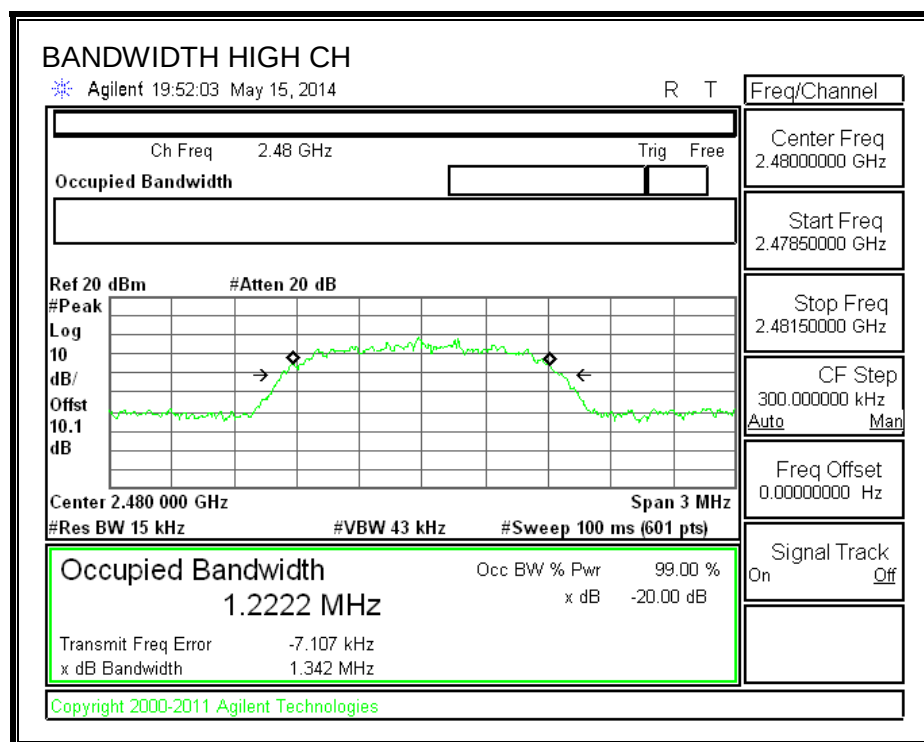

8PSK 99% BANDWIDTH

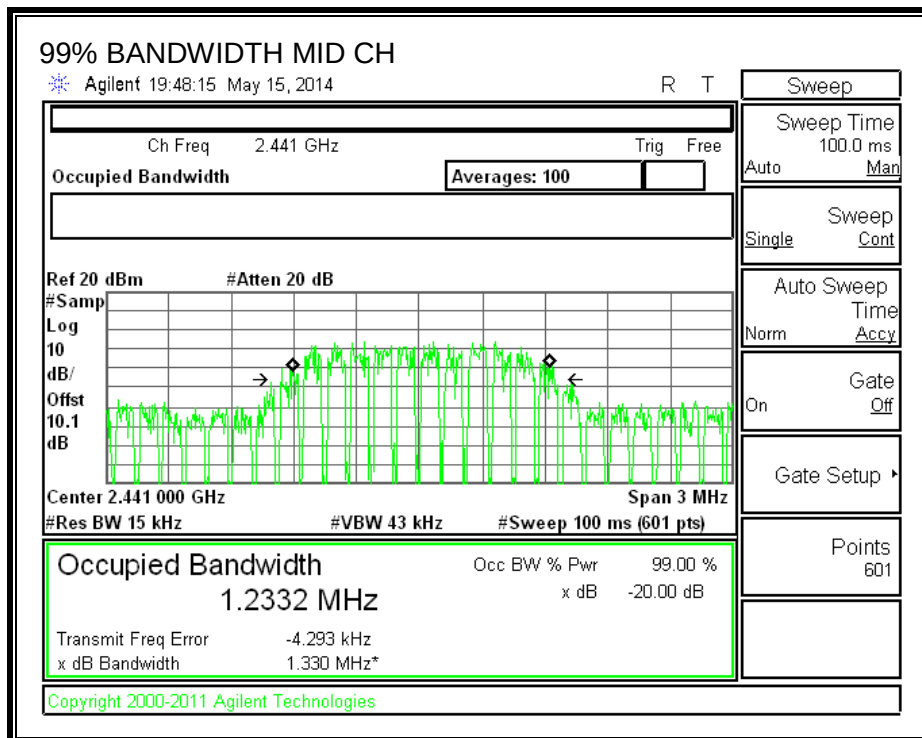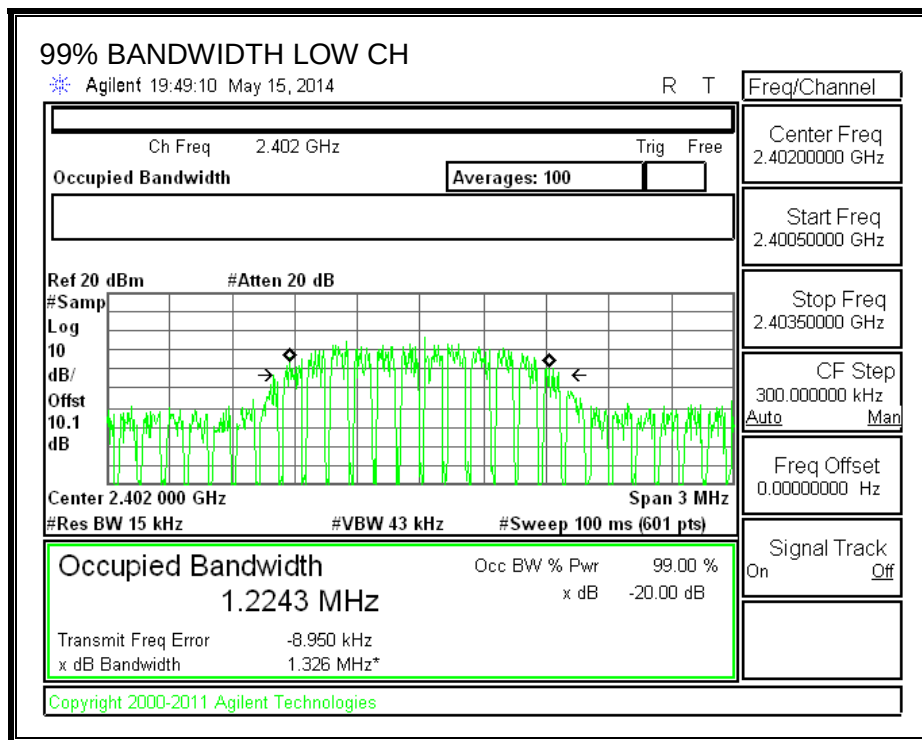

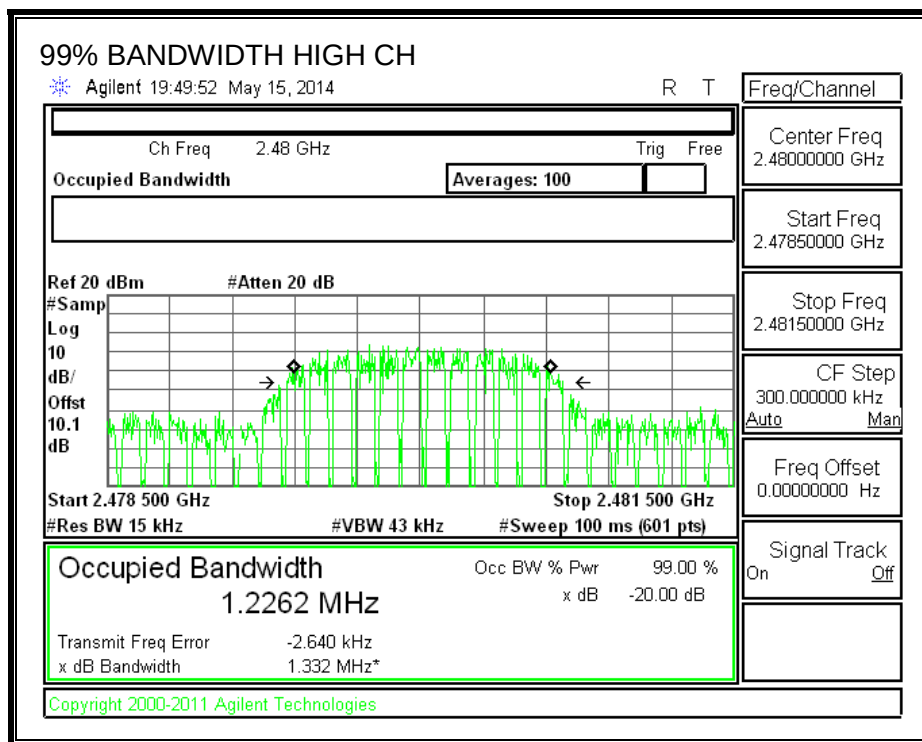

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 510 kHz and the VBW is set to 510 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

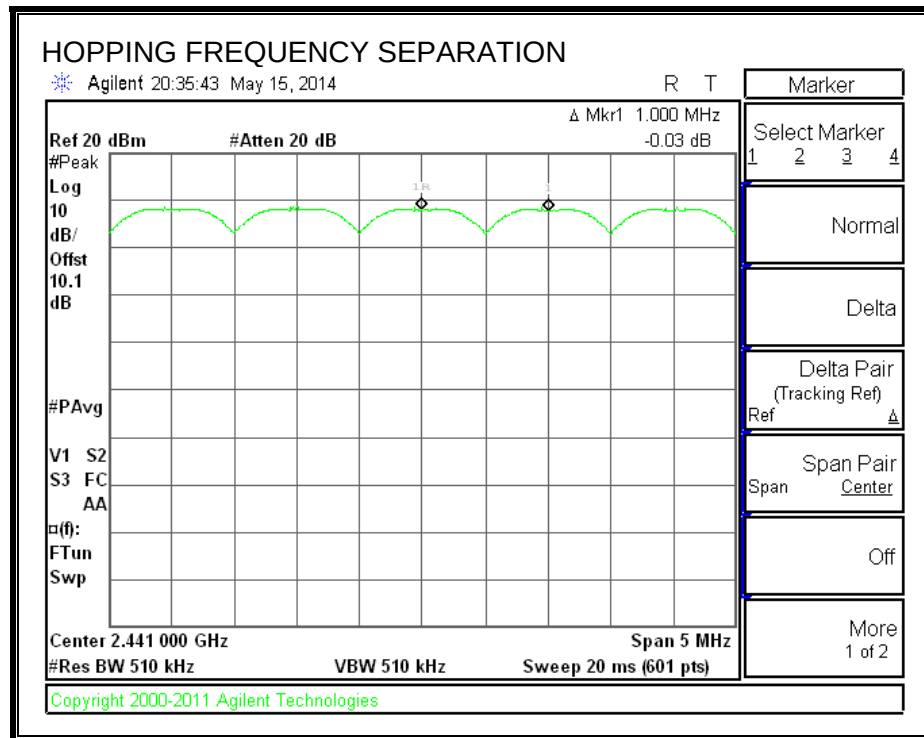

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

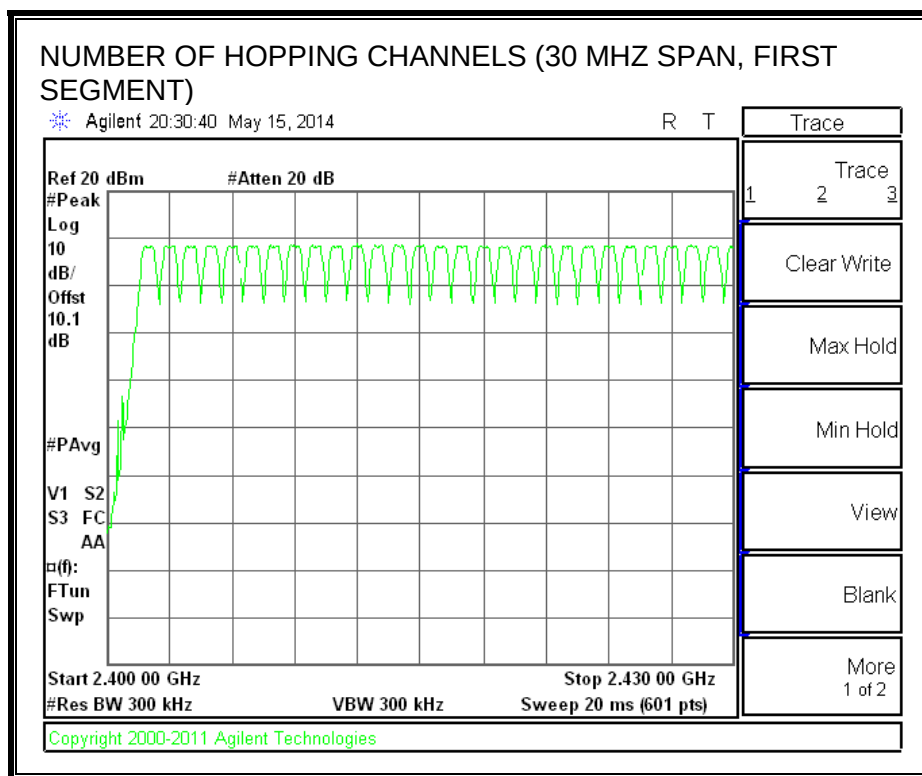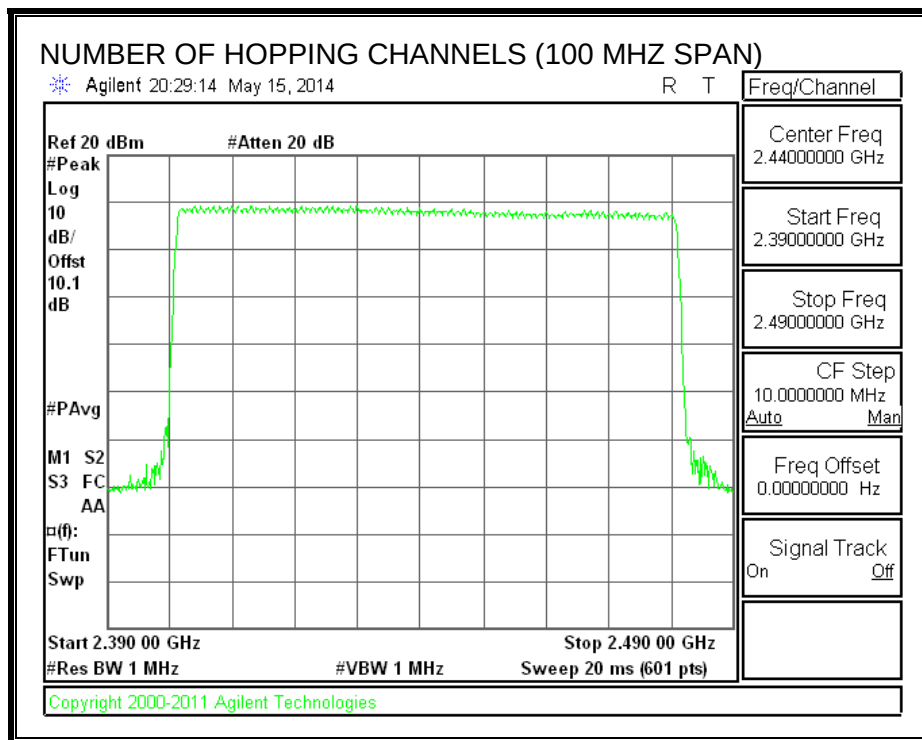

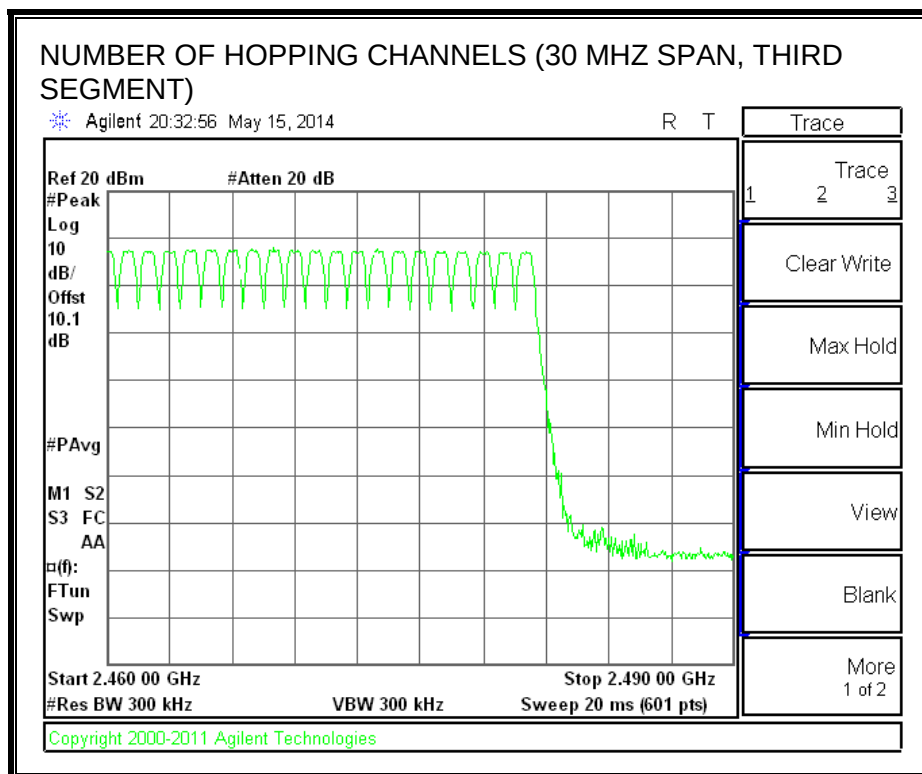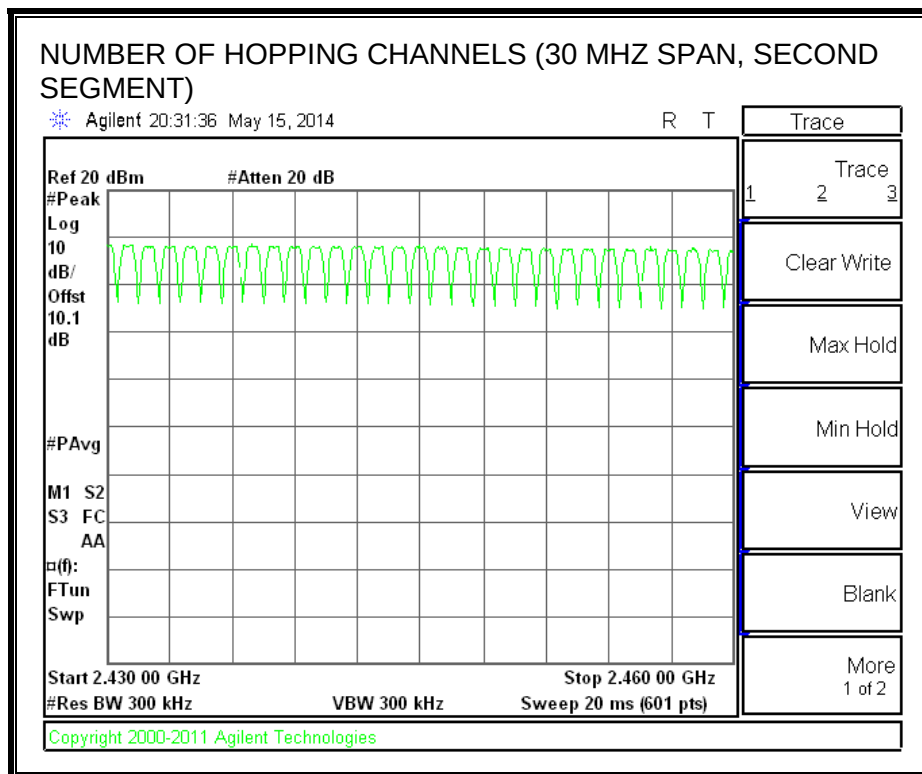

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.4104	32	0.131	0.4	-0.269
DH3	1.642	15	0.246	0.4	-0.154
DH5	2.882	9	0.259	0.4	-0.141
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.4104	8	0.033	0.4	-0.367
DH3	1.642	4	0.066	0.4	-0.334
DH5	2.882	3	0.086	0.4	-0.314


PULSE WIDTH - DH1

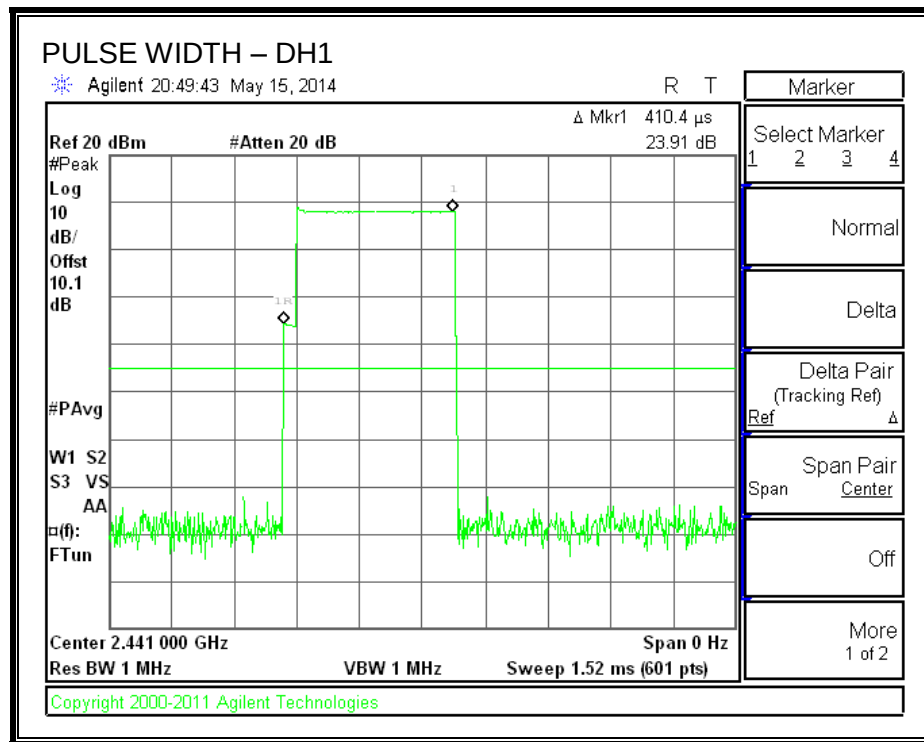


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

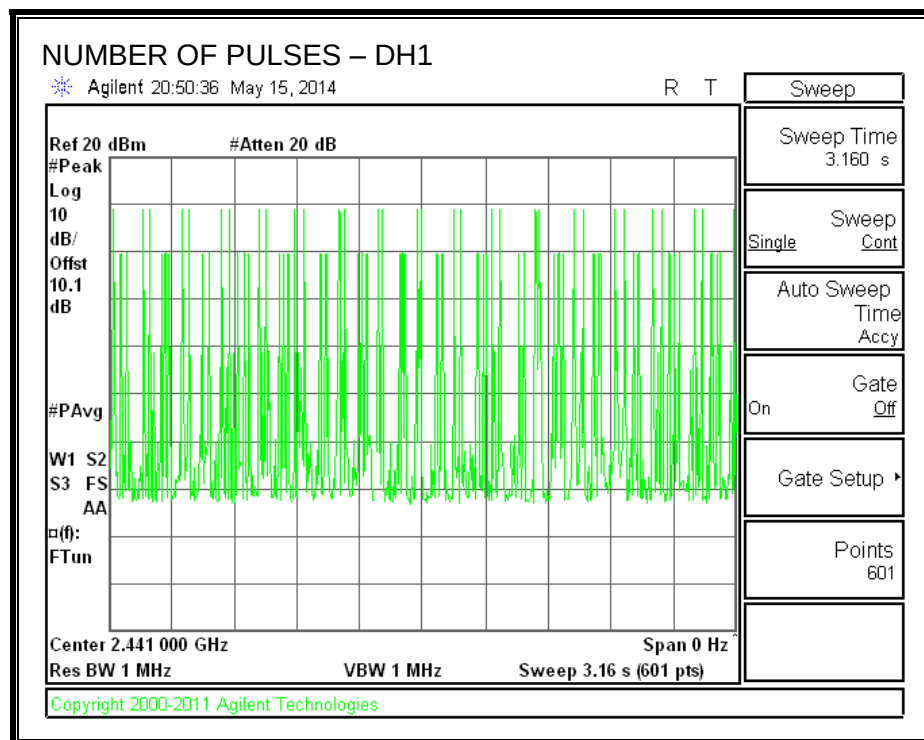


PULSE WIDTH – DH3

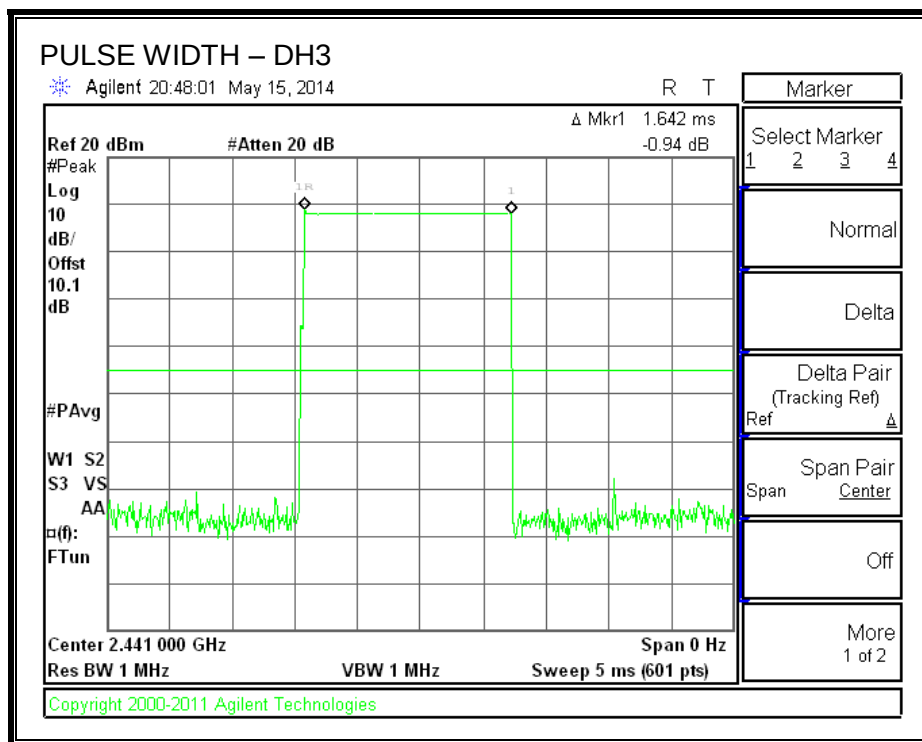


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

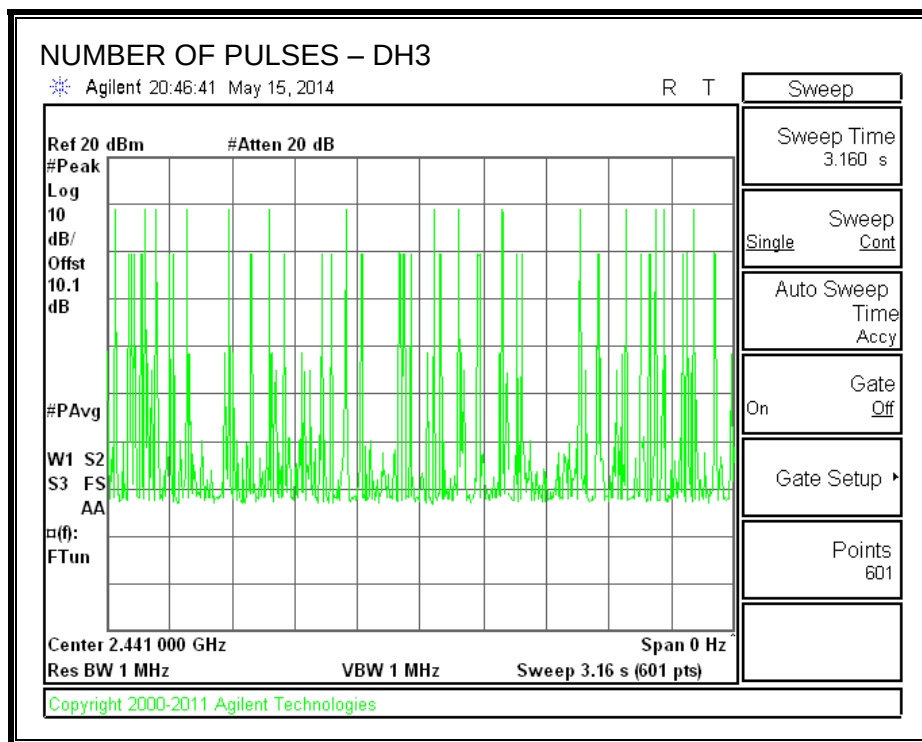

PULSE WIDTH – DH5

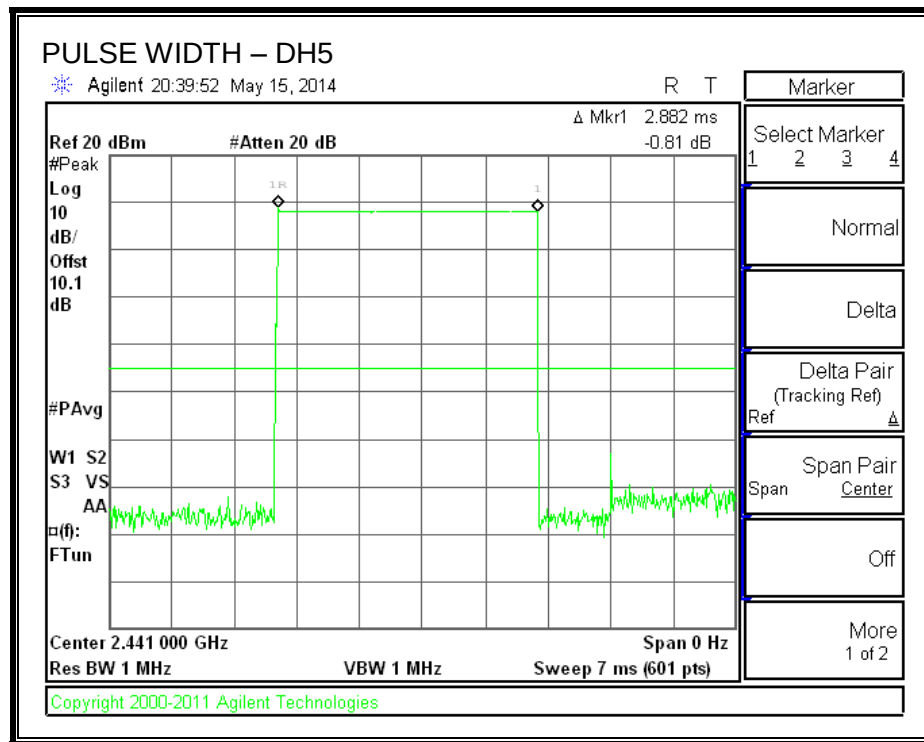

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

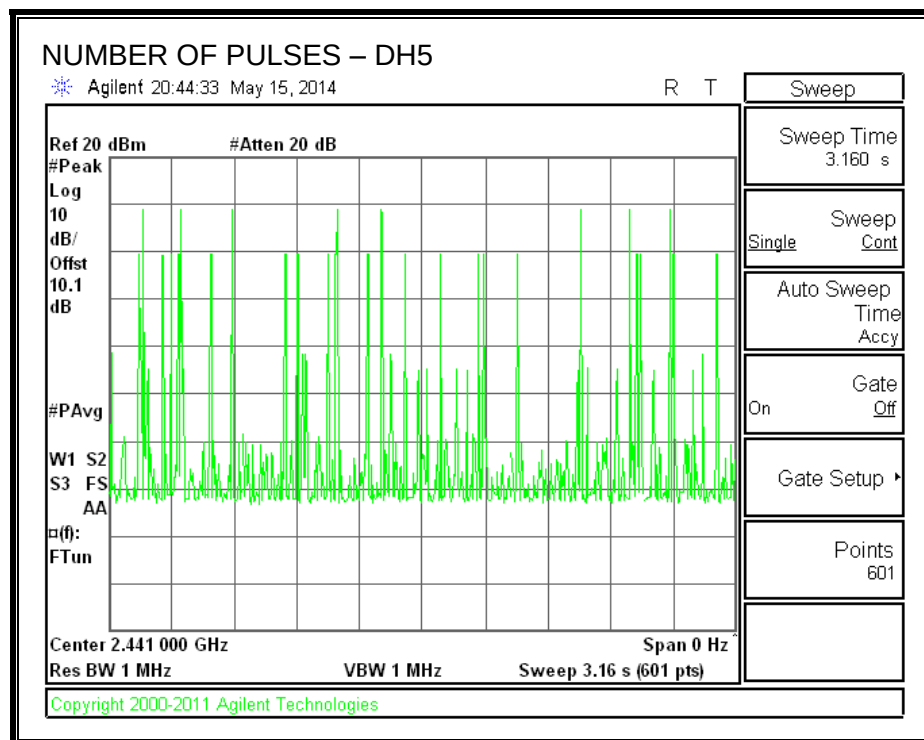

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.11	21	-11.89
Middle	2441	8.88	21	-12.12
High	2480	7.82	21	-13.18
Worst		9.11		-11.89

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.94	21	-12.06
Middle	2441	8.56	21	-12.44
High	2480	7.17	21	-13.83
Worst		8.94		-12.06


GFSK OUTPUT POWER

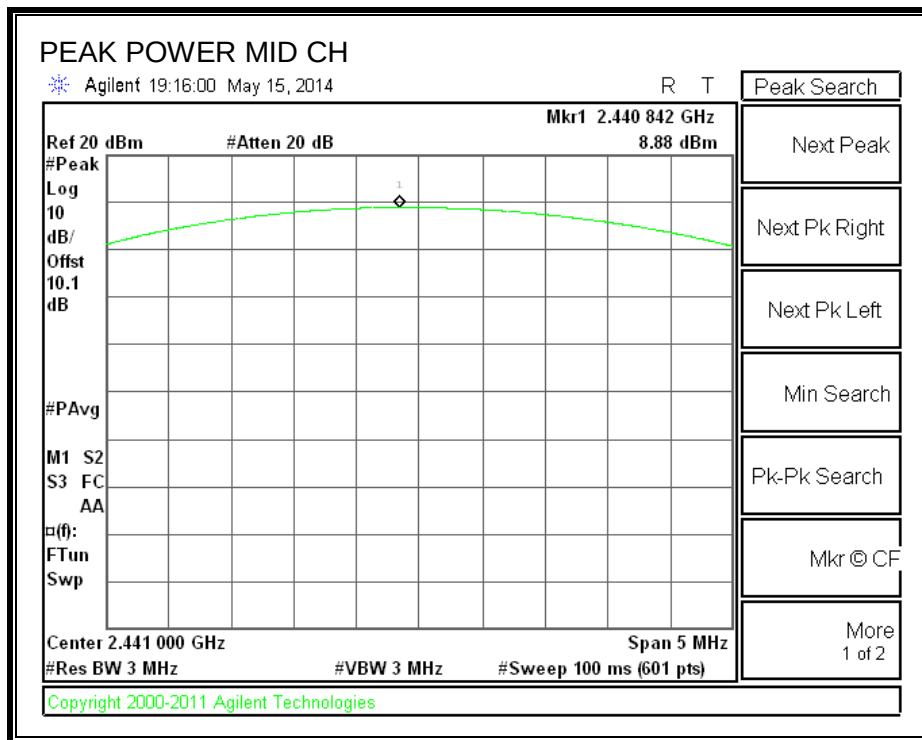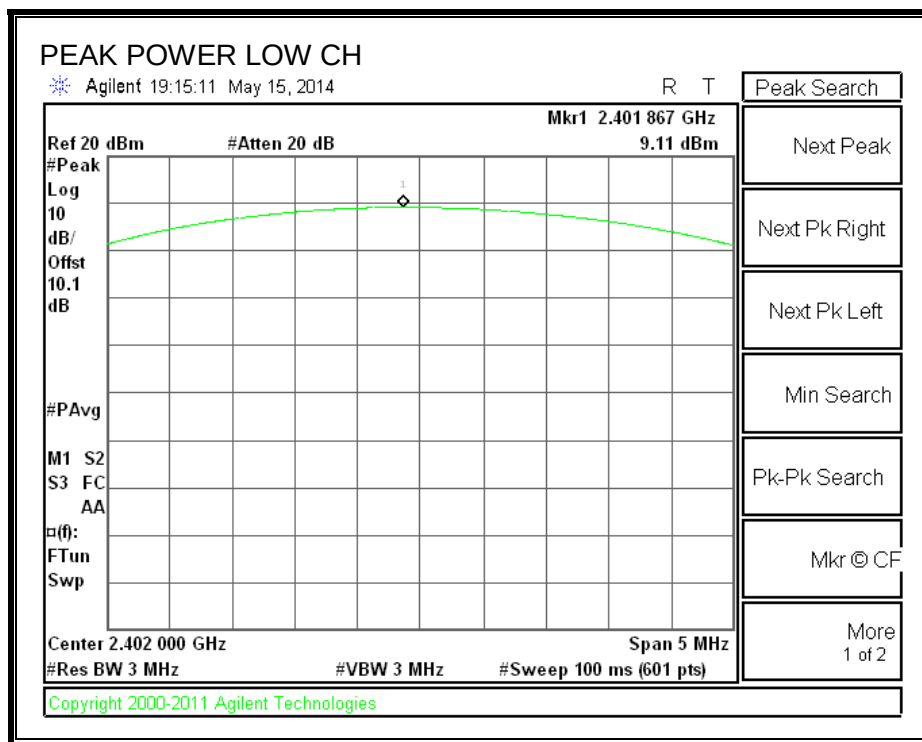

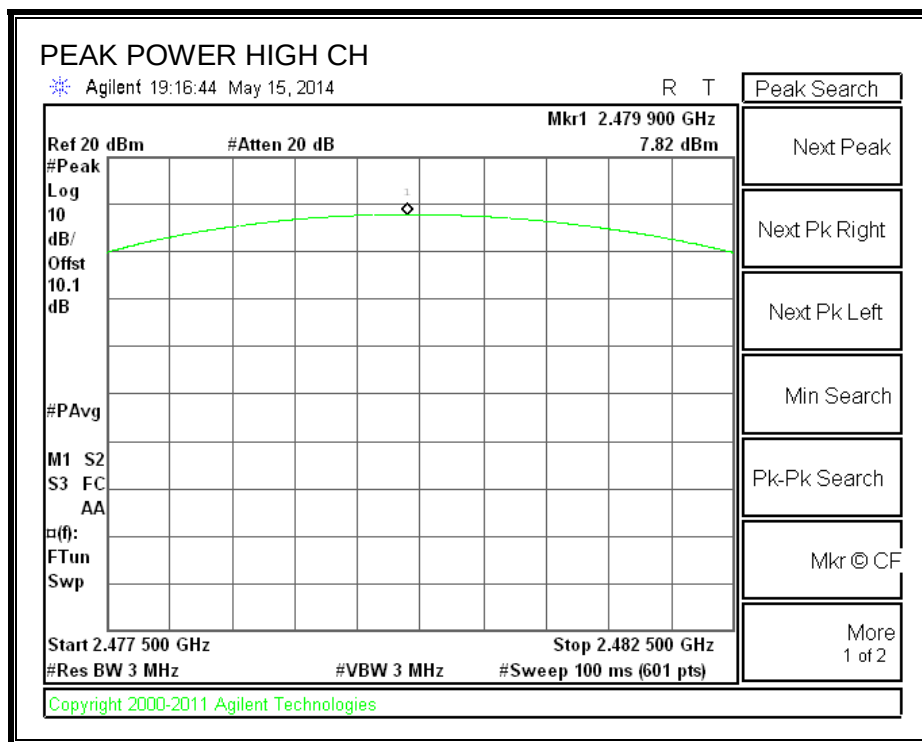

8PSK OUTPUT POWER

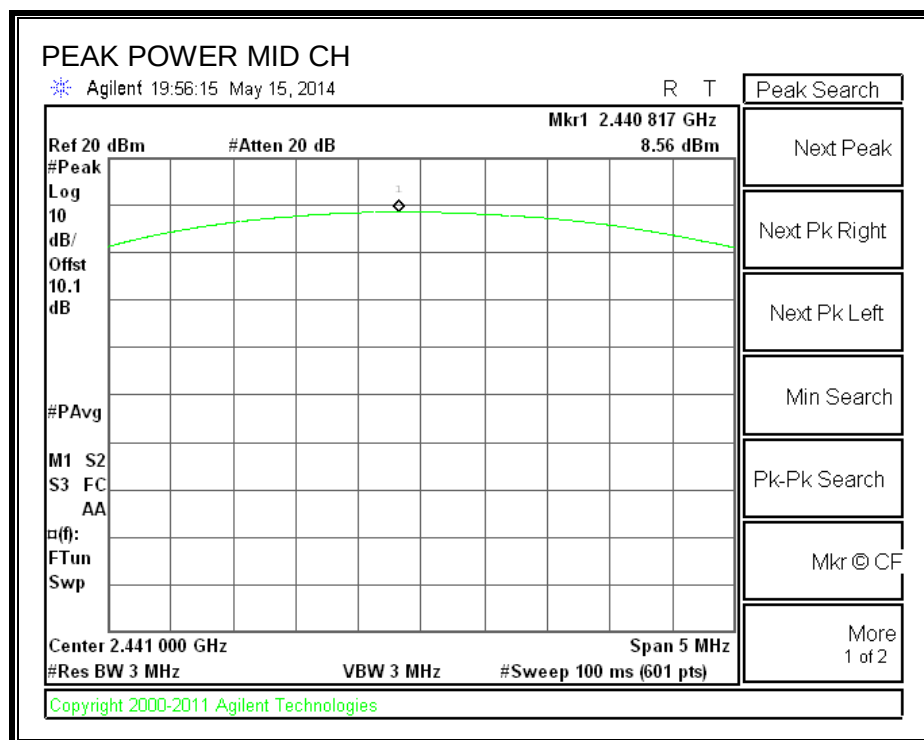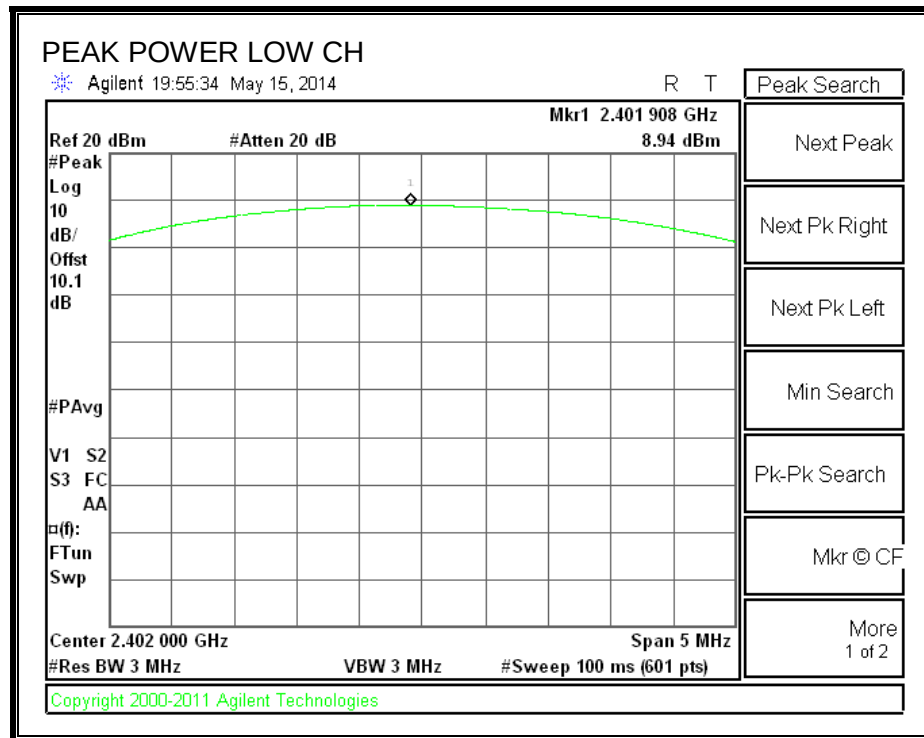

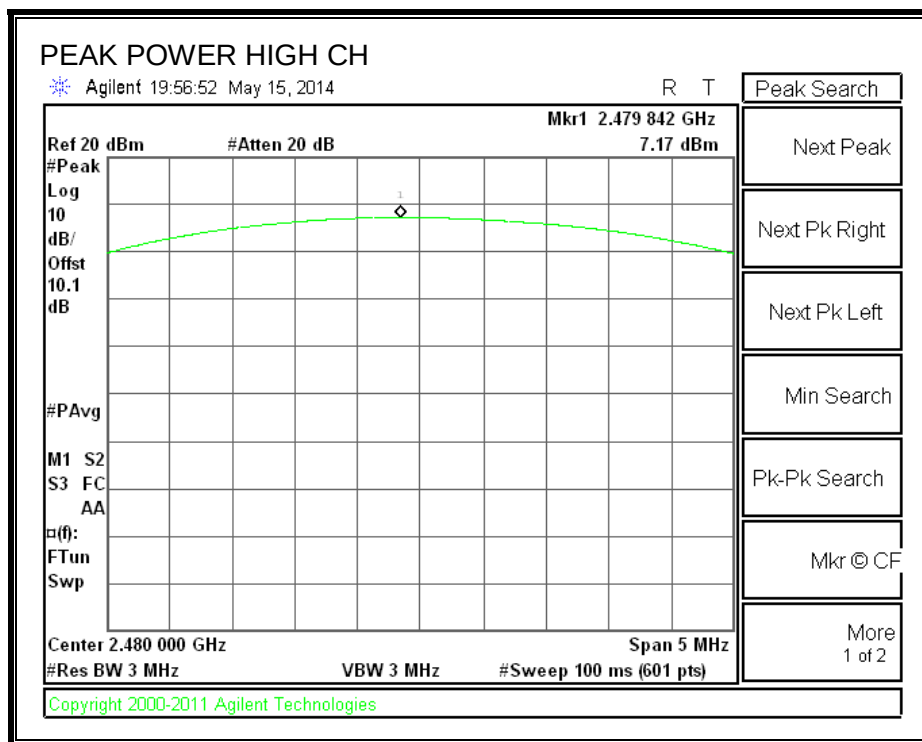

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.40
Middle	2441	7.60
High	2480	7.30
Worst		7.60

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.40
Middle	2441	4.60
High	2480	4.60
Worst		4.60

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.40
Middle	2441	4.60
High	2480	4.60
Worst		4.60

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

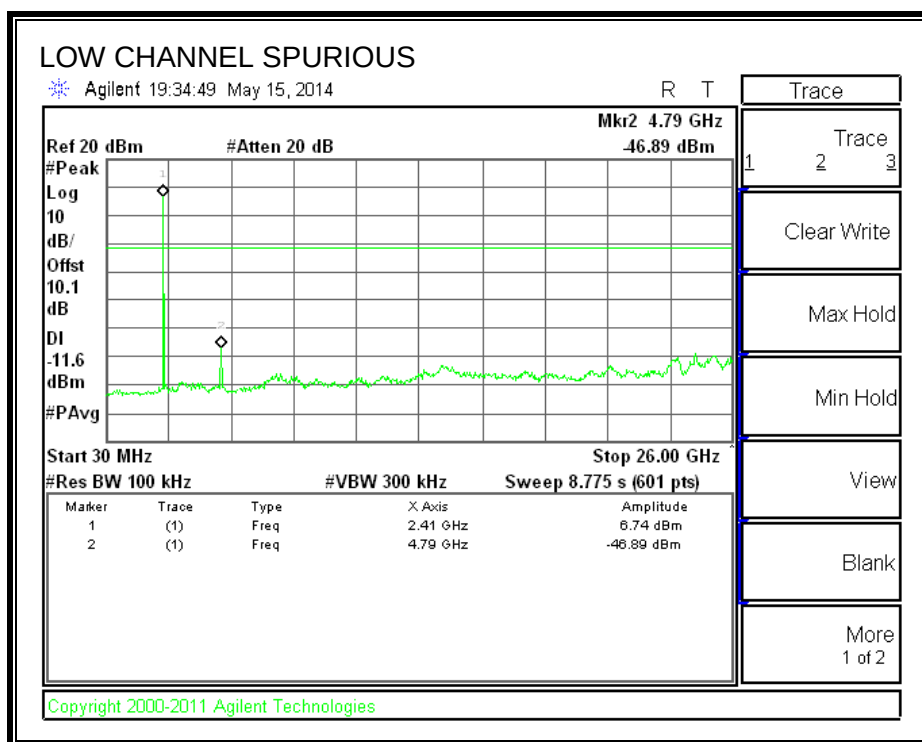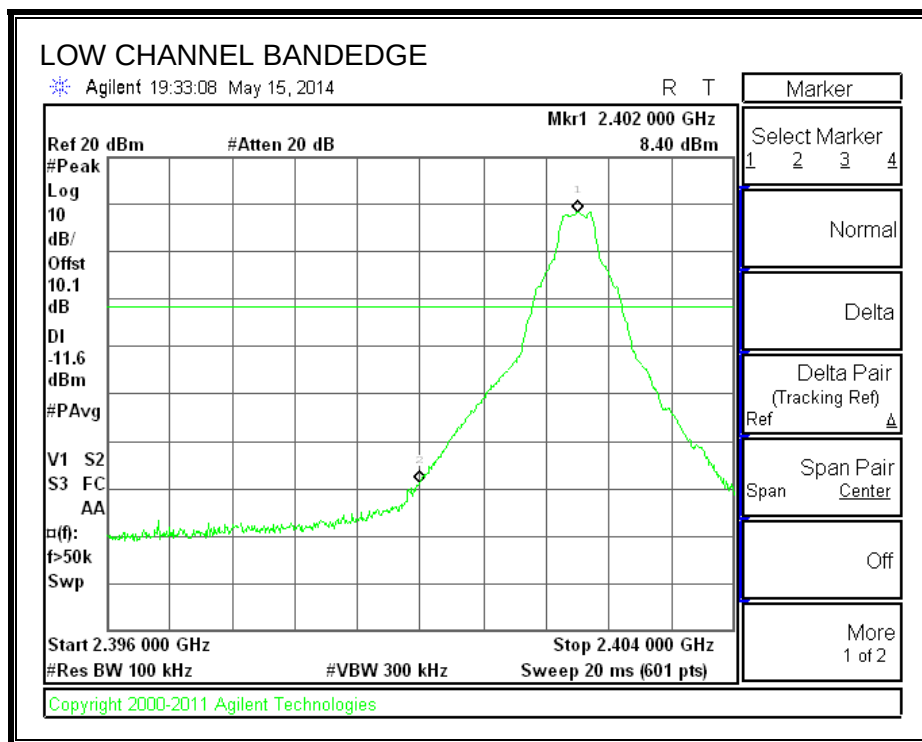



SPURIOUS EMISSIONS, MID CHANNEL

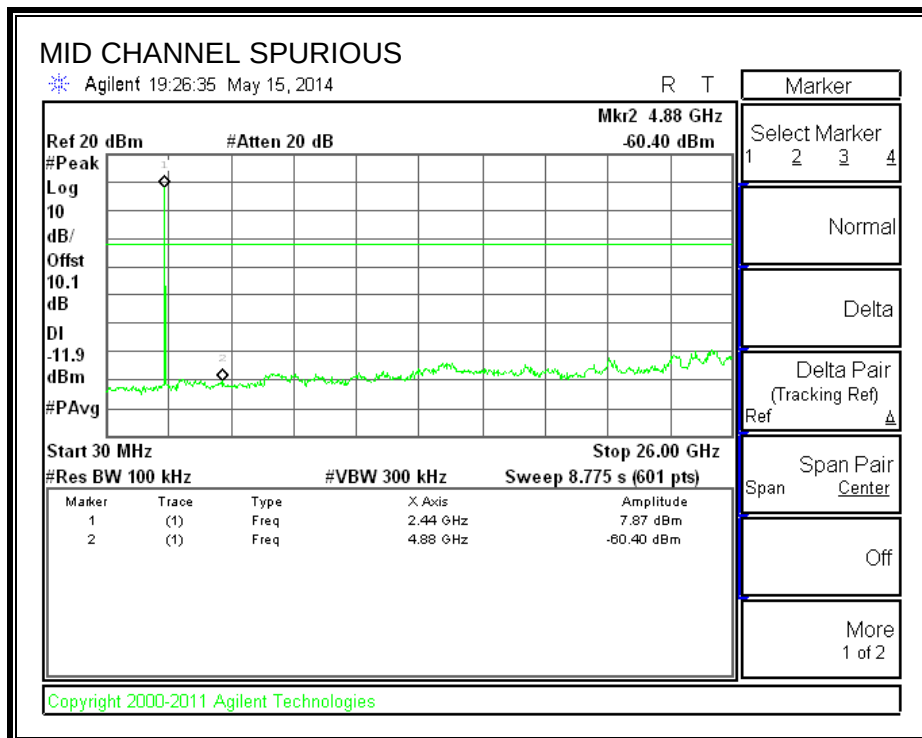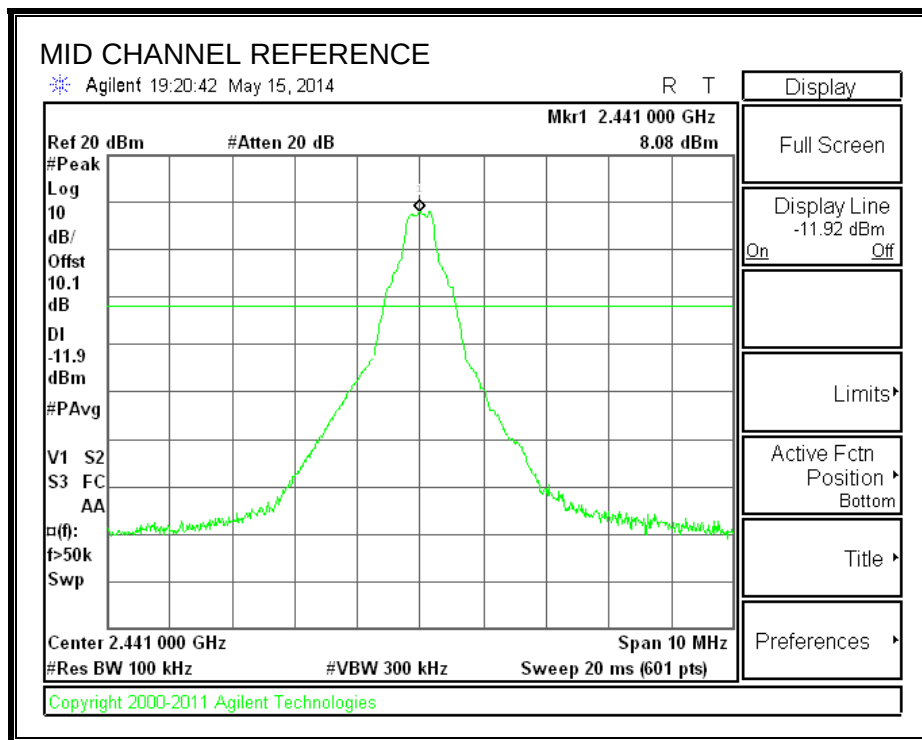

SPURIOUS EMISSIONS, HIGH CHANNEL

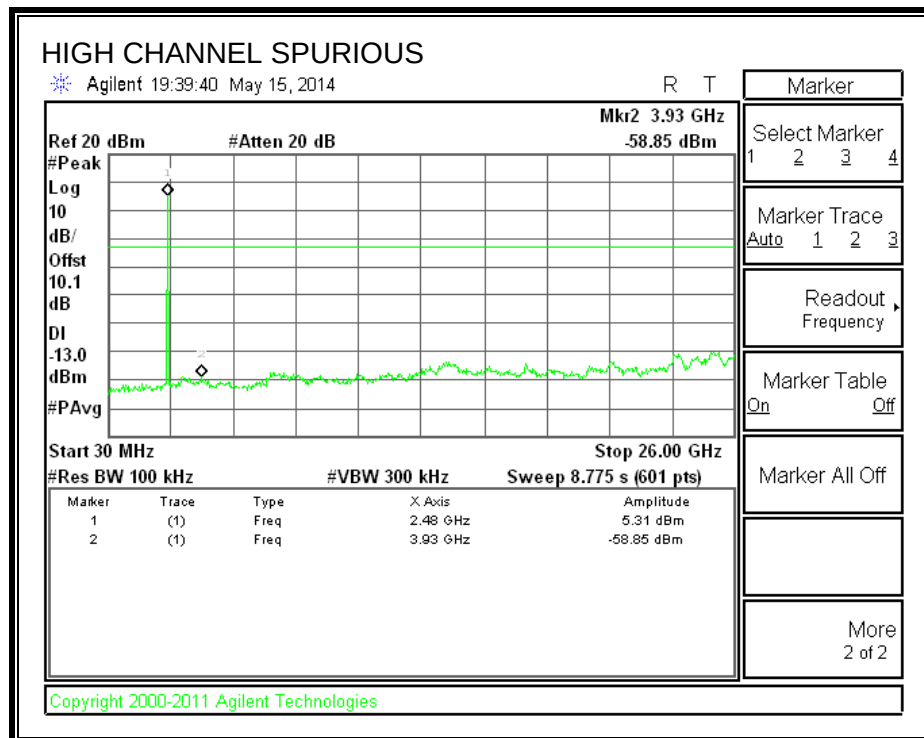
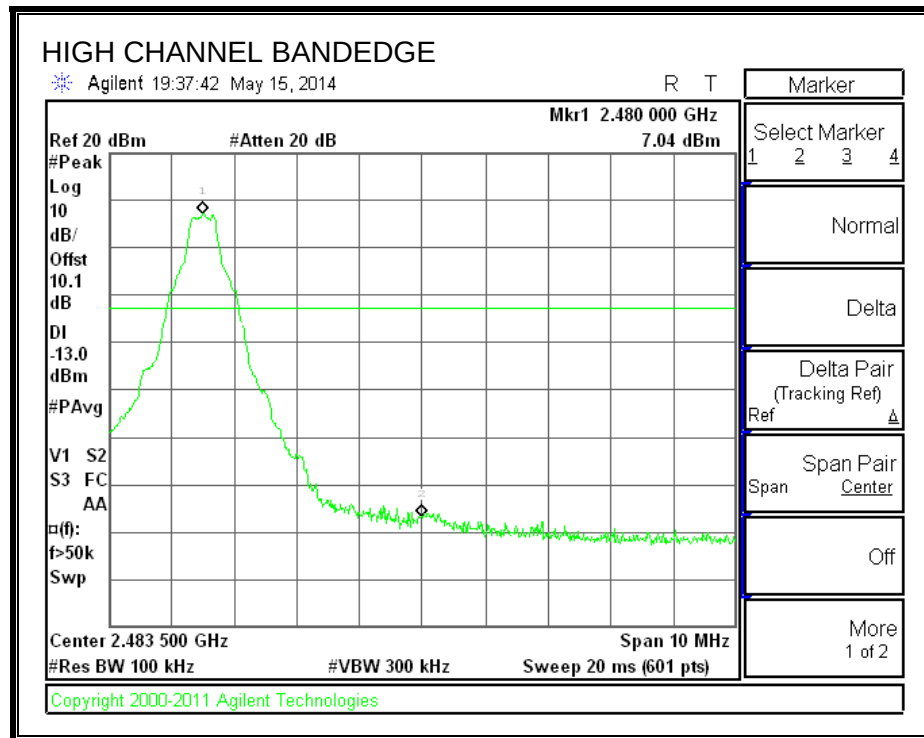


SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON

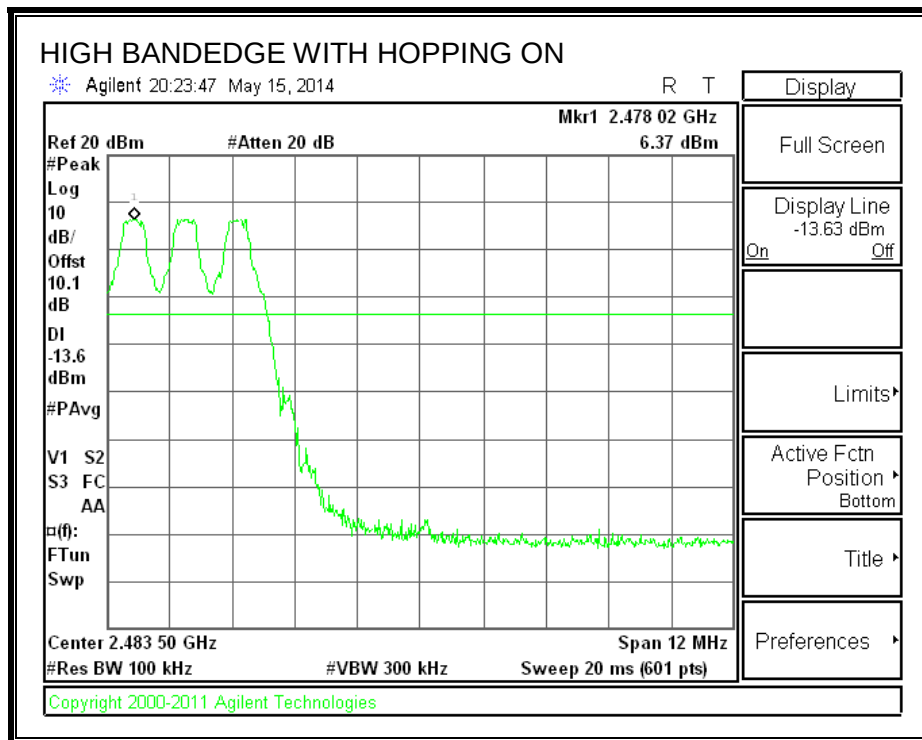
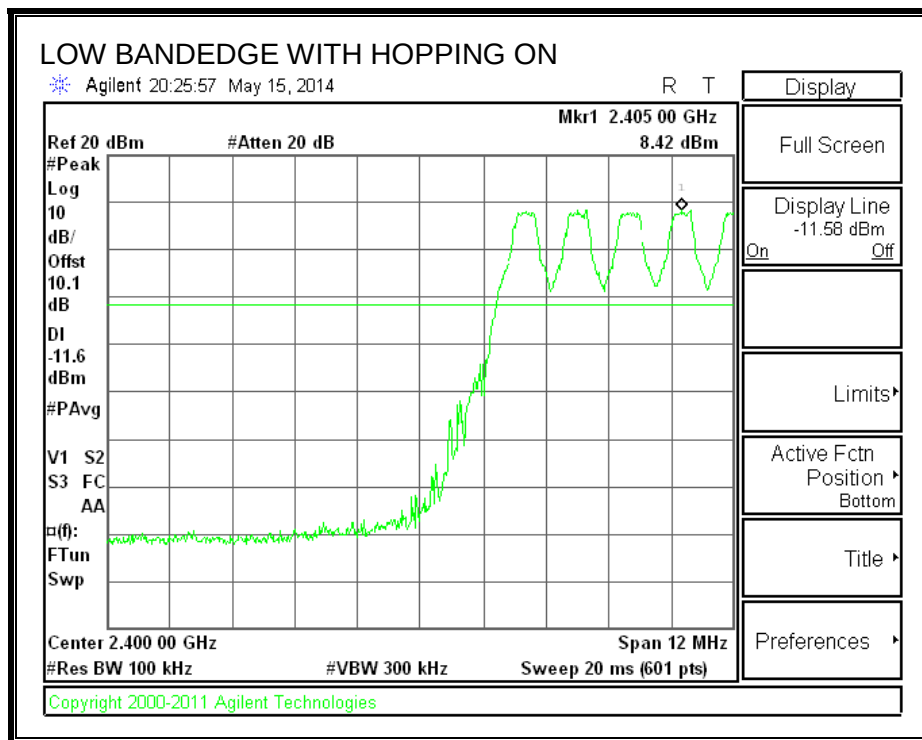


8.7.1. ENHANCED DATA RATE 8PSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

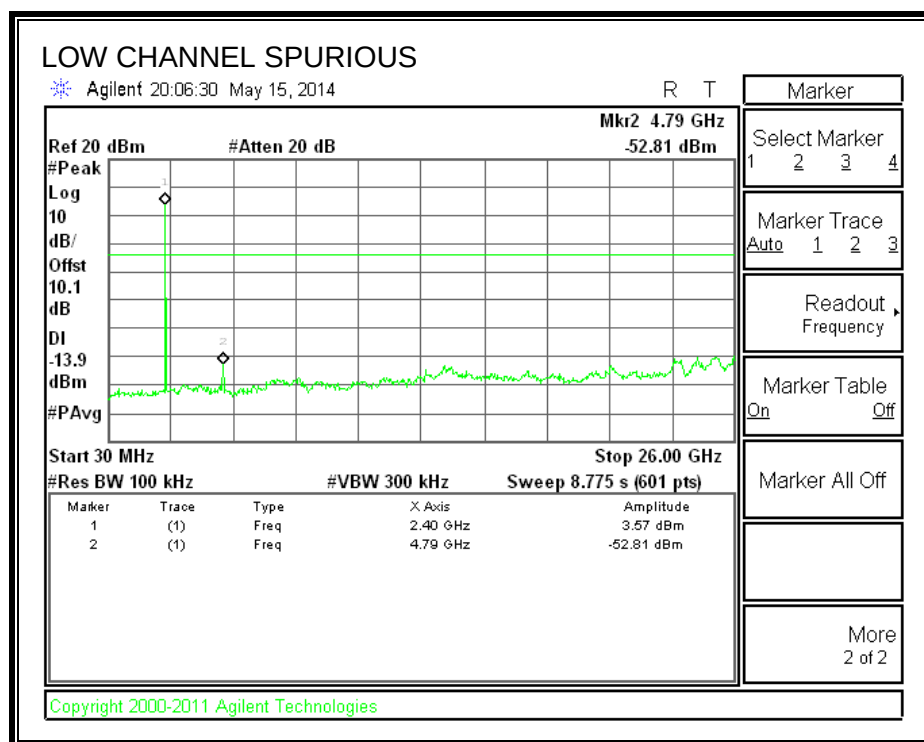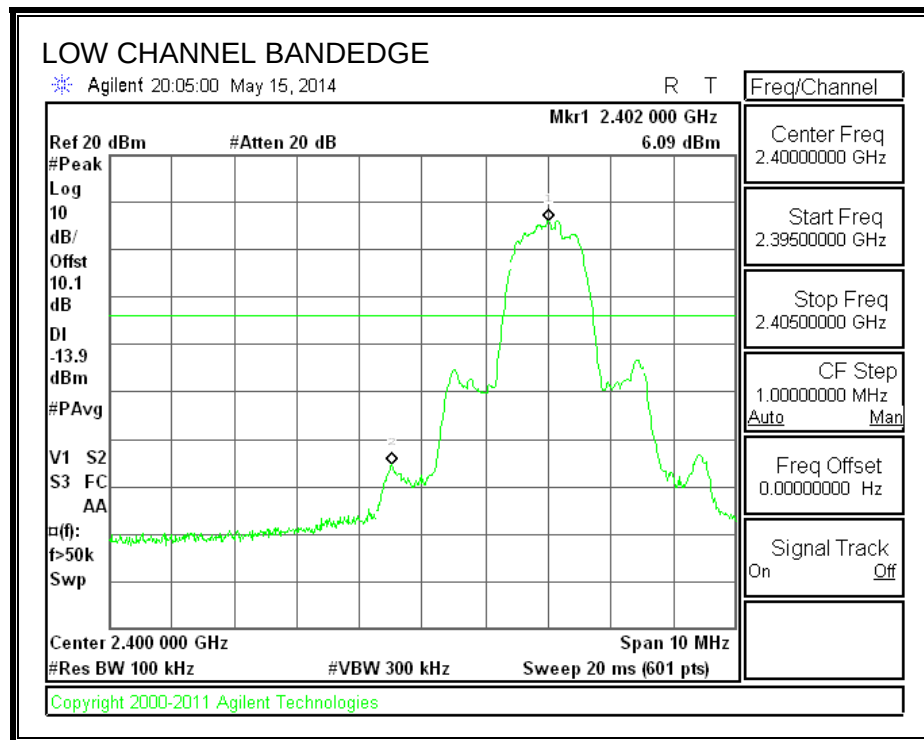



SPURIOUS EMISSIONS, MID CHANNEL

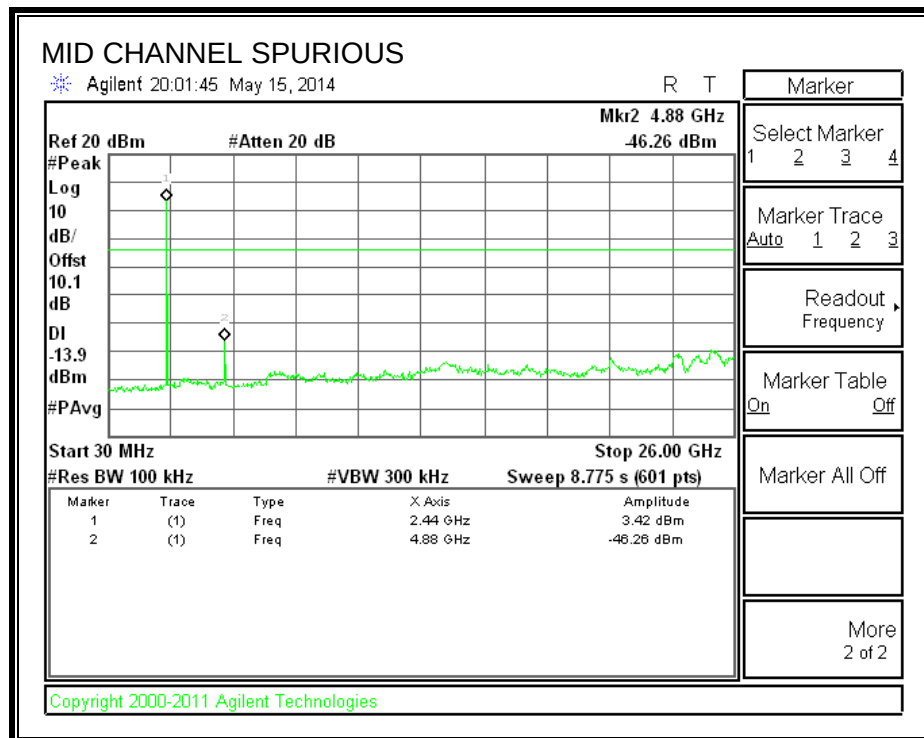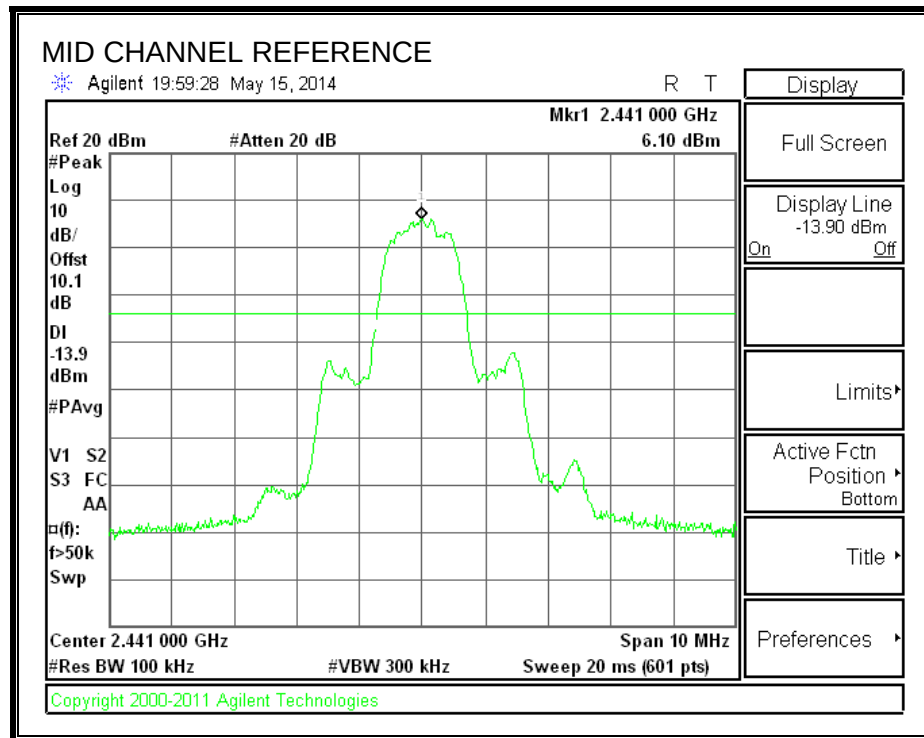

SPURIOUS EMISSIONS, HIGH CHANNEL

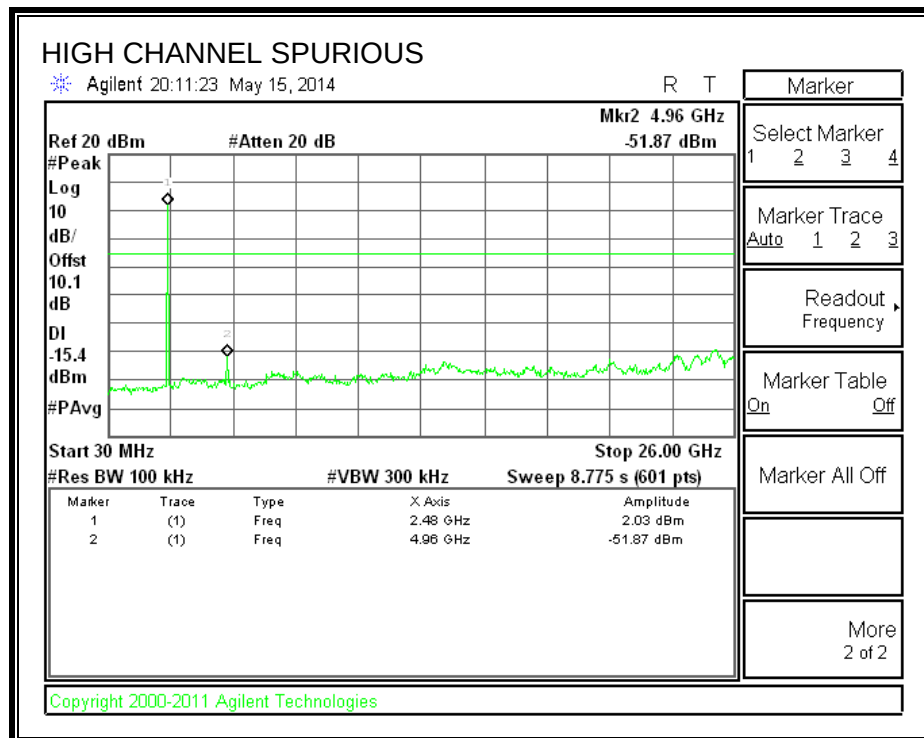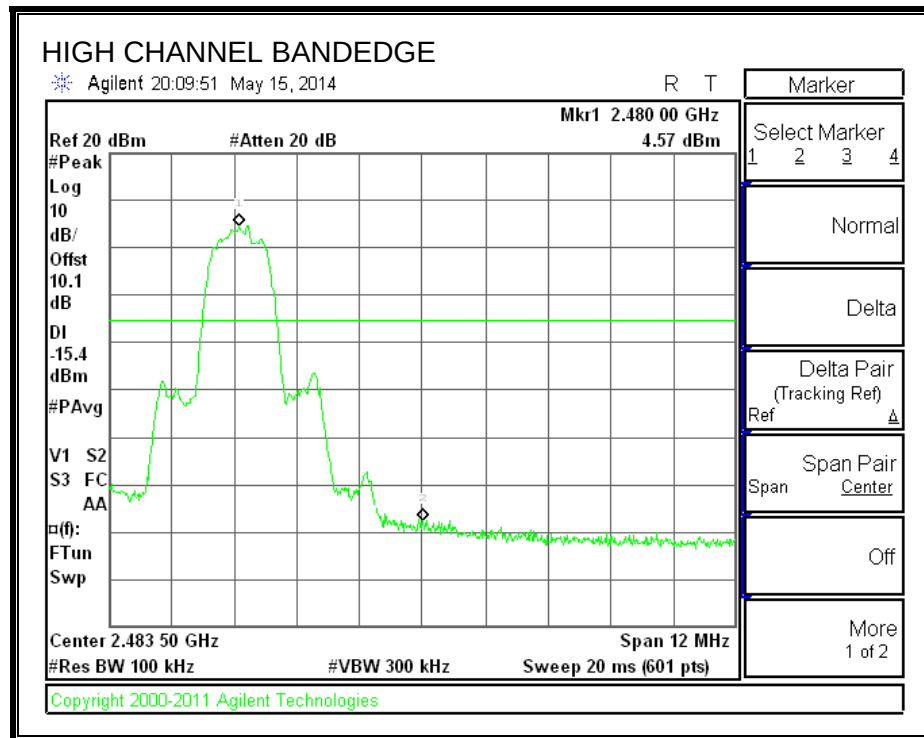

SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON

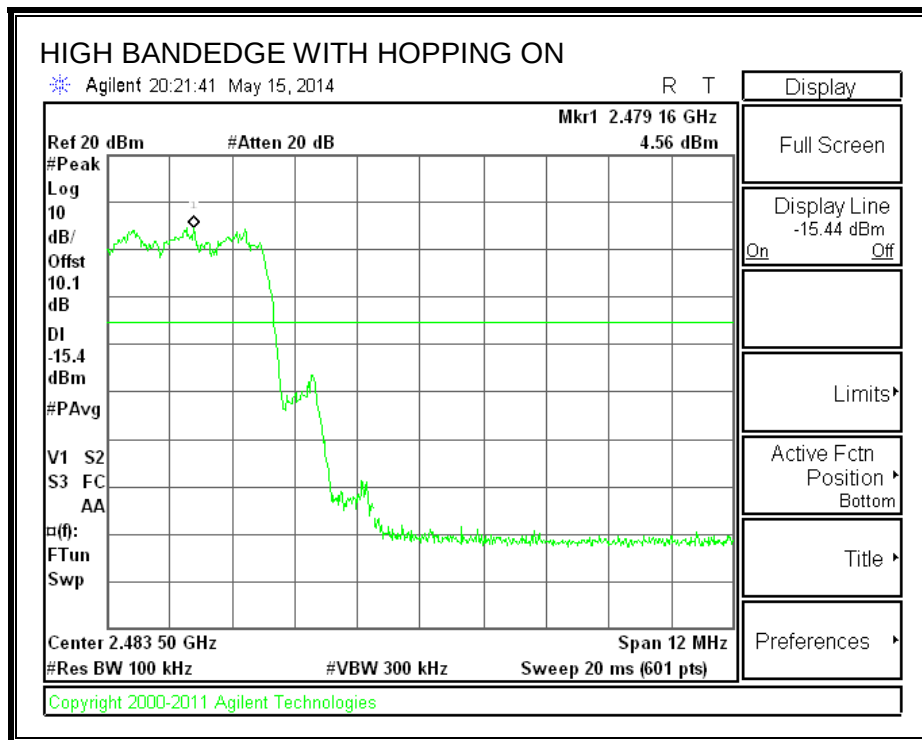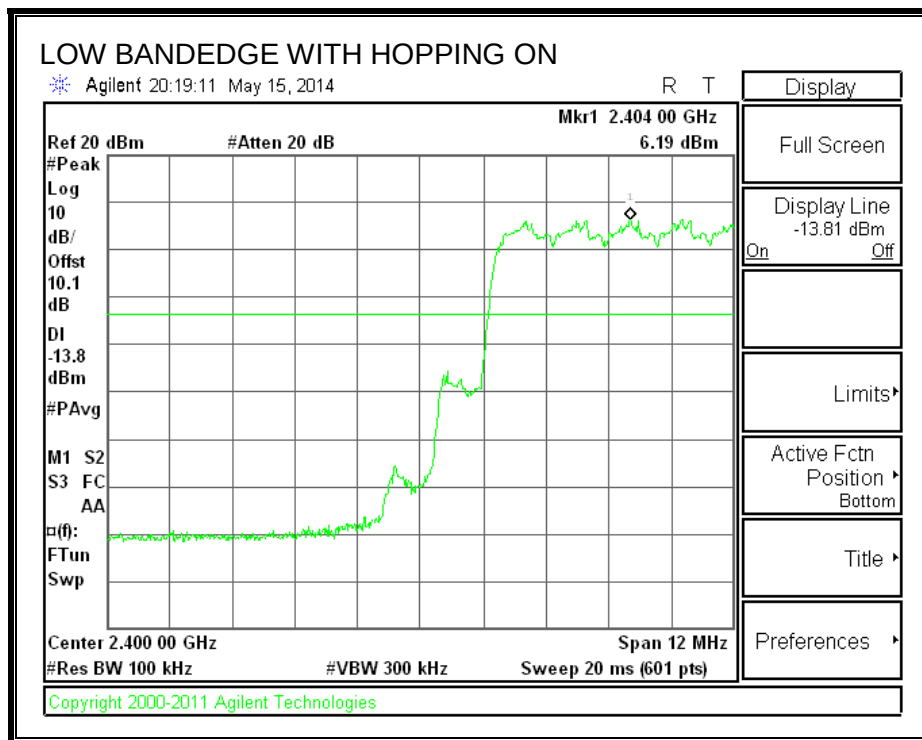

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. $GFSK = 1/T = 1 / 0.0028S = 360Hz$.


The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

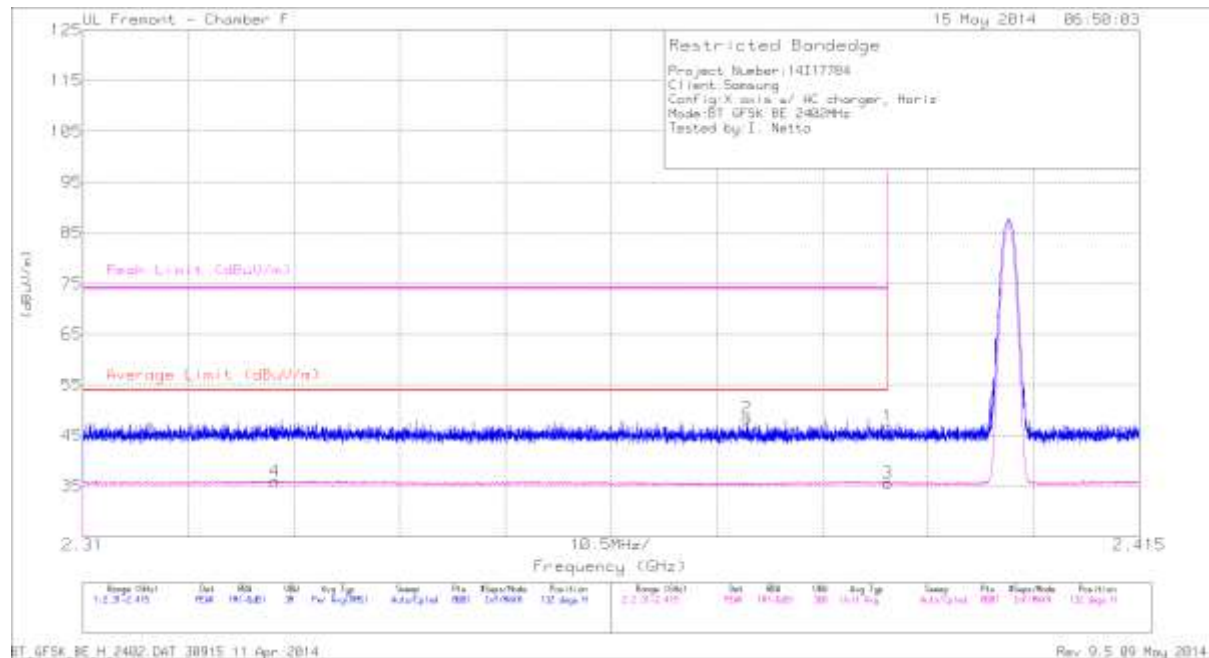


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.47	PK	32.2	-23.8	46.87	-	-	74	-27.13	132	286	H
2	* 2.376	40.21	PK	32.1	-23.9	48.41	-	-	74	-25.59	132	286	H
3	* 2.39	27.24	VB1T	32.2	-23.8	35.64	54	-18.36	-	-	132	286	H
4	* 2.329	27.61	VB1T	31.9	-23.5	36.01	54	-17.99	-	-	132	286	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

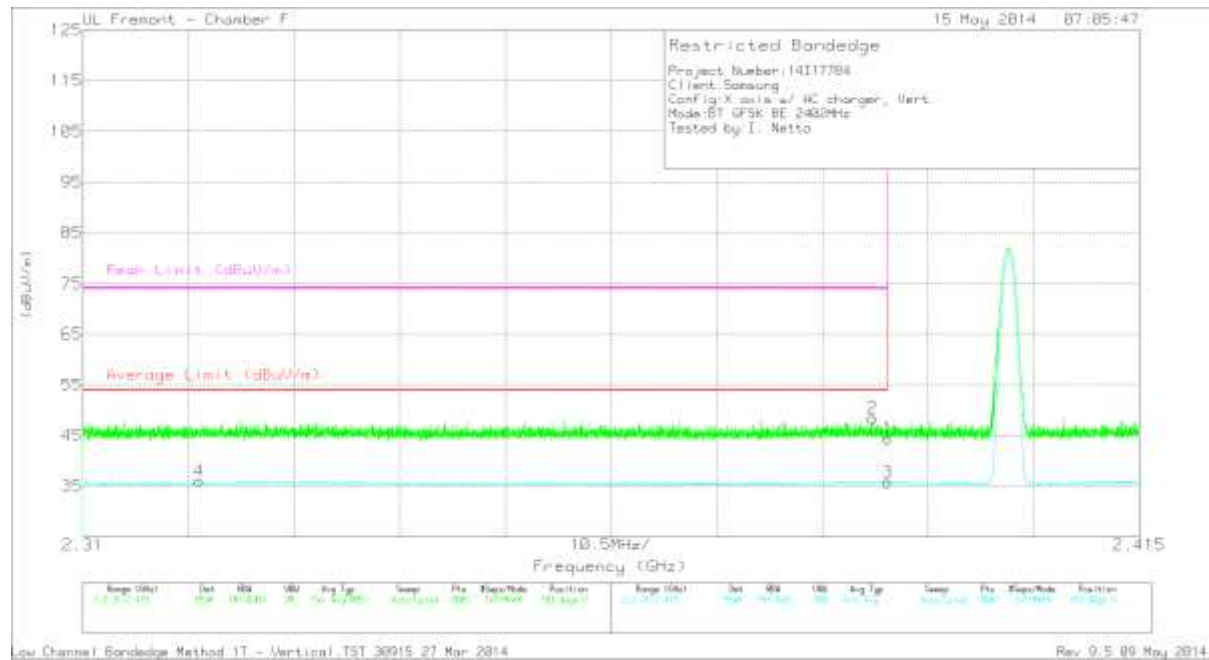


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	36.1	PK	32.2	-23.8	44.5	-	-	74	-29.5	183	364	V
2	* 2.389	39.99	PK	32.2	-23.8	48.39	-	-	74	-25.61	183	364	V
3	* 2.39	27.32	VB1T	32.2	-23.8	35.72	54	-18.28	-	-	183	364	V
4	* 2.322	27.57	VB1T	31.9	-23.5	35.97	54	-18.03	-	-	183	364	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)

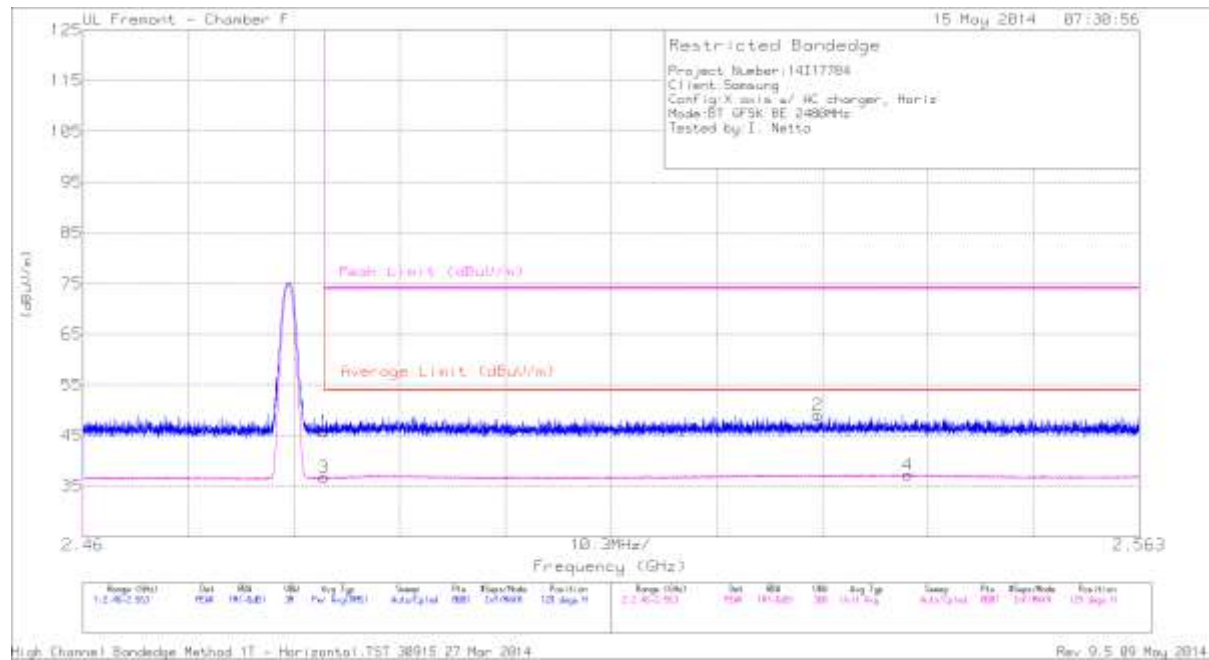


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.25	PK	32.6	-23	45.85	-	-	74	-28.15	129	342	H
2	2.532	39.19	PK	32.7	-22.8	49.09	-	-	74	-24.91	129	342	H
3	* 2.484	27.11	VB1T	32.6	-23	36.71	54	-17.29	-	-	129	342	H
4	2.54	27.38	VB1T	32.7	-22.8	37.28	54	-16.72	-	-	129	342	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

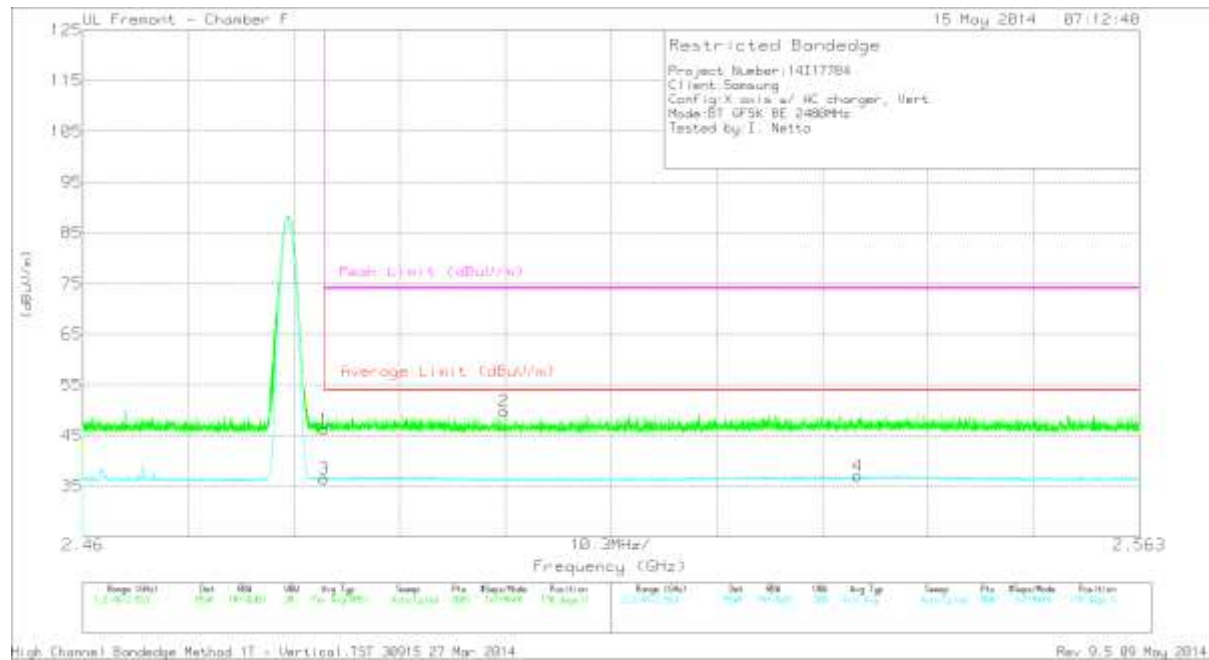

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.61	PK	32.6	-23	46.21	-	-	74	-27.79	170	331	V
2	2.501	40.29	PK	32.6	-23.1	49.79	-	-	74	-24.21	170	331	V
3	* 2.484	26.88	VB1T	32.6	-23	36.48	54	-17.52	-	-	170	331	V
4	2.536	27.09	VB1T	32.7	-22.8	36.99	54	-17.01	-	-	170	331	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

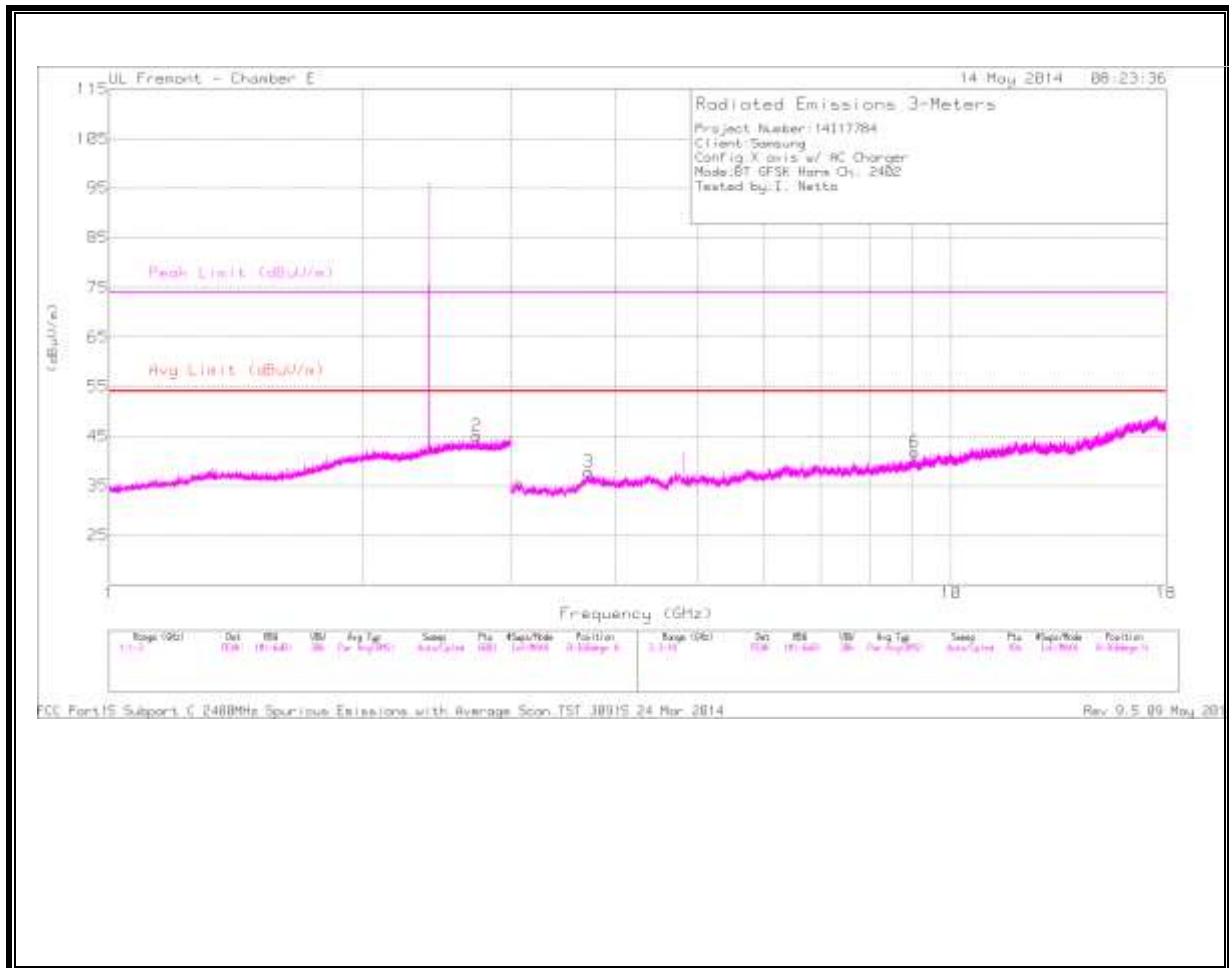

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

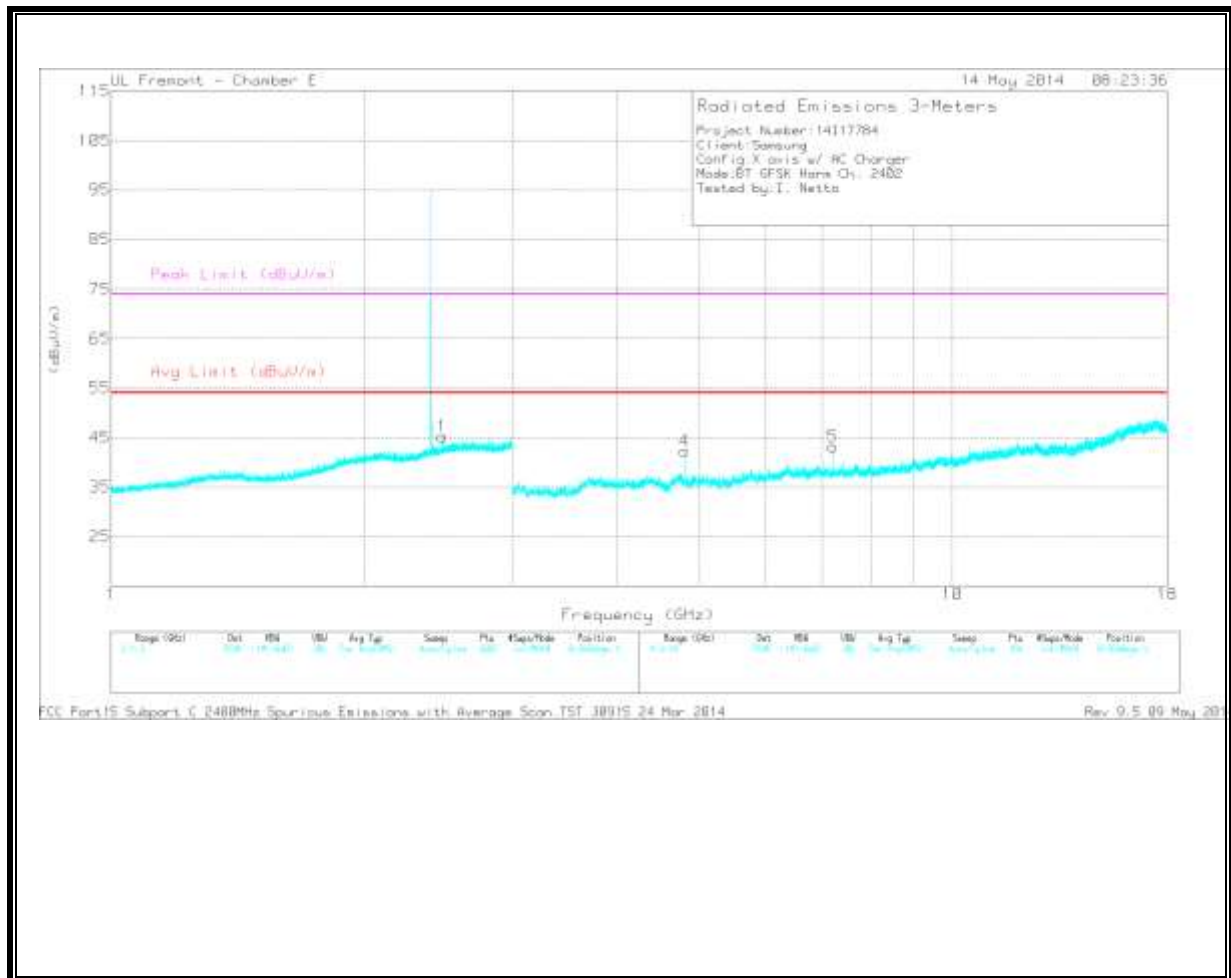

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.732	36.56	PK	32.5	-24	45.06	-	-	74	-28.94	0-360	101	H
3	* 3.712	35.51	PK	33.3	-30.9	37.91	-	-	74	-36.09	0-360	199	H
6	* 9.043	30.1	PK	36.4	-24.7	41.8	-	-	74	-32.2	0-360	101	H
4	* 4.804	39.09	PK	34.1	-30.9	42.29	-	-	74	-31.71	0-360	200	V
1	2.476	37.4	PK	32.3	-24.5	45.2	-	-	-	-	0-360	101	V
5	7.206	35.81	PK	35.8	-28.4	43.21	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.734	43.59	PK3	32.5	-24	52.09	-	-	74	-21.91	360	101	H
* 3.714	41.12	PK3	33.3	-30.9	43.52	-	-	74	-30.48	360	101	H
* 9.041	36.43	PK3	36.4	-24.7	48.13	-	-	74	-25.87	360	101	H
* 4.804	43.69	PK3	34.1	-30.9	46.89	-	-	74	-27.11	99	197	V
* 4.804	36.36	VB1T	34.1	-30.9	39.56	54	-14.44	-	-	99	197	V
2.476	43.64	PK3	32.3	-24.5	51.44	-	-	-	-	360	101	V
7.206	42.94	PK3	35.8	-28.4	50.34	-	-	-	-	31	306	V
7.206	33.54	VB1T	35.8	-28.4	40.94	-	-	-	-	31	306	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL
HORIZONTAL

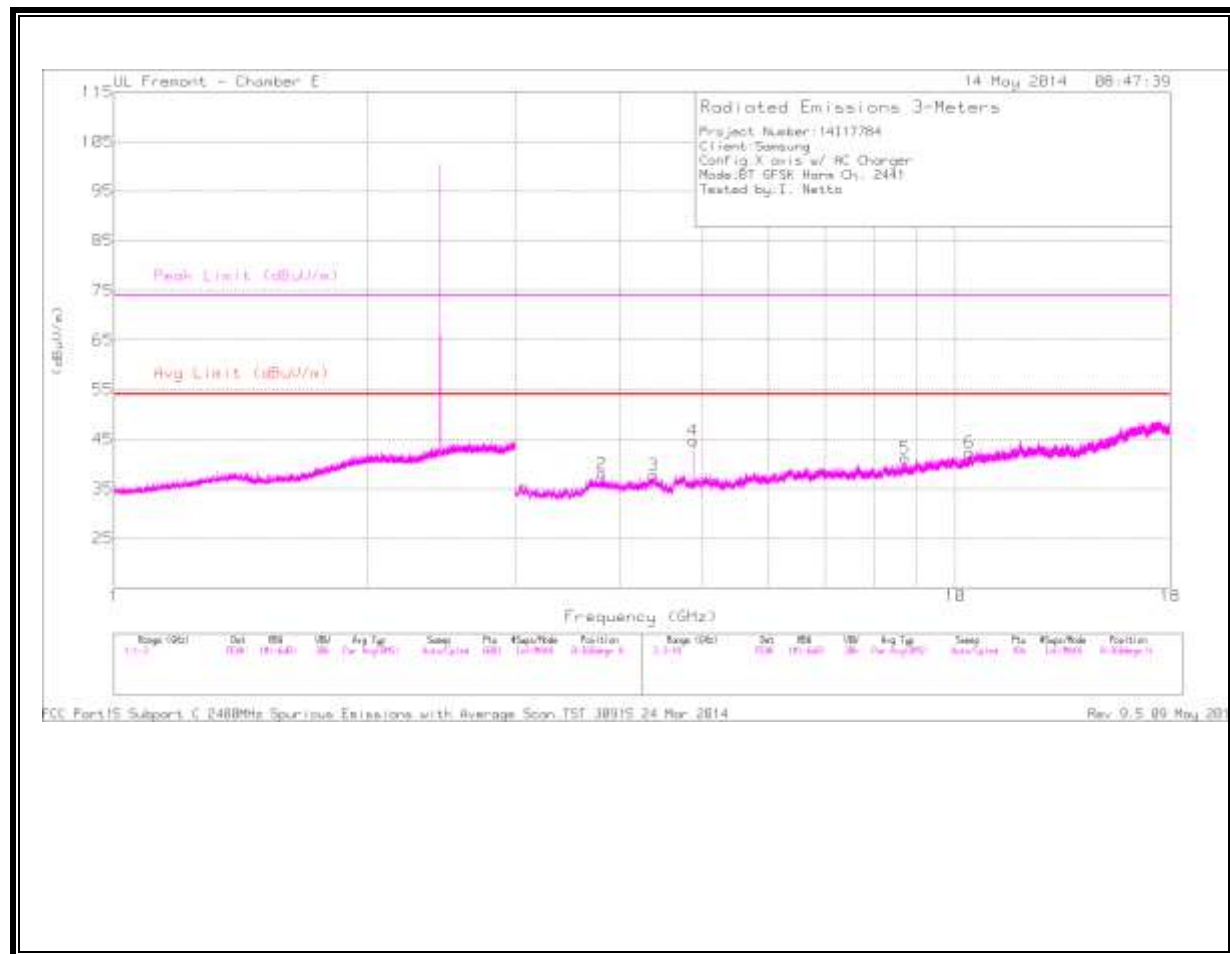

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.538	36.86	PK	28.4	-26.3	38.96	-	-	74	-35.04	0-360	101	V
2	* 3.802	35.77	PK	33.4	-31.2	37.97	-	-	74	-36.03	0-360	101	H
3	* 4.376	34.28	PK	33.7	-30.2	37.78	-	-	74	-36.22	0-360	101	H
4	* 4.882	41.62	PK	34	-30.9	44.72	-	-	74	-29.28	0-360	101	H
5	8.709	30.56	PK	36	-25.4	41.16	-	-	-	-	0-360	200	H
6	10.397	28.67	PK	37.4	-23.8	42.27	-	-	-	-	0-360	200	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.54	43.73	PK3	28.4	-26.3	45.83	-	-	74	-28.17	0	101	H
* 3.799	42.06	PK3	33.4	-31.3	44.16	-	-	74	-29.84	0	101	H
* 4.374	41.81	PK3	33.7	-30.2	45.31	-	-	74	-28.69	0	101	H
* 4.882	47.74	PK3	34	-30.9	50.84	-	-	74	-23.16	162	136	H
* 4.882	43.1	VB1T	34	-30.9	46.2	54	-7.8	-	-	162	136	H
8.708	36.91	PK3	36	-25.4	47.51	-	-	-	-	0	101	H
10.397	36.08	PK3	37.4	-23.8	49.68	-	-	-	-	0	101	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL HORIZONTAL

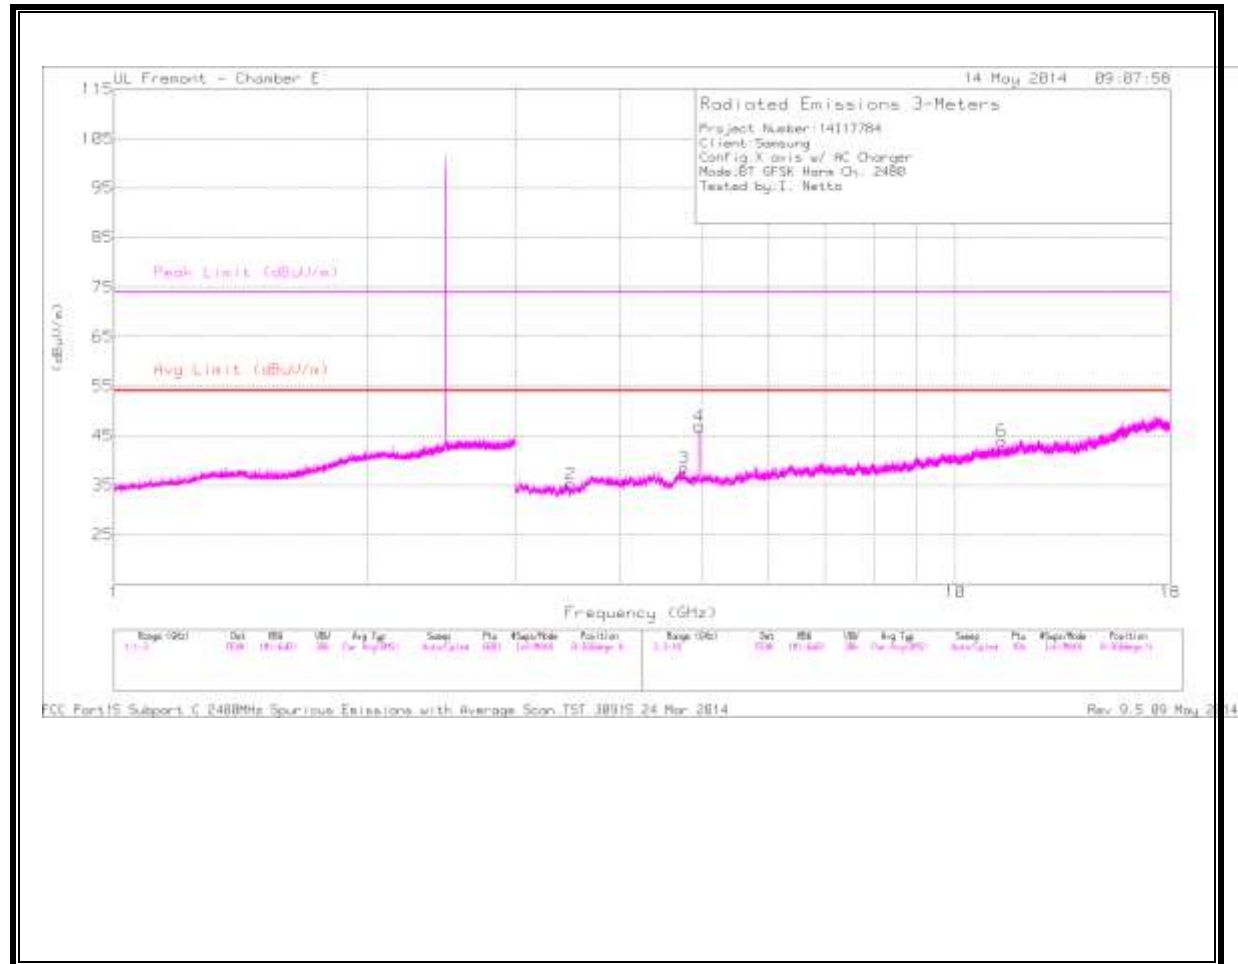

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.375	36.47	PK	31.9	-24.6	43.77	-	-	74	-30.23	0-360	200	V
3	* 4.762	35.37	PK	34.1	-31	38.47	-	-	74	-35.53	0-360	200	H
4	* 4.96	42.91	PK	34.1	-30.2	46.81	-	-	74	-27.19	0-360	200	H
6	* 11.35	28.73	PK	38	-22.8	43.93	-	-	74	-30.07	0-360	200	H
5	* 7.439	35.47	PK	35.7	-28.2	42.97	-	-	74	-31.03	0-360	200	V
2	3.49	33.94	PK	32.9	-31.6	35.24	-	-	-	-	0-360	200	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AFT346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.375	44.2	PK3	31.9	-24.6	51.5	-	-	74	-22.5	2	101	V
* 4.762	41.28	PK3	34.1	-31	44.38	-	-	74	-29.62	2	101	H
* 11.349	35.79	PK3	38	-22.7	51.09	-	-	74	-22.91	2	101	H
* 4.96	45.37	PK3	34.1	-30.2	49.27	-	-	74	-24.73	169	136	H
* 4.96	38.83	VB1T	34.1	-30.2	42.73	54	-11.27	-	-	169	136	H
* 7.44	42.23	PK3	35.7	-28.2	49.73	-	-	74	-24.27	32	306	V
* 7.44	33.34	VB1T	35.7	-28.2	40.84	54	-13.16	-	-	32	306	V
3.489	41.84	PK3	32.9	-31.6	43.14	-	-	-	-	2	101	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

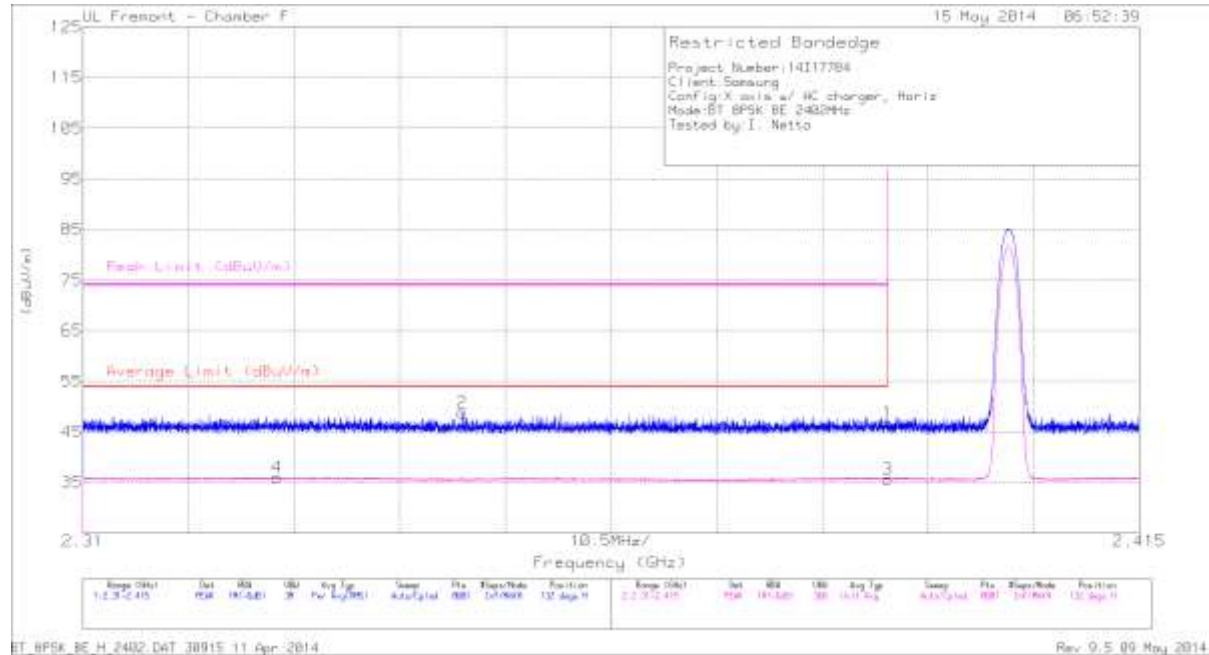


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.36	PK	32.2	-23.8	46.76	-	-	74	-27.24	132	286	H
2	* 2.348	40.53	PK	32	-23.7	48.83	-	-	74	-25.17	132	286	H
3	* 2.39	27.29	VB1T	32.2	-23.8	35.69	54	-18.31	-	-	132	286	H
4	* 2.329	27.62	VB1T	31.9	-23.5	36.02	54	-17.98	-	-	132	286	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

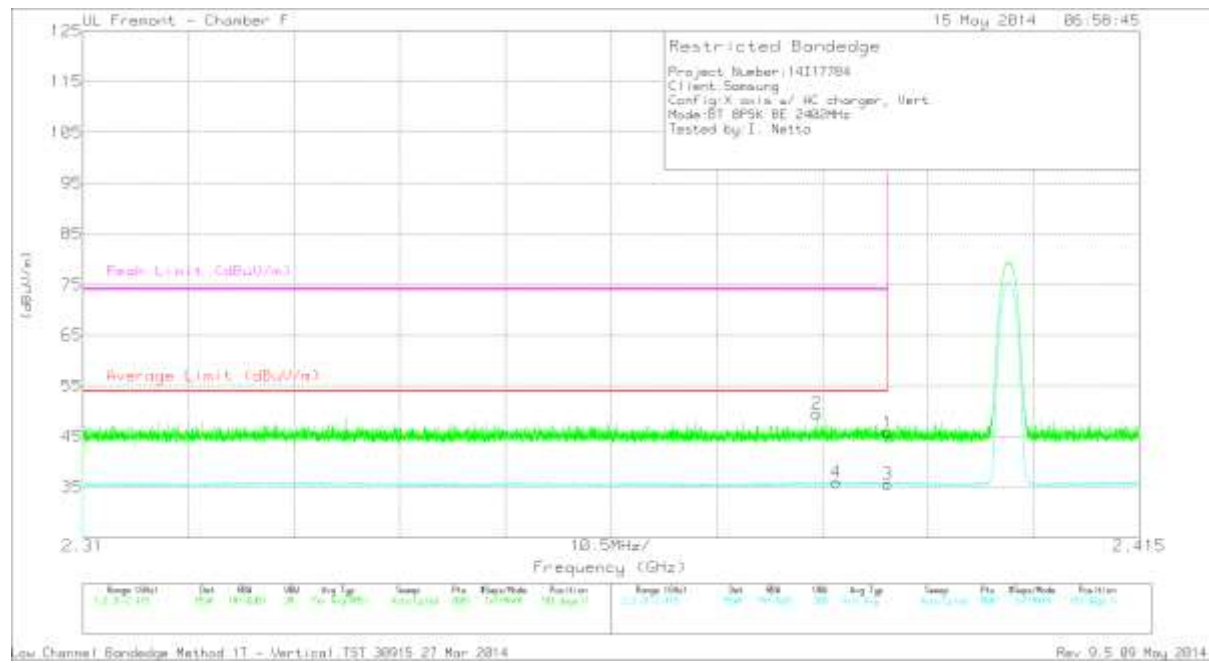


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.43	PK	32.2	-23.8	45.83	-	-	74	-28.17	183	364	V
2	* 2.383	41.26	PK	32.1	-23.8	49.56	-	-	74	-24.44	183	364	V
3	* 2.39	27.26	VB1T	32.2	-23.8	35.66	54	-18.34	-	-	183	364	V
4	* 2.385	27.77	VB1T	32.1	-23.8	36.07	54	-17.93	-	-	183	364	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)

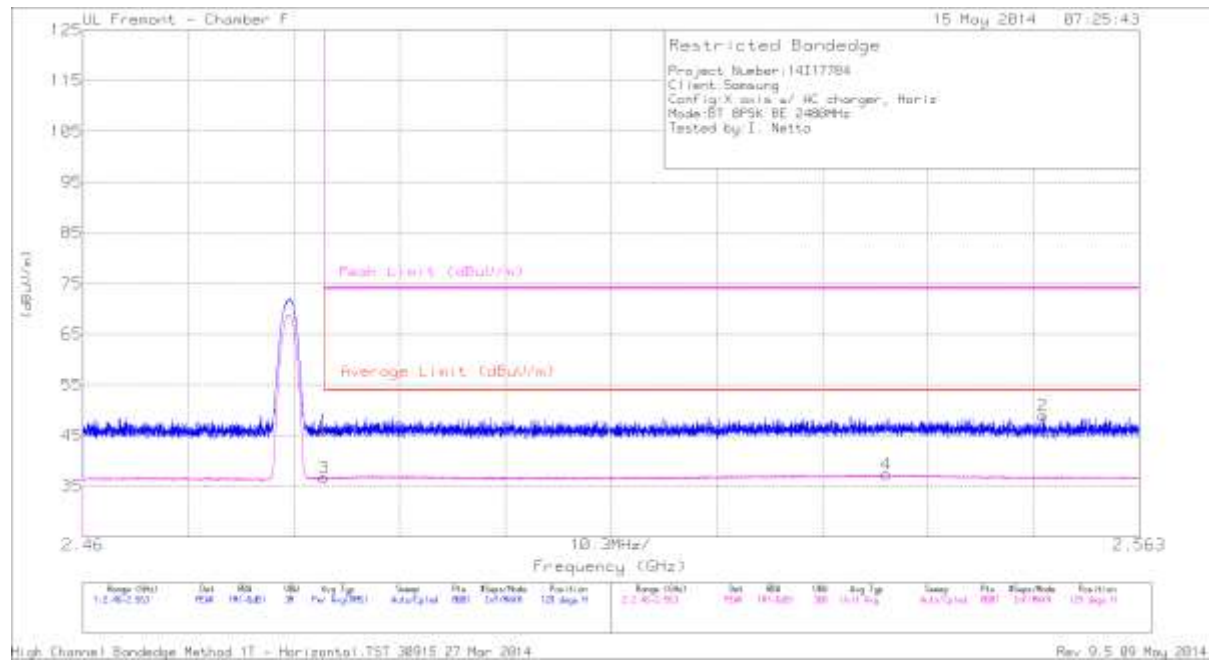


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.34	PK	32.6	-23	45.94	-	-	74	-28.06	129	342	H
2	2.554	39.41	PK	32.7	-23.2	48.91	-	-	74	-25.09	129	342	H
3	* 2.484	27.05	VB1T	32.6	-23	36.65	54	-17.35	-	-	129	342	H
4	2.538	27.43	VB1T	32.7	-22.8	37.33	54	-16.67	-	-	129	342	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

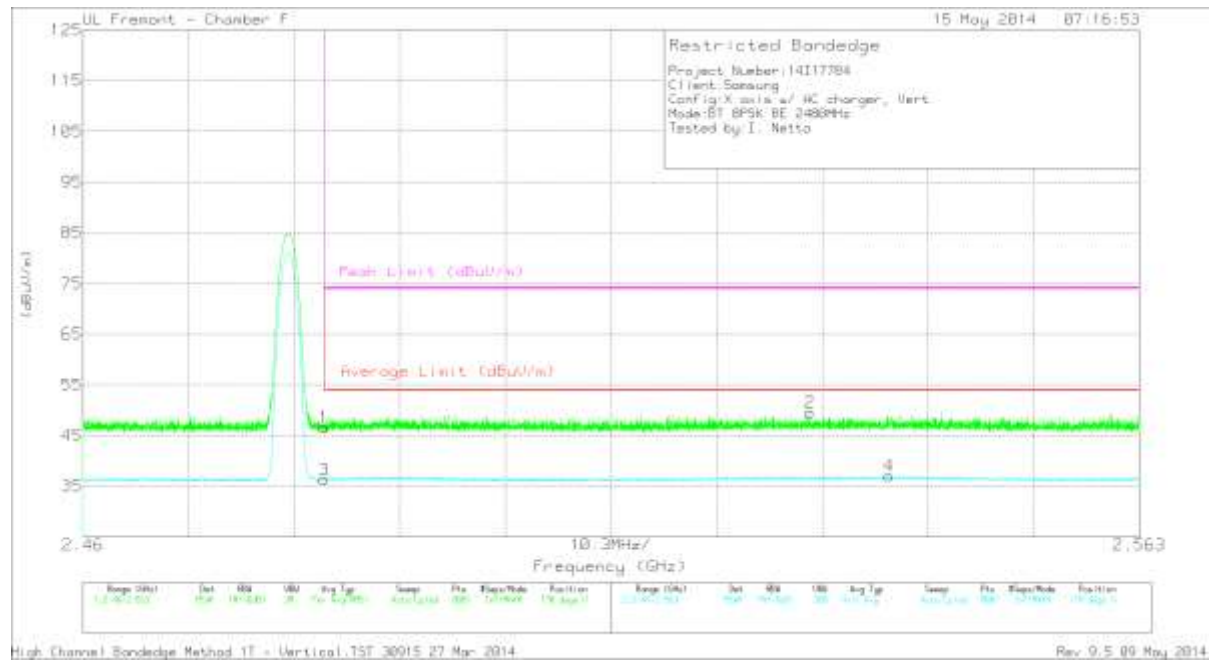

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.97	PK	32.6	-23	46.57	-	-	74	-27.43	170	331	V
2	2.531	39.66	PK	32.7	-22.8	49.56	-	-	74	-24.44	170	331	V
3	* 2.484	26.66	VB1T	32.6	-23	36.26	54	-17.74	-	-	170	331	V
4	2.539	27.15	VB1T	32.7	-22.8	37.05	54	-16.95	-	-	170	331	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

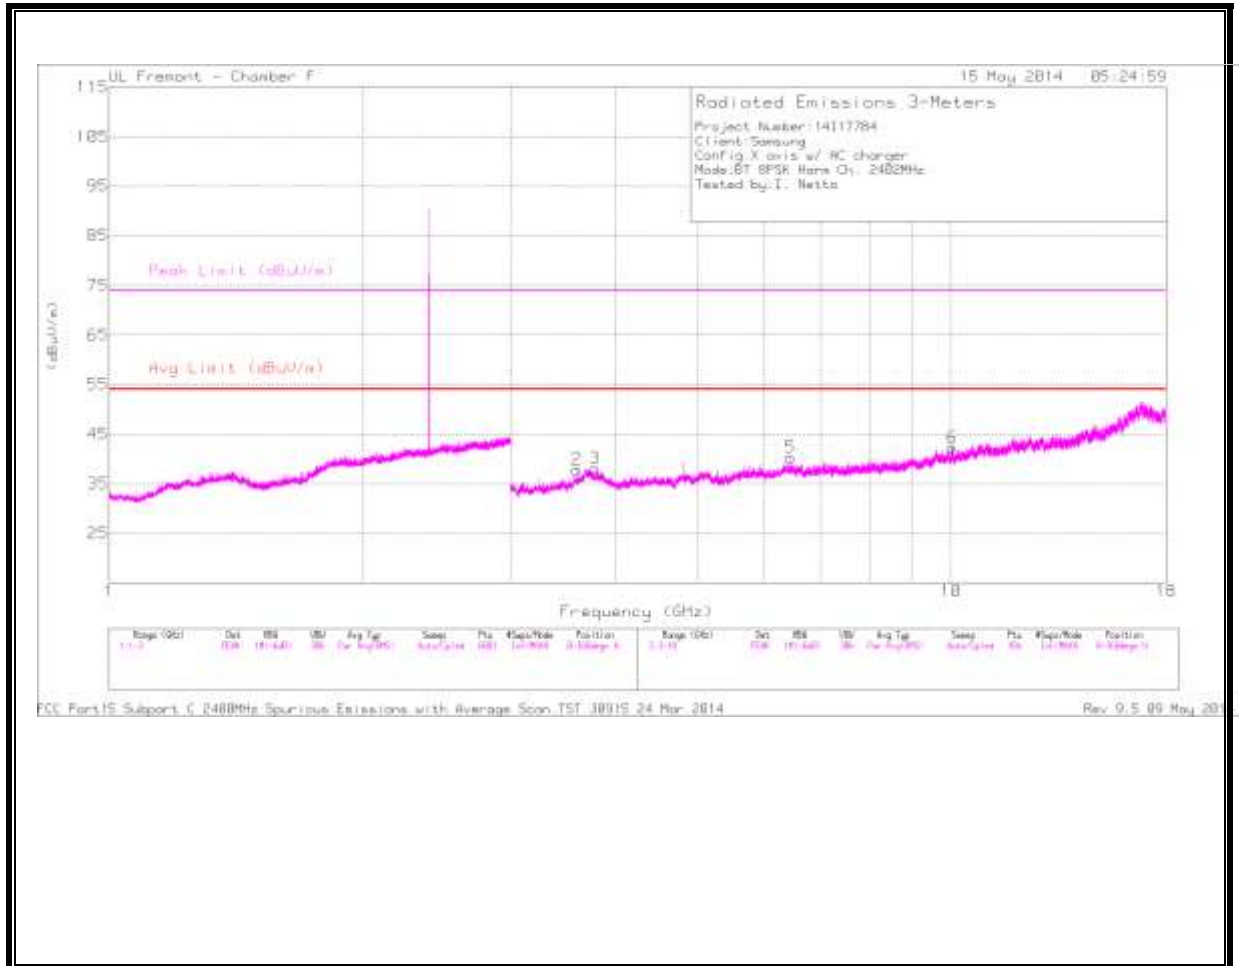

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

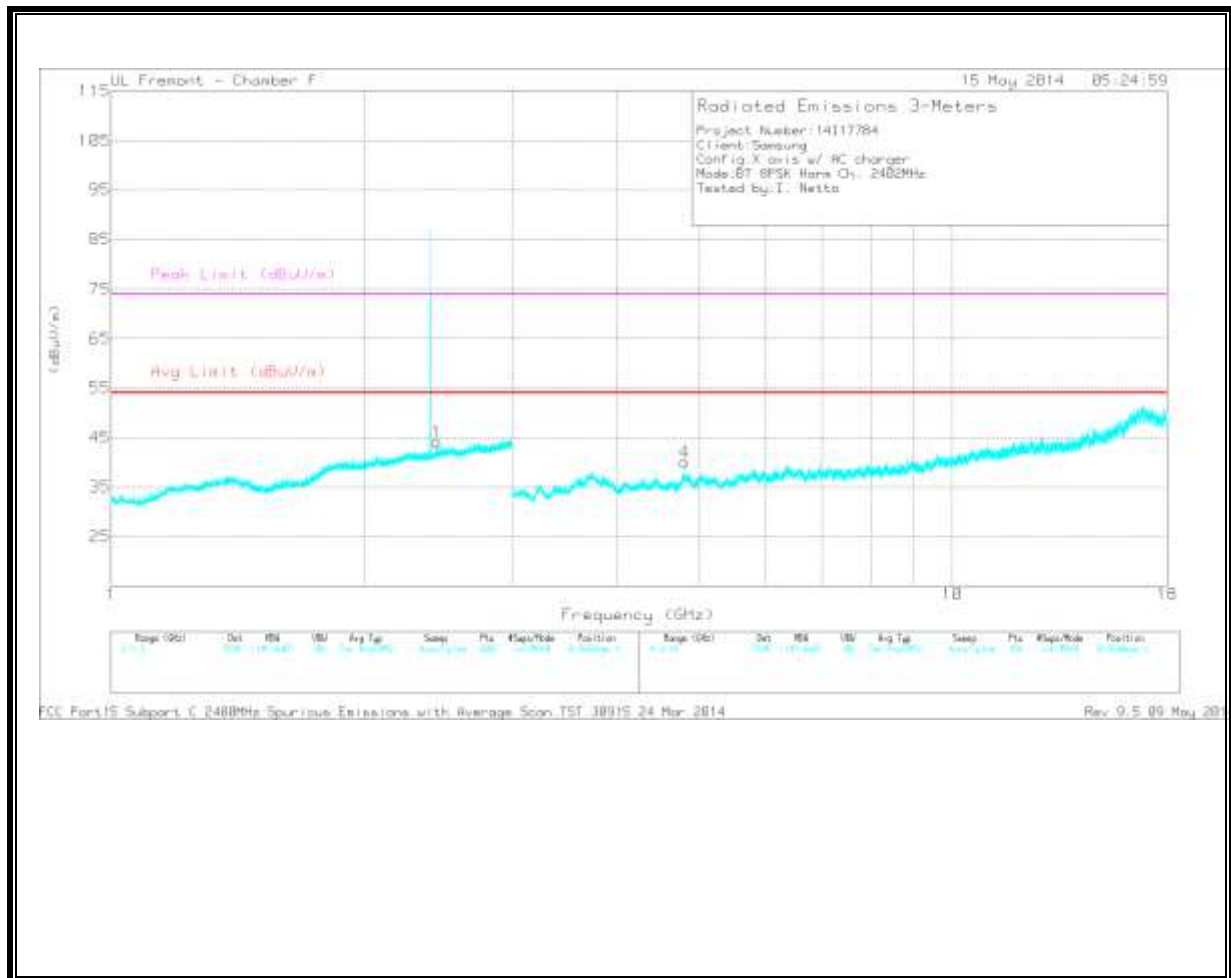

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.439	35.22	PK	32.4	-23.5	44.12	-	-	-	-	0-360	101	V
2	* 3.592	31.69	PK	34.9	-28.7	37.89	-	-	74	-36.11	0-360	101	H
3	* 3.775	32.94	PK	34.5	-29.3	38.14	-	-	74	-35.86	0-360	200	H
5	6.447	31.83	PK	35.6	-27.1	40.33	-	-	-	-	0-360	200	H
6	10.029	26.75	PK	37.2	-21.6	42.35	-	-	-	-	0-360	101	H
4	* 4.804	33.34	PK	34.1	-27.4	40.04	-	-	74	-33.96	0-360	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.438	41.41	PK3	32.4	-23.5	50.31	-	-	-	-	360	101	V
* 3.593	39.09	PK3	34.9	-28.7	45.29	-	-	74	-28.71	360	101	H
* 3.775	38.52	PK3	34.5	-29.3	43.72	-	-	74	-30.28	360	201	H
6.447	37.81	PK3	35.6	-27.1	46.31	-	-	-	-	360	201	H
10.029	33.67	PK3	37.2	-21.6	49.27	-	-	-	-	360	102	H
* 4.805	38.31	PK3	34.1	-27.4	45.01	-	-	74	-28.99	360	202	V
* 4.804	26.67	VB1T	34.1	-27.4	33.37	54	-20.63	-	-	360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL
HORIZONTAL

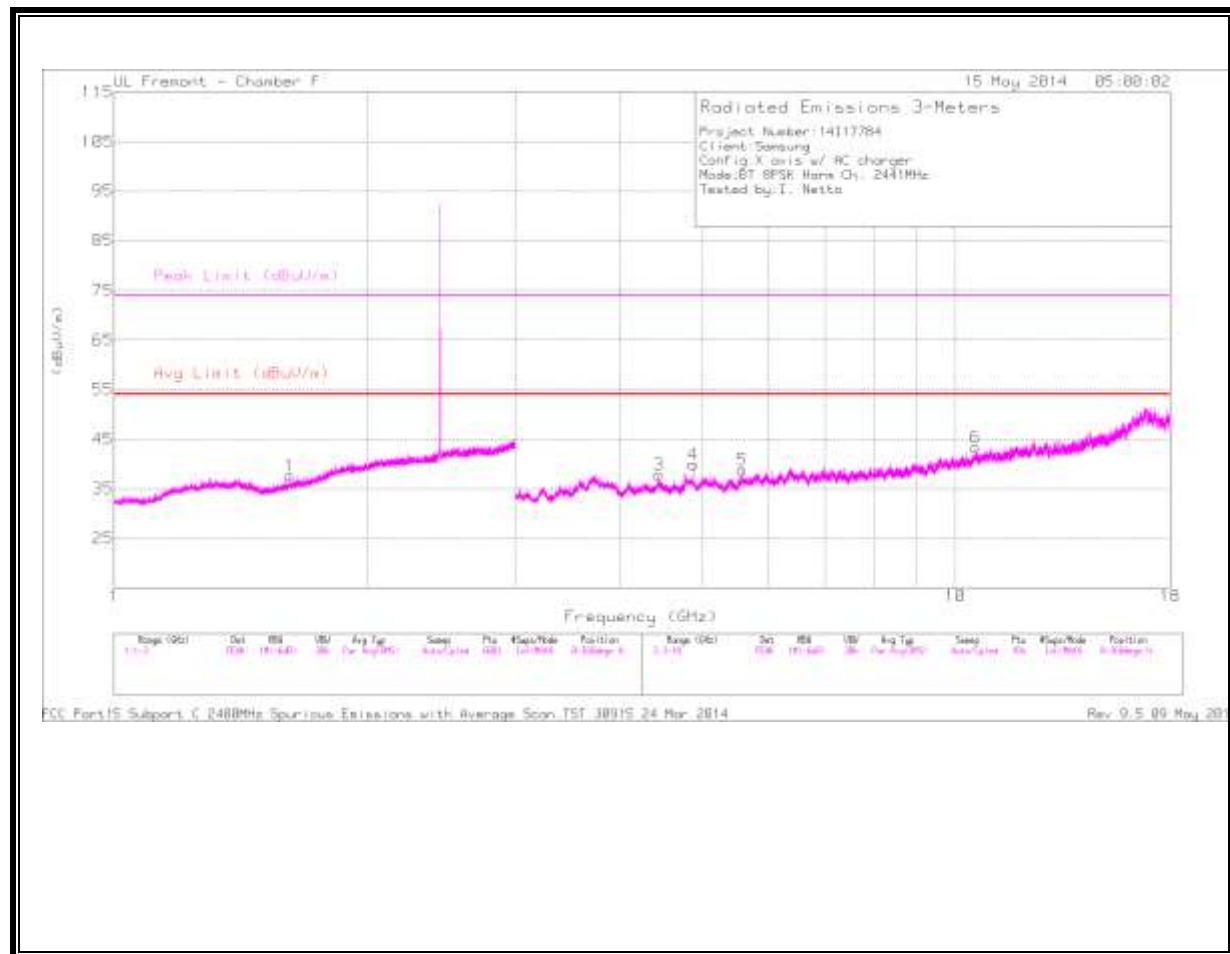

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

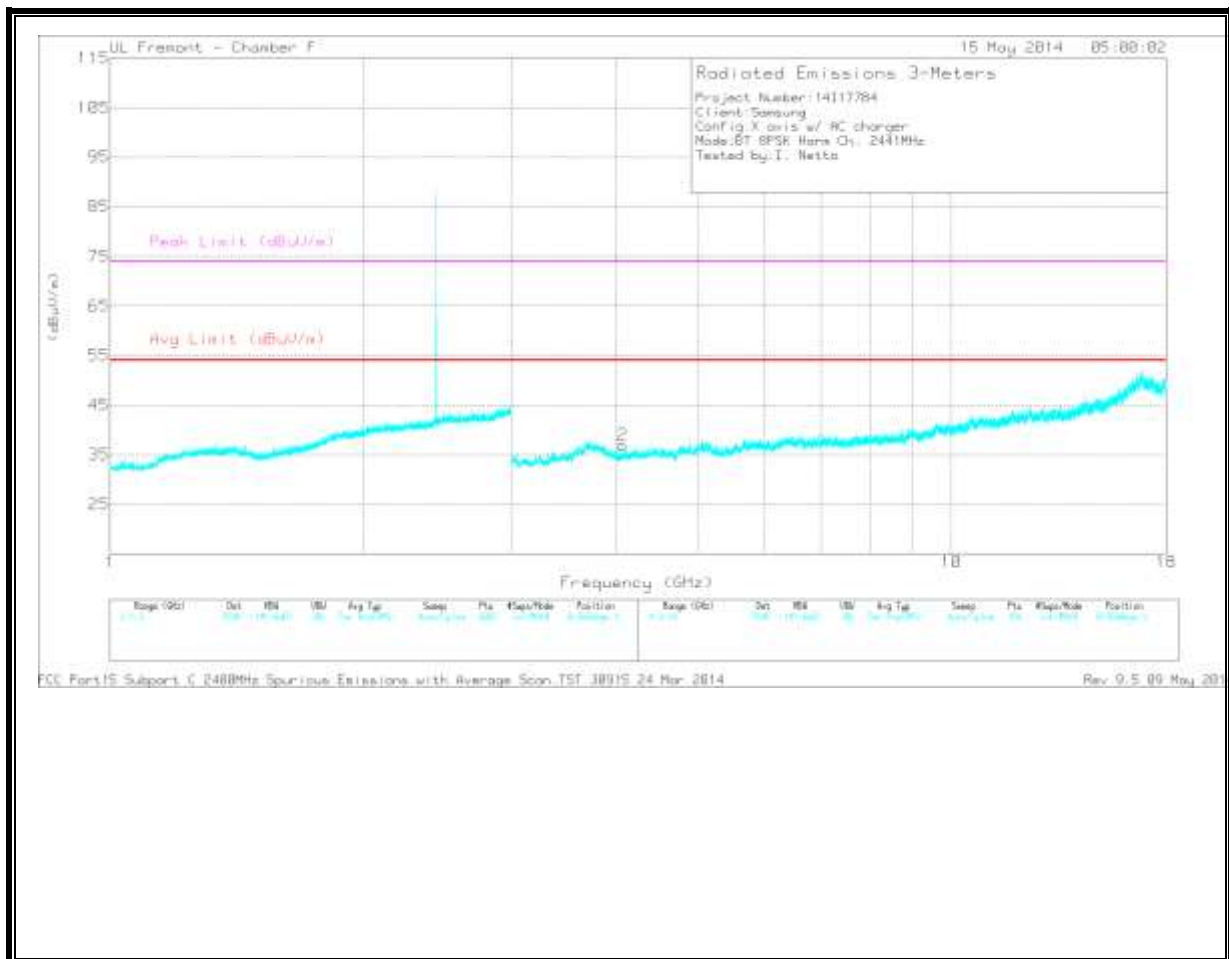

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.617	34.02	PK	28.6	-25	37.62	-	-	74	-36.38	0-360	201	H
3	4.442	32.37	PK	33.9	-28.4	37.87	-	-	-	-	0-360	201	H
4	* 4.882	33.58	PK	34.2	-27.9	39.88	-	-	74	-34.12	0-360	201	H
5	5.582	32.86	PK	34.6	-28.7	38.76	-	-	-	-	0-360	201	H
6	10.552	26.83	PK	37.8	-21.3	43.33	-	-	-	-	0-360	101	H
2	* 4.068	32.16	PK	33.7	-28.9	36.96	-	-	74	-37.04	0-360	199	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.616	40.8	PK3	28.6	-25	44.4	-	-	74	-29.6	1	202	H
4.44	37.69	PK3	33.9	-28.4	43.19	-	-	-	-	1	202	H
5.582	38.63	PK3	34.6	-28.7	44.53	-	-	-	-	1	202	H
5.581	38.63	PK3	34.6	-28.7	44.53	-	-	-	-	1	202	H
10.554	34.87	PK3	37.8	-21.3	51.37	-	-	-	-	1	102	H
* 4.882	39.71	PK3	34.2	-27.9	46.01	-	-	74	-27.99	327	308	H
* 4.882	30.29	VB1T	34.2	-27.9	36.59	54	-17.41	-	-	327	308	H
* 4.069	38	PK3	33.7	-28.9	42.8	-	-	74	-31.2	1	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL
HORIZONTAL

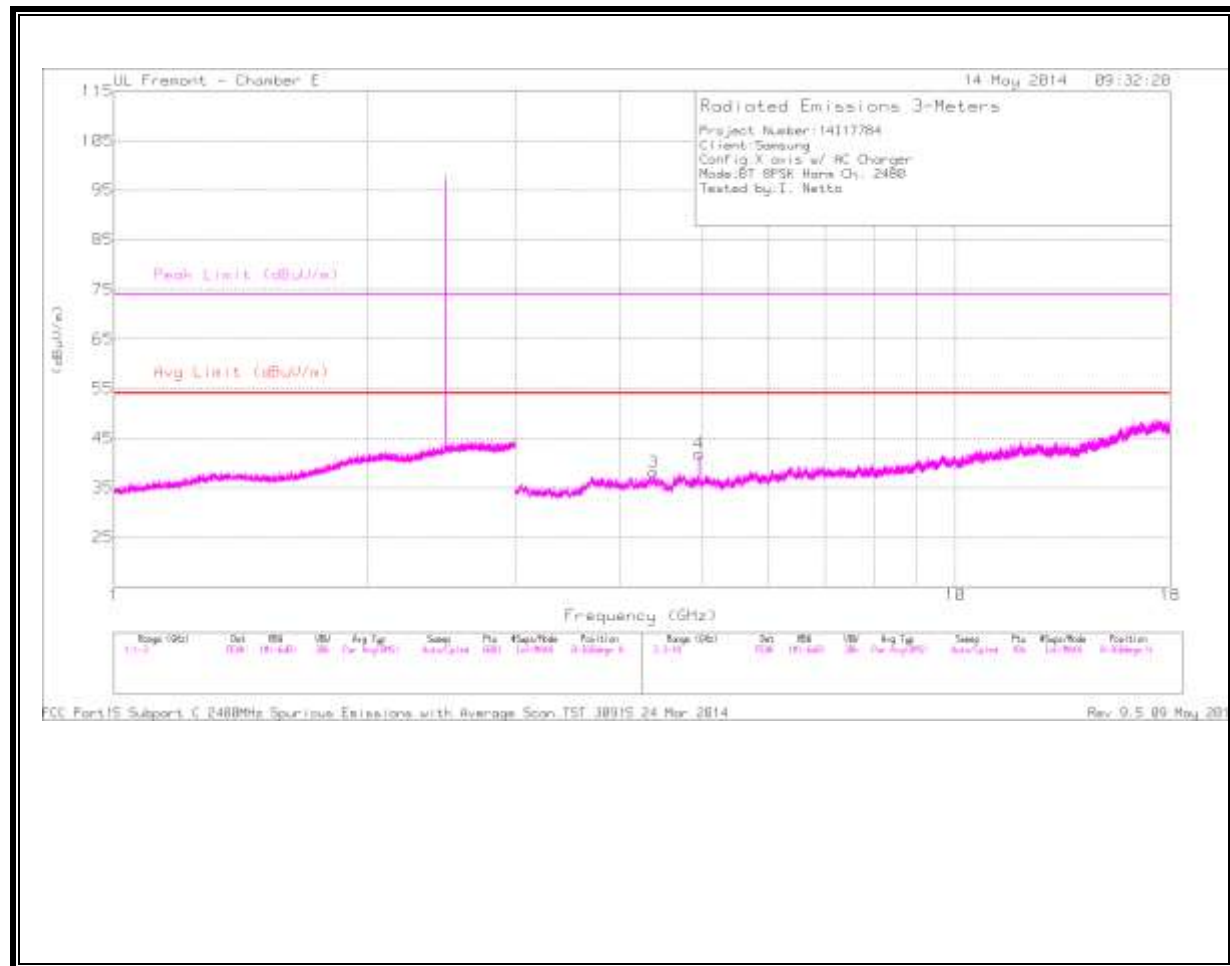

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

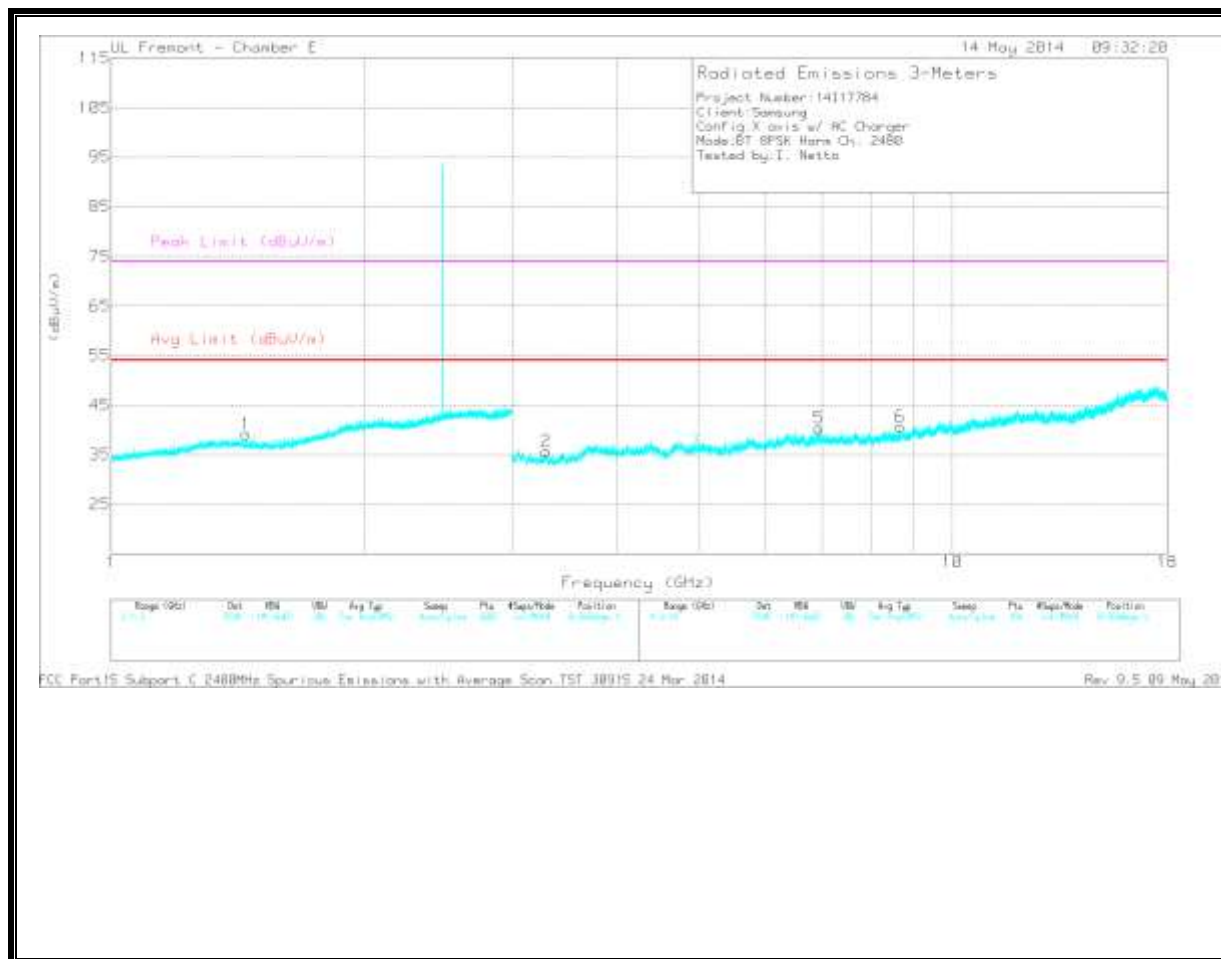

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.447	36.94	PK	28.6	-26.4	39.14	-	-	74	-34.86	0-360	101	V
3	* 4.381	34.77	PK	33.7	-30.3	38.17	-	-	74	-35.83	0-360	200	H
4	* 4.96	38.06	PK	34.1	-30.2	41.96	-	-	74	-32.04	0-360	200	H
2	3.292	34.35	PK	32.8	-31.5	35.65	-	-	-	-	0-360	200	V
5	6.941	32.63	PK	35.9	-28.1	40.43	-	-	-	-	0-360	200	V
6	8.67	29.8	PK	36	-25.1	40.7	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.445	44.52	PK3	28.6	-26.4	46.72	-	-	74	-27.28	0	101	V
* 4.382	41.82	PK3	33.7	-30.3	45.22	-	-	74	-28.78	0	101	H
* 4.96	45.96	PK3	34.1	-30.2	49.86	-	-	74	-24.14	158	136	H
* 4.96	36.83	VB1T	34.1	-30.2	40.73	54	-13.27	-	-	158	136	H
3.294	42.28	PK3	32.8	-31.5	43.58	-	-	-	-	0	101	V
6.943	39.33	PK3	35.9	-28	47.23	-	-	-	-	0	101	V
8.669	37.79	PK3	36	-25.1	48.69	-	-	-	-	0	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

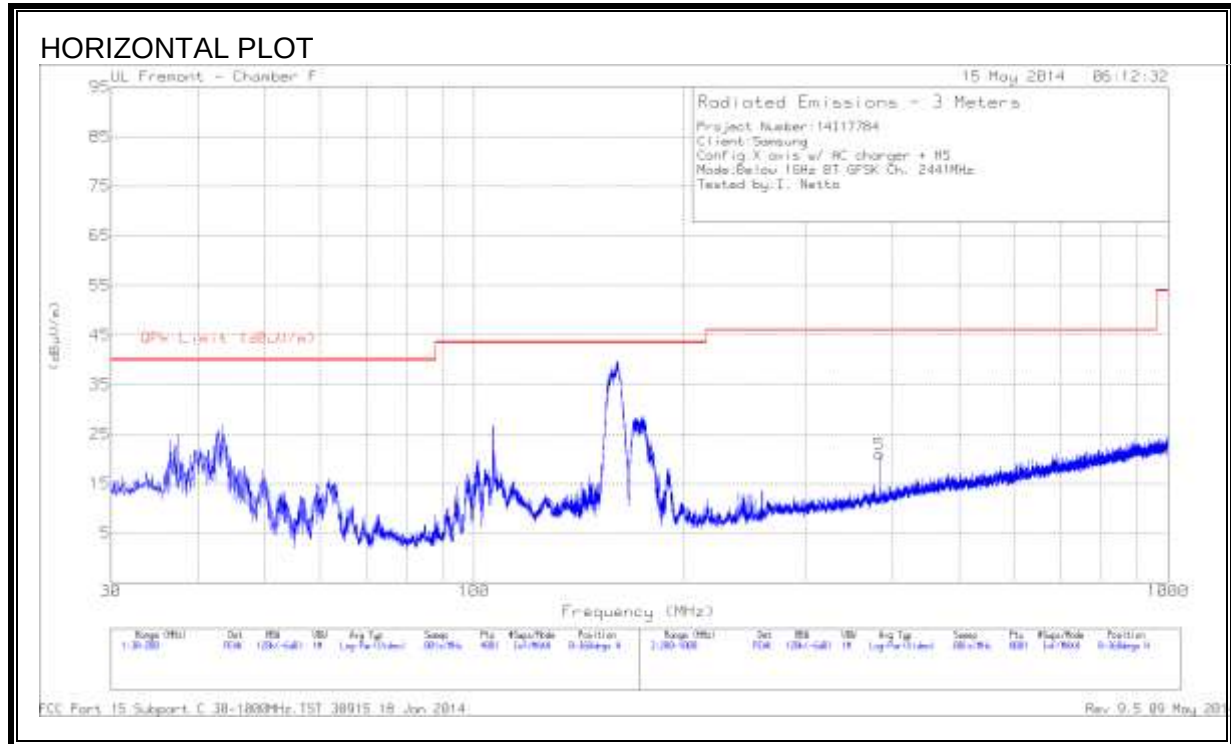

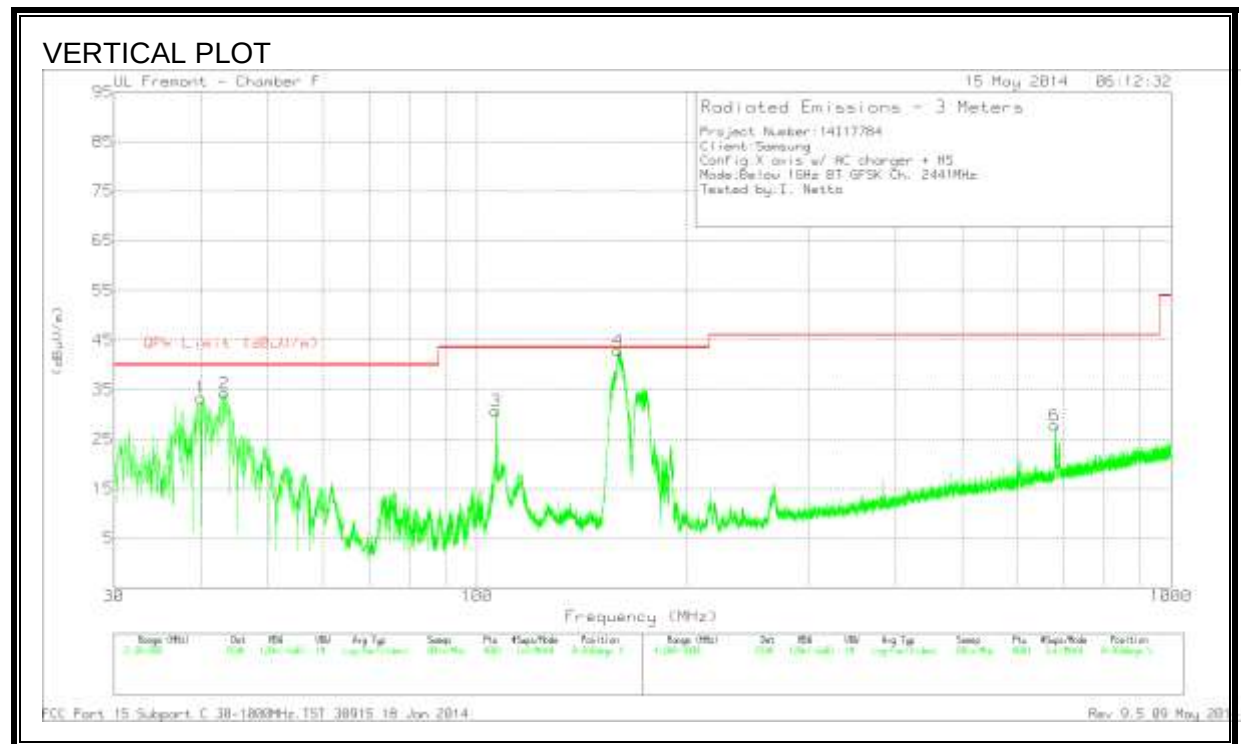

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	39.9875	51.44	PK	13.8	-31.9	33.34	40	-6.66	0-360	100	V
2	43.3025	54.57	PK	11.5	-31.8	34.27	40	-5.73	0-360	100	V
3	106.5	50.36	PK	12	-31.7	30.66	43.52	-12.86	0-360	100	V
4	159.625	61.62	PK	12.4	-31.2	42.82	43.52	-.7	0-360	100	V
5	384	36.21	PK	15.1	-30.4	20.91	46.02	-25.11	0-360	100	H
6	680.3	37.42	PK	20	-29.7	27.72	46.02	-18.3	0-360	100	V

PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
159.9068	56.22	QP	12.4	-31.3	37.32	43.52	-6.2	73	113	V

QP - Quasi-Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.159	53.6	PK	1.3	0	54.9	65.5	-10.6	-	-
2	.159	35.04	Av	1.3	0	36.34	-	-	55.5	-19.16
3	.3885	50.88	PK	.4	0	51.28	58.1	-6.82	-	-
4	.3885	43.21	Av	.4	0	43.61	-	-	48.1	-4.49
5	.4965	45.49	PK	.4	0	45.89	56.1	-10.21	-	-
6	.4965	34.92	Av	.4	0	35.32	-	-	46.1	-10.78
7	.7755	44.74	PK	.3	0	45.04	56	-10.96	-	-
8	.7755	33.02	Av	.3	0	33.32	-	-	46	-12.68
9	2.328	46.74	PK	.2	.1	47.04	56	-8.96	-	-
10	2.328	31.37	Av	.2	.1	31.67	-	-	46	-14.33
11	2.5395	46.63	PK	.2	.1	46.93	56	-9.07	-	-
12	2.5395	29.54	Av	.2	.1	29.84	-	-	46	-16.16
15	4.416	46.77	PK	.2	.1	47.07	56	-8.93	-	-
16	4.416	29.77	Av	.2	.1	30.07	-	-	46	-15.93
13	4.704	46.97	PK	.2	.1	47.27	56	-8.73	-	-
14	4.704	30.19	Av	.2	.1	30.49	-	-	46	-15.51
17	5.019	46.96	PK	.2	.1	47.26	60	-12.74	-	-
18	5.019	29.1	Av	.2	.1	29.4	-	-	50	-20.6
19	5.352	46.89	PK	.2	.1	47.19	60	-12.81	-	-
20	5.352	28.26	Av	.2	.1	28.56	-	-	50	-21.44
21	6.0675	46.52	PK	.2	.1	46.82	60	-13.18	-	-
22	6.0675	27.38	Av	.2	.1	27.68	-	-	50	-22.32
23	7.062	46.58	PK	.2	.1	46.88	60	-13.12	-	-
24	7.062	28.33	Av	.2	.1	28.63	-	-	50	-21.37
27	14.622	46.81	PK	.2	.2	47.21	60	-12.79	-	-
28	14.622	31.01	Av	.2	.2	31.41	-	-	50	-18.59
25	15.2925	47.05	PK	.3	.2	47.55	60	-12.45	-	-
26	15.2925	29.24	Av	.3	.2	29.74	-	-	50	-20.26

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
29	.1545	50.63	PK	1.4	0	52.03	65.8	-13.77	-	-
30	.1545	27.99	Av	1.4	0	29.39	-	-	55.8	-26.41
31	.168	50.31	PK	1.3	0	51.61	65.1	-13.49	-	-
32	.168	32.82	Av	1.3	0	34.12	-	-	55.1	-20.98
33	.3885	51.52	PK	.5	0	52.02	58.1	-6.08	-	-
34	.3885	40.68	Av	.5	0	41.18	-	-	48.1	-6.92
35	.4965	46.22	PK	.4	0	46.62	56.1	-9.48	-	-
36	.4965	33.34	Av	.4	0	33.74	-	-	46.1	-12.36
37	.834	44.14	PK	.3	0	44.44	56	-11.56	-	-
38	.834	31.42	Av	.3	0	31.72	-	-	46	-14.28
39	1.176	43.89	PK	.3	0	44.19	56	-11.81	-	-
40	1.176	26.06	Av	.3	0	26.36	-	-	46	-19.64
45	1.5675	43.75	PK	.2	.1	44.05	56	-11.95	-	-
46	1.5675	25.22	Av	.2	.1	25.52	-	-	46	-20.48
41	2.373	45.3	PK	.2	.1	45.6	56	-10.4	-	-
42	2.373	30.04	Av	.2	.1	30.34	-	-	46	-15.66
43	2.4585	45.14	PK	.2	.1	45.44	56	-10.56	-	-
44	2.4585	26.67	Av	.2	.1	26.97	-	-	46	-19.03
47	14.8335	46.5	PK	.3	.2	47	60	-13	-	-
48	14.8335	30.18	Av	.3	.2	30.68	-	-	50	-19.32
49	15.054	46.55	PK	.3	.2	47.05	60	-12.95	-	-
50	15.054	29.61	Av	.3	.2	30.11	-	-	50	-19.89

LINE 1 RESULTS

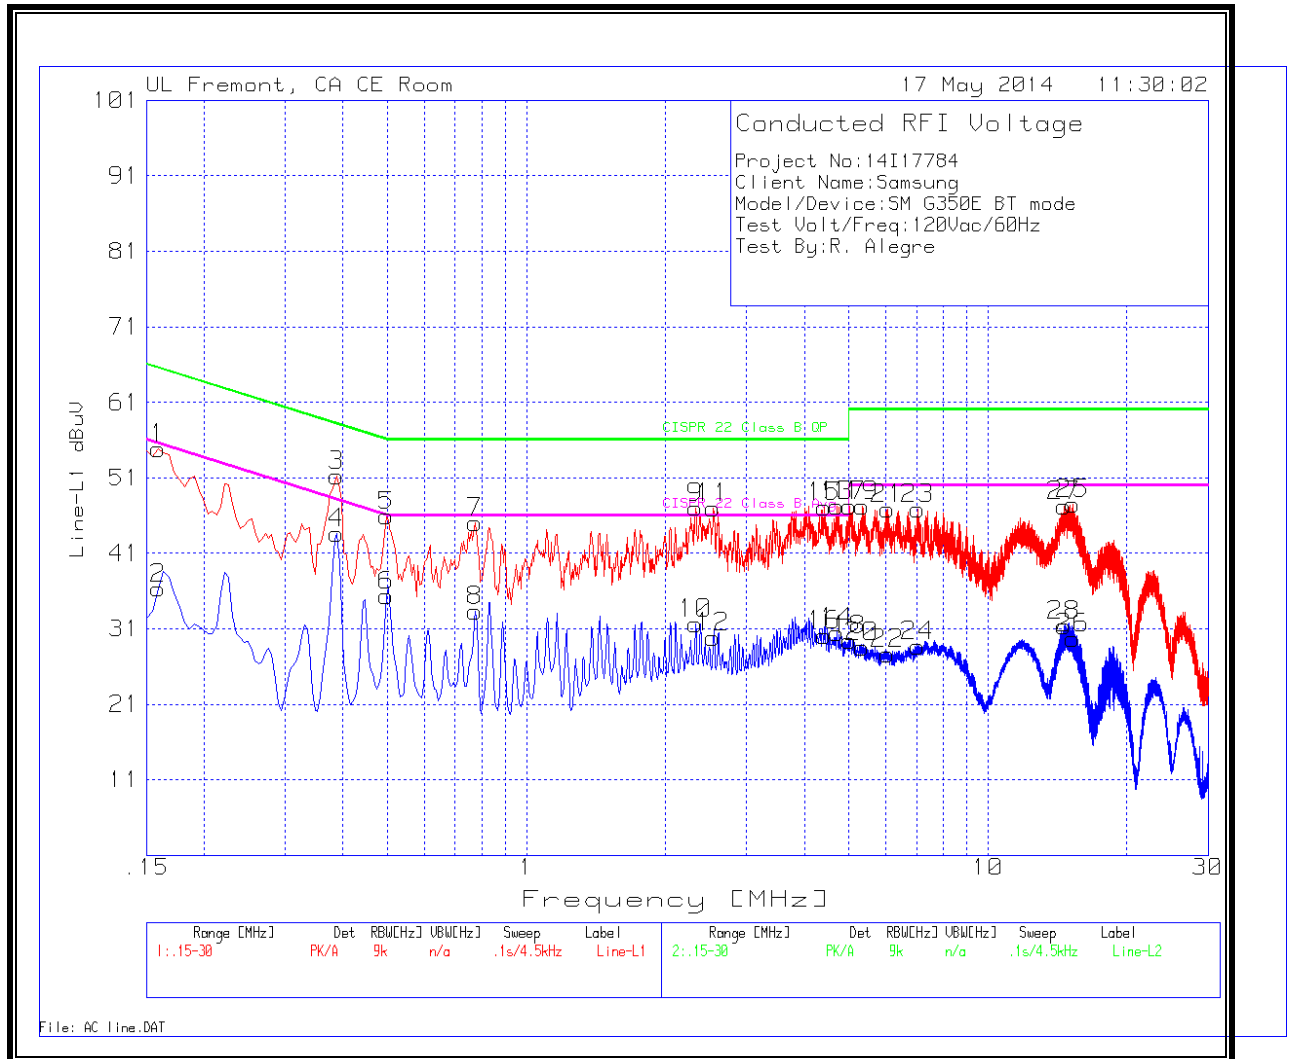

LINE 2 RESULTS

