FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC

MODEL NUMBER: SM-G3586V

FCC ID: A3LSMG3586V

REPORT NUMBER: 14I17354-2

ISSUE DATE: MARCH 26, 2014

Prepared for

SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	3/26/14	Initial Issue	P. Kim

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5

2. TEST METHODOLOGY 6

3. FACILITIES AND ACCREDITATION 6

4. CALIBRATION AND UNCERTAINTY 6

4.1. MEASURING INSTRUMENT CALIBRATION 6

4.2. SAMPLE CALCULATION 6

4.3. MEASUREMENT UNCERTAINTY 6

5. EQUIPMENT UNDER TEST 7

5.1. DESCRIPTION OF EUT 7

5.2. MAXIMUM OUTPUT POWER 7

5.3. DESCRIPTION OF AVAILABLE ANTENNAS 7

5.4. WORST-CASE CONFIGURATION AND MODE 8

5.5. DESCRIPTION OF TEST SETUP 9

6. TEST AND MEASUREMENT EQUIPMENT 11

7. SUMMARY TABLE 12

8. ANTENNA PORT TEST RESULTS 13

8.1. 20 dB AND 99% BANDWIDTH 13

8.1.1. BASIC DATA RATE GFSK MODULATION 13

8.1.1. ENHANCED DATA RATE 8PSK MODULATION 13

8.2. HOPPING FREQUENCY SEPARATION 22

8.3. NUMBER OF HOPPING CHANNELS 24

8.4. AVERAGE TIME OF OCCUPANCY 27

8.5. OUTPUT POWER 31

8.5.1. BASIC DATA RATE GFSK MODULATION 31

8.5.2. ENHANCED DATA RATE 8PSK MODULATION 31

8.6. AVERAGE POWER 36

8.6.1. BASIC DATA RATE GFSK MODULATION 36

8.6.2. ENHANCED DATA RATE 8PSK MODULATION 36

8.7. CONDUCTED SPURIOUS EMISSIONS 37

8.7.1. BASIC DATA RATE GFSK MODULATION 38

8.7.1. ENHANCED DATA RATE 8PSK MODULATION 42

9. RADIATED TEST RESULTS 46

9.1. LIMITS AND PROCEDURE 46

9.2. TRANSMITTER ABOVE 1 GHz 47

9.2.1. BASIC DATA RATE GFSK MODULATION 47

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.2. ENHANCED DATA RATE 8PSK MODULATION 60

9.3. WORST-CASE BELOW 1 GHz 73

10. AC POWER LINE CONDUCTED EMISSIONS 76

11. SETUP PHOTOS 80

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC

MODEL: SM-G3586V

SERIAL NUMBER: FL-102-D (Conducted); FL-102-A (Radiated)

DATE TESTED: March 13 – 15, 2014

APPLICABLE STANDARDS

STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

PHILIP KIM
CONSUMER TECHNOLOGY DIVISION
PROGRAM MANAGER
UL Verification Services Inc.

Tested By:

STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB TECHNICIAN
UL Verification Services Inc.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://www.ccsemc.com.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.96	12.47
2402 - 2480	Enhanced 8PSK	11.23	13.27

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.27 dBi.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	**Manufacturer**	**Model**	**Serial Number**	**FCC ID**
AC Adapter	Samsung		N/A	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No	**Port**	**# of identical ports**	**Connector Type**	**Cable Type**	**Cable Length (m)**	**Remarks**
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS

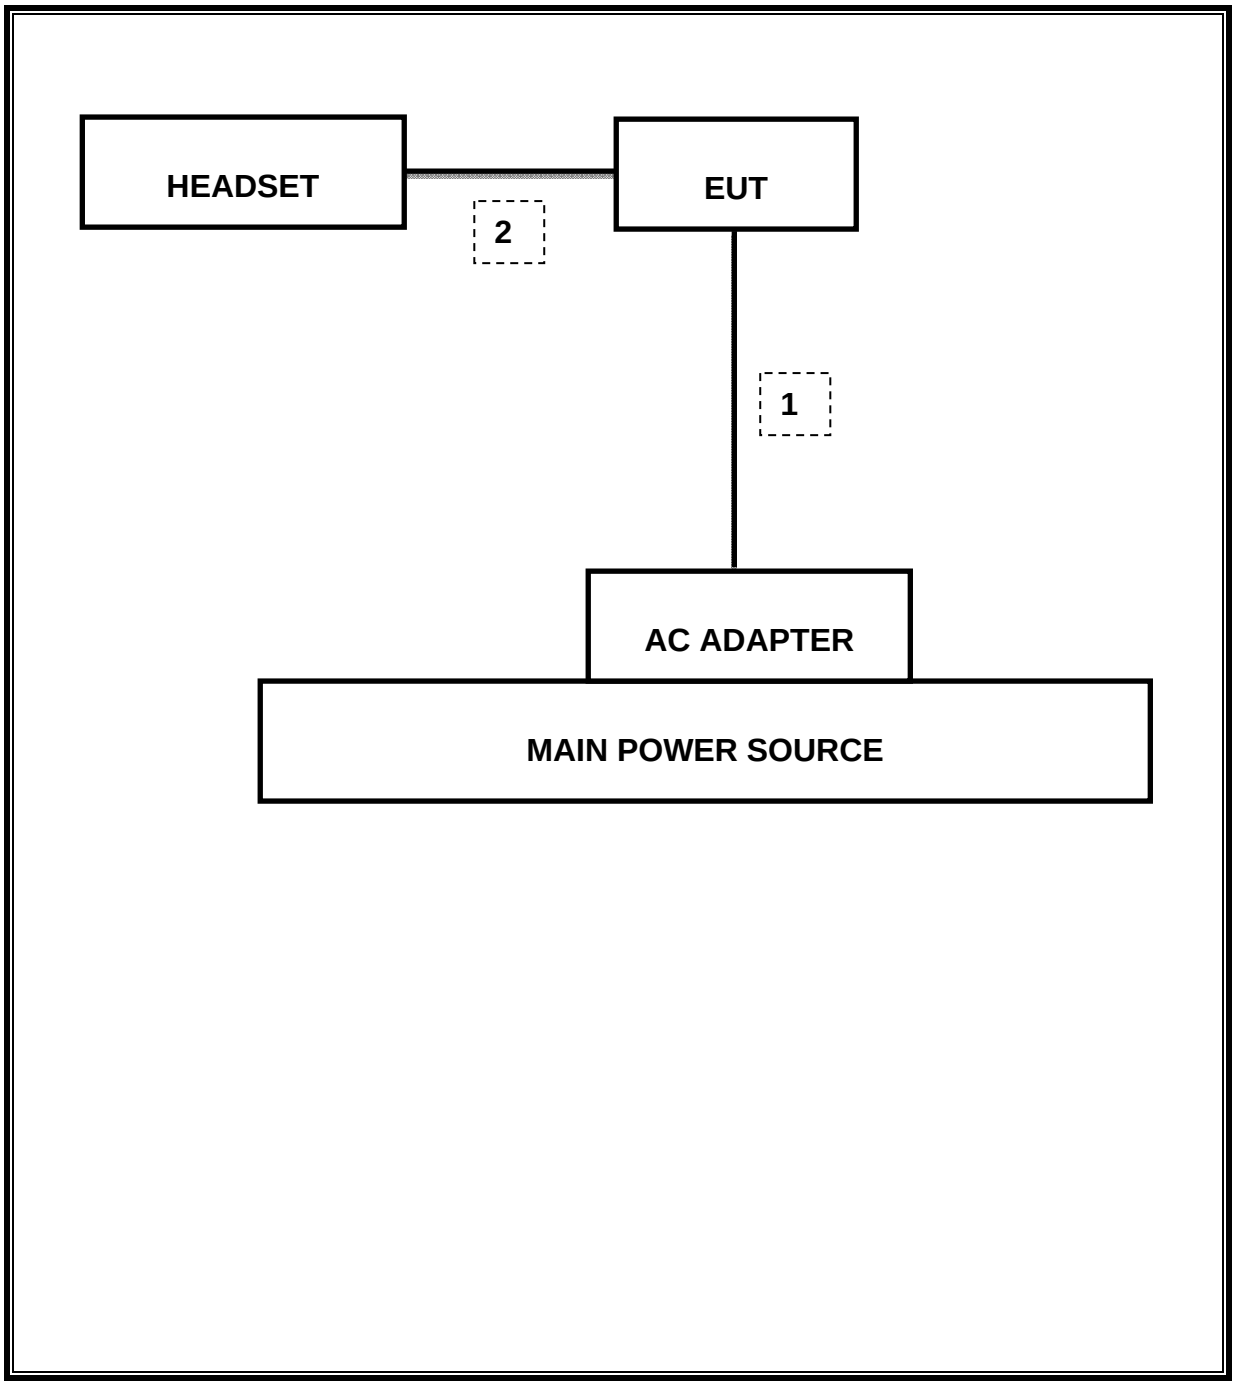

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. SUMMARY TABLE

The model FCC ID: A3LSMG3586Vshares the same enclosure and circuit board as mode FCC ID: A3LSMG3588V. The WLAN/Bluetooth circuitry and layout, including antenna, are almost identical between the two units. The WLAN/Bluetooth antenna and surrounding circuitry is the same between these two units.
After confirming through preliminary radiated emissions that the performance of the A3LSMG3588V WLAN remains representative of this model (FCC ID A3LSMG3586V) test data for FCC ID: A3LSMG3588V is being submitted for this application.
Radiated emissions were fully re-evaluated against 15B requirements for digital devices and results indicated no significant differences between the two versions. Other differences between the two FCC IDs are in the WWAN RF Transceiver, RF FEM, PAM design and WWAN SAR and EMC has been fully retested for FCC ID: A3LSMG3586V.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.208MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-47.13dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	11.23dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1.002MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.371sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	52.44dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	40.15dBuV/m

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	976.6	880.2
Middle	2441	979.3	900.8
High	2480	980.9	909.2
Worst		980.9	909.2

8.1.1. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.294	1.141
Middle	2441	1.294	1.176
High	2480	1.294	1.208
Worst		1.294	1.208

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GFSK 20 dB BANDWIDTH

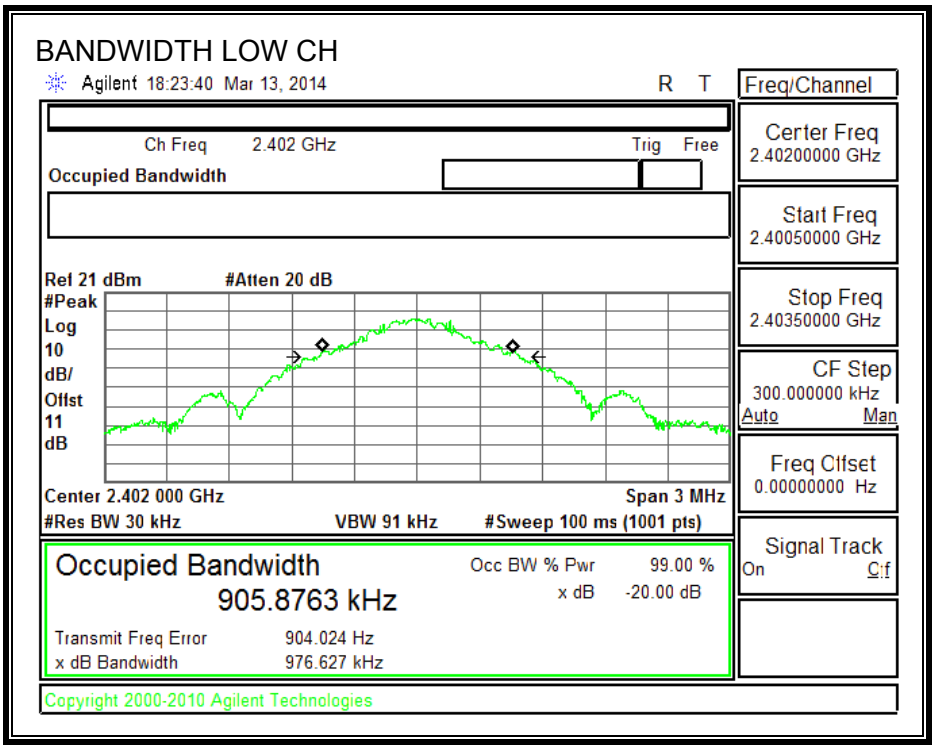

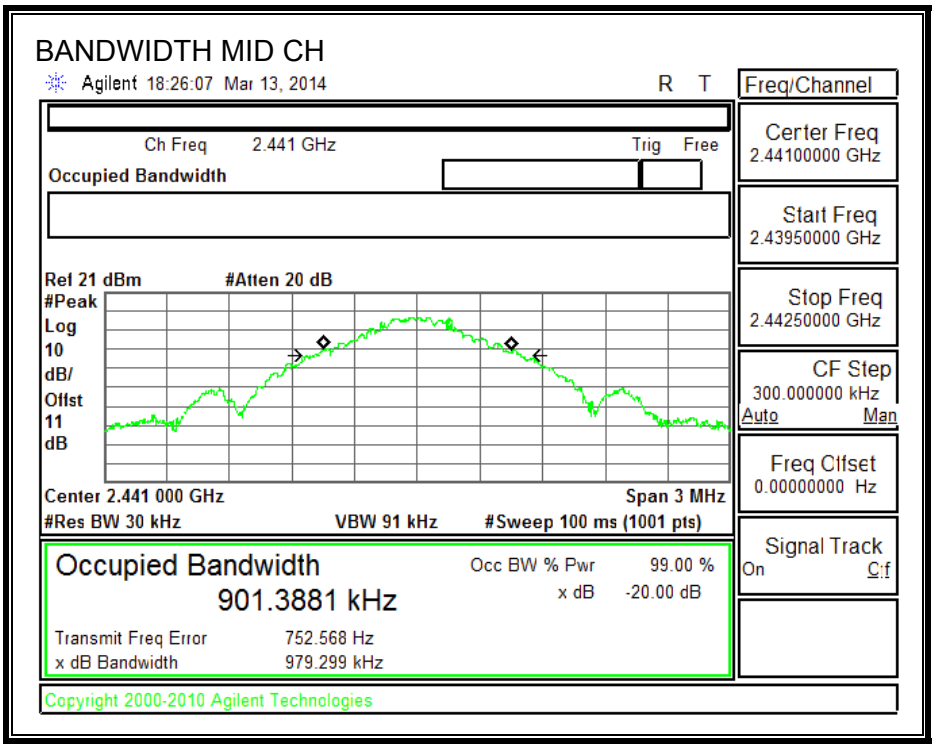

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

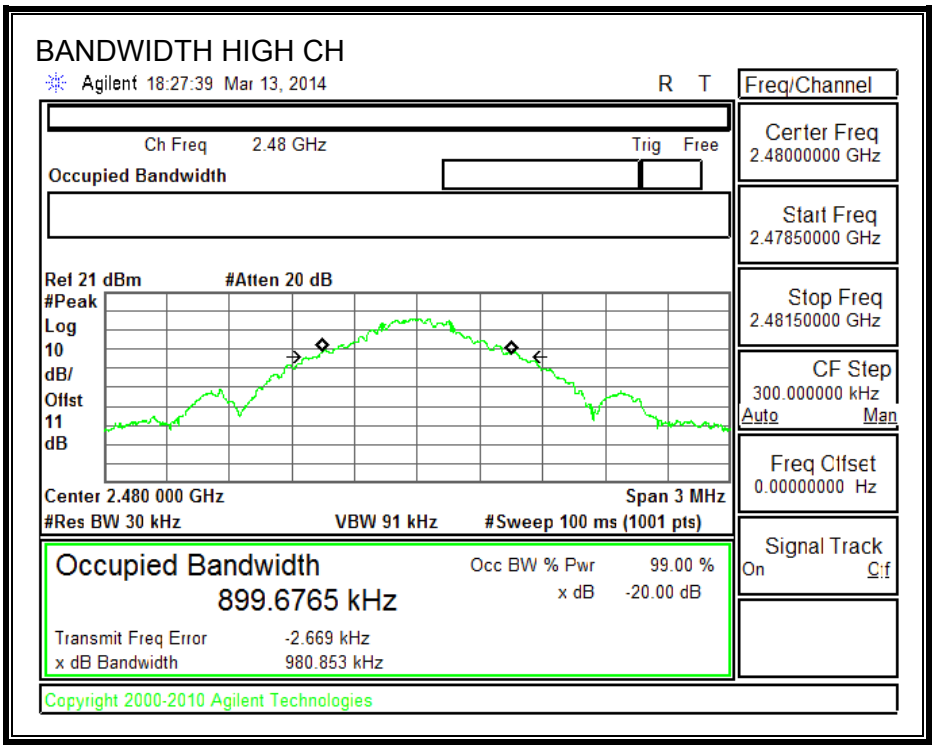

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GFSK 99% BANDWIDTH

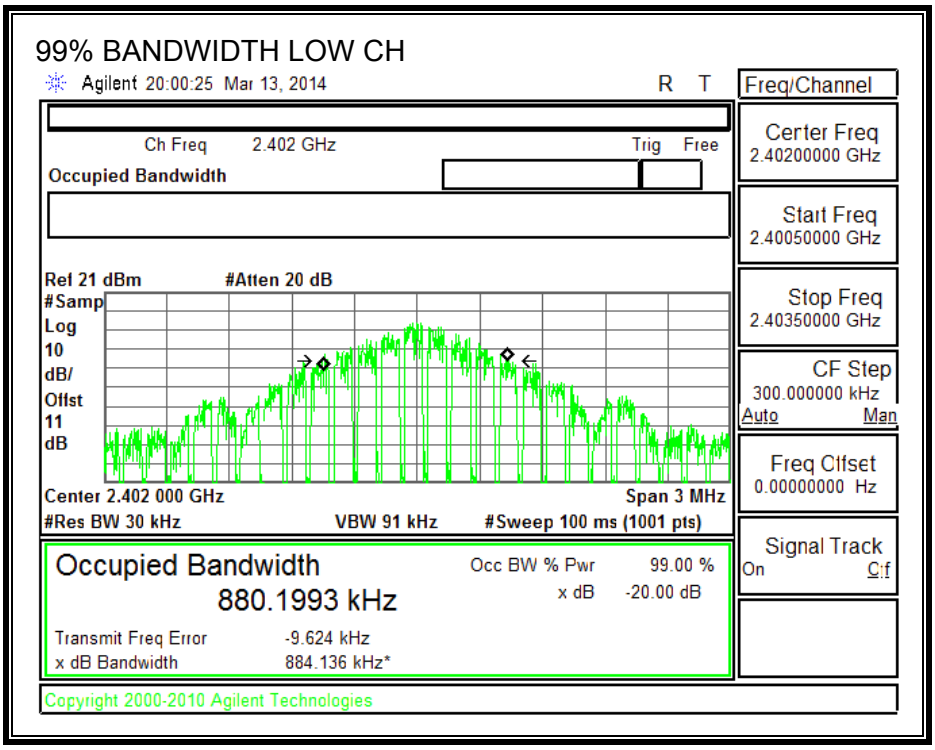

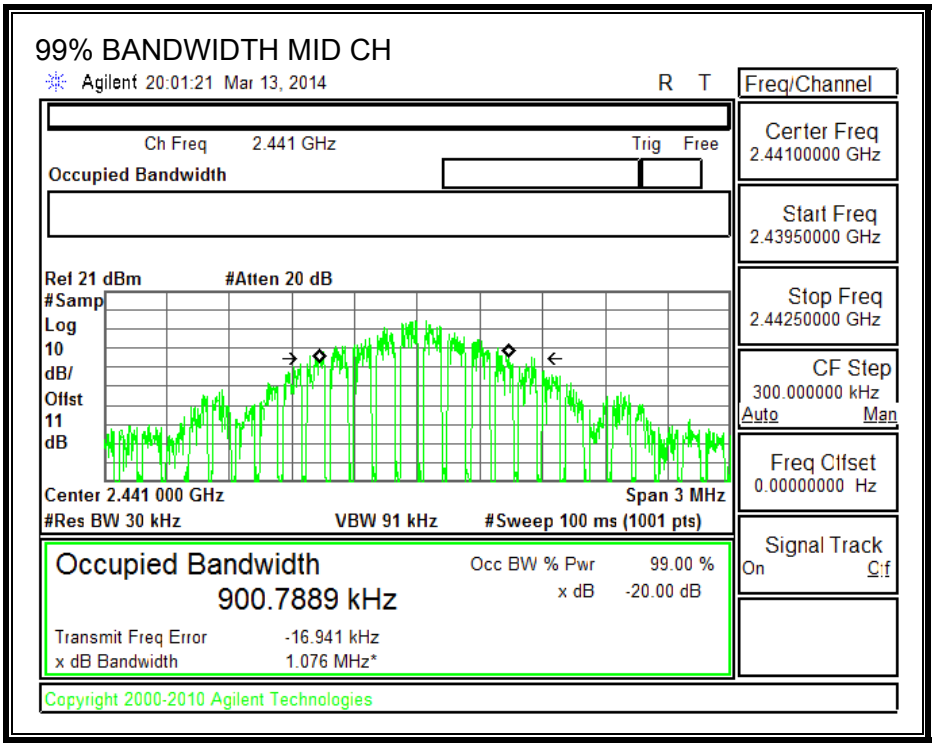

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

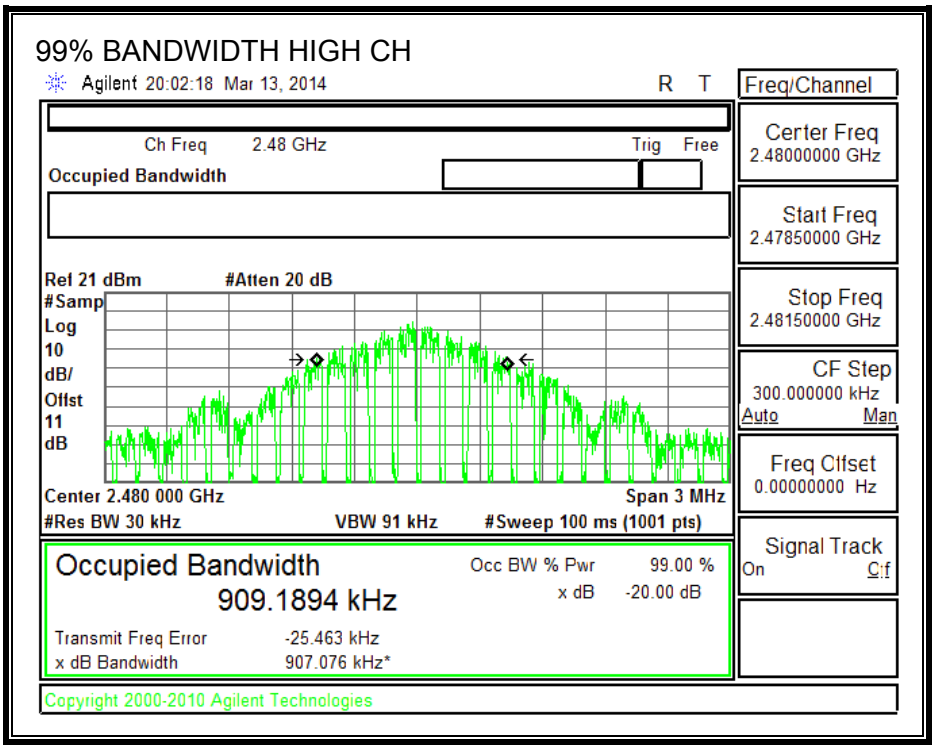

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8PSK 20 dB BANDWIDTH

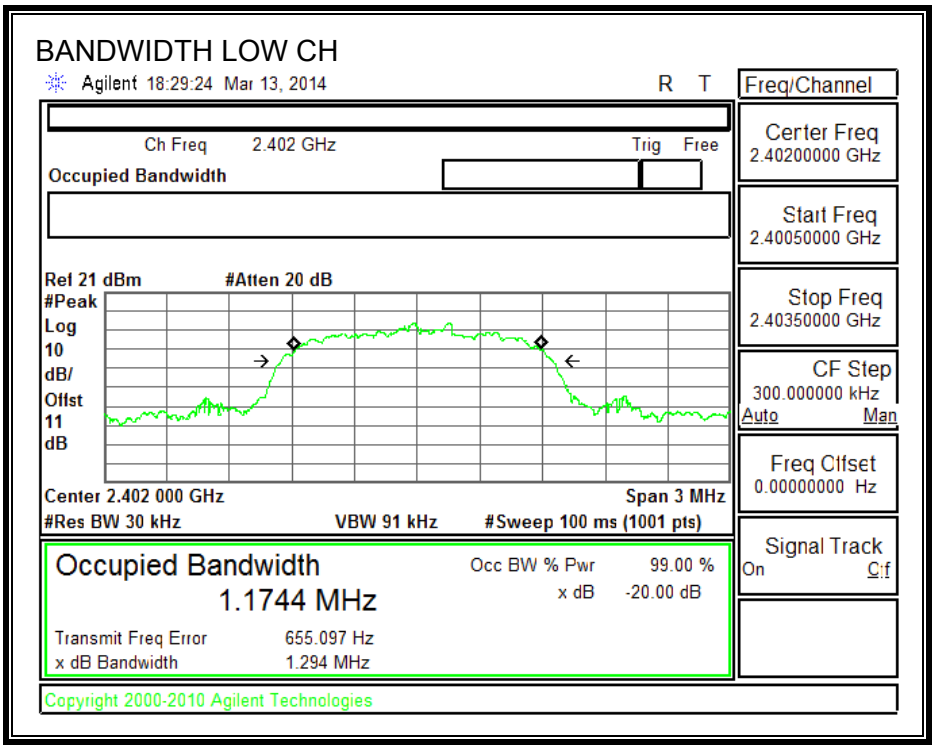

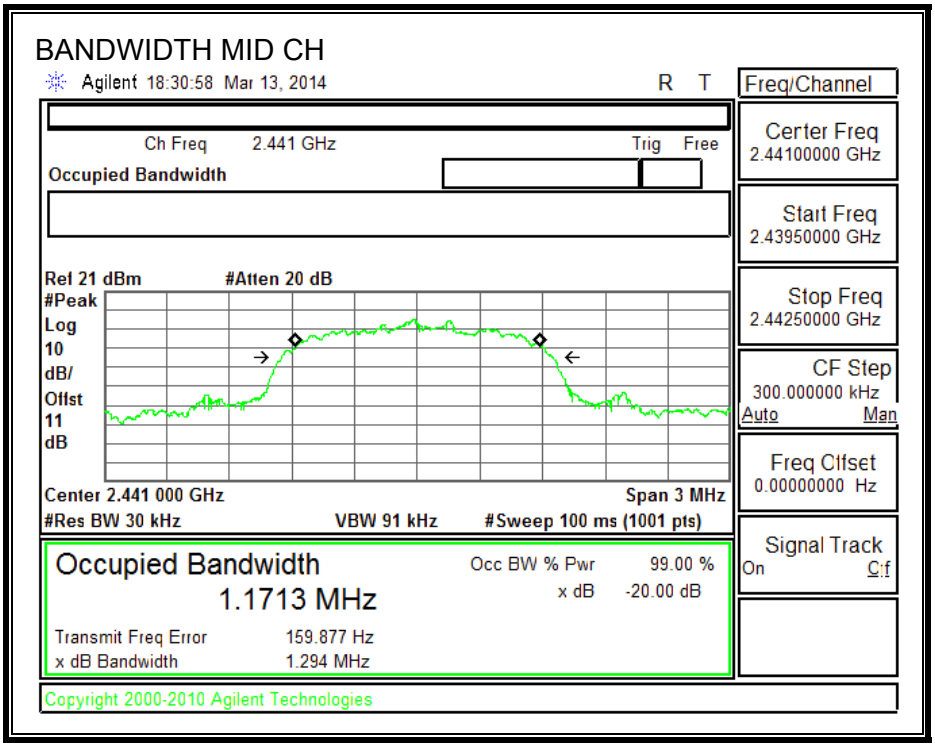

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

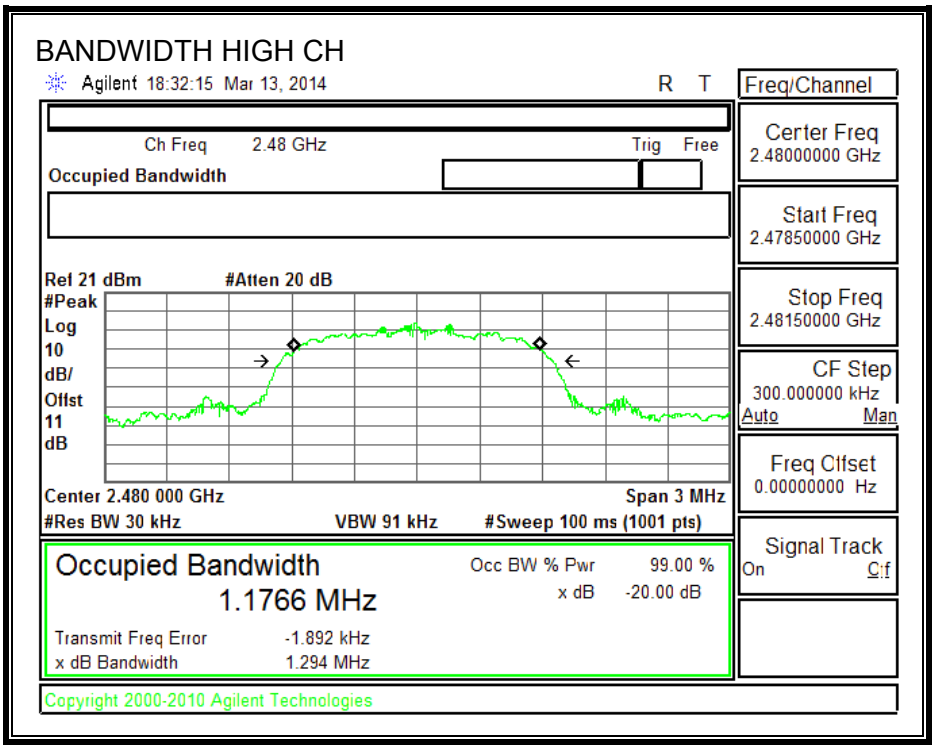

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8PSK 99% BANDWIDTH

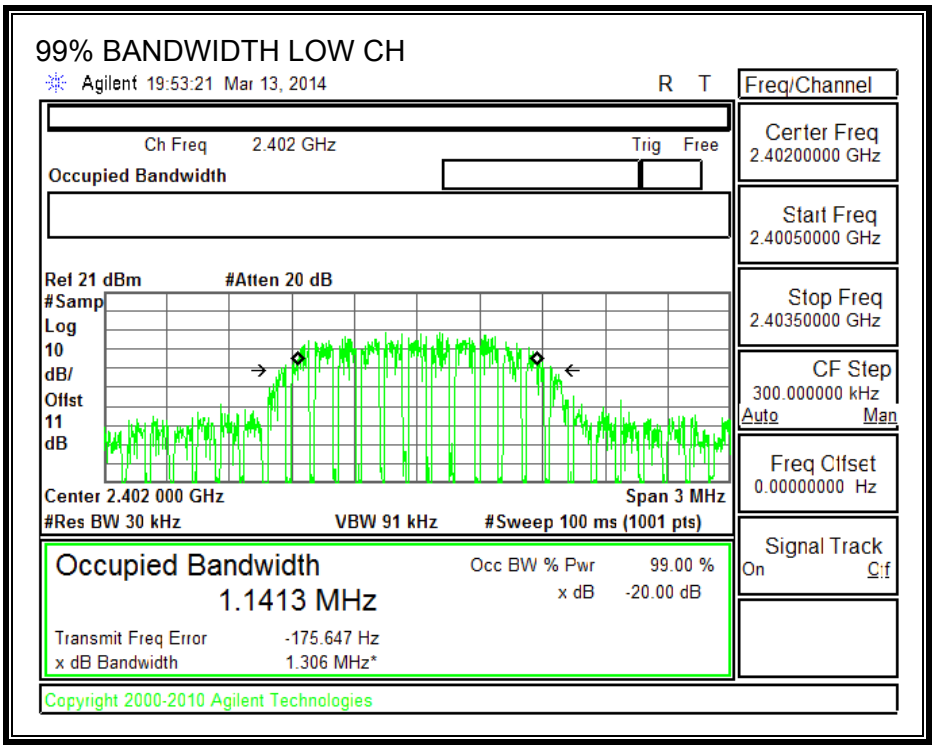

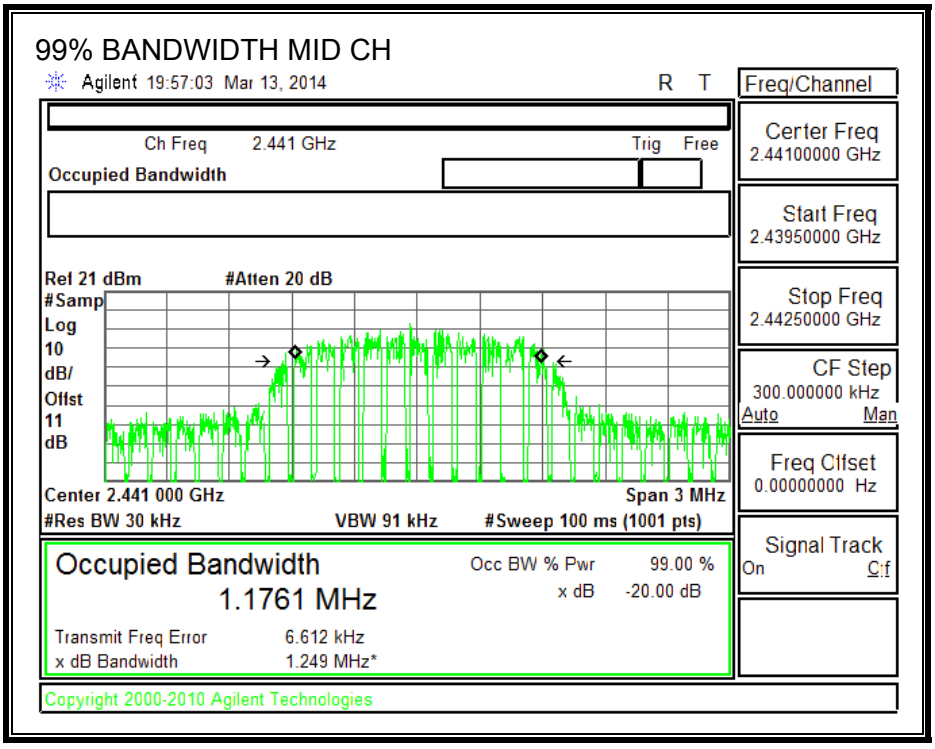

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

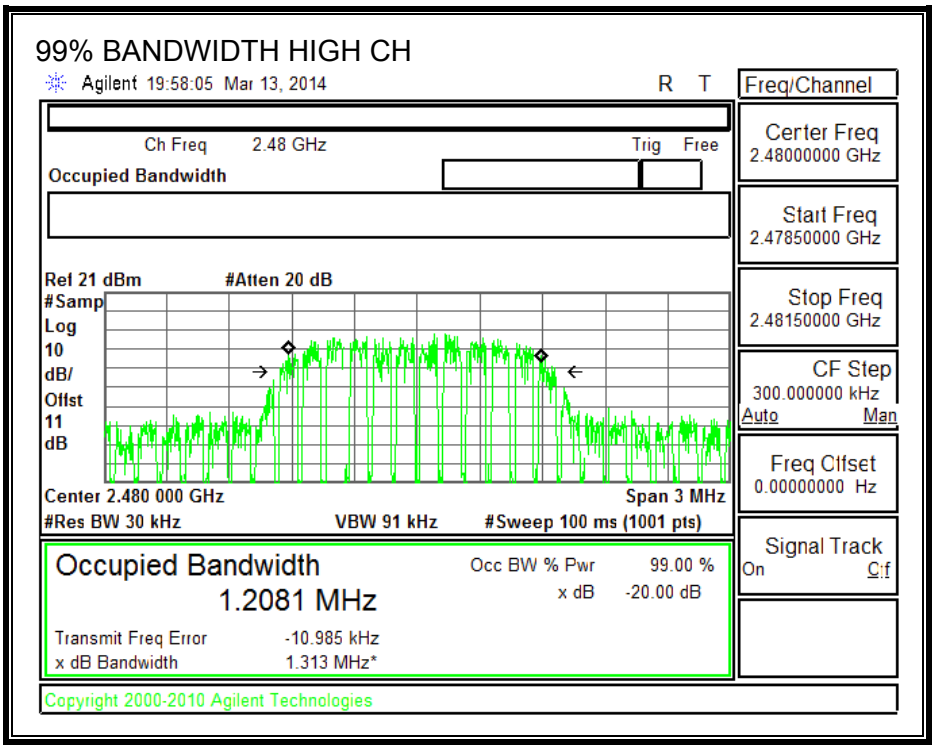

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HOPPING FREQUENCY SEPARATION

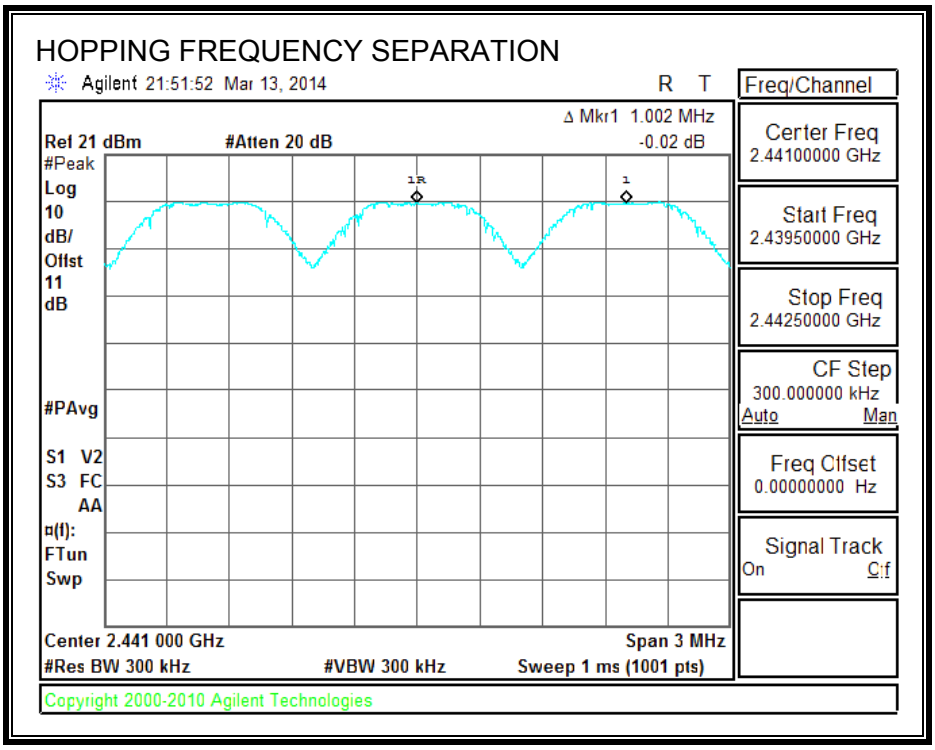

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

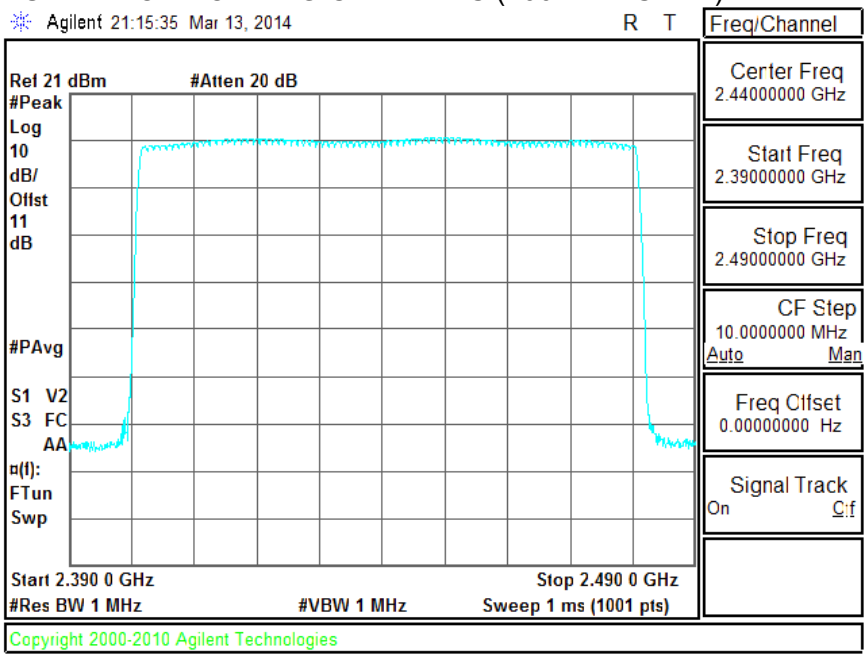

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

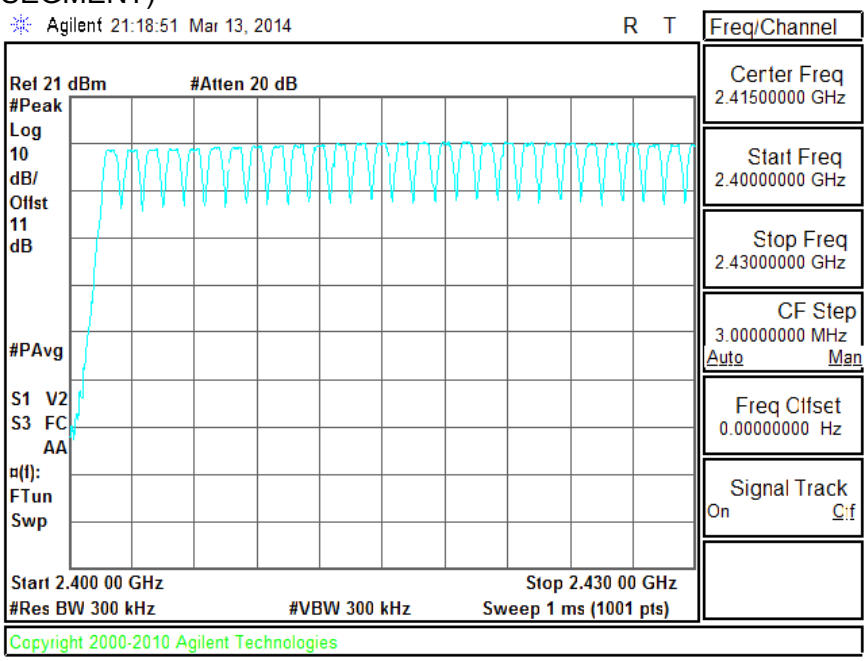

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

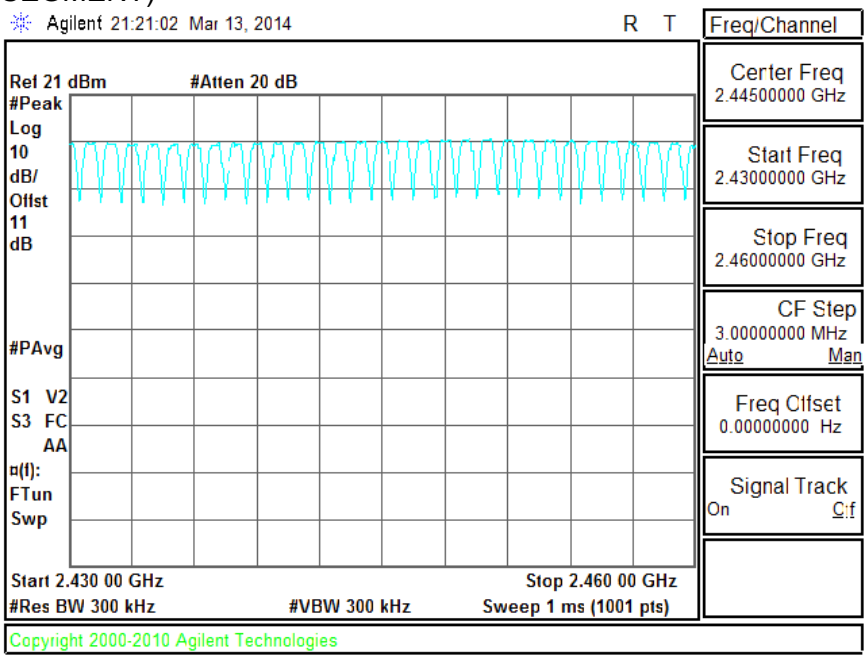

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

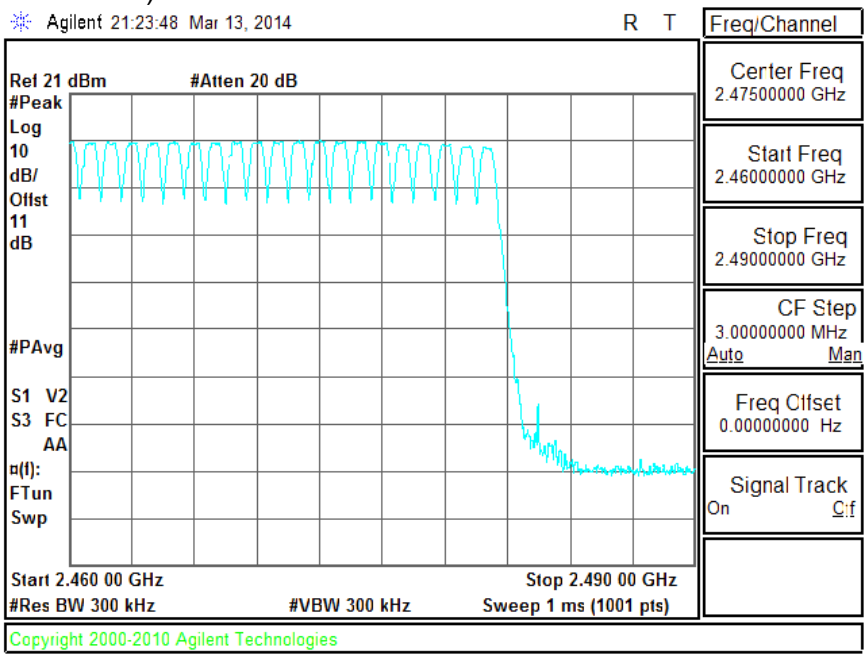

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.379	32	0.121	0.4	-0.279
DH3	1.62	18	0.292	0.4	-0.108
DH5	2.85	13	0.371	0.4	-0.030
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.379	8	0.030	0.4	-0.370
DH3	1.62	5	0.081	0.4	-0.319
DH5	2.85	4	0.114	0.4	-0.286

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH - DH1

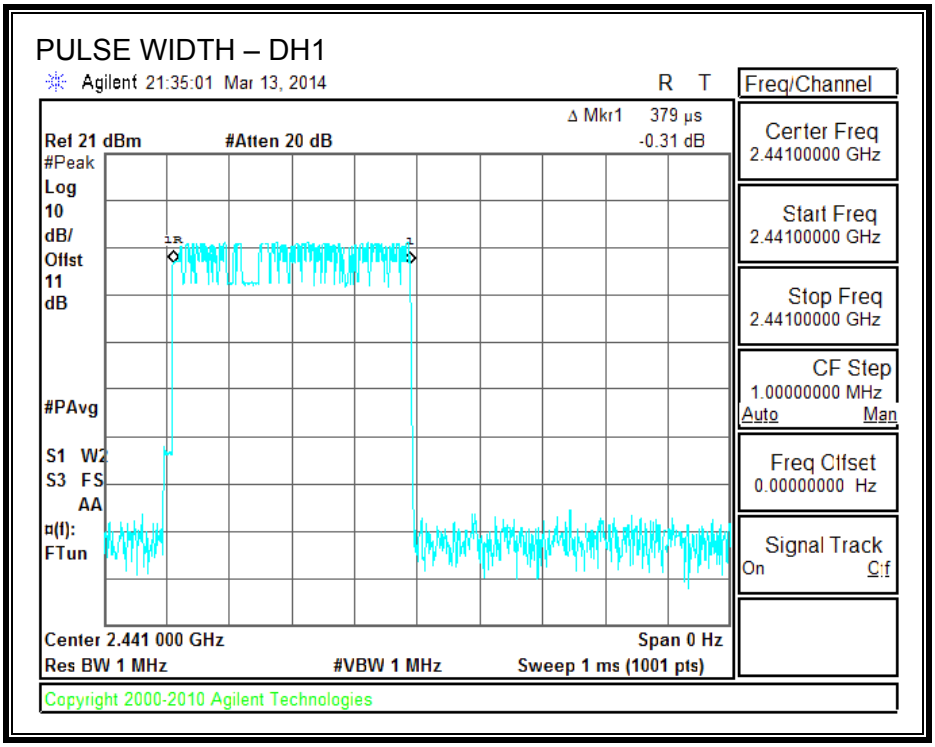

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

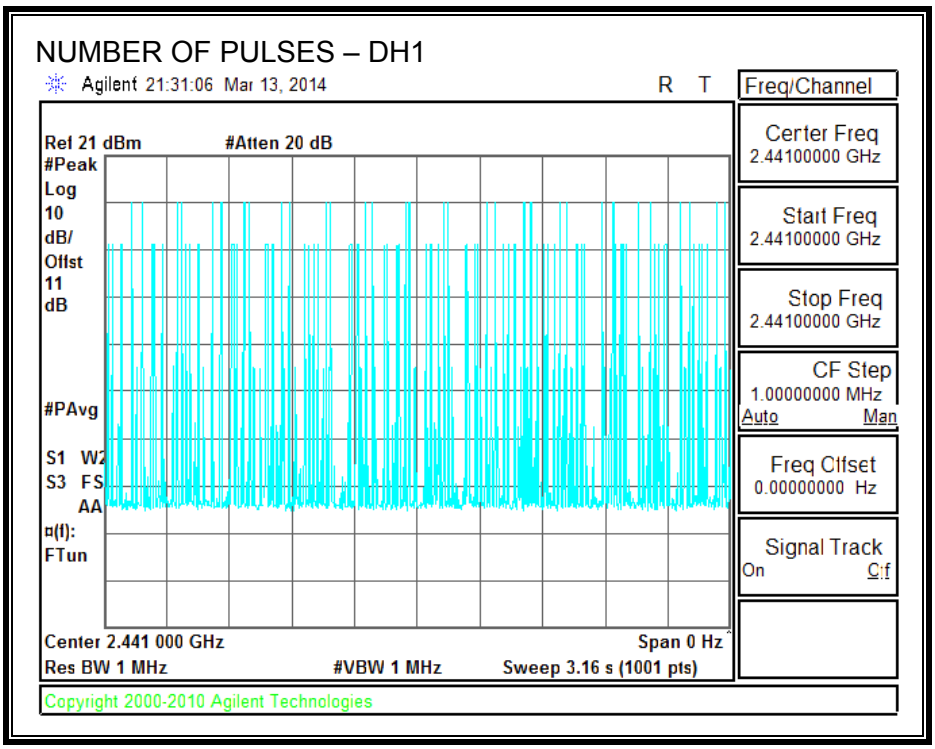

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH3

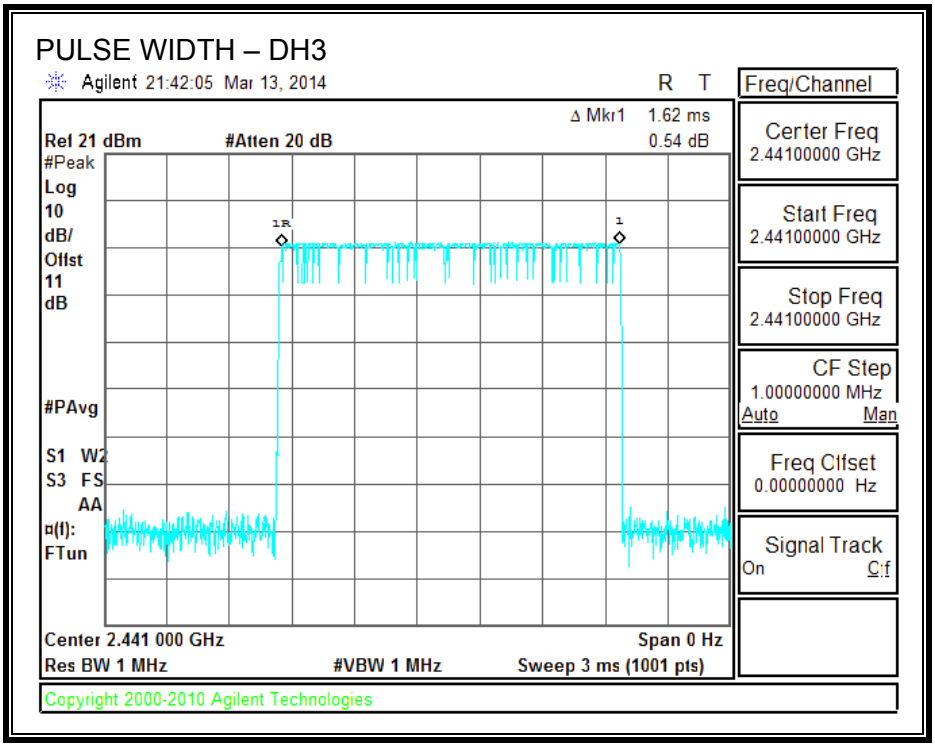

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

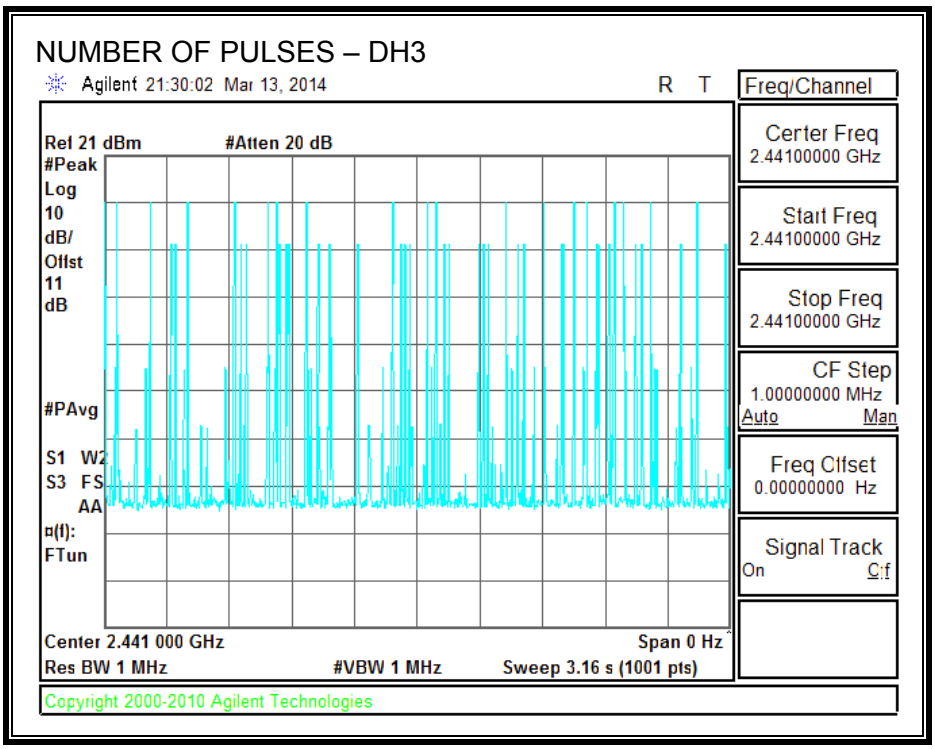

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH5

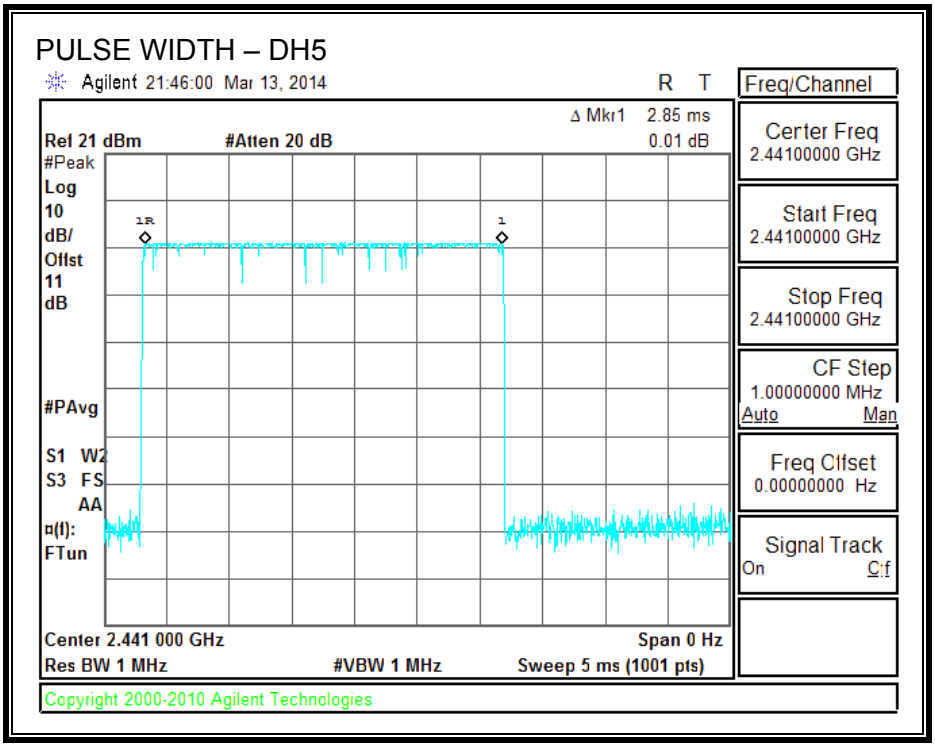

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

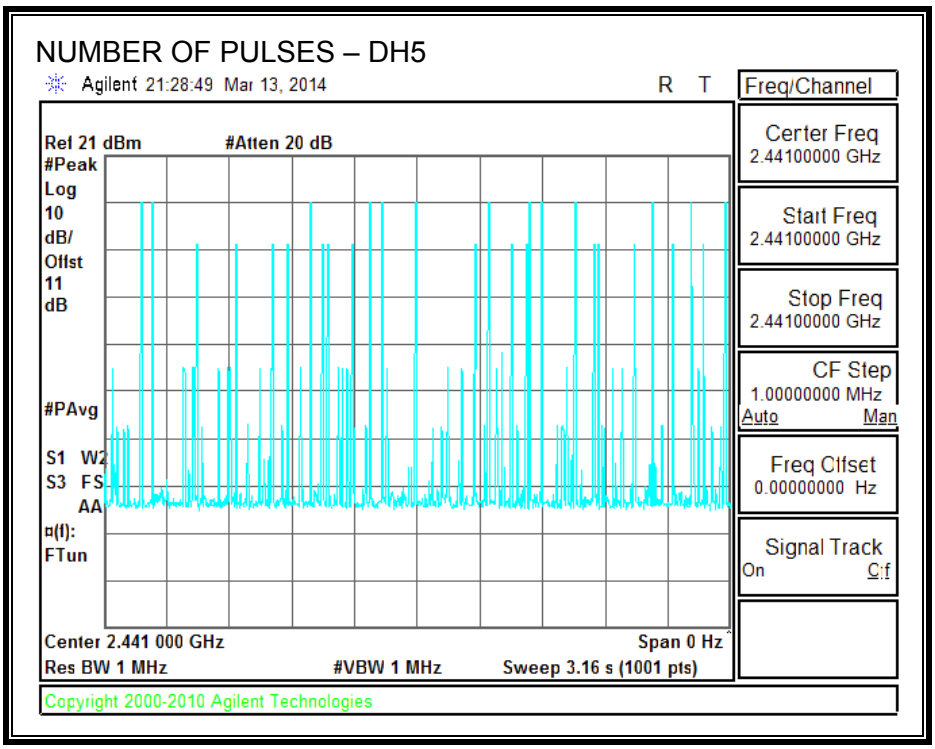

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.80	21	-11.20
Middle	2441	10.96	21	-10.04
High	2480	9.87	21	-11.13
Worst		10.96		-10.04

8.5.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.09	21	-10.91
Middle	2441	11.23	21	-9.77
High	2480	10.13	21	-10.87
Worst		11.23		-9.77

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GFSK OUTPUT POWER

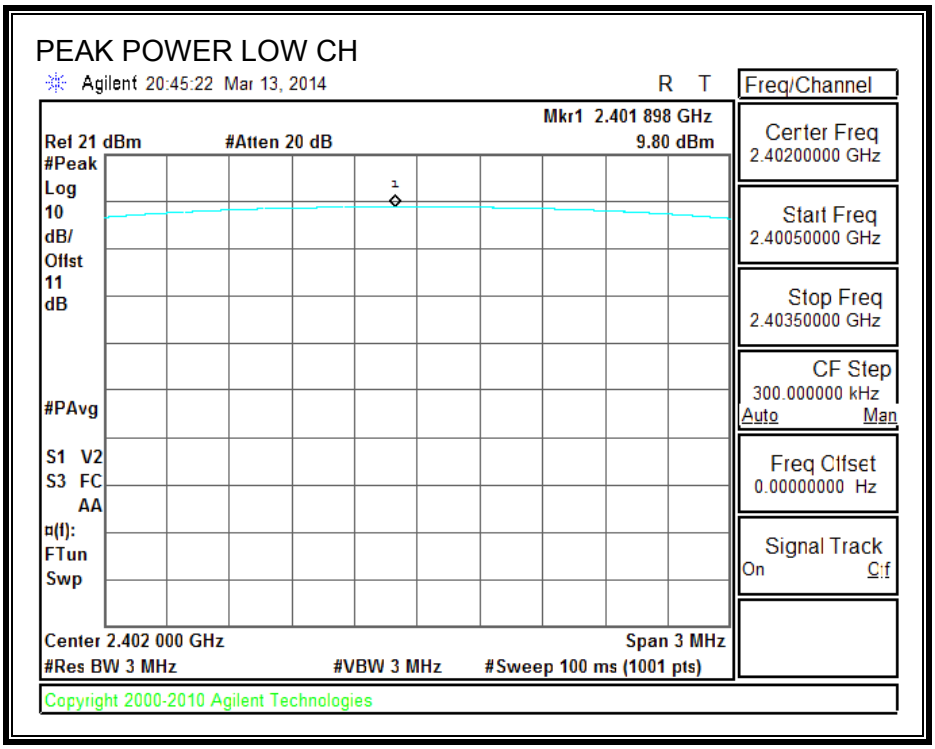

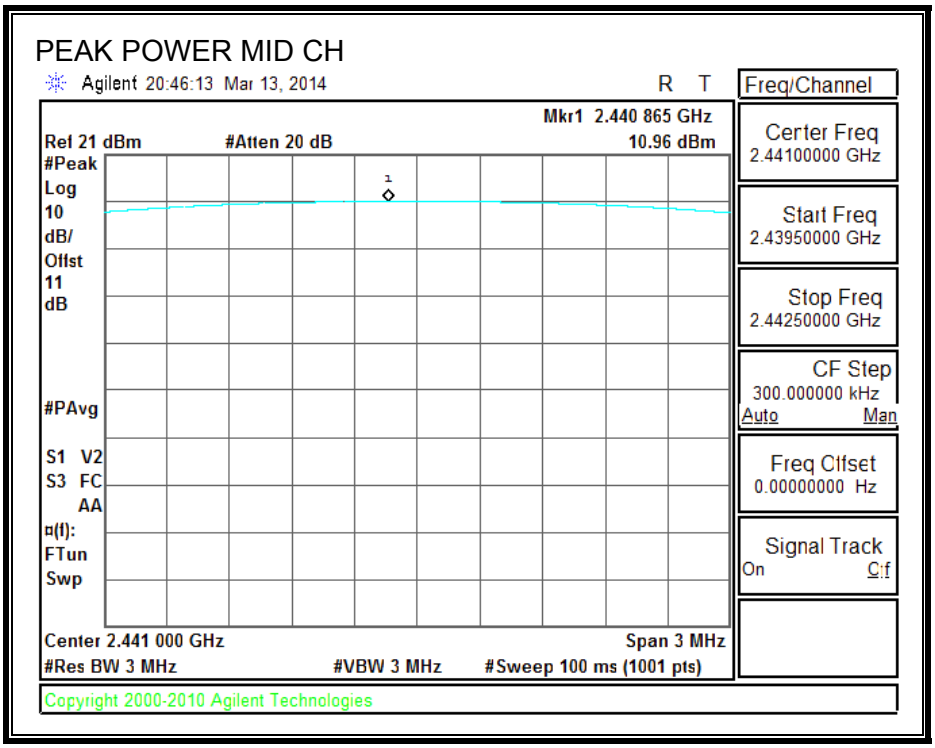

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PEAK POWER HIGH CH

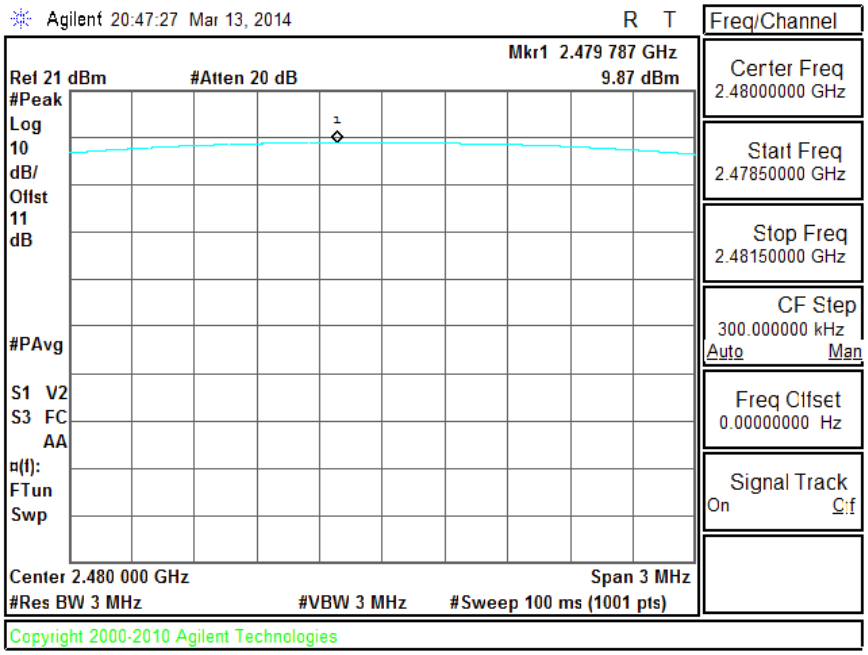

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8PSK OUTPUT POWER

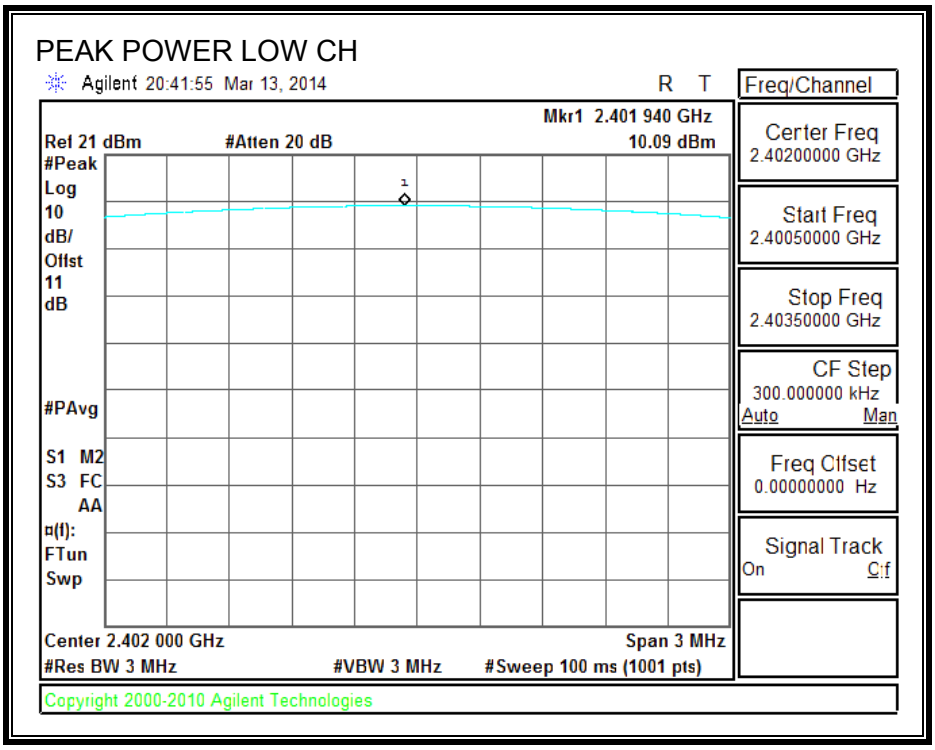

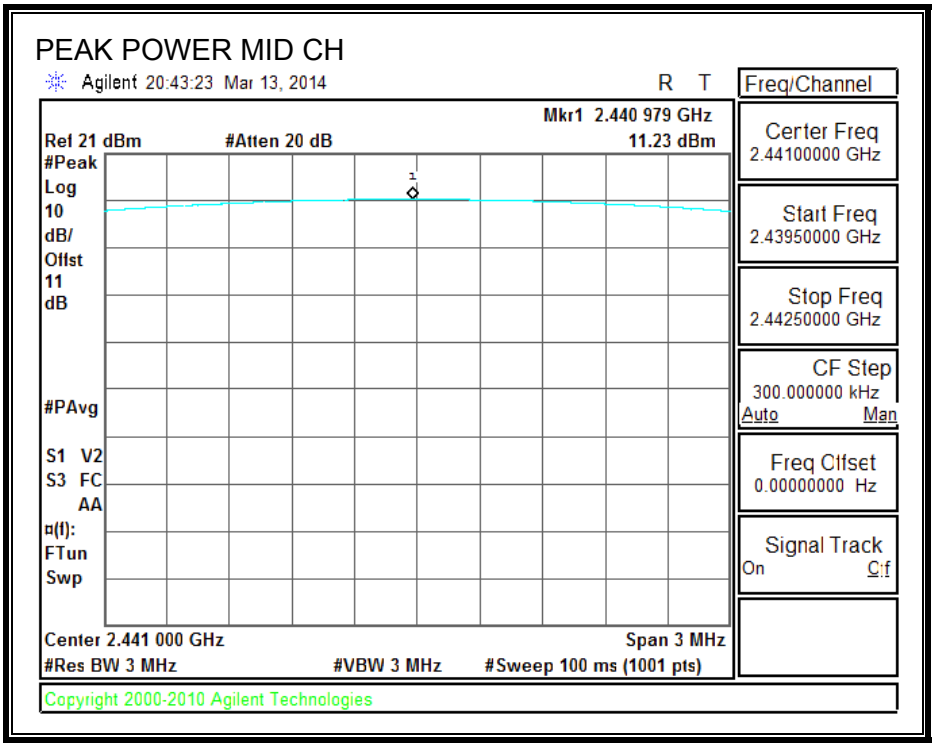

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PEAK POWER HIGH CH

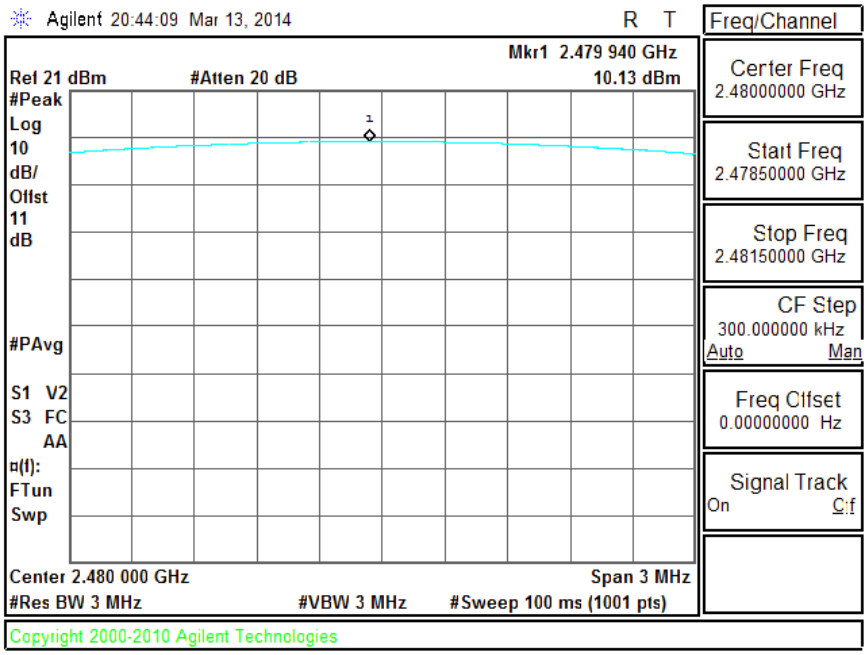

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.60
Middle	2441	10.50
High	2480	9.70
Worst		10.50

8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.90
Middle	2441	9.20
High	2480	8.10
Worst		9.20

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.1. BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL

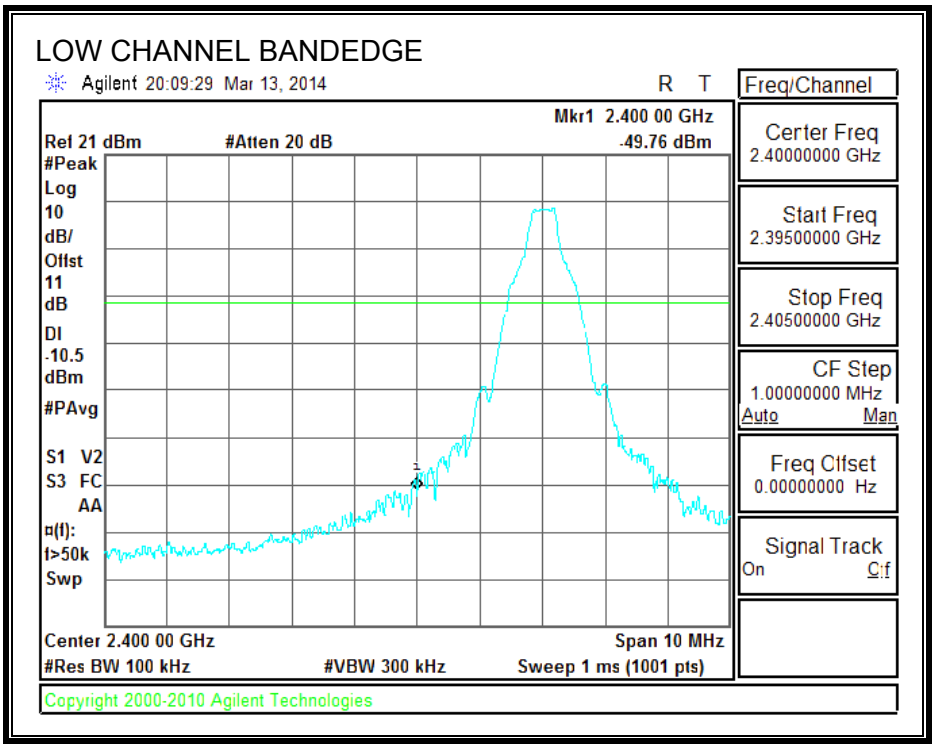

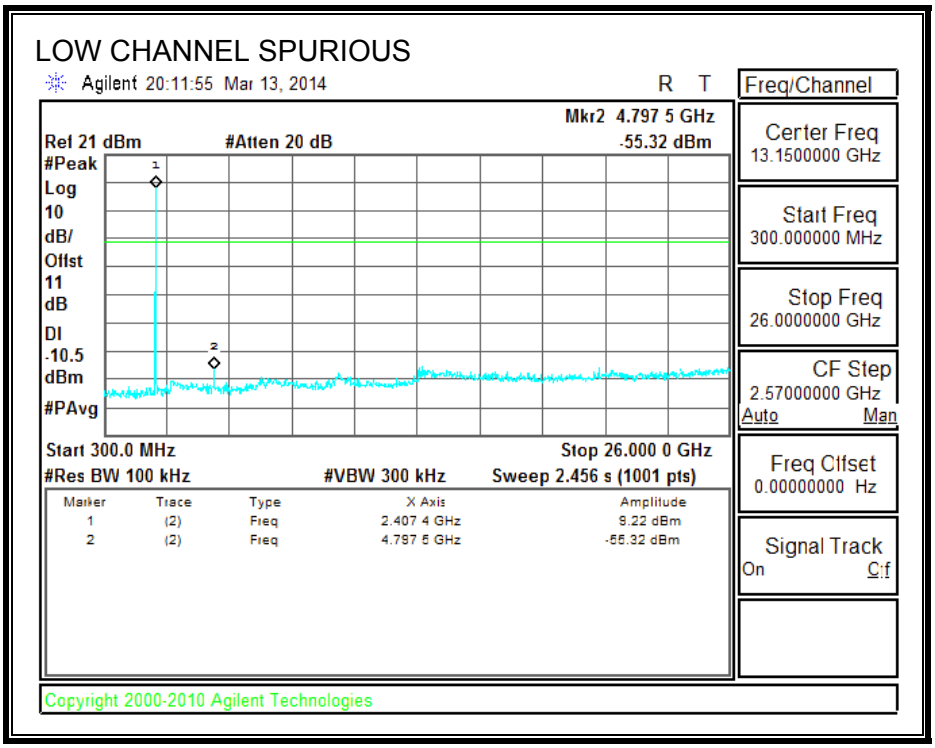

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

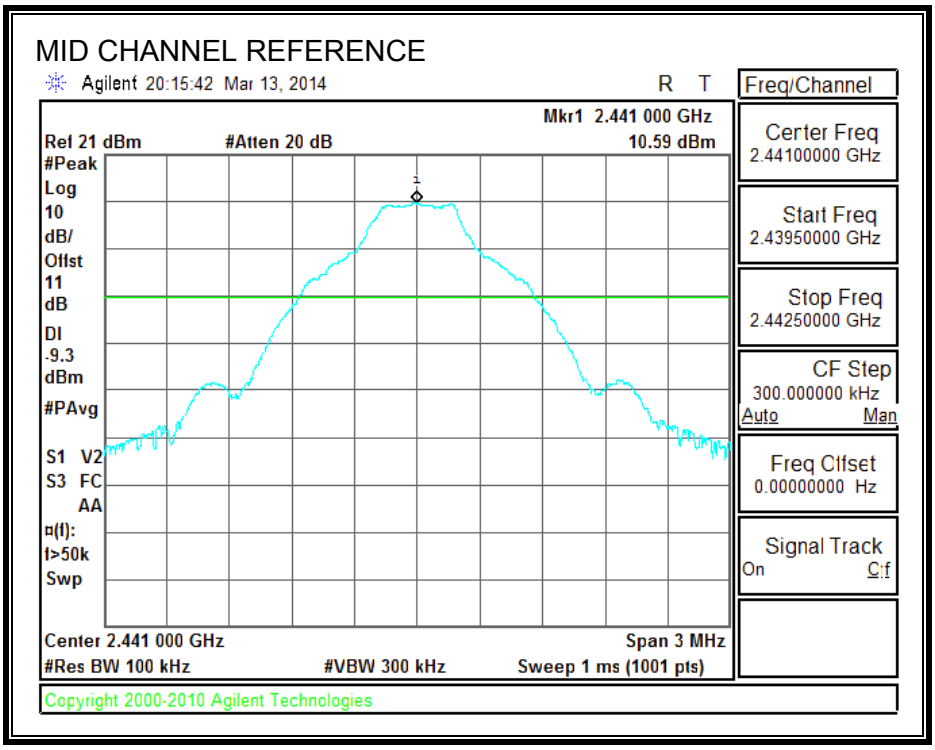

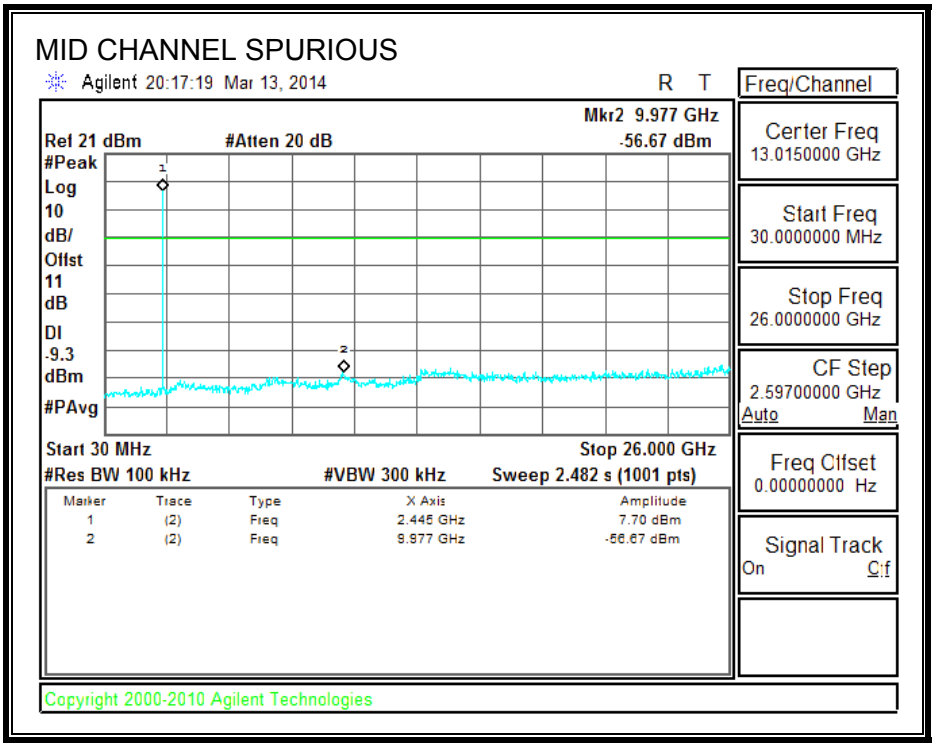

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

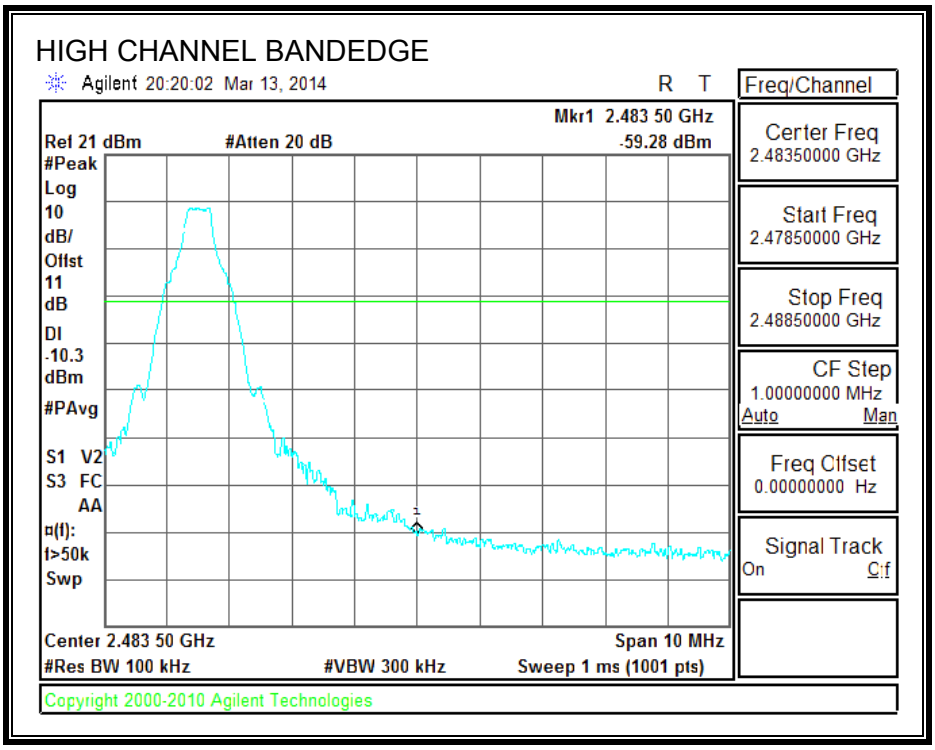

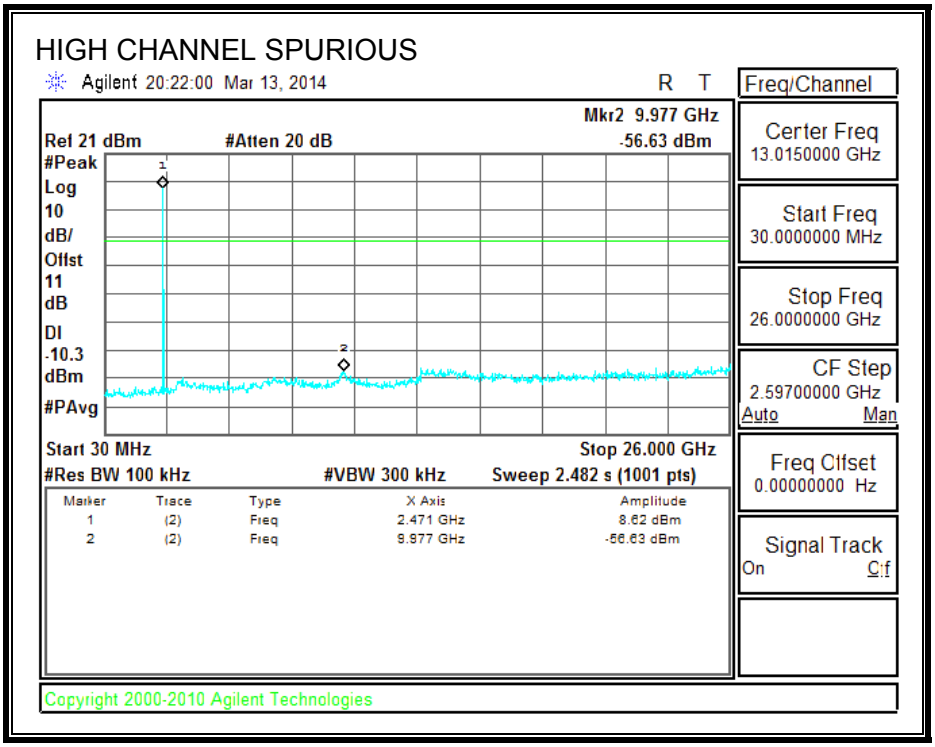

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON

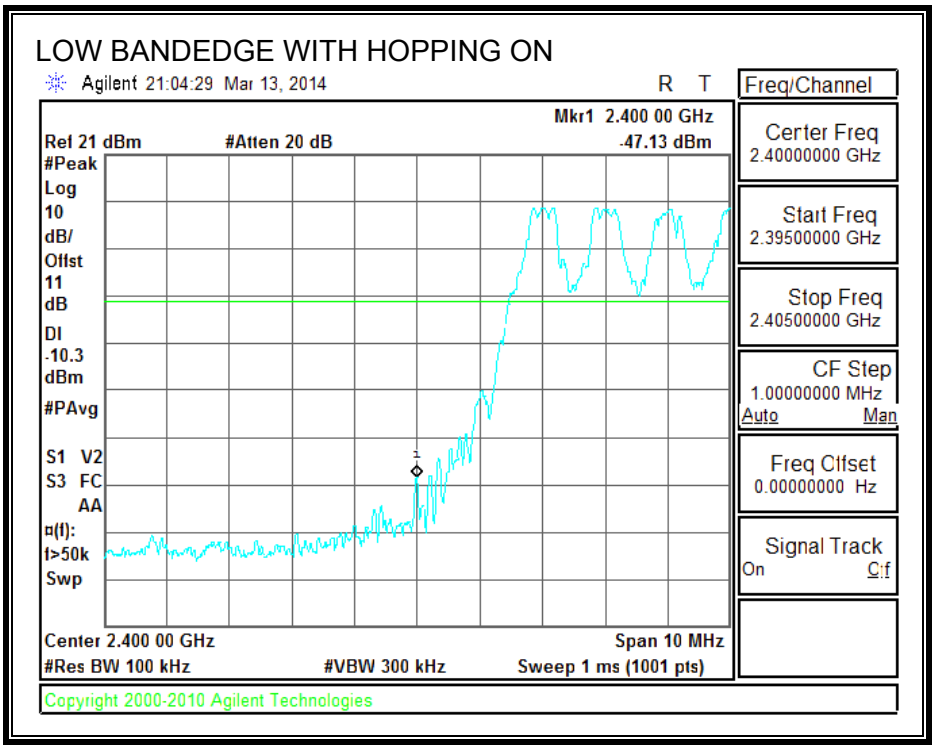

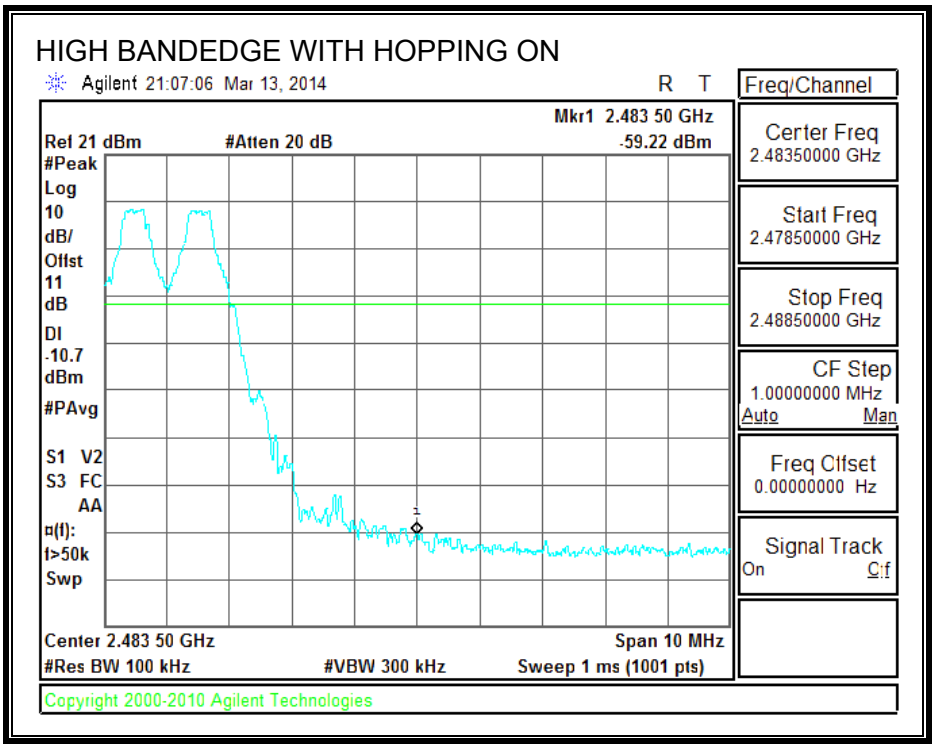

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.1. ENHANCED DATA RATE 8PSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL

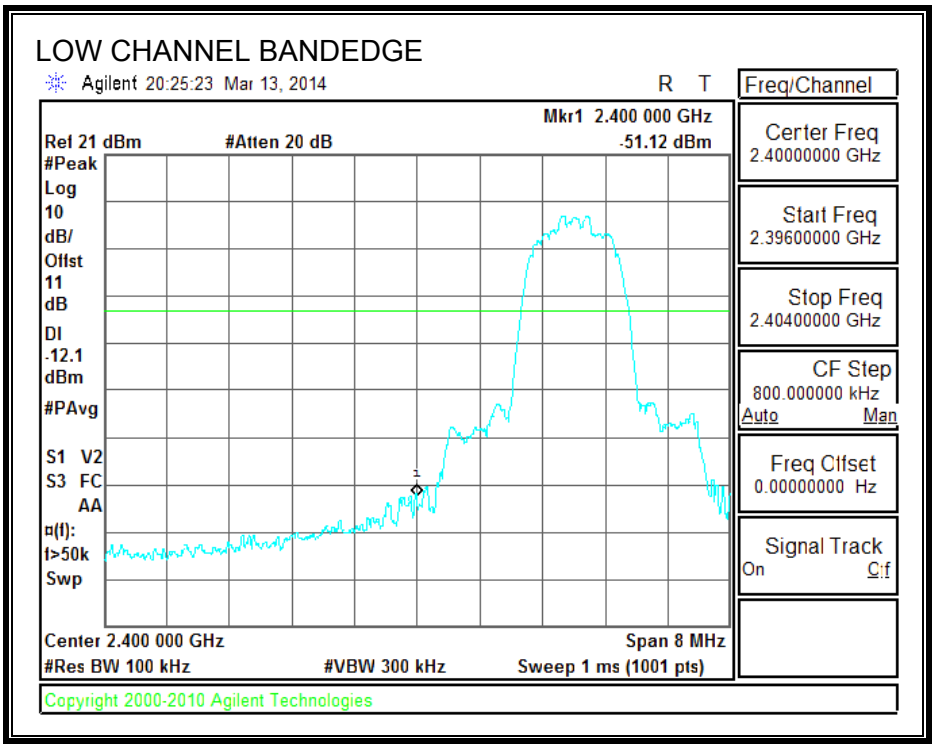

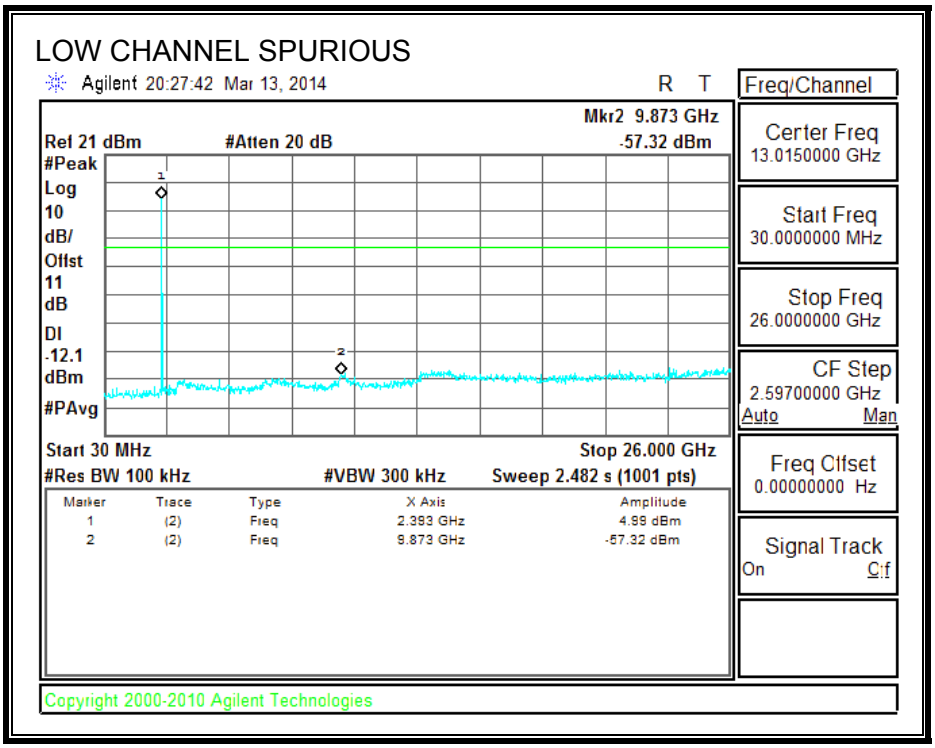

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

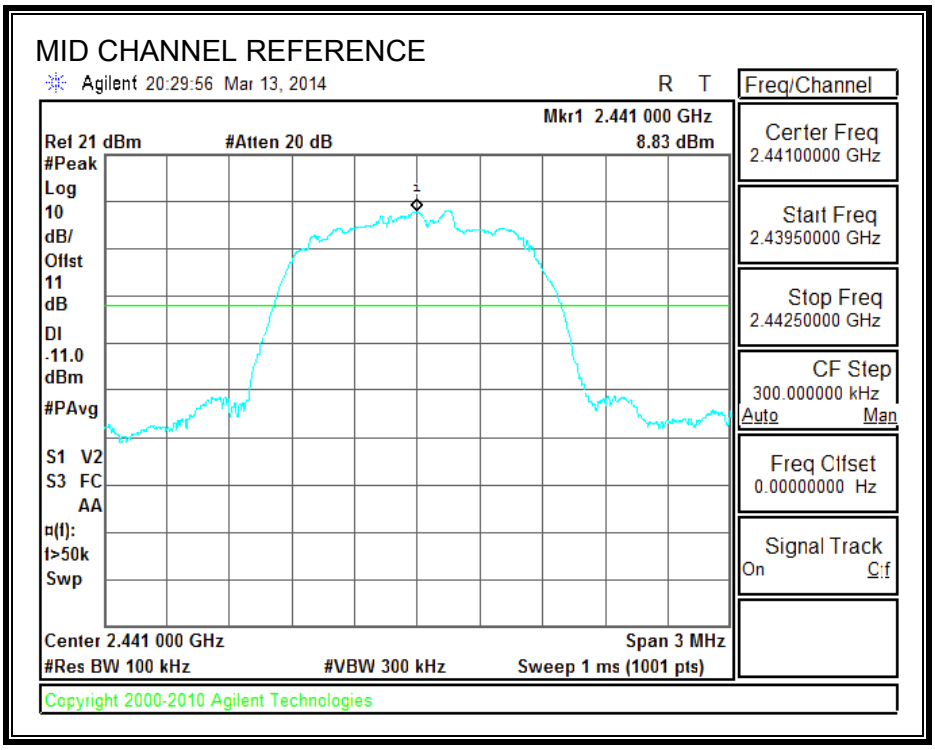

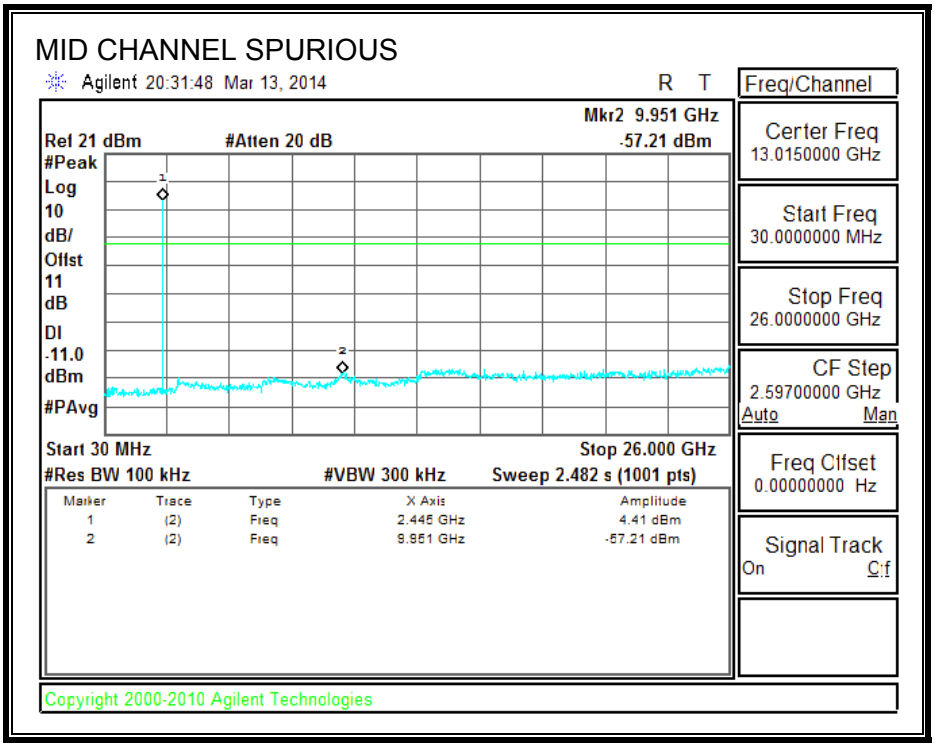

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

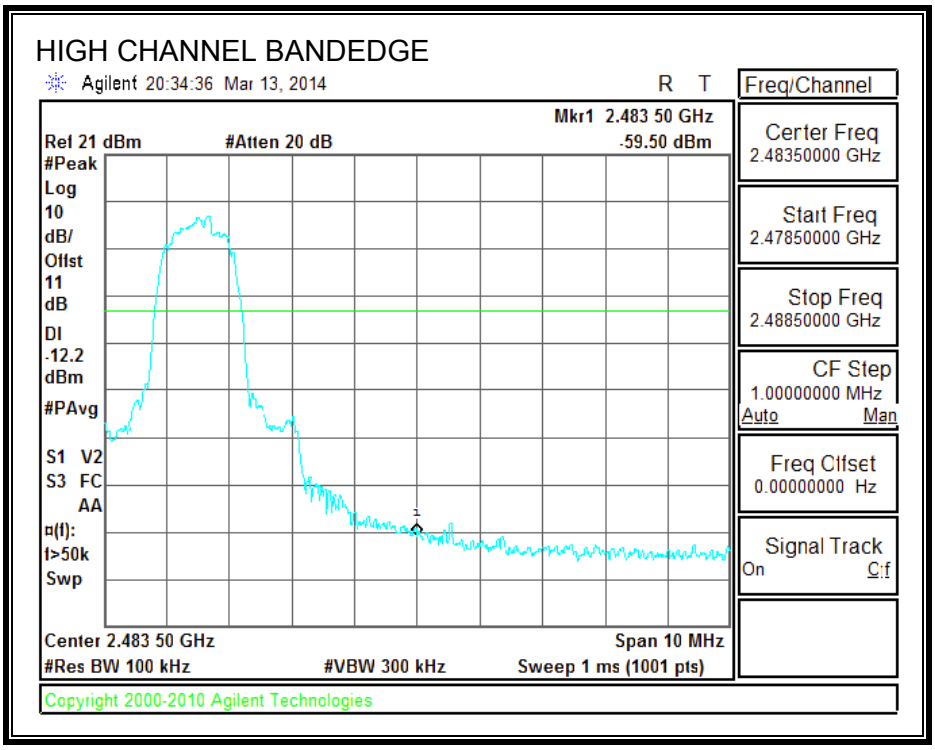

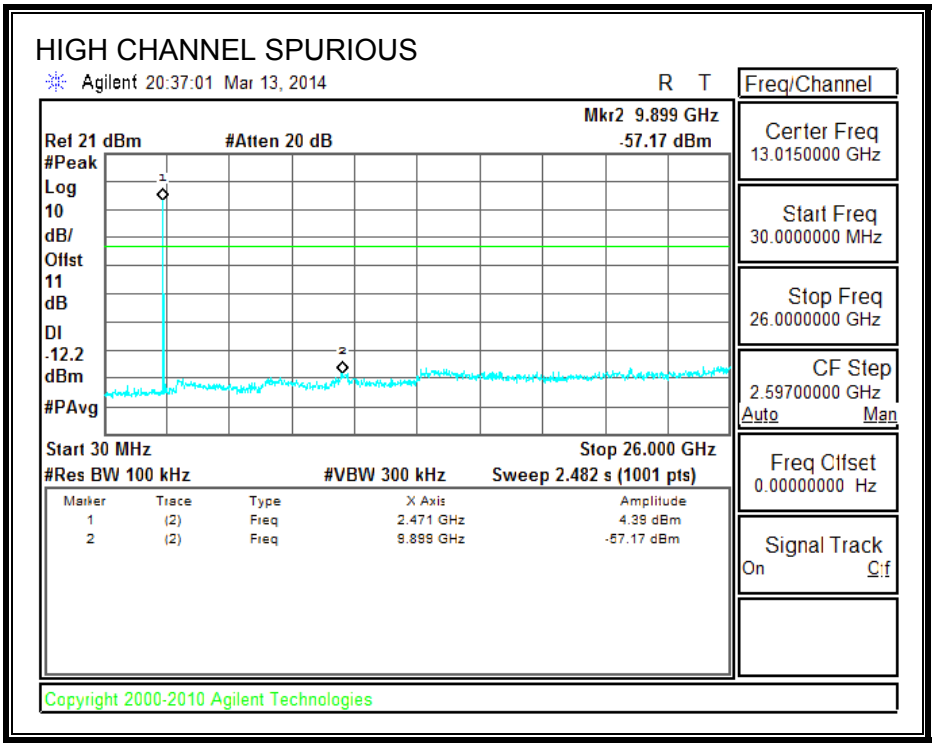

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON

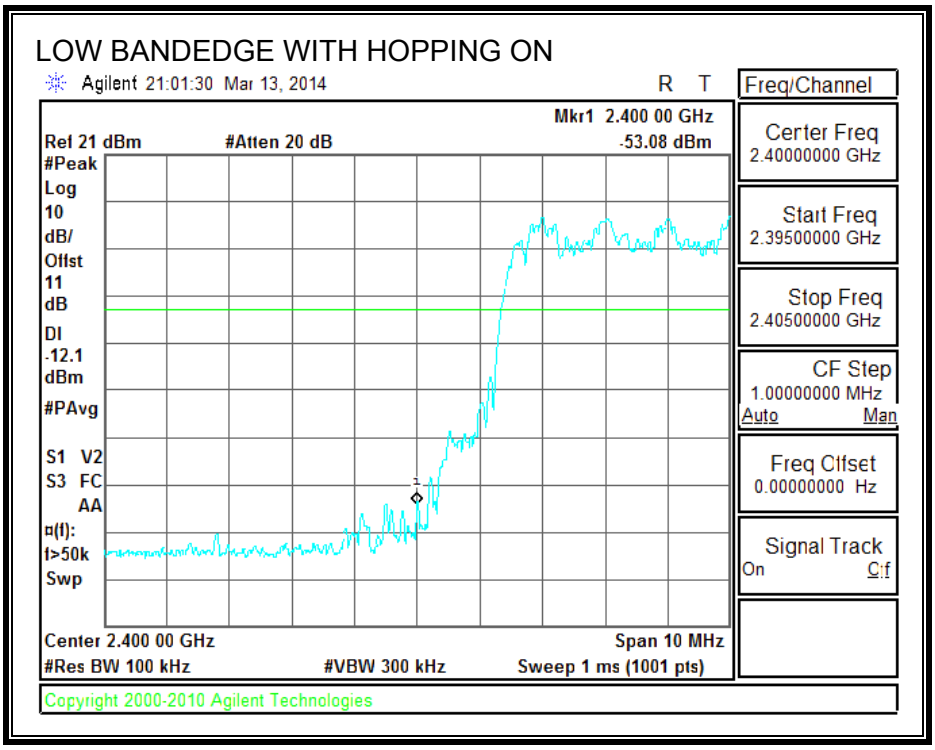

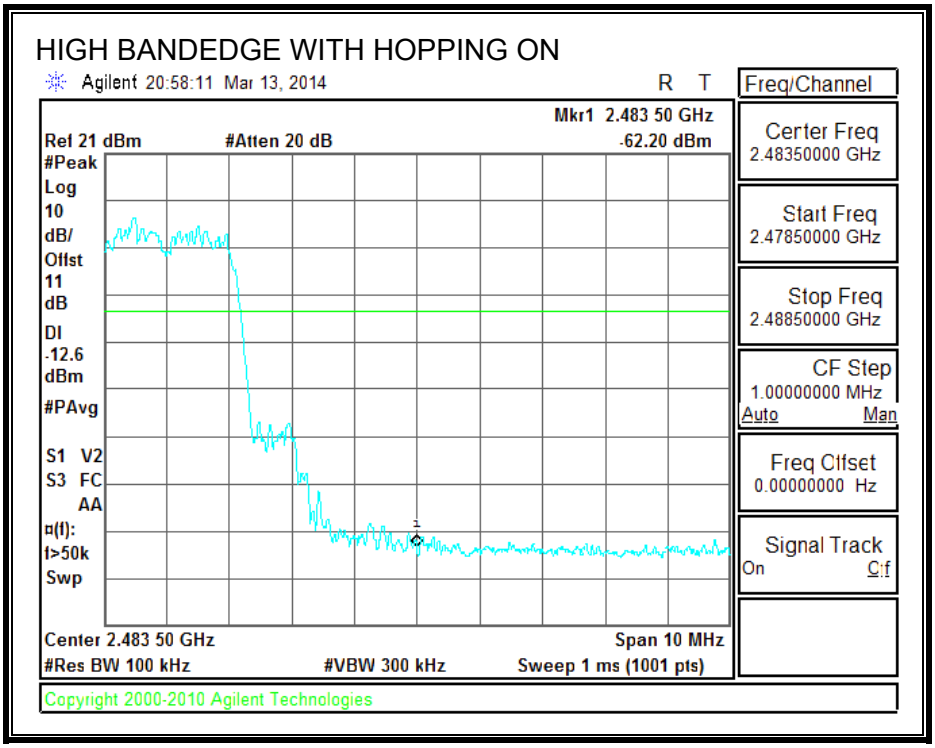

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. GFSK = 1/T = 350Hz.

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

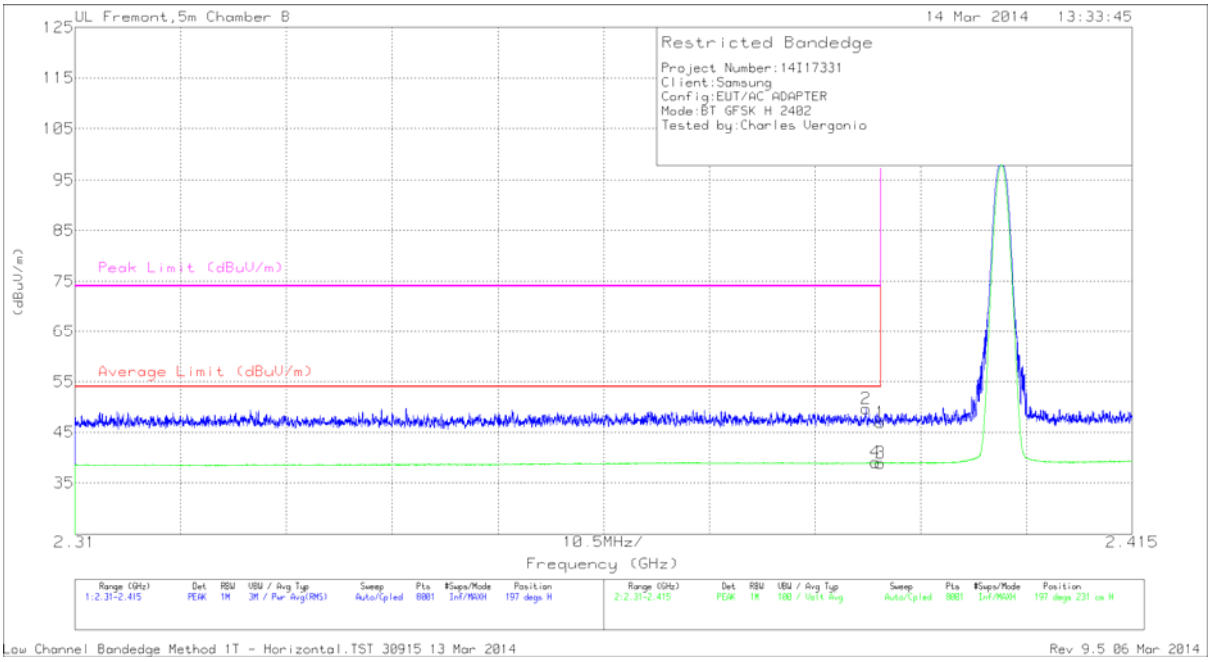

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.72	PK	32.1	-22.9	0	46.92	-	-	74	-27.08	197	231	H
2	* 2.389	40.48	PK	32.1	-22.9	0	49.68	-	-	74	-24.32	197	231	H
3	* 2.39	28.53	VB1T	32.1	-22.9	1.2	38.93	54	-15.07	-	-	197	231	H
4	* 2.39	28.66	VB1T	32.1	-22.9	1.2	39.06	54	-14.94	-	-	197	231	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
Low Channel Bandedge Method 1T - Horizontal.TST 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

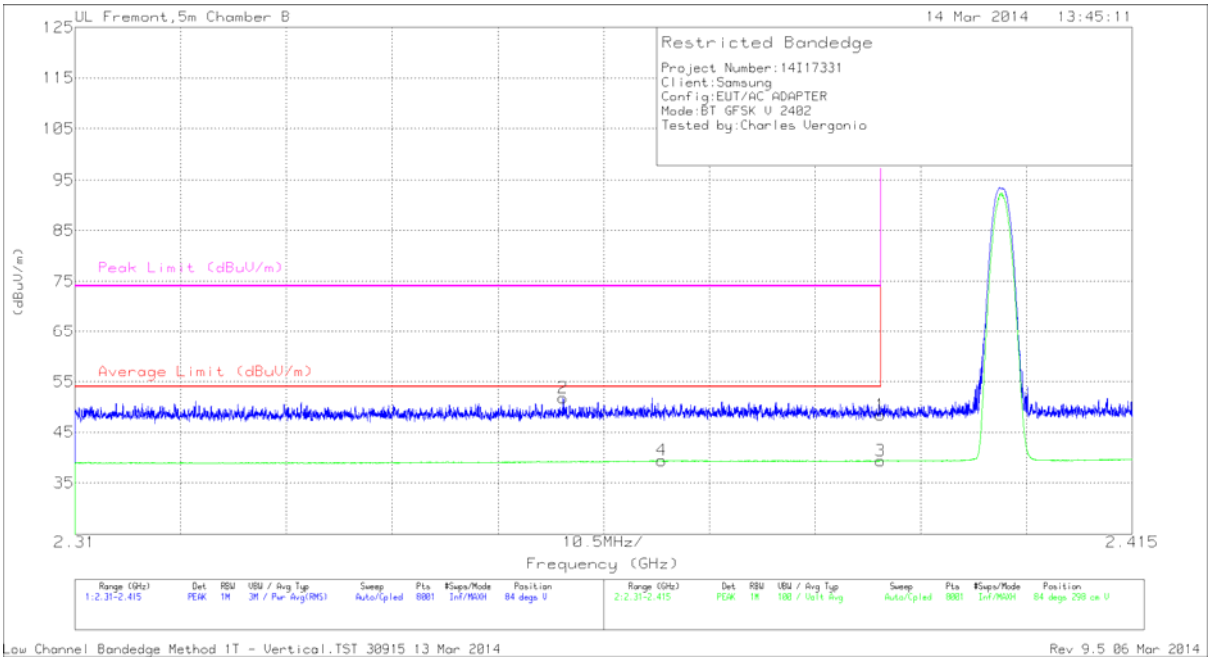

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.24	PK	32.1	-22.9	48.44	-	-	74	-25.56	84	298	V
2	* 2.358	42.79	PK	31.9	-22.9	51.79	-	-	74	-22.21	84	298	V
3	* 2.39	30.14	VB1T	32.1	-22.9	39.34	54	-14.66	-	-	84	298	V
4	* 2.368	30.23	VB1T	32	-22.8	39.43	54	-14.57	-	-	84	298	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
Low Channel Bandedge Method 1T - Vertical.TST 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

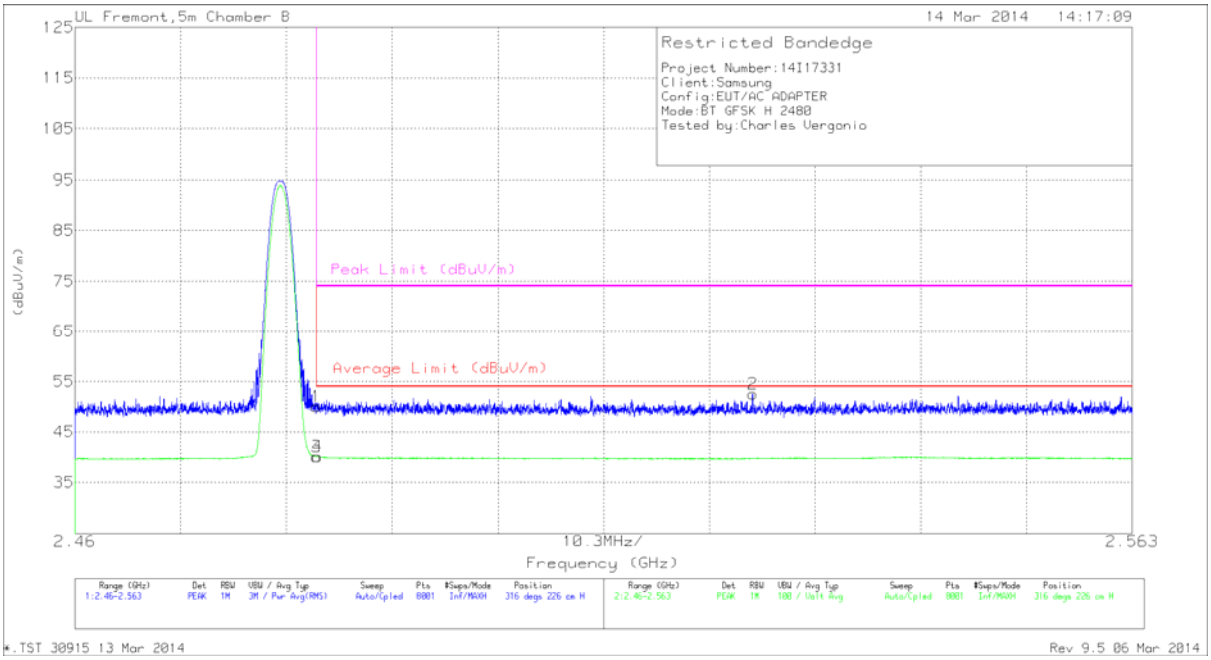

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.26	PK	32.4	-22.6	50.06	-	-	74	-23.94	316	226	H
3	* 2.484	30.27	VB1T	32.4	-22.6	40.07	54	-13.93	-	-	316	226	H
4	* 2.484	30.35	VB1T	32.4	-22.6	40.15	54	-13.85	-	-	316	226	H
2	2.526	42.76	PK	32.5	-22.7	52.56	-	-	74	-21.44	316	226	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
*.TST 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

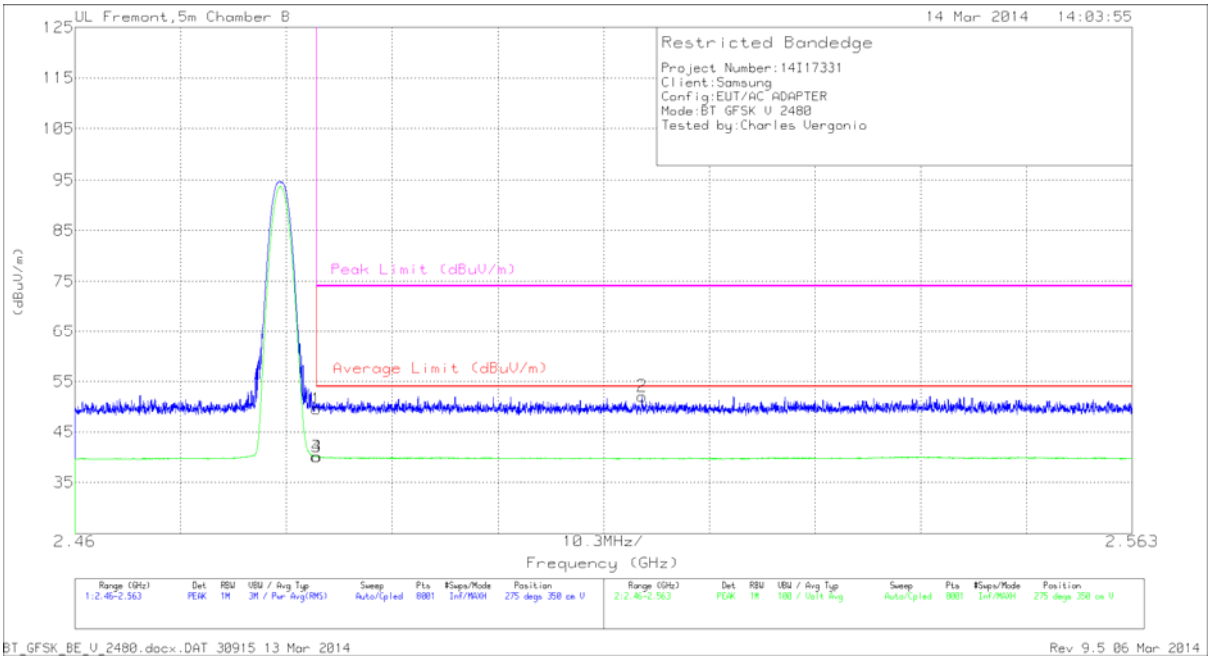

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	39.72	PK	32.4	-22.6	49.52	-	-	74	-24.48	275	350	V
3	2.484	30.31	VB1T	32.4	-22.6	40.11	54	-13.89	-	-	275	350	V
4	2.484	30.32	VB1T	32.4	-22.6	40.12	54	-13.88	-	-	275	350	V
2	2.515	42.39	PK	32.5	-22.8	52.09	-	-	74	-21.91	275	350	V

PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
BT_GFSK_BE_V_2480.docx.DAT 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
HORIZONTAL

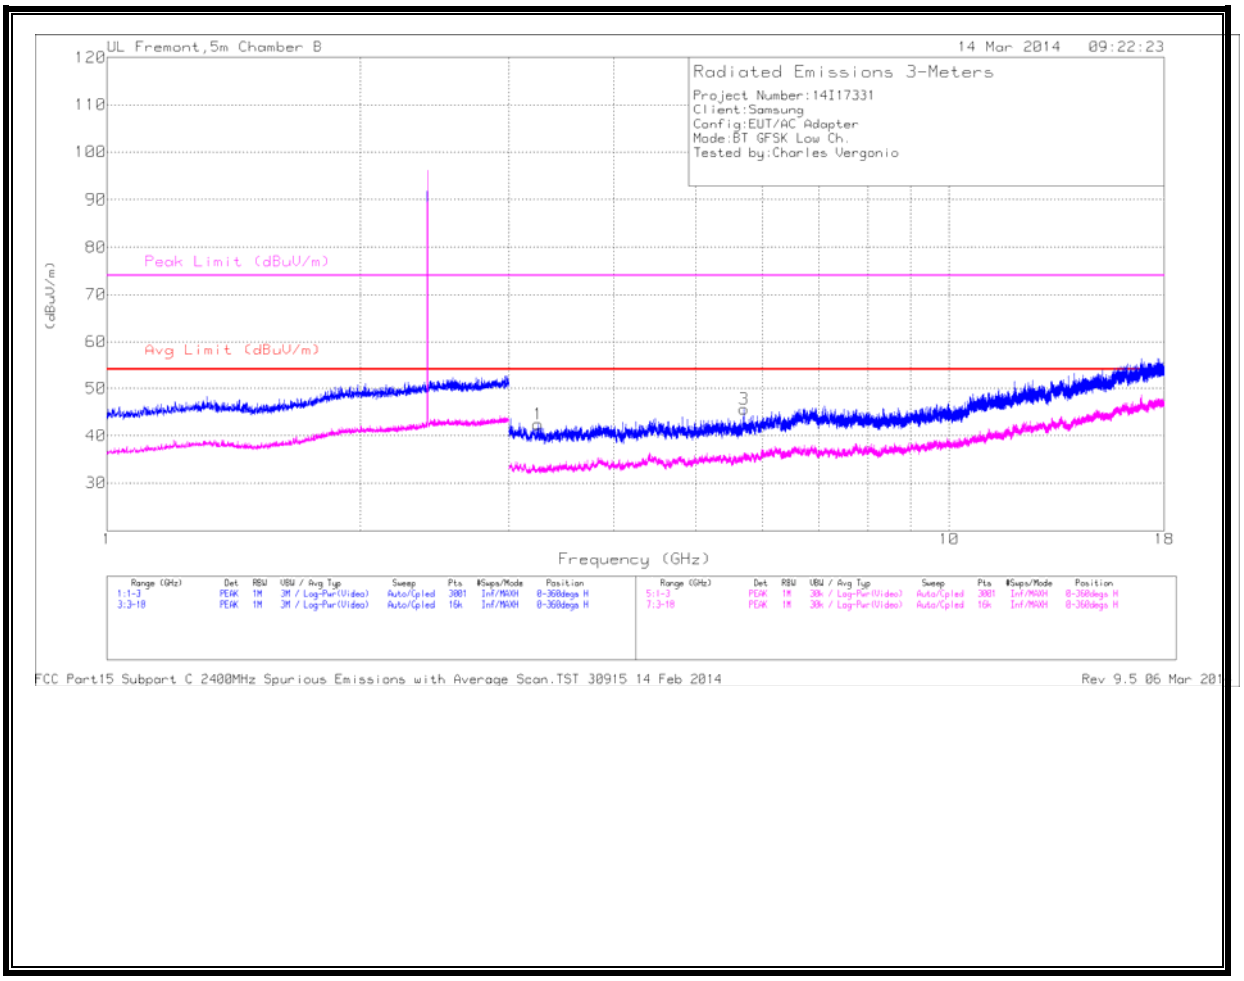

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL

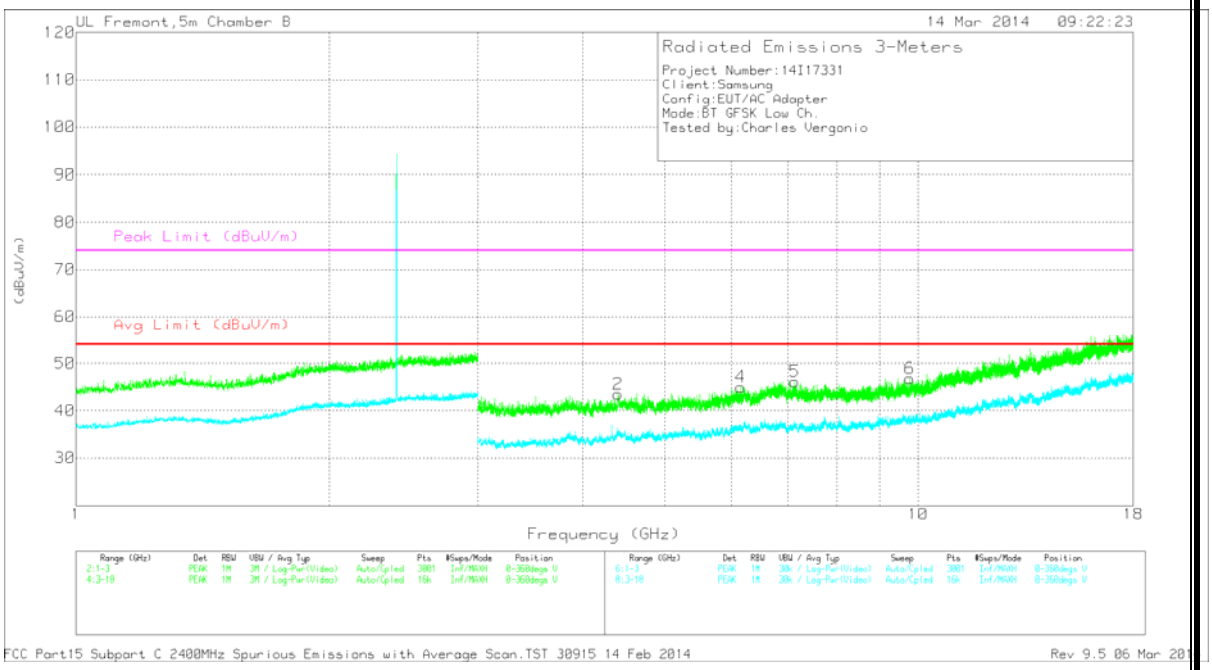

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.249	40.52	PK	32.8	-30.9	42.42	54	-11.58	74	-31.58	0-360	201	H
2	4.404	39.44	PK	33.8	-29.7	43.54	54	-10.46	74	-30.46	0-360	99	V
3	5.708	40.12	PK	34.5	-29	45.62	54	-8.38	74	-28.38	0-360	99	H
4	6.154	38.42	PK	35.4	-28.8	45.02	54	-8.98	74	-28.98	0-360	202	V
5	7.137	37.89	PK	35.6	-27.3	46.19	54	-7.81	74	-27.81	0-360	202	V
6	9.777	33.67	PK	36.9	-23.7	46.87	54	-7.13	74	-27.13	0-360	99	V

PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL
HORIZONTAL

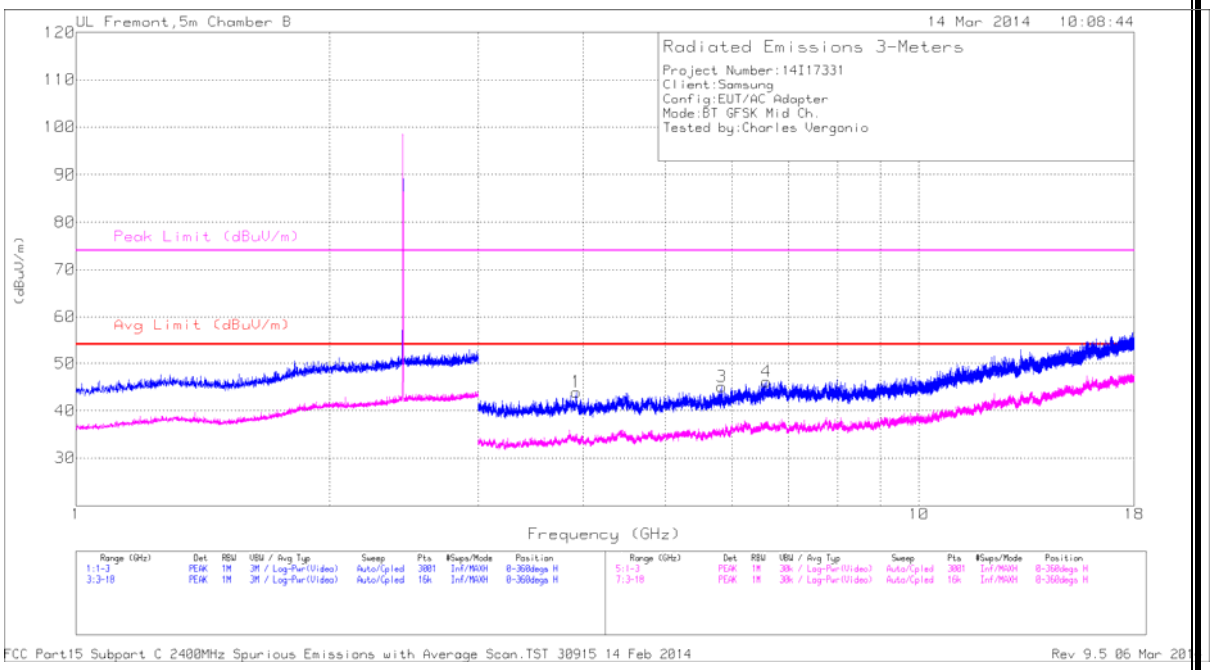

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL

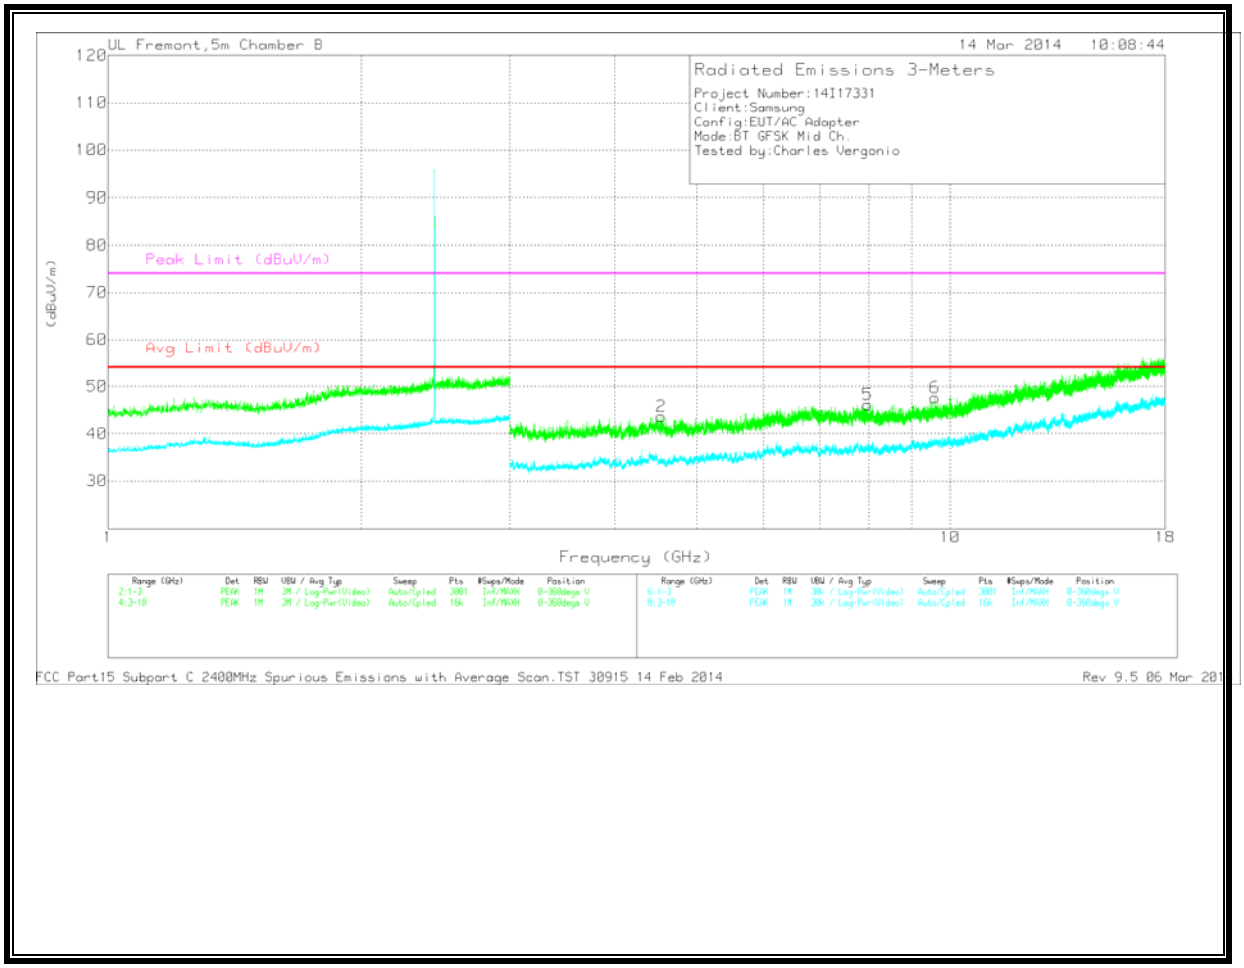

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.92	40.66	PK	33.8	-30.5	43.96	54	-10.04	74	-30.04	0-360	99	H
2	* 4.543	39.77	PK	34.1	-30.2	43.67	54	-10.33	74	-30.33	0-360	99	V
3	5.833	39.51	PK	34.8	-29.2	45.11	54	-8.89	74	-28.89	0-360	99	H
4	6.598	37.9	PK	35.8	-27.5	46.2	54	-7.8	74	-27.8	0-360	201	H
5	7.981	37.63	PK	35.7	-27.2	46.13	54	-7.87	74	-27.87	0-360	201	V
6	9.591	35.16	PK	36.8	-24.3	47.66	54	-6.34	74	-26.34	0-360	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL
HORIZONTAL

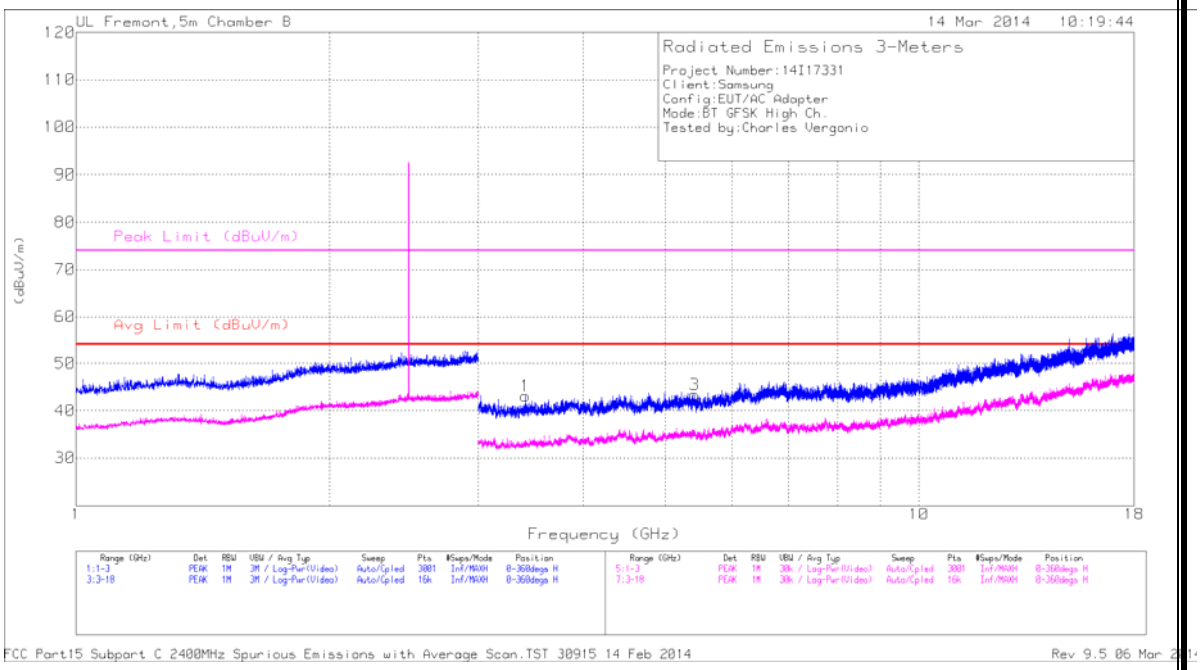

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL

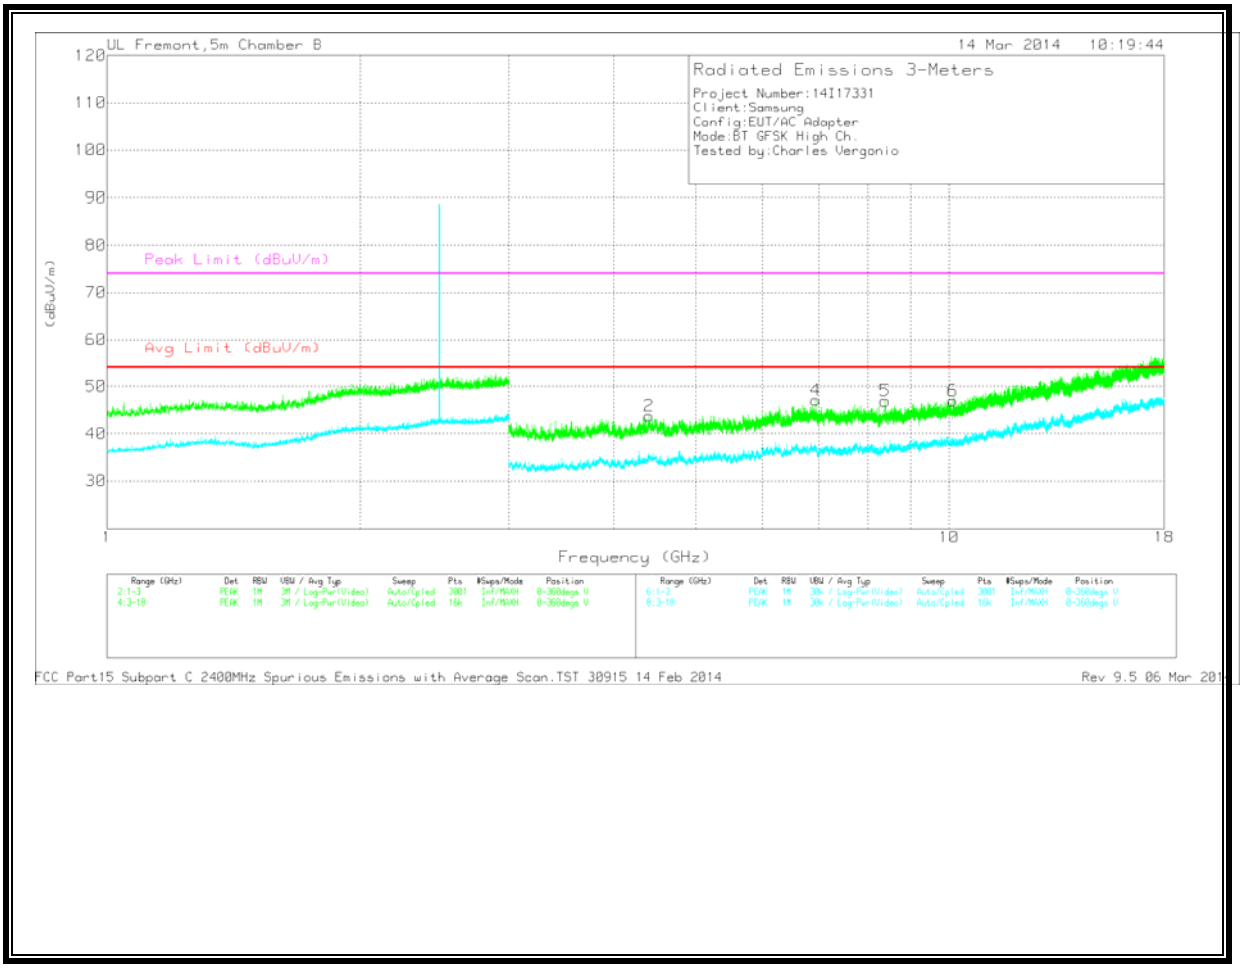

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 5.421	37.94	PK	34.5	-29.1	43.34	54	-10.66	74	-30.66	0-360	201	H
2	* 4.398	39.82	PK	33.8	-29.9	43.72	54	-10.28	74	-30.28	0-360	99	V
5	* 8.394	36.49	PK	35.8	-25.4	46.89	54	-7.11	74	-27.11	0-360	202	V
1	3.415	41.35	PK	32.8	-31.1	43.05	54	-10.46	74	-20.46	0-360	99	H
4	6.941	39.46	PK	35.6	-28	47.06	54	-6.94	74	-26.94	0-360	202	V
6	10.096	33.68	PK	37.1	-23.8	46.98	54	-7.02	74	-27.02	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

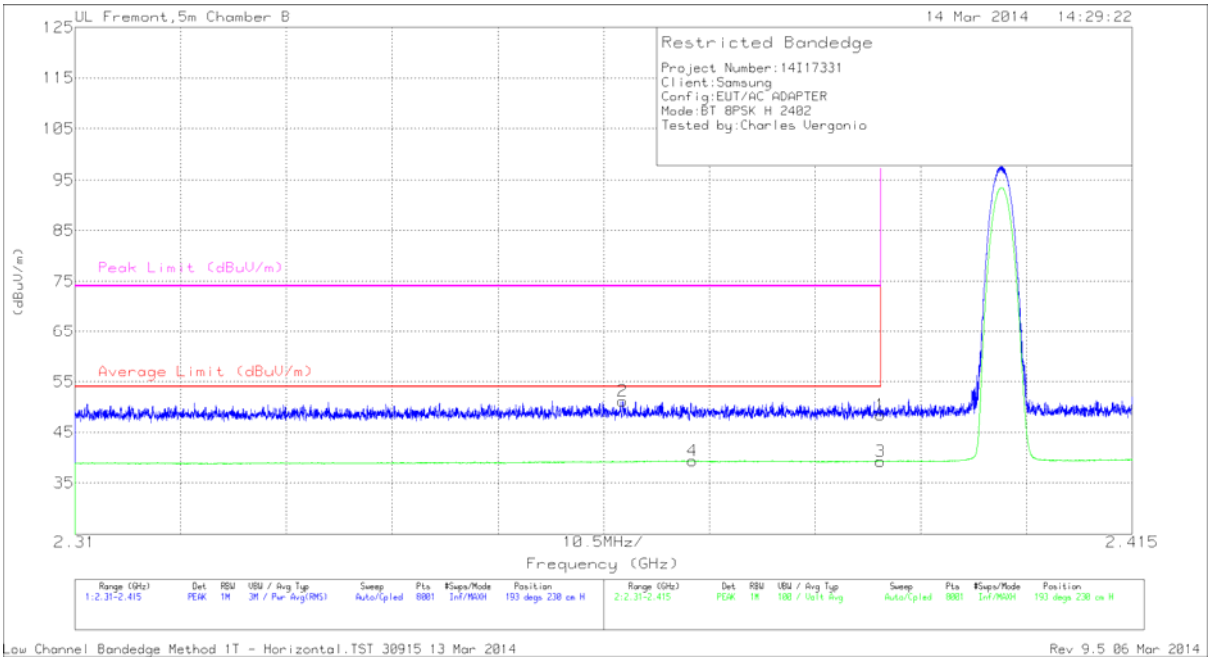

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/ m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.24	PK	32.1	-22.9	48.44	-	-	74	-25.56	193	230	H
2	* 2.364	42.06	PK	32	-22.9	51.16	-	-	74	-22.84	193	230	H
3	* 2.39	30.03	VB1T	32.1	-22.9	39.23	54	-14.77	-	-	193	230	H
4	* 2.371	30.18	VB1T	32	-22.8	39.38	54	-14.62	-	-	193	230	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

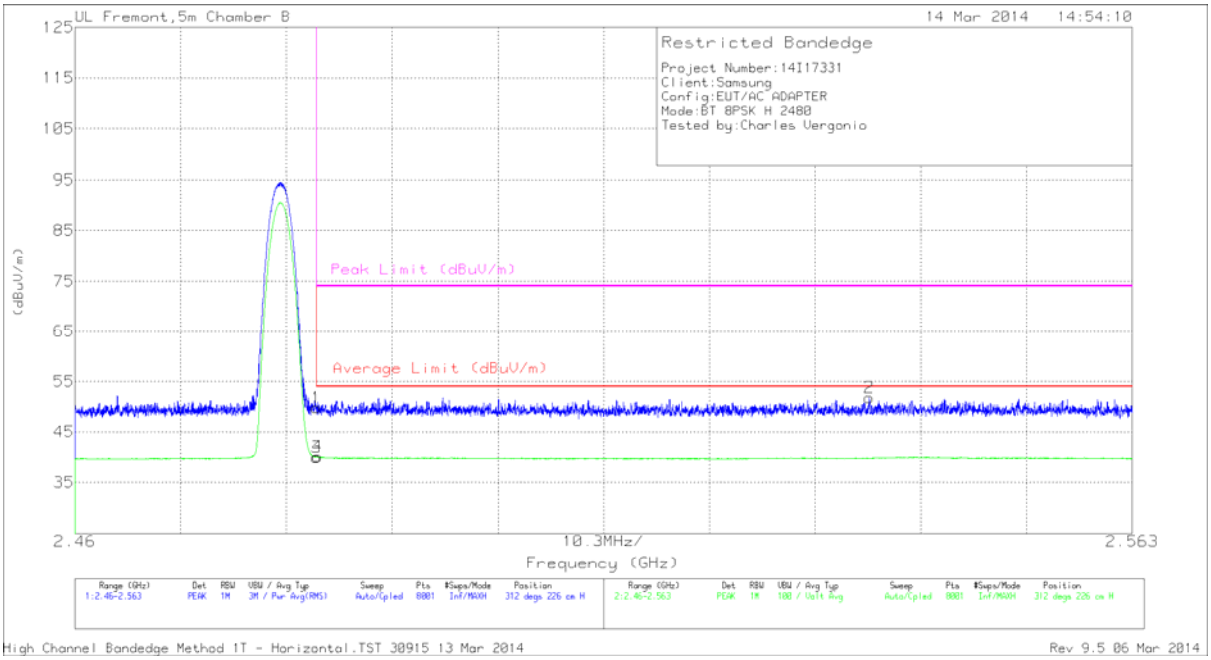

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.99	PK	32.4	-22.6	49.79	-	-	74	-24.21	312	226	H
3	* 2.484	30.19	VB1T	32.4	-22.6	39.99	54	-14.01	-	-	312	226	H
4	* 2.484	30.31	VB1T	32.4	-22.6	40.11	54	-13.89	-	-	312	226	H
2	2.537	41.91	PK	32.5	-22.6	51.81	-	-	74	-22.19	312	226	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
High Channel Bandedge Method 1T - Horizontal.TST 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

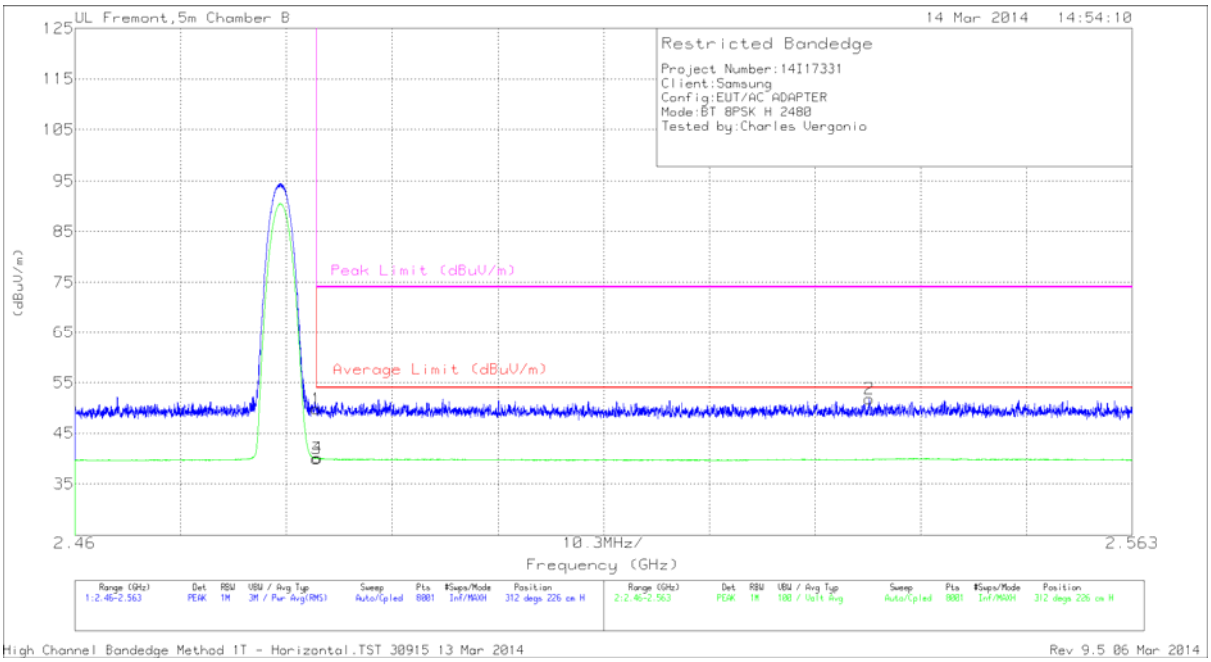

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.99	PK	32.4	-22.6	49.79	-	-	74	-24.21	312	226	H
3	* 2.484	30.19	VB1T	32.4	-22.6	39.99	54	-14.01	-	-	312	226	H
4	* 2.484	30.31	VB1T	32.4	-22.6	40.11	54	-13.89	-	-	312	226	H
2	2.537	41.91	PK	32.5	-22.6	51.81	-	-	74	-22.19	312	226	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
High Channel Bandedge Method 1T - Horizontal.TST 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

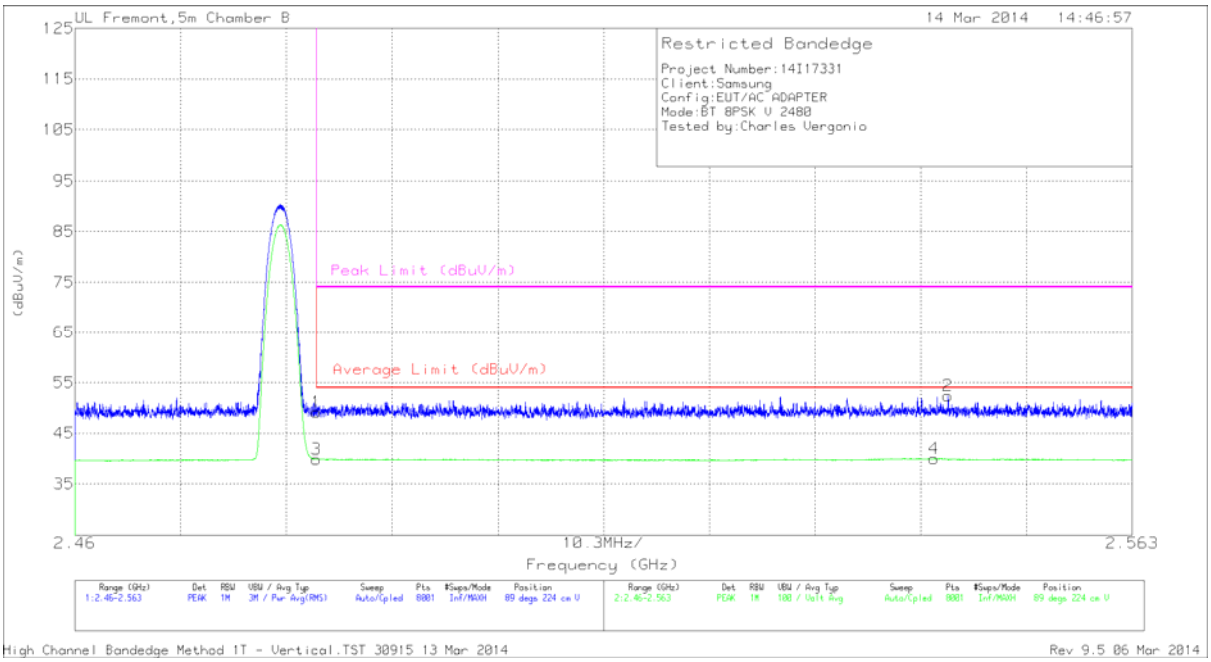

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	39.36	PK	32.4	-22.6	49.16	-	-	74	-24.84	89	224	V
3	2.484	30.07	VB1T	32.4	-22.6	39.87	54	-14.13	-	-	89	224	V
4	2.544	30.1	VB1T	32.5	-22.6	40	54	-14	-	-	89	224	V
2	2.545	42.54	PK	32.5	-22.6	52.44	-	-	74	-21.56	89	224	V

PK - Peak detector
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet
High Channel Bandedge Method 1T - Vertical.TST 30915 13 Mar 2014

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
HORIZONTAL

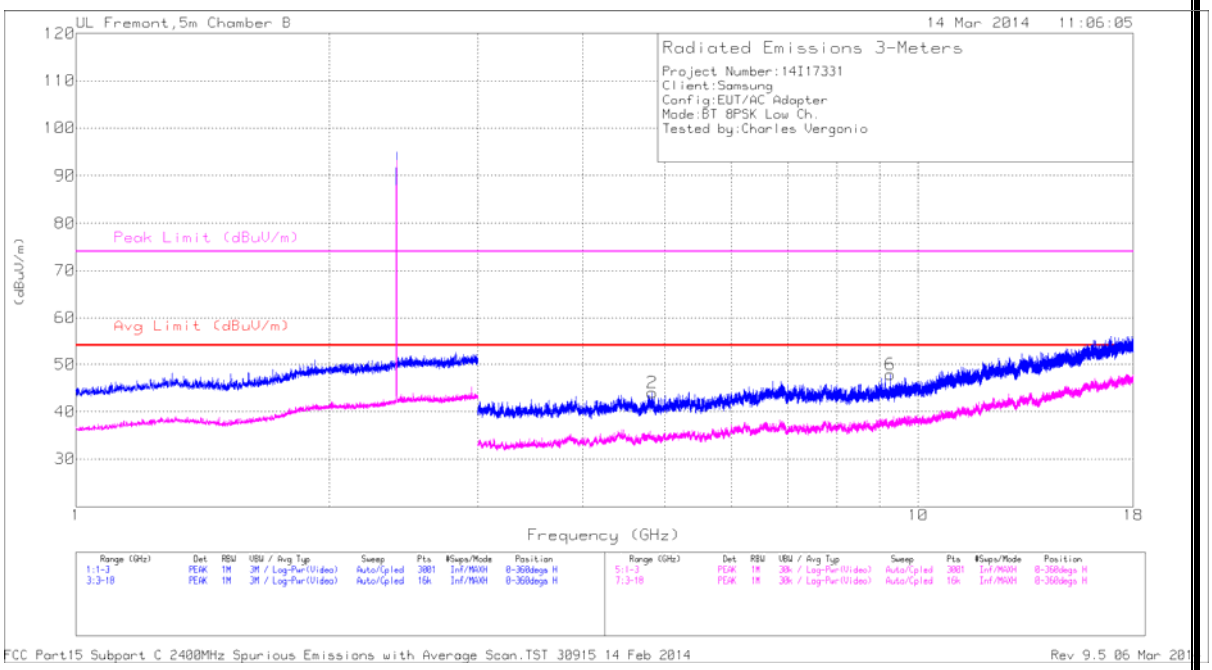

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL

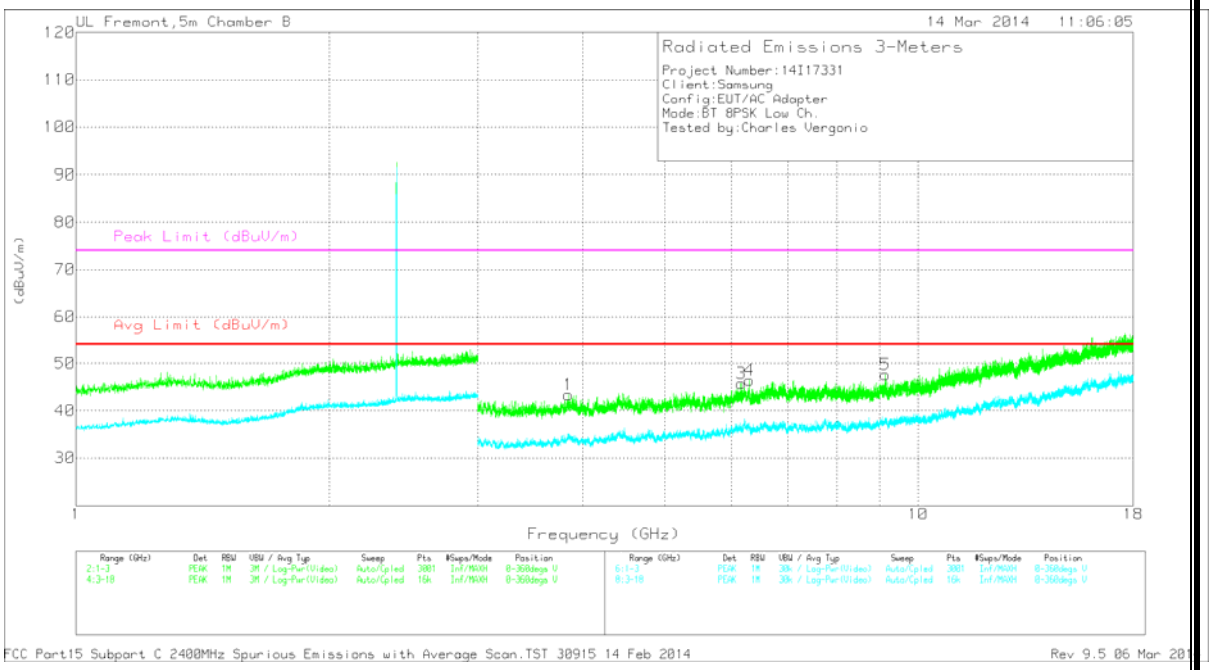

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.834	39.45	PK	34.2	-29.6	44.05	54	-9.95	74	-29.95	0-360	201	H
1	* 3.842	39.88	PK	33.7	-30.2	43.38	54	-10.62	74	-30.62	0-360	99	V
5	* 9.134	36.18	PK	36.3	-24.9	47.58	54	-6.42	74	-26.42	0-360	202	V
3	6.16	39.16	PK	35.4	-28.8	45.76	54	-8.24	74	-28.24	0-360	99	V
4	6.304	39.26	PK	35.5	-28.3	46.46	54	-7.54	74	-27.54	0-360	202	V
6	9.267	36.07	PK	36.4	-24.6	47.87	54	-6.13	74	-26.13	0-360	201	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL
HORIZONTAL

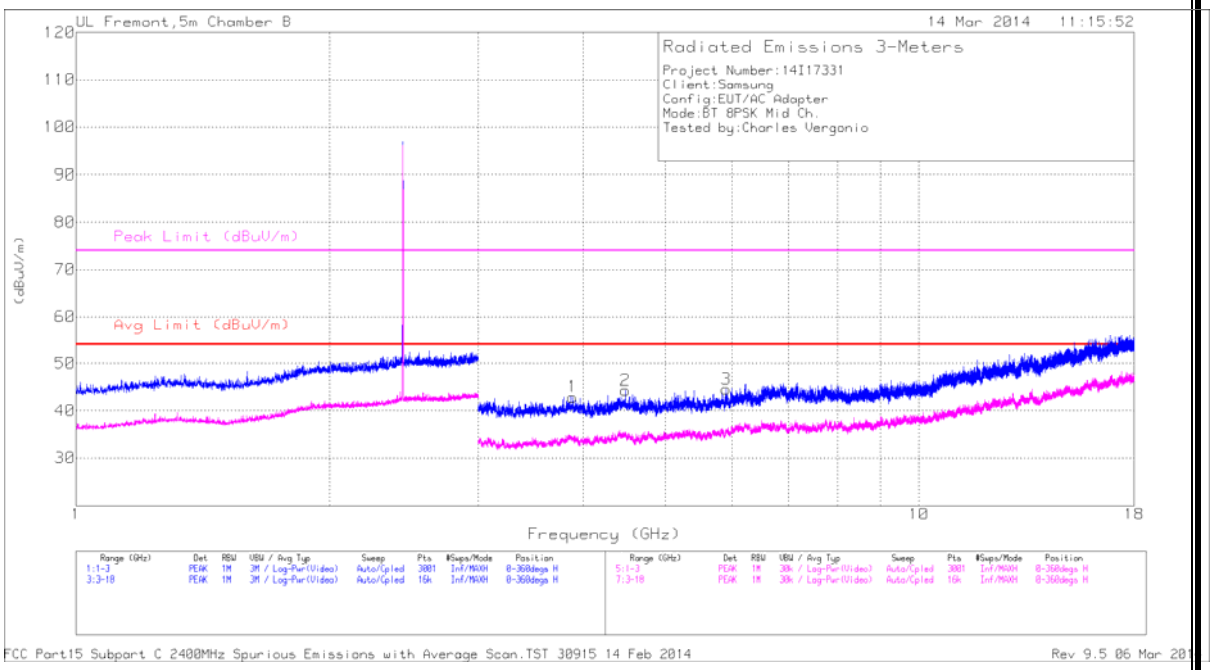

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL

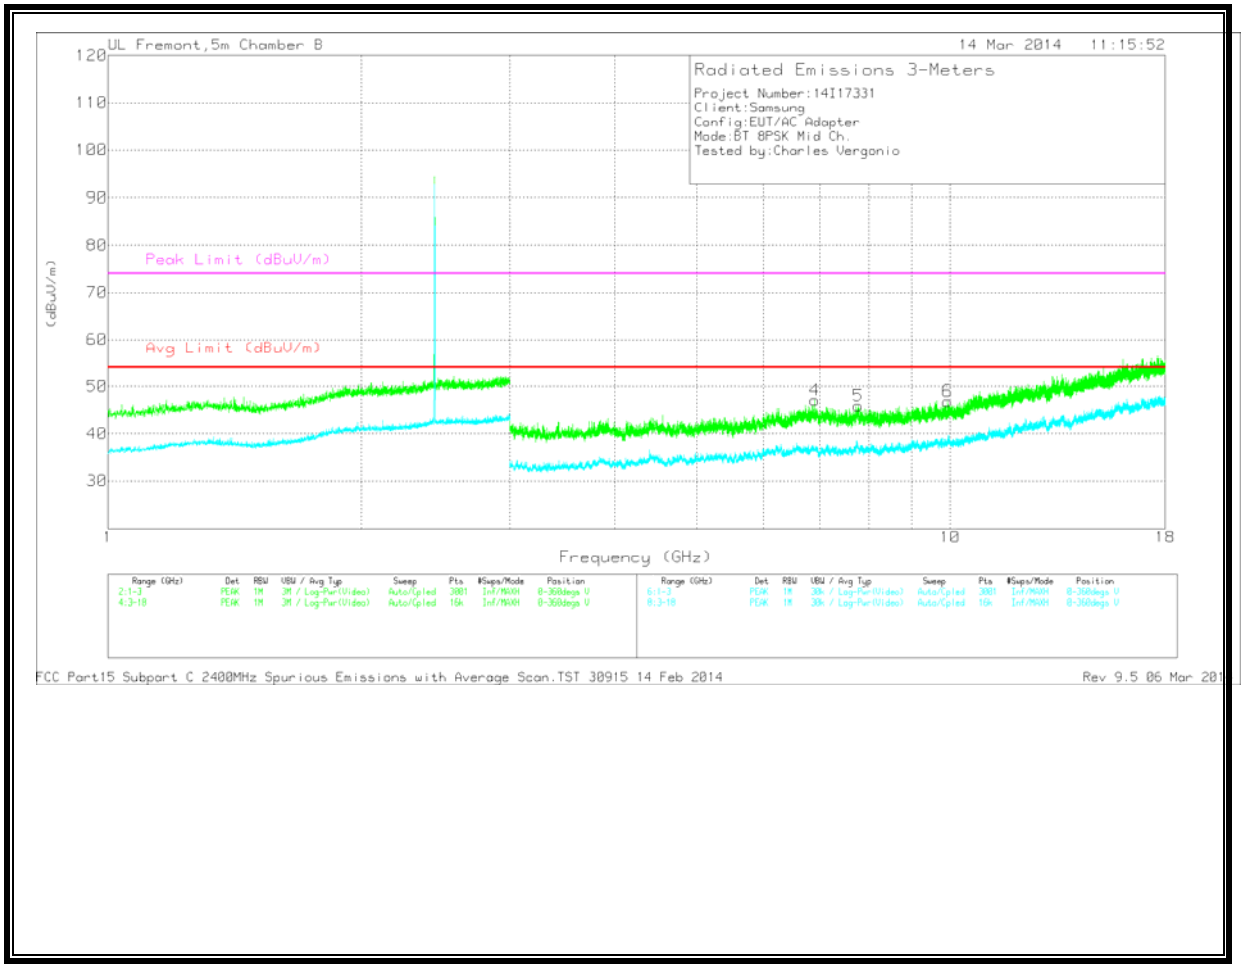

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.881	39.3	PK	33.8	-30.2	42.9	54	-11.1	74	-31.1	0-360	202	H
2	4.484	39.52	PK	34	-29.2	44.32	54	-9.68	74	-29.68	0-360	99	H
3	5.91	37.92	PK	35	-28.4	44.52	54	-9.48	74	-29.48	0-360	202	H
4	6.908	38.55	PK	35.6	-27.1	47.05	54	-6.95	74	-26.95	0-360	99	V
5	7.774	36.18	PK	35.7	-26	45.88	54	-8.12	74	-28.12	0-360	99	V
6	9.925	33.78	PK	37	-23.9	46.88	54	-7.12	74	-27.12	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL
HORIZONTAL

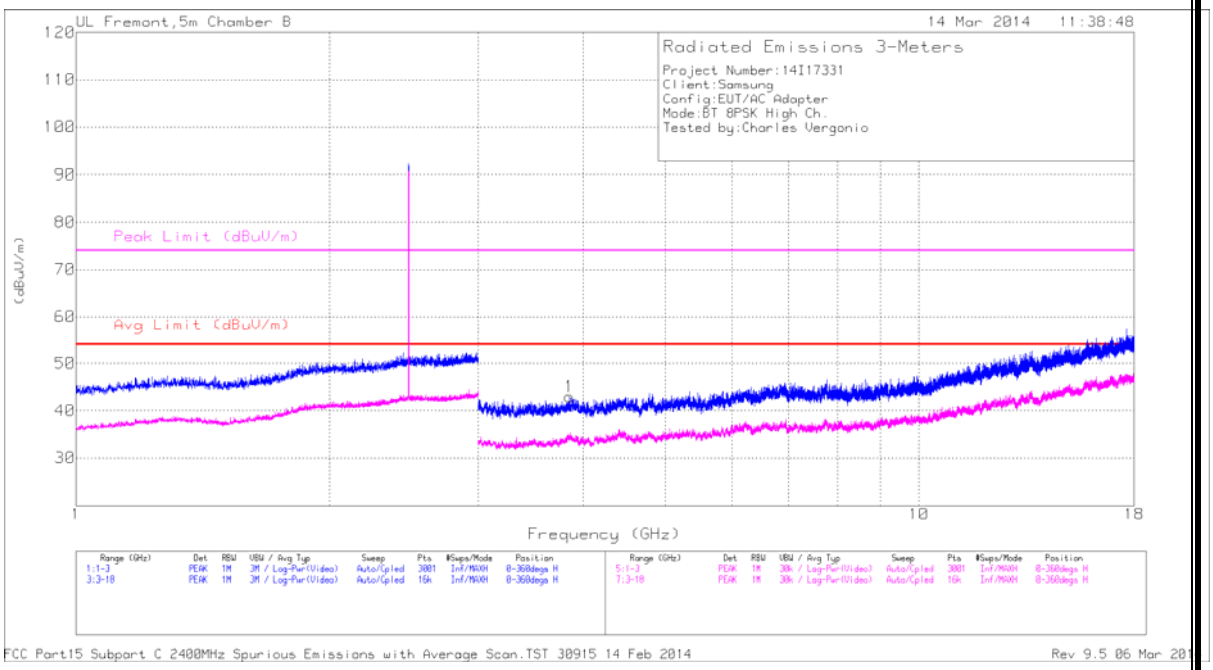

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL

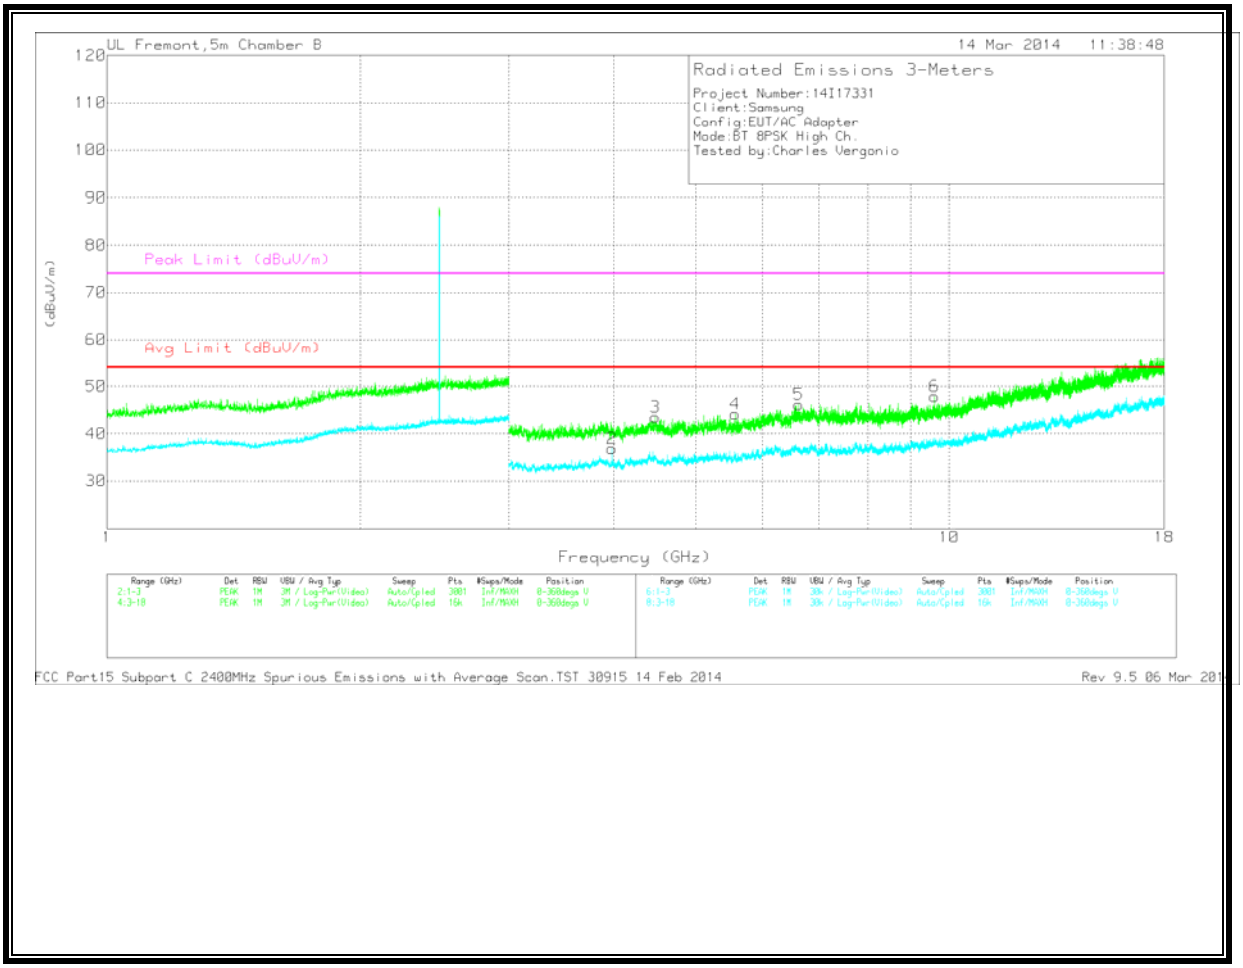

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.847	39.42	PK	33.7	-30.2	42.92	54	-11.08	74	-31.08	0-360	99	H
2	* 3.975	34.03	PK	33.6	-30.8	36.83	54	-17.17	74	-37.17	0-360	202	V
3	4.481	38.7	PK	34	-29.2	43.5	54	-10.5	74	-30.5	0-360	99	V
4	5.57	39.16	PK	34.5	-29.5	44.16	54	-9.84	74	-29.84	0-360	99	V
5	6.622	38.69	PK	35.7	-28.2	46.19	54	-7.81	74	-27.81	0-360	202	V
6	9.611	35.13	PK	36.8	-24.1	47.83	54	-6.17	74	-26.17	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

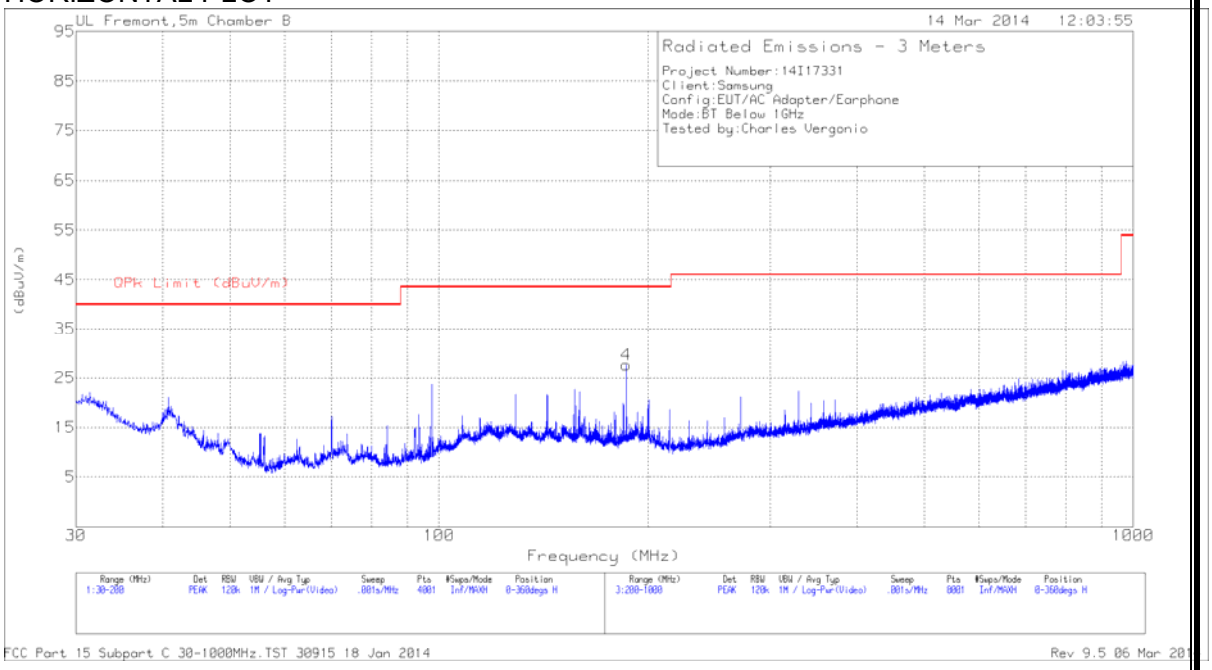

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

VERTICAL PLOT

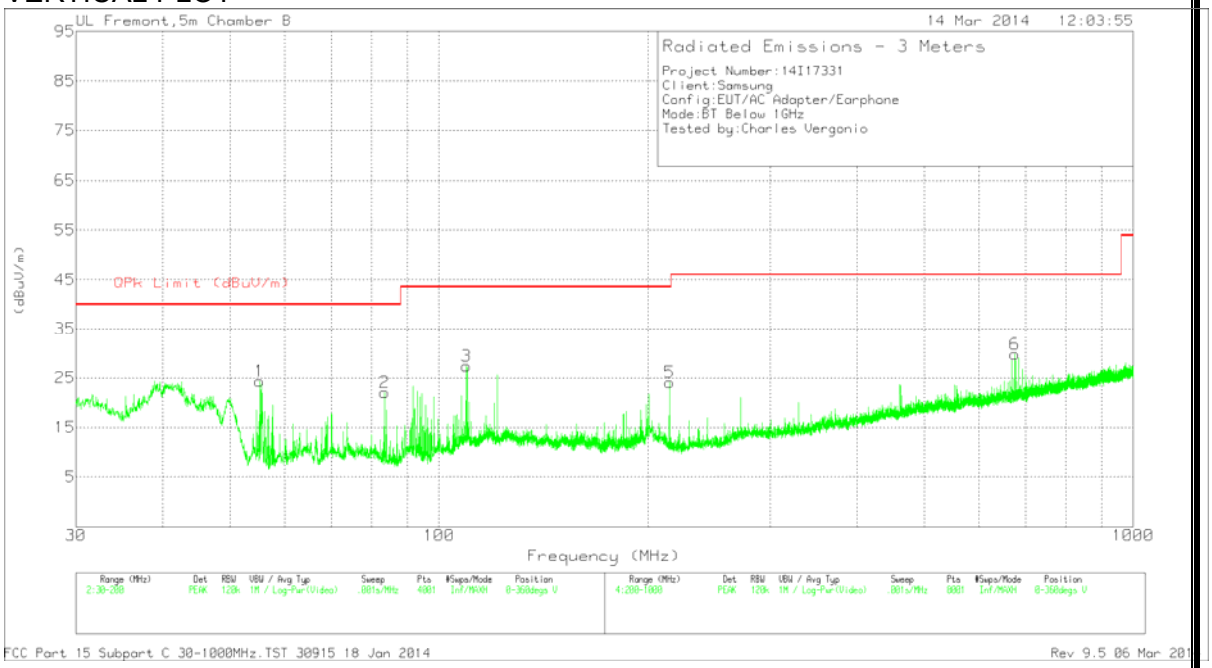

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 109.475	42.88	PK	12.5	-28	27.38	-	-	0-360	101	V
1	55.1175	45.92	PK	7	-28.6	24.32	-	-	0-360	101	V
2	83.465	42.86	PK	7.5	-28.3	22.06	-	-	0-360	101	V
4	186.145	43.39	PK	11.3	-27.1	27.59	-	-	0-360	101	H
5	214.8	40.49	PK	10.4	-26.8	24.09	-	-	0-360	200	V
6	676	35.61	PK	19.2	-25	29.81	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.3975	52.04	PK	.4	0	52.44	57.9	-5.46	-	-
2	.3975	38.62	Av	.4	0	39.02	-	-	47.9	-8.88
5	.609	45.31	PK	.3	0	45.61	56	-10.39	-	-
6	.609	32.55	Av	.3	0	32.85	-	-	46	-13.15
3	2.4135	51.4	PK	.2	.1	51.7	56	-4.3	-	-
4	2.4135	35.63	Av	.2	.1	35.93	-	-	46	-10.07
7	3.1875	50.46	PK	.2	.1	50.76	56	-5.24	-	-
8	3.1875	33.47	Av	.2	.1	33.77	-	-	46	-12.23

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
9	.33	44.45	PK	.5	0	44.95	59.5	-14.55	-	-
10	.33	27.48	Av	.5	0	27.98	-	-	49.5	-21.52
11	.402	49.98	PK	.4	0	50.38	57.8	-7.42	-	-
12	.402	33.44	Av	.4	0	33.84	-	-	47.8	-13.96
13	.609	43.75	PK	.3	0	44.05	56	-11.95	-	-
14	.609	31.57	Av	.3	0	31.87	-	-	46	-14.13
15	2.445	48.59	PK	.2	.1	48.89	56	-7.11	-	-
16	2.445	32.46	Av	.2	.1	32.76	-	-	46	-13.24
17	3.255	48.63	PK	.2	.1	48.93	56	-7.07	-	-
18	3.255	32.39	Av	.2	.1	32.69	-	-	46	-13.31

PK - Peak detector
Av - average detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LINE 1 RESULTS

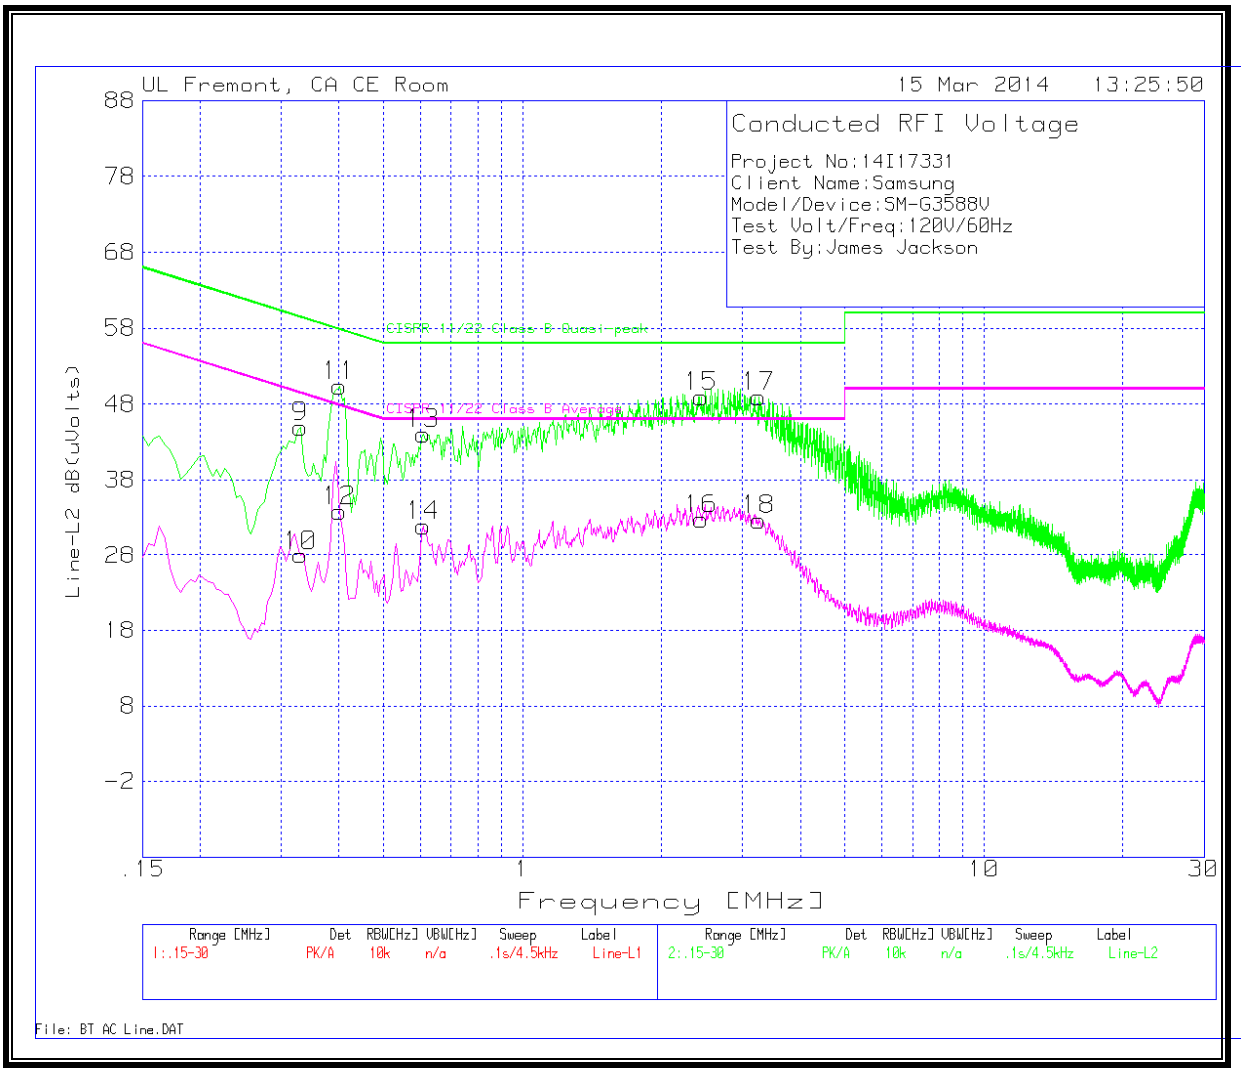

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LINE 2 RESULTS

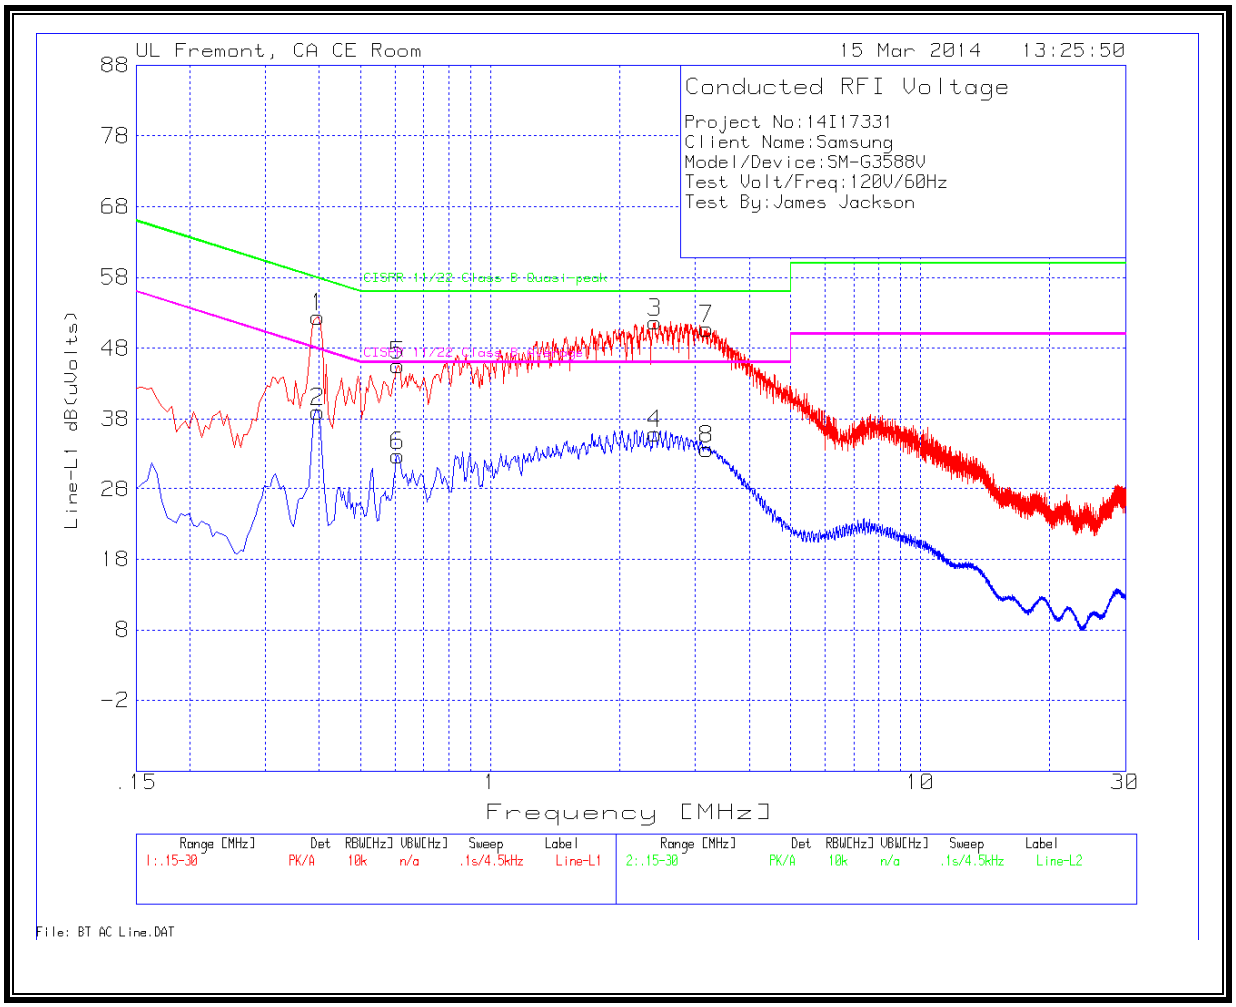

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.