



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, ANT+ and NFC

MODEL NUMBER: SM-G3589W

FCC ID: A3LSMG3589W

REPORT NUMBER: 14U17686-2

ISSUE DATE: MAY 15, 2014

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/15/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH	13
8.1.1. BASIC DATA RATE GFSK MODULATION	13
8.1.1. ENHANCED DATA RATE 8PSK MODULATION	13
8.2. HOPPING FREQUENCY SEPARATION	22
8.3. NUMBER OF HOPPING CHANNELS.....	24
8.4. AVERAGE TIME OF OCCUPANCY.....	27
8.5. OUTPUT POWER.....	31
8.5.1. BASIC DATA RATE GFSK MODULATION	31
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	31
8.6. AVERAGE POWER.....	36
8.6.1. BASIC DATA RATE GFSK MODULATION	36
8.6.2. ENHANCED DATA RATE 8PSK MODULATION	36
8.7. CONDUCTED SPURIOUS EMISSIONS.....	37
8.7.1. BASIC DATA RATE GFSK MODULATION	38
8.7.1. ENHANCED DATA RATE 8PSK MODULATION	42
9. RADIATED TEST RESULTS.....	47
9.1. LIMITS AND PROCEDURE	47
9.2. TRANSMITTER ABOVE 1 GHz	48
9.2.1. BASIC DATA RATE GFSK MODULATION	48

9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	61
9.3.	WORST-CASE BELOW 1 GHz.....	74
10.	AC POWER LINE CONDUCTED EMISSIONS	77
11.	SETUP PHOTOS	81

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n,
ANT+ and NFC

MODEL: SM-G3589W

SERIAL NUMBER: FL-161-A, FL-161-B, FL-161-C (Radiated), FL-161-D (Conducted)

DATE TESTED: MAY 9 - 15, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☒ Chamber B	☐ Chamber E
☐ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/ LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, ANT+ and NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	12.15	16.41
2402 - 2480	Enhanced 8PSK	12.44	17.54

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -0.19 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G3589W	N/A	N/A
Earphone	Samsung	SM-G3589W	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

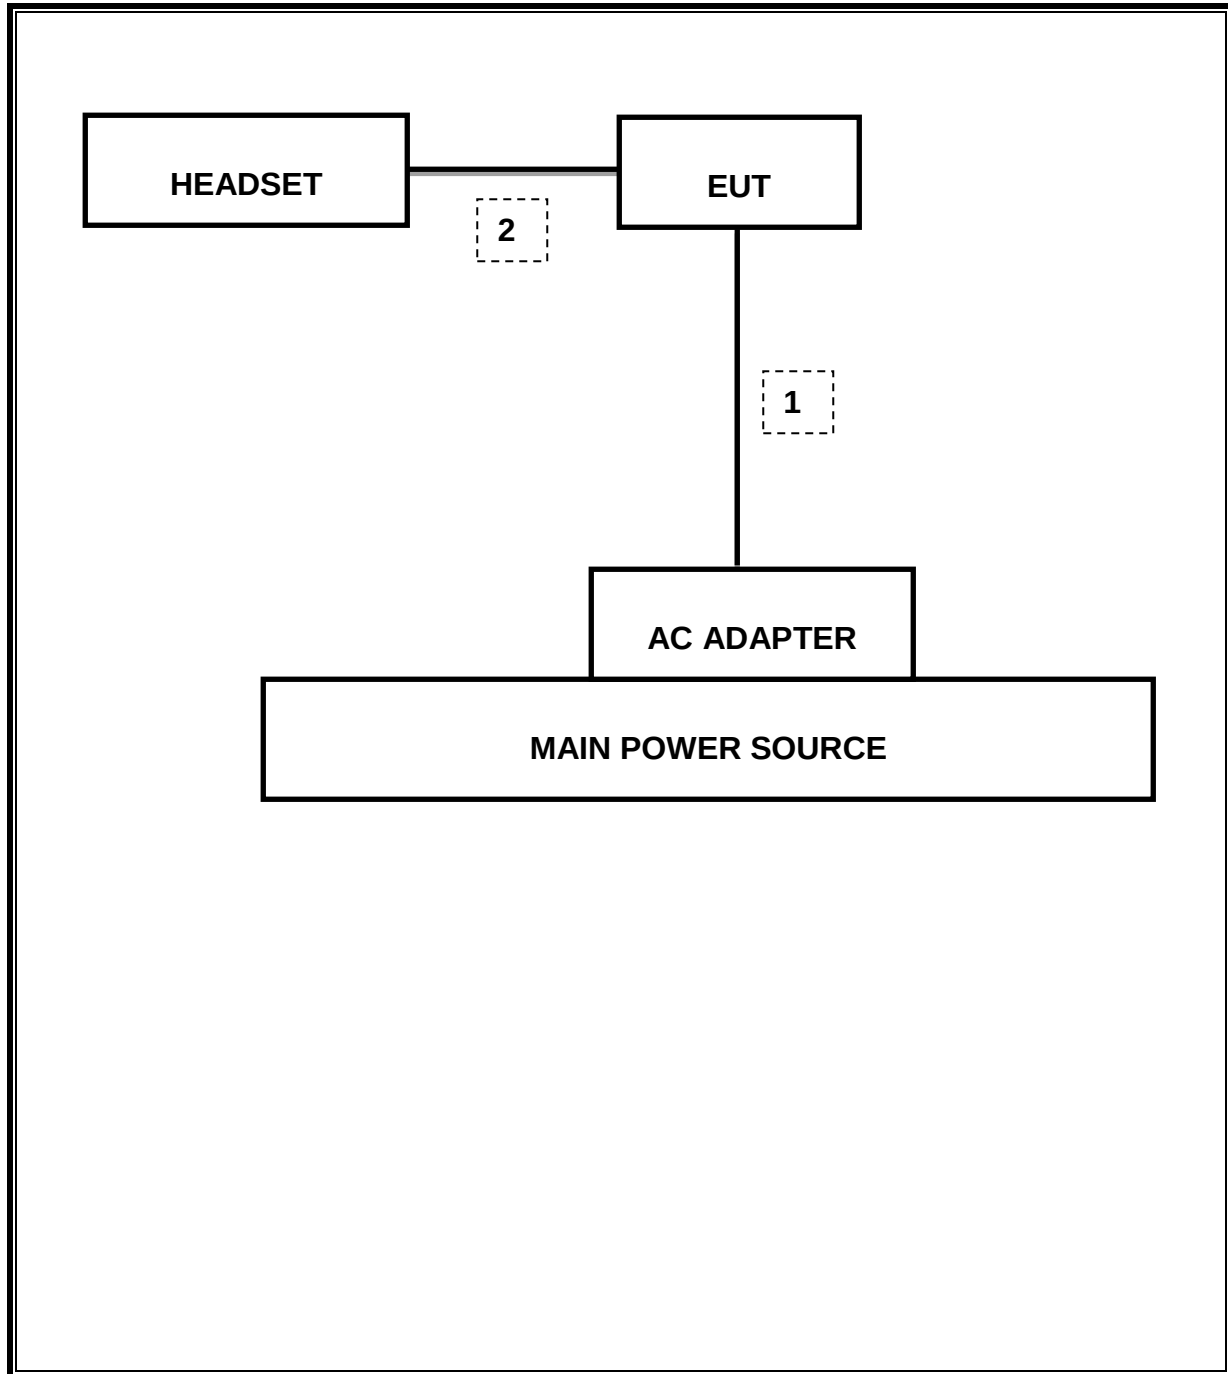

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.195 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-20.63 dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	12.44 dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79 ch
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.314 s
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	47.46 dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	43.38 dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq$ 1% of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.



RESULTS


8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9249	0.9013
Middle	2441	0.9251	0.934
High	2480	0.9248	0.9034
Worst		0.9251	0.934



8.1.1. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.262	1.195
Middle	2441	1.193	1.157
High	2480	1.262	1.165
Worst		1.262	1.195

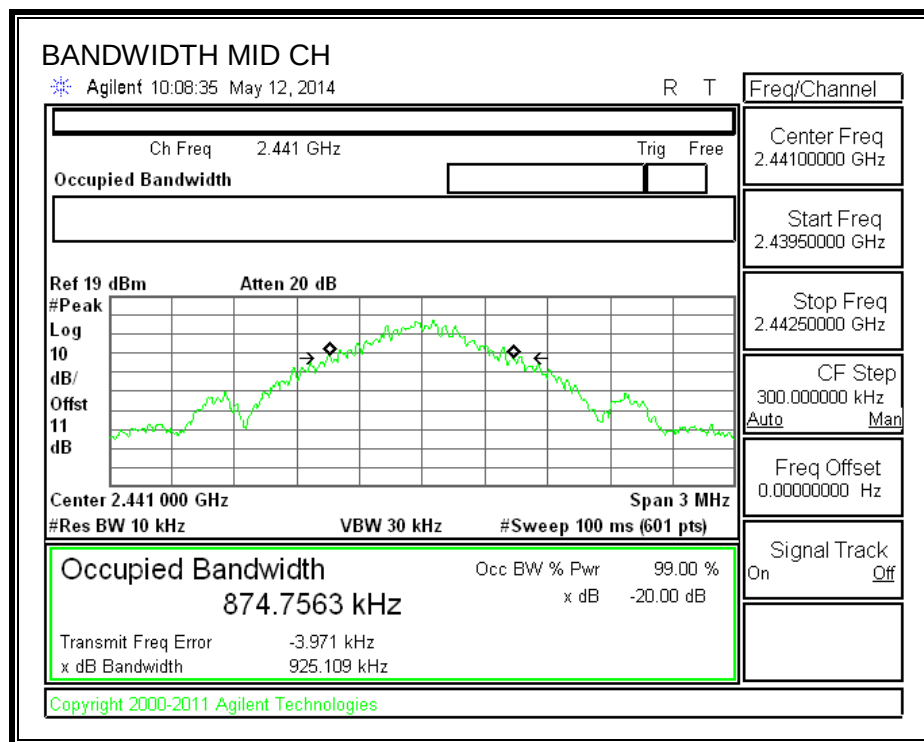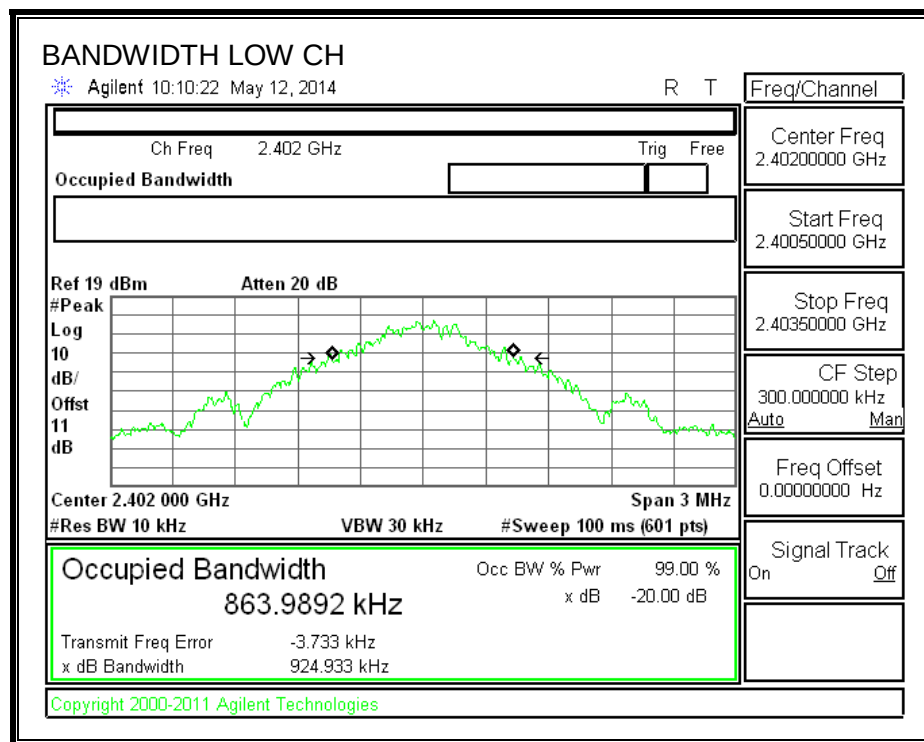


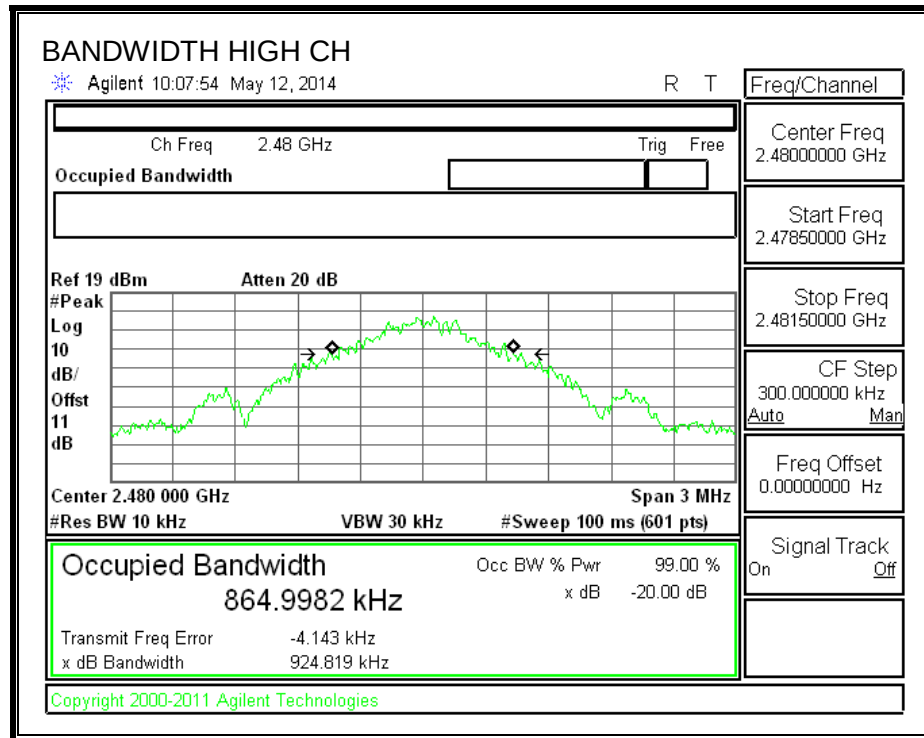



GFSK 99% BANDWIDTH

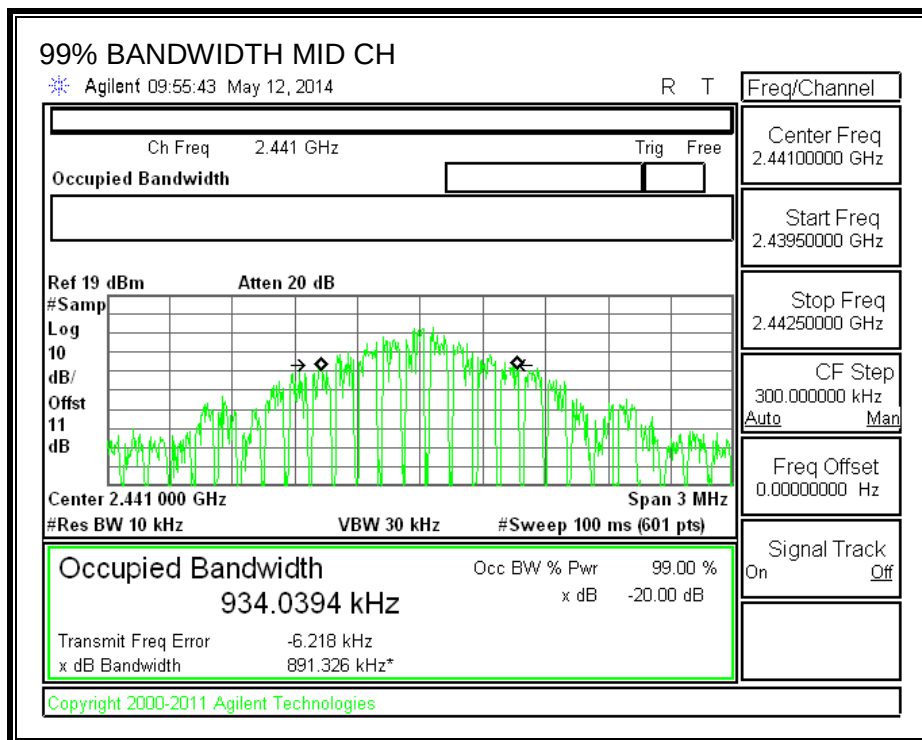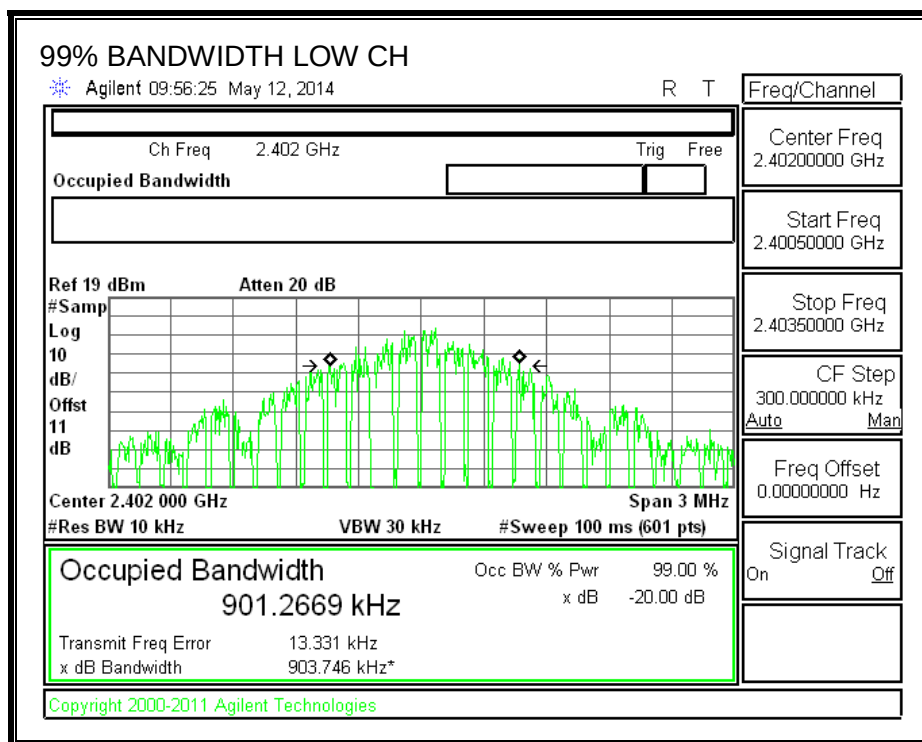


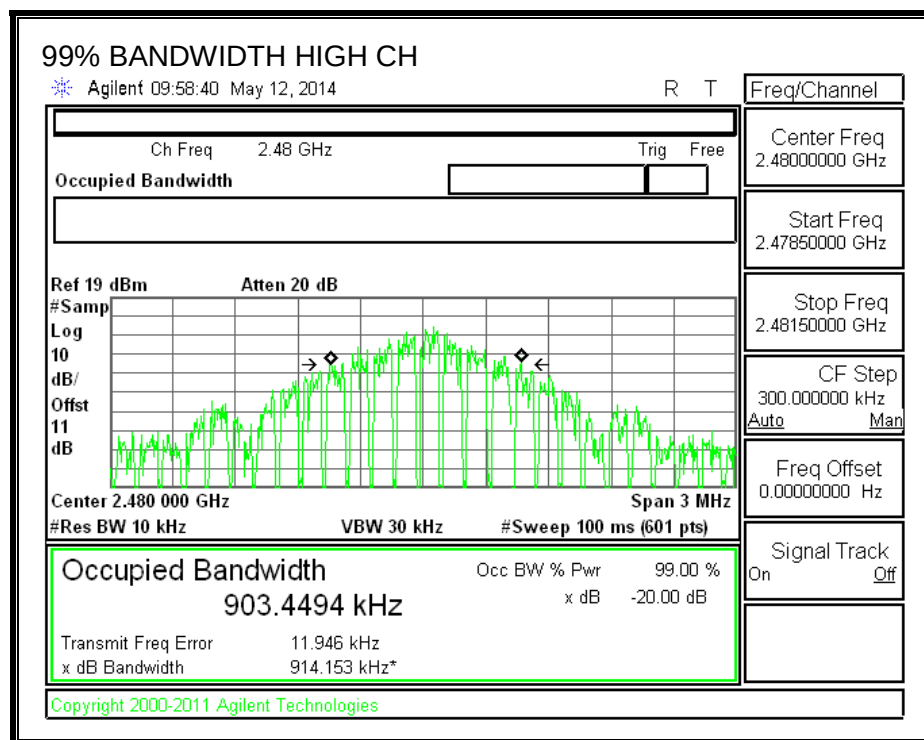



8PSK 20 dB BANDWIDTH

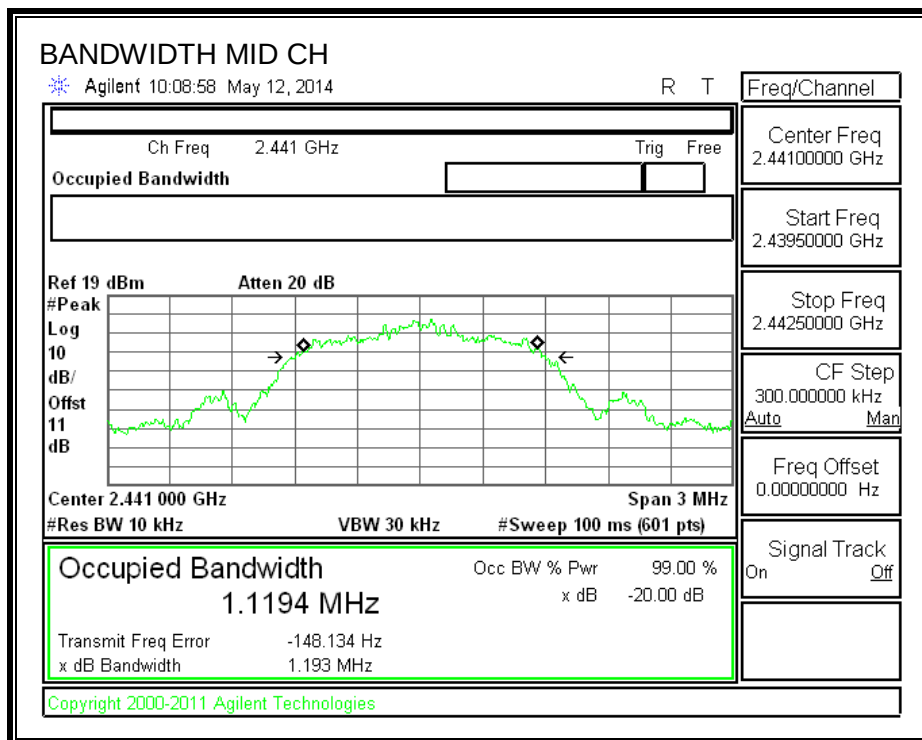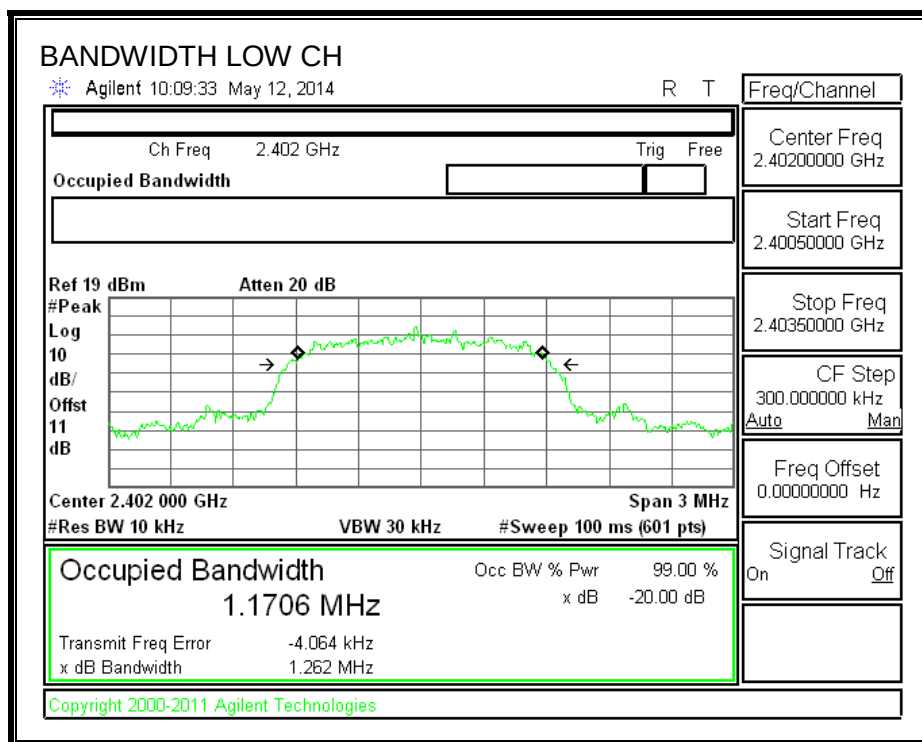

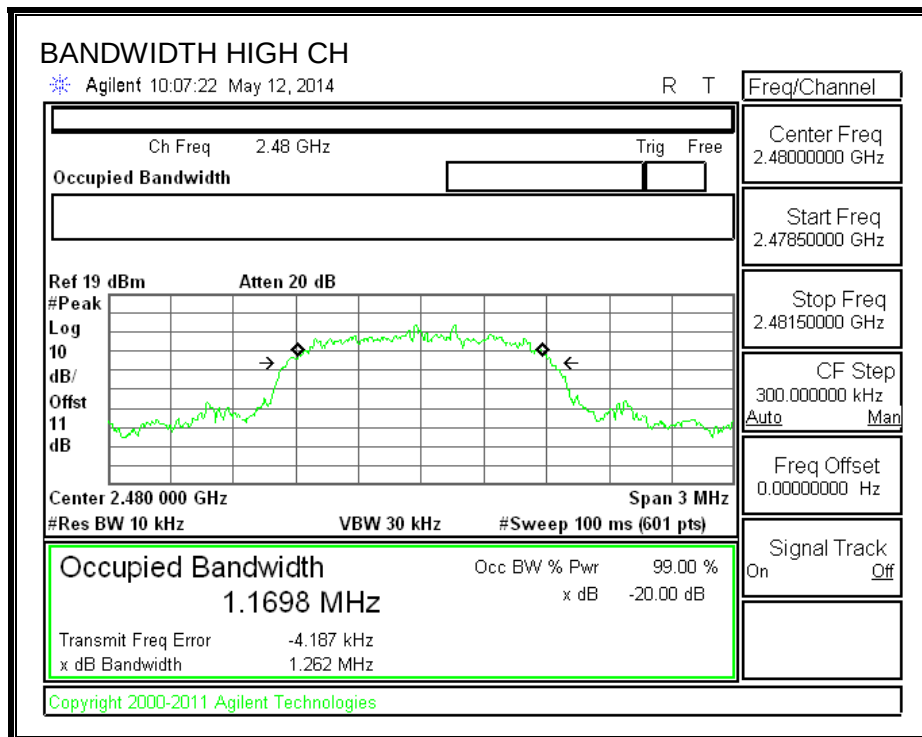

8PSK 99% BANDWIDTH

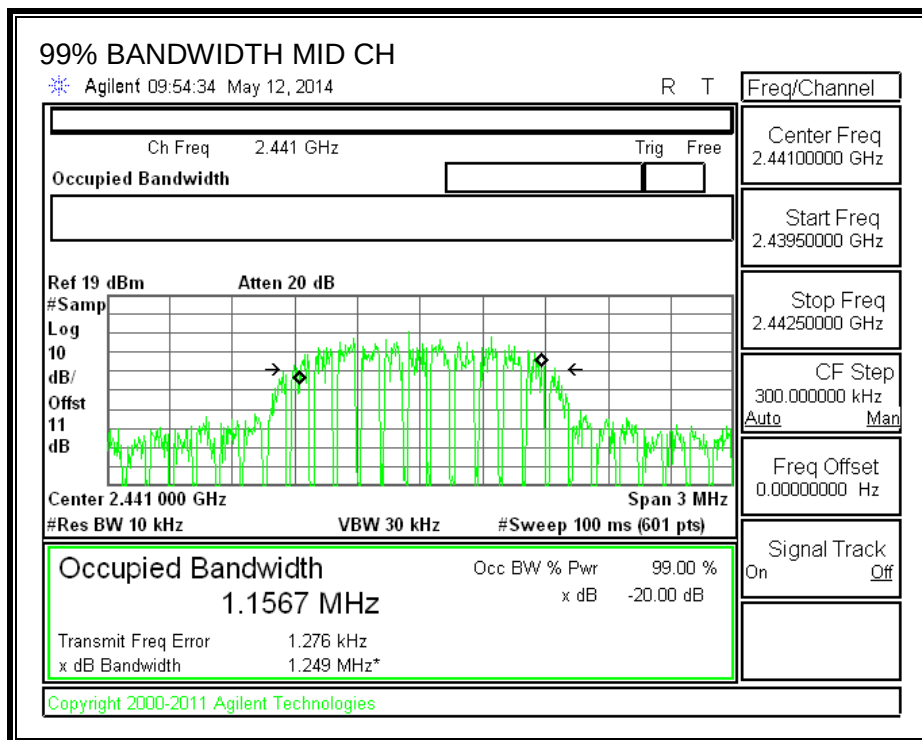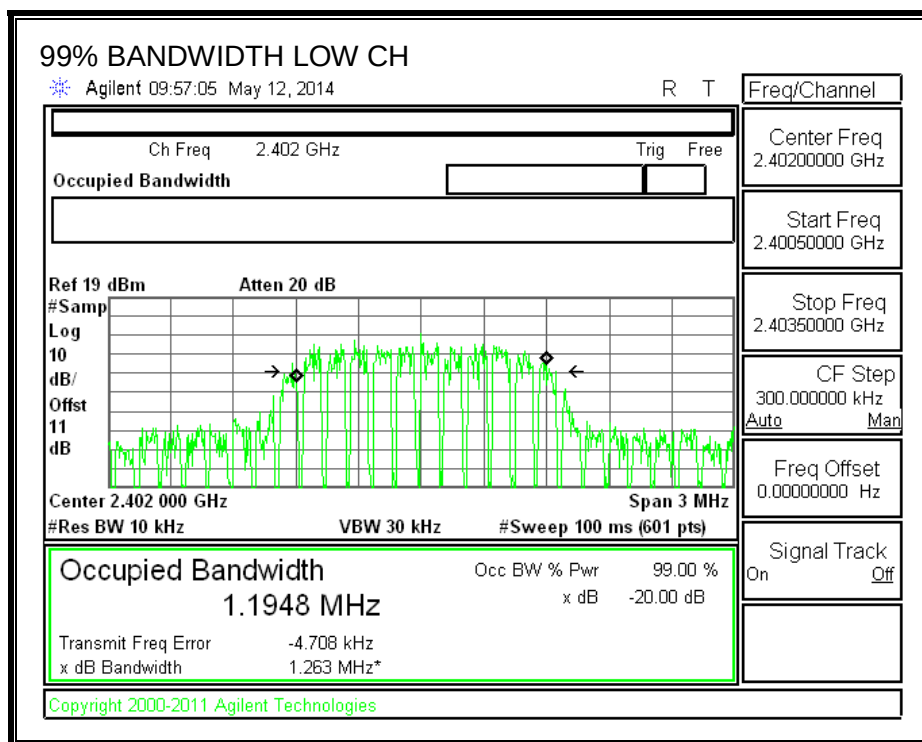

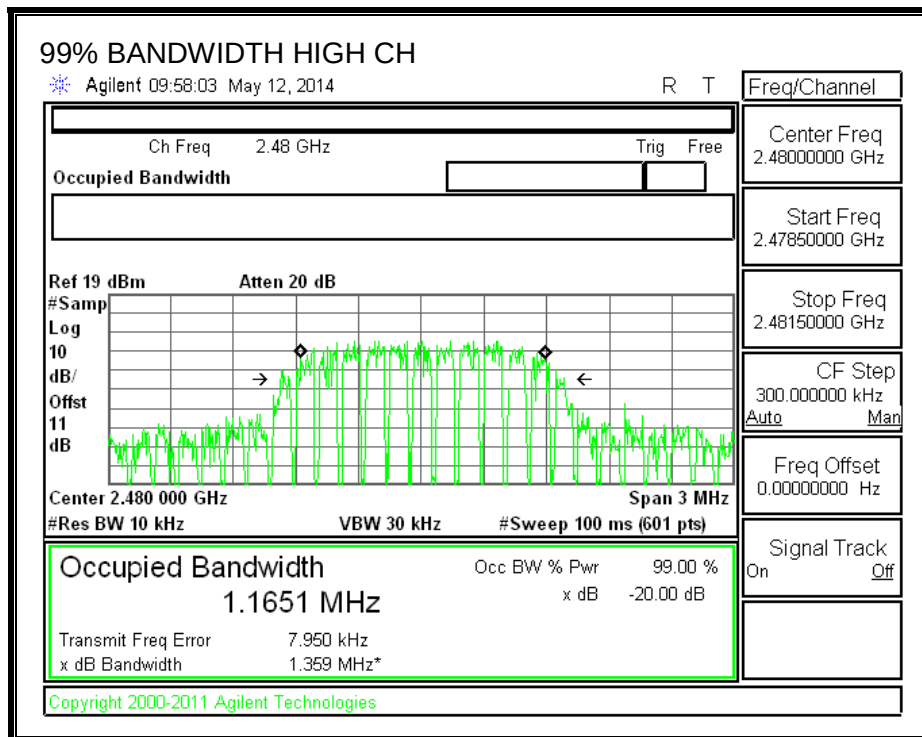

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

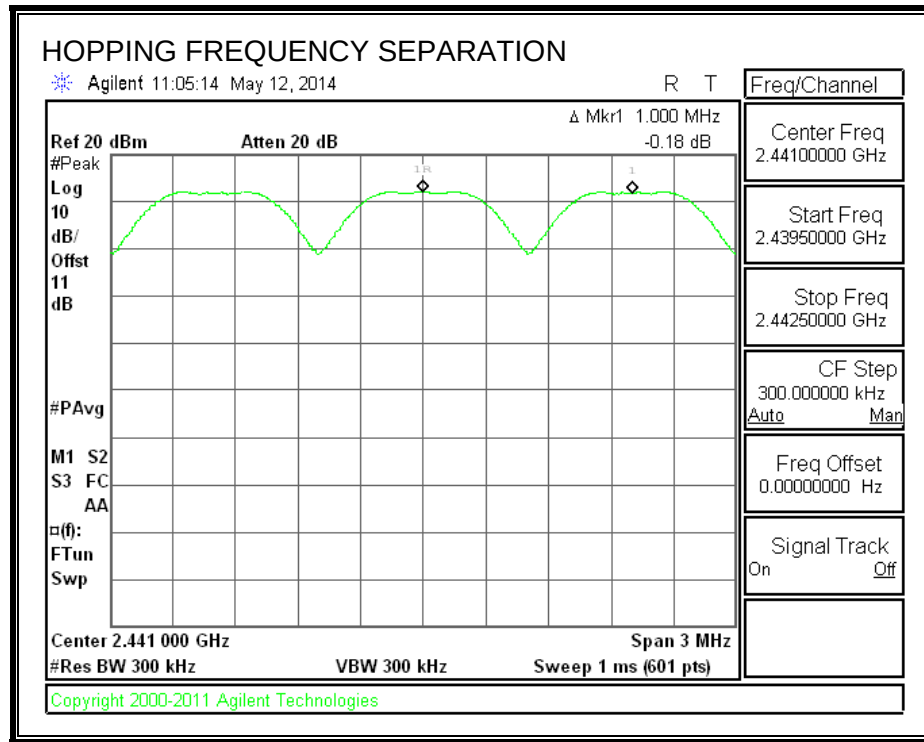

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

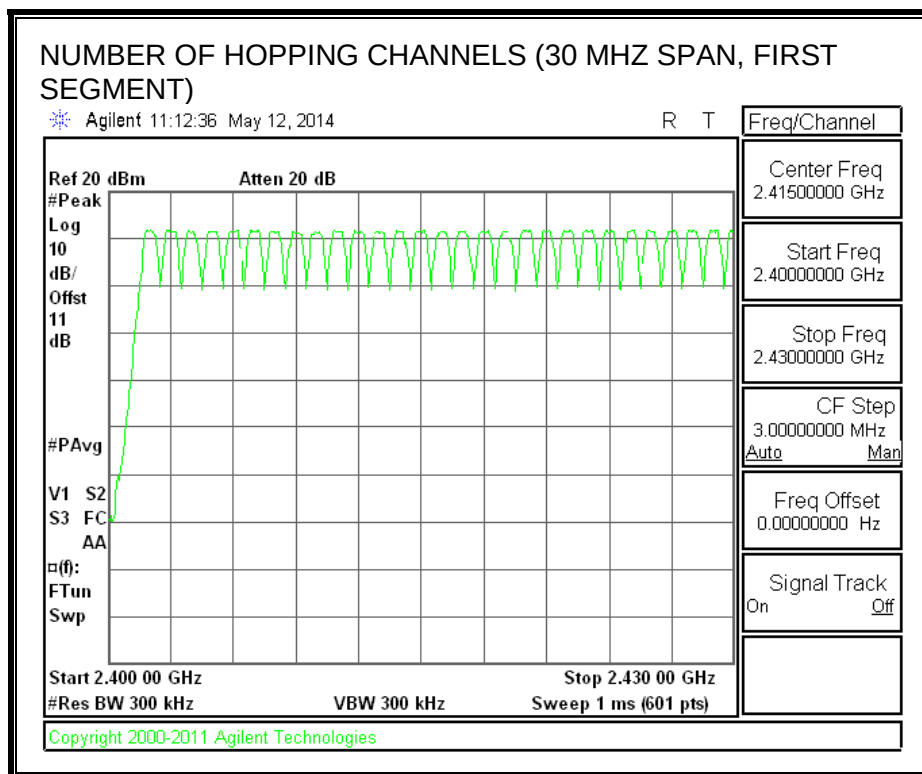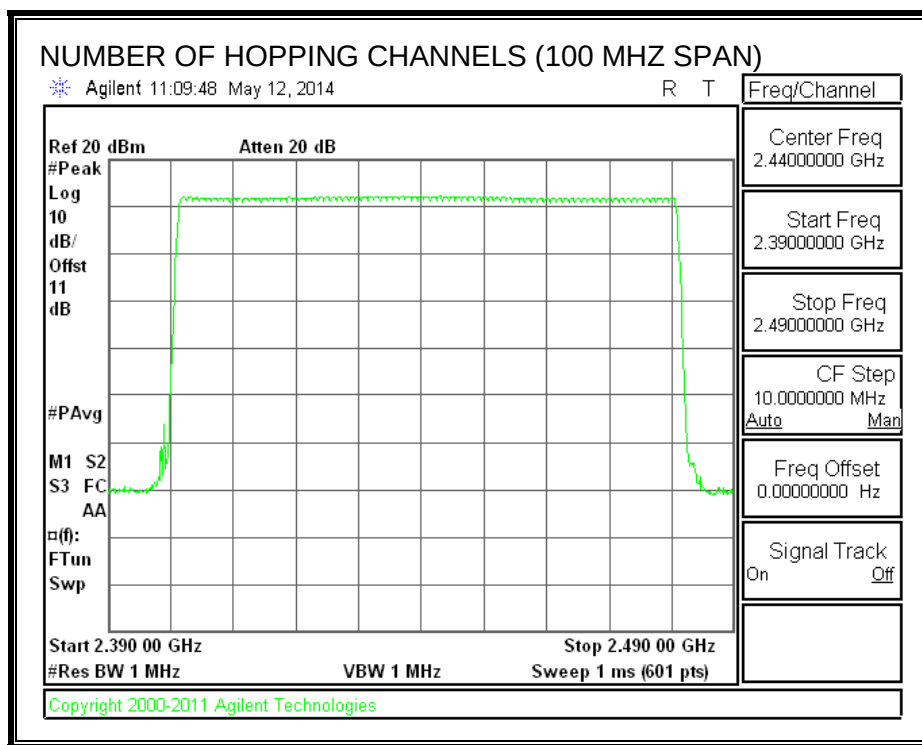

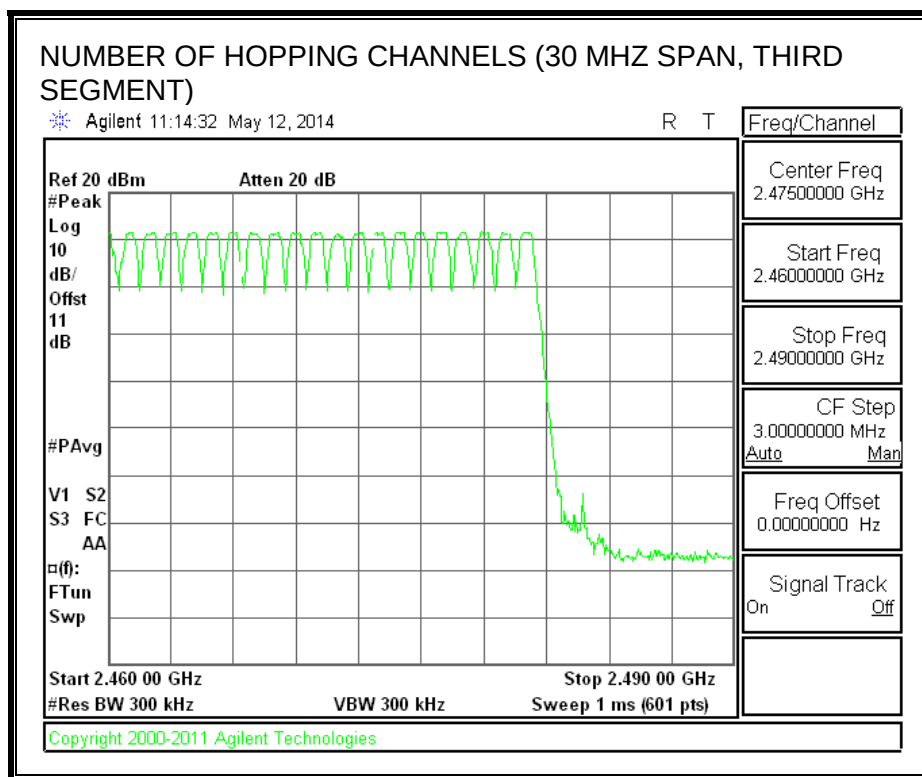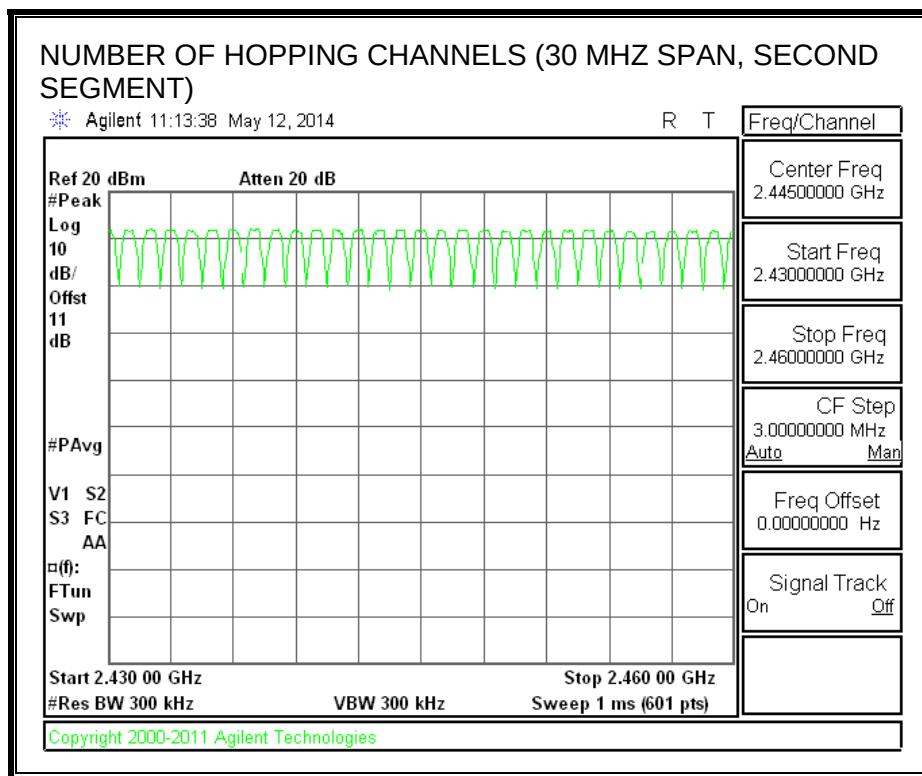

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.35	30	0.105	0.4	-0.295
DH3	1.617	12	0.194	0.4	-0.206
DH5	2.858	11	0.314	0.4	-0.086
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.35	8	0.028	0.4	-0.372
DH3	1.617	3	0.049	0.4	-0.351
DH5	2.858	3	0.086	0.4	-0.314


PULSE WIDTH - DH1

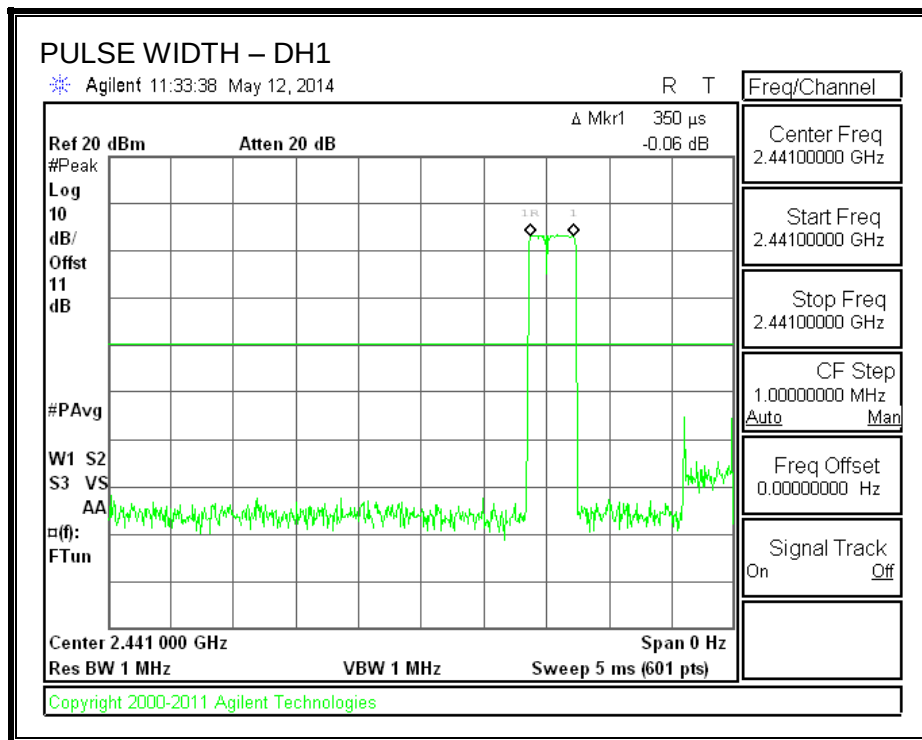


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

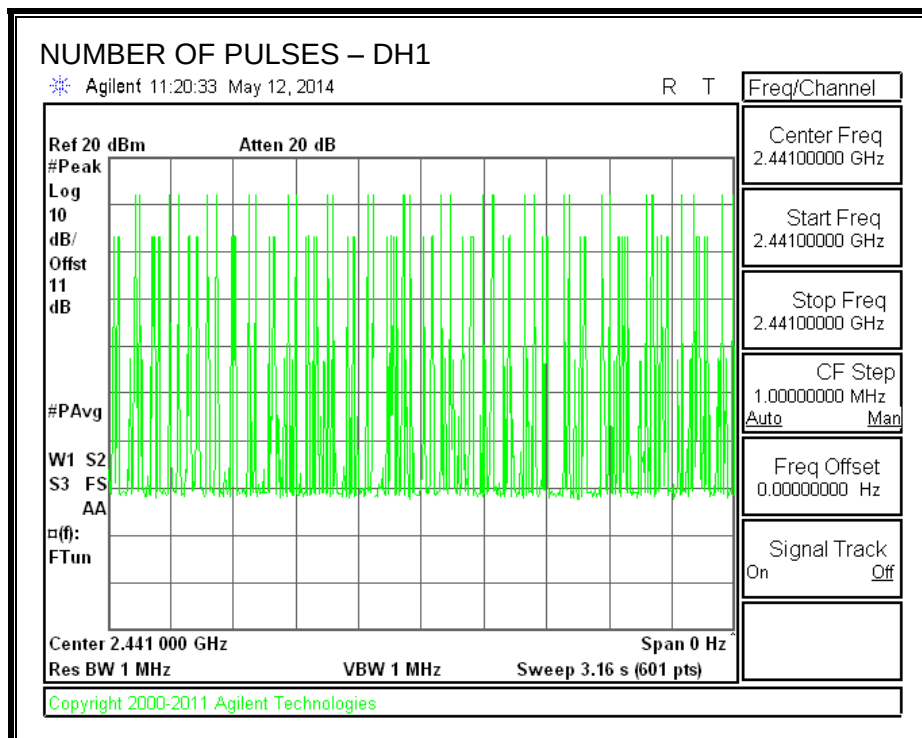


PULSE WIDTH – DH3

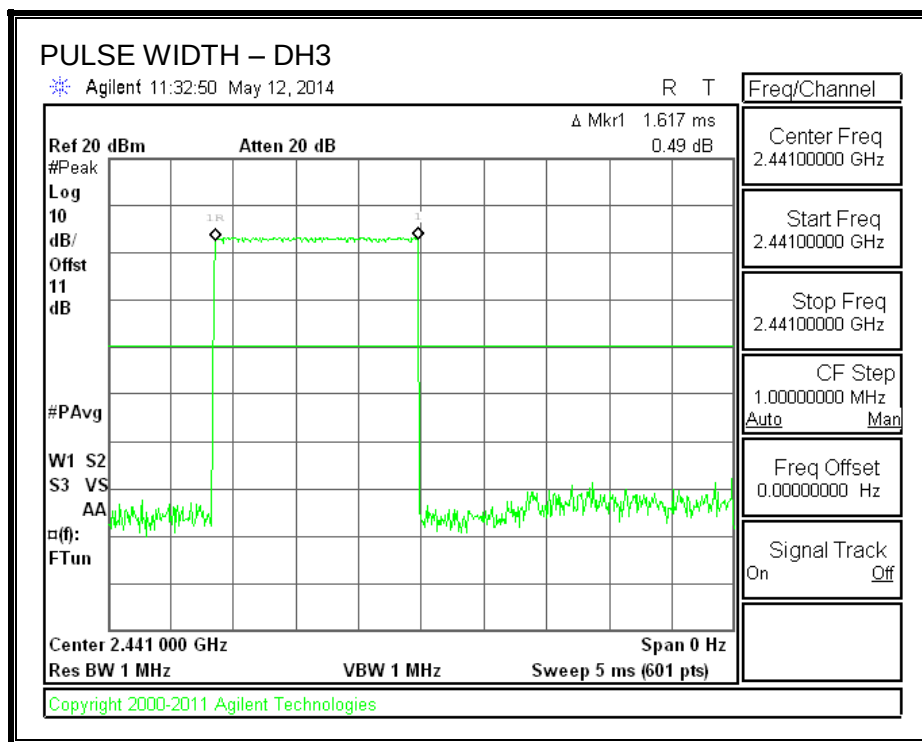


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

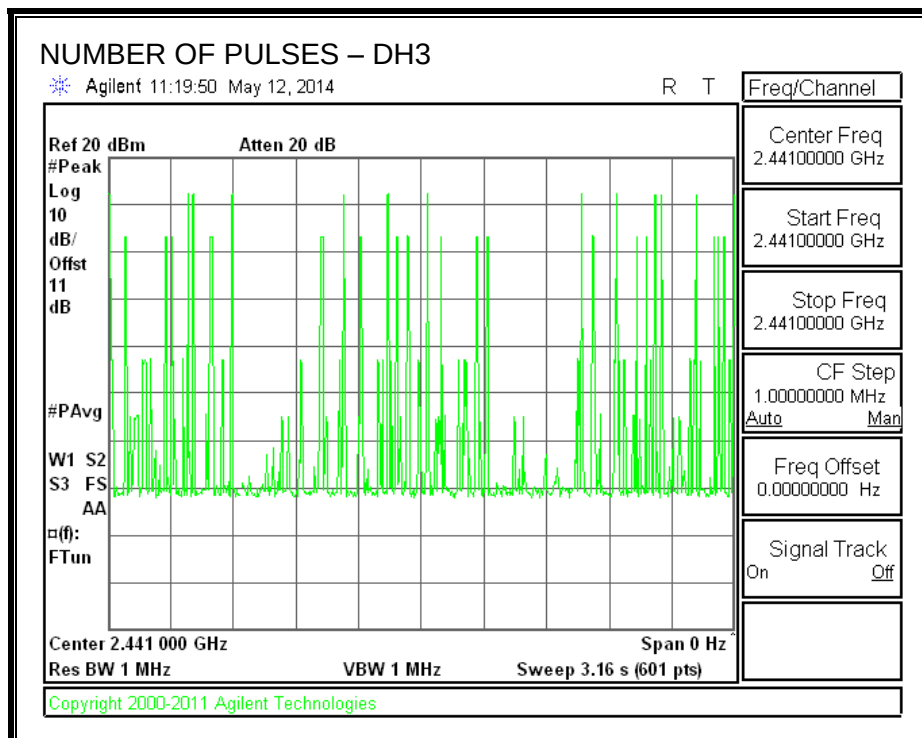

PULSE WIDTH – DH5

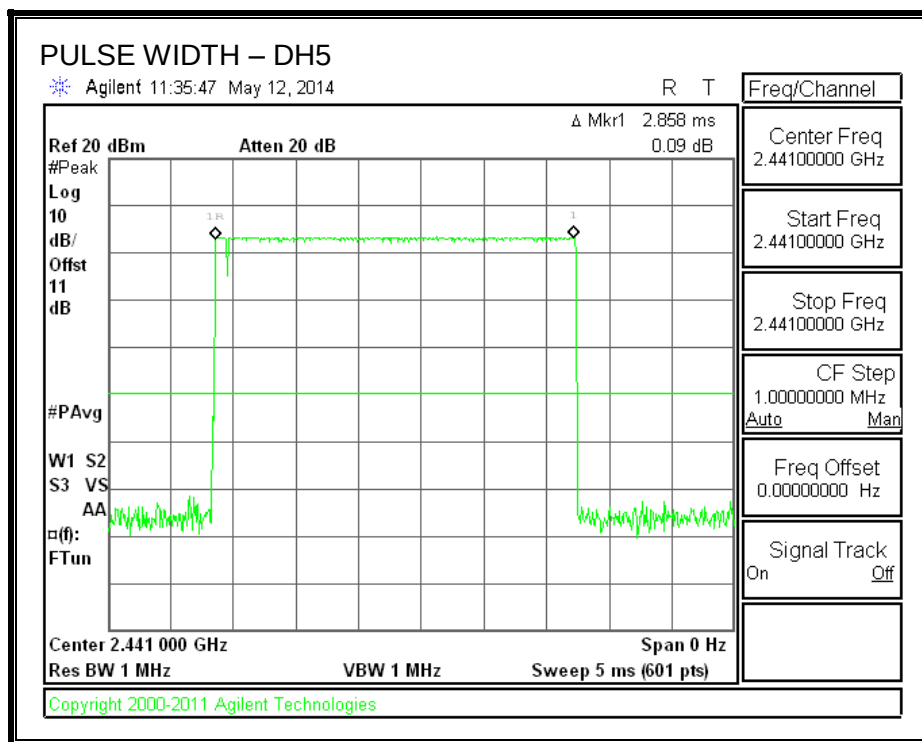

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

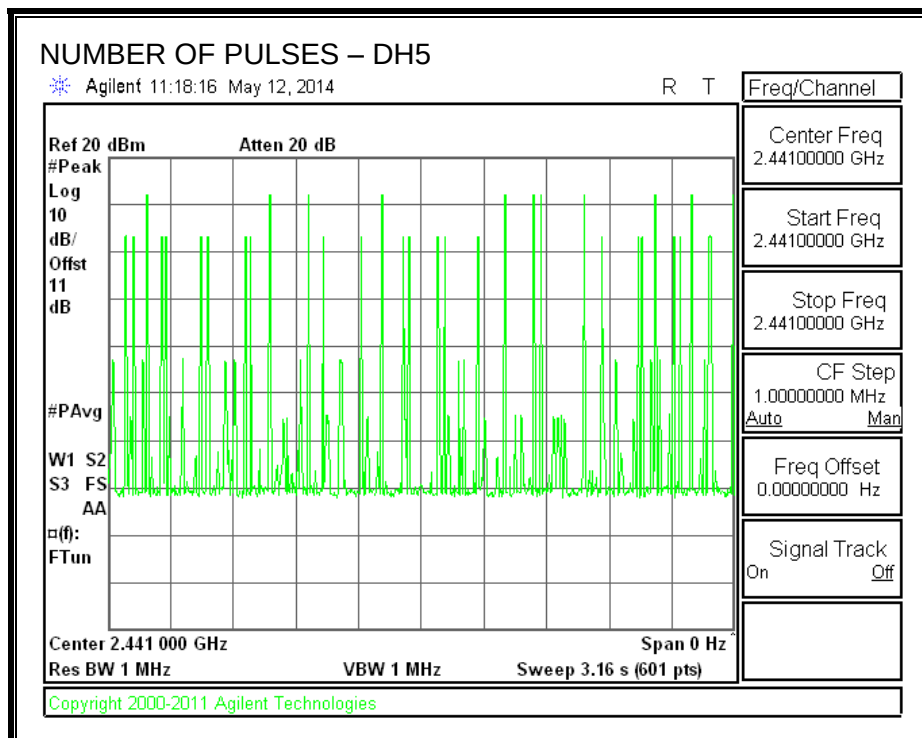

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.



RESULTS


8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.97	21	-9.03
Middle	2441	12.15	21	-8.85
High	2480	11.81	21	-9.19
Worst		12.15		-8.85



8.5.2. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.26	21	-8.74
Middle	2441	12.44	21	-8.56
High	2480	12.11	21	-8.89
Worst		12.44		-8.56

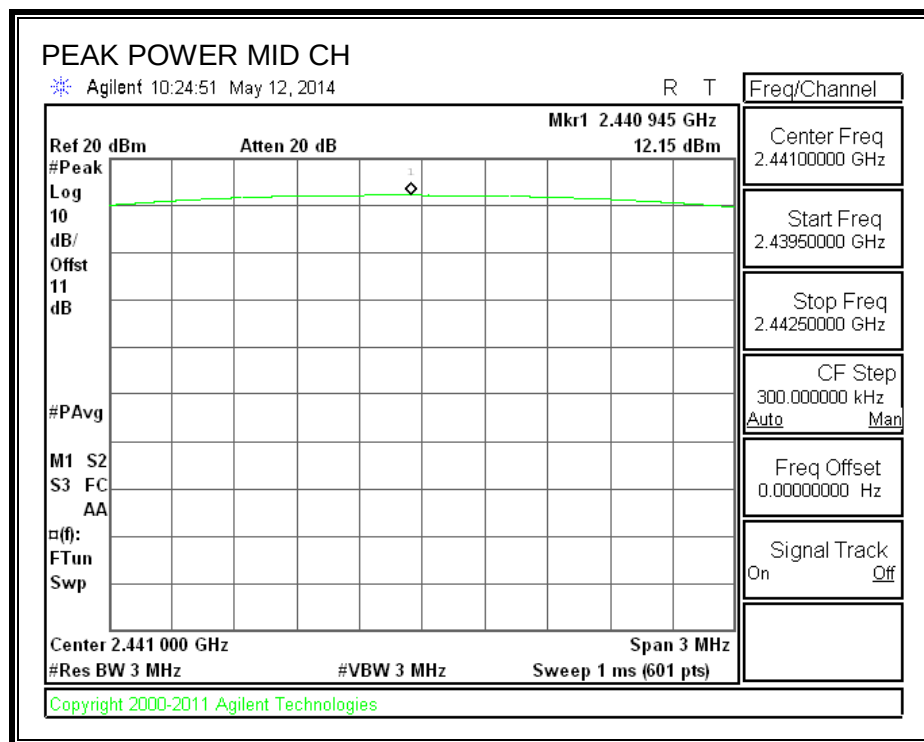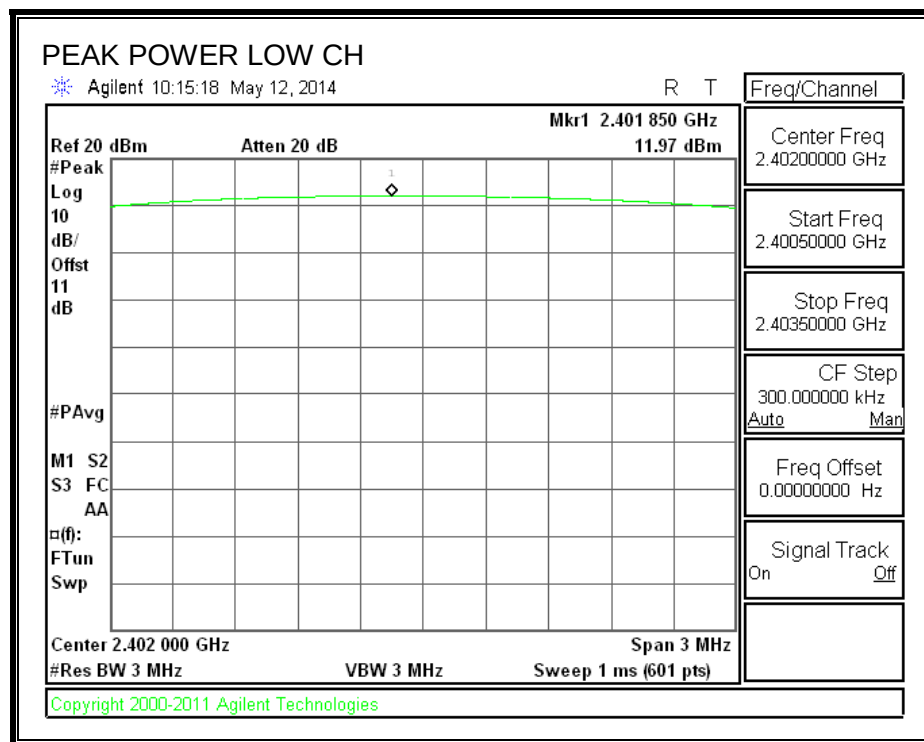GFSK OUTPUT POWER

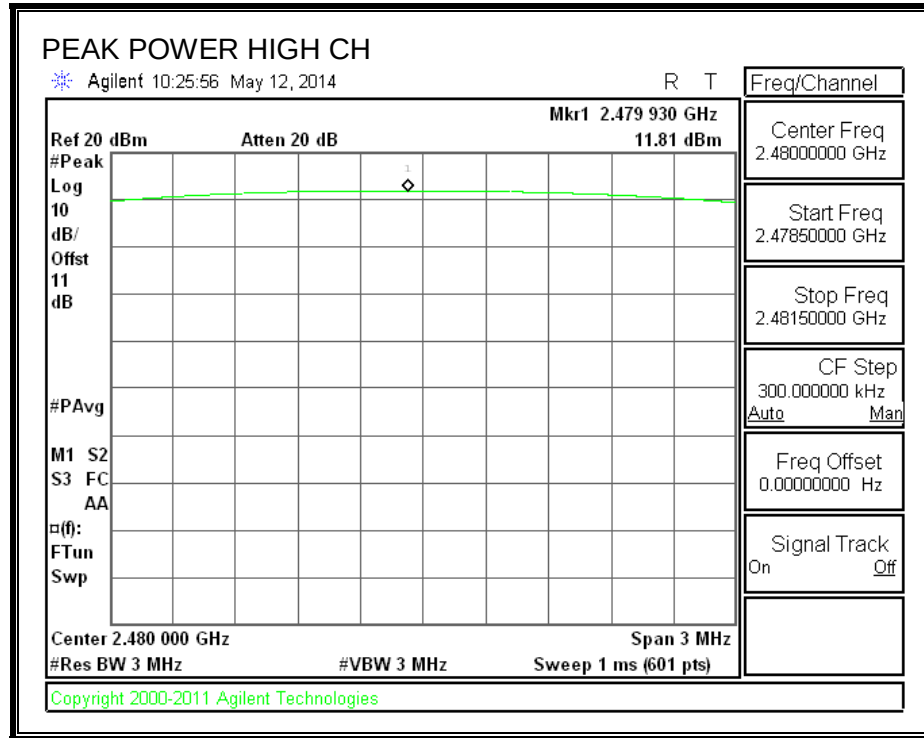

8PSK OUTPUT POWER

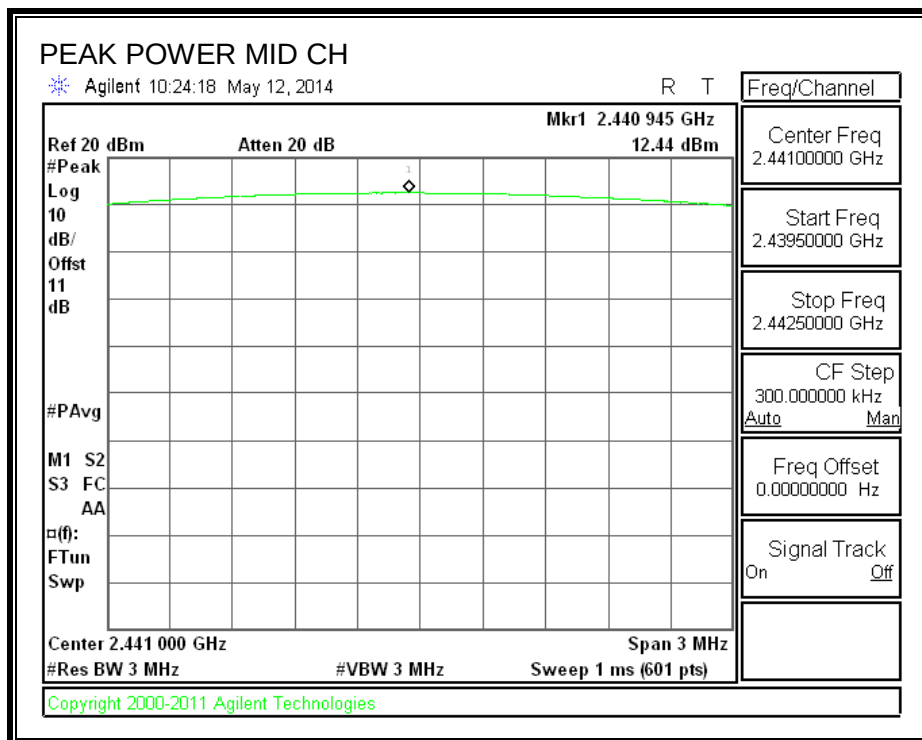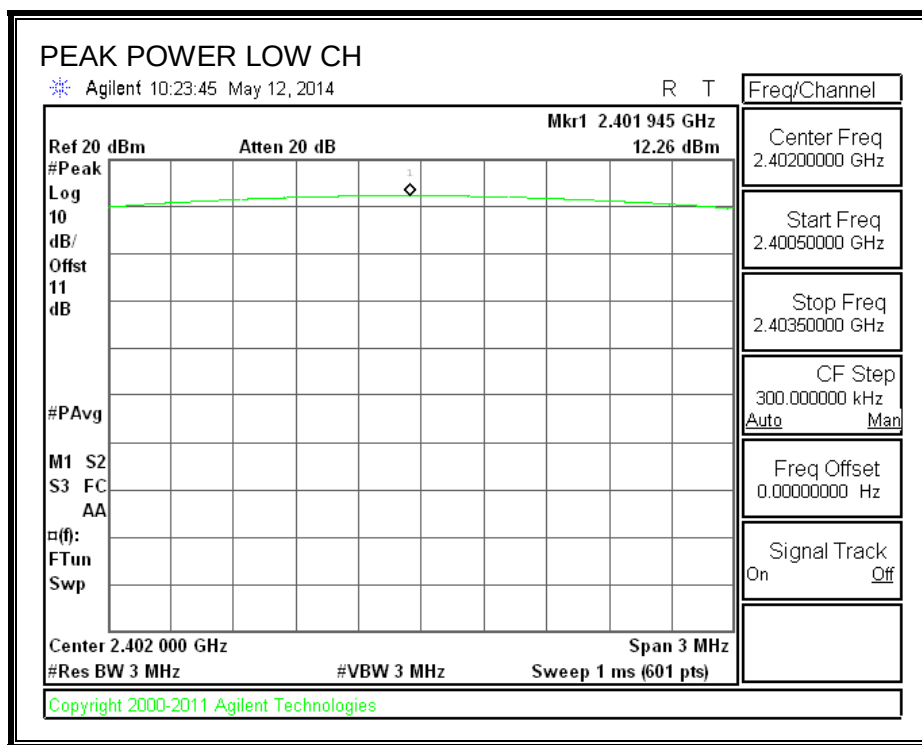

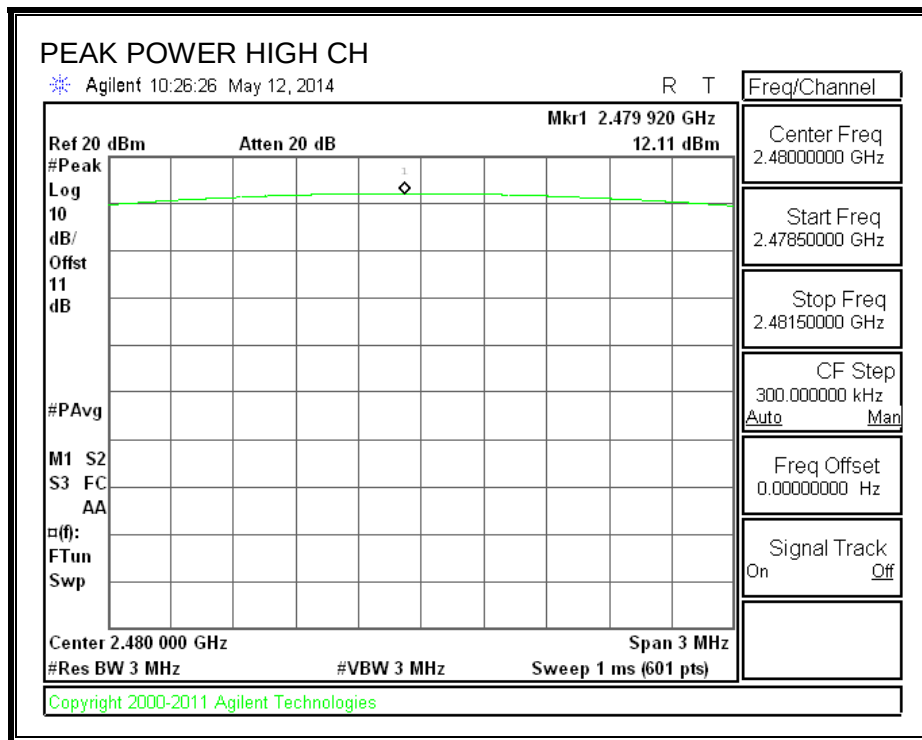

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.5
Middle	2441	11.4
High	2480	11.4
Worst		11.50

8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.51
Middle	2441	7.94
High	2480	7.94
Worst		8.51

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

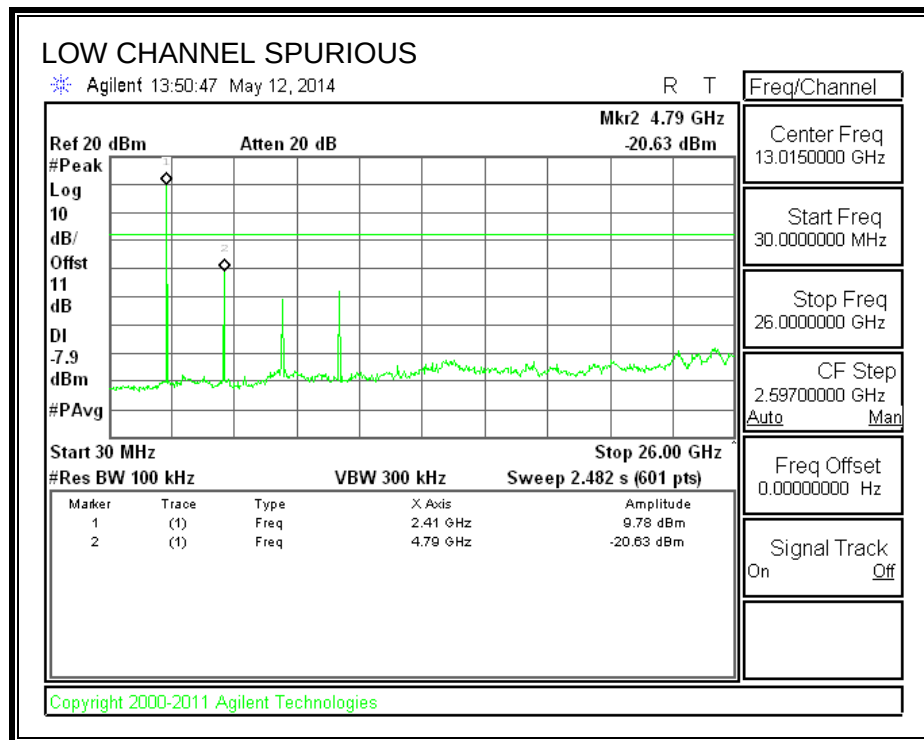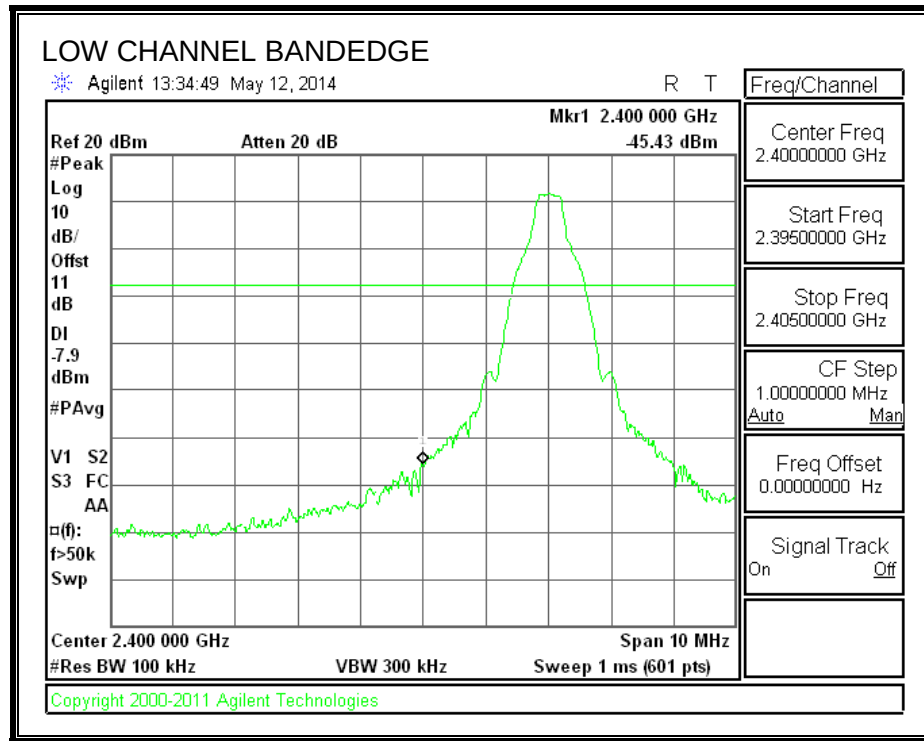



SPURIOUS EMISSIONS, MID CHANNEL

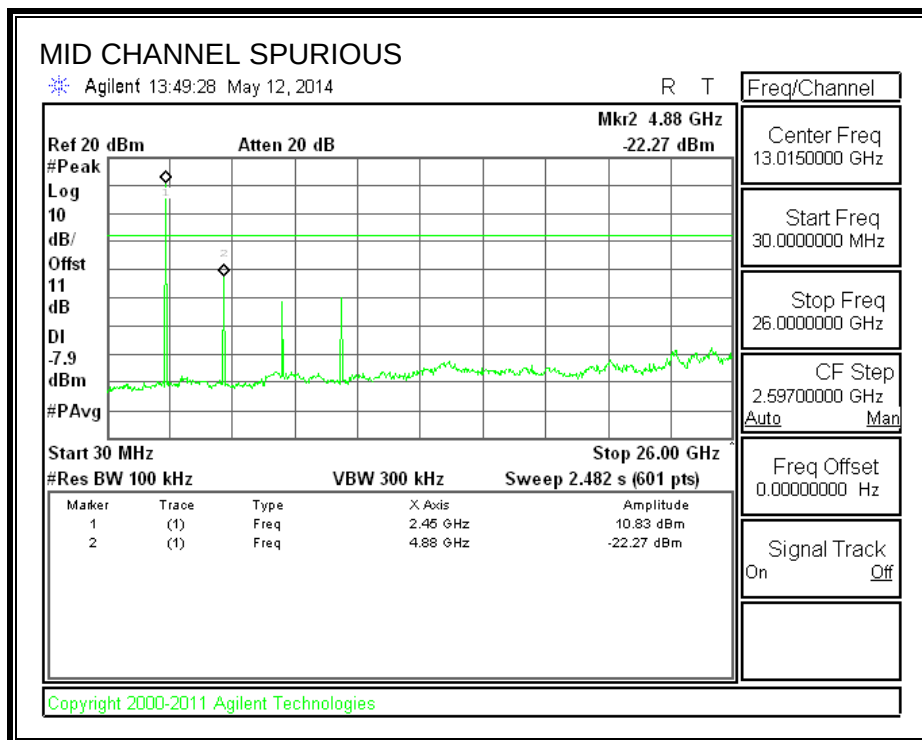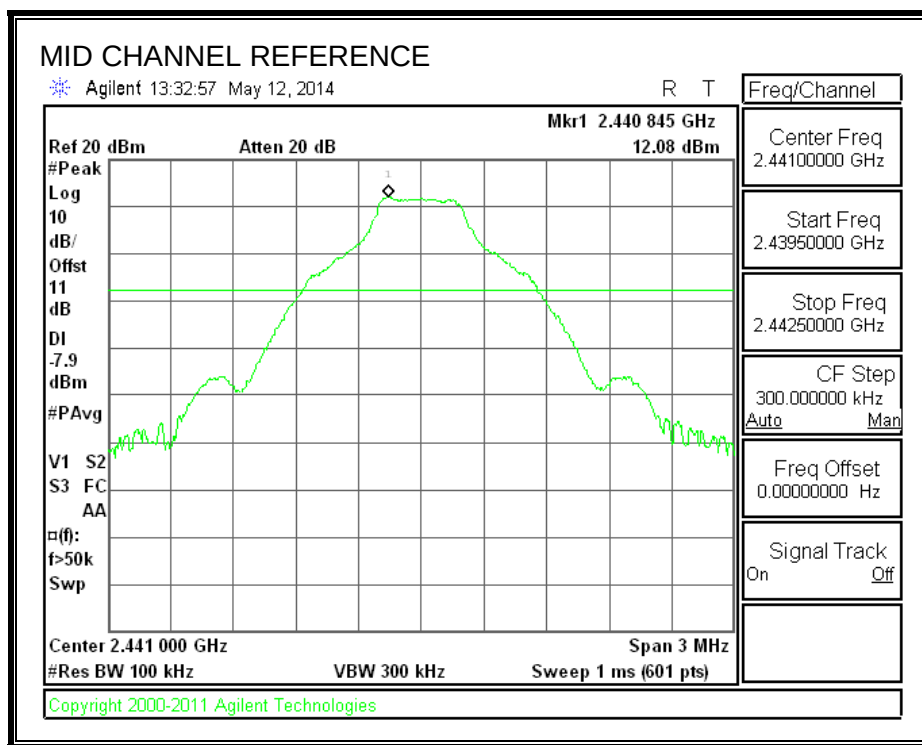

SPURIOUS EMISSIONS, HIGH CHANNEL

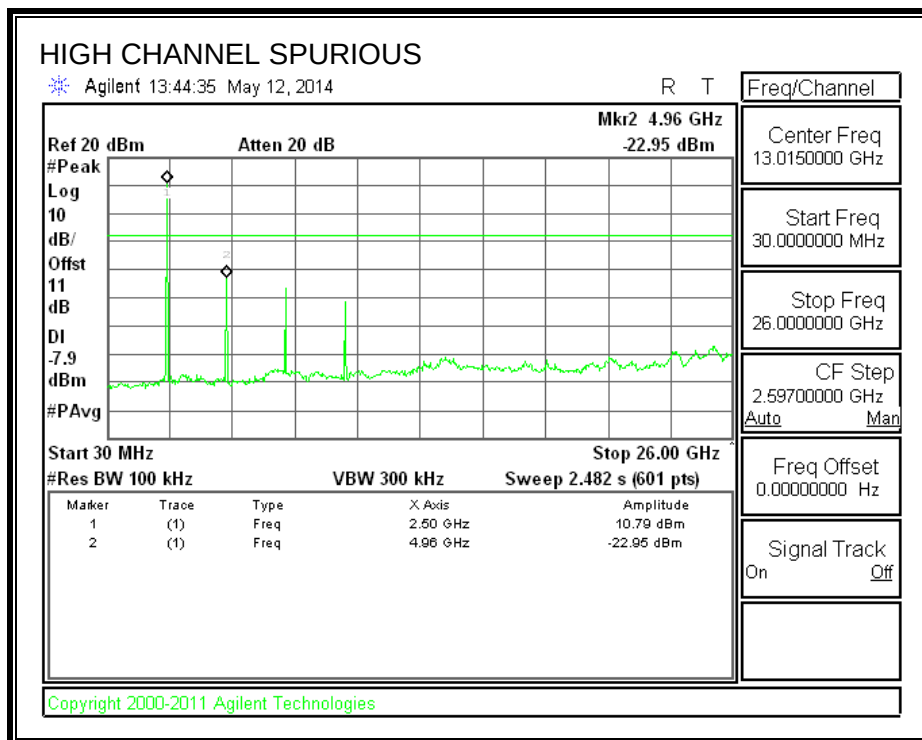
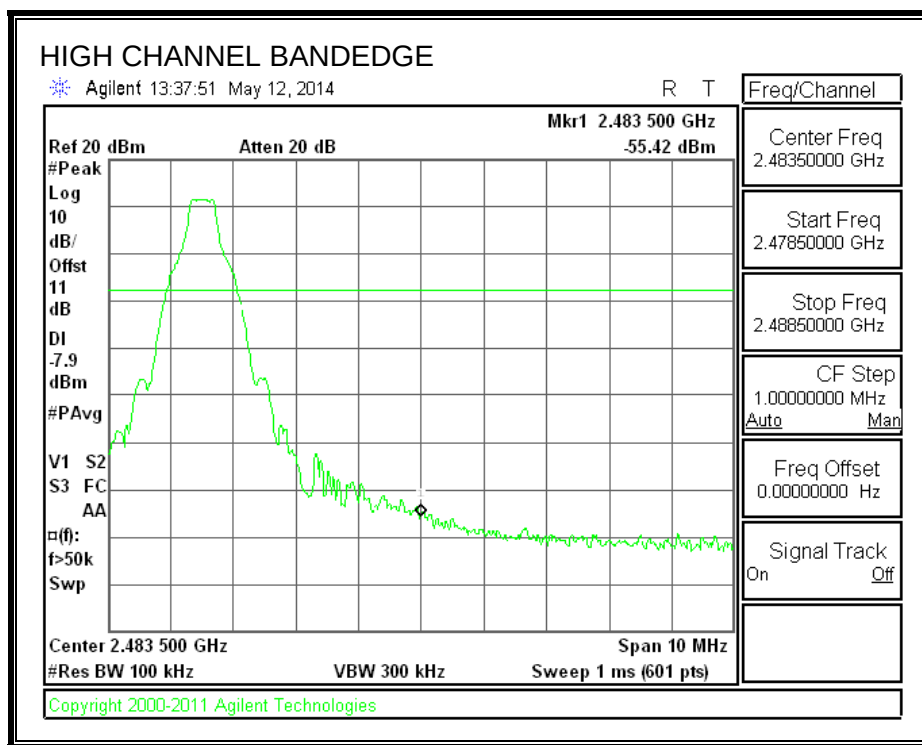


SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON

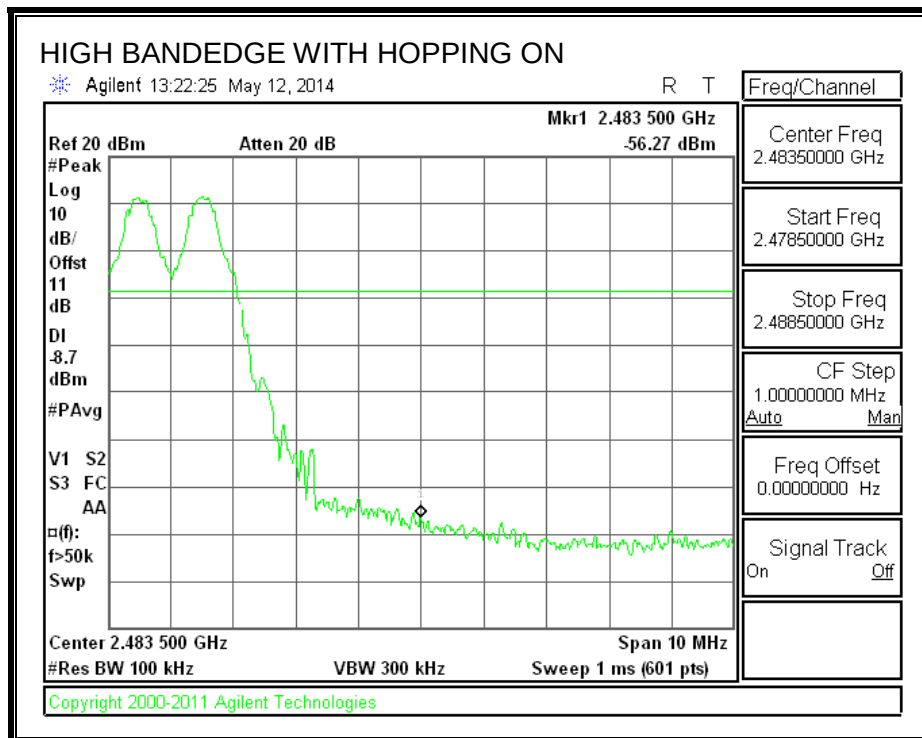
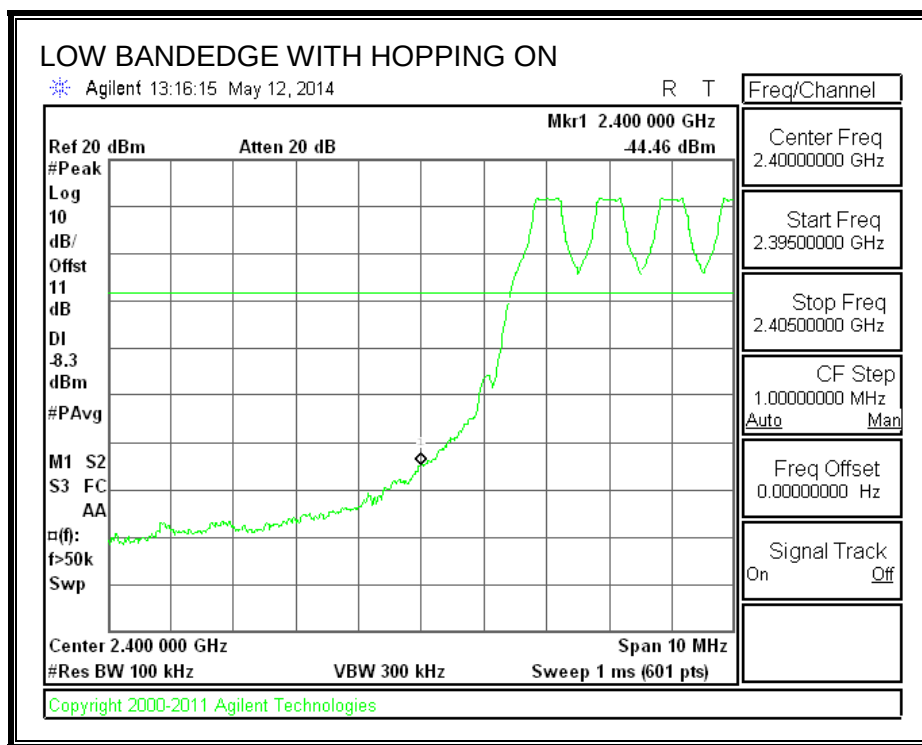


8.7.1. ENHANCED DATA RATE 8PSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

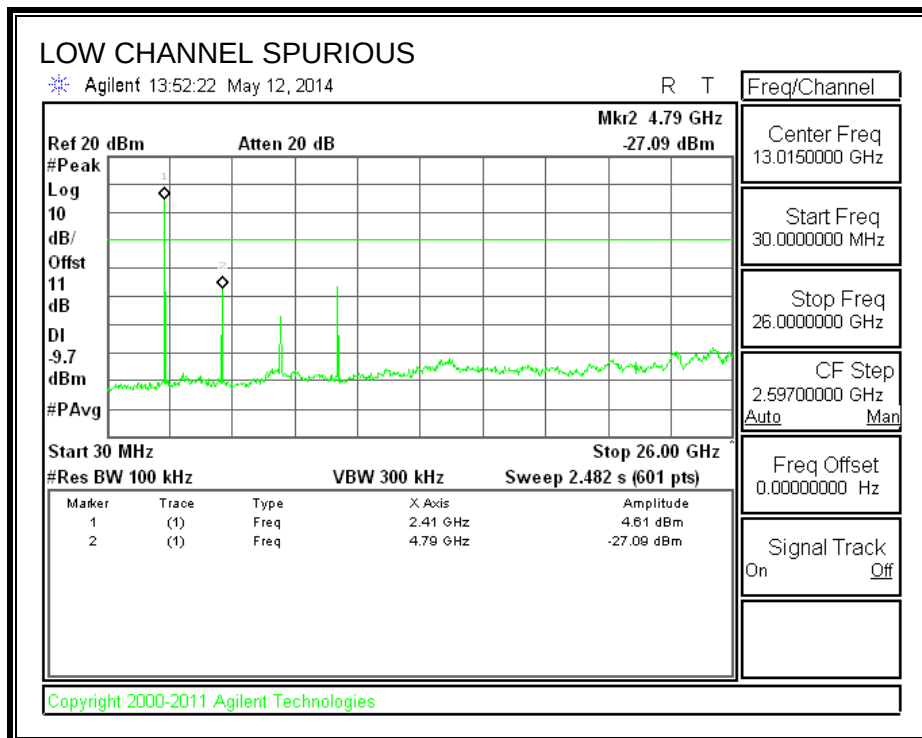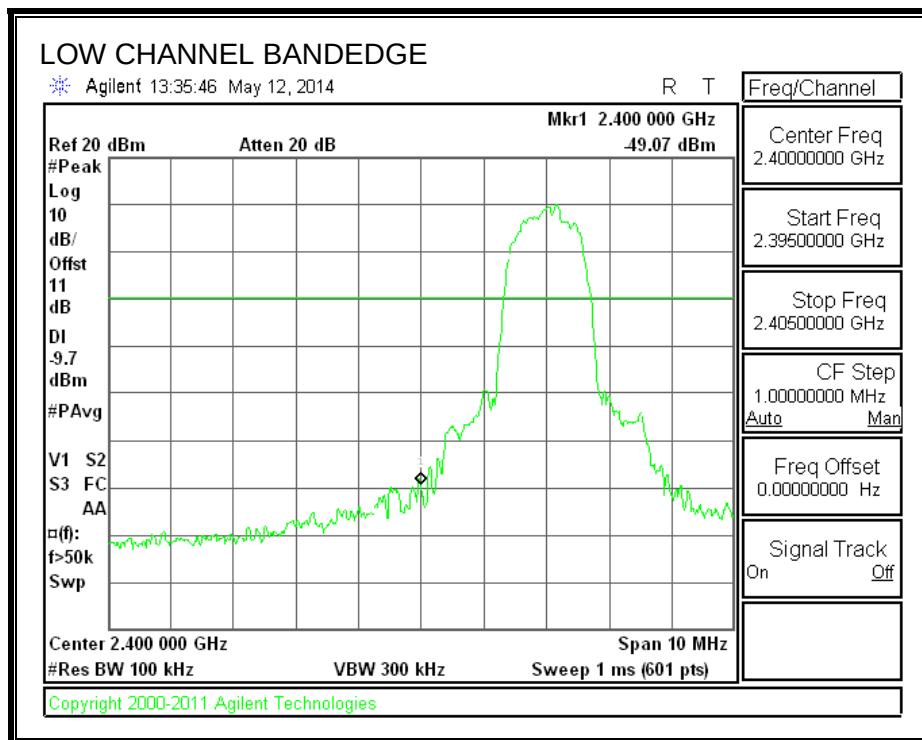


SPURIOUS EMISSIONS, MID CHANNEL

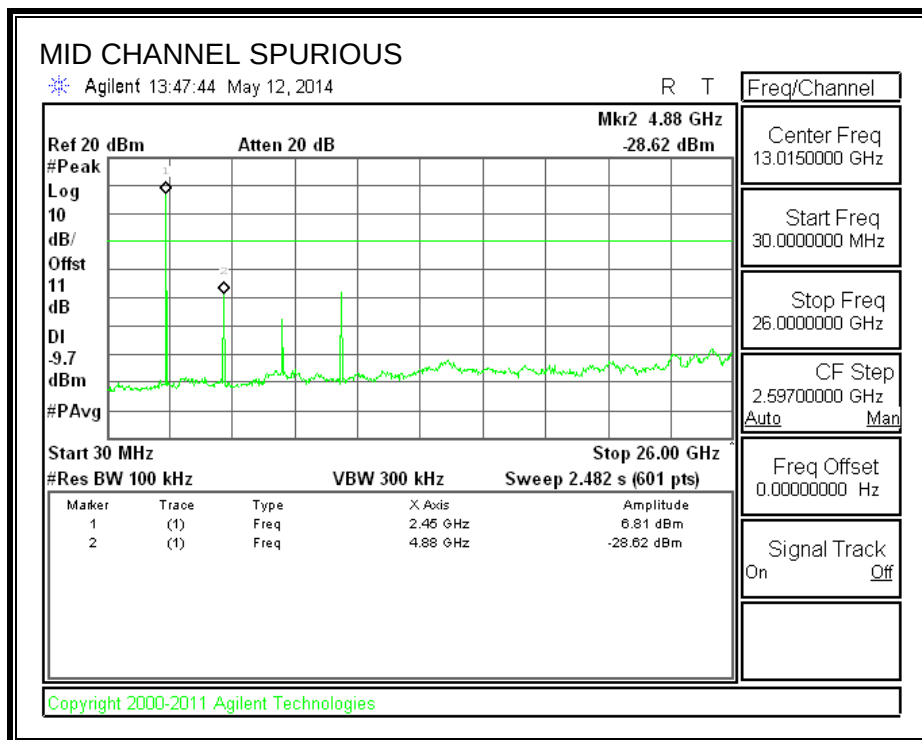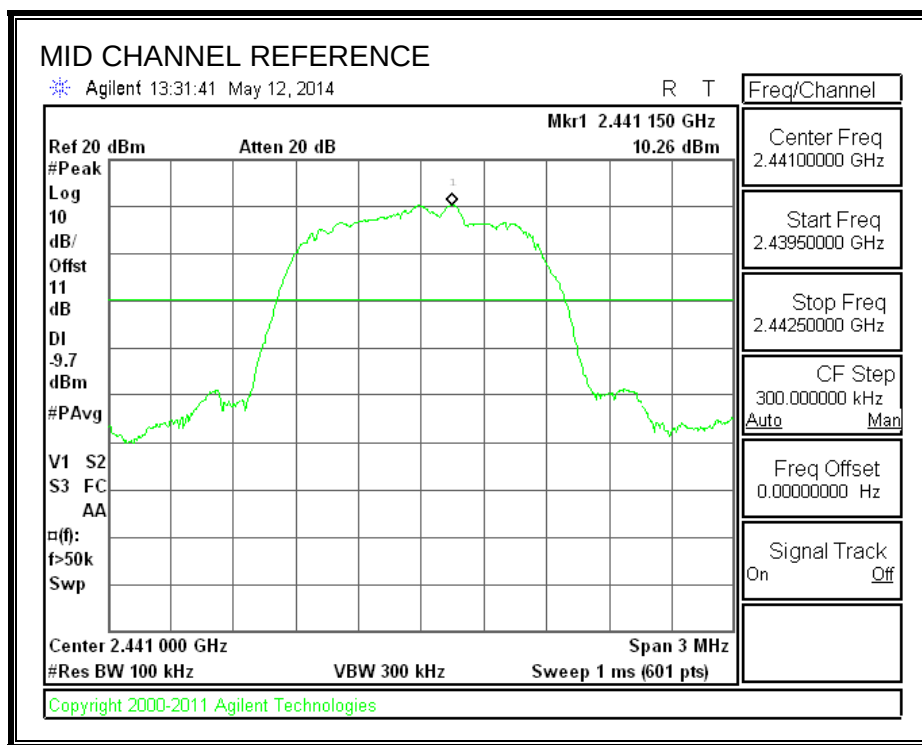


SPURIOUS EMISSIONS, HIGH CHANNEL

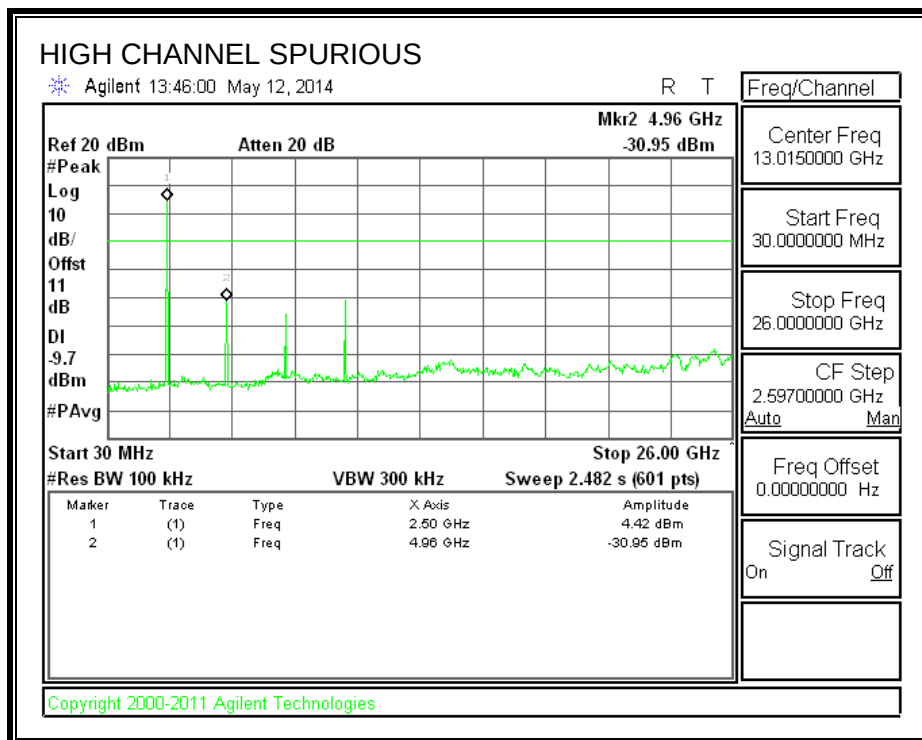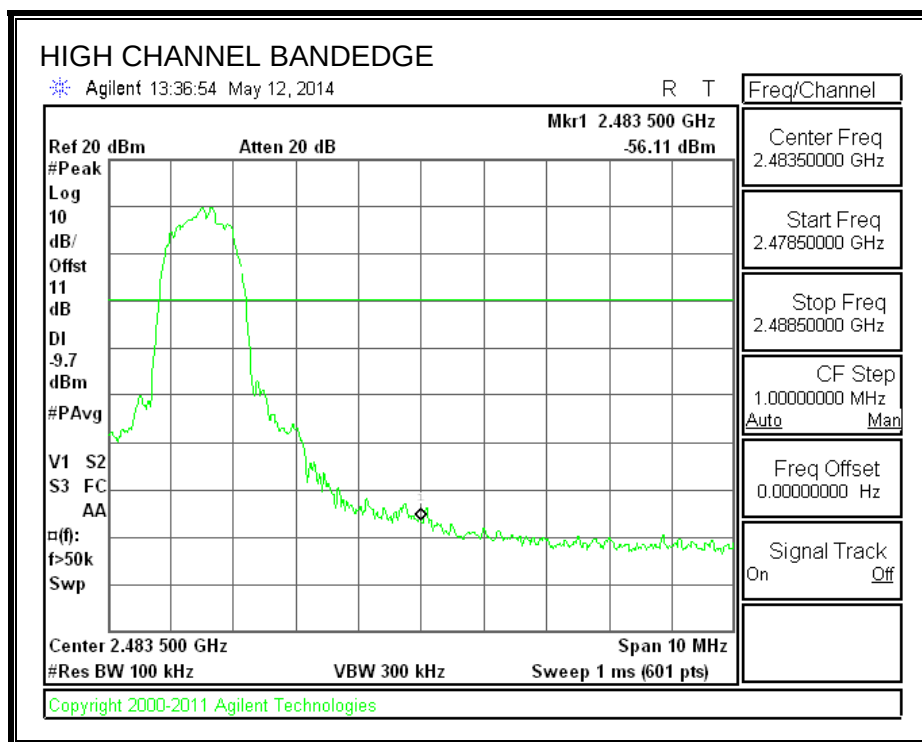

SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON

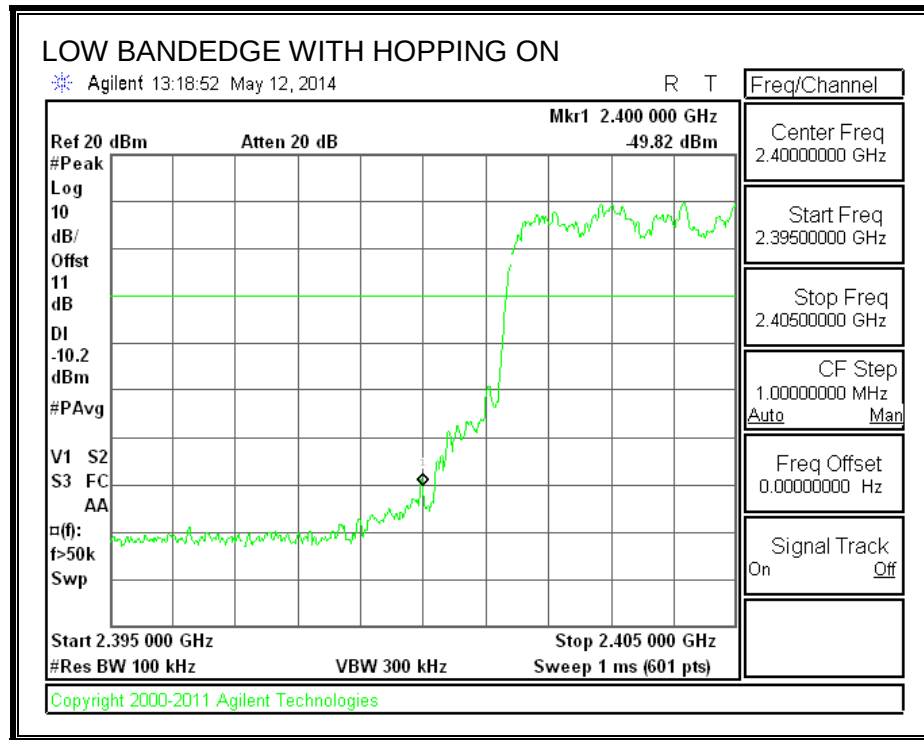

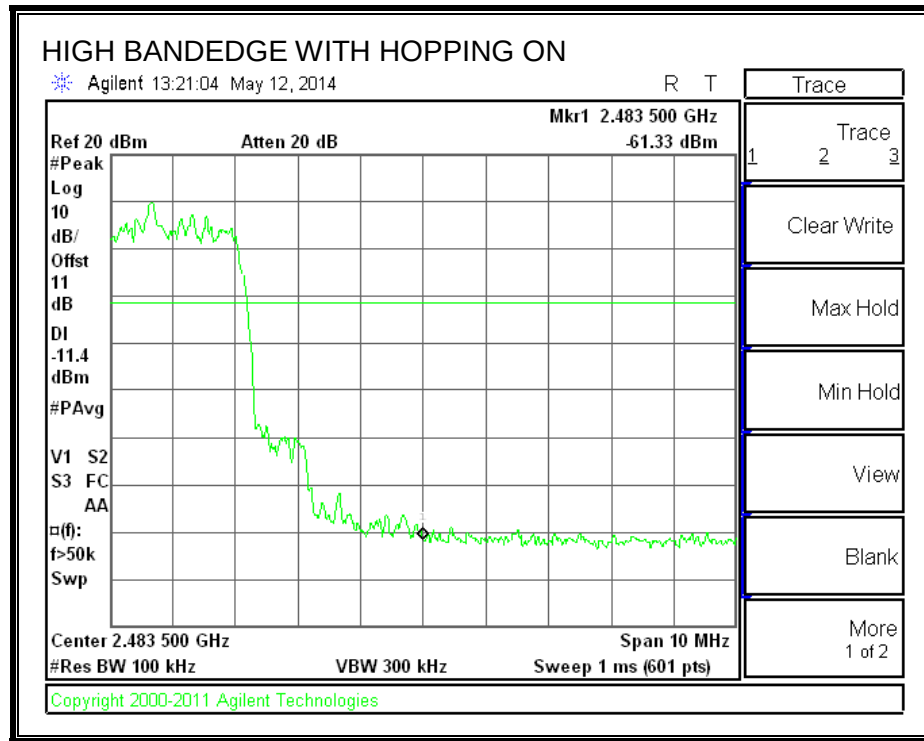

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. $GFSK = 1/T = 1 / 0.0028S = 360Hz$.


The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

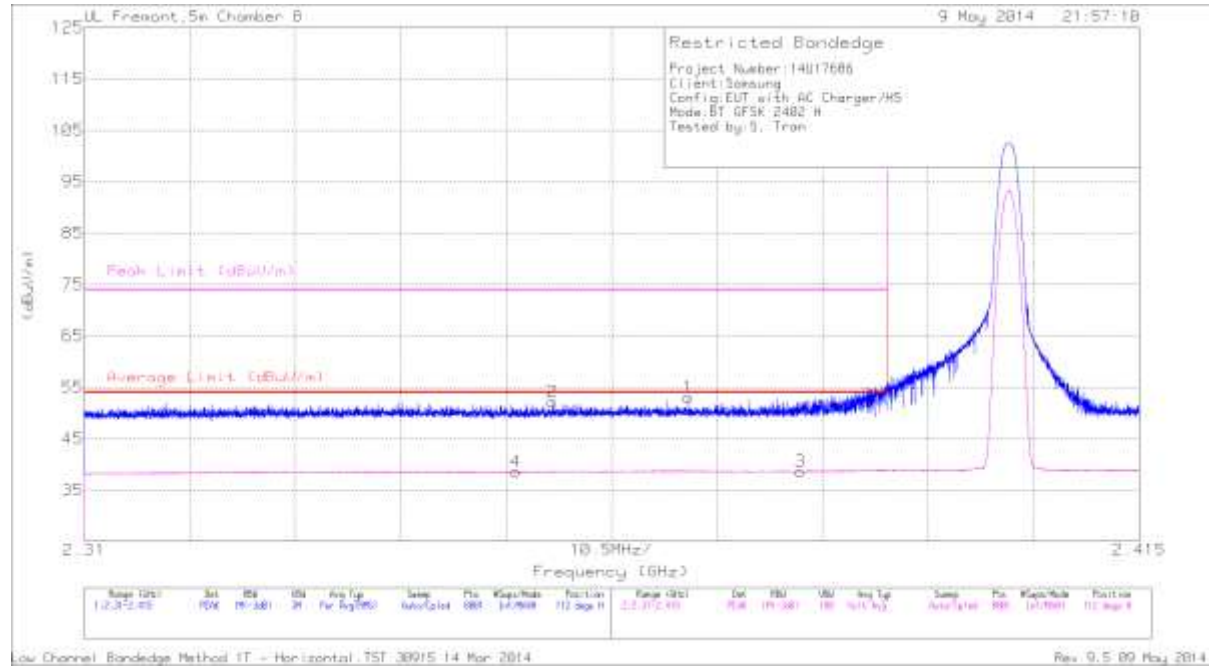


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.37	43.87	PK	32	-22.8	53.07	-	-	74	-20.93	112	358	H
2	* 2.357	43.07	PK	31.9	-22.8	52.17	-	-	74	-21.83	112	358	H
3	* 2.381	29.55	VB1T	32	-22.9	38.65	54	-15.35	-	-	112	358	H
4	* 2.353	29.61	VB1T	31.9	-22.9	38.61	54	-15.39	-	-	112	358	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)

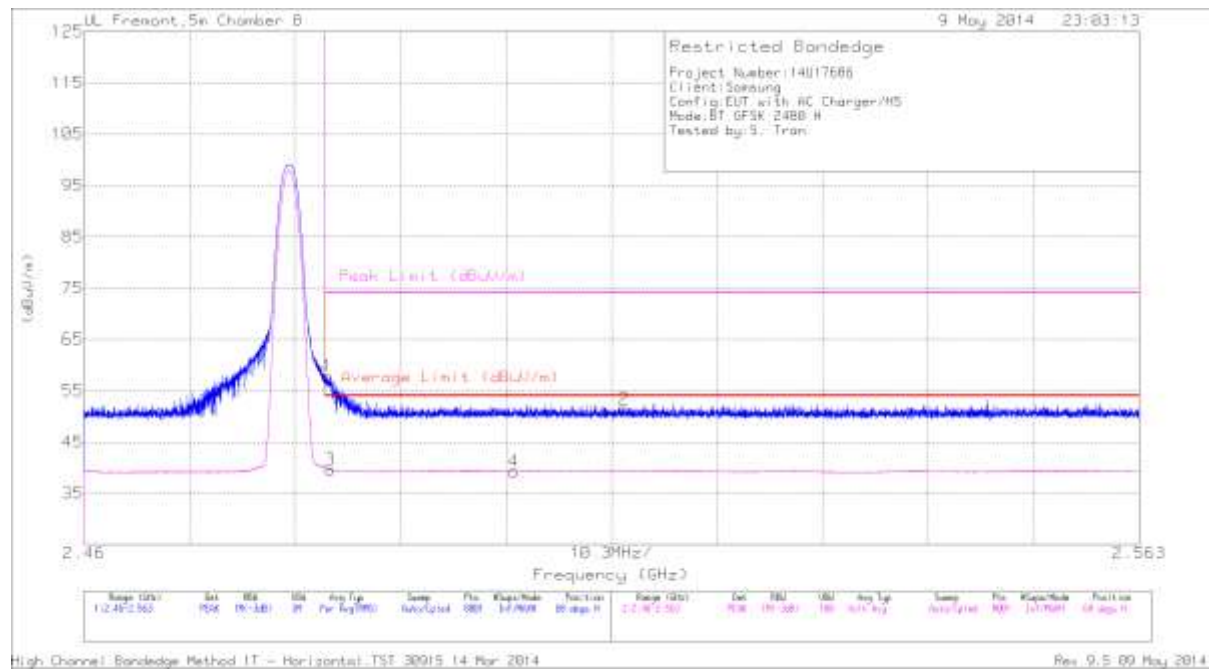


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.18	PK	32.4	-22.7	57.88	-	-	74	-16.12	68	358	H
3	* 2.484	29.92	VB1T	32.4	-22.7	39.62	54	-14.38	-	-	68	358	H
4	2.502	29.59	VB1T	32.4	-22.7	39.29	54	-14.71	-	-	68	358	H
2	2.513	41.61	PK	32.5	-22.7	51.41	-	-	74	-22.59	68	358	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

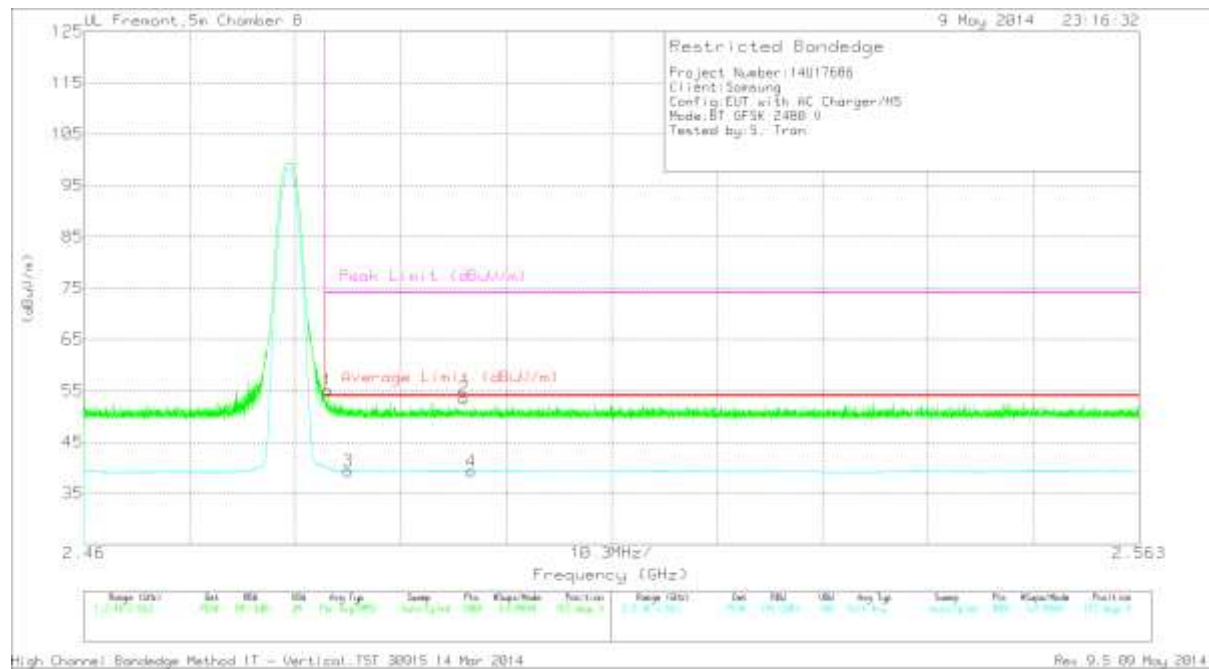

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.36	PK	32.4	-22.7	55.06	-	-	74	-18.94	157	358	V
2	* 2.497	43.83	PK	32.4	-22.7	53.53	-	-	74	-20.47	157	358	V
3	* 2.486	29.68	VB1T	32.4	-22.7	39.38	54	-14.62	-	-	157	358	V
4	* 2.498	29.6	VB1T	32.4	-22.7	39.3	54	-14.7	-	-	157	358	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
HORIZONTAL

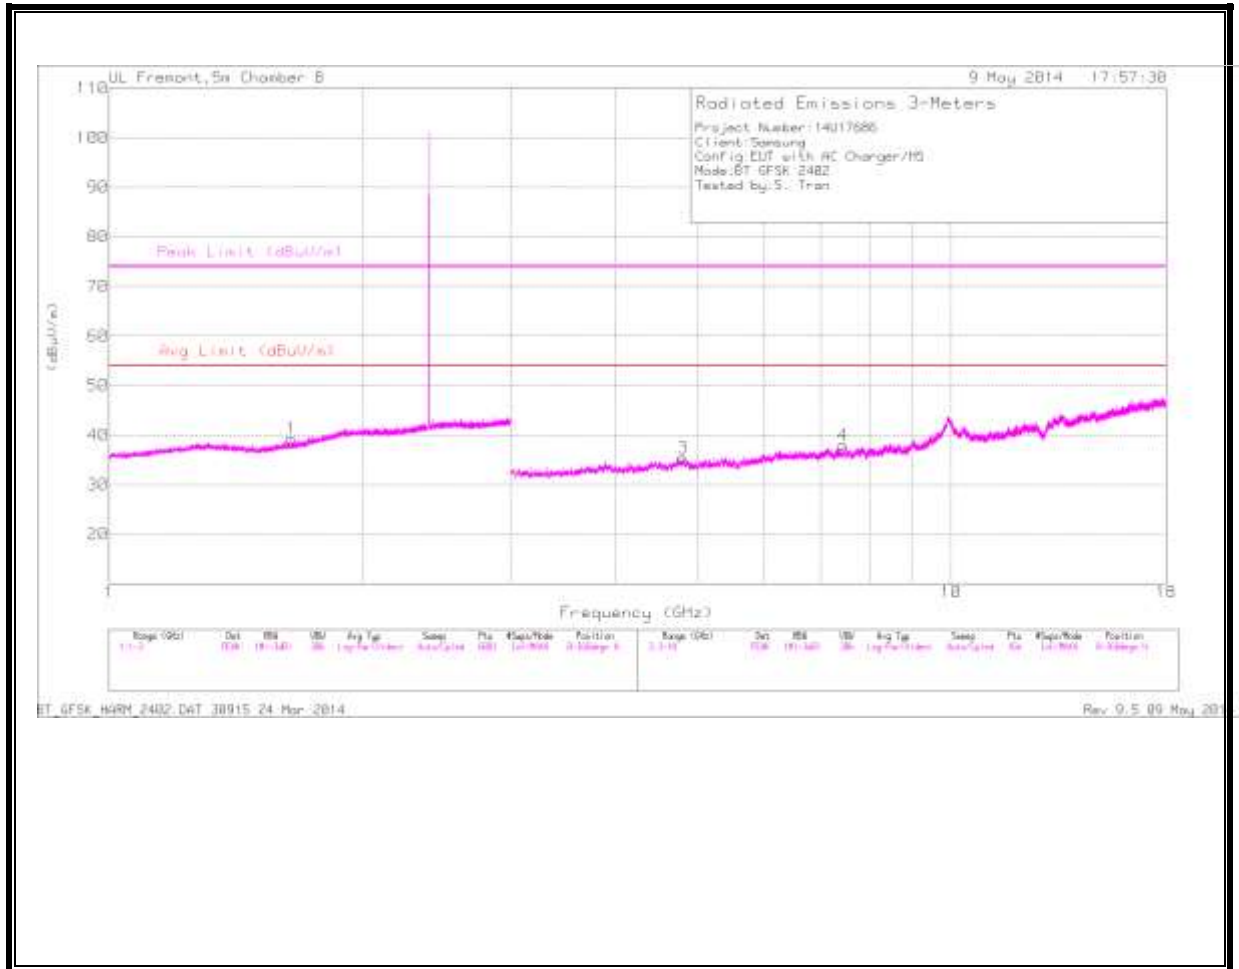

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

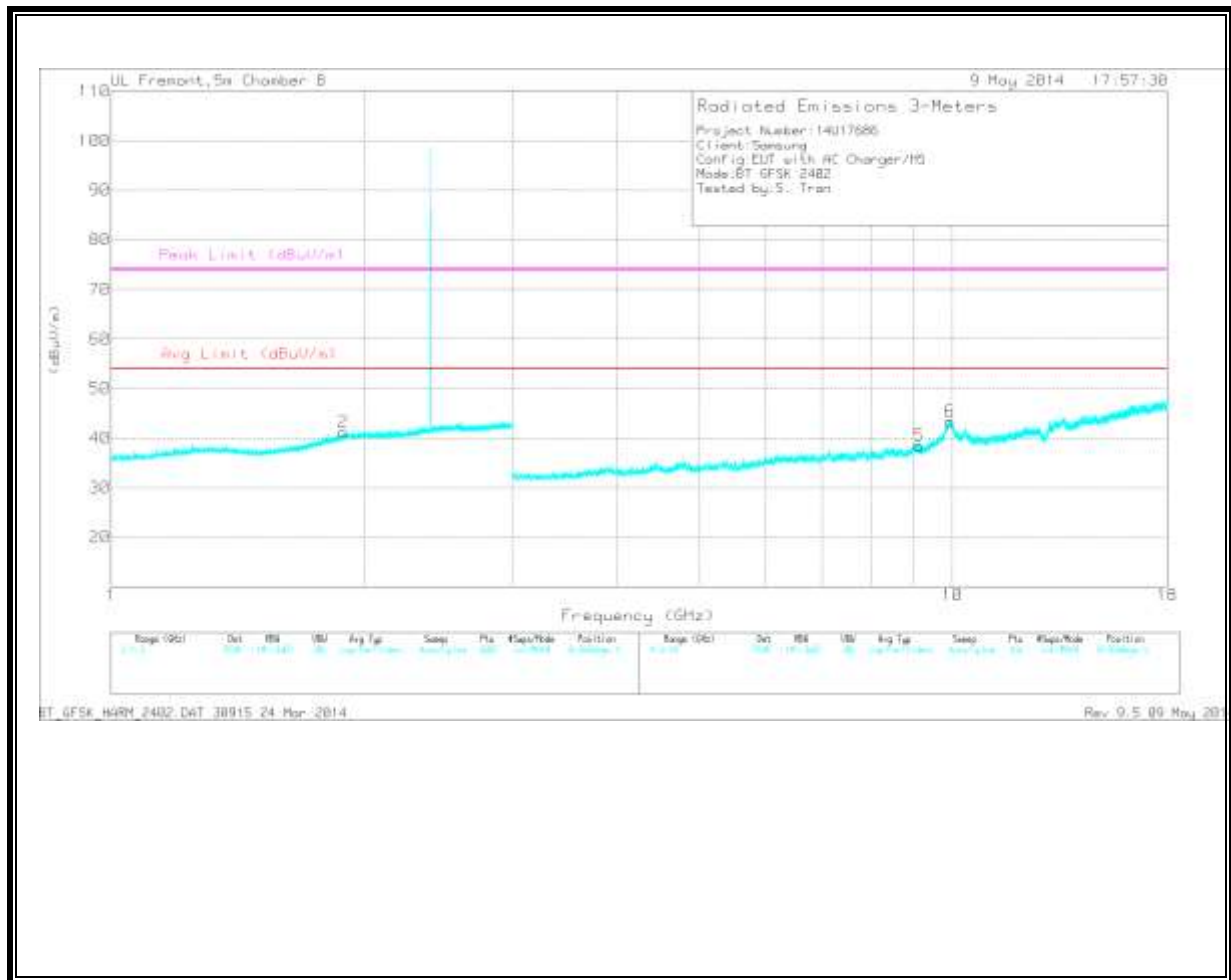

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.804	30.55	PK	34.2	-29.4	35.35	-	-	74	-38.65	0-360	99	H
4	* 7.434	28.87	PK	35.6	-26.5	37.97	-	-	74	-36.03	0-360	99	H
5	* 9.125	26.92	PK	36.3	-24.8	38.42	-	-	74	-35.58	0-360	202	V
1	1.647	34.31	PK	28.8	-23.8	39.31	-	-	-	-	0-360	202	H
2	1.888	33.66	PK	31	-23.4	41.26	-	-	-	-	0-360	202	V
6	9.93	29.81	PK	37	-23.4	43.41	-	-	-	-	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	27.38	VB1T	34.2	-29.4	32.18	54	-21.82	74	-41.82	1	100	H
* 7.438	29.5	PK	35.6	-26.4	38.7	54	-15.3	74	-35.3	1	100	H
* 9.129	22.59	VB1T	36.3	-24.9	33.99	54	-20.01	74	-40.01	1	100	V
1.9	43.1	PK3	31.1	-23.5	50.7	54	-3.3	74	-23.3	1	100	V
9.927	26	VB1T	37	-23.4	39.6	54	-14.4	74	-34.4	1	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

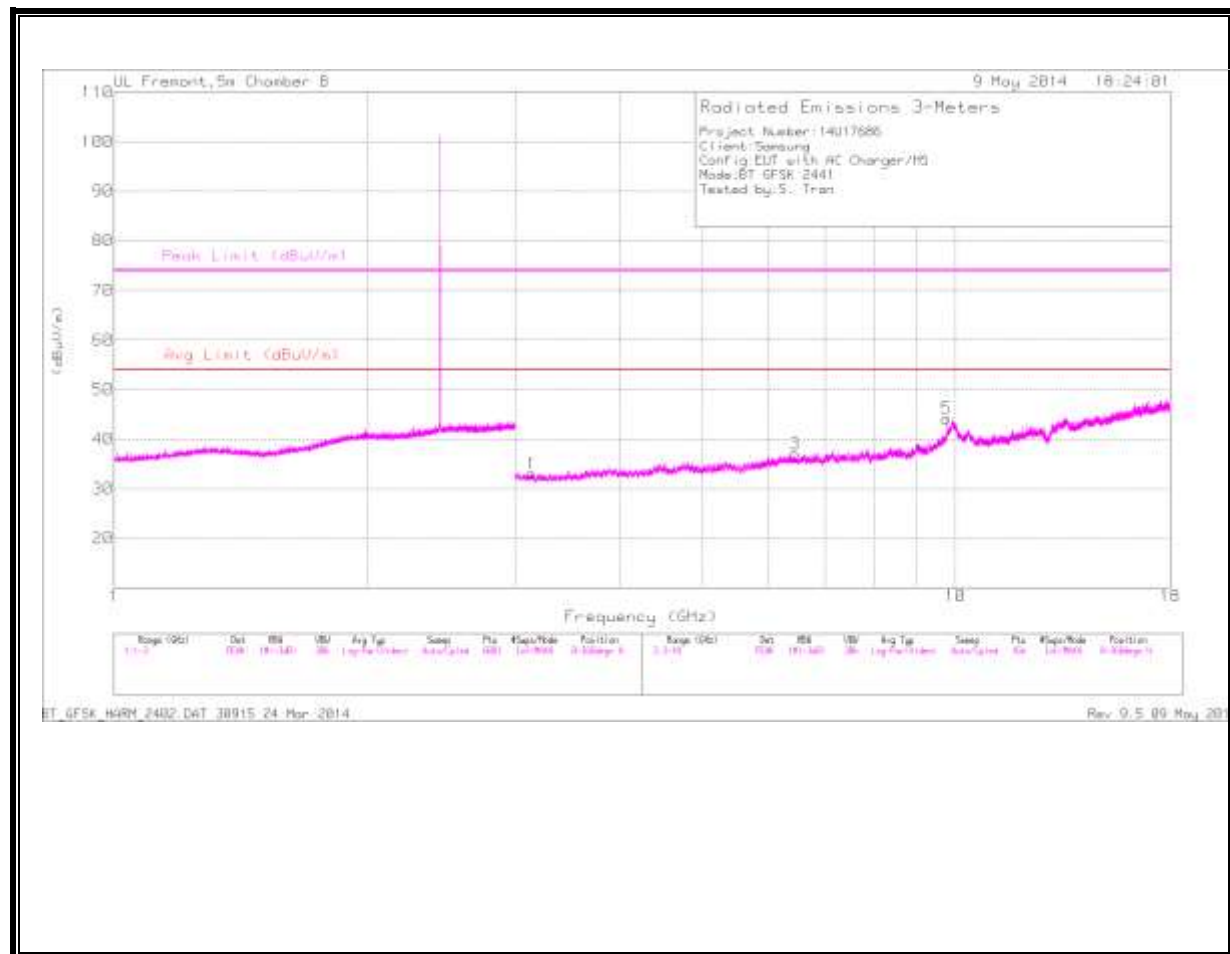MID CHANNEL
HORIZONTAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.139	31.33	PK	32.8	-31.2	32.93	-	-	-	-	0-360	202	H
2	3.143	31.83	PK	32.8	-31.1	33.53	-	-	-	-	0-360	202	V
3	6.442	30.52	PK	35.6	-29.1	37.02	-	-	-	-	0-360	99	H
4	6.484	29.37	PK	35.7	-28.6	36.47	-	-	-	-	0-360	99	V
5	9.764	30.99	PK	36.9	-23.7	44.19	-	-	-	-	0-360	99	H
6	9.927	29.91	PK	37	-23.4	43.51	-	-	-	-	0-360	202	V


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.128	41.98	VB1T	32.8	-31.4	43.38	54	-10.62	74	-30.62	1	100	V
3.135	41.76	PK3	32.8	-31.3	43.26	54	-10.74	74	-30.74	1	100	H
6.438	32.02	PK3	35.6	-29.2	38.42	54	-15.58	74	-35.58	1	100	H
9.759	27.16	PK3	36.9	-23.8	40.26	54	-13.74	74	-33.74	1	100	H

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

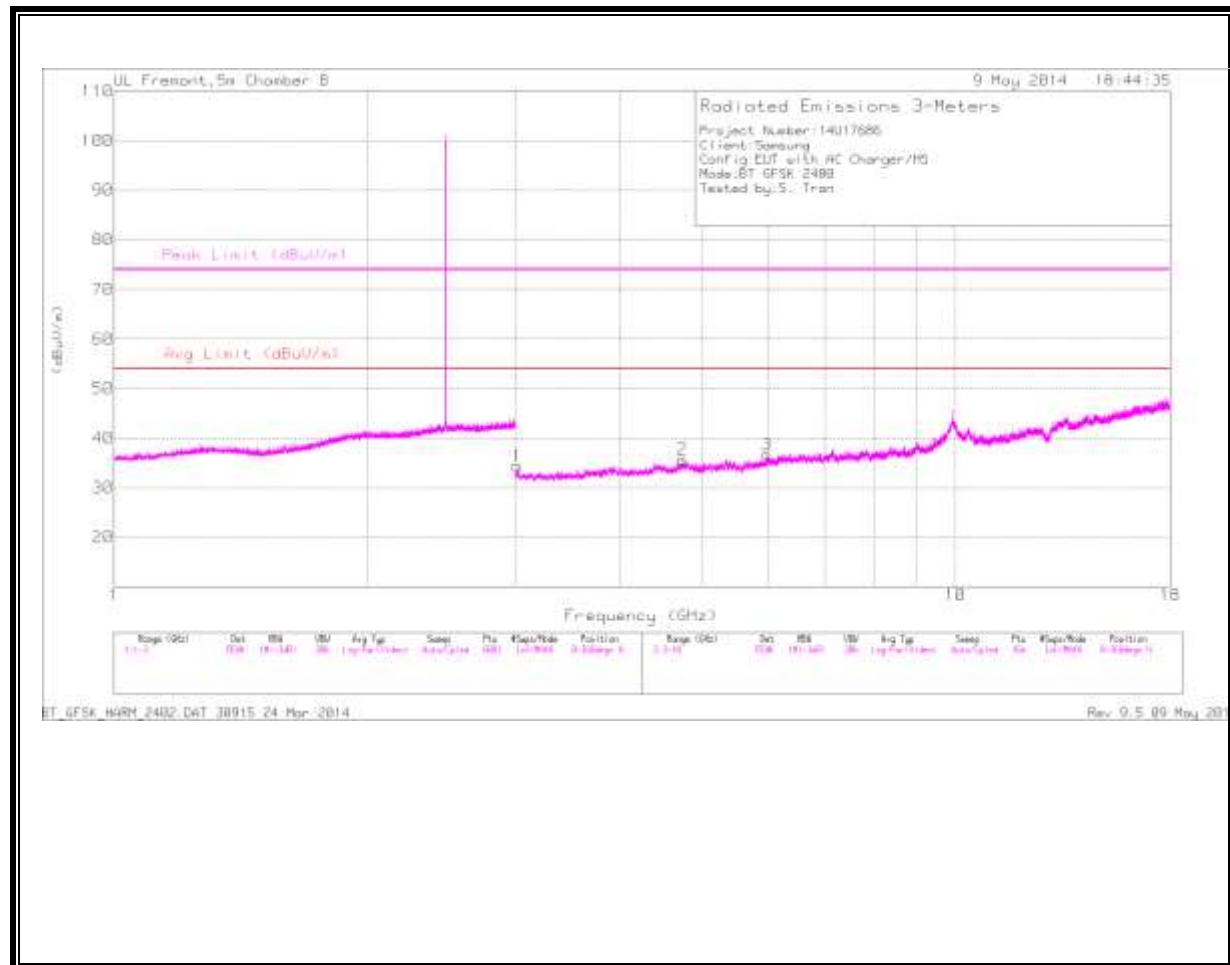HIGH CHANNEL
HORIZONTAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.738	30.91	PK	34.2	-29.4	35.71	-	-	74	-38.29	0-360	99	H
5	* 7.44	28.81	PK	35.6	-26.3	38.11	-	-	74	-35.89	0-360	202	V
1	3.017	32.74	PK	32.8	-31.2	34.34	-	-	-	-	0-360	201	H
4	3.059	32.54	PK	32.8	-31.7	33.64	-	-	-	-	0-360	202	V
3	5.97	29.99	PK	35.2	-28.5	36.69	-	-	-	-	0-360	99	H
6	9.919	30.94	PK	37	-23.5	44.44	-	-	-	-	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.744	27.36	VB1T	34.2	-29.3	32.26	54	-21.74	74	-41.74	1	100	H
* 7.451	24.75	VB1T	35.6	-26.4	33.95	54	-20.05	74	-40.05	1	100	V
3.023	41.71	PK3	32.8	-31.3	43.21	54	-10.79	74	-30.79	1	100	H
5.978	39.21	PK3	35.2	-28.5	45.91	54	-8.09	74	-28.09	1	100	H
9.908	38.93	PK3	37	-23.6	52.33	54	-1.67	74	-21.67	1	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEGE (LOW CHANNEL, HORIZONTAL)

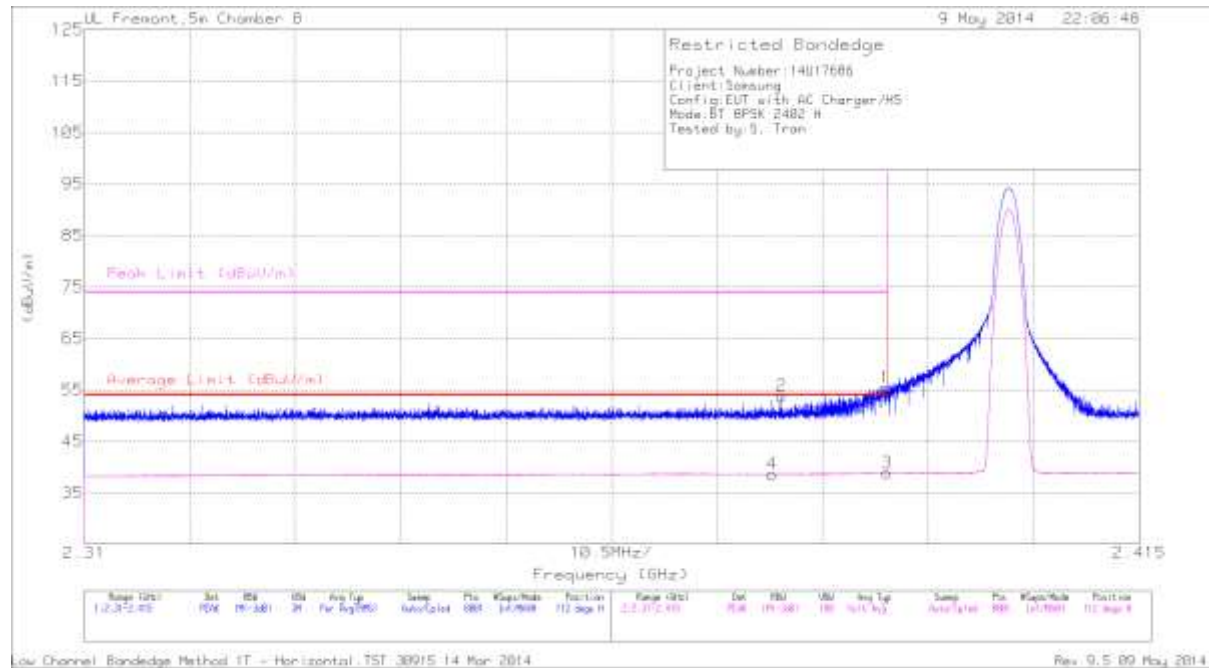


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.1	PK	32.1	-22.8	55.4	-	-	74	-18.6	112	358	H
2	* 2.379	44.7	PK	32	-22.9	53.8	-	-	74	-20.2	112	358	H
3	* 2.39	29.58	VB1T	32.1	-22.8	38.88	54	-15.12	-	-	112	358	H
4	* 2.378	29.56	VB1T	32	-22.9	38.66	54	-15.34	-	-	112	358	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (LOW CHANNEL, VERTICAL)

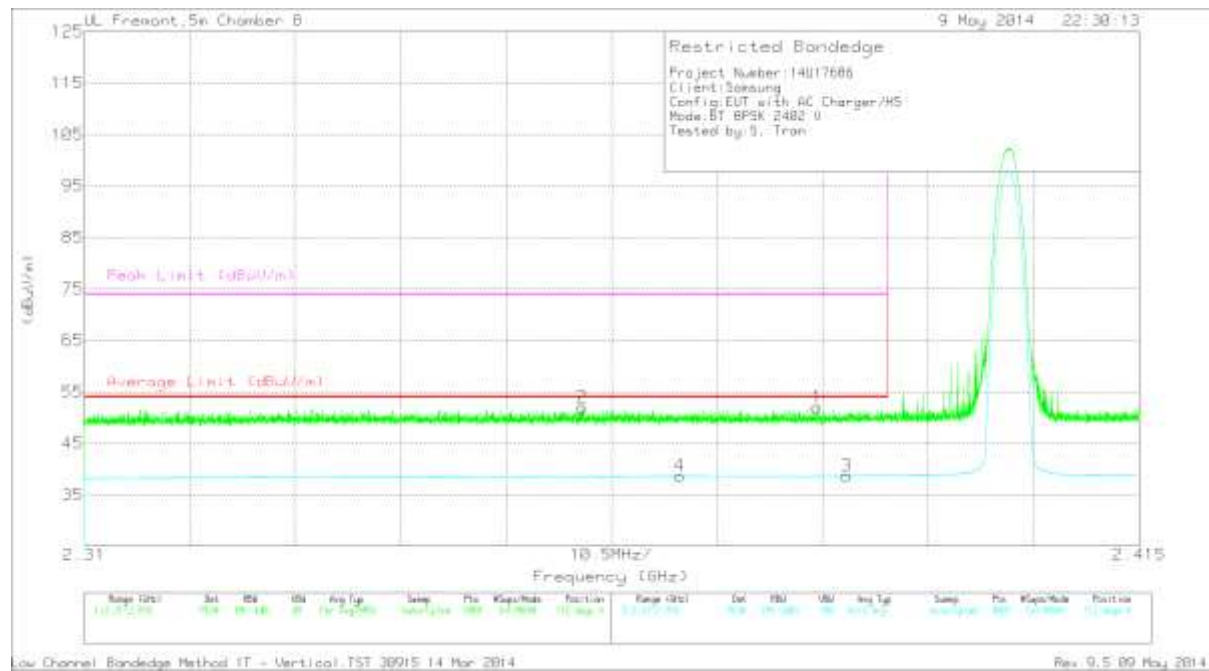


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.383	42.86	PK	32.1	-22.9	52.06	-	-	74	-21.94	112	358	V
2	* 2.36	42.91	PK	31.9	-22.8	52.01	-	-	74	-21.99	112	358	V
3	* 2.386	29.55	VB1T	32.1	-22.9	38.75	54	-15.25	-	-	112	358	V
4	* 2.369	29.54	VB1T	32	-22.8	38.74	54	-15.26	-	-	112	358	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)

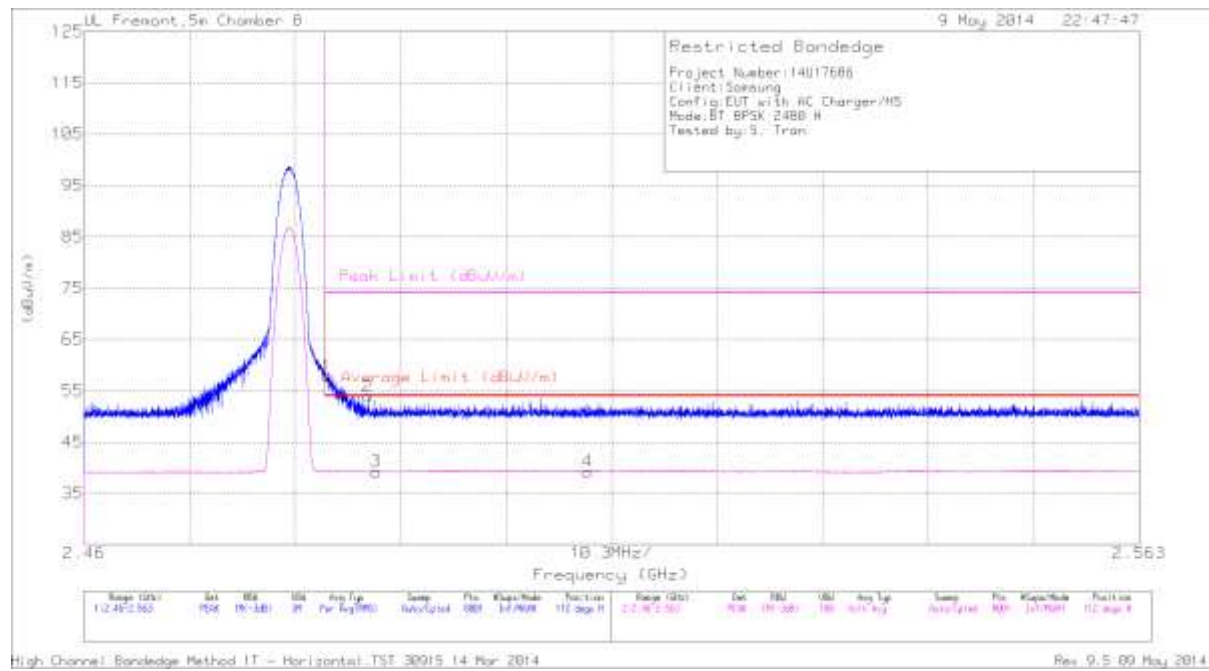


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.19	PK	32.4	-22.7	57.89	-	-	74	-16.11	112	358	H
2	* 2.488	44.16	PK	32.4	-22.7	53.86	-	-	74	-20.14	112	358	H
3	* 2.489	29.57	VB1T	32.4	-22.7	39.27	54	-14.73	-	-	112	358	H
4	2.509	29.57	VB1T	32.4	-22.7	39.27	54	-14.73	-	-	112	358	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

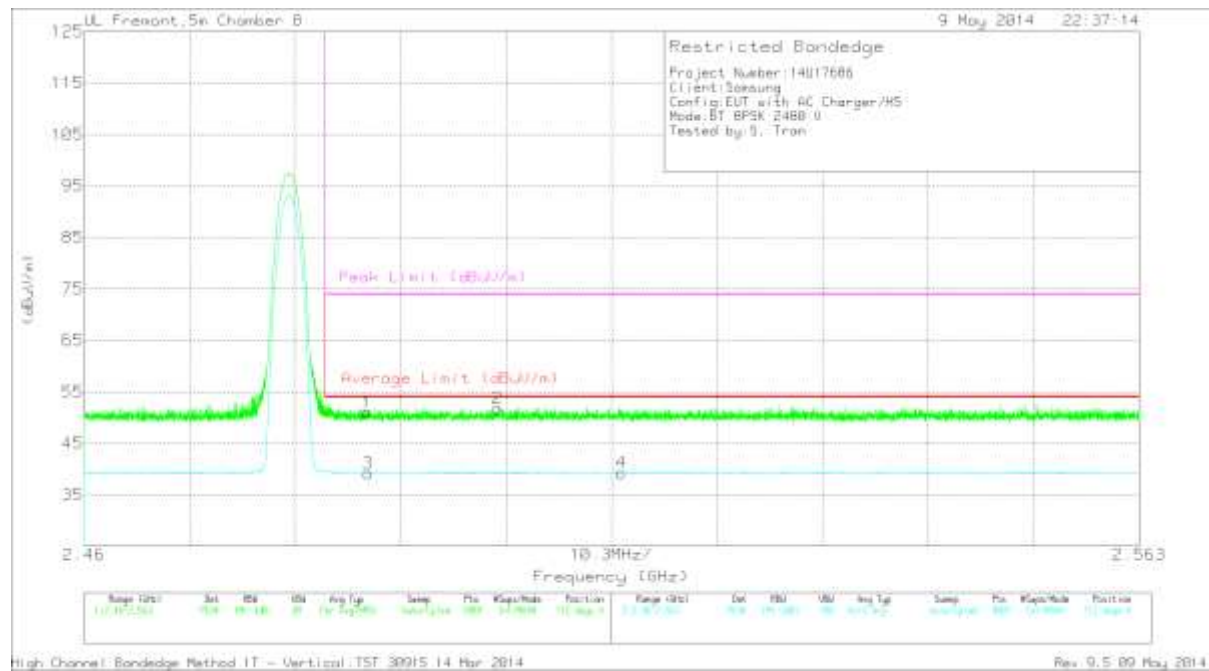

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.488	41.34	PK	32.4	-22.7	51.04	-	-	74	-22.96	112	358	V
3	* 2.488	29.5	VB1T	32.4	-22.7	39.2	54	-14.8	-	-	112	358	V
2	2.5	42.04	PK	32.4	-22.7	51.74	-	-	74	-22.26	112	358	V
4	2.512	29.47	VB1T	32.5	-22.7	39.27	54	-14.73	-	-	112	358	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

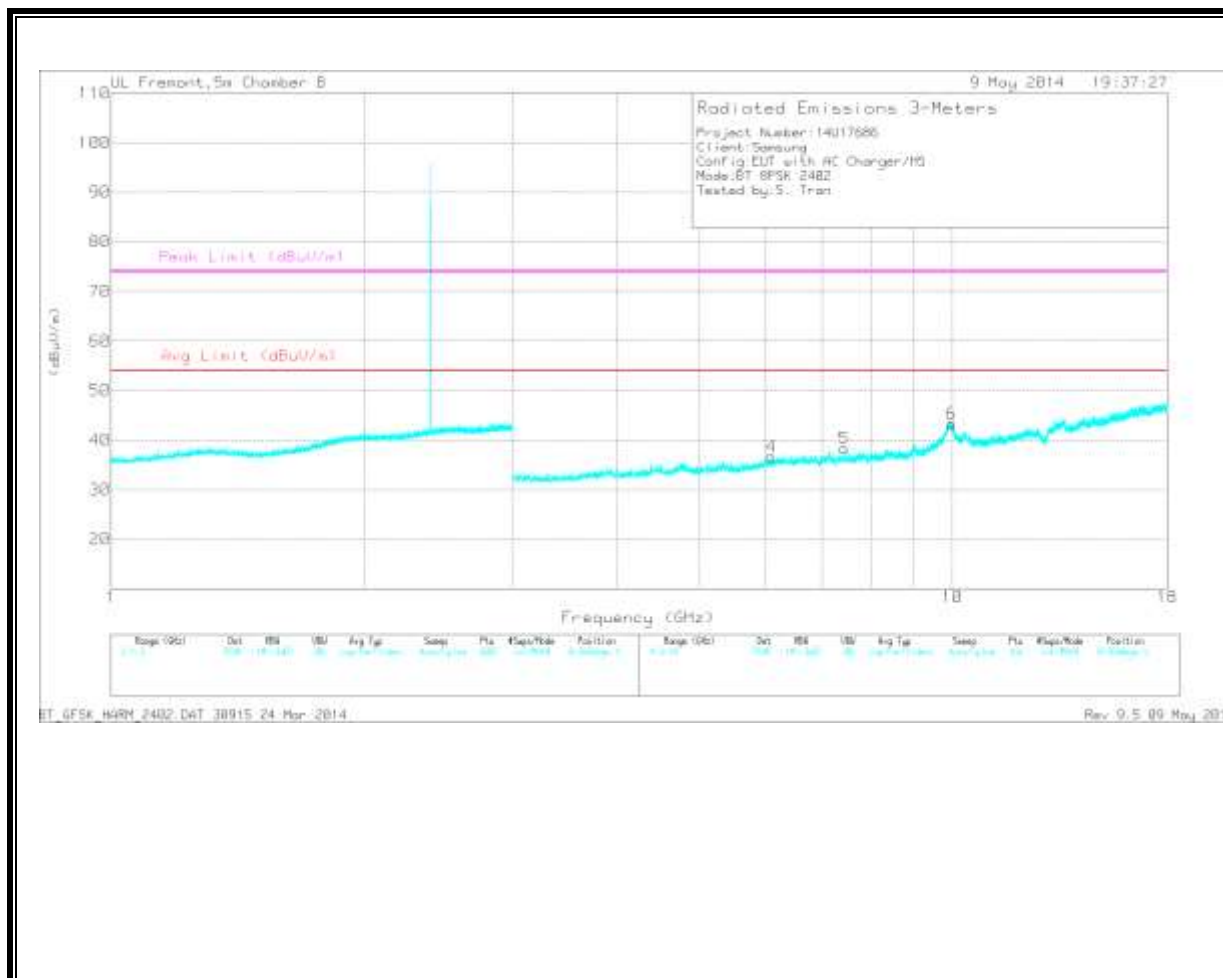

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 7.436	29.06	PK	35.6	-26.4	38.26	-	-	74	-35.74	0-360	202	V
1	3.105	31.3	PK	32.9	-31.5	32.7	-	-	-	-	0-360	99	H
4	6.088	31.25	PK	35.3	-29.9	36.65	-	-	-	-	0-360	202	V
2	6.338	29.49	PK	35.5	-28.5	36.49	-	-	-	-	0-360	99	H
3	9.901	30.34	PK	37	-23.6	43.74	-	-	-	-	0-360	201	H
6	9.974	29.91	PK	37	-23.6	43.31	-	-	-	-	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.435	37.6	PK3	35.6	-26.4	46.8	54	-7.2	74	-27.2	1	100	V
* 7.436	24.58	VB1T	35.6	-26.4	33.78	54	-20.22	74	-40.22	1	100	V
3.108	41.27	PK3	32.9	-31.6	42.57	54	-11.43	74	-31.43	1	100	H
6.084	40.46	PK3	35.3	-29.8	45.96	54	-8.04	74	-28.04	1	100	V
6.334	39.27	PK3	35.5	-28.5	46.27	54	-7.73	74	-27.73	1	100	H
9.885	40.32	PK3	37	-23.8	53.52	54	-0.48	74	-20.48	1	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

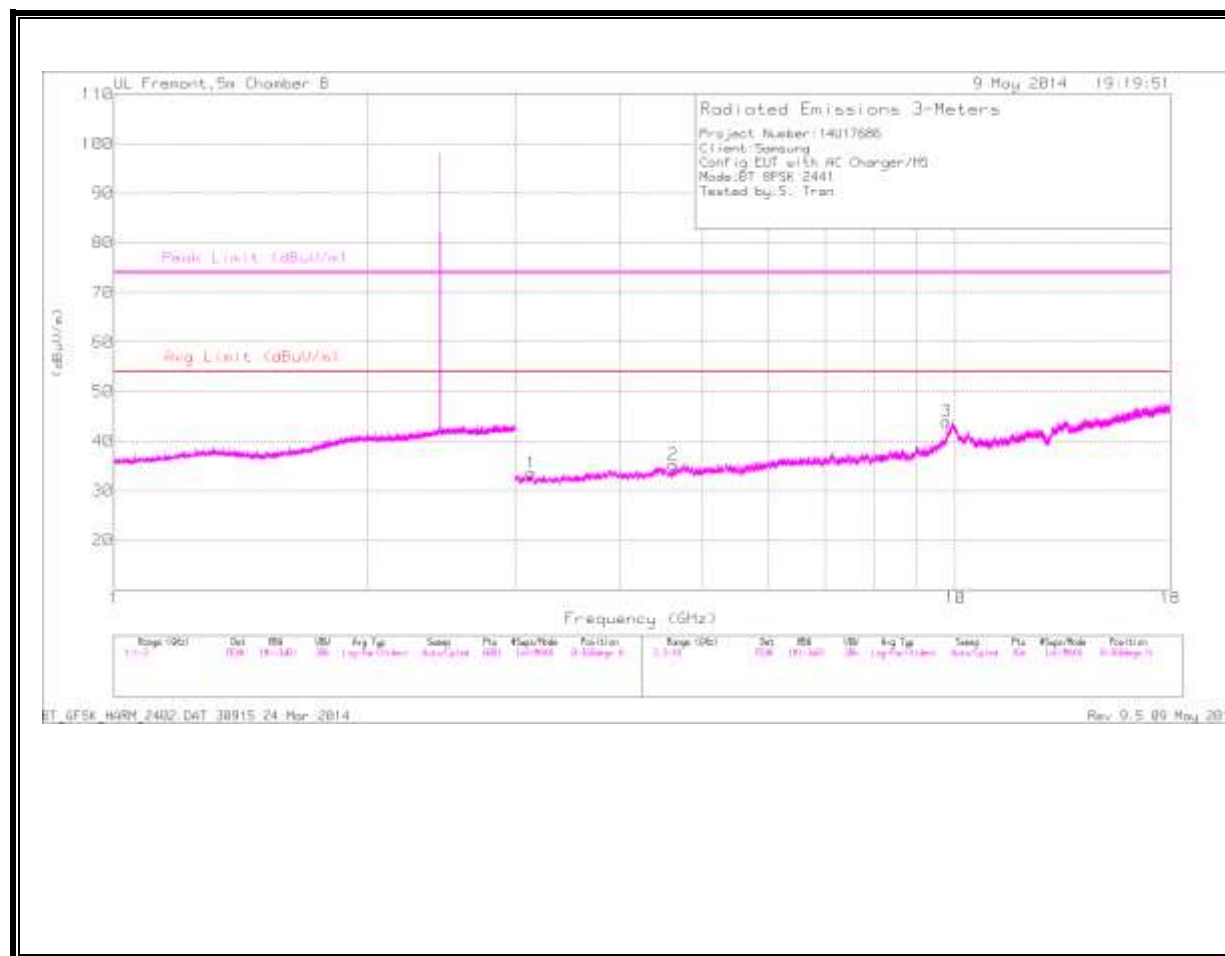MID CHANNEL
HORIZONTAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

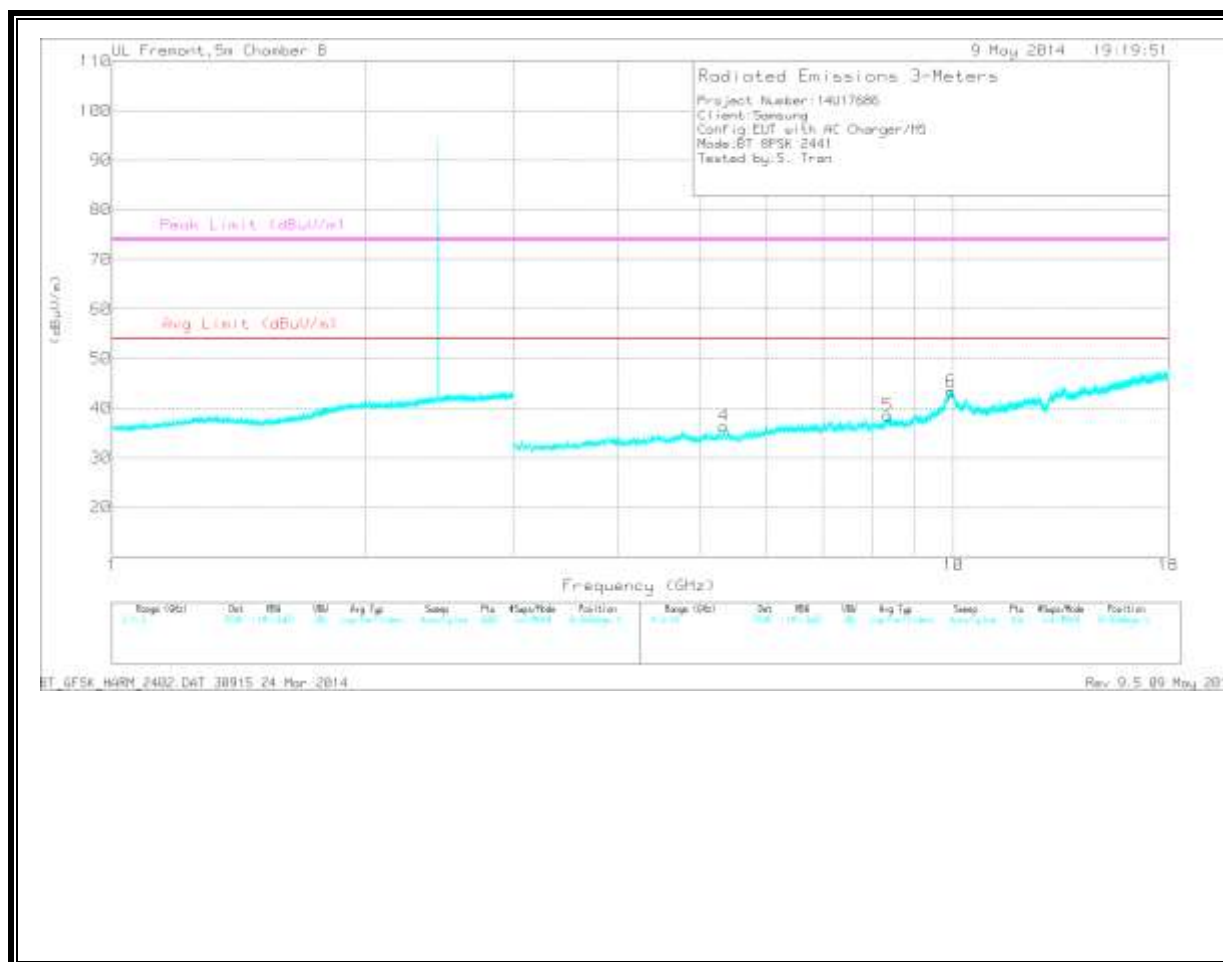

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.616	31.98	PK	34.2	-30.9	35.28	-	-	74	-38.72	0-360	201	H
5	* 8.354	28.01	PK	35.7	-25.2	38.51	-	-	74	-35.49	0-360	202	V
1	3.129	32.1	PK	32.8	-31.3	33.6	-	-	-	-	0-360	99	H
4	5.334	30.55	PK	34.5	-28.7	36.35	-	-	-	-	0-360	202	V
3	9.764	30.77	PK	36.9	-23.7	43.97	-	-	-	-	0-360	201	H
6	9.932	29.76	PK	37	-23.4	43.36	-	-	-	-	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.619	28.08	VB1T	34.2	-30.9	31.38	54	-22.62	74	-42.62	2	100	H
* 8.333	24.2	VB1T	35.7	-25.4	34.5	54	-19.5	74	-39.5	2	100	V
3.107	41.27	PK3	32.9	-31.5	42.67	54	-11.33	74	-31.33	2	100	H
5.333	39.64	PK3	34.5	-28.7	45.44	54	-8.56	74	-28.56	2	100	V
9.784	36.66	PK3	36.9	-23.7	49.86	54	-4.14	74	-24.14	2	100	H
9.928	38.77	PK3	37	-23.4	52.37	54	-1.63	74	-21.63	2	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

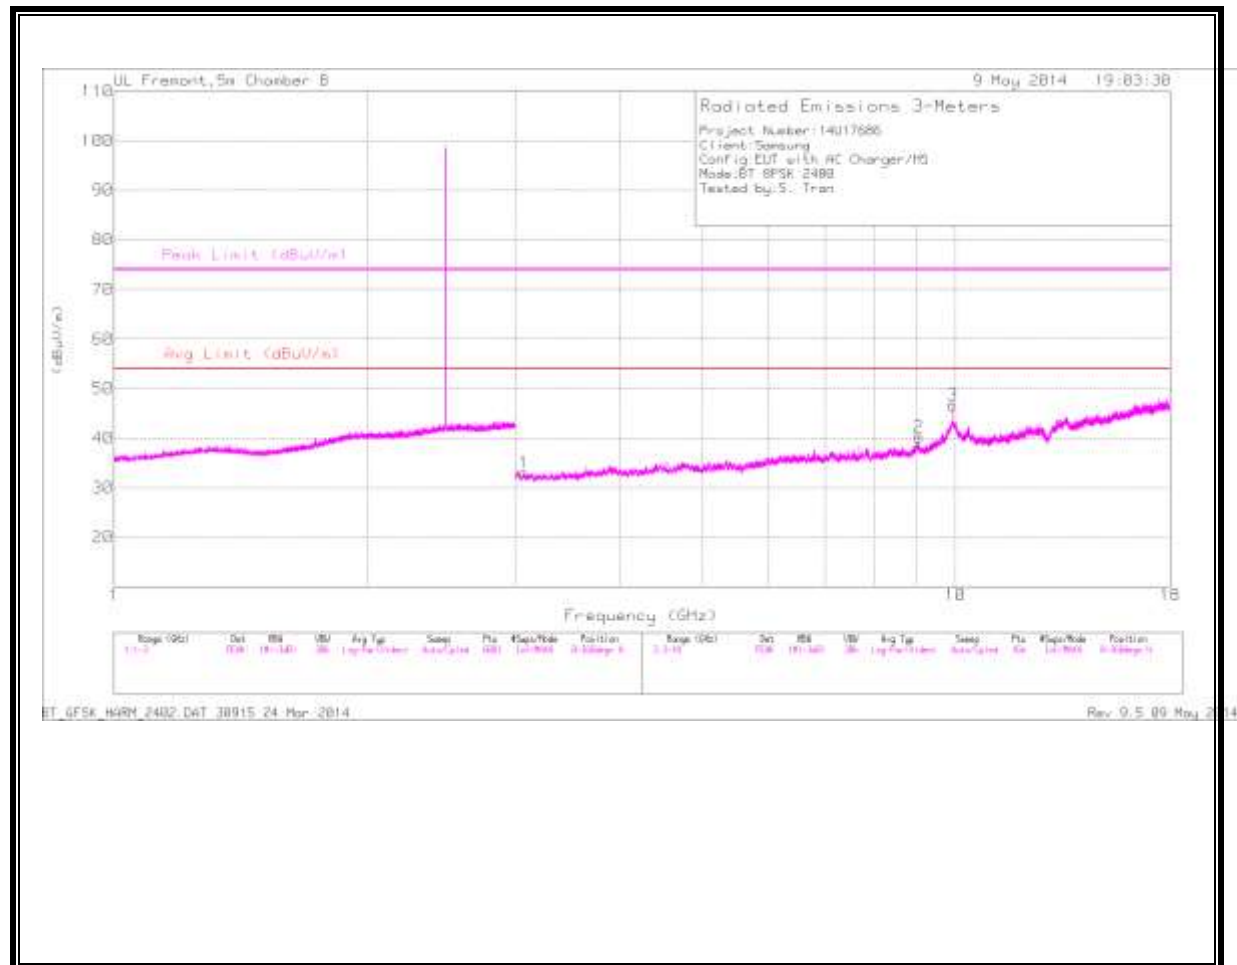HIGH CHANNEL
HORIZONTAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 9.044	27.53	PK	36.2	-23.5	40.23	-	-	74	-33.77	0-360	99	H
5	* 8.438	28.03	PK	35.8	-24.8	39.03	-	-	74	-34.97	0-360	99	V
1	3.07	31.92	PK	32.8	-31.7	33.02	-	-	-	-	0-360	99	H
4	3.132	31.86	PK	32.8	-31.3	33.36	-	-	-	-	0-360	202	V
3	9.919	33.14	PK	37	-23.5	46.64	-	-	-	-	0-360	202	H
6	9.919	30.6	PK	37	-23.5	44.1	-	-	-	-	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 9.065	22.61	VB1T	36.3	-24.1	34.81	54	-19.19	74	-39.19	1	100	H
* 8.454	24	VB1T	35.8	-25.2	34.6	54	-19.4	74	-39.4	1	100	V
3.092	41.31	PK3	32.9	-31.7	42.51	54	-11.49	74	-31.49	1	100	H
3.11	41.31	PK3	32.9	-31.6	42.61	54	-11.39	74	-31.39	1	100	V
9.92	38.99	PK3	37	-23.5	52.49	54	-1.51	74	-21.51	1	100	H
9.927	39.11	PK3	37	-23.4	52.71	54	-1.29	74	-21.29	1	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

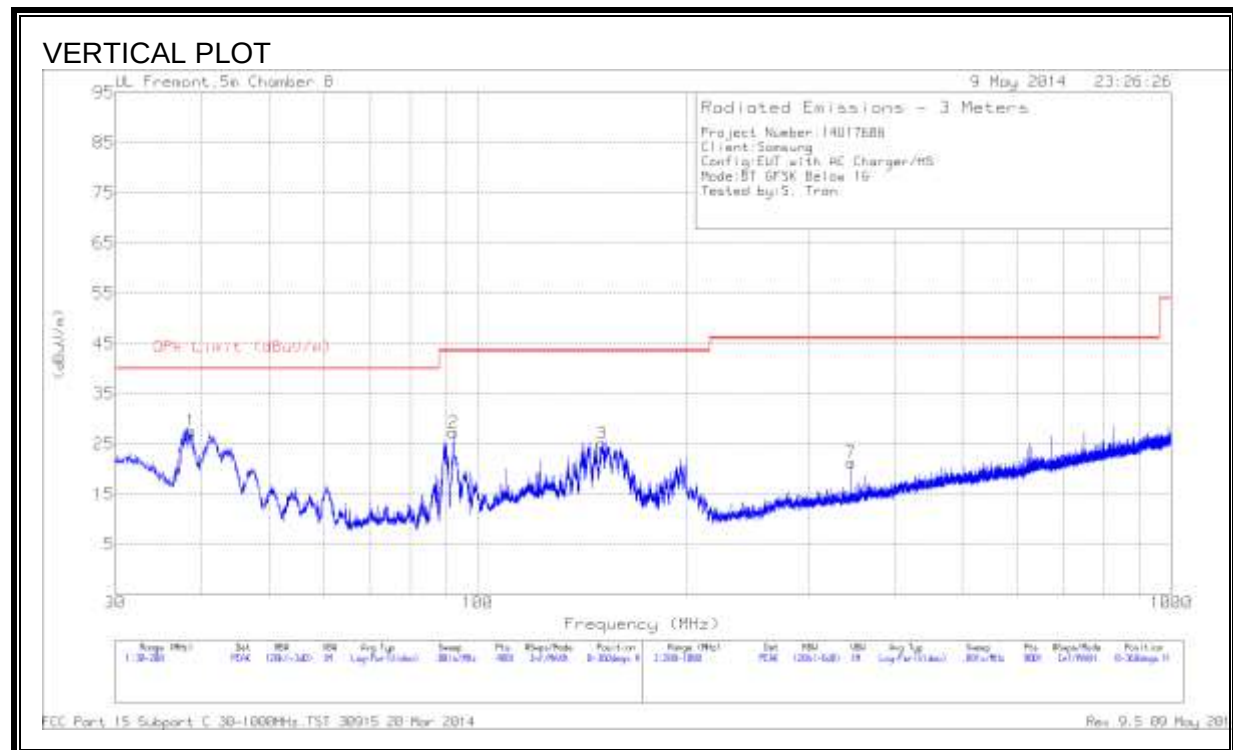

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	38.33	43.71	PK	15.2	-28.7	30.21	40	-9.79	0-360	101	V
1	38.6275	41.28	PK	15	-28.7	27.58	40	-12.42	0-360	300	H
2	92.305	47.13	PK	8.2	-28.1	27.23	43.52	-16.29	0-360	200	H
5	92.3475	43.91	PK	8.2	-28.1	24.01	43.52	-19.51	0-360	101	V
6	143.0925	40.17	PK	12.7	-27.5	25.37	43.52	-18.15	0-360	101	V
3	150.955	40.19	PK	12.3	-27.4	25.09	43.52	-18.43	0-360	200	H
7	345.6	32.95	PK	14	-25.7	21.25	46.02	-24.77	0-360	101	H
8	628	34.67	PK	19.4	-25.2	28.87	46.02	-17.15	0-360	101	V

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.222	35.35	PK	.8	0	36.15	62.7	-26.55	-	-
2	.222	25.09	Av	.8	0	25.89	-	-	52.7	-26.81
3	.357	46.96	PK	.5	0	47.46	58.8	-11.34	-	-
4	.357	36.65	Av	.5	0	37.15	-	-	48.8	-11.65
5	.6945	37.87	PK	.3	0	38.17	56	-17.83	-	-
6	.6945	23.53	Av	.3	0	23.83	-	-	46	-22.17
7	2.0085	40.75	PK	.2	.1	41.05	56	-14.95	-	-
8	2.0085	30.28	Av	.2	.1	30.58	-	-	46	-15.42
9	2.3415	41.21	PK	.2	.1	41.51	56	-14.49	-	-
10	2.3415	29.85	Av	.2	.1	30.15	-	-	46	-15.85
11	8.403	30.51	PK	.2	.1	30.81	60	-29.19	-	-
12	8.403	19.79	Av	.2	.1	20.09	-	-	50	-29.91
13	8.772	30.46	PK	.2	.1	30.76	60	-29.24	-	-
14	8.772	20	Av	.2	.1	20.3	-	-	50	-29.7
15	29.238	35.53	PK	.3	.3	36.13	60	-23.87	-	-
16	29.238	20.83	Av	.3	.3	21.43	-	-	50	-28.57

Line-L2 .15 - 30MHz


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
17	.15	32.11	PK	1.5	0	33.61	66	-32.39	-	-
18	.15	14.34	Av	1.5	0	15.84	-	-	56	-40.16
19	.357	41.74	PK	.5	0	42.24	58.8	-16.56	-	-
20	.357	29.12	Av	.5	0	29.62	-	-	48.8	-19.18
21	.357	41.74	PK	.5	0	42.24	58.8	-16.56	-	-
22	.357	29.12	Av	.5	0	29.62	-	-	48.8	-19.18
23	.699	36.69	PK	.3	0	36.99	56	-19.01	-	-
24	.699	18.02	Av	.3	0	18.32	-	-	46	-27.68
25	2.022	38.33	PK	.2	.1	38.63	56	-17.37	-	-
26	2.022	23.43	Av	.2	.1	23.73	-	-	46	-22.27
27	2.175	38.67	PK	.2	.1	38.97	56	-17.03	-	-
28	2.175	22.11	Av	.2	.1	22.41	-	-	46	-23.59
29	2.517	38.61	PK	.2	.1	38.91	56	-17.09	-	-
30	2.517	22.04	Av	.2	.1	22.34	-	-	46	-23.66
35	8.502	27.82	PK	.2	.1	28.12	60	-31.88	-	-
36	8.502	14.85	Av	.2	.1	15.15	-	-	50	-34.85
33	8.8125	27.6	PK	.2	.1	27.9	60	-32.1	-	-
34	8.8125	15	Av	.2	.1	15.3	-	-	50	-34.7
31	9.6585	27.88	PK	.2	.1	28.18	60	-31.82	-	-
32	9.6585	12.96	Av	.2	.1	13.26	-	-	50	-36.74
37	29.238	26.58	PK	.3	.3	27.18	60	-32.82	-	-
38	29.238	16.12	Av	.3	.3	16.72	-	-	50	-33.28

PK - Peak detector

Av - average detection

LINE 1 RESULTS

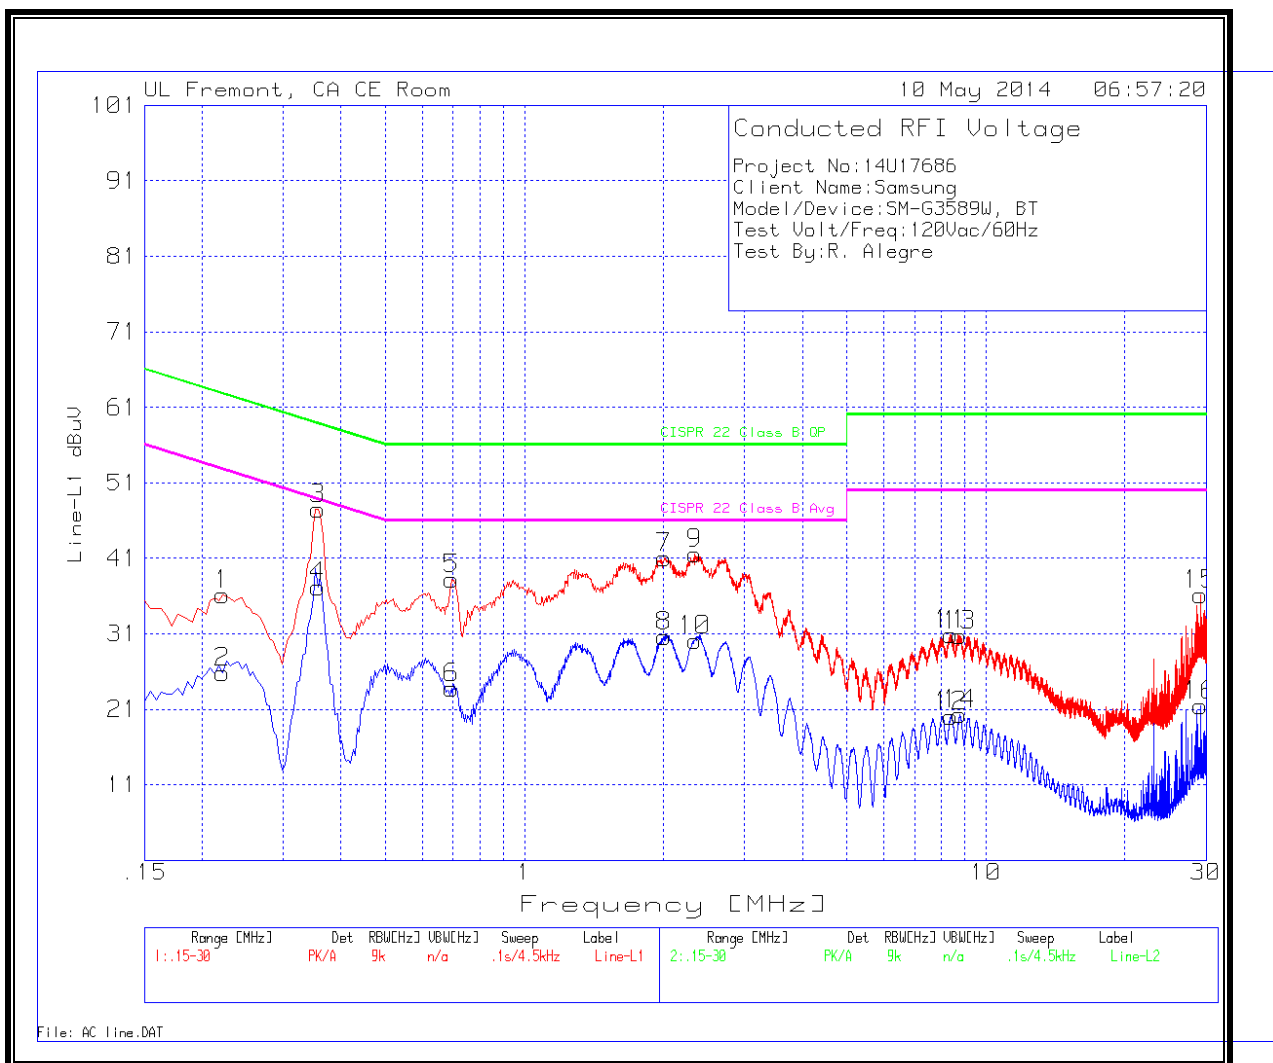

LINE 2 RESULTS

