


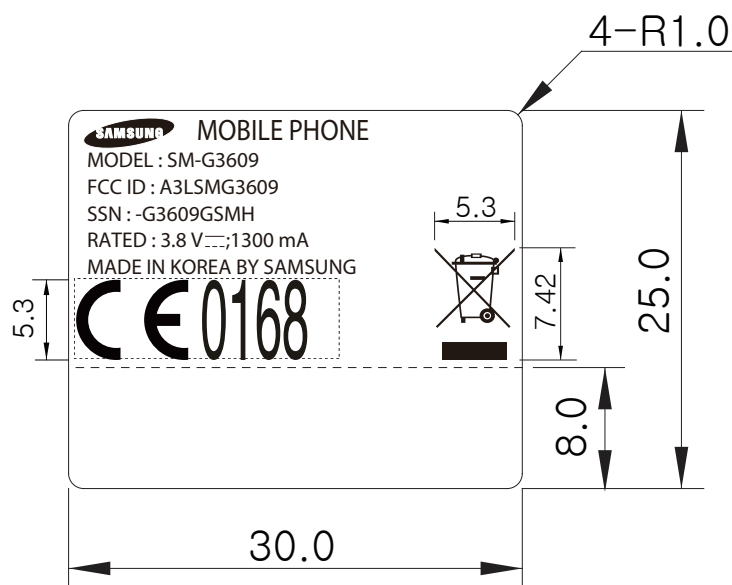

Technical Description

1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents
2. Background color is 'WHITE', letter color is 'BLACK'
(reverse for SAMSUNG LOGO)
3. Back side should be attached to release paper once adhesive is applied.
4. No letter should be blur/smeared
5. The production must be proceed after the approval of SAMSUNG R&D Group
6. The product must be within approved sample's specification tolerance.
7. The product must be finished in a ROLL
8. Release paper must be unifiedn for material and color(blue)
9. Do not contain any substances which are specified in (OQA-2049).

MAT.		HS-405W		MZ1081 40μ White PET 25μ Adhesive 20μ (0.085T±0.01)		FIN.	
TITLE		SM-G3609-승인용					
		LABEL-MAIN					
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION		
TOLERANCE	+0.0 -0.1	Park Tae San		Jeong Kyu Yeob			
SCALE	N/S						
Vendor	HANSUNG	140714		140714	SHEET NO	1 / 1	
SAMSUNG ELECTRONICS		Doc. CODE	GH68-00000A				