



**FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 22 SUBPART H**

CERTIFICATION TEST REPORT

For

GSM/WCDMA/LTE Phone + Bluetooth and WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G360GY

FCC ID: A3LSMG360GY

REPORT NUMBER: 14I19572-E1 REVISION A

ISSUE DATE: DECEMBER 30, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
--	12/15/14	Initial Issue	P. Zhang
A	12/30/14	Updated WCDMA B2 test result	P. Zhang

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	7
4.1.	MEASURING INSTRUMENT CALIBRATION	7
4.2.	SAMPLE CALCULATION	7
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	MAXIMUM OUTPUT POWER (LTE).....	9
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS	10
5.5.	DESCRIPTION OF TEST SETUP.....	11
6.	TEST AND MEASUREMENT EQUIPMENT.....	14
7.	Summary Table.....	15
8.	RF POWER OUTPUT VERIFICATION.....	16
8.1.	GSM/GPRS/EDGE	16
8.1.1.	GSM OUTPUT POWER RESULT	17
8.2.	UMTS REL 99.....	18
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	18
8.3.	UMTS HSDPA	19
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT.....	20
8.3.2.	UMTS HSUPA	21
8.3.3.	UMTS HSUPA OUTPUT POWER RESULT.....	22
8.3.4.	DC-HSDPA.....	23
8.4.	LTE OUTPUT VERIFICATION.....	25
8.4.1.	LTE OUTPUT RESULT	25
9.	PEAK TO AVERAGE RATIO	27
9.1.	CONDUCTED PEAK TO AVERAGE RESULT.....	27
10.	LIMITS AND CONDUCTED RESULTS.....	30
10.1.	OCCUPIED BANDWIDTH.....	30

10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	31
10.1.2.	OCCUPIED BANDWIDTH PLOTS	35
10.2.	<i>BAND EDGE EMISSIONS</i>	39
10.2.1.	BAND EDGE PLOTS	40
10.3.	<i>OUT OF BAND EMISSIONS</i>	52
10.3.1.	OUT OF BAND EMISSIONS RESULT	53
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	57
10.4.	<i>FREQUENCY STABILITY</i>	63
10.4.1.	FREQUENCY STABILITY RESULTS.....	64
11.	RADIATED TEST RESULTS	66
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	66
11.1.1.	ERP/EIRP Results.....	67
11.1.2.	ERP/EIRP DATA.....	70
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	86
11.2.1.	SPURIOUS RADIATION PLOTS.....	87
12.	SETUP PHOTOS	103

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth and WLAN 2.4GHz b/g/n
MODEL: SM-G360GY
SERIAL NUMBER: 1958413 (Radiated), 1958409 (Conducted)
DATE TESTED: DECEMBER 8-30, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☒ Chamber B	☐ Chamber E
☒ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

$$(\text{Path loss} = \text{Signal generator output} - \text{PSA reading with substitution antenna})$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth and WLAN DTS 2.4Ghz b/g/n.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
GSM850	824~849	GMSK	32.1	1621.8		
	824~849	GPRS	32.1	1621.8	29.47	885.1
	824~849	EGPRS	26.3	426.6	23.92	246.6
GSM1900	1850~1910	GMSK	29.0	794.3		
	1850~1910	GPRS	29.1	812.8	29.21	833.7
	1850~1910	EGPRS	25.3	338.8	25.01	316.9

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 5	824~849	REL99	22.5	177.8	20.15	103.5
	824~849	HSDPA	21.5	141.2	19.98	99.5
	824~849	HSUPA	21.5	141.2		
Band 2	1850~1910	REL99	21.8	151.36	23.70	234.42
	1850~1910	HSDPA	21.5	141.25	22.76	188.80
	1850~1910	HSUPA	21.5	141.25		

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27 (10MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	10MHz	QPSK	22.6	182.0	19.89	97.5
	824~849	10MHz	16QAM	21.2	131.8	18.92	78.0

FCC Part 27 (5MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	5MHz	QPSK	22.6	182.0	19.89	97.5
	824~849	5MHz	16QAM	21.7	147.9	18.90	77.6

FCC Part 27 (3MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	3MHz	QPSK	22.6	182.0	19.92	98.2
	824~849	3MHz	16QAM	21.7	147.9	18.87	77.1

FCC Part 27 (1.4MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	1.4MHz	QPSK	22.4	173.8	19.92	98.2
	824~849	1.4MHz	16QAM	21.6	144.5	19.03	80.0

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
Band 5, 824~849MHz	-2.28
Band 2, 1850~1910MHz	1.76

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	ETA0U10EWE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

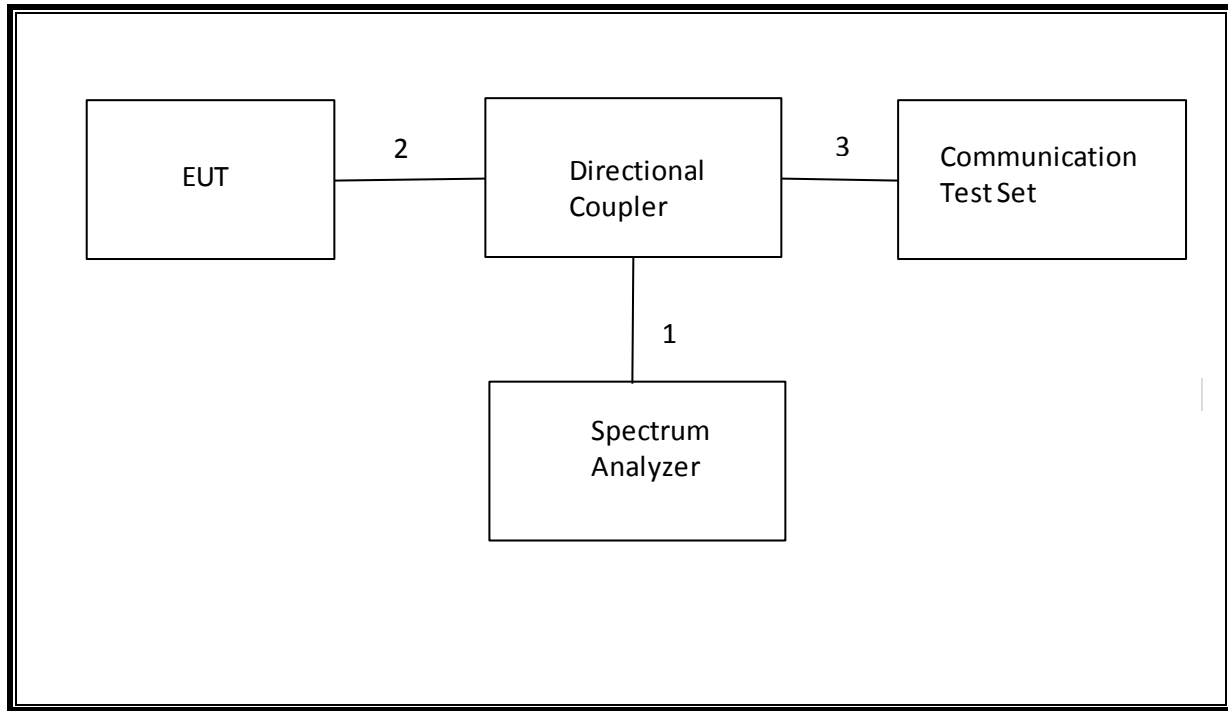
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)



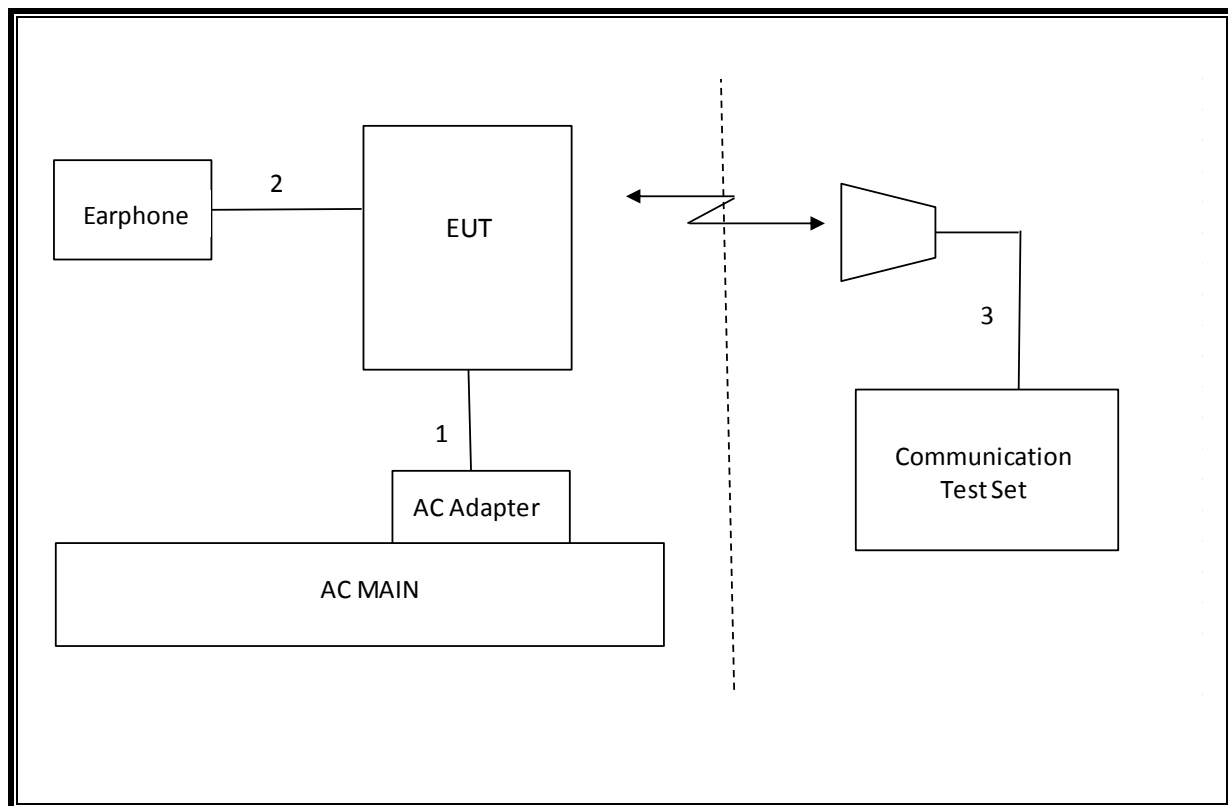SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)



6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/15
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15
Multimeter	Fluke	26111	74320701	4/15/2015

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worse Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	8.97MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-17.566dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.1dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.006PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	29.47dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	29.21dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-46.1dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	32.0			
		190	836.6	32.1			
		251	848.8	32.1			
	GPRS	128	824.2	32.0	31.5	29.9	28.5
		190	836.6	32.1	31.5	30.0	28.5
		251	848.8	32.1	31.5	30.0	28.5
	EGPRS	128	824.2	26.3	25.8	21.5	20.5
		190	836.6	26.3	26.0	21.5	20.7
		251	848.8	26.3	25.9	21.5	20.7
GSM1900	GMSK	512	1850.2	29.0			
		661	1880	29.0			
		810	1909.8	28.9			
	GPRS	512	1850.2	29.1	28.7	26.7	25.2
		661	1880	29.0	28.5	26.5	25.0
		810	1909.8	28.9	28.5	26.7	25.1
	EGPRS	512	1850.2	25.3	24.9	20.5	18.5
		661	1880	25.1	24.6	20.5	18.5
		810	1909.8	25.2	24.7	20.5	18.5

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

WCDMA General Settings	Mode	Rel99
	Subtest	-
	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 5	REL99	4132	826.4	22.5
		4183	836.6	22.5
		4233	846.6	22.5
Band 2	REL99	9262	1852.4	21.7
		9400	1880	21.8
		9538	1907.6	21.7

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSDPA	1	4132	826.4	21.5
			4183	836.6	21.5
			4233	846.6	21.5
		2	4132	826.4	21.5
			4183	836.6	21.2
			4233	846.6	21.5
		3	4132	826.4	20.0
			4183	836.6	20.8
			4233	846.6	20.5
		4	4132	826.4	19.8
			4183	836.6	19.9
			4233	846.6	19.9
Band 2	HSDPA	1	9262	1852.4	21.4
			9400	1880	21.5
			9538	1907.6	21.5
		2	9262	1852.4	20.6
			9400	1880	20.6
			9538	1907.6	20.6
		3	9262	1852.4	20.5
			9400	1880	20.5
			9538	1907.6	20.5
		4	9262	1852.4	20.4
			9400	1880	20.4
			9538	1907.6	20.4

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
HSDPA Specific Settings	β_{ed} (note1)	1309/225	94/75	47/15 47/15	56/75	134/15
	MPR	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
HSUPA Specific Settings	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSUPA	1	4132	826.4	21.5
			4183	836.6	21.5
			4233	846.6	21.3
		2	4132	826.4	20.0
			4183	836.6	20.0
			4233	846.6	20.0
		3	4132	826.4	20.8
			4183	836.6	20.5
			4233	846.6	20.3
		4	4132	826.4	20.0
			4183	836.6	20.0
			4233	846.6	20.0
		5	4132	826.4	21.5
			4183	836.6	21.5
			4233	846.6	21.5
Band 2	HSUPA	1	9262	1852.4	21.5
			9400	1880	21.5
			9538	1907.6	21.5
		2	9262	1852.4	21.5
			9400	1880	21.5
			9538	1907.6	21.5
		3	9262	1852.4	21.4
			9400	1880	21.5
			9538	1907.6	21.5
		4	9262	1852.4	21.4
			9400	1880	21.4
			9538	1907.6	21.5
		5	9262	1852.4	21.5
			9400	1880	21.5
			9538	1907.6	21.5

8.3.4. DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	21.5
		4183	836.6	0	21.5
		4233	846.6	0	21.3
	Subtest 2	4132	826.4	0	21.5
		4183	836.6	0	21.4
		4233	846.6	0	21.5
	Subtest 3	4132	826.4	0.5	21.0
		4183	836.6	0.5	21.0
		4233	846.6	0.5	20.9
	Subtest 4	4132	826.4	0.5	21.0
		4183	836.6	0.5	21.0
		4233	846.6	0.5	21.0
W-CDMA Band 2	Subtest 1	9262	1852.4	0	20.5
		9400	1880	0	20.5
		9538	1907.6	0	20.4
	Subtest 2	9262	1852.4	0	20.5
		9400	1880	0	20.5
		9538	1907.6	0	20.6
	Subtest 3	9262	1852.4	0.5	20.5
		9400	1880	0.5	20.5
		9538	1907.6	0.5	20.4
	Subtest 4	9262	1852.4	0.5	20.4
		9400	1880	0.5	20.5
		9538	1907.6	0.5	20.5

8.4. LTE OUTPUT VERIFICATION

8.4.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.60	22.40	22.40
			1	25	0	22.50	22.40	22.30
			1	49	0	22.40	22.40	22.30
			25	0	1	21.40	21.30	21.20
			25	12	1	21.40	21.20	21.20
			25	25	1	21.30	21.30	21.20
			50	0	1	21.20	21.20	21.20
		16QAM	1	0	1	21.10	21.20	21.00
			1	25	1	21.10	21.50	21.00
			1	49	1	21.00	21.40	21.00
			25	0	2	20.40	20.30	20.30
			25	12	2	20.40	20.30	20.30
			25	25	2	20.30	20.30	20.30
			50	0	2	20.30	20.30	20.30
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.60	22.40	22.40
			1	12	0	22.50	22.30	22.40
			1	24	0	22.40	22.30	22.30
			12	0	1	21.40	21.20	21.40
			12	7	1	21.30	21.30	21.30
			12	13	1	21.30	21.40	21.40
			25	0	1	21.30	21.20	21.20
		16QAM	1	0	1	21.70	21.00	21.70
			1	12	1	21.60	21.00	21.60
			1	24	1	21.50	21.00	21.50
			12	0	2	20.50	20.30	20.40
			12	7	2	20.50	20.20	20.40
			12	13	2	20.40	20.20	20.30
			25	0	2	20.40	20.30	20.20

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.60	22.20	22.30
			1	8	0	22.50	22.20	22.30
			1	14	0	22.40	22.10	22.20
			8	0	1	21.40	21.20	21.40
			8	4	1	21.40	21.20	21.40
			8	7	1	21.40	21.20	21.30
			15	0	1	21.30	21.30	21.30
		16QAM	1	0	1	21.70	21.00	21.50
			1	8	1	21.60	21.00	21.40
			1	14	1	21.50	21.00	21.30
			8	0	2	20.40	20.40	20.50
			8	4	2	20.40	20.30	20.50
			8	7	2	20.40	20.40	20.40
			15	0	2	20.50	20.40	20.40
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.40	22.30	22.30
			1	3	0	22.50	22.30	22.30
			1	5	0	22.40	22.30	22.30
			3	0	0	22.50	22.30	22.40
			3	1	0	22.40	22.30	22.30
			3	3	0	22.40	22.30	22.30
			6	0	1	21.40	21.40	21.40
		16QAM	1	0	1	21.00	21.10	21.60
			1	3	1	21.10	21.10	21.60
			1	5	1	21.00	21.00	21.60
			3	0	1	21.60	21.30	21.30
			3	1	1	21.60	21.30	21.30
			3	3	1	21.50	21.20	21.30
			6	0	2	20.60	20.40	20.20

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

PAR Measurement

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
GSM1900	1850.2	GPRS	26.87	26.74	0.13
		EGPRS	26.21	23.42	2.79
	1880	GPRS	27.5	27.44	0.06
		EGPRS	26.86	24.5	2.36
	1909.8	GPRS	30.57	30.42	0.15
		EGPRS	28.44	25.2	3.24

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
GSM850	824.2	GPRS	27.6	27.52	0.08
		EGPRS	23.54	20.33	3.21
	836.6	GPRS	27.74	27.69	0.05
		EGPRS	23.91	20.96	2.95
	848.8	GPRS	27.69	27.65	0.04
		EGPRS	23.83	20.97	2.86

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)		Delta
WCDMA 5	826.4	REL99	25.42	21.23		4.19
		HSDPA	25.65	21.58		4.07
	836.6	REL99	25.98	23.32		2.66
		HSDPA	26.2	22.33		3.87
	846.6	REL99	26.26	21.37		4.89
		HSDPA	26.44	22.39		4.05

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)		Delta
WCDMA 2						
	1880	REL99	25.8	23.85		1.95
		HSDPA	25.31	23.46		1.85

LTE PAR Measurement

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
1.4Mhz	824.7	QPSK	28.69	22.45	6.24
		16QAM	28.92	21.41	7.51
	836.5	QPSK	28.08	22.42	5.66
		16QAM	27.92	21.11	6.81
	848.3	QPSK	27.97	22.38	5.59
		16QAM	27.92	20.99	6.93

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
3Mhz	825.5	QPSK	28.7	22.45	6.25
		16QAM	29.13	21.49	7.64
	836.5	QPSK	28.21	22.59	5.62
		16QAM	28	21.24	6.76
	847.5	QPSK	28.49	22.29	6.2
		16QAM	28.29	21.18	7.11

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
5Mhz	826.5	QPSK	28.83	22.5	6.33
		16QAM	28.13	21.41	6.72
	836.5	QPSK	28.22	22.47	5.75
		16QAM	28.1	21.34	6.76
	846.5	QPSK	28.44	22.52	5.92
		16QAM	28.65	21.36	7.29

Cell Bandwidth	Channel (Mhz)	Mode	Peak (dBm)	Average (dBm)	Delta
10Mhz	829	QPSK	28.92	22.45	6.47
		16QAM	28.73	21.39	7.34
	836.5	QPSK	28.29	22.54	5.75
		16QAM	28.56	21.44	7.12
	844	QPSK	28.33	22.49	5.84
		16QAM	28.06	21.17	6.89

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

MODES TESTED

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	247.8	318.2
		190	836.6	244.0	315.5
		251	848.8	246.1	312.0
	EGPRS	128	824.2	244.5	280.6
		190	836.6	248.4	316.7
		251	848.8	236.1	272.3
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	242.4	319.0
		661	1880	245.8	317.4
		810	1909.8	241.6	306.0
	EGPRS	512	1850.2	248.4	306.9
		661	1880	250.2	304.4
		810	1909.8	244.9	303.8

WCDMA OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.16	4.64
		4183	836.6	4.16	4.62
		4233	846.6	4.15	4.64
	HSDPA	4132	826.4	4.15	4.62
		4183	836.6	4.14	4.64
		4233	846.6	4.14	4.61
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		
Band 2	REL99	9262	1852.4	4.16	4.66
		9400	1880	4.14	4.61
		9538	1907.6	4.14	4.65
	HSDPA	9262	1852.4	4.16	4.66
		9400	1880	4.14	4.62
		9538	1907.6	4.16	4.65
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

LTE OCCUPIED BANDWIDTH RESULTS





Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	10	QPSK	50/0	829	8.94	9.79
			50/0	836.5	8.97	9.76
			50/0	844	8.93	9.68
		16QAM	50/0	829	8.93	9.70
			50/0	836.5	8.95	9.73
			50/0	844	8.97	9.64

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	5	QPSK	25/0	826.5	4.49	4.94
			25/0	836.5	4.48	4.94
			25/0	846.5	4.50	4.94
		16QAM	25/0	826.5	4.51	4.96
			25/0	836.5	4.49	4.91
			25/0	846.5	4.49	4.93


Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	3	QPSK	15/0	825.5	2.70	2.98
			15/0	836.5	2.69	2.93
			15/0	847.5	2.68	2.96
		16QAM	15/0	825.5	2.69	3.0
			15/0	836.5	2.69	2.95
			15/0	847.5	2.68	2.98

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	1.4	QPSK	6/0	824.7	1.08	1.25
			6/0	836.5	1.09	1.27
			6/0	848.3	1.09	1.26
		16QAM	6/0	824.7	1.09	1.27
			6/0	836.5	1.08	1.28
			6/0	848.3	1.09	1.25

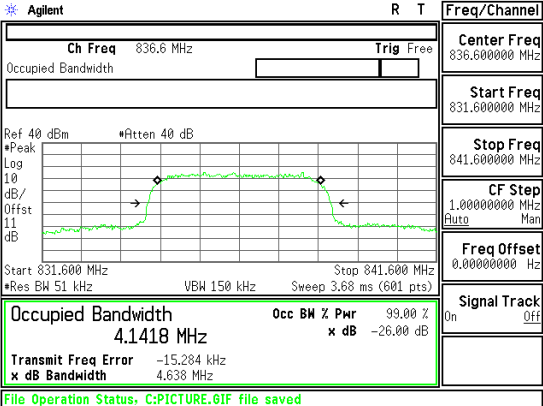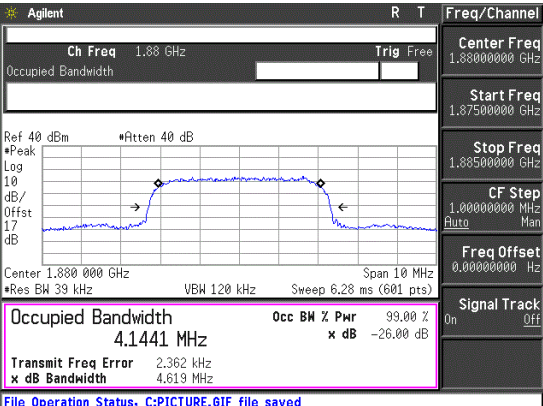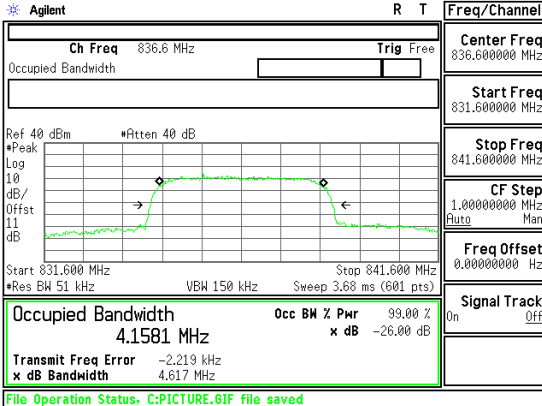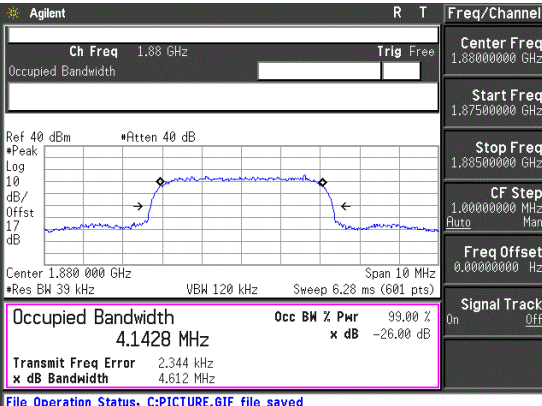10.1.2. OCCUPIED BANDWIDTH PLOTS

Band Band 5 HSDPA	 Agilent R T Freq/Channel Ch Freq 836.6 MHz Trig Free Center Freq 836.600000 MHz Start Freq 831.600000 MHz Stop Freq 841.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 40 dBm #Atten 40 dB Peak Log 10 dB/Offst 11 dB Start 831.600 MHz Stop 841.600 MHz *Res BW 51 kHz VBW 150 kHz Sweep 3.68 ms (601 pts) Occupied Bandwidth 4.1418 MHz Transmit Freq Error -15.284 kHz x dB Bandwidth 4.638 MHz File Operation Status: C:PICTURE.GIF file saved Band WCDMA B5 HSDPA OBW
Band Band 2 HSDPA	 Agilent R T Freq/Channel Ch Freq 1.88 GHz Trig Free Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 40 dBm #Atten 40 dB Peak Log 10 dB/Offst 17 dB Center 1.880 000 GHz Span 10 MHz *Res BW 39 kHz VBW 120 kHz Sweep 6.28 ms (601 pts) Occupied Bandwidth 4.1441 MHz Transmit Freq Error 2.362 kHz x dB Bandwidth 4.619 MHz File Operation Status: C:PICTURE.GIF file saved Band WCDMA B2 HSDPA OBW
 Agilent R T Freq/Channel Ch Freq 836.6 MHz Trig Free Center Freq 836.600000 MHz Start Freq 831.600000 MHz Stop Freq 841.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 40 dBm #Atten 40 dB Peak Log 10 dB/Offst 11 dB Start 831.600 MHz Stop 841.600 MHz *Res BW 51 kHz VBW 150 kHz Sweep 3.68 ms (601 pts) Occupied Bandwidth 4.1581 MHz Transmit Freq Error -2.219 kHz x dB Bandwidth 4.617 MHz File Operation Status: C:PICTURE.GIF file saved Band WCDMA B5 REL99 OBW	 Agilent R T Freq/Channel Ch Freq 1.88 GHz Trig Free Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Ref 40 dBm #Atten 40 dB Peak Log 10 dB/Offst 17 dB Center 1.880 000 GHz Span 10 MHz *Res BW 39 kHz VBW 120 kHz Sweep 6.28 ms (601 pts) Occupied Bandwidth 4.1428 MHz Transmit Freq Error 2.344 kHz x dB Bandwidth 4.612 MHz File Operation Status: C:PICTURE.GIF file saved Band WCDMA B2 REL99 OBW

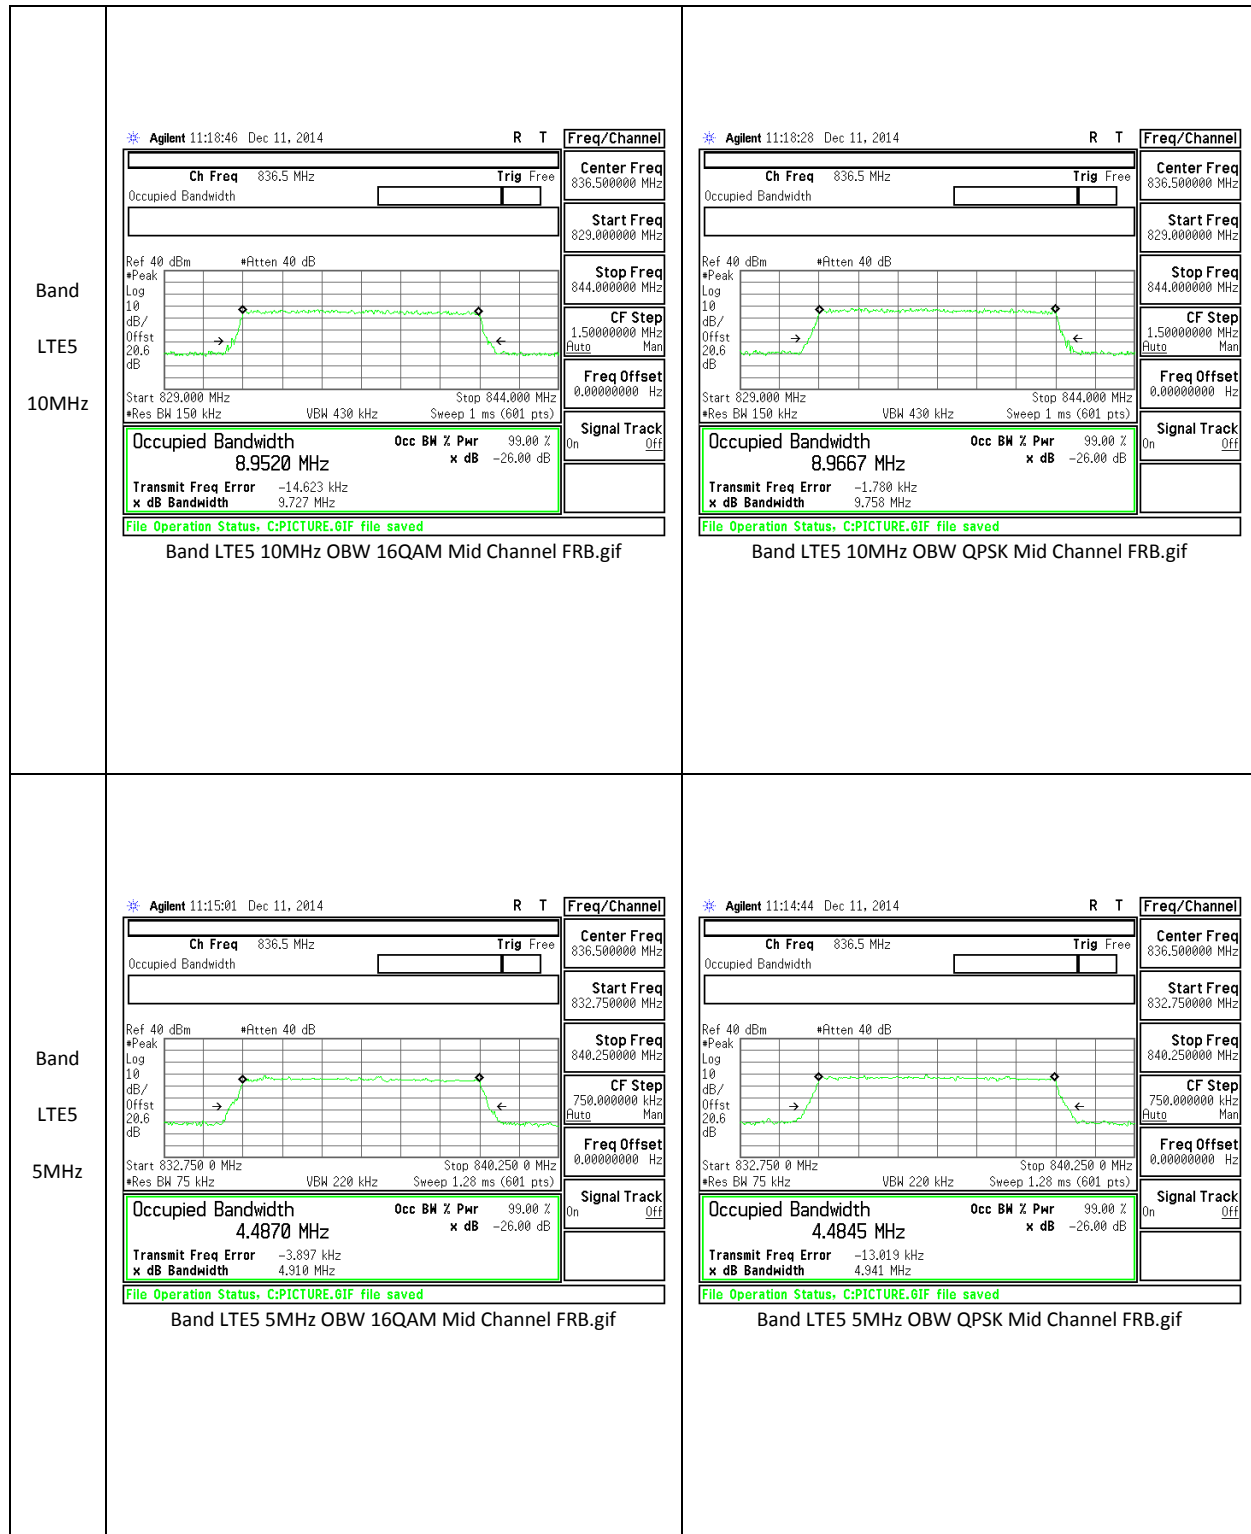Page 36 of 109



Band LTE5 3MHz	Agilent 11:12:16 Dec 11, 2014 R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 834.250000 MHz Stop Freq 838.750000 MHz CF Step 450.000000 kHz Man Freq Offset 0.00000000 Hz Signal Track On Ref 40 dBm #Atten 40 dB #Peak Log 10 dB/Offst 20.6 dB Start 834.250 0 MHz Stop 838.750 0 MHz #Res BW 43 kHz VBW 130 kHz Sweep 2.36 ms (601 pts) Occupied Bandwidth 2.6866 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 3.529 kHz x dB Bandwidth 2.950 MHz File Operation Status, C:PICTURE.GIF file saved
	Band LTE5 3MHz OBW 16QAM Mid Channel FRB.gif

	Agilent 11:11:59 Dec 11, 2014 R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 834.250000 MHz Stop Freq 838.750000 MHz CF Step 450.000000 kHz Man Freq Offset 0.00000000 Hz Signal Track On Ref 40 dBm #Atten 40 dB #Peak Log 10 dB/Offst 20.6 dB Start 834.250 0 MHz Stop 838.750 0 MHz #Res BW 43 kHz VBW 130 kHz Sweep 2.36 ms (601 pts) Occupied Bandwidth 2.6860 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 2.413 kHz x dB Bandwidth 2.932 MHz File Operation Status, C:PICTURE.GIF file saved
	Band LTE5 3MHz OBW QPSK Mid Channel FRB.gif

Band LTE5 1.4MHz	Agilent 11:09:27 Dec 11, 2014 R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 835.450000 MHz Stop Freq 837.550000 MHz CF Step 210.000000 kHz Man Freq Offset 0.00000000 Hz Signal Track On Ref 40 dBm #Atten 40 dB #Peak Log 10 dB/Offst 20.6 dB Start 835.450 0 MHz Stop 837.550 0 MHz #Res BW 20 kHz VBW 62 kHz Sweep 5.04 ms (601 pts) Occupied Bandwidth 1.0844 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 1.536 kHz x dB Bandwidth 1.284 MHz File Operation Status, C:PICTURE.GIF file saved
	Band LTE5 1.4MHz OBW 16QAM Mid Channel FRB.gif

	Agilent 11:09:10 Dec 11, 2014 R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 835.450000 MHz Stop Freq 837.550000 MHz CF Step 210.000000 kHz Man Freq Offset 0.00000000 Hz Signal Track On Ref 40 dBm #Atten 40 dB #Peak Log 10 dB/Offst 20.6 dB Start 835.450 0 MHz Stop 837.550 0 MHz #Res BW 20 kHz VBW 62 kHz Sweep 5.04 ms (601 pts) Occupied Bandwidth 1.0851 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.066 kHz x dB Bandwidth 1.267 MHz File Operation Status, C:PICTURE.GIF file saved
	Band LTE5 1.4MHz OBW QPSK Mid Channel FRB.gif

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

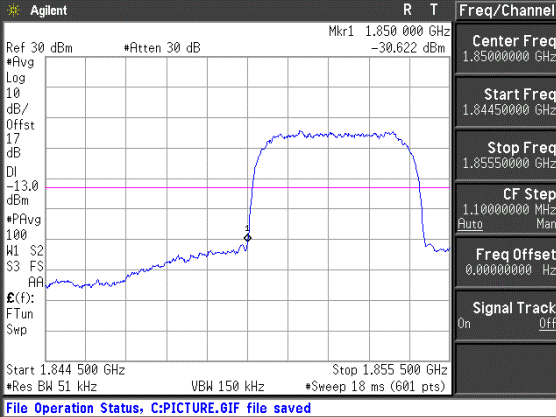
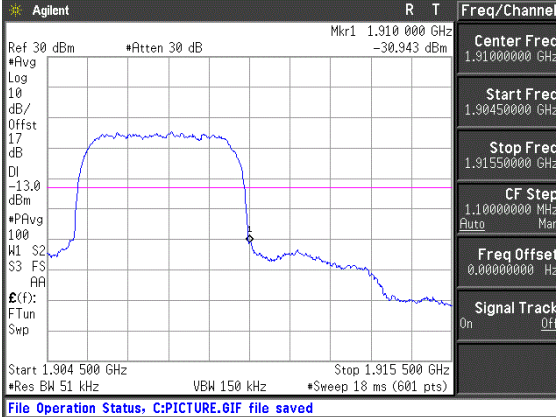
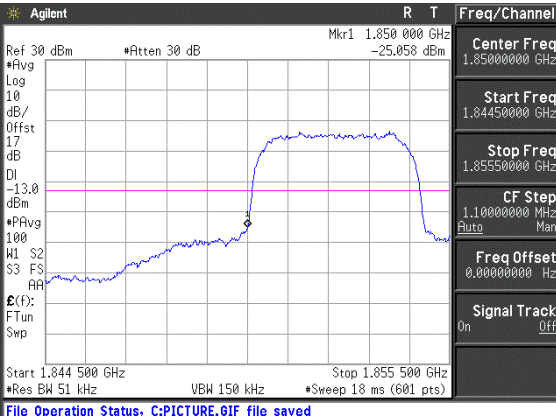
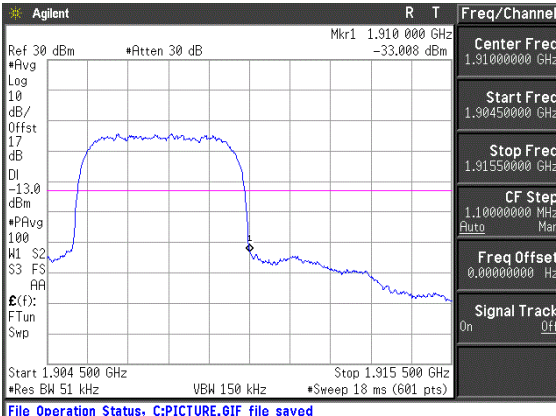
TEST PROCEDURE





Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.





RESULTS





10.2.1. BAND EDGE PLOTS


Band Band 2 HSDPA	 Band WCDMA B2 HSDPA CBE	 Band WCDMA B2 HSDPA CBE
Band Band 2 REL99	 Band WCDMA B2 REL99 CBE	 Band WCDMA B2 REL99 CBE

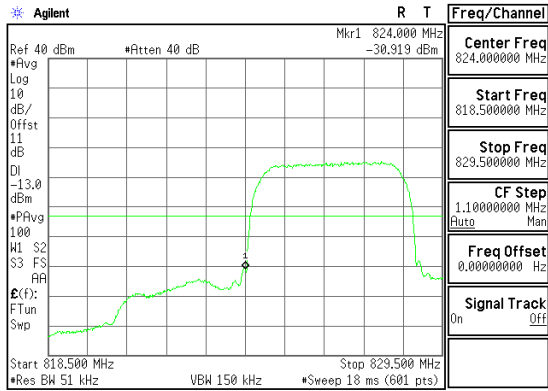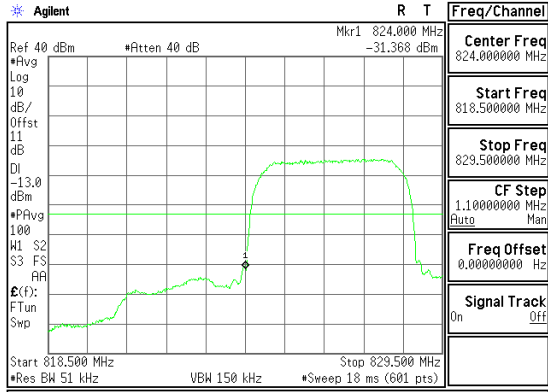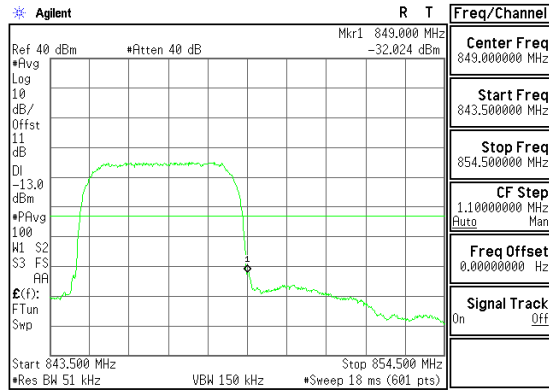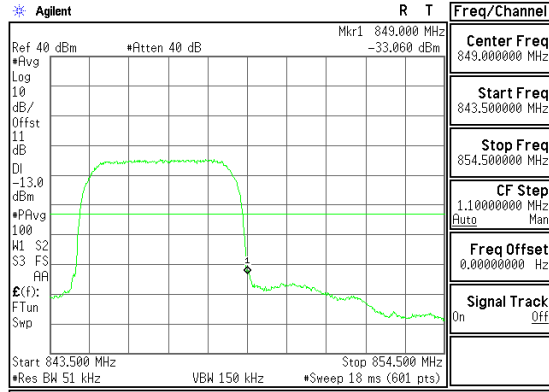
Band Band 5 HSDPA	 File Operation Status, C:PICTURE.6IF file saved Band WCDMA B5 HSDPA CBE
Band Band 5 REL99	 File Operation Status, C:PICTURE.6IF file saved Band WCDMA B5 REL99 CBE
 File Operation Status, C:PICTURE.6IF file saved Band WCDMA B5 HSDPA CBE	 File Operation Status, C:PICTURE.6IF file saved Band WCDMA B5 REL99 CBE


Band GSM1900 EGPRS	Agilent 16:57:41 Dec 8, 2014 R T Measure Ref 40 dBm *Atten 30 dB Mkr2 1.849 969 6 GHz -29.032 dBm Meas Off Channel Power Occupied BW ACP Multi Carrier Power Power Stat CCDF More 1 of 2 File Operation Status: C:PICTURE.GIF file saved Band GSM1900 EGPRS CBE Low channel	Agilent 16:58:16 Dec 8, 2014 R T Measure Ref 40 dBm *Atten 30 dB Mkr2 1.910 020 3 GHz -30.472 dBm Meas Off Channel Power Occupied BW ACP Multi Carrier Power Power Stat CCDF More 1 of 2 File Operation Status: C:PICTURE.GIF file saved Band GSM1900 EGPRS CBE High channel
Band GSM1900 GPRS	Agilent 16:56:19 Dec 8, 2014 R T Measure Ref 40 dBm *Atten 30 dB Mkr2 1.849 984 8 GHz -22.692 dBm Meas Off Channel Power Occupied BW ACP Multi Carrier Power Power Stat CCDF More 1 of 2 File Operation Status: C:PICTURE.GIF file saved Band GSM1900 GPRS CBE Low channel	Agilent 16:56:57 Dec 8, 2014 R T Measure Ref 40 dBm *Atten 30 dB Mkr2 1.910 001 7 GHz -23.285 dBm Meas Off Channel Power Occupied BW ACP Multi Carrier Power Power Stat CCDF More 1 of 2 File Operation Status: C:PICTURE.GIF file saved Band GSM1900 GPRS CBE High channel

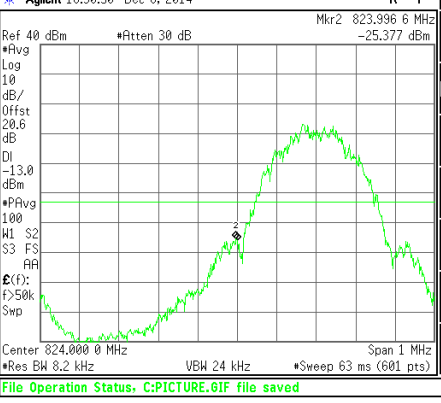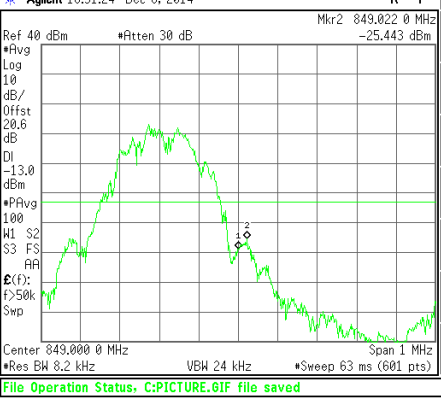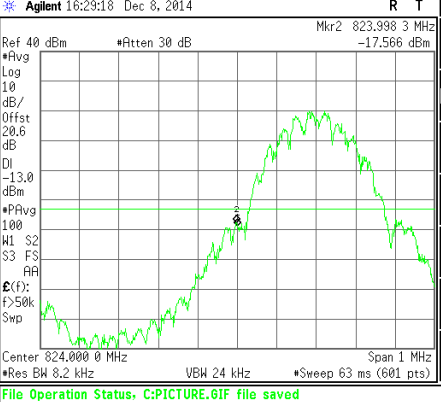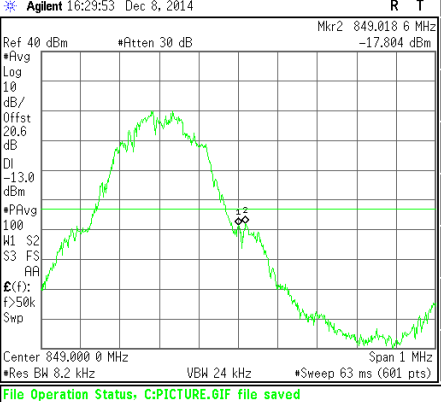
Band GSM850 EGPRS	Agilent 16:30:50 Dec 8, 2014  Center 824.000 0 MHz Res BW 8.2 kHz Span 1 MHz VBW 24 kHz Sweep 63 ms (601 pts) File Operation Status: C:PICTURE.GIF file saved Band GSM850 EGPRS CBE Low channel	Agilent 16:31:24 Dec 8, 2014  Center 849.022 0 MHz Res BW 8.2 kHz Span 1 MHz VBW 24 kHz Sweep 63 ms (601 pts) File Operation Status: C:PICTURE.GIF file saved Band GSM850 EGPRS CBE High channel
Band GSM850 GPRS	Agilent 16:29:18 Dec 8, 2014  Center 824.000 0 MHz Res BW 8.2 kHz Span 1 MHz VBW 24 kHz Sweep 63 ms (601 pts) File Operation Status: C:PICTURE.GIF file saved Band GSM850 GPRS CBE Low channel	Agilent 16:29:53 Dec 8, 2014  Center 849.018 0 MHz Res BW 8.2 kHz Span 1 MHz VBW 24 kHz Sweep 63 ms (601 pts) File Operation Status: C:PICTURE.GIF file saved Band GSM850 GPRS CBE High channel

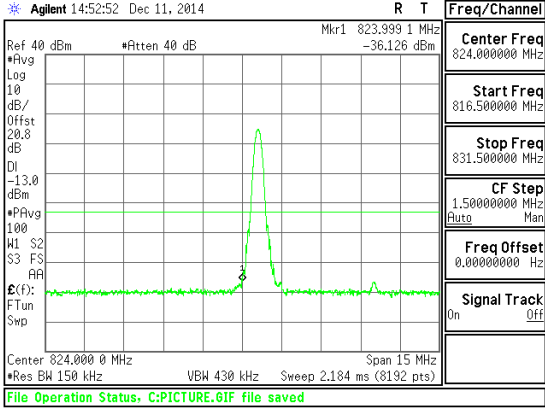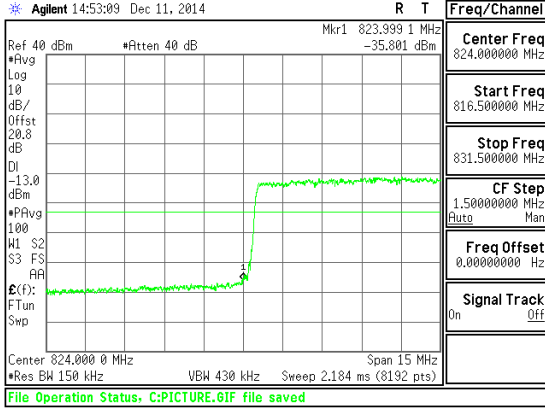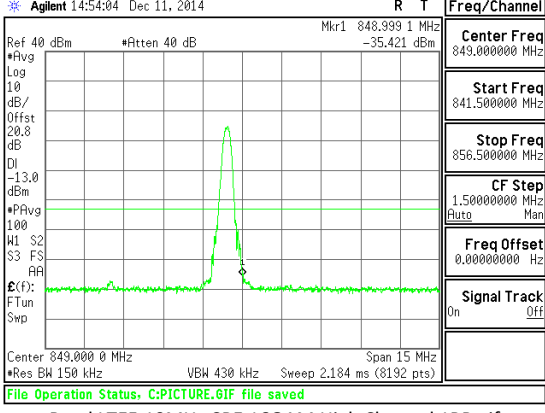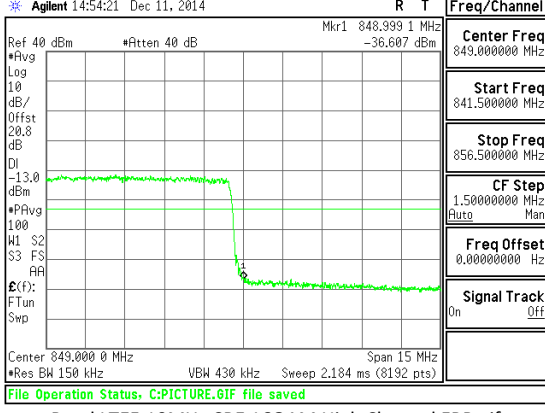
Band LTE5 10MHz 16QAM	Agilent 14:52:52 Dec 11, 2014  Center Freq 823.9991 MHz Start Freq 816.500000 MHz Stop Freq 831.500000 MHz CF Step 1.50000000 MHz Freq Offset 0.00000000 Hz Signal Track On Center 824.0000 MHz Res BW 150 kHz VBW 430 kHz Sweep 2.184 ms (8192 pts) File Operation Status: C:PICTURE.GIF file saved Band LTE5 10MHz CBE 16QAM Low Channel 1RB.gif	Agilent 14:53:09 Dec 11, 2014  Center Freq 823.9991 MHz Start Freq 816.500000 MHz Stop Freq 831.500000 MHz CF Step 1.50000000 MHz Freq Offset 0.00000000 Hz Signal Track On Center 824.0000 MHz Res BW 150 kHz VBW 430 kHz Sweep 2.184 ms (8192 pts) File Operation Status: C:PICTURE.GIF file saved Band LTE5 10MHz CBE 16QAM Low Channel FRB.gif
	Agilent 14:54:04 Dec 11, 2014  Center Freq 848.9991 MHz Start Freq 841.500000 MHz Stop Freq 856.500000 MHz CF Step 1.50000000 MHz Freq Offset 0.00000000 Hz Signal Track On Center 849.0000 MHz Res BW 150 kHz VBW 430 kHz Sweep 2.184 ms (8192 pts) File Operation Status: C:PICTURE.GIF file saved Band LTE5 10MHz CBE 16QAM High Channel 1RB.gif	Agilent 14:54:21 Dec 11, 2014  Center Freq 848.9991 MHz Start Freq 841.500000 MHz Stop Freq 856.500000 MHz CF Step 1.50000000 MHz Freq Offset 0.00000000 Hz Signal Track On Center 849.0000 MHz Res BW 150 kHz VBW 430 kHz Sweep 2.184 ms (8192 pts) File Operation Status: C:PICTURE.GIF file saved Band LTE5 10MHz CBE 16QAM High Channel FRB.gif

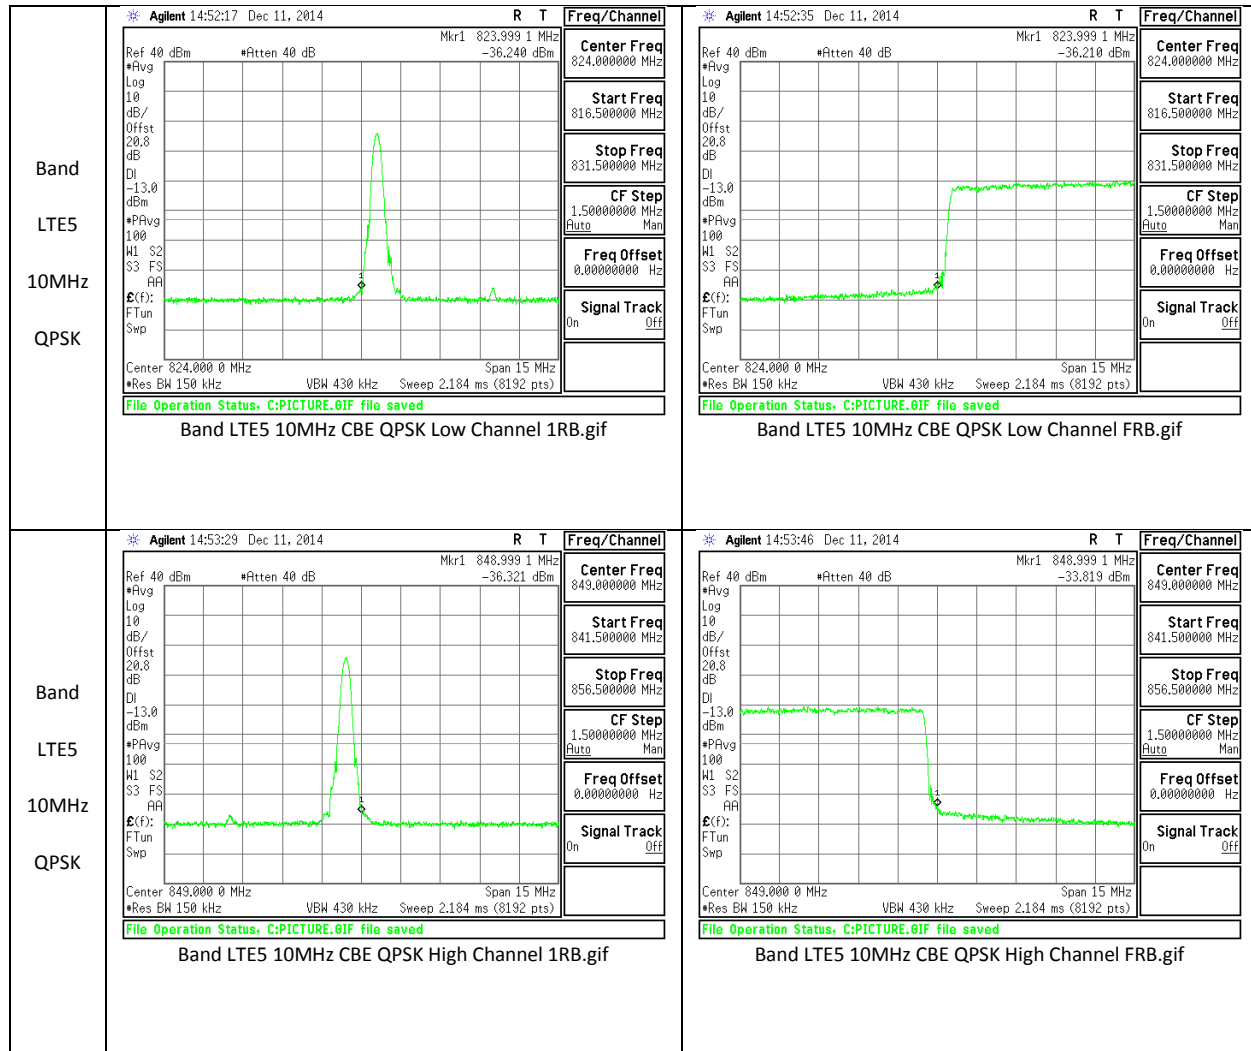

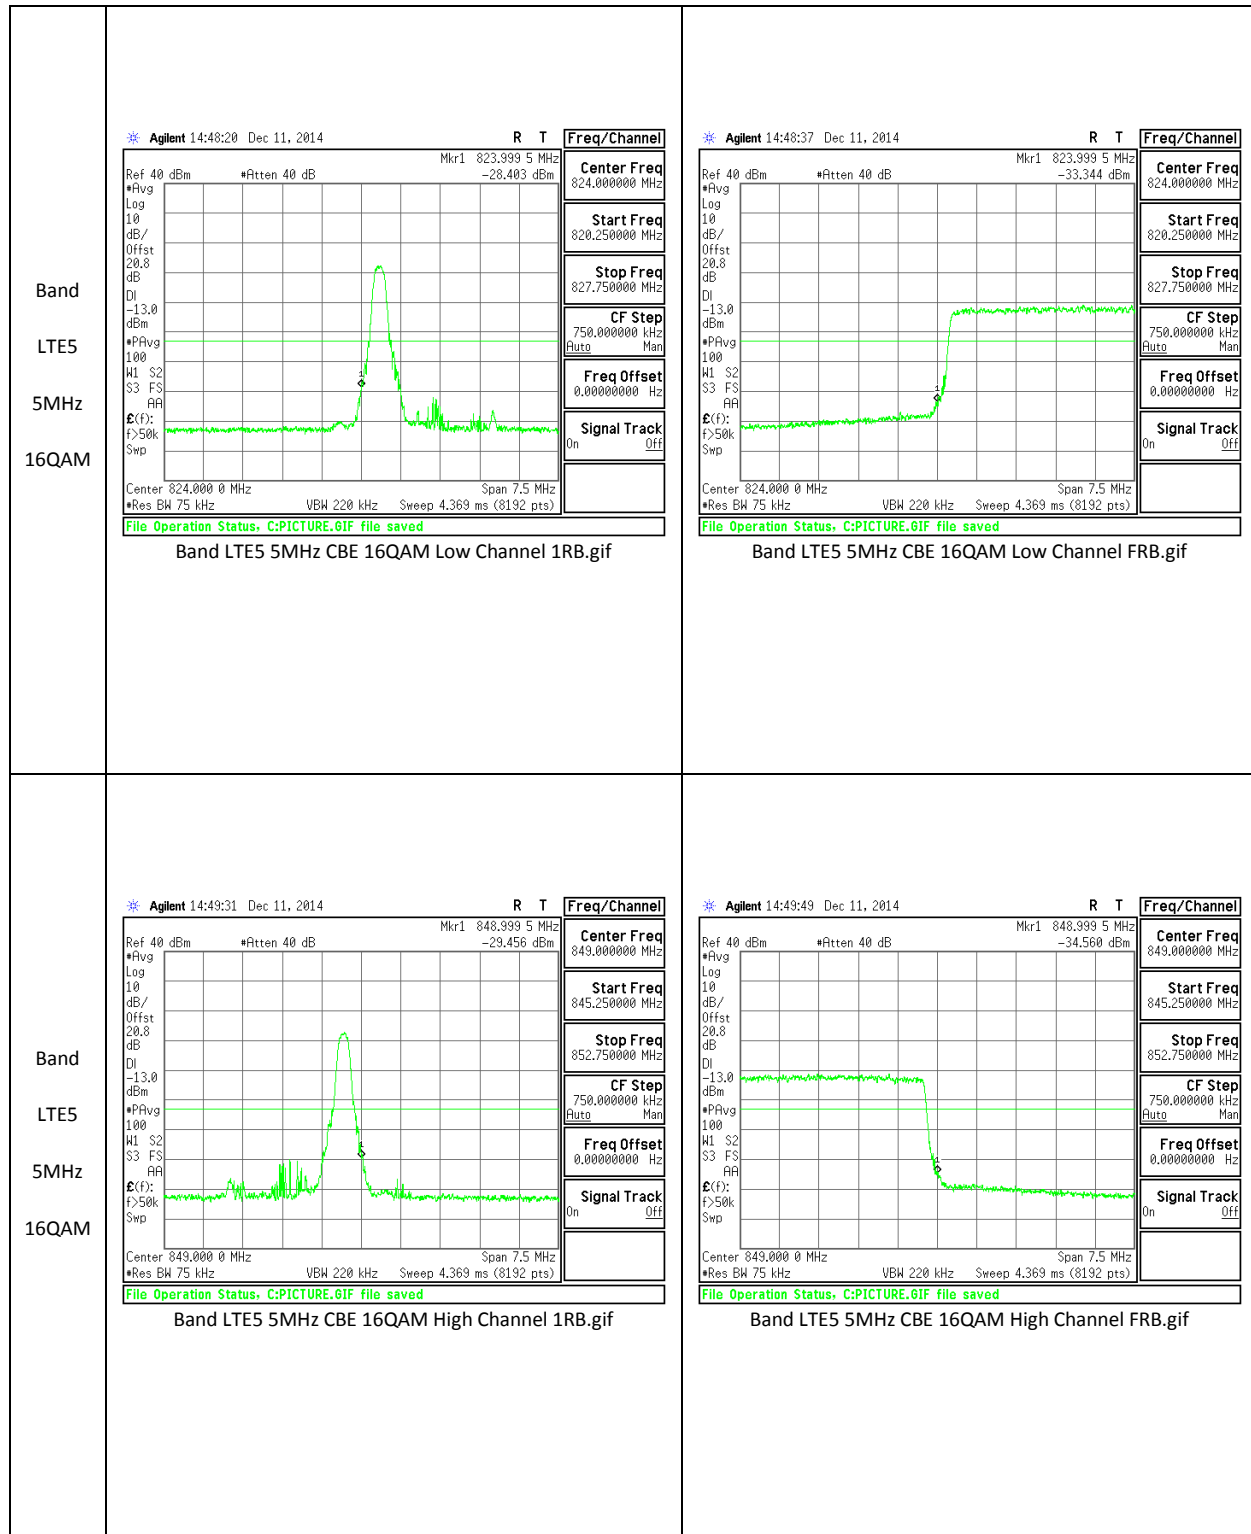


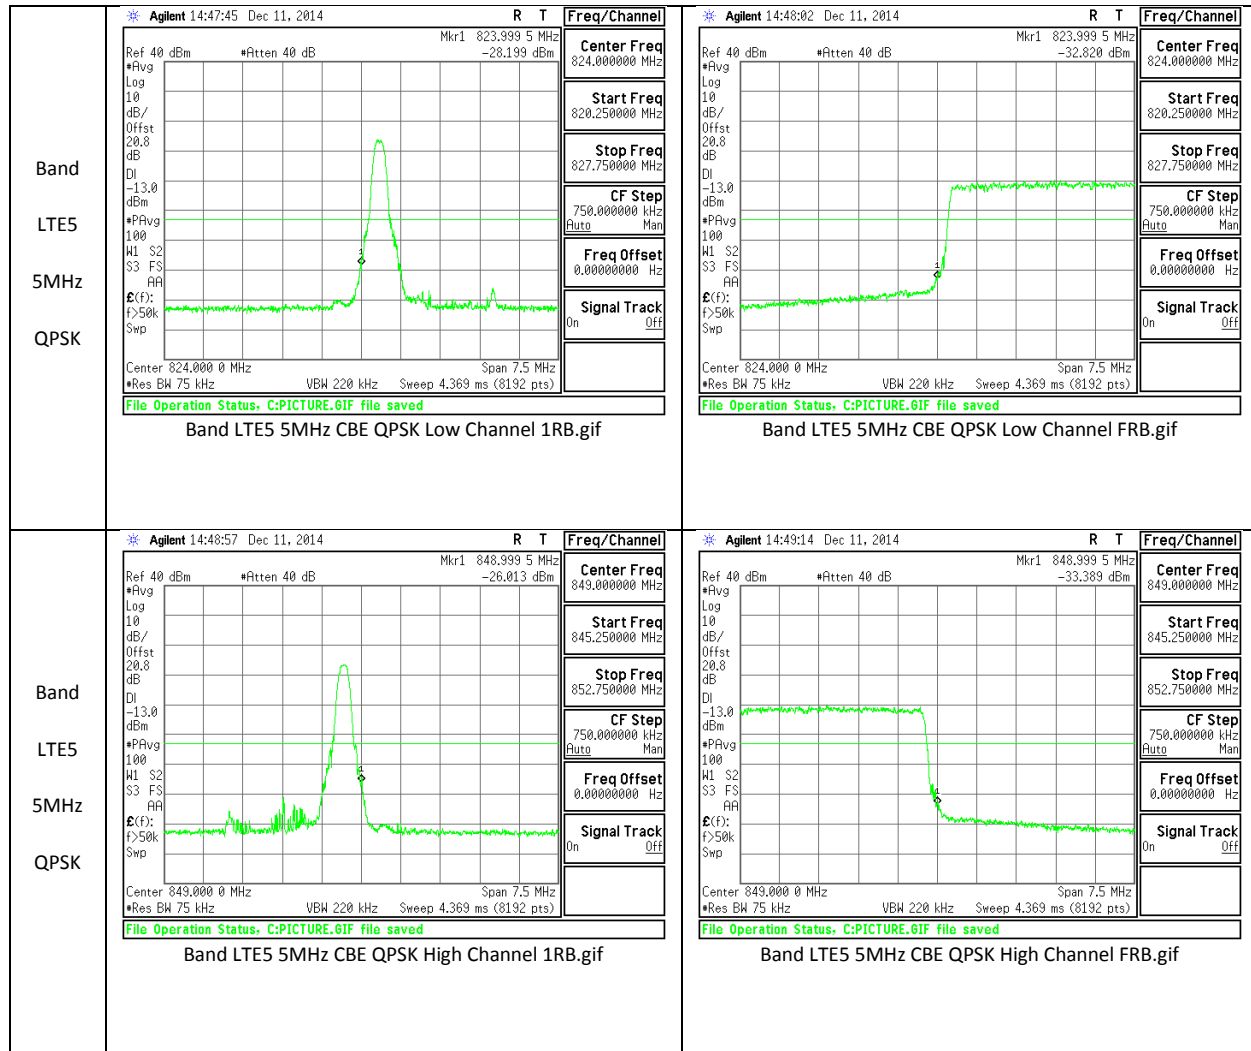

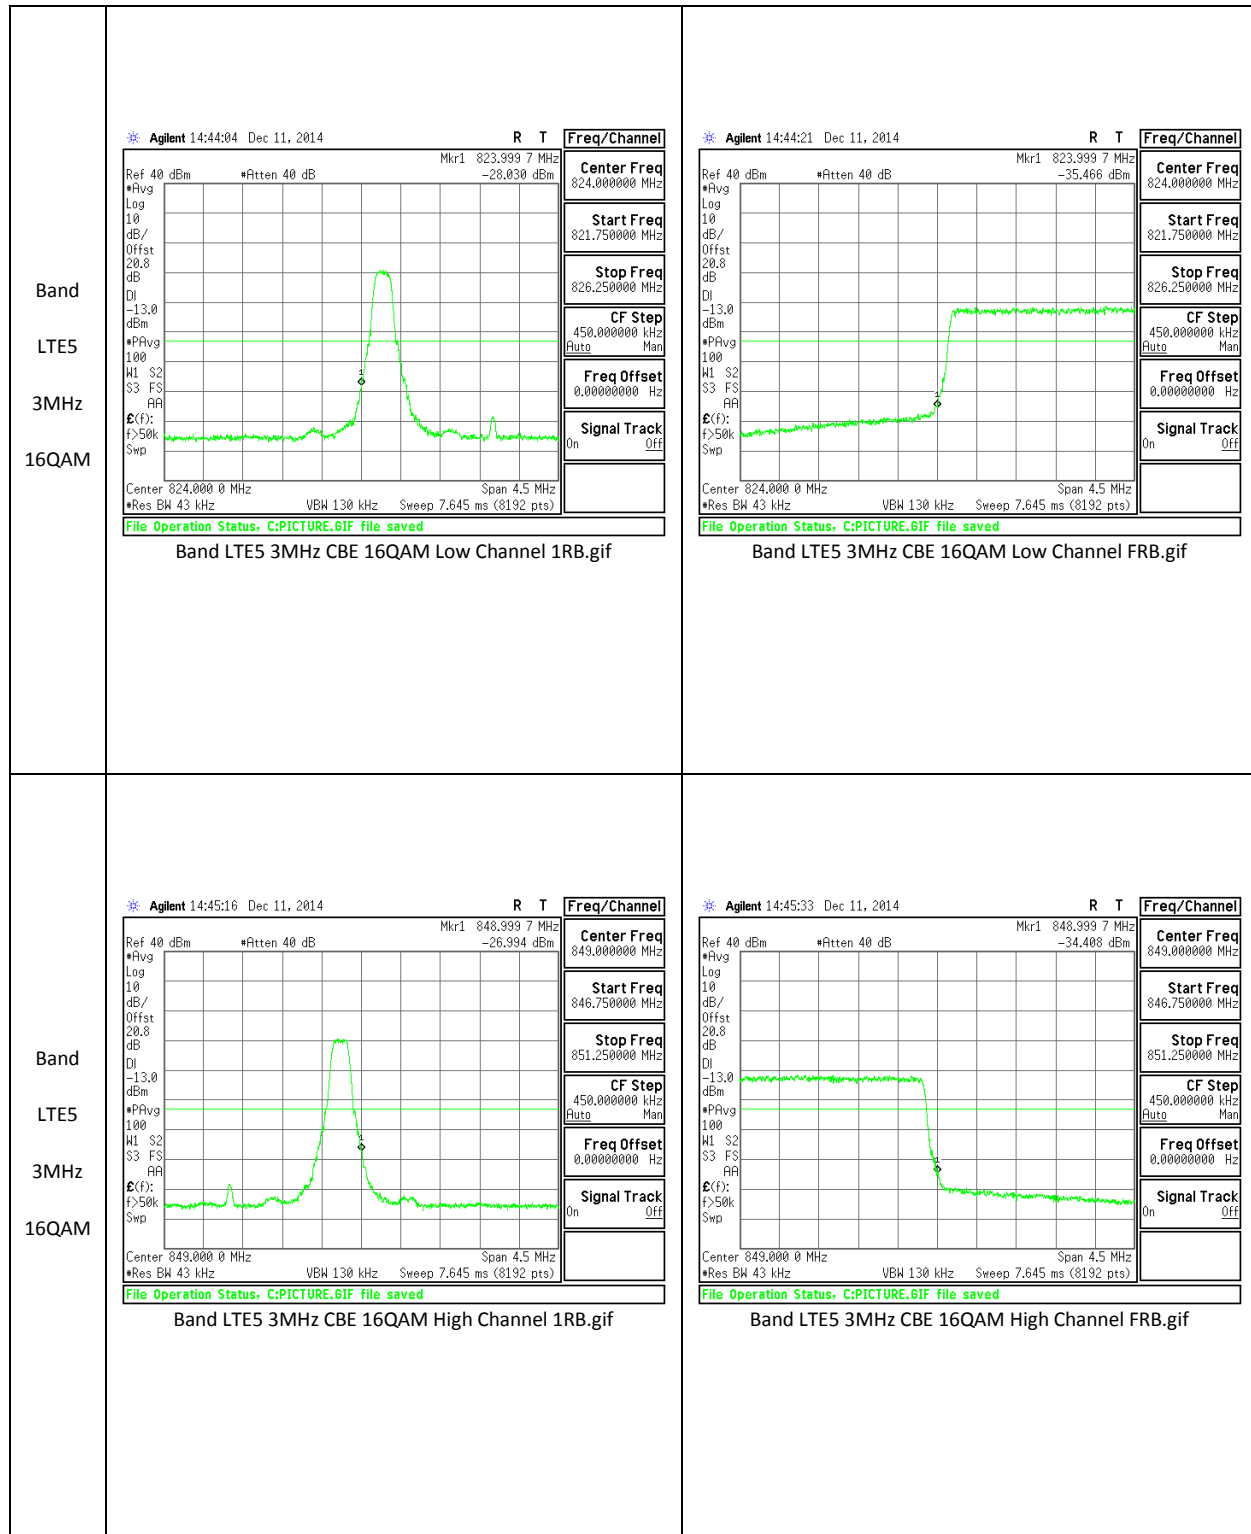

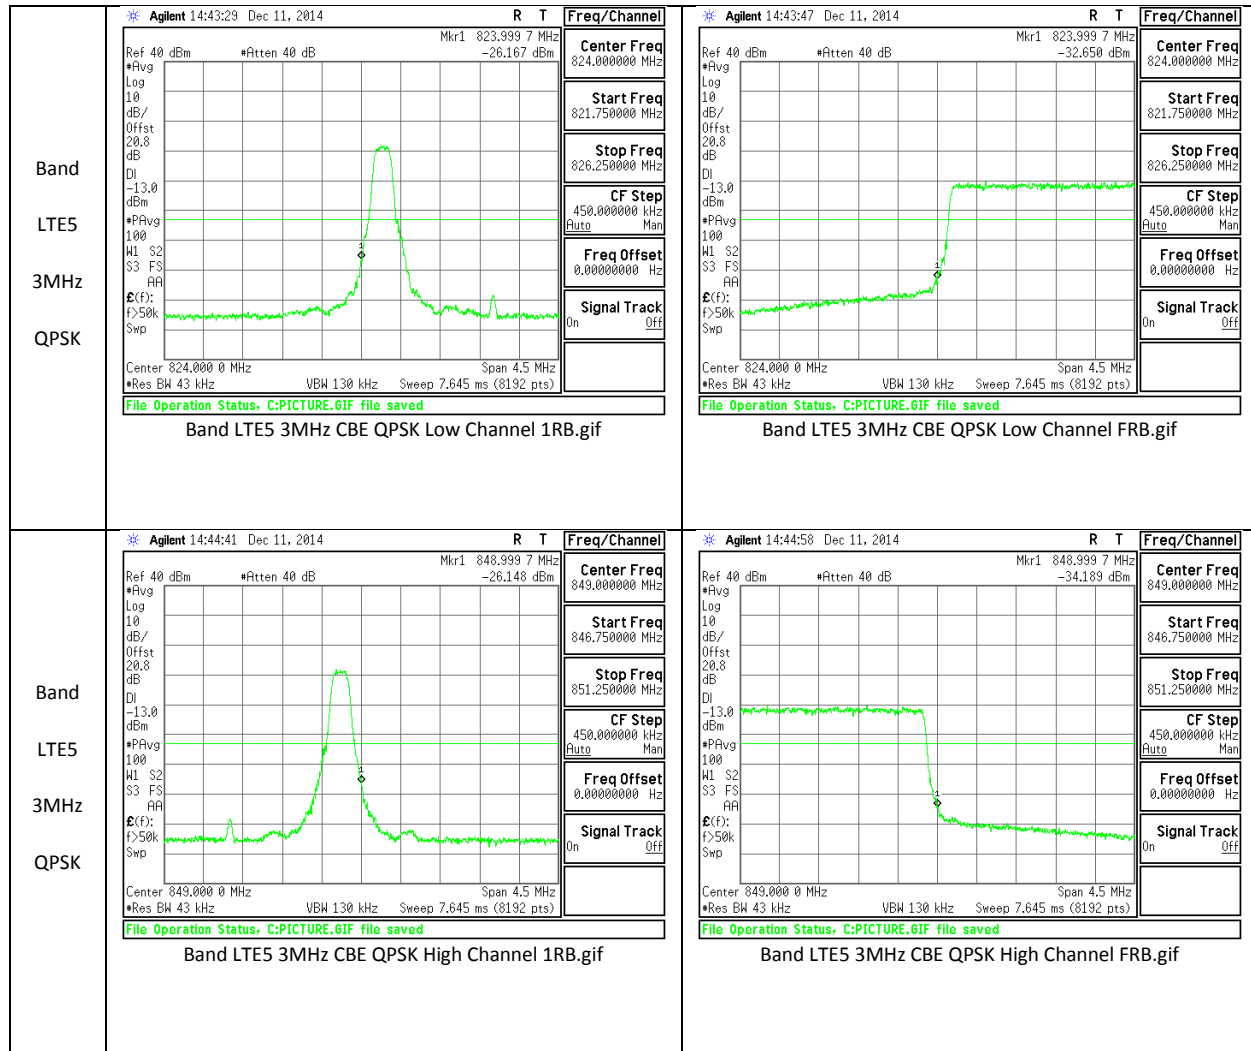

Band LTE5 1.4MHz 16QAM	Agilent 14:39:36 Dec 11, 2014 Ref 40 dBm #Atten 40 dB Mkr1 823.999 87 MHz -34.141 dBm Center Freq 824.000000 MHz Start Freq 822.950000 MHz Stop Freq 825.050000 MHz CF Step 210.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 824.000 00 MHz Span 2.1 MHz Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (8192 pts) File Operation Status, C:PICTURE.GIF file saved Band LTE5 1.4MHz CBE 16QAM Low Channel 1RB.gif	Agilent 14:39:53 Dec 11, 2014 Ref 40 dBm #Atten 40 dB Mkr1 823.999 87 MHz -35.904 dBm Center Freq 824.000000 MHz Start Freq 822.950000 MHz Stop Freq 825.050000 MHz CF Step 210.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 824.000 00 MHz Span 2.1 MHz Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (8192 pts) File Operation Status, C:PICTURE.GIF file saved Band LTE5 1.4MHz CBE 16QAM Low Channel FRB.gif
	Agilent 14:40:47 Dec 11, 2014 Ref 40 dBm #Atten 40 dB Mkr1 848.999 87 MHz -32.780 dBm Center Freq 849.000000 MHz Start Freq 847.950000 MHz Stop Freq 850.050000 MHz CF Step 210.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 849.000 00 MHz Span 2.1 MHz Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (8192 pts) File Operation Status, C:PICTURE.GIF file saved Band LTE5 1.4MHz CBE 16QAM High Channel 1RB.gif	Agilent 14:41:05 Dec 11, 2014 Ref 40 dBm #Atten 40 dB Mkr1 848.999 87 MHz -37.449 dBm Center Freq 849.000000 MHz Start Freq 847.950000 MHz Stop Freq 850.050000 MHz CF Step 210.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 849.000 00 MHz Span 2.1 MHz Res BW 20 kHz VBW 62 kHz Sweep 15.84 ms (8192 pts) File Operation Status, C:PICTURE.GIF file saved Band LTE5 1.4MHz CBE 16QAM High Channel FRB.gif

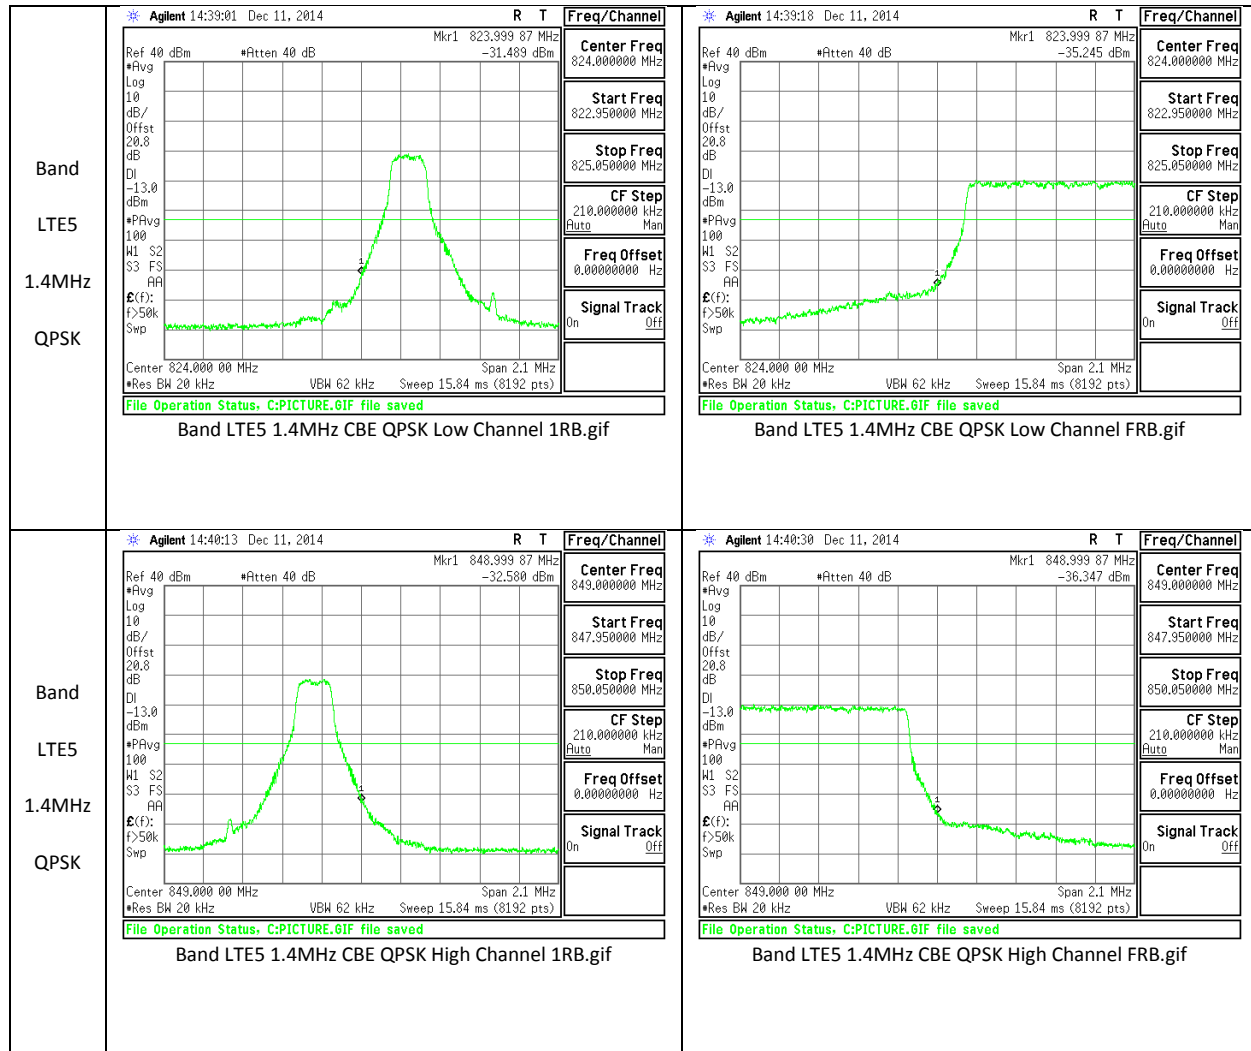

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238,

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-22.2	-13	-9.2
		836.6	-23.19	-13	-10.19
		848.8	-23.06	-13	-10.06
	EGPRS	824.2	-22.65	-13	-9.65
		836.6	-22.74	-13	-9.74
		848.8	-23.41	-13	-10.41
GSM1900	GPRS	1850.2	-22.2	-13	-9.2
		1880	-22.49	-13	-9.49
		1909.8	-23.88	-13	-10.88
	EGPRS	1850.2	-23.93	-13	-10.93
		1880	-21.7	-13	-8.7
		1909.8	-22.7	-13	-9.7

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
Band 5	REL99	826.4	-23.10	-13	-10.10
		836.6	-23.57	-13	-10.57
		846.6	-24.1	-13	-11.1
	HSDPA	826.4	-22.89	-13	-9.89
		836.6	-22.55	-13	-9.55
		846.6	-21.93	-13	-8.93
Band 2	REL99	1852.4	-29.37	-13	-16.37
		1880	-26.17	-13	-13.17
		1907.6	-27.23	-13	-14.23
	HSDPA	1852.4	-27.32	-13	-14.32
		1880	-26.64	-13	-13.64
		1907.6	-26.37	-13	-13.37


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	10	QPSK	829	-30.67	-13	-17.67
			836.5	-29.87	-13	-16.87
			844	-30.65	-13	-17.65
		16QAM	829	-30.58	-13	-17.58
			836.5	-30.54	-13	-17.54
			844	-30.54	-13	-17.54


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	5	QPSK	826.5	-29.94	-13	-16.94
			836.5	-29.50	-13	-16.50
			846.5	-29.6	-13	-16.6
		16QAM	826.5	-29.47	-13	-16.47
			836.5	-30.07	-13	-17.07
			846.5	-29.36	-13	-16.36


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	3	QPSK	825.5	-30.51	-13	-17.51
			836.5	-29.9	-13	-16.9
			847.5	-30.26	-13	-17.26
		16QAM	825.5	-30.07	-13	-17.07
			836.5	-29.46	-13	-16.46
			847.5	-29.69	-13	-16.69


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	1.4	QPSK	824.7	-30.53	-13	-17.53
			836.5	-30.11	-13	-17.11
			848.3	-31.09	-13	-18.09
		16QAM	824.7	-30.41	-13	-17.41
			836.5	-29.68	-13	-16.68
			848.3	-30.25	-13	-17.25

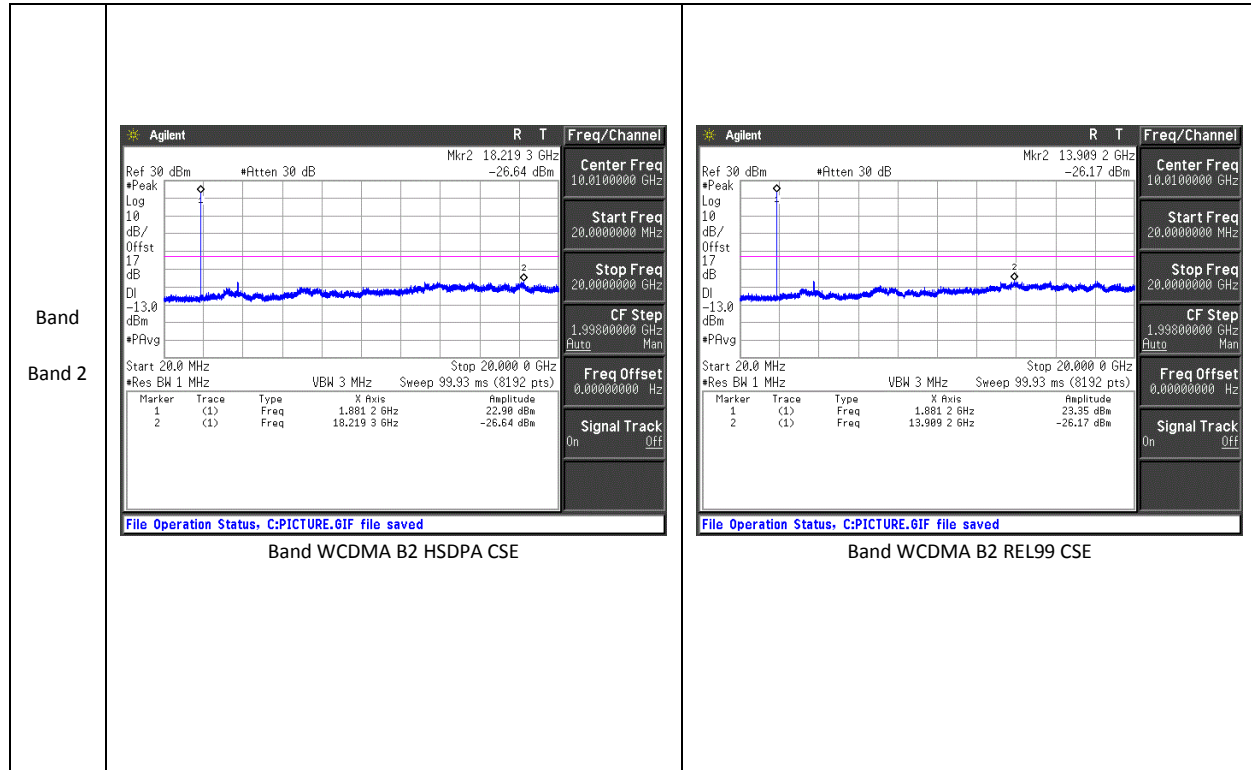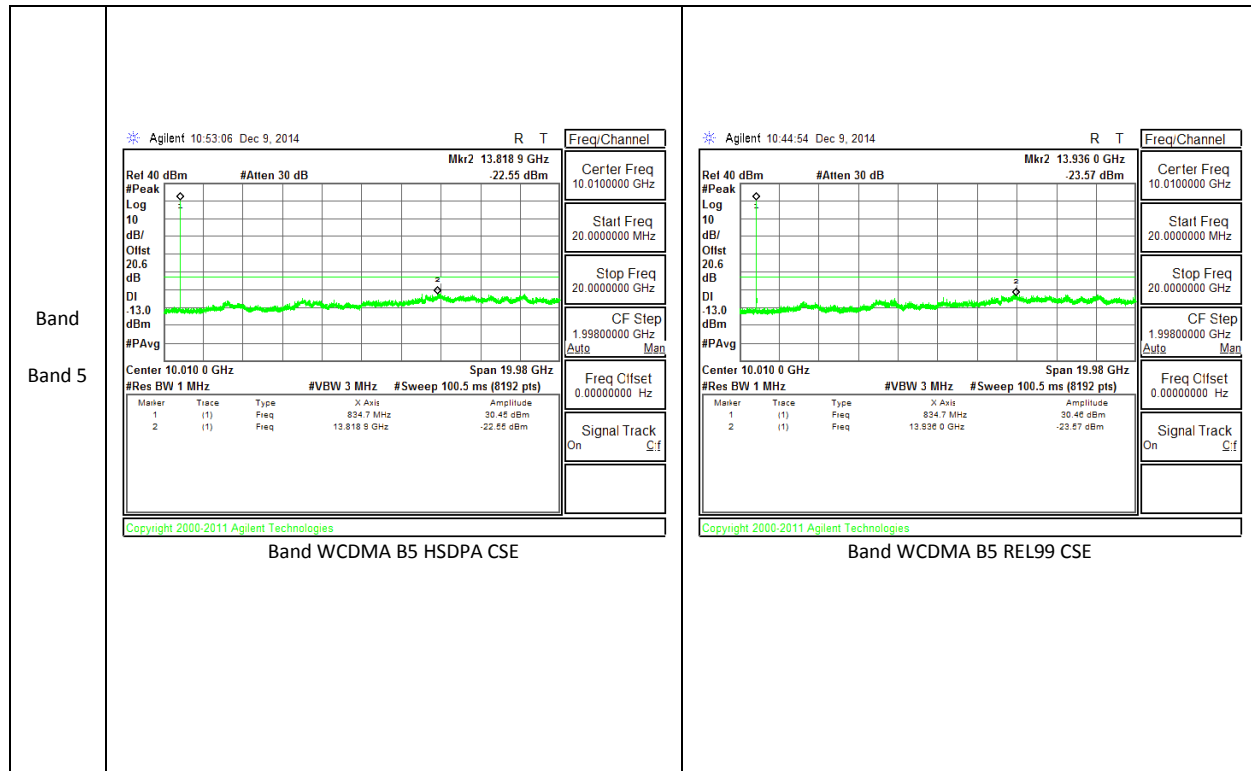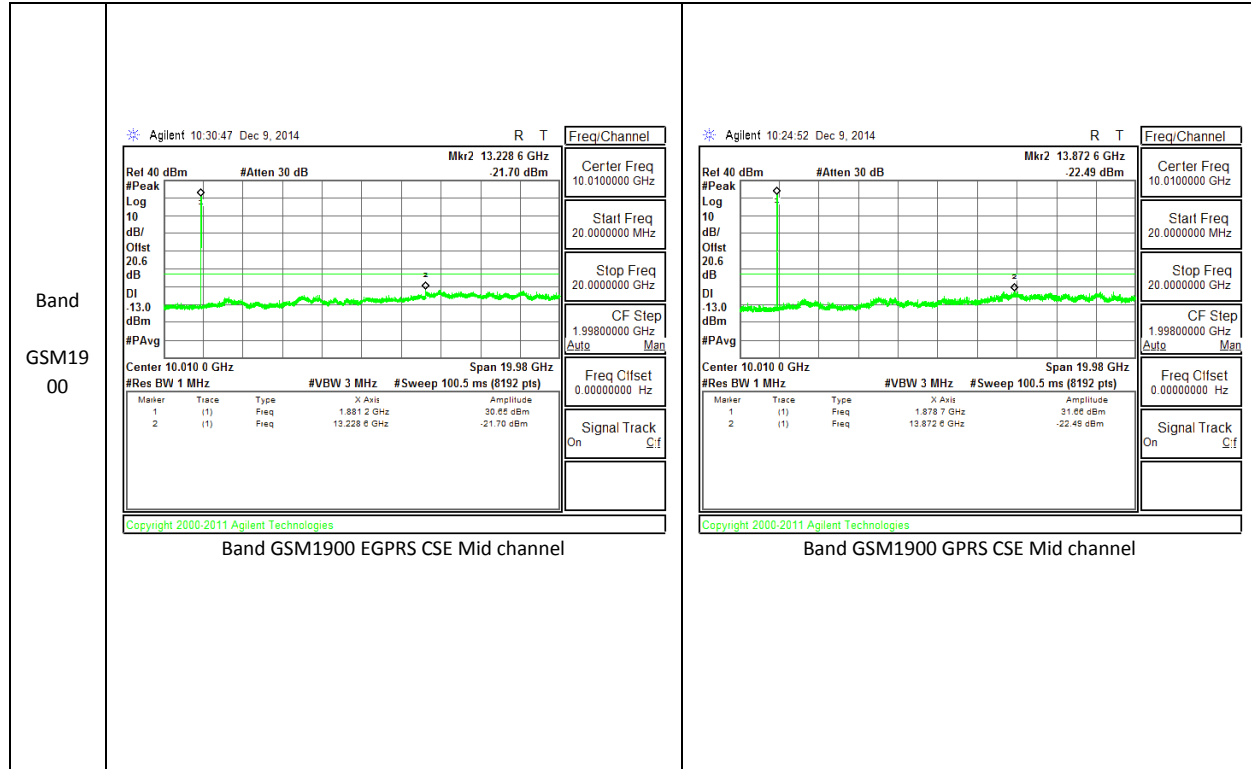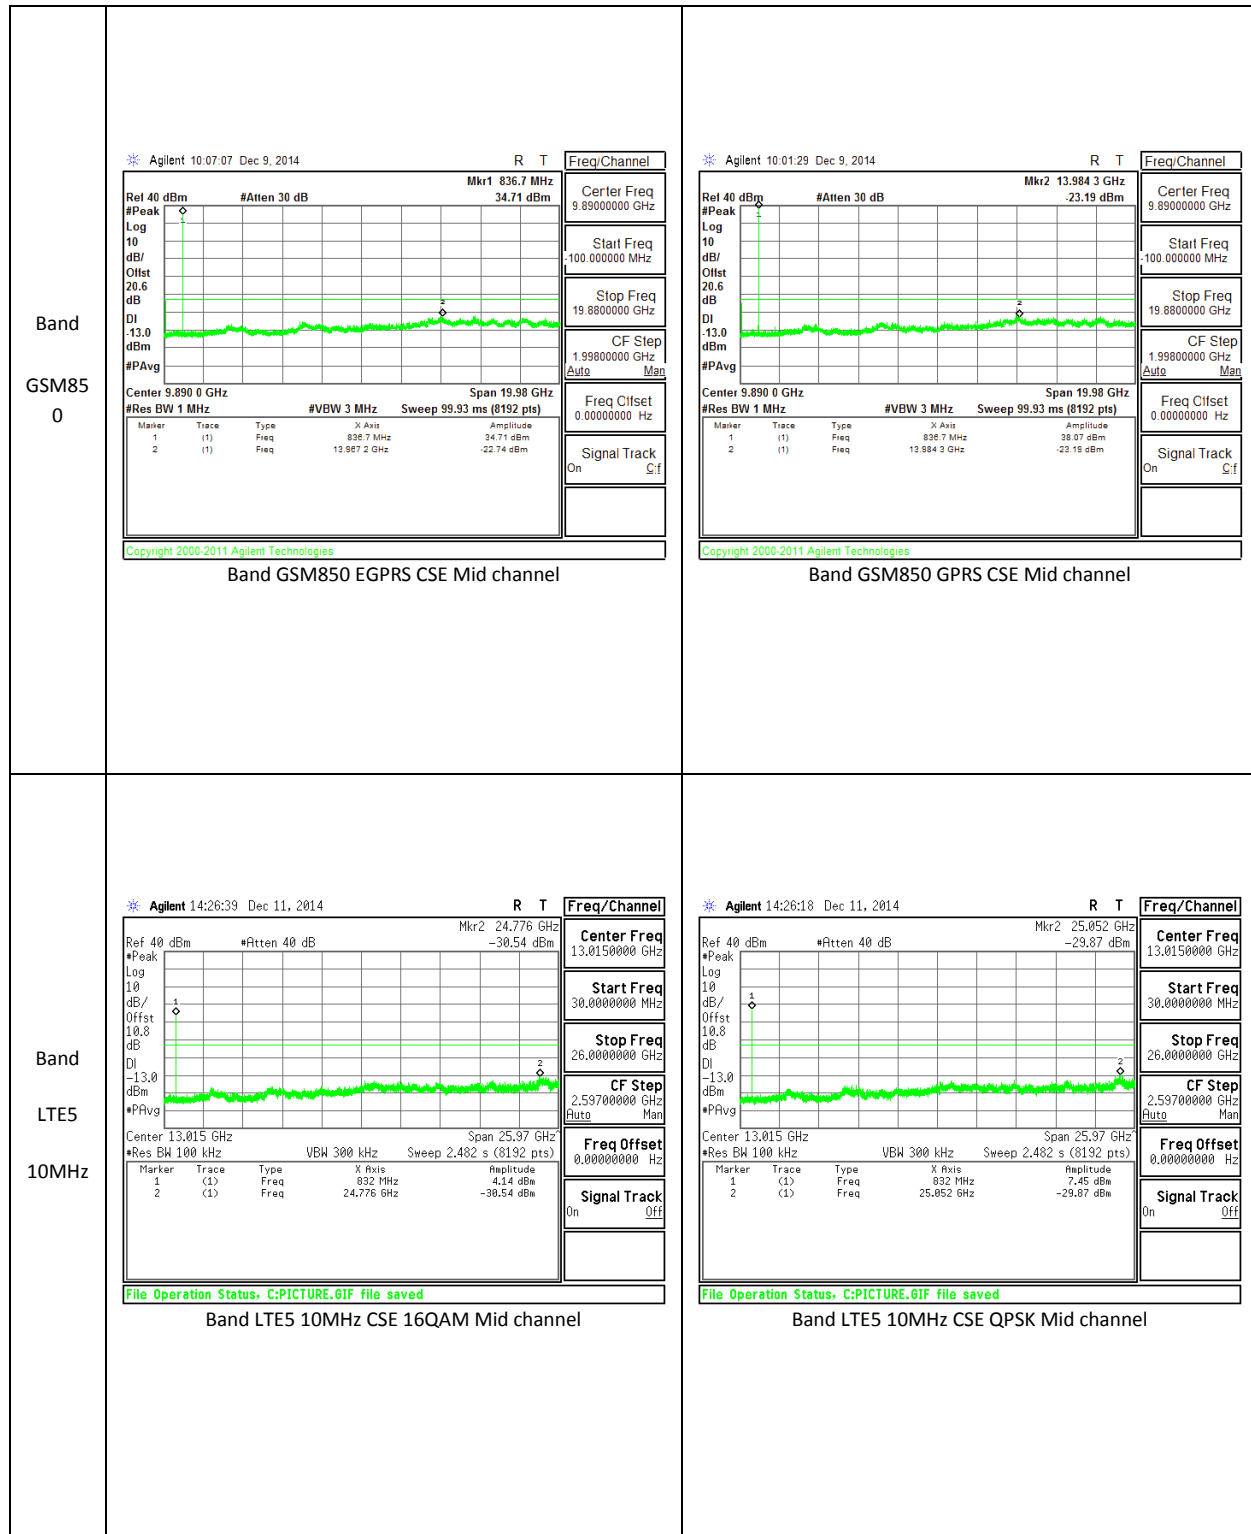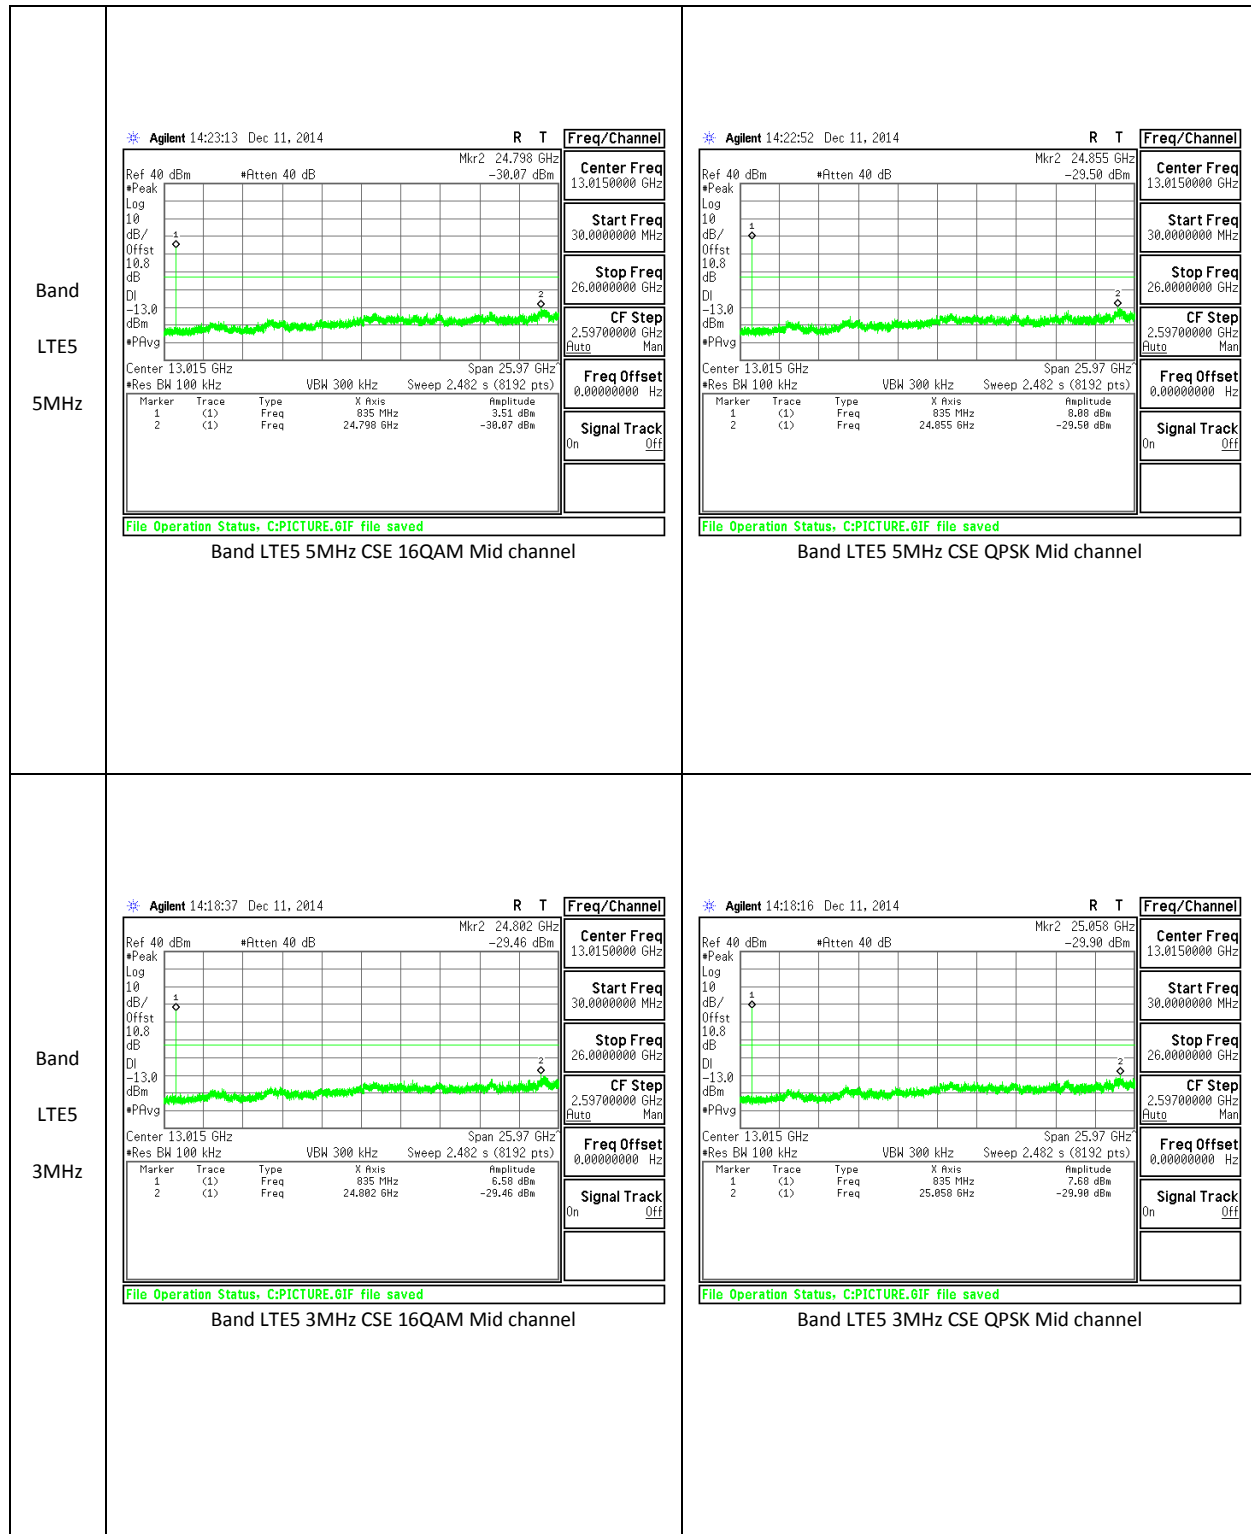
10.3.2. OUT OF BAND EMISSIONS PLOTS

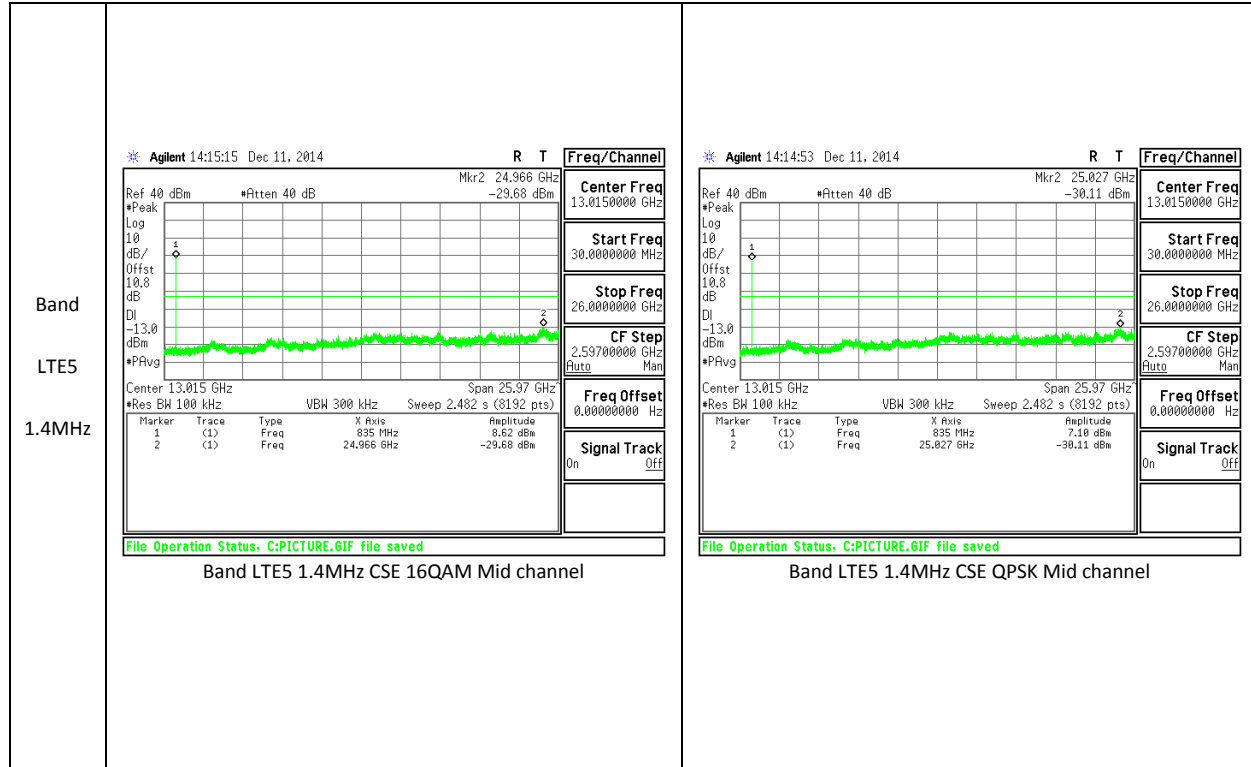












10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

GPRS 1900, Channel 661 - 1880MHz

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999977	-0.002	2.5
3.80	40	1879.999970	0.002	2.5
3.80	30	1879.999972	0.001	2.5
3.80	20	1879.999974	0	2.5
3.80	10	1879.999971	0.002	2.5
3.80	0	1879.999970	0.002	2.5
3.80	-10	1879.999968	0.003	2.5
3.80	-20	1879.999968	0.004	2.5
3.80	-30	1879.999969	0.003	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999974	0	2.5
4.37	20	1879.999973	0.001	2.5
3.3(End of Volt)	20	1879.999974	0.000	2.5

GPRS 850 CELL BAND, – CHANNEL 190, Frequency 836.6MHz

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599987	-0.006	2.5
3.80	40	836.599987	-0.005	2.5
3.80	30	836.599986	-0.005	2.5
3.80	20	836.599982	0	2.5
3.80	10	836.599981	0.001	2.5
3.80	0	836.599982	0.001	2.5
3.80	-10	836.599986	-0.004	2.5
3.80	-20	836.599987	-0.005	2.5
3.80	-30	836.599988	-0.006	2.5

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.599982	0.00000	2.5
4.37	20	836.599984	-0.00225	2.5
3.3(End of Volt)	20	836.599978	0.00582	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP	
				dBm	mW
Band 5	REL99	4132	826.4	20.15	103.5
		4183	836.6	20.04	100.9
		4233	846.6	20.07	101.6
	HSDPA	4132	826.4	19.98	99.5
		4183	836.6	19.97	99.3
		4233	846.6	19.88	97.3
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		
Band 2	REL99	9262	1852.4	23.51	224.4
		9400	1880	22.97	198.2
		9538	1907.6	23.70	234.4
	HSDPA	9262	1852.4	22.56	180.3
		9400	1880	21.99	158.1
		9538	1907.6	22.76	188.8
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

Band	Mode	Channel	f(MHz)	EIRP	
				dBm	mW
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	27.73	592.9
		661	1880	29.21	833.7
		810	1909.8	28.50	707.9
	EGPRS	512	1850.2	23.96	248.9
		661	1880	25.01	316.9
		810	1909.8	24.94	311.9

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	28.94	783.2
		190	836.6	28.82	762.1
		251	848.8	29.47	885.1
	EGPRS	128	824.2	23.42	219.8
		190	836.6	23.80	239.9
		251	848.8	23.92	246.6

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	19.36	86.3
			1/0	836.5	19.69	93.1
			1/0	844	19.89	97.5
		16QAM	1/0	829	18.41	69.3
			1/0	836.5	18.72	74.5
			1/0	844	18.92	78.0

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	5	QPSK	1/0	826.5	19.58	90.8
			1/0	836.5	19.89	97.5
			1/0	846.5	19.81	95.7
		16QAM	1/0	826.5	18.63	72.9
			1/0	836.5	18.80	75.8
			1/0	846.5	18.90	77.6

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	3	QPSK	1/0	825.5	19.53	89.7
			1/0	836.5	19.92	98.2
			1/0	847.5	19.41	87.3
		16QAM	1/0	825.5	18.65	73.3
			1/0	836.5	18.87	77.1
			1/0	847.5	18.49	70.6

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	1.4	QPSK	1/0	824.7	19.71	93.5
			1/0	836.5	19.71	93.5
			1/0	848.3	19.92	98.2
		16QAM	1/0	824.7	18.7	74.1
			1/0	836.5	19.03	80.0
			1/0	848.3	19.01	79.6

11.1.2. ERP/EIRP DATA

Band

LTE5

10MHz

16QAM

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Samsung

14I19572

12/09/14

R. Alegre

EUT Only

LTE5 10MHz 16QAM

Test Equipment:

Receiving: Sunol T185, and 3m Chamber C N-type Cable

Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
829.00	9.95	V	0.9	0.0	9.05	38.5	-29.4	
829.00	19.31	H	0.9	0.0	18.41	38.5	-20.0	
Mid Ch								
836.50	10.27	V	0.9	0.0	9.37	38.5	-29.1	
836.50	19.62	H	0.9	0.0	18.72	38.5	-19.7	
High Ch								
844.00	10.17	V	0.9	0.0	9.27	38.5	-29.2	
844.00	19.82	H	0.9	0.0	18.92	38.5	-19.5	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

LTE5

10MHz

QPSK

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Test Equipment:

Receiving: Sunol T185, and 3m Chamber C N-type Cable

Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
Low Ch								
829.00	11.08	V	0.9	0.0	10.18	38.5	-28.3	
829.00	20.26	H	0.9	0.0	19.36	38.5	-19.1	
Mid Ch								
836.50	11.52	V	0.9	0.0	10.62	38.5	-27.8	
836.50	20.59	H	0.9	0.0	19.69	38.5	-18.8	
High Ch								
844.00	11.22	V	0.9	0.0	10.32	38.5	-28.1	
844.00	20.79	H	0.9	0.0	19.89	38.5	-18.6	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

LTE5

5MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I19572
Date: 12/09/14
Test Engineer: R. Alegre
Configuration: EUT Only
Mode: LTE5 5MHz 16QAM

Test Equipment:
Receiving: Sunol T185, and 3m Chamber C N-type Cable
Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	10.18	V	0.9	0.0	9.28	38.5	-29.2	
826.50	19.53	H	0.9	0.0	18.63	38.5	-19.8	
Mid Ch								
836.50	10.62	V	0.9	0.0	9.72	38.5	-28.7	
836.50	19.70	H	0.9	0.0	18.80	38.5	-19.6	
High Ch								
846.50	10.27	V	0.9	0.0	9.37	38.5	-29.1	
846.50	19.80	H	0.9	0.0	18.90	38.5	-19.5	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

LTE5

3MHz

16QAM

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company: Samsung

Project #: 14I19572

Date: 12/09/14

Test Engineer: R. Alegre

Configuration: EUT Only

Mode: LTE5 3MHz 16QAM

Test Equipment:

Receiving: Sunol T185, and 3m Chamber C N-type Cable

Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
825.50	10.22	V	0.9	0.0	9.32	38.5	-29.1	
825.50	19.55	H	0.9	0.0	18.65	38.5	-19.8	
Mid Ch								
836.50	10.88	V	0.9	0.0	9.98	38.5	-28.5	
836.50	19.77	H	0.9	0.0	18.87	38.5	-19.6	
High Ch								
847.50	10.36	V	0.9	0.0	9.46	38.5	-29.0	
847.50	19.39	H	0.9	0.0	18.49	38.5	-20.0	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band LTE5 1.4MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C Company: Samsung Project #: 14I19572 Date: 12/09/14 Test Engineer: R. Alegre Configuration: EUT Only Mode: LTE5 1.4MHz 16QAM Test Equipment: Receiving: Sunol T185, and 3m Chamber C N-type Cable Substitution: Dipole T273, 4ft SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	10.19	V	0.9	0.0	9.29	38.5	-29.2	
	824.70	19.60	H	0.9	0.0	18.70	38.5	-19.7	
	Mid Ch								
	836.50	10.89	V	0.9	0.0	9.99	38.5	-28.5	
	836.50	19.93	H	0.9	0.0	19.03	38.5	-19.4	
	High Ch								
	848.30	10.37	V	0.9	0.0	9.47	38.5	-29.0	
	848.30	19.91	H	0.9	0.0	19.01	38.5	-19.4	
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band Band 2 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		Samsung						
	Project #:		14I19572						
	Date:		12/26/14						
	Test Engineer:		Charles Vergonio						
	Configuration:		EUT only						
	Mode:		WCDMA HSDPA B2						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1852.40	6.95	V	0.9	7.9	13.95	33.0	-19.1	
	1852.40	15.56	H	0.9	7.9	22.56	33.0	-10.4	
	Mid Ch								
	1880.00	5.91	V	0.9	7.9	12.91	33.0	-20.1	
	1880.00	14.99	H	0.9	7.9	21.99	33.0	-11.0	
	High Ch								
	1907.60	6.62	V	0.9	7.9	13.67	33.0	-19.3	
	1907.60	15.71	H	0.9	7.9	22.76	33.0	-10.2	
Rev. 3.17.11									
Note: For Band 4 EIRP limit is 30dBm									

Band

Band 2

REL99

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I19572
Date: 12/26/14
Test Engineer: Charles Vergonio
Configuration: EUT only
Mode: WCDMA REL99 B2

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	7.99	V	0.9	7.9	14.99	33.0	-18.0	
1852.40	16.51	H	0.9	7.9	23.51	33.0	-9.5	
Mid Ch								
1880.00	6.99	V	0.9	7.9	13.99	33.0	-19.0	
1880.00	15.97	H	0.9	7.9	22.97	33.0	-10.0	
High Ch								
1907.60	7.31	V	0.9	7.9	14.36	33.0	-18.6	
1907.60	16.65	H	0.9	7.9	23.70	33.0	-9.3	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

Band Band 5 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		14I19572																																																																																															
	Date:		12/09/14																																																																																															
	Test Engineer:		R. Alegre																																																																																															
	Configuration:		EUT only SN:2013193																																																																																															
	Mode:		WCDMA_HSDPA_850																																																																																															
	Test Equipment: Receiving: Sunol T185, and 3m Chamber N-type Cable Substitution: Dipole T273, 4ft SMA Cable Warehouse.																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>11.88</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.98</td> <td>38.5</td> <td>-27.5</td> <td></td> </tr> <tr> <td>826.40</td> <td>20.88</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.98</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>12.46</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.56</td> <td>38.5</td> <td>-26.9</td> <td></td> </tr> <tr> <td>836.60</td> <td>20.87</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.97</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>12.09</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.19</td> <td>38.5</td> <td>-27.3</td> <td></td> </tr> <tr> <td>846.60</td> <td>20.78</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>19.88</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									826.40	11.88	V	0.9	0.0	10.98	38.5	-27.5		826.40	20.88	H	0.9	0.0	19.98	38.5	-18.5		Mid Ch									836.60	12.46	V	0.9	0.0	11.56	38.5	-26.9		836.60	20.87	H	0.9	0.0	19.97	38.5	-18.5		High Ch									846.60	12.09	V	0.9	0.0	11.19	38.5	-27.3		846.60	20.78	H	0.9	0.0	19.88	38.5	-18.6	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																		
826.40	11.88	V	0.9	0.0	10.98	38.5	-27.5																																																																																											
826.40	20.88	H	0.9	0.0	19.98	38.5	-18.5																																																																																											
Mid Ch																																																																																																		
836.60	12.46	V	0.9	0.0	11.56	38.5	-26.9																																																																																											
836.60	20.87	H	0.9	0.0	19.97	38.5	-18.5																																																																																											
High Ch																																																																																																		
846.60	12.09	V	0.9	0.0	11.19	38.5	-27.3																																																																																											
846.60	20.78	H	0.9	0.0	19.88	38.5	-18.6																																																																																											
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																		

Band

Band 5

REL99

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Samsung

14I19572

12/09/14

R. Alegre

EUT only SN:2013193

WCDMA_Rel99_850

Test Equipment:

Receiving: Sunol T185, and 3m Chamber N-type Cable

Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
Low Ch								
826.40	11.95	V	0.9	0.0	11.05	38.5	-27.4	
826.40	21.05	H	0.9	0.0	20.15	38.5	-18.3	
Mid Ch								
836.60	12.59	V	0.9	0.0	11.69	38.5	-26.8	
836.60	20.94	H	0.9	0.0	20.04	38.5	-18.4	
High Ch								
846.60	12.18	V	0.9	0.0	11.28	38.5	-27.2	
846.60	20.97	H	0.9	0.0	20.07	38.5	-18.4	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

GSM

1900

GPRS

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Samsung

14I19572

12/09/14

R. Alegre

EUT only

GPRS 1900

Test Equipment:

Receiving: Horn T119, and Chamber C SMA Cables

Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
Low Ch								
1850.20	18.89	V	0.9	7.9	25.89	33.0	-7.1	
1850.20	20.73	H	0.9	7.9	27.73	33.0	-5.3	
Mid Ch								
1880.00	18.93	V	0.9	7.9	25.93	33.0	-7.1	
1880.00	22.21	H	0.9	7.9	29.21	33.0	-3.8	
High Ch								
1909.80	17.25	V	0.9	7.9	24.30	33.0	-8.7	
1909.80	21.45	H	0.9	7.9	28.50	33.0	-4.5	

Rev. 3.17.11

Note: For Band 4 EIRP limit is 30dBm

Band

GSM

850

EGPRS

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Samsung

14I19572

12/09/14

R. Alegre

EUT only SN:2013193

EGPRS 850MHz

Test Equipment:

Receiving: Sunol T185, and 3m Chamber N-type Cable

Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
Low Ch								
824.20	16.61	V	0.9	0.0	15.76	38.5	-22.7	
824.20	24.27	H	0.9	0.0	23.42	38.5	-15.0	
Mid Ch								
836.60	16.80	V	0.9	0.0	15.95	38.5	-22.5	
836.60	24.65	H	0.9	0.0	23.80	38.5	-14.6	
High Ch								
848.80	16.99	V	0.9	0.0	16.14	38.5	-22.3	
848.80	24.77	H	0.9	0.0	23.92	38.5	-14.5	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

GSM

850

GPRS

High Frequency Substitution Measurement

UL Verification Services, Inc. Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

Samsung

14I19572

12/09/14

R. Alegre

EUT only SN:2013193

GPRS 850MHz

Test Equipment:

Receiving: Sunol T185, and 3m Chamber N-type Cable

Substitution: Dipole T273, 4ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	22.09	V	0.9	0.0	21.19	38.5	-17.3	
824.20	29.84	H	0.9	0.0	28.94	38.5	-9.5	
Mid Ch								
836.60	22.41	V	0.9	0.0	21.51	38.5	-16.9	
836.60	29.72	H	0.9	0.0	28.82	38.5	-9.6	
High Ch								
848.80	22.76	V	0.9	0.0	21.86	38.5	-16.6	
848.80	30.37	H	0.9	0.0	29.47	38.5	-9.0	

Rev. 3.17.11

Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

UL Verification Services Above 1GHz High Frequency Substitution Measurement									
Company:	Samsung								
Project #:	14i19572								
Date:	12/26/14								
Test Engineer:	Charles Vergonio								
Configuration:	EUT X-pos/ AC Adapter/ Headset								
Mode:	Band 2 HSDPA								
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 24									
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0	
5.557	-21.1	V	3.0	34.7	1.0	-54.8	-13.0	-41.8	
7.410	-18.0	V	3.0	34.9	1.0	-51.9	-13.0	-38.9	
3.705	-20.5	H	3.0	35.4	1.0	-54.9	-13.0	-41.9	
5.557	-17.5	H	3.0	34.7	1.0	-51.2	-13.0	-38.2	
7.410	-15.6	H	3.0	34.9	1.0	-49.6	-13.0	-36.6	
Mid Ch, 1880MHz									
3.760	-9.1	V	3.0	35.3	1.0	-43.4	-13.0	-30.4	
5.640	-16.8	V	3.0	34.7	1.0	-50.5	-13.0	-37.5	
7.520	-16.3	V	3.0	34.9	1.0	-50.2	-13.0	-37.2	
3.760	-7.3	H	3.0	35.3	1.0	-41.7	-13.0	-28.7	
5.640	-17.6	H	3.0	34.7	1.0	-51.4	-13.0	-38.4	
7.520	-16.6	H	3.0	34.9	1.0	-50.6	-13.0	-37.6	
High Ch, 1907.6MHz									
3.815	-8.2	V	3.0	35.3	1.0	-42.5	-13.0	-29.5	
5.723	-17.0	V	3.0	34.7	1.0	-50.8	-13.0	-37.8	
7.630	-17.4	V	3.0	34.9	1.0	-51.4	-13.0	-38.4	
3.815	-10.1	H	3.0	35.3	1.0	-44.4	-13.0	-31.4	
5.723	-15.8	H	3.0	34.7	1.0	-49.5	-13.0	-36.5	
7.630	-15.5	H	3.0	34.9	1.0	-49.5	-13.0	-36.5	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

UL Verification Services										
Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14i19572								
Date:		12/26/14								
Test Engineer:		Charles Vergonio								
Configuration:		EUT X-pos/ AC Adapter/ Headset								
Mode:		Band 2 Rel99								
Chamber Pre-amplifier Filter Limit 3m Chamber T34 8449B Filter 1 Part 24										
	f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
Band	GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
	Low Ch, 1852.4MHz									
	3.705	-15.5	V	3.0	35.4	1.0	-49.9	-13.0	-36.9	
Band 2	5.557	-20.4	V	3.0	34.7	1.0	-54.1	-13.0	-41.1	
	7.410	-17.2	V	3.0	34.9	1.0	-51.2	-13.0	-38.2	
REL99	3.705	-19.7	H	3.0	35.4	1.0	-54.1	-13.0	-41.1	
	5.557	-16.6	H	3.0	34.7	1.0	-50.4	-13.0	-37.4	
	7.410	-15.6	H	3.0	34.9	1.0	-49.6	-13.0	-36.6	
	Mid Ch, 1880MHz									
	3.760	-8.1	V	3.0	35.3	1.0	-42.4	-13.0	-29.4	
	5.640	-16.6	V	3.0	34.7	1.0	-50.3	-13.0	-37.3	
	7.520	-16.3	V	3.0	34.9	1.0	-50.3	-13.0	-37.3	
	3.760	-6.2	H	3.0	35.3	1.0	-40.5	-13.0	-27.5	
	5.640	-16.6	H	3.0	34.7	1.0	-50.3	-13.0	-37.3	
	7.520	-16.1	H	3.0	34.9	1.0	-50.0	-13.0	-37.0	
	High Ch, 1907.6MHz									
	3.815	-7.2	V	3.0	35.3	1.0	-41.5	-13.0	-28.5	
	5.723	-15.6	V	3.0	34.7	1.0	-49.3	-13.0	-36.3	
	7.630	-16.8	V	3.0	34.9	1.0	-50.7	-13.0	-37.7	
	3.815	-9.8	H	3.0	35.3	1.0	-44.1	-13.0	-31.1	
	5.723	-15.7	H	3.0	34.7	1.0	-49.4	-13.0	-36.4	
	7.630	-15.2	H	3.0	34.9	1.0	-49.1	-13.0	-36.1	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

[illegible]

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19572								
Date:		12/10/14								
Test Engineer:		Jude Semana								
Configuration:		EUT w/ AC Charger + HS								
Mode:		REL99_B5								
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band Band 5 REL99	Low Ch, 826.4MHz									
	1.653	-25.8	V	3.0	37.4	1.0	-62.2	-13.0	-49.2	
	2.479	-19.6	V	3.0	36.4	1.0	-55.0	-13.0	-42.0	
	3.306	-20.2	V	3.0	35.8	1.0	-55.0	-13.0	-42.0	
	1.653	-26.4	H	3.0	37.4	1.0	-62.8	-13.0	-49.8	
	2.479	-21.3	H	3.0	36.4	1.0	-56.7	-13.0	-43.7	
	3.306	-20.8	H	3.0	35.8	1.0	-55.5	-13.0	-42.5	
	Mid Ch, 836.6MHz									
	1.673	-25.3	V	3.0	37.3	1.0	-61.7	-13.0	-48.7	
	2.510	-20.1	V	3.0	36.4	1.0	-55.5	-13.0	-42.5	
	3.346	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
	1.673	-25.8	H	3.0	37.3	1.0	-62.1	-13.0	-49.1	
	2.510	-21.8	H	3.0	36.4	1.0	-57.1	-13.0	-44.1	
	3.346	-21.0	H	3.0	35.8	1.0	-55.8	-13.0	-42.8	
	High Ch, 846.6MHz									
	1.693	-25.8	V	3.0	37.3	1.0	-62.1	-13.0	-49.1	
	2.540	-20.1	V	3.0	36.3	1.0	-55.4	-13.0	-42.4	
	3.386	-17.3	V	3.0	35.7	1.0	-52.0	-13.0	-39.0	
	1.693	-25.8	H	3.0	37.3	1.0	-62.1	-13.0	-49.1	
	2.540	-22.1	H	3.0	36.3	1.0	-57.4	-13.0	-44.4	
	3.386	-21.0	H	3.0	35.7	1.0	-55.7	-13.0	-42.7	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14I19572								
Date:		12/10/14								
Test Engineer:		Jude Semana								
Configuration:		EUT w/ AC Charger + HS								
Mode:		EGPRS1900								
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM19 00 EGPRS	Low Ch, 1850.2MHz									
	3.700	-24.4	V	3.0	35.4	1.0	-58.9	-13.0	-45.9	
	5.551	-18.6	V	3.0	34.7	1.0	-52.4	-13.0	-39.4	
	7.401	-19.7	V	3.0	34.9	1.0	-53.6	-13.0	-40.6	
	3.700	-25.3	H	3.0	35.4	1.0	-59.7	-13.0	-46.7	
	5.551	-21.6	H	3.0	34.7	1.0	-55.3	-13.0	-42.3	
	7.401	-20.3	H	3.0	34.9	1.0	-54.2	-13.0	-41.2	
	Mid Ch, 1880.0MHz									
	3.760	-26.6	V	3.0	35.3	1.0	-60.9	-13.0	-47.9	
	5.640	-24.1	V	3.0	34.7	1.0	-57.8	-13.0	-44.8	
	7.520	-23.4	V	3.0	34.9	1.0	-57.4	-13.0	-44.4	
	3.760	-25.0	H	3.0	35.3	1.0	-59.3	-13.0	-46.3	
	5.640	-18.9	H	3.0	34.7	1.0	-52.6	-13.0	-39.6	
	7.520	-19.3	H	3.0	34.9	1.0	-53.3	-13.0	-40.3	
	High Ch, 1909.8MHz									
	3.820	-20.5	V	3.0	35.3	1.0	-54.7	-13.0	-41.7	
	5.729	-20.3	V	3.0	34.7	1.0	-54.1	-13.0	-41.1	
	7.639	-20.2	V	3.0	35.0	1.0	-54.2	-13.0	-41.2	
3.820	-23.8	H	3.0	35.3	1.0	-58.1	-13.0	-45.1		
5.729	-12.3	H	3.0	34.7	1.0	-46.1	-13.0	-33.1		
7.639	-20.4	H	3.0	35.0	1.0	-54.3	-13.0	-41.3		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																															
Company: Project #: Date: Test Engineer: Configuration: Mode:	Samsung 14I19572 12/10/14 Jude Semana EUT w/ AC Charger + HS GPRS1900																																																																																																																																																																																																																																														
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 24																																																																																																																																																																																																																																															
Band GSM19 00 GPRS	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch, 1850.2MHz</td> </tr> <tr><td>3.700</td><td>-25.0</td><td>V</td><td>3.0</td><td>35.4</td><td>1.0</td><td>-59.5</td><td>-13.0</td><td>-46.5</td><td></td></tr> <tr><td>5.551</td><td>-17.7</td><td>V</td><td>3.0</td><td>34.7</td><td>1.0</td><td>-51.4</td><td>-13.0</td><td>-38.4</td><td></td></tr> <tr><td>7.401</td><td>-18.3</td><td>V</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-52.2</td><td>-13.0</td><td>-39.2</td><td></td></tr> <tr><td>3.700</td><td>-25.4</td><td>H</td><td>3.0</td><td>35.4</td><td>1.0</td><td>-59.8</td><td>-13.0</td><td>-46.8</td><td></td></tr> <tr><td>5.551</td><td>-20.5</td><td>H</td><td>3.0</td><td>34.7</td><td>1.0</td><td>-54.2</td><td>-13.0</td><td>-41.2</td><td></td></tr> <tr><td>7.401</td><td>-20.1</td><td>H</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-54.0</td><td>-13.0</td><td>-41.0</td><td></td></tr> <tr> <td colspan="10">Mid Ch, 1880.0MHz</td> </tr> <tr><td>3.760</td><td>-26.4</td><td>V</td><td>3.0</td><td>35.3</td><td>1.0</td><td>-60.7</td><td>-13.0</td><td>-47.7</td><td></td></tr> <tr><td>5.640</td><td>-24.1</td><td>V</td><td>3.0</td><td>34.7</td><td>1.0</td><td>-57.8</td><td>-13.0</td><td>-44.8</td><td></td></tr> <tr><td>7.520</td><td>-23.0</td><td>V</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-56.9</td><td>-13.0</td><td>-43.9</td><td></td></tr> <tr><td>3.760</td><td>-24.1</td><td>H</td><td>3.0</td><td>35.3</td><td>1.0</td><td>-58.4</td><td>-13.0</td><td>-45.4</td><td></td></tr> <tr><td>5.640</td><td>-23.2</td><td>H</td><td>3.0</td><td>34.7</td><td>1.0</td><td>-56.9</td><td>-13.0</td><td>-43.9</td><td></td></tr> <tr><td>7.520</td><td>-20.4</td><td>H</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-54.3</td><td>-13.0</td><td>-41.3</td><td></td></tr> <tr> <td colspan="10">High Ch, 1909.8MHz</td> </tr> <tr><td>3.820</td><td>-25.2</td><td>V</td><td>3.0</td><td>35.3</td><td>1.0</td><td>-59.5</td><td>-13.0</td><td>-46.5</td><td></td></tr> <tr><td>5.729</td><td>-19.9</td><td>V</td><td>3.0</td><td>34.7</td><td>1.0</td><td>-53.6</td><td>-13.0</td><td>-40.6</td><td></td></tr> <tr><td>7.639</td><td>-17.6</td><td>V</td><td>3.0</td><td>35.0</td><td>1.0</td><td>-51.6</td><td>-13.0</td><td>-38.6</td><td></td></tr> <tr><td>3.820</td><td>-25.2</td><td>H</td><td>3.0</td><td>35.3</td><td>1.0</td><td>-59.5</td><td>-13.0</td><td>-46.5</td><td></td></tr> <tr><td>5.729</td><td>-22.9</td><td>H</td><td>3.0</td><td>34.7</td><td>1.0</td><td>-56.7</td><td>-13.0</td><td>-43.7</td><td></td></tr> <tr><td>7.639</td><td>-19.5</td><td>H</td><td>3.0</td><td>35.0</td><td>1.0</td><td>-53.5</td><td>-13.0</td><td>-40.5</td><td></td></tr> <tr><td colspan="10"> </td></tr> </tbody> </table>									f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 1850.2MHz										3.700	-25.0	V	3.0	35.4	1.0	-59.5	-13.0	-46.5		5.551	-17.7	V	3.0	34.7	1.0	-51.4	-13.0	-38.4		7.401	-18.3	V	3.0	34.9	1.0	-52.2	-13.0	-39.2		3.700	-25.4	H	3.0	35.4	1.0	-59.8	-13.0	-46.8		5.551	-20.5	H	3.0	34.7	1.0	-54.2	-13.0	-41.2		7.401	-20.1	H	3.0	34.9	1.0	-54.0	-13.0	-41.0		Mid Ch, 1880.0MHz										3.760	-26.4	V	3.0	35.3	1.0	-60.7	-13.0	-47.7		5.640	-24.1	V	3.0	34.7	1.0	-57.8	-13.0	-44.8		7.520	-23.0	V	3.0	34.9	1.0	-56.9	-13.0	-43.9		3.760	-24.1	H	3.0	35.3	1.0	-58.4	-13.0	-45.4		5.640	-23.2	H	3.0	34.7	1.0	-56.9	-13.0	-43.9		7.520	-20.4	H	3.0	34.9	1.0	-54.3	-13.0	-41.3		High Ch, 1909.8MHz										3.820	-25.2	V	3.0	35.3	1.0	-59.5	-13.0	-46.5		5.729	-19.9	V	3.0	34.7	1.0	-53.6	-13.0	-40.6		7.639	-17.6	V	3.0	35.0	1.0	-51.6	-13.0	-38.6		3.820	-25.2	H	3.0	35.3	1.0	-59.5	-13.0	-46.5		5.729	-22.9	H	3.0	34.7	1.0	-56.7	-13.0	-43.7		7.639	-19.5	H	3.0	35.0	1.0	-53.5	-13.0	-40.5											
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																																						
Low Ch, 1850.2MHz																																																																																																																																																																																																																																															
3.700	-25.0	V	3.0	35.4	1.0	-59.5	-13.0	-46.5																																																																																																																																																																																																																																							
5.551	-17.7	V	3.0	34.7	1.0	-51.4	-13.0	-38.4																																																																																																																																																																																																																																							
7.401	-18.3	V	3.0	34.9	1.0	-52.2	-13.0	-39.2																																																																																																																																																																																																																																							
3.700	-25.4	H	3.0	35.4	1.0	-59.8	-13.0	-46.8																																																																																																																																																																																																																																							
5.551	-20.5	H	3.0	34.7	1.0	-54.2	-13.0	-41.2																																																																																																																																																																																																																																							
7.401	-20.1	H	3.0	34.9	1.0	-54.0	-13.0	-41.0																																																																																																																																																																																																																																							
Mid Ch, 1880.0MHz																																																																																																																																																																																																																																															
3.760	-26.4	V	3.0	35.3	1.0	-60.7	-13.0	-47.7																																																																																																																																																																																																																																							
5.640	-24.1	V	3.0	34.7	1.0	-57.8	-13.0	-44.8																																																																																																																																																																																																																																							
7.520	-23.0	V	3.0	34.9	1.0	-56.9	-13.0	-43.9																																																																																																																																																																																																																																							
3.760	-24.1	H	3.0	35.3	1.0	-58.4	-13.0	-45.4																																																																																																																																																																																																																																							
5.640	-23.2	H	3.0	34.7	1.0	-56.9	-13.0	-43.9																																																																																																																																																																																																																																							
7.520	-20.4	H	3.0	34.9	1.0	-54.3	-13.0	-41.3																																																																																																																																																																																																																																							
High Ch, 1909.8MHz																																																																																																																																																																																																																																															
3.820	-25.2	V	3.0	35.3	1.0	-59.5	-13.0	-46.5																																																																																																																																																																																																																																							
5.729	-19.9	V	3.0	34.7	1.0	-53.6	-13.0	-40.6																																																																																																																																																																																																																																							
7.639	-17.6	V	3.0	35.0	1.0	-51.6	-13.0	-38.6																																																																																																																																																																																																																																							
3.820	-25.2	H	3.0	35.3	1.0	-59.5	-13.0	-46.5																																																																																																																																																																																																																																							
5.729	-22.9	H	3.0	34.7	1.0	-56.7	-13.0	-43.7																																																																																																																																																																																																																																							
7.639	-19.5	H	3.0	35.0	1.0	-53.5	-13.0	-40.5																																																																																																																																																																																																																																							
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																															

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company:
Project #:
Date:
Test Engineer:
Configuration:
Mode:

Samsung
 14119572
 12/10/14
 Jude Semana
 EUT w/ AC Charger + HS
EGPRS850

Chamber
 3m Chamber

Pre-amplifier
 T34 8449B

Filter
 Filter 1

Limit
 Part 22

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850	Low Ch, 824.2MHz									
	1.648	-26.1	V	3.0	37.4	1.0	-62.5	-13.0	-49.5	
	2.473	-20.0	V	3.0	36.4	1.0	-55.4	-13.0	-42.4	
	3.297	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
	1.648	-26.0	H	3.0	37.4	1.0	-62.4	-13.0	-49.4	
	2.473	-21.5	H	3.0	36.4	1.0	-56.9	-13.0	-43.9	
	3.297	-20.5	H	3.0	35.8	1.0	-55.3	-13.0	-42.3	
	Mid Ch, 836.6MHz									
	1.673	-25.8	V	3.0	37.3	1.0	-62.1	-13.0	-49.1	
EGPRS	2.510	-20.2	V	3.0	36.4	1.0	-55.5	-13.0	-42.5	
	3.346	-21.0	V	3.0	35.8	1.0	-55.7	-13.0	-42.7	
	1.673	-25.5	H	3.0	37.3	1.0	-61.9	-13.0	-48.9	
	2.510	-21.1	H	3.0	36.4	1.0	-56.4	-13.0	-43.4	
	3.346	-19.4	H	3.0	35.8	1.0	-54.2	-13.0	-41.2	
	High Ch, 848.8MHz									
	1.698	-25.4	V	3.0	37.3	1.0	-61.7	-13.0	-48.7	
	2.547	-20.3	V	3.0	36.3	1.0	-55.6	-13.0	-42.6	
	3.395	-20.1	V	3.0	35.7	1.0	-54.8	-13.0	-41.8	
1.698	-25.5	H	3.0	37.3	1.0	-61.8	-13.0	-48.8		
2.547	-21.9	H	3.0	36.3	1.0	-57.3	-13.0	-44.3		
3.395	-20.7	H	3.0	35.7	1.0	-55.4	-13.0	-42.4		

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: Samsung Project #: 14I19572 Date: 12/10/14 Test Engineer: Jude Semana Configuration: EUT w/ AC Charger + HS Mode: GPRS 850										
Chamber 3m Chamber		Pre-amplifier T34 8449B		Filter Filter 1		Limit Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850 GPRS	Low Ch, 824.2MHz									
	1.648	-26.1	V	3.0	37.4	1.0	-62.5	-13.0	-49.5	
	2.473	-18.8	V	3.0	36.4	1.0	-54.2	-13.0	-41.2	
	3.297	-20.6	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	1.648	-26.4	H	3.0	37.4	1.0	-62.8	-13.0	-49.8	
	2.473	-21.4	H	3.0	36.4	1.0	-56.8	-13.0	-43.8	
	3.297	-20.7	H	3.0	35.8	1.0	-55.5	-13.0	-42.5	
	Mid Ch, 836.6MHz									
	1.673	-26.1	V	3.0	37.3	1.0	-62.4	-13.0	-49.4	
	2.510	-20.2	V	3.0	36.4	1.0	-55.5	-13.0	-42.5	
	3.346	-20.2	V	3.0	35.8	1.0	-54.9	-13.0	-41.9	
	1.673	-26.4	H	3.0	37.3	1.0	-62.7	-13.0	-49.7	
	2.510	-21.5	H	3.0	36.4	1.0	-56.9	-13.0	-43.9	
	3.346	-21.1	H	3.0	35.8	1.0	-55.9	-13.0	-42.9	
	High Ch, 848.8MHz									
	1.698	-25.4	V	3.0	37.3	1.0	-61.7	-13.0	-48.7	
	2.547	-20.6	V	3.0	36.3	1.0	-56.0	-13.0	-43.0	
	3.395	-20.7	V	3.0	35.7	1.0	-55.4	-13.0	-42.4	
	1.698	-25.2	H	3.0	37.3	1.0	-61.5	-13.0	-48.5	
	2.547	-22.2	H	3.0	36.3	1.0	-57.5	-13.0	-44.5	
3.395	-20.4	H	3.0	35.7	1.0	-55.1	-13.0	-42.1		
Rev: 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc Above 1GHz High Frequency Substitution Measurement										
Company: Samsung Project #: 14I19572 Date: 12/10/14 Test Engineer: Jude Semana Configuration: EUT, AC Charger, Headset Location: Chamber C Mode: LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth										
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band LTE5 3MHz 16QAM	Low Ch, 825.5									
	1651.00	-30.9	V	3.0	37.0	1.0	-66.9	-13.0	-53.9	
	2476.50	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
	3302.00	-24.9	V	3.0	36.2	1.0	-60.0	-13.0	-47.0	
	1651.00	-29.4	H	3.0	37.0	1.0	-65.4	-13.0	-52.4	
	2476.50	-26.6	H	3.0	36.4	1.0	-62.1	-13.0	-49.1	
	3302.00	-25.1	H	3.0	36.2	1.0	-60.3	-13.0	-47.3	
	Mid Ch, 836.5									
	1673.00	-30.7	V	3.0	37.0	1.0	-66.7	-13.0	-53.7	
	2509.50	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6	
	3346.00	-24.7	V	3.0	36.1	1.0	-59.8	-13.0	-46.8	
	1673.00	-30.0	H	3.0	37.0	1.0	-66.0	-13.0	-53.0	
	2509.50	-26.5	H	3.0	36.4	1.0	-61.9	-13.0	-48.9	
	3346.00	-25.4	H	3.0	36.1	1.0	-60.5	-13.0	-47.5	
	High Ch, 847.5									
	1695.00	-30.3	V	3.0	37.0	1.0	-66.2	-13.0	-53.2	
	2542.50	-25.2	V	3.0	36.4	1.0	-60.6	-13.0	-47.6	
	3390.00	-24.7	V	3.0	36.1	1.0	-59.7	-13.0	-46.7	
	1695.00	-29.7	H	3.0	37.0	1.0	-65.6	-13.0	-52.6	
	2542.50	-27.3	H	3.0	36.4	1.0	-62.7	-13.0	-49.7	
	3390.00	-25.1	H	3.0	36.1	1.0	-60.2	-13.0	-47.2	

UL Verification Services, Inc bove 1GHz High Frequency Substitution Measureme										
Company: Samsung Project #: 14I19572 Date: 12/10/14 Test Engineer: Jude Semana Configuration: EUT, AC Charger, Headset Location: Chamber C Mode: LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth										
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 825.5									
	1651.00	-31.0	V	3.0	37.0	1.0	-67.0	-13.0	-54.0	
	2476.50	-24.7	V	3.0	36.4	1.0	-60.2	-13.0	-47.2	
LTE5	3302.00	-25.8	V	3.0	36.2	1.0	-61.0	-13.0	-48.0	
	1651.00	-31.1	H	3.0	37.0	1.0	-67.1	-13.0	-54.1	
	2476.50	-26.8	H	3.0	36.4	1.0	-62.2	-13.0	-49.2	
3MHz	3302.00	-25.2	H	3.0	36.2	1.0	-60.4	-13.0	-47.4	
	Mid Ch, 836.5									
	1673.00	-30.9	V	3.0	37.0	1.0	-66.9	-13.0	-53.9	
QPSK	2509.50	-24.8	V	3.0	36.4	1.0	-60.2	-13.0	-47.2	
	3346.00	-24.7	V	3.0	36.1	1.0	-59.9	-13.0	-46.9	
	1673.00	-30.2	H	3.0	37.0	1.0	-66.2	-13.0	-53.2	
	2509.50	-26.6	H	3.0	36.4	1.0	-62.0	-13.0	-49.0	
	3346.00	-25.6	H	3.0	36.1	1.0	-60.7	-13.0	-47.7	
	High Ch, 847.5									
	1695.00	-30.5	V	3.0	37.0	1.0	-66.4	-13.0	-53.4	
	2542.50	-25.9	V	3.0	36.4	1.0	-61.3	-13.0	-48.3	
	3390.00	-24.7	V	3.0	36.1	1.0	-59.8	-13.0	-46.8	
	1695.00	-30.5	H	3.0	37.0	1.0	-66.4	-13.0	-53.4	
	2542.50	-27.3	H	3.0	36.4	1.0	-62.7	-13.0	-49.7	
	3390.00	-25.7	H	3.0	36.1	1.0	-60.7	-13.0	-47.7	

Band LTE5 1.4MHz 16QAM	UL Verification Services, Inc Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 14I19572 Date: 12/10/14 Test Engineer: Jude Semana Configuration: EUT, AC Charger, Headset Location: Chamber C Mode: LTE_16QAM Band 5 Harmonics, 1.4MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.7									
	1649.40	-31.2	V	3.0	37.0	1.0	-67.3	-13.0	-54.3	
	2474.10	-24.6	V	3.0	36.4	1.0	-60.1	-13.0	-47.1	
	3298.80	-25.6	V	3.0	36.2	1.0	-60.8	-13.0	-47.8	
	1649.40	-31.2	H	3.0	37.0	1.0	-67.3	-13.0	-54.3	
	2474.10	-26.6	H	3.0	36.4	1.0	-62.1	-13.0	-49.1	
	3298.80	-25.3	H	3.0	36.2	1.0	-60.4	-13.0	-47.4	
	Mid Ch, 836.5									
	1673.00	-31.6	V	3.0	37.0	1.0	-67.6	-13.0	-54.6	
	2509.50	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1	
	3346.00	-25.1	V	3.0	36.1	1.0	-60.2	-13.0	-47.2	
	1673.00	-31.1	H	3.0	37.0	1.0	-67.1	-13.0	-54.1	
	2509.50	-27.5	H	3.0	36.4	1.0	-62.9	-13.0	-49.9	
	3346.00	-25.6	H	3.0	36.1	1.0	-60.7	-13.0	-47.7	
	High Ch, 848.3									
	1696.60	-30.3	V	3.0	37.0	1.0	-66.2	-13.0	-53.2	
	2544.90	-24.8	V	3.0	36.4	1.0	-60.2	-13.0	-47.2	
	3393.20	-24.3	V	3.0	36.1	1.0	-59.4	-13.0	-46.4	
	1696.60	-30.1	H	3.0	37.0	1.0	-66.1	-13.0	-53.1	
	2544.90	-27.4	H	3.0	36.4	1.0	-62.8	-13.0	-49.8	
	3393.20	-25.4	H	3.0	36.1	1.0	-60.5	-13.0	-47.5	
			</							

UL Verification Services, Inc Above 1GHz High Frequency Substitution Measuremen										
Company: Samsung Project #: 14I19572 Date: 12/10/14 Test Engineer: Jude Semana Configuration: EUT, AC Charger, Headset Location: Chamber C Mode: LTE_QPSK Band 5 Harmonics, 1.4MHz Bandwidth										
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 824.7									
	1649.40	-31.1	V	3.0	37.0	1.0	-67.1	-13.0	-54.1	
	2474.10	-25.1	V	3.0	36.4	1.0	-60.5	-13.0	-47.5	
LTE5	3298.80	-25.2	V	3.0	36.2	1.0	-60.3	-13.0	-47.3	
	1649.40	-31.1	H	3.0	37.0	1.0	-67.2	-13.0	-54.2	
	2474.10	-26.9	H	3.0	36.4	1.0	-62.3	-13.0	-49.3	
1.4MHz	3298.80	-25.5	H	3.0	36.2	1.0	-60.7	-13.0	-47.7	
	Mid Ch, 836.5									
	1673.00	-30.7	V	3.0	37.0	1.0	-66.7	-13.0	-53.7	
QPSK	2509.50	-25.3	V	3.0	36.4	1.0	-60.7	-13.0	-47.7	
	3346.00	-25.9	V	3.0	36.1	1.0	-61.0	-13.0	-48.0	
	1673.00	-30.5	H	3.0	37.0	1.0	-66.5	-13.0	-53.5	
	2509.50	-26.3	H	3.0	36.4	1.0	-61.7	-13.0	-48.7	
	3346.00	-25.1	H	3.0	36.1	1.0	-60.2	-13.0	-47.2	
	High Ch, 848.3									
	1696.60	-30.0	V	3.0	37.0	1.0	-66.0	-13.0	-53.0	
	2544.90	-25.7	V	3.0	36.4	1.0	-61.1	-13.0	-48.1	
	3393.20	-24.9	V	3.0	36.1	1.0	-60.0	-13.0	-47.0	
	1696.60	-29.4	H	3.0	37.0	1.0	-65.4	-13.0	-52.4	
	2544.90	-27.3	H	3.0	36.4	1.0	-62.7	-13.0	-49.7	
	3393.20	-25.1	H	3.0	36.1	1.0	-60.2	-13.0	-47.2	