



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

GSM/WCDMA Phone + Bluetooth and WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G530BT

FCC ID: A3LSMG530BT

REPORT NUMBER: 14I18664-E2

ISSUE DATE: September 4, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	09/04/14	Initial issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH	13
8.1.1. BASIC DATA RATE GFSK MODULATION	13
8.1.2. ENHANCED DATA RATE 8PSK MODULATION	13
20 dB AND 99% BANDWIDTH PLOTS	14
8.2. HOPPING FREQUENCY SEPARATION	26
8.3. NUMBER OF HOPPING CHANNELS	28
8.4. AVERAGE TIME OF OCCUPANCY	33
8.5. OUTPUT POWER.....	40
8.5.1. BASIC DATA RATE GFSK MODULATION	40
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	40
8.5.3. OUTPUT POWER PLOTS	41
8.6. AVERAGE POWER	47
8.6.1. BASIC DATA RATE GFSK MODULATION	47
8.6.2. DATA RATE PI/4-DQPSK MODULATION	47
8.6.3. ENHANCED DATA RATE 8PSK MODULATION	48
8.7. CONDUCTED SPURIOUS EMISSIONS	49
8.7.1. BASIC DATA RATE GFSK MODULATION	50
ENHANCED DATA RATE 8PSK MODULATION	58
9. RADIATED TEST RESULTS.....	66

9.1.	LIMITS AND PROCEDURE	66
9.2.	TRANSMITTER ABOVE 1 GHz	67
9.2.1.	BASIC DATA RATE GFSK MODULATION	67
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	80
9.3.	WORST-CASE BELOW 1 GHz.....	93
10.	AC POWER LINE CONDUCTED EMISSIONS	96
11.	SETUP PHOTOS	99
	END OF REPORT	104

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth and WLAN 2.4GHz b/g/n
MODEL: SM-G530BT
SERIAL NUMBER: R31F800SN4W (RADIATED), R31F800SN2M (CONDUCTED)
DATE TESTED: AUGUST 27 - SEPTEMBER 4, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☒ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☒ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth and WLAN 2.4GHz b/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	11.73	14.89
2402 - 2480	Enhanced 8PSK	11.96	15.70

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.86 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA0U83BWB	N/A	N/A
Earphone	Samsung	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

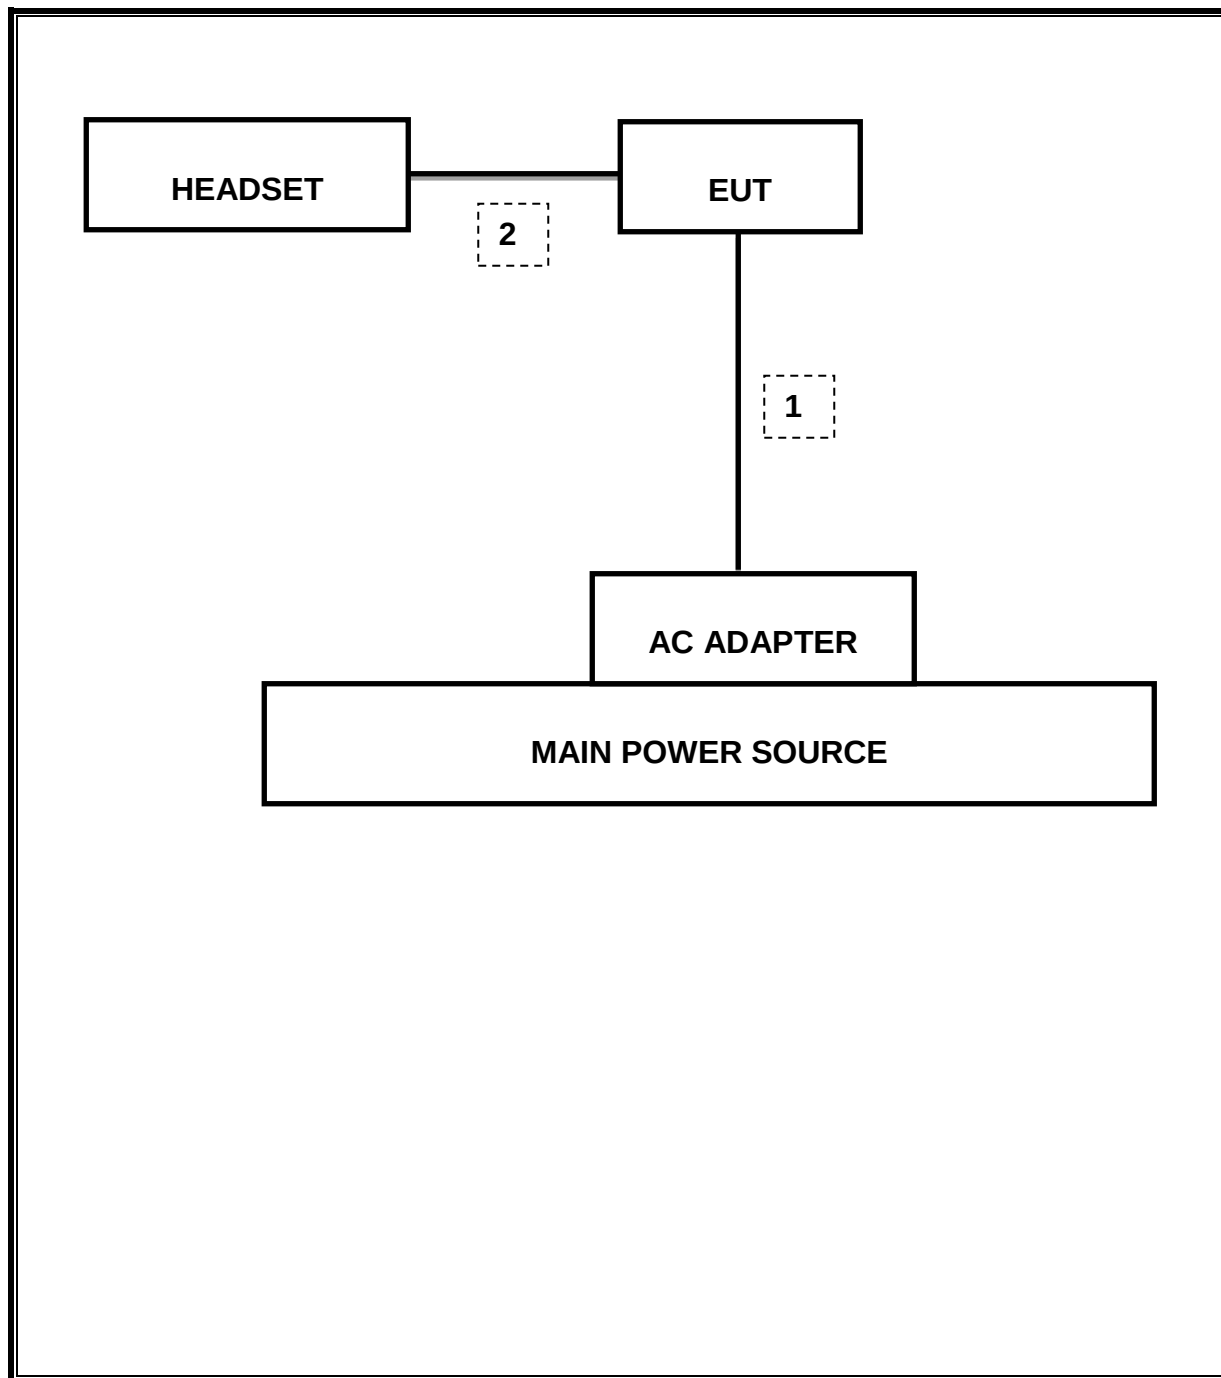

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.214MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-46.17dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	11.96dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.287sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	23.12dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	46.76dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.923	0.893
Middle	2441	0.923	0.895
High	2480	0.924	0.909
Worst		0.924	0.909


8.1.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.263	1.173
Middle	2441	1.263	1.214
High	2480	1.263	1.181
Worst		1.263	1.214


20 dB AND 99% BANDWIDTH PLOTS

GFSK 20 dB BANDWIDTH


LOW CHANNEL

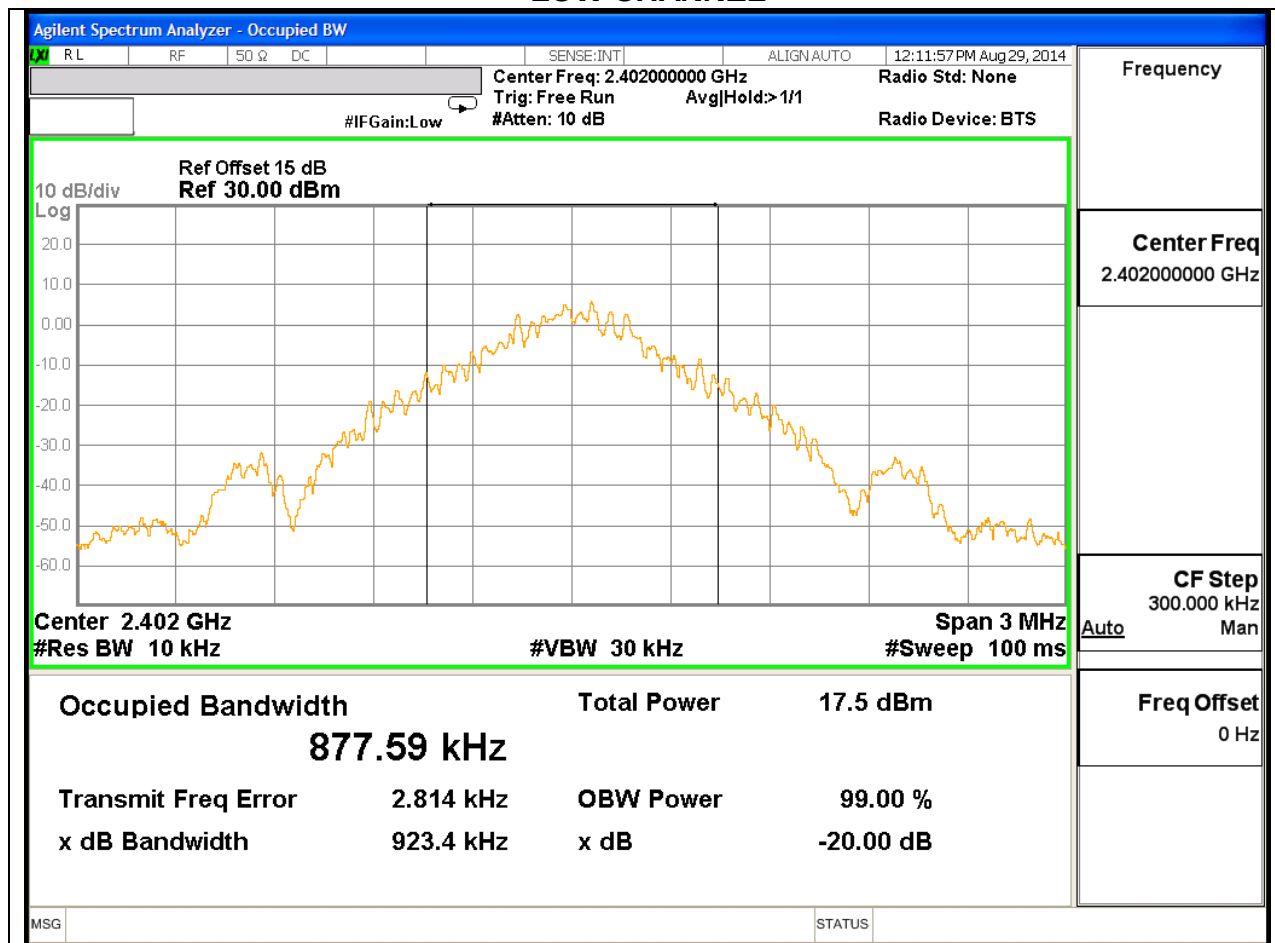

MID CHANNEL

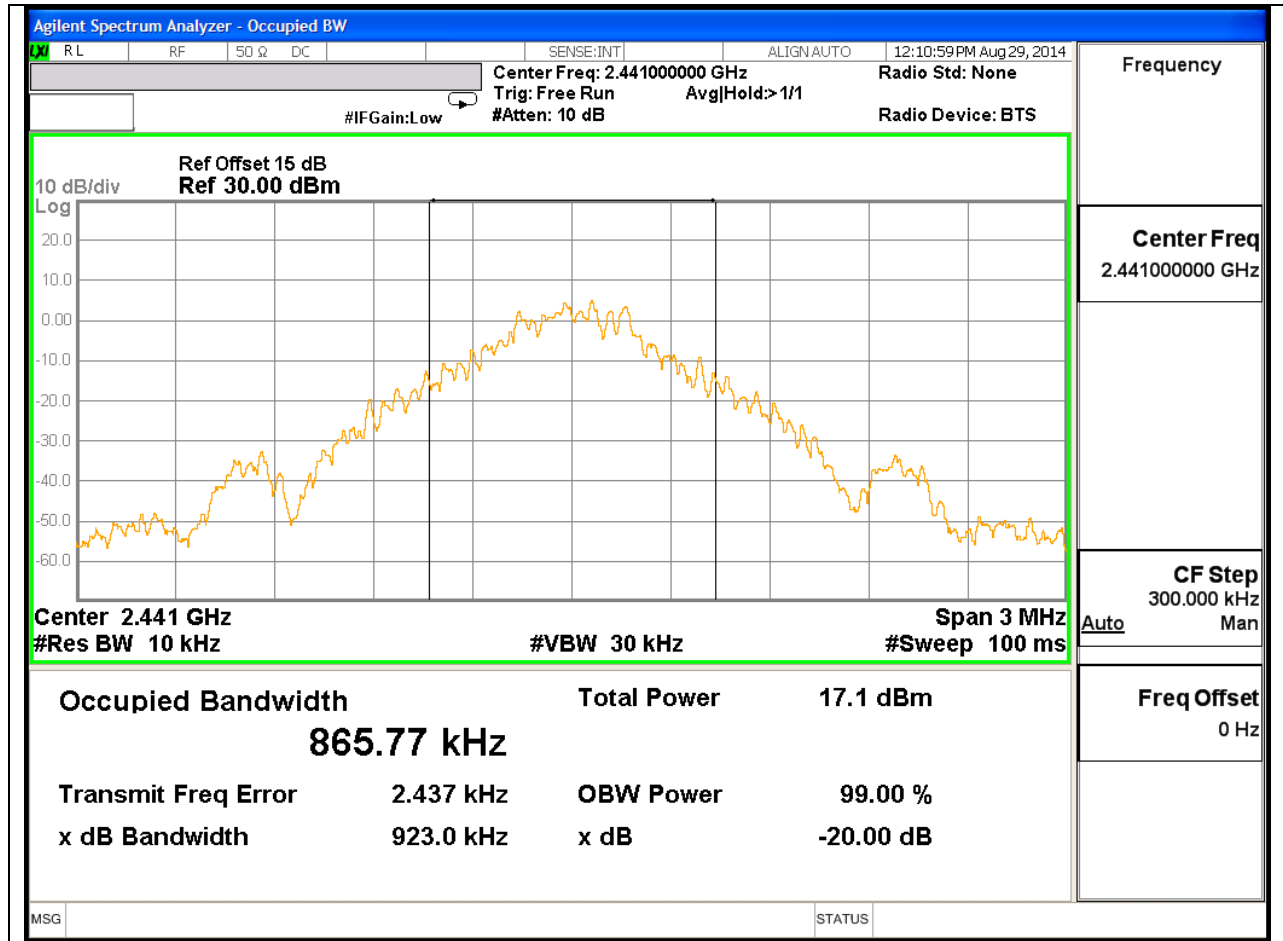


HIGH CHANNEL

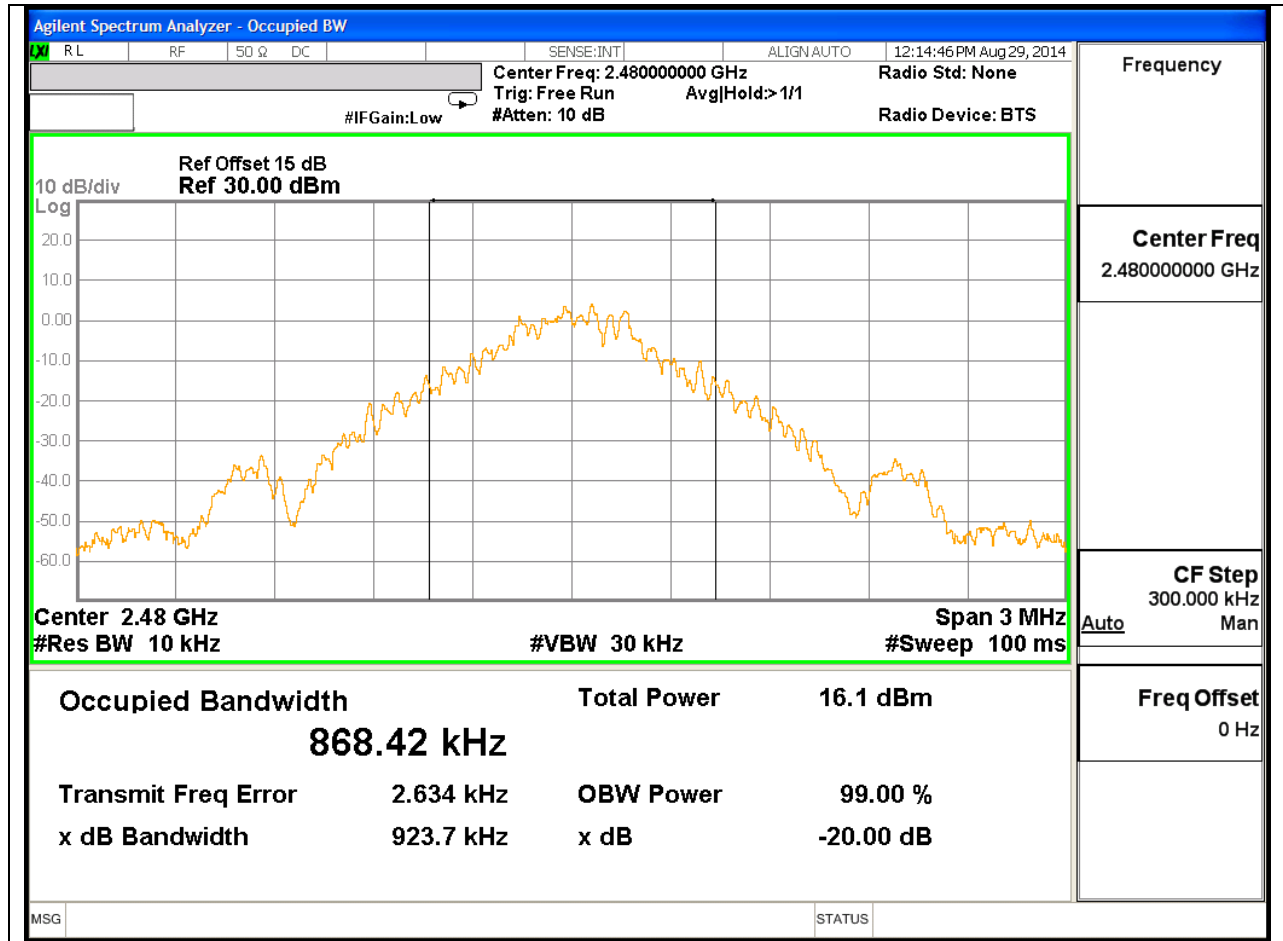


GFSK 99% BANDWIDTH


LOW CHANNEL

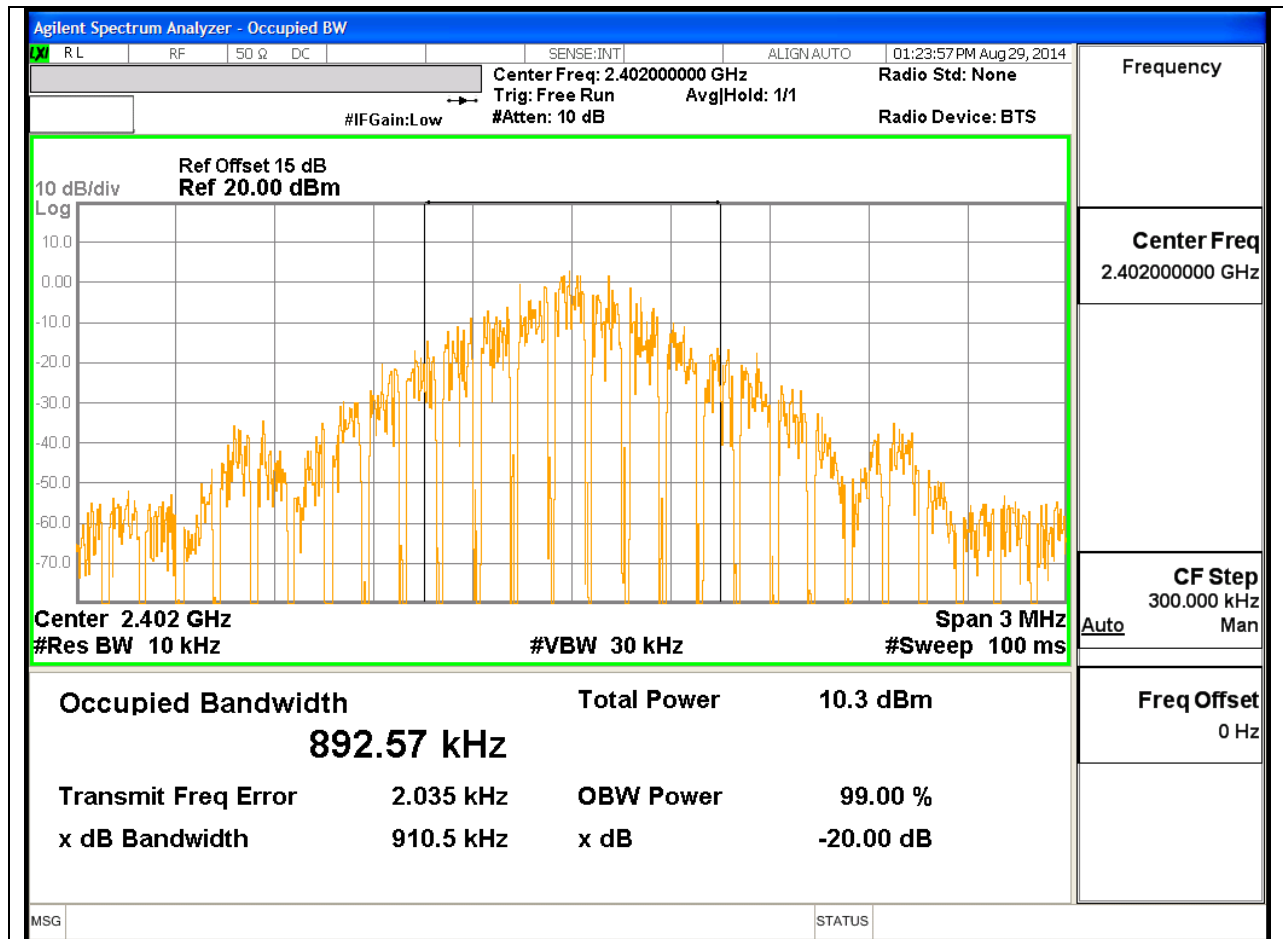

MID CHANNEL

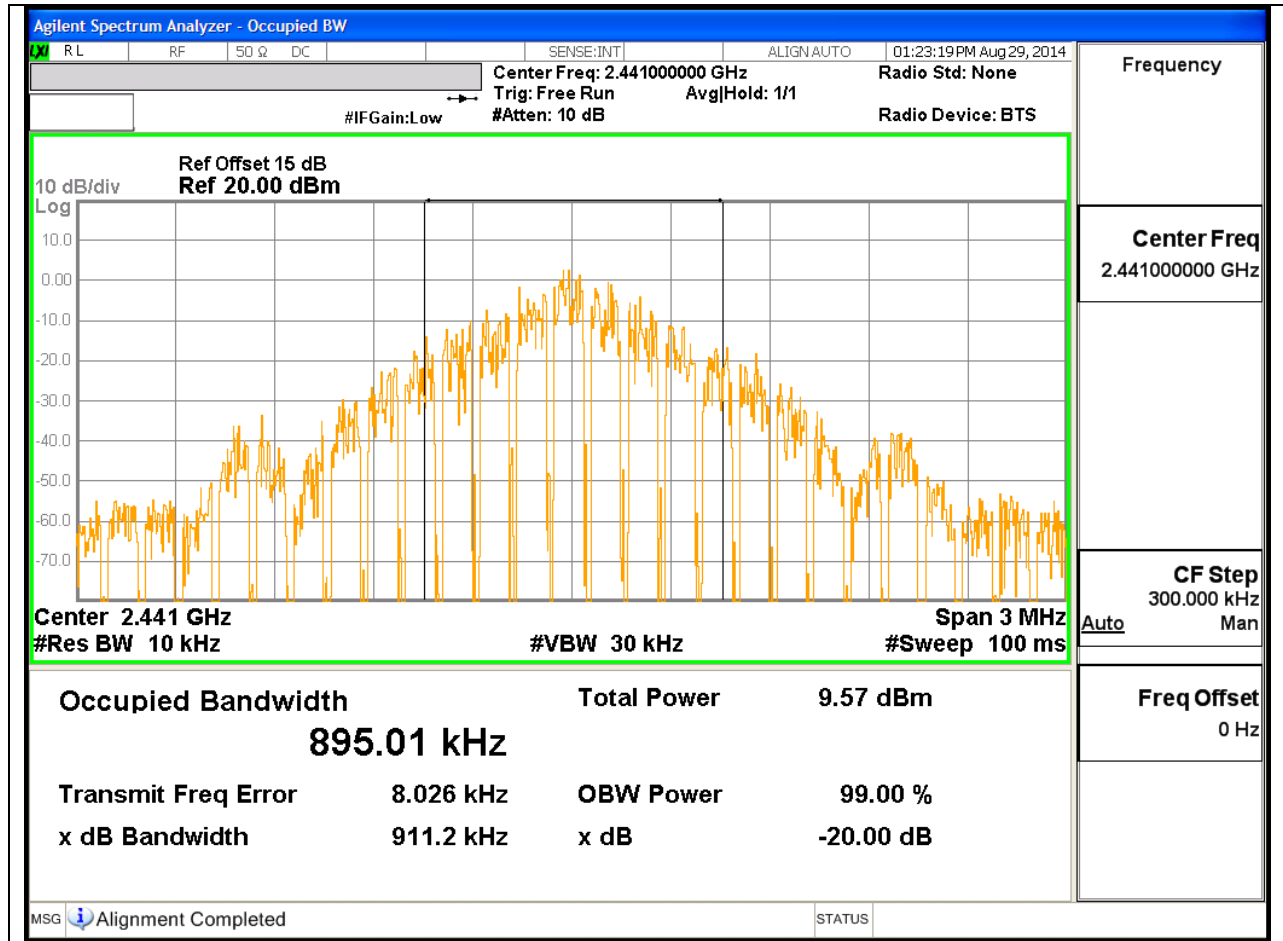


HIGH CHANNEL

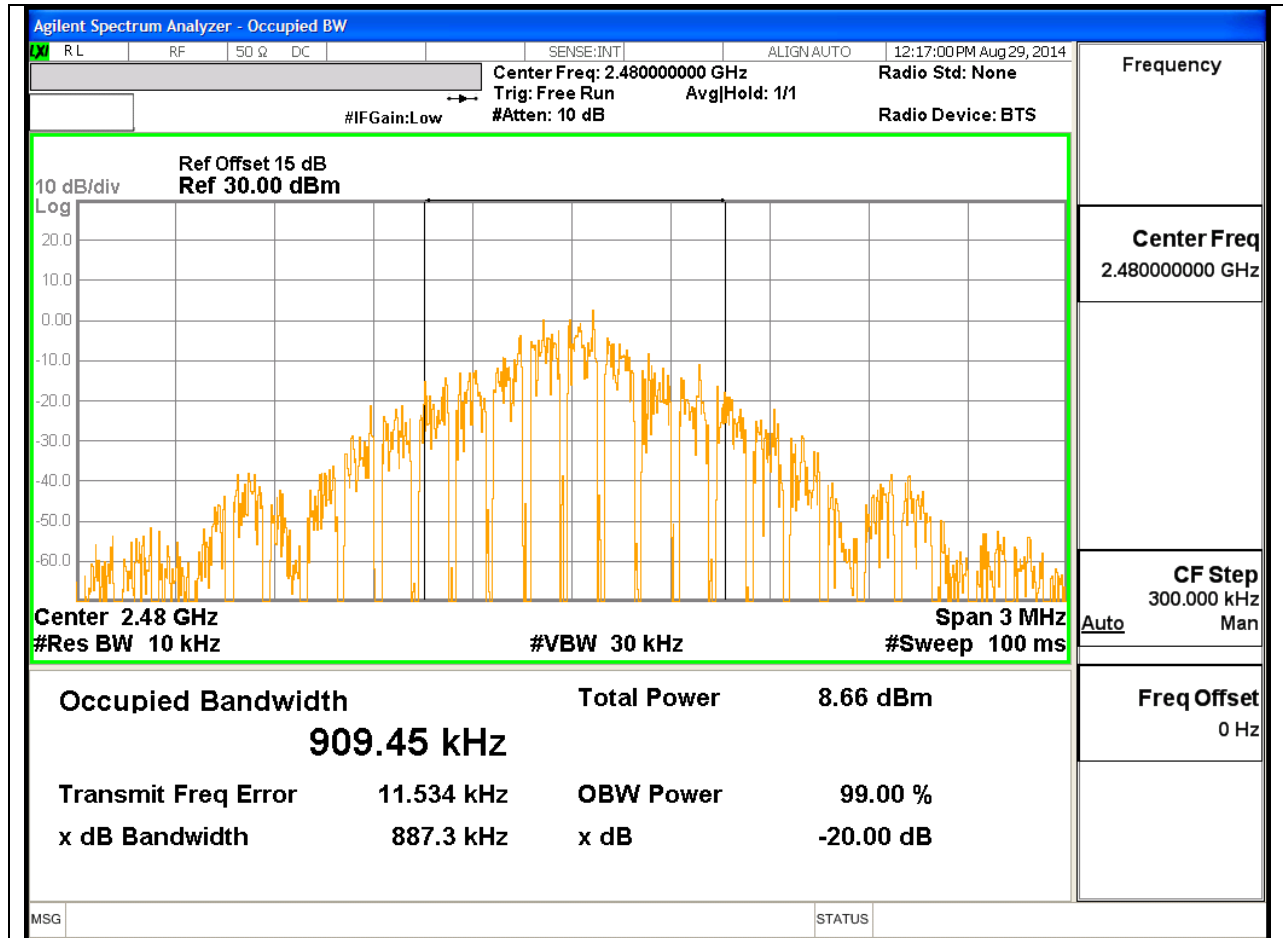


8PSK 20 dB BANDWIDTH


LOW CHANNEL

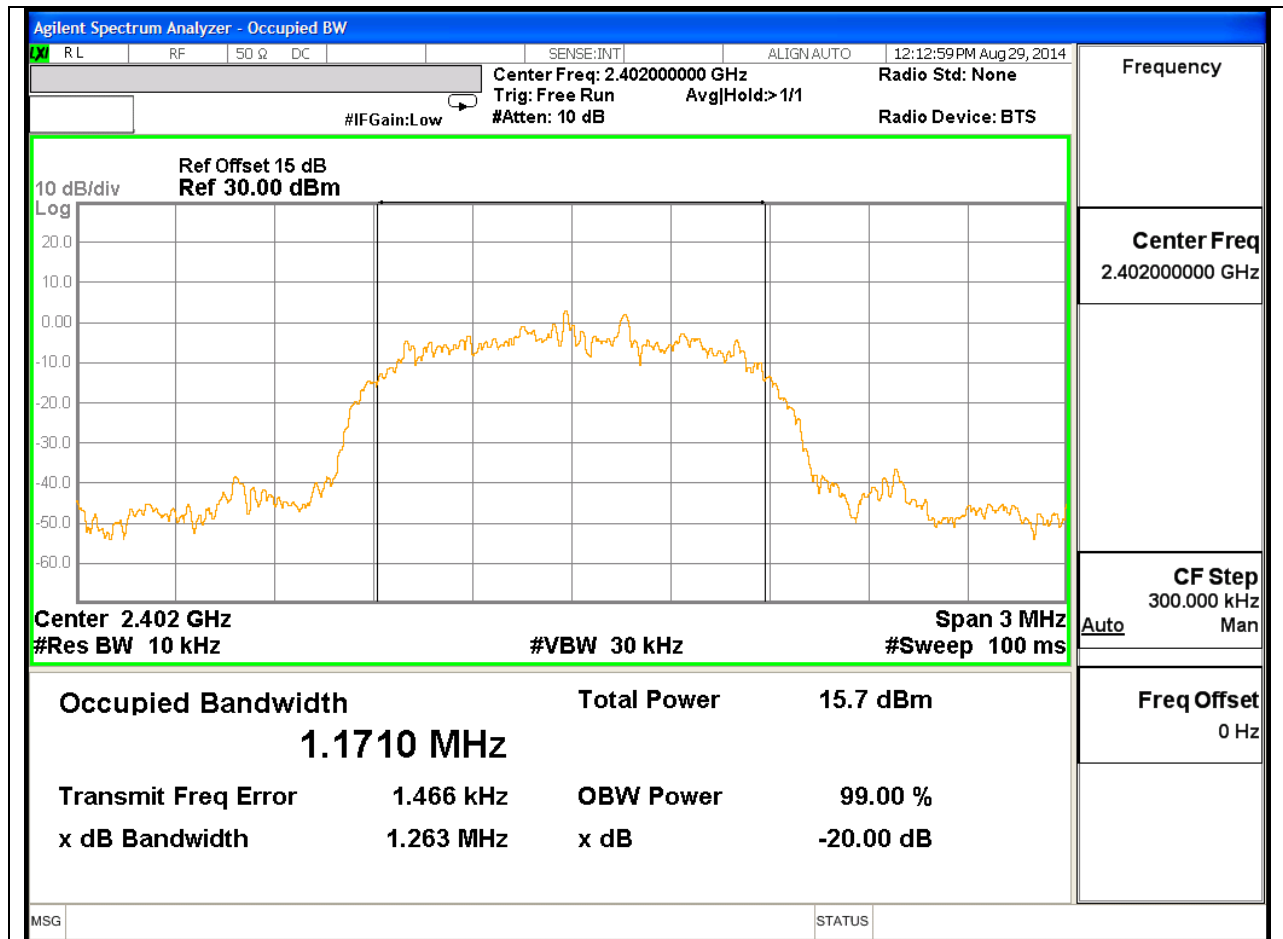

MID CHANNEL

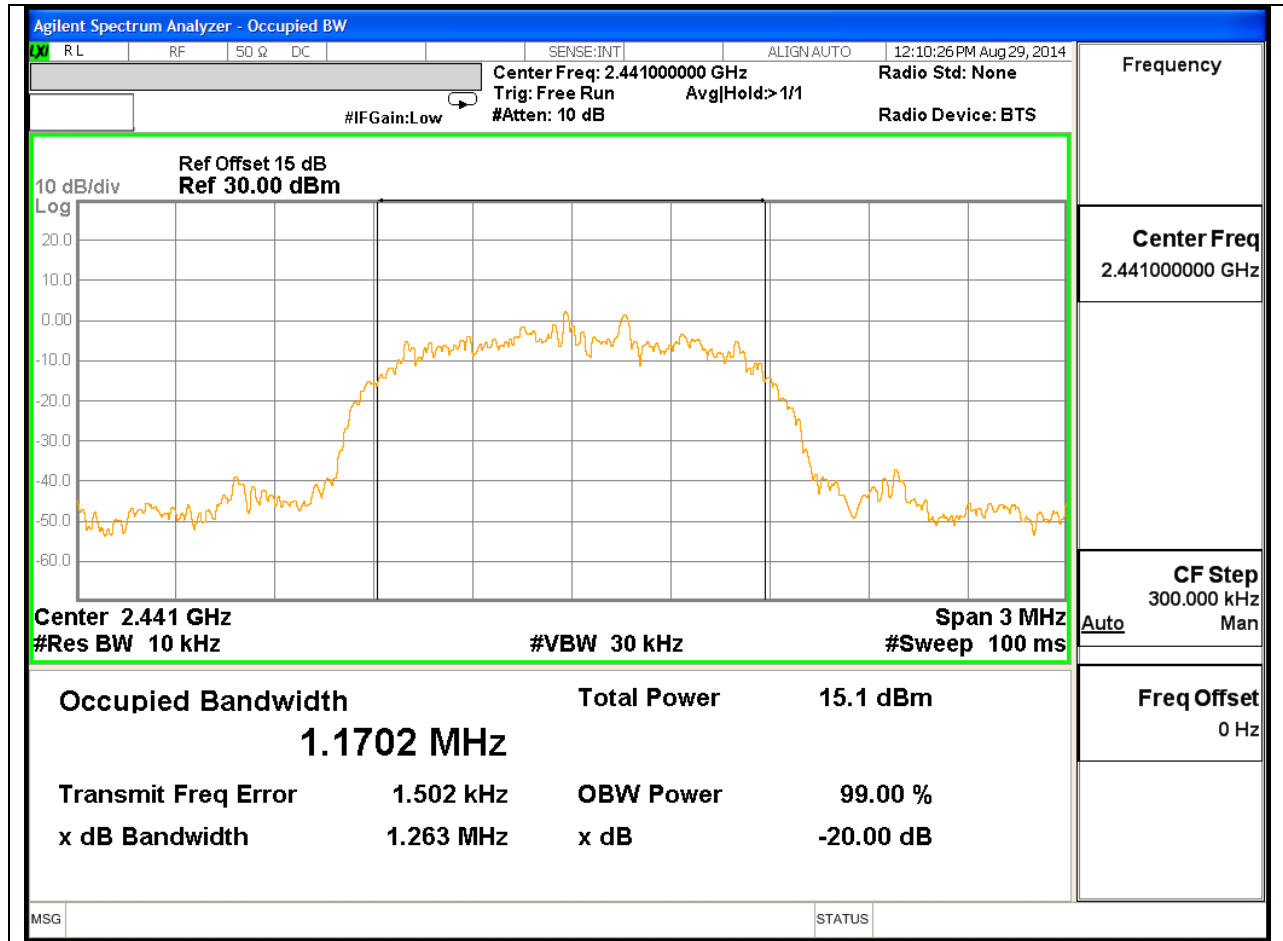


HIGH CHANNEL

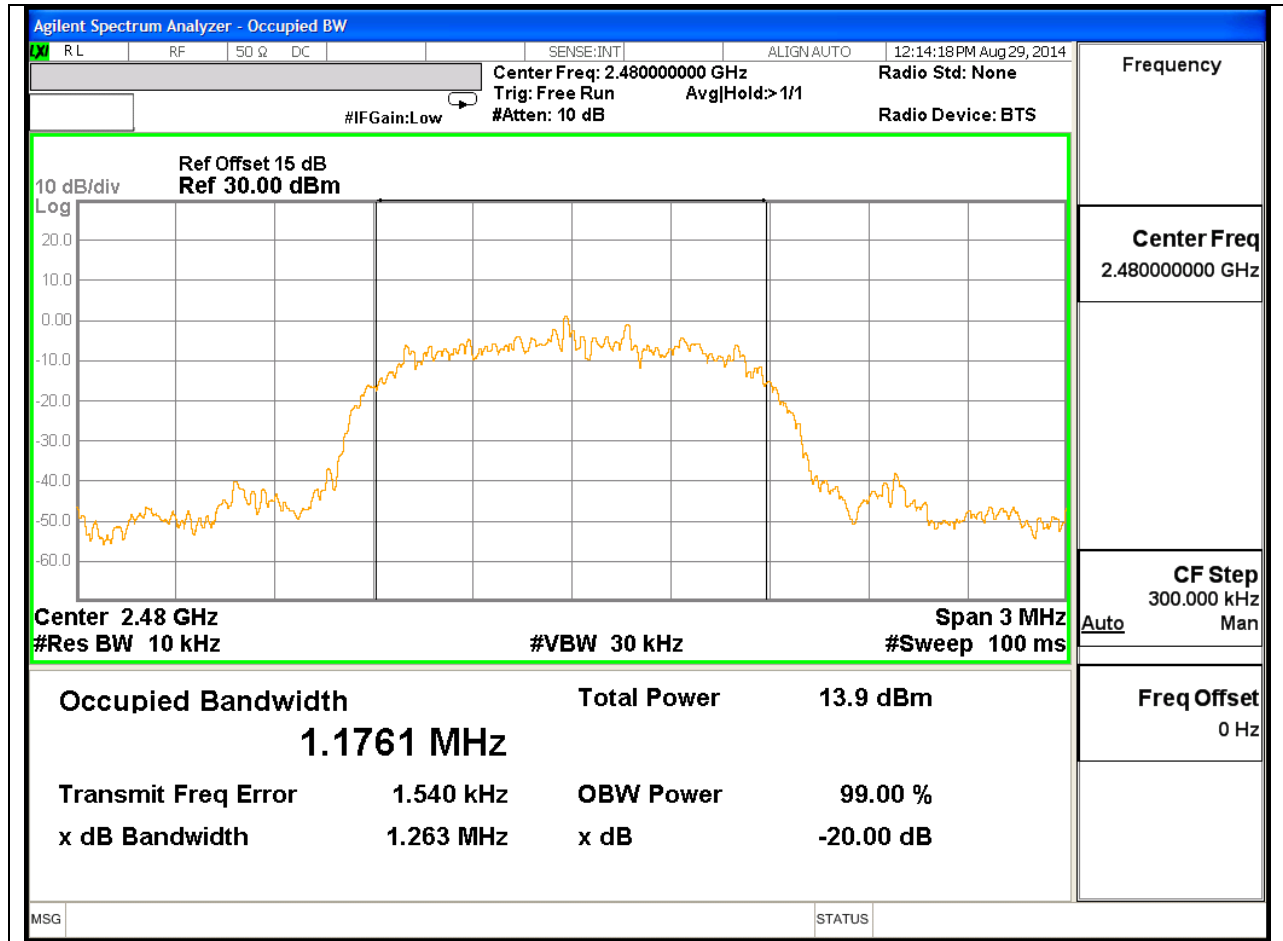


8PSK 99% BANDWIDTH


LOW CHANNEL

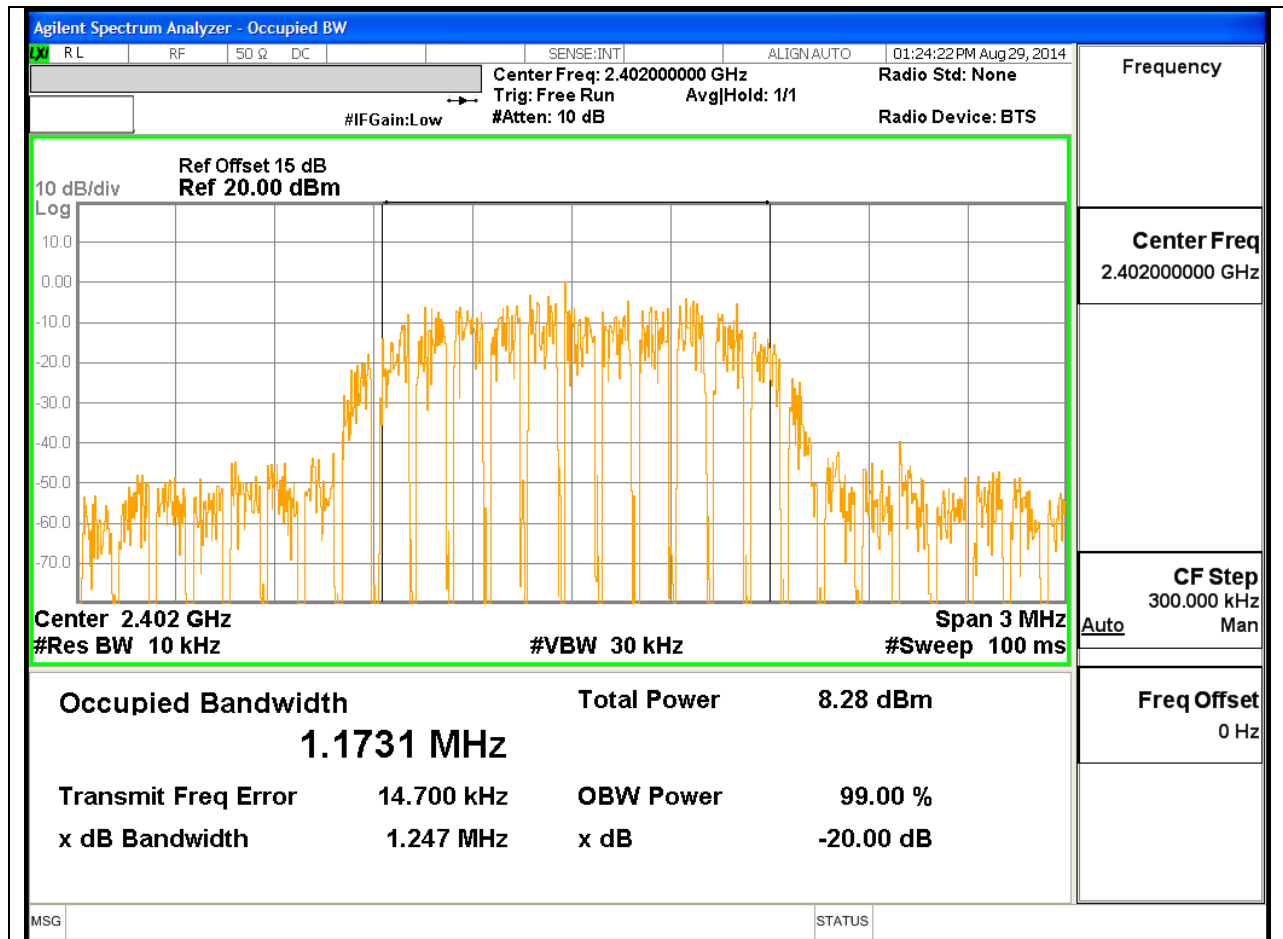

MID CHANNEL

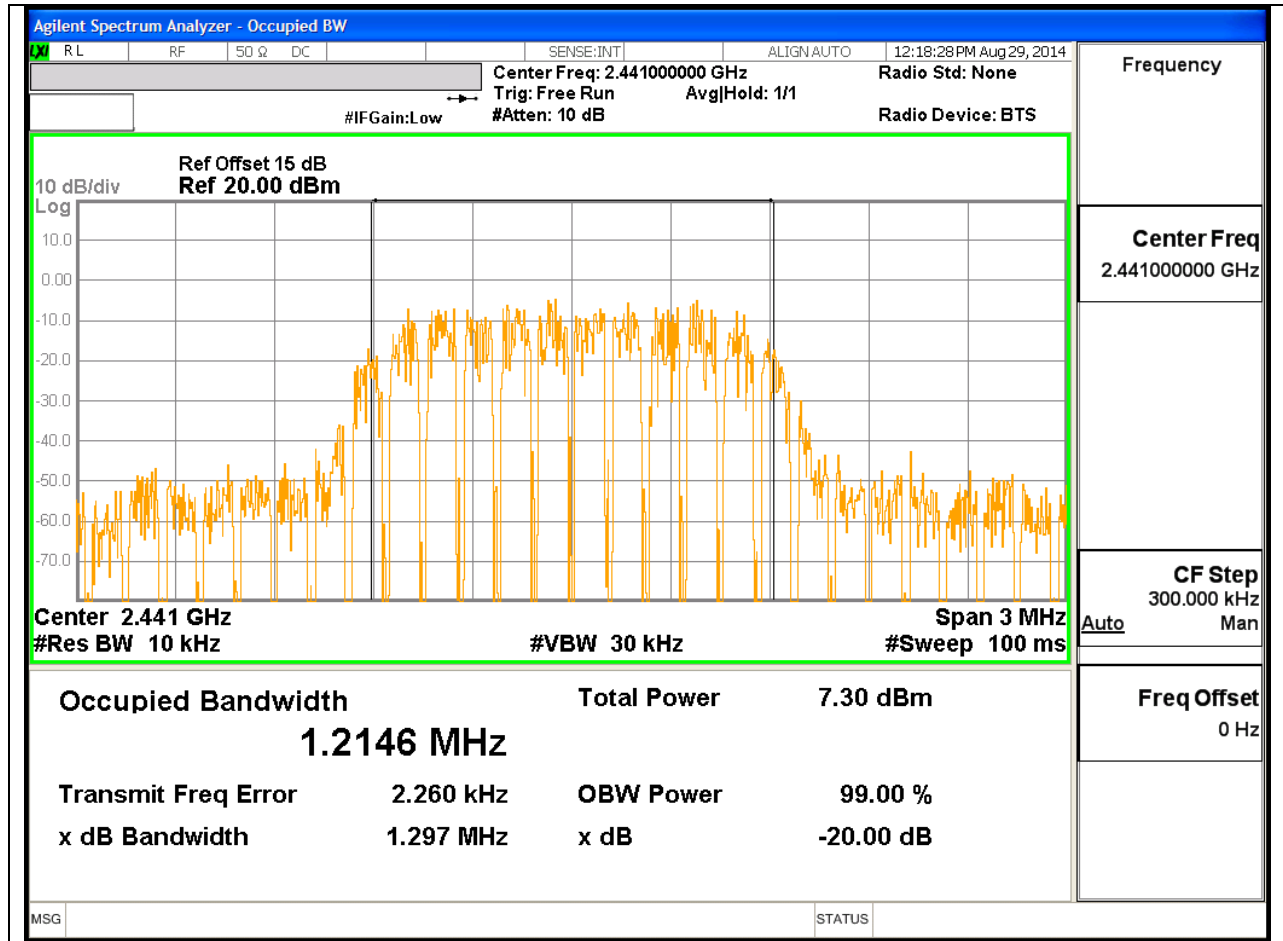

HIGH CHANNEL

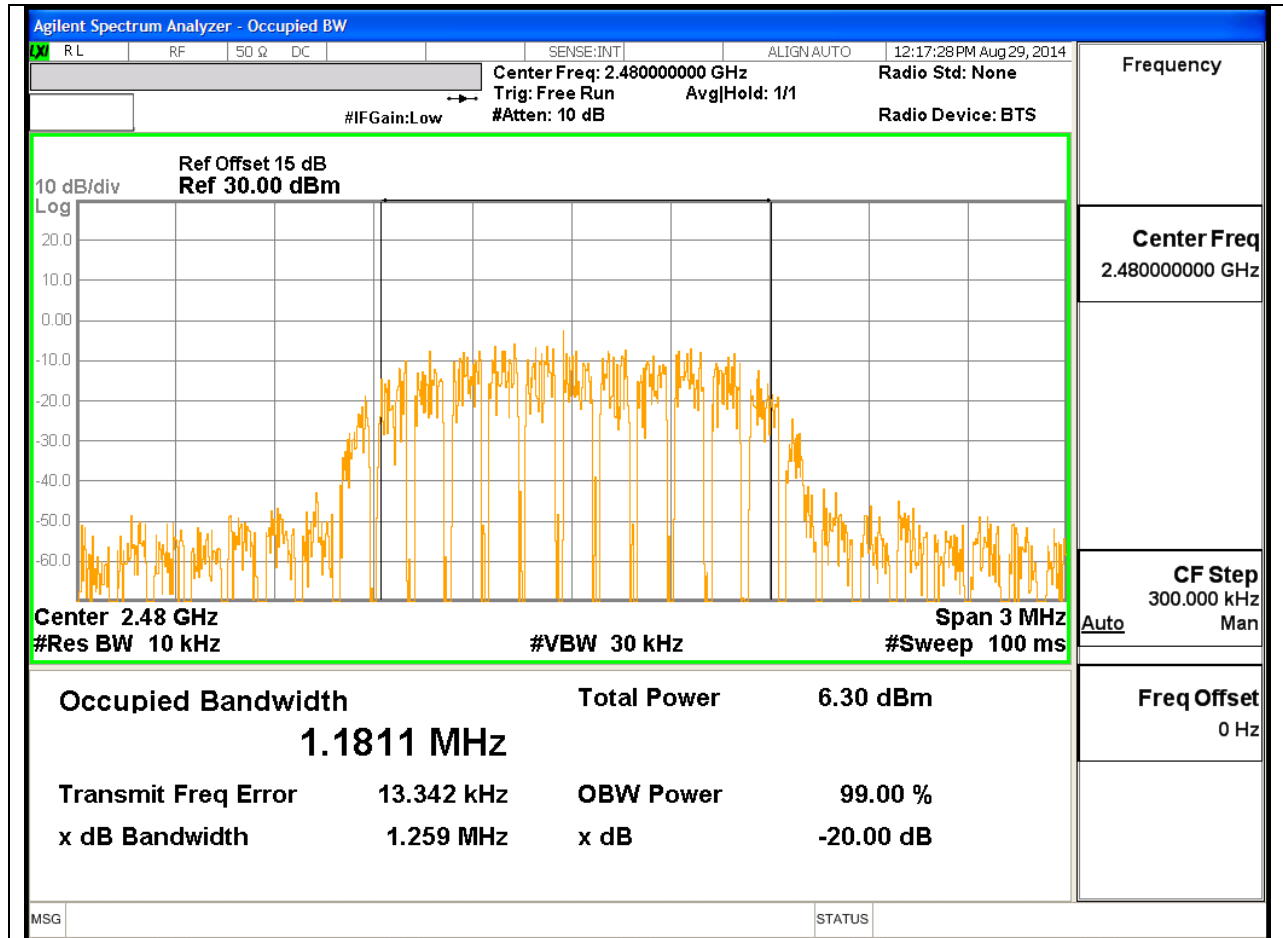

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

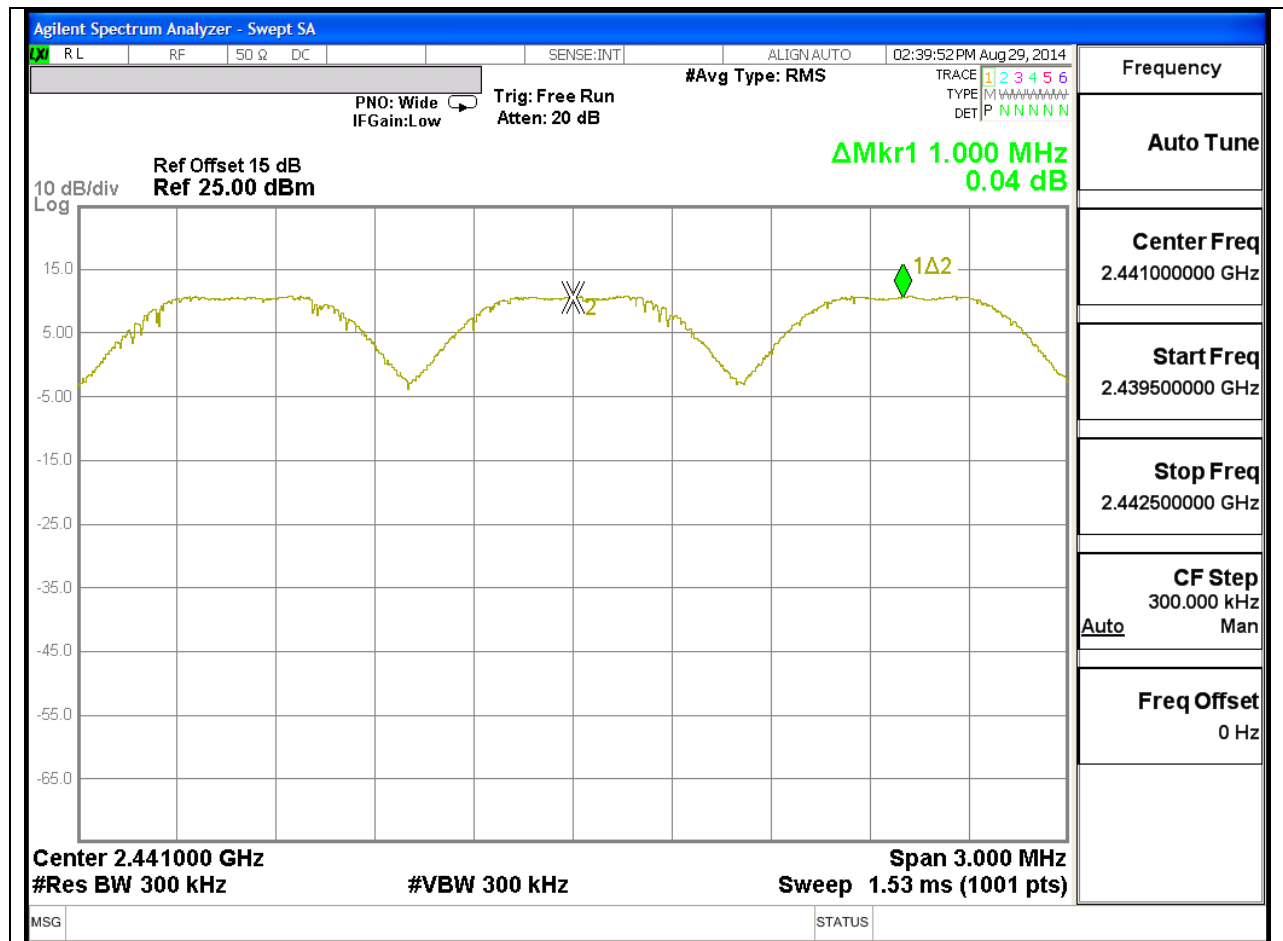

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS


NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

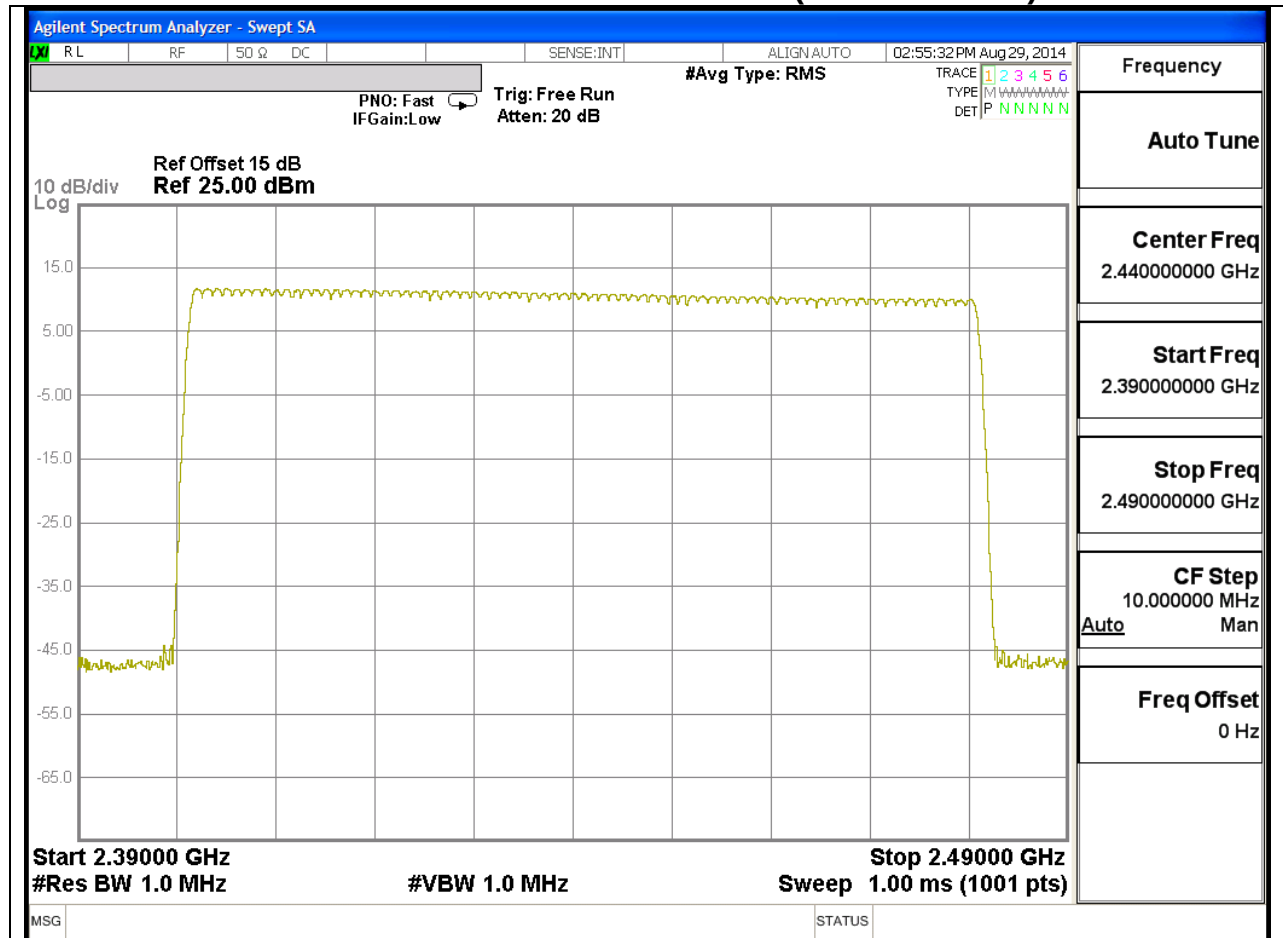

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

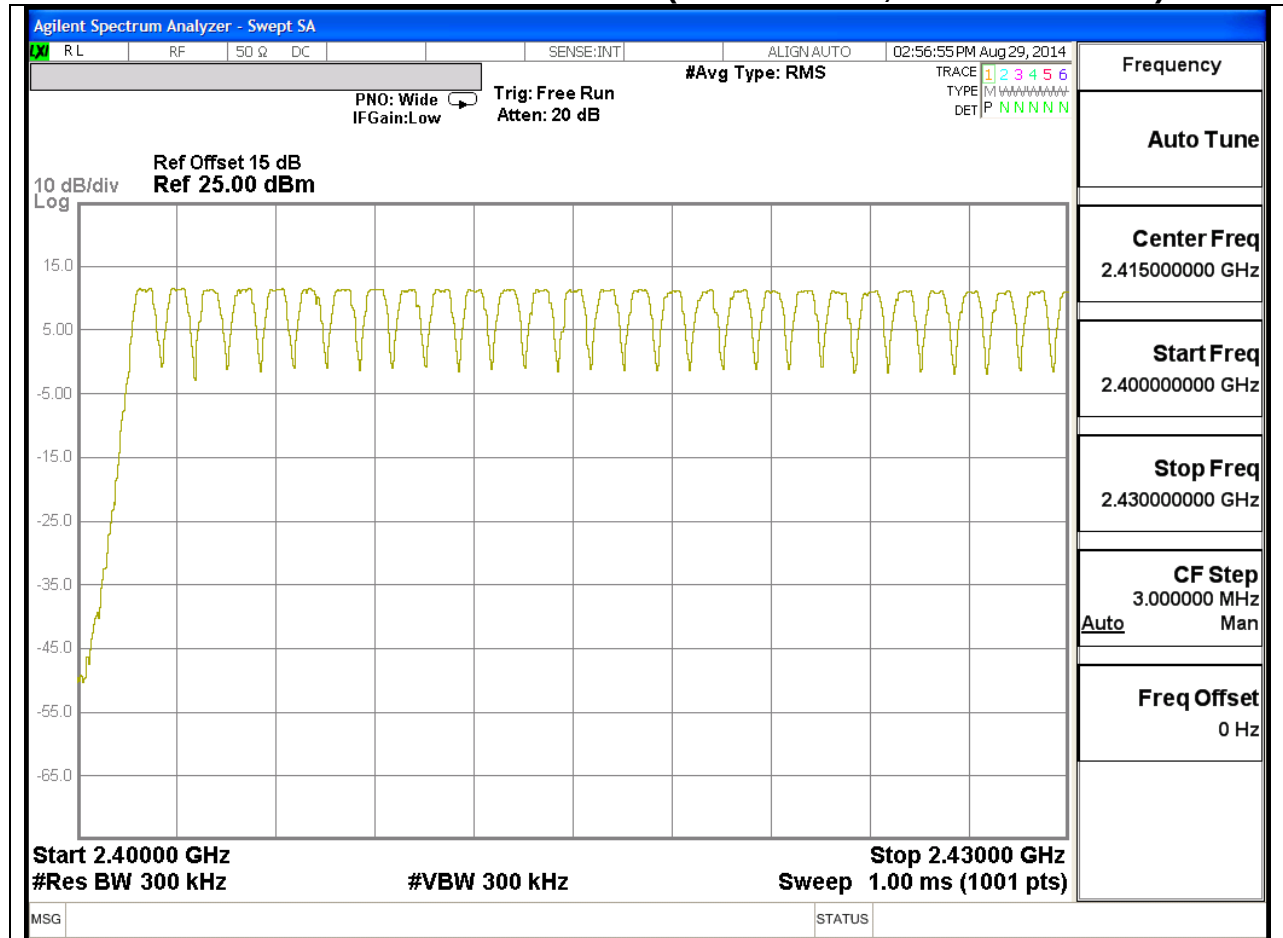

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

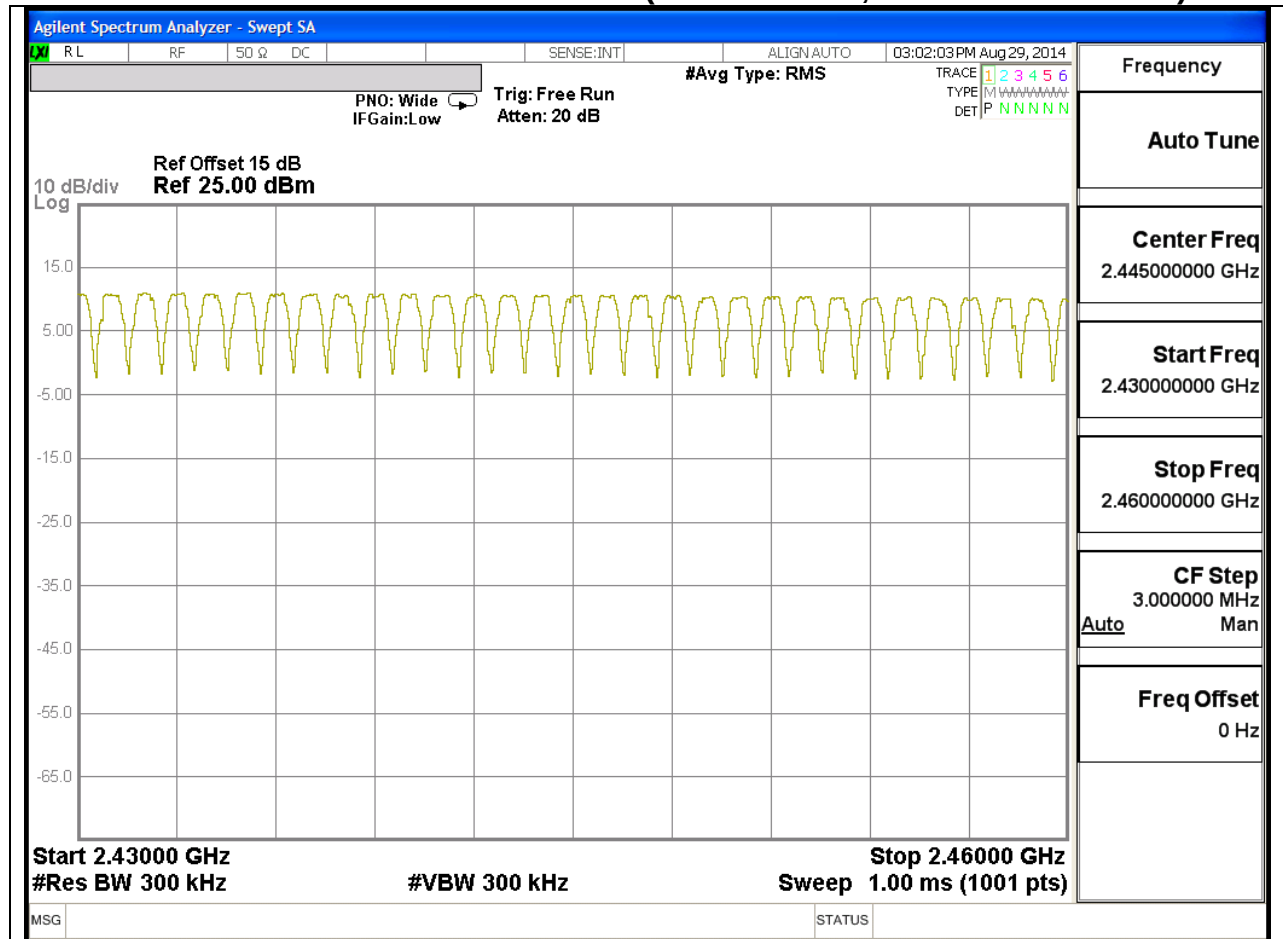

Agilent Spectrum Analyzer - Swept SA

☒ R L RF 50 Ω DC SENSE:INT ALIGN: AUTO 03:17:00 PM Aug 29, 2014

PNO: Wide IFGain:Low Trig: Free Run #Avg Type: RMS TRACE 1 2 3 4 5 6
 TYPE M N N N N N
 DET P N N N N N

10 dB/div Ref Offset 15 dB Ref 25.00 dBm
 Log

Start 2.46000 GHz Stop 2.49000 GHz
 #Res BW 300 kHz #VBW 300 kHz Sweep 1.00 ms (1001 pts)

MSG STATUS

Frequency	
Auto Tune	
Center Freq	2.475000000 GHz
Start Freq	2.460000000 GHz
Stop Freq	2.490000000 GHz
CF Step	3.000000 MHz
Auto	Man
Freq Offset	0 Hz

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.381	32	0.12192	0.4	-0.27808
DH3	1.626	17	0.27642	0.4	-0.12358
DH5	2.87	10	0.287	0.4	-0.113
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.381	8	0.03048	0.4	-0.36952
DH3	1.626	4.25	0.069105	0.4	-0.3309
DH5	2.87	2.5	0.07175	0.4	-0.32825

PULSE WIDTH - DH1

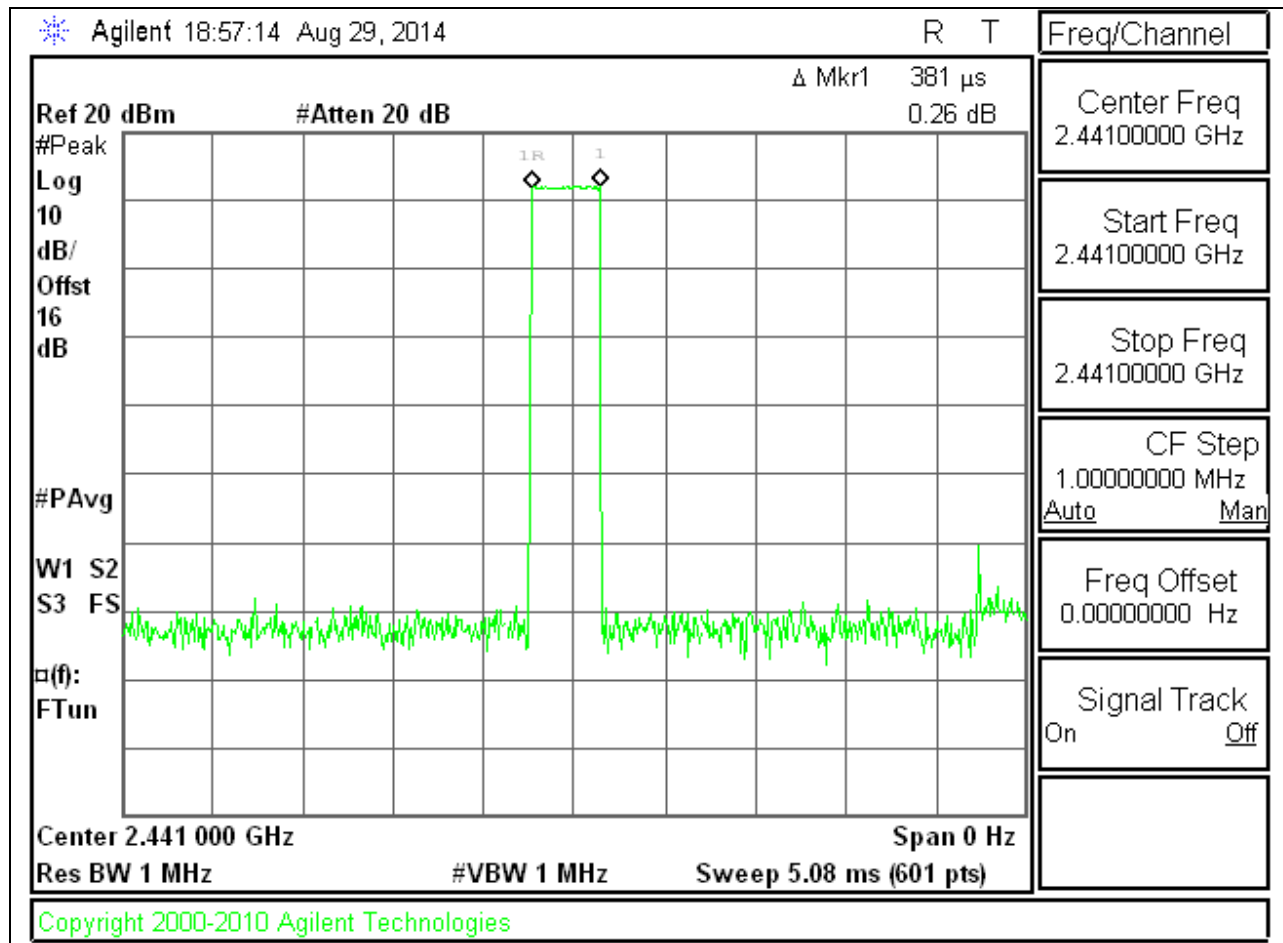

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:04:09 PM Aug 29, 2014

#Avg Type: RMS

TRACE 1 2 3 4 5 6
TYPE W W W W W W
DET P N N N N N

PNO: Wide IFGain: Low Trig: Free Run Atten: 20 dB

Ref Offset 15 dB
Ref 25.00 dBm

10 dB/div
Log


Center 2.441000000 GHz
Res BW 1.0 MHz

#VBW 1.0 MHz

Span 0 Hz
Sweep 3.160 s (1001 pts)

MSG STATUS

PULSE WIDTH - DH3

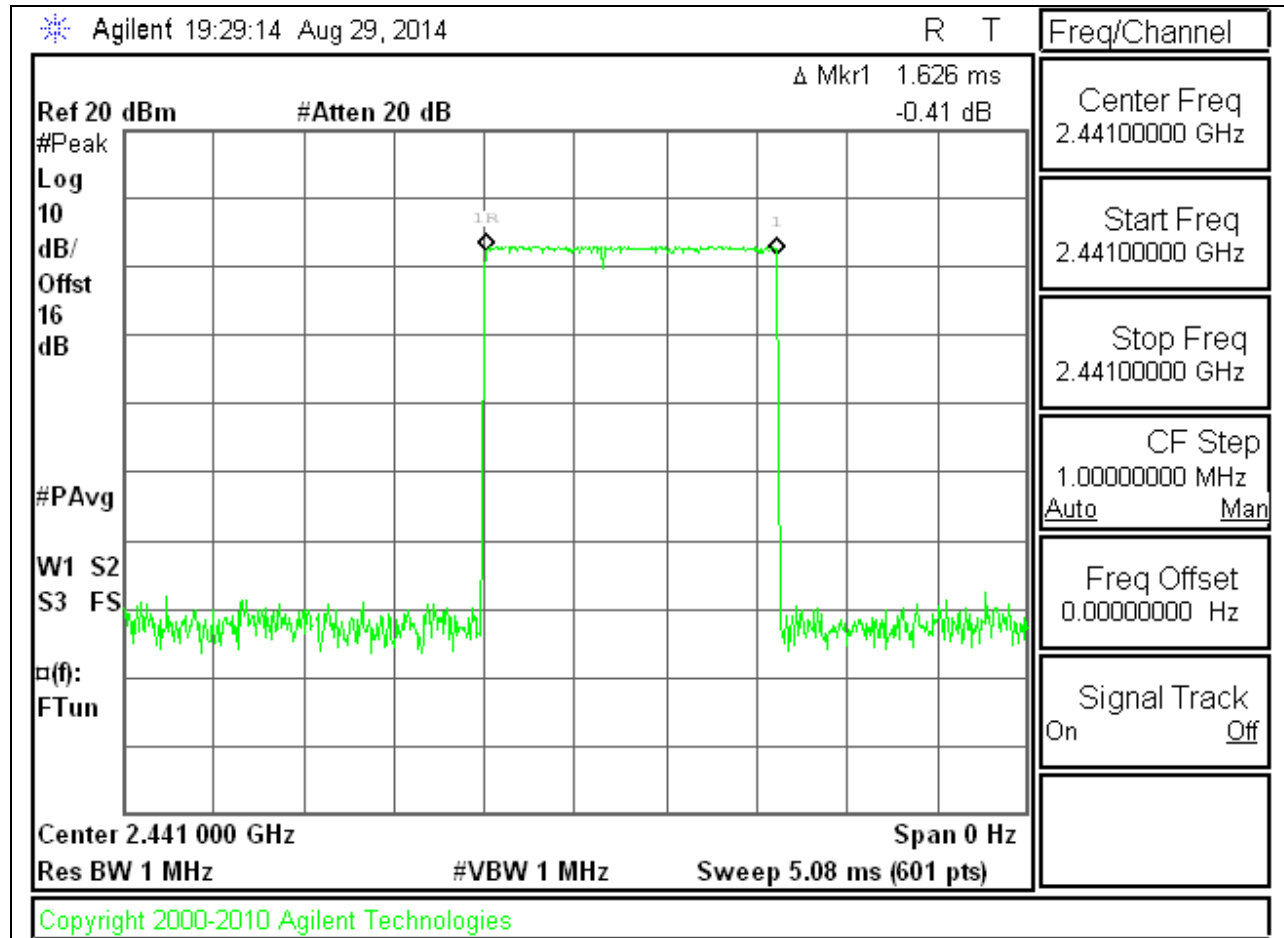

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN AUTO 04:04:47 PM Aug 29, 2014

#Avg Type: RMS

TRACE 1 2 3 4 5 6
TYPE W W W W W W
DET P N N N N N

PNO: Wide IFGain:Low Trig: Free Run Atten: 20 dB

10 dB/div Log
Ref Offset 15 dB
Ref 25.00 dBm

The spectrum analyzer display shows a swept signal with a peak at 2.44 GHz. The vertical axis represents power in dBm, ranging from -65.0 to 15.0. The horizontal axis represents frequency in GHz, ranging from 2.435 to 2.445. The signal is a narrowband pulse with a peak power of approximately 10 dBm. The background noise floor is around -45 dBm. The display is set to a resolution bandwidth of 1.0 MHz and a span of 0 Hz.

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 3.160 s (1001 pts)
Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz


CF Step
1.000000 MHz
Man

Auto


Freq Offset
0 Hz

MSG STATUS

PULSE WIDTH - DH5

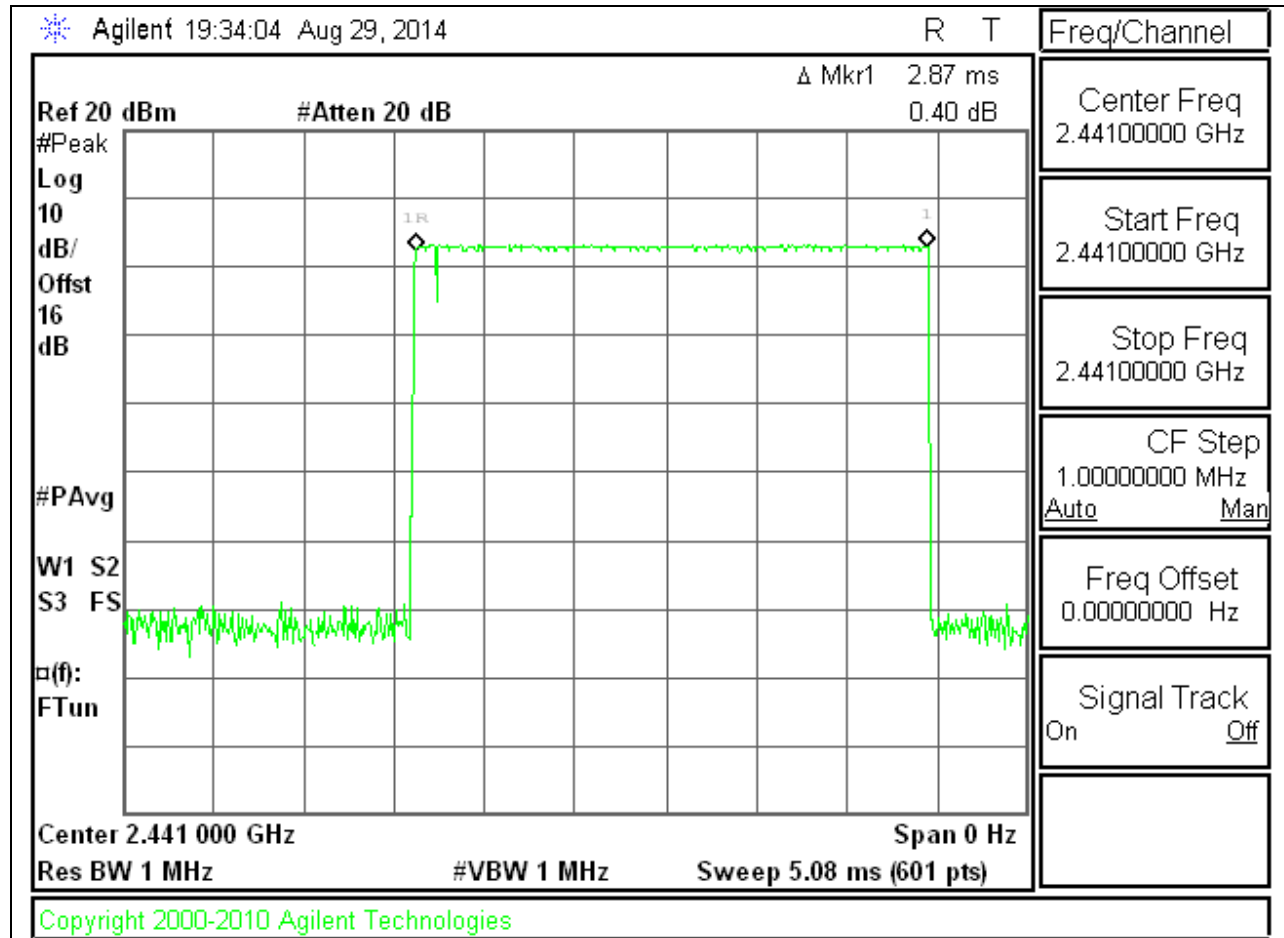

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5

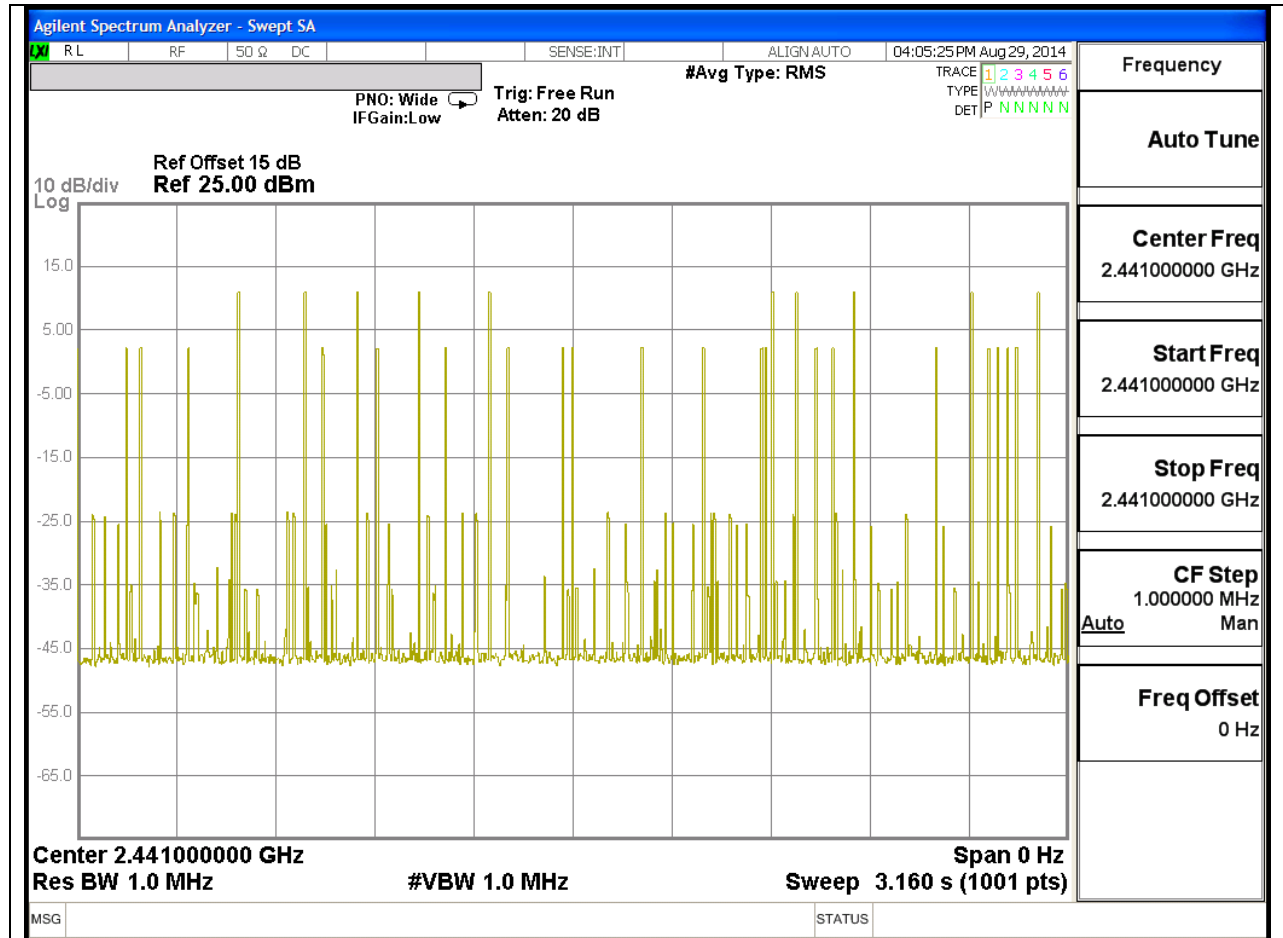

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.73	21	-9.27
Middle	2441	10.98	21	-10.02
High	2480	10.06	21	-10.94
Worst		11.73		-9.27

8.5.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.96	21	-9.04
Middle	2441	11.2	21	-9.8
High	2480	10.37	21	-10.63
Worst		11.96		-9.04

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 01:41:35 PM Aug 29, 2014

#Avg Type: RMS

TRAC 1 2 3 4 5 6
TYPE M W W W W W W W W W
DET P N N N N N N

PNO: Fast IF Gain: Low Trig: Free Run Atten: 20 dB

Ref Offset 15 dB
Ref 25.00 dBm

Mkr1 2.440 838 GHz
10.98 dBm

10 dB/div
Log

Center 2.441000 GHz
#Res BW 3.0 MHz

Span 3.000 MHz
#Sweep 100 ms (1001 pts)

VBW 3.0 MHz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.439500000 GHz

Stop Freq
2.442500000 GHz


CF Step
300.000 kHz
Auto Man

Freq Offset
0 Hz

MSG STATUS

8PSK OUTPUT POWER

LOW CHANNEL

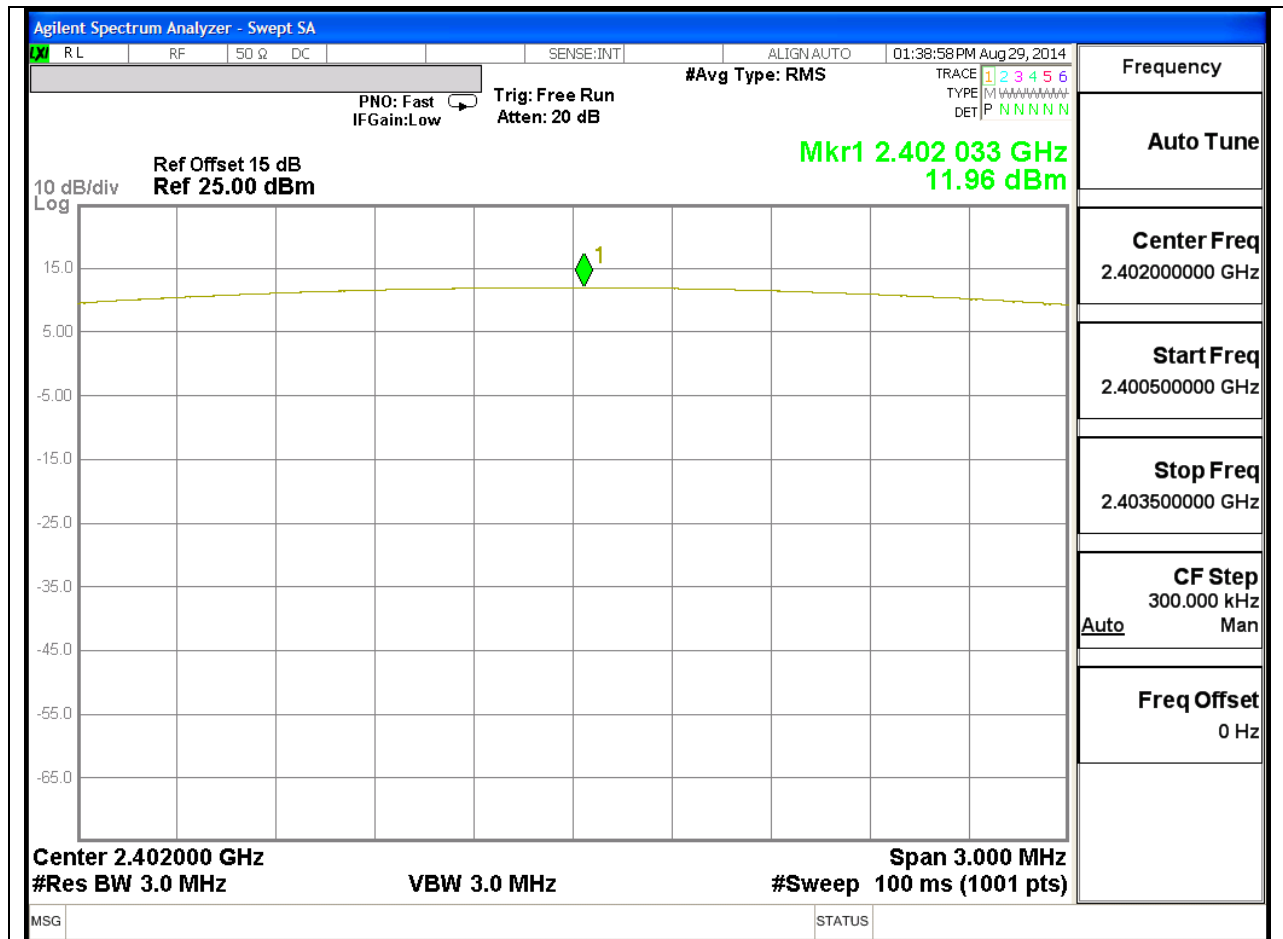

Agilent Spectrum Analyzer - Swept SA

RL	RF	50 Ω	DC		SENSE:INT	ALIGN:AUTO	01:44:16 PM Aug 29, 2014
----	----	------	----	--	-----------	------------	--------------------------

#Avg Type: RMS

PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB

Ref Offset 15 dB
Ref 25.00 dBm

Mkr1 2.479 988 GHz
10.37 dBm

The plot shows a spectrum with a vertical axis labeled 'Log' ranging from -65.0 to 15.0 dB/div. The horizontal axis represents frequency. A single yellow trace shows a broad peak centered around 2.48 GHz, marked with a green diamond and the number '1'. The grid consists of 10 major divisions horizontally and 10 major divisions vertically.

Frequency	
Auto Tune	
Center Freq	2.480000000 GHz
Start Freq	2.478500000 GHz
Stop Freq	2.481500000 GHz
CF Step	300.000 kHz
Auto	Man
Freq Offset	0 Hz

Center 2.480000 GHz Span 3.000 MHz
#Res BW 3.0 MHz VBW 3.0 MHz #Sweep 100 ms (1001 pts)

MSG	STATUS
-----	--------

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.9
Middle	2441	10.4
High	2480	9.8
Worst		10.9

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.80
Middle	2441	8.20
High	2480	7.50
Worst		8.80

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.8
Middle	2441	8.2
High	2480	7.6
Worst		8.8

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


8.7.1. BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL


LOW CHANNEL BANDEDGE

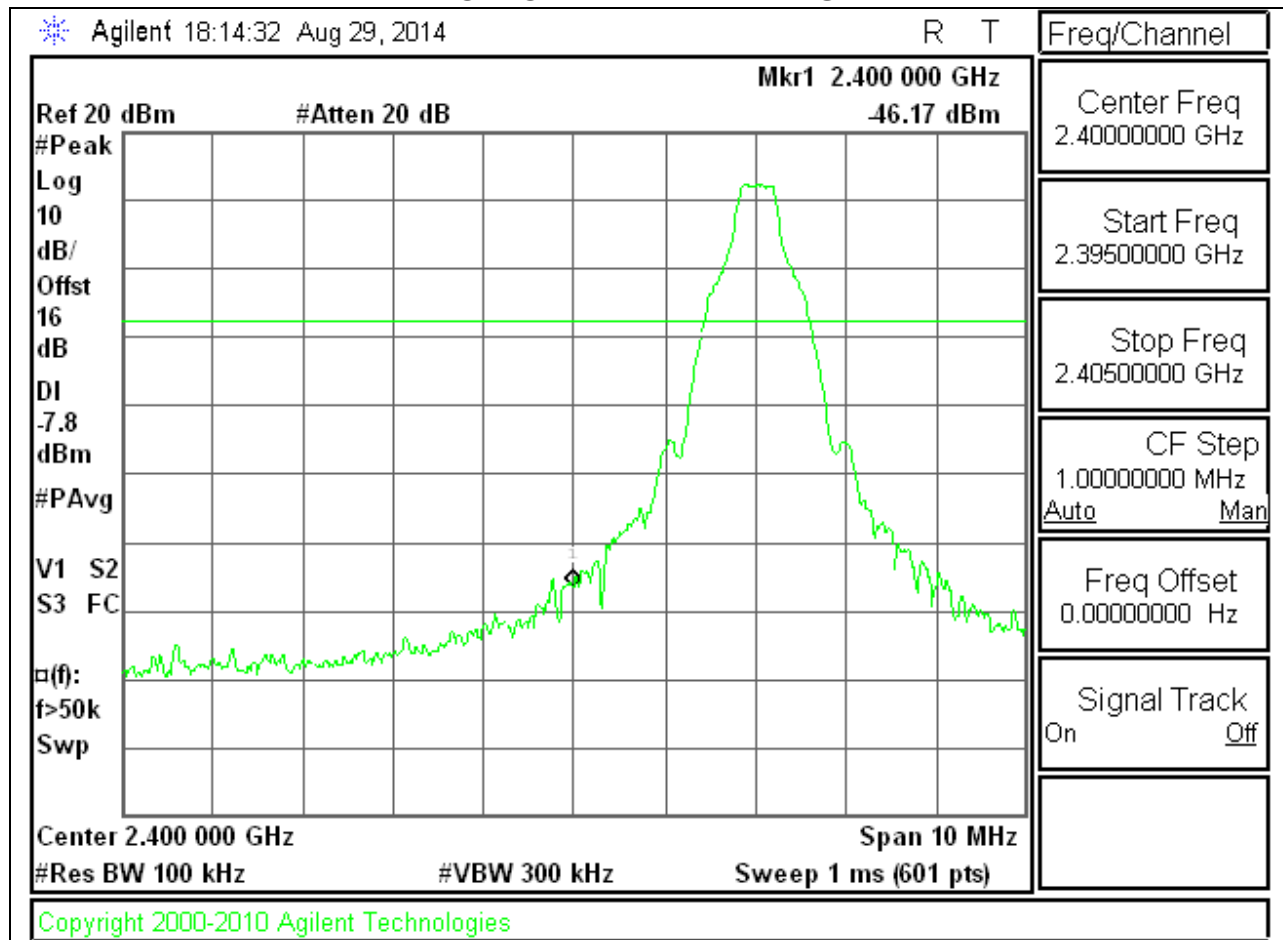


LOW CHANNEL SPURIOUS

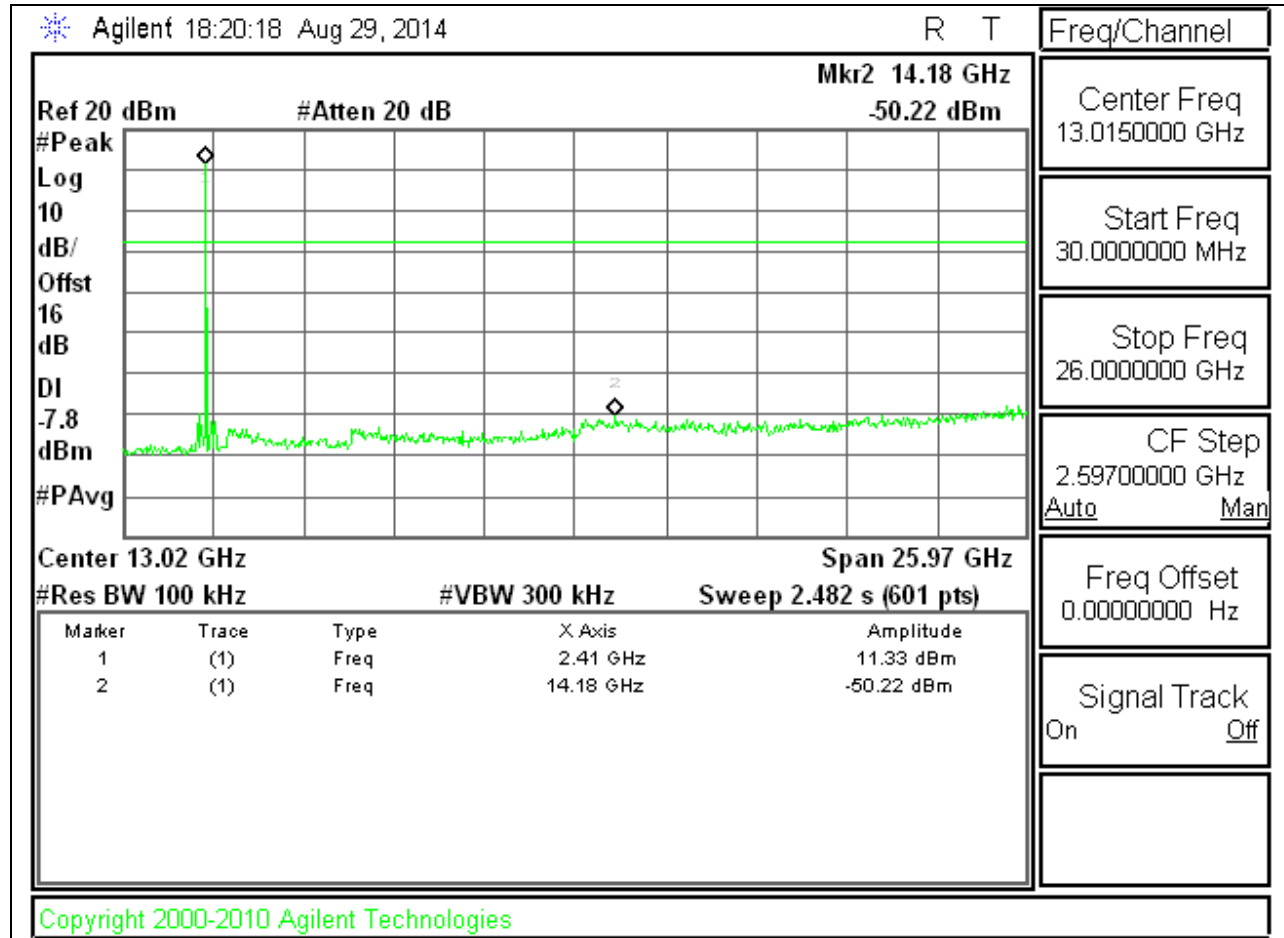

SPURIOUS EMISSIONS, MID CHANNEL

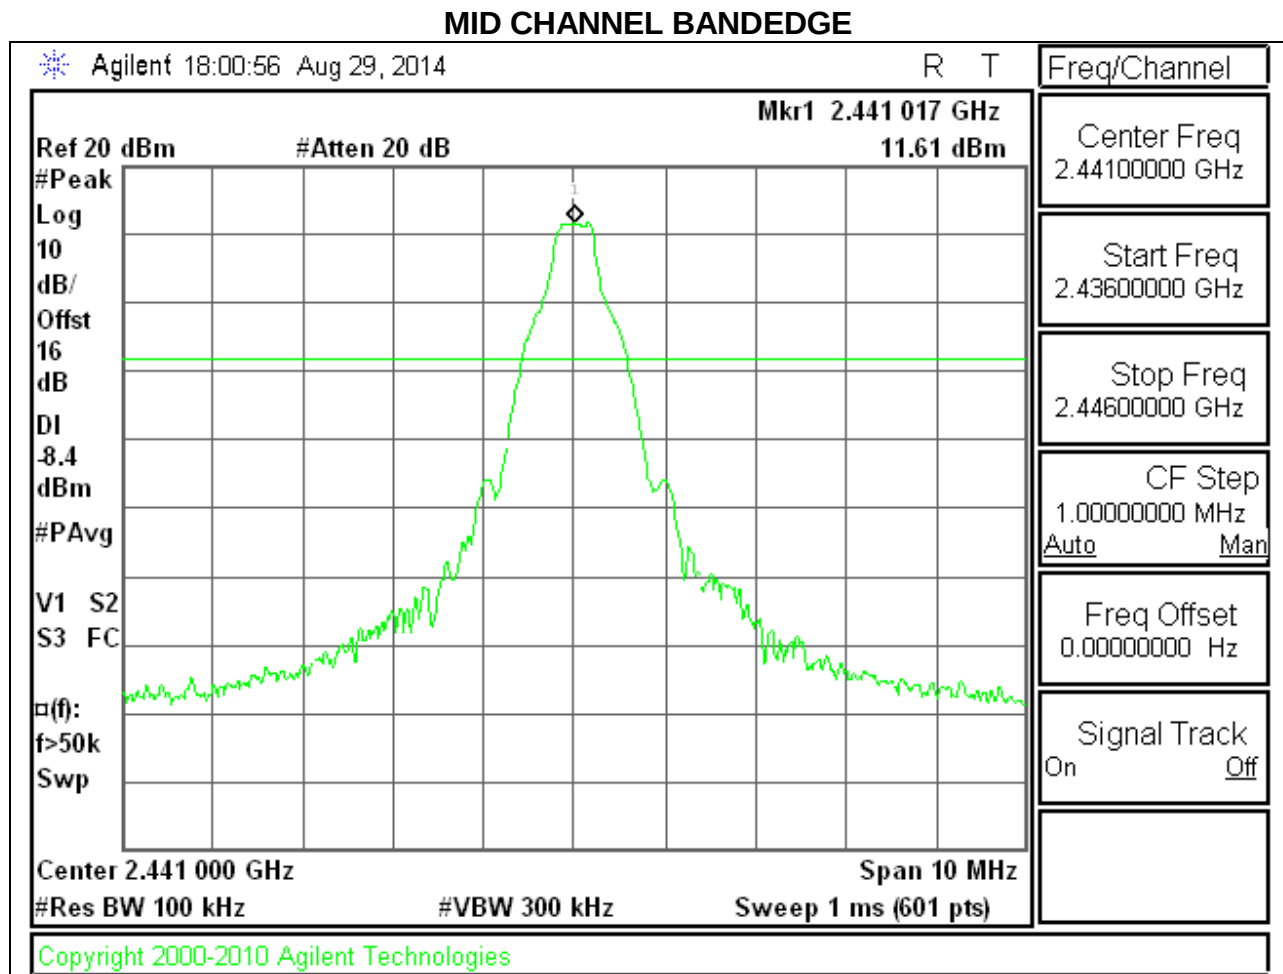


MID CHANNEL SPURIOUS

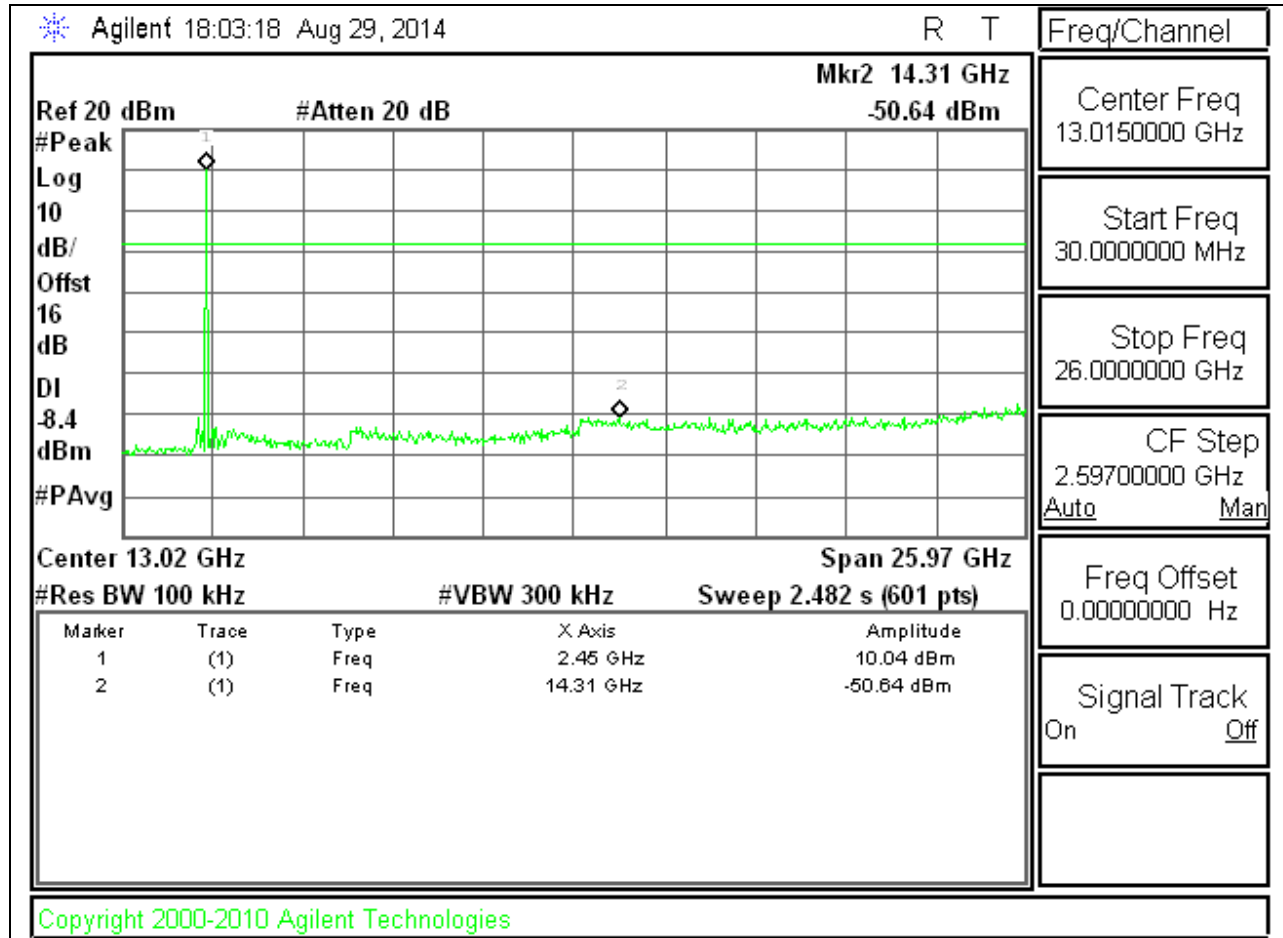


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

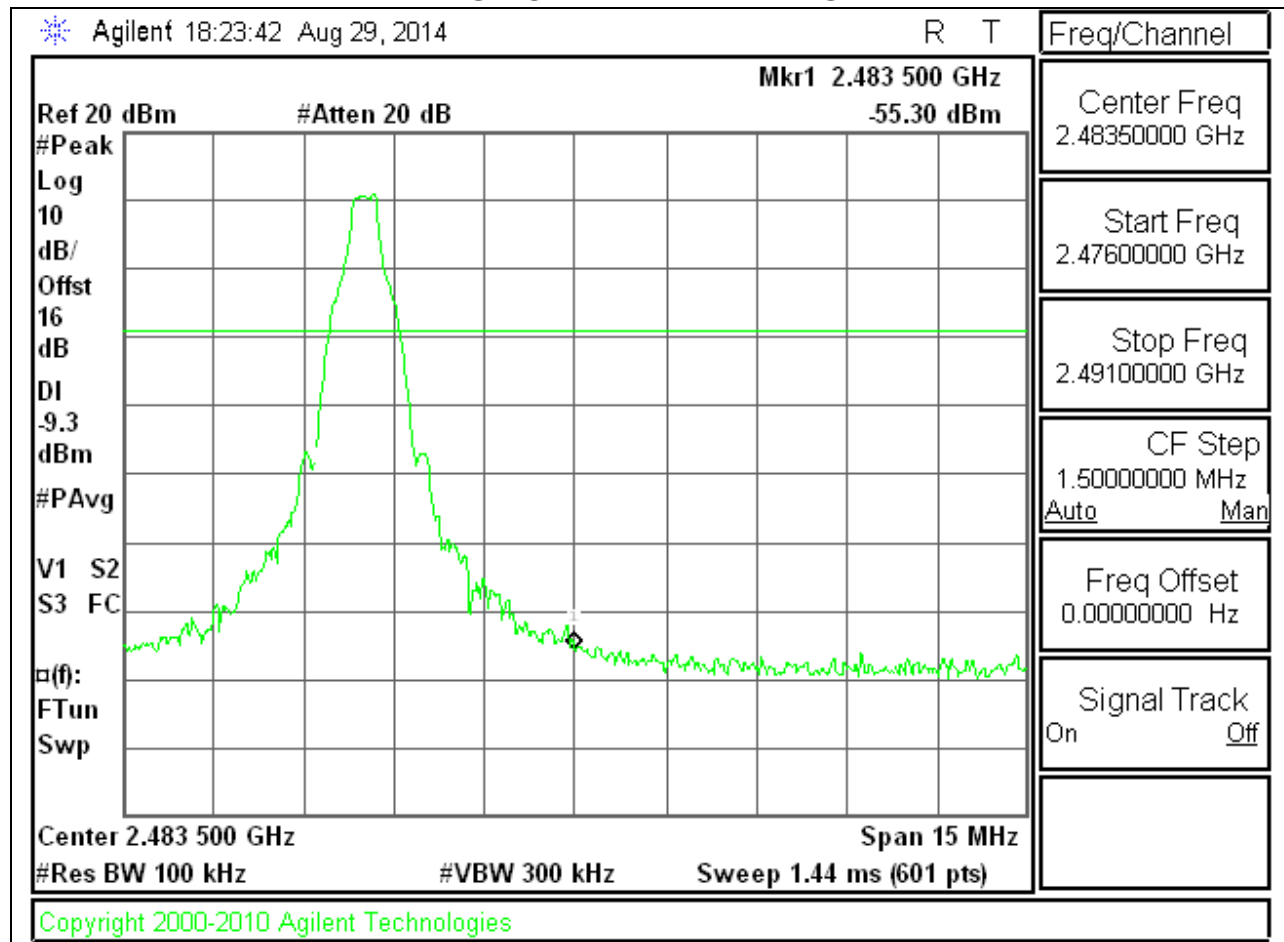


HIGH CHANNEL SPURIOUS

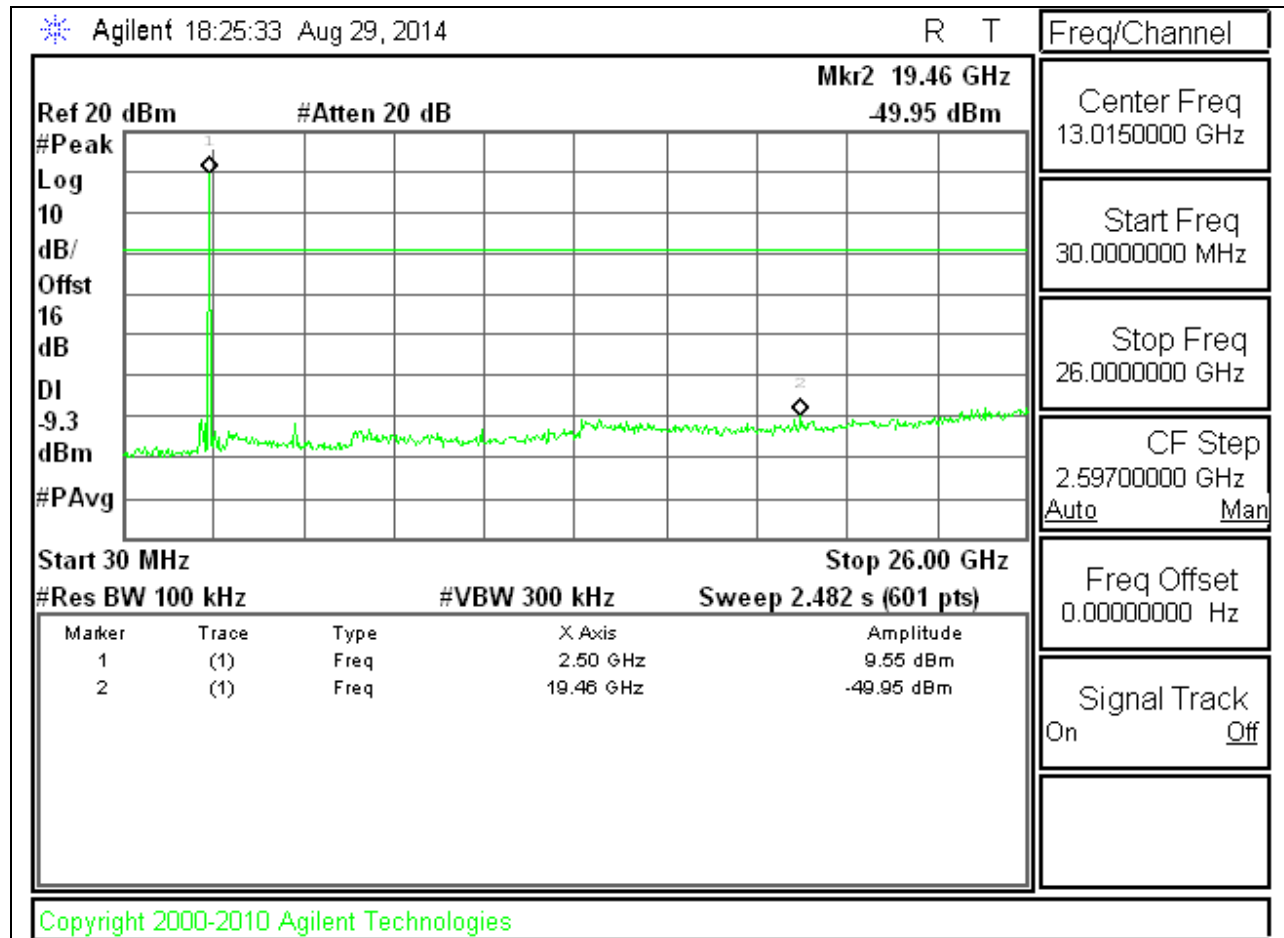


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

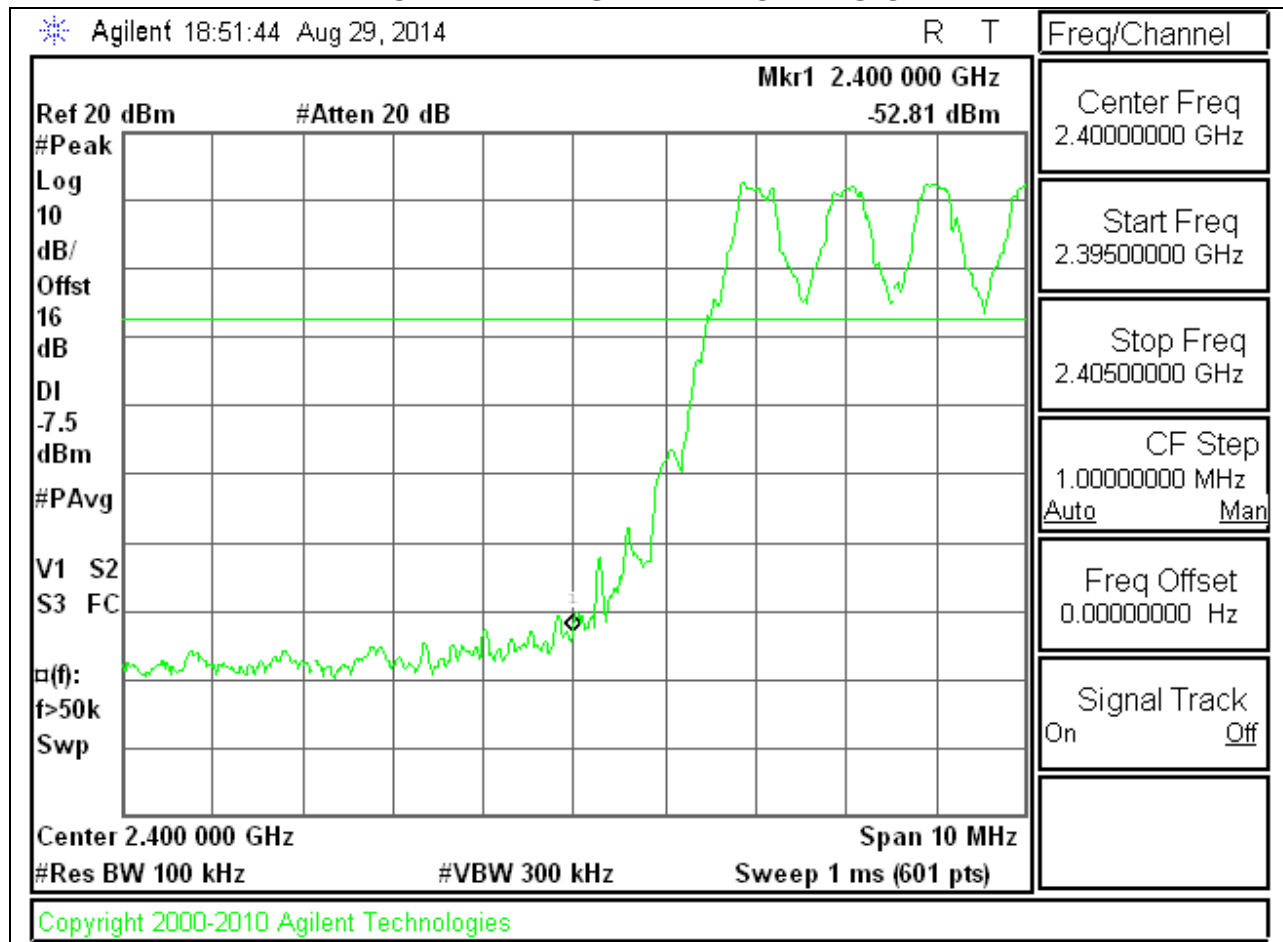


HIGH BANDEDGE WITH HOPPING ON

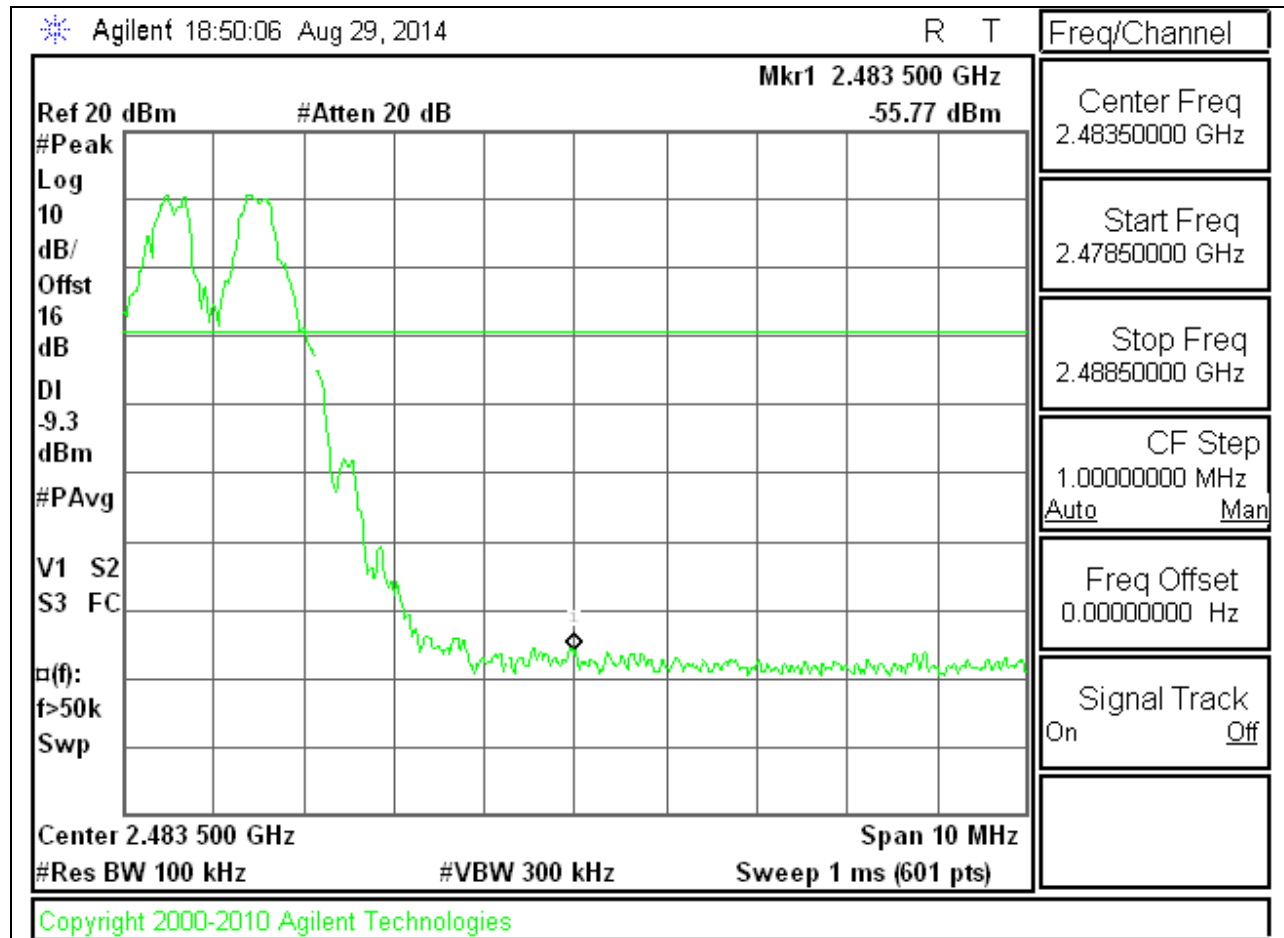


ENHANCED DATA RATE 8PSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL


LOW CHANNEL BANDEDGE

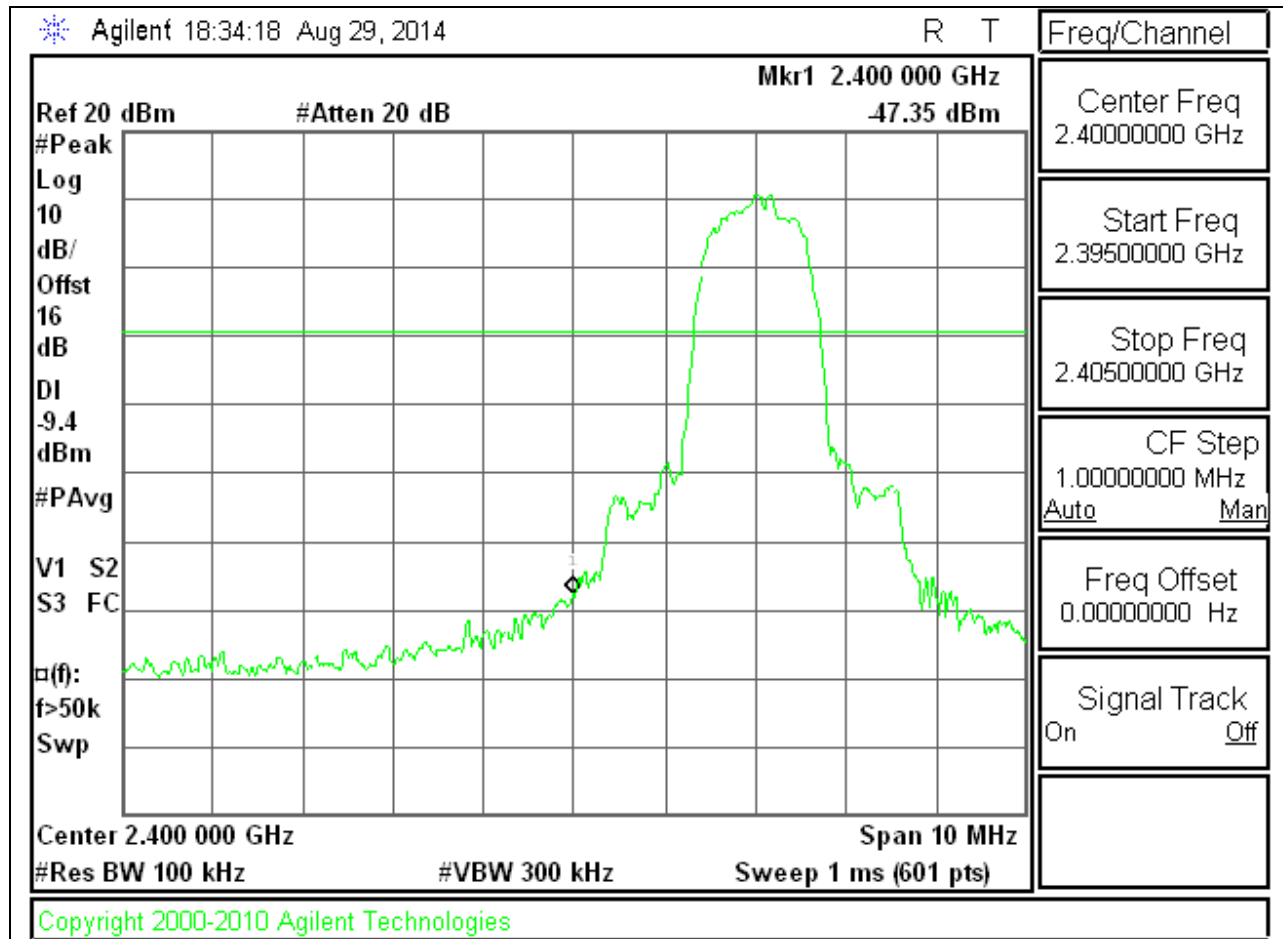


LOW CHANNEL SPURIOUS

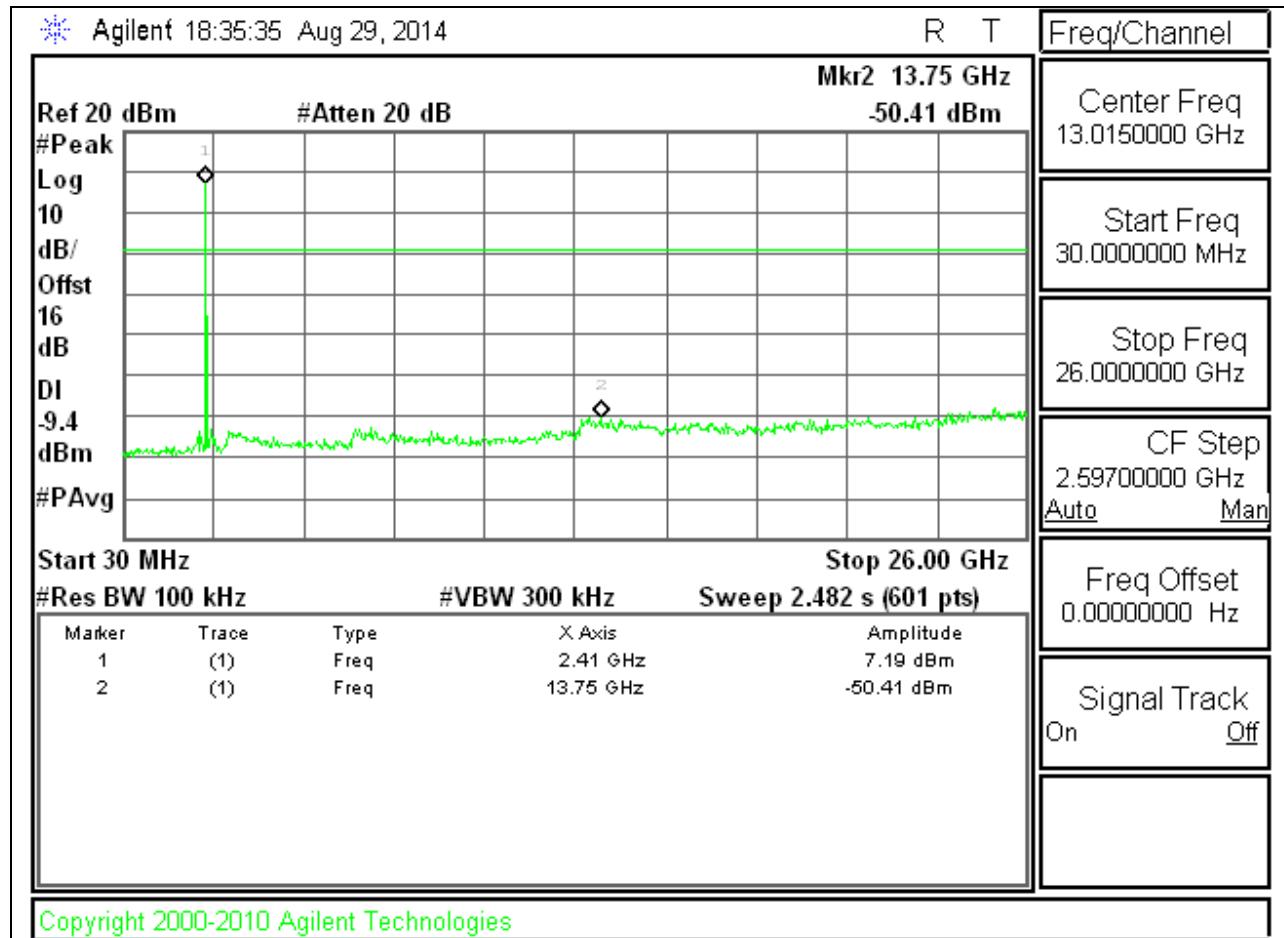

SPURIOUS EMISSIONS, MID CHANNEL

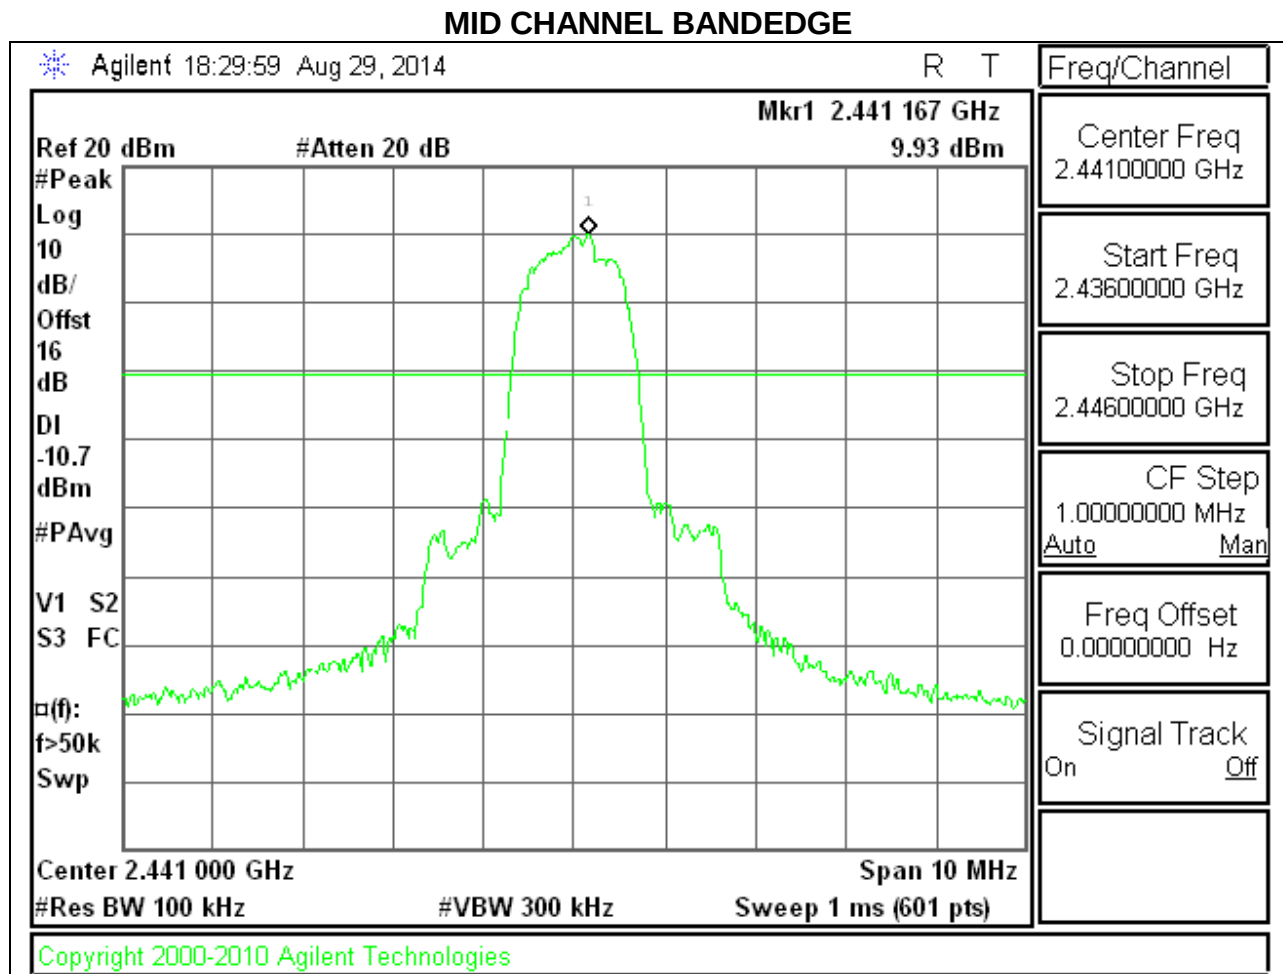


MID CHANNEL SPURIOUS

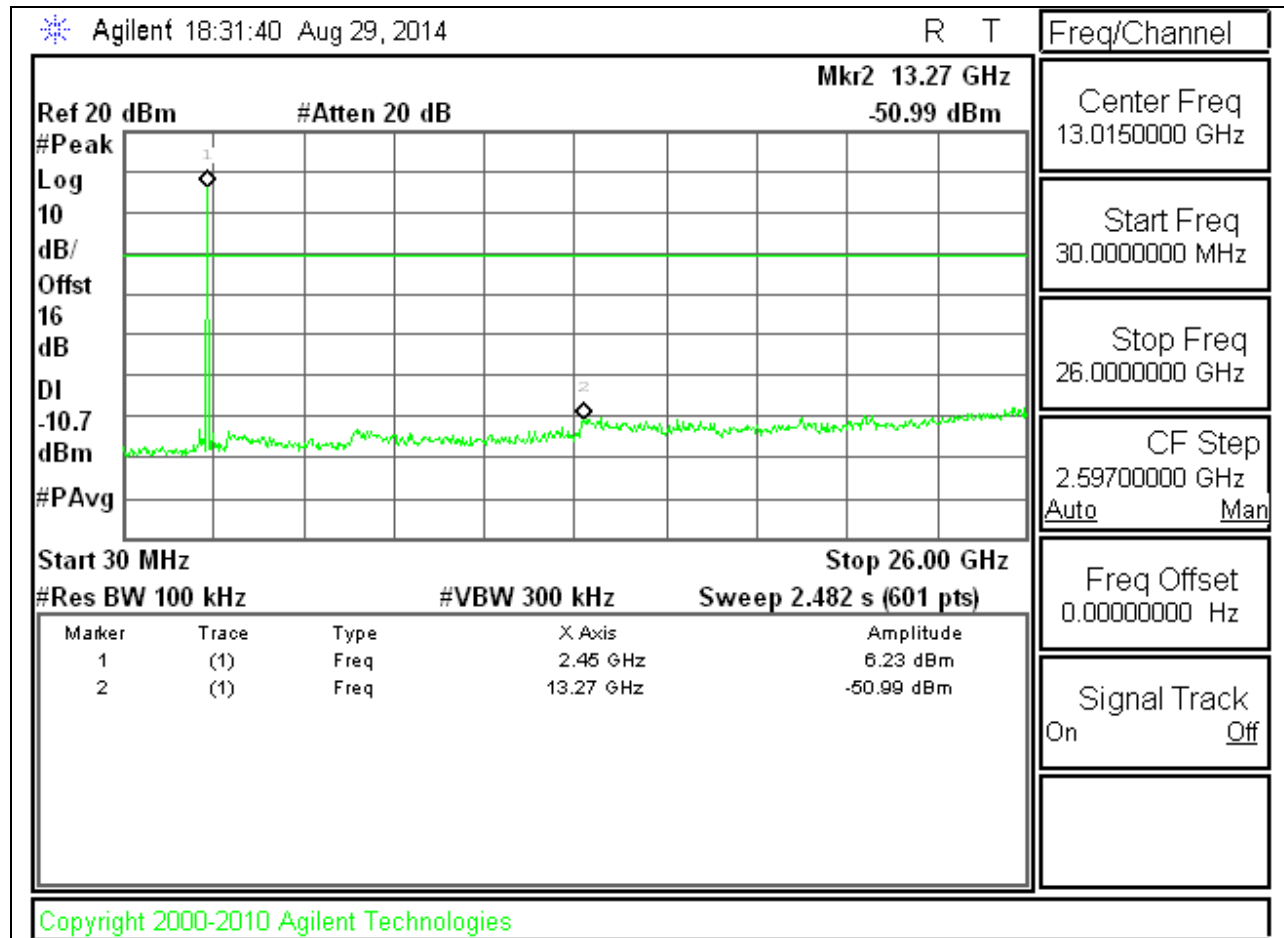


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

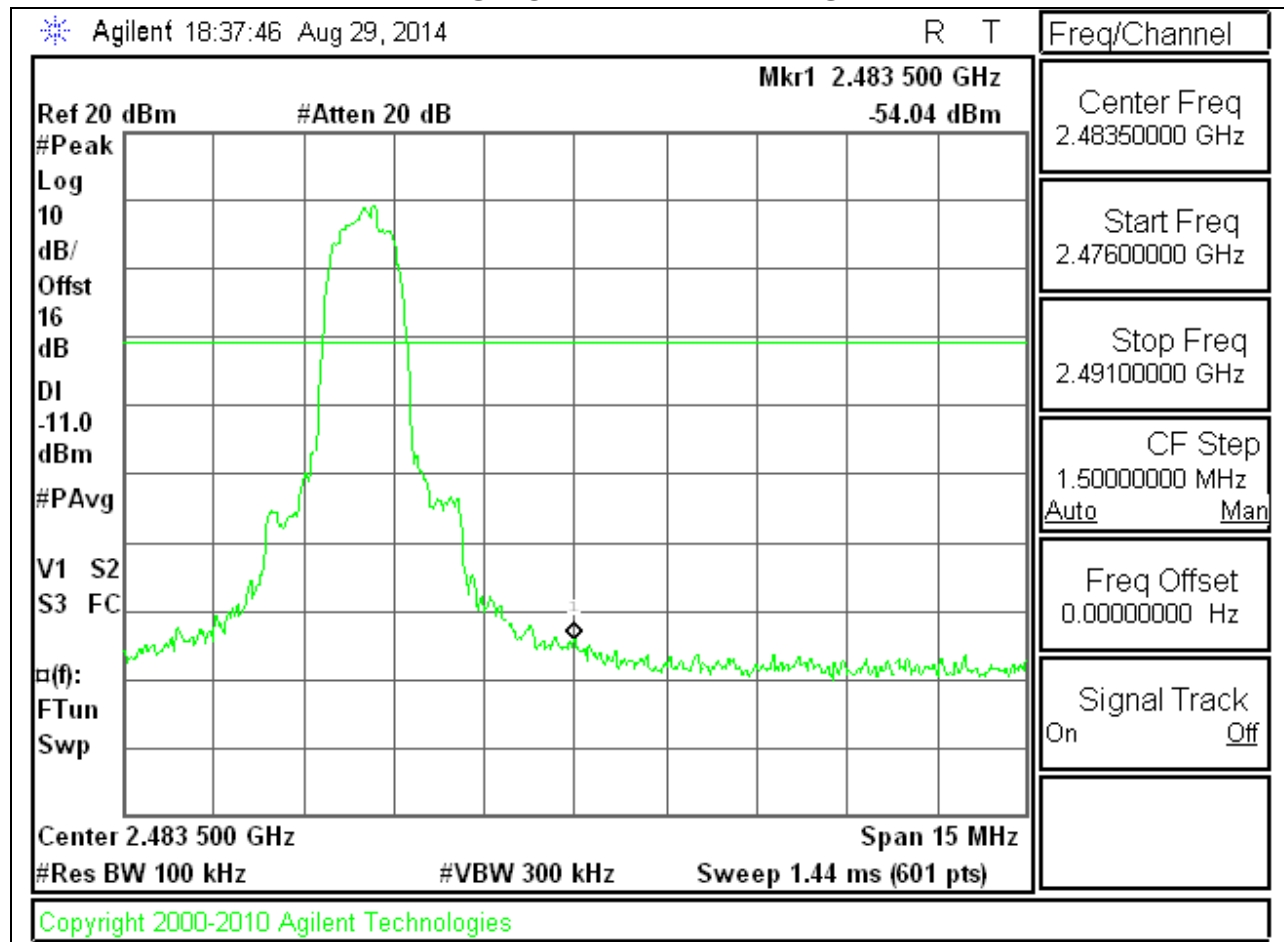


HIGH CHANNEL SPURIOUS

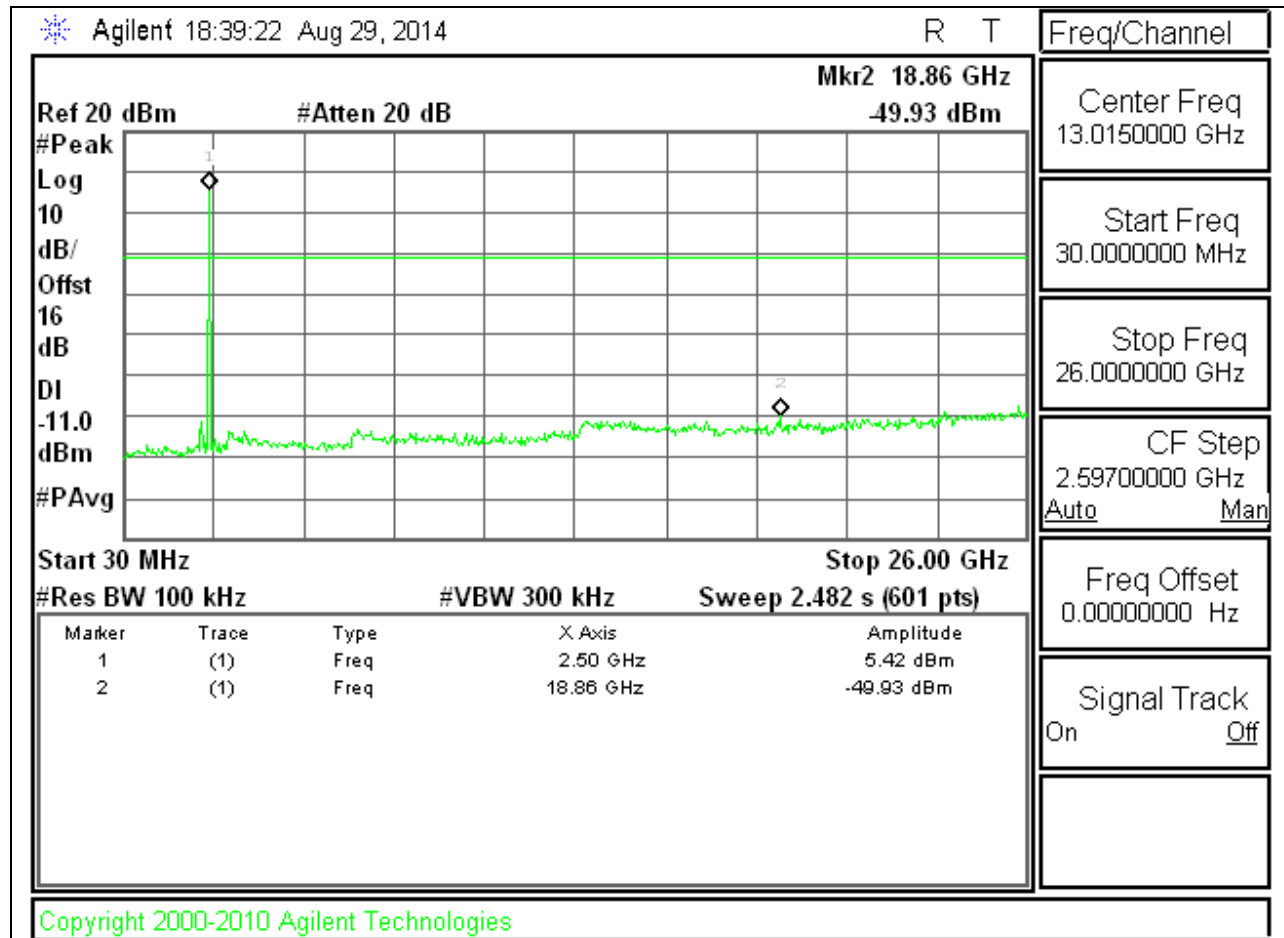


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

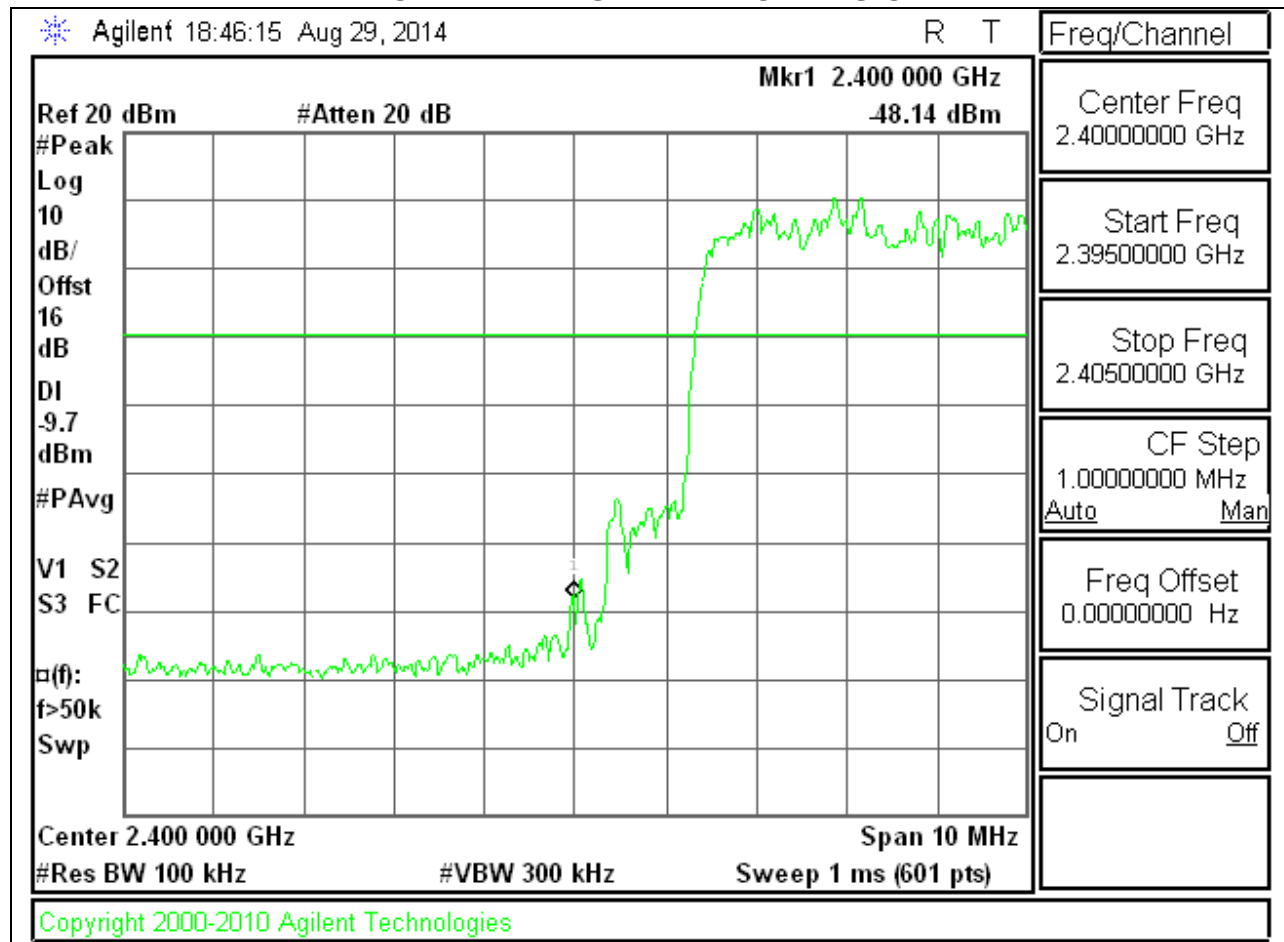

HIGH BANDEDGE WITH HOPPING ON

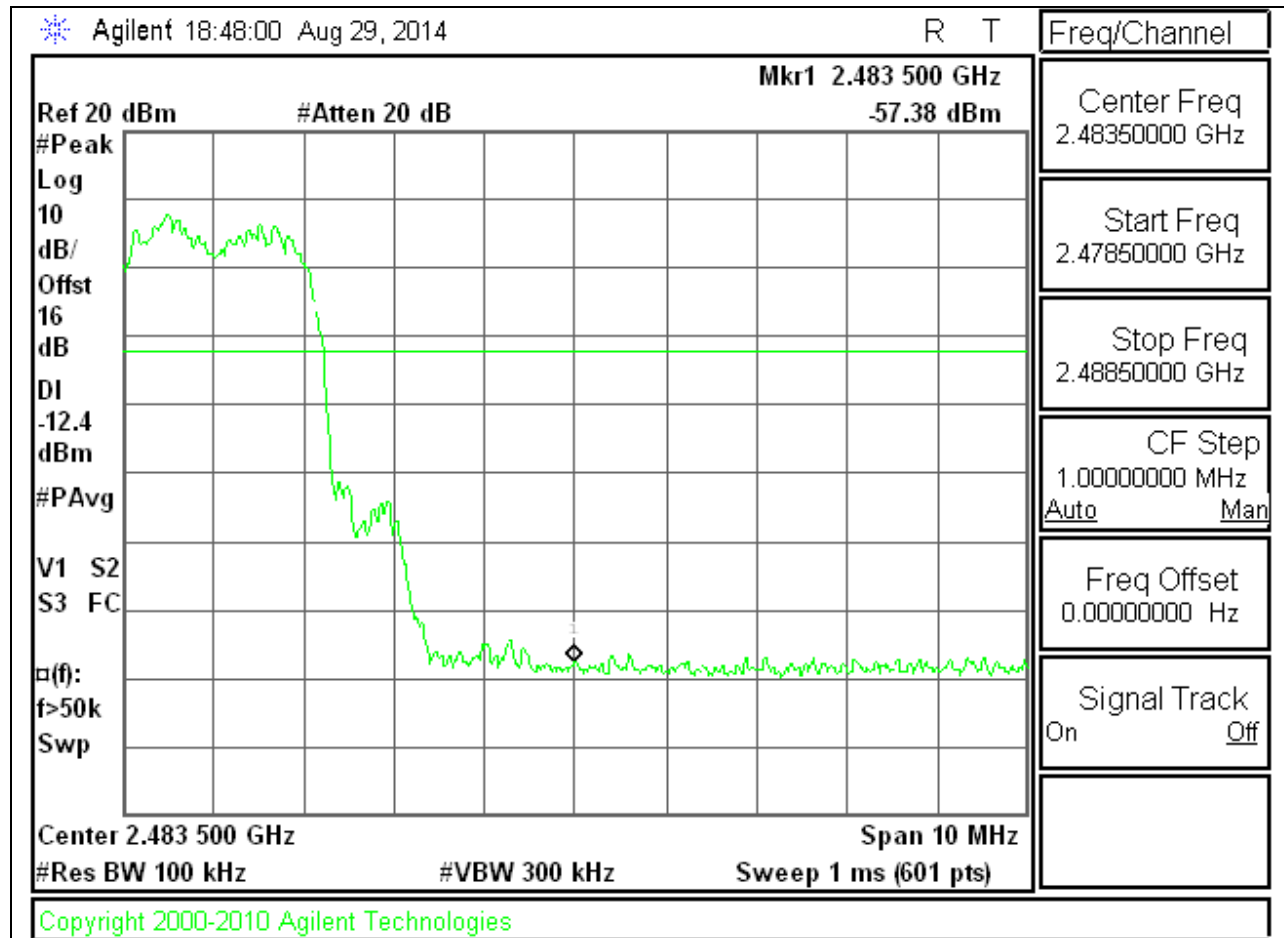

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. $GFSK = 1/T = 1 / 0.0028S = 360Hz$.

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

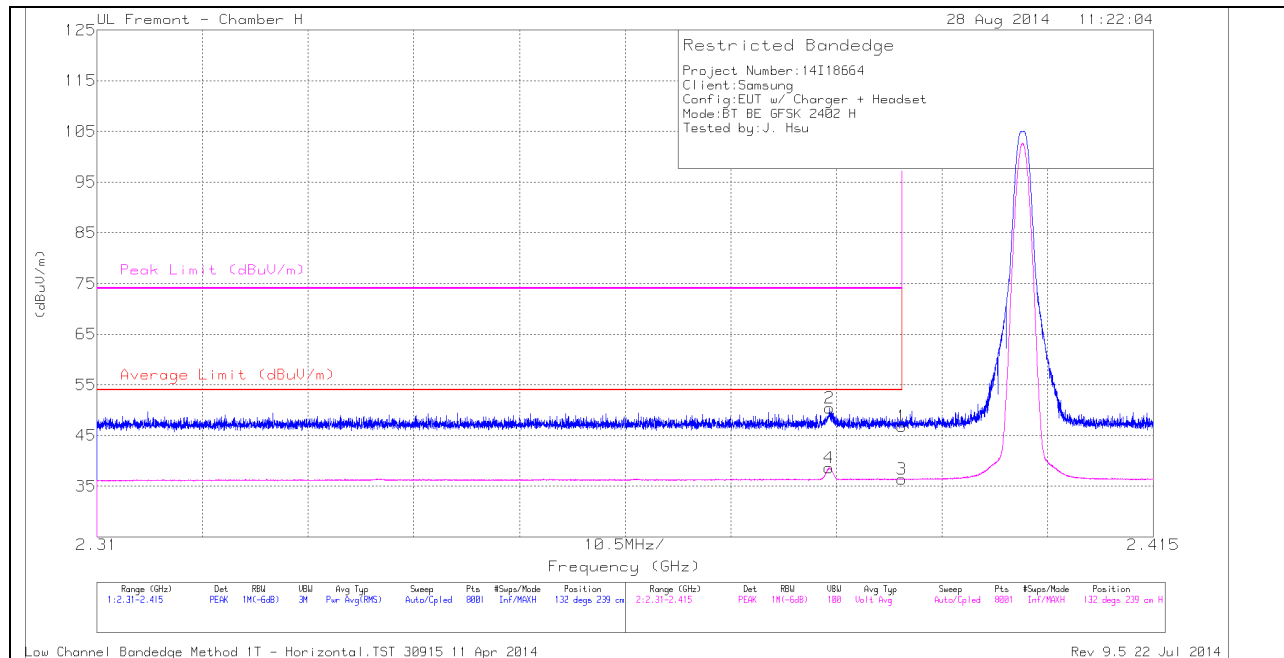

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.383	43.02	PK	32	-24.6	50.42	-	-	74	-23.58	132	239	H
4	* 2.383	31.25	VB1T	32	-24.6	38.65	54	-15.35	-	-	132	239	H
1	* 2.39	39.47	PK	32	-24.6	46.87	-	-	74	-27.13	132	239	H
3	* 2.39	28.94	VB1T	32	-24.6	36.34	54	-17.66	-	-	132	239	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

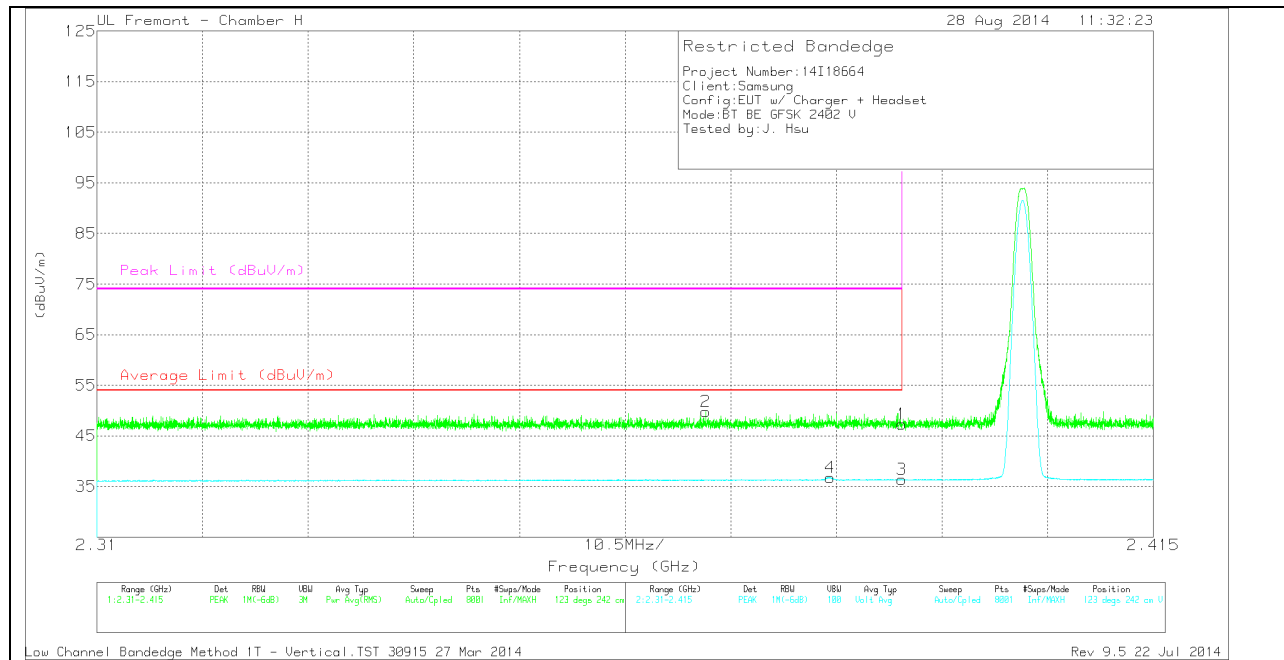

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.371	42.44	PK	31.9	-24.6	49.74	-	-	74	-24.26	123	242	V
4	* 2.383	29.37	VB1T	32	-24.6	36.77	54	-17.23	-	-	123	242	V
1	* 2.39	39.96	PK	32	-24.6	47.36	-	-	74	-26.64	123	242	V
3	* 2.39	28.98	VB1T	32	-24.6	36.38	54	-17.62	-	-	123	242	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

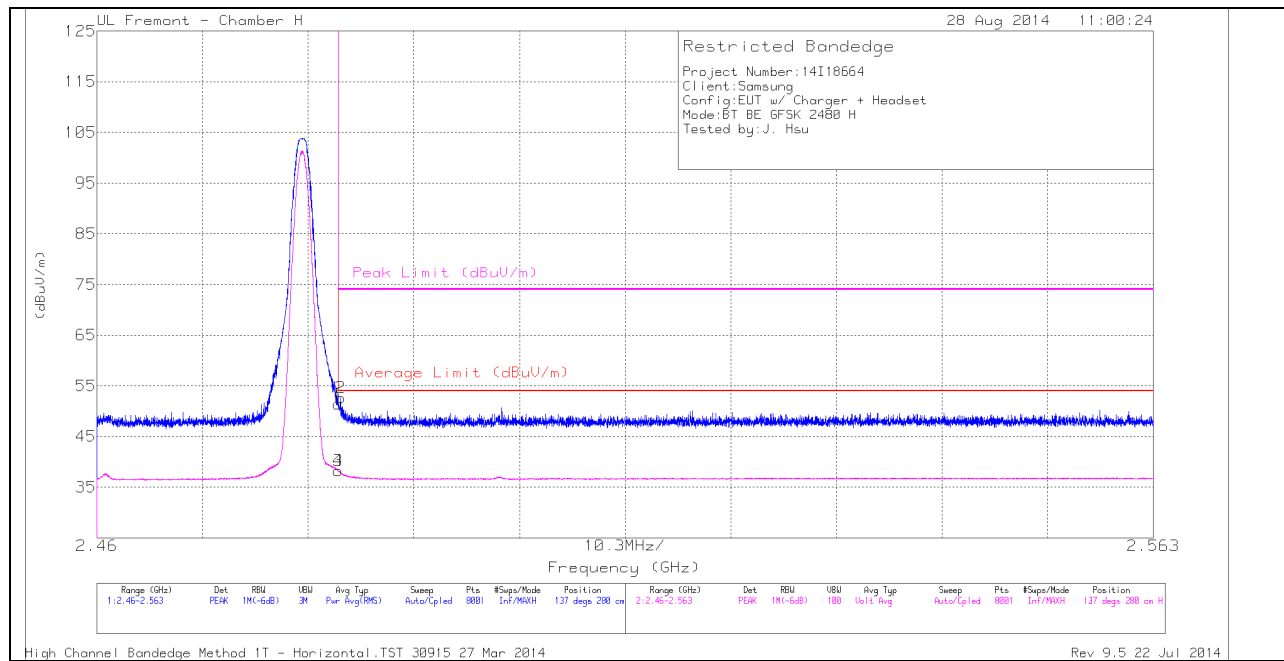

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.7	PK	32.2	-24.5	51.4	-	-	74	-22.6	137	280	H
2	* 2.484	44.94	PK	32.2	-24.5	52.64	-	-	74	-21.36	137	280	H
3	* 2.484	30.53	VB1T	32.2	-24.5	38.23	54	-15.77	-	-	137	280	H
4	* 2.484	30.57	VB1T	32.2	-24.5	38.27	54	-15.73	-	-	137	280	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

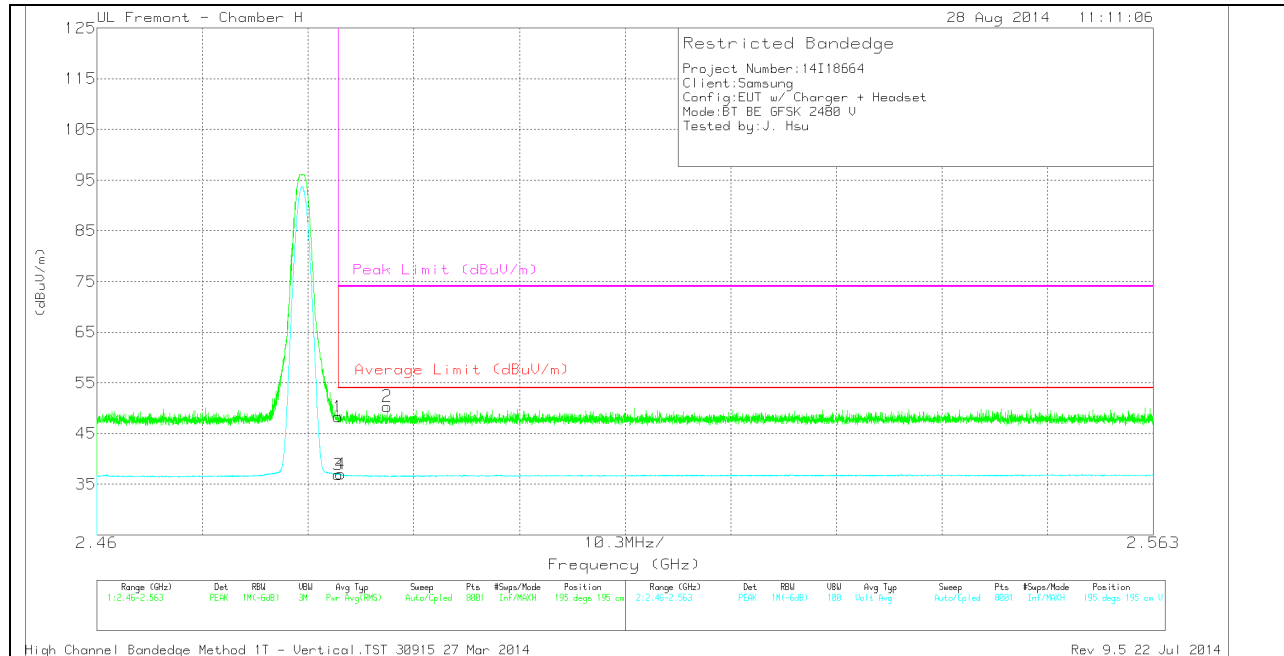

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.58	PK	32.2	-24.5	48.28	-	-	74	-25.72	195	195	V
3	* 2.484	29.22	VB1T	32.2	-24.5	36.92	54	-17.08	-	-	195	195	V
4	* 2.484	29.3	VB1T	32.2	-24.5	37	54	-17	-	-	195	195	V
2	* 2.488	42.65	PK	32.2	-24.5	50.35	-	-	74	-23.65	195	195	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS

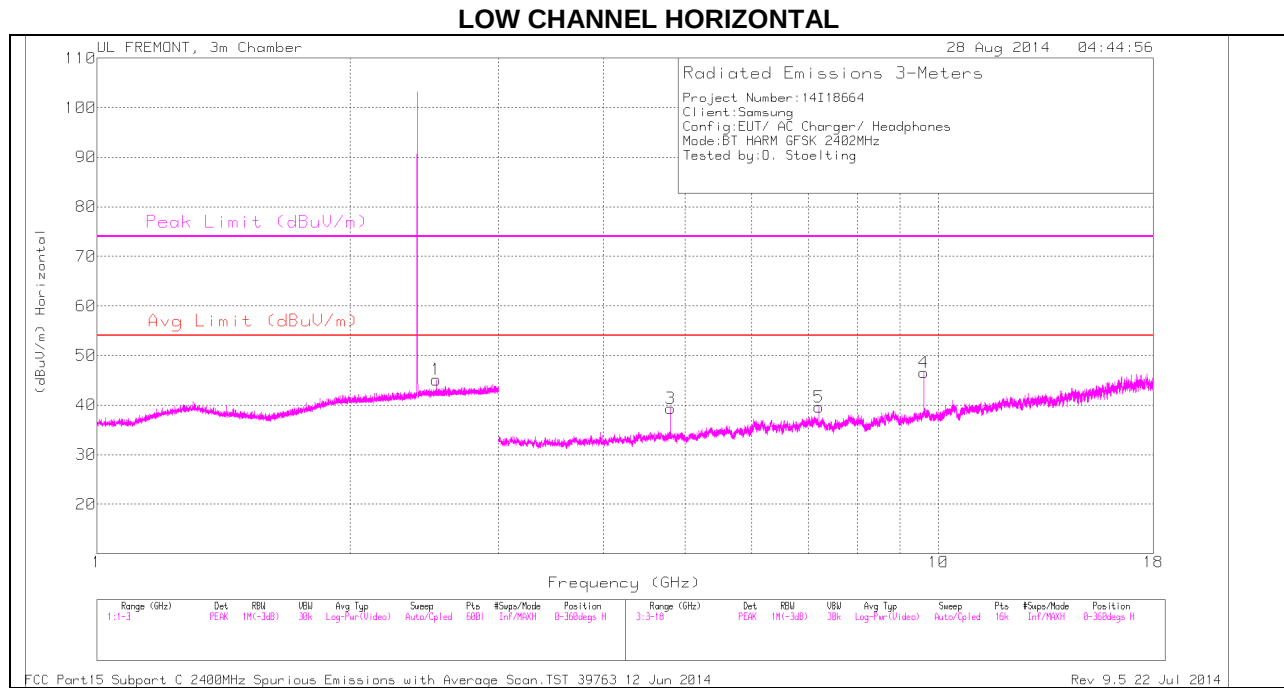

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

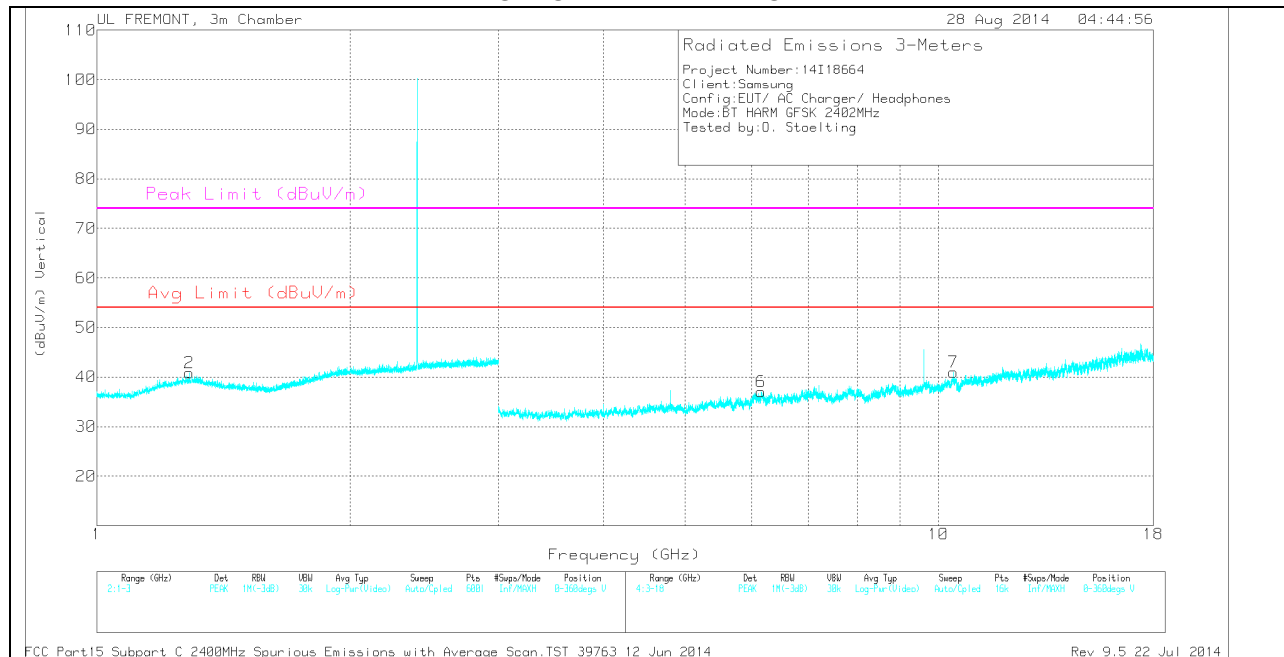

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.288	34.42	PK	30.1	-23.7	40.82	-	-	74	-33.18	0-360	200	V
1	2.53	35.31	PK	32.4	-22.6	45.11	-	-	-	-	0-360	200	H
3	4.805	35.52	PK	34.1	-30.3	39.32	-	-	74	-34.68	0-360	200	H
6	6.158	31.48	PK	35.3	-29.7	37.08	-	-	-	-	0-360	100	V
5	7.205	33.24	PK	35.6	-29.2	39.64	-	-	-	-	0-360	200	H
4	9.608	35.16	PK	36.7	-25.3	46.56	-	-	-	-	0-360	200	H
7	10.411	28.68	PK	37.4	-25.1	40.98	-	-	-	-	0-360	100	V

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.608	40.58	PK3	36.7	-25.3	51.98	-	-	-	-	87	209	H
9.608	31.53	VB1T	36.7	-25.3	42.93	-	-	-	-	87	209	H

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

UL FREMONT, 3m Chamber

28 Aug 2014 05:26:52

Radiated Emissions 3-Meters

Project Number: 14I18664
 Client: Samsung
 Config: EUT/ AC Charger/ Headphones
 Mode: BT HARM GFSK 2441MHz
 Tested by: O. Stoelting

Peak Limit (dBuV/m)

Avg Limit (dBuV/m)

1

0.3

0.4

(dBuV/m) Horizontal

Frequency (GHz)


Range (GHz)	Det	RBW	VBW	Avg Type	Sweep	Pts	#Sps/Mode	Position
1.1-3	PEAK	1M(-3dB)	30k	Log-Pwr (Video)	Auto/ptd	10k	3276800	0-355deg H
3-10	PEAK	1M(-3dB)	30k	Log-Pwr (Video)	Auto/ptd	10k	3276800	0-355deg H

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 39763 12 Jun 2014

Rev 9.5 22 Jul 2014

Page 74 of 104

MID CHANNEL VERTICAL

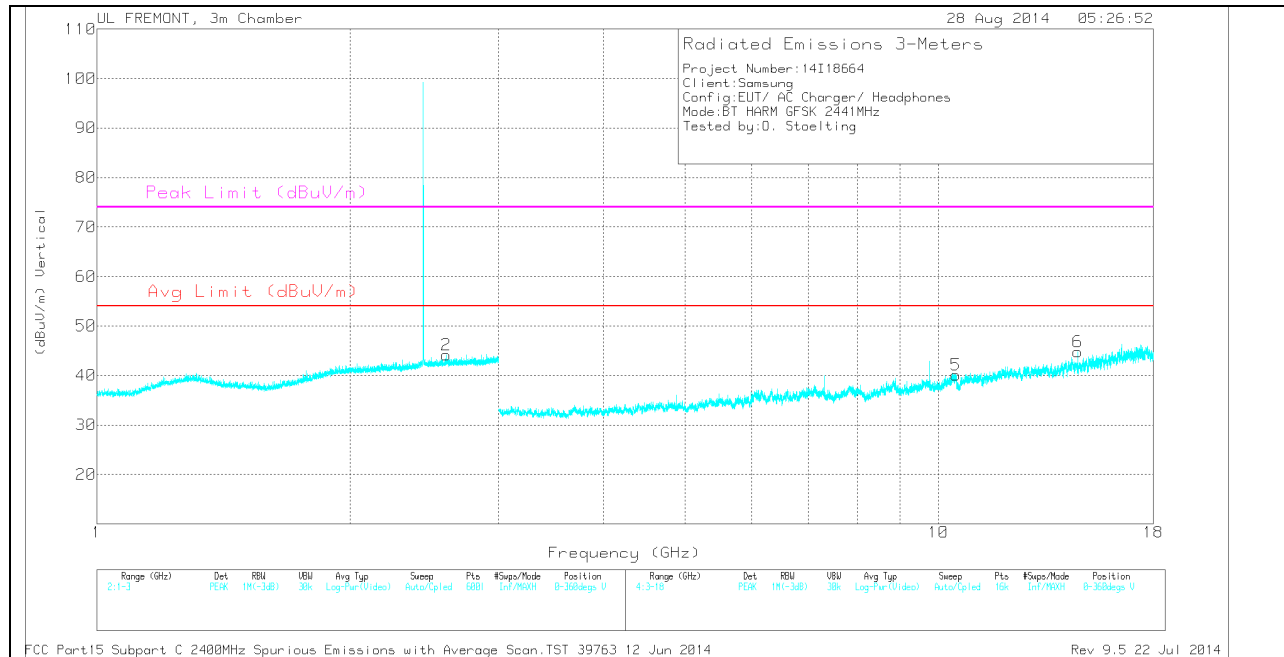

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.249	34.76	PK	31.8	-23	43.56	-	-	74	-30.44	0-360	200	H
2	2.601	34.3	PK	32.5	-22.7	44.1	-	-	-	-	0-360	200	V
3	7.323	33.67	PK	35.6	-28.4	40.87	-	-	74	-33.13	0-360	100	H
4	9.764	32.36	PK	36.9	-26	43.26	-	-	-	-	0-360	200	H
5	10.495	28.24	PK	37.5	-25.6	40.14	-	-	-	-	0-360	100	V
6	14.646	32.07	PK	39.7	-27	44.77	-	-	-	-	0-360	200	V

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.762	36.69	PK3	36.9	-26	47.59	-	-	-	-	21	241	H
9.764	36.88	PK3	36.9	-26	47.78	-	-	-	-	13	251	H
9.764	23.82	VB1T	36.9	-26	34.72	-	-	-	-	13	251	H
9.765	23.52	VB1T	36.9	-26	34.42	-	-	-	-	21	241	H
9.765	36.68	PK3	36.9	-26	47.58	-	-	-	-	272	391	H
9.765	23.54	VB1T	36.9	-26	34.44	-	-	-	-	272	391	H

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL HORIZONTAL

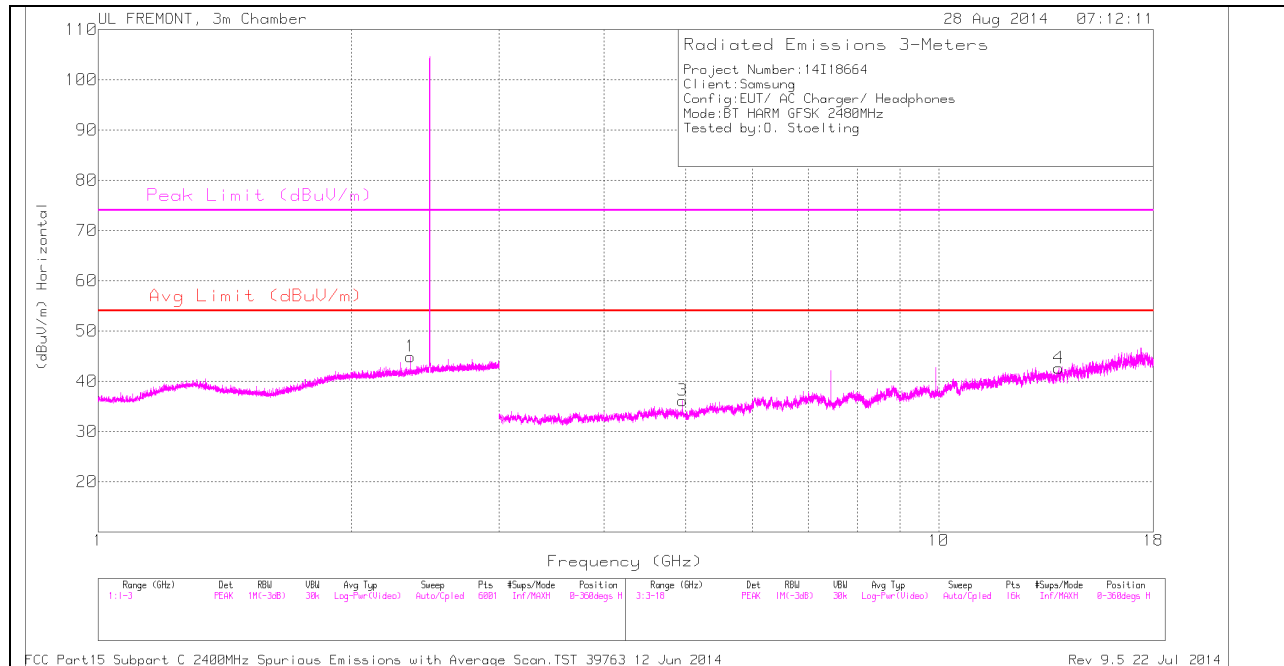

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

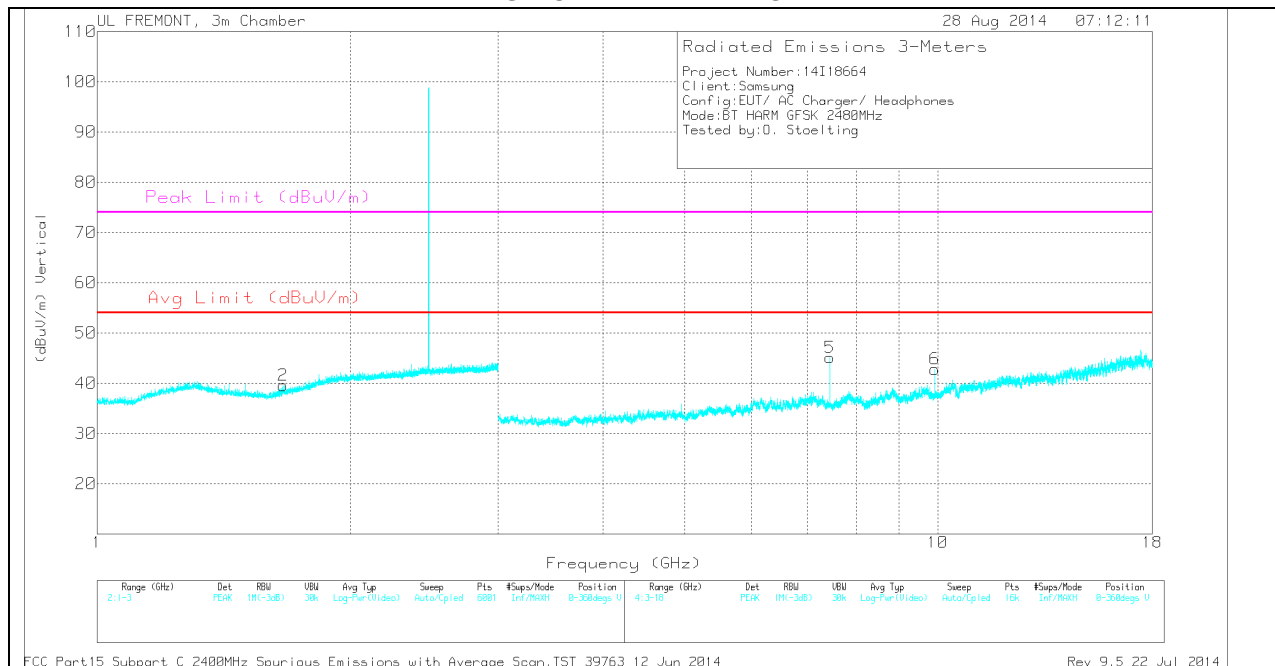

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.665	34.24	PK	28.7	-23.4	39.54	-	-	74	-34.46	0-360	100	V
1	2.352	36.01	PK	32	-23.1	44.91	-	-	74	-29.09	0-360	200	H
3	4.96	33.16	PK	34	-31	36.16	-	-	74	-37.84	0-360	100	H
5	7.44	38.3	PK	35.7	-28.9	45.1	-	-	74	-28.9	0-360	200	V
6	9.92	31.49	PK	36.9	-25.6	42.79	-	-	-	-	0-360	200	V
4	13.892	30.84	PK	38.8	-27	42.64	-	-	-	-	0-360	200	H

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.44	44.37	PK3	35.7	-28.9	51.17	-	-	74	-22.83	15	211	V
7.44	36.14	VB1T	35.7	-28.9	42.94	54	-11.06	-	-	15	211	V

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

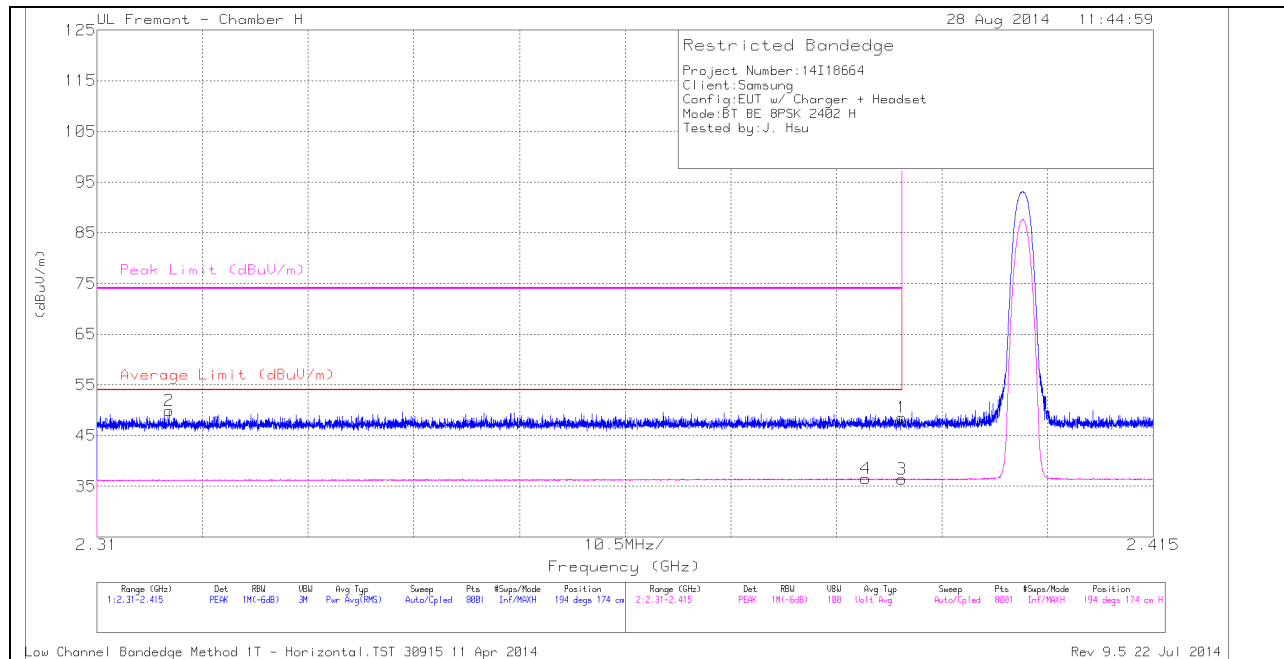

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.317	42.74	PK	31.8	-24.6	49.94	-	-	74	-24.06	194	174	H
4	* 2.386	28.96	VB1T	32	-24.5	36.46	54	-17.54	-	-	194	174	H
1	* 2.39	41.12	PK	32	-24.6	48.52	-	-	74	-25.48	194	174	H
3	* 2.39	28.94	VB1T	32	-24.6	36.34	54	-17.66	-	-	194	174	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

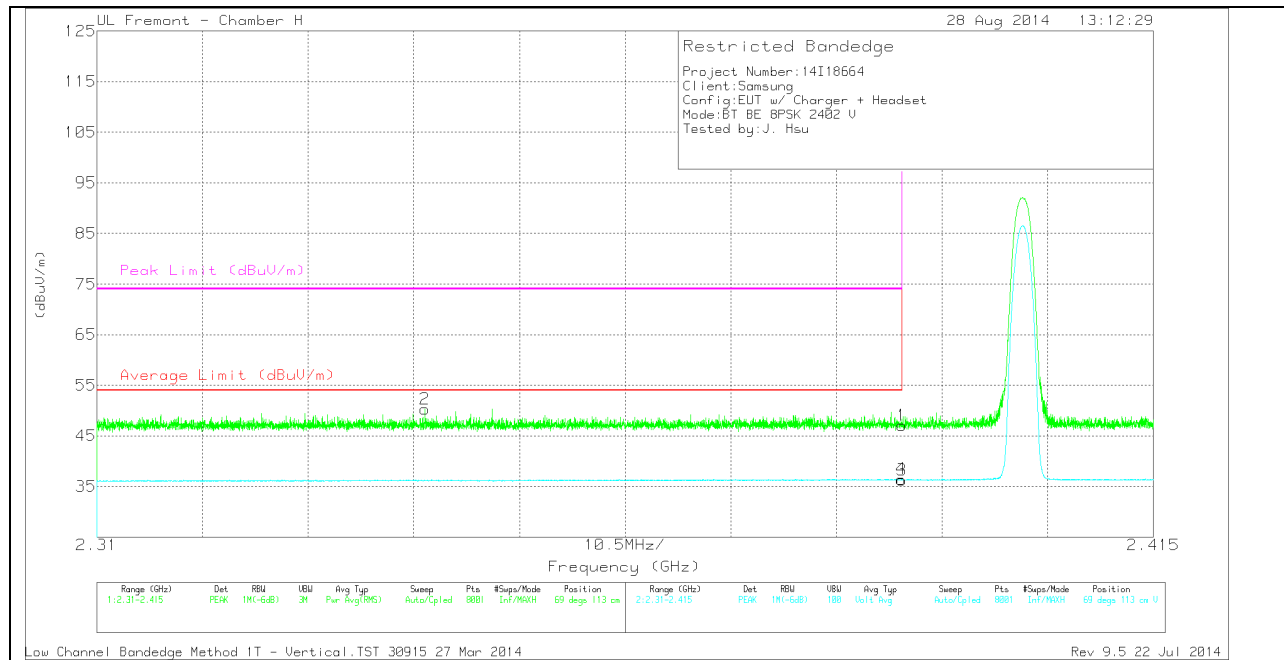

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.343	42.96	PK	31.9	-24.6	50.26	-	-	74	-23.74	69	113	V
1	* 2.39	39.62	PK	32	-24.6	47.02	-	-	74	-26.98	69	113	V
3	* 2.39	28.9	VB1T	32	-24.6	36.3	54	-17.7	-	-	69	113	V
4	* 2.39	29.05	VB1T	32	-24.6	36.45	54	-17.55	-	-	69	113	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

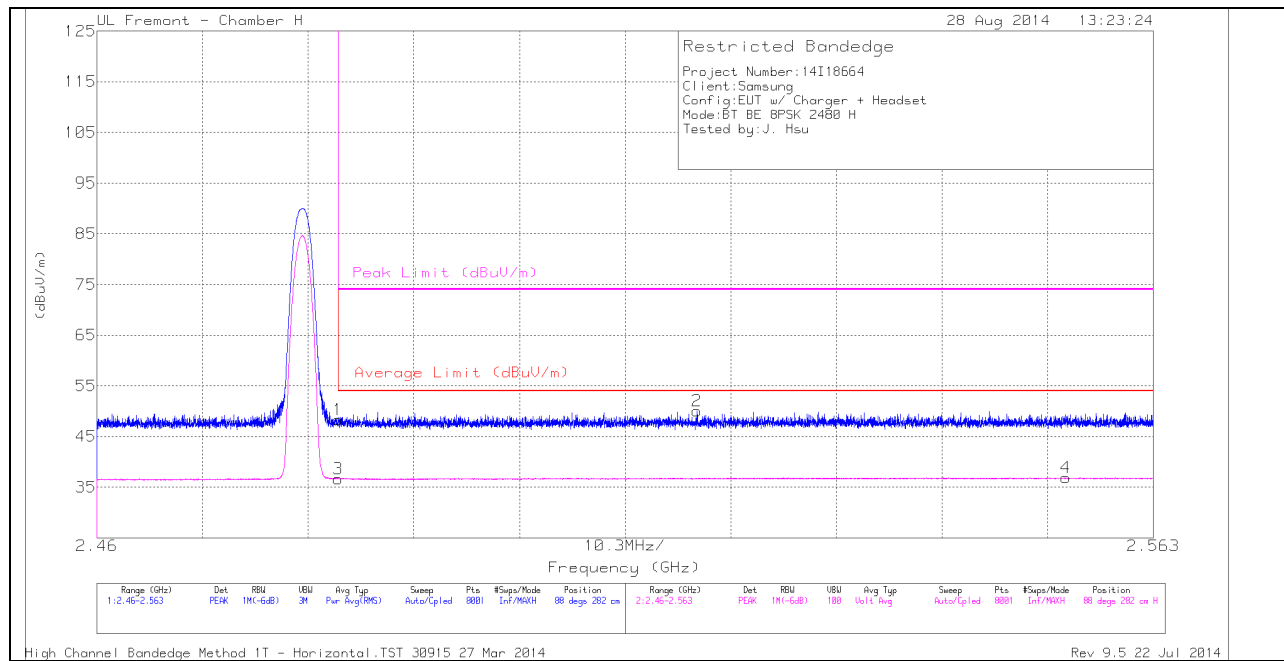

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.65	PK	32.2	-24.5	48.35	-	-	74	-25.65	88	282	H
3	* 2.484	28.99	VB1T	32.2	-24.5	36.69	54	-17.31	-	-	88	282	H
2	2.519	42.21	PK	32.2	-24.4	50.01	-	-	74	-23.99	88	282	H
4	2.554	29.02	VB1T	32.2	-24.3	36.92	54	-17.08	-	-	88	282	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

VERTICAL PEAK AND AVERAGE PLOT

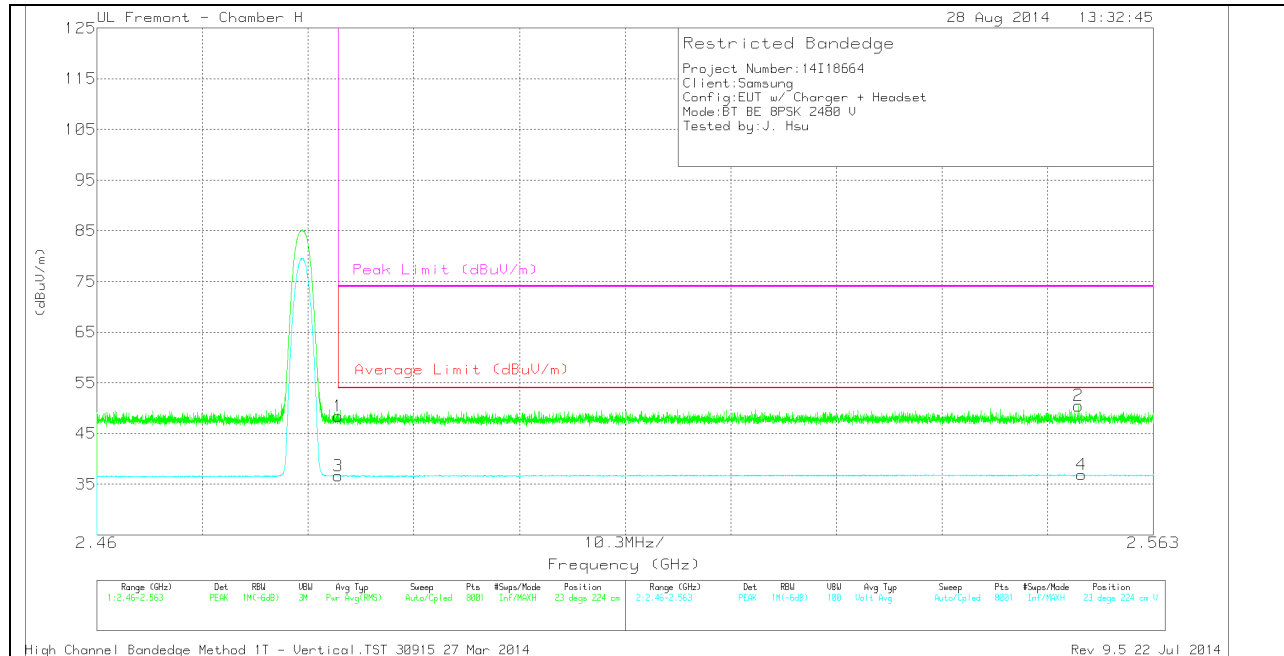

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.77	PK	32.2	-24.5	48.47	-	-	74	-25.53	23	224	V
3	* 2.484	28.94	VB1T	32.2	-24.5	36.64	54	-17.36	-	-	23	224	V
2	2.556	42.58	PK	32.2	-24.3	50.48	-	-	74	-23.52	23	224	V
4	2.556	28.99	VB1T	32.2	-24.3	36.89	54	-17.11	-	-	23	224	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS

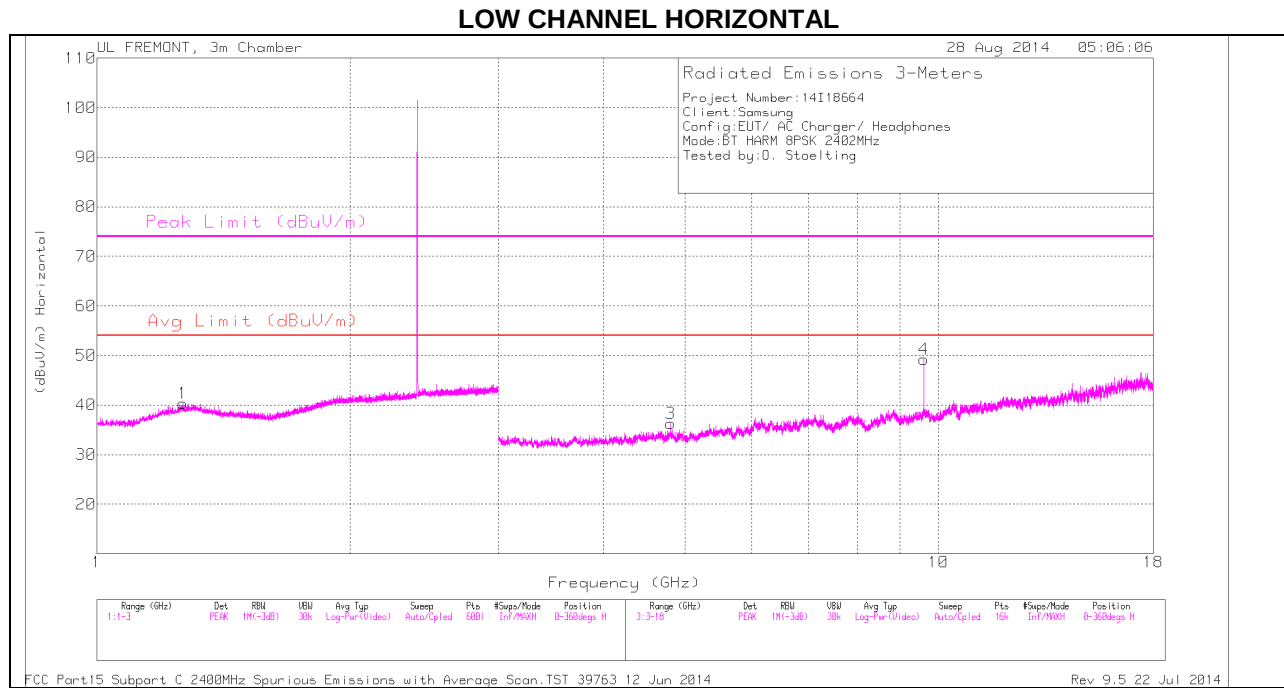

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

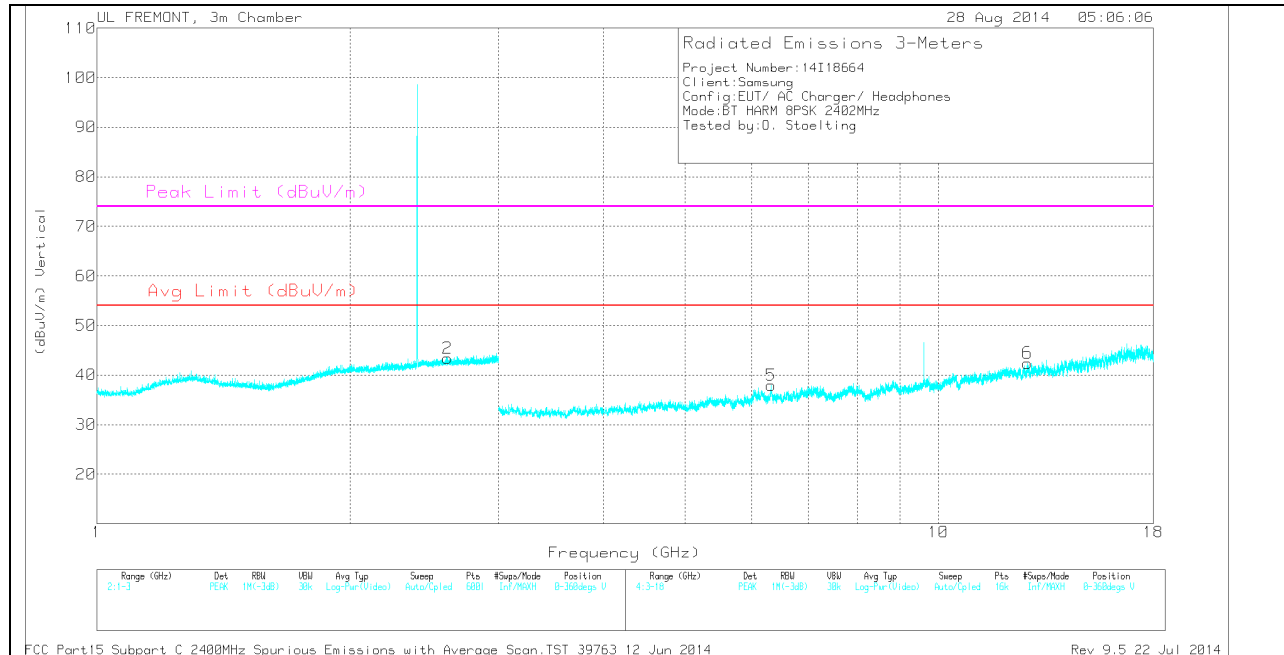

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.266	34.19	PK	29.9	-23.8	40.29	-	-	74	-33.71	0-360	100	H
2	2.609	33.57	PK	32.5	-22.7	43.37	-	-	-	-	0-360	100	V
3	4.805	32.48	PK	34.1	-30.3	36.28	-	-	74	-37.72	0-360	200	H
5	6.322	31.85	PK	35.4	-29.3	37.95	-	-	-	-	0-360	200	V
4	9.608	37.86	PK	36.7	-25.3	49.26	-	-	-	-	0-360	200	H
6	12.748	29.94	PK	39.2	-26.7	42.44	-	-	-	-	0-360	200	V

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.608	41.59	PK3	36.7	-25.3	52.99	-	-	-	-	85	234	H
9.608	35.36	VB1T	36.7	-25.3	46.76	-	-	-	-	85	234	H

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL HORIZONTAL

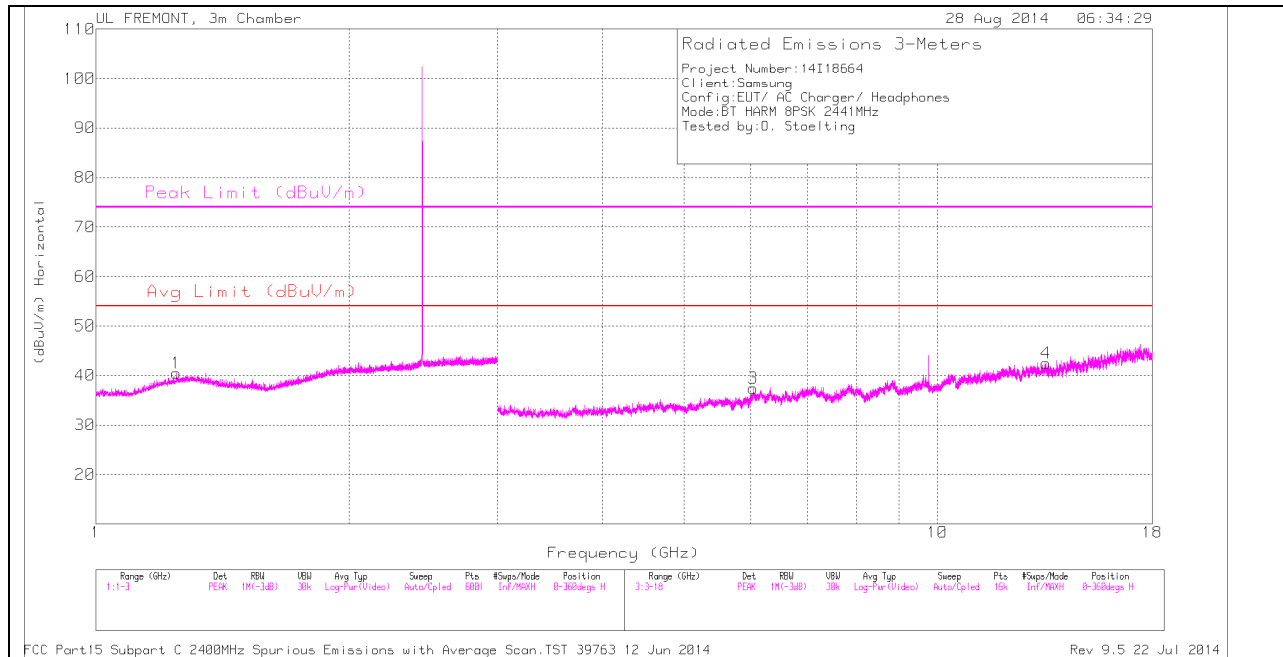

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

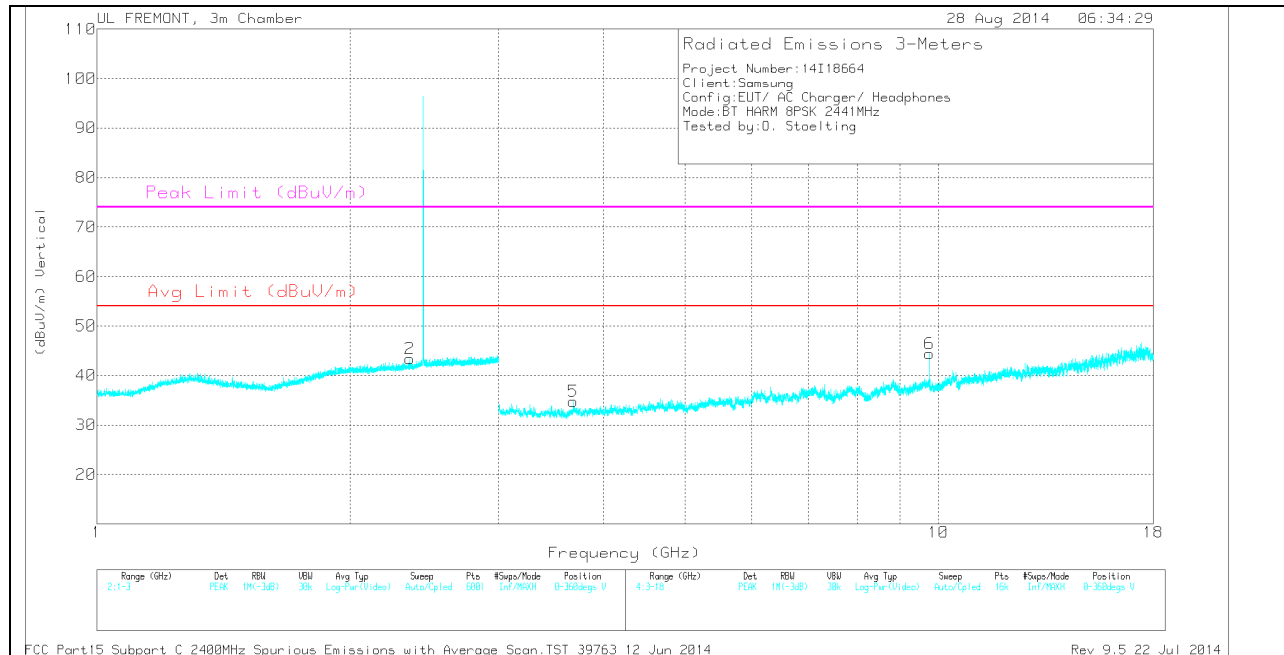

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.247	34.56	PK	29.7	-23.8	40.46	-	-	74	-33.54	0-360	100	H
2	2.352	34.44	PK	32	-23.1	43.34	-	-	74	-30.66	0-360	100	V
5	3.68	32.11	PK	33.2	-30.6	34.71	-	-	74	-39.29	0-360	100	V
3	6.041	31.27	PK	35.3	-29.2	37.37	-	-	-	-	0-360	100	H
6	9.764	33.56	PK	36.9	-26	44.46	-	-	-	-	0-360	200	V
4	13.454	30.31	PK	39.1	-26.9	42.51	-	-	-	-	0-360	200	H

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.764	36.38	PK3	36.9	-26	47.28	-	-	-	-	0	200	V
9.764	36.8	PK3	36.9	-26	47.7	-	-	-	-	10	134	V
9.764	24.3	VB1T	36.9	-26	35.2	-	-	-	-	10	134	V
9.765	23.52	VB1T	36.9	-26	34.42	-	-	-	-	0	200	V

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL HORIZONTAL

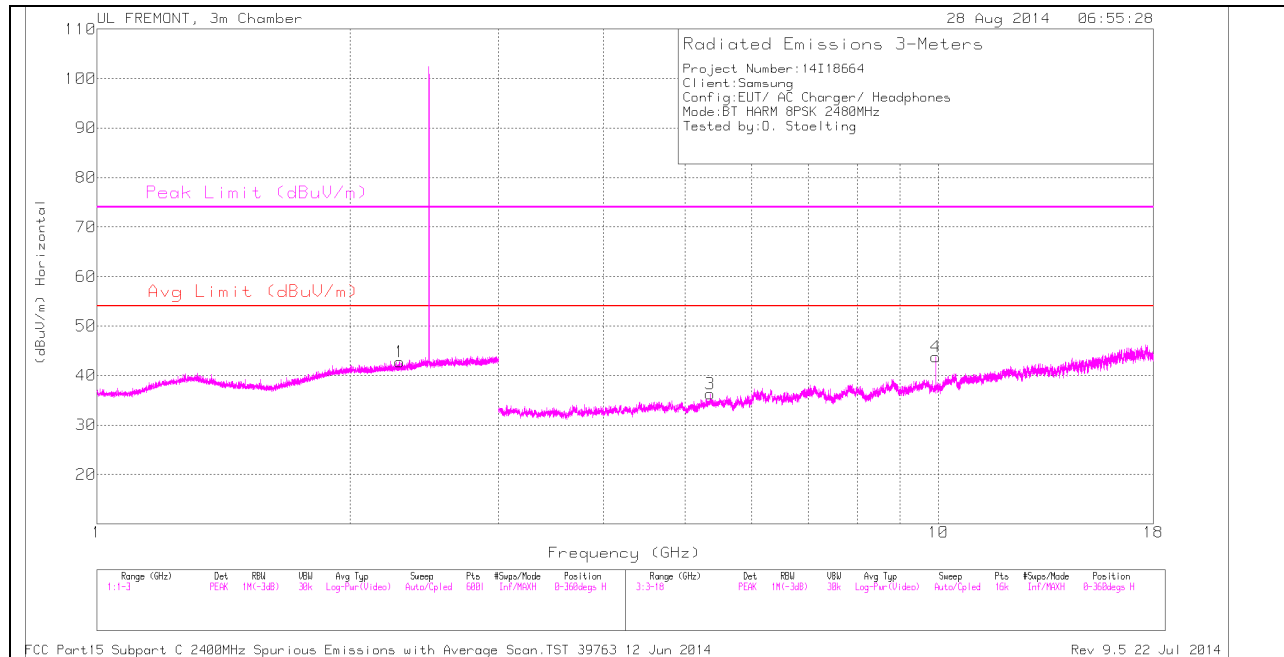

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

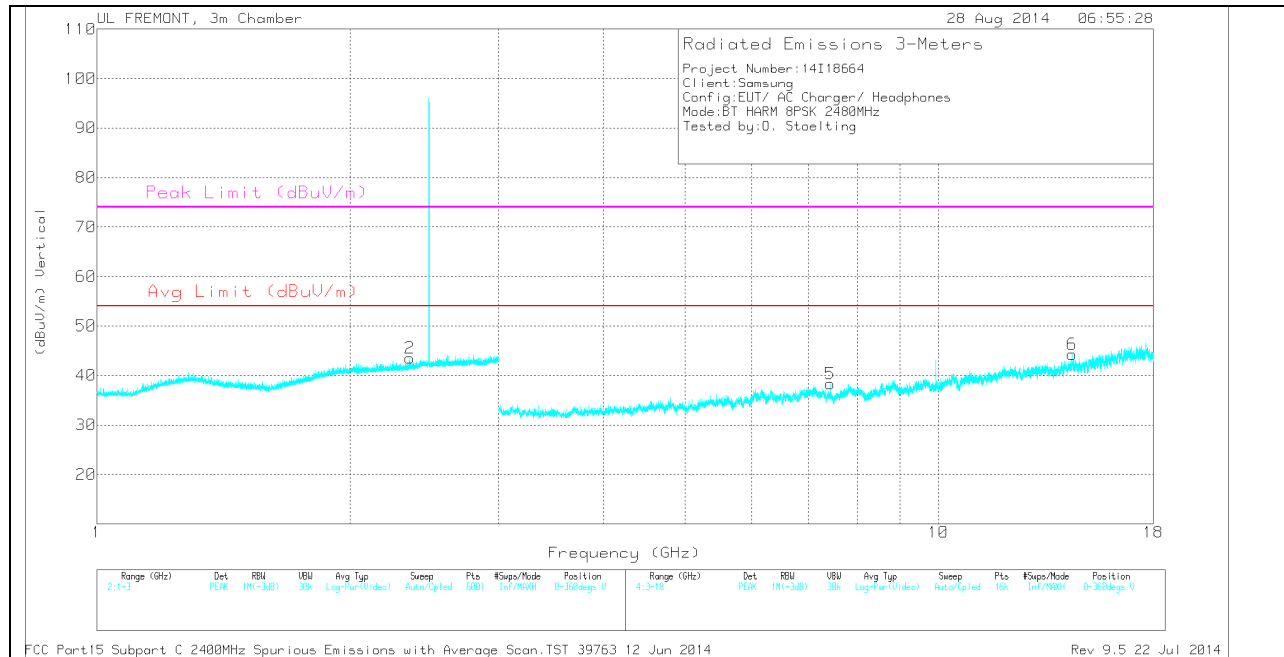

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.288	34.01	PK	31.8	-23	42.81	-	-	74	-31.19	0-360	100	H
2	2.352	34.66	PK	32	-23.1	43.56	-	-	74	-30.44	0-360	200	V
3	5.353	31.76	PK	34.5	-30	36.26	-	-	74	-37.74	0-360	200	H
5	7.44	31.48	PK	35.7	-28.9	38.28	-	-	74	-35.72	0-360	200	V
4	9.919	32.47	PK	36.9	-25.6	43.77	-	-	-	-	0-360	200	H
6	14.414	30.98	PK	39.5	-26.2	44.28	-	-	-	-	0-360	200	V

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.92	38.62	PK3	36.9	-25.6	49.92	-	-	-	-	98	347	H
9.92	28.54	VB1T	36.9	-25.6	39.84	-	-	-	-	98	347	H

PK3 - FHSS Method: Maximum Peak


9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

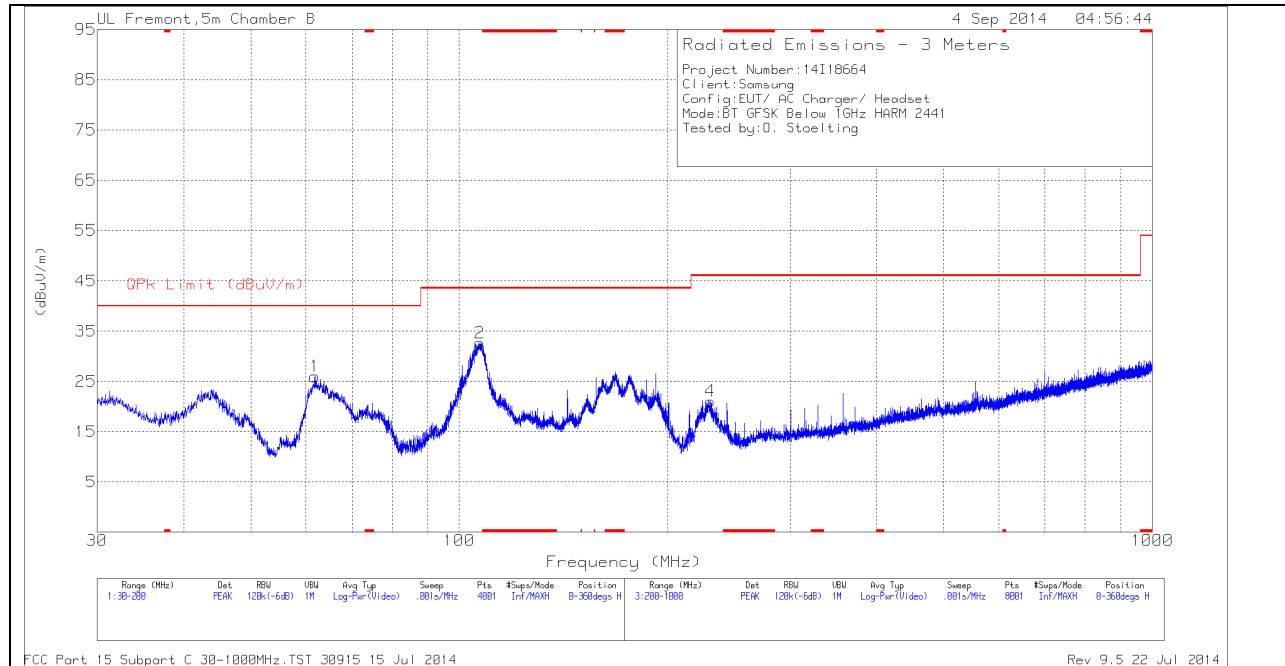

VERTICAL PLOT

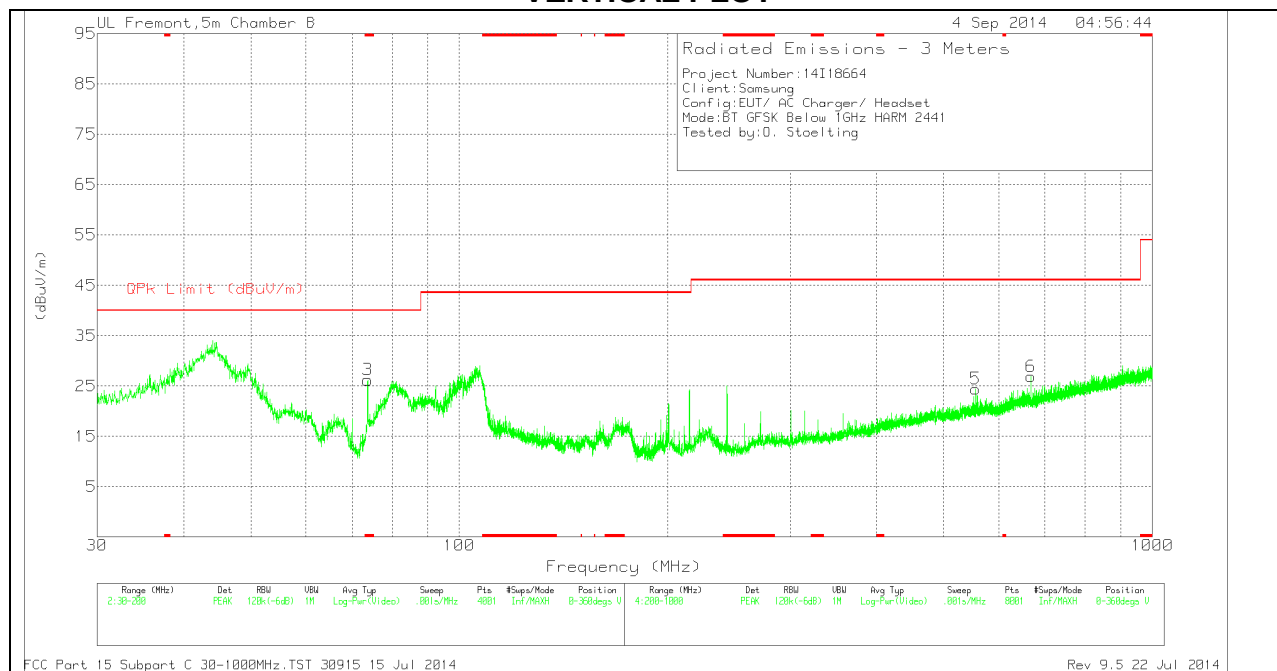

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 73.7325	46.42	PK	8.1	-28.3	26.22	40	-13.78	0-360	101	V
1	61.875	46.88	PK	7.6	-28.5	25.98	40	-14.02	0-360	400	H
2	106.9675	48.52	PK	12	-27.9	32.62	43.52	-10.9	0-360	200	H
4	230.4	36.57	PK	11.1	-26.6	21.07	46.02	-24.95	0-360	101	H
5	556	31.73	PK	18.2	-25.5	24.43	46.02	-21.59	0-360	200	V
6	668	32.18	PK	19.6	-24.9	26.88	46.02	-19.14	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
106.9617	46.13	PK3	12	-27.9	30.23	43.52	-13.29	1	200	H
107.0991	29.12	VB1T	12	-27.9	13.22	-	-	1	200	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


LINE 1 PLOT

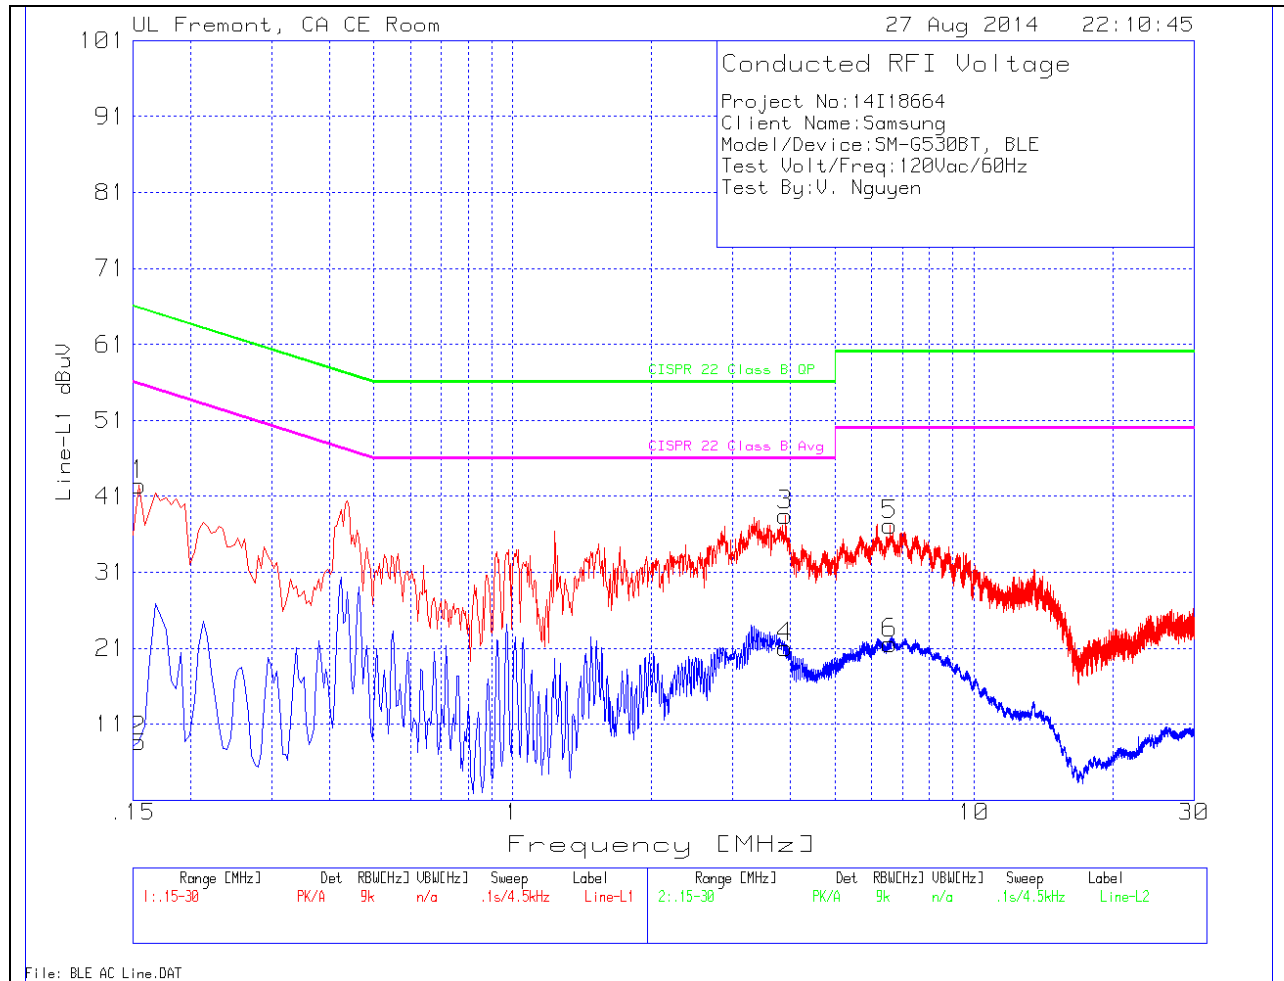

LINE 1 RESULTS

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1545	41.17	PK	1.3	0	42.47	65.8	-23.33	-	-
2	.1545	7.4	Av	1.3	0	8.7	-	-	55.8	-47.1
3	3.8985	38.16	PK	.2	.1	38.46	56	-17.54	-	-
4	3.8985	20.72	Av	.2	.1	21.02	-	-	46	-24.98
5	6.576	36.86	PK	.2	.1	37.16	60	-22.84	-	-
6	6.576	21.28	Av	.2	.1	21.58	-	-	50	-28.42

LINE 2 PLOT

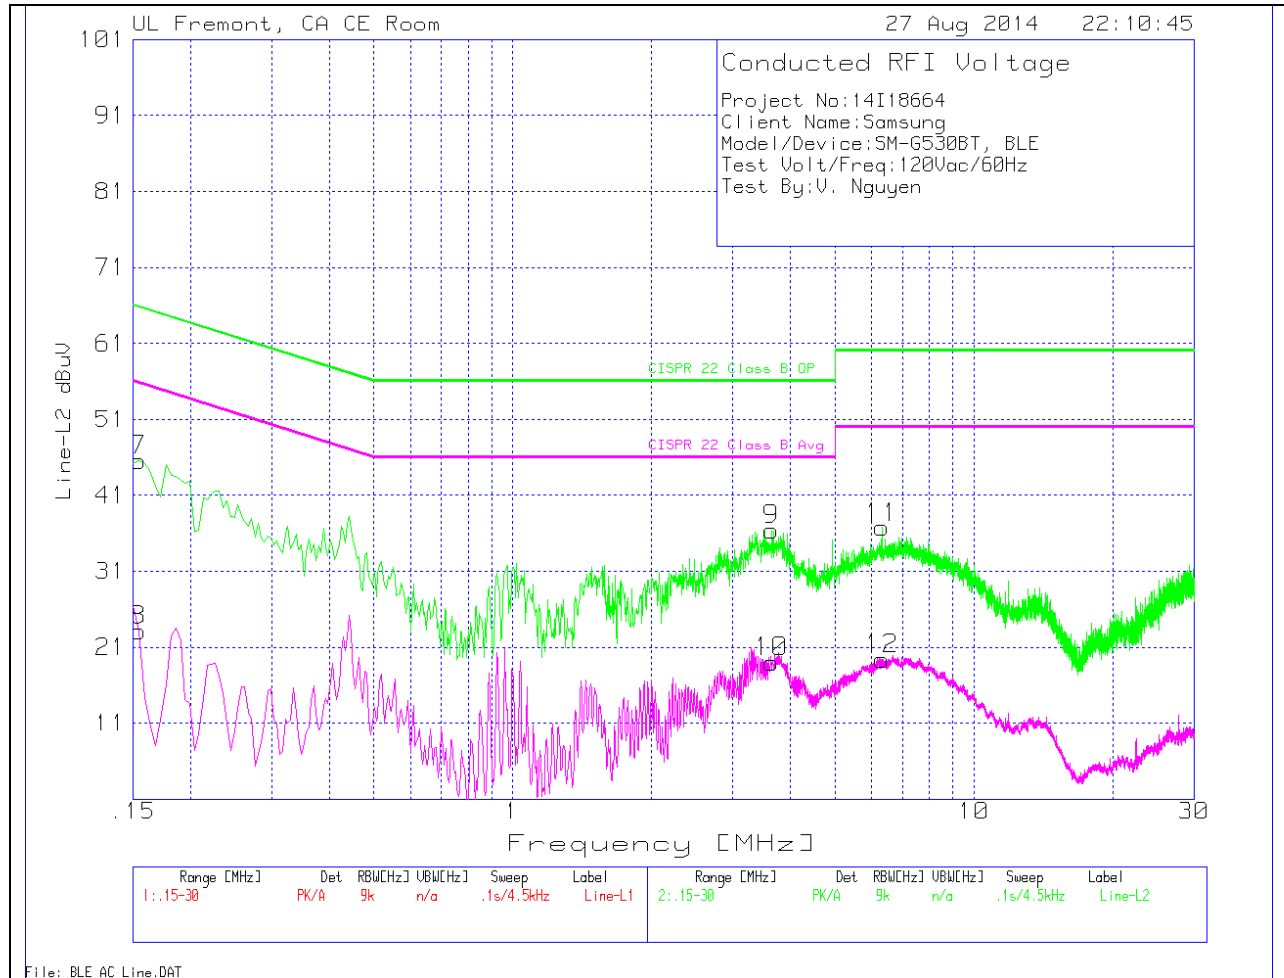

LINE 2 RESULTS

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.1545	44.18	PK	1.4	0	45.58	65.8	-20.22	-	-
8	.1545	21.72	Av	1.4	0	23.12	-	-	55.8	-32.68
9	3.6375	36.07	PK	.2	.1	36.37	56	-19.63	-	-
10	3.6375	18.71	Av	.2	.1	19.01	-	-	46	-26.99
11	6.3195	36.43	PK	.2	.1	36.73	60	-23.27	-	-
12	6.3195	19.15	Av	.2	.1	19.45	-	-	50	-30.55