



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth/BLE and DTS b/g/n

MODEL NUMBER : SM-G600FY

FCC ID: A3LSMG600FY

REPORT NUMBER: 15K21555-E3

ISSUE DATE: SEP 03, 2015

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

Rev.	Issue Date	Revisions	Revised By
--	09/03/15	Initial issue	SungGil Park

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	7
5.5. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY TABLE	11
8. ANTENNA PORT TEST RESULTS	12
8.1. 20 dB AND 99% BANDWIDTH	12
8.1.1. BASIC DATA RATE GFSK MODULATION	12
8.1.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION.....	12
8.1.3. ENHANCED DATA RATE 8PSK MODULATION	12
8.1.4. 20 dB AND 99% BANDWIDTH PLOTS.....	13
8.2. HOPPING FREQUENCY SEPARATION	16
8.3. NUMBER OF HOPPING CHANNELS.....	18
8.4. AVERAGE TIME OF OCCUPANCY.....	21
8.5. OUTPUT POWER.....	25
8.5.1. BASIC DATA RATE GFSK MODULATION	25
8.5.2. ENHANCED DATA RATE PI/4-DPSK MODULATION	25
8.5.3. ENHANCED DATA RATE 8PSK MODULATION	25
8.5.4. OUTPUT POWER PLOTS.....	26
8.6. AVERAGE POWER	29
8.6.1. BASIC DATA RATE GFSK MODULATION	29
8.6.2. DATA RATE PI/4-DQPSK MODULATION	29
8.6.3. ENHANCED DATA RATE 8PSK MODULATION	29
8.7. CONDUCTED SPURIOUS EMISSIONS.....	30
8.7.1. BASIC DATA RATE GFSK MODULATION	31

9. RADIATED TEST RESULTS.....	37
9.1. LIMITS AND PROCEDURE	37
9.2. TRANSMITTER ABOVE 1 GHz	38
9.2.1. BASIC DATA RATE GFSK MODULATION	38
9.2.2. ENHANCED DATA RATE 8PSK MODULATION	48
9.3. WORST-CASE BELOW 1 GHz.....	58
10. AC POWER LINE CONDUCTED EMISSIONS	60
11. SETUP PHOTOS	63

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth/BLE and DTS b/g/n
MODEL NUMBER: SM-G600FY
SERIAL NUMBER: R38G80J911J (RADIATED); R38G80J8ZDH (CONDUCTED)
DATE TESTED: AUG 14, 2015 - SEP 03, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1
☒	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth/BLE and DTS b/g/n.
This test report addresses the DSS (BT) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	8.76	7.52
		Peak	9.43	8.76
	Enhanced Pi/4-DPSK	Average	6.52	4.49
		Peak	7.51	12.52
	Enhanced 8PSK	Average	6.55	4.52
		Peak	7.71	5.90

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.41 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50IWE	DK1G316VS/A-E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	GH59-11849A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

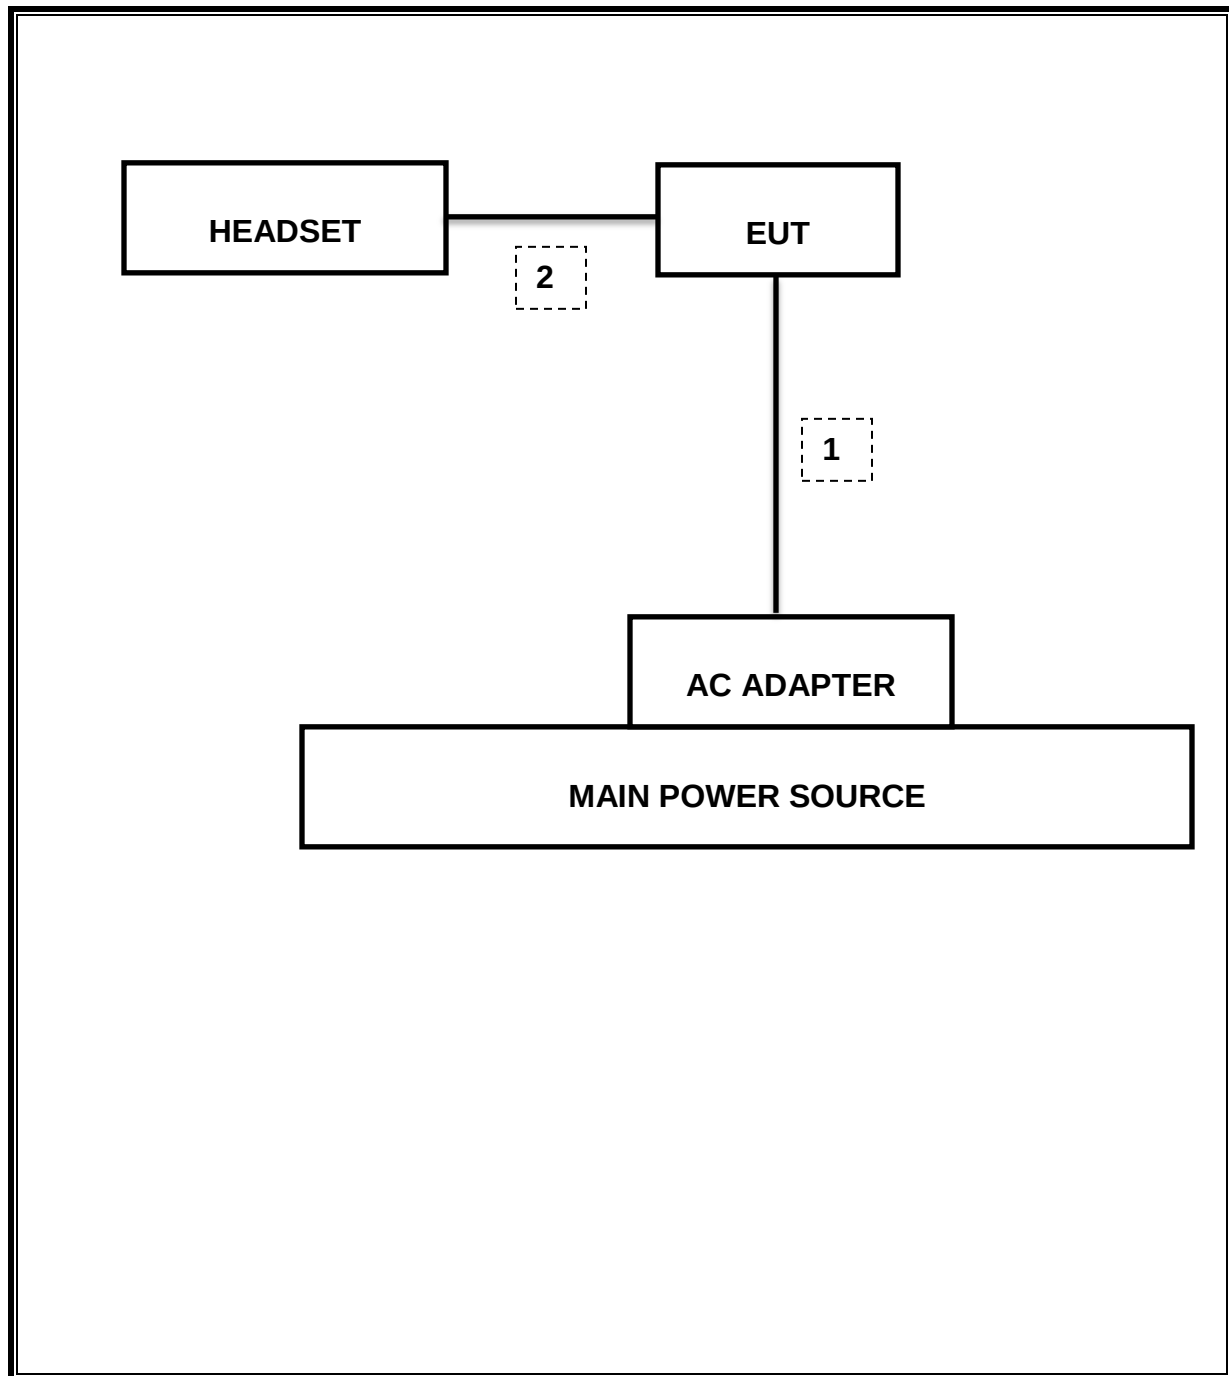

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-16
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-16
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16
Combiner	WEINSCHEL	1575	2153	08-20-16

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	1.197 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-38.69 dBm
15.247 (b)(1)	TX conducted output power	<21dBm		Pass	9.426 dBm (Peak)
15.247 (a)(1)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass	0.346 sec
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	43.43 dBuV (AV)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	27.43 dBuV/m (AV)

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	0.900	0.938
Mid	2441	1.007	0.936
High	2480	1.010	0.908
Worst		1.010	0.938

8.1.2. ENHANCED DATA RATE $\pi/4$ -DQPSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.229	1.163
Mid	2441	1.221	1.197
High	2480	1.310	1.167
Worst		1.310	1.197

8.1.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.264	1.166
Mid	2441	1.264	1.163
High	2480	1.261	1.162
Worst		1.264	1.166

8.1.4. 20 dB AND 99% BANDWIDTH PLOTS


GFSK BANDWIDTH

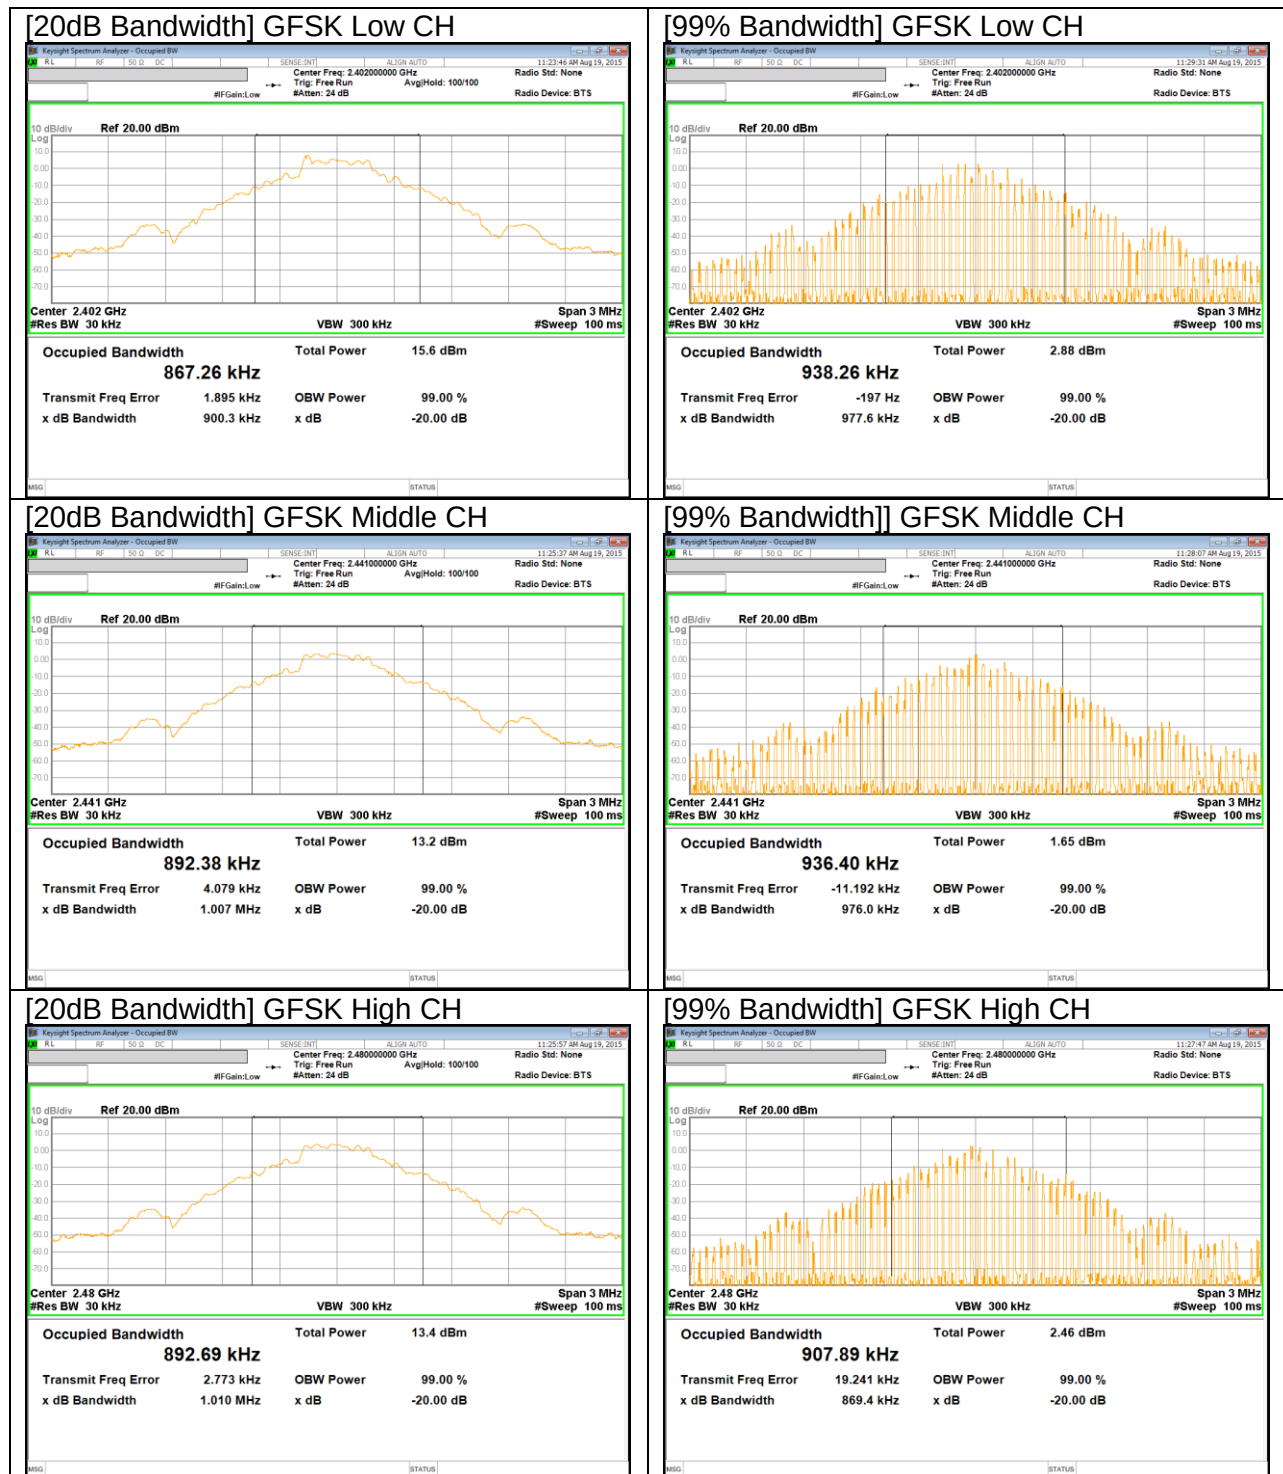

Pi/4-DQPSK BANDWIDTH

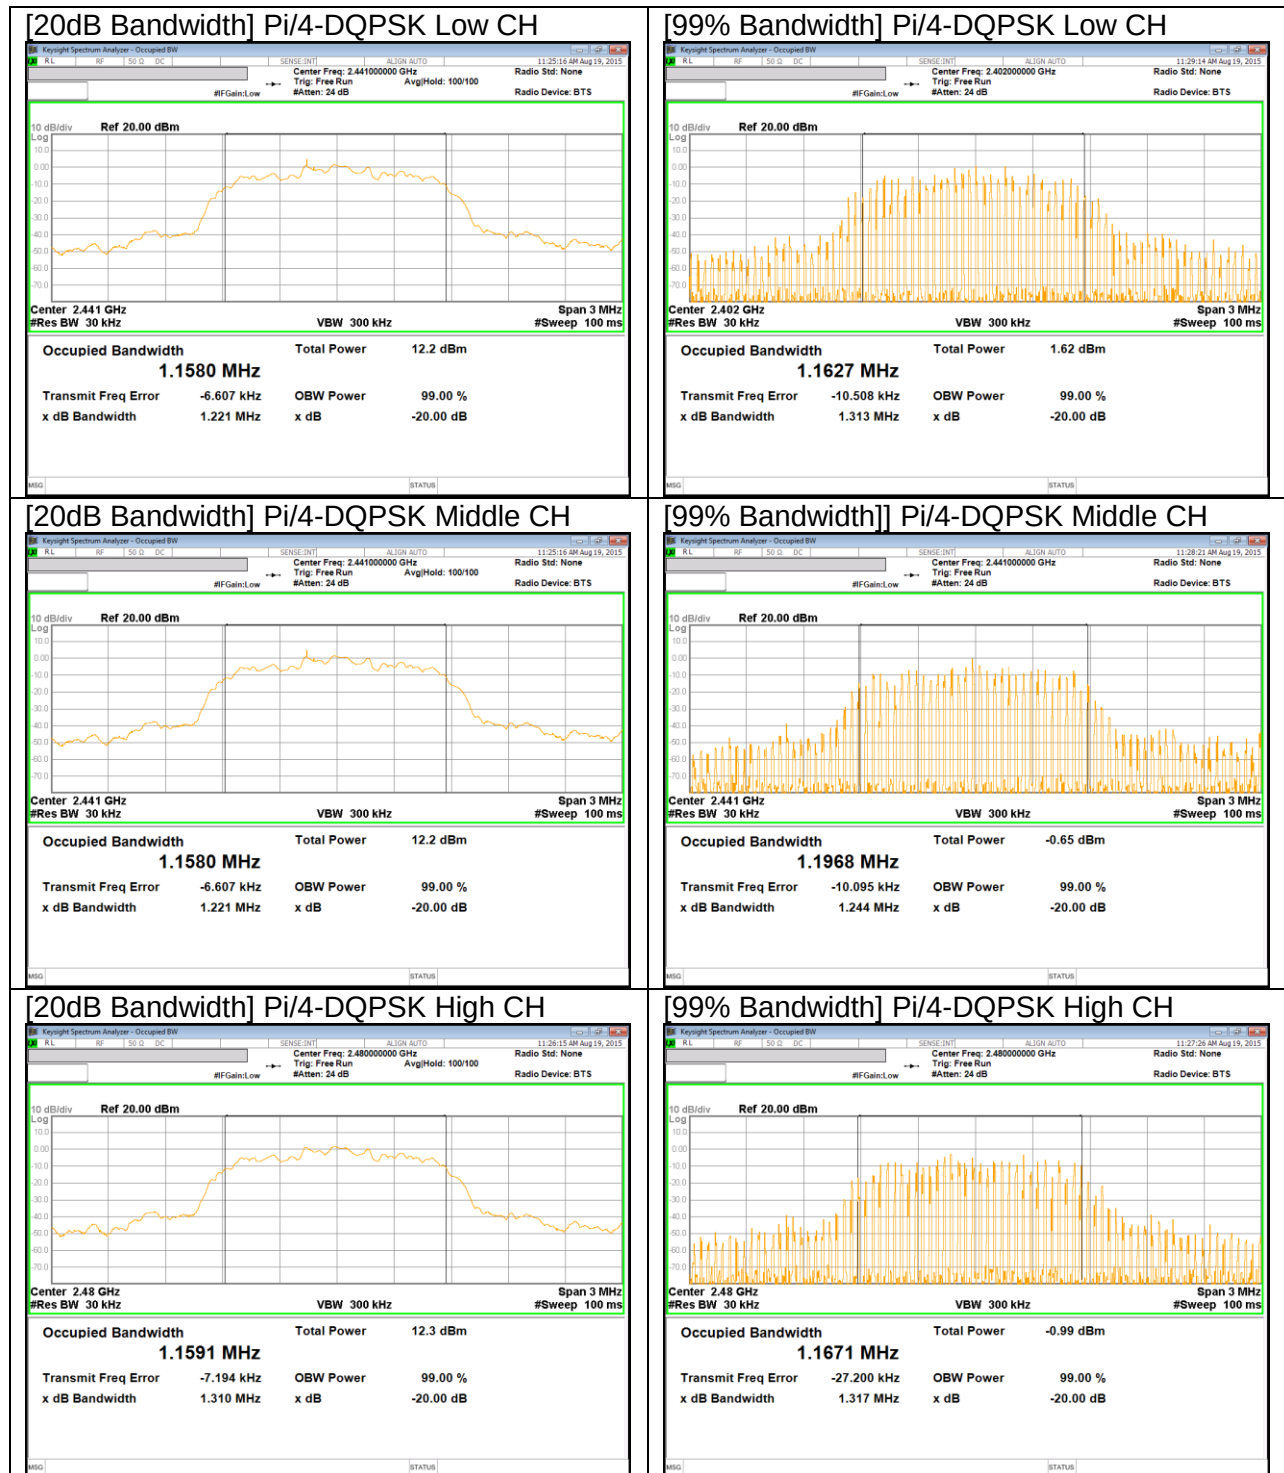

8PSK BANDWIDTH

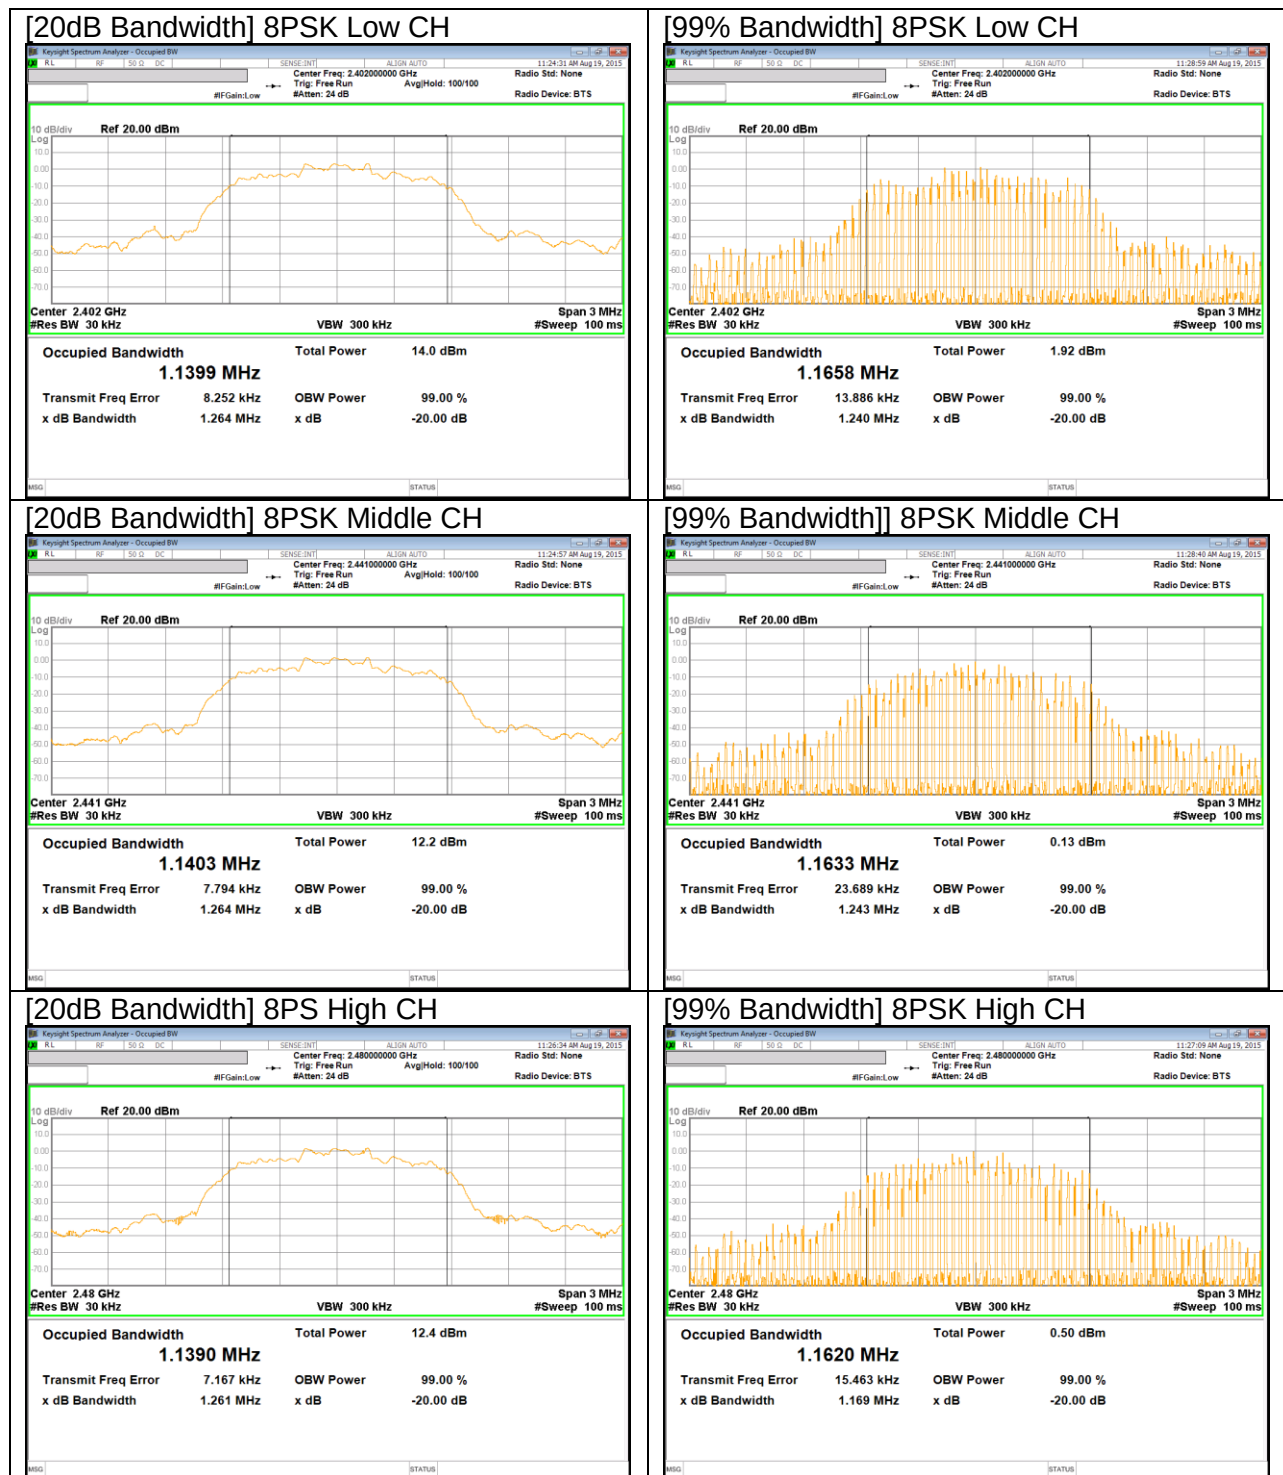

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

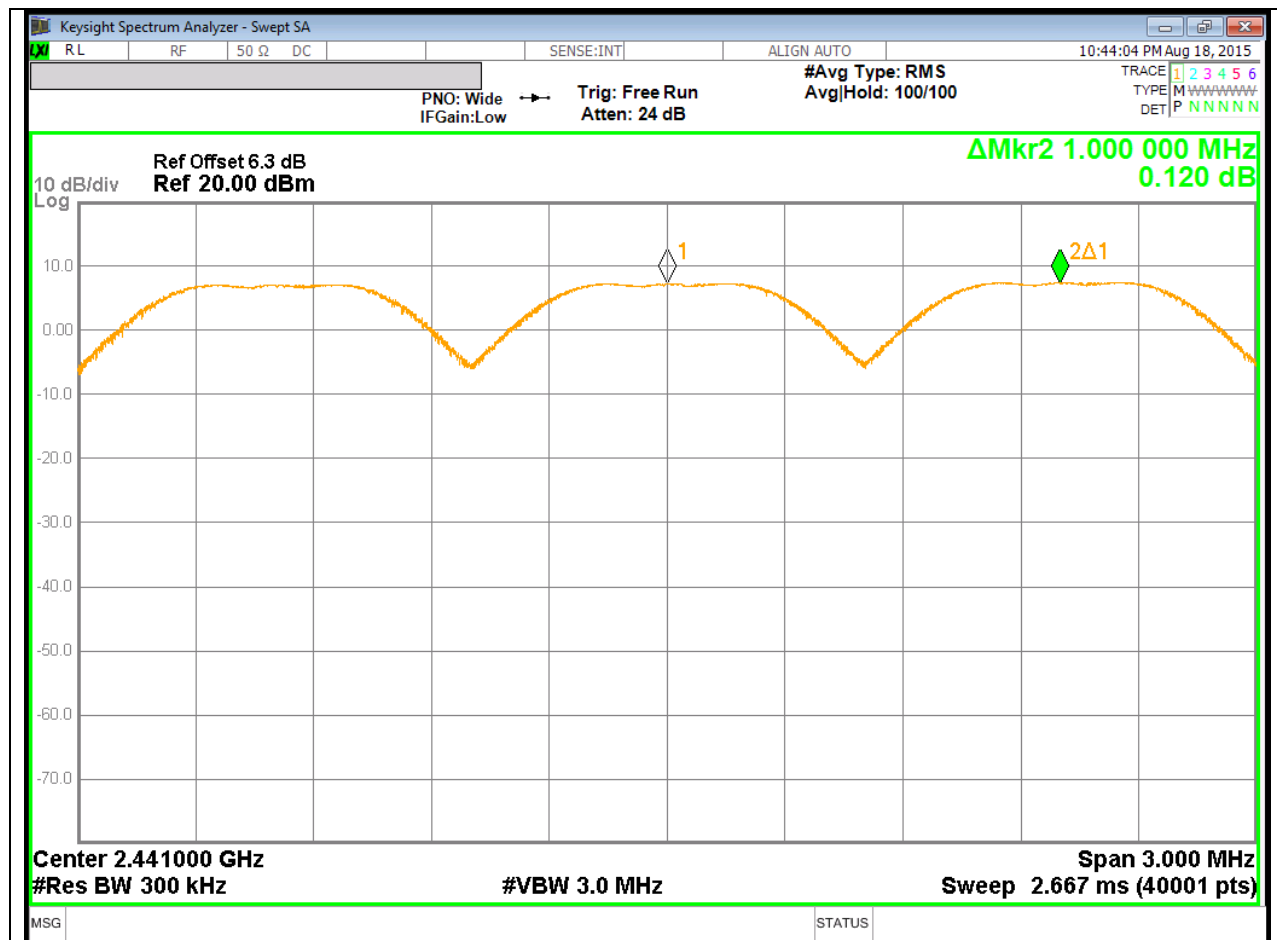

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)


Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

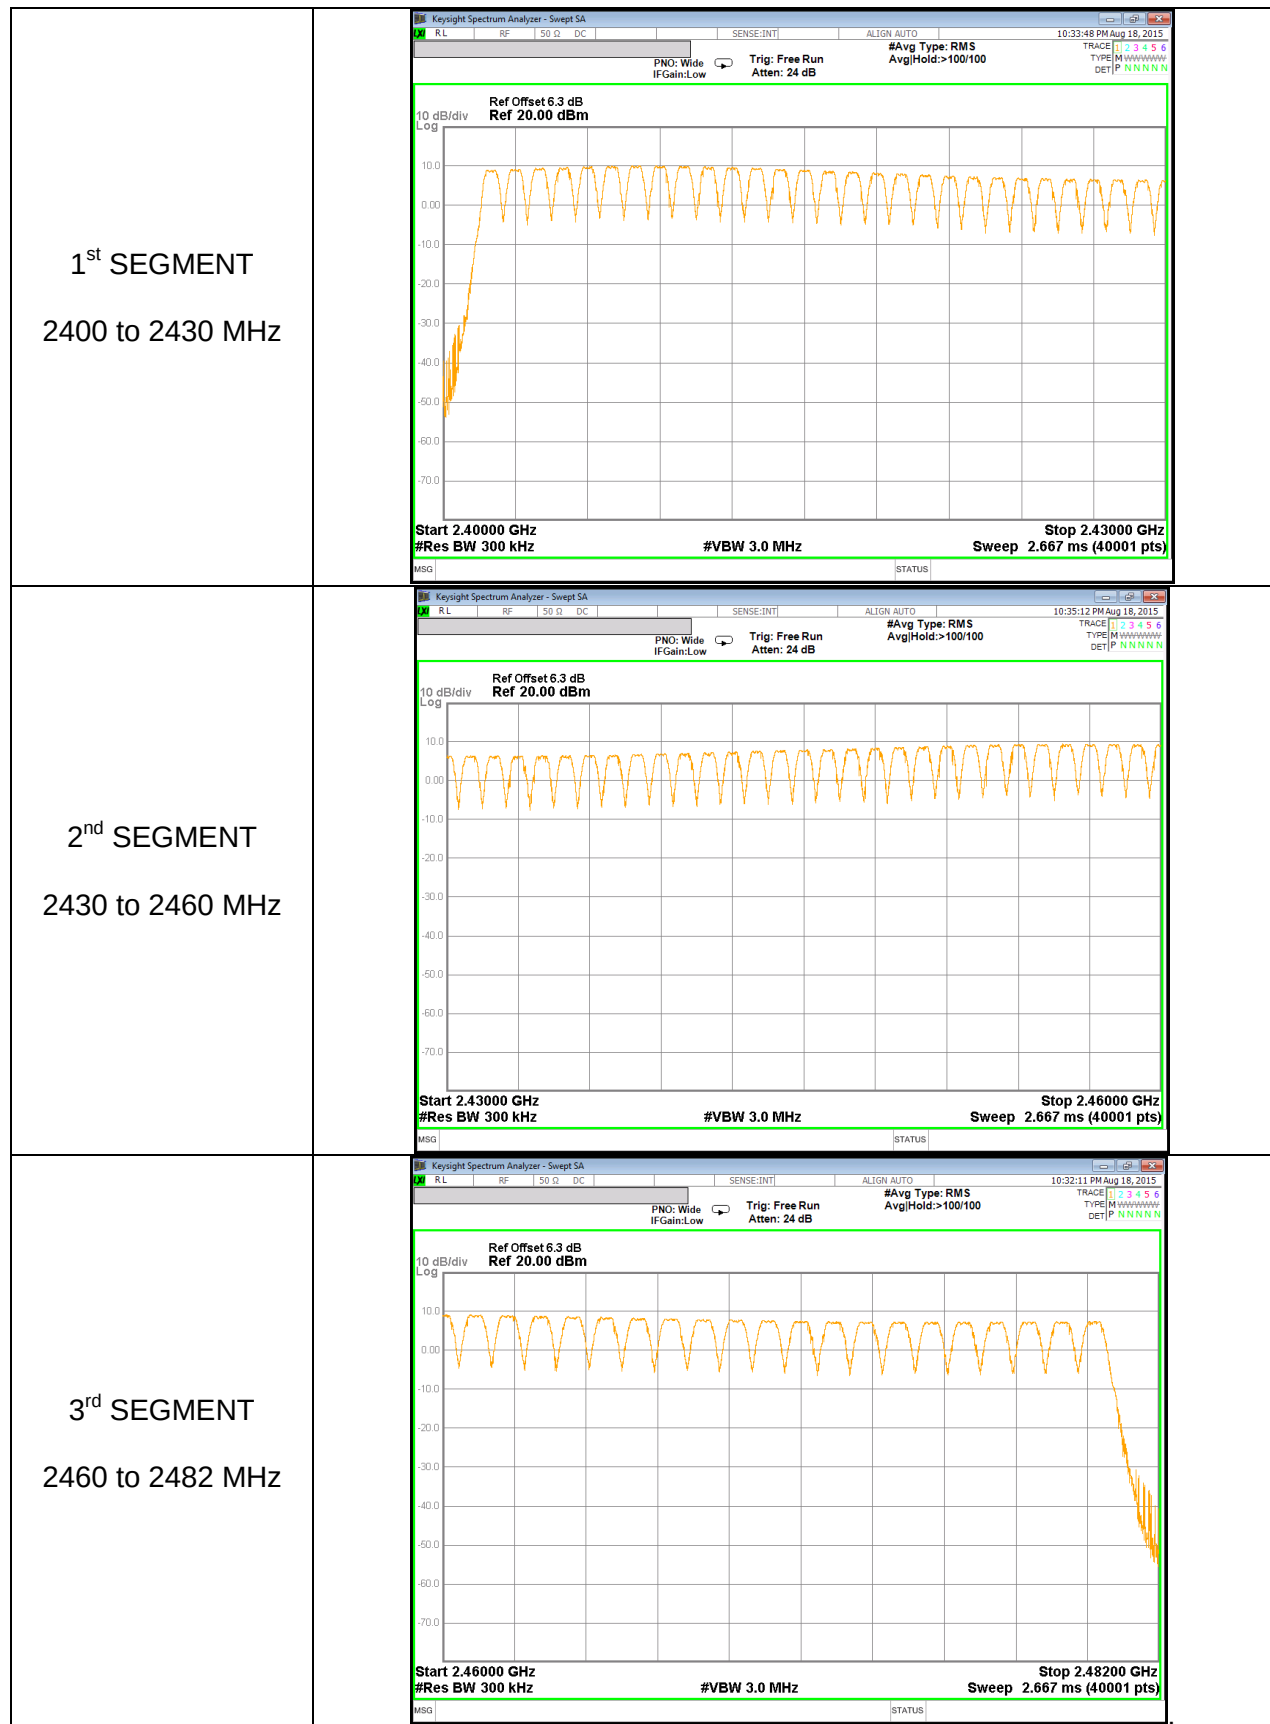

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal					
DH1	0.380	32	0.121536	0.4	-0.2785
DH3	1.635	17	0.277950	0.4	-0.1221
DH5	2.882	12	0.345840	0.4	-0.0542
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH					
DH1	0.380	8	0.030384	0.4	-0.36962
DH3	1.635	4.25	0.069488	0.4	-0.33051
DH5	2.882	3	0.086460	0.4	-0.31354

DH1

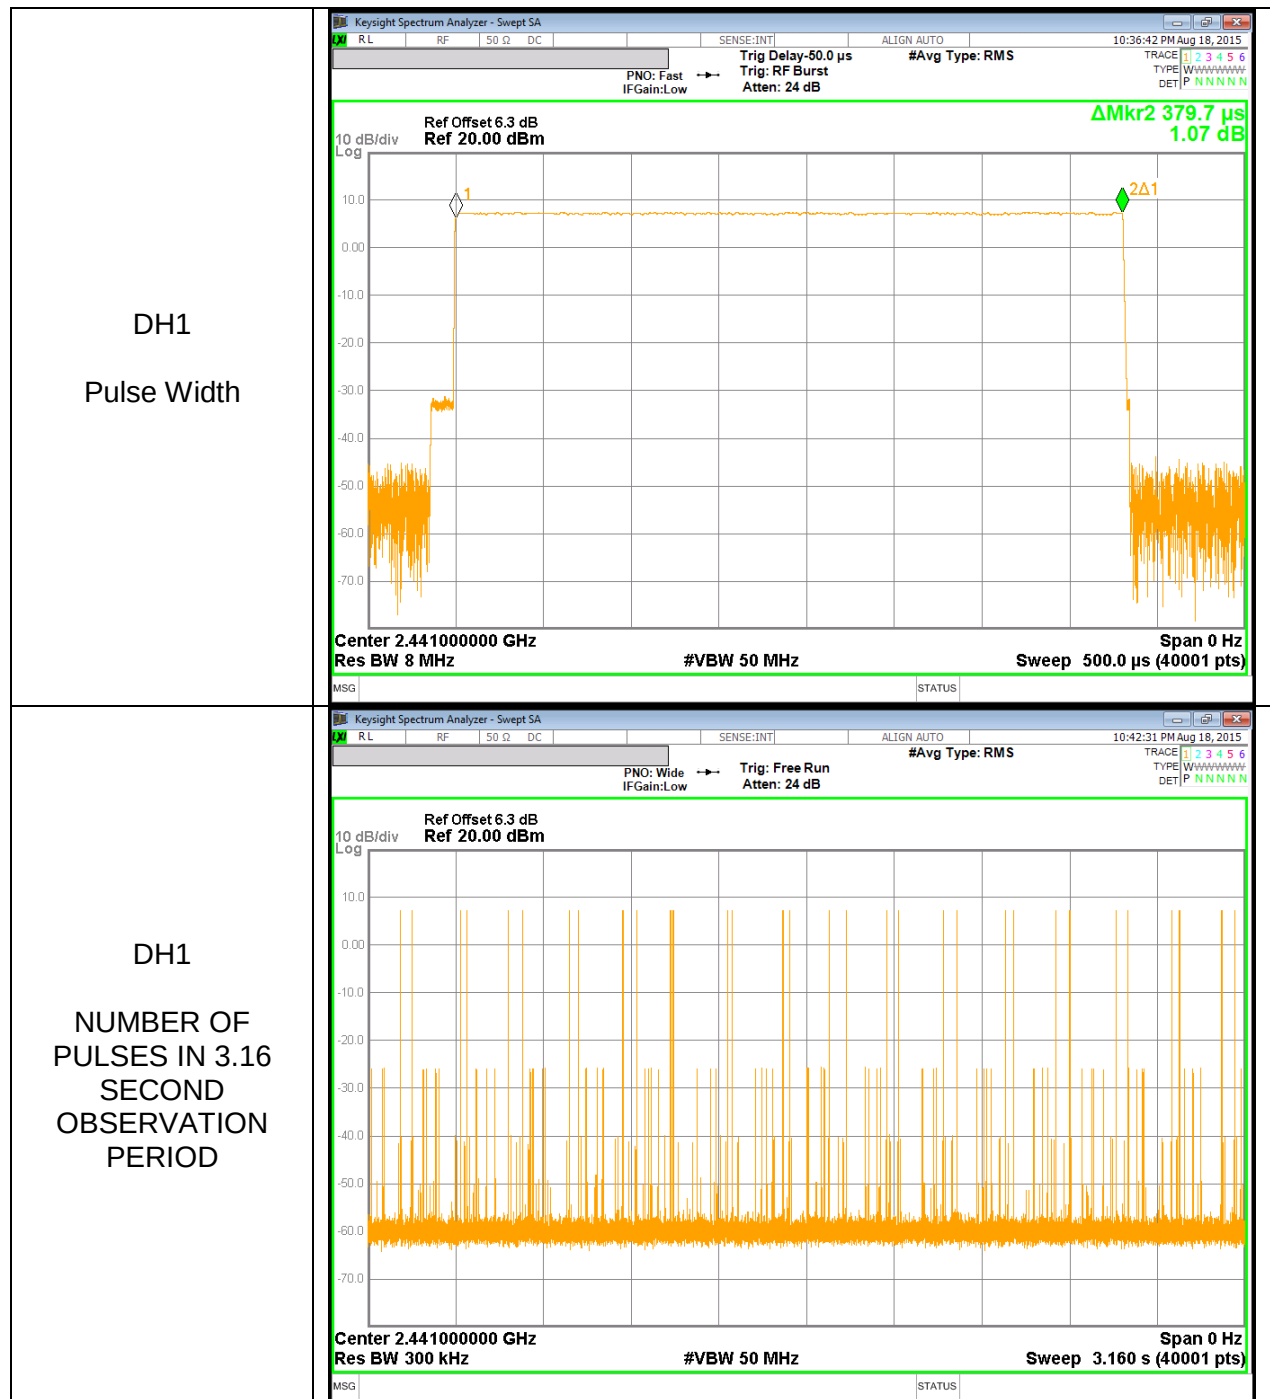

DH3

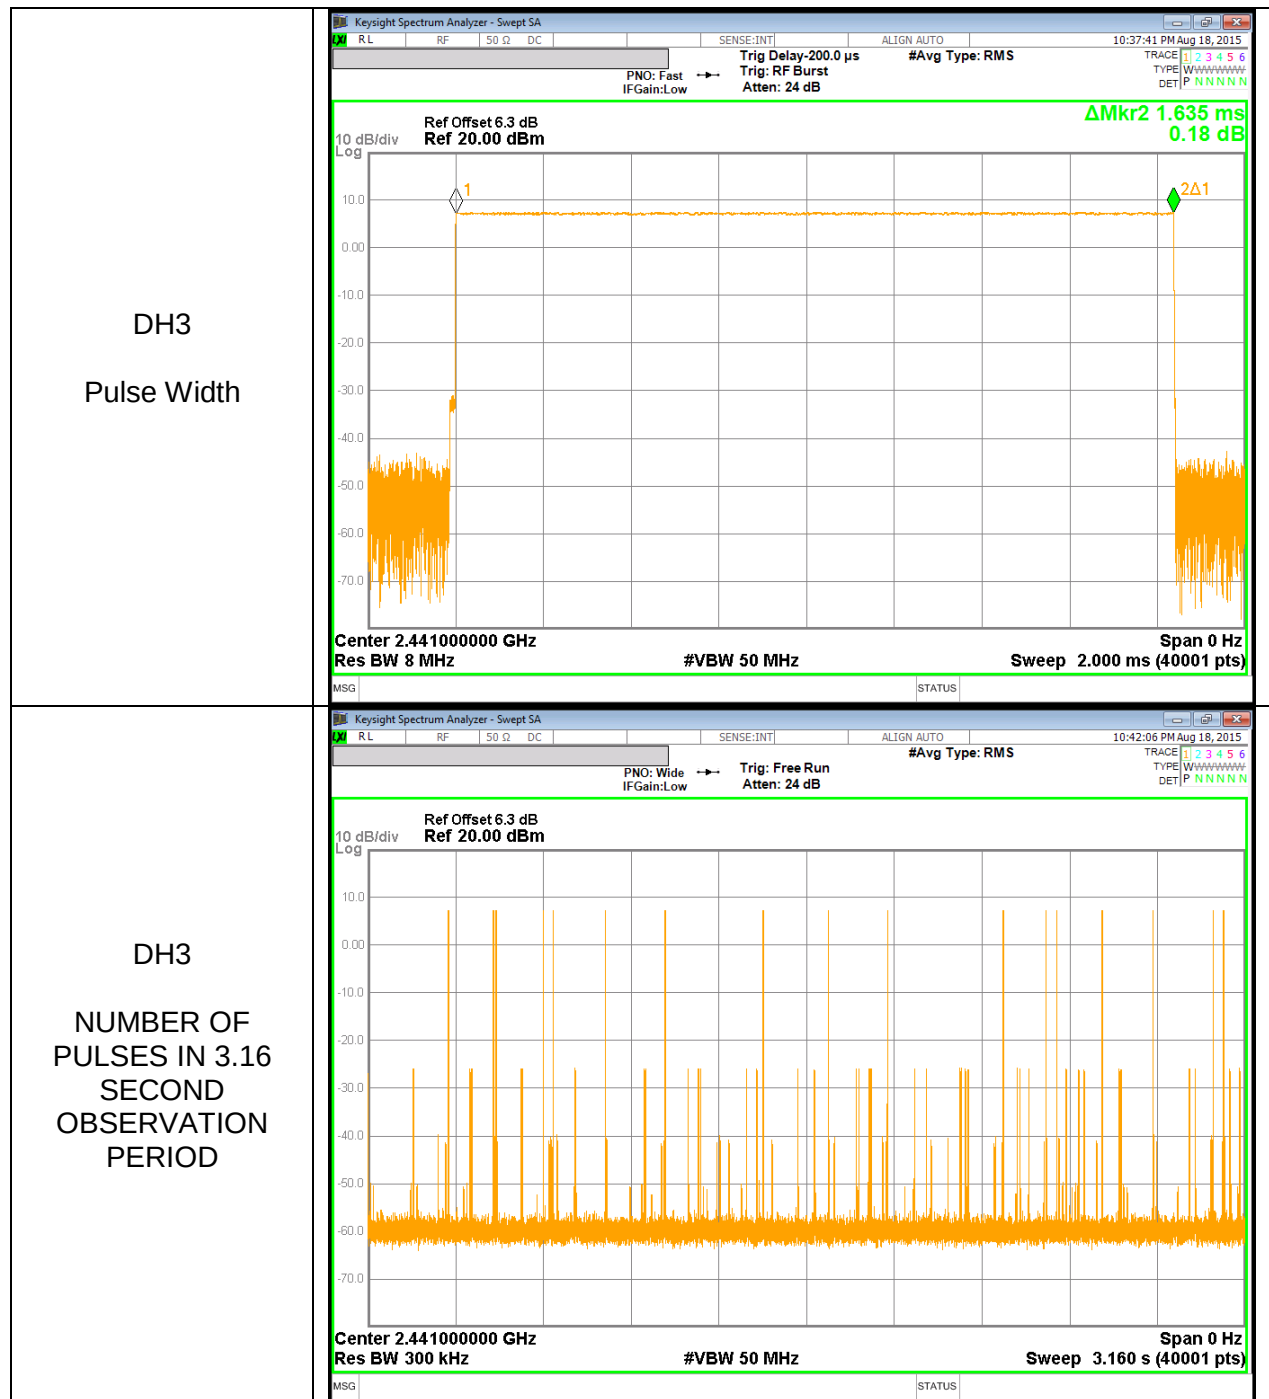

DH5



8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	9.071	21	-11.929
Middle	2441	9.015	21	-11.985
High	2480	9.426	21	-11.574
Worst		9.426	21	-11.574

8.5.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.143	21	-13.857
Middle	2441	7.094	21	-13.906
High	2480	7.505	21	-13.495
Worst		7.505	21	-13.495

8.5.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.328	21	-13.672
Middle	2441	7.273	21	-13.727
High	2480	7.705	21	-13.295
Worst		7.705	21	-13.295

8.5.4. OUTPUT POWER PLOTS


GFSK OUTPUT POWER



Pi/4-DPSK OUTPUT POWER

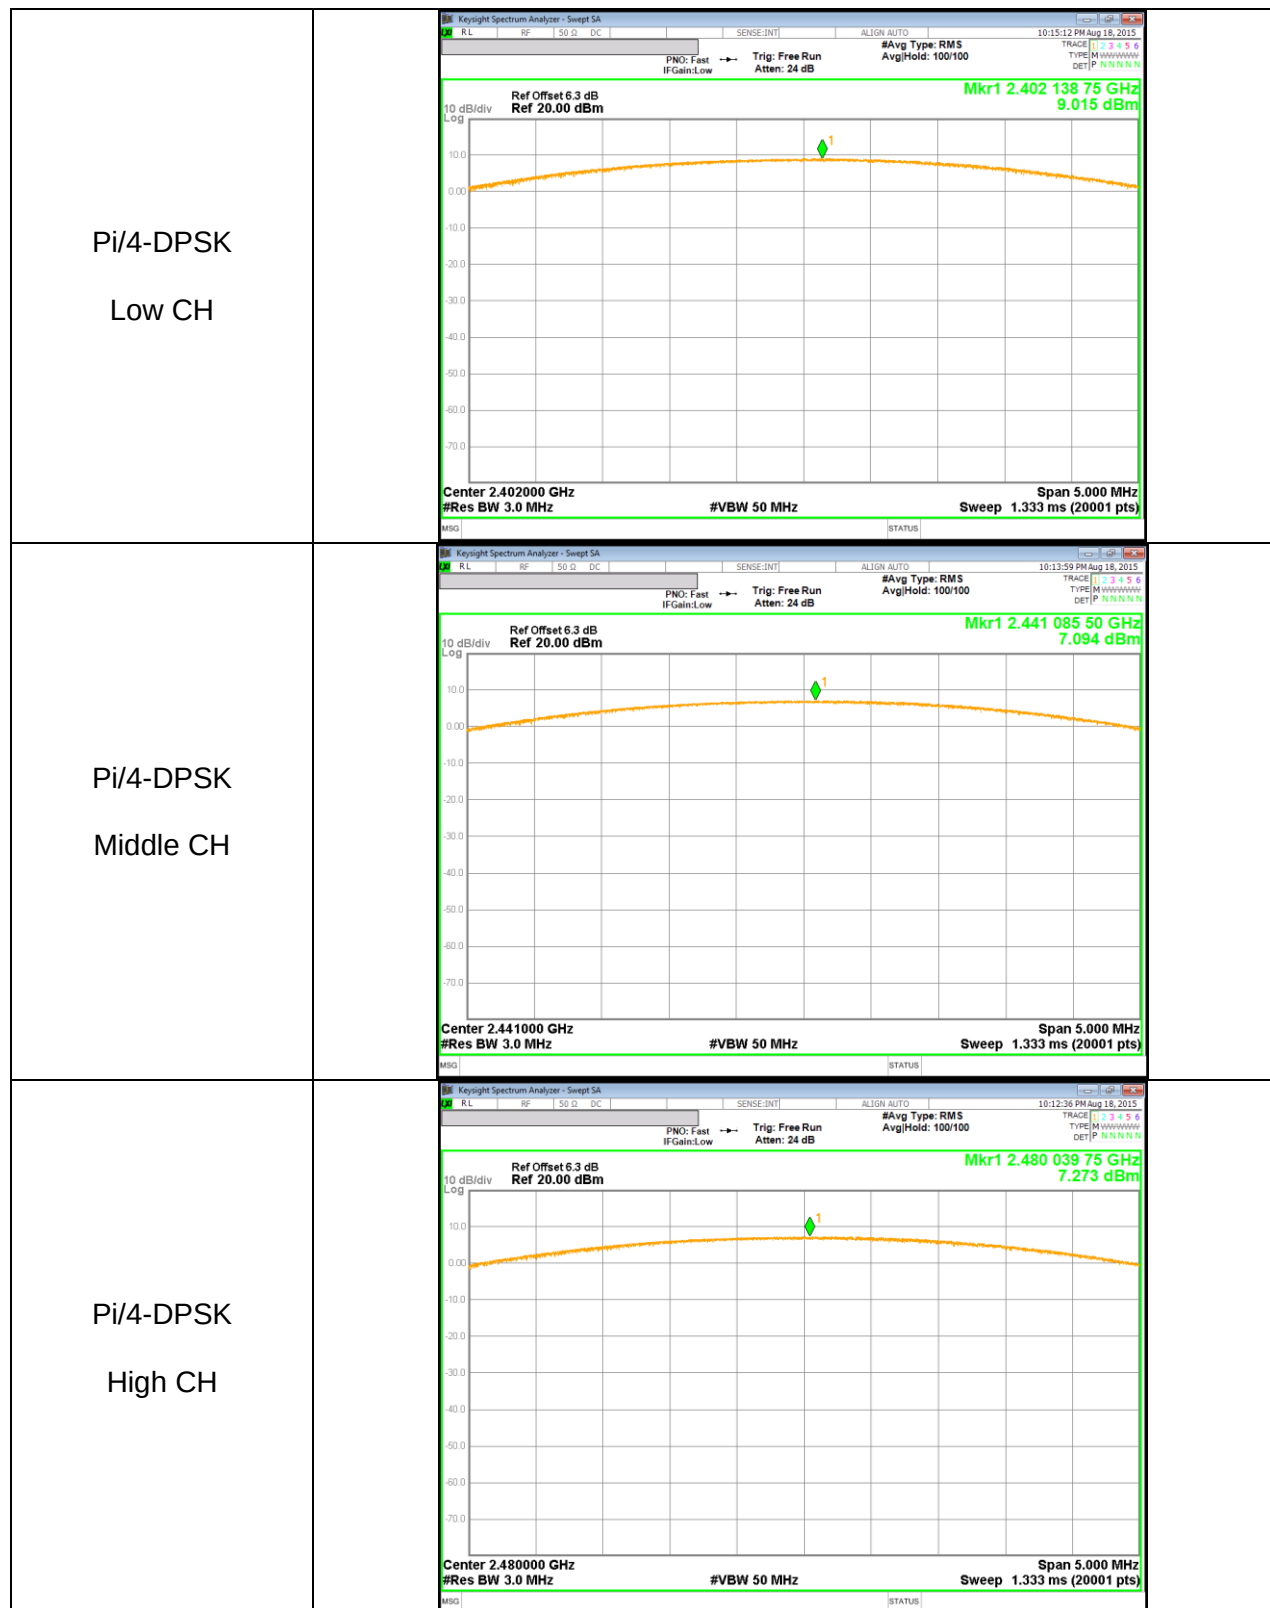

8PSK OUTPUT POWER

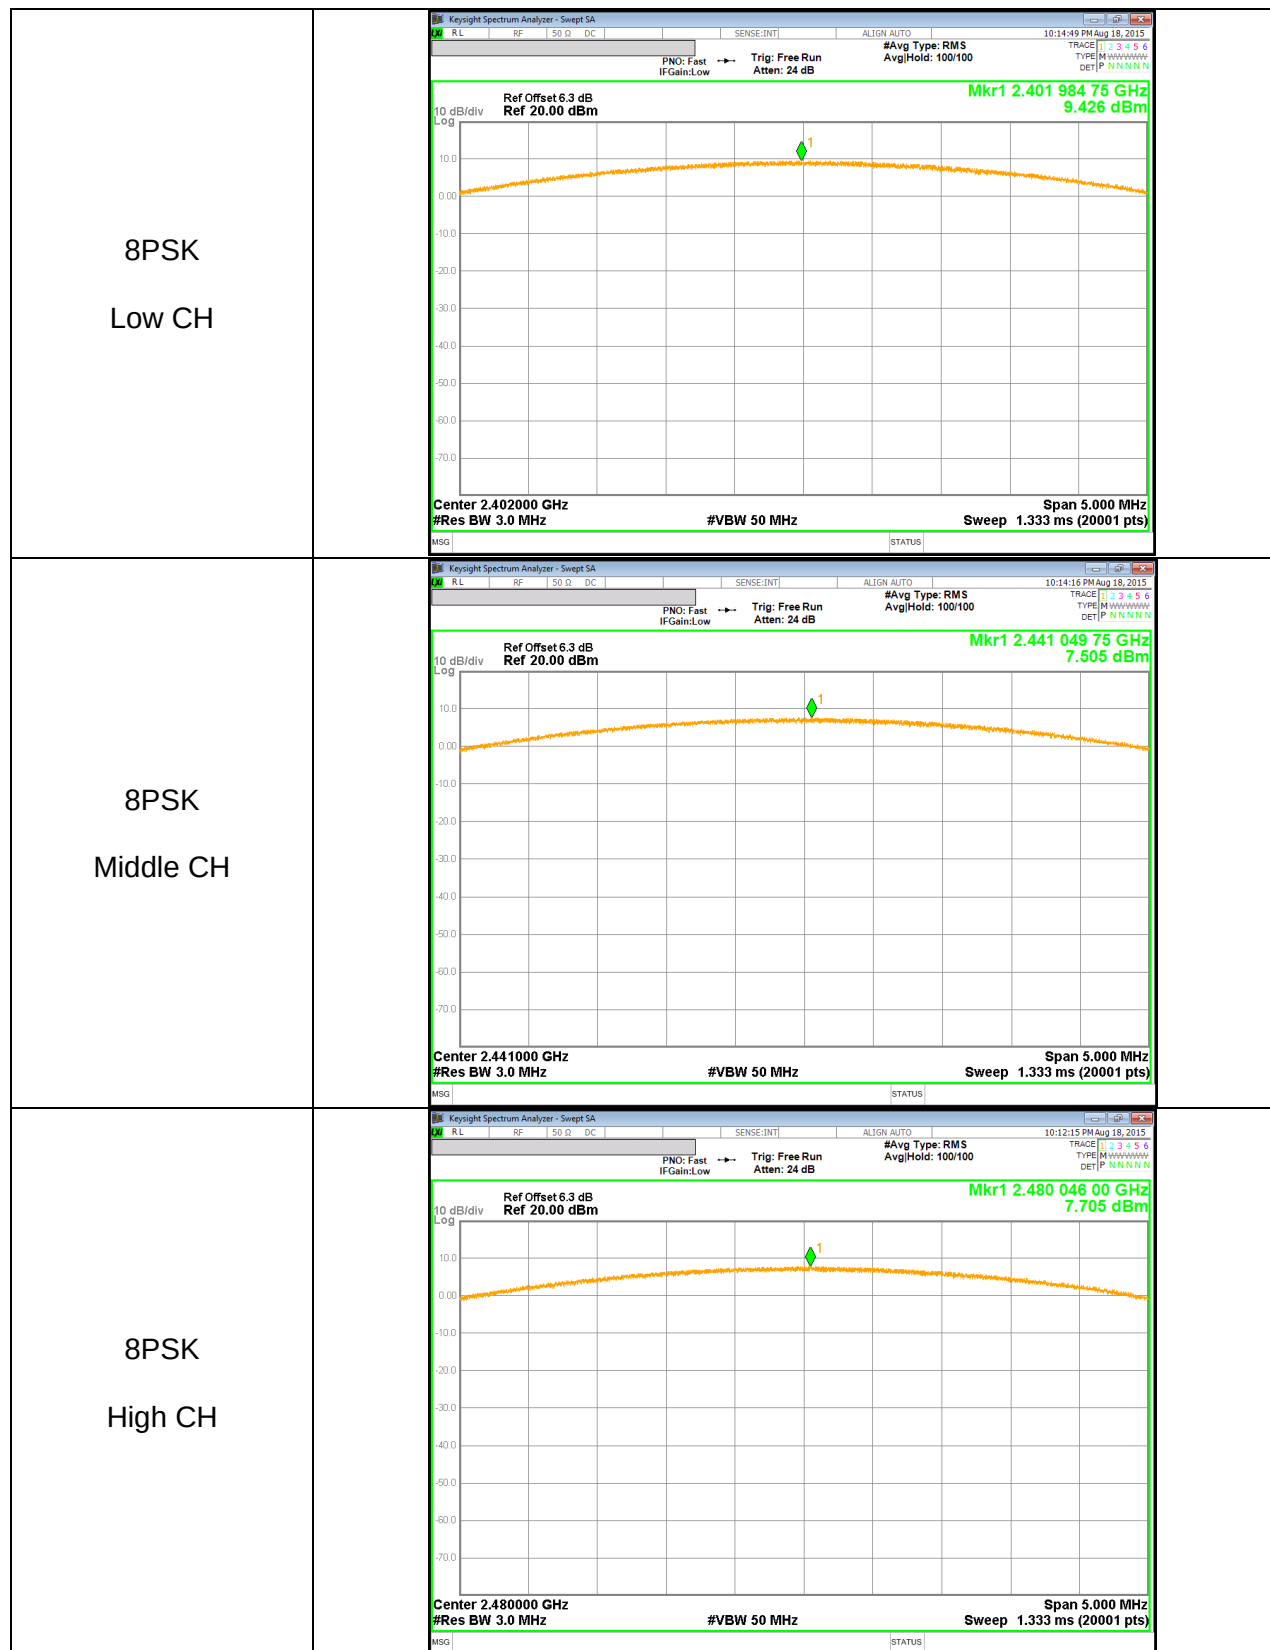

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	8.76	7.52
Middle	2441	6.86	4.86
High	2480	7.03	5.05

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	6.52	4.49
Middle	2441	4.62	2.90
High	2480	4.78	3.00

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	6.55	4.52
Middle	2441	4.66	2.92
High	2480	4.81	3.03

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


8.7.1. BASIC DATA RATE GFSK MODULATION

GFSK Mode

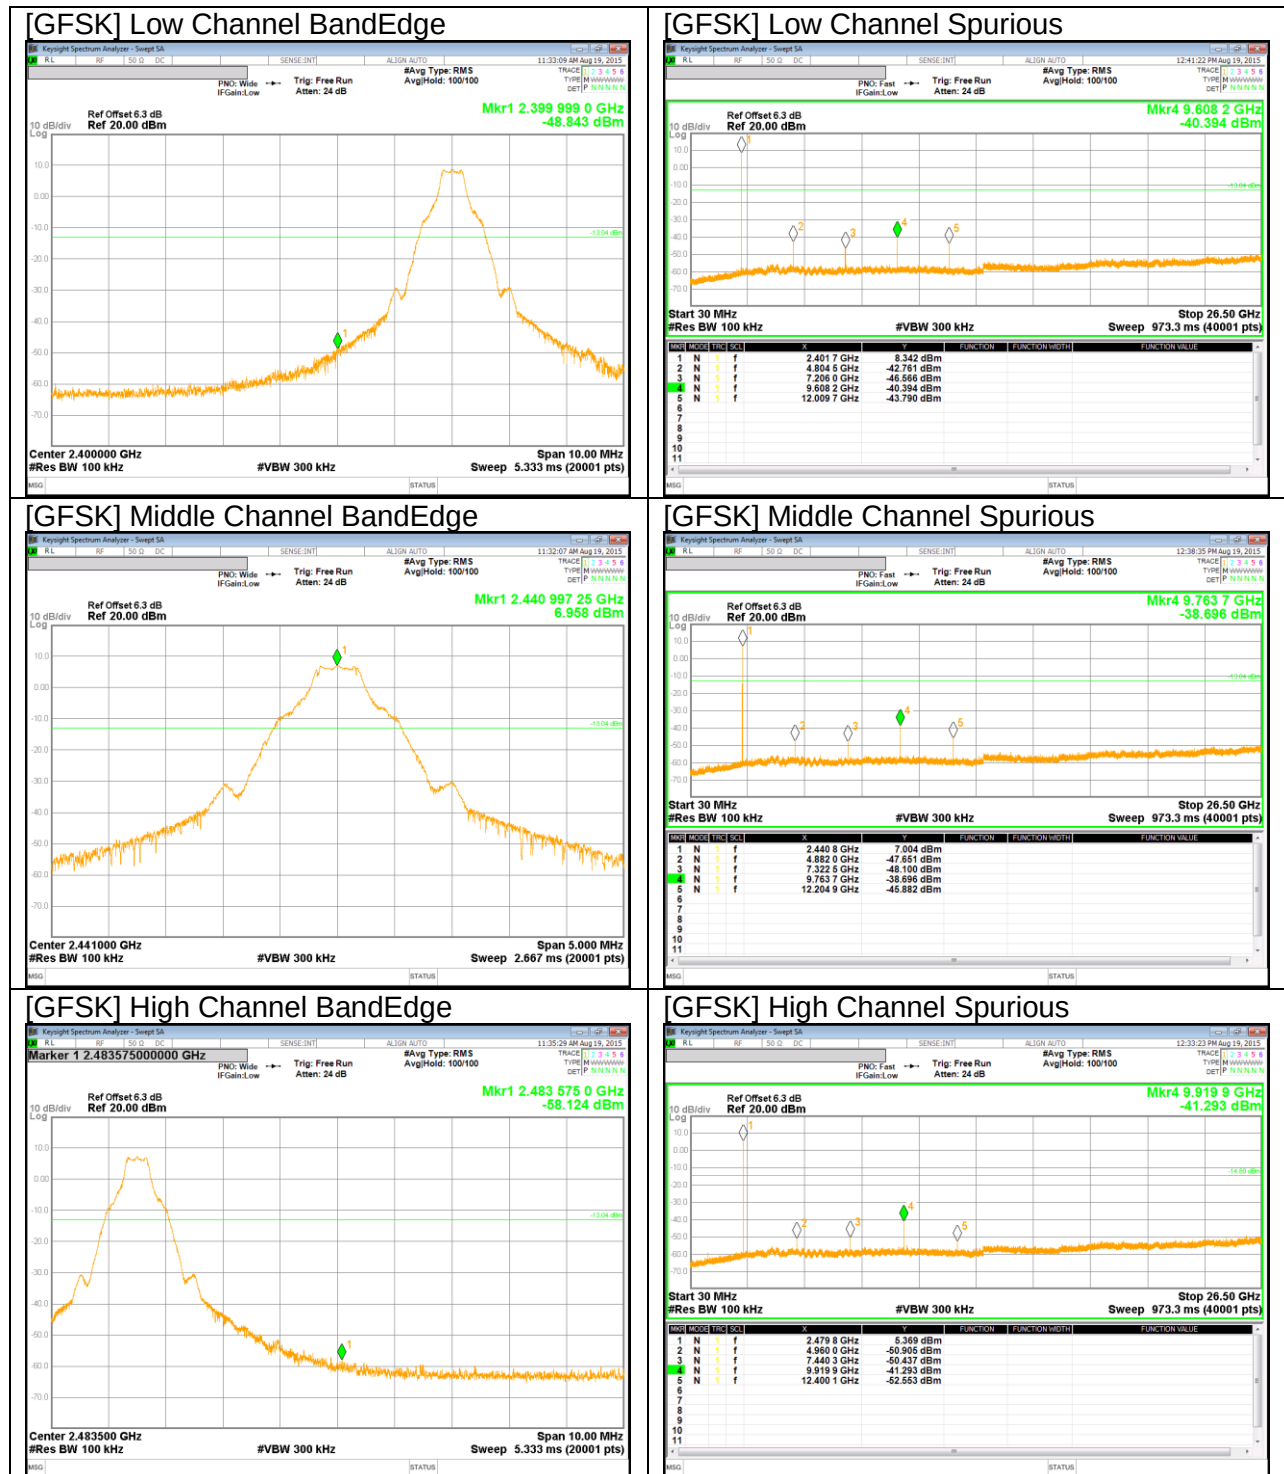


BandEdge Emission at GFSK Hopping Mode


[GFSK Hopping Mode] Low Channel BandEdge

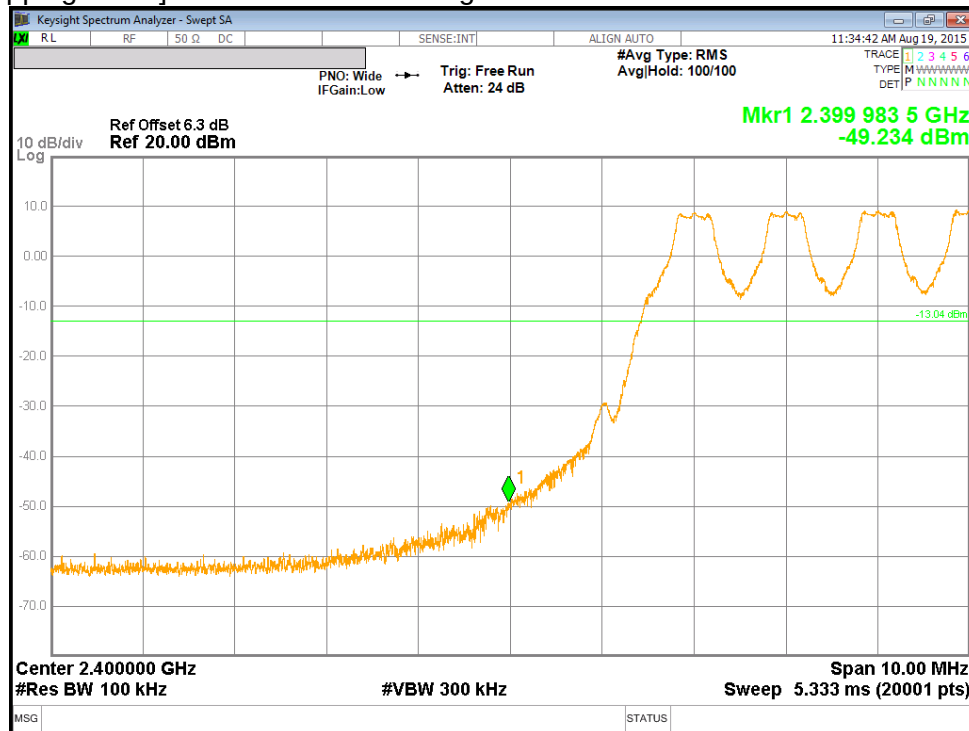

[GFSK Hopping Mode] High Channel BandEdge

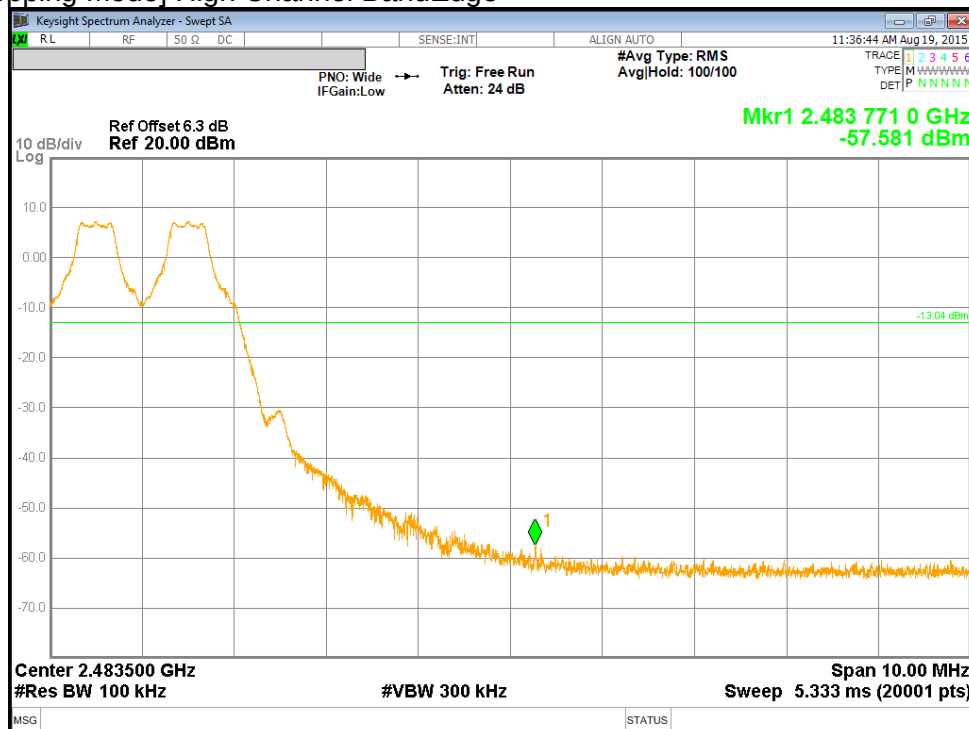


PI/4-DQPSK Mode

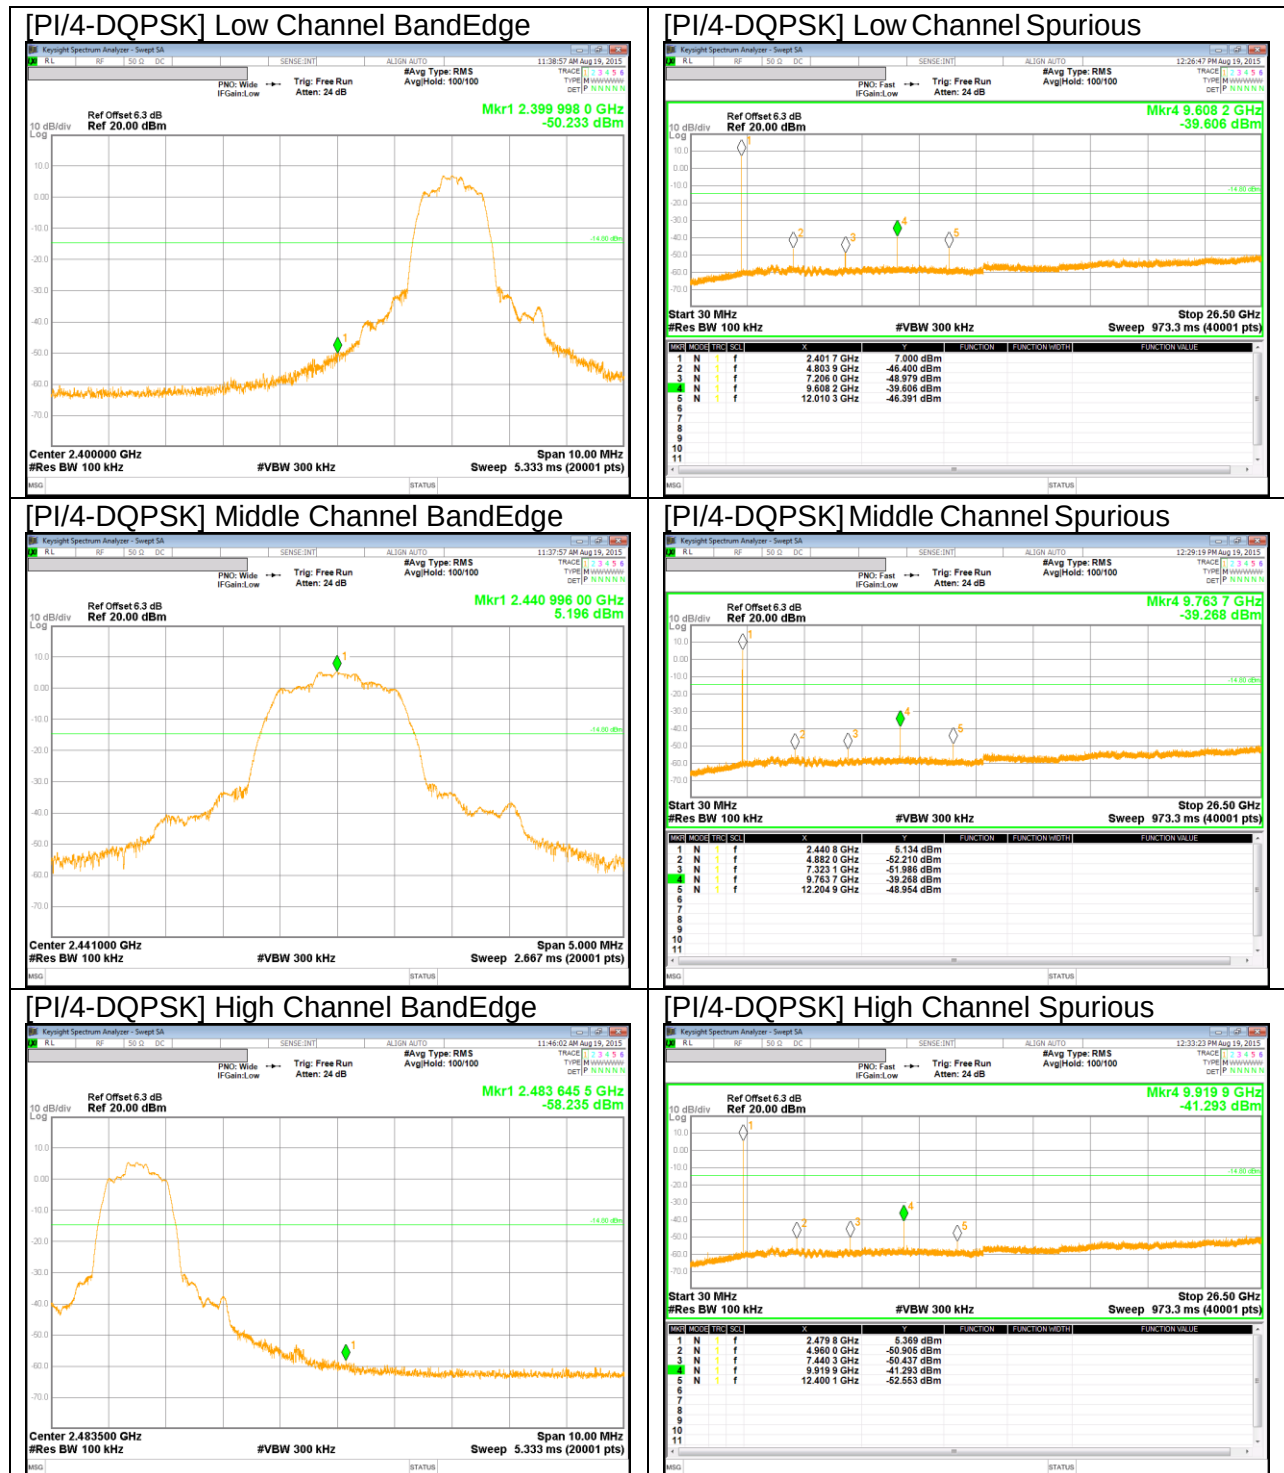


BandEdge Emission at PI/4-DQPSK Hopping Mode


[PI/4-DQPSK Hopping Mode] Low Channel BandEdge

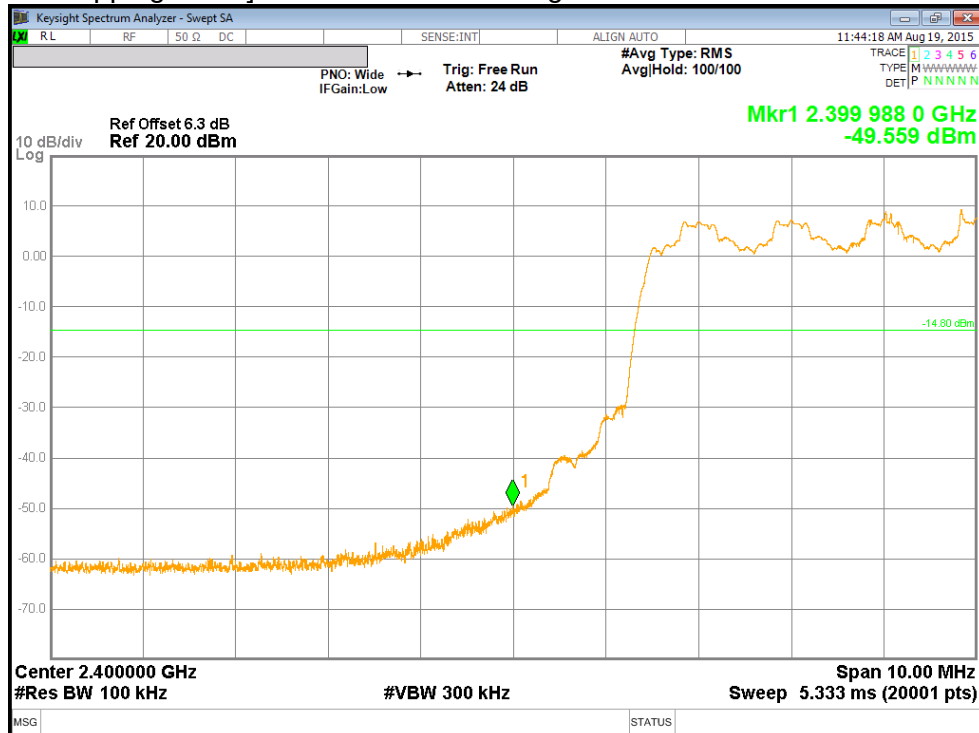

[PI/4-DQPSK Hopping Mode] High Channel BandEdge

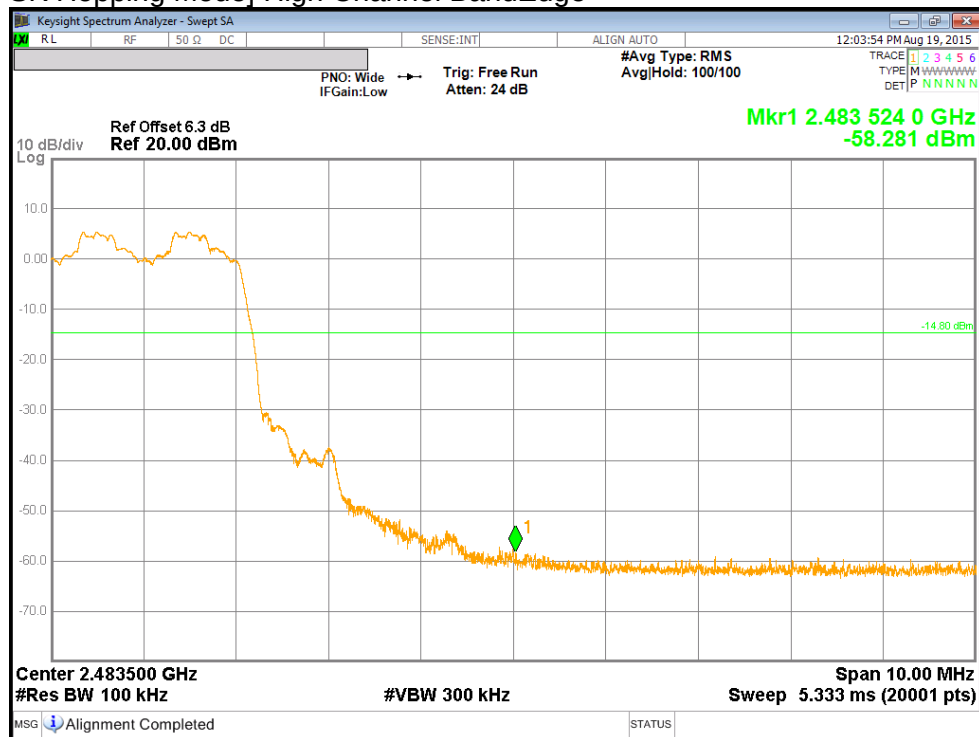


8PSK Mode

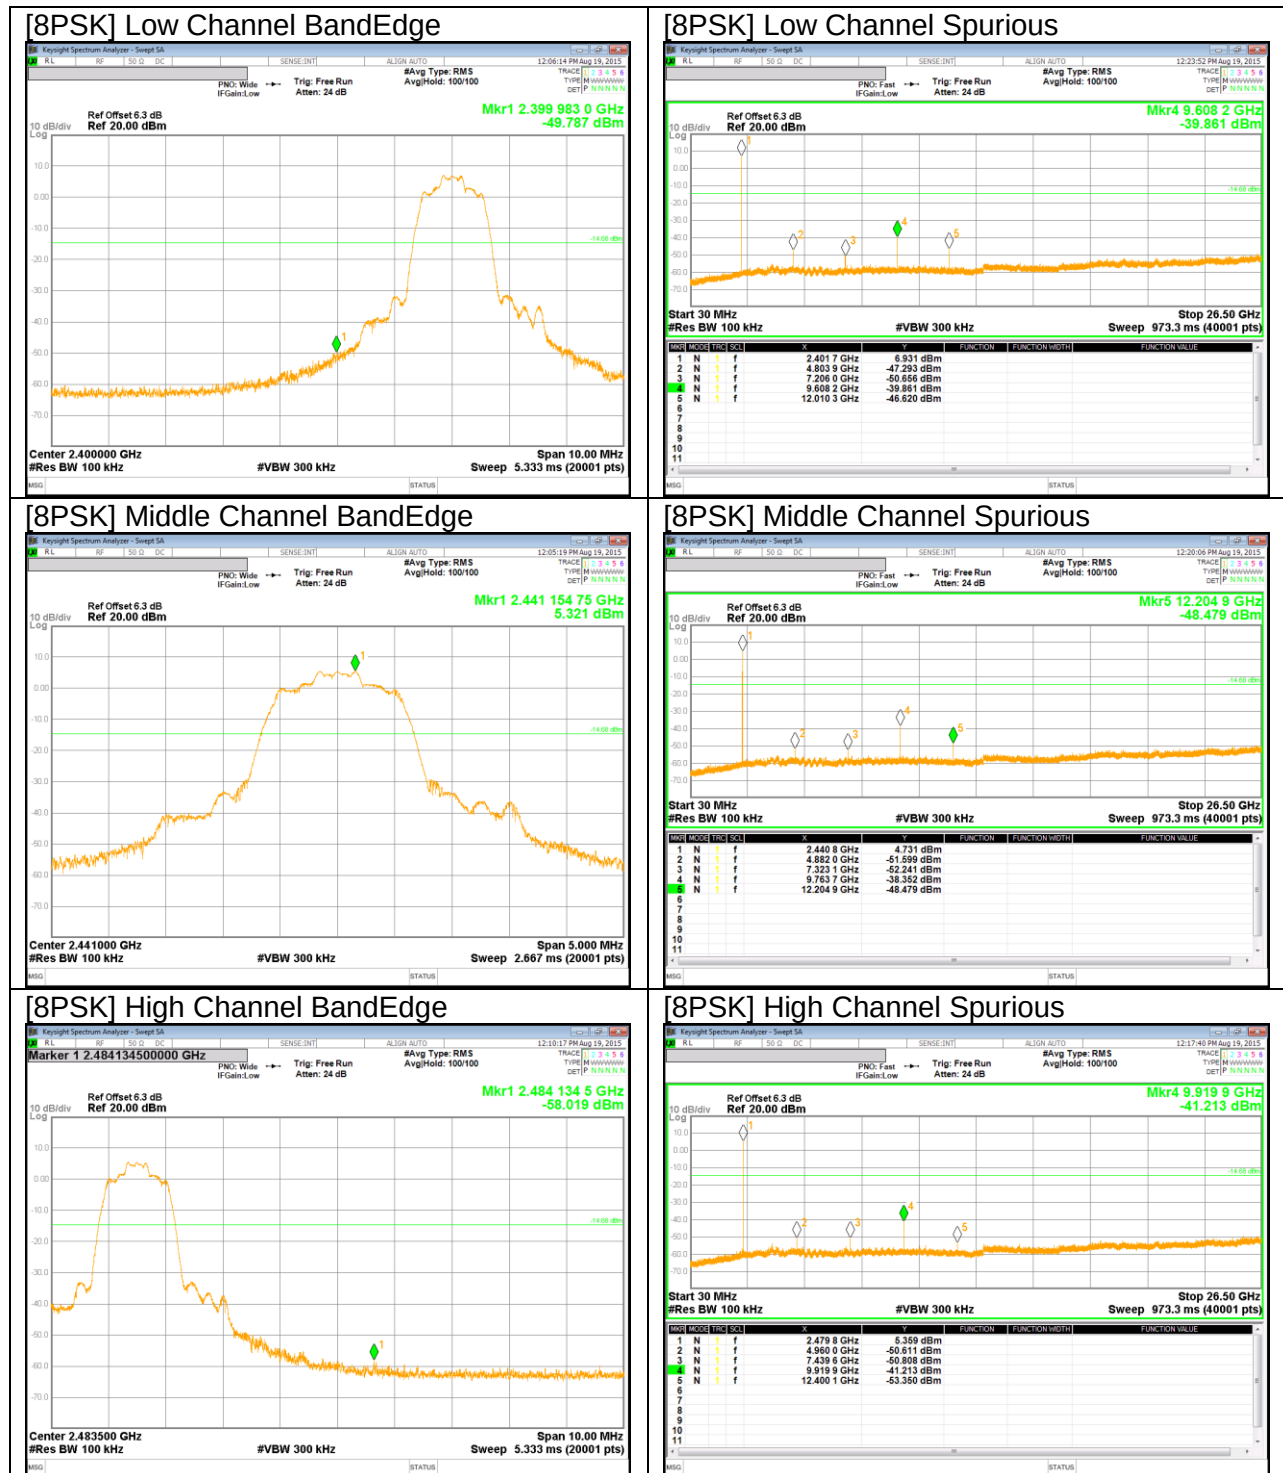


BandEdge Emission at 8PSK Hopping Mode

[8PSK Hopping Mode] Low Channel BandEdge

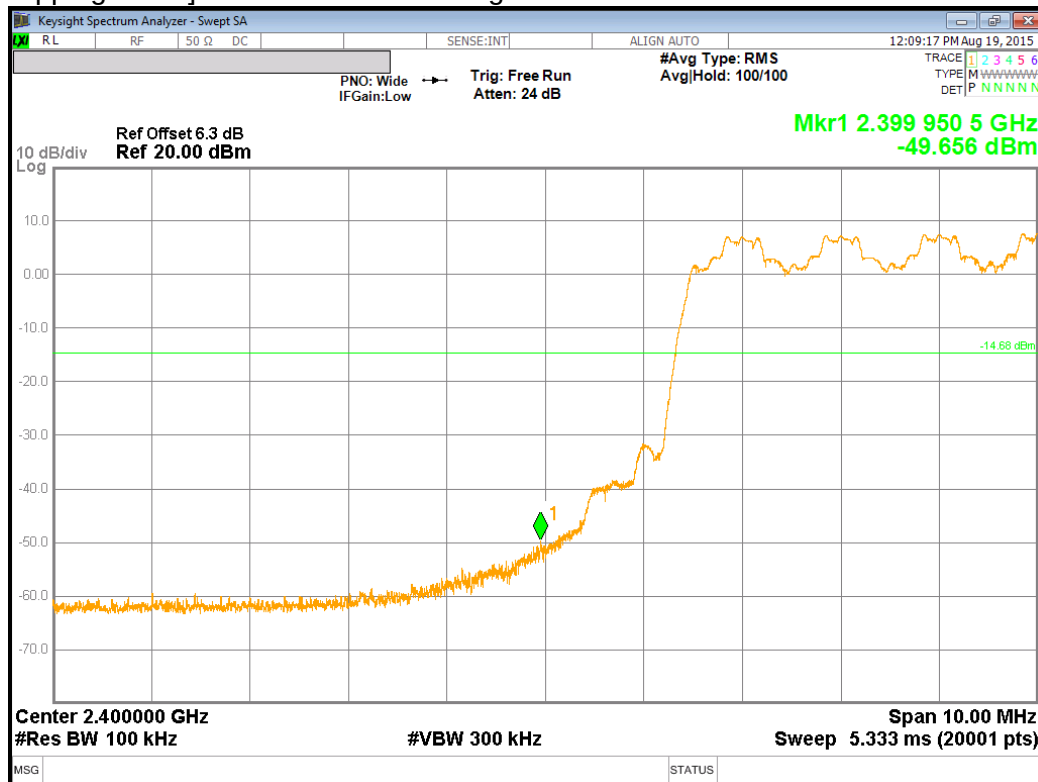

[8PSK Hopping Mode] High Channel BandEdge

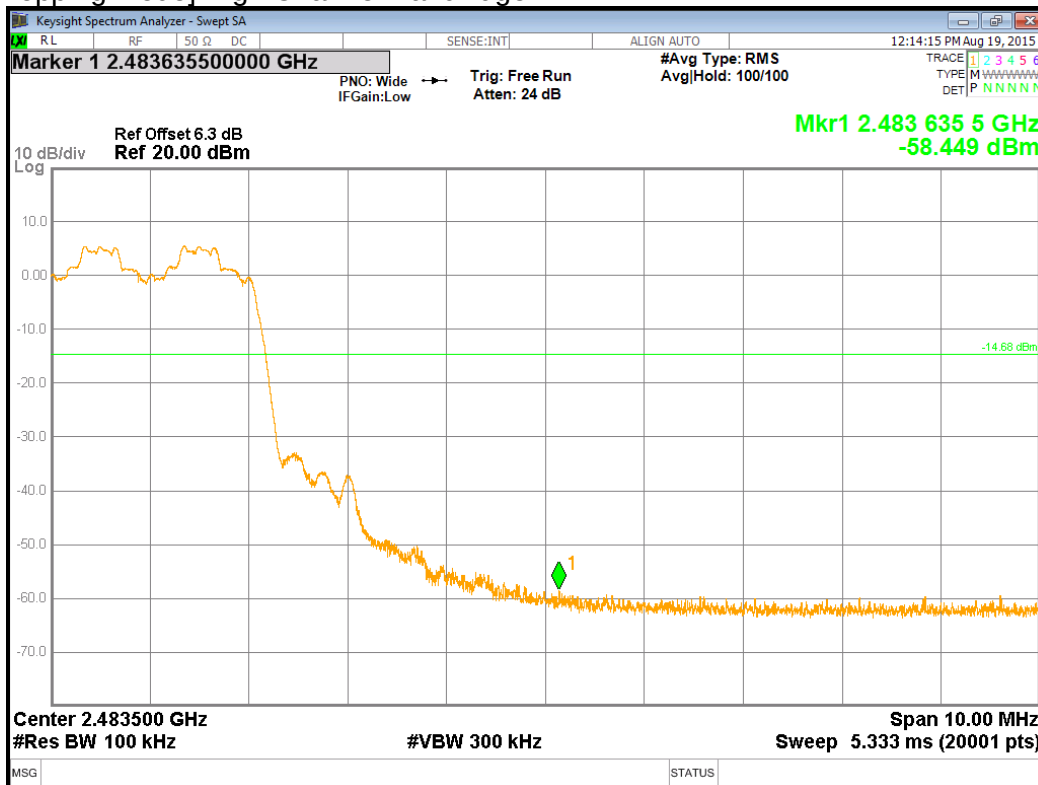

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$$GFSK = 1/T = 1 / 0.0029S = 350Hz.$$

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

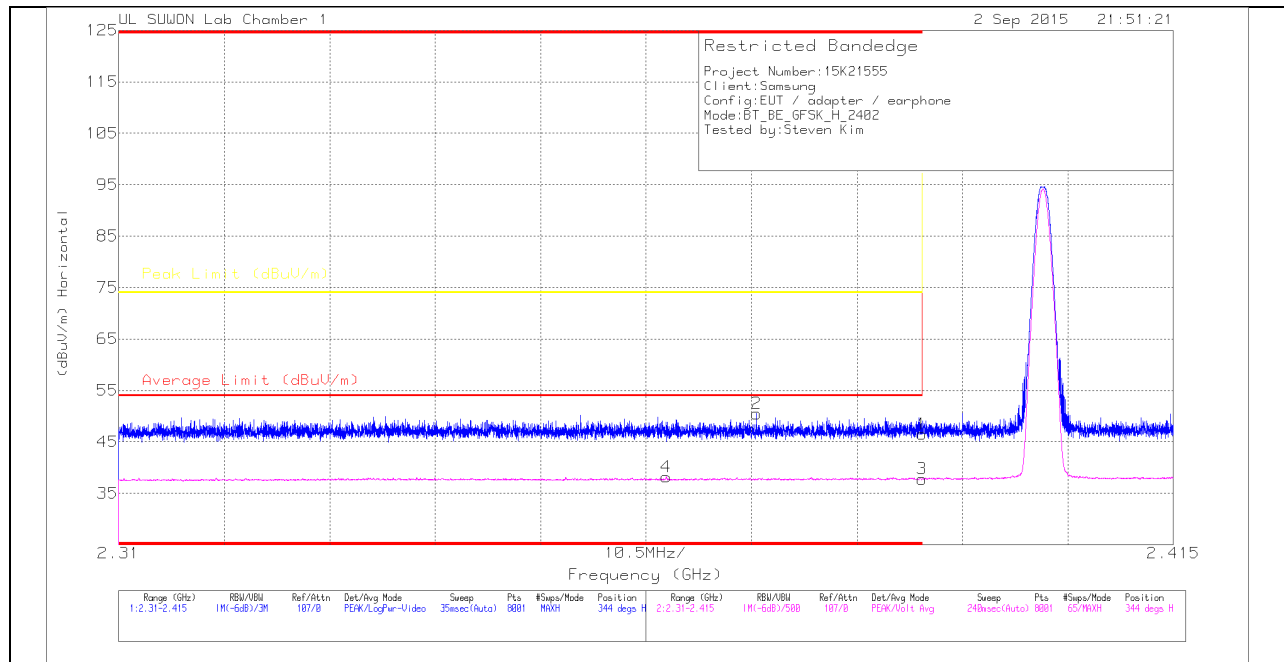

HORIZONTAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.47	Pk		-22.8	46.47	-	-	74	-27.53	344	102	H
2	* 2.374	41.49	Pk		-22.8	50.49	-	-	74	-23.51	344	102	H
3	* 2.39	28.78	V1TV		-22.8	37.78	54	-16.22	-	-	344	102	H
4	* 2.365	29.17	V1TV		-22.8	38.17	54	-15.83	-	-	344	102	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

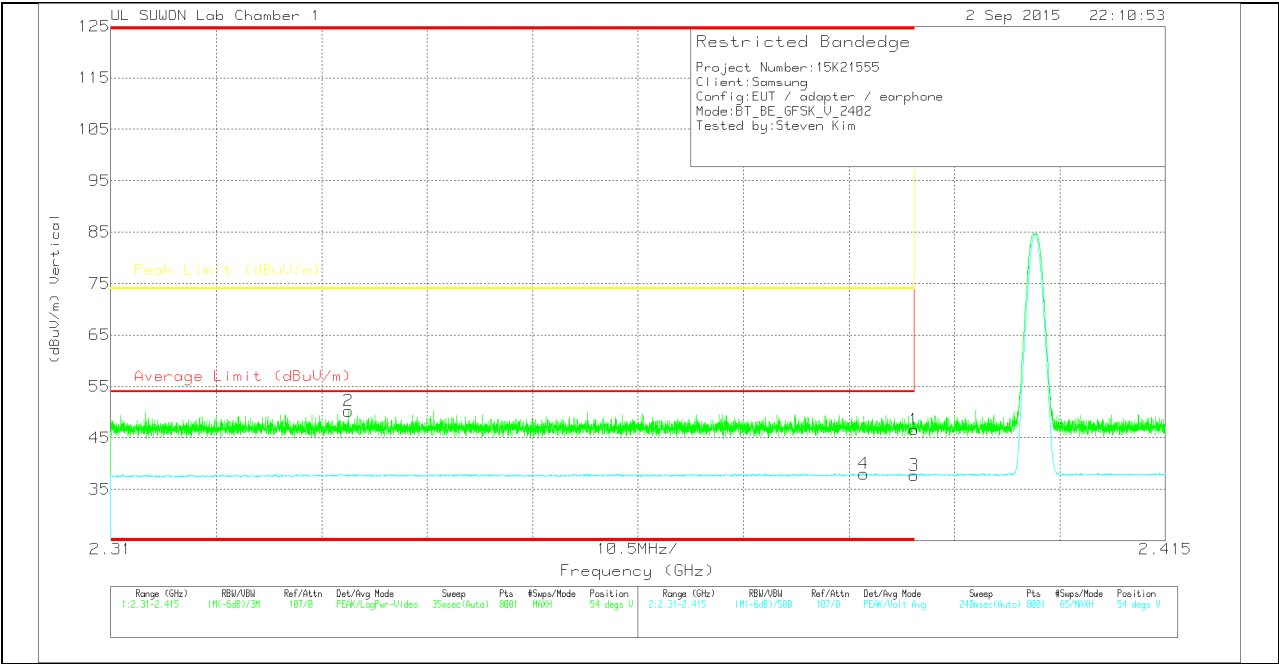

VERTICAL DATA

Trace Markers


1	* 2.39	37.59	Pk	31.8	-22.8	46.59	-	-	74	-27.41	54	317	V
2	* 2.334	41.44	Pk	31.7	-22.9	50.24	-	-	74	-23.76	54	317	V
3	* 2.39	28.75	V1TV	31.8	-22.8	37.75	54	-16.25	-	-	54	317	V
4	* 2.385	29.02	V1TV	31.8	-22.8	38.02	54	-15.98	-	-	54	317	V
1	* 2.39	37.59	Pk	31.8	-22.8	46.59	-	-	74	-27.41	54	317	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

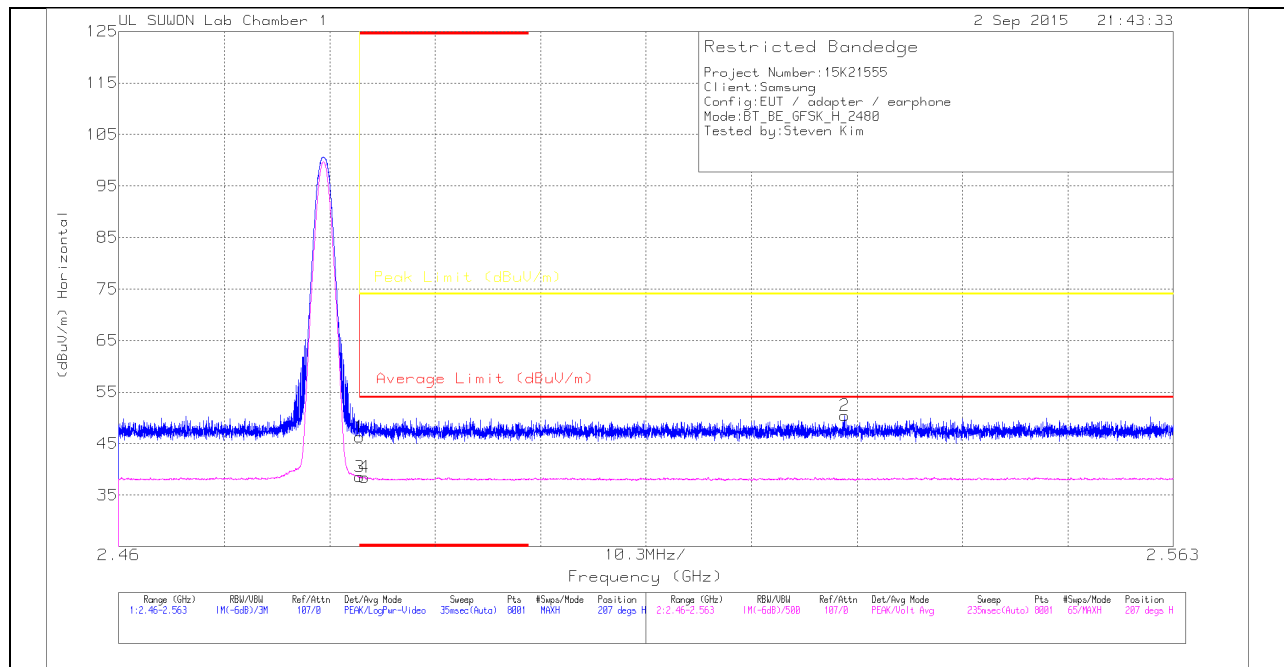

HORIZONTAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.83	Pk	32	-22.6	46.23	-	-	74	-27.77	207	290	H
2	2.531	41.04	Pk	32	-22.6	50.44	-	-	74	-23.56	207	290	H
3	* 2.484	29.15	V1TV	32	-22.6	38.55	54	-15.45	-	-	207	290	H
4	* 2.484	29.08	V1TV	32	-22.6	38.48	54	-15.52	-	-	207	290	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

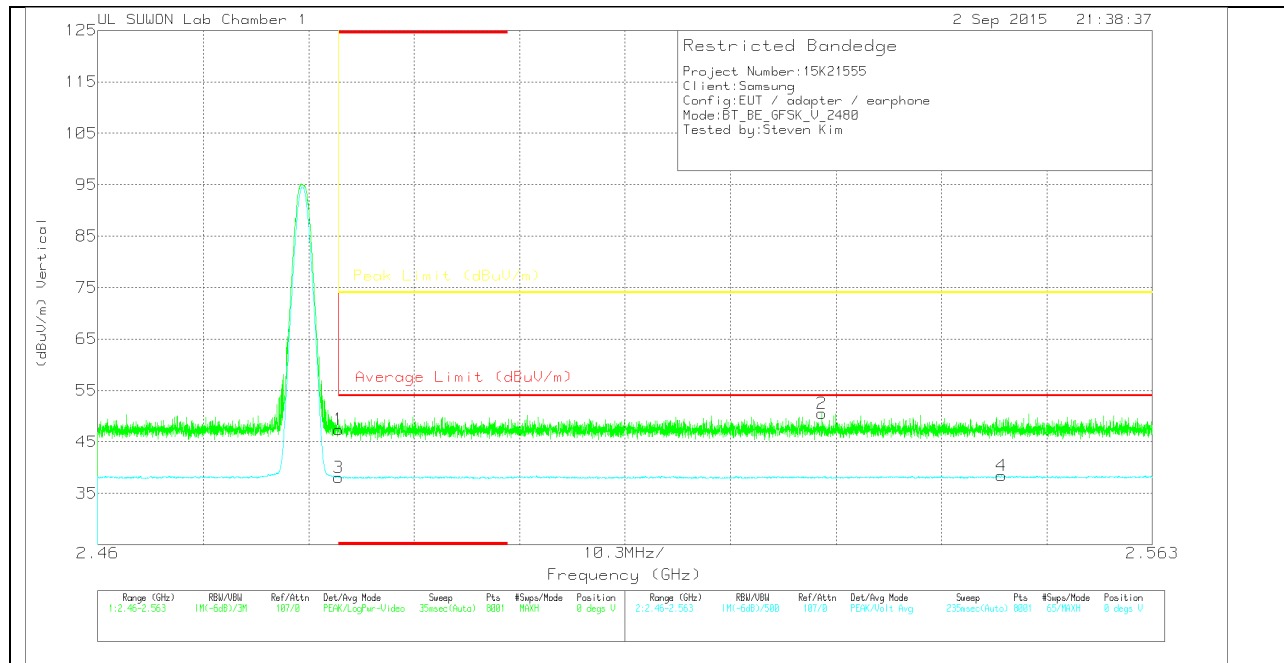

VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38	Pk	32	-22.6	47.4	-	-	74	-26.6	0	363	V
2	2.531	41.12	Pk	32	-22.6	50.52	-	-	74	-23.48	0	363	V
3	* 2.484	28.69	V1TV	32	-22.6	38.09	54	-15.91	-	-	0	363	V
4	2.548	29.06	V1TV	32	-22.6	38.46	54	-15.54	-	-	0	363	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

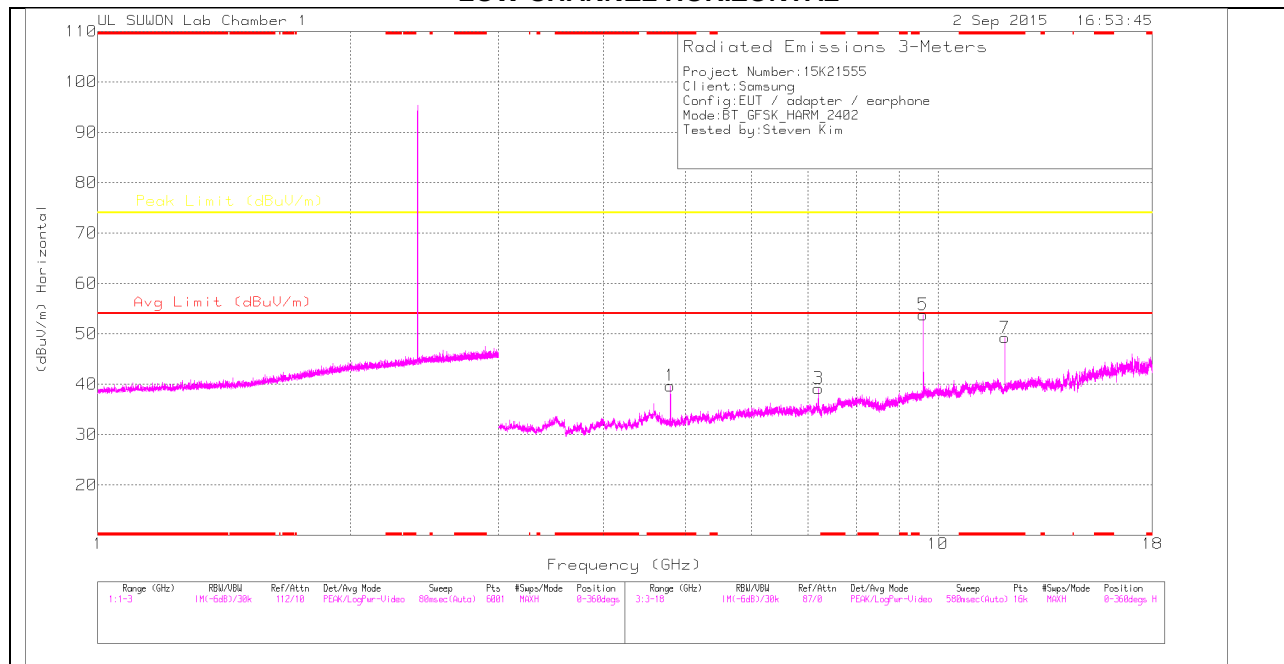

LOW CHANNEL VERTICAL

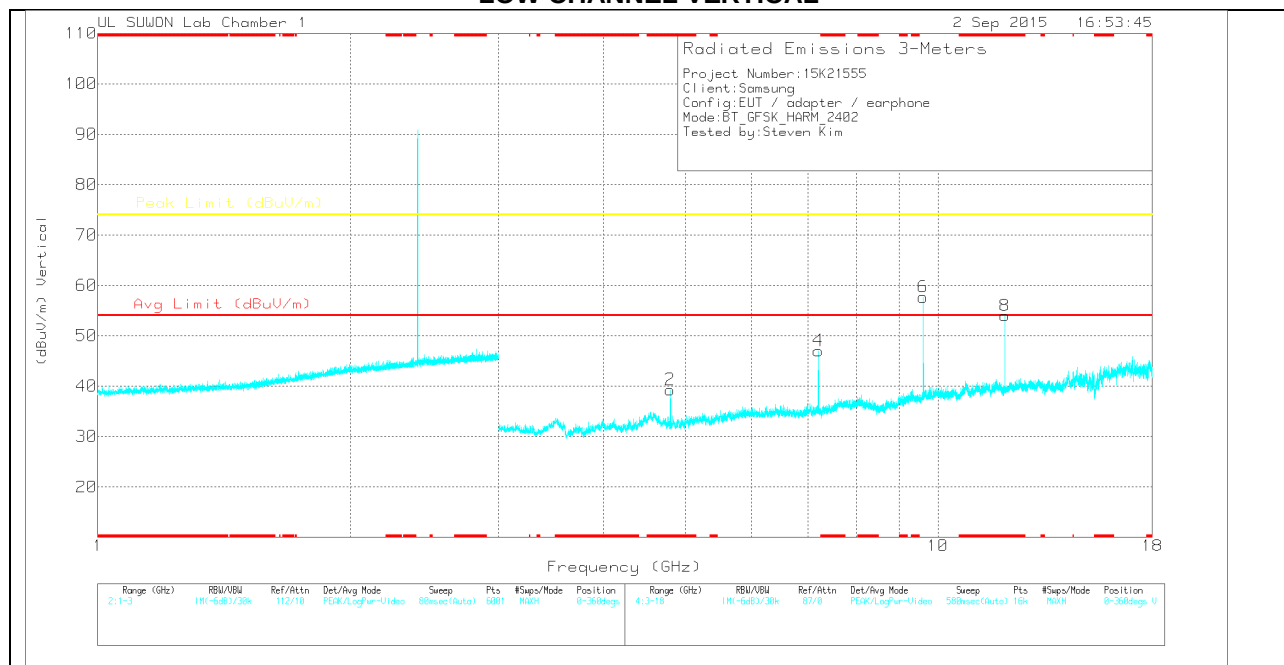

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 724)_15061 9	Path_3	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	35.48	PK	34	-29.8	39.68	-	-	74	-34.32	0-360	100	H
3	7.205	28.87	PK	35.7	-25.4	39.17	-	-	74	-34.83	0-360	200	H
5	9.608	37.79	PK	37	-21	53.79	-	-	74	-20.21	0-360	200	H
7	* 12.01	31.03	PK	38.9	-20.7	49.23	-	-	74	-24.77	0-360	200	H
2	* 4.804	35.09	PK	34	-29.8	39.29	-	-	74	-34.71	0-360	100	V
4	7.206	36.74	PK	35.7	-25.4	47.04	-	-	74	-26.96	0-360	100	V
6	9.608	41.68	PK	37	-21	57.68	-	-	74	-16.32	0-360	100	V
8	* 12.011	35.81	PK	38.9	-20.7	54.01	-	-	74	-19.99	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_3_3G HP	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 12.01	39.05	PK2	38.9	-20.7	57.25	-	-	74	-16.75	306	338	H
* 12.01	34.69	VA1T	38.9	-20.7	52.89	54	-1.11	-	-	306	338	H
9.608	41.6	PK2	37	-21	57.6	-	-	74	-16.4	84	278	H
7.206	41.36	PK2	35.7	-25.4	51.66	-	-	74	-22.34	182	389	H
* 4.804	43.47	PK2	34	-29.8	47.67	-	-	74	-26.33	26	100	H
* 4.804	36.64	VA1T	34	-29.8	40.84	54	-13.16	-	-	26	100	H
9.608	46.26	PK2	37	-21	62.26	-	-	74	-11.74	109	389	V
7.206	45.31	PK2	35.7	-25.4	55.61	-	-	74	-18.39	153	272	V
* 4.804	36.81	VA1T	34	-29.8	41.01	54	-12.99	-	-	250	339	V
* 12.01	40.03	PK2	38.9	-20.7	58.23	-	-	74	-15.77	220	191	V
* 12.01	35.52	VA1T	38.9	-20.7	53.72	54	-.28	-	-	220	191	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

VA1T - FHSS: Linear Voltage Average $V_B = 1/T_{on}$ where: T_{on} is transmit duration

* For marker 8, 12.01 GHz, used the following method to do averaging:

$DCCF = 20 * \log(100ms/T_{on})$


$T_{on} = 2.88ms$

$DCCF = 30.8$


Corrected AV reading = Peak Reading – DCCF

$= 58.23 - 30.8 = 27.43 \text{ dBuV/m}$

MID CHANNEL HORIZONTAL

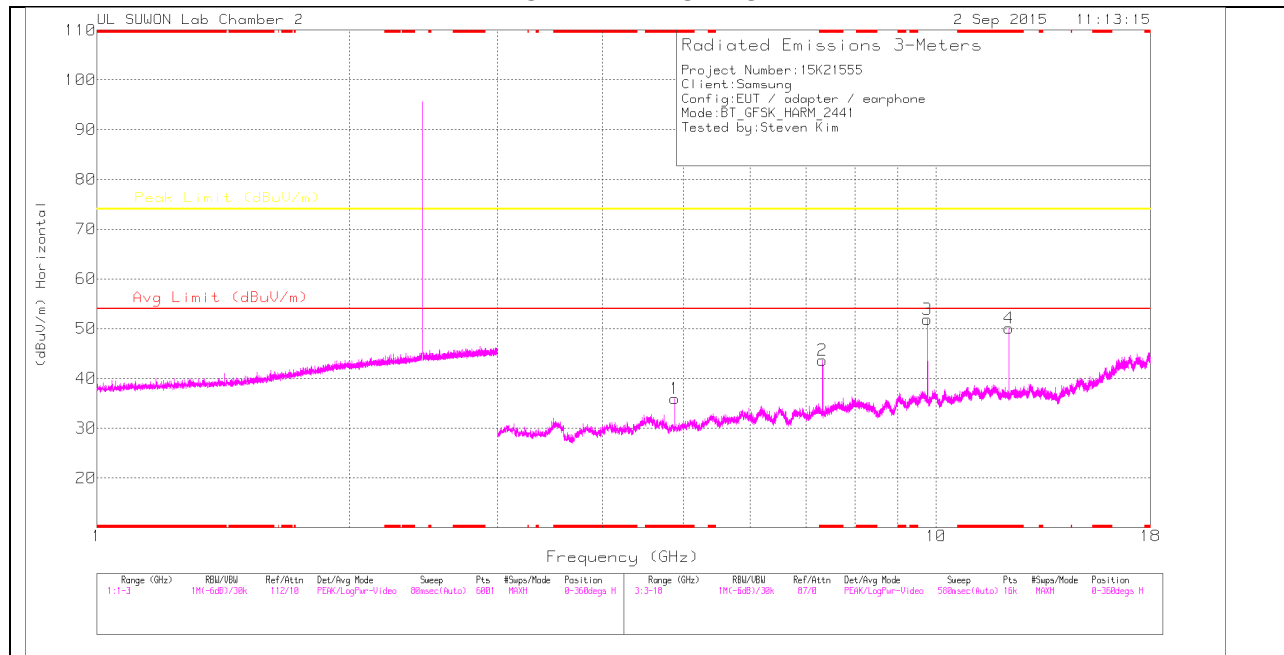

MID CHANNEL VERTICAL

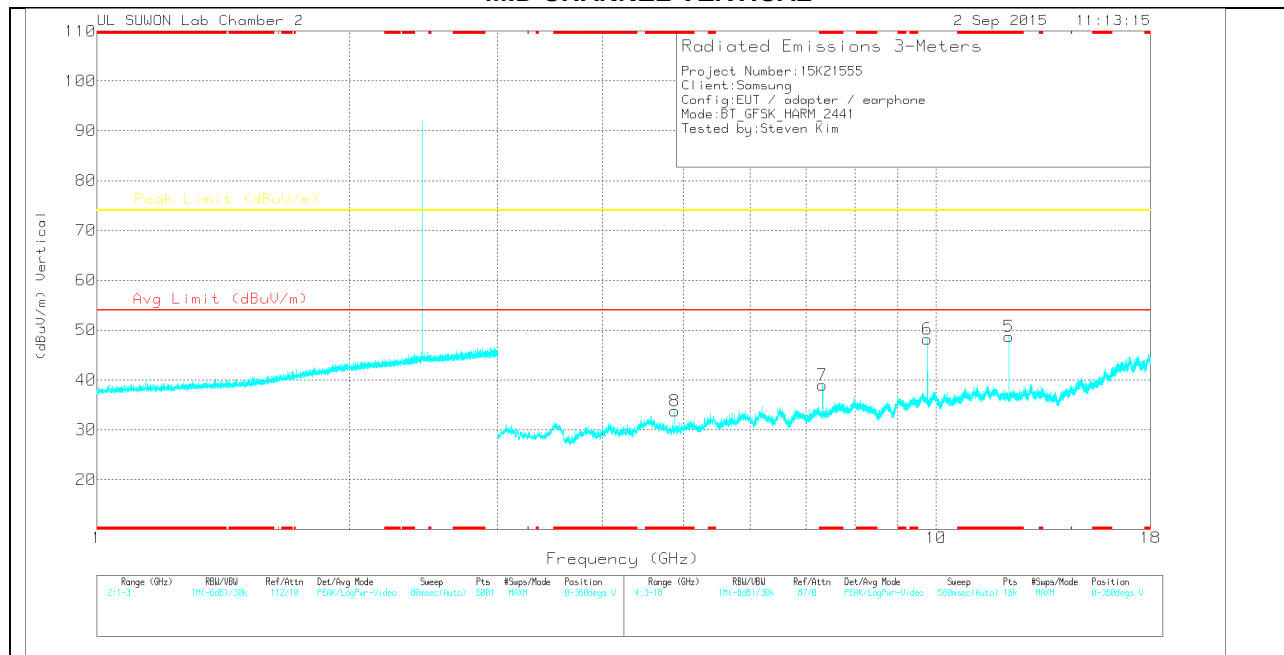

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 724)_150619	Path_3	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	31.02	PK	34	-29.1	35.92	-	-	74	-38.08	0-360	200	H
2	* 7.323	33.45	PK	35.8	-25.6	43.65	-	-	74	-30.35	0-360	200	H
3	9.764	36.65	PK	37.2	-22	51.85	-	-	74	-22.15	0-360	200	H
4	* 12.205	32.52	PK	38.9	-21.3	50.12	-	-	74	-23.88	0-360	200	H
5	* 12.206	31.12	PK	38.9	-21.3	48.72	-	-	74	-25.28	0-360	200	V
6	9.764	33	PK	37.2	-22	48.2	-	-	74	-25.8	0-360	200	V
7	* 7.323	28.81	PK	35.8	-25.6	39.01	-	-	74	-34.99	0-360	100	V
8	* 4.881	28.93	PK	34	-29.1	33.83	-	-	74	-40.17	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_3_3G HP	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.882	38.41	PK2	34	-29.1	43.31	-	-	74	-30.69	19	299	H
* 4.882	26.9	VA1T	34	-29.1	31.8	54	-22.2	-	-	19	299	H
* 4.882	39.33	PK2	34	-29.1	44.23	-	-	74	-29.77	241	332	V
* 4.882	30.23	VA1T	34	-29.1	35.13	54	-18.87	-	-	241	332	V
* 7.323	40.14	PK2	35.8	-25.6	50.34	-	-	74	-23.66	39	245	H
* 7.323	30.79	VA1T	35.8	-25.6	40.99	54	-13.01	-	-	39	245	H
* 7.323	38.95	PK2	35.8	-25.6	49.15	-	-	74	-24.85	360	324	V
* 7.323	28.95	VA1T	35.8	-25.6	39.15	54	-14.85	-	-	360	324	V
9.764	43.4	PK2	37.2	-22	58.6	-	-	74	-15.4	79	245	H
9.764	39.77	PK2	37.2	-22	54.97	-	-	74	-19.03	138	207	V
* 12.205	37.1	PK2	38.9	-21.3	54.7	-	-	74	-19.3	307	163	H
* 12.205	32.95	VA1T	38.9	-21.3	50.55	54	-3.45	-	-	307	163	H
* 12.205	33.77	PK2	38.9	-21.3	51.37	-	-	74	-22.63	279	233	V
* 12.205	27.12	VA1T	38.9	-21.3	44.72	54	-9.28	-	-	279	233	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HIGH CHANNEL HORIZONTAL

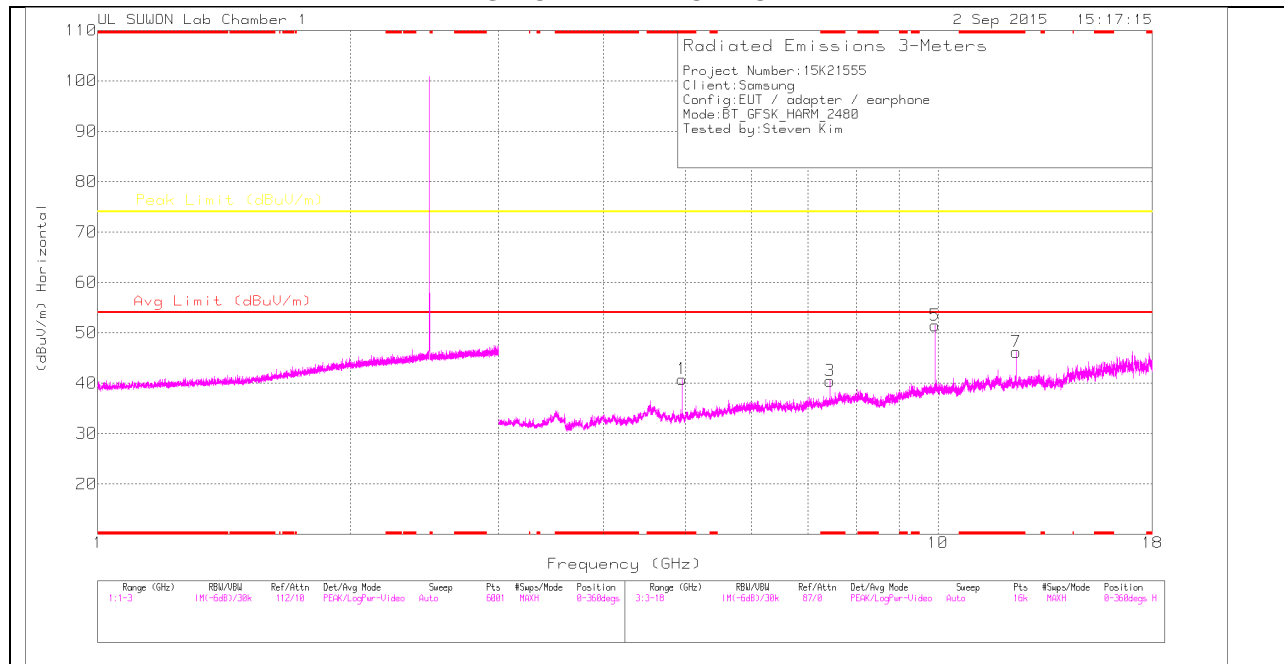

HIGH CHANNEL VERTICAL

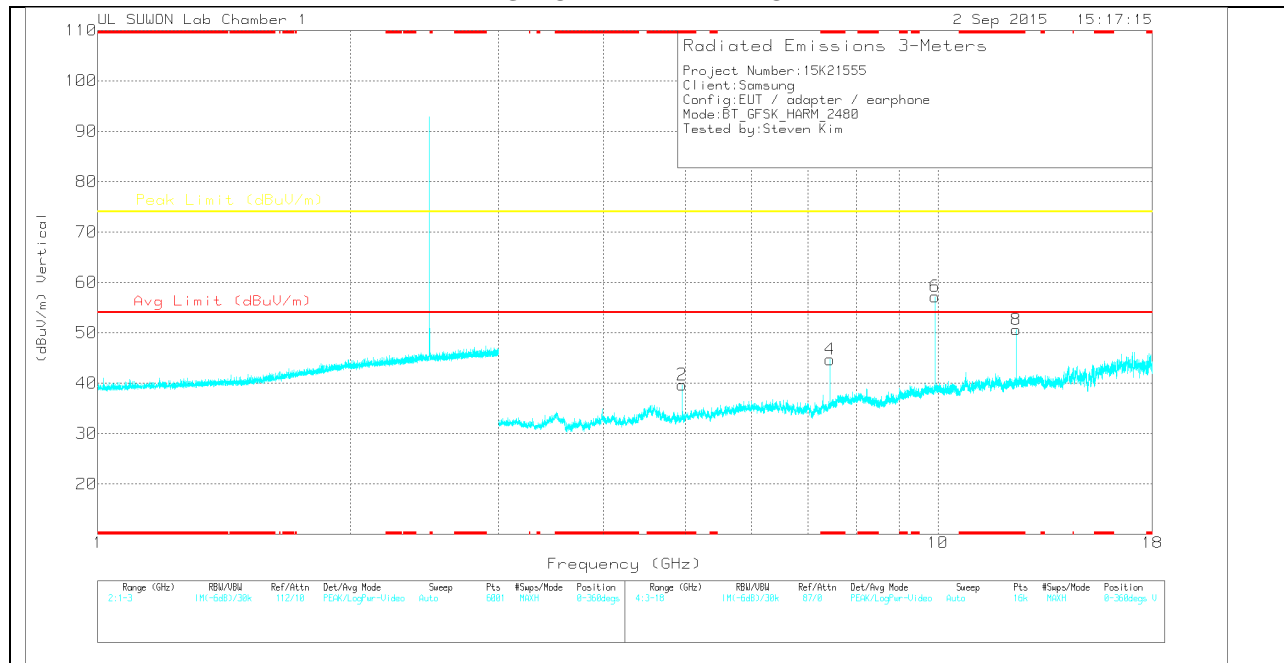

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 724)_15061 9	Path_3	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.959	35.71	PK	34	-28.9	40.81	-	-	74	-33.19	0-360	100	H
3	* 7.44	29.45	PK	35.8	-24.8	40.45	-	-	74	-33.55	0-360	200	H
5	9.92	34.45	PK	37.4	-20.4	51.45	-	-	74	-22.55	0-360	200	H
7	* 12.401	28.19	PK	38.9	-20.9	46.19	-	-	74	-27.81	0-360	200	H
2	* 4.959	34.56	PK	34	-28.9	39.66	-	-	74	-34.34	0-360	100	V
4	* 7.44	33.7	PK	35.8	-24.8	44.7	-	-	74	-29.3	0-360	100	V
6	9.92	40.18	PK	37.4	-20.4	57.18	-	-	74	-16.82	0-360	100	V
8	* 12.4	32.63	PK	38.9	-20.9	50.63	-	-	74	-23.37	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_3_3G HP	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	42.75	PK2	34	-28.9	47.85	-	-	74	-26.15	42	265	H
* 4.96	34.67	VA1T	34	-28.9	39.77	54	-14.23	-	-	42	265	H
* 7.44	38.37	PK2	35.8	-24.8	49.37	-	-	74	-24.63	113	263	H
* 7.44	26.66	VA1T	35.8	-24.8	37.66	54	-16.34	-	-	113	263	H
9.92	38.38	PK2	37.4	-20.4	55.38	-	-	74	-18.62	113	200	H
* 12.4	36.28	PK2	38.9	-20.9	54.28	-	-	74	-19.72	298	292	H
* 12.4	29.15	VA1T	38.9	-20.9	47.15	54	-6.85	-	-	298	292	H
* 4.96	42.17	PK2	34	-28.9	47.27	-	-	74	-26.73	359	289	V
* 4.96	33.39	VA1T	34	-28.9	38.49	54	-15.51	-	-	359	289	V
* 7.44	39.19	PK2	35.8	-24.8	50.19	-	-	74	-23.81	180	208	V
* 7.44	27.59	VA1T	35.8	-24.8	38.59	54	-15.41	-	-	180	208	V
9.92	42.69	PK2	37.4	-20.4	59.69	-	-	74	-14.31	113	257	V
* 12.401	32.47	PK2	38.9	-20.9	50.47	-	-	74	-23.53	232	378	V
* 12.401	17.83	VA1T	38.9	-20.9	35.83	54	-18.17	-	-	232	378	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

VA1T - FHSS: Linear Voltage Average $V_B = 1/T_{on}$ where: T_{on} is transmit duration

9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

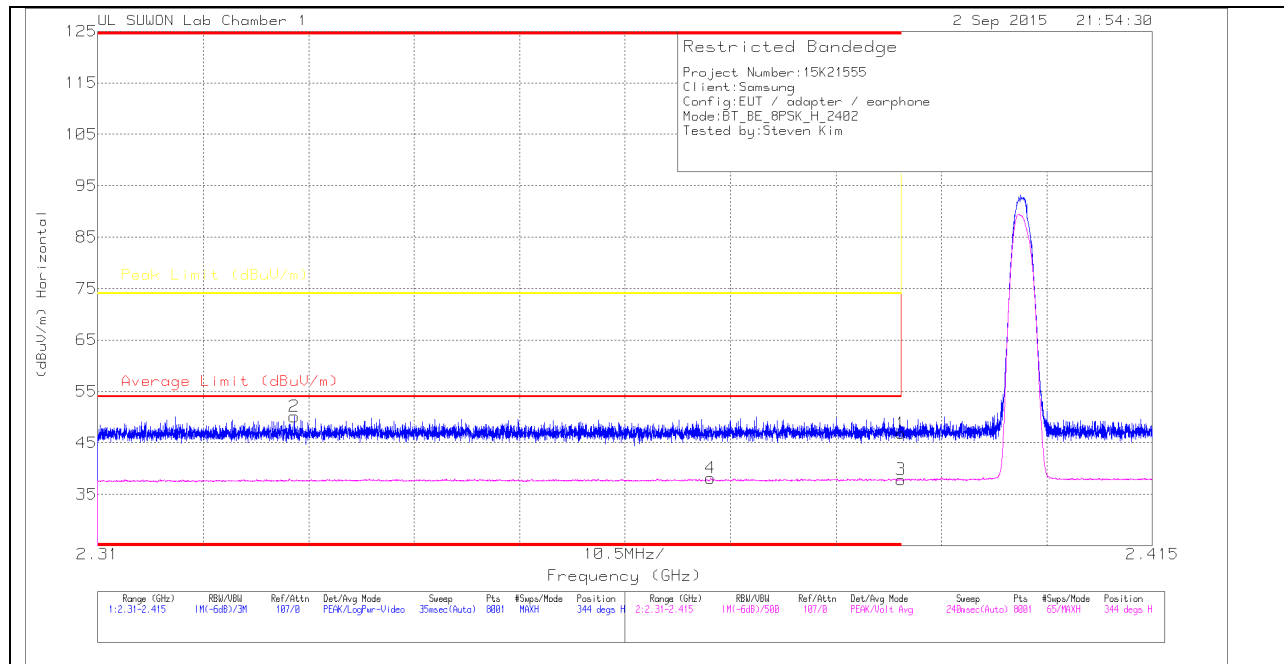

HORIZONTAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.88	Pk	31.8	-22.8	46.88	-	-	74	-27.12	344	102	H
2	* 2.33	41.32	Pk	31.7	-22.9	50.12	-	-	74	-23.88	344	102	H
3	* 2.39	28.87	V1TV	31.8	-22.8	37.87	54	-16.13	-	-	344	102	H
4	* 2.371	29.15	V1TV	31.8	-22.8	38.15	54	-15.85	-	-	344	102	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

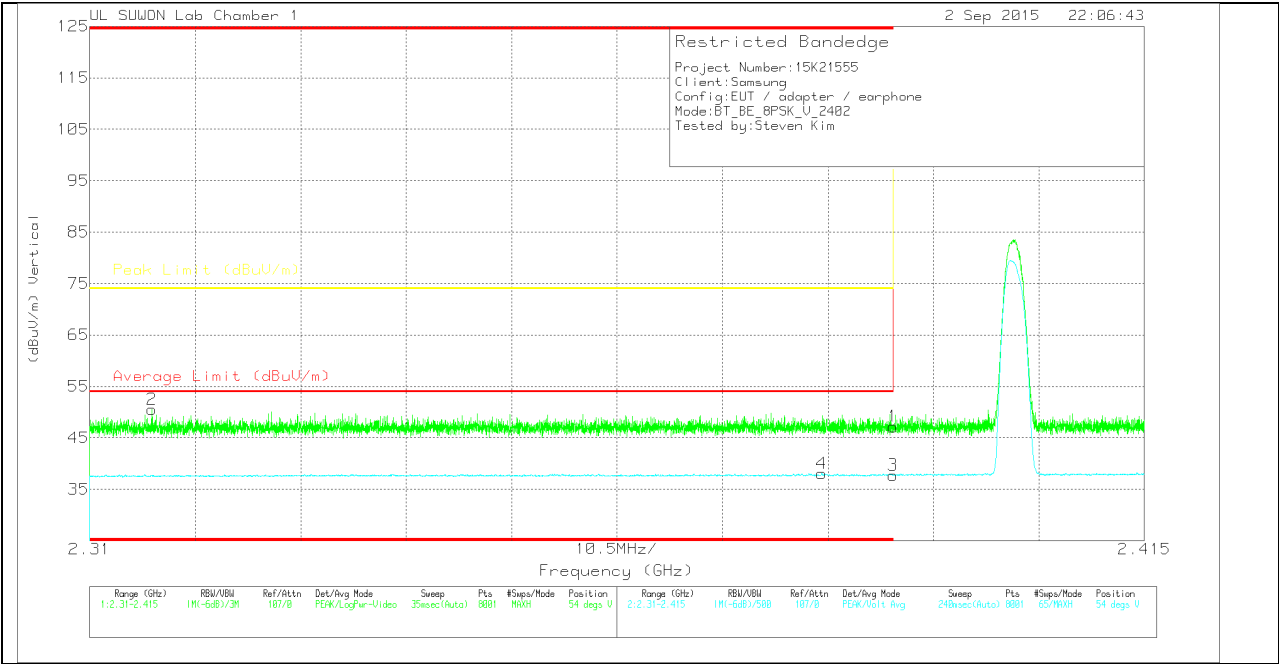

VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8724_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.18	Pk			47.18	-	-	74	-26.82	54	317	V
2	* 2.316	41.7	Pk			50.5	-	-	74	-23.5	54	317	V
3	* 2.39	28.75	V1TV			37.75	54	-16.25	-	-	54	317	V
4	* 2.383	29.04	V1TV			38.04	54	-15.96	-	-	54	317	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

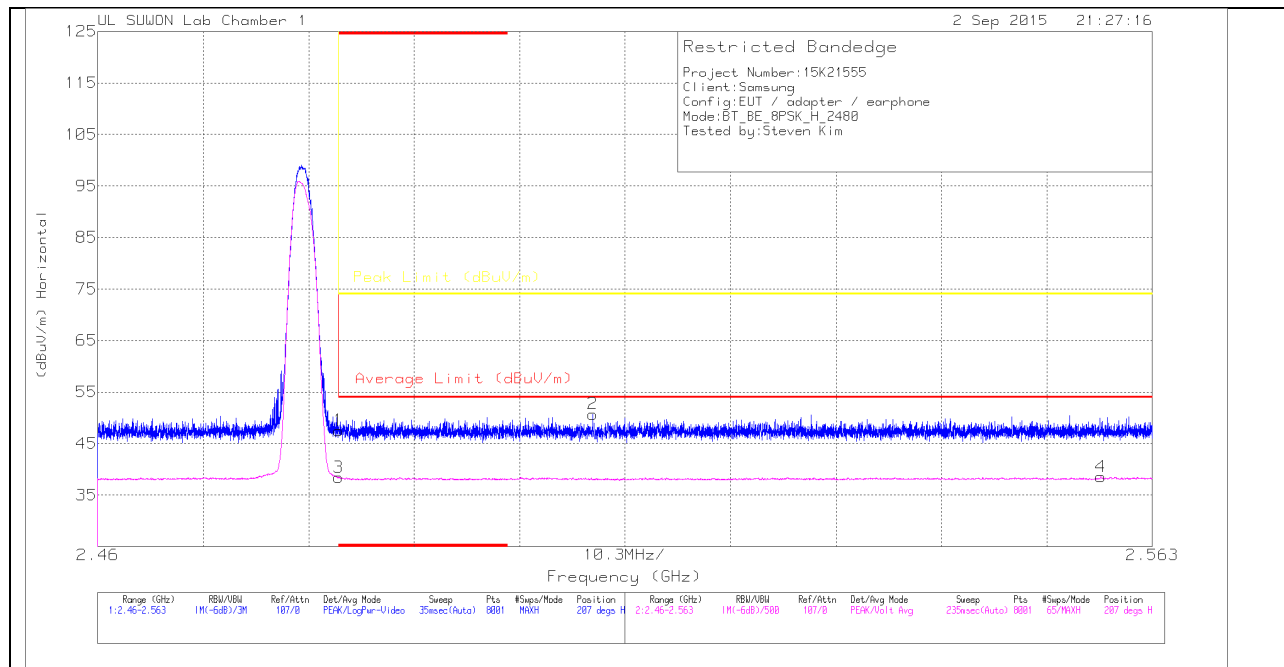

HORIZONTAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.13	Pk	32	-22.6	47.53	-	-	74	-26.47	207	291	H
2	2.508	41.32	Pk	32	-22.6	50.72	-	-	74	-23.28	207	291	H
3	* 2.484	29	V1TV	32	-22.6	38.4	54	-15.6	-	-	207	291	H
4	2.558	29.13	V1TV	32	-22.6	38.53	54	-15.47	-	-	207	291	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

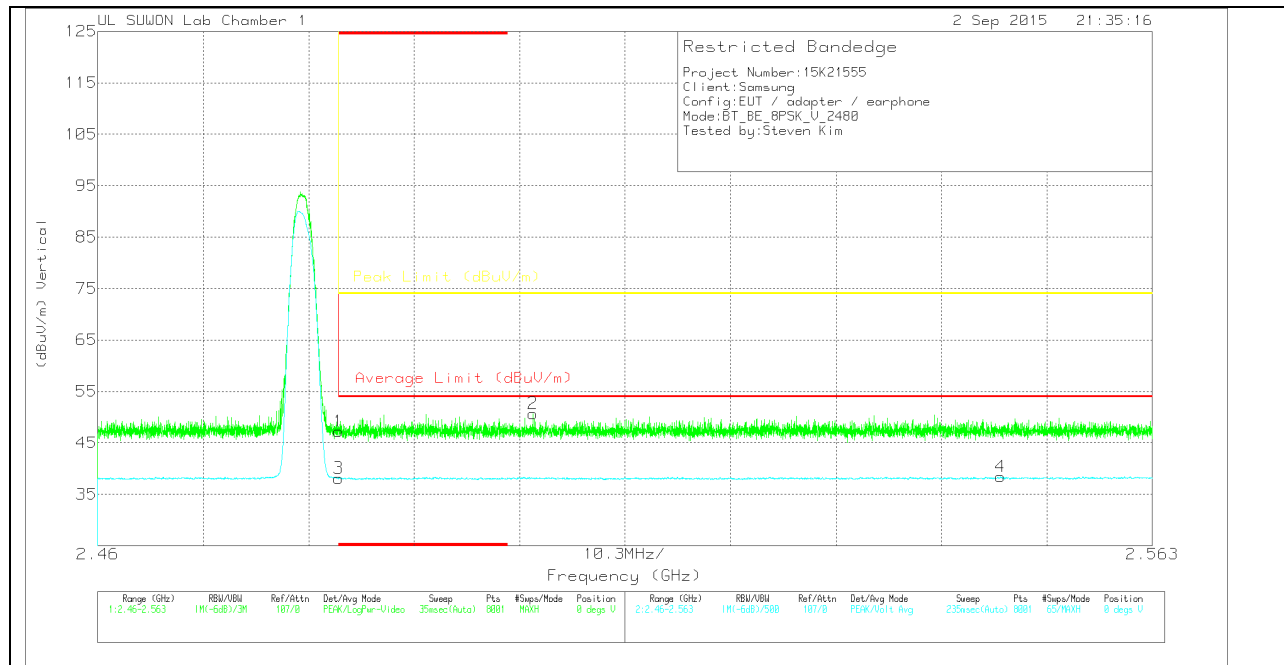

VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_2_10 dB	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.8	Pk	32	-22.6	47.2	-	-	74	-26.8	0	363	V
2	2.502	41.3	Pk	32	-22.6	50.7	-	-	74	-23.3	0	363	V
3	* 2.484	28.72	V1TV	32	-22.6	38.12	54	-15.88	-	-	0	363	V
4	2.548	29	V1TV	32	-22.6	38.4	54	-15.6	-	-	0	363	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

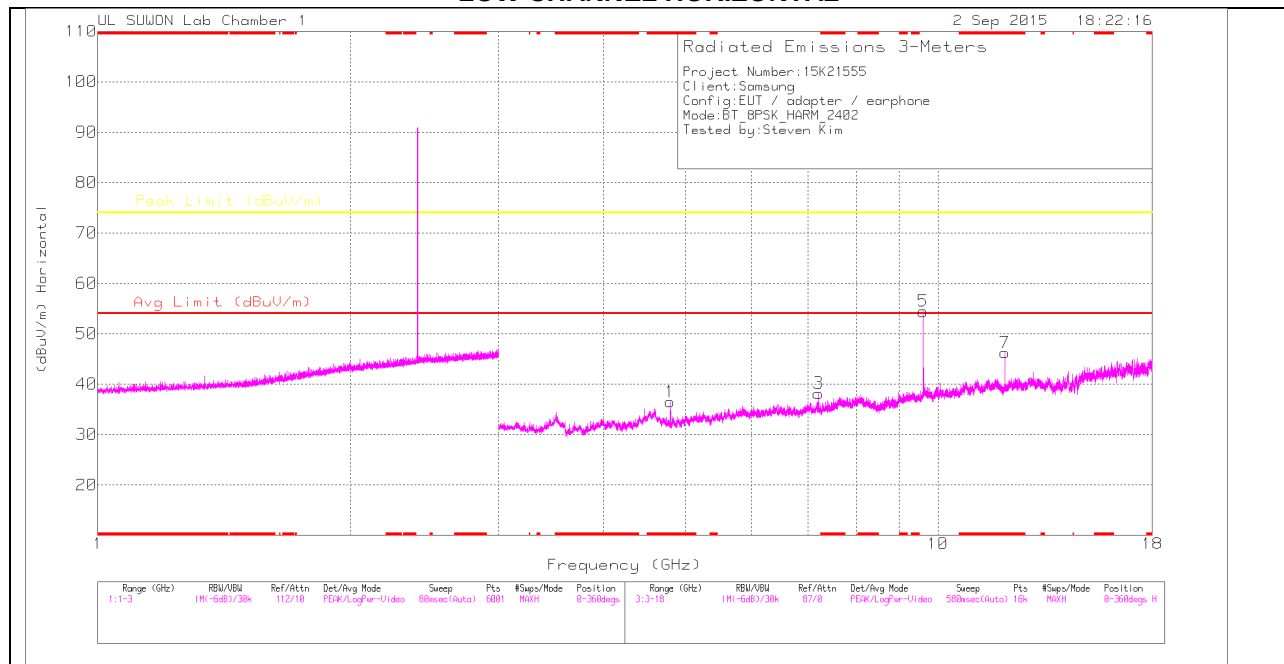

LOW CHANNEL VERTICAL

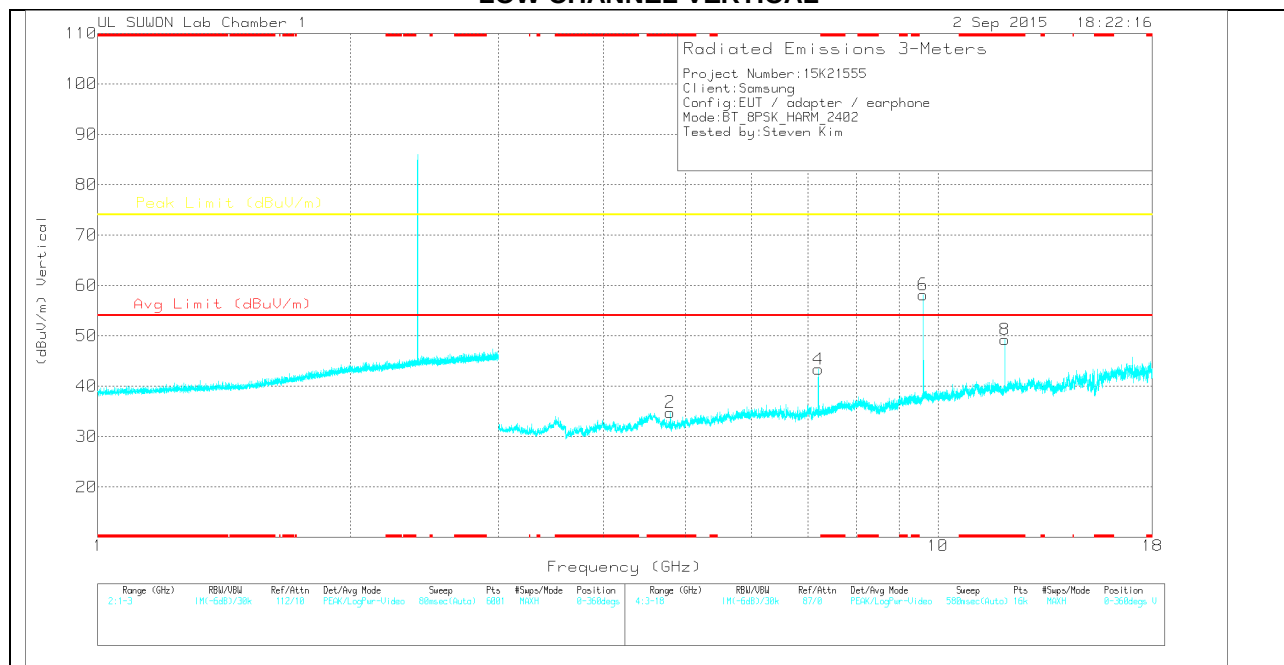

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 724)_15061 9	Path_3	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	32.28	PK	34	-29.8	36.48	-	-	74	-37.52	0-360	100	H
3	7.206	27.88	PK	35.7	-25.4	38.18	-	-	74	-35.82	0-360	200	H
5	9.608	38.44	PK	37	-21	54.44	-	-	74	-19.56	0-360	200	H
7	* 12.01	28.01	PK	38.9	-20.7	46.21	-	-	74	-27.79	0-360	200	H
2	* 4.804	30.59	PK	34	-29.8	34.79	-	-	74	-39.21	0-360	100	V
4	7.205	33.06	PK	35.7	-25.4	43.36	-	-	74	-30.64	0-360	100	V
6	9.608	42.14	PK	37	-21	58.14	-	-	74	-15.86	0-360	200	V
8	* 12.01	31.02	PK	38.9	-20.7	49.22	-	-	74	-24.78	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_3_3G HP	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	41.76	PK2	34	-29.8	45.96	-	-	74	-28.04	360	100	H
* 4.804	29.56	VA1T	34	-29.8	33.76	54	-20.24	-	-	360	100	H
7.206	39.95	PK2	35.7	-25.4	50.25	-	-	74	-23.75	133	389	H
9.608	43.89	PK2	37	-21	59.89	-	-	74	-14.11	78	277	H
* 12.01	37.06	PK2	38.9	-20.7	55.26	-	-	74	-18.74	279	271	H
* 12.01	28.14	VA1T	38.9	-20.7	46.34	54	-7.66	-	-	279	271	H
* 4.804	40.57	PK2	34	-29.8	44.77	-	-	74	-29.23	360	100	V
* 4.804	28.5	VA1T	34	-29.8	32.7	54	-21.3	-	-	360	100	V
7.206	40.77	PK2	35.7	-25.4	51.07	-	-	74	-22.93	143	232	V
9.608	46.85	PK2	37	-21	62.85	-	-	74	-11.15	109	368	V
* 12.01	39.89	PK2	38.9	-20.7	58.09	-	-	74	-15.91	247	161	V
* 12.01	32.74	VA1T	38.9	-20.7	50.94	54	-3.06	-	-	247	161	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

MID CHANNEL HORIZONTAL

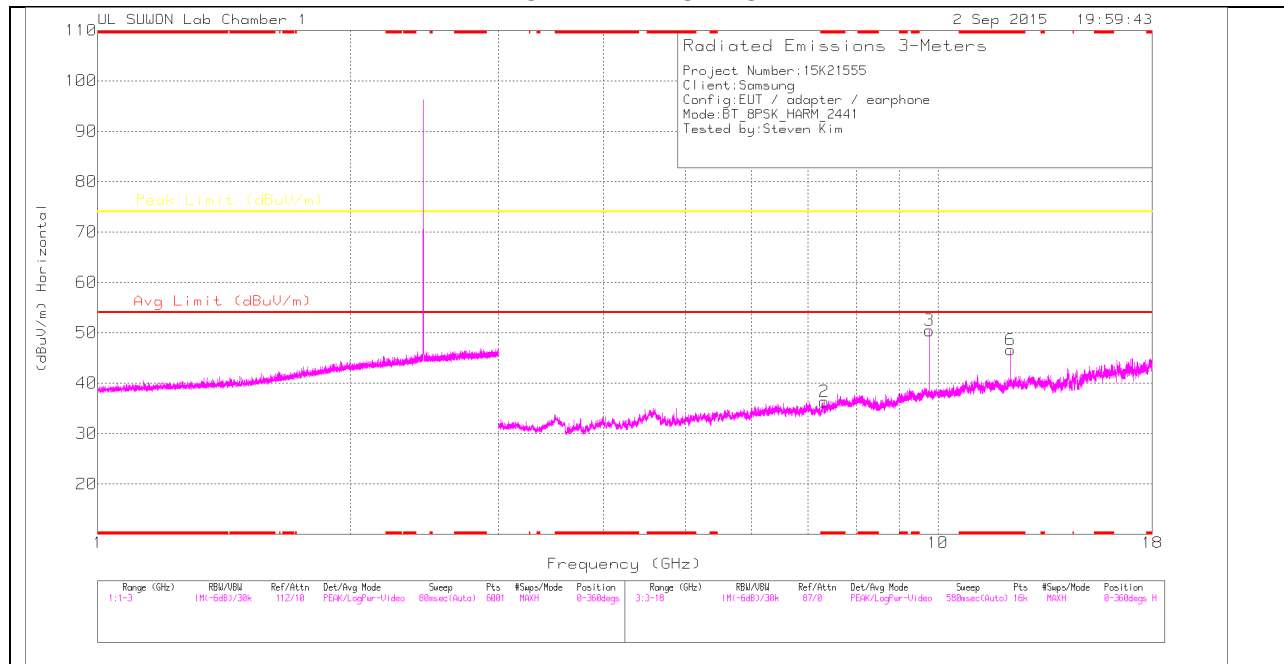

MID CHANNEL VERTICAL

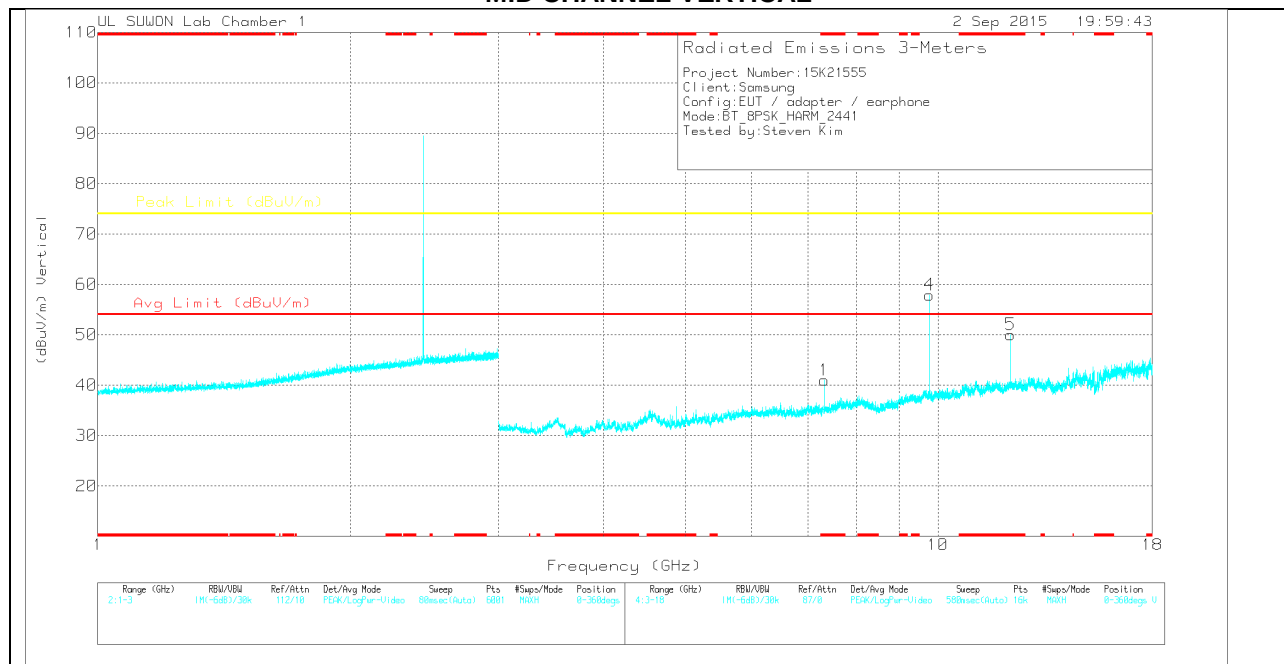

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 724)_15061 9	Path_3	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 7.323	26.13	PK	35.8	-25.6	36.33	-	-	74	-37.67	0-360	200	H
3	9.764	35.25	PK	37.2	-22	50.45	-	-	74	-23.55	0-360	200	H
6	* 12.205	28.98	PK	38.9	-21.3	46.58	-	-	74	-27.42	0-360	200	H
1	* 7.323	30.78	PK	35.8	-25.6	40.98	-	-	74	-33.02	0-360	100	V
4	9.764	42.71	PK	37.2	-22	57.91	-	-	74	-16.09	0-360	100	V
5	* 12.205	32.44	PK	38.9	-21.3	50.04	-	-	74	-23.96	0-360	100	V
2	* 7.323	26.13	PK	35.8	-25.6	36.33	-	-	74	-37.67	0-360	200	H
3	9.764	35.25	PK	37.2	-22	50.45	-	-	74	-23.55	0-360	200	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_3 3G HP	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.764	40.9	PK2	37.2	-22	56.1	-	-	74	-17.9	53	385	H
* 12.205	38.11	PK2	38.9	-21.3	55.71	-	-	74	-18.29	310	313	H
* 12.205	29.52	VA1T	38.9	-21.3	47.12	54	-6.88	-	-	310	313	H
* 7.323	42.13	PK2	35.8	-25.6	52.33	-	-	74	-21.67	143	261	V
* 7.323	32.72	VA1T	35.8	-25.6	42.92	54	-11.08	-	-	143	261	V
9.764	46.82	PK2	37.2	-22	62.02	-	-	74	-11.98	100	275	V
* 12.205	39.56	PK2	38.9	-21.3	57.16	-	-	74	-16.84	232	100	V
* 12.205	32.45	VA1T	38.9	-21.3	50.05	54	-3.95	-	-	232	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

VA1T - FHSS: Linear Voltage Average $V_B = 1/T_{on}$ where: T_{on} is transmit duration

HIGH CHANNEL HORIZONTAL

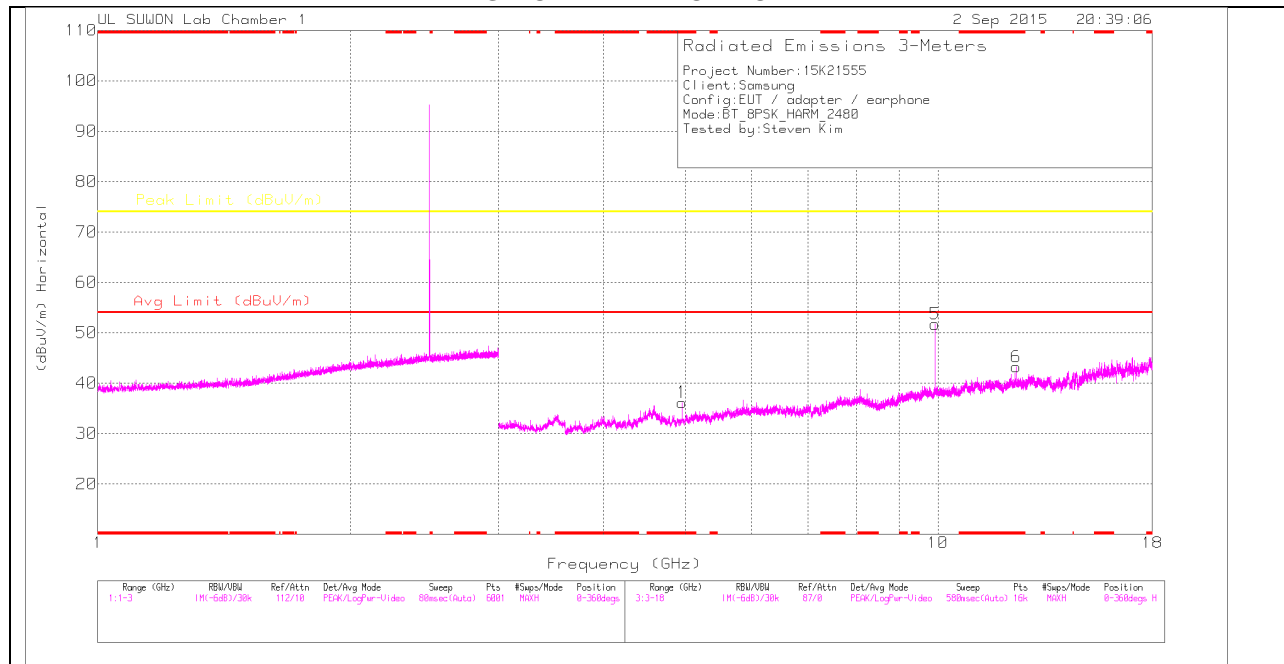

HIGH CHANNEL VERTICAL

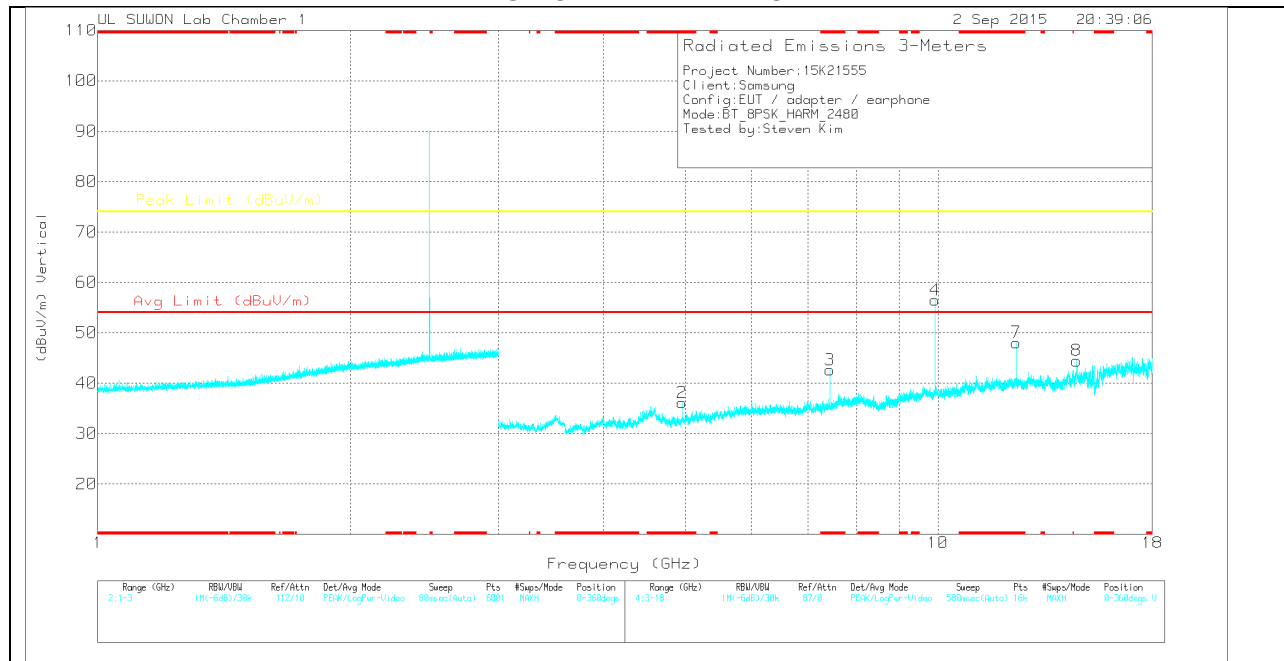

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00168 724)_15061 9	Path_3	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.959	31.08	PK	34	-28.9	36.18	-	-	74	-37.82	0-360	100	H
5	9.92	34.7	PK	37.4	-20.4	51.7	-	-	74	-22.3	0-360	200	H
6	* 12.4	25.23	PK	38.9	-20.9	43.23	-	-	74	-30.77	0-360	200	H
2	* 4.96	31.02	PK	34	-28.9	36.12	-	-	74	-37.88	0-360	100	V
3	* 7.44	31.61	PK	35.8	-24.8	42.61	-	-	74	-31.39	0-360	100	V
4	9.92	39.47	PK	37.4	-20.4	56.47	-	-	74	-17.53	0-360	100	V
7	* 12.4	30.02	PK	38.9	-20.9	48.02	-	-	74	-25.98	0-360	100	V
8	14.63	25.95	PK	39.8	-21.3	44.45	-	-	74	-29.55	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_3_3G HP	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	39.32	PK2	34	-28.9	44.42	-	-	74	-29.58	360	120	H
* 4.96	26.04	VA1T	34	-28.9	31.14	54	-22.86	-	-	360	120	H
9.92	42.53	PK2	37.4	-20.4	59.53	-	-	74	-14.47	282	400	H
* 12.4	33.54	PK2	38.9	-20.9	51.54	-	-	74	-22.46	360	210	H
* 12.4	20.74	VA1T	38.9	-20.9	38.74	54	-15.26	-	-	360	210	H
* 4.96	39.92	PK2	34	-28.9	45.02	-	-	74	-28.98	360	120	V
* 4.96	27.47	VA1T	34	-28.9	32.57	54	-21.43	-	-	360	120	V
* 7.44	39.79	PK2	35.8	-24.8	50.79	-	-	74	-23.21	156	239	V
* 7.44	29.67	VA1T	35.8	-24.8	40.67	54	-13.33	-	-	156	239	V
9.92	42.87	PK2	37.4	-20.4	59.87	-	-	74	-14.13	92	218	V
* 12.4	36.43	PK2	38.9	-20.9	54.43	-	-	74	-19.57	254	161	V
* 12.4	27.18	VA1T	38.9	-20.9	45.18	54	-8.82	-	-	254	161	V
14.631	34.95	PK2	39.8	-21.3	53.45	-	-	74	-20.55	221	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration


9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

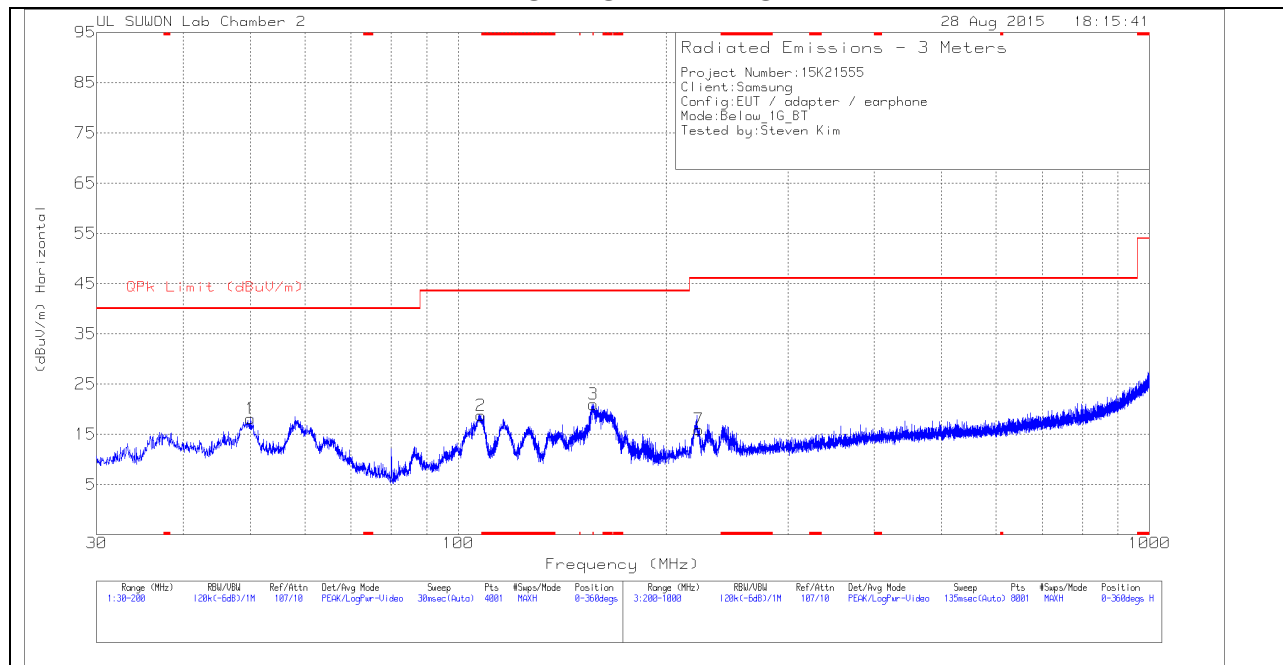

VERTICAL PLOT

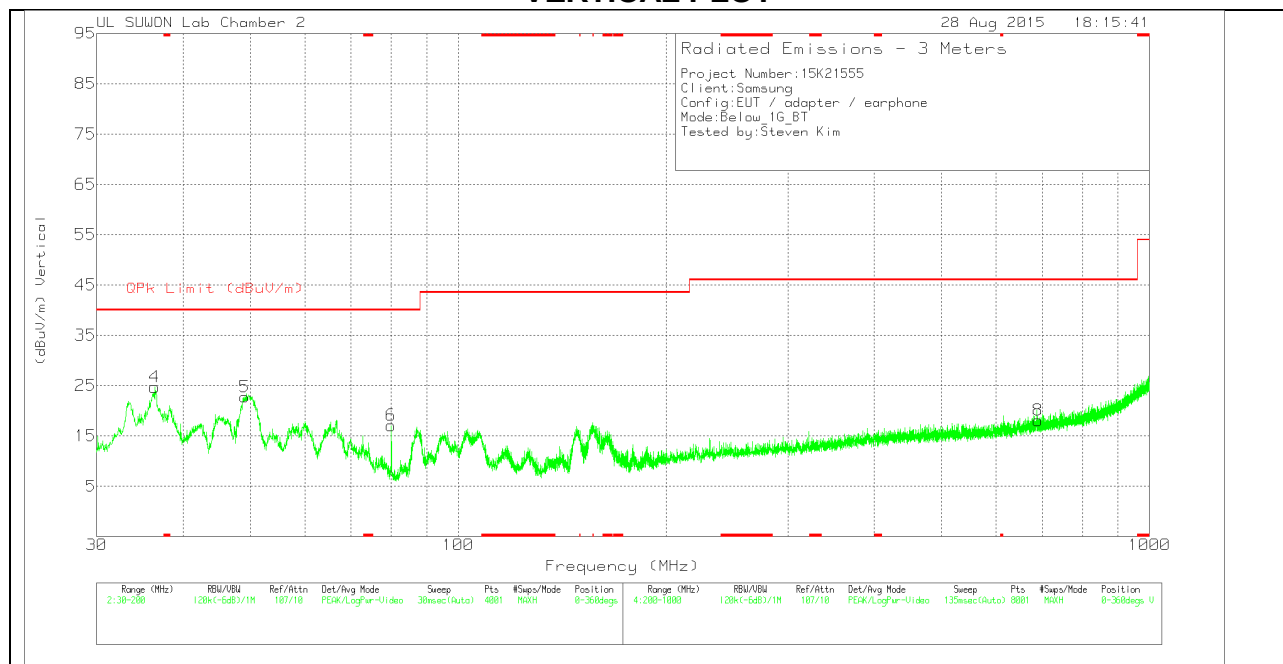

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-749	Below_1G	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	50.06	34.71	Pk	14.1	-30.7	18.11	40	-21.89	0-360	400	H
2	107.945	38.32	Pk	10.9	-30.5	18.72	43.52	-24.8	0-360	300	H
3	* 156.82	42.95	Pk	8.4	-30.4	20.95	43.52	-22.57	0-360	200	H
4	36.375	44.1	Pk	11.3	-30.7	24.7	40	-15.3	0-360	100	V
5	49.0825	39.31	Pk	14.1	-30.7	22.71	40	-17.29	0-360	100	V
6	79.98	40.57	Pk	7.1	-30.6	17.07	40	-22.93	0-360	200	V
7	222.8	34.23	Pk	11.9	-30.2	15.93	46.02	-30.09	0-360	100	H
8	690.4	30.08	Pk	17.1	-29.1	18.08	46.02	-27.94	0-360	300	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS

LINE 1 PLOT

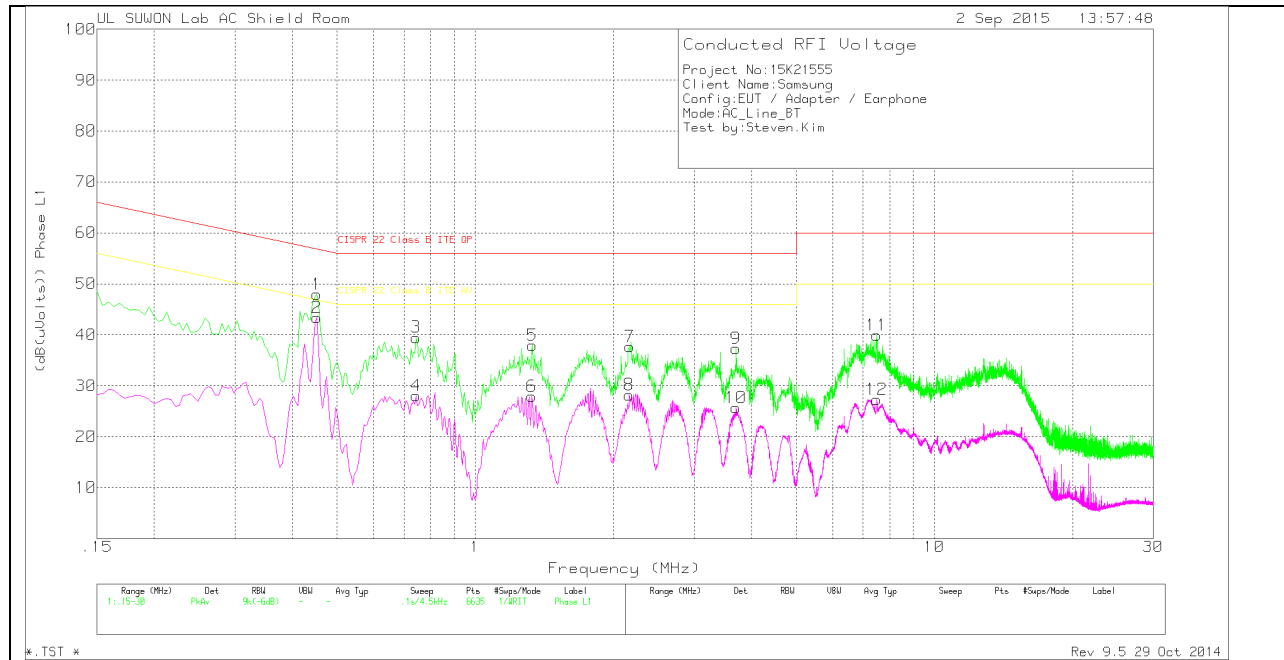

LINE 1 RESULTS


Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_L1	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.4515	37.82	Pk	10.1	0	47.92	56.85	-8.93	-	-
2	.4515	33.33	Av	10.1	0	43.43	-	-	46.85	-3.42
3	.744	29.49	Pk	10	0	39.49	56	-16.51	-	-
4	.744	18.01	Av	10	0	28.01	-	-	46	-17.99
5	1.3335	28	Pk	9.8	.1	37.9	56	-18.1	-	-
6	1.329	17.97	Av	9.8	.1	27.87	-	-	46	-18.13
7	2.1705	27.74	Pk	9.8	.1	37.64	56	-18.36	-	-
8	2.166	18.33	Av	9.8	.1	28.23	-	-	46	-17.77
9	3.7005	27.41	Pk	9.8	.1	37.31	56	-18.69	-	-
10	3.7005	15.85	Av	9.8	.1	25.75	-	-	46	-20.25
11	7.4895	29.93	Pk	9.9	.1	39.93	60	-20.07	-	-
12	7.494	17.32	Av	9.9	.1	27.32	-	-	50	-22.68

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

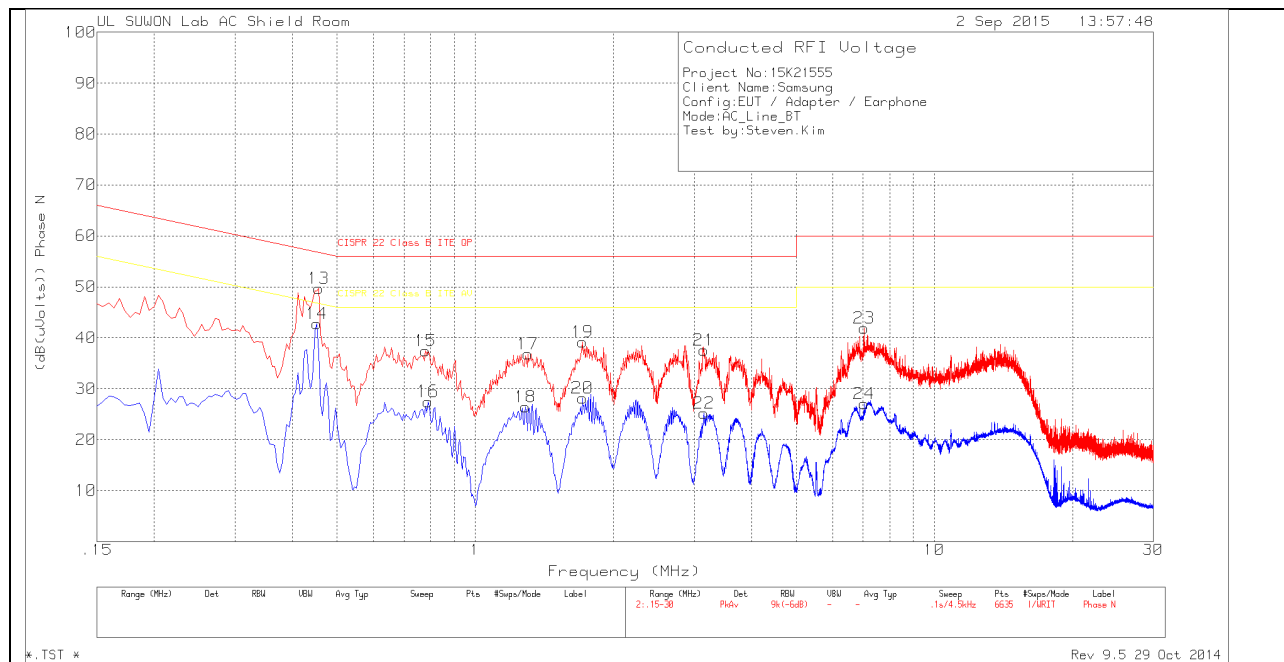

LINE 2 RESULTS

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_N	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.456	39.54	Pk	10.1	0	49.64	56.77	-7.13	-	-
14	.4515	32.62	Av	10.1	0	42.72	-	-	46.85	-4.13
15	.78	27.49	Pk	10	0	37.49	56	-18.51	-	-
16	.789	17.59	Av	9.9	0	27.49	-	-	46	-18.51
17	1.302	26.91	Pk	9.8	.1	36.81	56	-19.19	-	-
18	1.2885	16.54	Av	9.8	.1	26.44	-	-	46	-19.56
19	1.7115	29.25	Pk	9.8	.1	39.15	56	-16.85	-	-
20	1.7115	18.29	Av	9.8	.1	28.19	-	-	46	-17.81
21	3.147	27.65	Pk	9.8	.1	37.55	56	-18.45	-	-
22	3.147	15.25	Av	9.8	.1	25.15	-	-	46	-20.85
23	7.0305	31.86	Pk	9.9	.1	41.86	60	-18.14	-	-
24	7.0305	17.07	Av	9.9	.1	27.07	-	-	50	-22.93

Pk - Peak detector

Av - Average detection