

Part 96 MEASUREMENT REPORT**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

1/6/2025 – 3/6/2025

Test Report Issue Date:

3/7/2025

Test Site/Location:

Element Lab. Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2501020001-13.A3L

FCC ID:

A3LSMG766U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-G766U

Additional Models:

SM-G766U1

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

96

Test Procedure(s):

ANSI C63.26-2015, KDB 940660 D01 v03, WINNF-TS-0122
v1.0.2

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 1 of 114

TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Measurement Procedure.....	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	12
7.3	Occupied Bandwidth	17
7.4	Spurious and Harmonic Emissions at Antenna Terminal	42
7.5	Band Edge Emissions at Antenna Terminal	60
7.6	Radiated Power (EIRP)	76
7.7	Radiated Spurious Emissions Measurements	81
7.8	Frequency Stability / Temperature Variation	102
7.9	End User Device Additional Requirement (CBSD Protocol).....	105
8.0	CONCLUSION.....	114

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 2 of 114

MEASUREMENT REPORT

FCC Part 96

Antenna-6						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
ULCA LTE Band 48	40 MHz	QPSK	3570.0 - 3680.0	0.150	21.76	37M7G7D
		16QAM	3570.0 - 3680.0	0.148	21.71	37M7W7D
	35 MHz	QPSK	3567.5 - 3682.5	0.143	21.56	32M8G7D
		16QAM	3567.5 - 3682.5	0.152	21.82	32M8W7D
	30 MHz	QPSK	3565.0 - 3685.0	0.147	21.67	27M9G7D
		16QAM	3565.0 - 3685.0	0.144	21.58	27M8W7D
	25 MHz	QPSK	3562.5 - 3687.5	0.149	21.73	23M1G7D
		16QAM	3562.5 - 3687.5	0.153	21.84	23M0W7D
LTE Band 48	20 MHz	QPSK	3560.0 - 3690.0	0.152	21.83	17M9G7D
		16QAM	3560.0 - 3690.0	0.132	21.20	18M0W7D
	15 MHz	QPSK	3557.5 - 3692.5	0.155	21.89	13M5G7D
		16QAM	3557.5 - 3692.5	0.140	21.47	13M5W7D
	10 MHz	QPSK	3555.0 - 3695.0	0.151	21.79	9M02G7D
		16QAM	3555.0 - 3695.0	0.138	21.41	9M03W7D
	5 MHz	QPSK	3552.5 - 3697.5	0.153	21.86	4M51G7D
		16QAM	3552.5 - 3697.5	0.139	21.43	4M52W7D
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.156	21.92	35M8G7D
		QPSK	3570.0 - 3680.0	0.141	21.48	38M0G7D
		16QAM	3570.0 - 3680.0	0.118	20.70	38M1W7D
	30 MHz	$\pi/2$ BPSK	3565.0 - 3685.0	0.157	21.95	26M8G7D
		QPSK	3565.0 - 3685.0	0.137	21.35	28M0G7D
		16QAM	3565.0 - 3685.0	0.119	20.74	28M0W7D
	20 MHz	$\pi/2$ BPSK	3560.0 - 3690.0	0.156	21.92	17M9G7D
		QPSK	3560.0 - 3690.0	0.127	21.04	18M4G7D
		16QAM	3560.0 - 3690.0	0.127	21.05	18M3W7D
	15 MHz	$\pi/2$ BPSK	3557.5 - 3692.5	0.156	21.94	13M0G7D
		QPSK	3557.5 - 3692.5	0.128	21.07	13M7G7D
		16QAM	3557.5 - 3692.5	0.119	20.75	13M7W7D
	10 MHz	$\pi/2$ BPSK	3555.0 - 3695.0	0.155	21.90	8M71G7D
		QPSK	3555.0 - 3695.0	0.129	21.10	8M67G7D
		16QAM	3555.0 - 3695.0	0.111	20.45	8M72W7D

EUT Overview

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 3 of 114

Antenna-8						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.079	18.99	35M9G7D
		QPSK	3570.0 - 3680.0	0.079	18.97	38M0G7D
		16QAM	3570.0 - 3680.0	0.079	18.95	38M0W7D

EUT Overview

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.069	18.36	35M8G7D
		QPSK	3570.0 - 3680.0	0.061	17.83	38M1G7D
		16QAM	3570.0 - 3680.0	0.059	17.69	38M0W7D

EUT Overview

Antenna-4						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.017	12.25	35M9G7D
		QPSK	3570.0 - 3680.0	0.016	12.15	38M1G7D
		16QAM	3570.0 - 3680.0	0.016	12.06	38M0W7D

EUT Overview

Note: EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 4 of 114

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. (“MD”)

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISSED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea. (“ES”)

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 5 of 114

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG766U**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBRS band. Per FCC Part 96, this device is evaluated as a Citizens Band End User Devices (CBE).

Test Device Serial No.: 4481M, 2869M, 4500M, 3466M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-Band LTE, MultiBand 5G NR (FR1), 802.11b/g/n/ac/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version C766USQ0AXL3 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 6 of 114

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 7 of 114

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget – MD

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

Table 4-2. Measurement Uncertainty Budget – ES

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 8 of 114

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx1
-	LTx2	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx2
-	LTx3	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx3
-	WL25-1	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-1
-	WL40-1	Conducted Cable Set (40GHz)	4/2/2024	Annual	4/2/2025	WL40-1
Agilent	N9020A	MXA Signal Analyzer	3/22/2024	Annual	3/22/2025	US46470561
Agilent	N9038A	MXE EMI Receiver	9/16/2024	Annual	9/16/2025	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	4/9/2024	Annual	4/9/2025	MY52350166
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Emco	3115	Horn Antenna (1-18GHz)	6/7/2024	Biennial	6/7/2026	150693
Espec	ESX-2CA	Environmental Chamber	7/5/2023	Annual	7/5/2025	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/29/2023	Biennial	3/29/2025	128337
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	8/26/2024	Annual	8/26/2025	MY54490576
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			102060
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	2/15/2024	Annual	2/15/2025	103200
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/21/2024	Biennial	2/21/2026	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	2/13/2024	Biennial	2/13/2026	A042511
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	9/11/2024	Biennial	9/11/2026	A051107

Table 5-1. Test Equipment – MD

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	218555
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	7/5/2024	Annual	7/5/2025	101366
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/10/2024	Annual	12/10/2025	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/10/2024	Annual	12/10/2025	164715
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/9/2024	Annual	4/9/2025	304

Table 5-2. Test Equipment – ES

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 9 of 114

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (7250 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 10 of 114

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMG766U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE/NR/ULCA

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference	Test Location
CONDUCTED	Conducted Power	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2	ES
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3	ES
	Conducted Band Edge / Spurious Emissions (EUD)	2.1051, 96.41(e)(ii)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS	Sections 7.4, 7.5	ES
	Conducted Band Edge / Spurious Emissions (CBSD)	2.1051, 96.41(e)(i)	-13 dBm/MHz at frequencies within 0-10 MHz of above the upper SAS-assigned channel edge and within 0-10MHz below the lower SAS-assigned channel edge -25 dBm/MHz at frequencies greater than 10 MHz above and below channel edge -emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz	PASS	Sections 7.4, 7.5	ES
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.10	MD
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.11	MD
	Uplink Carrier Aggregation	96.41(e)	> 43 + 10log(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Section 7.7	ES
RADIATED	Equivalent Isotropic Radiated Power (EIRP) (EUD)	96.41(b)	23 dBm/10MHz	PASS	Section 7.8	ES
	Radiated Spurious Emissions	2.1053, 96.41(e)	-40 dBm/MHz	PASS	Section 7.9	MD

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.2.2.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 11 of 114

7.2 Conducted Output Power Data

Test Overview

The EUT is set up to transmit at maximum power for LTE. All power levels are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

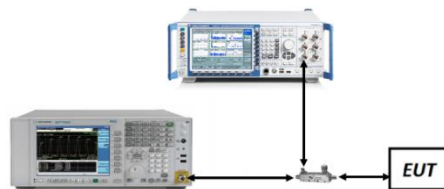


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 12 of 114

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	55340	3560.0	1 / 49	21.89
		55990	3625.0	1 / 49	21.38
		56640	3690.0	1 / 49	21.63
	16-QAM	55340	3560.0	1 / 49	20.99
		55990	3625.0	1 / 49	20.49
		56640	3690.0	1 / 49	20.74
15 MHz	QPSK	55315	3557.5	1 / 19	21.94
		55990	3625.0	1 / 36	21.48
		56665	3692.5	1 / 36	21.40
	16-QAM	55315	3557.5	1 / 19	21.03
		55990	3625.0	1 / 36	20.59
		56665	3692.5	1 / 36	21.01
10 MHz	QPSK	55290	3555.0	1 / 12	21.55
		55990	3625.0	1 / 1	21.36
		56690	3695.0	1 / 12	21.59
	16-QAM	55290	3555.0	1 / 12	20.61
		55990	3625.0	1 / 22	20.71
		56690	3695.0	1 / 22	20.95
5 MHz	QPSK	55265	3552.5	1 / 5	21.08
		55990	3625.0	1 / 5	21.22
		56715	3697.5	1 / 5	21.66
	16-QAM	55265	3552.5	1 / 5	20.16
		55990	3625.0	1 / 5	20.59
		56715	3697.5	1 / 5	20.97

Table 7-2. Conducted Power Output Data (LTE Band 48 – Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 13 of 114

Bandwidth	Modulation	PCC			SCC			Conducted Power [dBm]
		Bandwidth [MHz]	Frequency [MHz]	RB / Offset	Bandwidth [MHz]	Frequency [MHz]	RB / Offset	
40 MHz	QPSK	20	3560.0	1 / 99	20	3579.8	1 / 0	21.28
		20	3625.0	1 / 99	20	3644.8	1 / 0	21.59
		20	3690.0	1 / 0	20	3670.2	1 / 99	21.70
	16-QAM	20	3560.0	1 / 99	20	3579.8	1 / 0	20.63
		20	3625.0	1 / 99	20	3644.8	1 / 0	20.51
		20	3690.0	1 / 0	20	3670.2	1 / 99	20.78
35 MHz	QPSK	20	3560.0	1 / 99	15	3577.1	1 / 0	21.70
		20	3625.0	1 / 99	15	3642.1	1 / 0	21.38
		20	3690.0	1 / 0	15	3672.9	1 / 74	21.67
	16-QAM	20	3560.0	1 / 99	15	3577.1	1 / 0	20.78
		20	3625.0	1 / 99	15	3642.1	1 / 0	20.29
		20	3690.0	1 / 0	15	3672.9	1 / 74	20.46
30 MHz	QPSK	20	3560.0	1 / 99	10	3574.4	1 / 0	21.78
		20	3625.0	1 / 99	10	3639.4	1 / 0	21.49
		20	3690.0	1 / 0	10	3675.6	1 / 49	21.87
	16-QAM	20	3560.0	1 / 99	10	3574.4	1 / 0	20.54
		20	3625.0	1 / 99	10	3639.4	1 / 0	19.94
		20	3690.0	1 / 0	10	3675.6	1 / 49	20.43
25 MHz	QPSK	20	3560.0	1 / 99	5	3571.7	1 / 0	21.64
		20	3625.0	1 / 99	5	3636.7	1 / 0	21.55
		20	3690.0	1 / 0	5	3678.3	1 / 24	21.77
	16-QAM	20	3560.0	1 / 99	5	3571.7	1 / 0	20.61
		20	3625.0	1 / 99	5	3636.7	1 / 0	19.98
		20	3690.0	1 / 0	5	3678.3	1 / 24	20.92

Table 7-3. Conducted Power Output Data (ULCA LB48 – Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 14 of 114

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 104	20.85
		641666	3625.0	1 / 104	21.64
		645332	3680.0	1 / 1	21.53
	QPSK	638000	3570.0	1 / 104	20.77
		641666	3625.0	1 / 104	21.61
		645332	3680.0	1 / 1	21.65
	16-QAM	638000	3570.0	1 / 104	20.27
		641666	3625.0	1 / 104	20.38
		645332	3680.0	1 / 1	20.53
30 MHz	π/2 BPSK	637666	3565.0	1 / 1	20.75
		641666	3625.0	1 / 76	21.38
		645666	3685.0	1 / 39	21.57
	QPSK	637666	3565.0	1 / 1	21.02
		641666	3625.0	1 / 76	21.48
		645666	3685.0	1 / 1	21.60
	16-QAM	637666	3565.0	1 / 1	20.20
		641666	3625.0	1 / 76	20.42
		645666	3685.0	1 / 1	20.56
20 MHz	π/2 BPSK	637334	3560.0	1 / 1	20.98
		641666	3625.0	1 / 49	21.35
		646000	3690.0	1 / 1	21.54
	QPSK	637334	3560.0	1 / 1	20.82
		641666	3625.0	1 / 49	21.17
		646000	3690.0	1 / 1	21.60
	16-QAM	637334	3560.0	1 / 1	20.85
		641666	3625.0	1 / 49	20.73
		646000	3690.0	1 / 1	20.14
15 MHz	π/2 BPSK	637166	3557.5	1 / 36	20.96
		641666	3625.0	1 / 36	21.34
		646166	3692.5	1 / 1	21.56
	QPSK	637166	3557.5	1 / 19	20.92
		641666	3625.0	1 / 36	21.20
		646166	3692.5	1 / 1	21.59
	16-QAM	637166	3557.5	1 / 1	21.00
		641666	3625.0	1 / 36	20.38
		646166	3692.5	1 / 1	20.46
10 MHz	π/2 BPSK	637000	3555.0	1 / 1	20.97
		641666	3625.0	1 / 22	21.08
		646332	3695.0	1 / 12	21.27
	QPSK	637000	3555.0	1 / 22	20.85
		641666	3625.0	1 / 22	21.23
		646332	3695.0	1 / 22	21.22
	16-QAM	637000	3555.0	1 / 12	20.70
		641666	3625.0	1 / 22	20.05
		646332	3695.0	1 / 22	19.83

Table 7-4. Conducted Power Output Data (NR Band n48 – Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 15 of 114

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 104	15.93
		641666	3625.0	1 / 104	16.72
		645332	3680.0	1 / 104	16.91
	QPSK	638000	3570.0	1 / 104	15.83
		641666	3625.0	1 / 104	16.67
		645332	3680.0	1 / 104	16.82
	16-QAM	638000	3570.0	1 / 104	15.83
		641666	3625.0	1 / 104	16.64
		645332	3680.0	1 / 104	16.90

Table 7-5. Conducted Power Output Data (NR Band n48 – Ant 8)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 104	19.78
		641666	3625.0	1 / 104	20.52
		645332	3680.0	1 / 53	20.40
	QPSK	638000	3570.0	1 / 1	19.83
		641666	3625.0	1 / 104	20.64
		645332	3680.0	1 / 53	20.35
	16-QAM	638000	3570.0	1 / 1	18.40
		641666	3625.0	1 / 104	19.35
		645332	3680.0	1 / 53	19.55

Table 7-6. Conducted Power Output Data (NR Band n48 – Ant 2)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 1	15.90
		641666	3625.0	1 / 104	16.64
		645332	3680.0	1 / 53	16.57
	QPSK	638000	3570.0	1 / 1	15.90
		641666	3625.0	1 / 104	16.71
		645332	3680.0	1 / 53	16.68
	16-QAM	638000	3570.0	1 / 1	14.72
		641666	3625.0	1 / 104	15.56
		645332	3680.0	1 / 53	15.62

Table 7-7. Conducted Power Output Data (NR Band n48 – Ant 4)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset		Page 16 of 114

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

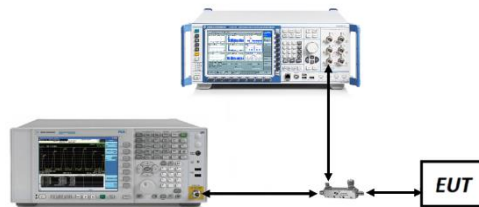


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None


FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 17 of 114

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B48	20 MHz	QPSK	17.94
		16QAM	17.98
	15 MHz	QPSK	13.46
		16QAM	13.49
	10 MHz	QPSK	9.02
		16QAM	9.03
	5 MHz	QPSK	4.51
		16QAM	4.52
LTE-B48	20+20MHz	QPSK	37.75
		16QAM	37.73
	20+15MHz	QPSK	32.83
		16QAM	32.78
	20+10MHz	QPSK	27.87
		16QAM	27.83
	20+5MHz	QPSK	23.08
		16QAM	23.05
NR-n48	40MHz	$\pi/2$ BPSK	35.76
		QPSK	37.99
		16QAM	38.08
	30MHz	$\pi/2$ BPSK	26.84
		QPSK	27.96
		16QAM	27.95
	20MHz	$\pi/2$ BPSK	17.93
		QPSK	18.38
		16QAM	18.31
	15MHz	$\pi/2$ BPSK	12.97
		QPSK	13.66
		16QAM	13.66
	10 MHz	$\pi/2$ BPSK	8.71
		QPSK	8.67
		16QAM	8.72


Table 7-8. Occupied Bandwidth Test Results – Ant 6

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 18 of 114

LTE Band 48 – Ant 6

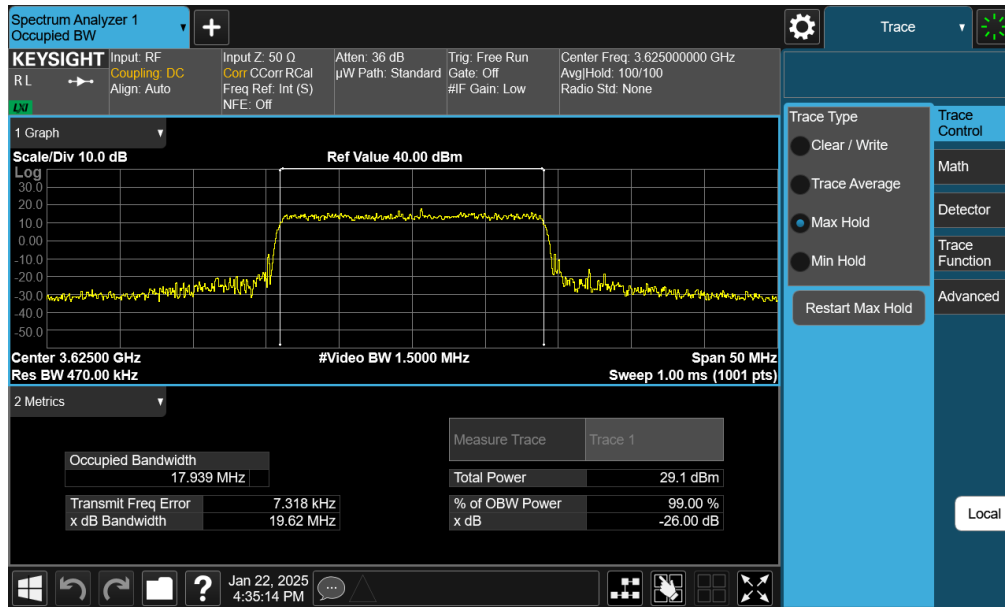


Plot 7-1. Occupied Bandwidth Plot (LTE Band 48 - 20MHz QPSK - Full RB Configuration - Ant 6)

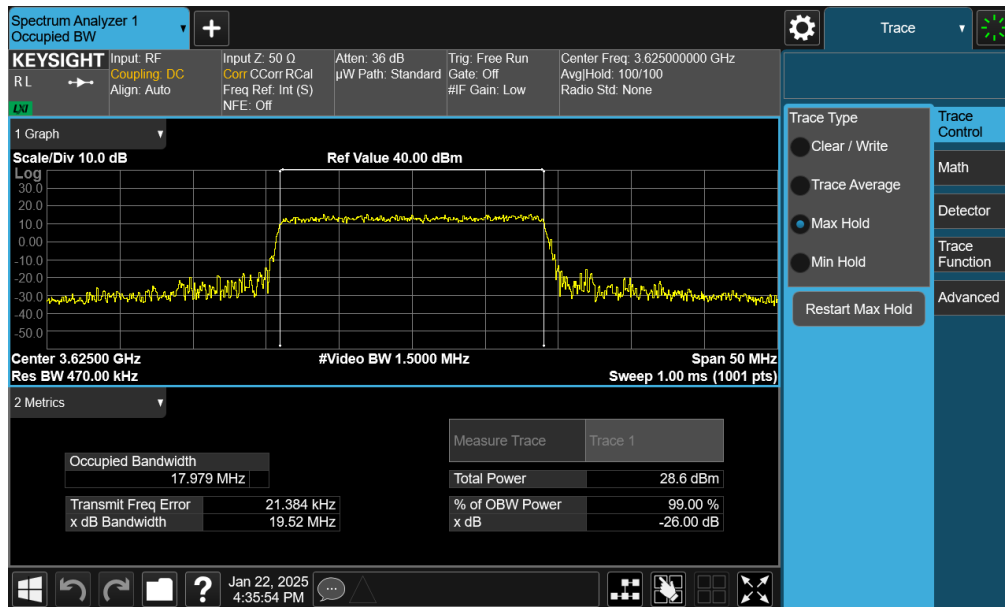


Plot 7-2. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 19 of 114

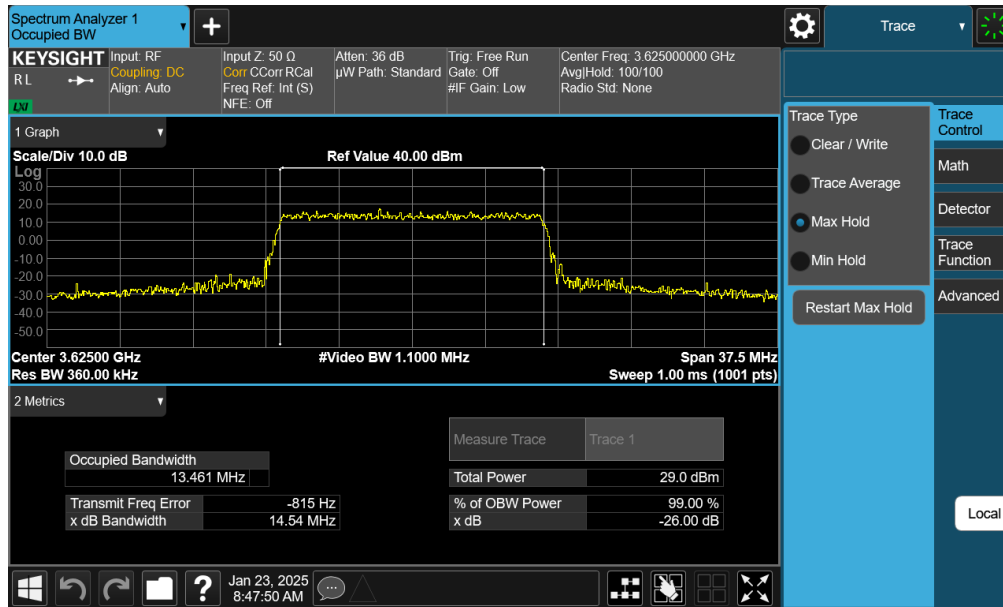


Plot 7-3. Occupied Bandwidth Plot (LTE Band 48 - 15MHz QPSK - Full RB Configuration - Ant 6)

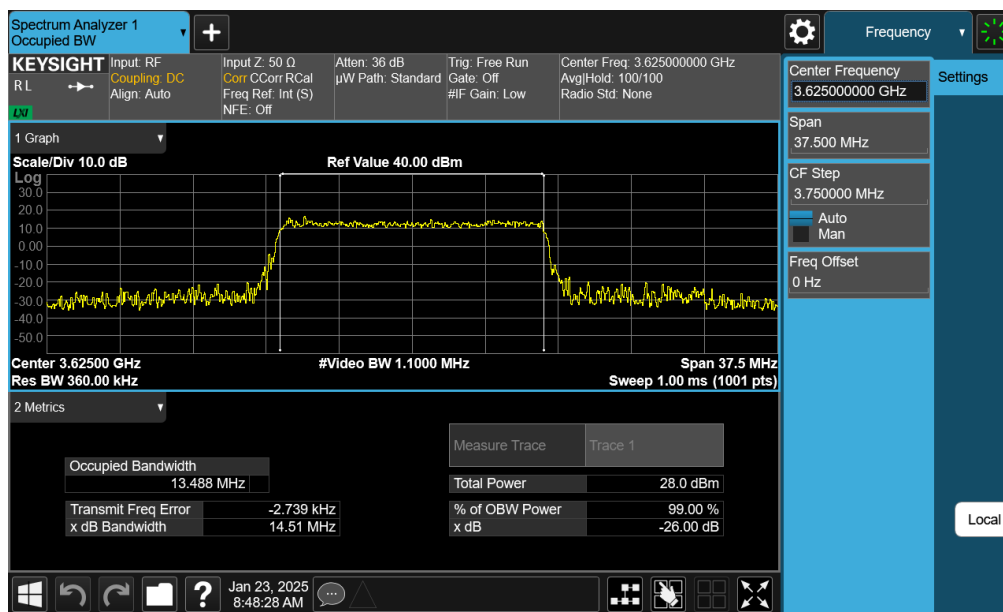


Plot 7-4. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 20 of 114

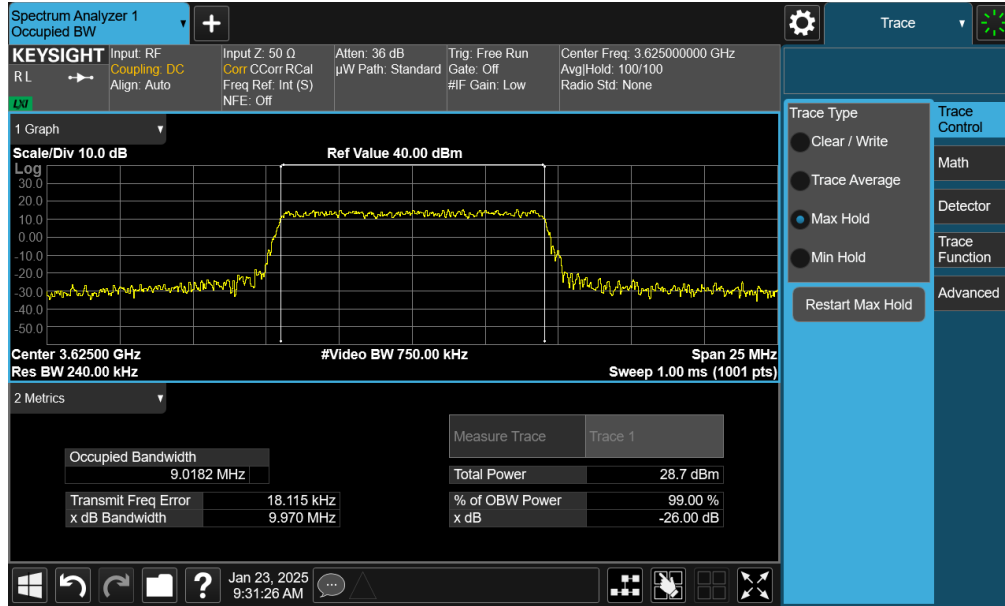


Plot 7-5. Occupied Bandwidth Plot (LTE Band 48 - 10MHz QPSK - Full RB Configuration - Ant 6)

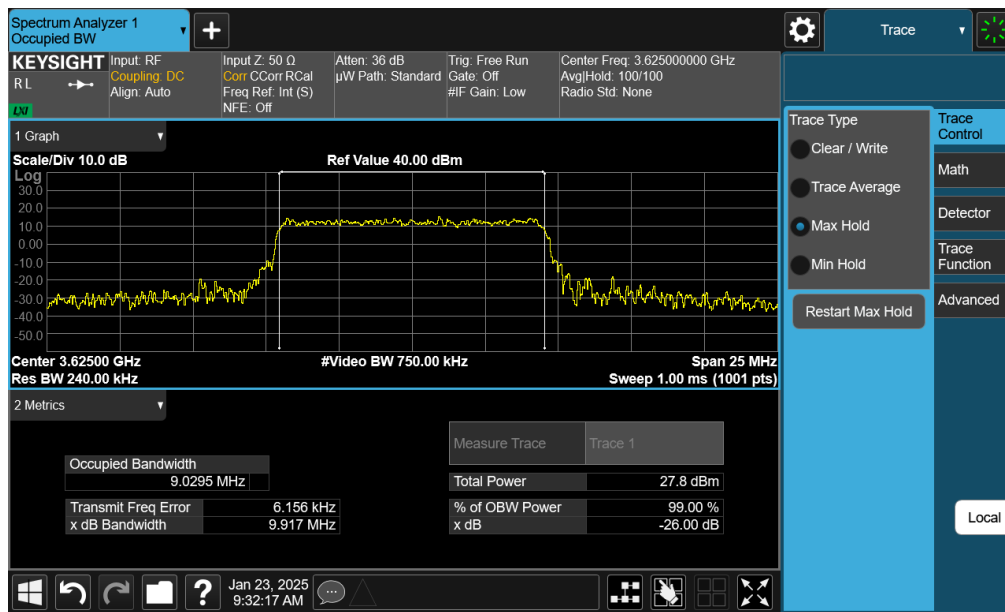


Plot 7-6. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 21 of 114

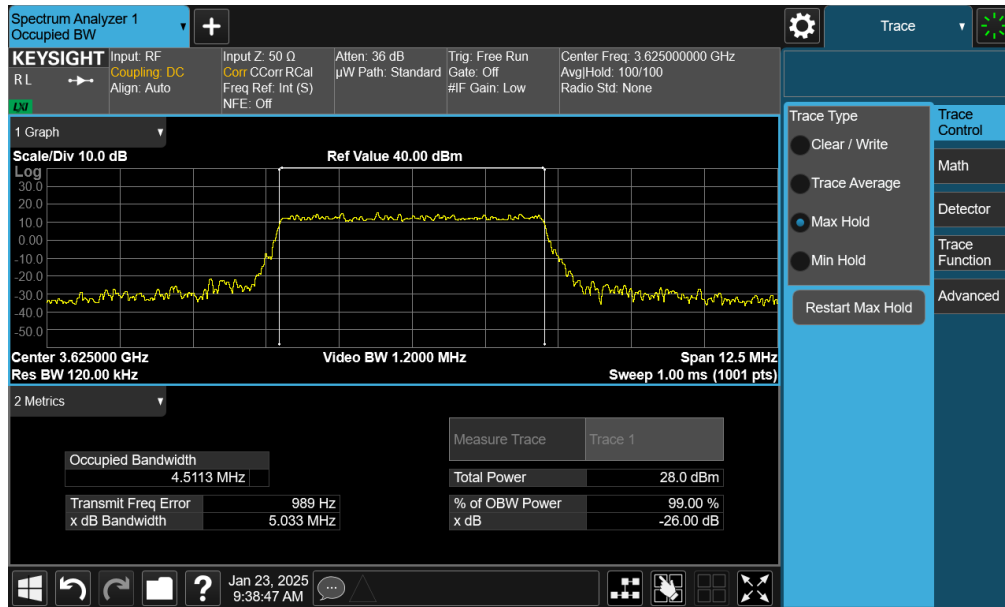


Plot 7-7. Occupied Bandwidth Plot (LTE Band 48 - 5MHz QPSK - Full RB Configuration - Ant 6)

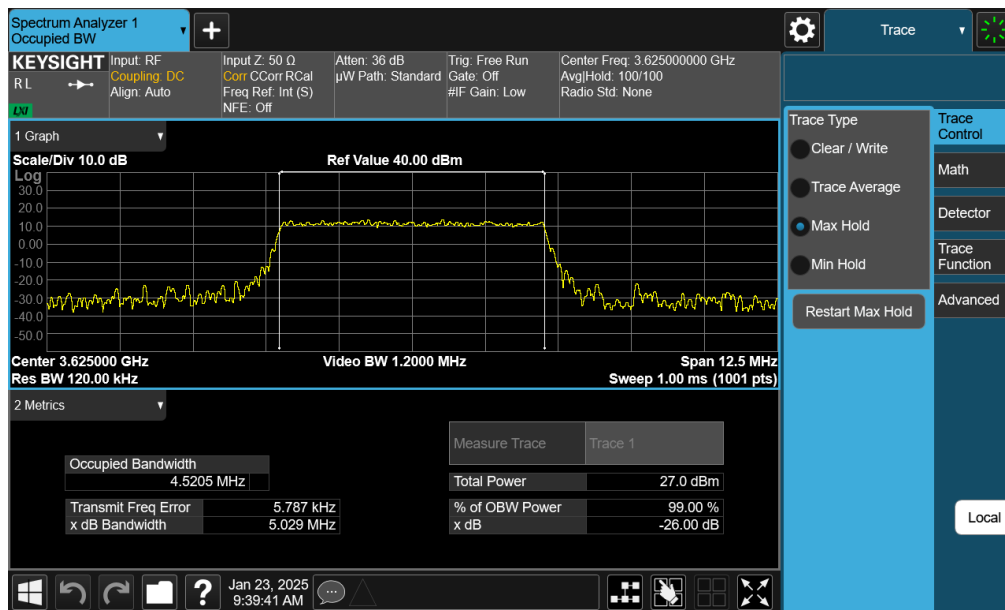


Plot 7-8. Occupied Bandwidth Plot (LTE Band 48 - 5MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 22 of 114

ULCA LTE Band 48 – Ant 6

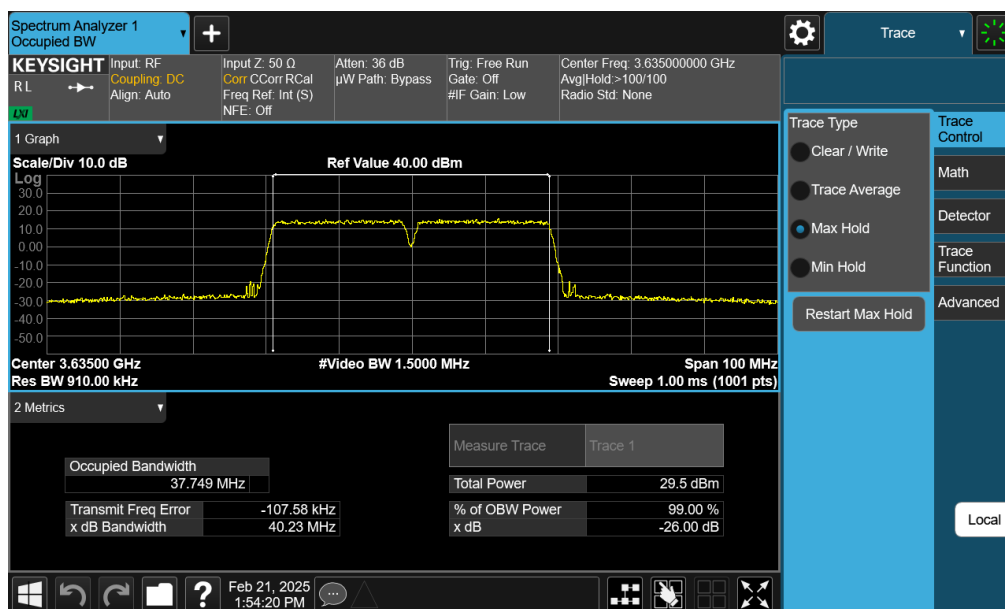


Plot 7-9. Occupied Bandwidth Plot (ULCA LB48 - 20+20MHz QPSK - Full RB Configuration - Ant 6)

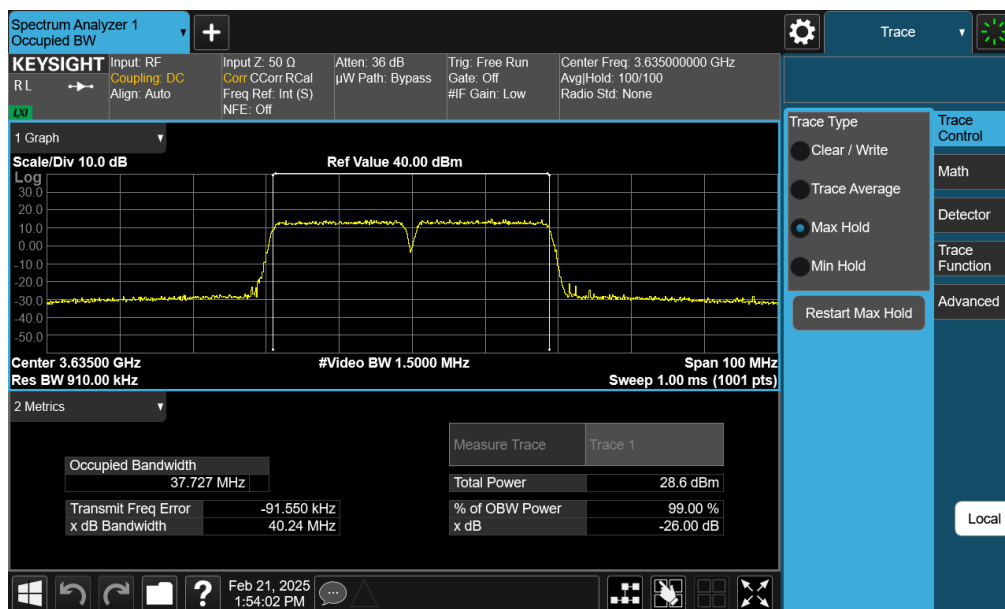


Plot 7-10. Occupied Bandwidth Plot (ULCA LB48 - 20+20MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 23 of 114

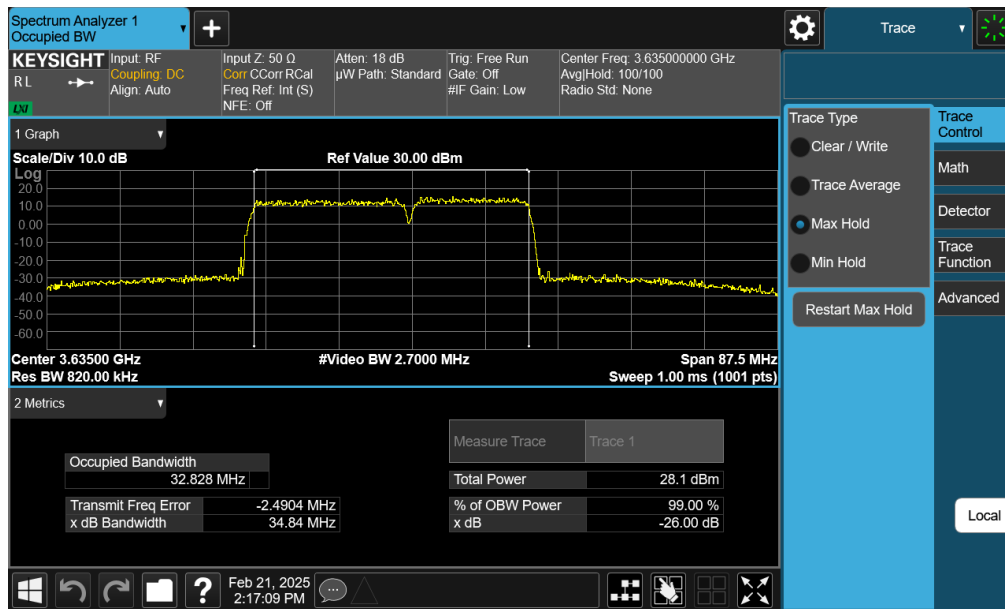


Plot 7-11. Occupied Bandwidth Plot (ULCA LB48 - 20+15MHz QPSK - Full RB Configuration - Ant 6)

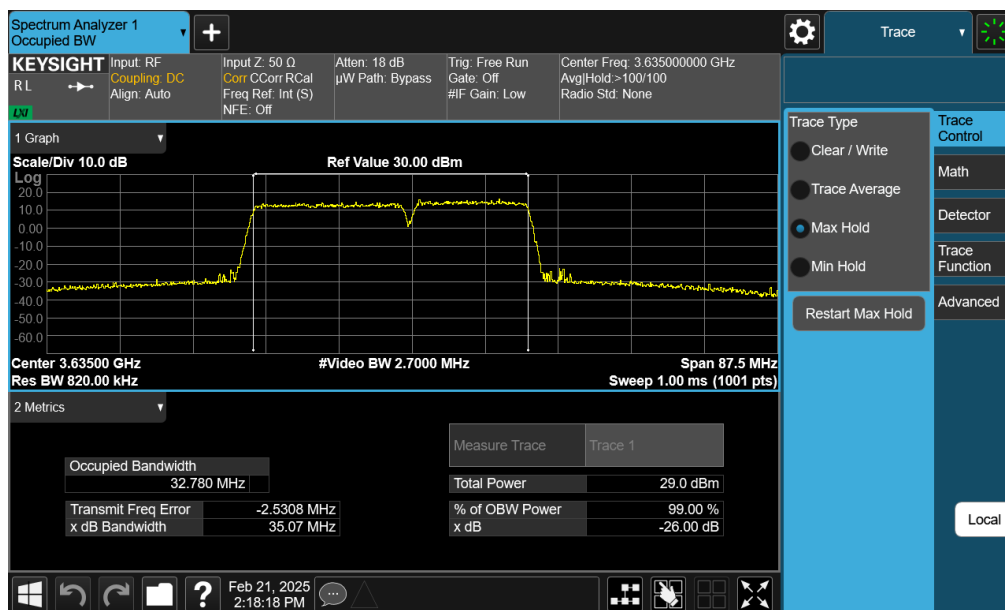


Plot 7-12. Occupied Bandwidth Plot (ULCA LB48 - 20+15MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 24 of 114

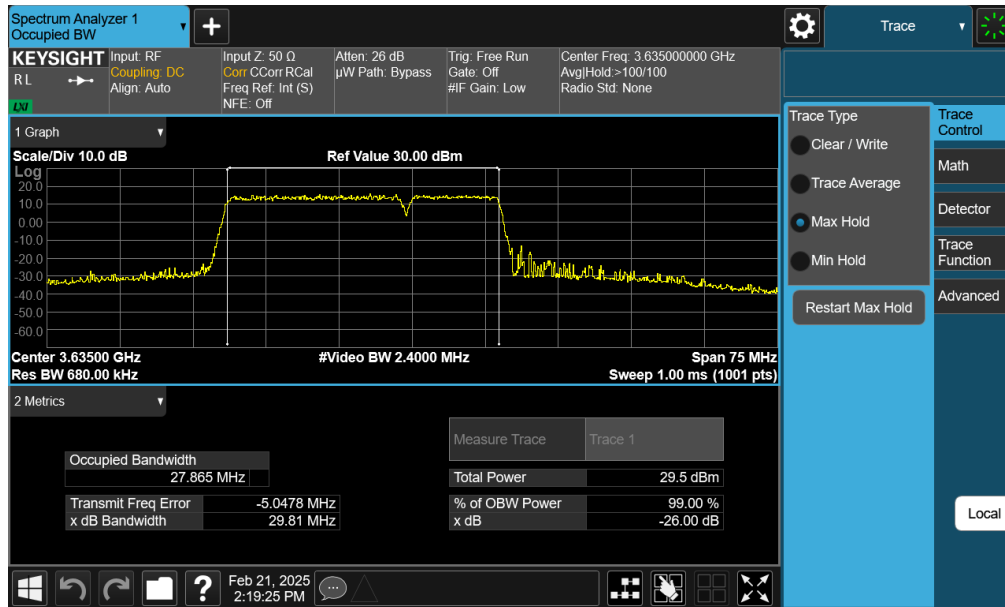


Plot 7-13. Occupied Bandwidth Plot (ULCA LB48 - 20+10MHz QPSK - Full RB Configuration - Ant 6)

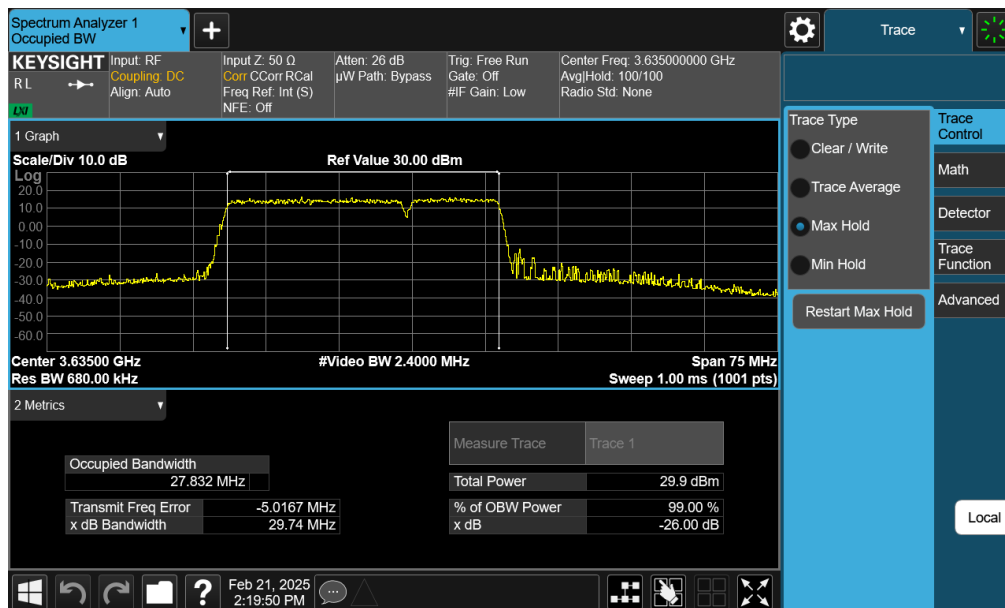


Plot 7-14. Occupied Bandwidth Plot (ULCA LB48 - 20+10MHz 16-QAM - Full RB Configuration - Ant 6)


FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 25 of 114

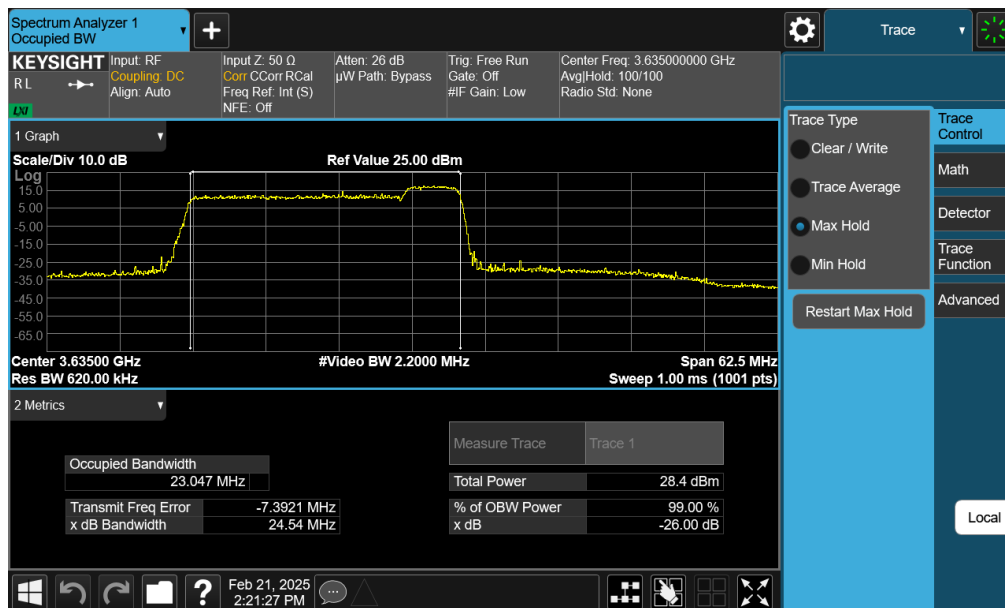

NR Band n48 – Ant 6

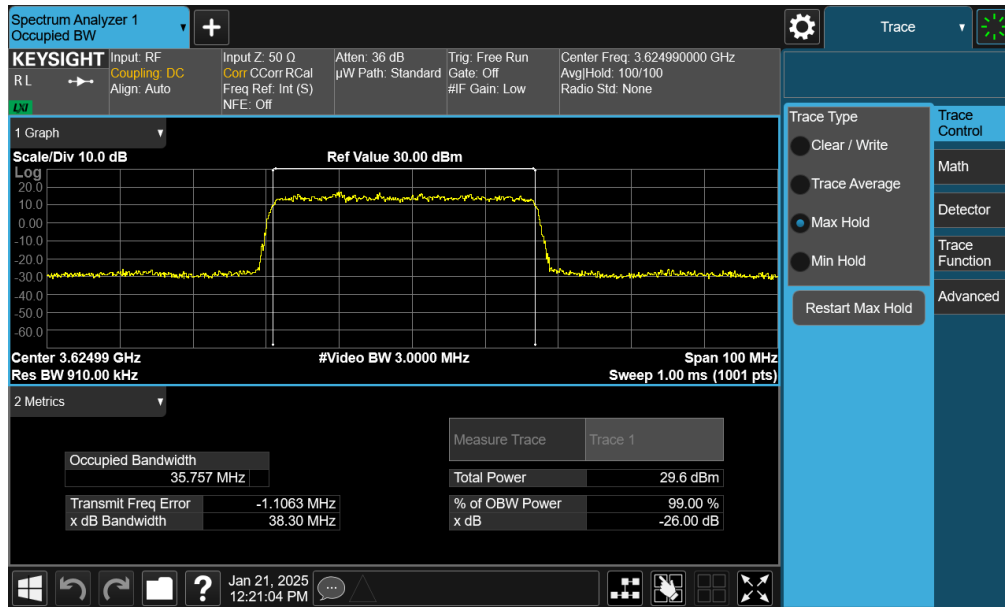


Plot 7-17. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant 6)

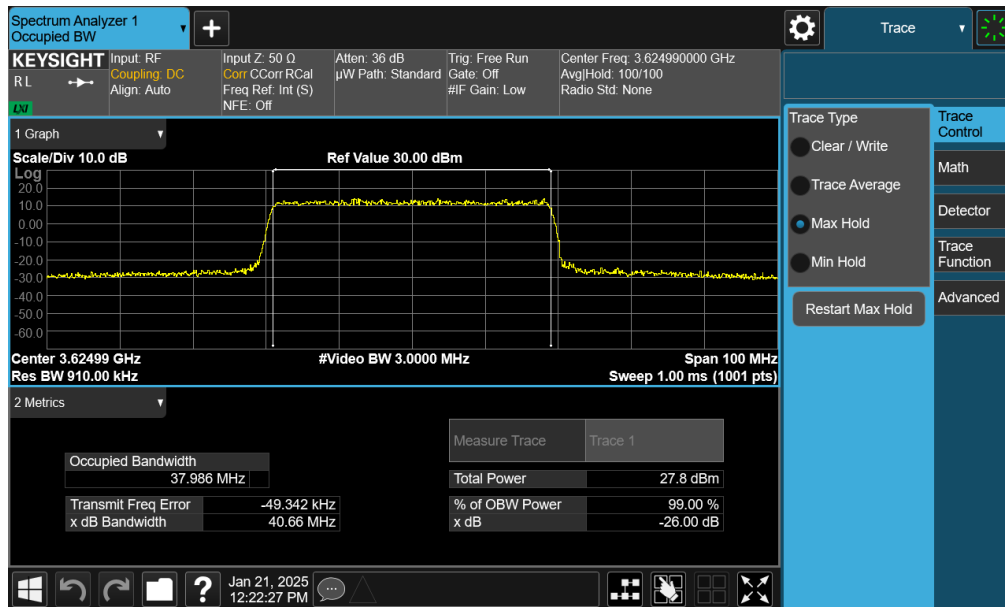


Plot 7-18. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 27 of 114

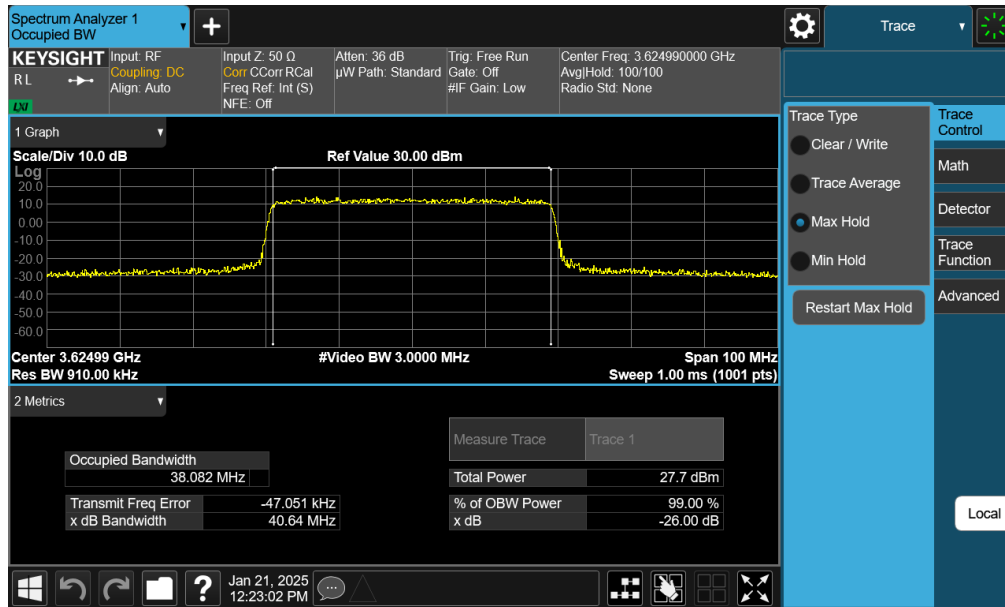


Plot 7-19. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant 6)

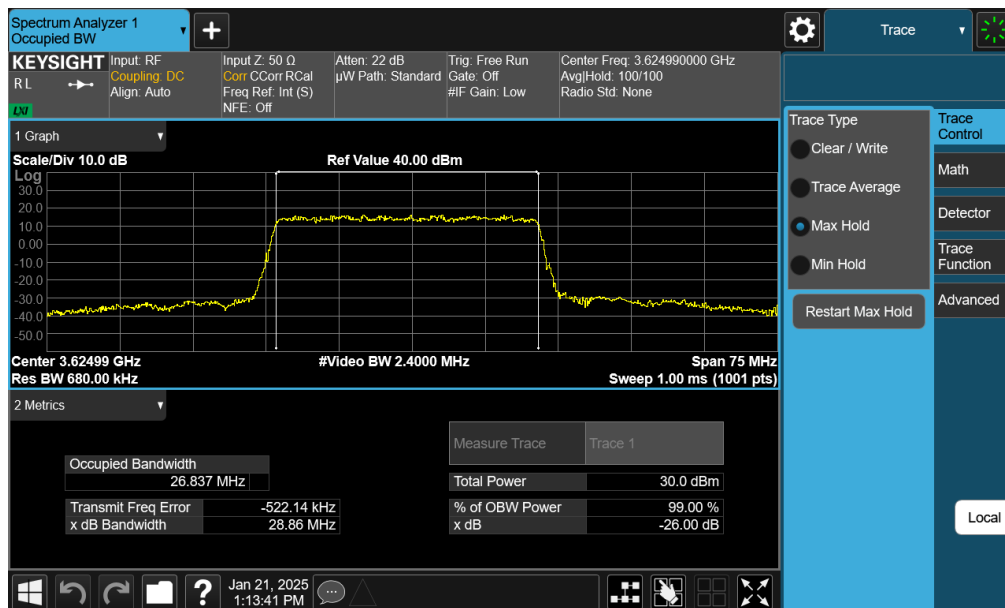


Plot 7-20. Occupied Bandwidth Plot (NR Band n48 - 30MHz $\pi/2$ BPSK - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 28 of 114

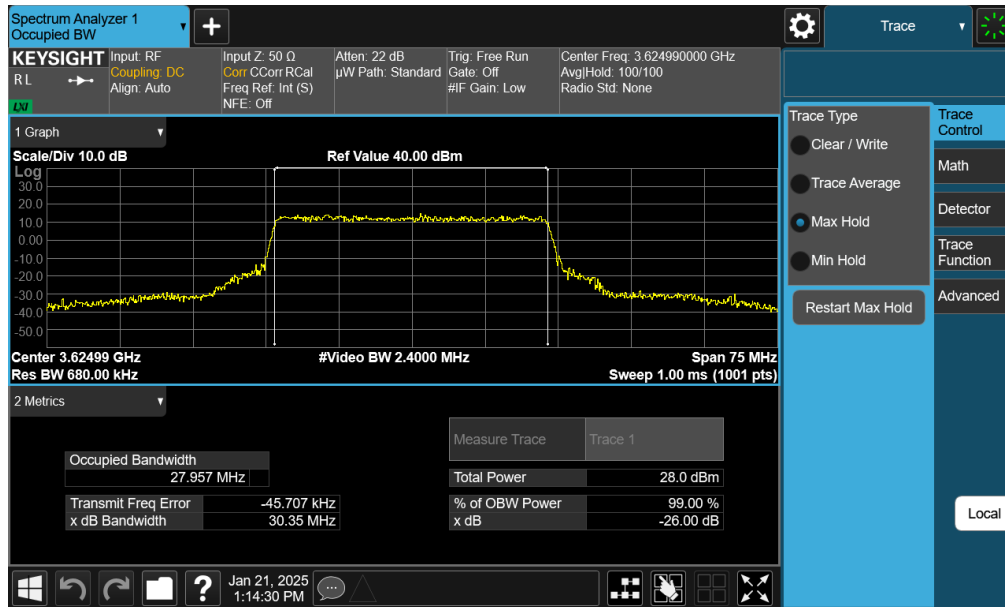


Plot 7-21. Occupied Bandwidth Plot (NR Band n48 - 30MHz QPSK - Full RB Configuration - Ant 6)

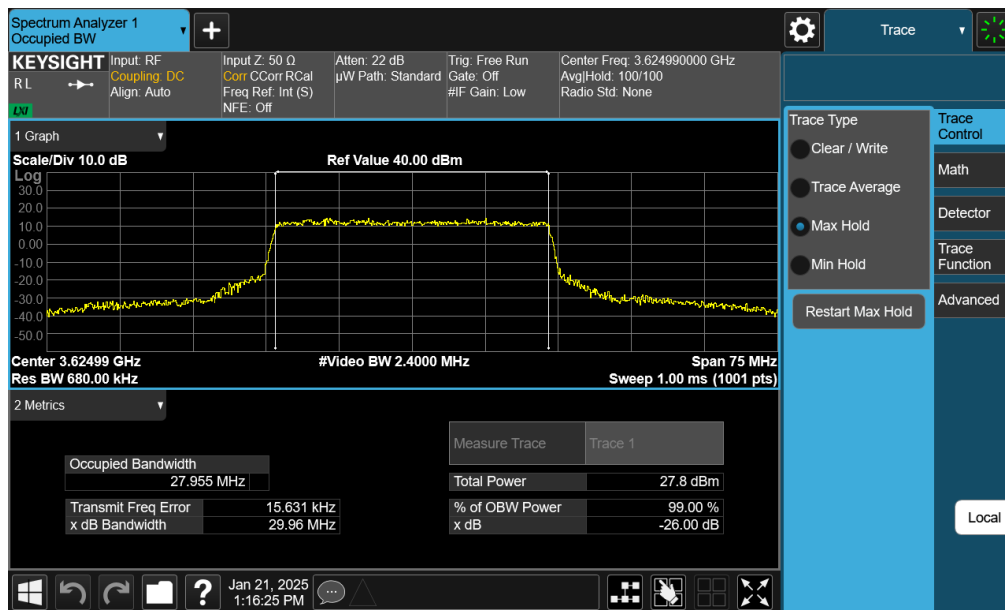


Plot 7-22. Occupied Bandwidth Plot (NR Band n48 - 30MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 29 of 114

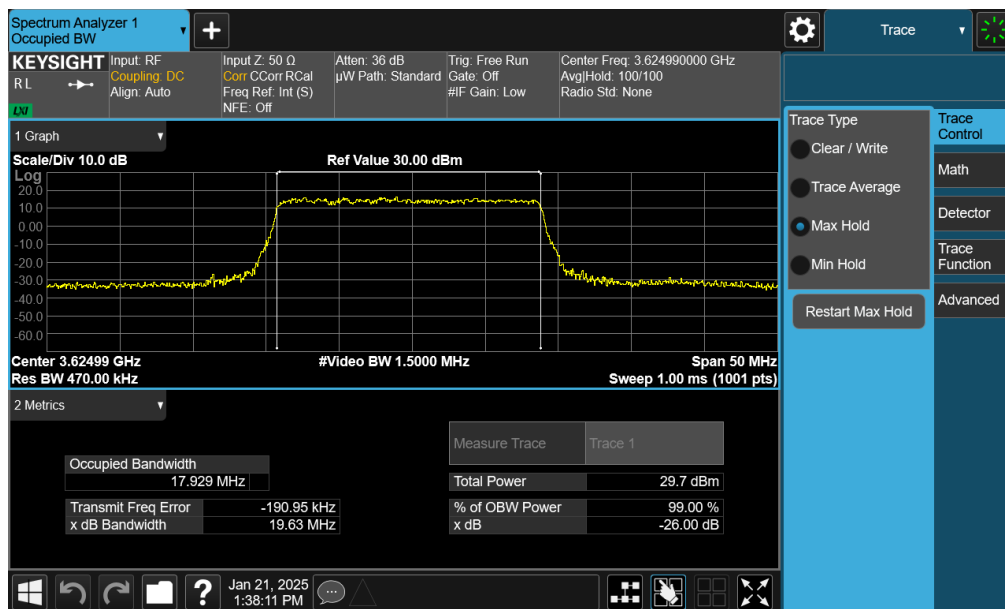


Plot 7-23. Occupied Bandwidth Plot (NR Band n48 - 20MHz $\pi/2$ BPSK - Full RB Configuration - Ant 6)

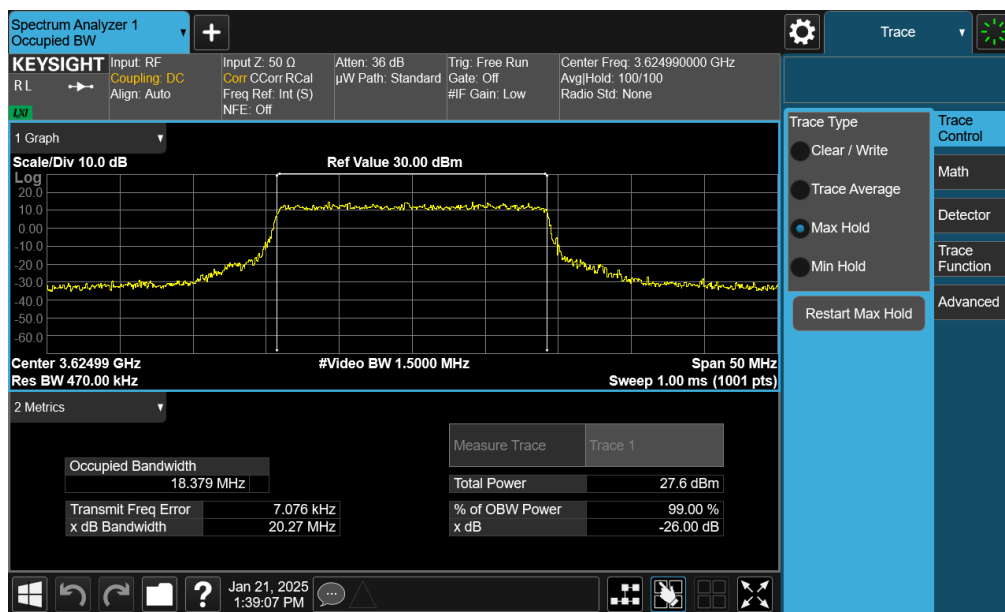


Plot 7-24. Occupied Bandwidth Plot (NR Band n48 - 20MHz QPSK - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 30 of 114

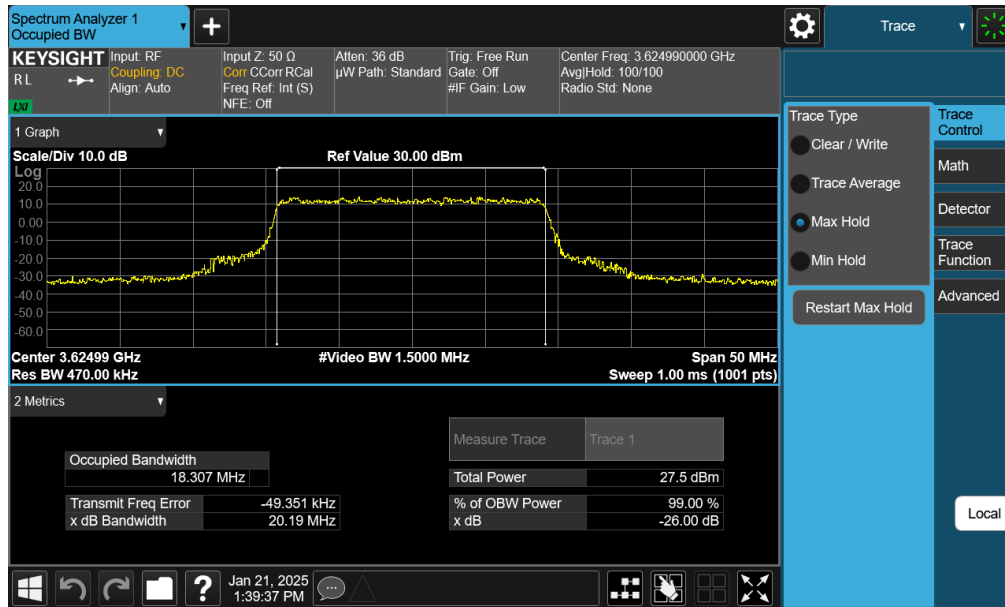


Plot 7-25. Occupied Bandwidth Plot (NR Band n48 - 20MHz 16-QAM - Full RB Configuration - Ant 6)

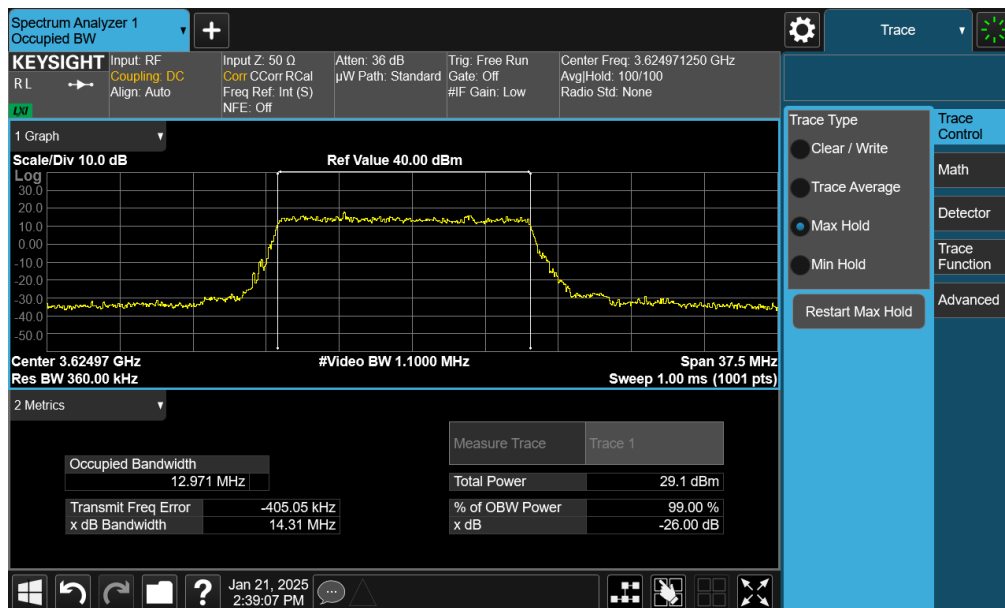


Plot 7-26. Occupied Bandwidth Plot (NR Band n48 - 15MHz $\pi/2$ BPSK - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 31 of 114

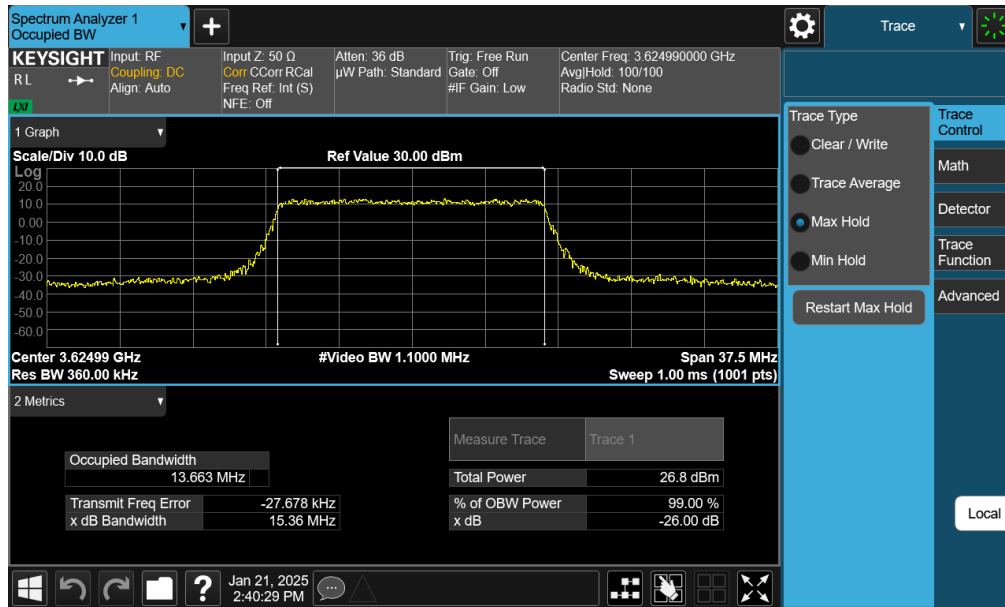


Plot 7-27. Occupied Bandwidth Plot (NR Band n48 - 15MHz QPSK - Full RB Configuration - Ant 6)

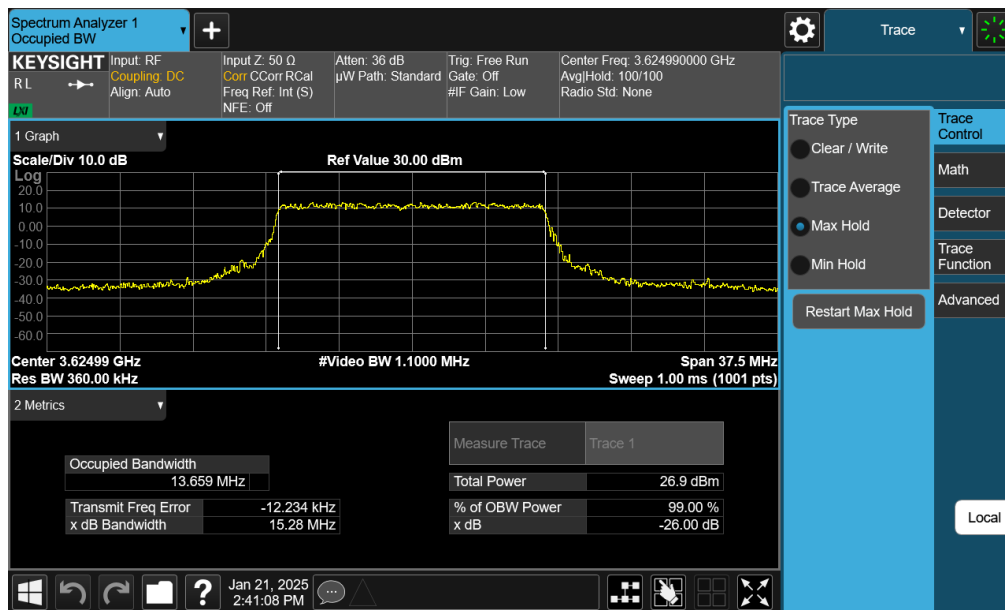


Plot 7-28. Occupied Bandwidth Plot (NR Band n48 - 15MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 32 of 114

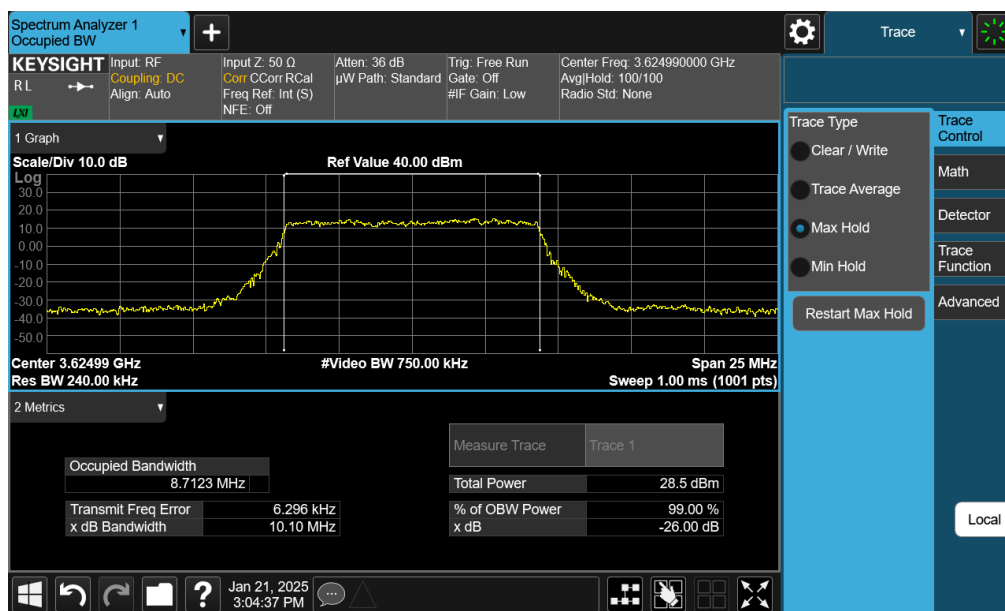


Plot 7-29. Occupied Bandwidth Plot (NR Band n48 - 10MHz $\pi/2$ BPSK - Full RB Configuration - Ant 6)

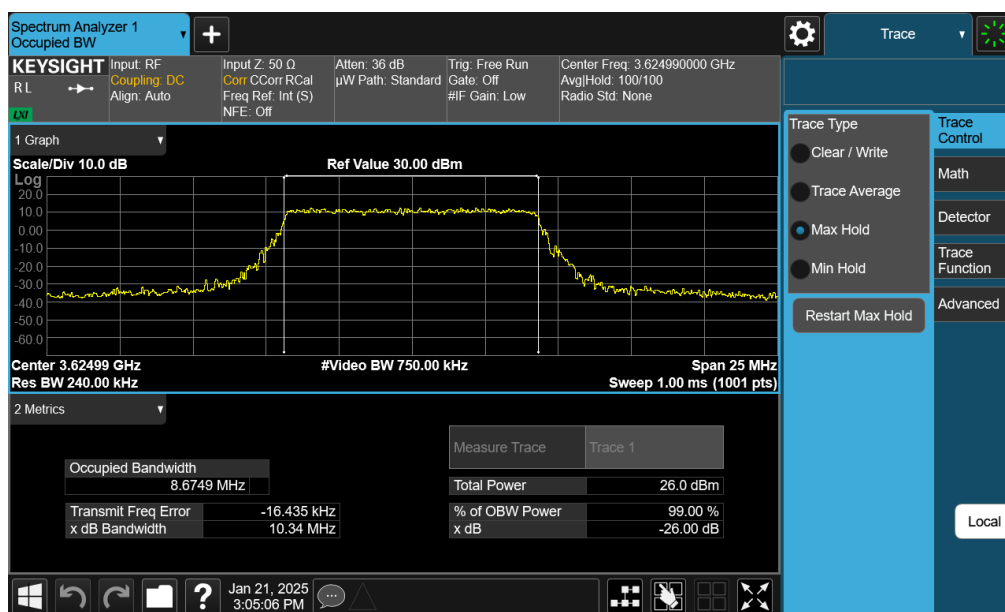

Plot 7-30. Occupied Bandwidth Plot (NR Band n48 - 10MHz QPSK - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 33 of 114

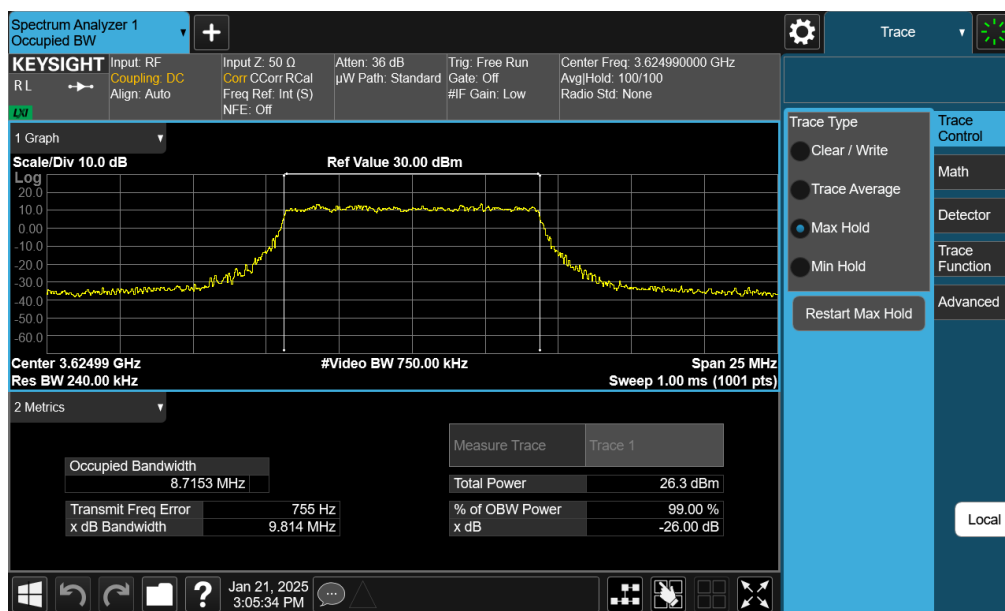

Plot 7-31. Occupied Bandwidth Plot (NR Band n48 - 10MHz 16-QAM - Full RB Configuration - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 34 of 114

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	35.89
		QPSK	38.01
		16QAM	37.96

Table 7-9. Occupied Bandwidth Test Results – NR Band n48 – Ant 8

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	35.82
		QPSK	38.06
		16QAM	38.02


Table 7-10. Occupied Bandwidth Test Results – NR Band n48 – Ant 2

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	35.92
		QPSK	38.12
		16QAM	37.99


Table 7-11. Occupied Bandwidth Test Results – NR Band n48 – Ant 4

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 35 of 114

NR Band n48 – Ant 8

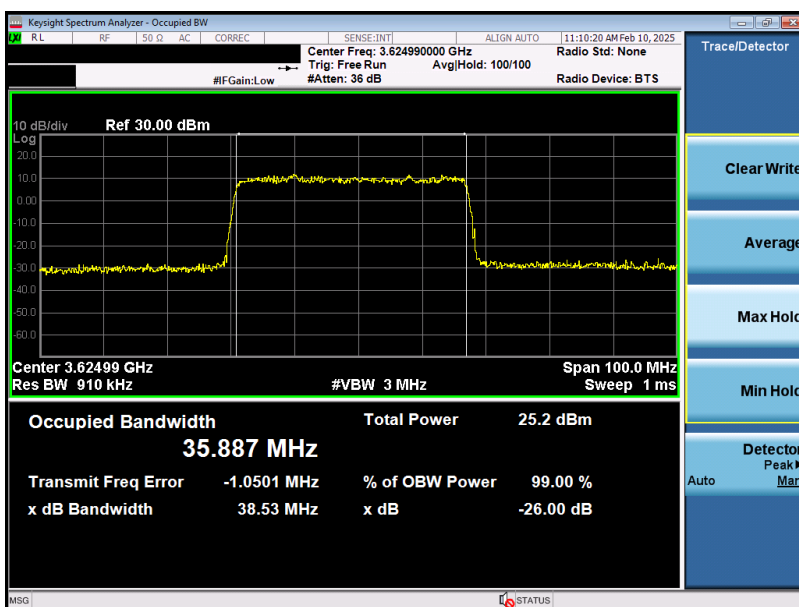


Plot 7-32. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant 8)

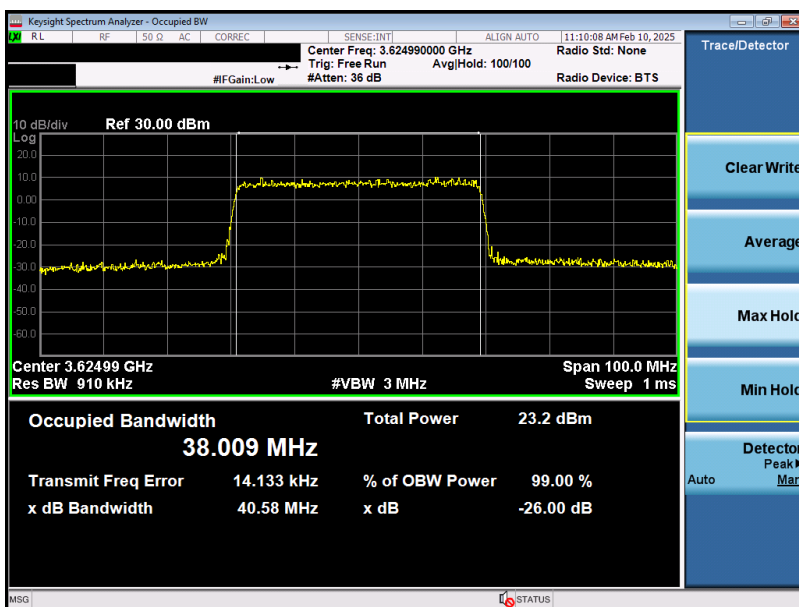

Plot 7-33. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant 8)


FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 36 of 114

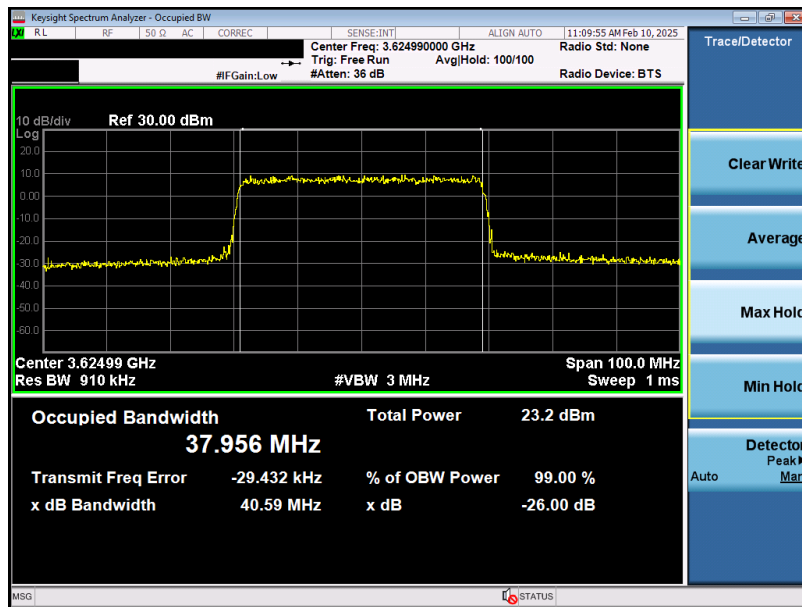


Plot 7-34. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant 8)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 37 of 114

NR Band n48 – Ant 2

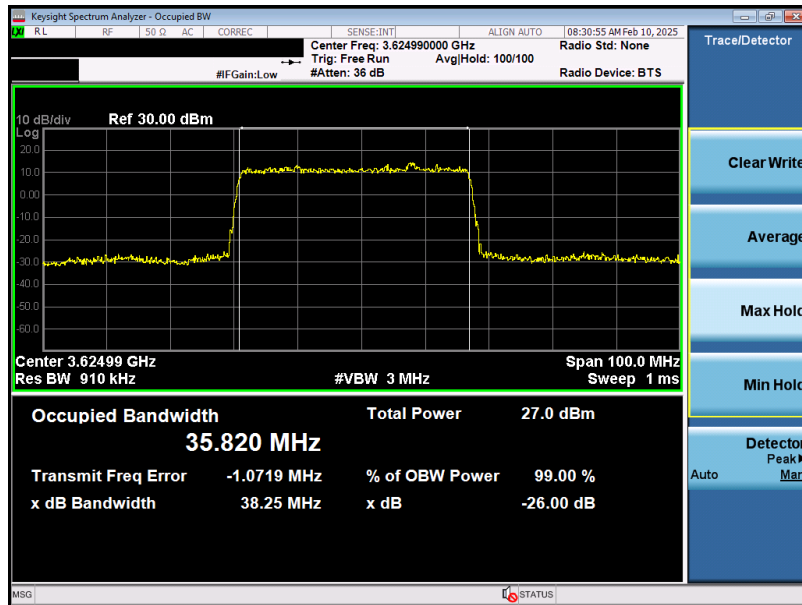


Plot 7-35. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant 2)

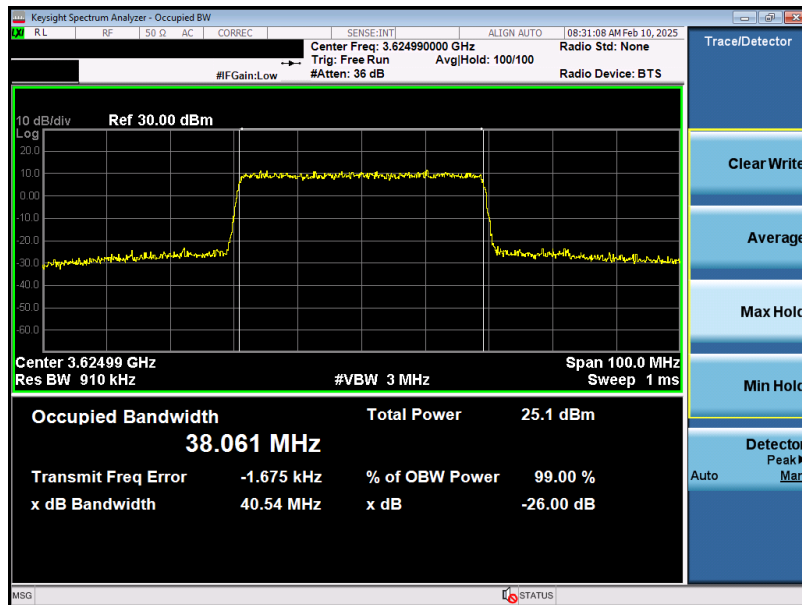

Plot 7-36. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant 2)


FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 38 of 114

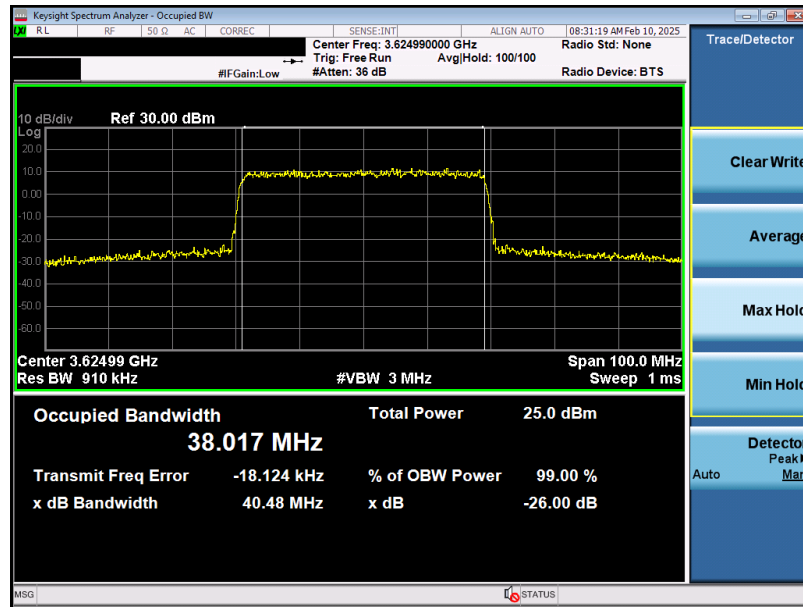


Plot 7-37. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant 2)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 39 of 114

NR Band n48 – Ant 4

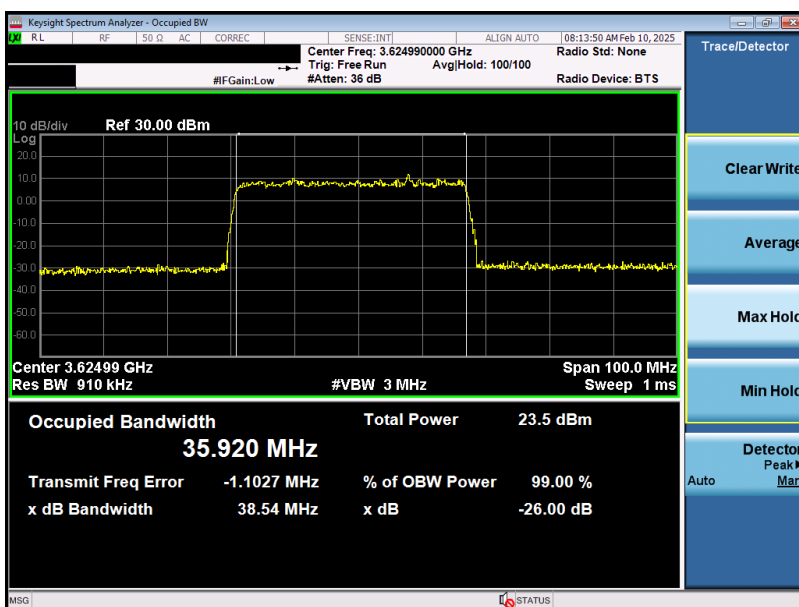


Plot 7-38. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant 4)

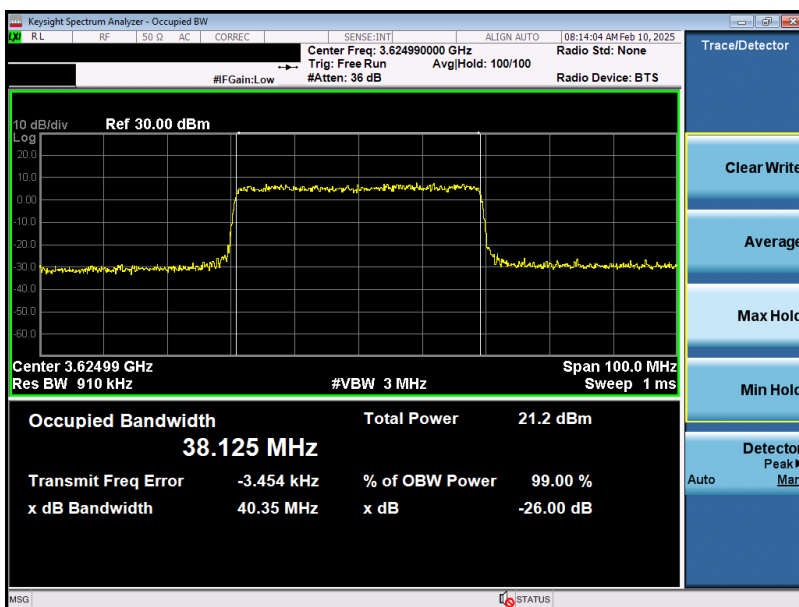

Plot 7-39. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant 4)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 40 of 114

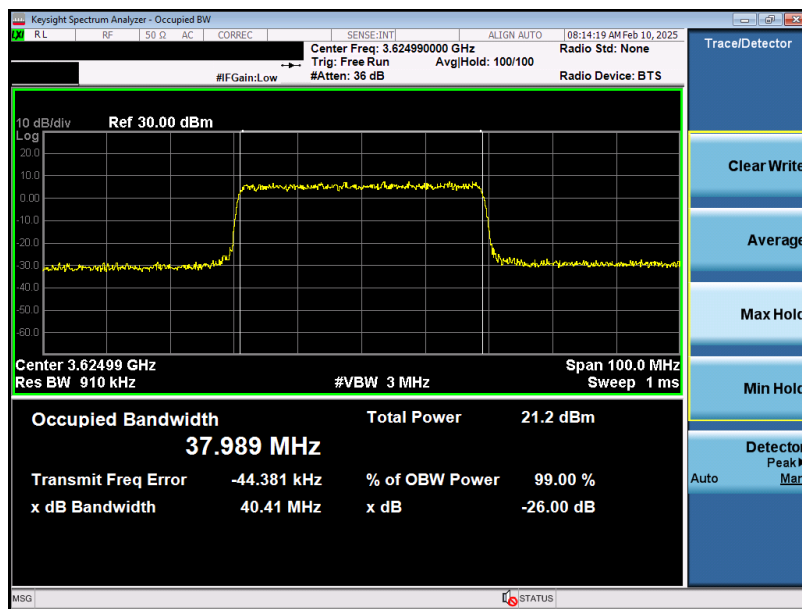

Plot 7-40. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant 4)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 41 of 114

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

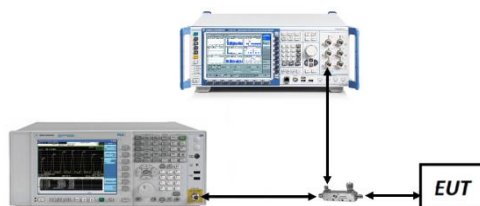


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.



FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 42 of 114

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B48	20MHz	Low	30.0 - 3510.0	-44.72	-40.0	-4.72
		Low	3610.0 - 15000.0	-43.73	-40.0	-3.73
		Low	15000.0 - 27000.0	-56.59	-40.0	-16.59
		Low	27000.0 - 40000.0	-50.48	-40.0	-10.48
		Mid	30.0 - 35750.0	-46.70	-40.0	-6.70
		Mid	3675.0 - 15000.0	-43.26	-40.0	-3.26
		Mid	15000.0 - 27000.0	-56.24	-40.0	-16.24
		Mid	27000.0 - 40000.0	-50.26	-40.0	-10.26
		High	30.0 - 3640.0	-48.00	-40.0	-8.00
		High	3740.0 - 15000.0	-43.13	-40.0	-3.13
		High	15000.0 - 27000.0	-56.67	-40.0	-16.67
		High	27000.0 - 40000.0	-50.22	-40.0	-10.22
LTE Band 48 ULCA	20+20MHz	Low	30.0 - 3510.0	-46.26	-40.0	-6.26
		Low	3540.0 - 3630.0	-27.51	-	-
		Low	3610.0 - 15000.0	-43.54	-40.0	-3.54
		Low	15000.0 - 27000.0	-56.63	-48.2	-8.39
		Low	27000.0 - 40000.0	-51.11	-40.0	-11.11
		Mid	30.0 - 3575.0	-46.91	-40.0	-6.91
		Mid	3575.0 - 3720.0	-21.54	-	-
		Mid	3675.0 - 15000.0	-44.33	-40.0	-4.33
		Mid	15000.0 - 27000.0	-57.27	-40.0	-17.27
		Mid	27000.0 - 40000.0	-51.43	-40.0	-11.43
		High	30.0 - 3640.0	-48.33	-40.0	-8.33
		High	3620.0 - 3710.0	-24.84	-	-
		High	3740.0 - 15000.0	-43.74	-40.0	-3.74
		High	15000.0 - 27000.0	-57.20	-40.0	-17.20
		High	27000.0 - 40000.0	-51.12	-40.0	-11.12
NR-n48	40MHz	Low	30.0 - 3510.0	-47.78	-40.0	-7.78
		Low	3610.0 - 15000.0	-43.07	-40.0	-3.07
		Low	15000.0 - 27000.0	-55.46	-40.0	-15.46
		Low	27000.0 - 40000.0	-49.05	-40.0	-9.05
		Mid	30.0 - 35750.0	-48.38	-40.0	-8.38
		Mid	3675.0 - 15000.0	-43.62	-40.0	-3.62
		Mid	15000.0 - 27000.0	-55.24	-40.0	-15.24
		Mid	27000.0 - 40000.0	-49.26	-40.0	-9.26
		High	30.0 - 3640.0	-46.25	-40.0	-6.25
		High	3740.0 - 15000.0	-43.77	-40.0	-3.77
		High	15000.0 - 27000.0	-55.90	-40.0	-15.90
		High	27000.0 - 40000.0	-48.99	-40.0	-8.99


Table 7-12. Conducted Emission Test Results – Ant 6

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 43 of 114


LTE Band 48 – Ant 6

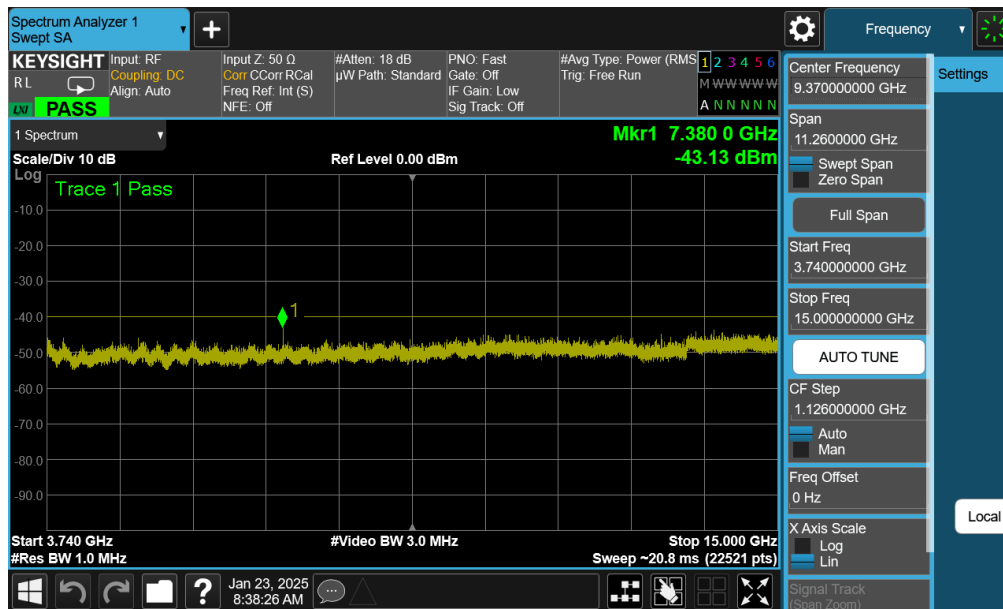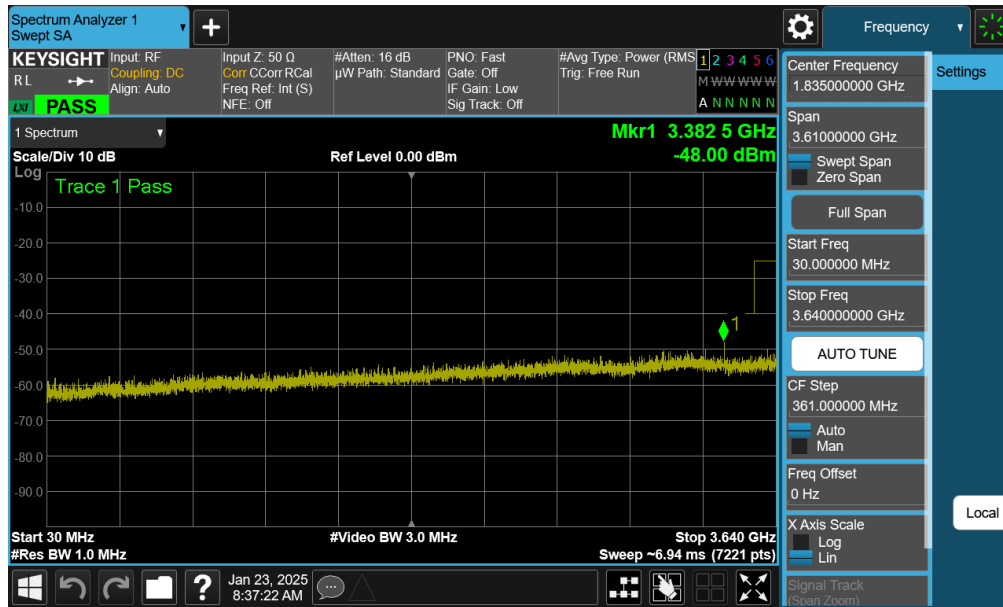

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 44 of 114

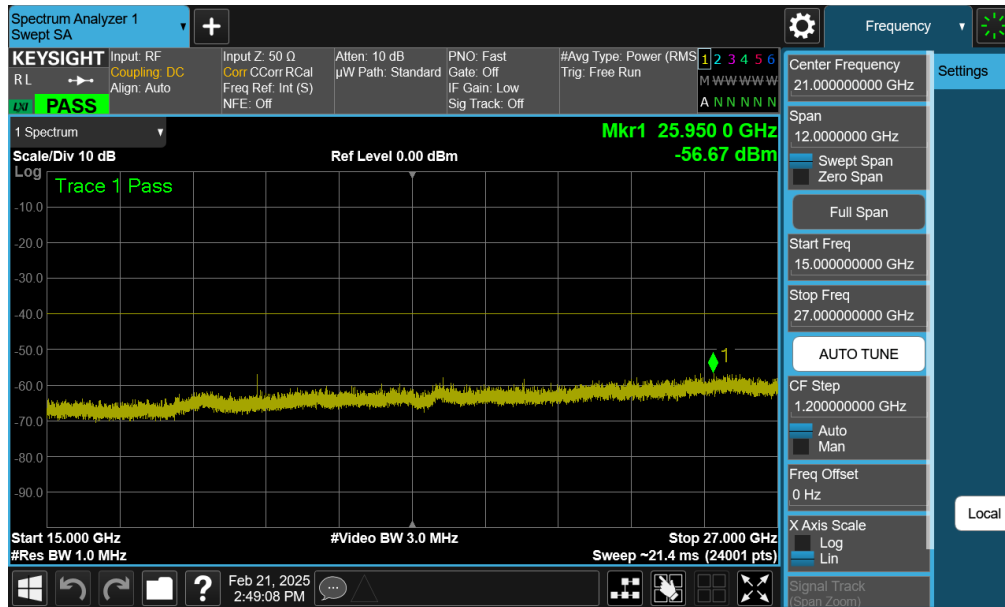


Plot 7-43. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel - Ant 6)

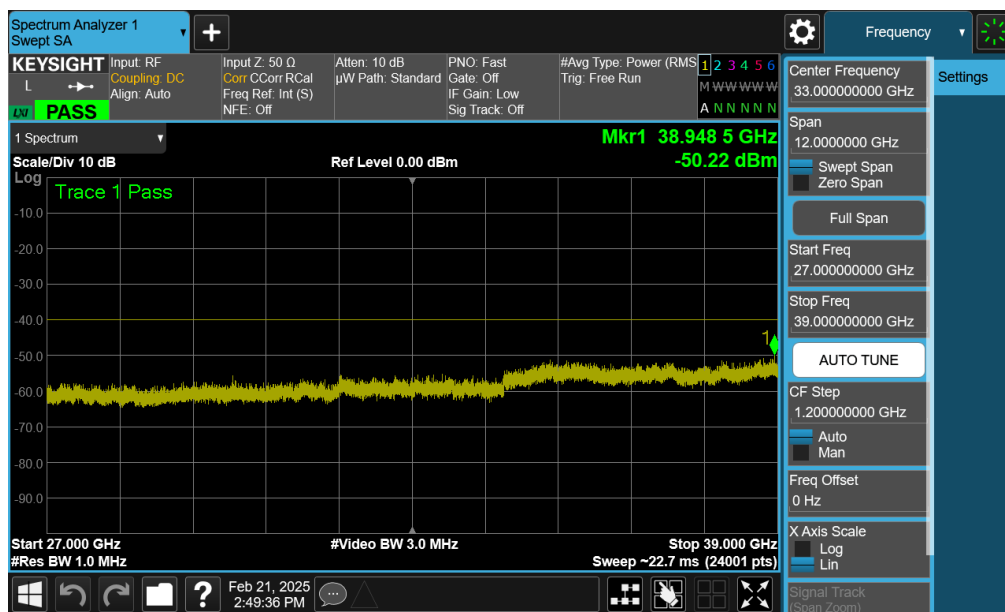


Plot 7-44. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 45 of 114

ULCA LB48 – Ant 6

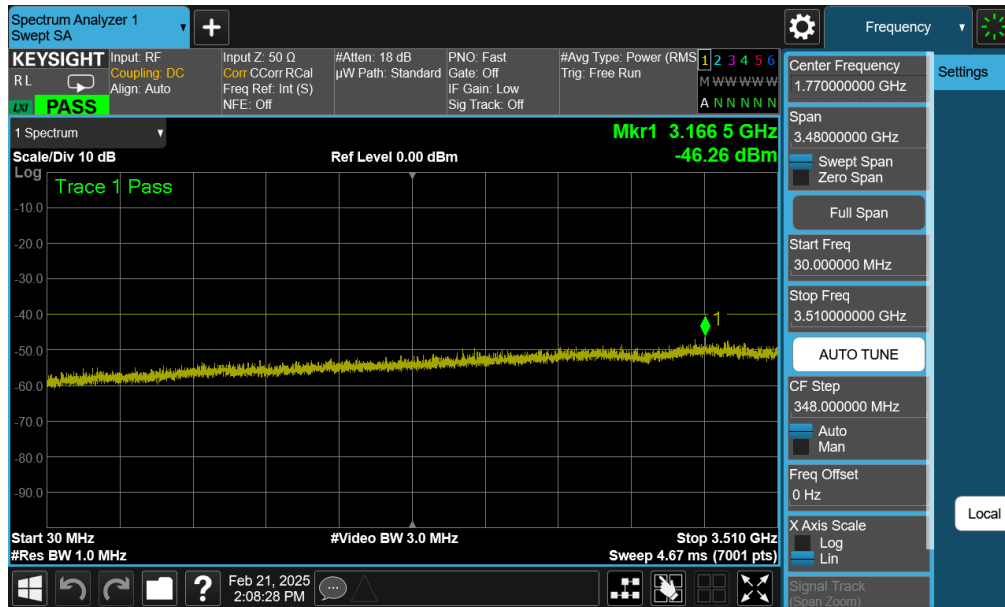


Plot 7-45. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel - Ant 6)

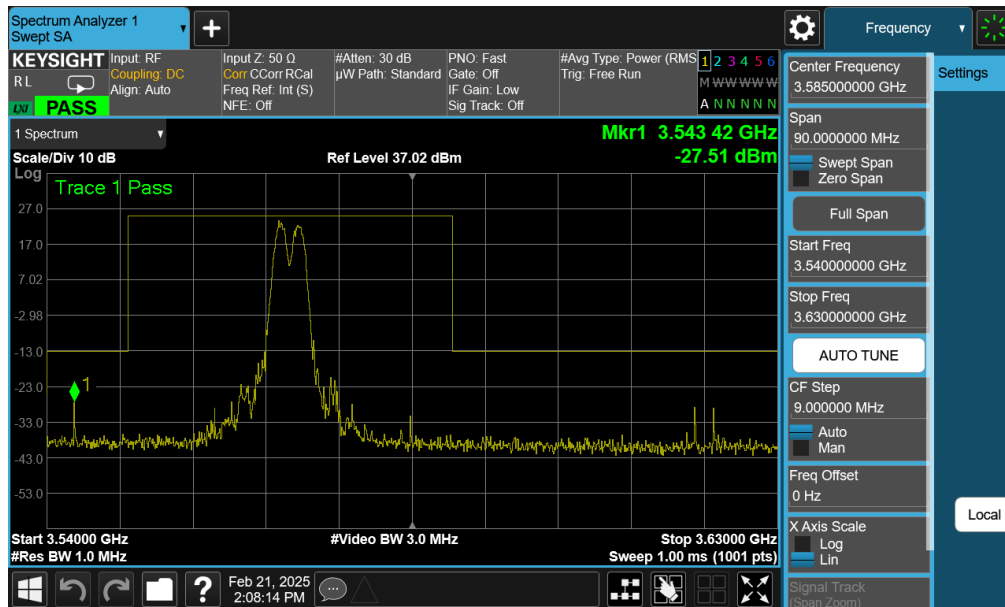


Plot 7-46. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 46 of 114

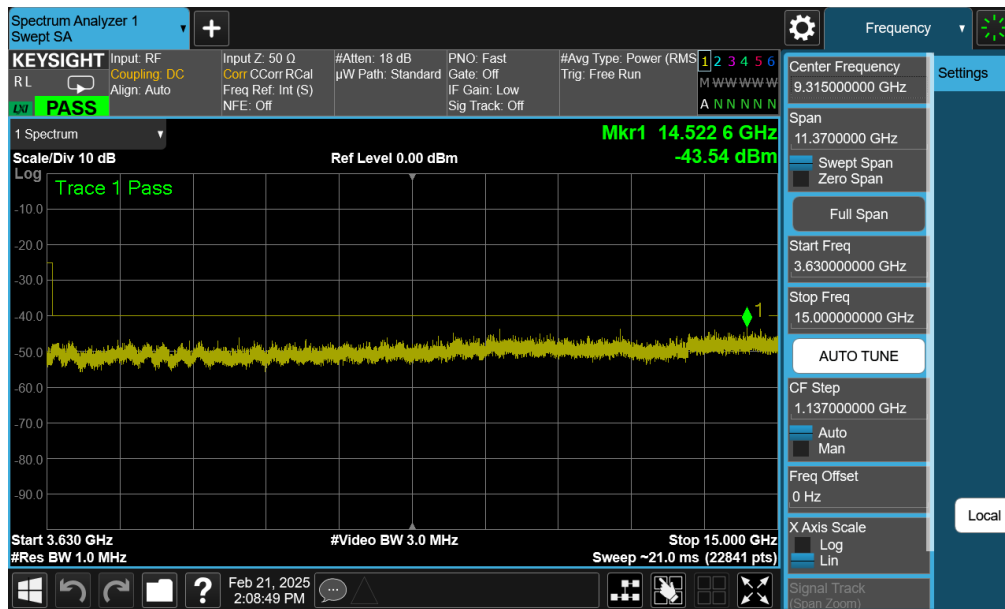


Plot 7-47. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel - Ant 6)

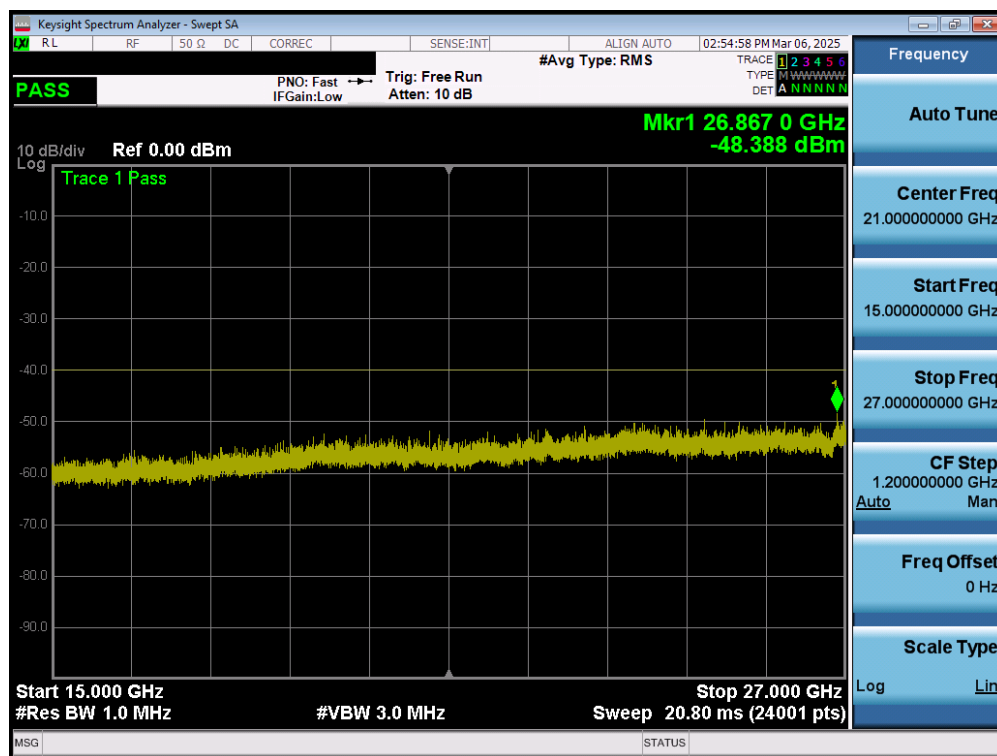


Plot 7-48. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 47 of 114

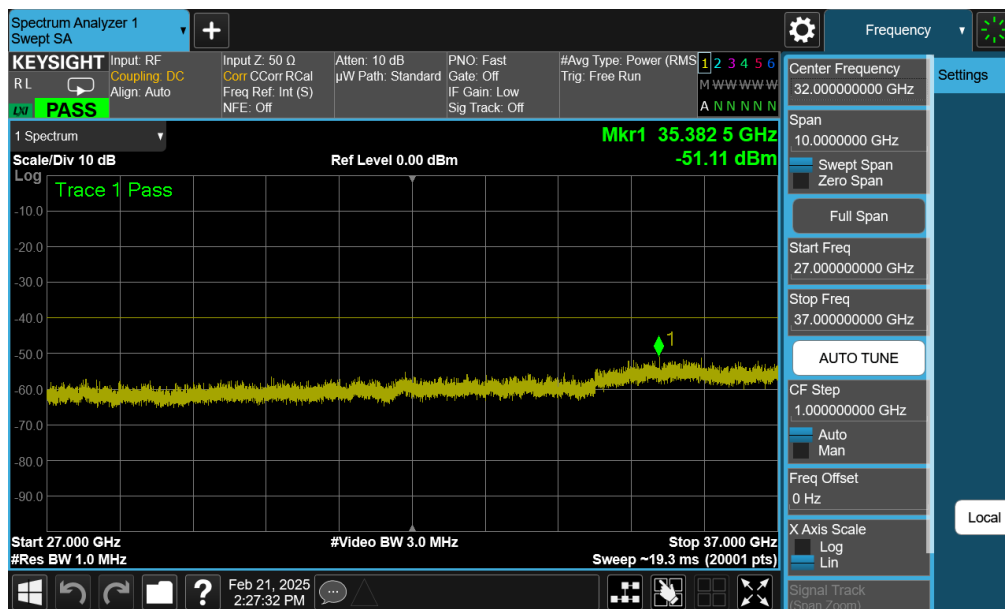


FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 48 of 114

NR Band n48 – Ant 6

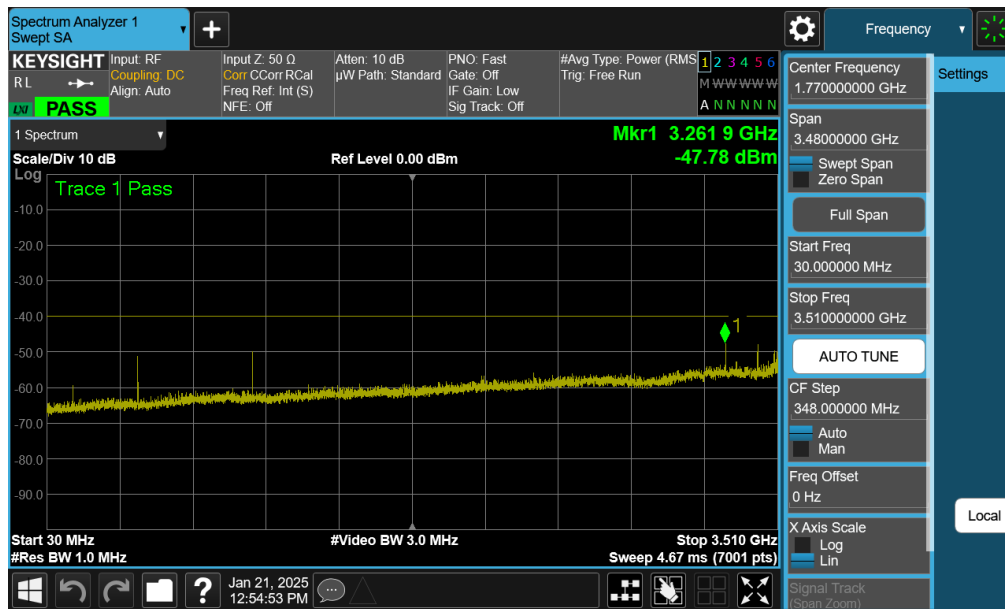


Plot 7-50. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant 6)

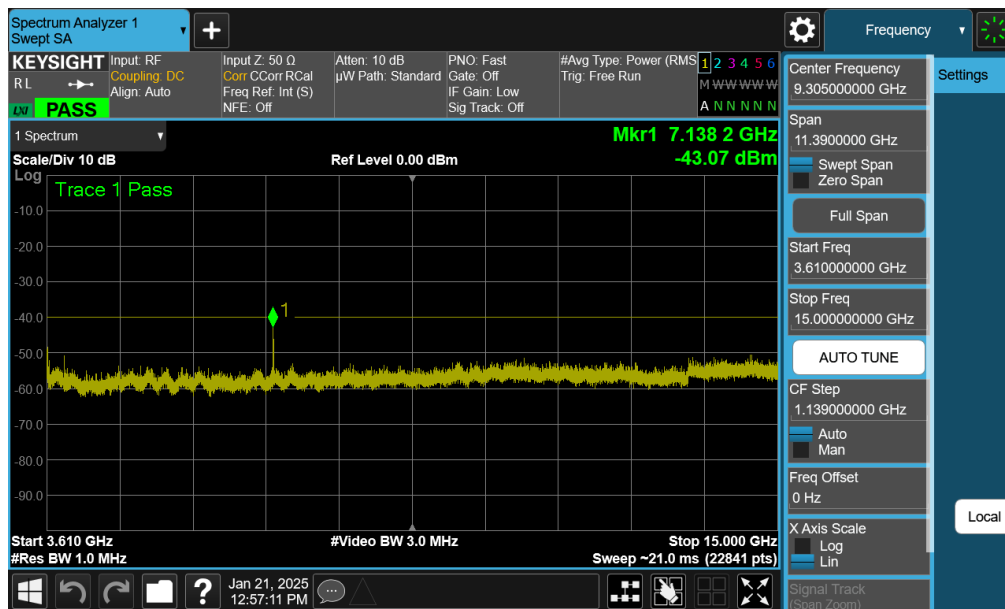


Plot 7-51. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant 6)

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 49 of 114

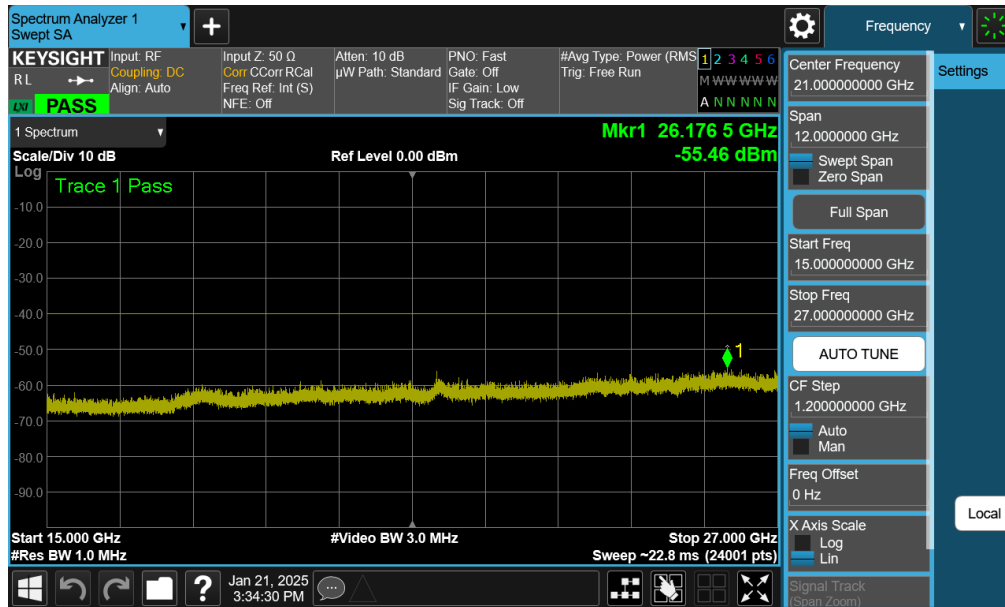

Plot 7-52. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant 6)

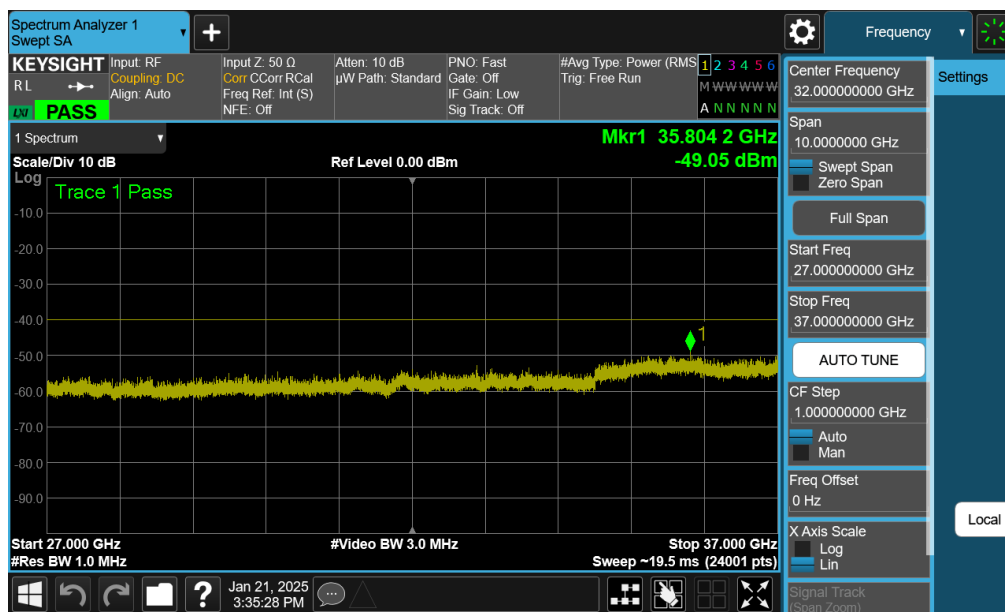

Plot 7-53. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant 6)



FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 50 of 114

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
NR-n48	40MHz	Low	30.0 - 3510.0	-47.11	-40.0	-7.11
		Low	3610.0 - 15000.0	-48.22	-40.0	-8.22
		Low	15000.0 - 27000.0	-56.25	-40.0	-16.25
		Low	27000.0 - 40000.0	-50.55	-40.0	-10.55
		Mid	30.0 - 35750.0	-45.87	-40.0	-5.87
		Mid	3675.0 - 15000.0	-47.05	-40.0	-7.05
		Mid	15000.0 - 27000.0	-55.95	-40.0	-15.95
		Mid	27000.0 - 40000.0	-49.61	-40.0	-9.61
		High	30.0 - 3640.0	-47.69	-40.0	-7.69
		High	3740.0 - 15000.0	-47.86	-40.0	-7.86
		High	15000.0 - 27000.0	-55.70	-40.0	-15.70
		High	27000.0 - 40000.0	-50.79	-40.0	-10.79



Table 7-13. Conducted Emission Test Results – NR Band n48 – Ant 8

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 51 of 114

NR Band n48 – Ant 8

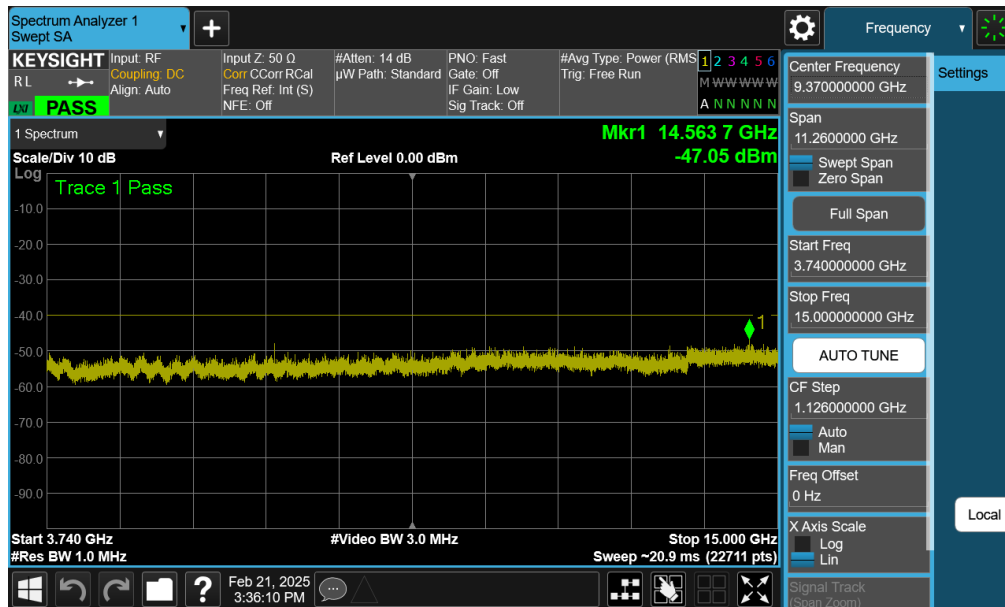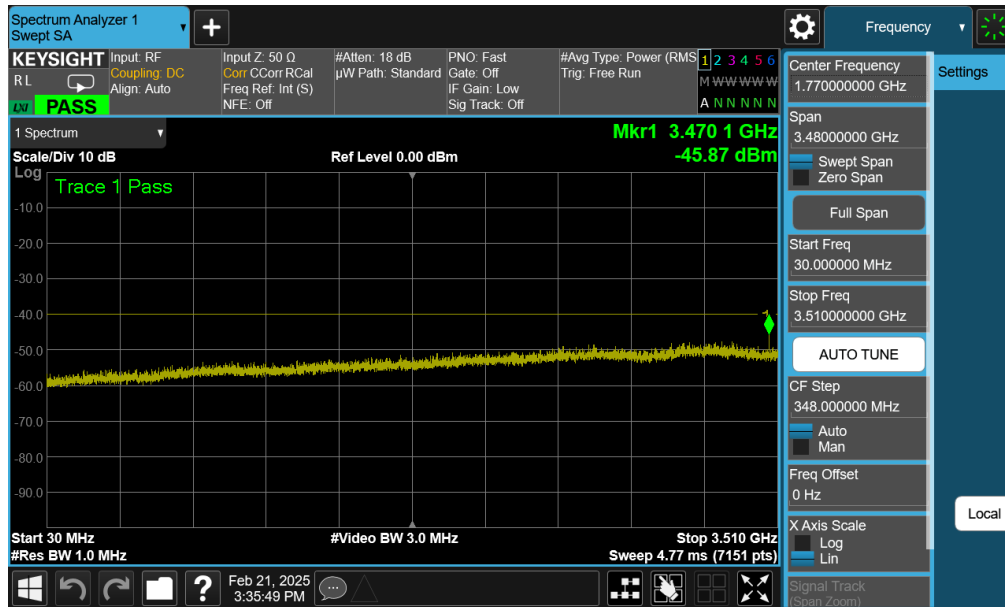

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 52 of 114

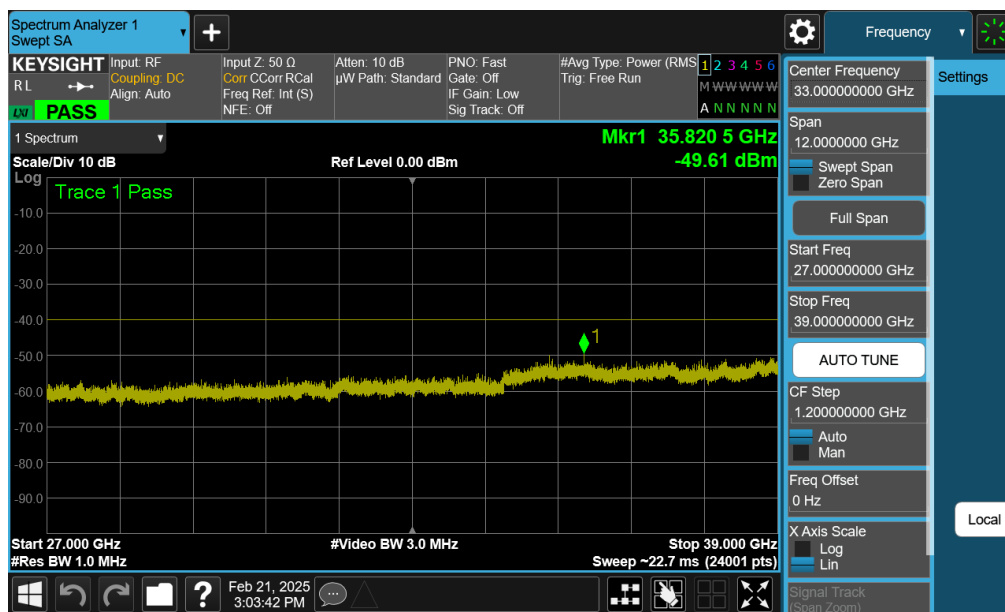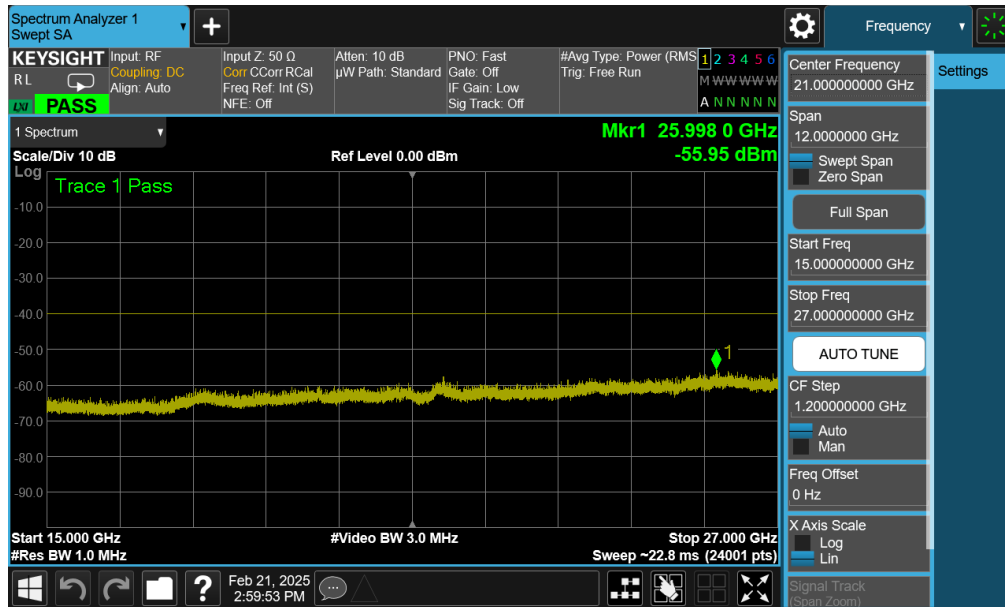



FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 53 of 114

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
NR-n48	40MHz	Low	30.0 - 3510.0	-47.21	-40.0	-7.21
		Low	3610.0 - 15000.0	-45.47	-40.0	-5.47
		Low	15000.0 - 27000.0	-56.31	-40.0	-16.31
		Low	27000.0 - 40000.0	-50.46	-40.0	-10.46
		Mid	30.0 - 35750.0	-46.32	-40.0	-6.32
		Mid	3675.0 - 15000.0	-43.76	-40.0	-3.76
		Mid	15000.0 - 27000.0	-56.78	-40.0	-16.78
		Mid	27000.0 - 40000.0	-50.06	-40.0	-10.06
		High	30.0 - 3640.0	-46.17	-40.0	-6.17
		High	3740.0 - 15000.0	-46.18	-40.0	-6.18
		High	15000.0 - 27000.0	-55.73	-40.0	-15.73
		High	27000.0 - 40000.0	-49.72	-40.0	-9.72

Table 7-14. Conducted Emission Test Results – NR Band n48 – Ant 2

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 54 of 114

NR Band n48 – Ant 2

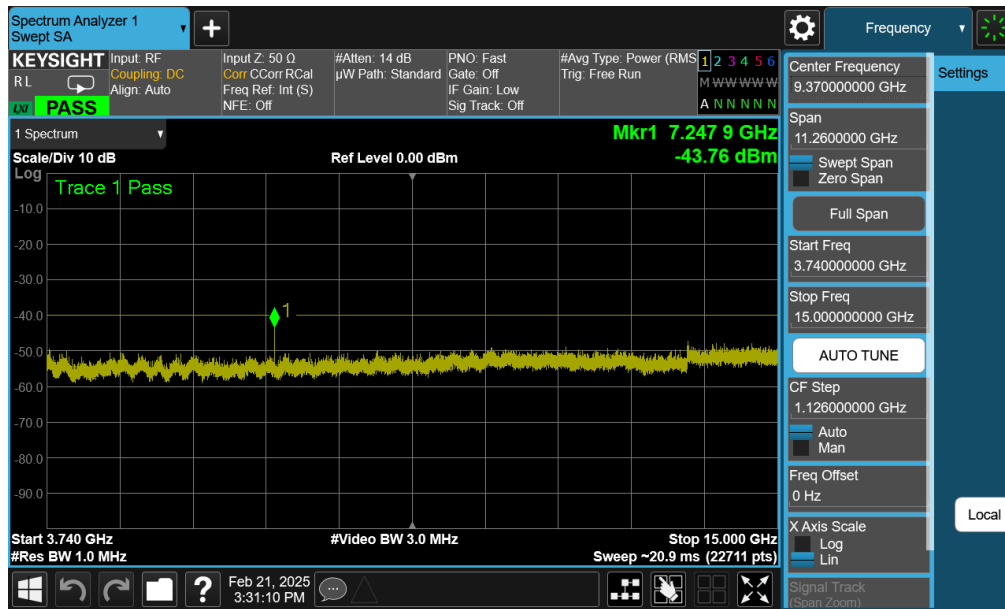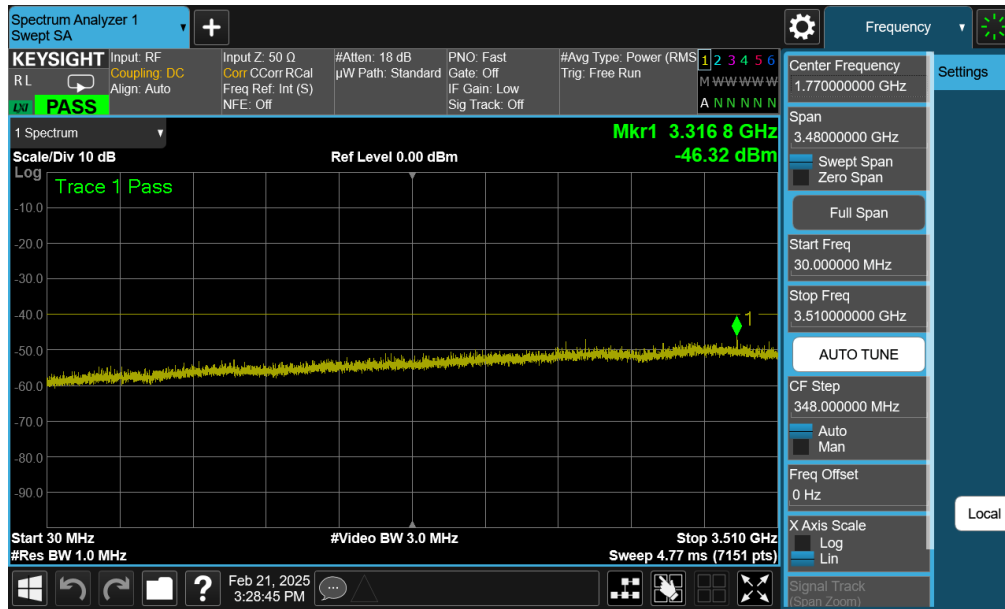

FCC ID: A3LSMG766U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-13.A3L	Test Dates: 1/6/2025 – 3/6/2025	EUT Type: Portable Handset	Page 55 of 114