

MEASUREMENT REPORT

FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

1/19-3/3/2015

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

OY1501190158.A3L

FCC ID:

A3LSMG925T

APPLICANT:

Samsung Electronics, Co. Ltd.

Application Type:

Certification

Model(s):

SM-G925T

EUT Type:

Portable Handset

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15.407

Test Procedure(s):

KDB 789033 D02 v01, KDB 644545 D03 v01, KDB 648474 D03 v01r02,
KDB 662911 D01 v02r01

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
				Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)	Max Power (mW)	Max Power (dBm)
802.11a	1	20	5180 - 5240	25.527	14.07	26.546	14.24	NA	
	2A	20	5260 - 5320	27.102	14.33	24.774	13.94		
	2C	20	5500 - 5720	27.227	14.35	26.242	14.19		
	3	20	5745 - 5825	26.242	14.19	27.606	14.41		
802.11n	1	20	5180 - 5240	24.044	13.81	25.119	14.00	48.997	16.90
	2A	20	5260 - 5320	26.062	14.16	25.410	14.05	50.893	17.07
	2C	20	5500 - 5720	27.102	14.33	25.410	14.05	52.337	17.19
	3	20	5745 - 5825	24.774	13.94	26.182	14.18	50.360	17.02
802.11ac	1	20	5180 - 5240	20.797	13.18	19.055	12.80	39.852	16.00
	2A	20	5260 - 5320	22.080	13.44	20.137	13.04	41.668	16.20
	2C	20	5500 - 5700	18.923	12.77	21.878	13.40	40.801	16.11
	3	20	5745 - 5825	19.055	12.80	21.086	13.24	40.141	16.04
802.11n	1	40	5190 - 5230	17.338	12.39	17.579	12.45	34.798	15.42
	2A	40	5270 - 5310	15.453	11.89	17.701	12.48	32.872	15.17
	2C	40	5510 - 5710	16.106	12.07	17.660	12.47	33.484	15.25
	3	40	5755 - 5795	17.701	12.48	15.596	11.93	33.297	15.22
802.11ac	1	40	5190 - 5230	14.997	11.76	17.539	12.44	32.330	15.10
	2A	40	5270 - 5310	16.596	12.20	17.701	12.48	34.297	15.35
	2C	40	5510 - 5670	17.539	12.44	15.849	12.00	32.920	15.17
	3	40	5755 - 5795	16.788	12.25	15.740	11.97	32.528	15.12
802.11ac	1	80	5210	11.940	10.77	12.050	10.81	23.990	13.80
	2A	80	5290	13.709	11.37	12.331	10.91	26.040	14.16
	2C	80	5530 - 5690	13.243	11.22	12.417	10.94	25.660	14.09
	3	80	5775	12.246	10.88	12.794	11.07	25.040	13.99

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01 and KDB 644545 v01r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: OY1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 1 of 213

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 PCTEST TEST LOCATION	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION	6
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	6
3.0 DESCRIPTION OF TEST	7
3.1 EVALUATION PROCEDURE	7
3.2 AC LINE CONDUCTED EMISSIONS	7
3.3 RADIATED EMISSIONS	8
3.4 ENVIRONMENTAL CONDITIONS	8
4.0 ANTENNA REQUIREMENTS	9
5.0 TEST EQUIPMENT CALIBRATION DATA	10
6.0 TEST RESULTS	11
6.1 SUMMARY	11
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	12
6.3 6DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	45
6.4 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC	56
6.5 MAXIMUM POWER SPECTRAL DENSITY – 802.11A/N/AC	61
6.6 FREQUENCY STABILITY	105
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS	109
6.7.1 ANTENNA-1 RADIATED SPURIOUS EMISSION MEASUREMENTS	112
6.7.2 ANTENNA-2 RADIATED SPURIOUS EMISSION MEASUREMENTS	125
6.7.3 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	138
6.7.4 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	145
6.7.5 ANTENNA-1 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	152
6.7.6 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	159
6.7.7 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	166
6.7.8 ANTENNA-2 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	173
6.7.9 MIMO RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	180
6.7.10 MIMO RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	187
6.7.11 MIMO RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	194
6.8 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ	201
6.9 LINE-CONDUCTED TEST DATA	205
7.0 CONCLUSION	213

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 2 of 213



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: Samsung Electronics, Co. Ltd.

APPLICANT ADDRESS: 129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: SM-G925T

FCC ID: A3LSMG925T

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

Test Device Serial No.: 15631, 1562F, 1562D, 15F8F ☐ Production ☒ Pre-Production ☐ Engineering

DATE(S) OF TEST: 1/19-3/3/2015

TEST REPORT S/N: 0Y1501190158.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 3 of 213

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

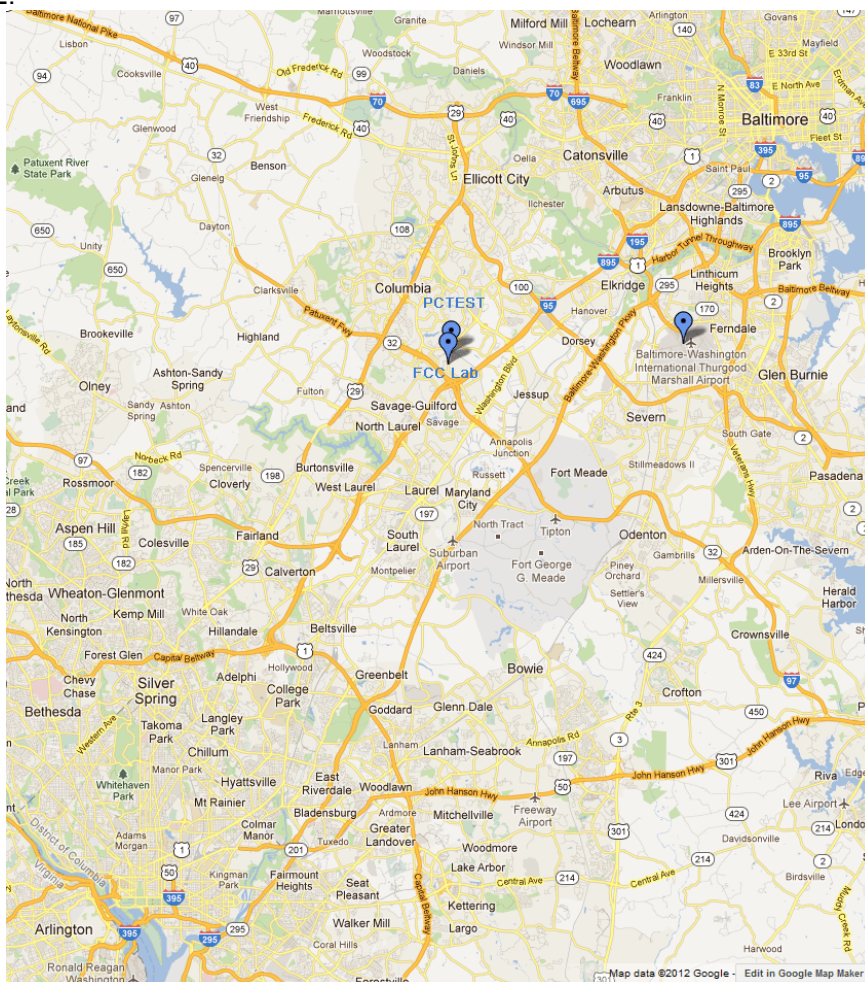


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 4 of 213

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG925T**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
2.4GHz	b	99.90	99.89	N/A
	g	98.75	98.74	N/A
	n	98.54	98.90	97.22
5GHz	a	98.62	98.41	N/A
	n (HT20)	98.61	98.40	98.40
	n (HT40)	98.53	98.23	98.12
	ac (HT80)	97.18	95.65	98.10

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM	
		ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗
	11n (20MHz)	✓	✓	✓	✓
	11n (40MHz)	✓	✓	✓	✓
	11ac (80MHz)	✓	✓	✓	✓

Table 2-1. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325,
 351/390, 390/433.3 (ac – 80MHz BW)

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset	Page 5 of 213	

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSMG925T was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.4, 6.5, and 0 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r02. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset	Page 6 of 213	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **Samsung Portable Handset FCC ID: A3LSMG925T**.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 7 of 213

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 8 of 213

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Samsung Portable Handset FCC ID: A3LSMG925T** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 4-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550		
				:	:		
				142	5710	159	5795

Table 4-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset				Page 9 of 213

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	10/24/2014	Annual	10/24/2015	N/A
-	RE3	Radiated Emissions Cable Set	10/17/2014	Annual	10/17/2015	N/A
-	WL25-1	Conducted Cable Set (25GHz)	10/14/2014	Annual	10/14/2015	N/A
Agilent	8447D	Broadband Amplifier	6/2/2014	Annual	6/2/2015	1937A03348
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/16/2014	Annual	4/16/2015	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N9038A	MXE EMI Receiver	3/3/2014	Annual	3/3/2015	MY51210133
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Anritsu	MA2411B	Pulse Sensor	4/8/2014	Biennial	4/8/2016	846215
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Biennial	6/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Emco	3816/2	Line Impedance Stabilization Network	2/12/2013	Biennial	2/12/2015	9709-1077
Espec	ESX-2CA	Environmental Chamber	4/16/2014	Annual	4/16/2015	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	10/15/2014	Annual	10/15/2015	251425001
K & L	11SH10-6000/T18000	High Pass Filter	12/1/2014	Annual	12/1/2015	1
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
Pasternack	NMLC-1	Line Conducted Emissions Cable (NM)	10/17/2014	Annual	10/17/2015	N/A
Rhode & Schwarz	TS-PR18	Pre-Amplifier	6/12/2014	Annual	6/12/2015	101622
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/27/2014	Annual	3/27/2015	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	5/15/2014	Annual	5/15/2015	100037
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

Table 5-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 10 of 213

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics, Co. Ltd.
 FCC ID: A3LSMG925T
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 6.3
15.407 (a.1)(2)(3)	Maximum Conducted Output Power	< 250mW (23.98dBm) (5150-5250MHz) < 250mW (23.98dBm) (5250-5350MHz) < 250mW (23.98dBm) (5470-5725MHz) < 1W(5725-5850MHz)		PASS	Section 6.4
15.407 (a)	Peak Power Spectral Density	< 11 dBm/MHz (5150-5350MHz, 5470-5725MHz) <30dBm/500kHz (5725-5850MHz)		PASS	Section 6.5
15.407(g)	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz) < -17dBm/MHz EIRP (within 5715-5725, 5850-5860MHz) < -27dBm/MHz EIRP (outside 5715-5860MHz)	RADIATED	PASS	Section 6.7
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 6.7, 6.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.9

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 3.4.

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset	Page 11 of 213	

6.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-1. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 12 of 213

Antenna-1 26 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.58
	5200	40	a	6	21.52
	5240	48	a	6	21.55
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.62
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.71
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.73
	5190	38	n (40MHz)	13.5/15 (MCS0)	40.04
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.70
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.98
Band 2A	5260	52	a	6	21.53
	5280	56	a	6	21.70
	5320	64	a	6	21.42
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.86
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.71
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.78
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.95
	5310	62	n (40MHz)	13.5/15 (MCS0)	40.24
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	82.36
Band 2C	5500	100	a	6	21.39
	5580	116	a	6	21.28
	5720	144	a	6	21.61
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.42
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.64
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.63
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.89
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.80
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.87
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.60
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	82.11

Table 6-2. Conducted Bandwidth Measurements

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 13 of 213

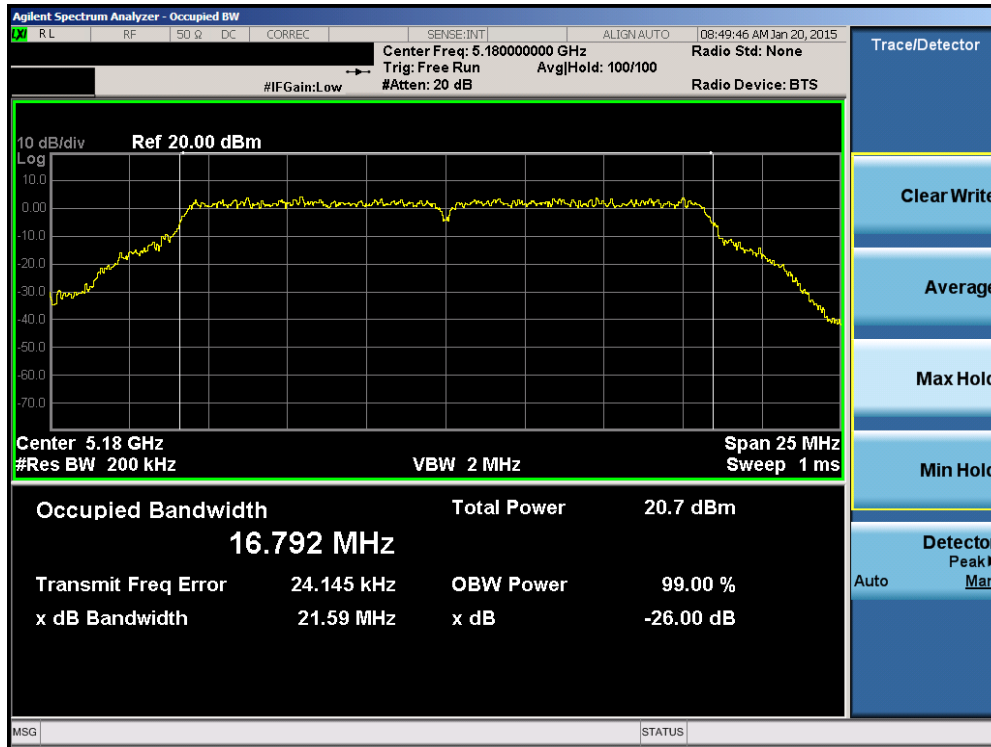


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

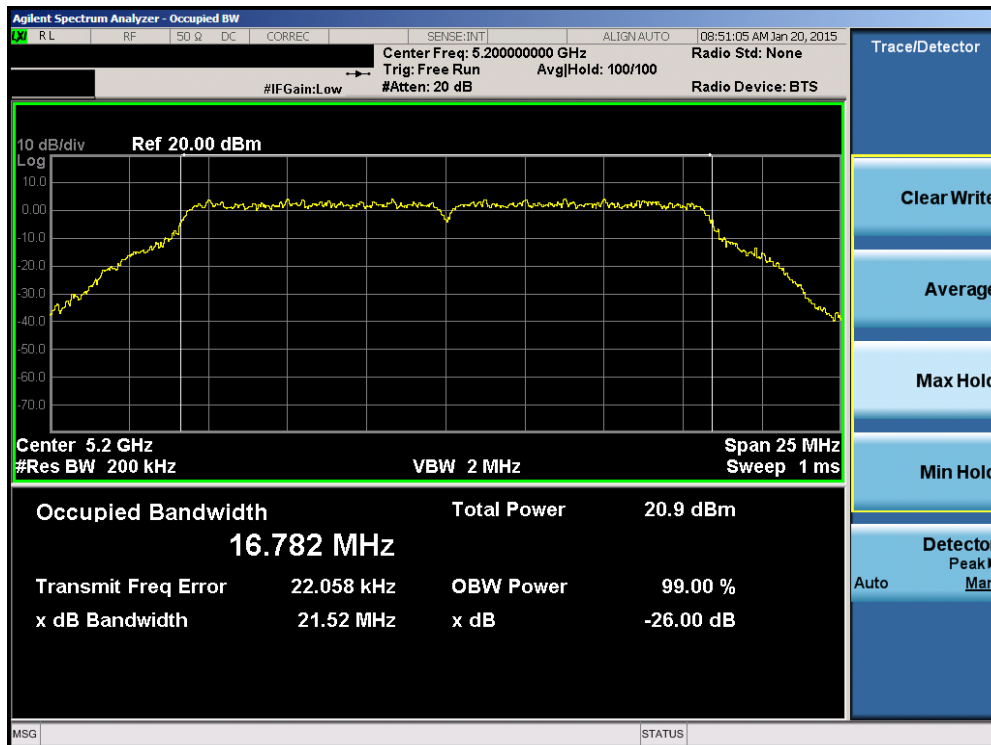


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 14 of 213

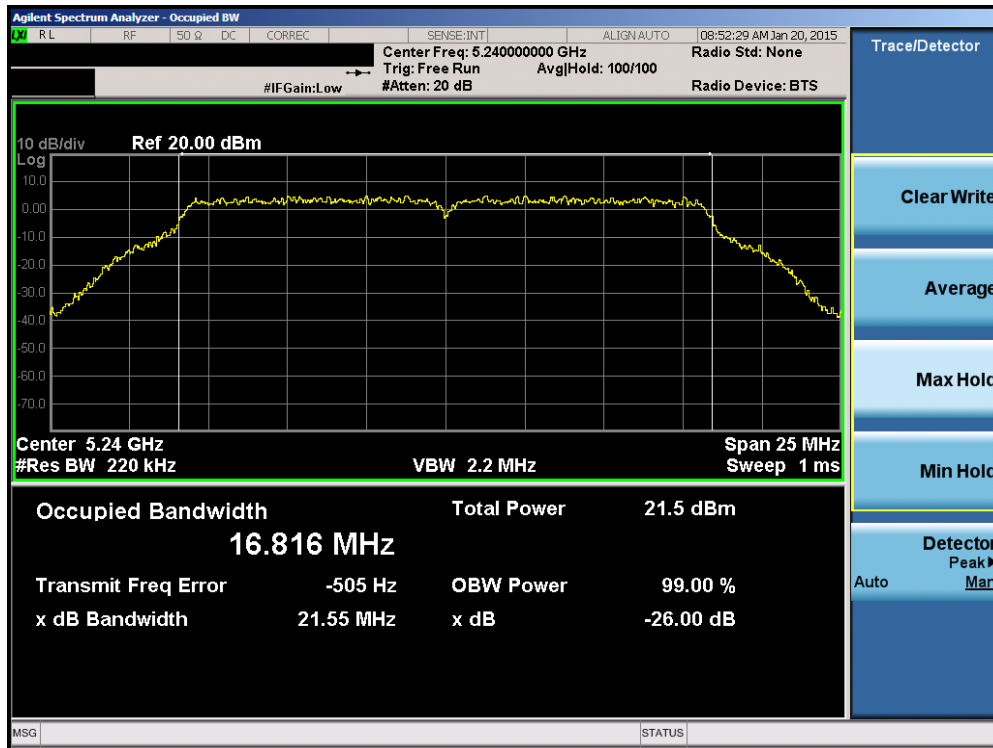


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

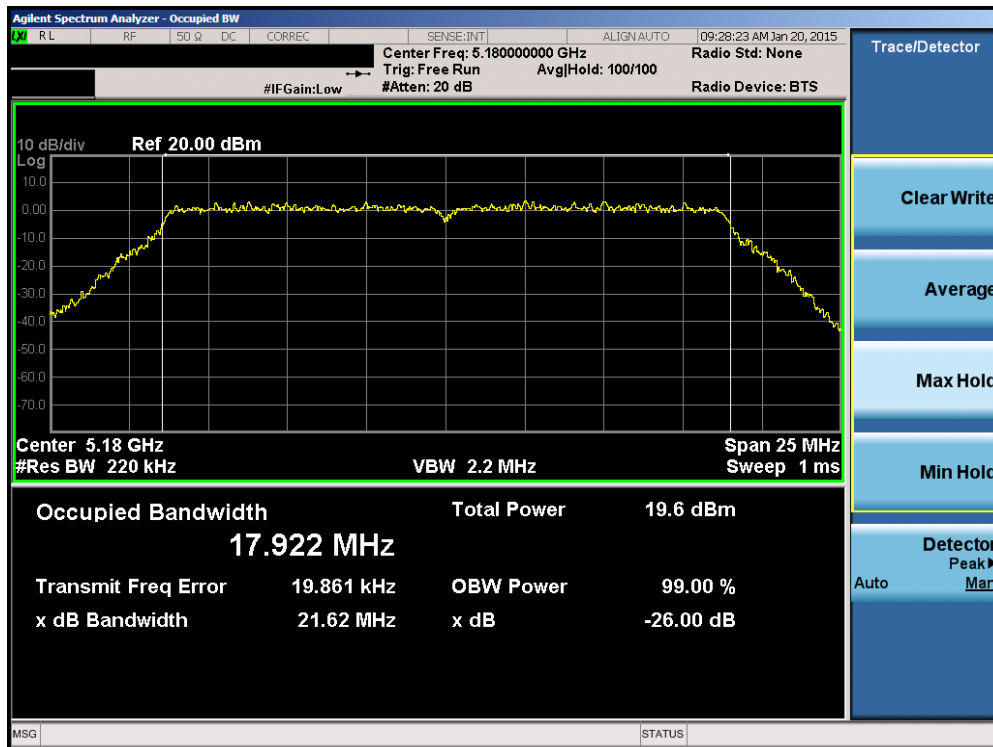


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 15 of 213

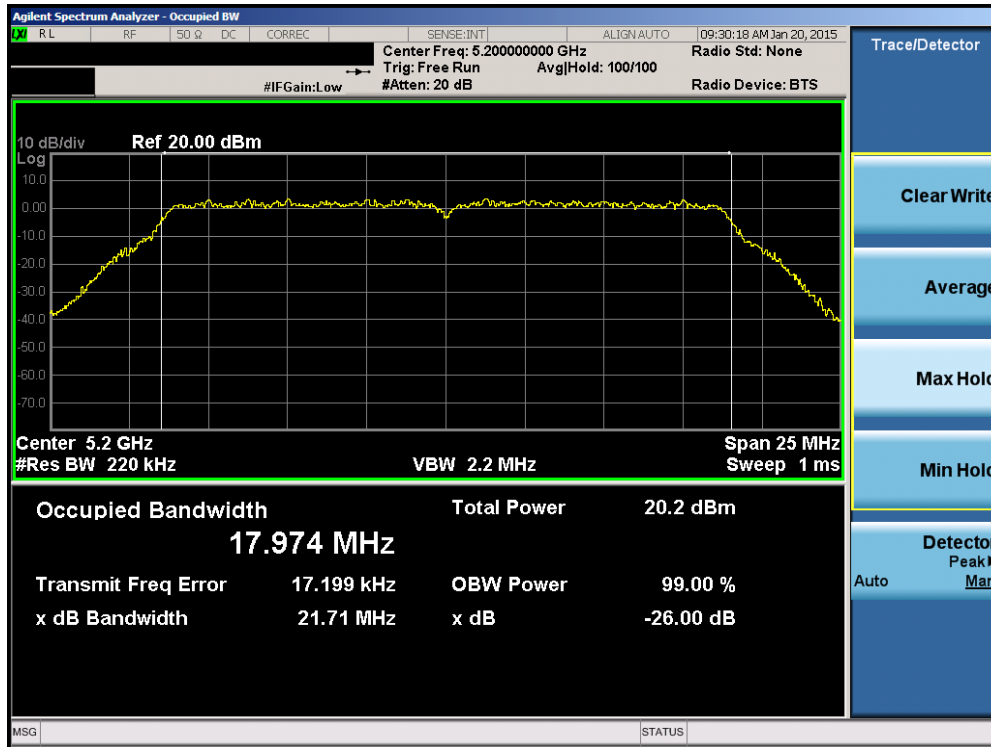


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

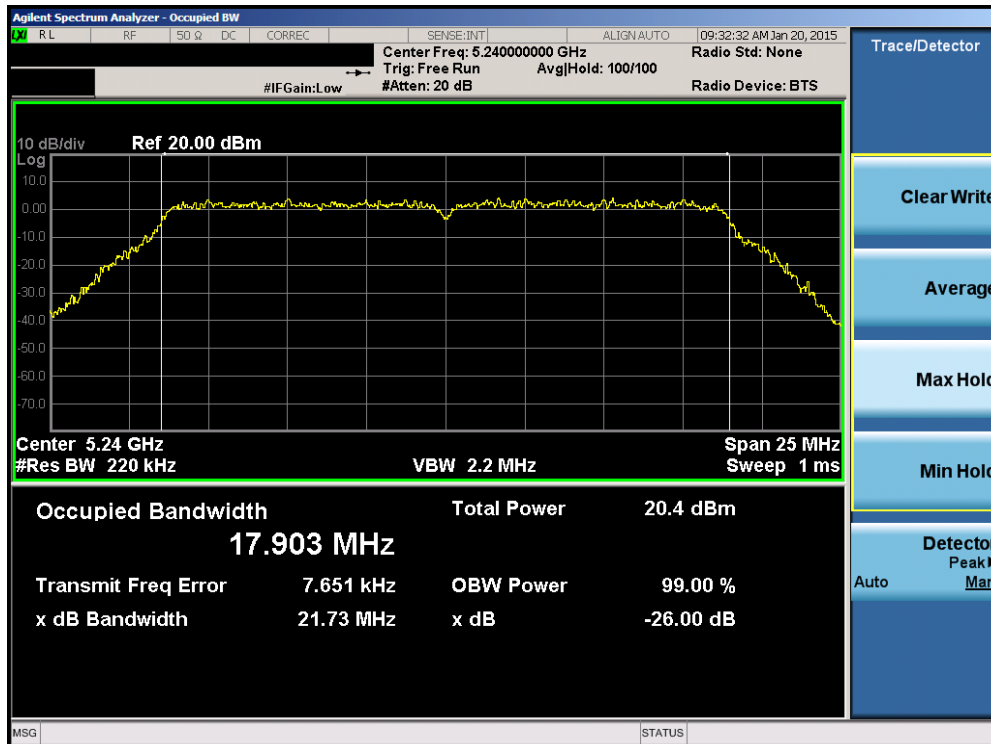


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 16 of 213

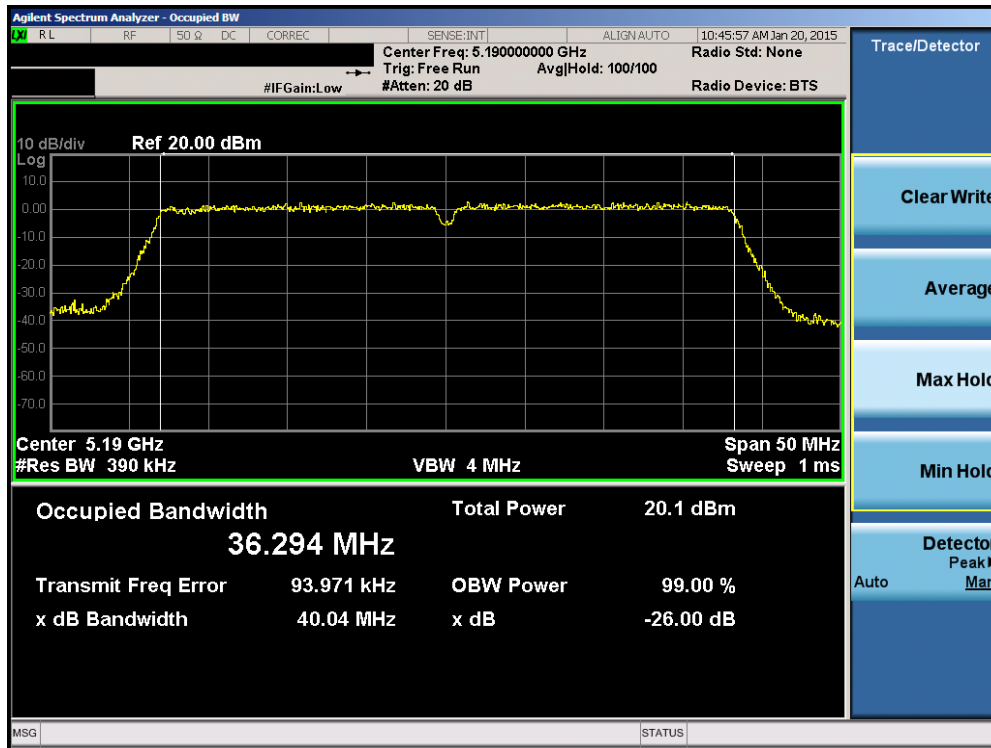


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

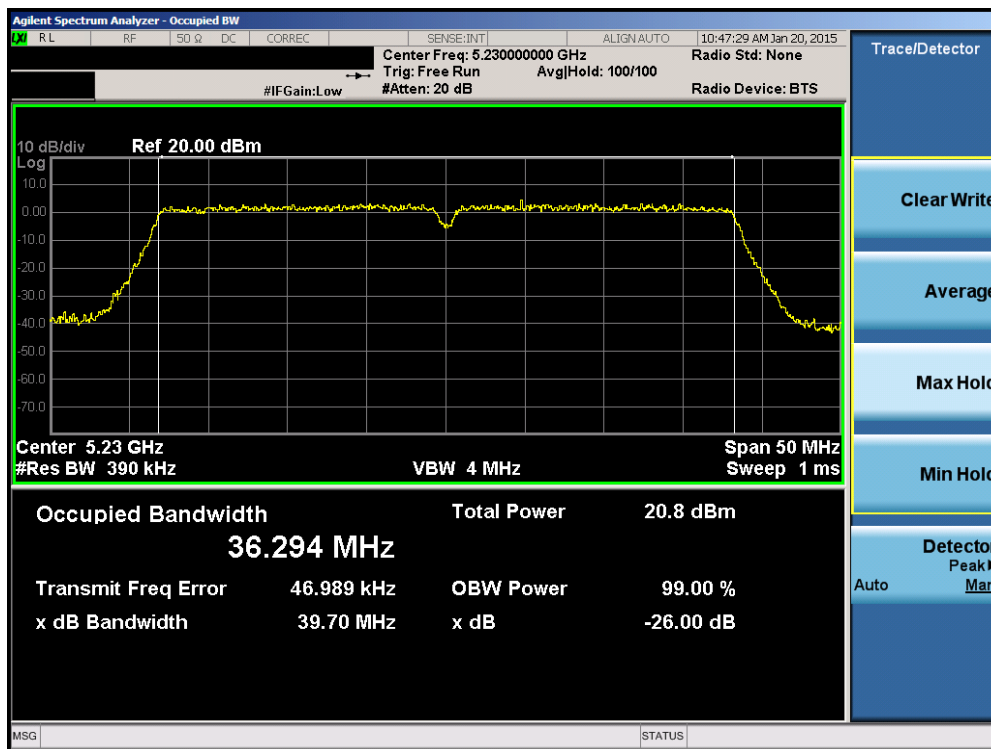


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 17 of 213

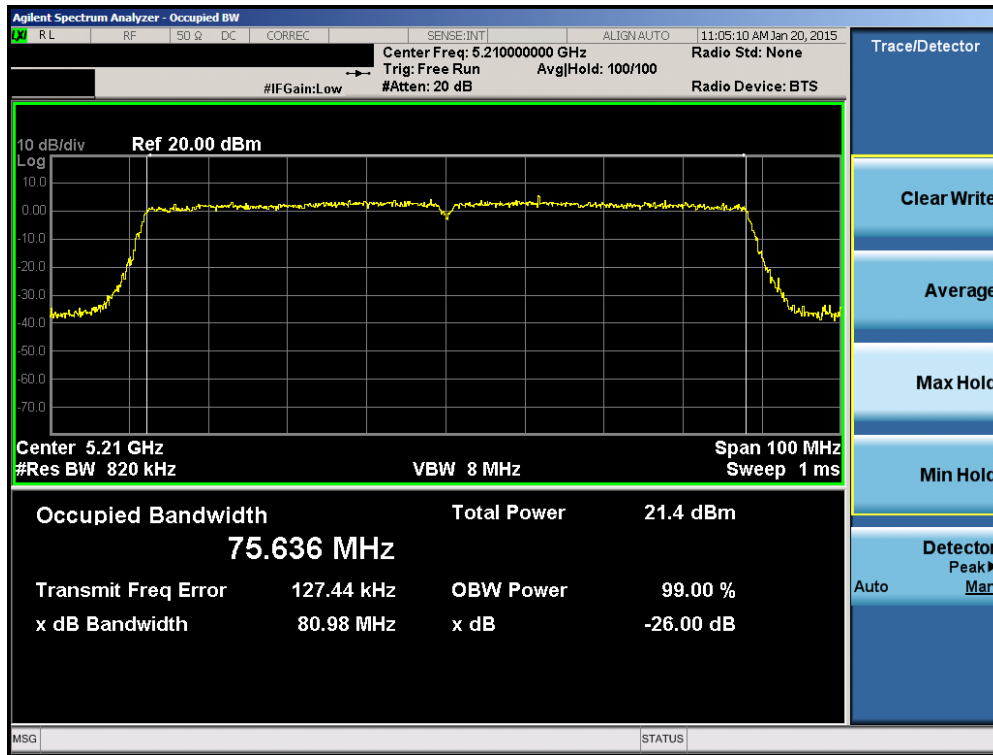


Plot 6-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

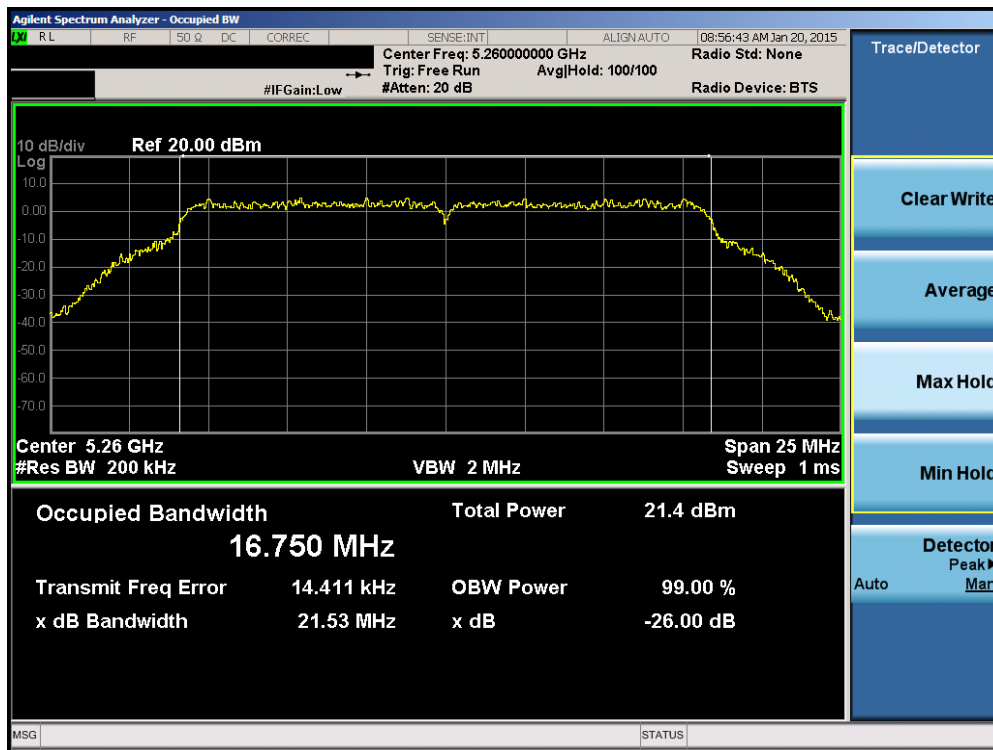


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 18 of 213

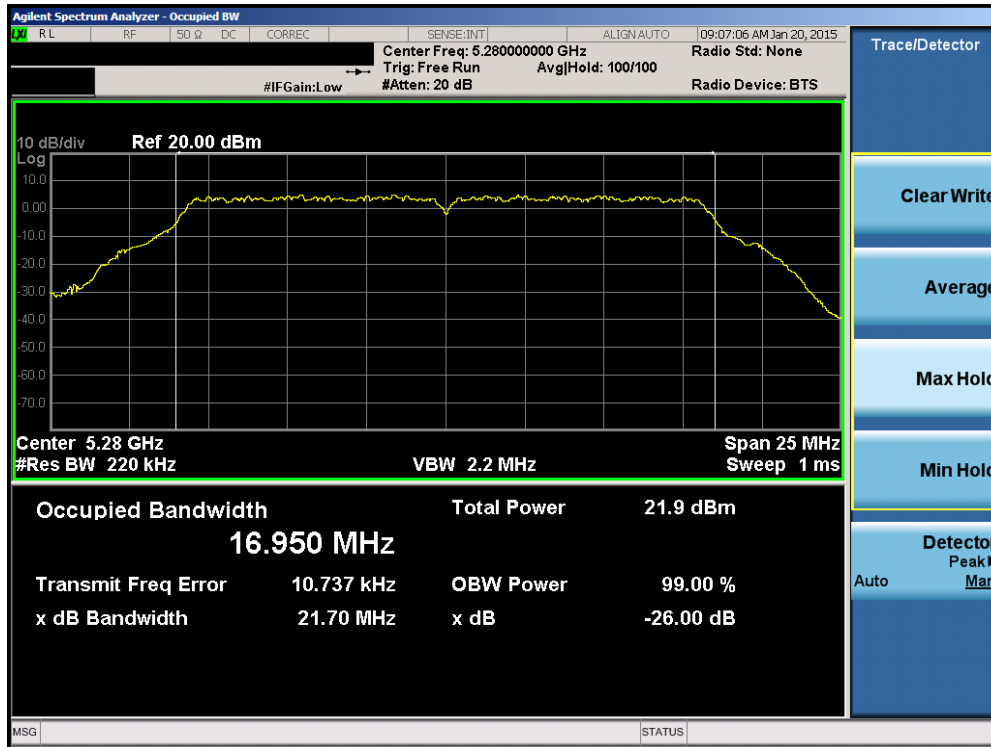


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

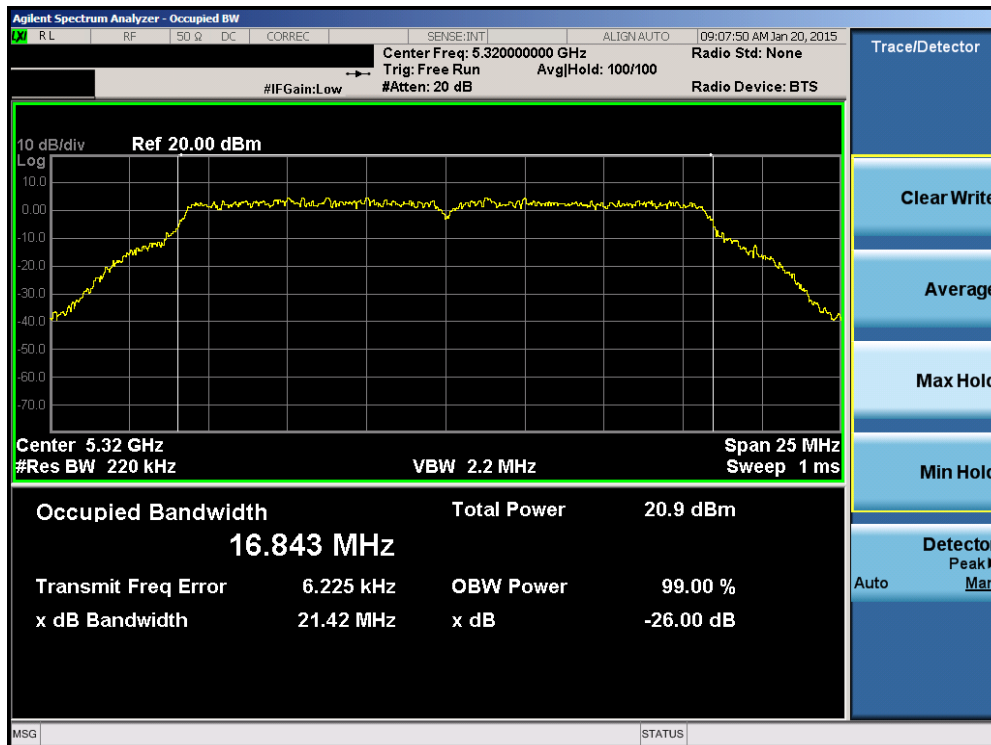


Plot 6-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 19 of 213

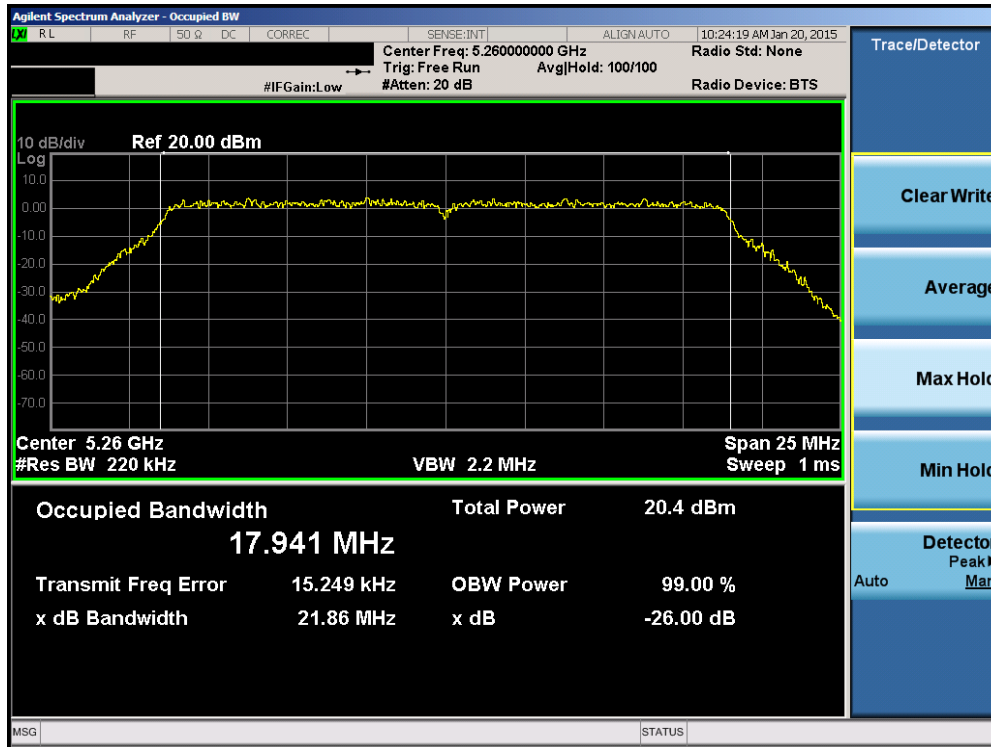


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

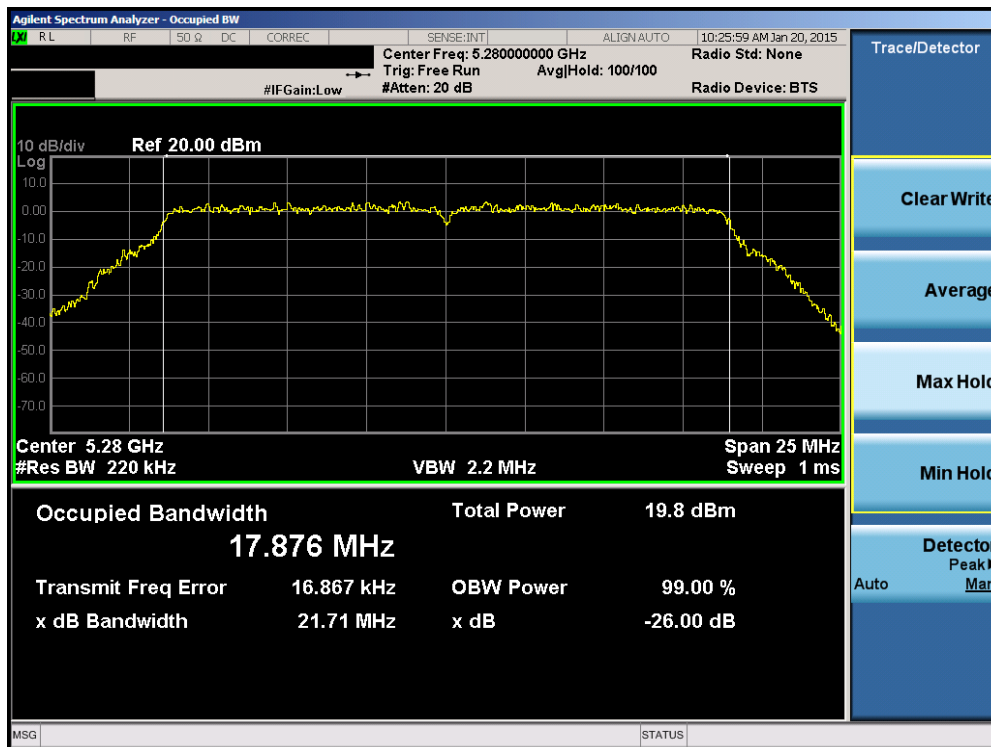


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 20 of 213

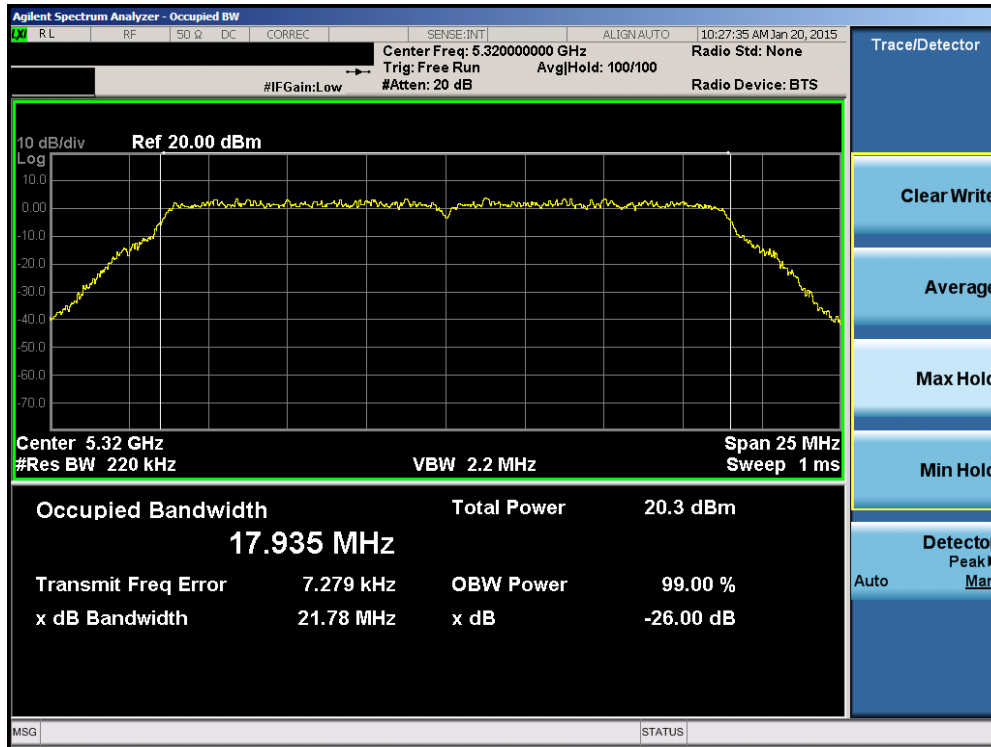


Plot 6-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

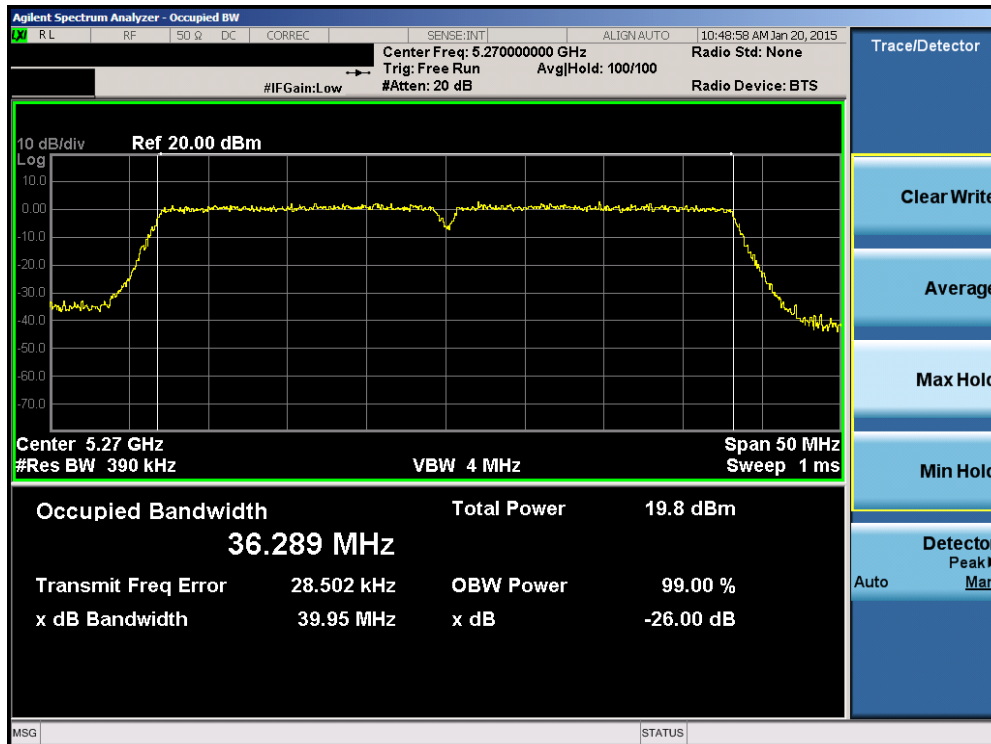


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 21 of 213

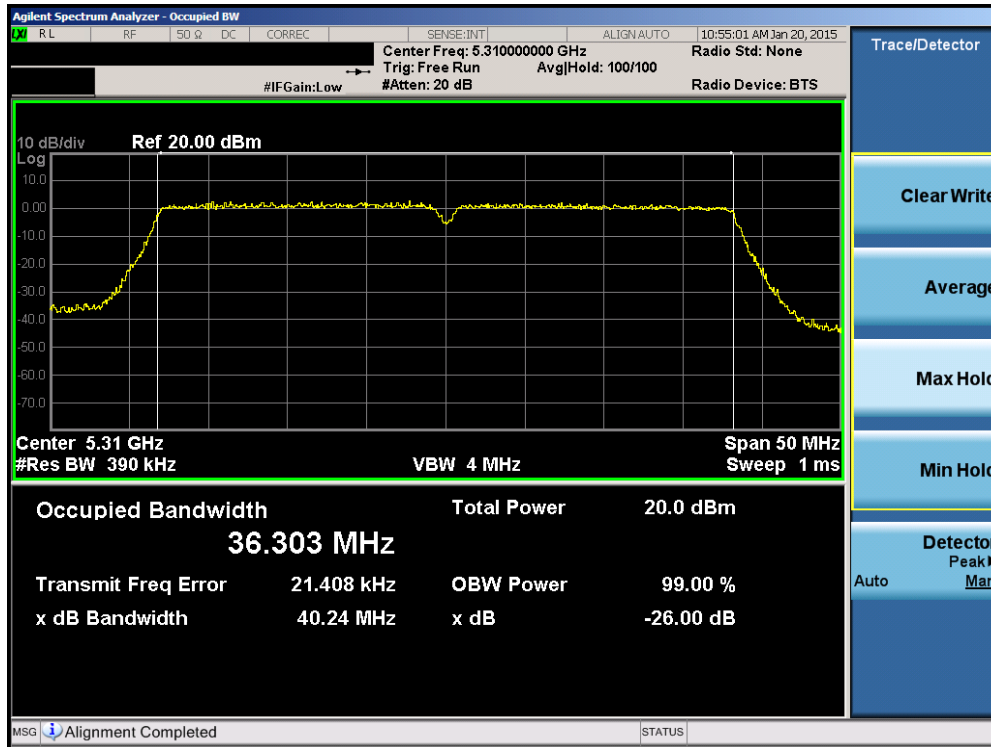


Plot 6-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

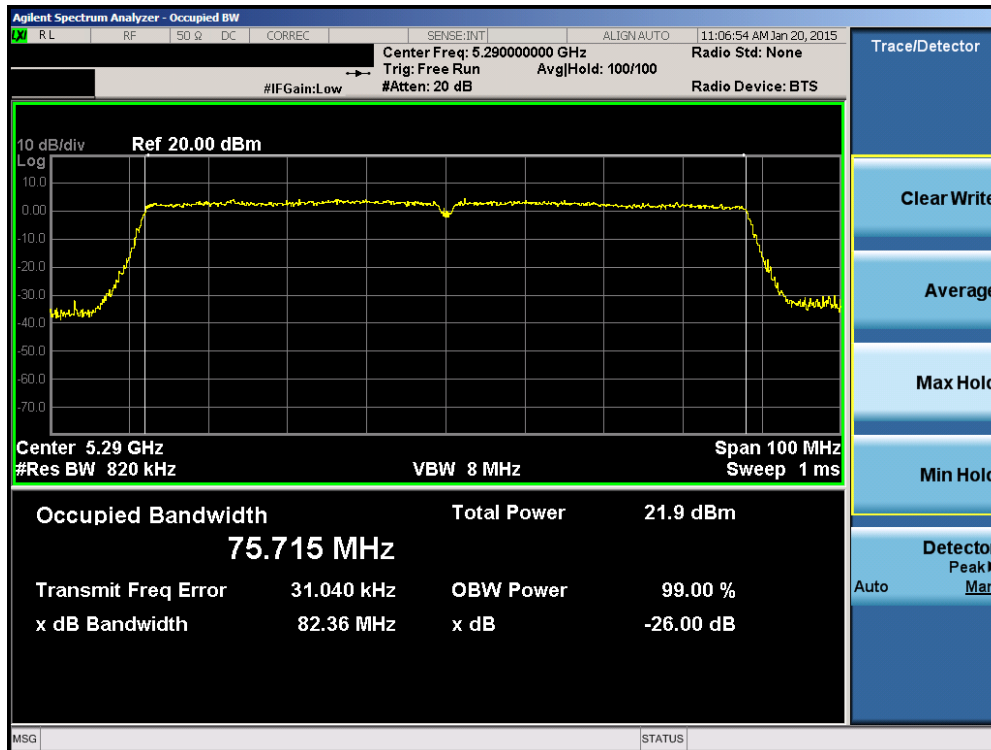


Plot 6-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 22 of 213

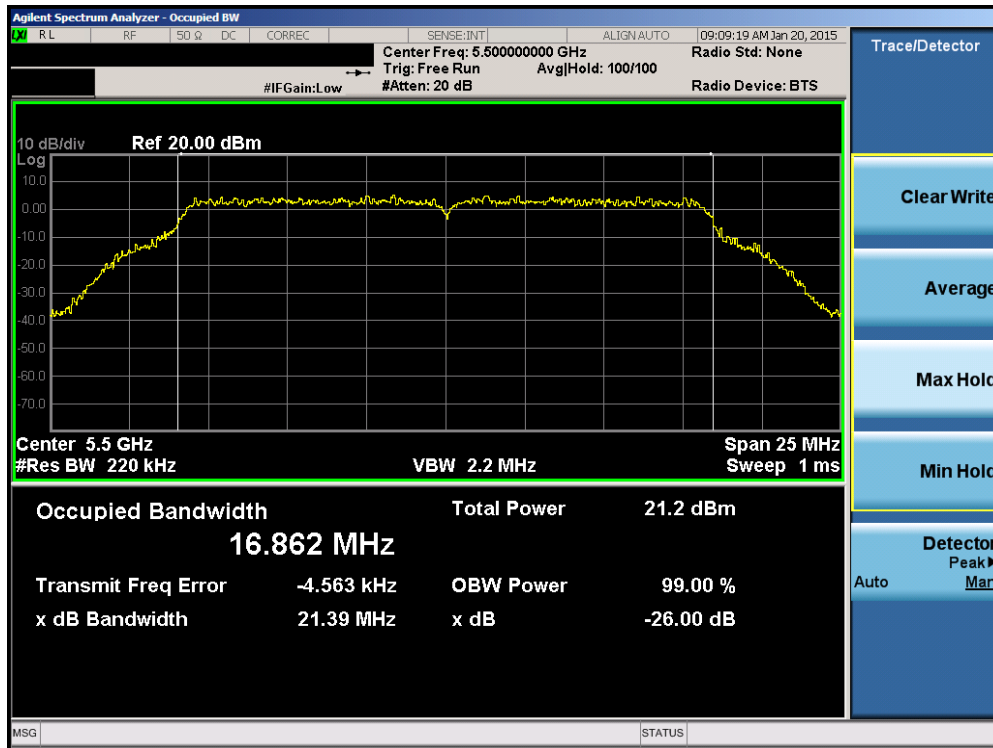


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

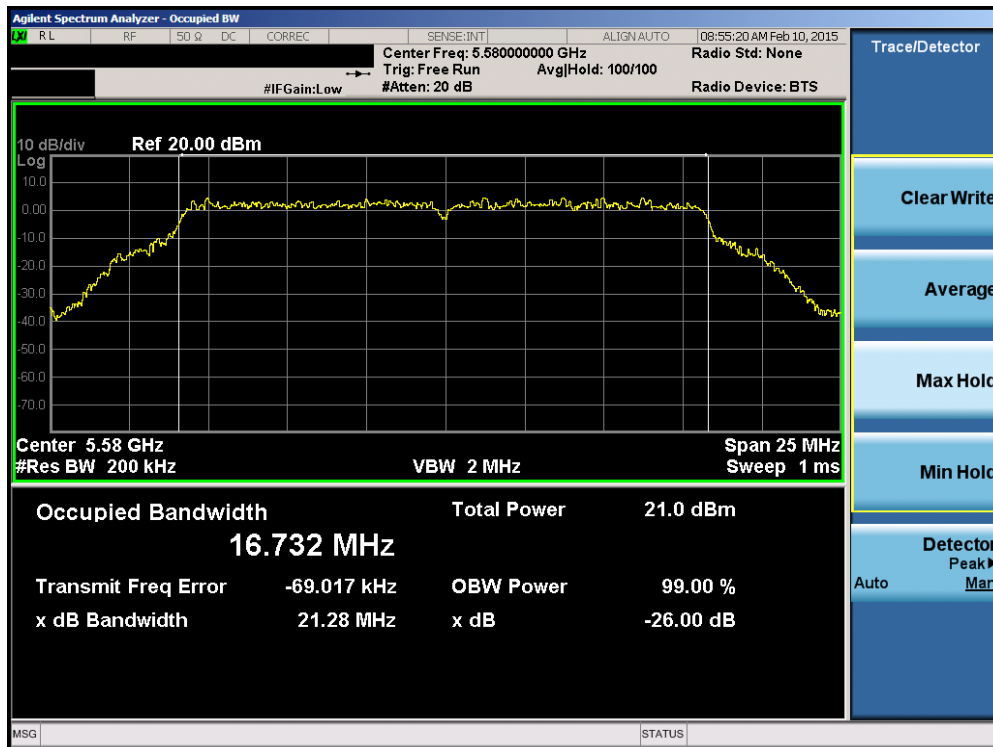


Plot 6-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 23 of 213

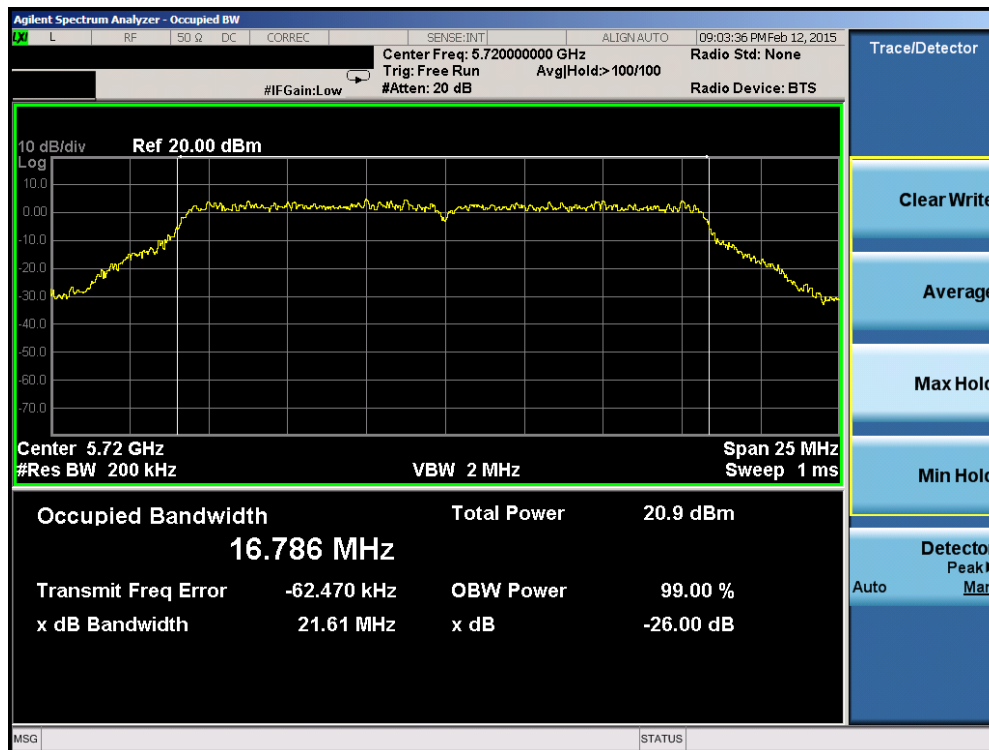


Plot 6-21. 26dB Bandwidth Plot (20MHz BW 802.11a (UNII Band 2C) – Ch. 144)

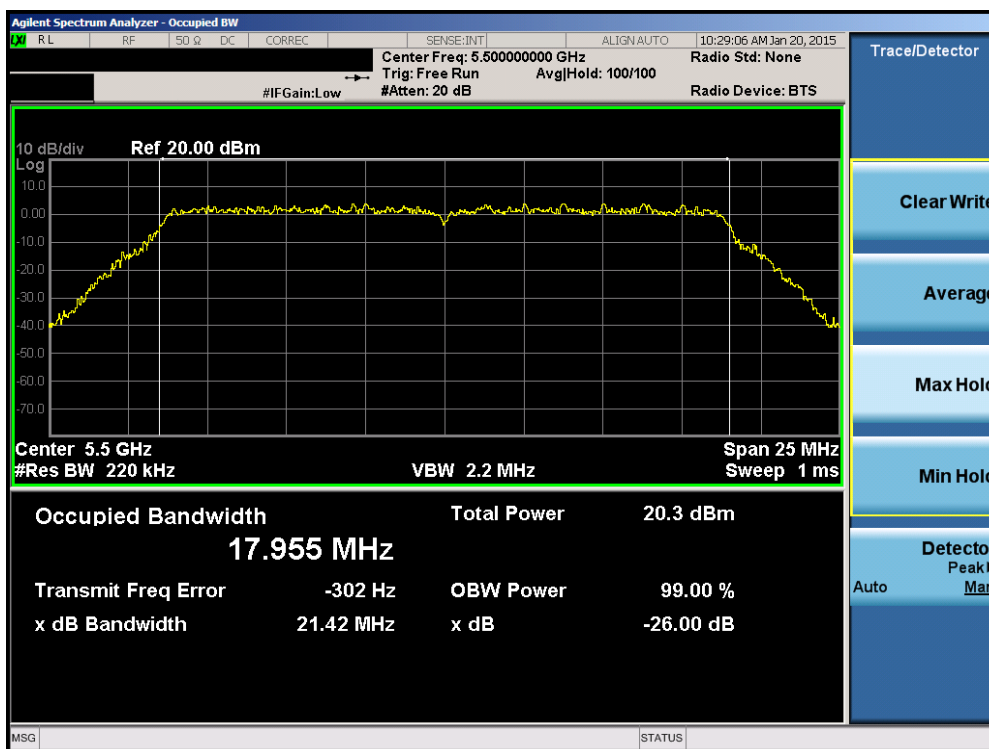


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 24 of 213

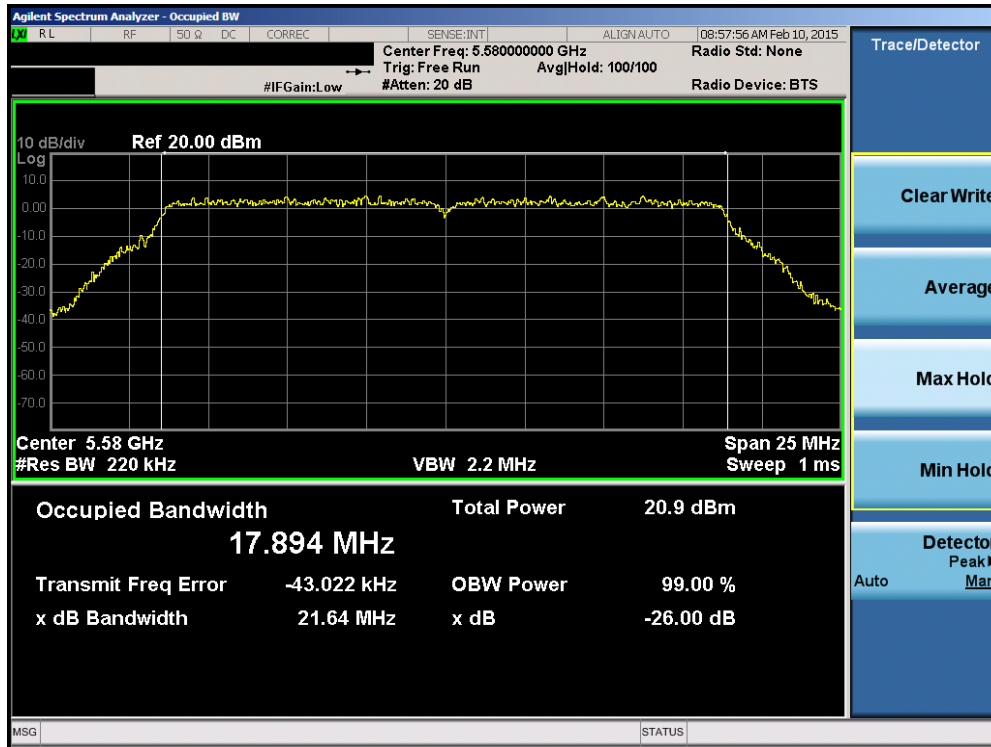


Plot 6-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

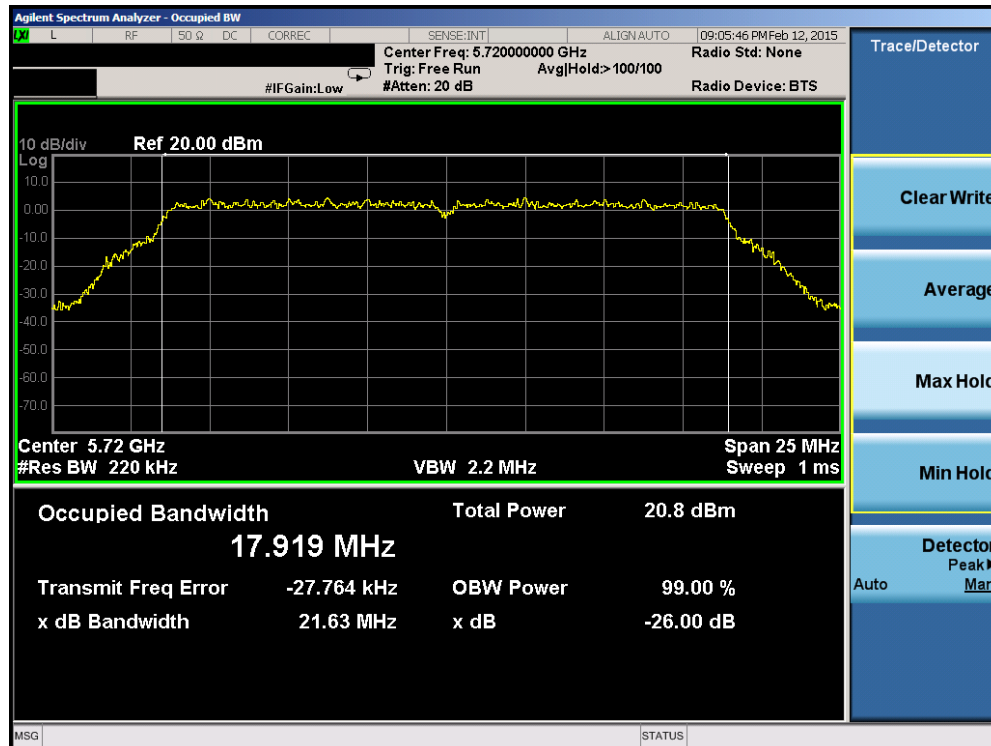


Plot 6-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 25 of 213

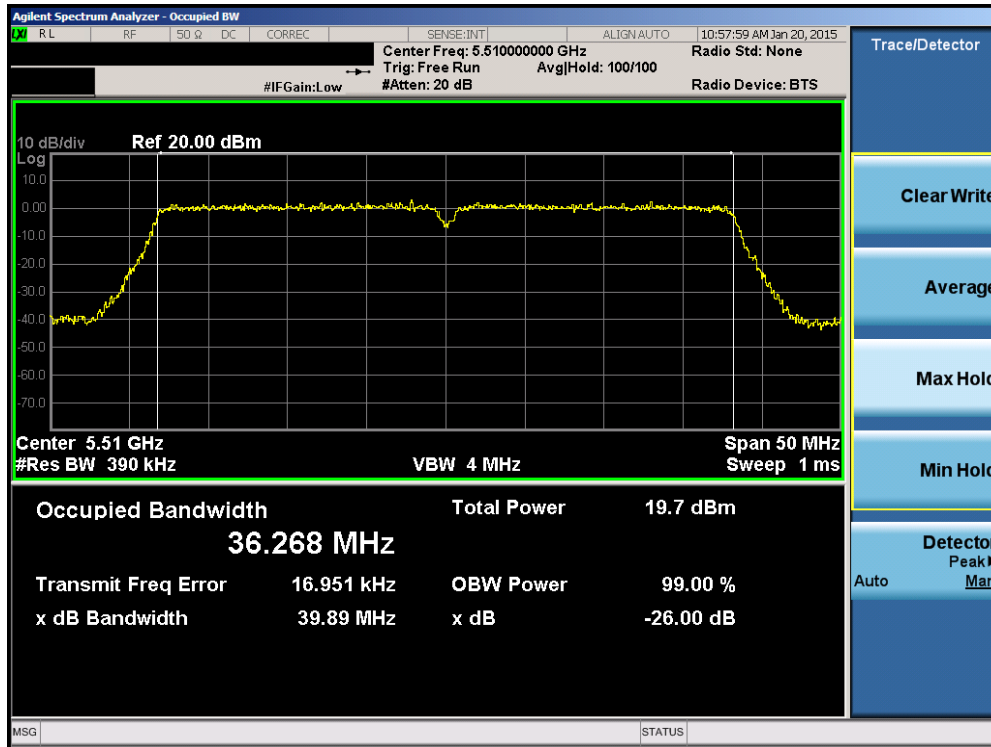


Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

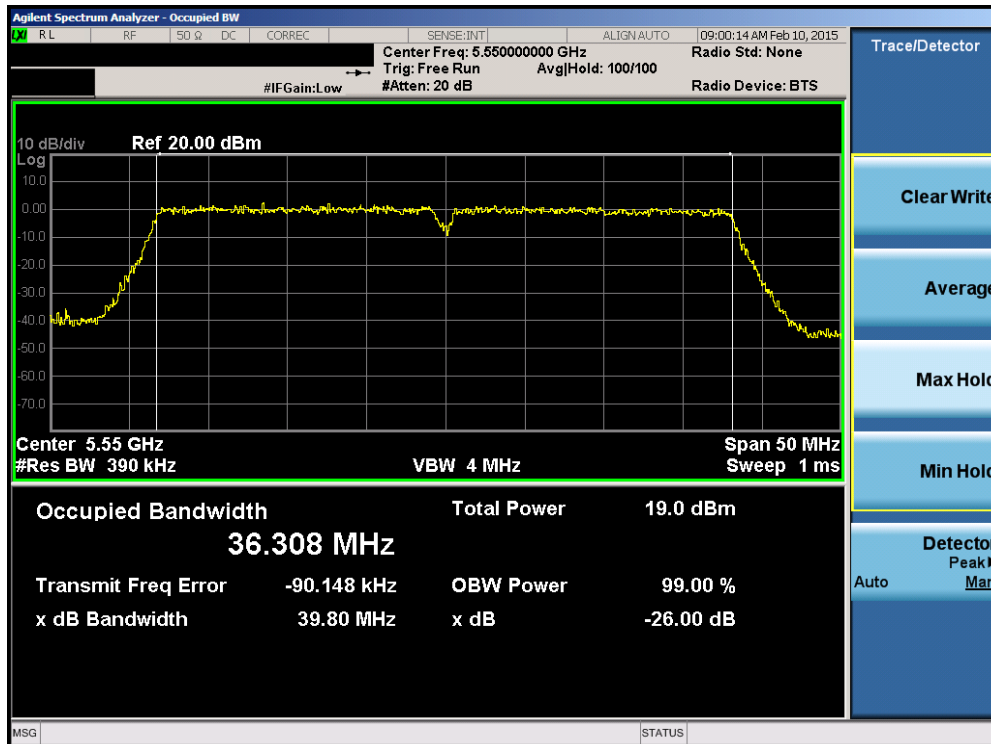


Plot 6-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 26 of 213

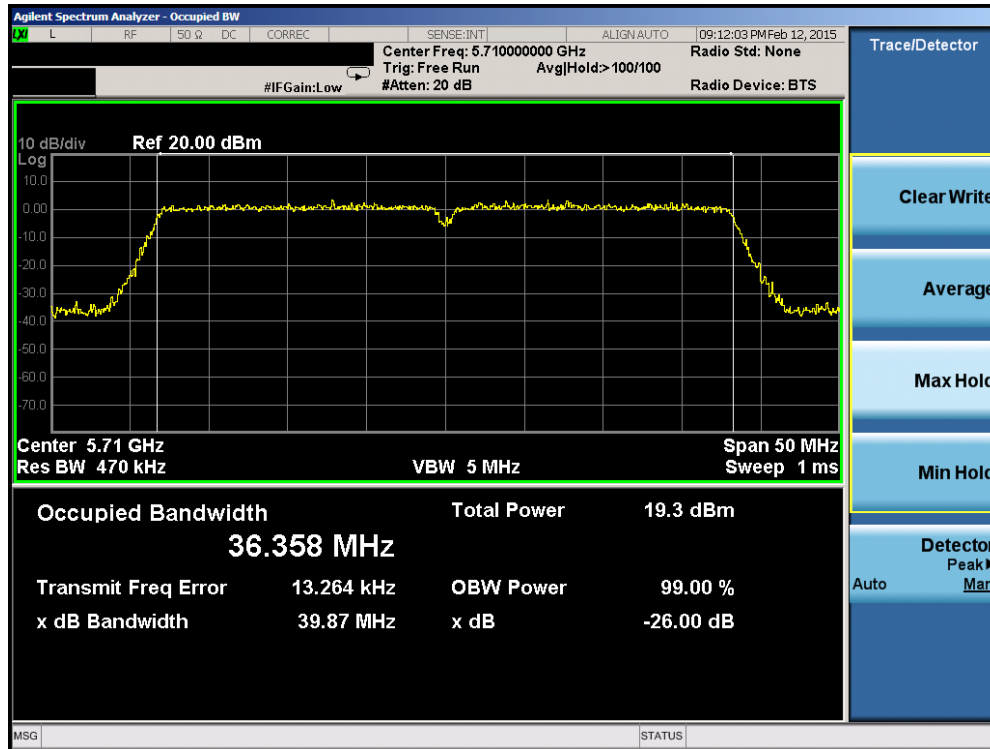


Plot 6-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

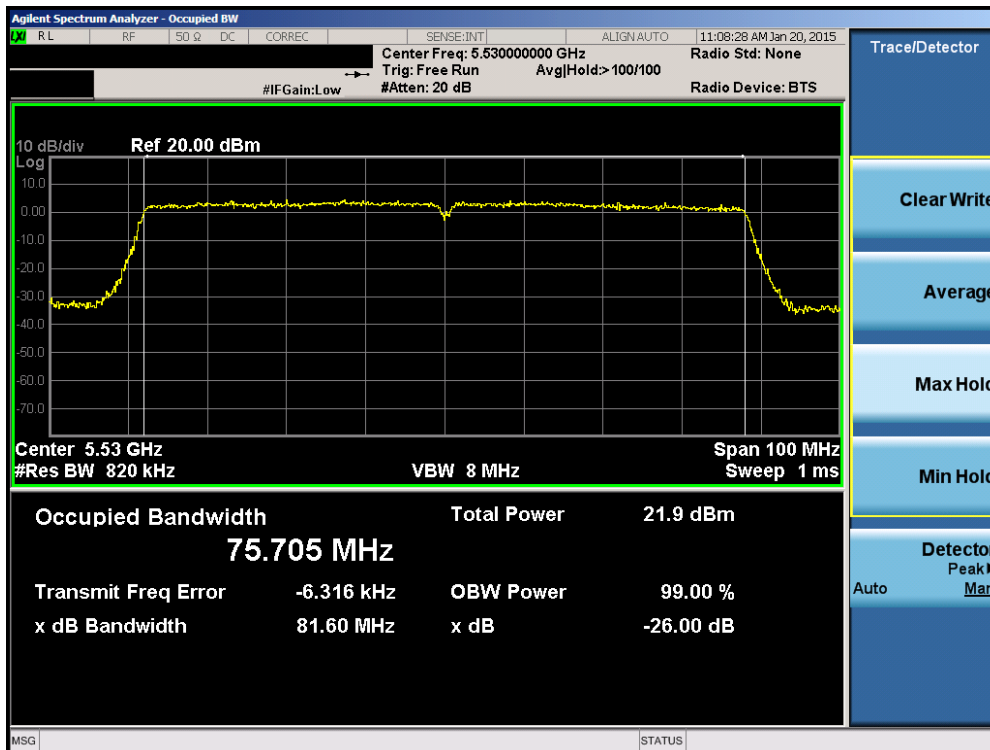

Plot 6-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 27 of 213

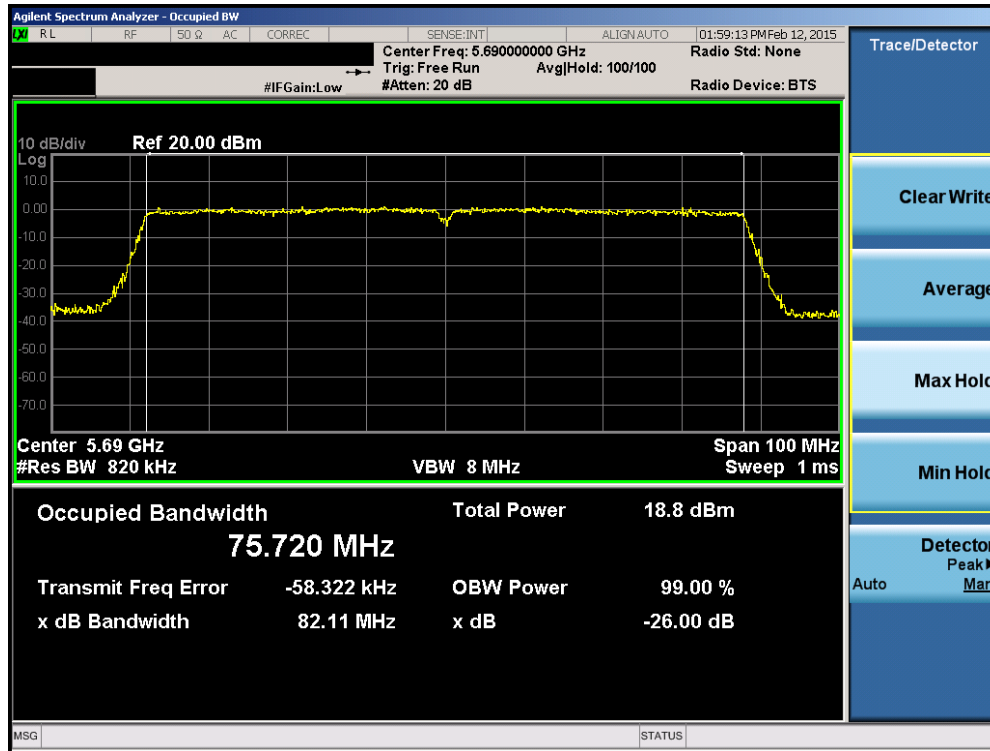

Plot 6-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138


FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 28 of 213

Antenna-2 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	21.30
	5200	40	a	6	21.34
	5240	48	a	6	21.33
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	22.02
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.78
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.71
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.90
	5230	46	n (40MHz)	13.5/15 (MCS0)	40.01
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.99
Band 2A	5260	52	a	6	21.40
	5280	56	a	6	21.55
	5320	64	a	6	21.80
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.66
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.65
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.85
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.84
	5310	62	n (40MHz)	13.5/15 (MCS0)	40.34
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.79
Band 2C	5500	100	a	6	21.59
	5580	116	a	6	21.50
	5720	144	a	6	24.16
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.86
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.73
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	21.92
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.74
	5550	110	n (40MHz)	13.5/15 (MCS0)	40.26
	5710	142	n (40MHz)	13.5/15 (MCS0)	40.13
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	82.16
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.72

Table 6-3. Conducted Bandwidth Measurements

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 29 of 213

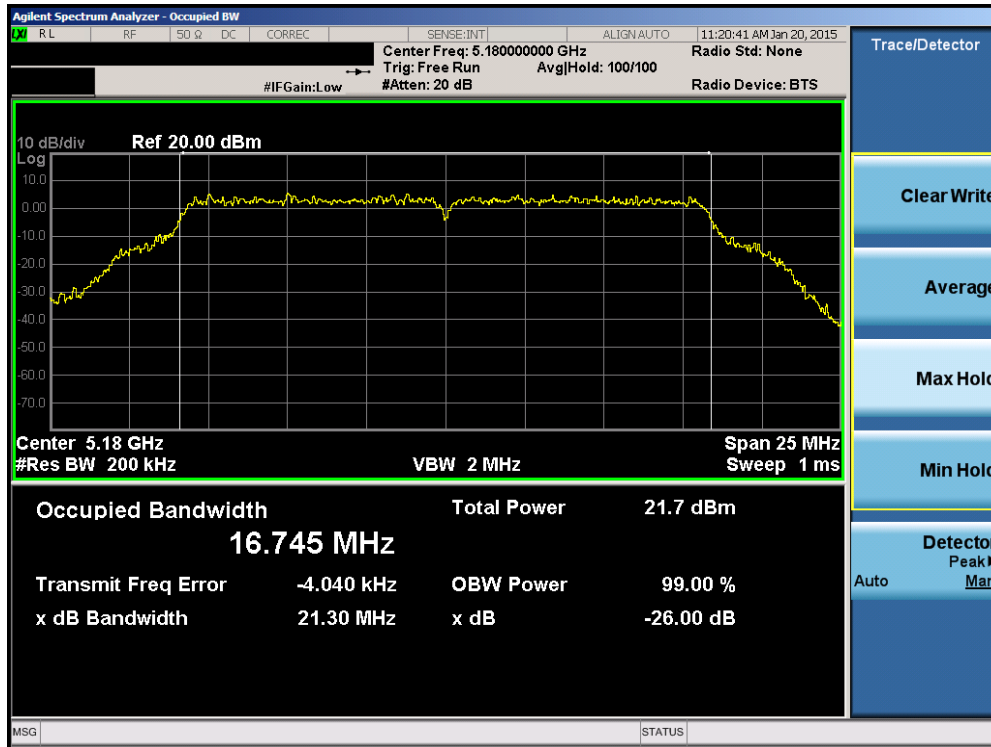


Plot 6-30. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

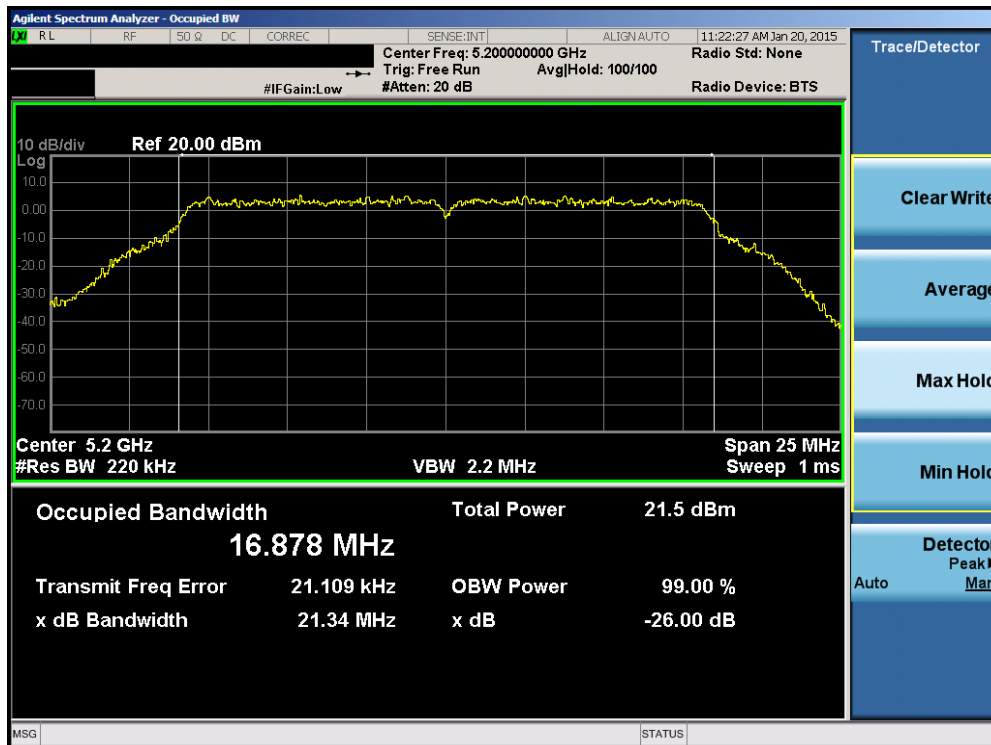


Plot 6-31. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 30 of 213

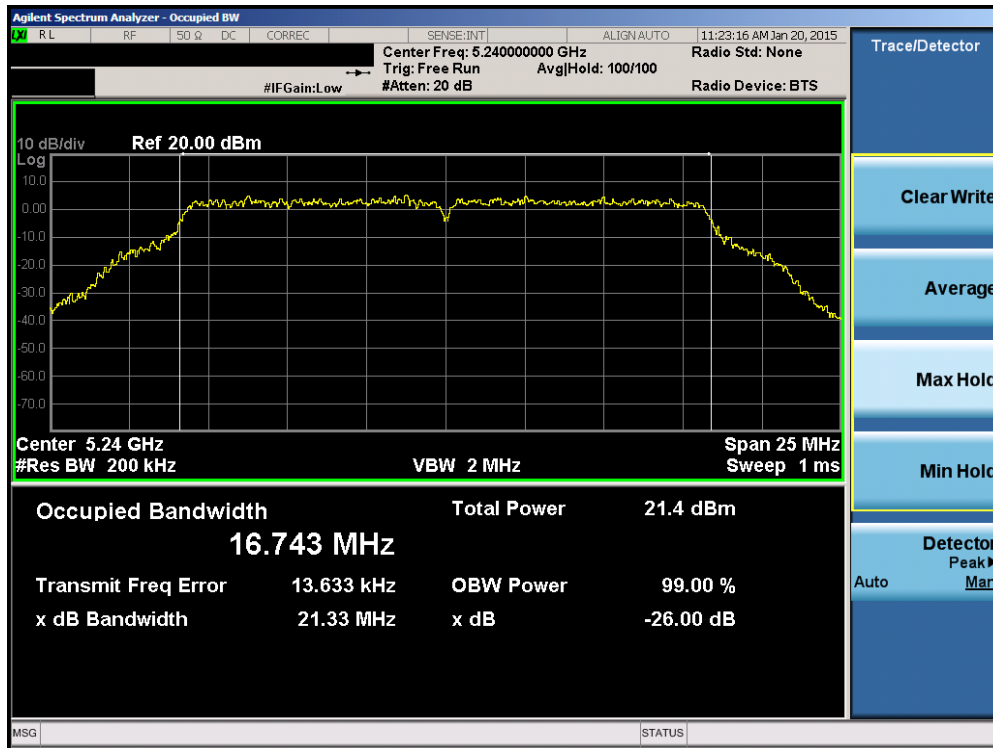


Plot 6-32. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

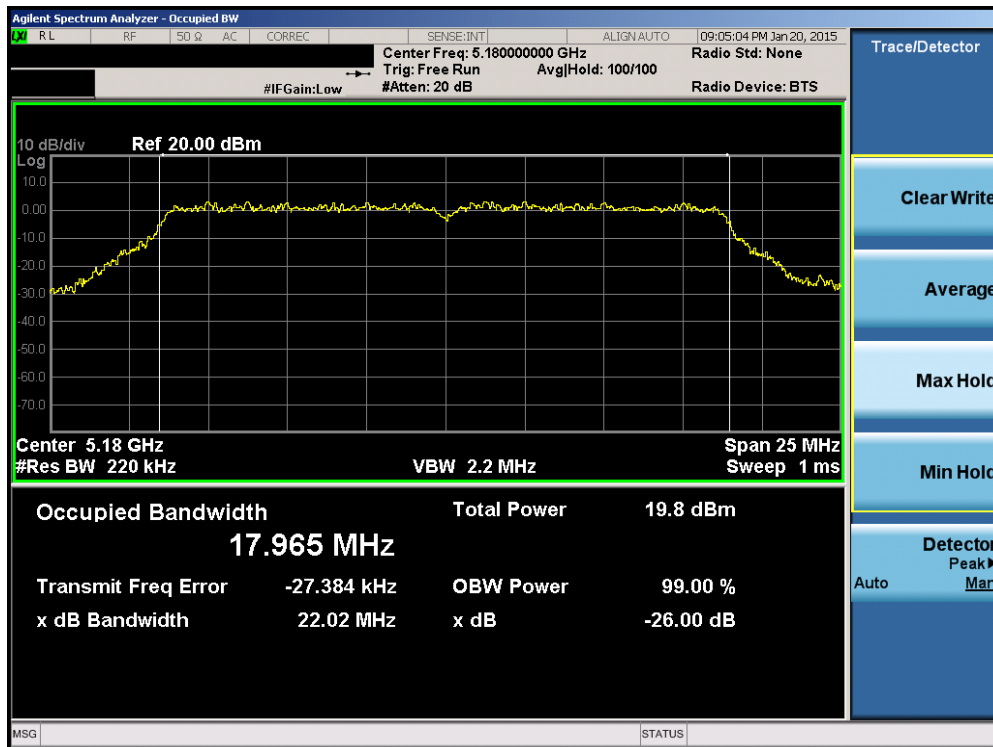


Plot 6-33. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 31 of 213

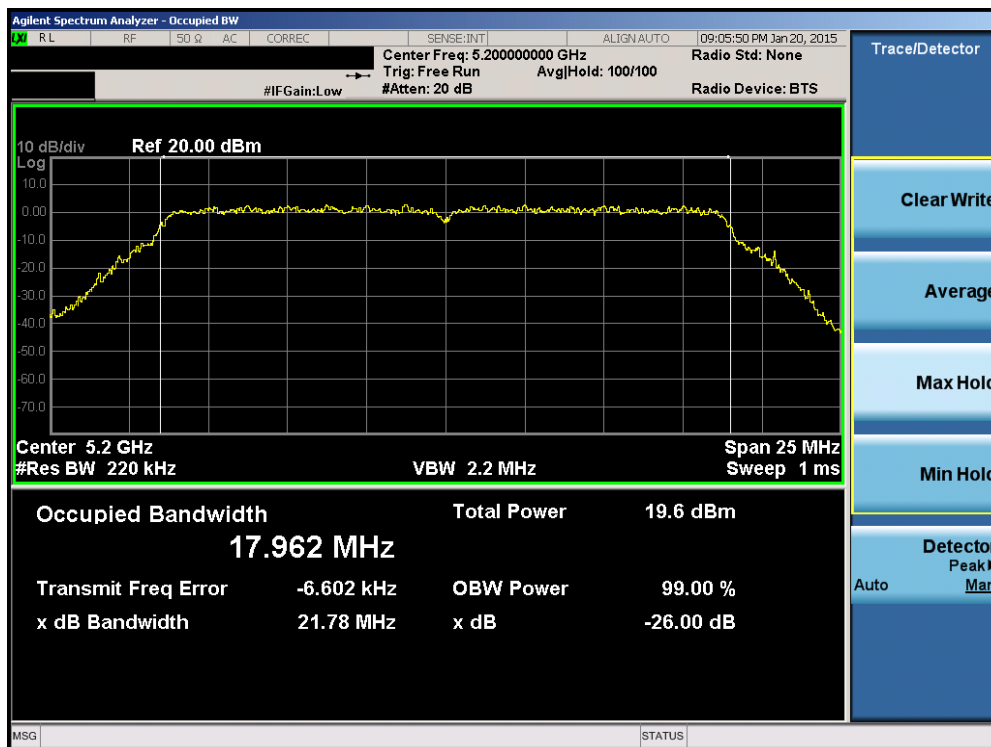


Plot 6-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

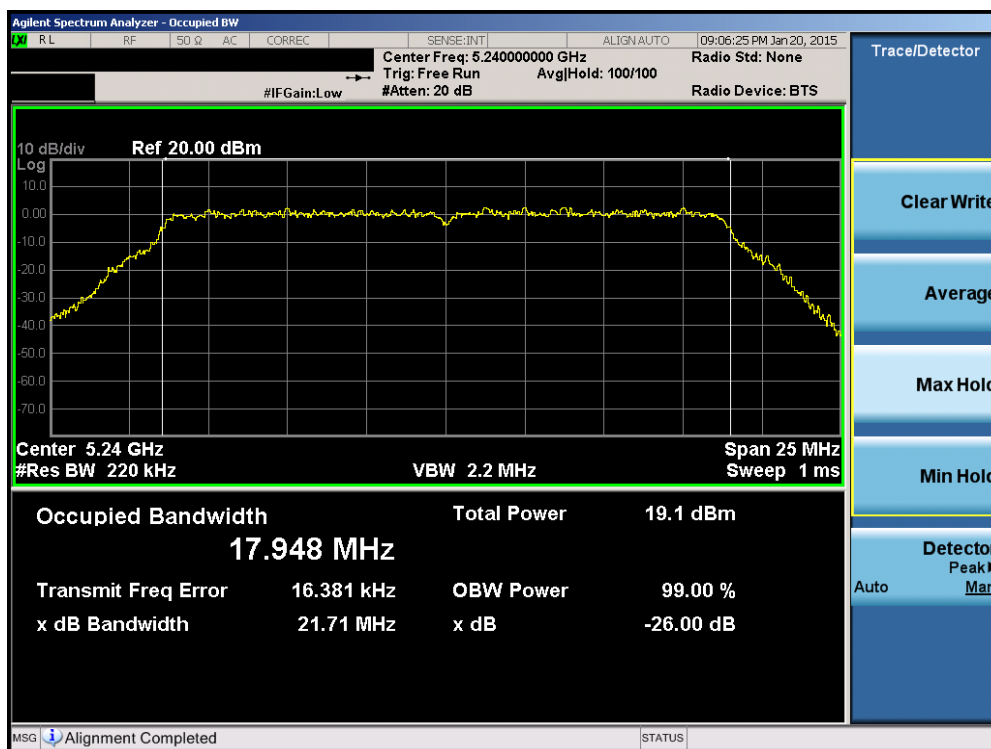


Plot 6-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 32 of 213

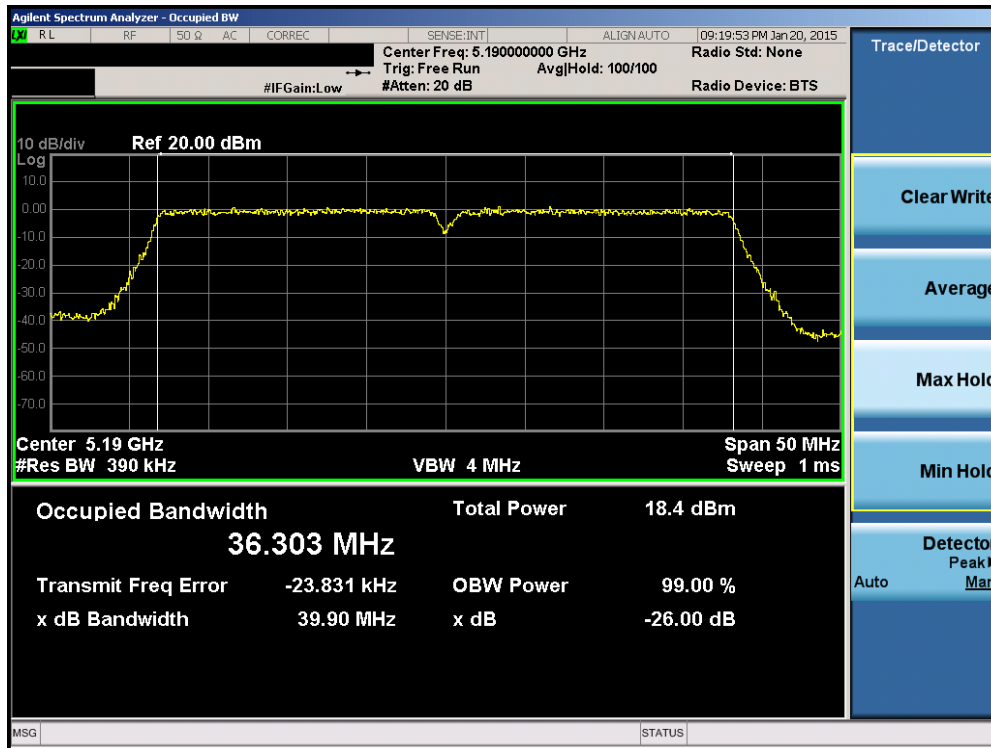


Plot 6-36. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

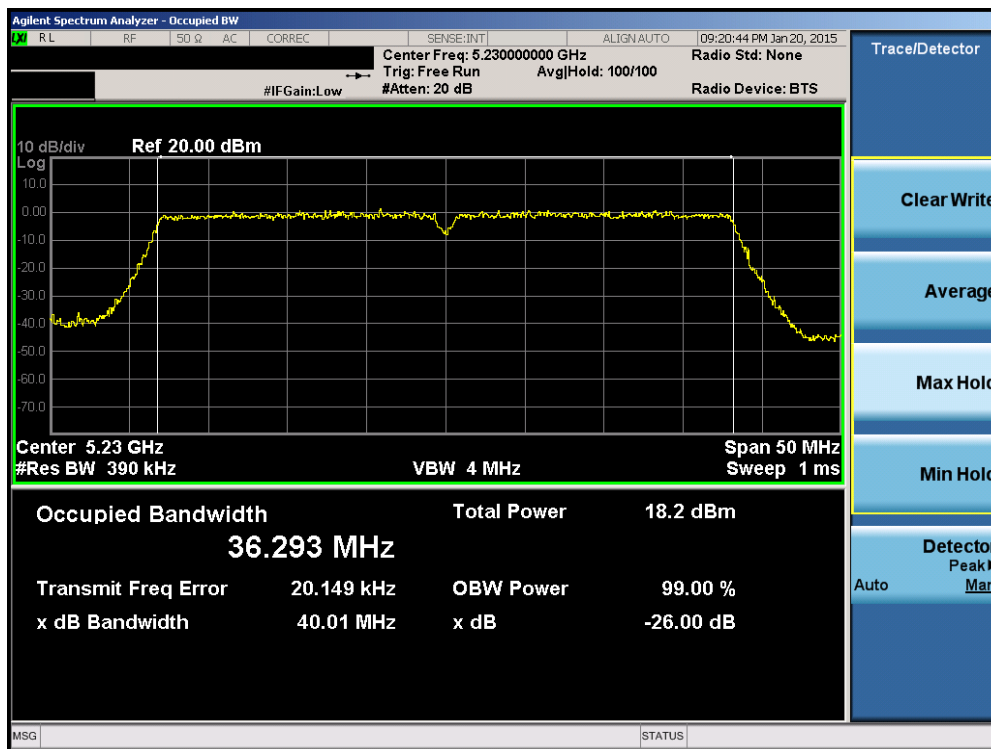


Plot 6-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 33 of 213

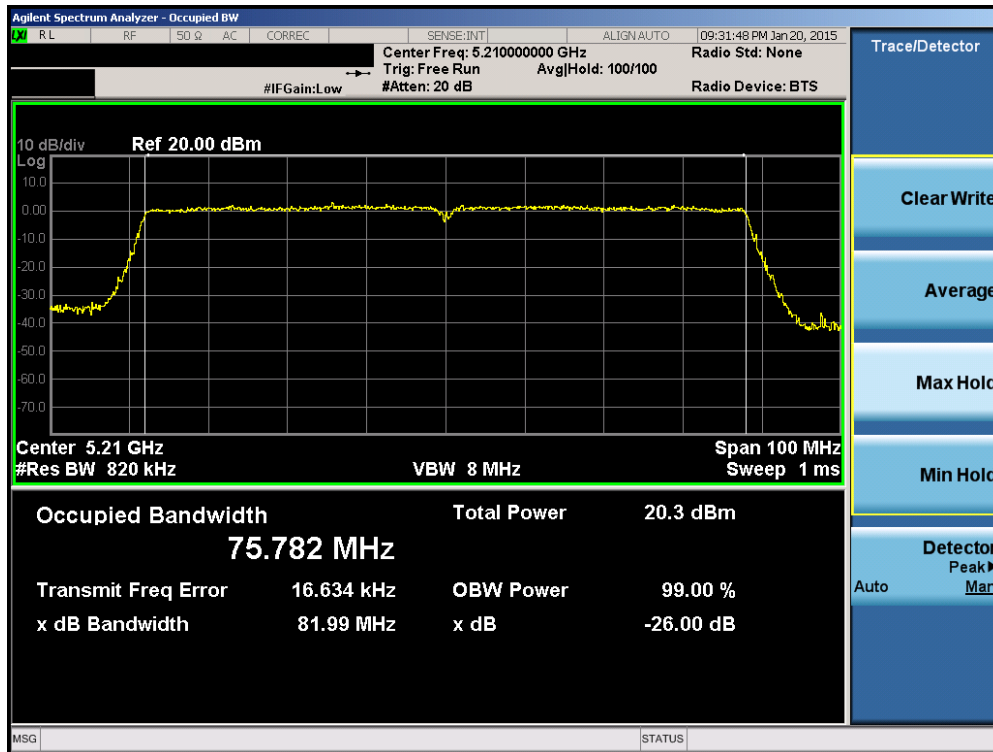


Plot 6-38. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

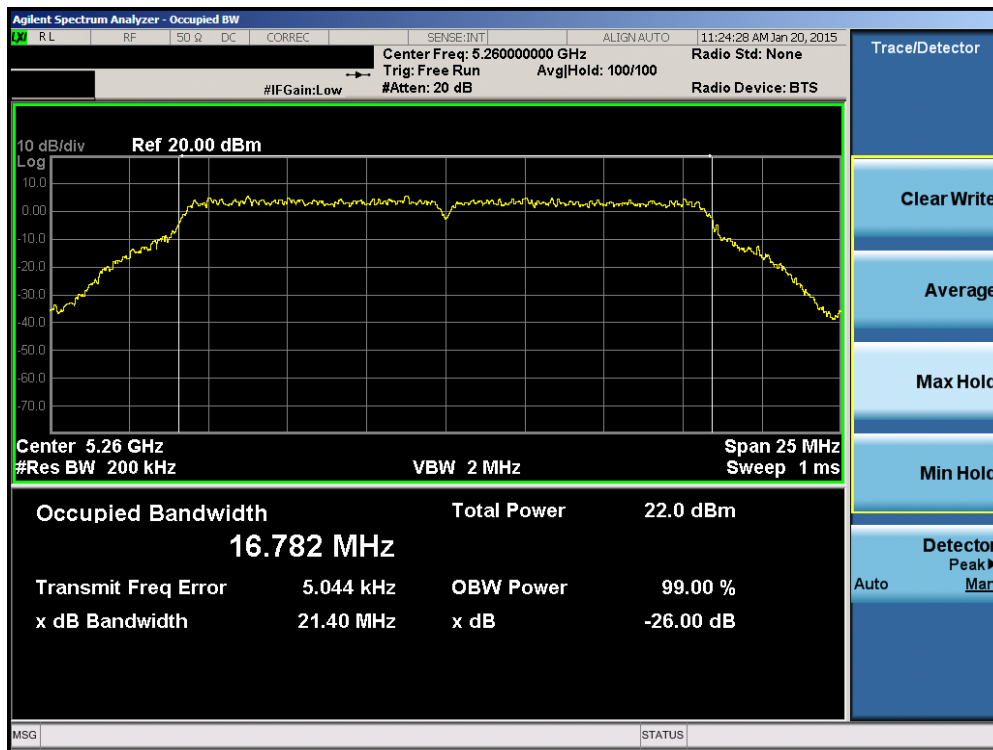


Plot 6-39. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 34 of 213

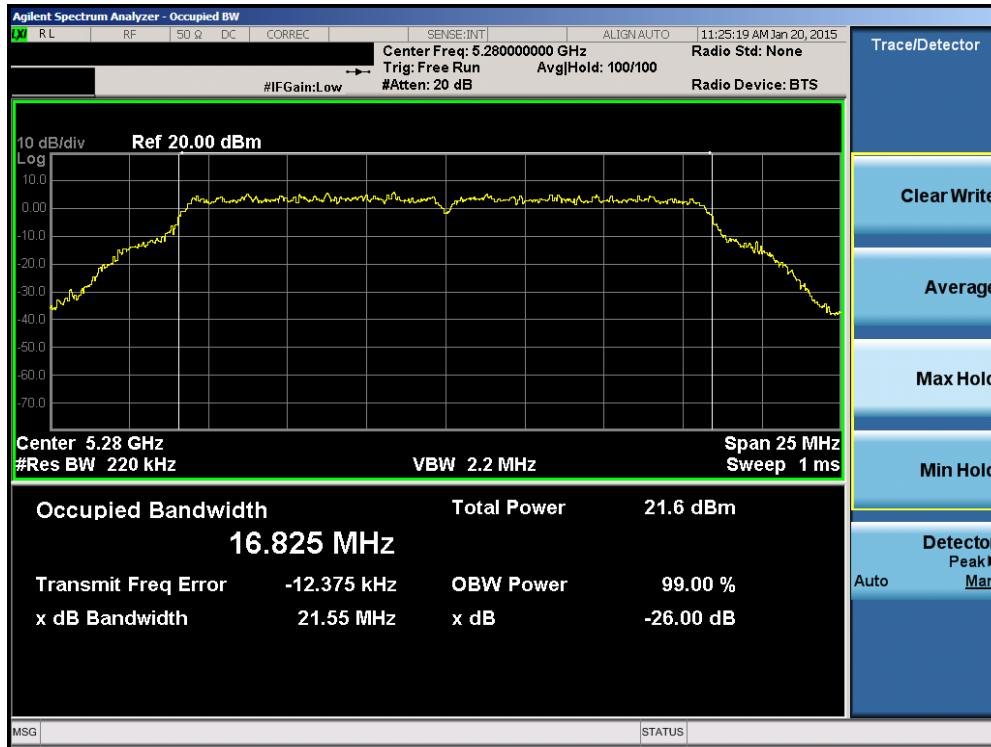


Plot 6-40. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

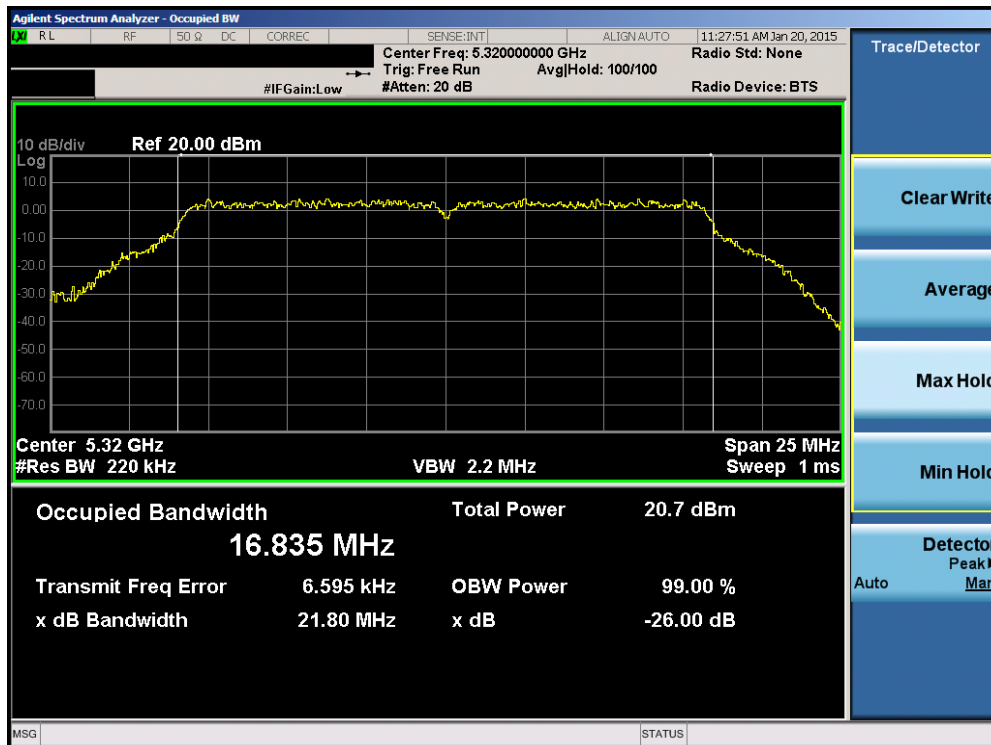


Plot 6-41. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 35 of 213

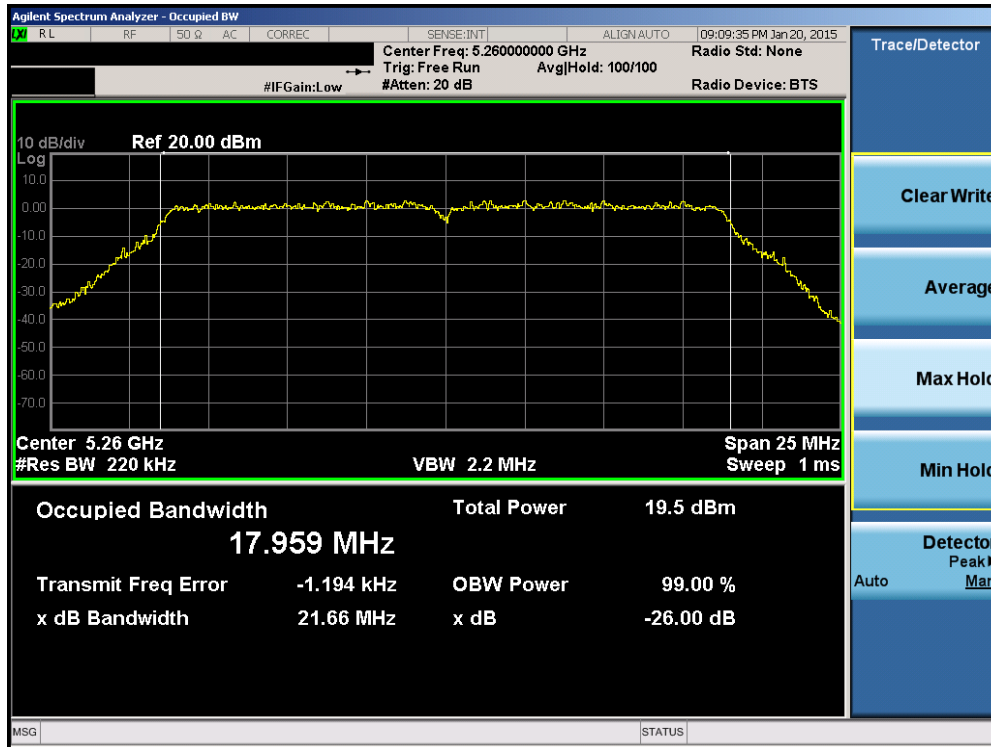


Plot 6-42. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

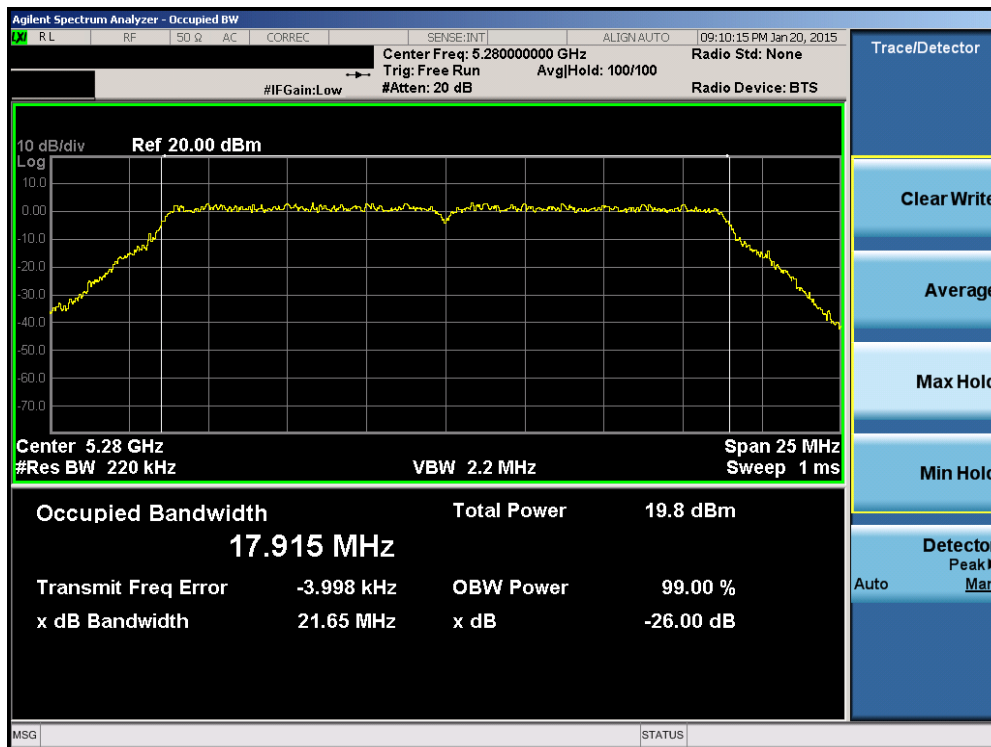


Plot 6-43. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 36 of 213

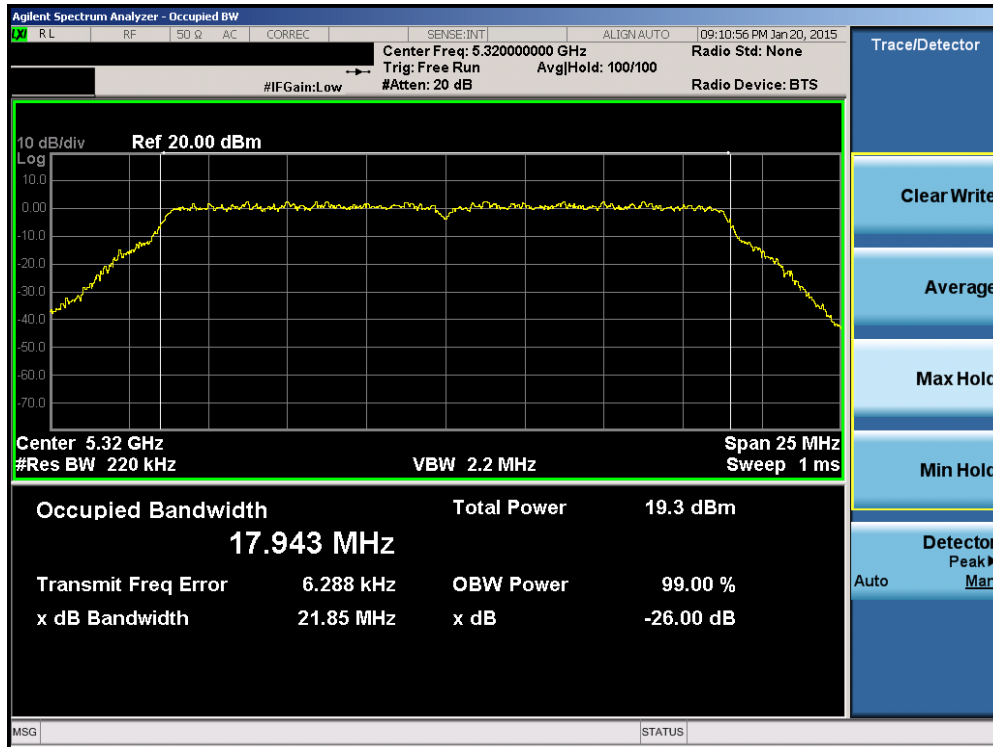


Plot 6-44. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

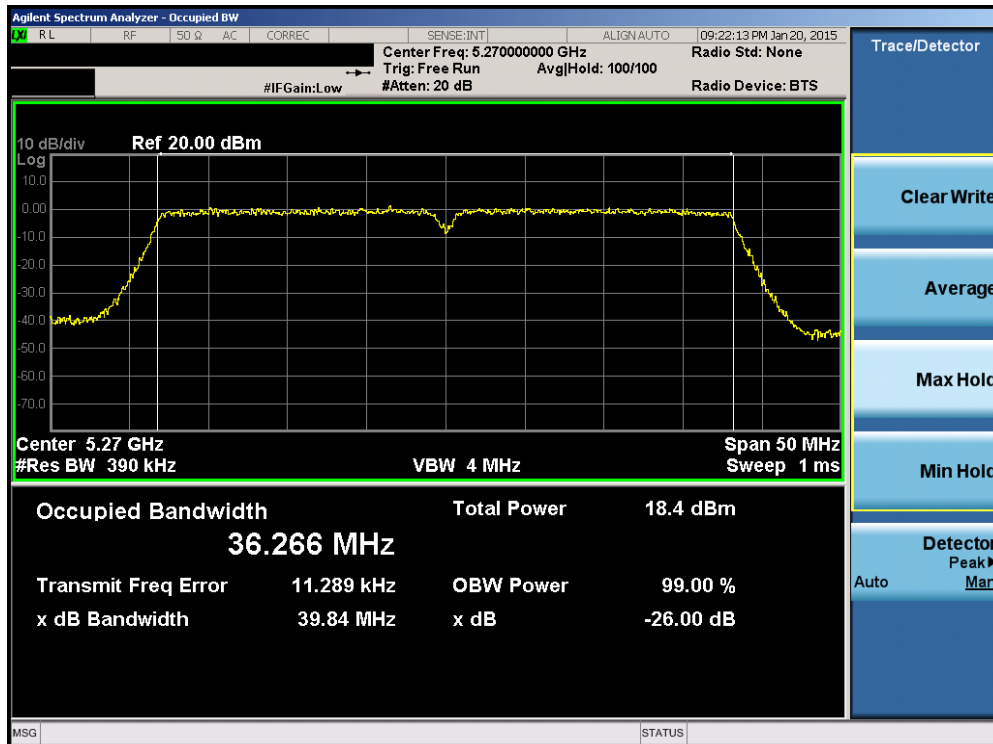


Plot 6-45. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 37 of 213

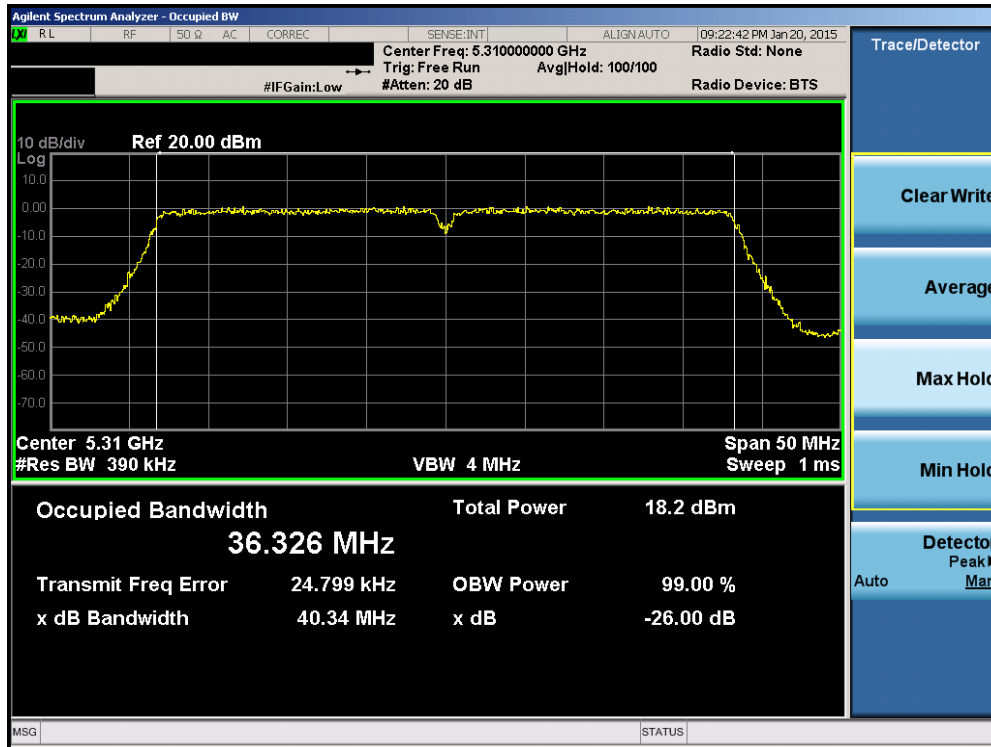


Plot 6-46. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

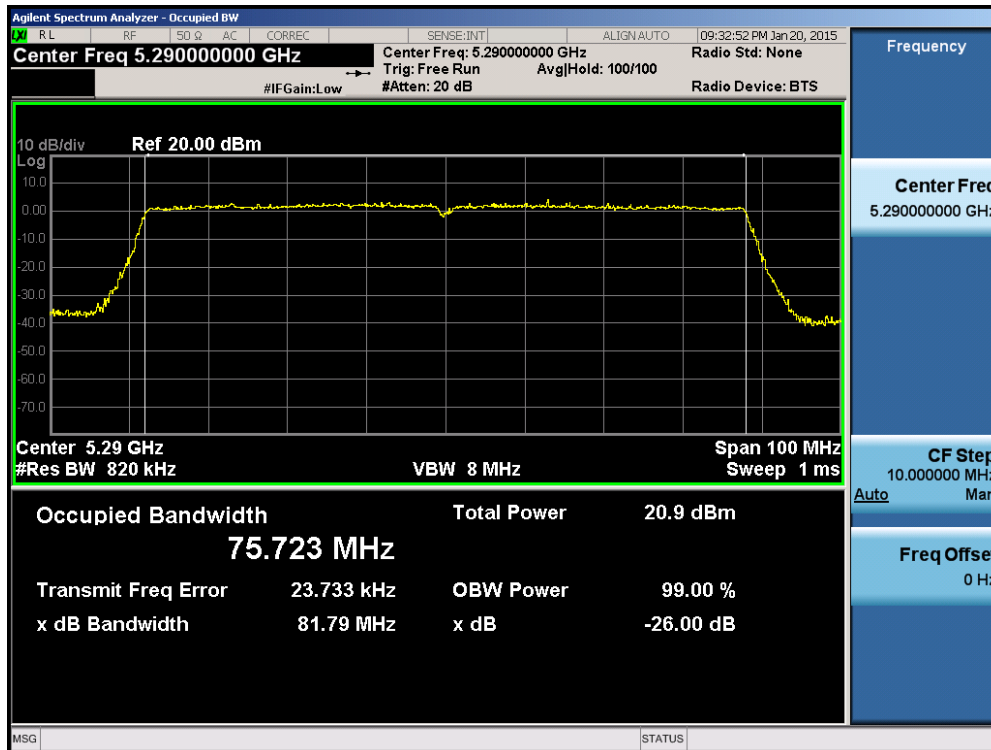


Plot 6-47. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 38 of 213

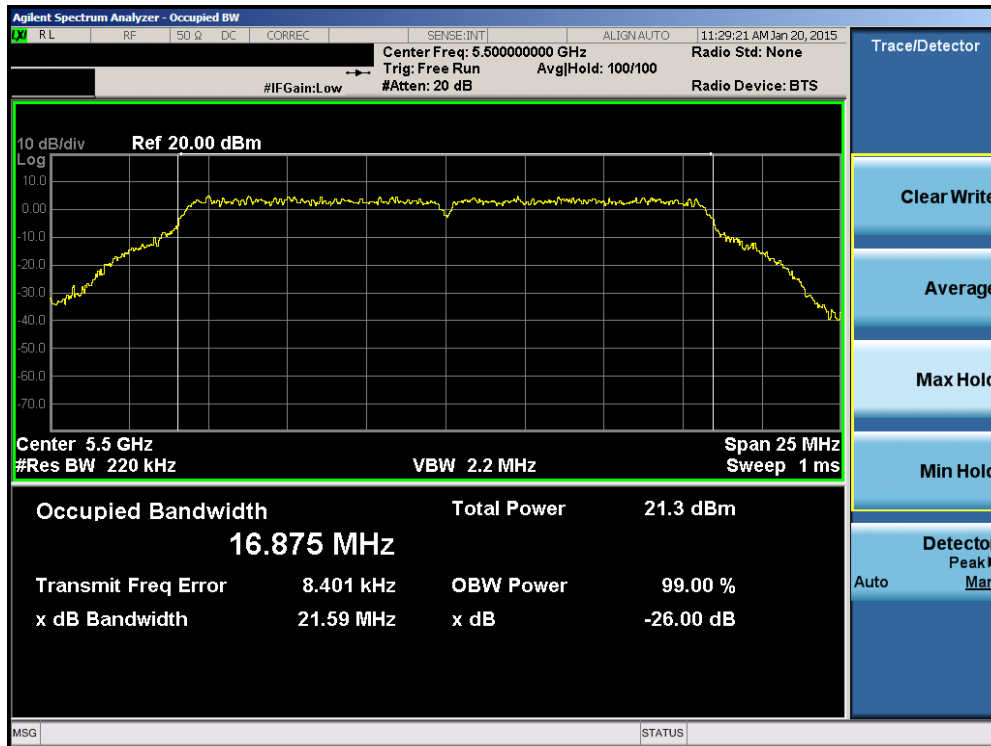


Plot 6-48. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

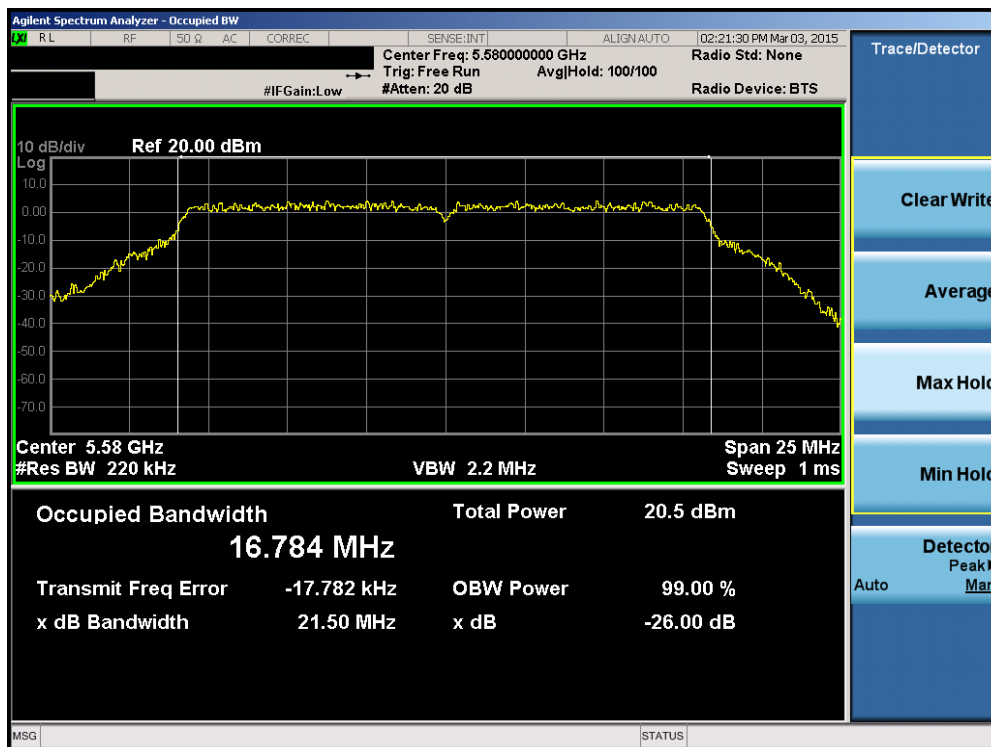


Plot 6-49. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 39 of 213

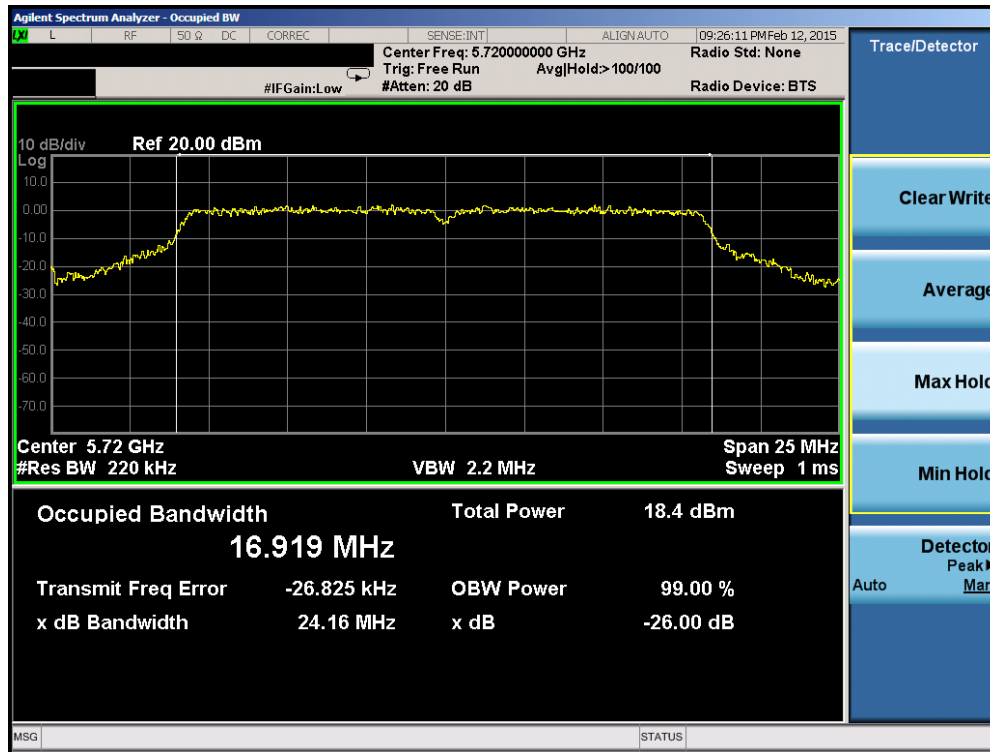


Plot 6-50. 26dB Bandwidth Plot (20MHz BW 802.11a (UNII Band 2C) – Ch. 144)

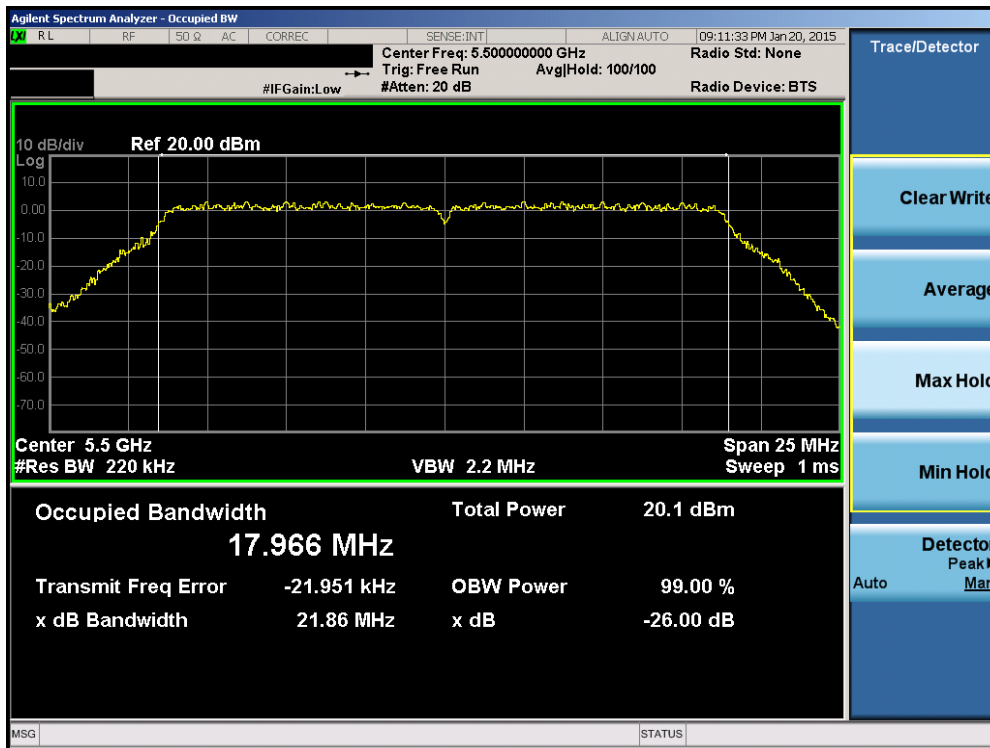


Plot 6-51. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 40 of 213

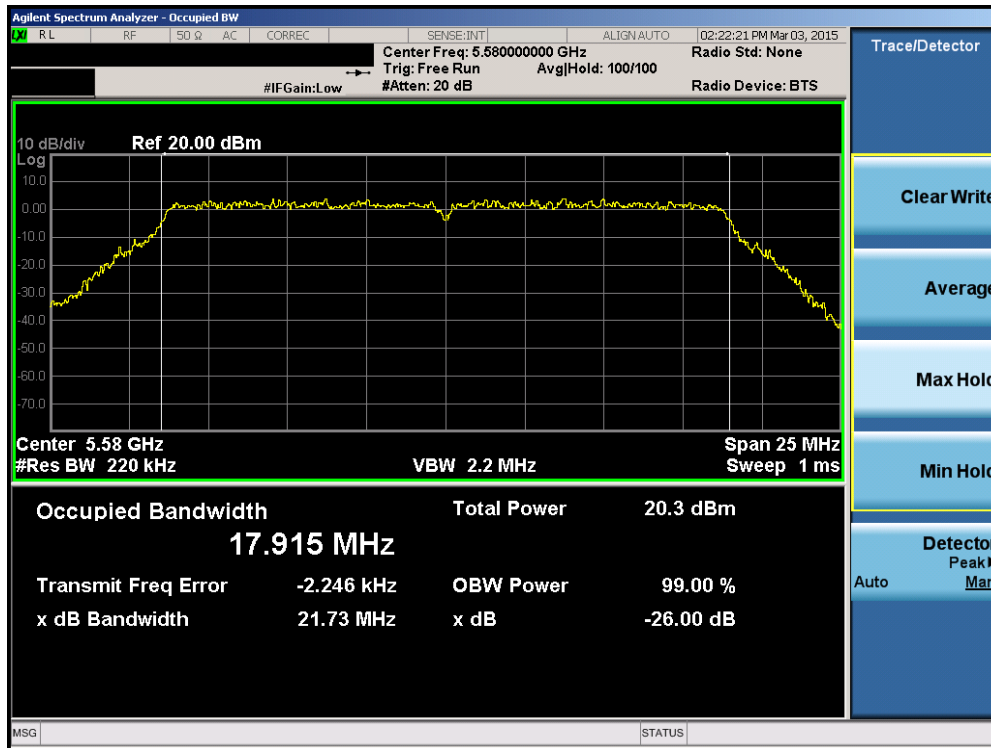


Plot 6-52. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

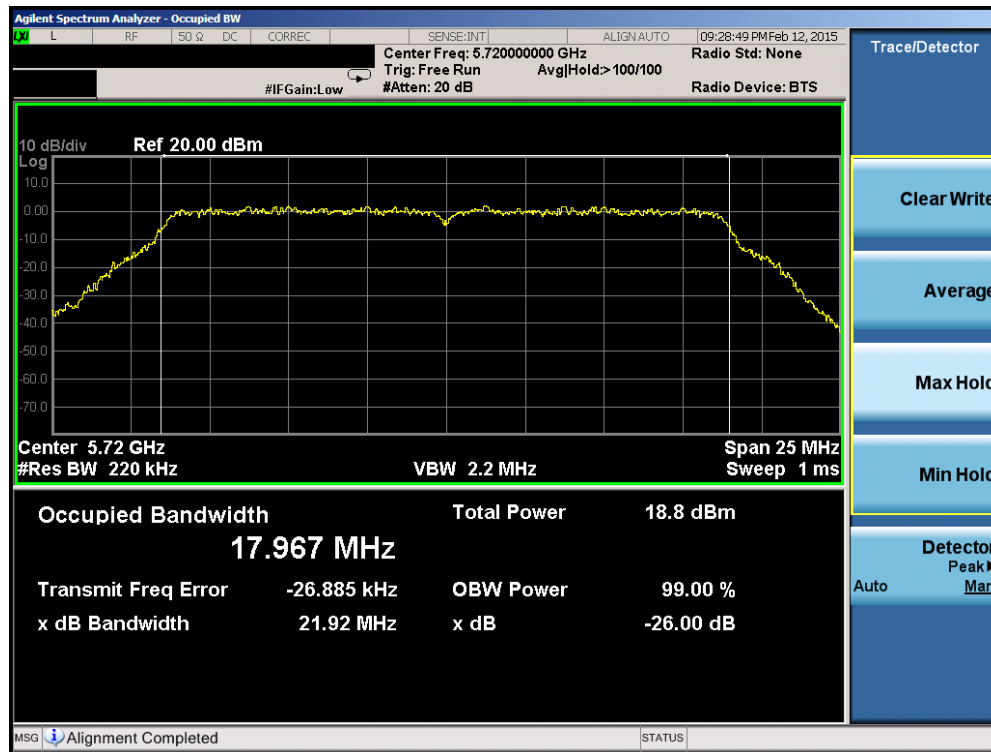


Plot 6-53. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 41 of 213

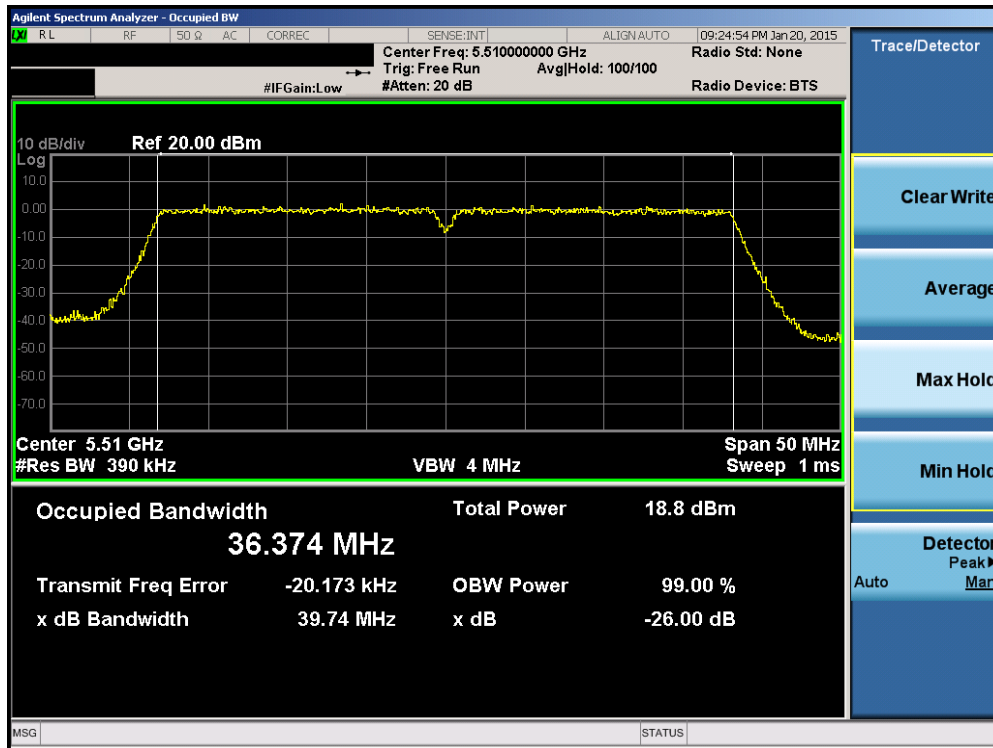


Plot 6-54. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

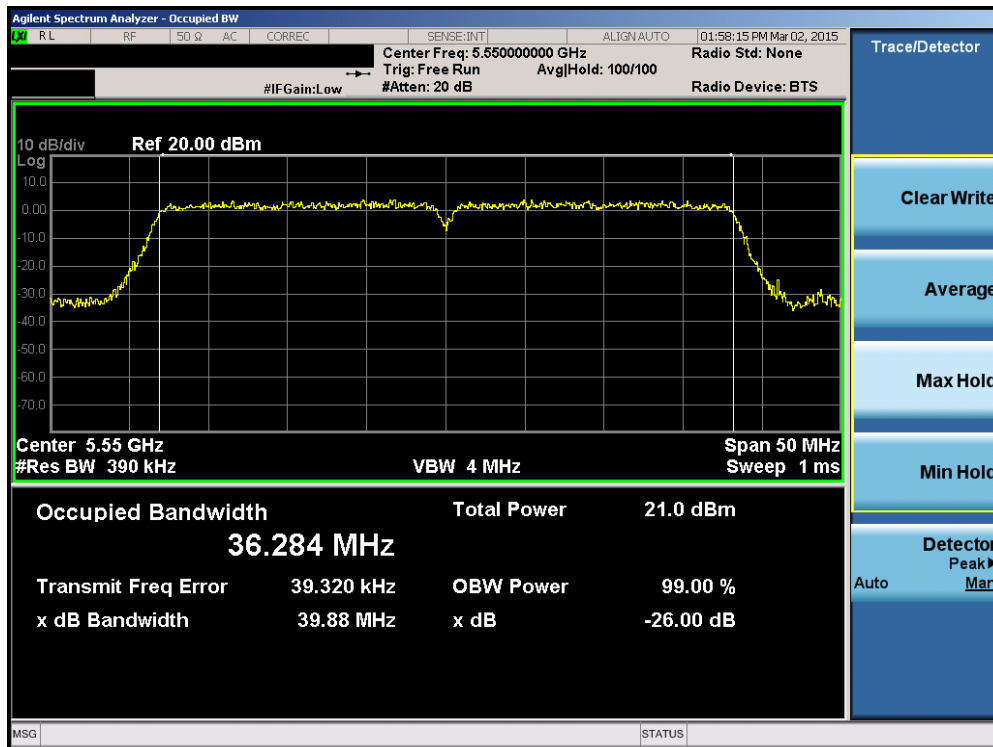


Plot 6-55. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 110)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 42 of 213

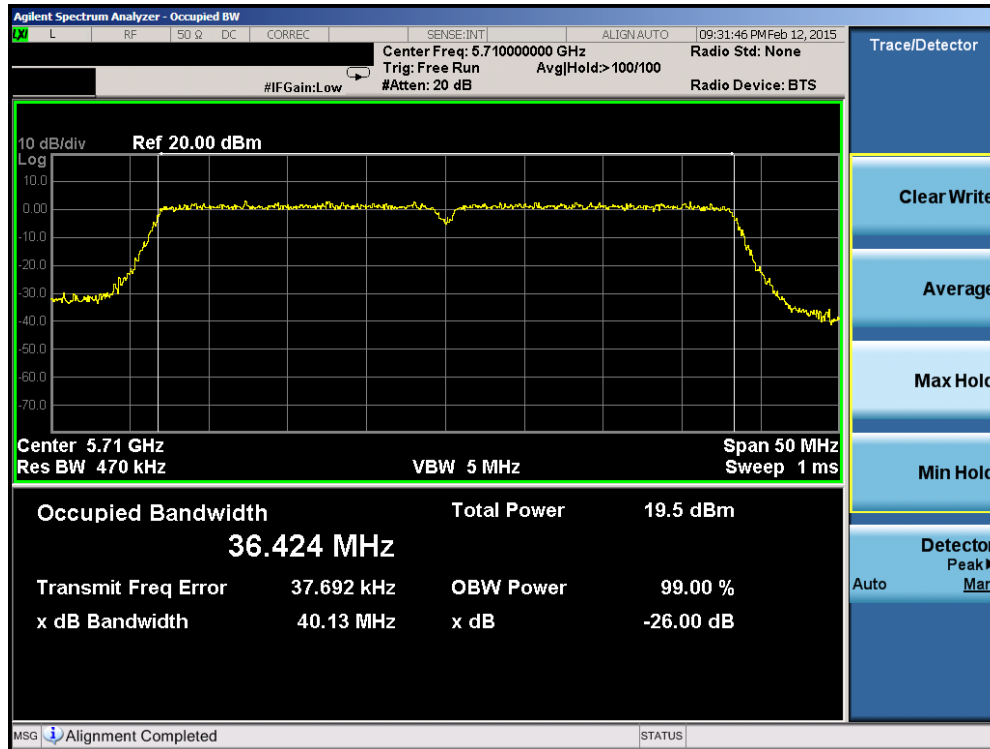


Plot 6-56. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

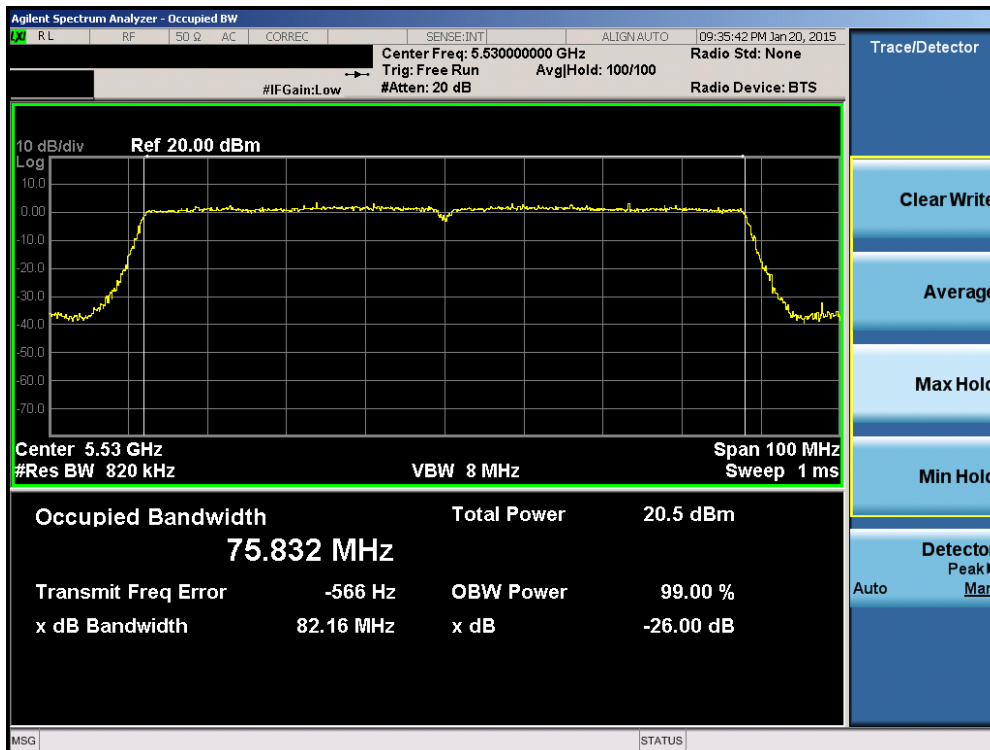

Plot 6-57. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 43 of 213

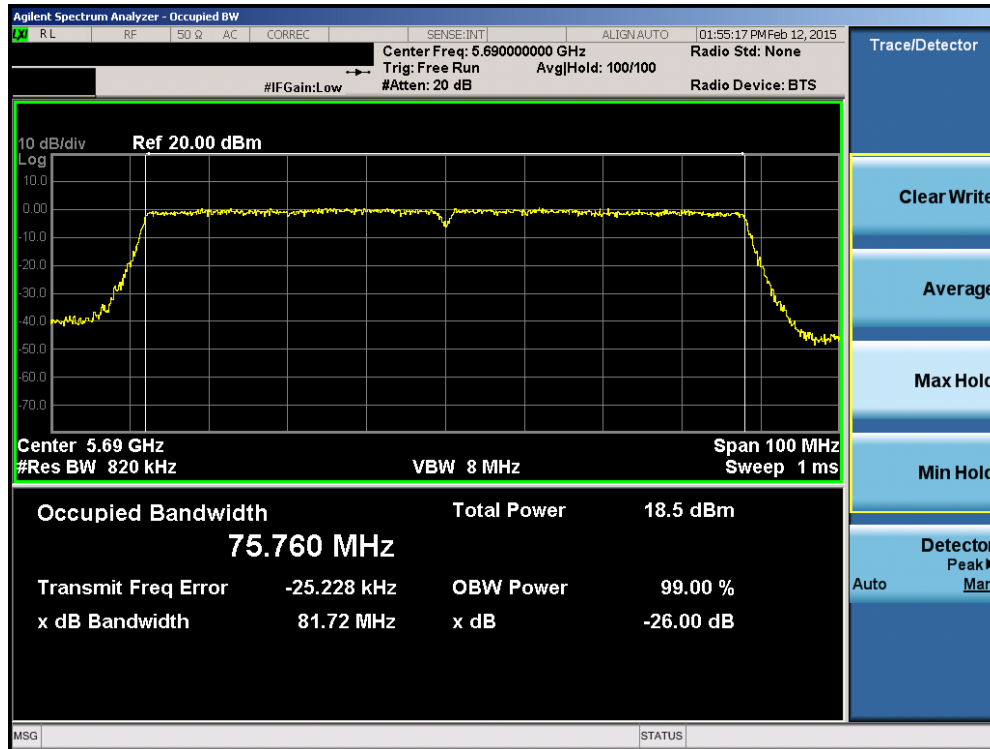

Plot 6-58. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 44 of 213

6.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e)

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

KDB 789033 D02 v01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 45 of 213

Antenna-1 6 dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.38
	5785	157	a	6	16.37
	5825	165	a	6	16.40
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.58
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.63
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.59
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.35
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.14
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.60

Table 6-4. Conducted Bandwidth Measurements

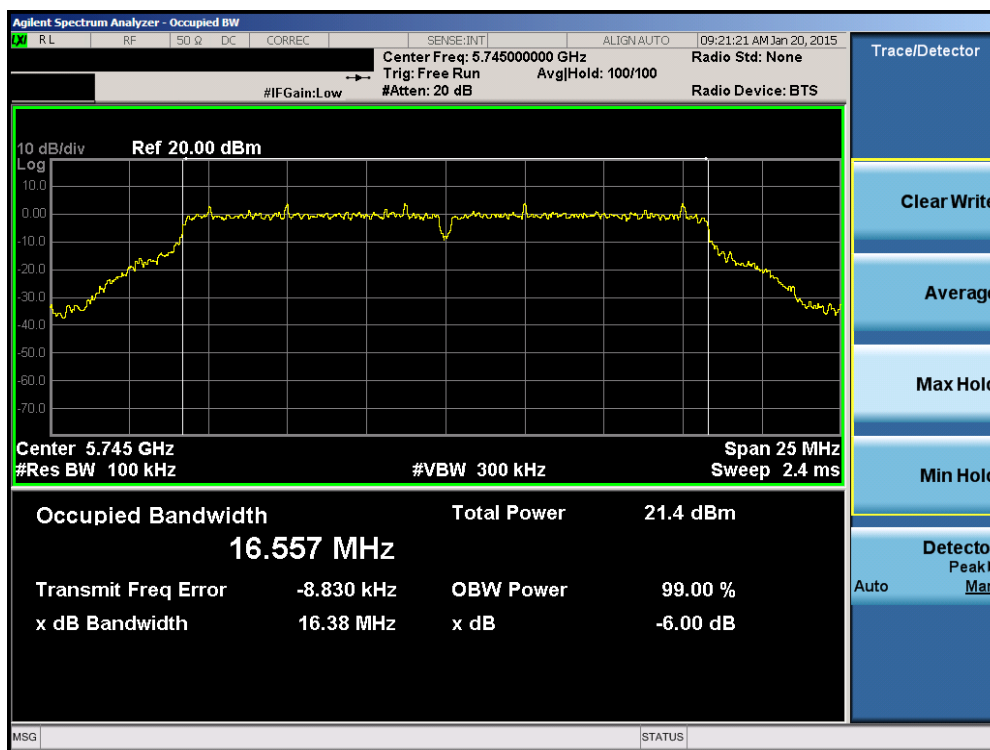


Plot 6-59. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 46 of 213

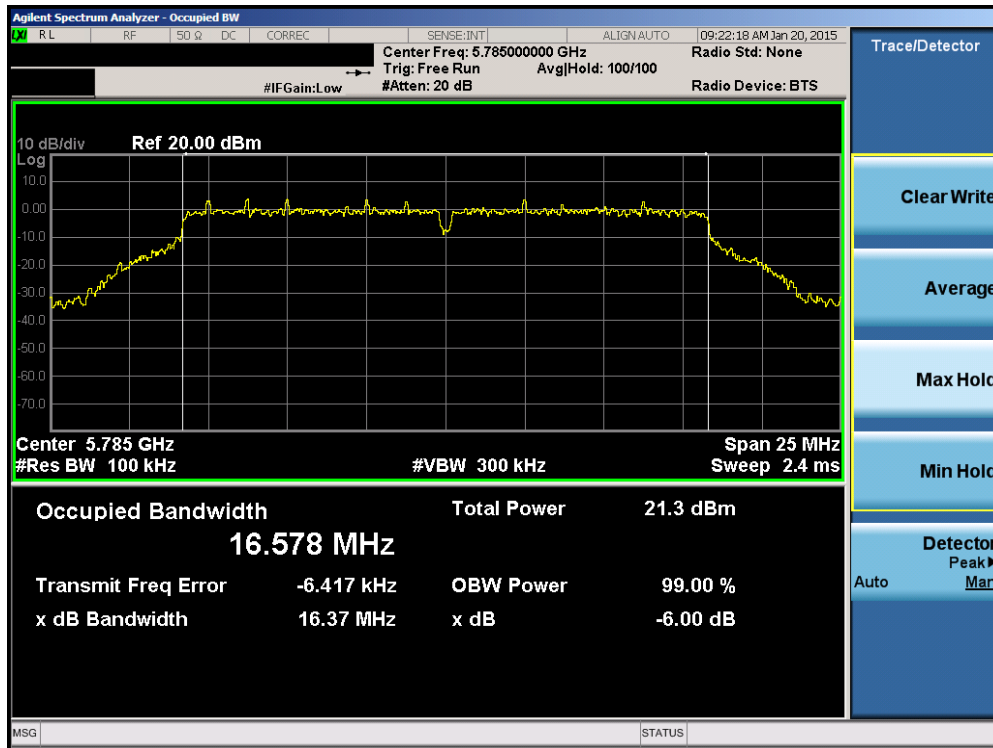


Plot 6-60. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

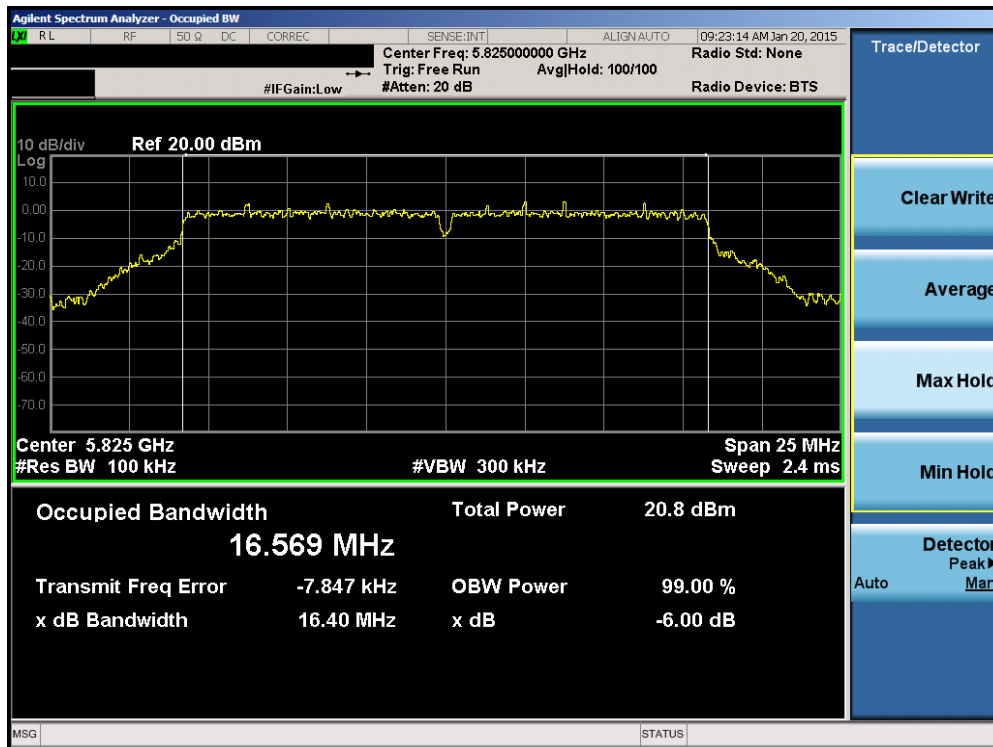


Plot 6-61. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 47 of 213

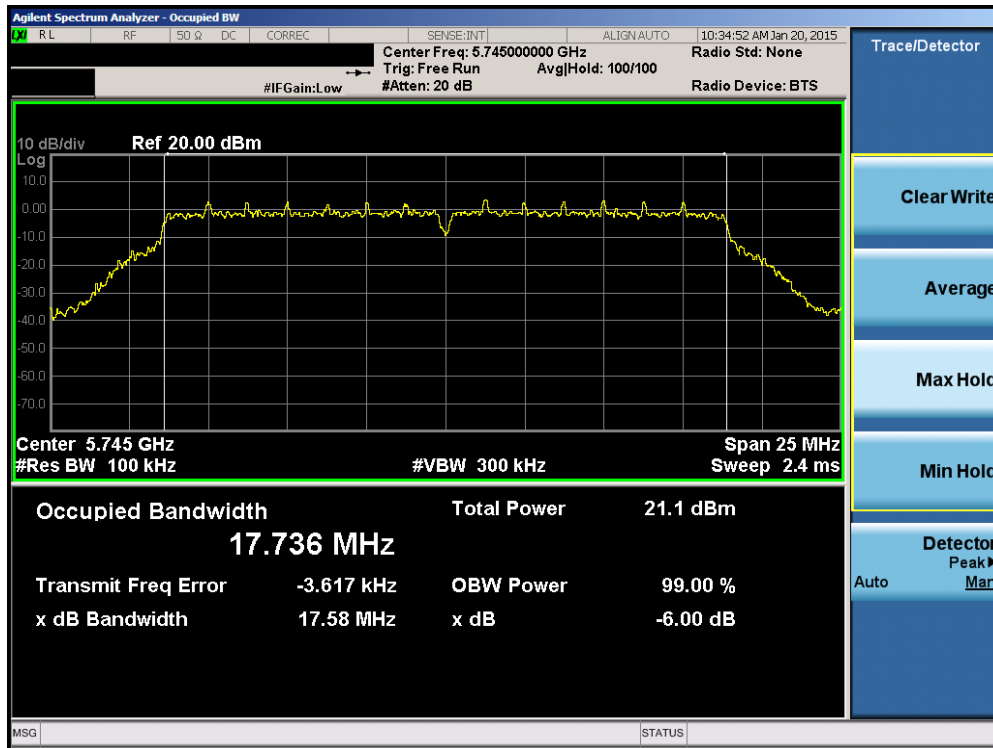


Plot 6-62. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

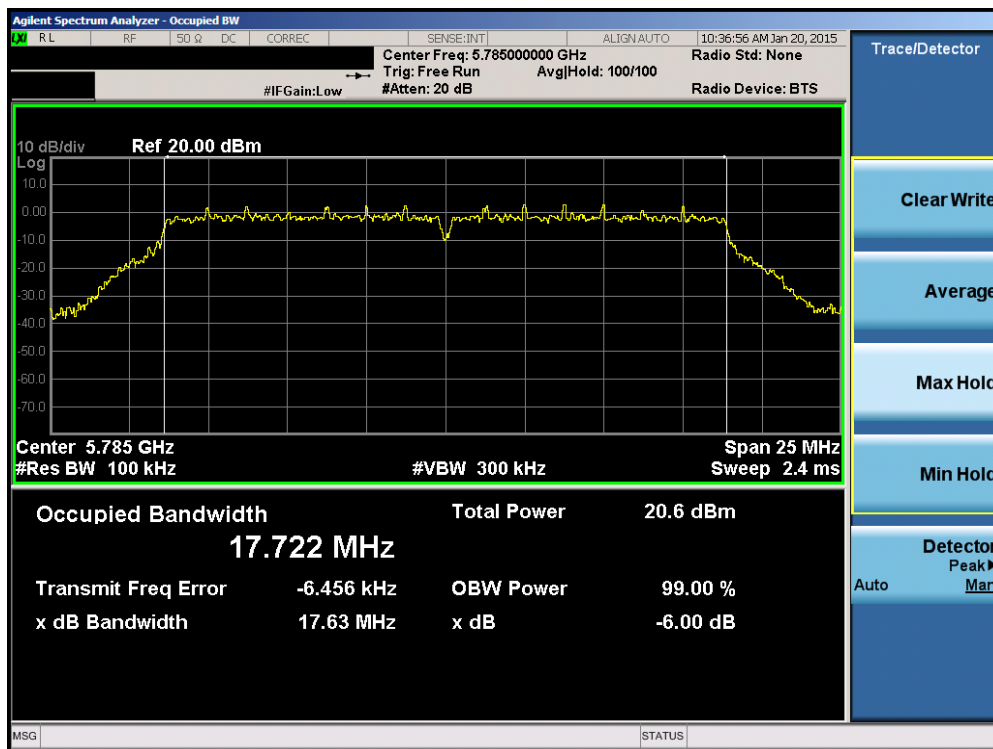


Plot 6-63. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 48 of 213

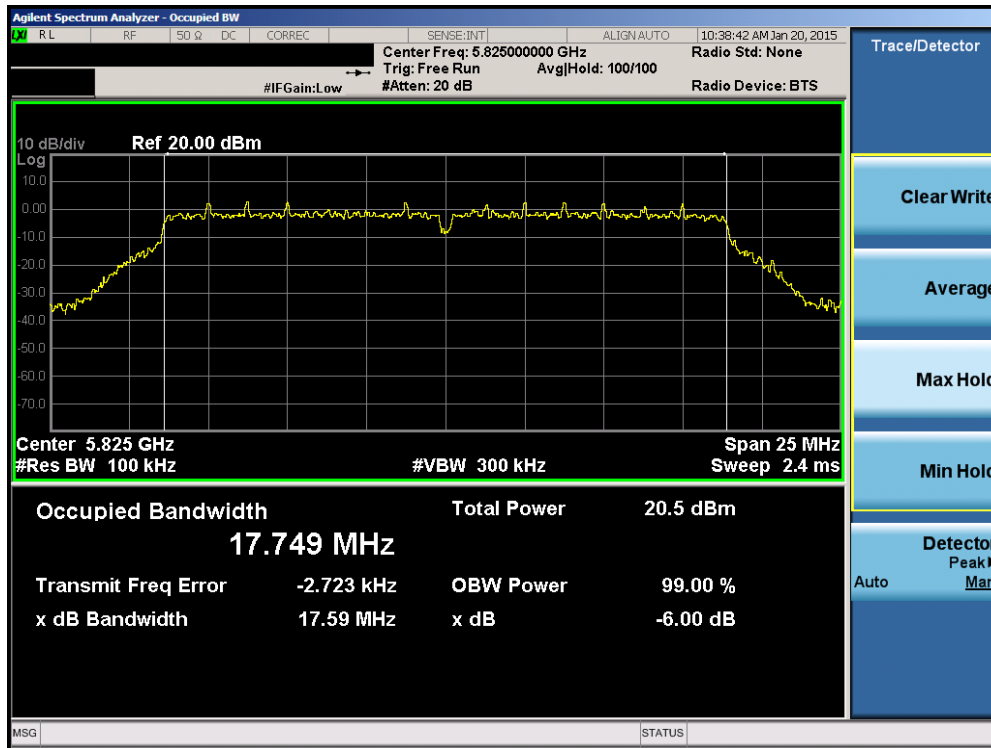


Plot 6-64. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

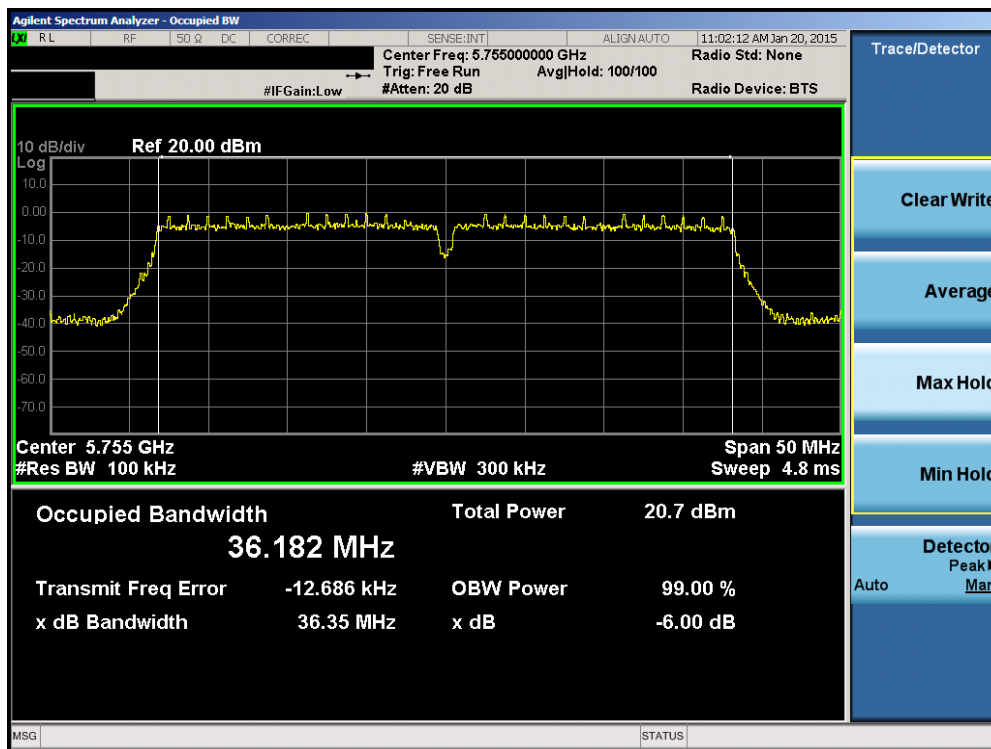


Plot 6-65. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 49 of 213

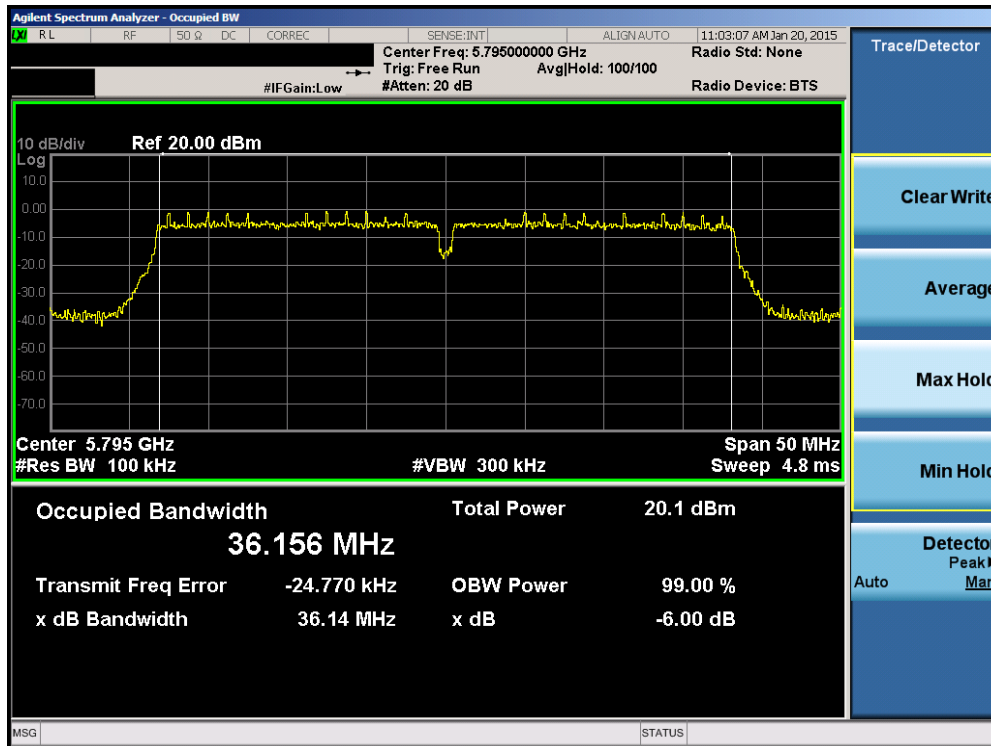

Plot 6-66. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

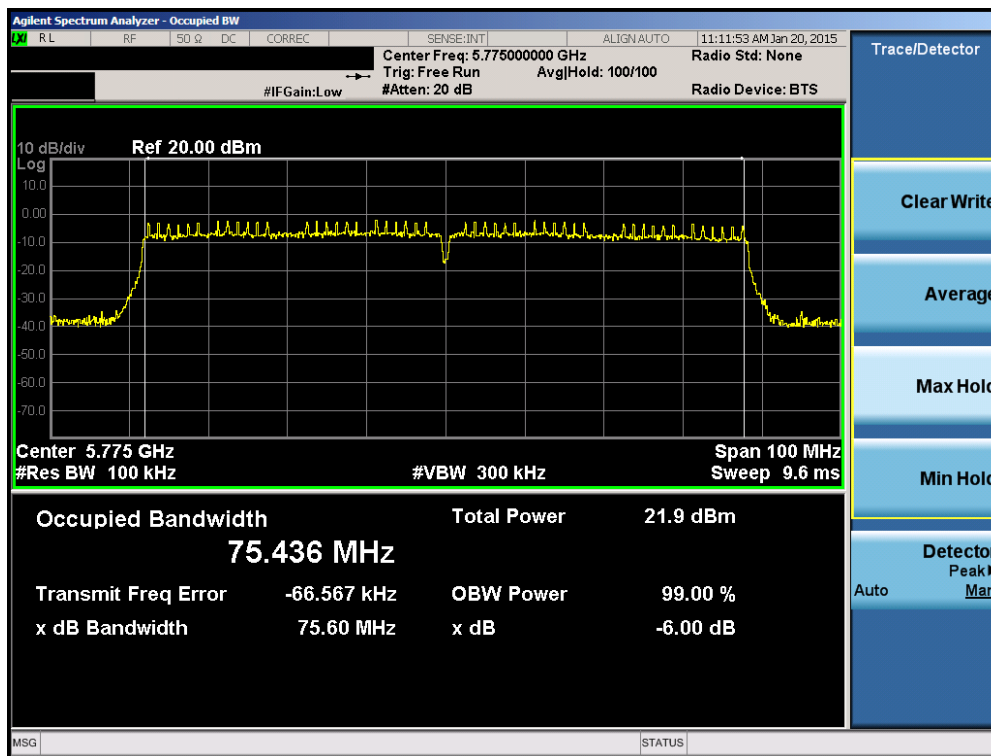


Plot 6-67. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 50 of 213

Antenna-2 6dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	a	6	16.36
	5785	157	a	6	16.40
	5825	165	a	6	16.40
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.58
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.60
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.61
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.38
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.36
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.71

Table 6-5. Conducted Bandwidth Measurements

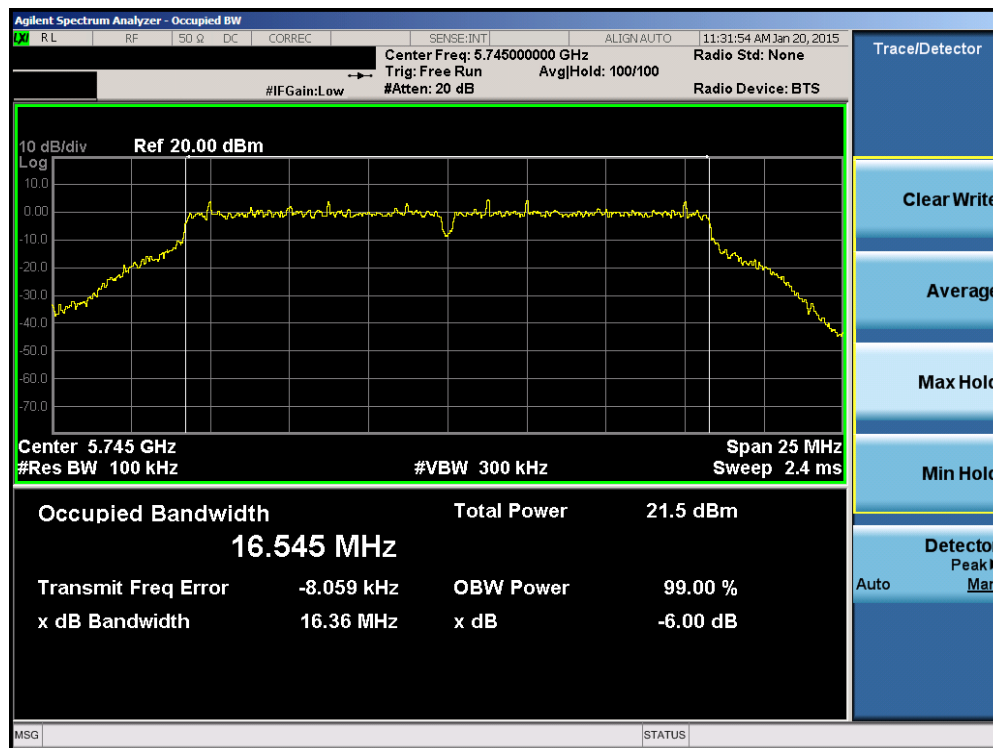


Plot 6-68. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 51 of 213

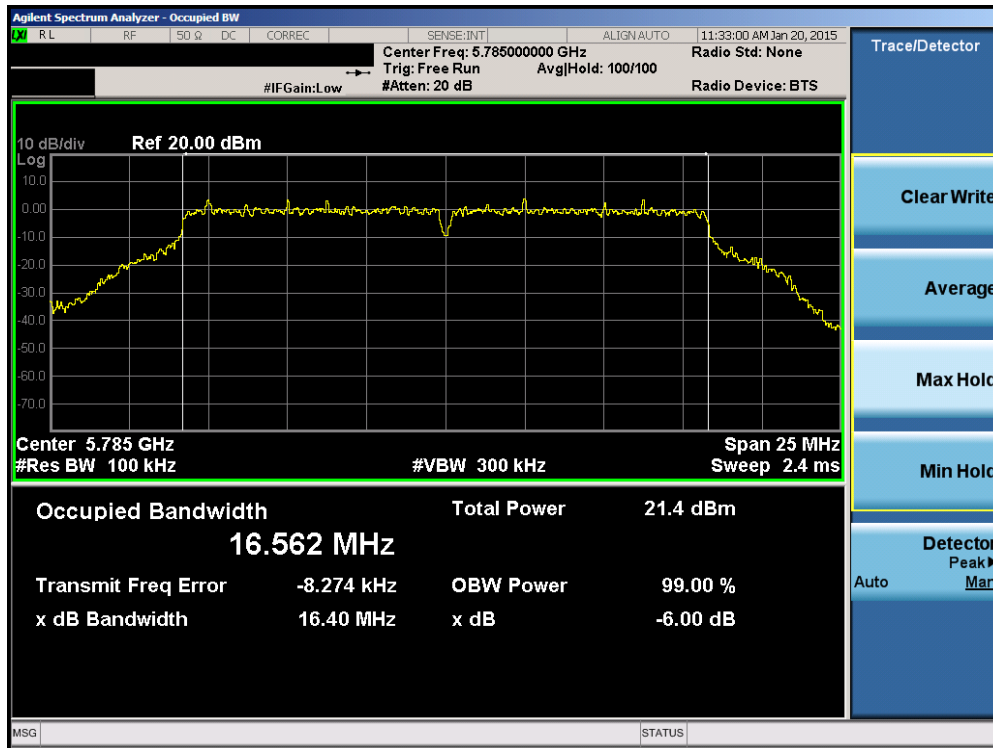


Plot 6-69. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

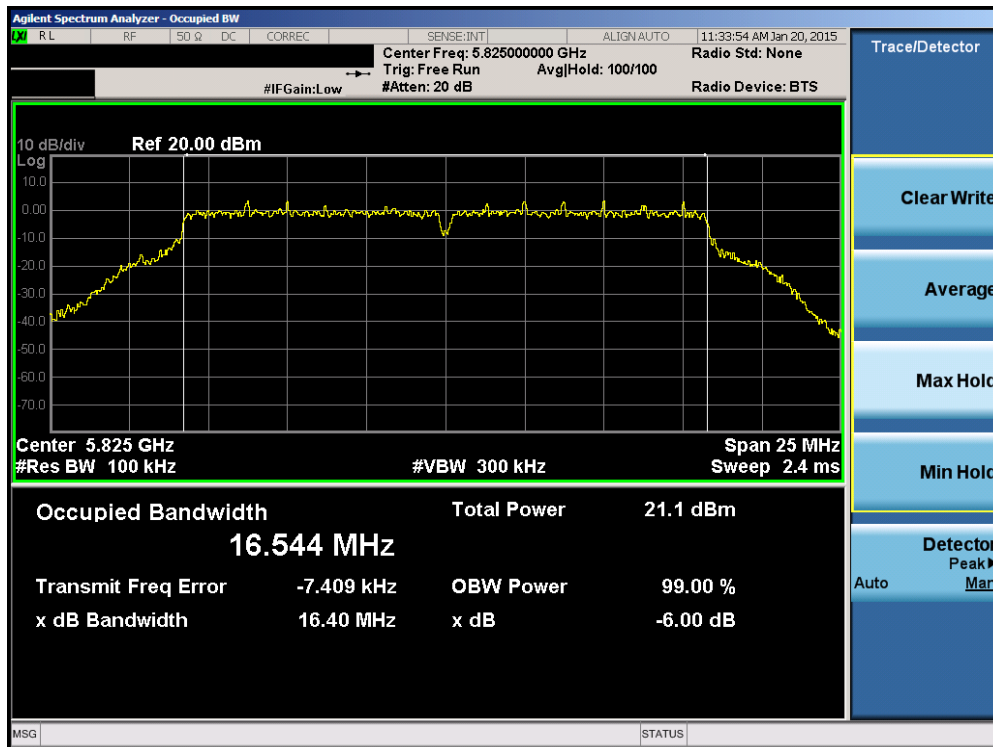


Plot 6-70. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 52 of 213


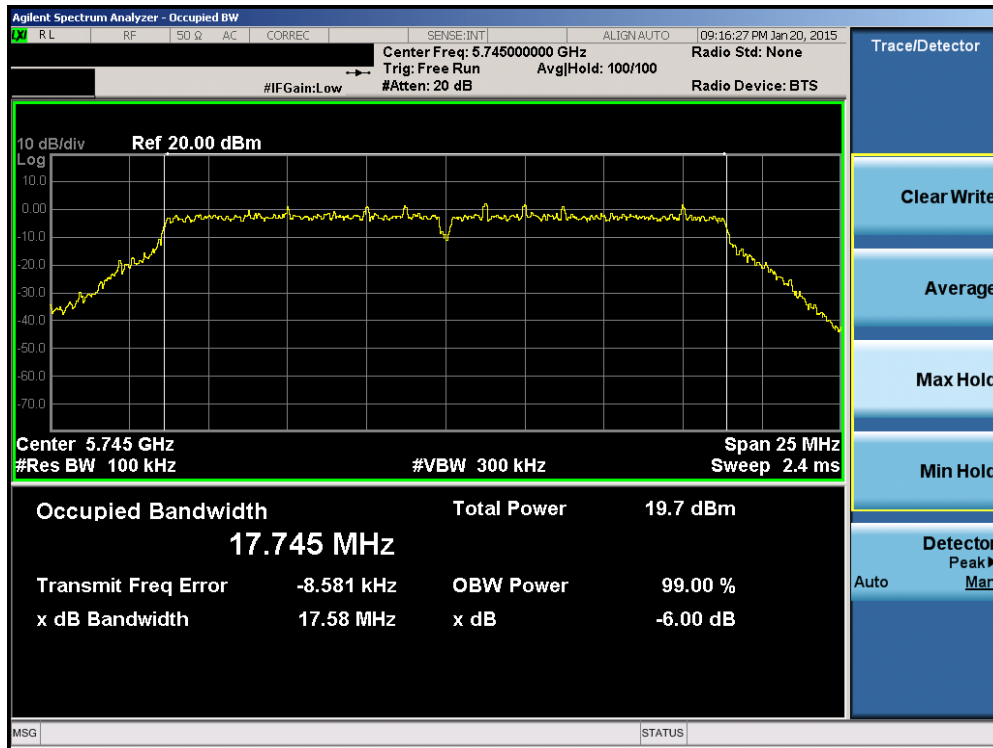




Plot 6-71. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

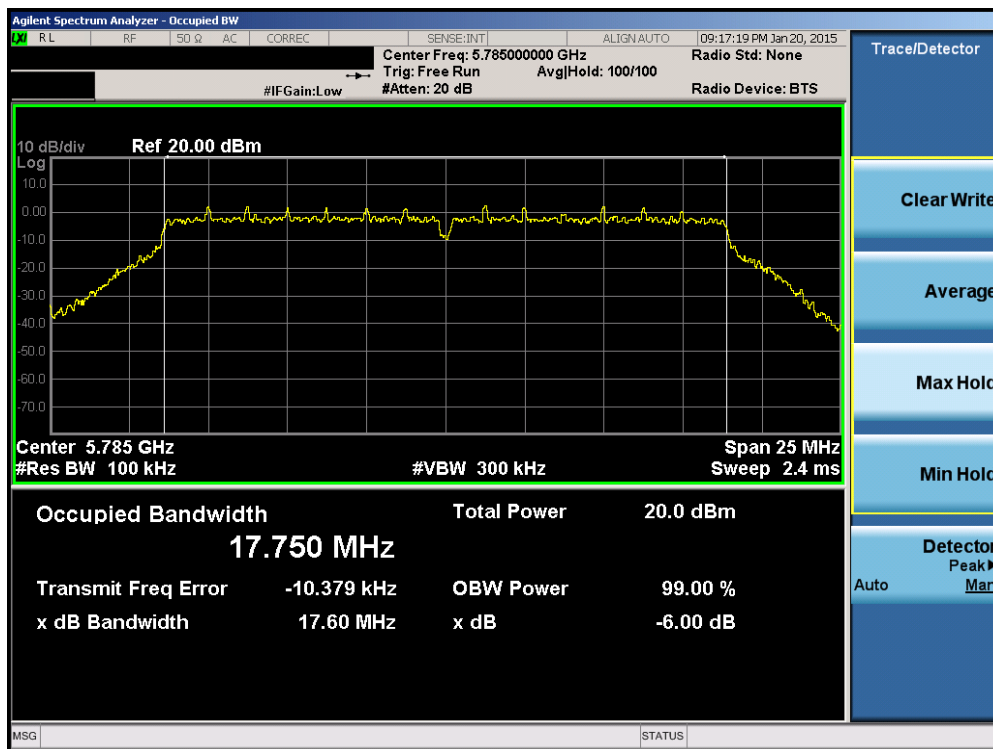

Plot 6-72. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 53 of 213

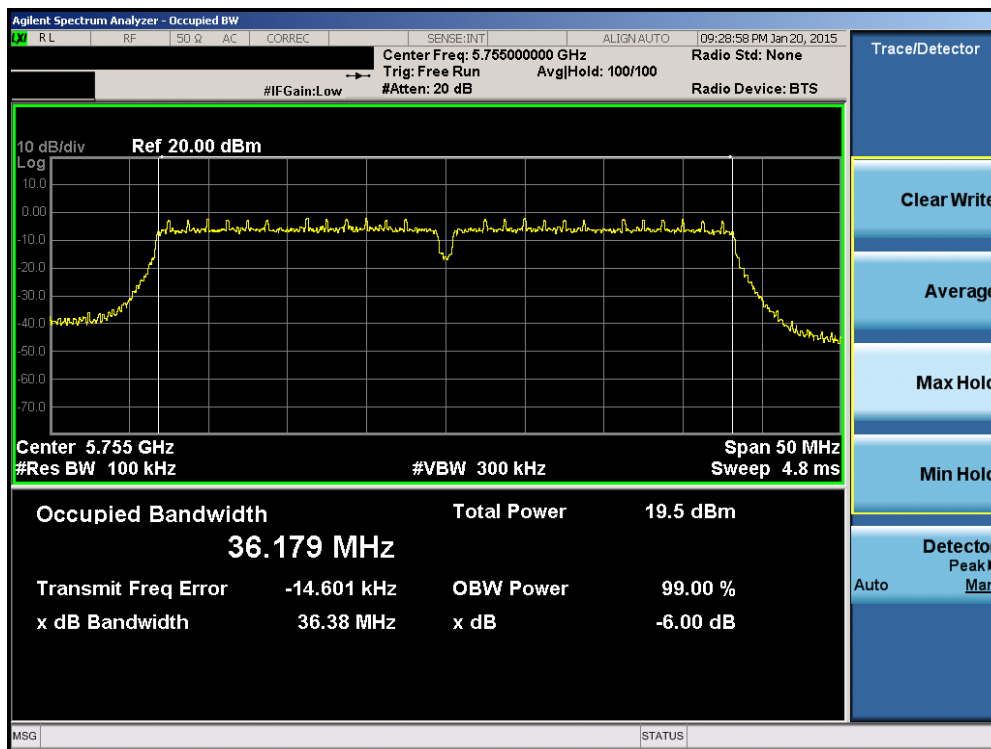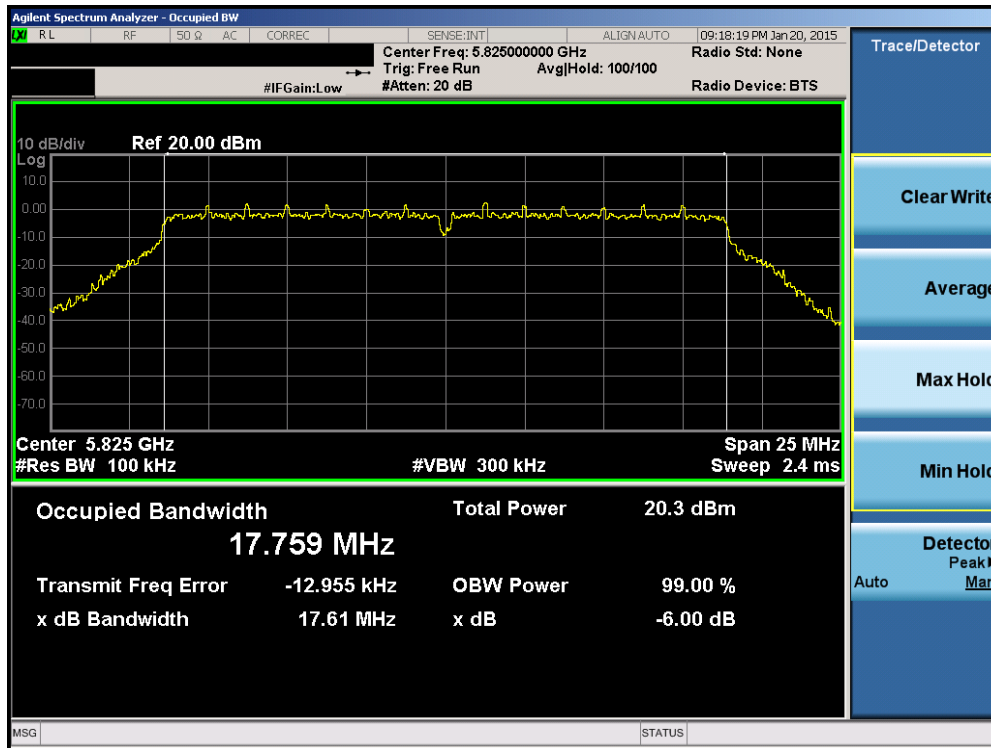

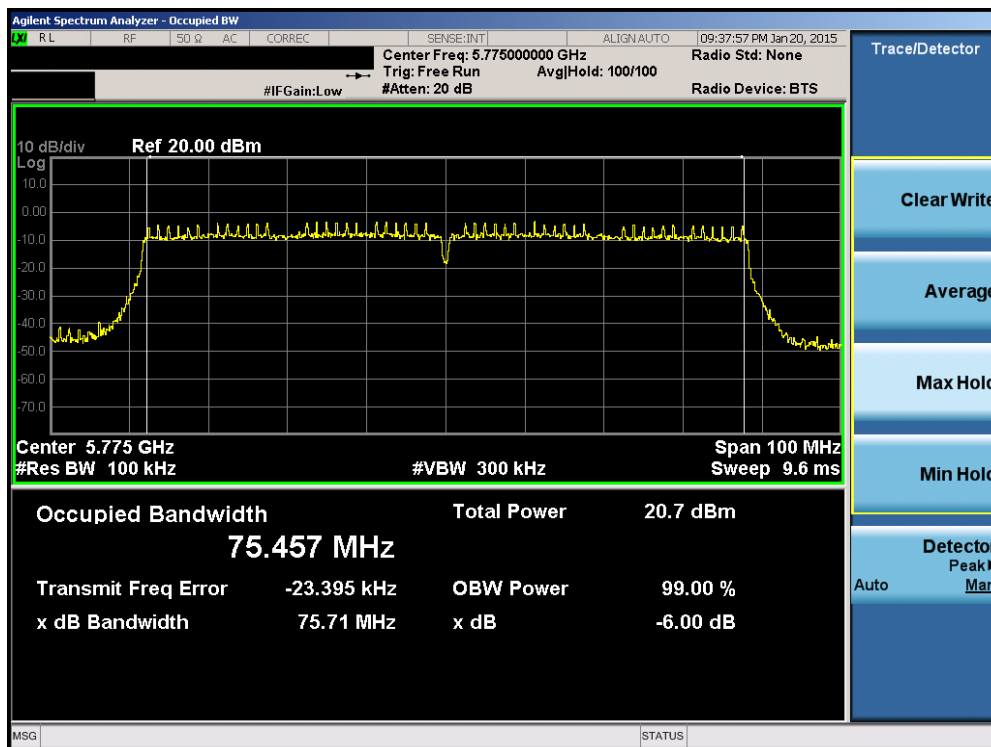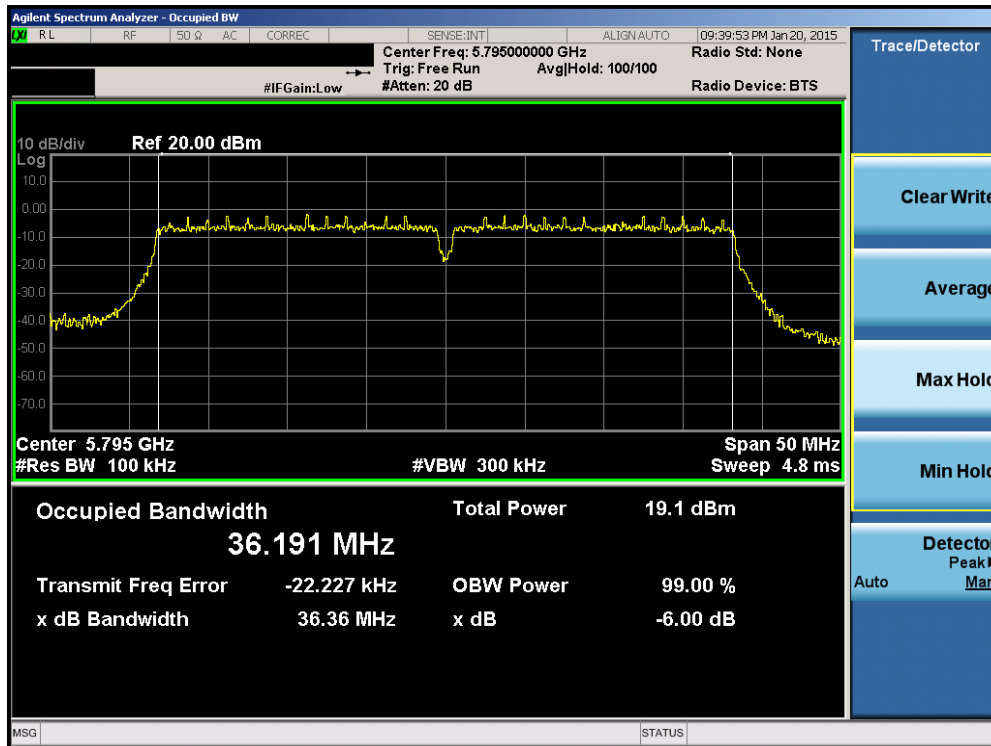

6.4 UNII Output Power Measurement – 802.11a/n/ac §15.407 (a)

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.42) = 24.31\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.28) = 24.28\text{dBm}$.

In the 5.725 – 5.825GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

KDB 789033 D02 v01 – Section E)3)b) Method PM-G
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

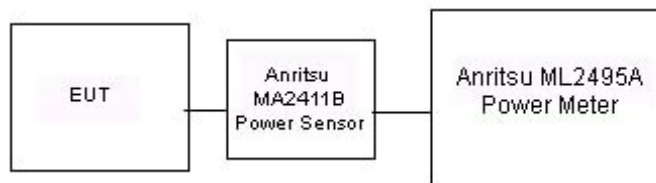


Figure 6-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 56 of 213

Antenna-1 Conducted Output Power Measurements

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	13.91	13.78	13.18
5200	40	13.72	13.76	13.10
5220	44	13.89	13.69	13.03
5240	48	14.07	13.81	13.12
5260	52	14.06	14.06	13.31
5280	56	14.20	13.99	13.44
5300	60	14.33	14.16	12.58
5320	64	14.16	14.12	12.63
5500	100	14.19	14.21	12.75
5540	108	13.55	13.65	12.71
5580	116	14.23	14.22	12.77
5660	132	14.35	14.33	12.74
5720	144	13.70	13.60	12.70
5745	149	14.19	13.94	12.80
5785	157	13.87	13.89	12.80
5825	165	13.76	13.82	12.63

Table 6-6. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11n	802.11ac
5190	38	12.39	11.76
5230	46	12.36	11.70
5270	54	11.81	12.20
5310	62	11.89	12.16
5510	102	11.85	12.27
5550	110	12.07	12.44
5710	142	12.03	12.00
5755	151	12.41	12.25
5795	159	12.48	12.22

Table 6-7. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	10.77
5290	58	11.37
5530	106	11.22
5690	138	10.68
5775	155	10.88

Table 6-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset			Page 57 of 213

Antenna-2 Conducted Output Power Measurements

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	14.24	14.00	12.80
5200	40	14.13	13.99	12.72
5220	44	14.02	13.96	12.69
5240	48	13.87	13.78	12.70
5260	52	13.94	14.05	13.04
5280	56	13.87	13.98	12.92
5300	60	13.85	13.95	12.93
5320	64	13.78	13.91	12.87
5500	100	14.19	14.01	13.38
5540	108	13.81	13.78	13.30
5580	116	14.15	14.05	13.40
5660	132	14.08	14.02	13.31
5720	144	14.16	13.88	13.15
5745	149	14.31	14.08	13.24
5785	157	14.41	14.09	13.17
5825	165	14.11	14.18	13.18

Table 6-9. 20MHz BW (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11n	802.11ac
5190	38	11.78	11.60
5230	46	12.45	12.44
5270	54	12.48	12.48
5310	62	12.41	12.34
5510	102	12.47	12.00
5550	110	12.40	11.87
5710	142	11.90	11.83
5755	151	11.89	11.97
5795	159	11.93	11.77

Table 6-10. 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	10.81
5290	58	10.91
5530	106	10.94
5690	138	10.90
5775	155	11.07

Table 6-11. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset			Page 58 of 213

MIMO Maximum Conducted Output Power Measurements

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		ANT1	ANT2	MIMO
5180	36	13.78	14.00	16.90
5200	40	13.76	13.99	16.89
5220	44	13.69	13.96	16.84
5240	48	13.81	13.78	16.91
5260	52	14.06	14.05	17.07
5280	56	13.99	13.98	17.00
5300	60	14.16	13.95	17.07
5320	64	14.12	13.91	17.03
5500	100	14.21	14.01	17.12
5540	108	13.65	13.78	16.73
5580	116	14.22	14.05	17.15
5660	132	14.33	14.02	17.19
5720	144	13.60	13.88	16.75
5745	149	13.94	14.08	17.02
5785	157	13.89	14.09	17.00
5825	165	13.82	14.18	17.01

Table 6-12. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		ANT1	ANT2	MIMO
5180	36	13.18	12.80	16.00
5200	40	13.10	12.72	15.92
5220	44	13.03	12.69	15.87
5240	48	13.12	12.70	15.93
5260	52	13.31	13.04	16.19
5280	56	13.44	12.92	16.20
5300	60	12.58	12.93	15.77
5320	64	12.63	12.87	15.76
5500	100	12.75	13.38	16.09
5540	108	12.71	13.30	16.03
5580	116	12.77	13.40	16.11
5660	132	12.74	13.31	16.04
5720	144	12.70	13.15	15.94
5745	149	12.80	13.24	16.04
5785	157	12.80	13.17	16.00
5825	165	12.63	13.18	15.92

Table 6-13. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset			Page 59 of 213

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]		
		ANT1	ANT2	MIMO
5190	38	12.39	11.78	15.11
5230	46	12.36	12.45	15.42
5270	54	11.81	12.48	15.17
5310	62	11.89	12.41	15.17
5510	102	11.85	12.47	15.18
5550	110	12.07	12.40	15.25
5710	142	12.03	11.90	14.98
5755	151	12.41	11.89	15.17
5795	159	12.48	11.93	15.22

Table 6-14. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]		
		ANT1	ANT2	MIMO
5190	38	11.76	11.60	14.69
5230	46	11.70	12.44	15.10
5270	54	12.20	12.48	15.35
5310	62	12.16	12.34	15.26
5510	102	12.27	12.00	15.15
5550	110	12.44	11.87	15.17
5710	142	12.00	11.83	14.93
5755	151	12.25	11.97	15.12
5795	159	12.22	11.77	15.01

Table 6-15. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	5GHz (80MHz) Conducted Power [dBm]		
		ANT1	ANT2	MIMO
5210	42	10.77	10.81	13.80
5290	58	11.37	10.91	14.16
5530	106	11.22	10.94	14.09
5690	138	10.68	10.90	13.80
5775	155	10.88	11.07	13.99

Table 6-16. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Note:

Per KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz the average conducted output power was measured to be 13.78 dBm for Antenna-1 and 14.00 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(13.78 \text{ dBm} + 14.00 \text{ dBm}) = (23.88 \text{ mW} + 25.12 \text{ mW}) = 49.00 \text{ mW} = 16.90 \text{ dBm}$$

FCC ID: A3LSMG925T		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1501190158.A3L	Test Dates: 1/19-3/3/2015	EUT Type: Portable Handset		Page 60 of 213