



129 Samsung-ro,
Yeongtong-gu, Suwon-Si,
Gyeonggi-Do, 443-742
Korea
Tel: 82-31-8062-4278
Fax: 82-31-279-9985

FCC TEST REPORT

Manufacturer: SAMSUNG Electronics Co., Ltd.

Model: SM-G928S, SM-G928K, SM-G928L


FCC ID: A3LSMG928KOR

Application Type: Certification

EUT Type: Portable Handset

All measurements reported here are in accordance with FCC Rules,
47CFR Part2 and Part27.

Prepared By  Date 2015.07.14
Jooha Bek
Test Engineer

Checked By  Date 2015.07.14
YG Choi
Deputy Technical Manager

Authorized By  Date 2015.07.14
WT Jang
Technical Manager



Revision History

Rev. #	Issue Date	Revisions	Revised By
1	2015.07.13	▪ Initial issue	Jooha Bek
1/2	2015.07.14	▪ Revised FCC ID ▪ Revised the LTE Band 41 emission designators for 15MHz and 20MHz ▪ Revised the max power value in Table 0-1 for 15MHz BW LTE Band 41	Jooha Bek

– End of this page –

Table of Contents

§2.1033 General Information	4
1. INTRODUCTION	5
1.1. General.....	5
2. PRODUCT INFORMATION	5
2.1. Equipment Description	5
2.2. Device Capabilities	5
3. DESCRIPTION OF TESTS	6
3.1. Evaluation Procedure.....	6
3.2. Measurement Procedure for Radiated Power and Radiated Spurious Emissions..	6
3.3. EMI Suppression Device(s)/Modifications	6
4. TEST EQUIPMENT LIST	7
5. SAMPLE CALCULATIONS	9
6. TEST RESULTS	10
6.1. Summary	10
6.2. Occupied Bandwidth	12
6.3. Spurious and Harmonic Emissions at Antenna Terminal	19
6.4. Band Edge Emissions at Antenna Terminal	45
6.5. Frequency Stability / Temperature Variation	56
6.6. Radiated Power (ERP/EIRP).....	59
6.7. Radiated Spurious Emissions Measurements	62
7. CONCLUSION.....	67

**§2.1033 General Information**

APPLICANT: Samsung Electronics Co., Ltd.

APPLICANT ADDRESS: 129 Samsung-ro,
Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Korea

TEST SITE: Samsung Electronics Co., Ltd.

TEST SITE ADDRESS: 129 Samsung-ro,
Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Korea

FCC RULE PART(S): §2, §27.

TEST PROCEDURE(S): ANSI/TIA603-C-2004, KDB971168 v02r02

BASE MODEL: SM-G928S

MULTI MODEL: SM-G928K, SM-G928L

FCC ID: A3LSMG928KOR

FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

MODE: LTE

EMISSION DESIGNATOR: See Table 0-1

TX FREQUENCY BLOCK 704 – 716MHz (LTE Band 17)
2496 – 2690MHz (LTE Band 41)

RX FREQUENCY BLOCK 734 – 746MHz (LTE Band 17)
2496 – 2690MHz (LTE Band 41)

MAX POWER RATING: 0.031 W ERP LTE Band 17 (14.86 dBm)
0.035 W EIRP LTE Band 41 (15.38 dBm)

TEST DEVICE SERIAL NO.: FCM-022-A , FCM-022-B

DATE(S) OF TEST: June 20 – July 12, 2015

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (Watt)	Max. Power (dBm)
LTE Band 17	706.5 – 713.5	4M50G7D	QPSK	0.029	14.59
LTE Band 17	706.5 – 713.5	4M50W7D	16QAM	0.026	14.17
LTE Band 17	709 – 711	8M95G7D	QPSK	0.031	14.86
LTE Band 17	709 – 711	8M95W7D	16QAM	0.027	14.34
LTE Band 41	2498.5 – 2687.5	4M50G7D	QPSK	0.033	15.24
LTE Band 41	2498.5 – 2687.5	4M48W7D	16QAM	0.030	14.71
LTE Band 41	2501.0 – 2685.0	8M95G7D	QPSK	0.035	15.38
LTE Band 41	2501.0 – 2685.0	8M93W7D	16QAM	0.031	14.87
LTE Band 41	2503.5 – 2682.5	13M5G7D	QPSK	0.029	14.64
LTE Band 41	2503.5 – 2682.5	13M5W7D	16QAM	0.023	13.63
LTE Band 41	2506.0 – 2680.0	17M9G7D	QPSK	0.025	13.98
LTE Band 41	2506.0 – 2680.0	17M9W7D	16QAM	0.024	13.75

Table 0-1. Emission Designator



1. INTRODUCTION

1.1. General

These measurement tests were conducted at SAMSUNG ELECTRONICS CO., LTD. (SUWON). The site address is 129 Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Korea.

2. PRODUCT INFORMATION

2.1. Equipment Description

The Equipment Under Test (EUT) is the Samsung Portable Handset FCC ID: A3LSMG928KOR. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2. Device Capabilities

This device contains the following capabilities:

1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11a/b/g/n/ac WLAN, Bluetooth (1x, EDR, LE, HS), NFC, ANT+.

– End of this page –

3. DESCRIPTION OF TESTS

3.1. Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM - Communications Equipment- Measurements and Performance Standards" (ANSI/TIA-603-C-2004) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1MHz) Digital Transmission System" (KDB 971168) were used in the measurement of the Samsung Portable Handset FCC ID: A3LSMG928KOR.

3.2. Measurement Procedure for Radiated Power and Radiated Spurious Emissions

The radiated and spurious measurements were made at the full anechoic chamber. The equipment under test was placed on the Turn Device at the same height and a distance of 3-meters from the measuring antenna.

The turn device is designed for mobile device measurements. Different sized devices can be mounted on the mounting bracket made of Rohacell.

The turn device is mounted onto a turntable to have both 360° vertical and horizontal rotation. The measurement was made for each horizontal/vertical position in combination with horizontally and vertically polarized measuring antenna.

The substitution antenna will replace the EUT antenna at the same position. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The output level of the signal generator shall be adjusted until an equal or a known related level that was measured from the EUT. This level was recorded. For emissions above 1 GHz, the above procedure is repeated by using horn antennas and dBi gain is taken into consideration.

The power of the emission is calculated using the following formula:

$$P_{d[\text{dBm}]} = P_{g[\text{dBm}]} - \text{cable loss}_{[\text{dB}]} + \text{antenna gain}_{[\text{dBd,dBi}]}$$

Where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole(dBd) or an isotropic source(dBi). The cable connects the generator to the substitute antenna.

Radiated power levels and radiated spurious emissions levels are investigated per ANSI/TIA-603-C-2004.

3.3. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.



4. TEST EQUIPMENT LIST

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Description	Model	Serial No.	Manufacturer	Cal. Date	Cal. Due
Wideband Radio Communication Tester	CMW500	140748	R&S	2014-10-28	2015-10-28
Wideband Radio Communication Tester	CMW500	100697	R&S	2014-11-03	2015-11-03
Signal & Spectrum Analyzer	FSW	100656	R&S	2014-11-04	2015-11-04
PXA Signal Analyzer	N9030A	MY52350977	Agilent	2014-10-24	2015-10-24
PSG Analog Signal Generator	E8257D	MY51501209	Agilent	2014-11-07	2015-11-07
EPM Series Power Meter	E4419B	GB41293846	Agilent	2014-09-22	2015-09-22
POWER SENSOR	E9300H	MY41495838	Agilent	2014-09-23	2015-09-23
DC Power Supply	E3642A	MY40022438	Agilent	2015-02-23	2016-02-23
Temperature Humidity Chamber	SH-641	92009178	Espec	2015-03-19	2016-03-19
Loop Antenna	HFH2-Z2	100276	R&S	2014-05-19	2016-05-19
DIPOLE ANTENNA	UHA 9105	9105-2412	Schwarzbeck	2013-10-16	2015-10-16
LOG PERIODIC DIPOLE ANTENNA	HL040	353255/019	R&S	2013-09-06	2015-09-06
HORN Antenna	3115	00156245	ETS LINDGREN	2015-05-07	2017-05-07
HORN Antenna	BBHA 9120	9120D-637	Schwarzbeck	2013-09-05	2015-09-05
HORN Antenna & Pre-amplifier assembly	HAP18-26N	216249	Flann	2013-09-24	2015-09-24
HORN Antenna & Pre-amplifier assembly	HAP18-26N	216251	Flann	2015-04-30	2017-04-30
PRE-AMPLIFIER	8449B	3008A00691	Agilent	2014-11-25	2015-11-25
RF Power Amplifier	5S1G4	304866	AR	2015-02-09	2016-02-09
Hygrothermograph Data Logger	SK-L200TH2a	005077	SATO	2014-10-31	2015-10-31
Hygrothermograph Data Logger	SK-L200TH2a	005078	SATO	2014-10-31	2015-10-31
Hygrothermograph Data Logger	SK-L200TH2a	005110	SATO	2014-10-31	2015-10-31
Power Divider	11636B	58456	Agilent	2015-04-27	2016-04-27
Highpass Filter	WHVX1.0/15G-10SS	39	Wainwright	2015-01-07	2016-01-07
Highpass Filter	WHKX3.0/18G-10SS	206	Wainwright	2015-01-07	2016-01-07
Attenuator 10dB	8491B	MY39264180	Agilent	2015-06-23	2016-06-23
Attenuator 20dB	8493C	74158	Agilent	2014-08-21	2015-08-21

Table 4-1. Test Equipment



Note

1. For equipment listed above that has calibration dates that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

– End of this page –

5. SAMPLE CALCULATIONS

5.1. QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission

5.2. 16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulation

7 = Quantized/Digital Info

D = Data transmission

5.3. Spurious Radiated Emission

Example: Spurious emission at 3700.40MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turn device was -81.0dBm. The gain of the substituted antenna is 8.1dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3700.40MHz. So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.80dBm. The fundamental EIRP was 25.50dBm so this harmonic was 25.50dBm - (-24.80) = 50.3dBc.

– End of this page –



6. TEST RESULTS

6.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 27.53(g)	Conducted Band Edge / Spurious Emissions	$> 43 + \log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 6.3, 6.4
2.1051 27.53(m)	Conducted Band Edge / Spurious Emissions	$> 40 + 10\log_{10} (P[\text{Watts}])$ between channel edge and 5 MHz from the channel edge, $> 43 + 10\log_{10} (P[\text{Watts}])$ between 5 MHz and X MHz from the channel edge, or between 2490.5 MHz and 2496 MHz, $> 55 + 10\log_{10} (P[\text{Watts}])$ more than X MHz from the channel edge, or below 2490.5 MHz, where X is the greater of 6 MHz or the actual emission bandwidth.		PASS	Sections 6.3, 6.4
2.1046	Transmitter Conducted Output Power	N/A		PASS	See SAR Report
2.1055 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 6.5
27.50(c.10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP	RADIATED	PASS	Section 6.6
27.50(h.2)	Equivalent Isotropic Radiated Power (Band 41)	< 2 Watts max. EIRP		PASS	Section 6.6
2.1053 27.53(g)	Radiated Spurious Emissions	$> 43 + \log_{10} (P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 6.7
2.1053 27.53(m)	Radiated Spurious Emissions	$> 40 + 10\log_{10} (P[\text{Watts}])$ between channel edge and 5 MHz from the channel edge, $> 43 + 10\log_{10} (P[\text{Watts}])$ between 5 MHz and X MHz from the channel edge, or between 2490.5 MHz and 2496 MHz, $> 55 + 10\log_{10} (P[\text{Watts}])$ more than X MHz from the channel edge, or below 2490.5 MHz, where X is the greater of 6 MHz or the actual emission bandwidth.		PASS	Section 6.7

Table 6-1. Summary of Test Results

Test Notes

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, couplers, and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.



3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and couplers.
4. The automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Rohde & Schwarz and SAMSUNG Electronics "CMWrun", Version 1.8.1.

– End of this page –

6.2. Occupied Bandwidth

§2.1049

Test Overview

The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 v02r02 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% Occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1~5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2~7 were repeated after changing the RBW such that it would be within 1~5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


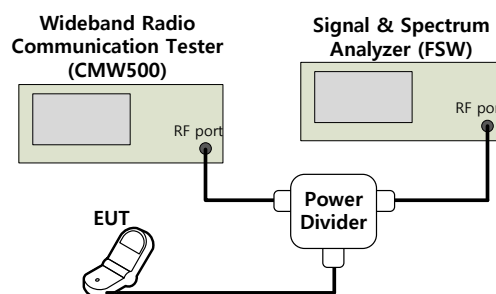



Figure 6-1. Test Instruments & Measurement Setup

Test Plots

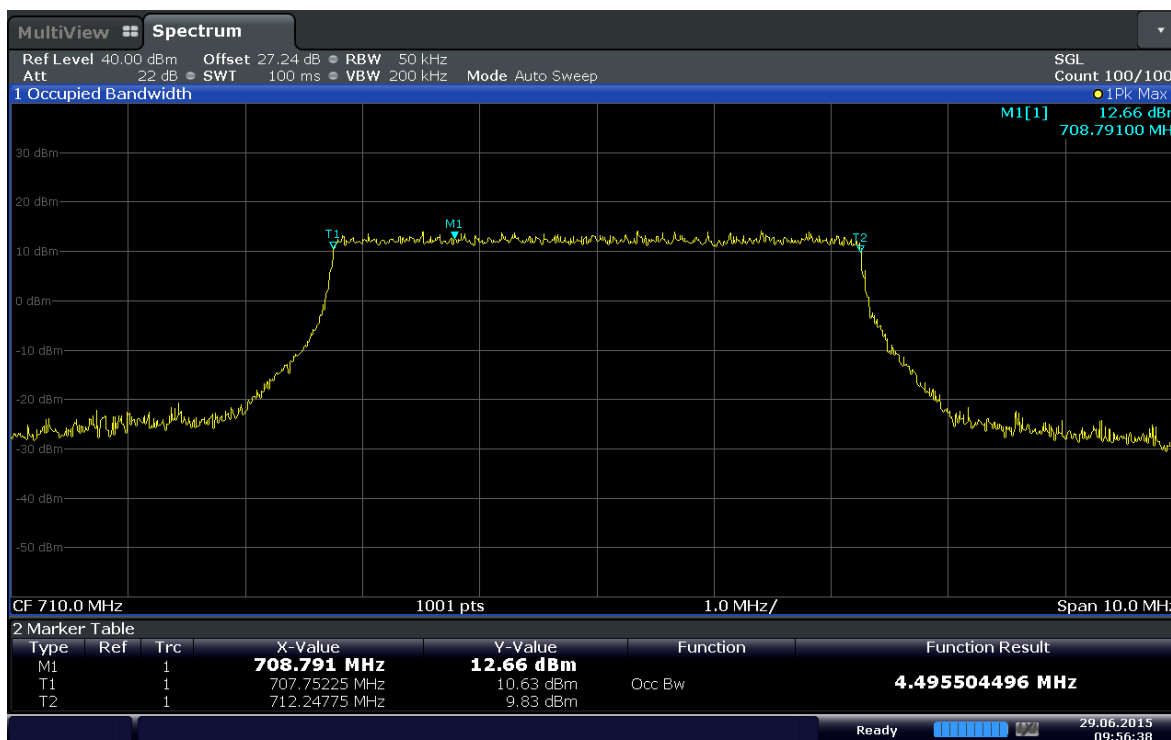


Date: 29.JUN.2015 09:56:38

Plot 6-1. Occupied Bandwidth Plot (Band 17 – 5MHz QPSK - RB Size 25)

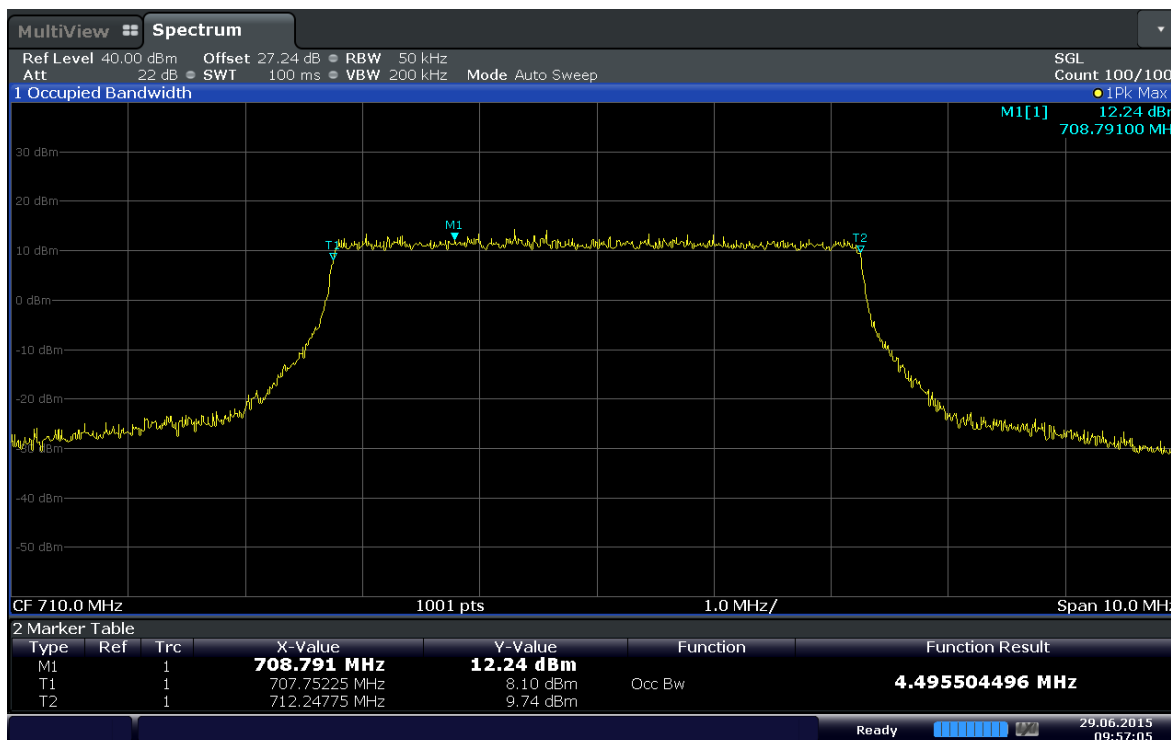


Date: 29.JUN.2015 09:57:04

Plot 6-2. Occupied Bandwidth Plot (Band 17 – 5MHz 16QAM - RB Size 25)

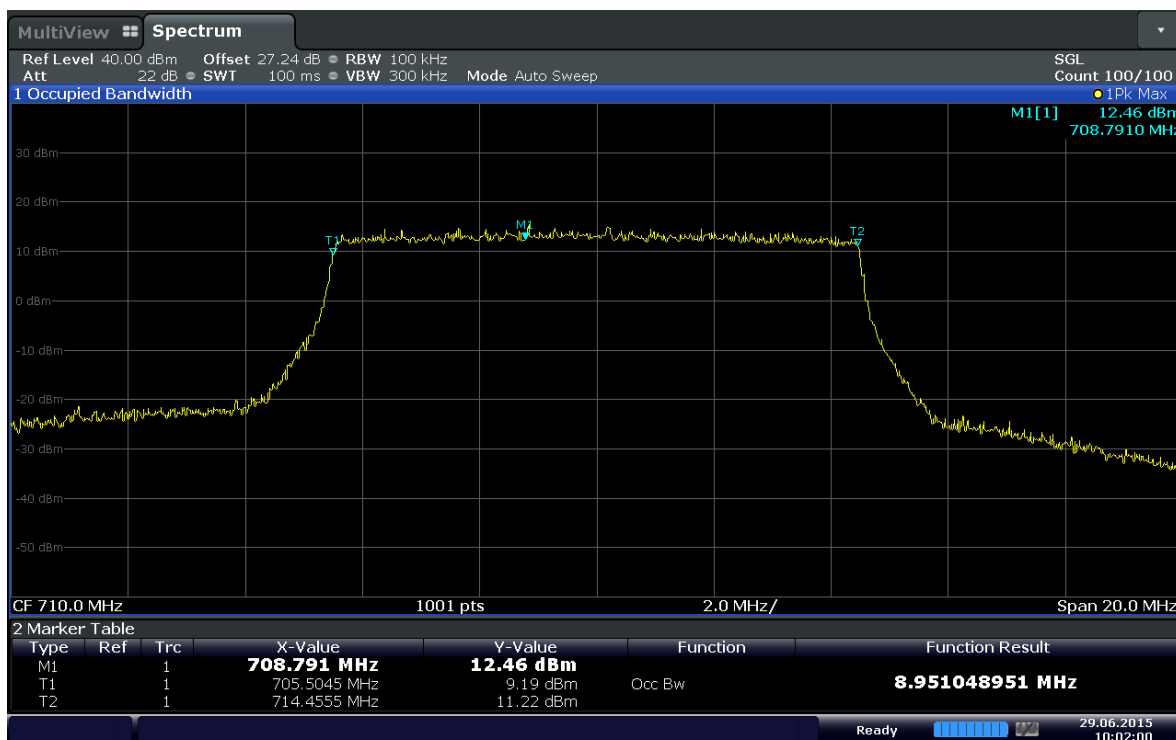


Date: 29.JUN.2015 10:01:59

Plot 6-3. Occupied Bandwidth Plot (Band 17 – 10MHz QPSK - RB Size 50)

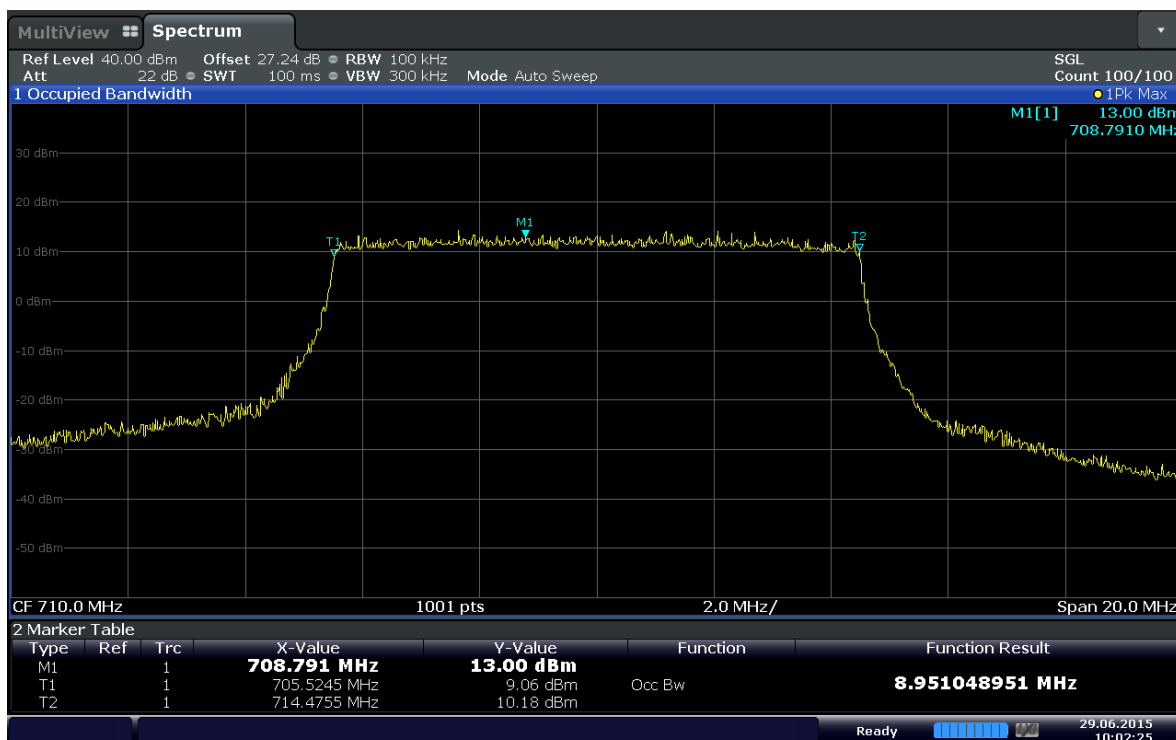


Date: 29.JUN.2015 10:02:26

Plot 6-4. Occupied Bandwidth Plot (Band 17 – 10MHz 16QAM - RB Size 50)

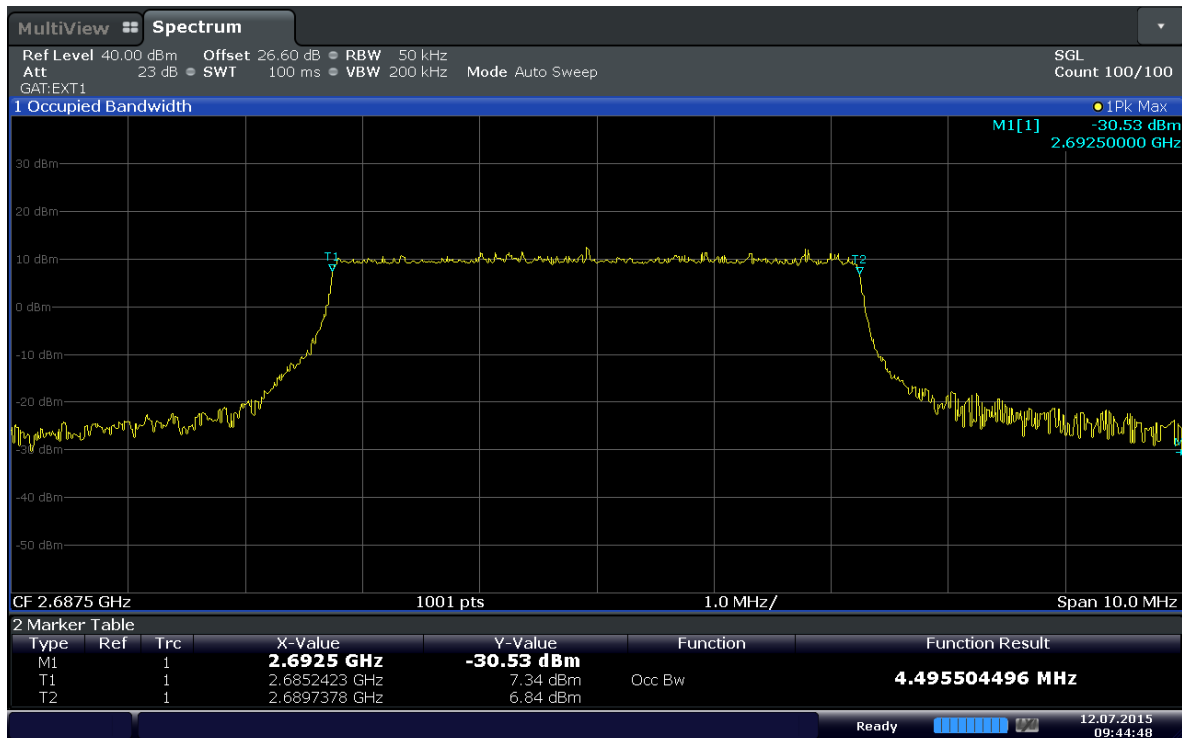


Date: 12.JUL.2015 09:44:49

Plot 6-5. Occupied Bandwidth Plot (Band 41 – 5MHz QPSK - RB Size 25)

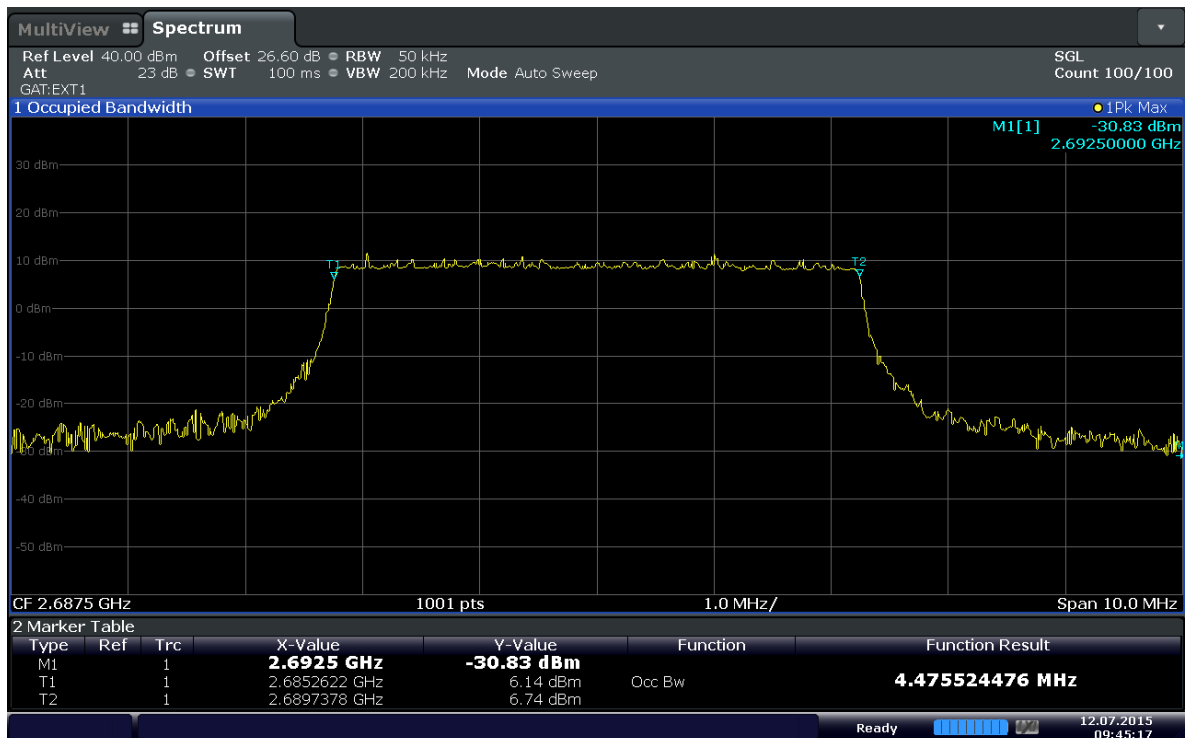


Date: 12.JUL.2015 09:45:17

Plot 6-6. Occupied Bandwidth Plot (Band 41 – 5MHz 16QAM - RB Size 25)

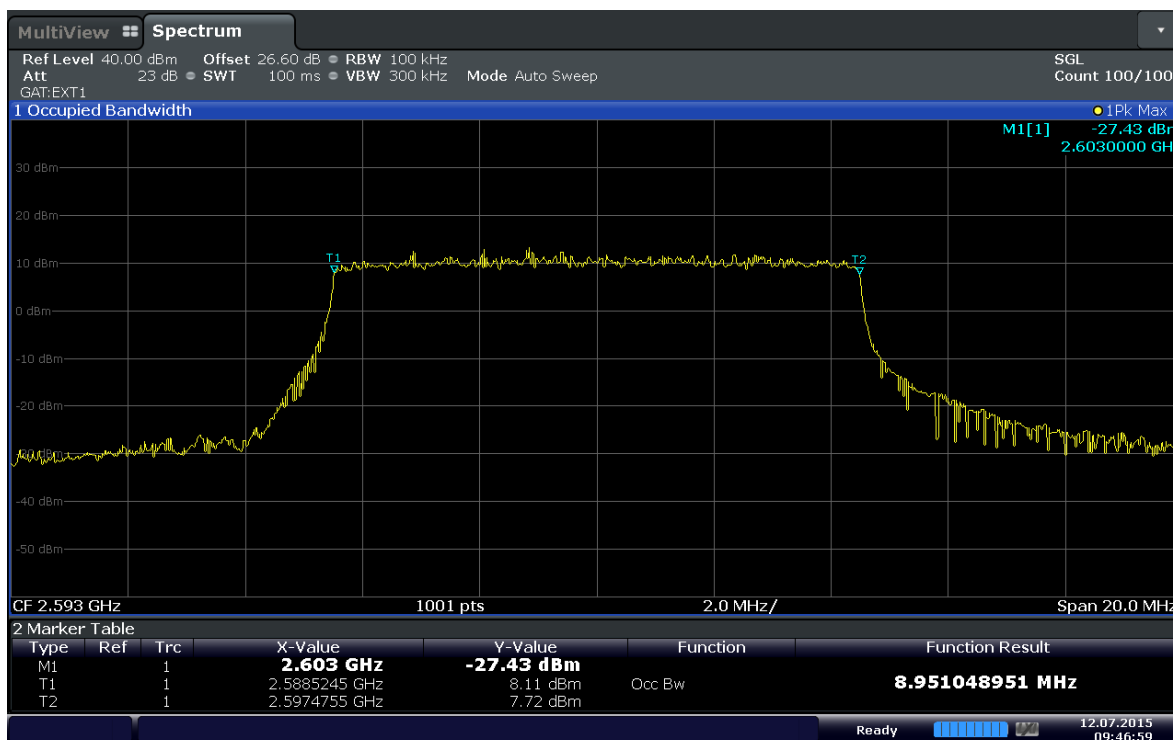


Date: 12.JUL.2015 09:46:59

Plot 6-7. Occupied Bandwidth Plot (Band 41 – 10MHz QPSK - RB Size 50)

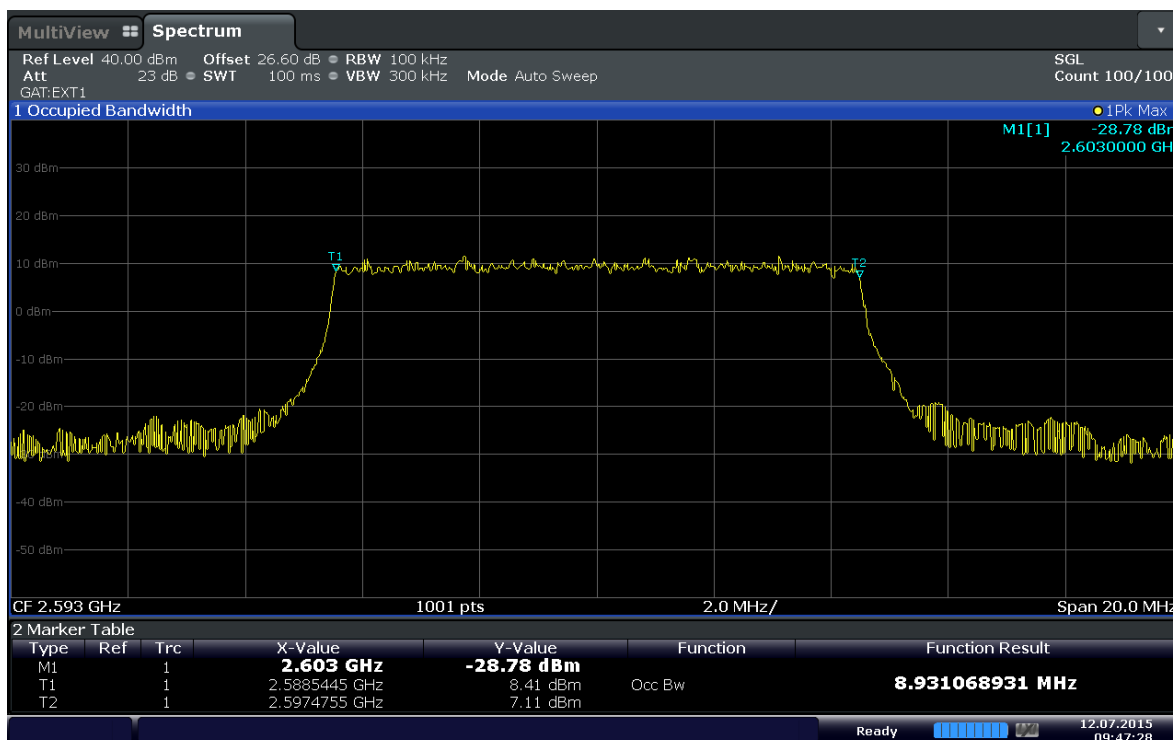


Date: 12.JUL.2015 09:47:28

Plot 6-8. Occupied Bandwidth Plot (Band 41 – 10MHz 16QAM - RB Size 50)

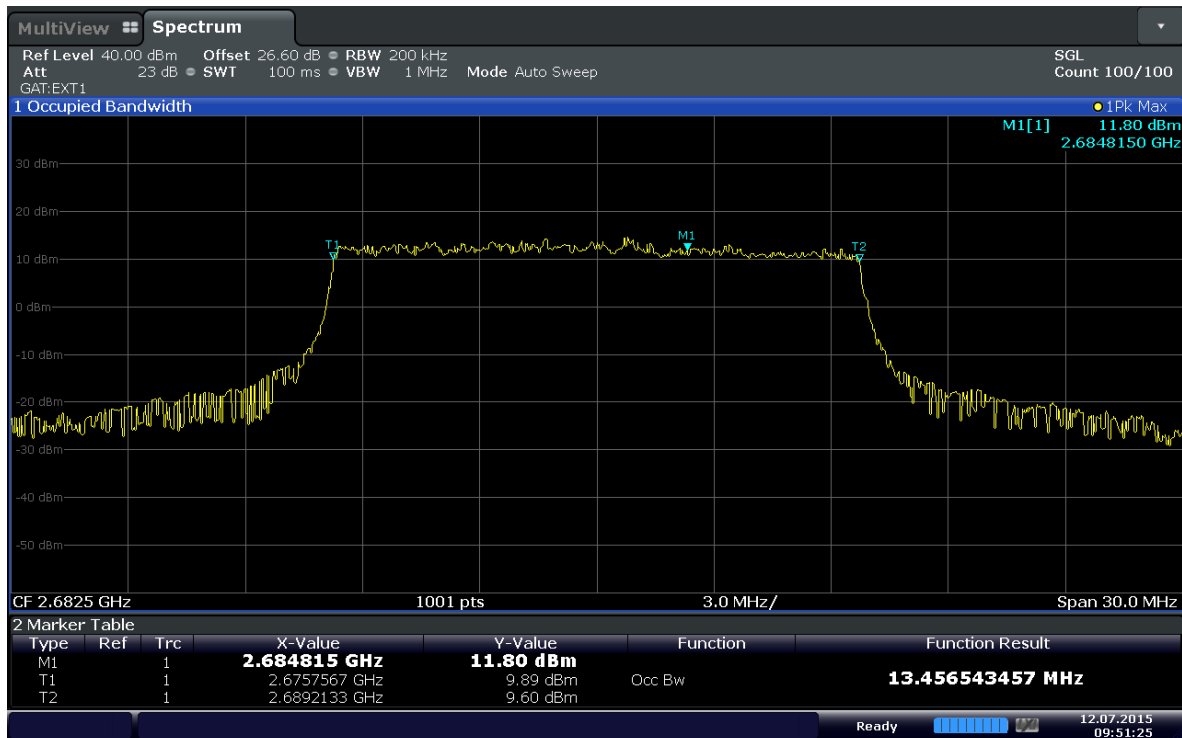


Date: 12.JUL.2015 09:51:25

Plot 6-9. Occupied Bandwidth Plot (Band 41 - 15MHz QPSK - RB Size 75)

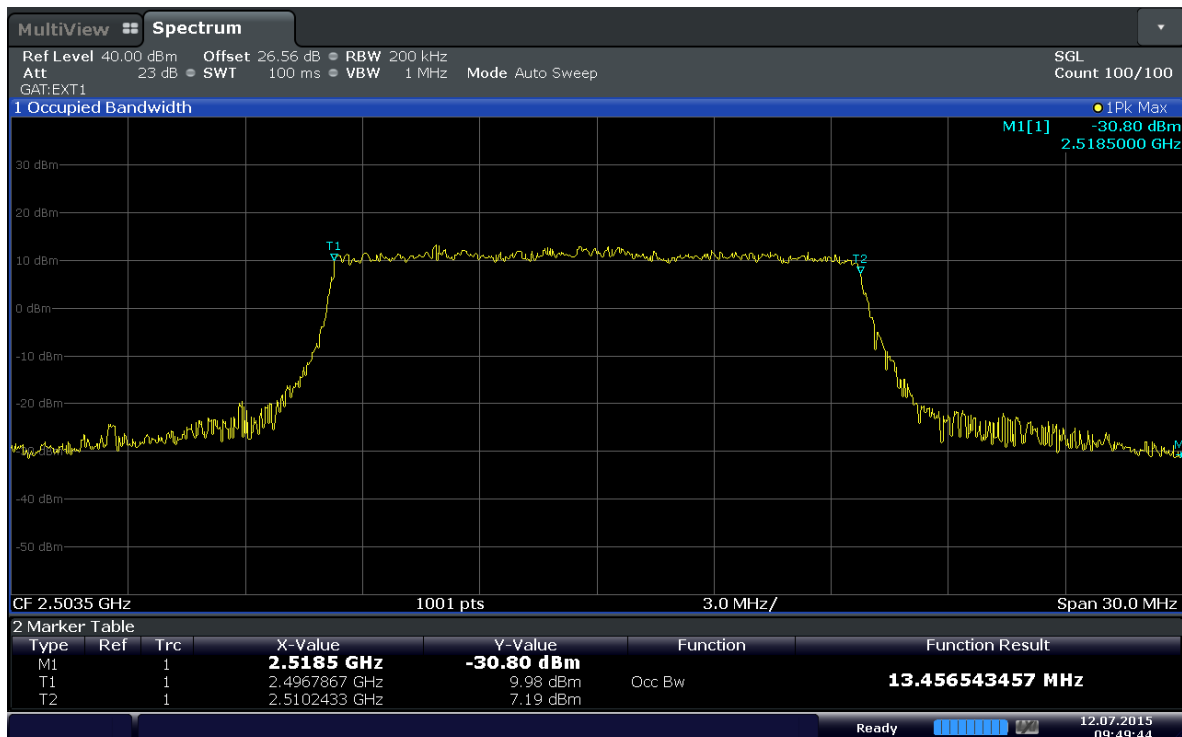


Date: 12.JUL.2015 09:49:43

Plot 6-10. Occupied Bandwidth Plot (Band 41 - 15MHz 16QAM - RB Size 75)

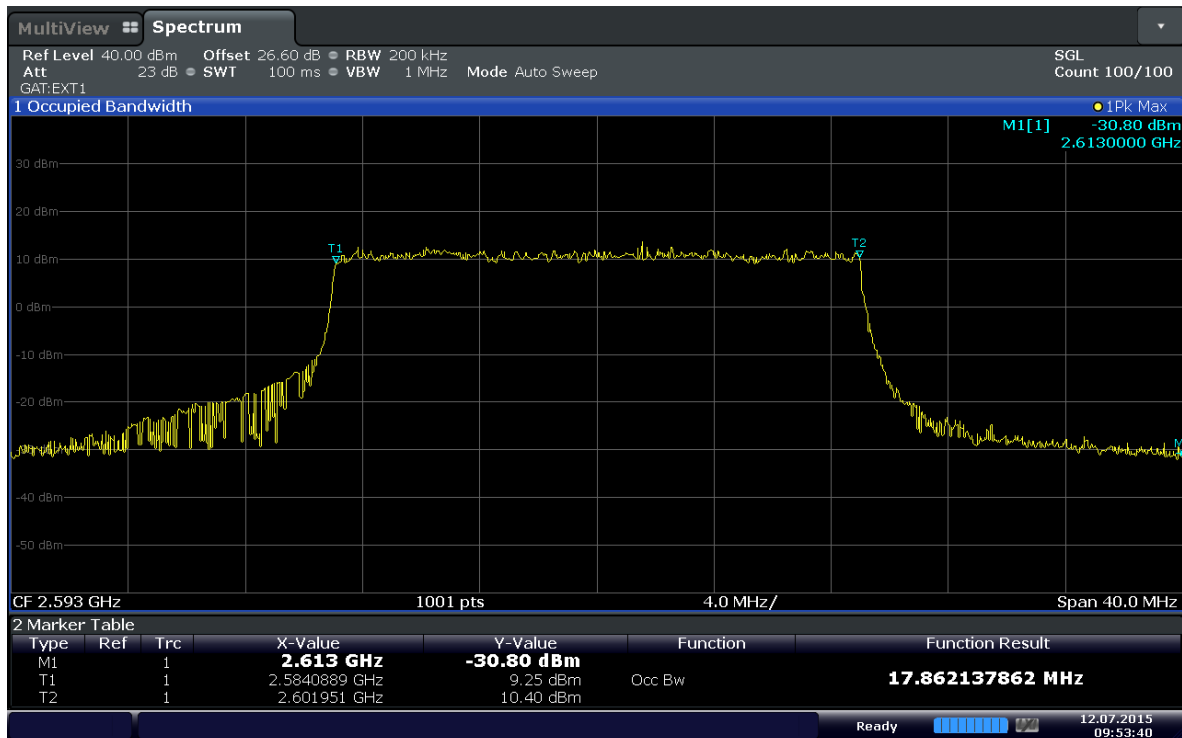

Date: 12.JUL.2015 09:53:40

Plot 6-11. Occupied Bandwidth Plot (Band 41 - 20MHz QPSK - RB Size 100)

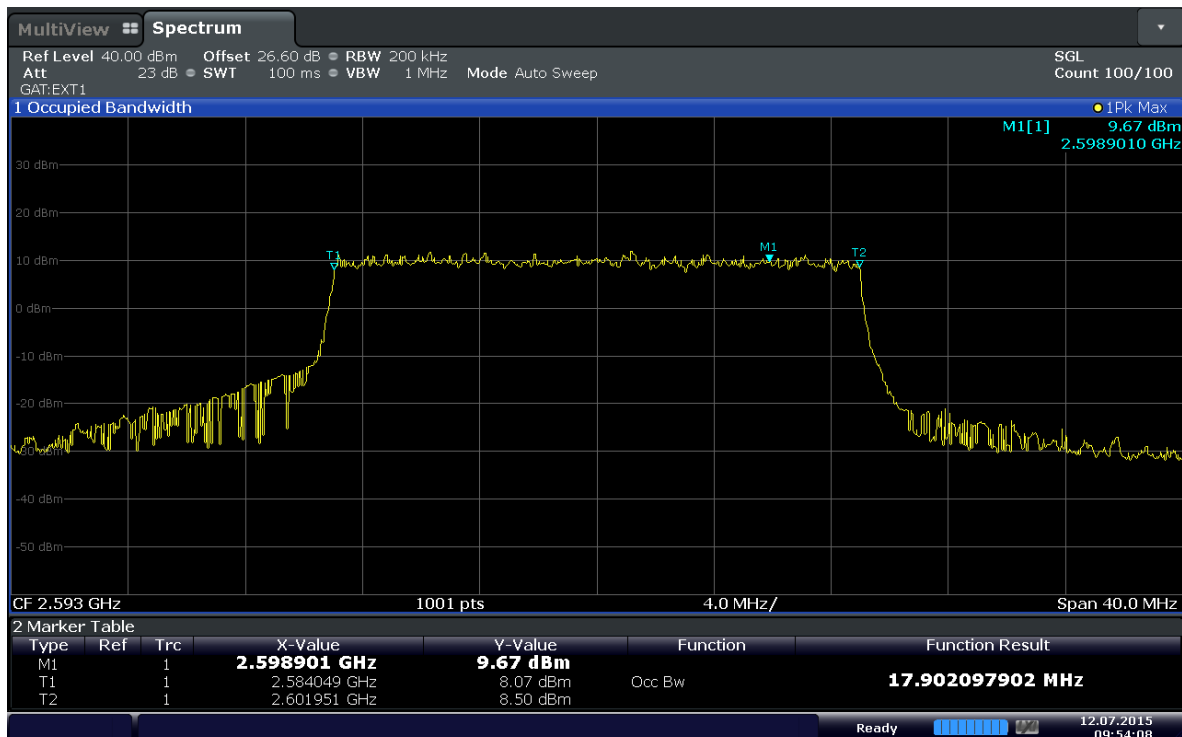

Date: 12.JUL.2015 09:54:09

Plot 6-12. Occupied Bandwidth Plot (Band 41 - 20MHz 16QAM - RB Size 100)

6.3. Spurious and Harmonic Emissions at Antenna Terminal §2.1051 §27.53(g) §27.53(m)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{[Watts]}})$ for Band17 and $55 + \log_{10}(P_{\text{[Watts]}})$, for band 41, where P is the transmitter power in Watts. Limit equivalent to -13dBm and -25dBm, sample calculation shown below.

$$55 + 10 \log_{10}(1.567\text{W}) = 56.95 \text{ dB}$$

$$1.567\text{W} = 31.95 \text{ dBm}$$

$$31.95 \text{ dBm} - 56.95 \text{ dB} = -25 \text{ dBm}$$

Test Procedure Used

KDB 971168 v02r02 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Band 17 and set to 30GHz for Band 41 (separated into at least two plots per channel)
2. RBW $\geq$ 100kHz (Band 17)
RBW $\geq$ 1MHz (Band 41)
3. VBW $\geq$ 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

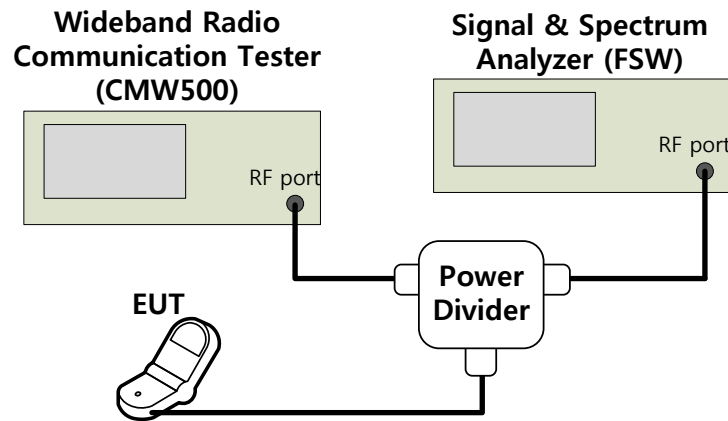
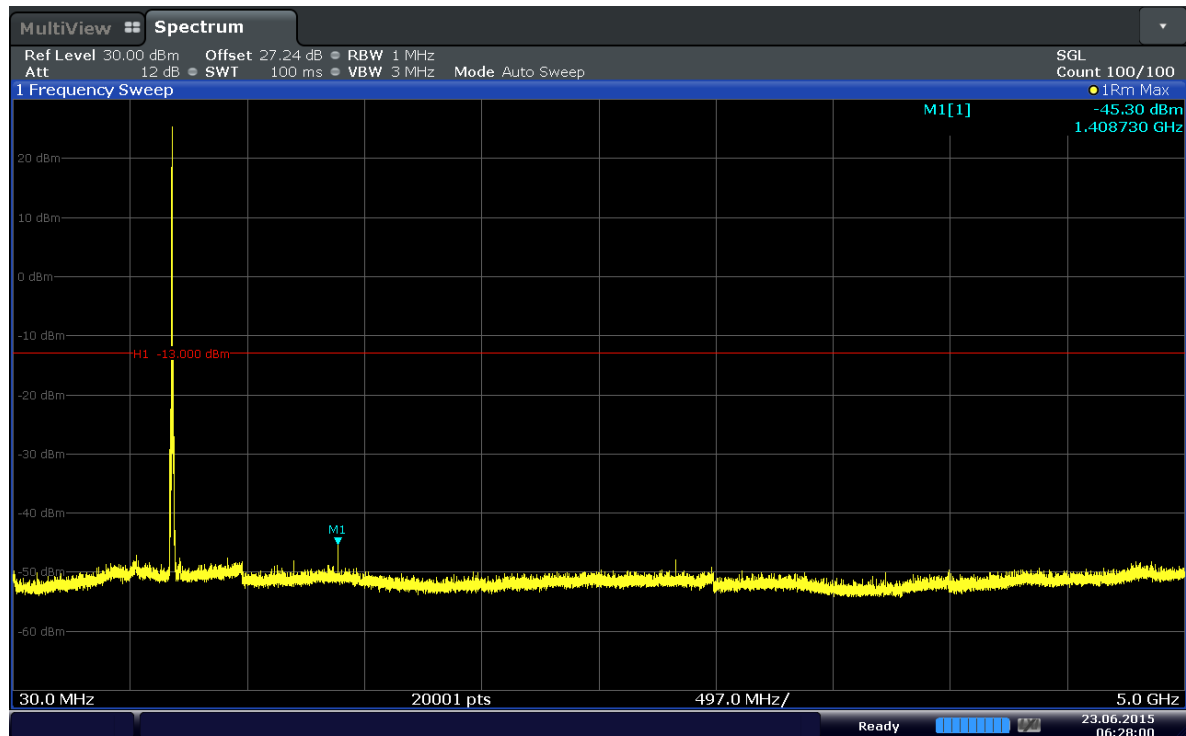



Figure 6-2. Test Instruments & Measurement Setup

– End of this page –

Test Plots


Date: 23.JUN.2015 06:28:00

Plot 6-13. Conducted Spurious Plot (Band 17-5MHz-QPSK-RB Size 1-RB Offset 0-Ch.23755)

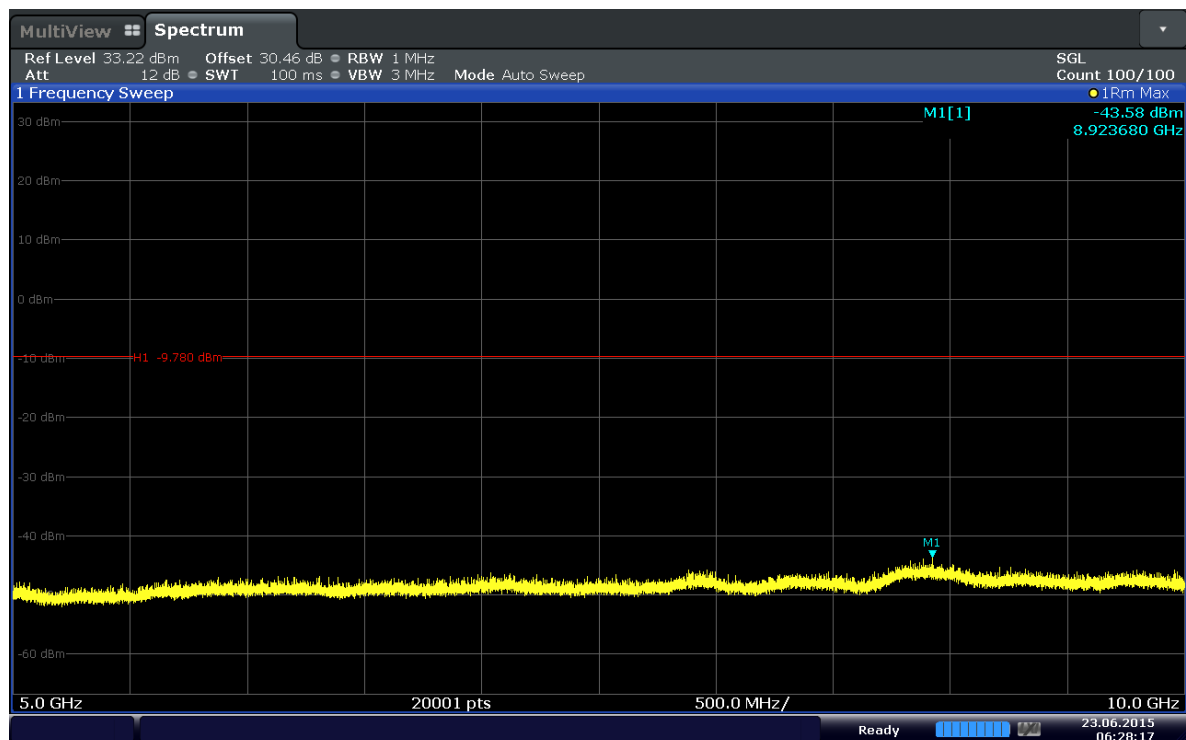


Date: 23.JUN.2015 06:28:17

Plot 6-14. Conducted Spurious Plot (Band 17-5MHz-QPSK-RB Size 1-RB Offset 0-Ch.23755)

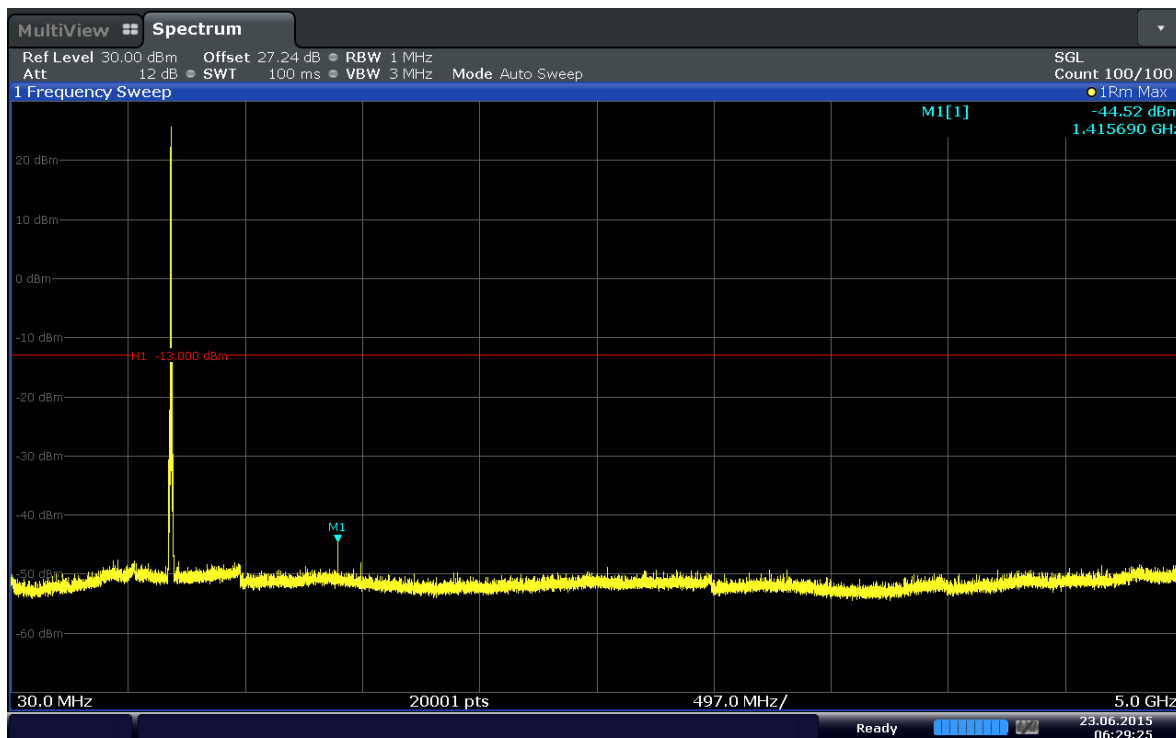


Date: 23.JUN.2015 06:29:25

Plot 6-15. Conducted Spurious Plot (Band 17–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.23790)

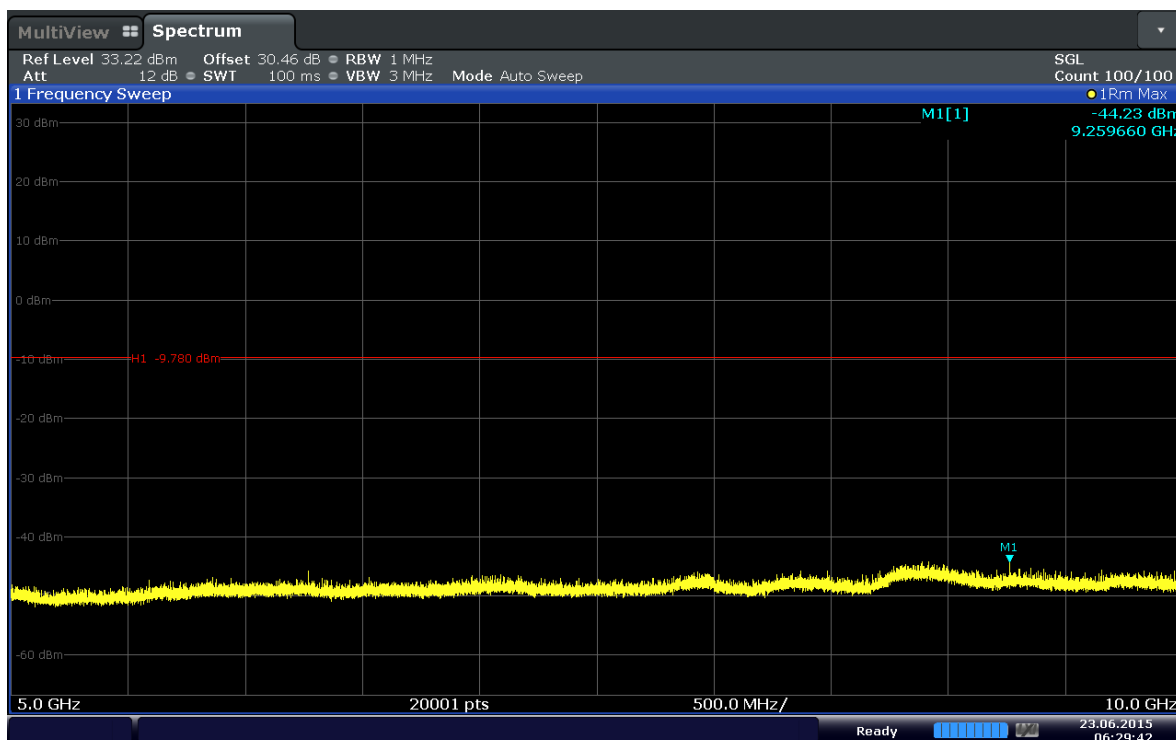


Date: 23.JUN.2015 06:29:42

Plot 6-16. Conducted Spurious Plot (Band 17–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.23790)

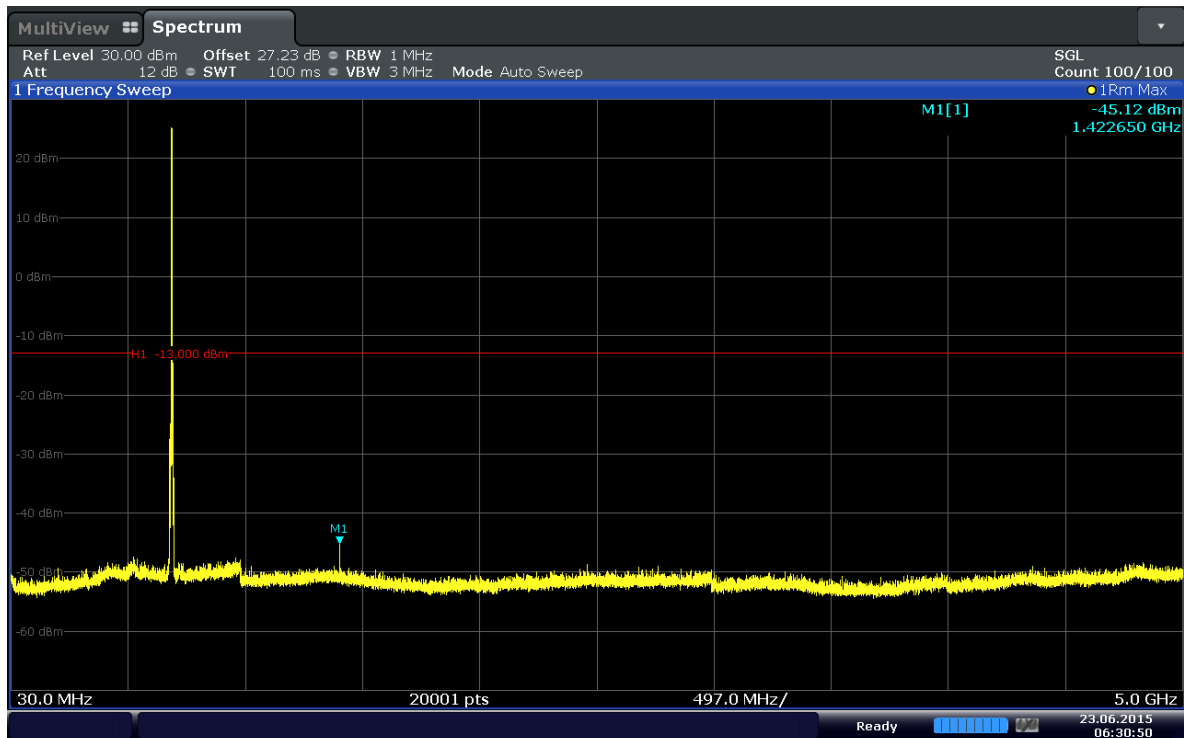


Date: 23.JUN.2015 06:30:50

Plot 6-17. Conducted Spurious Plot (Band 17–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.23825)

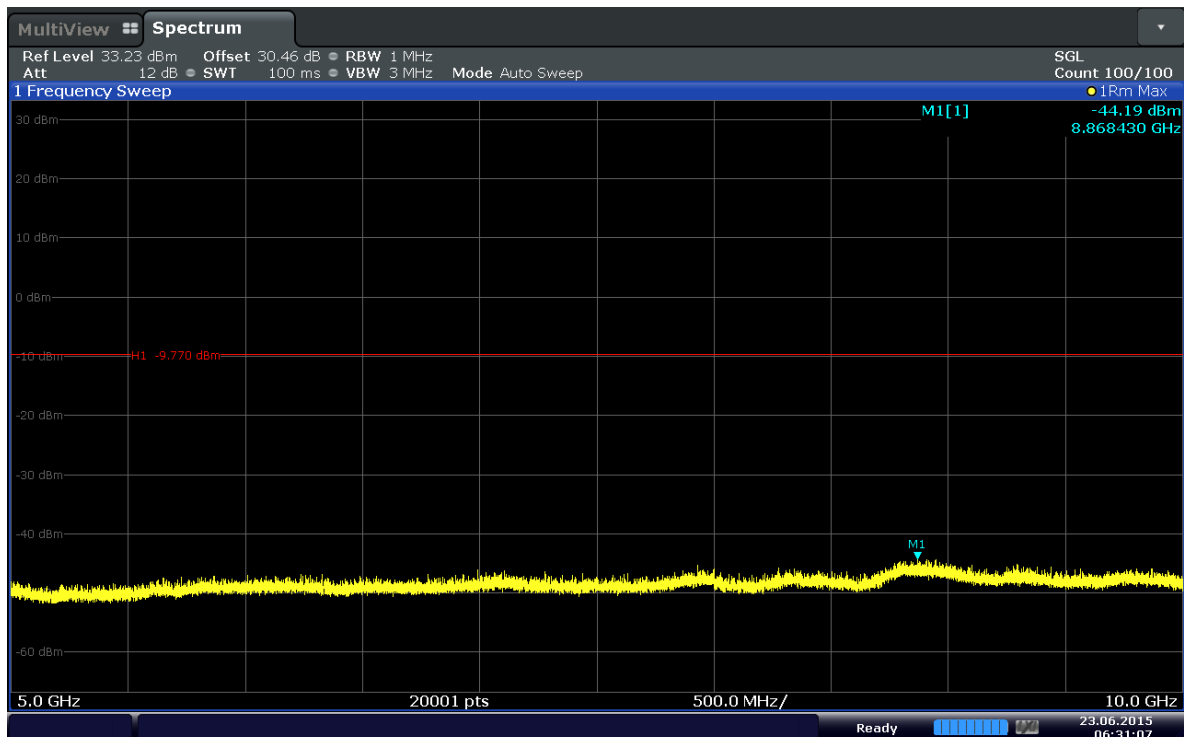


Date: 23.JUN.2015 06:31:07

Plot 6-18. Conducted Spurious Plot (Band 17–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.23825)

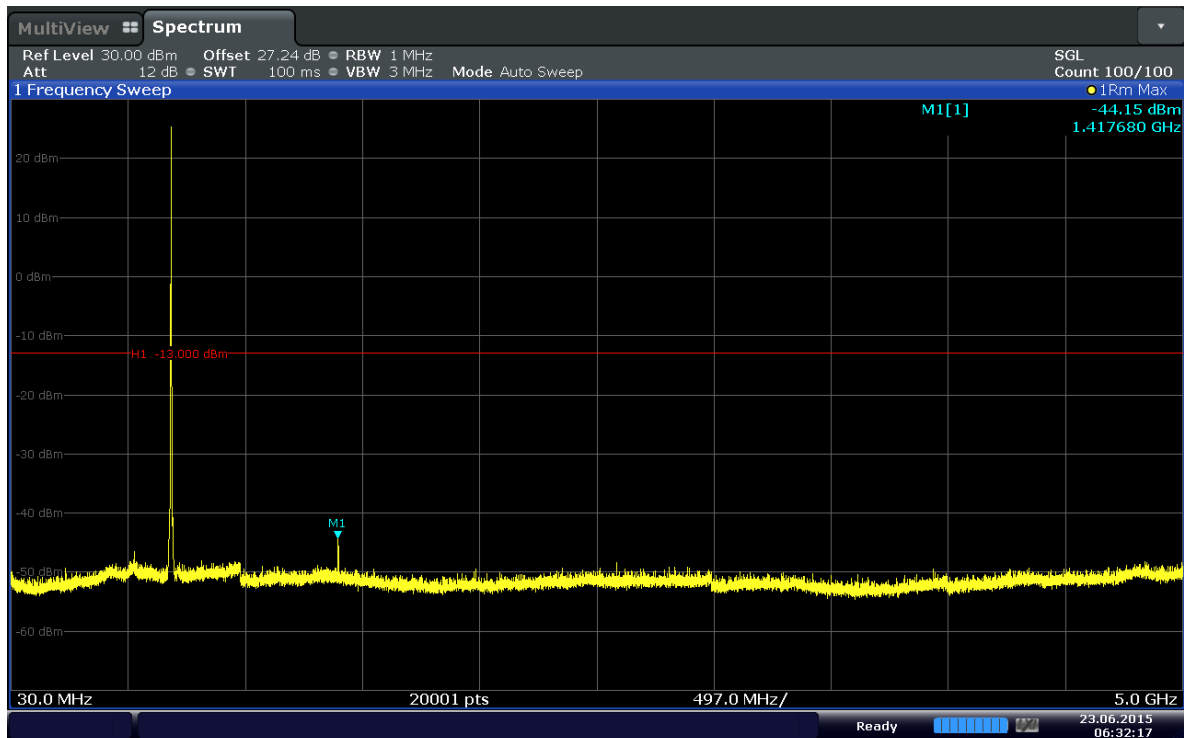


Date: 23.JUN.2015 06:32:18

Plot 6-19. Conducted Spurious Plot (Band 17–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.23780)

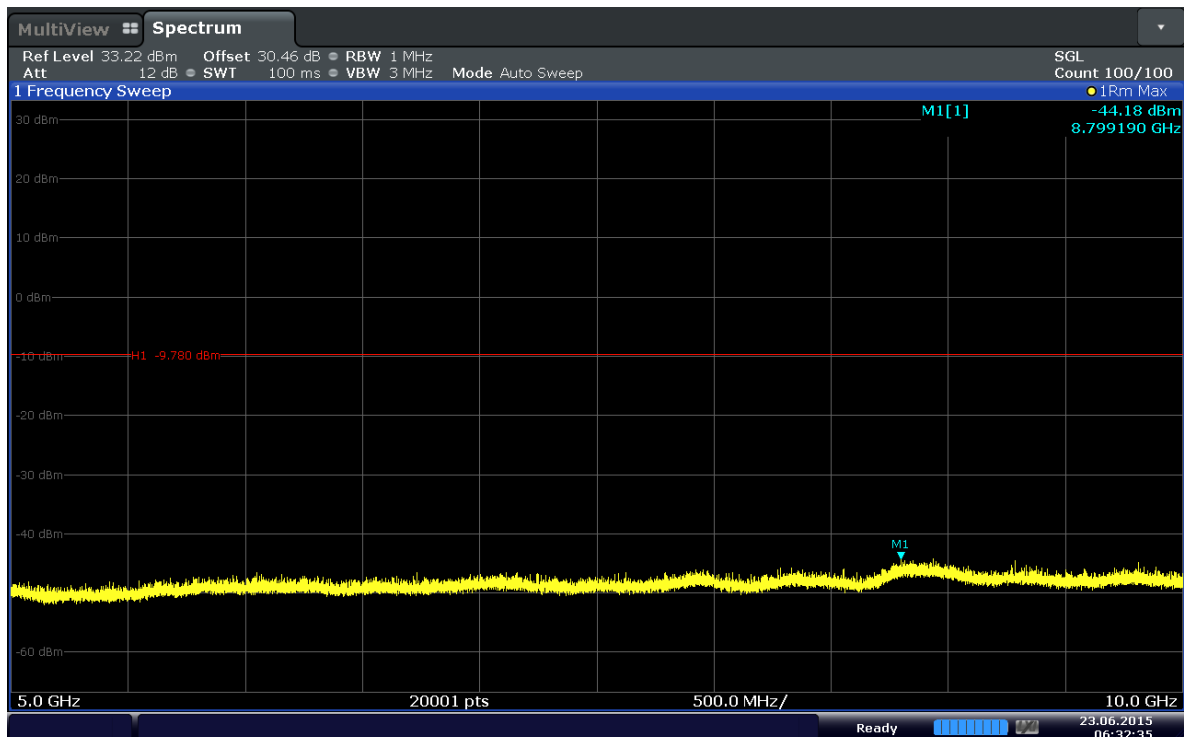


Date: 23.JUN.2015 06:32:35

Plot 6-20. Conducted Spurious Plot (Band 17–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.23780)

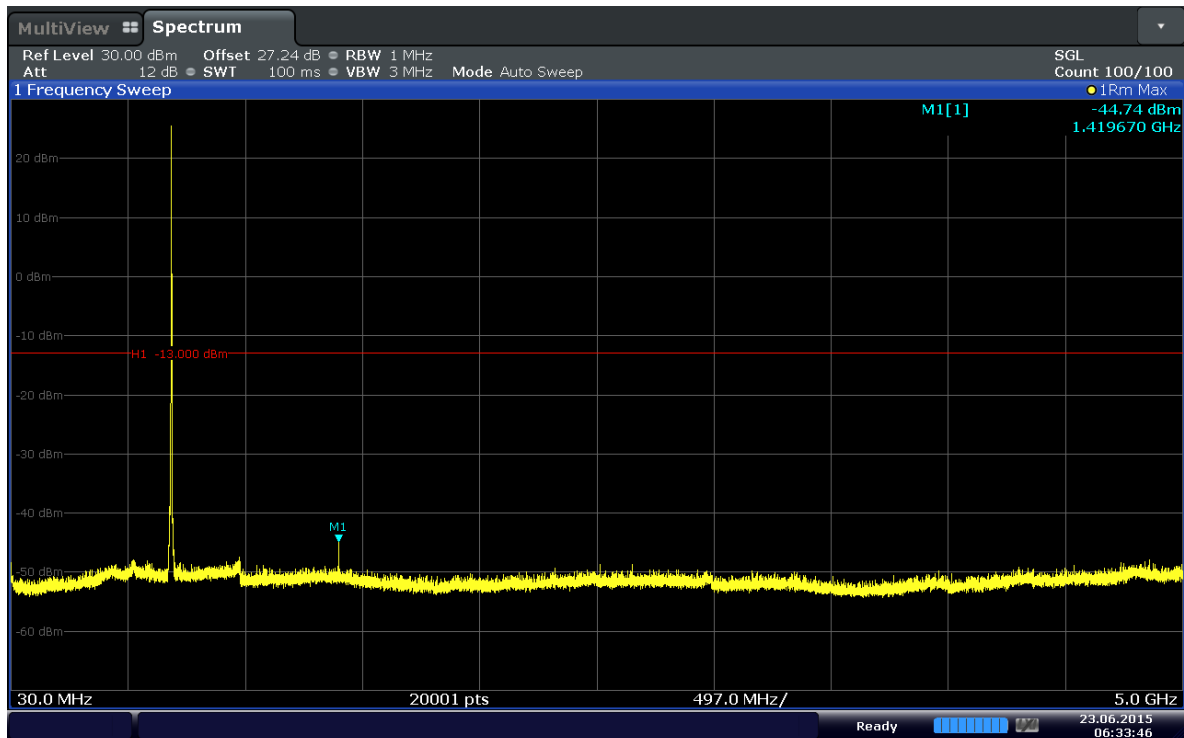


Date: 23.JUN.2015 06:33:45

Plot 6-21. Conducted Spurious Plot (Band 17–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.23790)

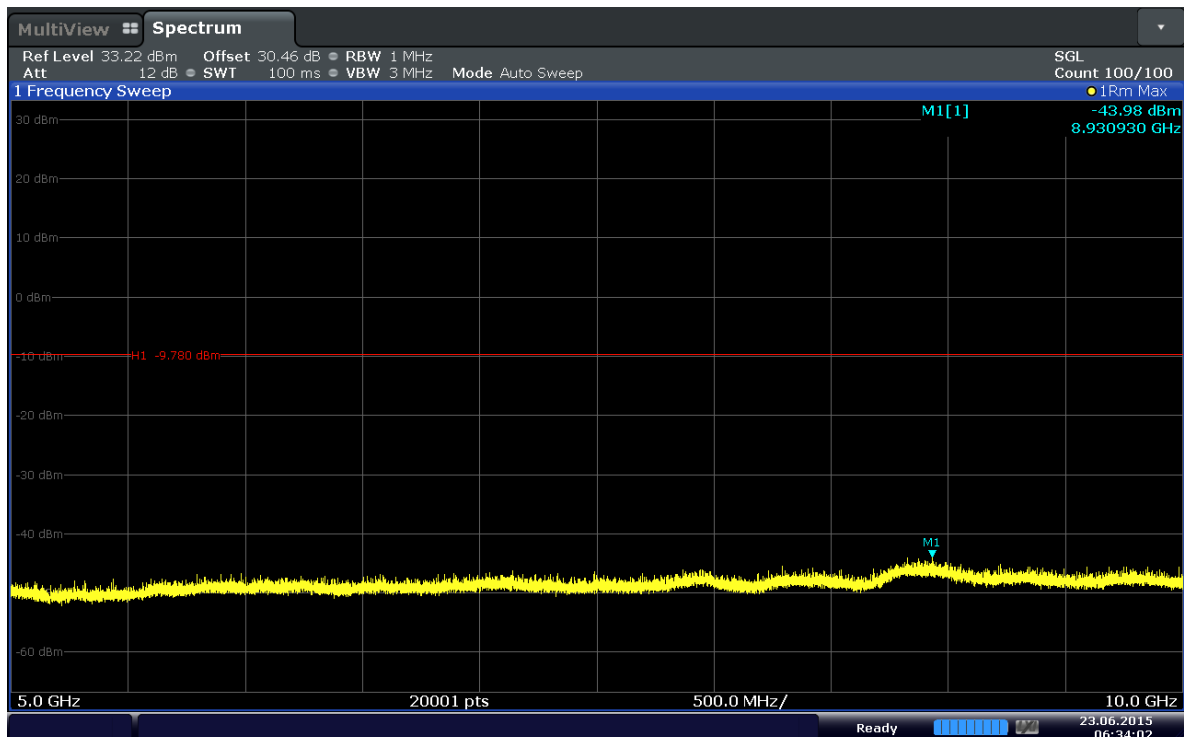


Date: 23.JUN.2015 06:34:02

Plot 6-22. Conducted Spurious Plot (Band 17–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.23790)

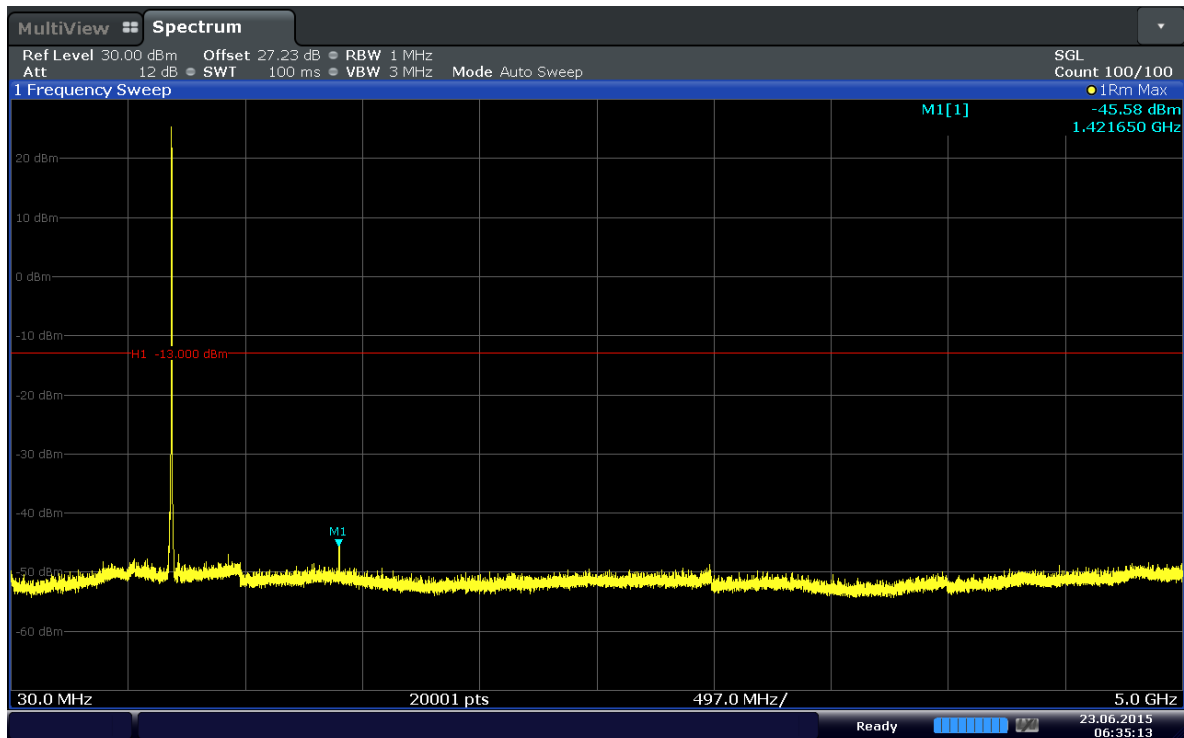


Date: 23.JUN.2015 06:35:13

Plot 6-23. Conducted Spurious Plot (Band 17–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.23800)

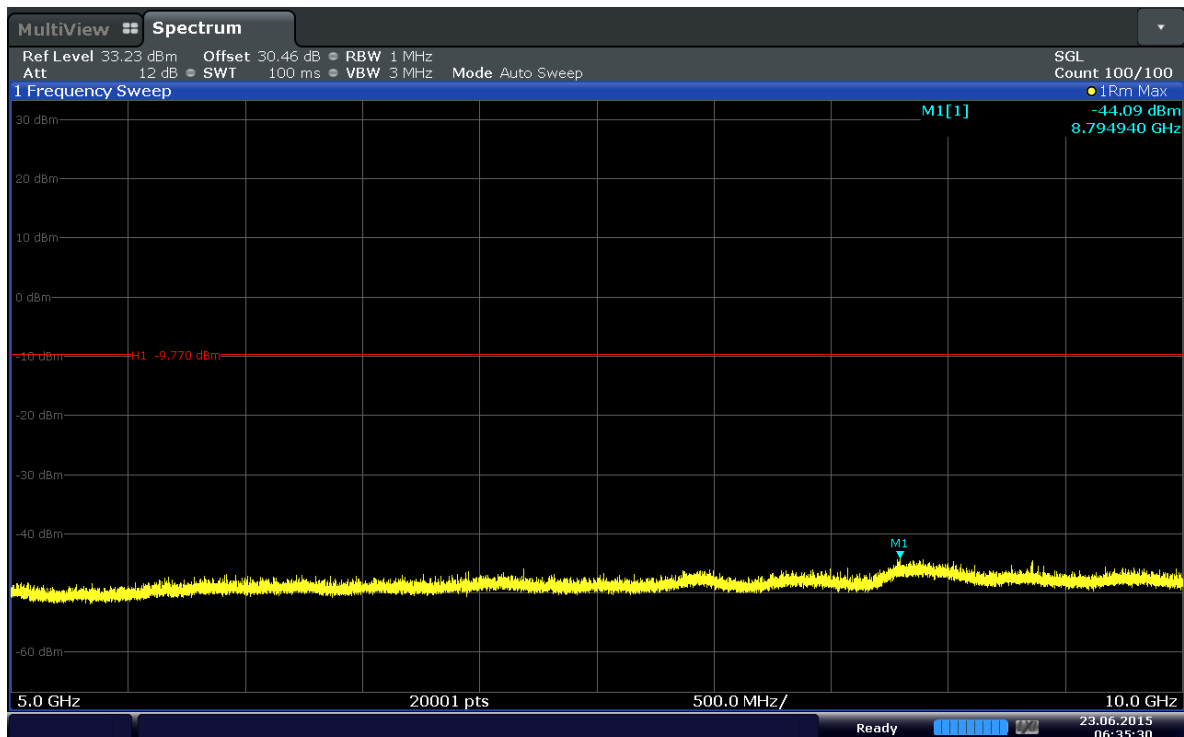


Date: 23.JUN.2015 06:35:30

Plot 6-24. Conducted Spurious Plot (Band 17–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.23800)

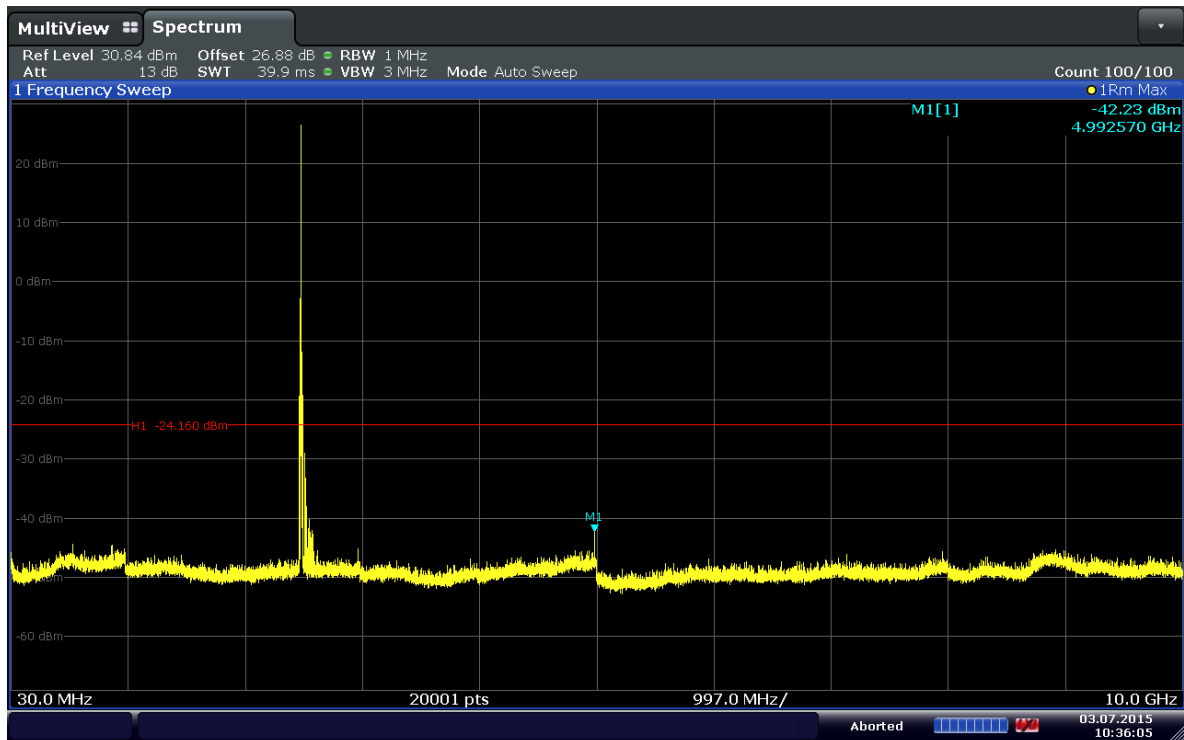


Date: 3.JUL 2015 10:36:06

Plot 6-25. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.39675)

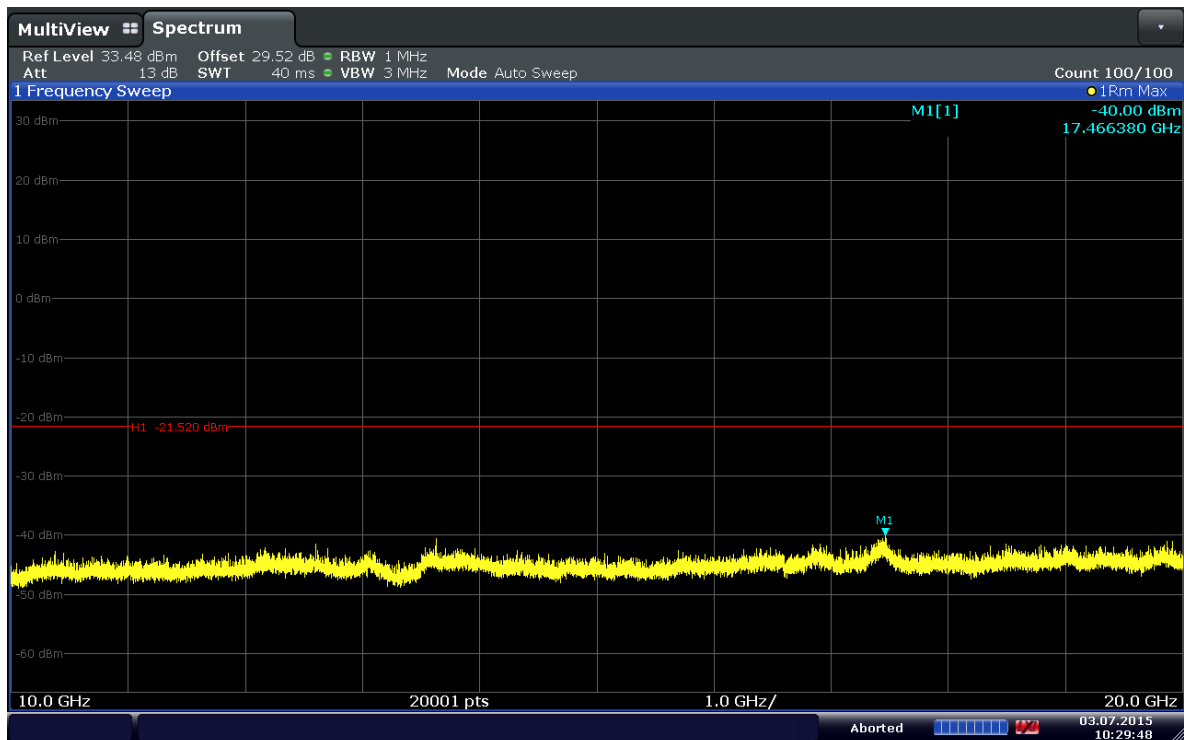


Date: 3.JUL 2015 10:29:48

Plot 6-26. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.39675)

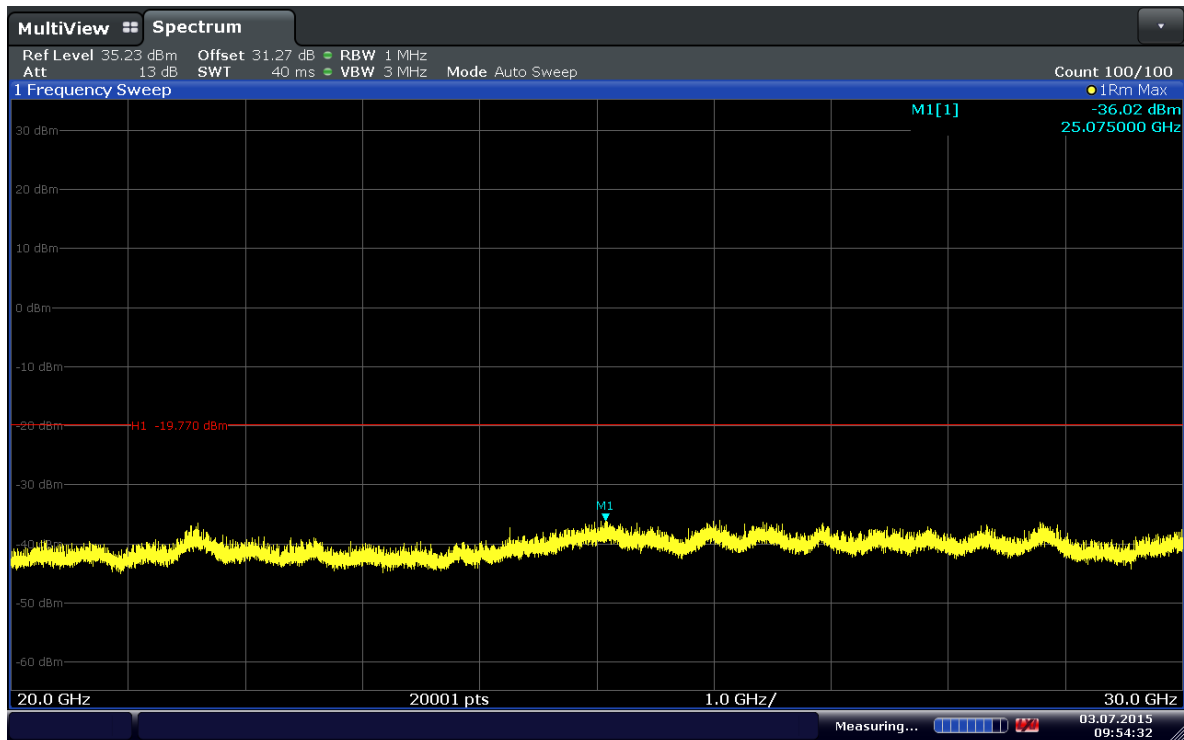


Date: 3.JUL.2015 09:54:33

Plot 6-27. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 0–Ch.39675)

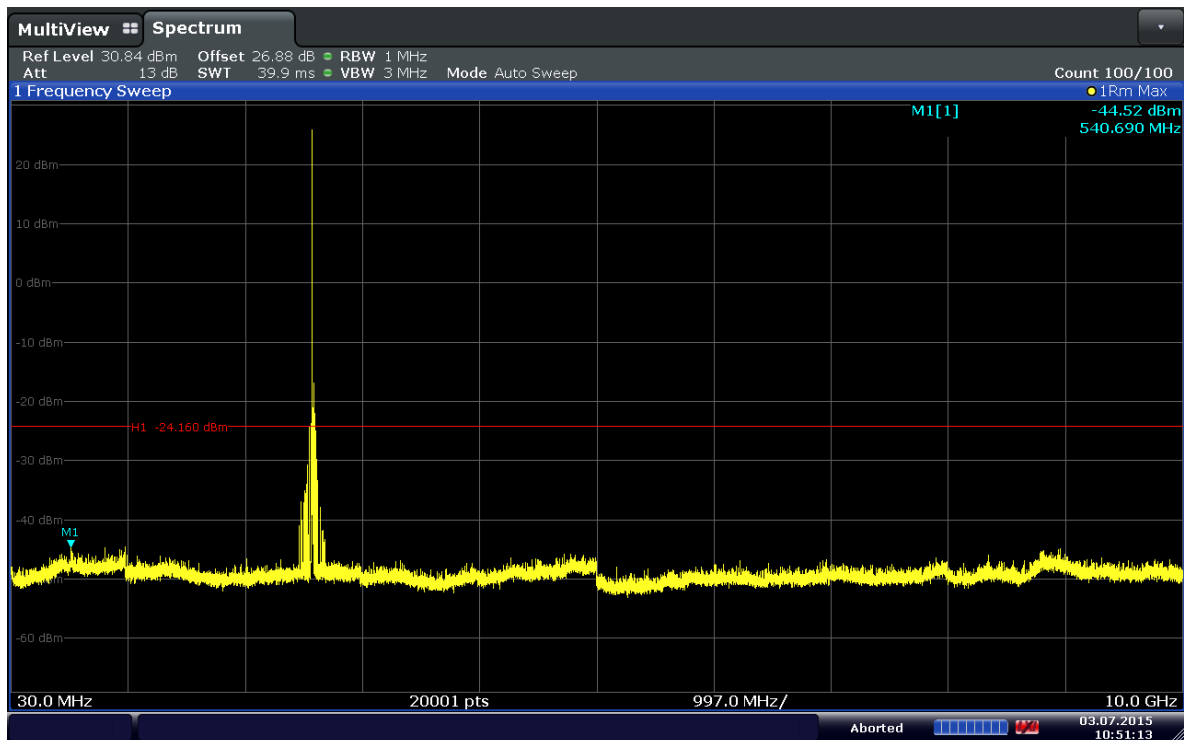


Date: 3.JUL.2015 10:51:13

Plot 6-28. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 12–Ch.40620)

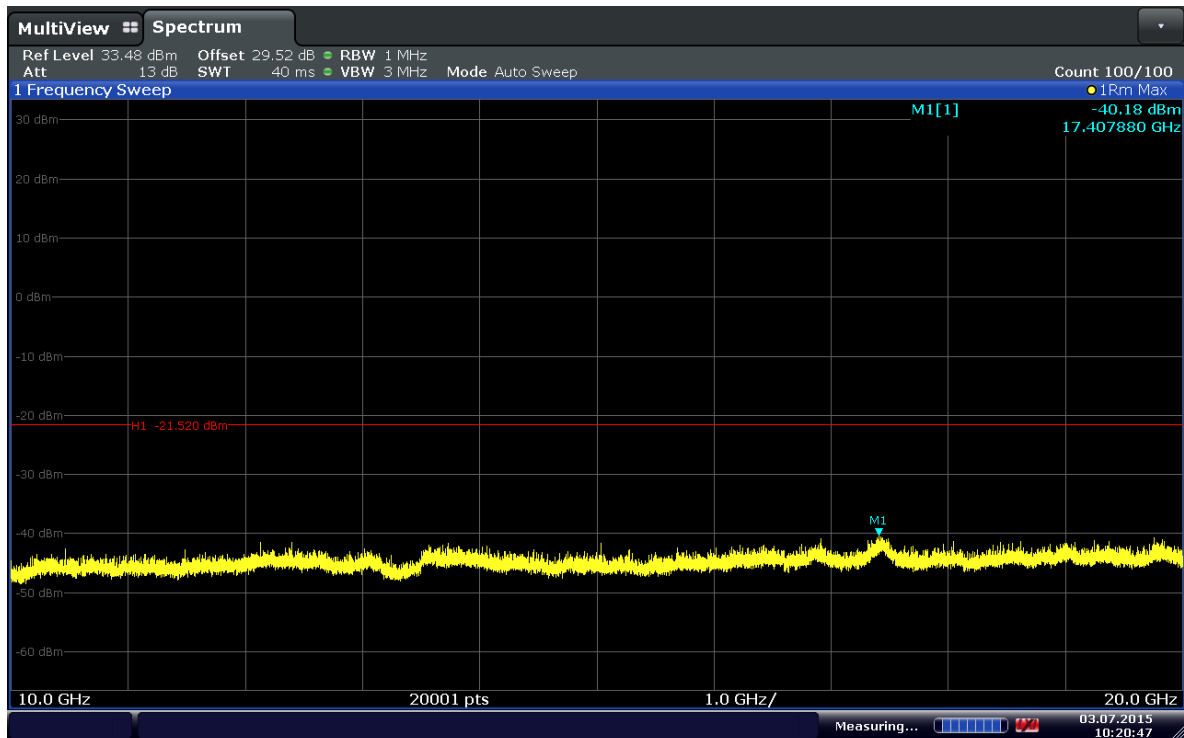


Date: 3.JUL 2015 10:20:47

Plot 6-29. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 12–Ch.40620)

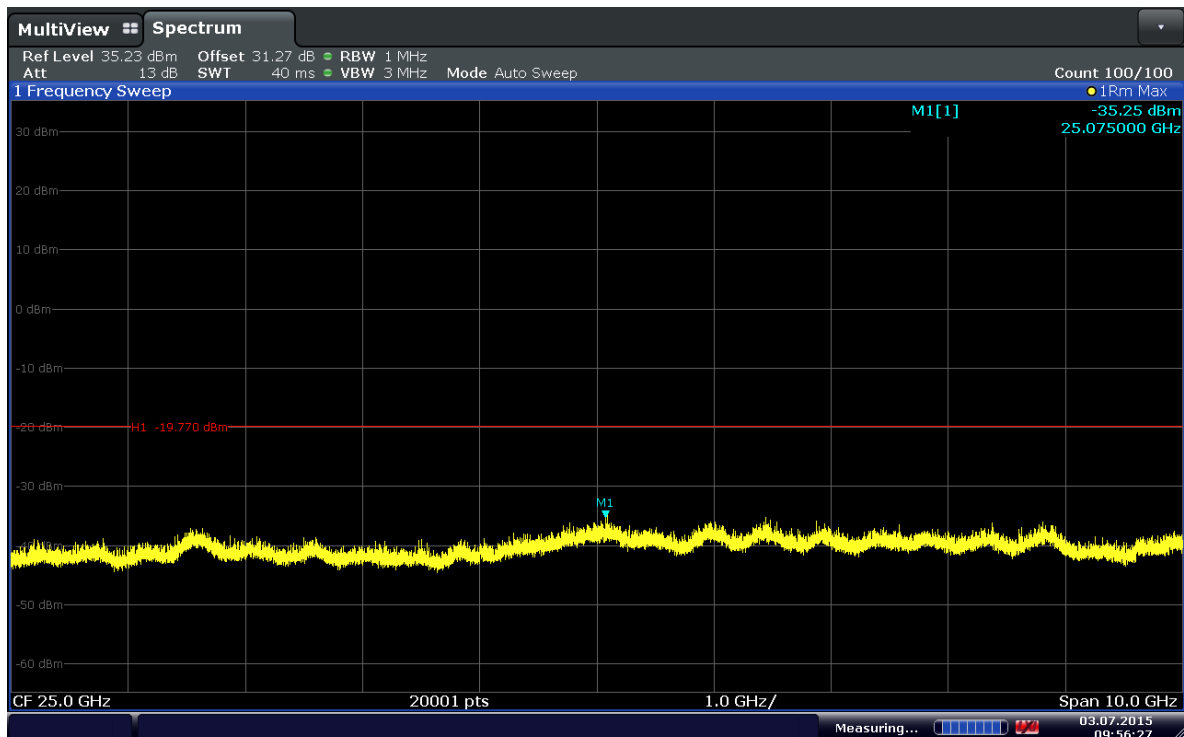


Date: 3.JUL 2015 09:56:28

Plot 6-30. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 12–Ch.40620)

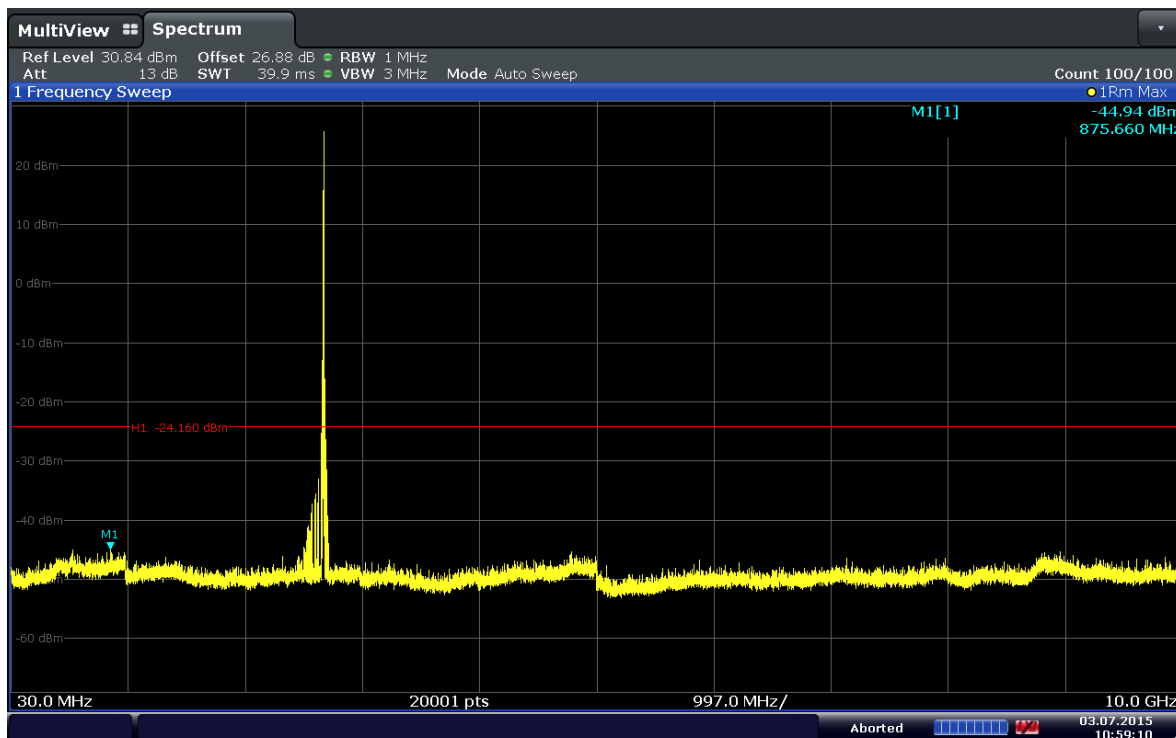


Date: 3.JUL.2015 10:59:10

Plot 6-31. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 24–Ch.41565)

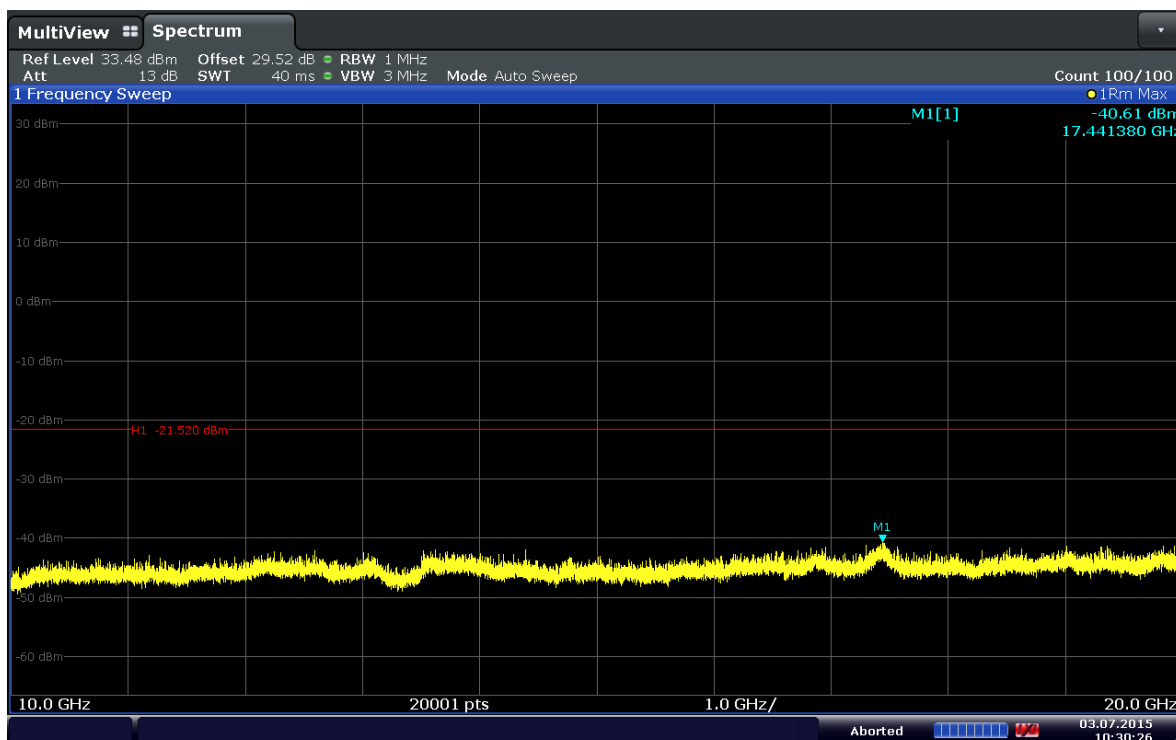


Date: 3.JUL.2015 10:30:26

Plot 6-32. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 24–Ch.41565)

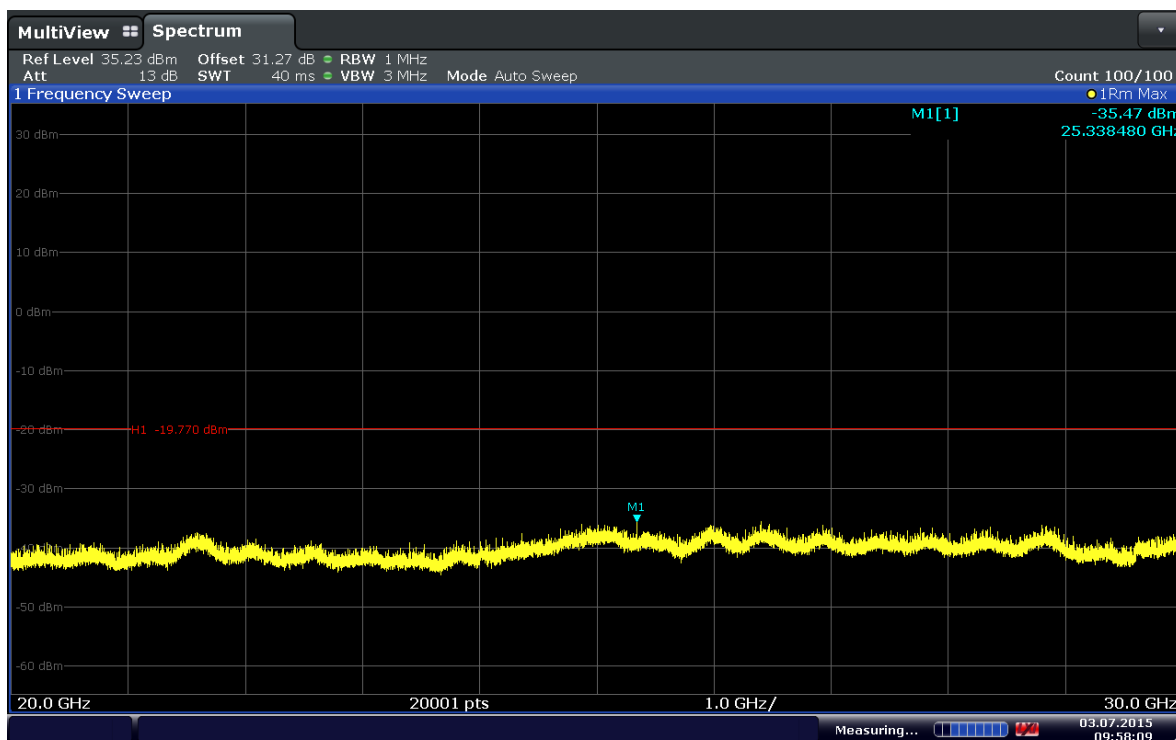


Date: 3.JUL.2015 09:58:09

Plot 6-33. Conducted Spurious Plot (Band 41–5MHz–QPSK–RB Size 1–RB Offset 24–Ch.41565)

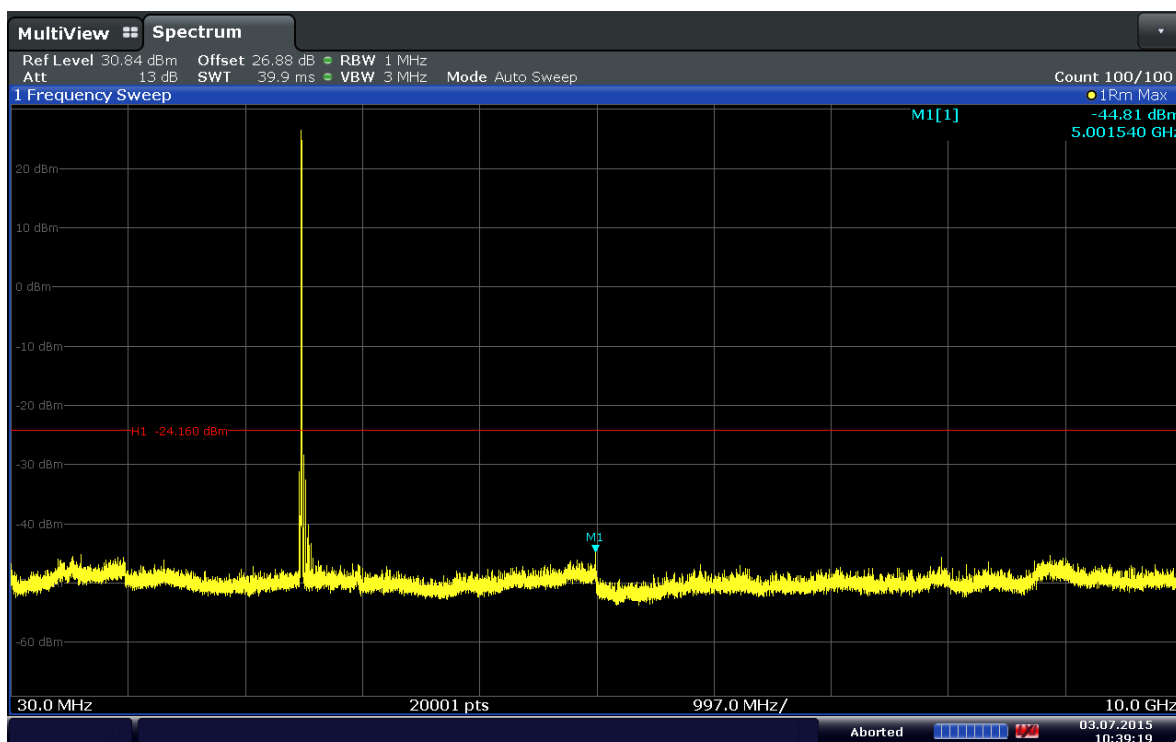


Date: 3.JUL.2015 10:39:19

Plot 6-34. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.39700)

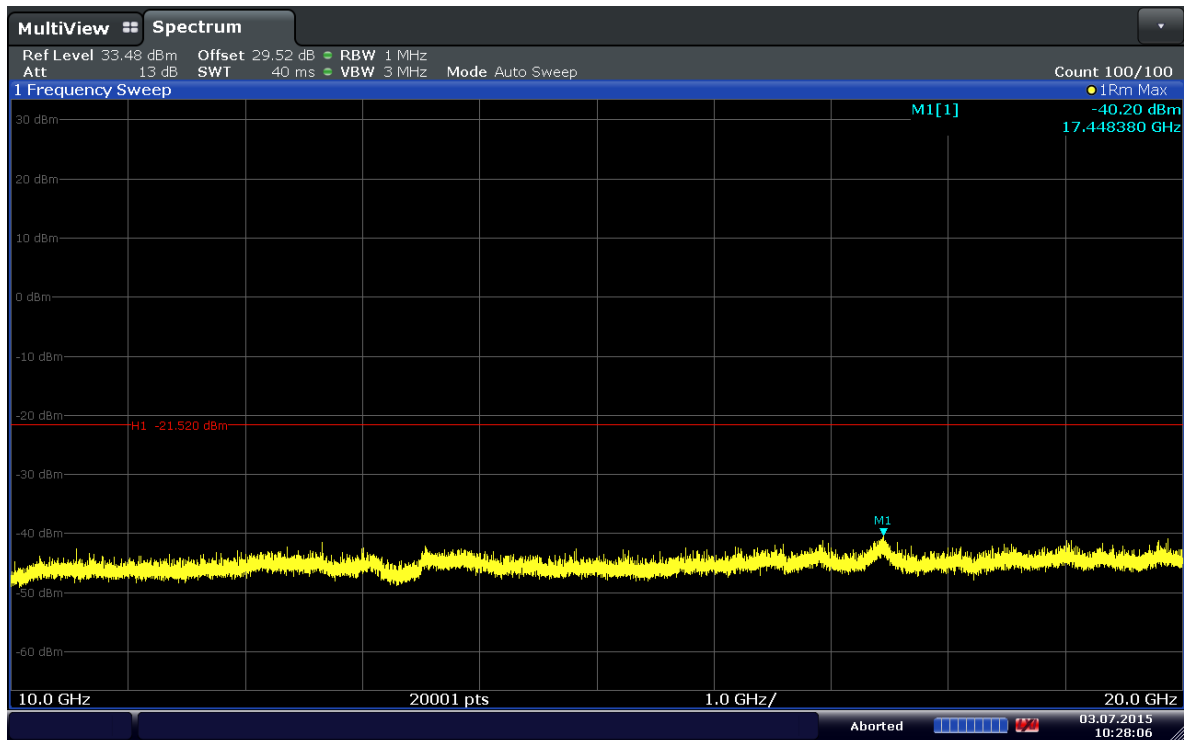


Date: 3.JUL.2015 10:28:06

Plot 6-35. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.39700)

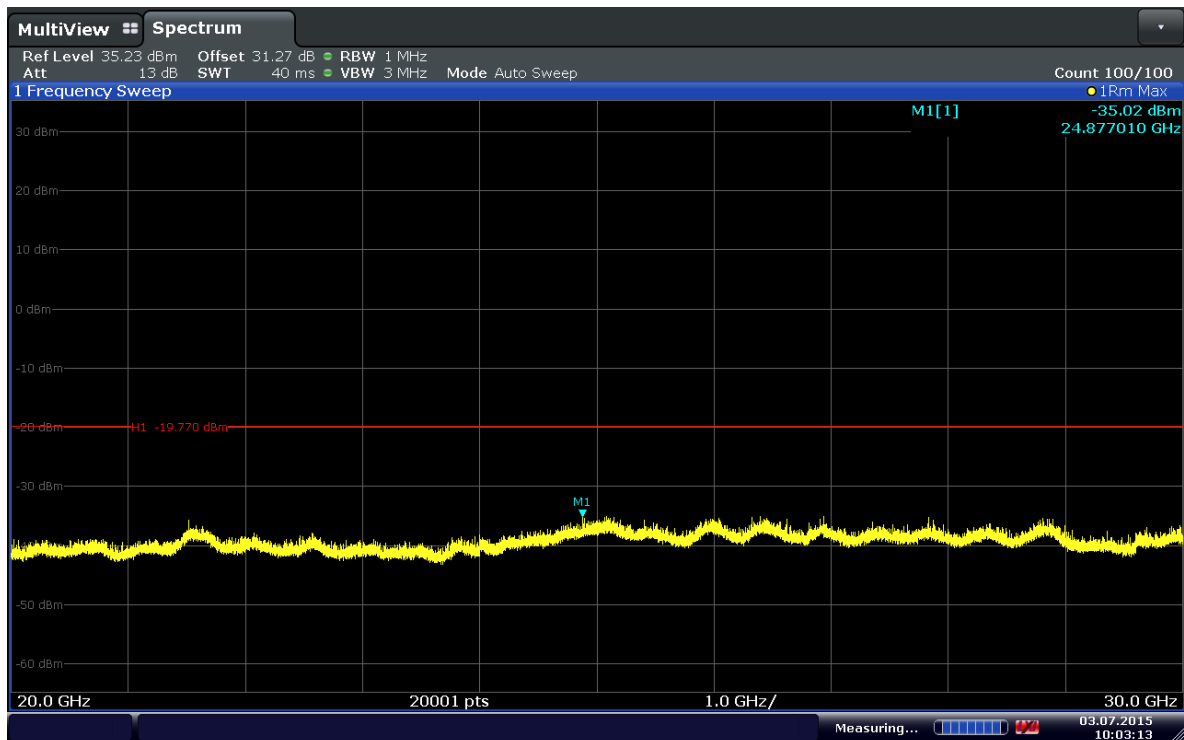


Date: 3.JUL.2015 10:03:13

Plot 6-36. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.39700)

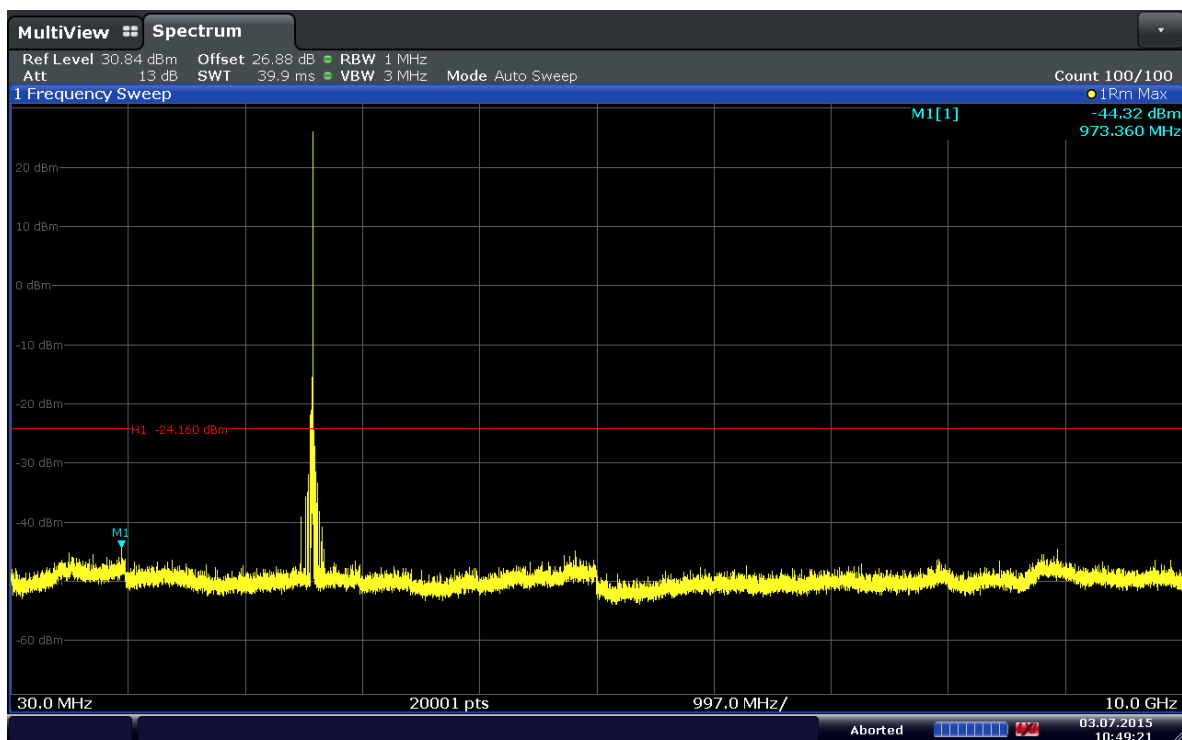


Date: 3.JUL.2015 10:49:22

Plot 6-37. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 49–Ch.40620)

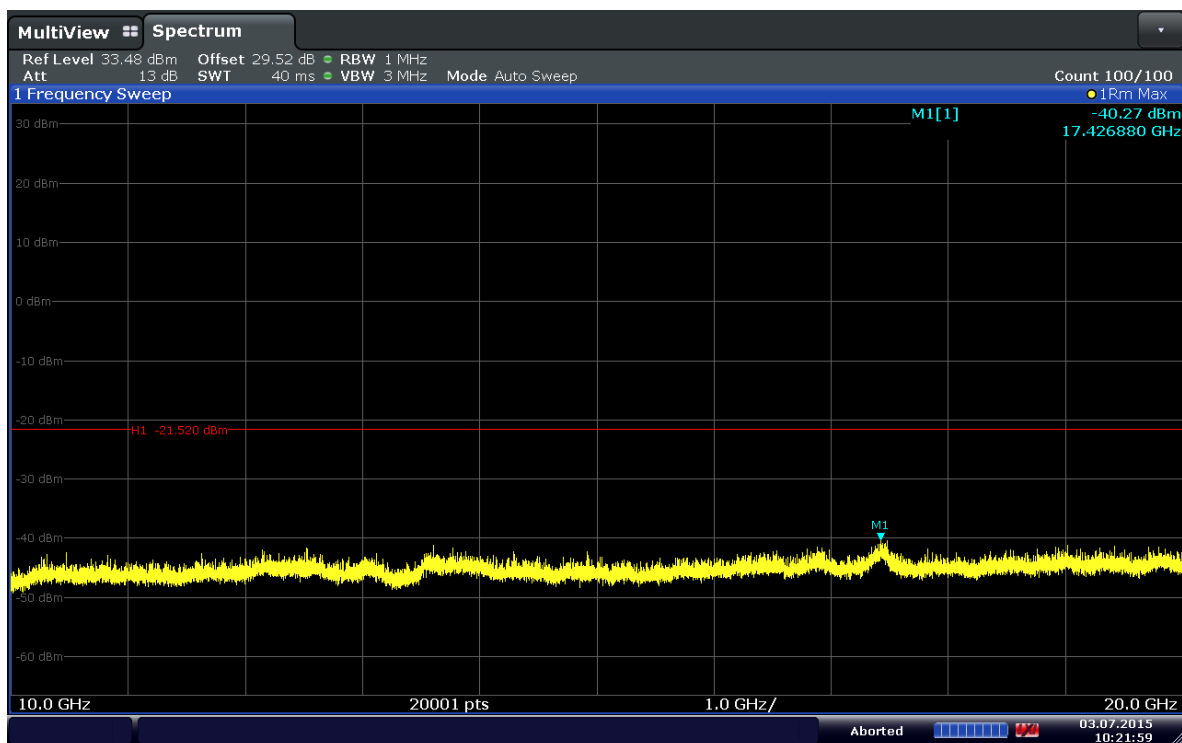


Date: 3.JUL.2015 10:21:59

Plot 6-38. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 49–Ch.40620)

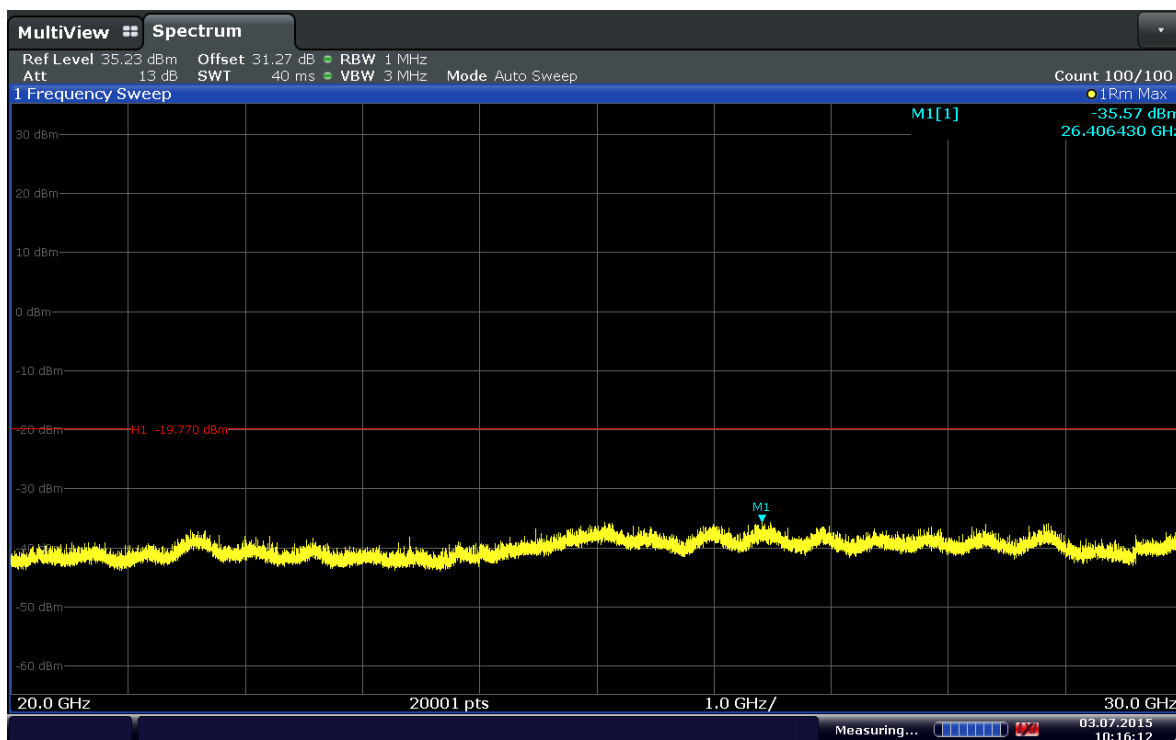


Date: 3.JUL.2015 10:16:12

Plot 6-39. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 49–Ch.40620)

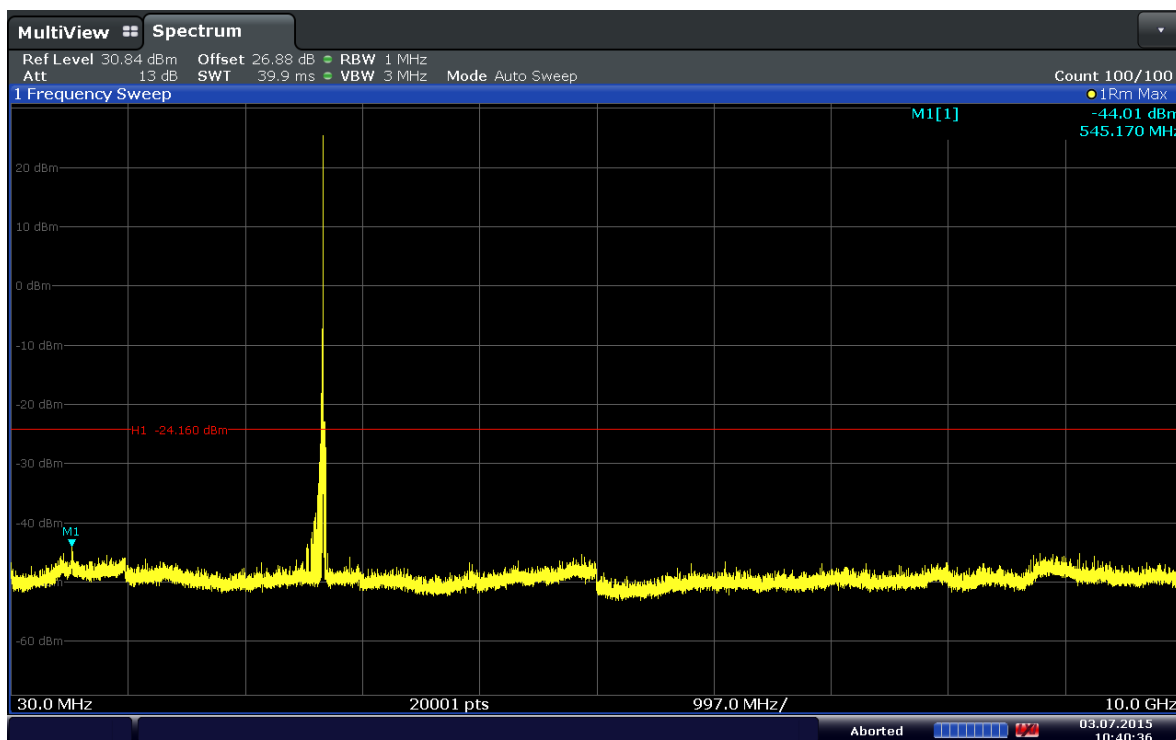


Date: 3.JUL.2015 10:40:36

Plot 6-40. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.41540)

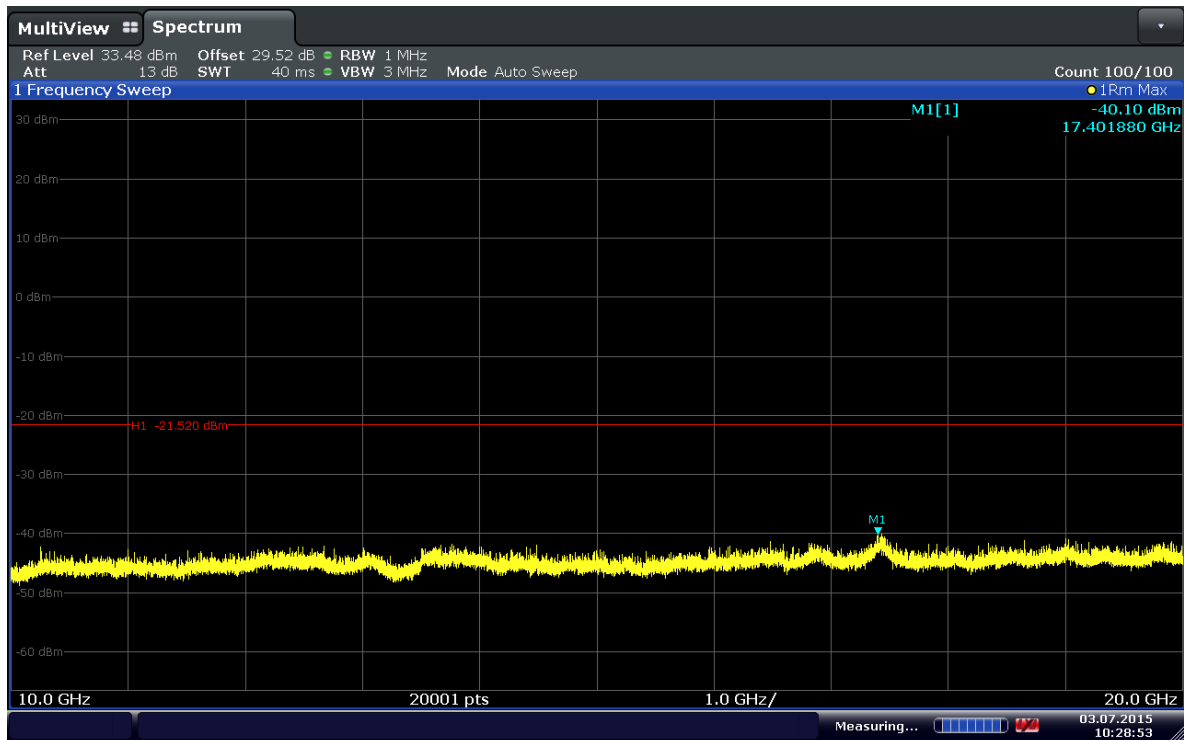


Date: 3.JUL 2015 10:28:53

Plot 6-41. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.41540)

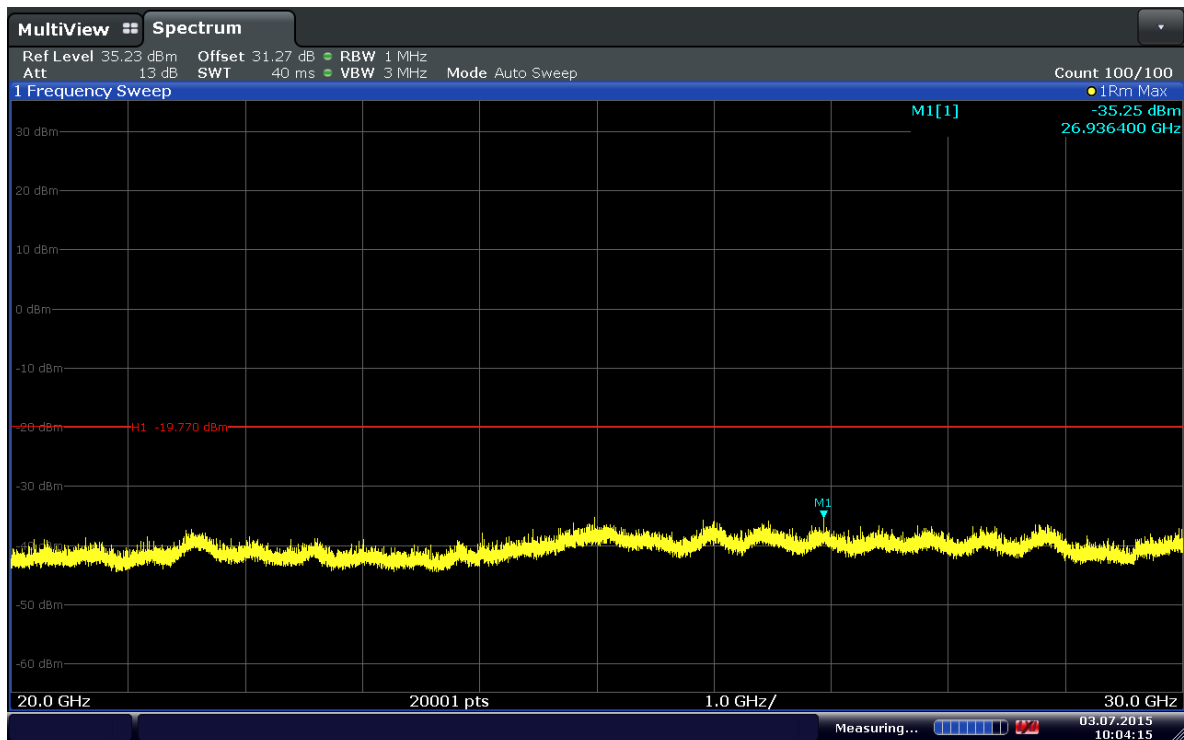


Date: 3.JUL 2015 10:04:15

Plot 6-42. Conducted Spurious Plot (Band 41–10MHz–QPSK–RB Size 1–RB Offset 24–Ch.41540)

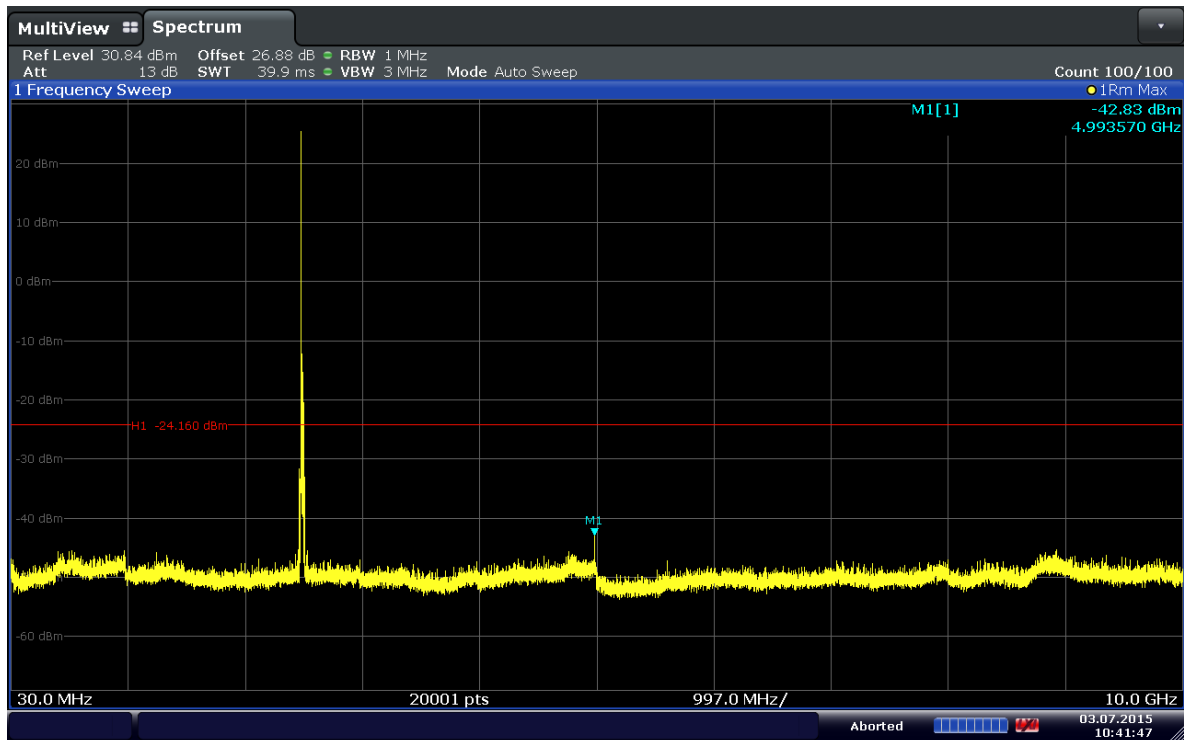


Date: 3.JUL.2015 10:41:48

Plot 6-43. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 0–Ch.39725)

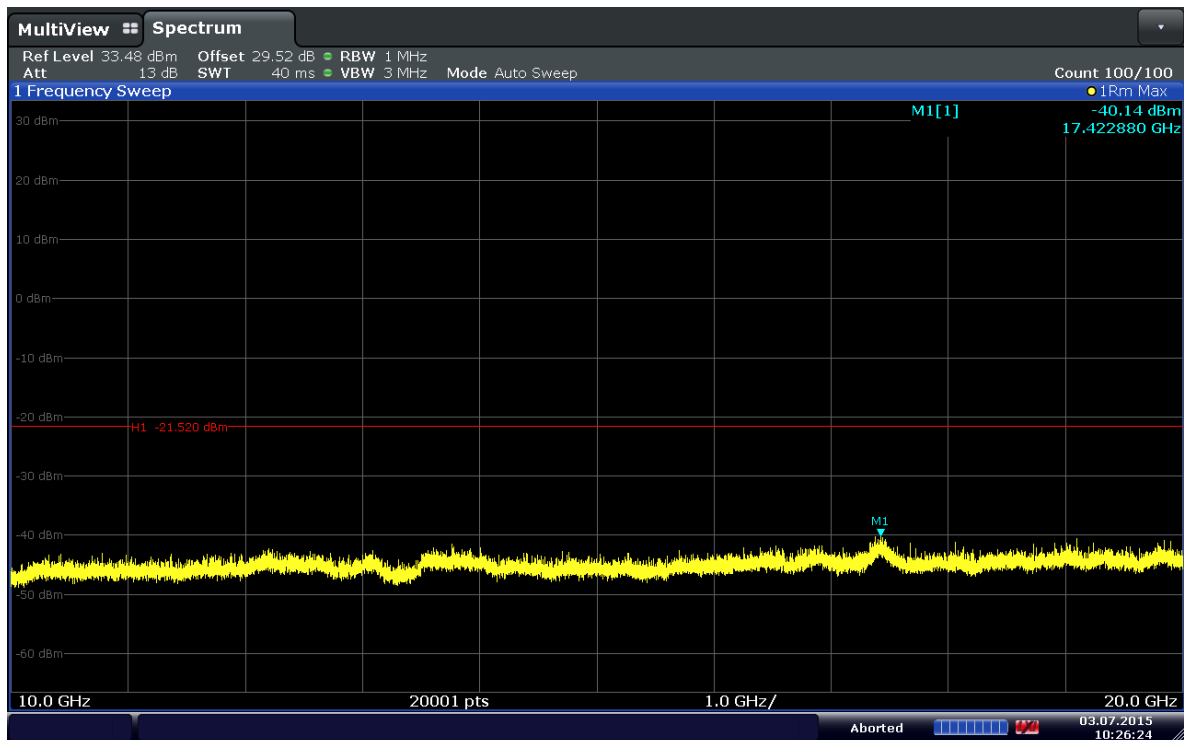


Date: 3.JUL.2015 10:26:24

Plot 6-44. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 0–Ch.39725)

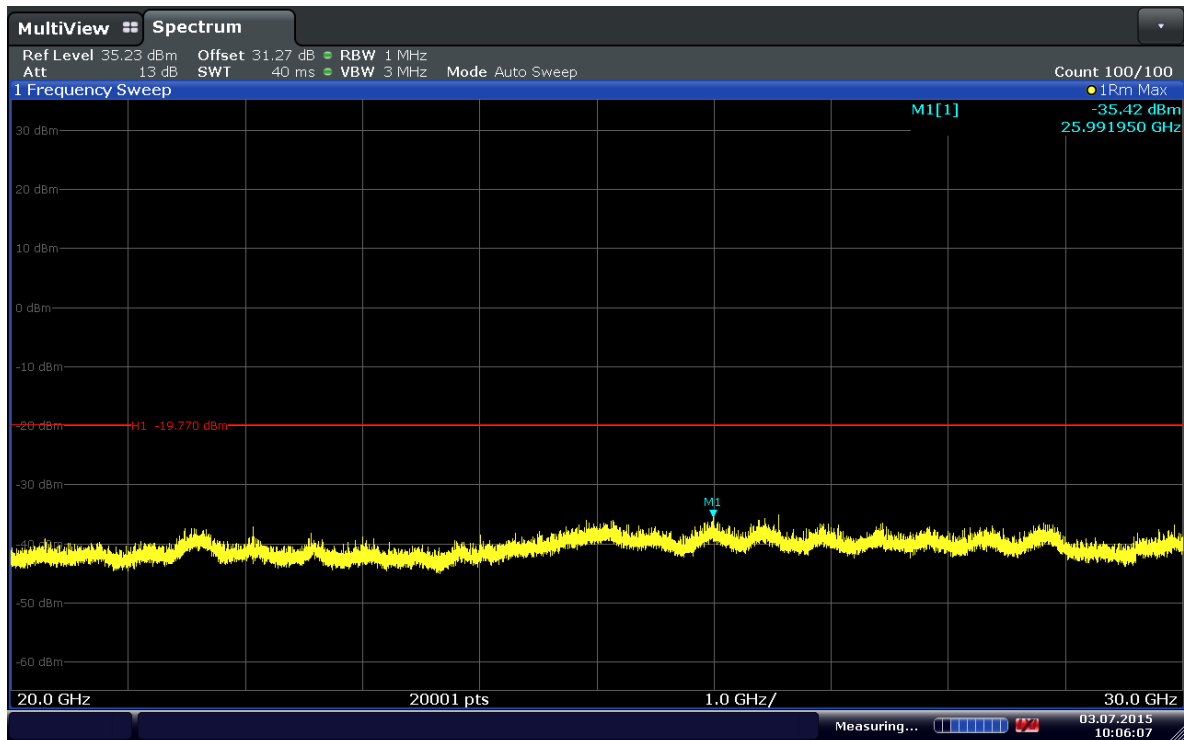


Date: 3.JUL.2015 10:06:07

Plot 6-45. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 0–Ch.39725)

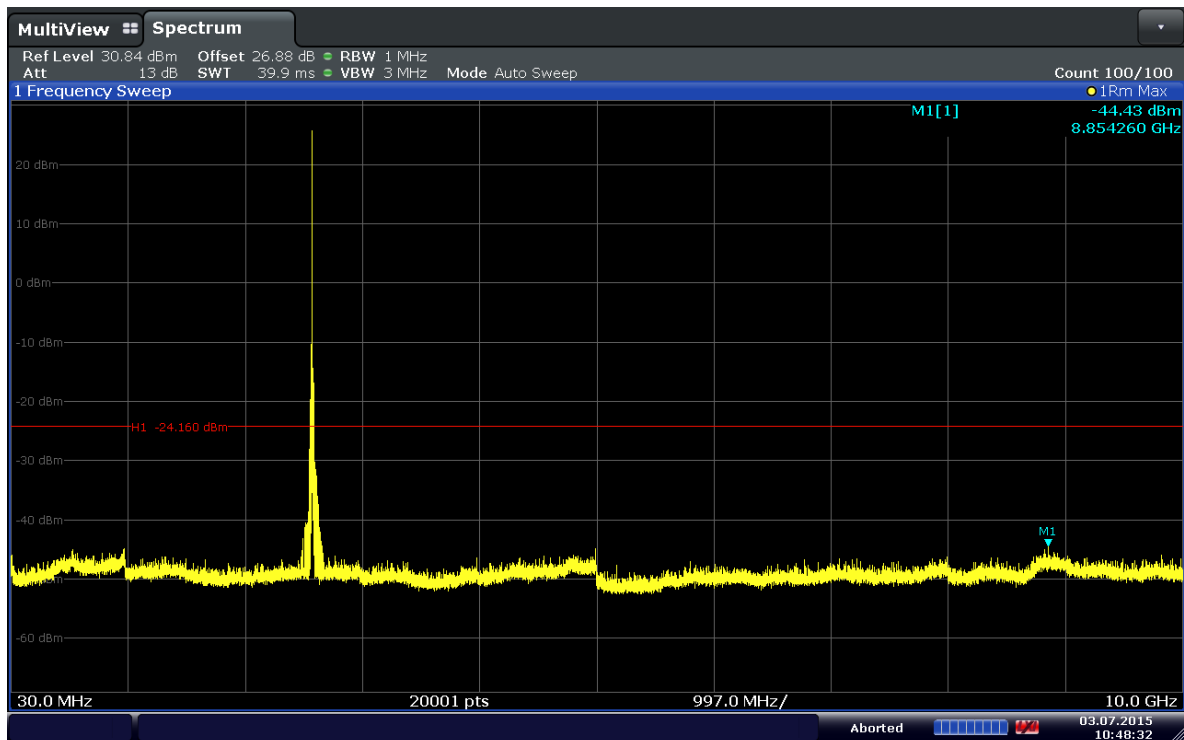


Date: 3.JUL.2015 10:48:32

Plot 6-46. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 36–Ch.40620)

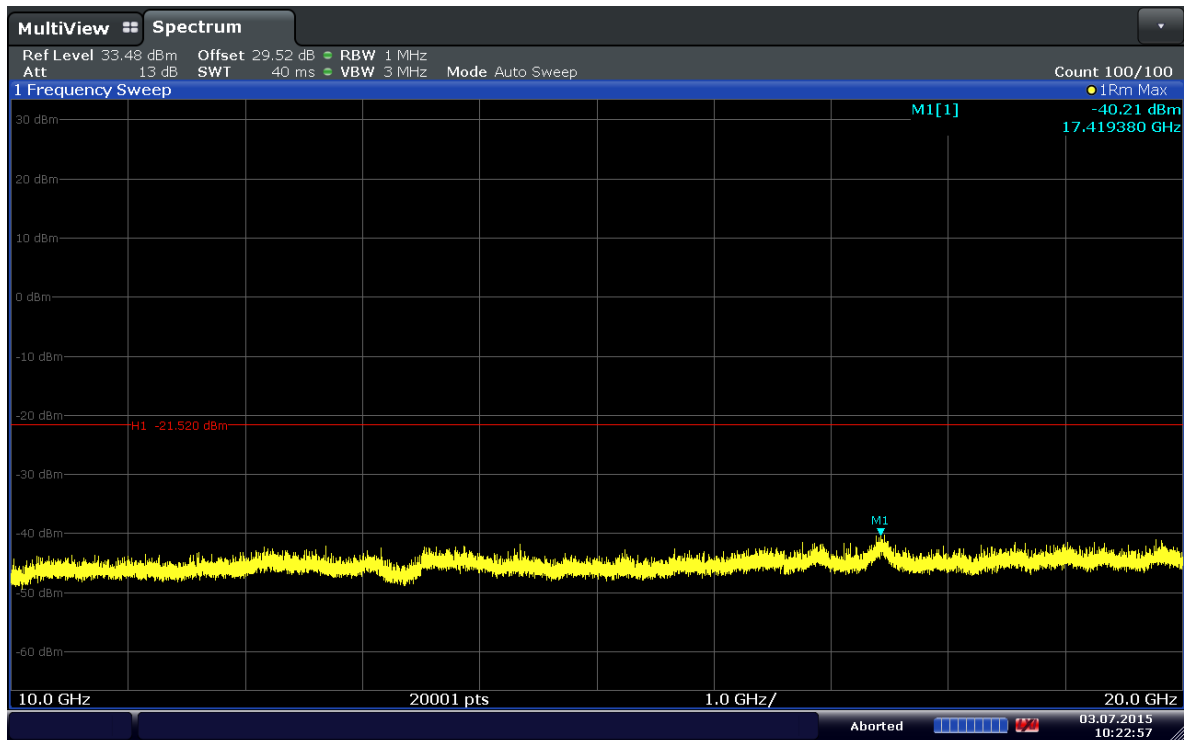


Date: 3.JUL 2015 10:22:58

Plot 6-47. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 36–Ch.40620)

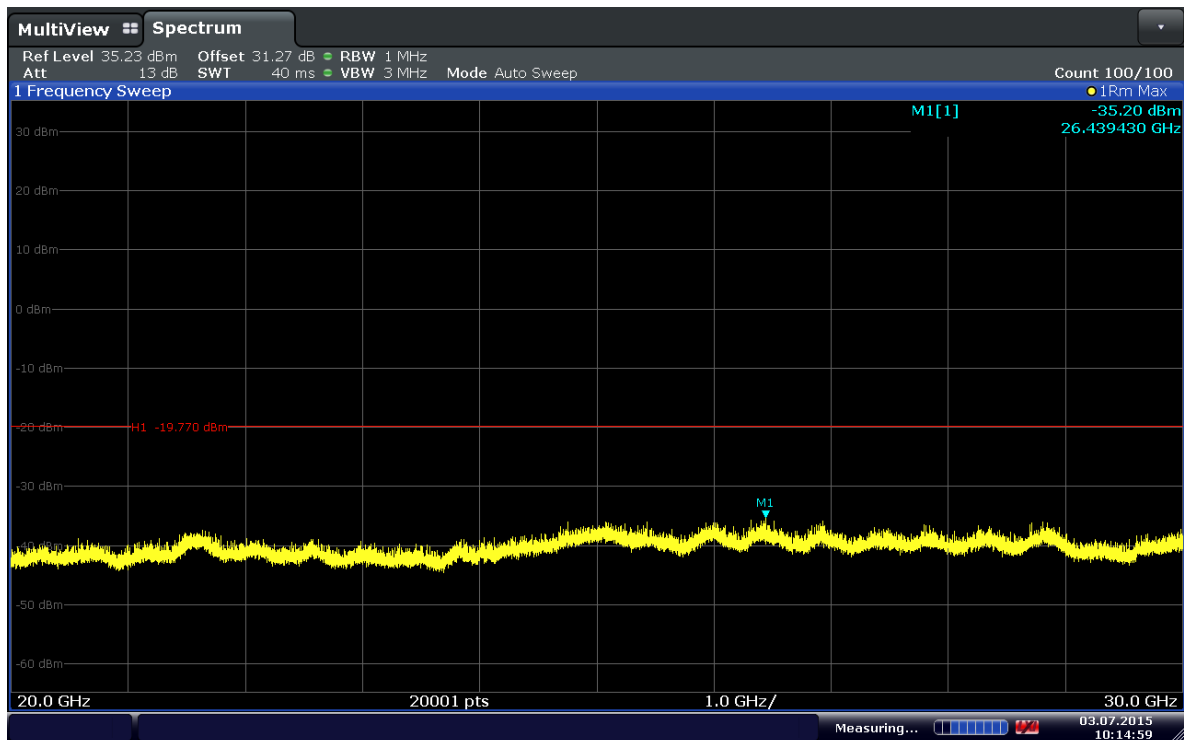


Date: 3.JUL 2015 10:14:59

Plot 6-48. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 36–Ch.40620)

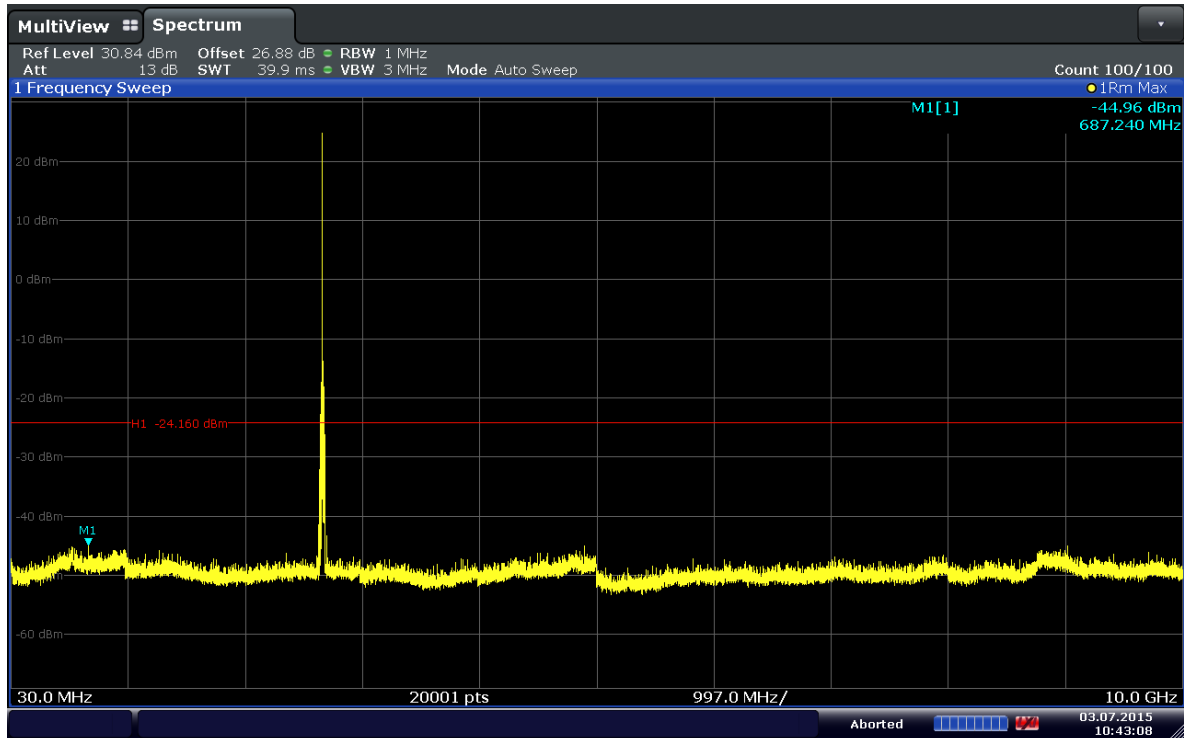


Date: 3.JUL.2015 10:43:08

Plot 6-49. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 0–Ch.41515)

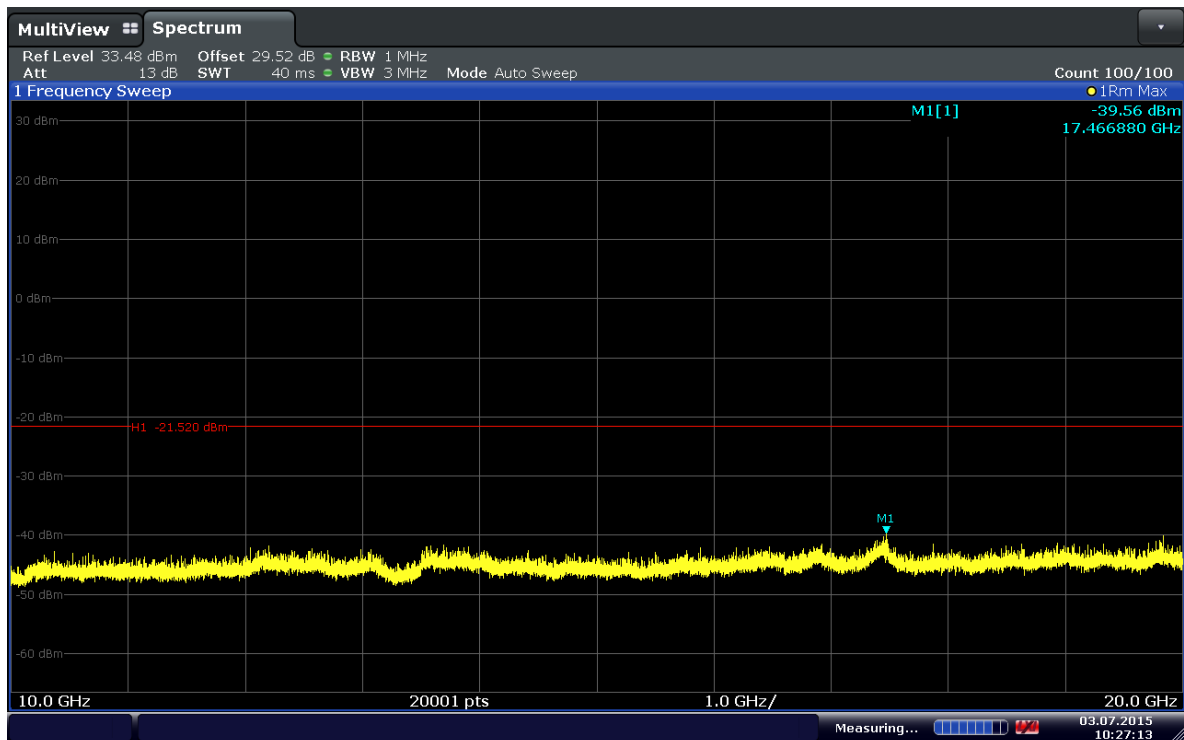


Date: 3.JUL.2015 10:27:13

Plot 6-50. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 0–Ch.41515)

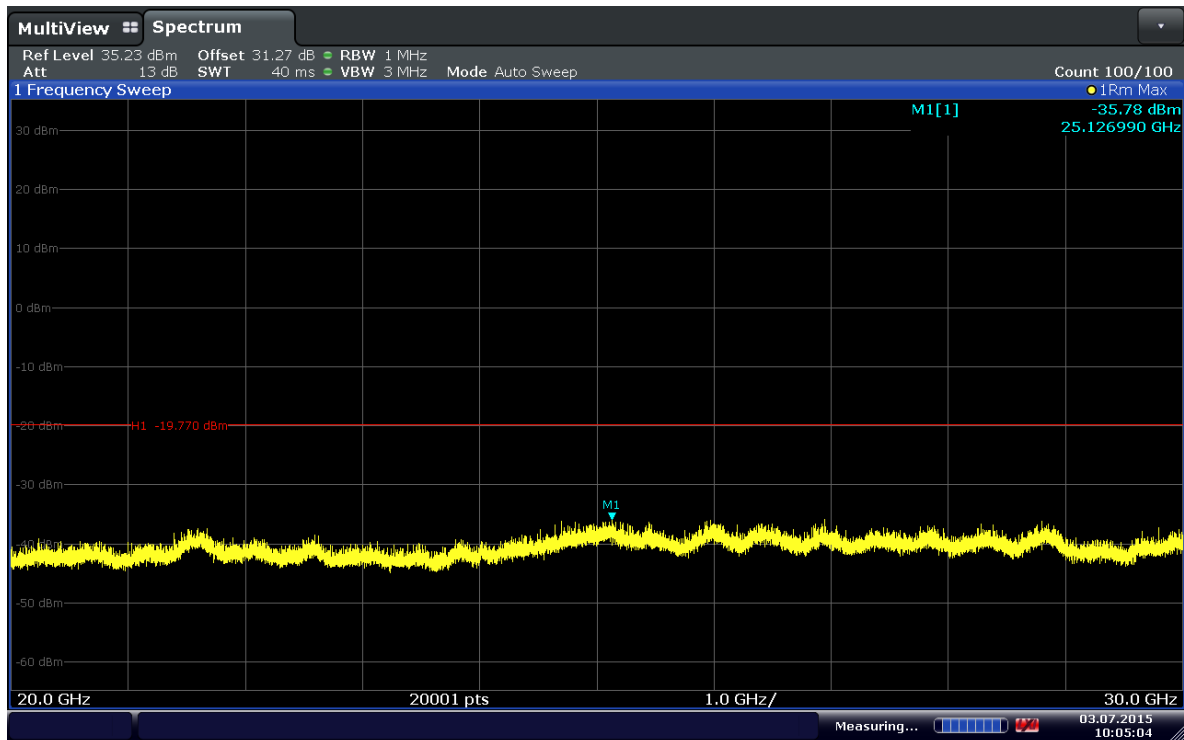


Date: 3.JUL.2015 10:05:04

Plot 6-51. Conducted Spurious Plot (Band 41–15MHz–QPSK–RB Size 1–RB Offset 0–Ch.41515)

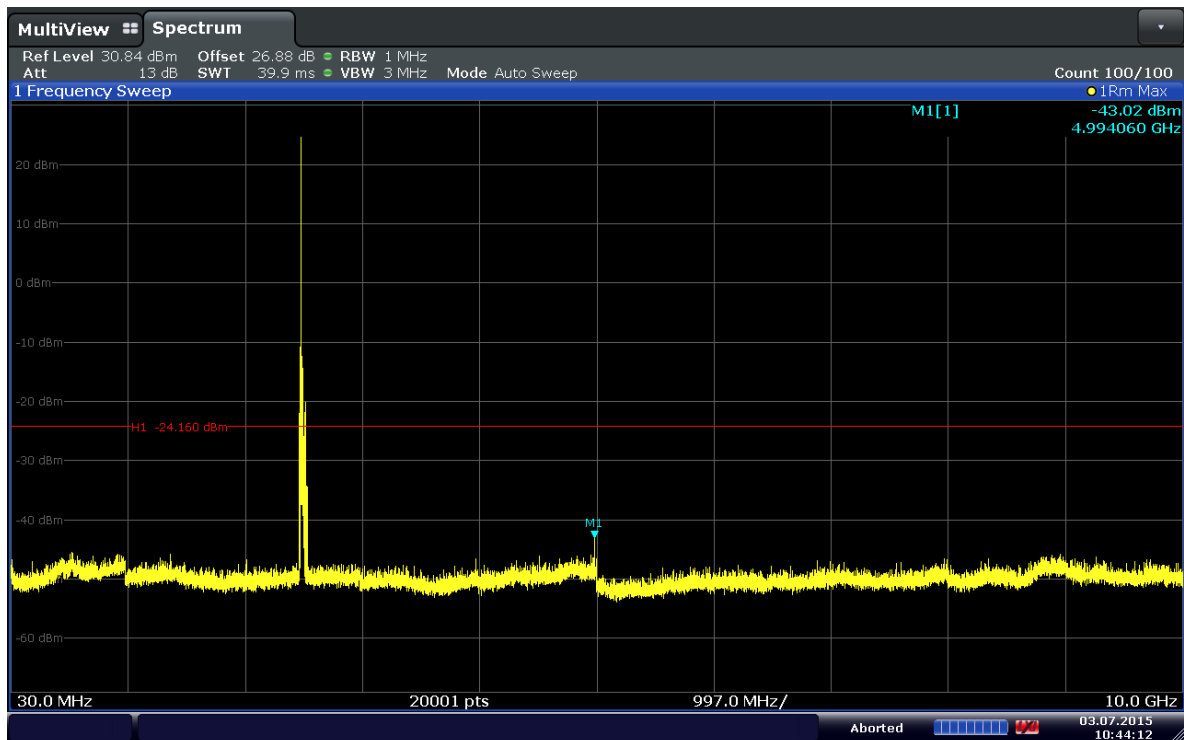


Date: 3.JUL.2015 10:44:12

Plot 6-52. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 0–Ch.39750)

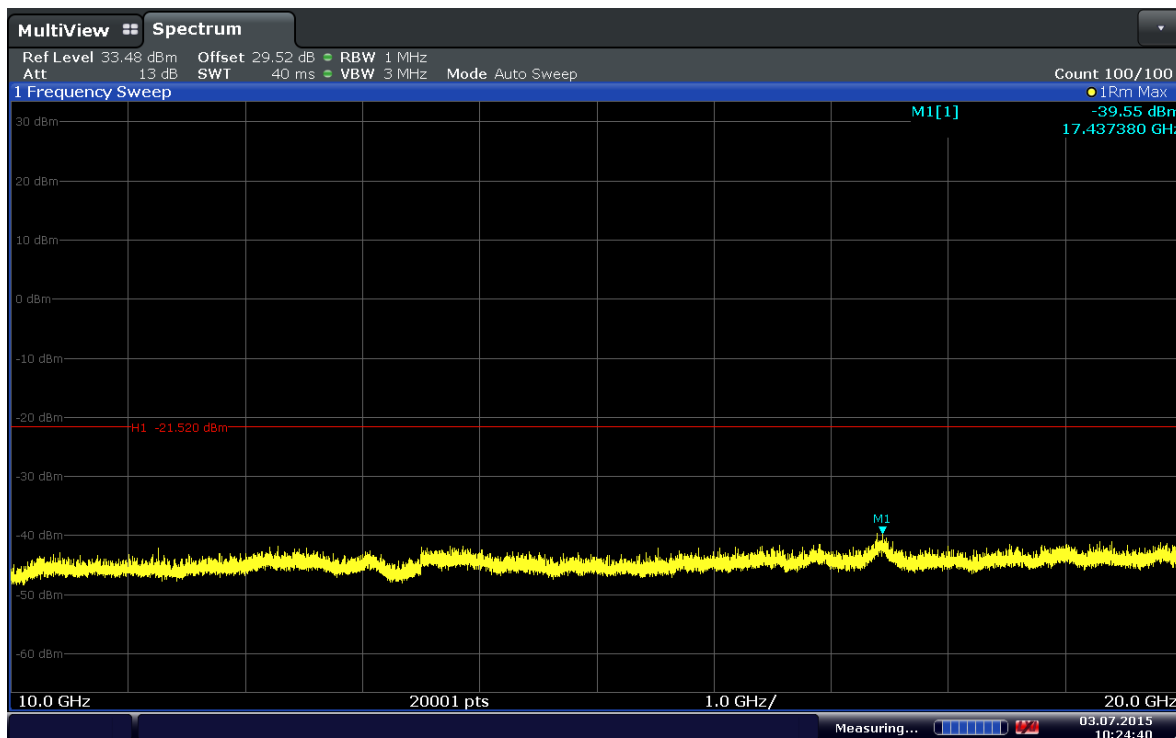


Date: 3.JUL 2015 10:24:40

Plot 6-53. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 0–Ch.39750)

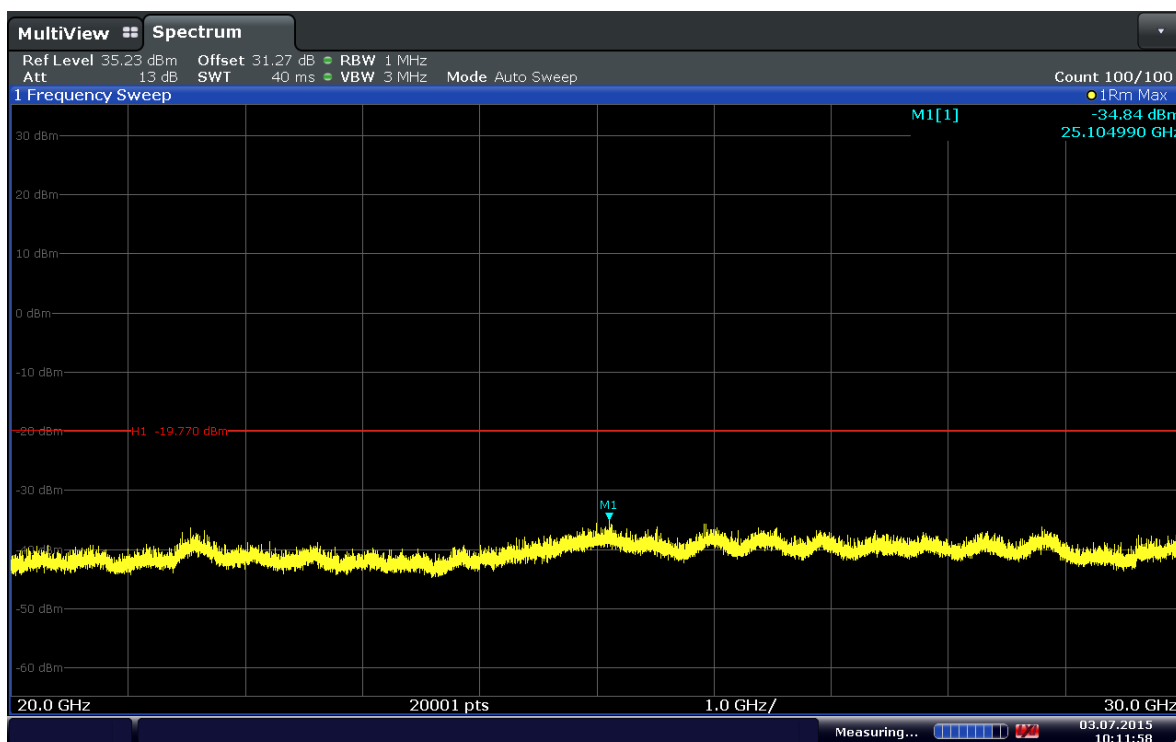


Date: 3.JUL 2015 10:11:59

Plot 6-54. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 0–Ch.39750)

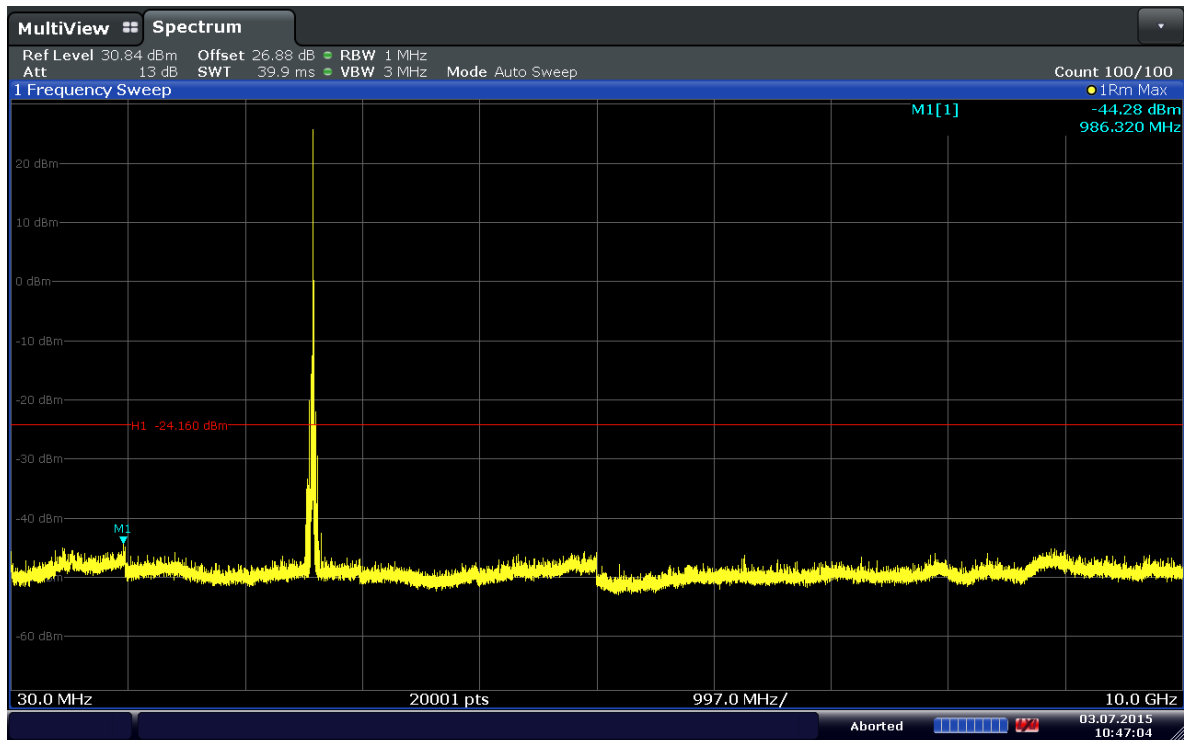


Date: 3.JUL.2015 10:47:04

Plot 6-55. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 99–Ch.40620)

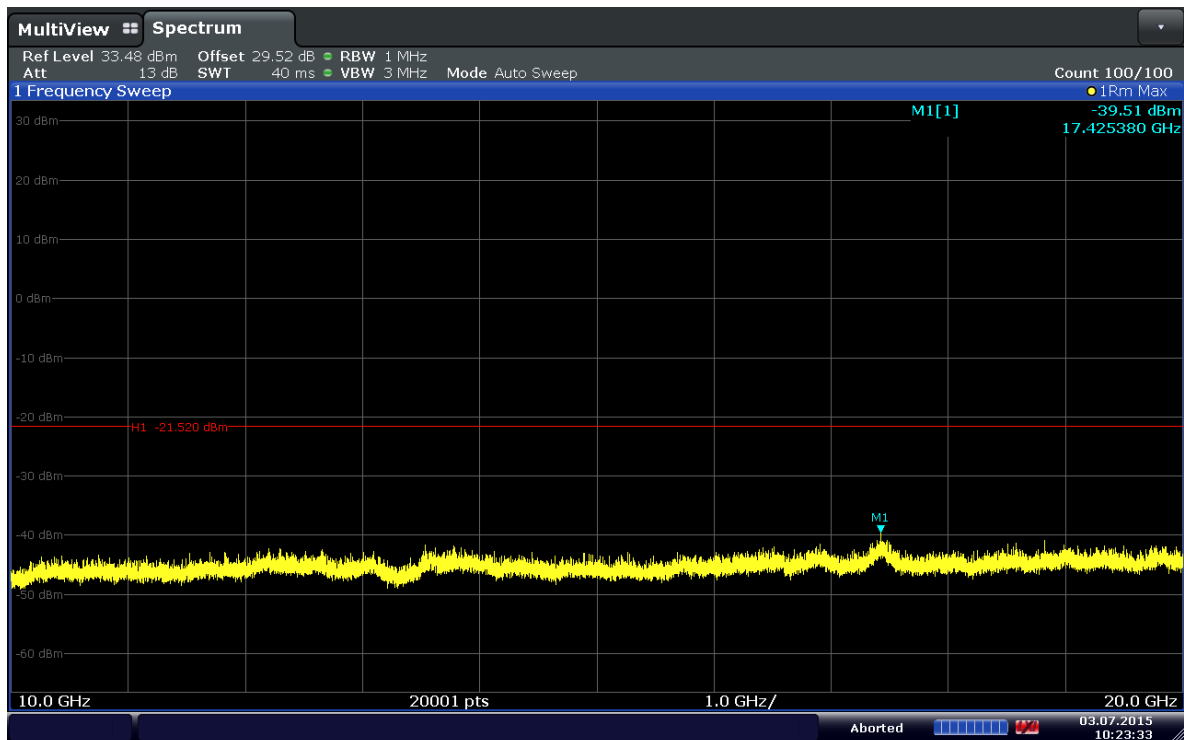


Date: 3.JUL.2015 10:23:34

Plot 6-56. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 99–Ch.40620)

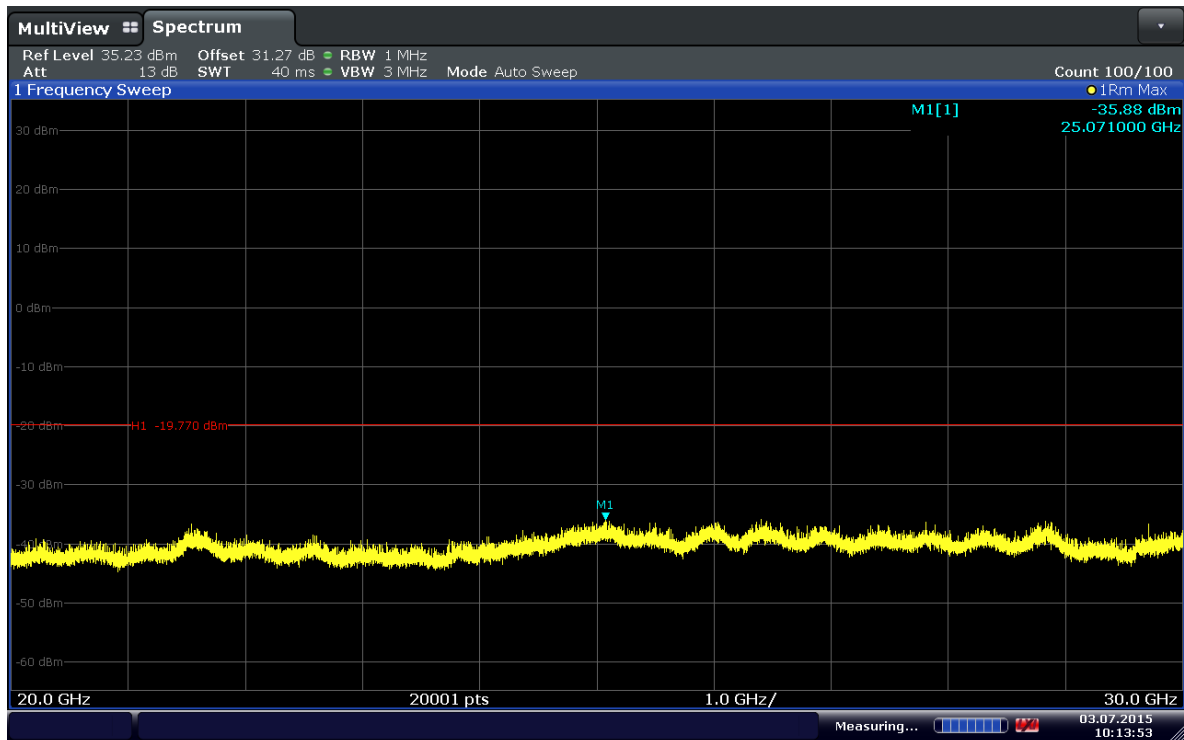


Date: 3.JUL 2015 10:13:53

Plot 6-57. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 99–Ch.40620)

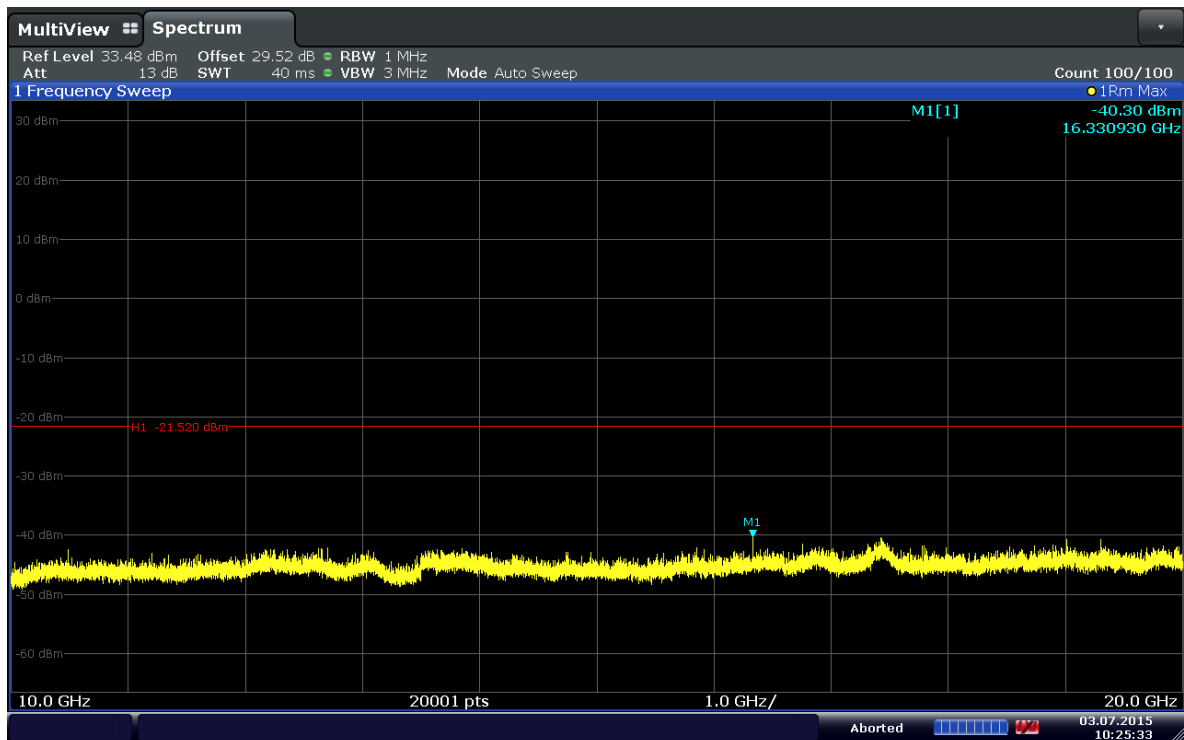


Date: 3.JUL 2015 10:25:33

Plot 6-58. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 99–Ch.41490)

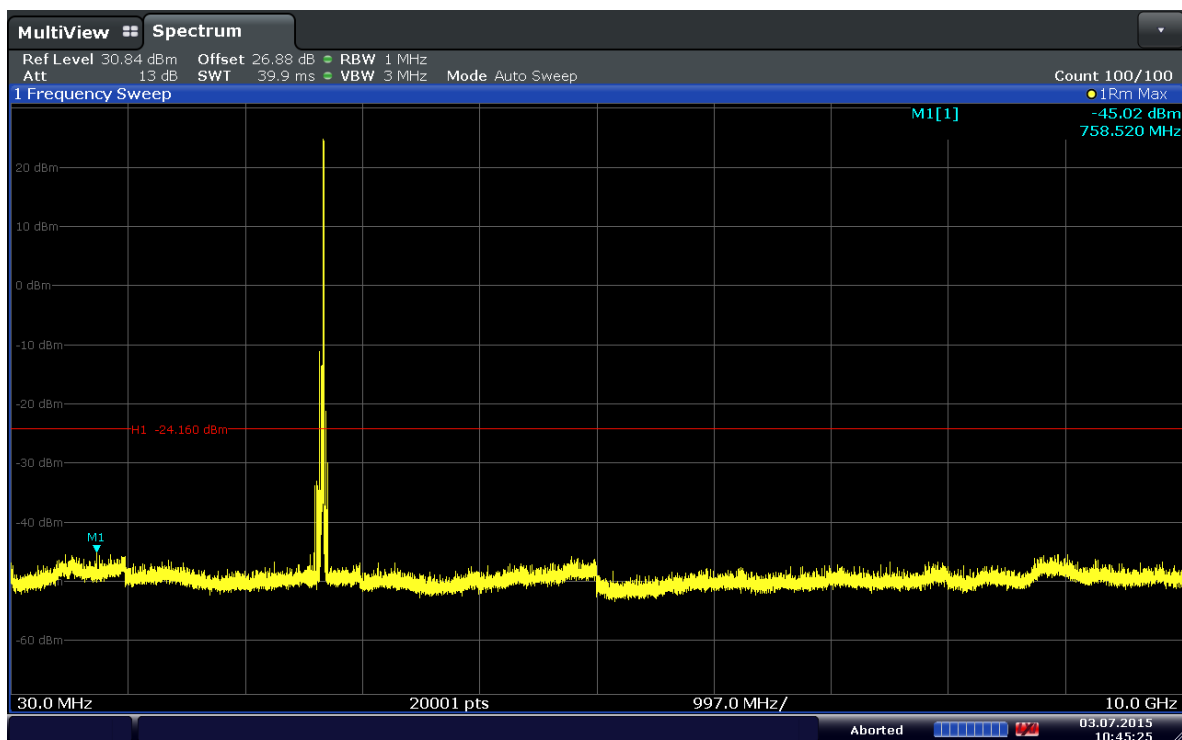

Date: 3.JUL.2015 10:45:25

Plot 6-59. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 99–Ch.41490)

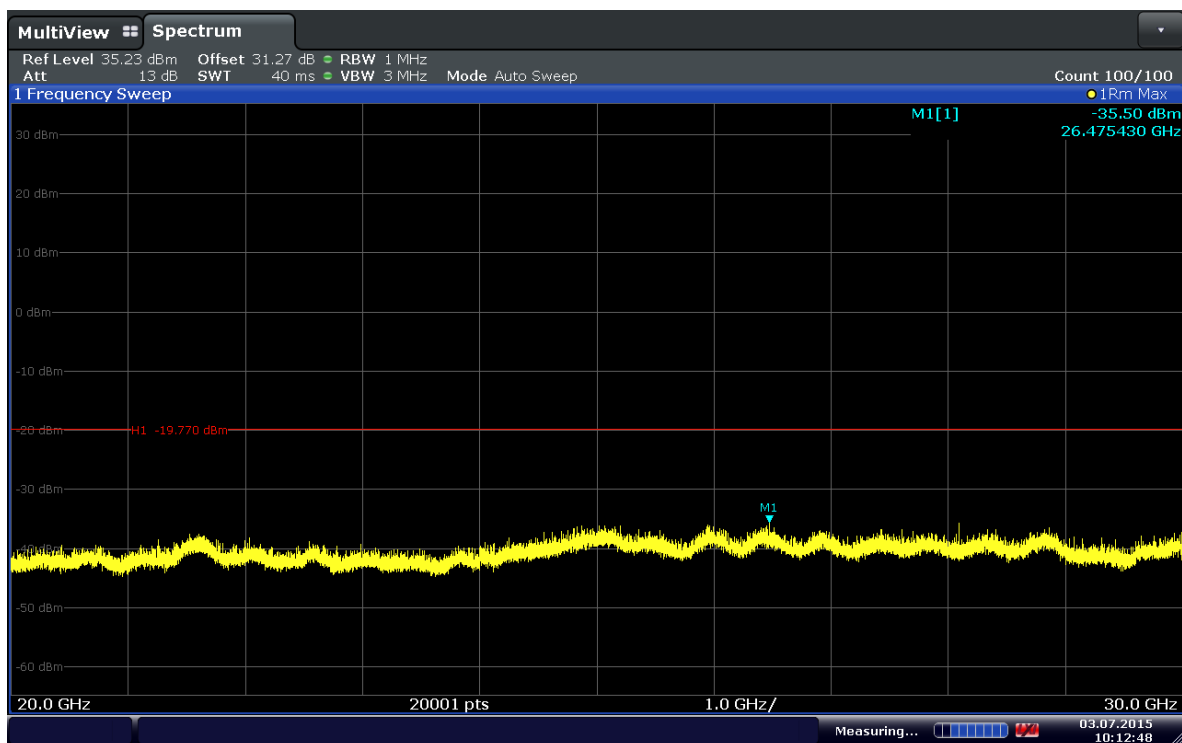

Date: 3.JUL.2015 10:12:48

Plot 6-60. Conducted Spurious Plot (Band 41–20MHz–QPSK–RB Size 1–RB Offset 99–Ch.41490)

6.4. Band Edge Emissions at Antenna Terminal §2.1051 §27.53(g) §27.53(m)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For 27.53(g), the minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{[Watts]}})$, where P is the transmitter power in Watts. Limit equivalent to -13dBm, calculation shown below.

$$\begin{aligned}43 + 10 \log_{10}(1.567\text{W}) &= 44.95 \text{ dB} \\1.567\text{W} &= 31.95 \text{ dBm} \\31.95 \text{ dBm} - 44.95 \text{ dB} &= -13 \text{ dBm}\end{aligned}$$

For 27.53(m), the minimum permissible attenuation level is $> 40 + 10\log_{10}(P_{\text{[Watts]}})$ between channel edge and 5 MHz from the channel edge, $> 43 + 10\log_{10}(P_{\text{[Watts]}})$ between 5 MHz and X MHz from the channel edge, or between 2490.5 MHz and 2496 MHz, and $> 55 + \log_{10}(P_{\text{[Watts]}})$ more than X MHz from the channel edge, or below 2490.5 MHz, where X is the greater of 6 MHz or the actual emission bandwidth.

Test Procedure Used

KDB 971168 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq$ 1% of the emission bandwidth
4. VBW $\geq$ 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq$ 2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

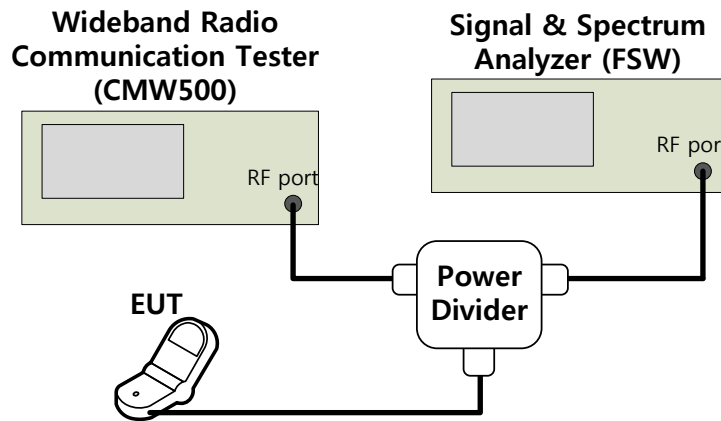



Figure 6-3. Test Instruments & Measurement Setup

Test Notes

1. Per 27.53(g), in the 100 kilohertz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed.
2. Per 27.53(m), compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.




Test Plots

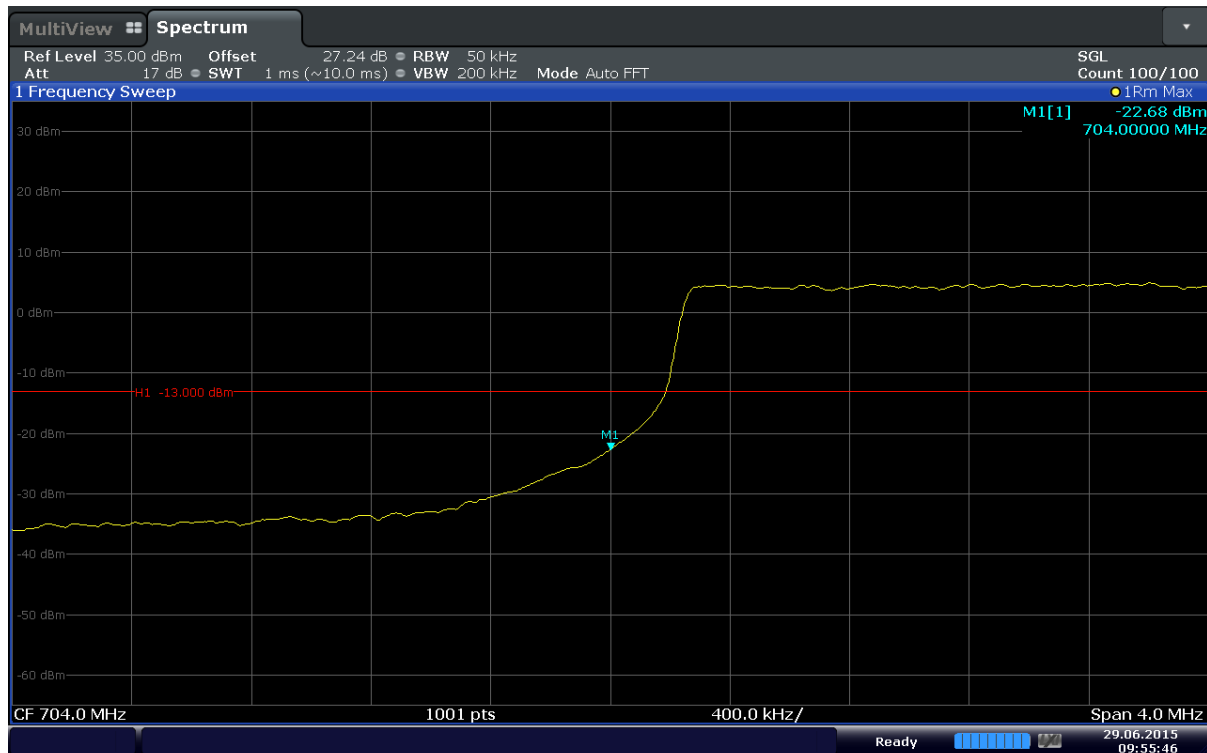


Date: 29 JUN 2015 09:55:47

Plot 6-61. Lower Band Edge Plot (Band17 – 5MHz – QPSK – RB Size 25)

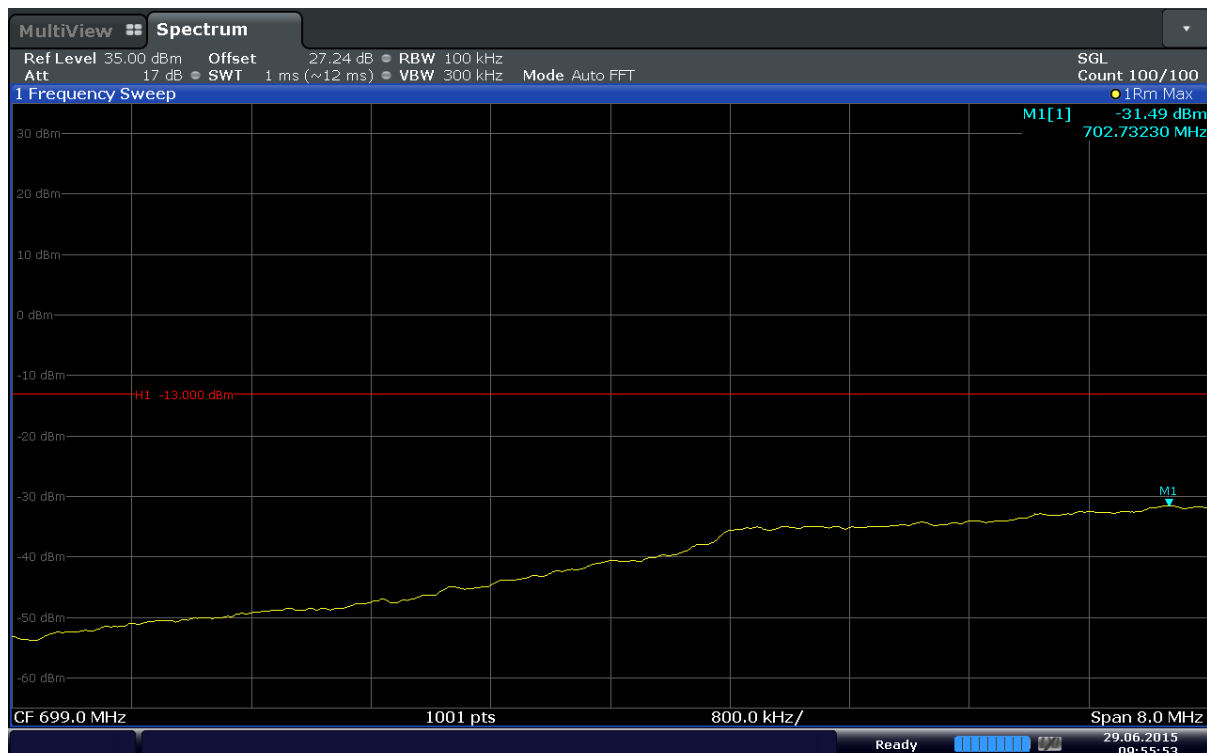


Date: 29 JUN 2015 09:55:53

Plot 6-62. Extended Lower Band Edge Plot (Band17 – 5MHz – QPSK – RB Size 25)

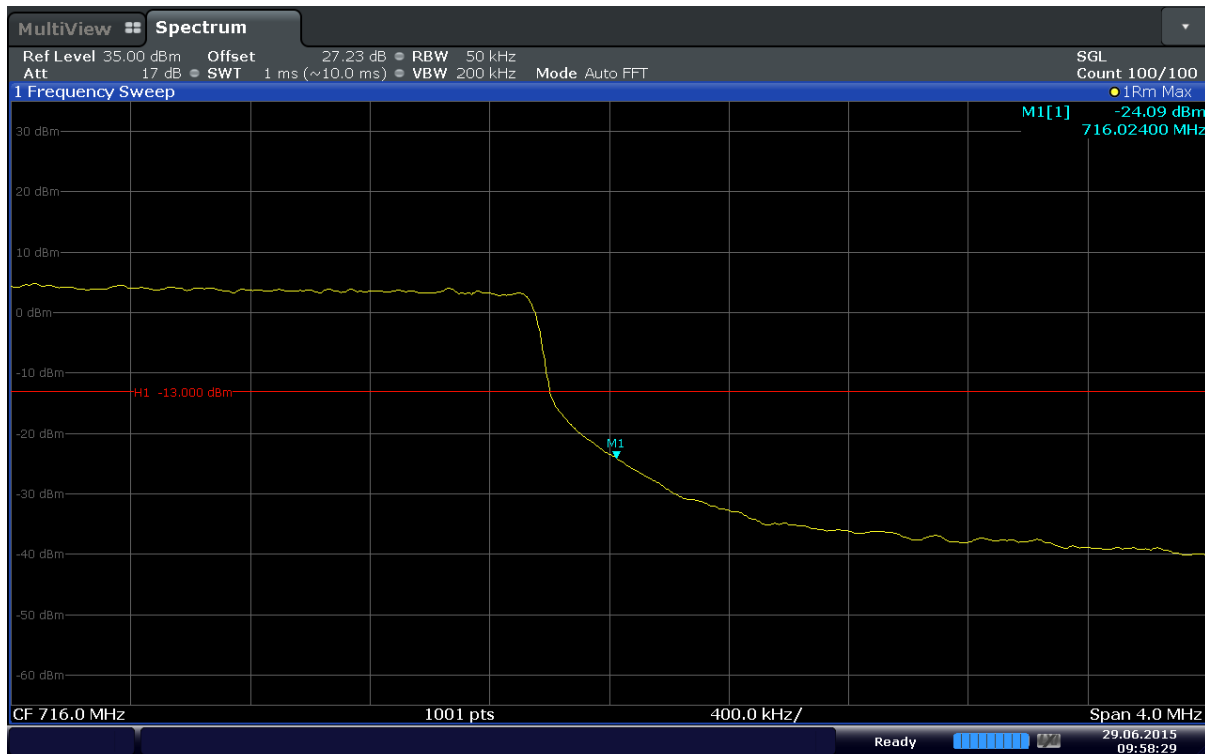


Date: 29 JUN 2015 09:58:29

Plot 6-63. Upper Band Edge Plot (Band17 – 5MHz – QPSK – RB Size 25)

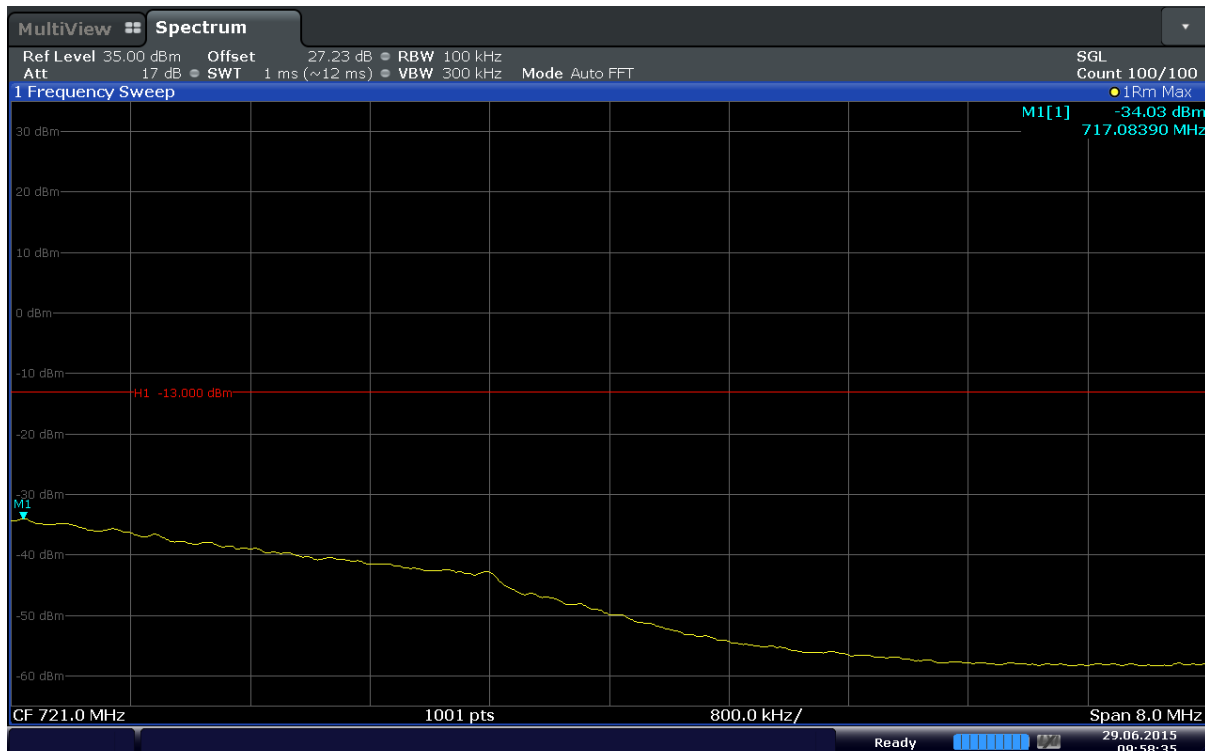


Date: 29 JUN 2015 09:58:35

Plot 6-64. Extended Upper Band Edge Plot (Band17 – 5MHz – QPSK – RB Size 25)

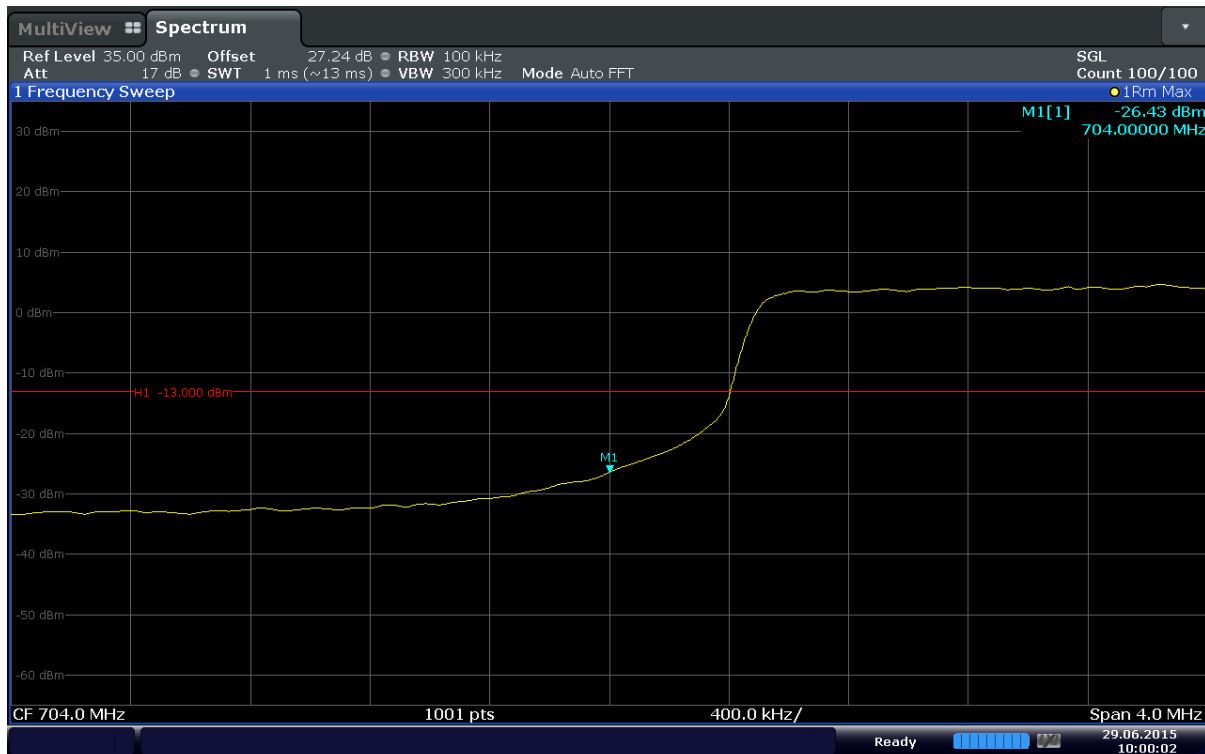


Date: 29 JUN 2015 10:00:02

Plot 6-65. Lower Band Edge Plot (Band17 – 10MHz – QPSK – RB Size 50)

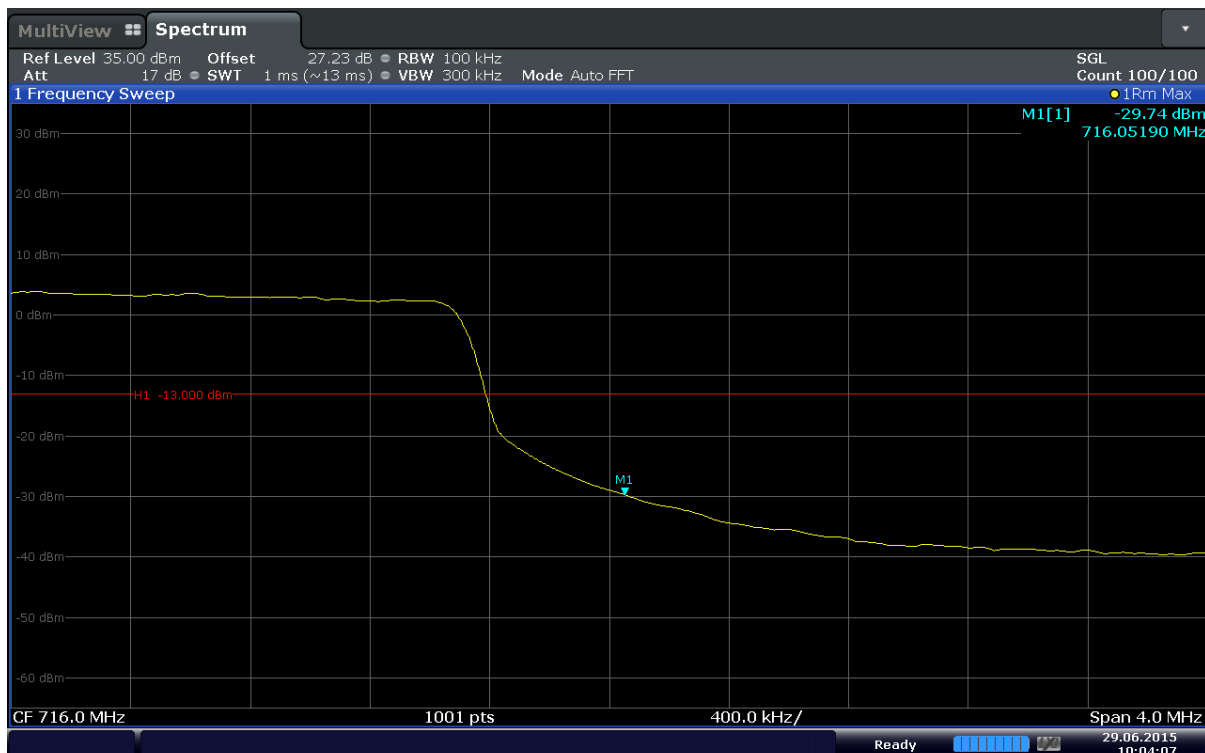


Date: 29 JUN 2015 10:04:07

Plot 6-66. Upper Band Edge Plot (Band17 – 10MHz – QPSK – RB Size 50)

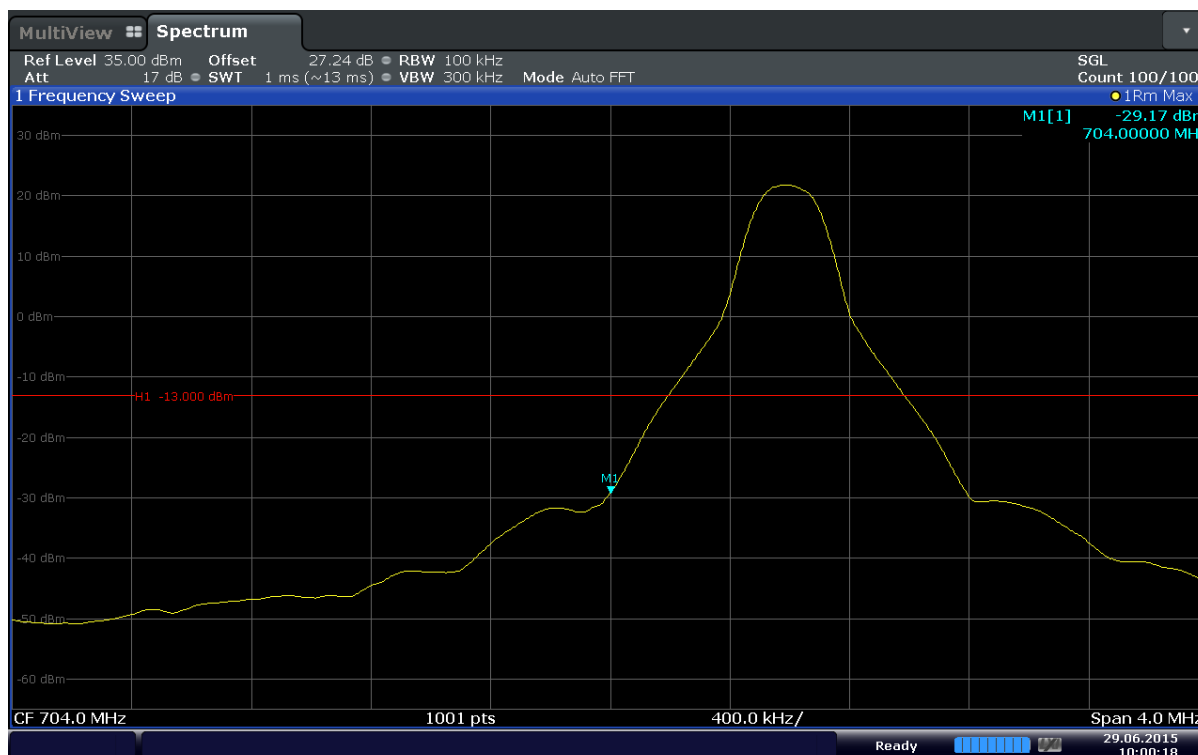


Date: 29 JUN 2015 10:00:19

Plot 6-67. Lower Band Edge Plot (Band17 – 10MHz – QPSK – RB Size 1 – RB Offset 0)

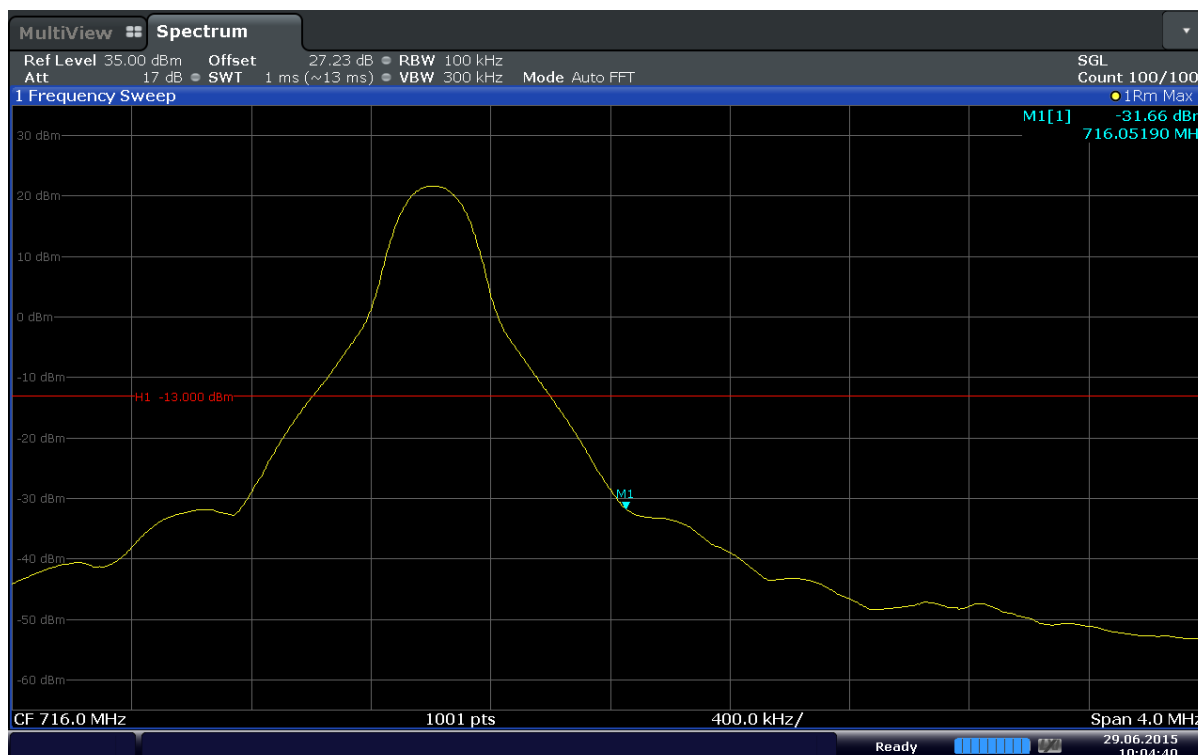


Date: 29 JUN 2015 10:04:40

Plot 6-68. Upper Band Edge Plot (Band17 – 10MHz – QPSK – RB Size 1 – RB Offset 49)

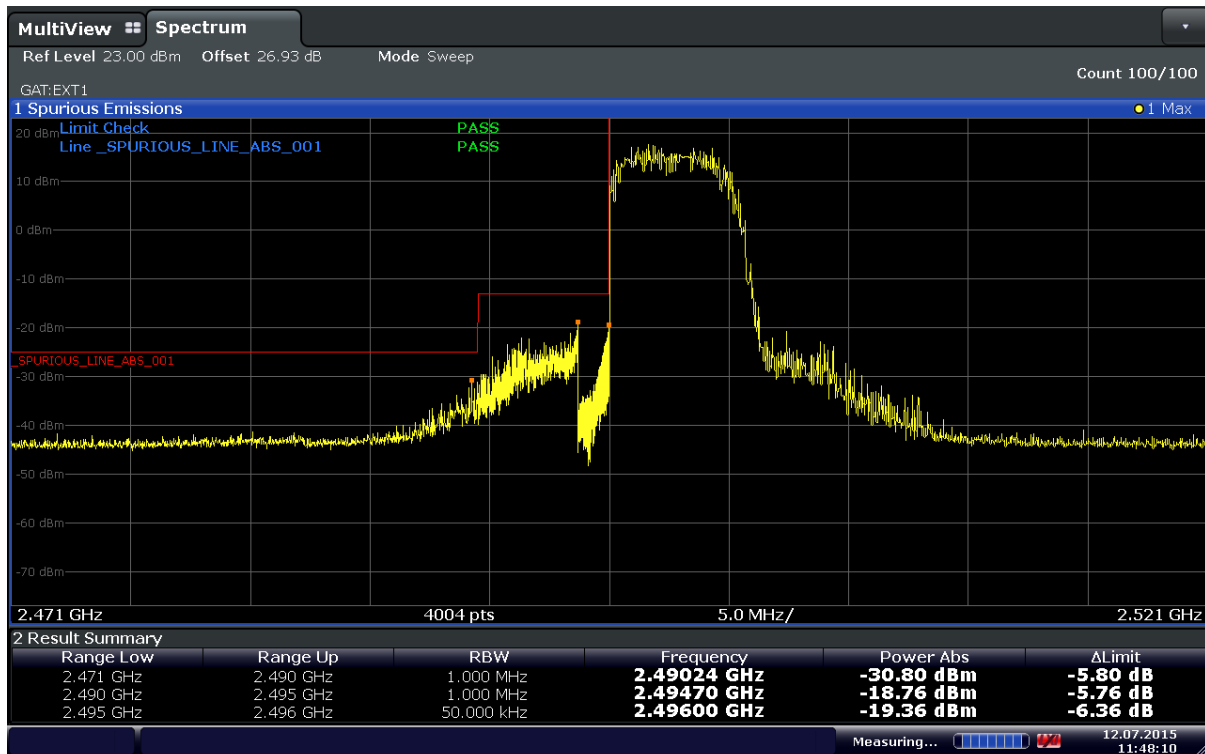


Date: 12 JUL 2015 11:48:09

Plot 6-69. Lower Band Edge Plot (Band41 – 5MHz – QPSK – RB Size 25)

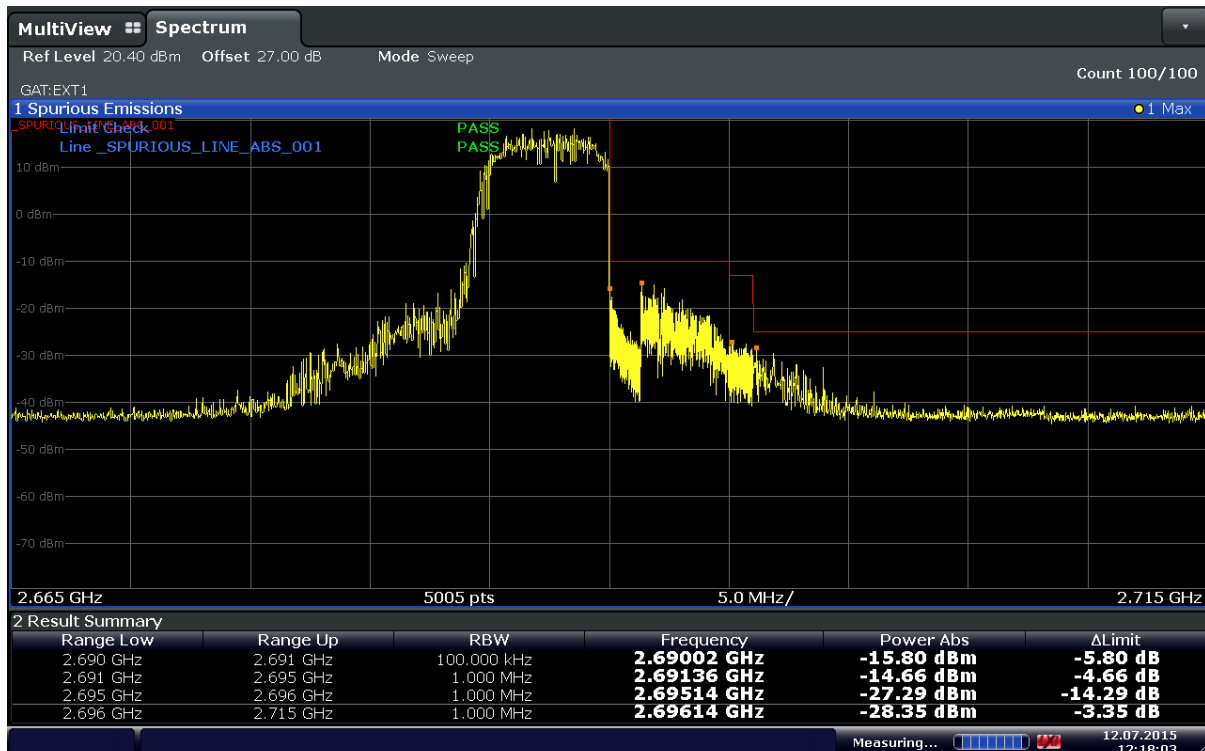


Date: 12 JUL 2015 12:18:04

Plot 6-70. Upper Band Edge Plot (Band41 – 5MHz – QPSK – RB Size 25)

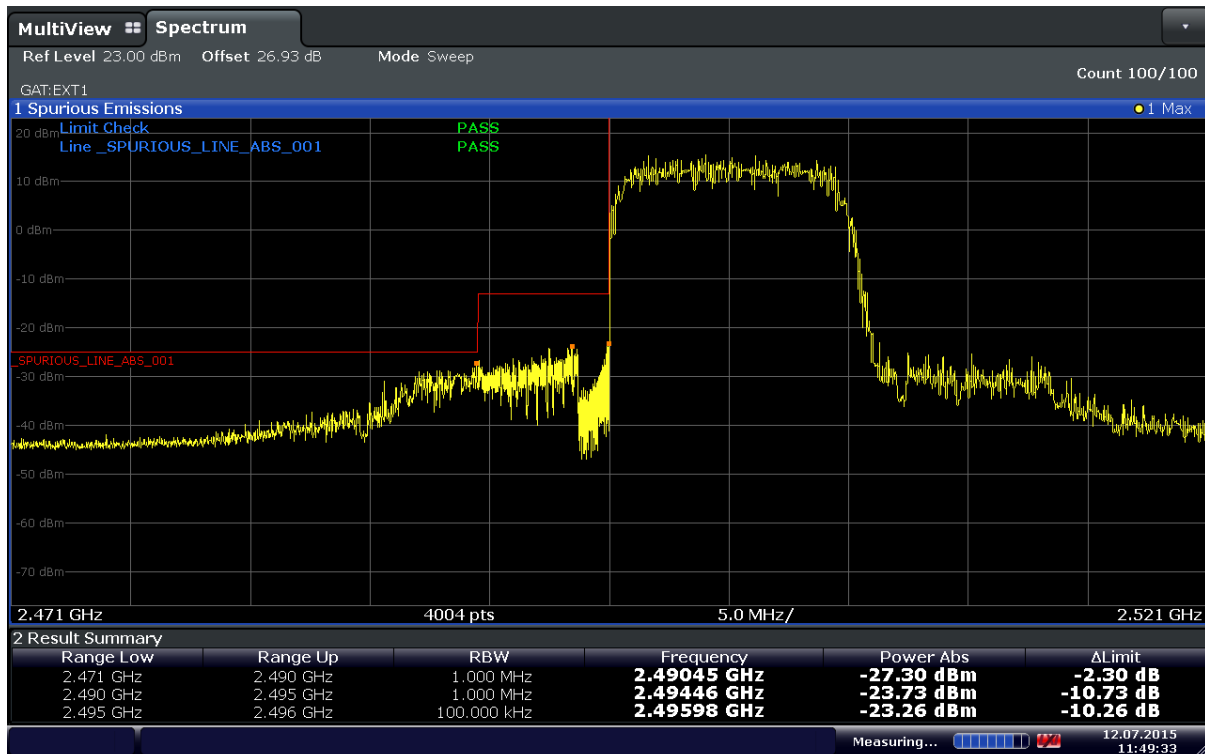


Date: 12 JUL 2015 11:49:33

Plot 6-71. Lower Band Edge Plot (Band41 – 10MHz – QPSK – RB Size 50)

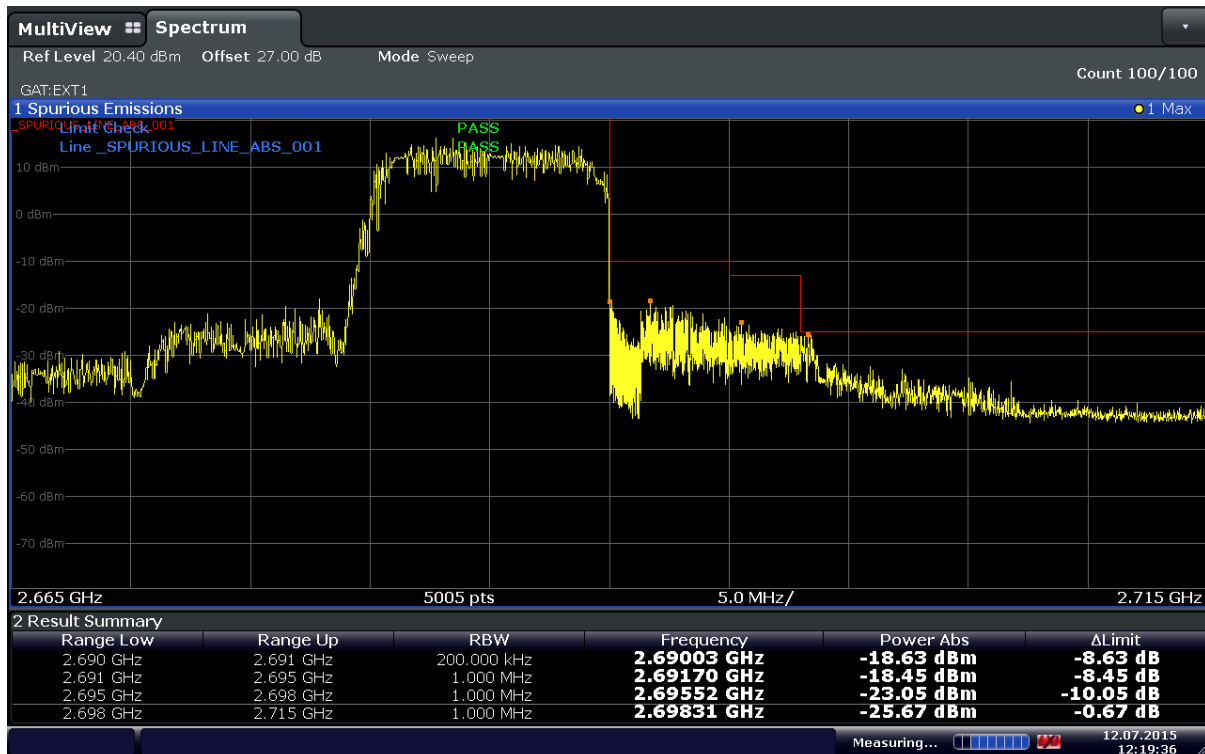


Date: 12 JUL 2015 12:19:36

Plot 6-72. Upper Band Edge Plot (Band41 – 10MHz – QPSK – RB Size 50)

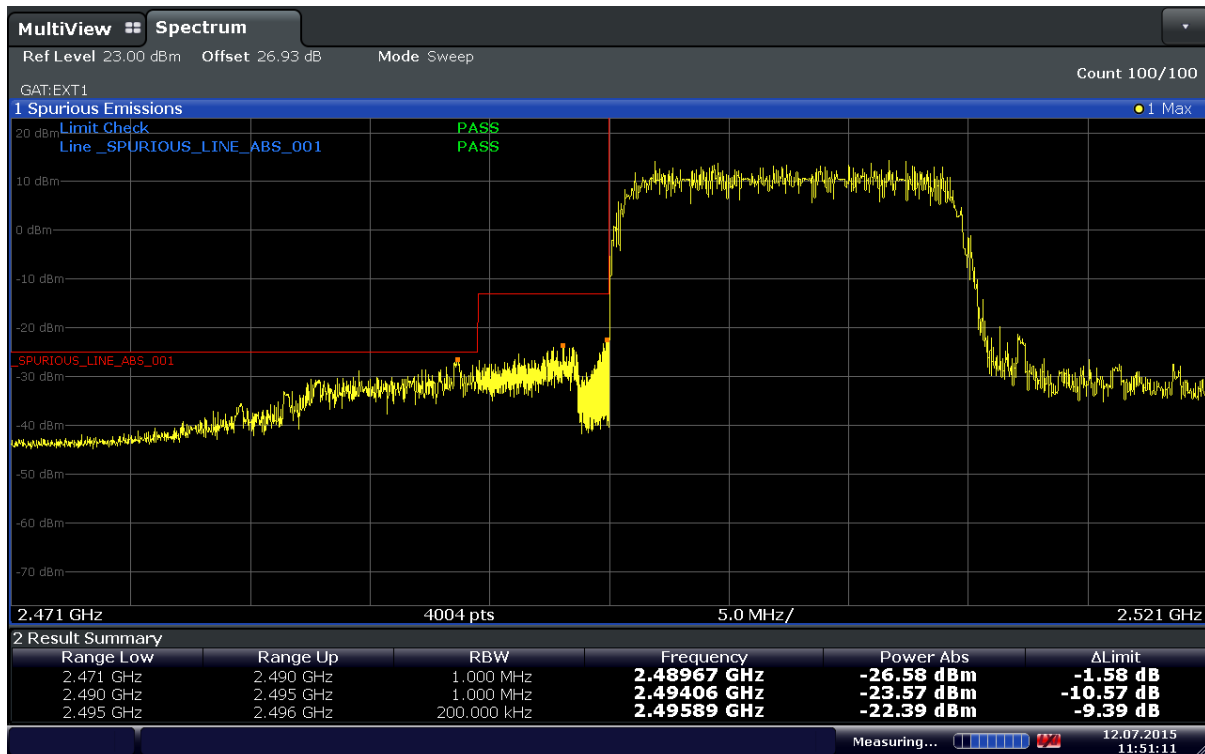


Date: 12 JUL 2015 11:51:12

Plot 6-73. Lower Band Edge Plot (Band41 – 15MHz – QPSK – RB Size 75)

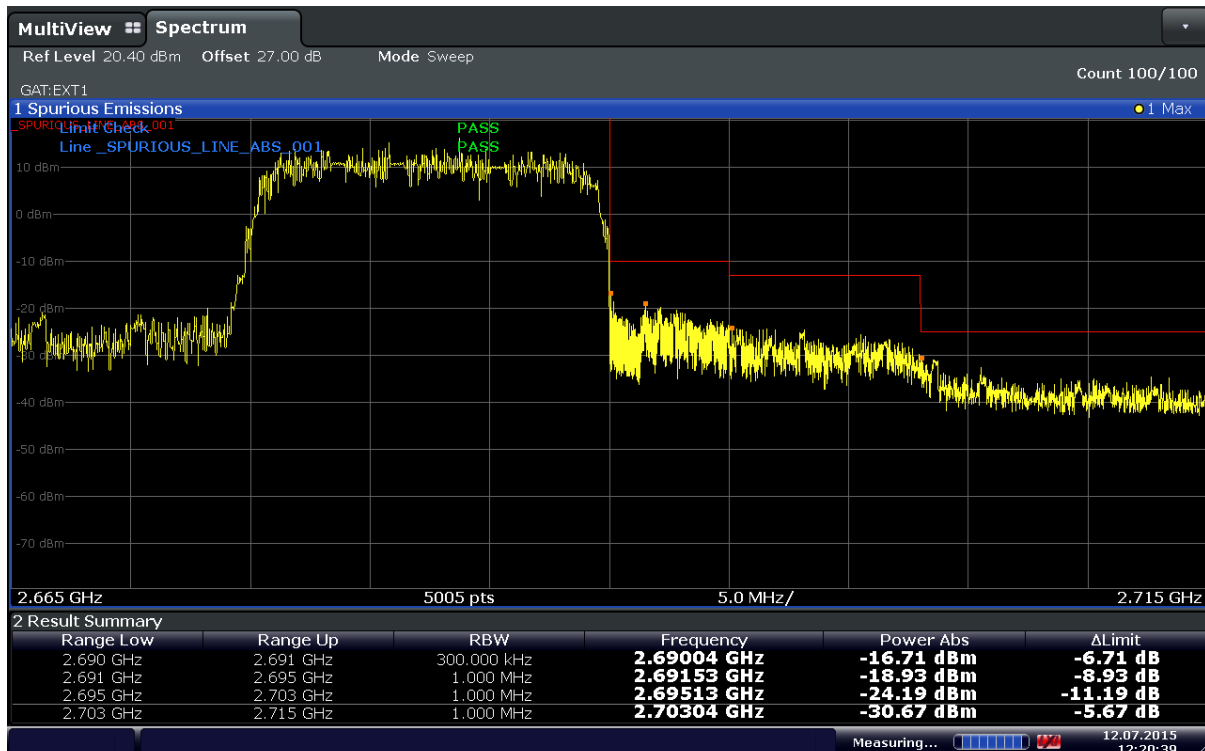


Date: 12 JUL 2015 12:20:39

Plot 6-74. Upper Band Edge Plot (Band41 – 15MHz – QPSK – RB Size 75)

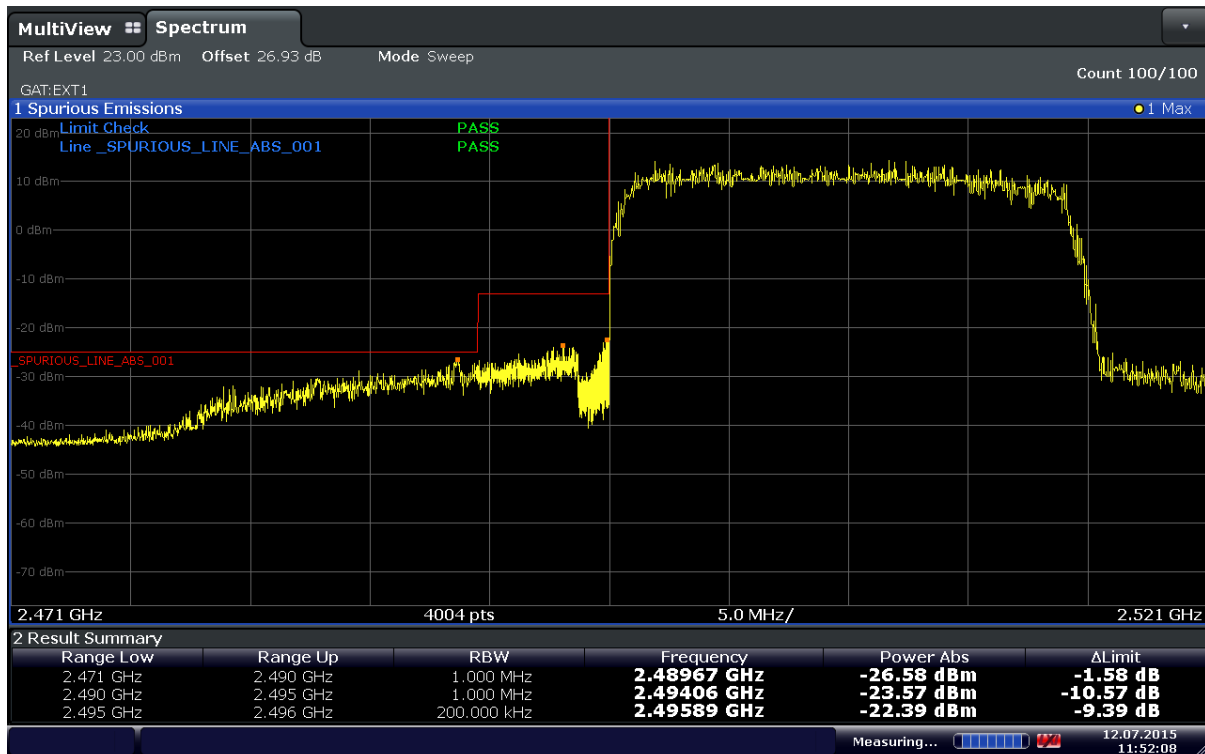


Date: 12 JUL 2015 11:52:08

Plot 6-75. Lower Band Edge Plot (Band41 – 20MHz – QPSK – RB Size 100)

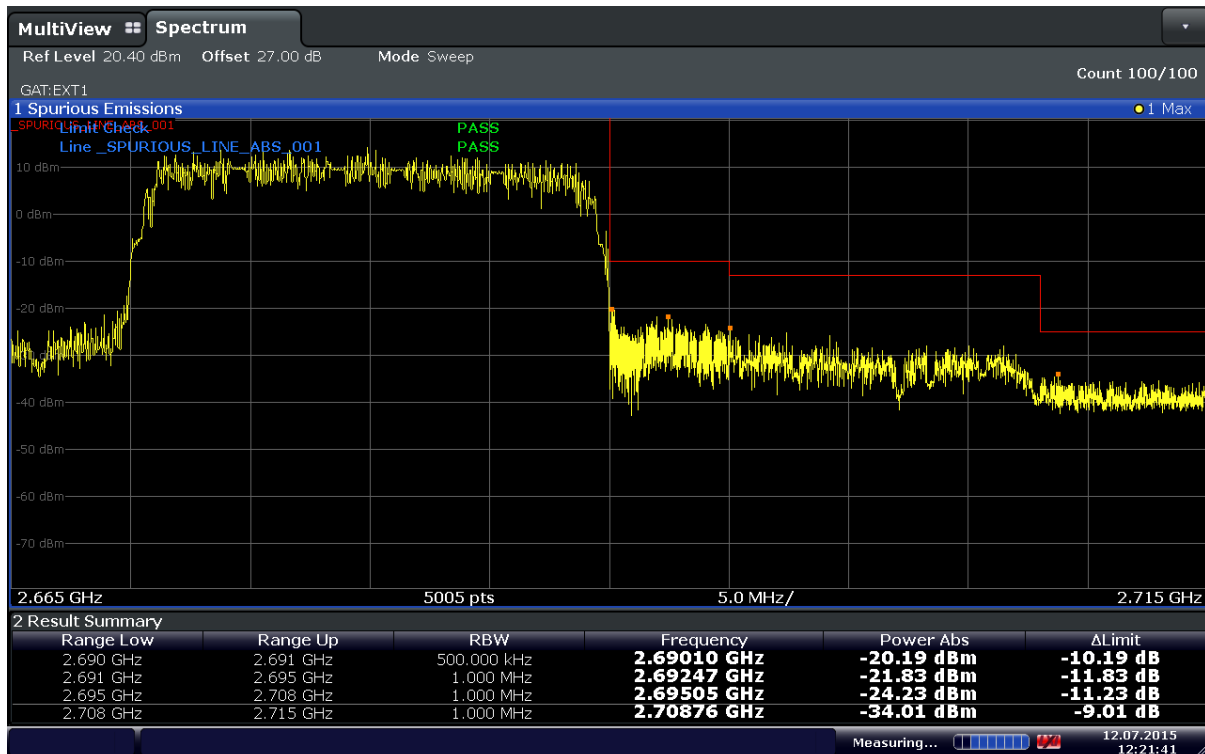


Date: 12 JUL 2015 12:21:42

Plot 6-76. Upper Band Edge Plot (Band41 – 20MHz – QPSK – RB Size 100)

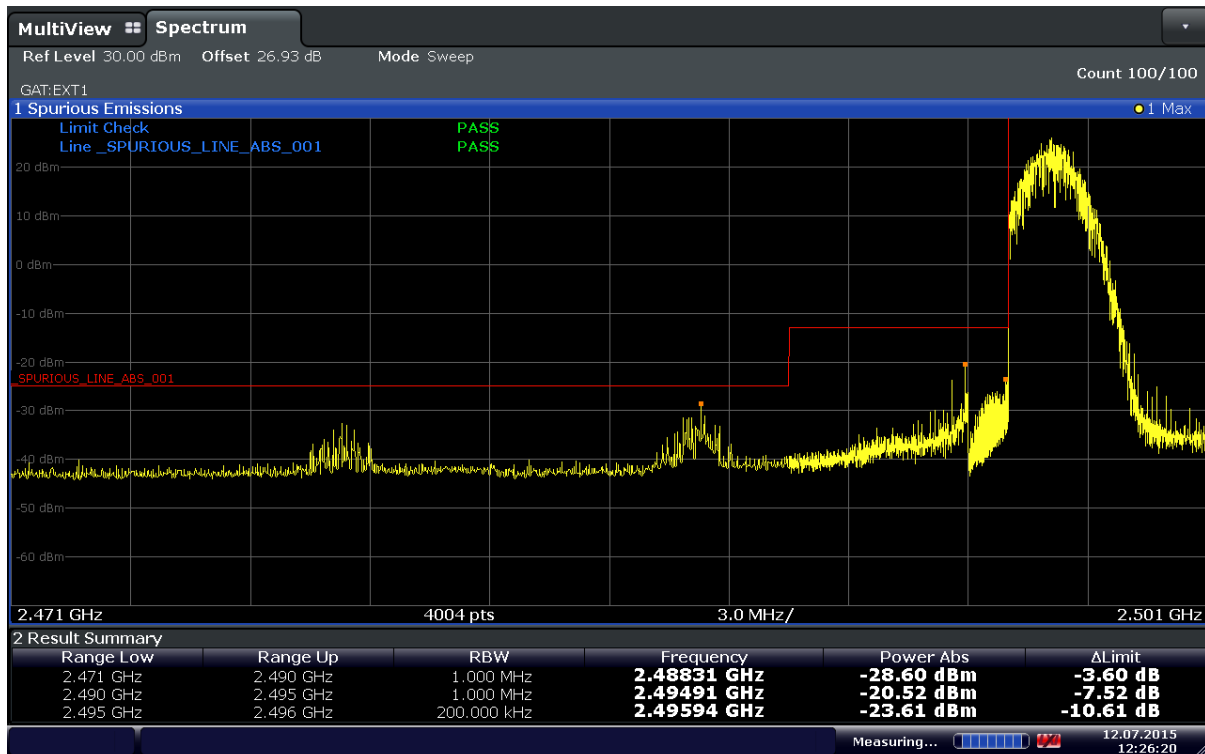

Date: 12 JUL 2015 12:26:20

Plot 6-77. Lower Band Edge Plot (Band41 – 20MHz – QPSK – RB Size 1 – RB Offset 0)

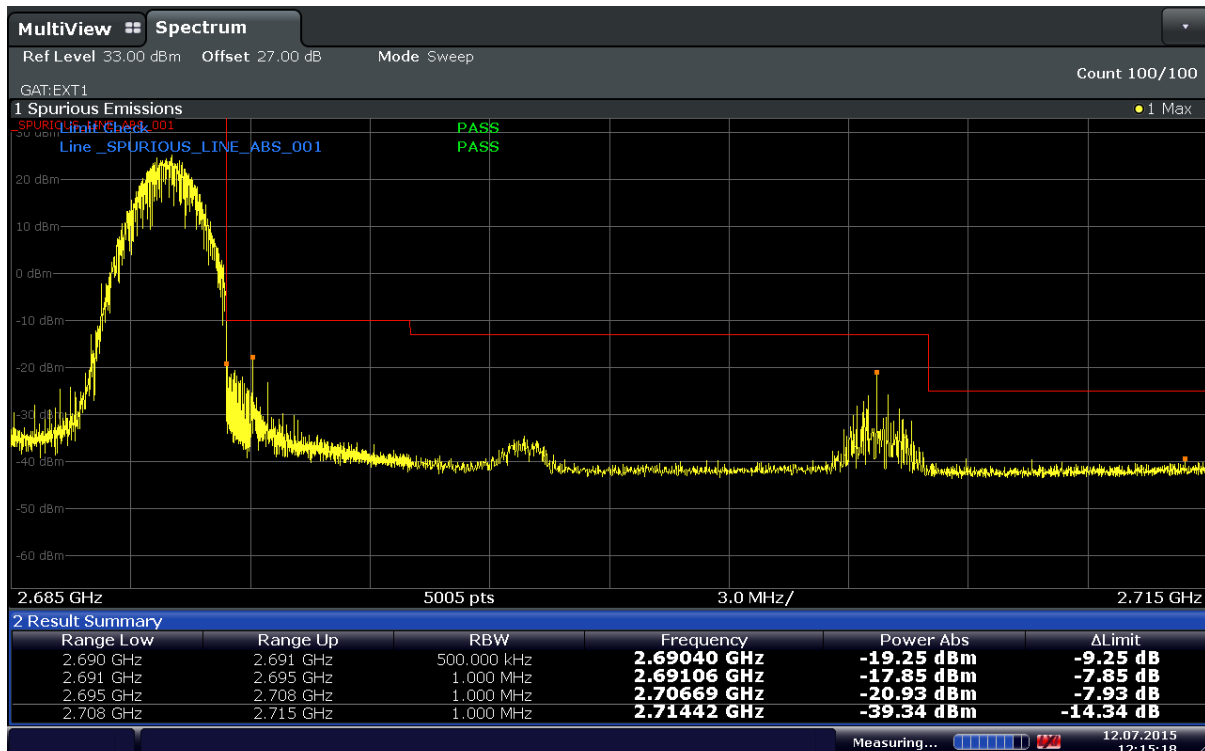

Date: 12 JUL 2015 12:15:19

Plot 6-78. Upper Band Edge Plot (Band41 – 20MHz – QPSK – RB Size 1 – RB Offset 99)

6.5. Frequency Stability / Temperature Variation

§2.1055 §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

1. Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
2. Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for other than hand carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point(=Batt.End) which shall be specified by the manufacturer.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of time sufficient to stabilize EUT at each temperature level shall be allowed prior to frequency measurement.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

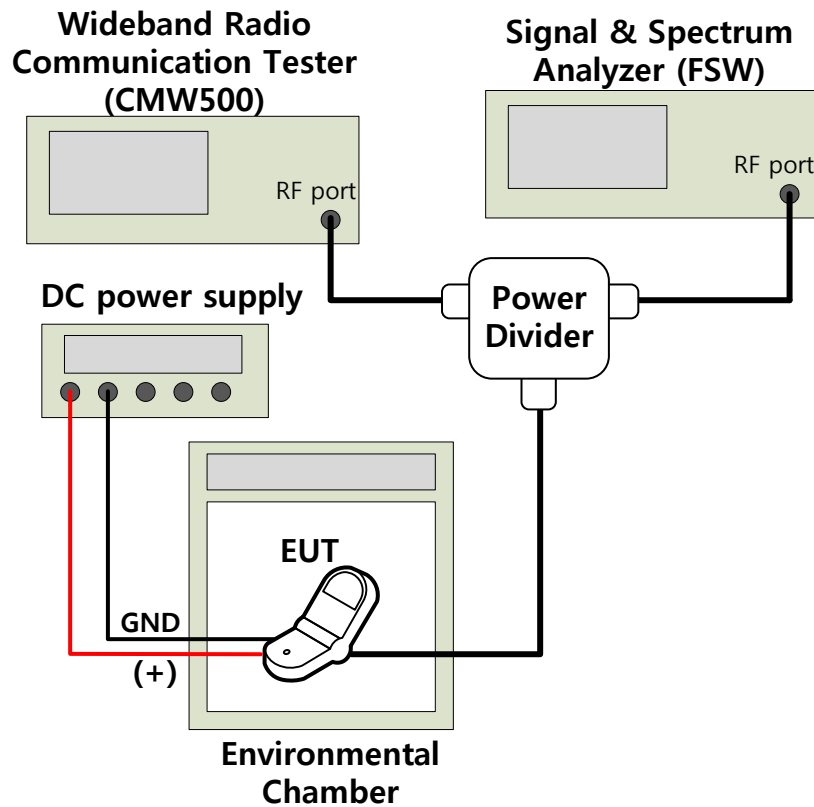


Figure 6-4. Test Instruments & Measurement Setup

Test Notes

1. MCF is the Measured Carrier Frequency
ACF is the Assigned Carrier Frequency
2. Calculate the ppm frequency error by the following:

$$\text{ppm error} = \left(\frac{\text{MCF}_{[\text{MHz}]} - \text{ACF}_{[\text{MHz}]}}{\text{ACF}_{[\text{MHz}]}} \right) \times 10^6$$

3. Per part 27, the fundamental emission should stay within the authorized frequency block. But, based on the results of the frequency stability test at the center channel, the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Mode : LTE Band 17
Channel : 23755
Operating Frequency : 706.5 MHz
Reference Voltage : 3.85 VDC

Voltage [%]	Power [VDC]	Temp [°C]	ACF [MHz]	MCF [MHz]	Freq. Dev. [Hz]	ppm error
100 %	3.85	-30	706.5	706.499999	-1.25	-0.002
		-20	706.5	706.500002	1.71	0.002
		-10	706.5	706.500000	0.41	0.001
		0	706.5	706.499999	-1.25	-0.002
		+10	706.5	706.500004	3.65	0.005
		+20	706.5	706.499996	-3.78	-0.005
		+30	706.5	706.499994	-6.14	-0.009
		+40	706.5	706.500001	0.68	0.001
		+50	706.5	706.499998	-2.33	-0.003
Batt.End	3.40	+20	706.5	706.499998	-1.76	-0.002

Table 6-2. Frequency Stability Data (LTE Band 17)

Mode : LTE Band 41
Channel : 41490
Operating Frequency : 2652.5 MHz
Reference Voltage : 3.85 VDC

Voltage [%]	Power [VDC]	Temp [°C]	ACF [MHz]	MCF [MHz]	Freq. Dev. [Hz]	ppm error
100 %	3.85	-30	2652.5	2,652.500021	20.62	0.008
		-20	2652.5	2,652.500017	16.84	0.006
		-10	2652.5	2,652.499979	-21.42	-0.008
		0	2652.5	2,652.499981	-19.33	-0.007
		+10	2652.5	2,652.499986	-13.66	-0.005
		+20	2652.5	2,652.500015	15.18	0.006
		+30	2652.5	2,652.499984	-15.83	-0.006
		+40	2652.5	2,652.500016	15.72	0.006
		+50	2652.5	2,652.500018	18.48	0.007
Batt.End	3.40	+20	2652.5	2,652.499988	-12.42	-0.005

Table 6-3. Frequency Stability Data (LTE Band 41)



6.6. Radiated Power (ERP/EIRP)
§27.50(c.10) §27.50(h.2)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedure Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for continuous signals with trigger and gating operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto" for Band 17,
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration for Band 41, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

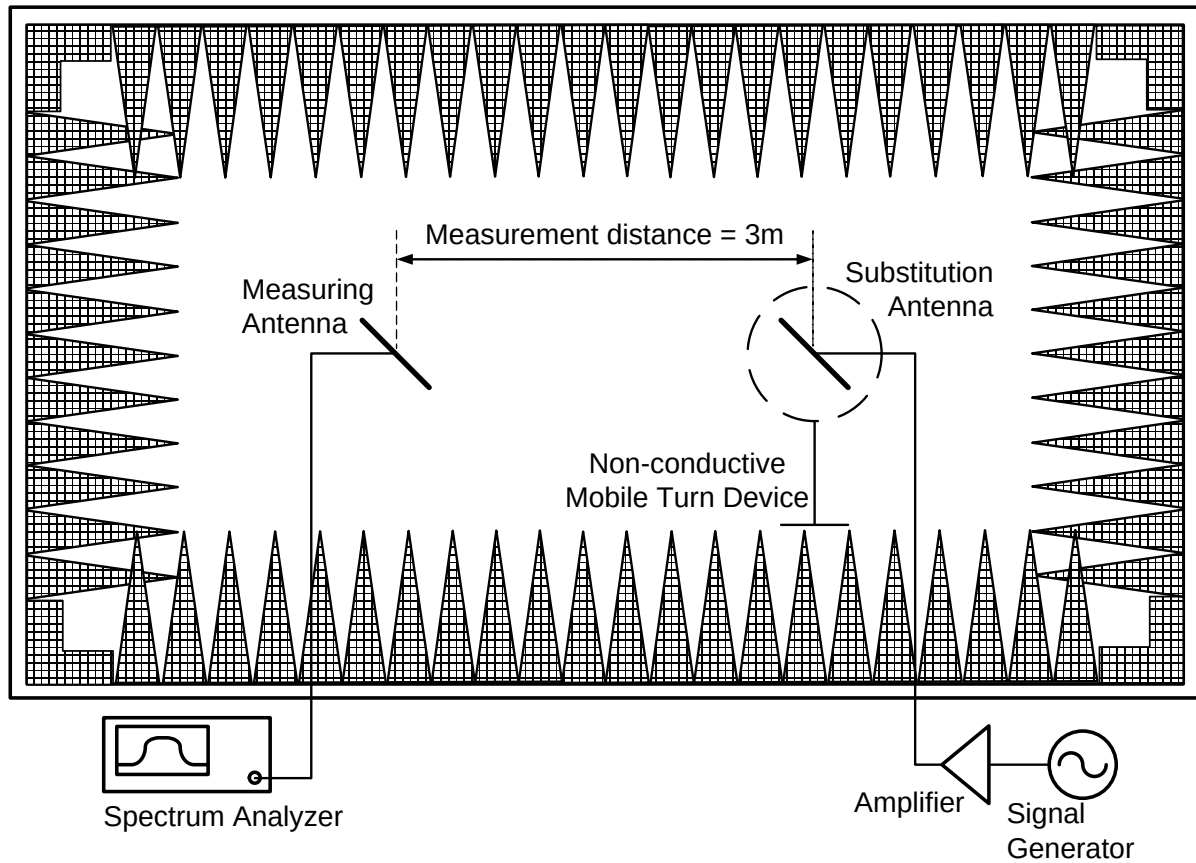


Figure 6-7. Test Instruments & Measurement Setup

Test Notes

1. The EUT was tested with Turn Device and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its embedded battery.

Test Results

Channel	Channel BW [MHz]	Mod.	RB Size /Offset	Ant Pol (H/V)	EUT POL [degree]		S/A Reading [dBm]	S/G Level [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	ERP [dBm]	Margin [dB]
					Azimuth	Elevation						
23755	5	QPSK	1 / 0	H	303	20	-17.77	17.95	2.85	-0.88	14.21	20.56
23755	5	16QAM	1 / 0	H	300	0	-17.86	17.86	2.85	-0.88	14.12	20.65
23790	5	QPSK	1 / 0	H	300	10	-17.48	18.32	2.86	-0.87	14.59	20.18
23790	5	16QAM	1 / 0	H	295	0	-17.90	17.90	2.86	-0.87	14.17	20.60
23825	5	QPSK	1 / 0	H	290	0	-17.62	18.27	2.87	-0.86	14.54	20.23
23825	5	16QAM	1 / 0	H	290	10	-18.03	17.86	2.87	-0.86	14.13	20.64
23780	10	QPSK	1 / 24	H	306	0	-17.51	18.27	2.86	-0.87	14.54	20.23
23780	10	16QAM	1 / 24	H	302	360	-18.19	17.59	2.86	-0.87	13.86	20.91
23790	10	QPSK	1 / 24	H	304	10	-17.26	18.54	2.86	-0.87	14.81	19.96
23790	10	16QAM	1 / 24	H	286	360	-17.89	17.91	2.86	-0.87	14.18	20.59
23800	10	QPSK	1 / 24	H	300	315	-17.24	18.59	2.86	-0.87	14.86	19.92
23800	10	16QAM	1 / 0	H	300	20	-17.76	18.07	2.86	-0.87	14.34	20.44

Table 6-4. ERP (LTE Band 17)

Channel	Channel BW [MHz]	Mod.	RB Size /Offset	Ant Pol (H/V)	EUT POL [degree]		S/A Reading [dBm]	S/G Level [dBm]	Tx C/L [dB]	Ant. Gain [dBi]	ERP [dBm]	Margin [dB]
					Azimuth	Elevation						
39675	5	QPSK	1 / 0	V	125	270	-33.84	8.05	5.60	10.51	12.96	20.05
39675	5	16QAM	1 / 0	V	123	272	-35.81	6.08	5.60	10.51	10.99	22.02
40620	5	QPSK	1 / 12	V	135	275	-33.58	38.97	5.71	10.68	14.01	19.00
40620	5	16QAM	1 / 24	V	132	270	-33.98	38.97	5.71	10.68	13.61	19.40
41565	5	QPSK	1 / 24	V	131	273	-33.68	10.23	5.81	10.83	15.24	17.77
41565	5	16QAM	1 / 0	V	130	270	-34.21	9.70	5.81	10.83	14.71	18.30
39700	10	QPSK	1 / 24	V	126	278	-33.52	8.39	5.60	10.51	13.29	19.72
39700	10	16QAM	1 / 49	V	121	280	-34.03	7.88	5.60	10.51	12.78	20.23
40620	10	QPSK	1 / 49	V	133	275	-33.70	8.93	5.71	10.68	13.89	19.12
40620	10	16QAM	1 / 49	V	130	275	-34.15	8.48	5.71	10.68	13.44	19.57
41540	10	QPSK	1 / 24	V	142	240	-33.56	10.36	5.81	10.83	15.38	17.63
41540	10	16QAM	1 / 49	V	140	245	-34.07	9.85	5.81	10.83	14.87	18.14
39725	15	QPSK	1 / 0	V	123	276	-32.97	8.95	5.60	10.51	13.86	19.15
39725	15	16QAM	1 / 0	V	120	275	-33.21	8.71	5.60	10.51	13.62	19.39
40620	15	QPSK	1 / 37	V	135	284	-33.87	8.76	5.71	10.68	13.72	19.29
40620	15	16QAM	1 / 37	V	135	280	-34.54	8.09	5.71	10.68	13.05	19.96
41515	15	QPSK	1 / 0	V	126	265	-34.31	9.62	5.82	10.84	14.64	18.37
41515	15	16QAM	1 / 37	V	125	265	-35.32	8.61	5.82	10.84	13.63	19.38
39750	20	QPSK	1 / 0	V	124	281	-33.08	8.85	5.61	10.51	13.76	19.25
39750	20	16QAM	1 / 0	V	125	280	-33.71	8.22	5.61	10.51	13.13	19.88
40620	20	QPSK	1 / 99	V	134	278	-33.81	38.97	5.71	10.68	13.78	19.23
40620	20	16QAM	1 / 99	V	135	280	-33.84	38.97	5.71	10.68	13.75	19.26
41490	20	QPSK	1 / 99	V	125	270	-34.99	8.96	5.82	10.84	13.98	19.03
41490	20	16QAM	1 / 99	V	125	270	-35.57	8.38	5.82	10.84	13.40	19.61

Table 6-5. EIRP (LTE Band 41)



6.7. Radiated Spurious Emissions Measurements §2.1053 §27.53(g) §27.53(m)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedure Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. No. of sweep points $\geq$ Span / RBW
4. Detector = Max Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

– End of this page –

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

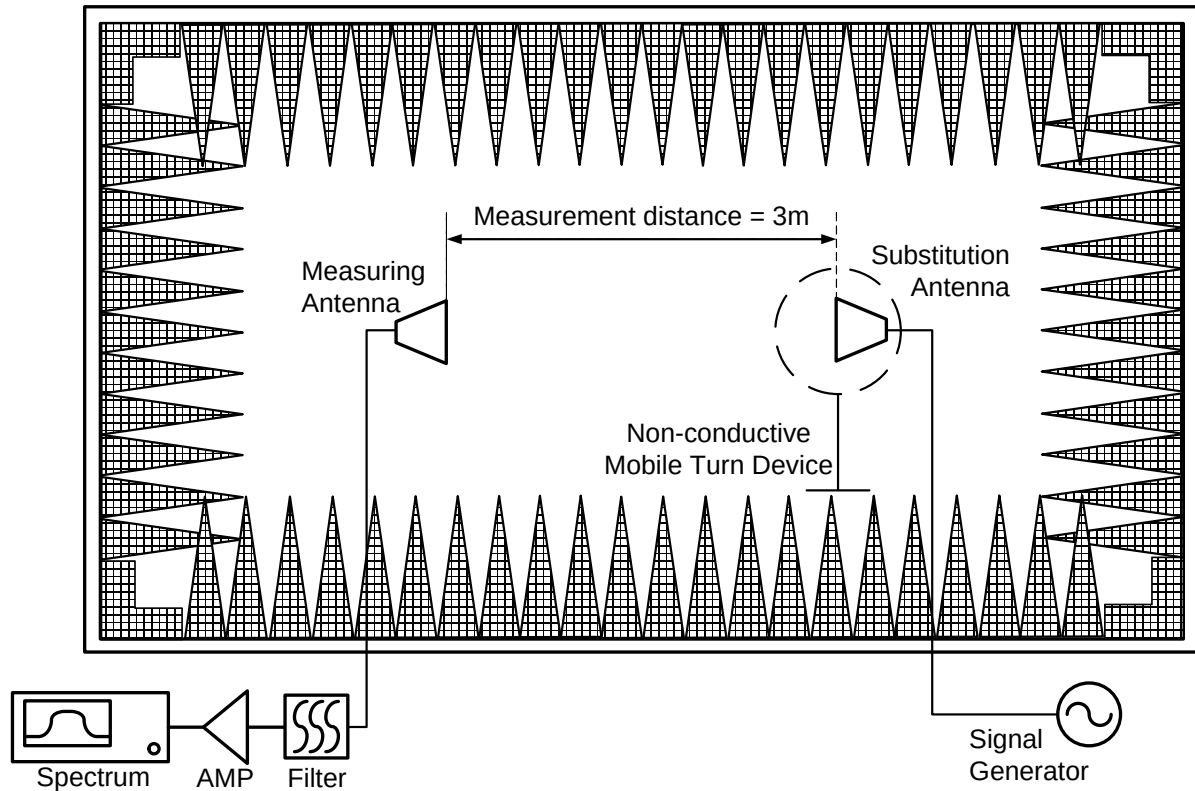


Figure 6-8. Test Instruments & Measurement Setup

Test Notes

1. The EUT was tested with Turn Device and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its embedded battery.
3. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.

Test Results

Operating Frequency : 709.0 MHz
 Channel : 23780
 Measured Output Power : 24.54 dBm = 0.028 Watt
 Modulation Signal : QPSK
 Band Width : 10 MHz
 RB Size / Offset : 1 / 24
 Distance : 3 meters
 Limit : $43 + 10 \log_{10}(W)$ = 27.54 dBc
 RSE Limit : -13 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	RSE Level [dBm]
		Azimuth	Elevation					
1418.1	V	90	317	-67.82	-66.13	4.13	6.10	-64.16
2127.2	H	104	300	-68.44	-61.67	5.13	7.45	-59.34
2836.2	V	227	205	-71.12	-63.85	6.00	8.86	-60.99
3545.3	H	360	270	-71.69	-60.70	6.80	10.11	-57.39
4254.3	H	Noise floor		-76.50	-62.46	7.51	10.77	-59.20

Table 6-6. Radiated Spurious Data (LTE Band 17 – Low Channel)

Operating Frequency : 710.0 MHz
 Channel : 23790
 Measured Output Power : 14.81 dBm = 0.030 Watt
 Modulation Signal : QPSK
 Band Width : 10 MHz
 RB Size / Offset : 1 / 24
 Distance : 3 meters
 Limit : $43 + 10 \log_{10}(W)$ = 27.81 dBc
 RSE Limit : -13 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	RSE Level [dBm]
		Azimuth	Elevation					
1420.2	V	73	300	-67.51	-65.81	4.14	6.12	-63.83
2130.3	H	104	288	-68.52	-61.73	5.13	7.42	-59.44
2840.4	V	220	44	-69.72	-62.50	6.00	8.85	-59.65
3550.5	H	320	360	-76.33	-65.27	6.80	10.09	-61.98

Table 6-7. Radiated Spurious Data (LTE Band 17 – Mid Channel)

Operating Frequency : 711.0 MHz
 Channel : 23800
 Measured Output Power : 14.86 dBm = 27.86 Watt
 Modulation Signal : QPSK
 Band Width : 10 MHz
 RB Size / Offset : 1 / 24
 Distance : 3 meters
 Limit : $43 + 10 \log_{10}(W)$ = 27.86 dBc
 RSE Limit : -13 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBd]	RSE Level [dBm]
		Azimuth	Elevation					
1413.11	V	74	300	-68.50	-66.79	4.14	6.13	-64.81
2119.78	H	104	270	-69.02	-62.22	5.14	7.39	-59.96
2826.41	V	220	0	-71.24	-64.07	6.00	8.85	-61.23
3532.73	H	152	220	-75.08	-63.98	6.81	10.09	-60.70

Table 6-8. Radiated Spurious Data (LTE Band 17 – High Channel)

Operating Frequency : 2503.5 MHz
 Channel : 39725
 Measured Output Power : 13.86 dBm = 0.024 Watt
 Modulation Signal : QPSK
 Band Width : 15 MHz
 RB Size / Offset : 1 / 0
 Distance : 3 Meters
 Limit : $55 + 10 \log_{10}(W)$ = 38.86 dBc
 RSE Limit : -25 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBi]	RSE Level [dBm]
		Azimuth	Elevation					
4993.7	H	115	338	-73.38	-56.47	8.18	12.70	-51.95
7490.6	H	37	216	-76.22	-48.60	10.01	10.62	-48.00
9987.4	H	51	300	-75.33	-43.57	11.79	11.56	-43.80
12484.3	H	Noise floor		-75.58	-43.74	13.30	13.50	-43.54

Table 6-9. Radiated Spurious Data (LTE Band 41 – Low Channel)

Operating Frequency : 2593.0 MHz
 Channel : 40620
 Measured Output Power : 14.01 dBm = 0.025 Watt
 Modulation Signal : QPSK
 Band Width : 5 MHz
 RB Size / Offset : 1 / 12
 Distance : 3 meters
 Limit : $55 + 10 \log_{10}(W)$ = 39.01 dBc
 RSE Limit : -25 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBi]	RSE Level [dBm]
		Azimuth	Elevation					
5186.0	H	166	219	-73.44	-55.42	8.33	12.42	-51.33
7779.0	H	200	167	-76.58	-50.05	10.28	11.06	-49.27
10372.0	H	242	180	-77.42	-45.49	12.01	11.22	-46.29

Table 6-10. Radiated Spurious Data (LTE Band 41 – Mid Channel)

Operating Frequency : 2685.0 MHz
 Channel : 41540
 Measured Output Power : 15.38 dBm = 0.035 Watt
 Modulation Signal : QPSK
 Band Width : 10 MHz
 RB Size / Offset : 1 / 24
 Distance : 3 meters
 Limit : $55 + 10 \log_{10}(W)$ = 40.38 dBc
 RSE Limit : -25 dBm

Freq. [MHz]	Ant Pol (H/V)	EUT Pol [degree]		S/A reading [dBm]	S/G Lev. [dBm]	Tx C/L [dB]	Ant. Gain [dBi]	RSE Level [dBm]
		Azimuth	Elevation					
5365.0	H	200	340	-74.41	-56.32	8.38	13.00	-51.70
8047.5	H	200	310	-75.28	-47.24	10.51	10.76	-46.99
10730.0	H	30	335	-76.61	-44.01	12.36	10.99	-45.38

Table 6-11. Radiated Spurious Data (LTE Band 41 – High Channel)



7. CONCLUSION

The data collected relate only the item(s) tested and show that the Samsung Portable Handset FCC ID: A3LSMG928KOR compliance with all the requirements of Parts 2 and 27 of the FCC rules.

– End of this report –