



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

01/02/17 – 02/13/17

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

1M1701160026-01.A3L

FCC ID:

A3LSMG9550

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

SM-G9550

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)	10 gm Phablet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.16	0.27	0.54	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.15	0.74	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.15	0.25	0.42	N/A
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.11	0.50	0.73	3.21
PCE	Cell. CDMA/EVDO	824.70 - 848.31 MHz	0.27	0.44	0.63	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	< 0.1	0.10	0.17	N/A
PCE	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.14	0.19	0.30	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.21	0.33	0.53	N/A
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.20	0.27	0.43	N/A
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.13	0.64	0.55	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.15	0.54	0.79	3.29
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	0.32	0.40	N/A
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.46	0.20	0.37	N/A
Nil	U-NII-1	5180 - 5240 MHz	N/A	N/A	N/A	N/A
Nil	U-NII-2A	5260 - 5320 MHz	0.15	0.23	N/A	0.87
Nil	U-NII-2C	5500 - 5720 MHz	0.28	0.29	N/A	0.93
Nil	U-NII-3	5745 - 5825 MHz	0.49	0.16	0.19	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.10	< 0.1	< 0.1	0.68
Simultaneous SAR per KDB 690783 D01v01r03:			1.40	1.16	1.52	3.97

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 1 of 98

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	12
3	INTRODUCTION	13
4	DOSIMETRIC ASSESSMENT	14
5	DEFINITION OF REFERENCE POINTS.....	15
6	TEST CONFIGURATION POSITIONS.....	16
7	RF EXPOSURE LIMITS	20
8	FCC MEASUREMENT PROCEDURES.....	21
9	RF CONDUCTED POWERS.....	28
10	SYSTEM VERIFICATION.....	64
11	SAR DATA SUMMARY	68
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	85
13	SAR MEASUREMENT VARIABILITY	93
14	EQUIPMENT LIST.....	94
15	MEASUREMENT UNCERTAINTIES.....	95
16	CONCLUSION.....	96
17	REFERENCES	97
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 2 of 98

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
Cell. CDMA/EVDO	Voice/Data	824.70 - 848.31 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
ANT+	Data	2402 - 2480 MHz
MST	Data	555 Hz - 8.33 kHz

1.2 Power Reduction for SAR

This device utilizes a single step power reduction mechanism for SAR compliance under portable hotspot conditions for some wireless modes and bands. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 3 of 98

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum PCE Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)					Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	
GSM/GPRS/EDGE 850	Maximum	33.0	33.0	31.5	29.8	27.8	27.0	25.5	23.5	22.0	
	Nominal	32.5	32.5	31.0	29.3	27.3	26.5	25.0	23.0	21.5	
GSM/GPRS/EDGE 1900	Maximum	30.0	30.0	29.0	27.0	25.0	25.7	24.7	22.7	21.3	
	Nominal	29.5	29.5	28.5	26.5	24.5	25.2	24.2	22.2	20.8	

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	23.5	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	23.5	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0	23.0

Mode / Band		Modulated Average (dBm)
Cell. CDMA/EVDO	Maximum	26.0
	Nominal	25.5

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	24.0
	Nominal	23.5
LTE Band 17	Maximum	24.0
	Nominal	23.5
LTE Band 13	Maximum	24.0
	Nominal	23.5
LTE Band 5 (Cell)	Maximum	24.5
	Nominal	24.0
LTE Band 26 (Cell)	Maximum	24.0
	Nominal	23.5
LTE Band 4 (AWS)	Maximum	24.0
	Nominal	23.5
LTE Band 25 (PCS)	Maximum	23.5
	Nominal	23.0
LTE Band 2 (PCS)	Maximum	23.5
	Nominal	23.0
LTE Band 41	Maximum	25.0
	Nominal	24.5

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 4 of 98

1.3.2 Reduced PCE Power – Hotspot Mode Activated

Mode / Band		Burst Average GMSK (dBm)			
		1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GPRS 1900	Maximum	28.0	27.0	25.0	23.0
	Nominal	27.5	26.5	24.5	22.5

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 2 (1900 MHz)	Maximum	20.5	20.5	20.5	20.5
	Nominal	20.0	20.0	20.0	20.0

Mode / Band		Modulated Average (dBm)
LTE Band 4 (AWS)	Maximum	20.5
	Nominal	20.0
LTE Band 25 (PCS)	Maximum	20.5
	Nominal	20.0
LTE Band 2 (PCS)	Maximum	20.5
	Nominal	20.0
LTE Band 41	Maximum	21.0
	Nominal	20.5

1.3.3 Maximum Bluetooth and SISO and MIMO WLAN Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	20.5
	Nominal	20.0
IEEE 802.11g (2.4 GHz)	Maximum	17.5
	Nominal	17.0
IEEE 802.11n (2.4 GHz)	Maximum	16.5
	Nominal	16.0

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	15.5		
	Nominal	15.0		
IEEE 802.11n (5 GHz)	Maximum	15.5	15.5	
	Nominal	15.0	15.0	
IEEE 802.11ac (5 GHz)	Maximum	15.5	15.5	15.5
	Nominal	15.0	15.0	15.0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 5 of 98

Mode / Band		Modulated Average - MIMO (dBm)	
		20 MHz Bandwidth	
		Ch. 1-10	Ch. 11
IEEE 802.11g (2.4 GHz)	Maximum	20.5	19.5
	Nominal	20.0	19.0
IEEE 802.11n (2.4 GHz)	Maximum	19.5	
	Nominal	19.0	

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	18.5		
	Nominal	18.0		
IEEE 802.11n (5 GHz)	Maximum	18.5	18.5	
	Nominal	18.0	18.0	
IEEE 802.11ac (5 GHz)	Maximum	18.5	18.5	18.5
	Nominal	18.0	18.0	18.0

Mode / Band		Modulated Average - Single Tx Chain (dBm)
Bluetooth (1Mbps)	Maximum	16.0
	Nominal	15.5
Bluetooth (EDR)	Maximum	10.0
	Nominal	9.5
Bluetooth LE	Maximum	8.5
	Nominal	8.0

1.3.4 Reduced SISO and MIMO WLAN Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	16.5
	Nominal	16.0
IEEE 802.11g (2.4 GHz)	Maximum	16.5
	Nominal	16.0
IEEE 802.11n (2.4 GHz)	Maximum	16.5
	Nominal	16.0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 6 of 98

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	13.5		
	Nominal	13.0		
IEEE 802.11n (5 GHz)	Maximum	13.5	13.5	
	Nominal	13.0	13.0	
IEEE 802.11ac (5 GHz)	Maximum	13.5	13.5	13.5
	Nominal	13.0	13.0	13.0

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11g (2.4 GHz)	Maximum	19.5		
	Nominal	19.0		
IEEE 802.11n (2.4 GHz)	Maximum	19.5		
	Nominal	19.0		
IEEE 802.11a (5 GHz)	Maximum	16.5		
	Nominal	16.0		
IEEE 802.11n (5 GHz)	Maximum	16.5	16.5	
	Nominal	16.0	16.0	
IEEE 802.11ac (5 GHz)	Maximum	16.5	16.5	16.5
	Nominal	16.0	16.0	16.0

1.3.1 Maximum Powers During Conditions with Simultaneous 2.4 GHz and 5 GHz WLAN

	# Tx	5 GHz WiFi [dBm]		2.4 GHz WiFi [dBm]		802.11 Modes
		Ant1	Ant2	Ant1	Ant2	
2.4 GHz + 5 GHz	2	A	-	-	B	2.4 GHz: b,g,n 5 GHz: a,n,ac
	2	-	A	B	-	
	2	A	-	B	-	
	2	-	A	-	B	
	3	A	A	B	-	2.4 GHz: b, g, n 5 GHz: n, ac, a (CDD + STBC only)
	3	A	A	-	B	
	3	A	-	B	B	2.4 GHz: n, g (CDD + STBC only) 5 GHz: a, n, ac
	3	-	A	B	B	
	4	A	A	B	B	2.4 GHz: n, g (CDD + STBC only) 5 GHz: n, ac, a (CDD + STBC only)

A = 13 dBm

B = 13 dBm

(Upper tolerance: target + 0.5 dB)

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 7 of 98

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
Cell. EVDO	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
Bluetooth	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

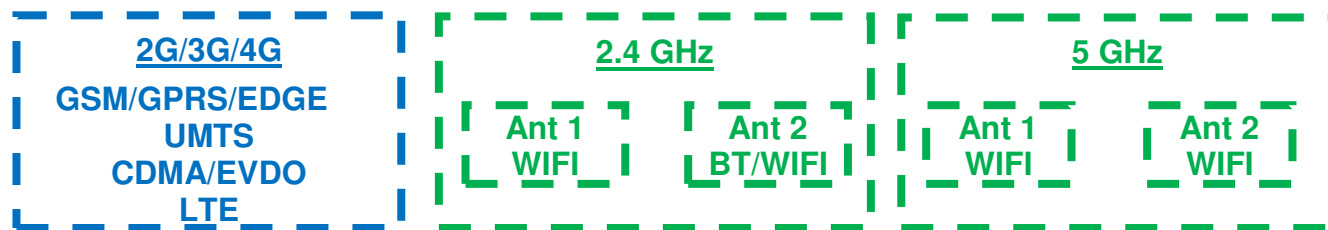


Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 8 of 98

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz W-FI	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz W-FI	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz W-FI + 5 GHz W-FI	Yes	Yes	N/A	Yes	
4	1x CDMA voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^BT Tethering applications are considered.
5	1x CDMA voice + 2.4 GHz W-FI MIMO	Yes	Yes	N/A	Yes	
6	1x CDMA voice + 5 GHz W-FI MIMO	Yes	Yes	N/A	Yes	
7	1x CDMA voice + 2.4 GHz W-FI MIMO + 5 GHz W-FI MIMO	Yes	Yes	N/A	Yes	
8	GSM voice + 2.4 GHz W-FI	Yes	Yes	N/A	Yes	
9	GSM voice + 5 GHz W-FI	Yes	Yes	N/A	Yes	
10	GSM voice + 2.4 GHz W-FI + 5 GHz W-FI	Yes	Yes	N/A	Yes	
11	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^BT Tethering applications are considered.
12	GSM voice + 2.4 GHz W-FI MIMO	Yes	Yes	N/A	Yes	
13	GSM voice + 5 GHz W-FI MIMO	Yes	Yes	N/A	Yes	
14	GSM voice + 2.4 GHz W-FI MIMO + 5 GHz W-FI MIMO	Yes	Yes	N/A	Yes	
15	UMTS + 2.4 GHz W-FI	Yes	Yes	Yes	Yes	
16	UMTS + 5 GHz W-FI	Yes	Yes	Yes	Yes	
17	UMTS + 2.4 GHz W-FI + 5 GHz W-FI	Yes	Yes	Yes	Yes	
18	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^BT Tethering applications are considered.
19	UMTS + 2.4 GHz W-FI MIMO	Yes	Yes	Yes	Yes	
20	UMTS + 5 GHz W-FI MIMO	Yes	Yes	Yes	Yes	
21	UMTS + 2.4 GHz W-FI MIMO + 5 GHz W-FI MIMO	Yes	Yes	Yes	Yes	
22	LTE + 2.4 GHz W-FI	Yes	Yes	Yes	Yes	
23	LTE + 5 GHz W-FI	Yes	Yes	Yes	Yes	
24	LTE + 2.4 GHz W-FI + 5 GHz W-FI	Yes	Yes	Yes	Yes	
25	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^BT Tethering applications are considered.
26	LTE + 2.4 GHz W-FI MIMO	Yes	Yes	Yes	Yes	
27	LTE + 5 GHz W-FI MIMO	Yes	Yes	Yes	Yes	
28	LTE + 2.4 GHz W-FI MIMO + 5 GHz W-FI MIMO	Yes	Yes	Yes	Yes	
29	CDMA/EVDO data + 2.4 GHz W-FI	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
30	CDMA/EVDO data + 5 GHz W-FI	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
31	CDMA/EVDO data + 2.4 GHz W-FI + 5 GHz W-FI	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
32	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes*^	Yes*	Yes^	Yes	*-Pre-installed VOIP applications are considered. ^BT Tethering applications are considered.
33	CDMA/EVDO data + 2.4 GHz W-FI MIMO	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
34	CDMA/EVDO data + 5 GHz W-FI MIMO	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
35	CDMA/EVDO data + 2.4 GHz W-FI MIMO + 5 GHz W-FI MIMO	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
36	GPRS/EDGE + 2.4 GHz W-FI	N/A	N/A	Yes	Yes	
37	GPRS/EDGE + 5 GHz W-FI	N/A	N/A	Yes	Yes	
38	GPRS/EDGE + 2.4 GHz W-FI + 5 GHz W-FI	N/A	N/A	Yes	Yes	
39	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes^	Yes	^BT Tethering applications are considered.
40	GPRS/EDGE + 2.4 GHz W-FI MIMO	N/A	N/A	Yes	Yes	
41	GPRS/EDGE + 5 GHz W-FI MIMO	N/A	N/A	Yes	Yes	
42	GPRS/EDGE + 2.4 GHz W-FI MIMO + 5 GHz W-FI MIMO	N/A	N/A	Yes	Yes	

- Bluetooth cannot transmit simultaneously with WLAN.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
- This device supports 2x2 MIMO Tx for WLAN. 802.11 a/g/n/ac supports CDD and STBC and 802.11n/ac additionally supports SDM.
- This device supports Bluetooth tethering for EDR packet only.
- This device supports VOLTE.
- This device supports VoWIFI.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 9 of 98

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

This device supports 64QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is $\leq \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 10 of 98

This device supports both LTE B12 and LTE B17. Since the supported frequency span for LTE B17 falls completely within the supported frequency span for LTE B12, both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B12.

This device supports both LTE B25 (PCS) and LTE B2 (PCS). Since the supported frequency span for LTE B2 (PCS) falls completely within the supported frequency span for LTE B25 (PCS), both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B25 (PCS).

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg.

This device supports LTE Carrier Aggregation (CA) in the uplink for LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance

1.8 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number	Phablet Serial Number
GSM/GPRS/EDGE 850	F7CA0	0813A	0813A	-
GSM/GPRS/EDGE 1900	07EFF	07CF0	07CF0	-
UMTS 850	F7CA0	0813A	0813A	-
UMTS 1900	07EFF	07CF0	07CF0	07CF0
Cell. CDMA/EVDO	07EFF	0813A	0813A	-
LTE Band 12	F80C4	F80C4	F80C4	-
LTE Band 13	F80C4	F80C4	F80C4	-
LTE Band 5 (Cell)	F7CA0	0813A	0813A	-
LTE Band 26 (Cell)	F7CA0	0813A	0813A	-
LTE Band 4 (AWS)	07EFF	07EFF	07EFF	-
LTE Band 25 (PCS)	07EFF	07CF0	07CF0	07CF0
LTE Band 41	F7CF0	0813A	F7CF5	-
2.4 GHz WLAN	0910E	0910E	0910E	-
5 GHz WLAN	F7CA0	0910E	0910E	0910E
Bluetooth	0910E	0910E	0910E	0910E

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 11 of 98

2 LTE INFORMATION

LTE Information					
FCC ID	A3LSMG9550				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 17: 5 MHz	706.5 (23755)		710 (23790)		713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)		710 (23790)		711 (23800)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 16 (QPSK, 16QAM, 64QAM, 256QAM) UL UE Cat 5 (QPSK, 16QAM, 64QAM)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Release 12 Additional Information	This device does not support full CA features on 3GPP Release 12. It supports carrier aggregation features as shown in Section 9. All other uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC unless otherwise specified. The following LTE Release 12 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 12 of 98	

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 13 of 98

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoomTV}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 14 of 98

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

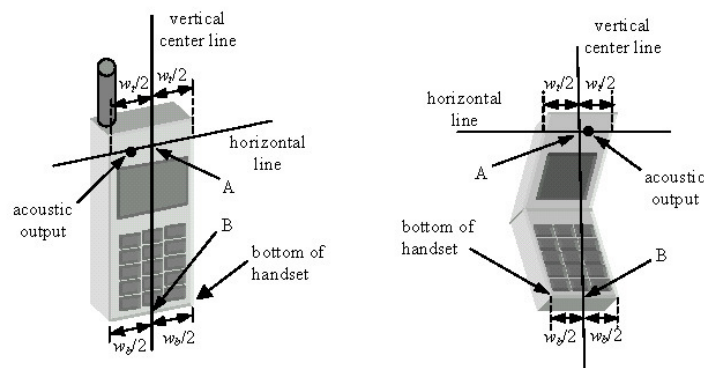


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 15 of 98

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

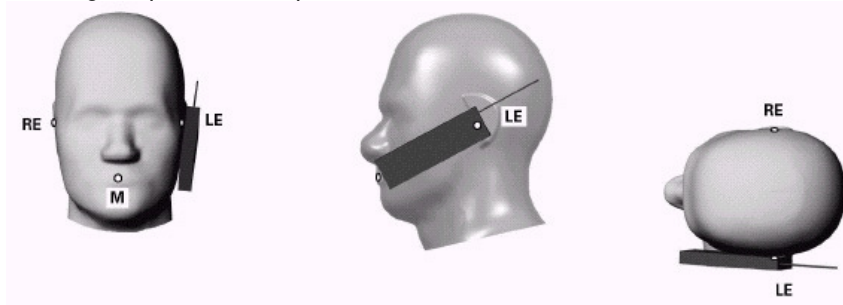


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 16 of 98

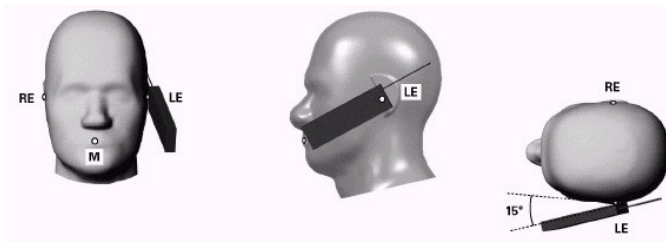


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

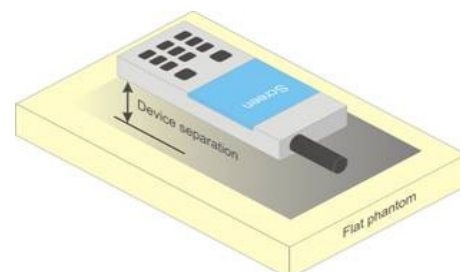


Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 17 of 98

metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 18 of 98

6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 19 of 98

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 20 of 98

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 21 of 98

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements

SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with Ev-Do capabilities, the 3G SAR test reduction procedure is applied to Ev-Do Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 22 of 98

the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For Ev-Do data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with Ev-Do Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.

8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH_n and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 23 of 98

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.5.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 24 of 98

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 25 of 98

those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 26 of 98

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 27 of 98

9 RF CONDUCTED POWERS

9.1 CDMA Conducted Powers

Table 9-1
Maximum Conducted Powers

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SC	FCH	(RTAP)	(RETAP)
Cellular	1013	22H	824.7	25.20	25.11	25.05	25.09	25.11	25.15	25.17
	384	22H	836.52	25.36	25.27	25.21	25.23	25.26	25.32	25.25
	777	22H	848.31	24.70	24.59	24.58	24.54	24.59	24.59	24.54

Note:

1. RC1 is only applicable for IS-95 compatibility.
2. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.




Figure 9-1
Power Measurement Setup

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 28 of 98

9.2 GSM Conducted Powers

Table 9-2
Maximum Conducted Powers

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.90	32.92	30.98	28.87	26.62	26.43	24.65	22.54	20.86
	190	32.96	32.98	31.17	29.04	26.86	26.56	24.68	22.63	21.03
	251	32.92	32.95	31.05	28.98	26.71	26.53	24.71	22.55	20.91
GSM 1900	512	29.94	29.43	28.45	26.20	23.93	25.17	23.86	21.69	20.27
	661	29.98	29.82	28.59	26.37	24.04	25.42	24.14	21.89	20.39
	810	29.98	29.91	28.93	26.47	24.26	25.47	24.26	22.03	20.56
Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.87	23.89	24.96	24.61	23.61	17.40	18.63	18.28	17.85
	190	23.93	23.95	25.15	24.78	23.85	17.53	18.66	18.37	18.02
	251	23.89	23.92	25.03	24.72	23.70	17.50	18.69	18.29	17.90
GSM 1900	512	20.91	20.40	22.43	21.94	20.92	16.14	17.84	17.43	17.26
	661	20.95	20.79	22.57	22.11	21.03	16.39	18.12	17.63	17.38
	810	20.95	20.88	22.91	22.21	21.25	16.44	18.24	17.77	17.55
GSM 850	Frame Avg. Targets:	23.47	23.47	24.98	25.04	24.29	17.47	18.98	18.74	18.49
GSM 1900		20.47	20.47	22.48	22.24	21.49	16.17	18.18	17.94	17.79

FCC ID: A3LSMG9550		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset			Page 29 of 98

Table 9-3
Reduced Conducted Powers – Hotspot Mode Active

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot
GSM 1900	512	27.78	26.52	24.29	22.10
	661	27.98	26.71	24.47	22.36
	810	27.97	26.77	24.59	22.38
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot
GSM 1900	512	18.75	20.50	20.03	19.09
	661	18.95	20.69	20.21	19.35
	810	18.94	20.75	20.33	19.37
GSM 1900	Frame Avg.Targets:	18.47	20.48	20.24	19.49

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.
- There is no power reduction for EDGE 8PSK 1900 when Hotspot mode is activated.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A




Figure 9-2
Power Measurement Setup

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 30 of 98	

9.3 UMTS Conducted Powers

Table 9-4
Maximum Conducted Powers

Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
		4132	4183	4233	9262	9400	9538	
WCDMA	12.2 kbps RMC	23.06	23.23	23.15	23.06	23.05	23.17	-
	12.2 kbps AMR	23.10	23.25	23.15	22.94	23.12	23.10	-
HSDPA	Subtest 1	22.16	22.34	22.29	22.20	21.95	22.15	0
	Subtest 2	22.05	22.21	22.27	22.19	22.02	22.18	0
	Subtest 3	21.54	21.68	21.87	21.68	21.47	21.66	0.5
	Subtest 4	21.60	21.71	21.75	21.67	21.46	21.65	0.5
HSUPA	Subtest 1	22.05	22.33	22.24	21.54	21.68	21.50	0
	Subtest 2	20.04	20.30	20.24	19.55	19.68	19.50	2
	Subtest 3	21.03	21.29	21.27	20.66	20.68	20.51	1
	Subtest 4	20.03	20.28	20.23	19.63	19.59	19.50	2
	Subtest 5	22.13	22.21	22.40	21.57	21.70	21.84	0
DC-HSDPA	Subtest 1	22.14	22.29	22.37	21.56	21.93	21.84	0
	Subtest 2	22.10	22.30	22.21	21.75	22.00	21.50	0
	Subtest 3	21.57	21.68	21.77	21.24	21.45	21.01	0.5
	Subtest 4	21.60	21.72	21.70	21.19	21.47	21.32	0.5

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 31 of 98

Table 9-5
Reduced Conducted Powers – Hotspot Mode Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	PCS Band [dBm]			3GPP MPR [dB]
			9262	9400	9538	
99	WCDMA	12.2 kbps RMC	19.72	19.94	19.73	-
99		12.2 kbps AMR	19.69	19.98	19.75	-
6	HSDPA	Subtest 1	19.00	19.25	19.07	0
6		Subtest 2	18.87	18.96	19.07	0
6		Subtest 3	18.47	18.73	18.56	0.5
6		Subtest 4	18.44	18.72	18.35	0.5
6	HSUPA	Subtest 1	18.75	18.88	18.62	0
6		Subtest 2	16.81	16.92	16.65	2
6		Subtest 3	17.76	17.92	17.66	1
6		Subtest 4	16.78	16.91	16.70	2
6		Subtest 5	18.73	19.22	18.67	0
8	DC-HSDPA	Subtest 1	18.81	19.18	19.08	0
8		Subtest 2	18.99	18.94	18.88	0
8		Subtest 3	18.40	18.44	18.18	0.5
8		Subtest 4	18.25	18.34	18.20	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 9-3
Power Measurement Setup

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 32 of 98

9.4 LTE Conducted Powers

9.4.1 LTE Band 12

Table 9-6
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.70	0	0
	1	25	23.29		0
	1	49	23.11		0
	25	0	22.41	0-1	1
	25	12	22.40		1
	25	25	22.36		1
	50	0	22.36		1
16QAM	1	0	22.05	0-1	1
	1	25	22.59		1
	1	49	22.44		1
	25	0	21.44	0-2	2
	25	12	21.47		2
	25	25	21.36		2
	50	0	21.41		2
64QAM	1	0	21.02	0-2	2
	1	25	21.56		2
	1	49	21.47		2
	25	0	20.43	0-3	3
	25	12	20.45		3
	25	25	20.39		3
	50	0	20.42		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-7
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.36	23.38	23.23	0	0
	1	12	22.90	23.31	22.49		0
	1	24	23.12	23.33	22.81		0
	12	0	22.12	22.43	21.87	0-1	1
	12	6	21.86	22.43	21.59		1
	12	13	21.87	22.39	21.61		1
	25	0	21.92	22.37	21.73		1
16QAM	1	0	22.44	22.97	22.18	0-1	1
	1	12	21.71	22.95	21.73		1
	1	24	21.92	22.91	22.01		1
	12	0	21.11	21.43	20.96	0-2	2
	12	6	20.81	21.46	20.66		2
	12	13	20.83	21.39	20.65		2
	25	0	20.99	21.37	20.82		2
64QAM	1	0	21.51	21.39	21.41	0-2	2
	1	12	20.91	21.38	20.69		2
	1	24	21.36	21.51	20.98		2
	12	0	20.29	20.46	20.06	0-3	3
	12	6	20.01	20.49	19.71		3
	12	13	19.96	20.44	19.66		3
	25	0	20.09	20.39	19.88		3

FCC ID: A3LSMG9550			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 33 of 98	

Table 9-8
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.28	23.28	22.51	0	0
	1	7	23.02	23.37	22.57		0
	1	14	22.62	23.35	22.87		0
	8	0	22.31	22.43	21.52	0-1	1
	8	4	22.06	22.44	21.54		1
	8	7	21.85	22.41	21.57		1
16QAM	15	0	22.07	22.42	21.55	0-1	1
	1	0	22.58	22.51	22.06		1
	1	7	22.56	22.63	21.78		1
	1	14	22.06	22.53	22.09	0-2	1
	8	0	21.49	21.43	20.55		2
	8	4	21.09	21.46	20.52		2
64QAM	8	7	20.92	21.42	20.58	0-2	2
	15	0	21.10	21.45	20.64		2
	1	0	21.39	21.57	20.59		0-2
	1	7	21.29	21.70	20.52	2	
	1	14	20.92	21.56	21.22	2	
	8	0	20.31	20.58	19.84	0-3	3
8	4	20.17	20.44	19.83	3		
8	7	19.93	20.39	19.95	3		
	15	0	20.24	20.44	19.68		3

Table 9-9
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.21	23.28	22.37	0	0
	1	2	23.27	23.31	22.66		0
	1	5	23.02	23.24	22.79		0
	3	0	23.15	23.28	22.36		0
	3	2	23.20	23.31	22.54		0
	3	3	23.07	23.29	22.62		0
	6	0	22.21	22.34	21.59	0-1	1
16QAM	1	0	22.42	22.14	21.62	0-1	1
	1	2	22.39	22.23	21.33		1
	1	5	22.09	22.14	21.60		1
	3	0	22.29	22.17	21.48		1
	3	2	22.31	22.32	21.73		1
	3	3	22.20	22.34	21.74		1
	6	0	21.34	21.23	20.74	0-2	2
64QAM	1	0	21.53	21.44	20.63	0-2	2
	1	2	21.59	21.51	20.82		2
	1	5	21.44	21.47	21.01		2
	3	0	21.37	21.44	20.79		2
	3	2	21.41	21.53	21.02		2
	3	3	21.36	21.48	20.95		2
	6	0	20.33	20.33	19.64	0-3	3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 34 of 98

9.4.2 LTE Band 13

Table 9-10
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.26	0	0
	1	25	23.13		0
	1	49	23.09		0
	25	0	22.24	0-1	1
	25	12	22.22		1
	25	25	22.13		1
16QAM	50	0	22.20	0-1	1
	1	0	22.52		1
	1	25	22.39		1
	1	49	22.36	0-2	1
	25	0	21.22		2
	25	12	21.24		2
64QAM	25	25	21.17	0-2	2
	50	0	21.18		2
	1	0	21.43	0-2	2
	1	25	21.28		2
	1	49	21.25	0-3	2
	25	0	20.27		3
64QAM	25	12	20.21		3
	25	25	20.16	0-3	3
	50	0	20.21		3

Table 9-11
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.21	0	0
	1	12	23.14		0
	1	24	23.12		0
	12	0	22.18	0-1	1
	12	6	22.19		1
	12	13	22.12		1
16QAM	25	0	22.17	0-1	1
	1	0	22.81		1
	1	12	22.74		1
	1	24	22.44	0-2	1
	12	0	21.24		2
	12	6	21.25		2
64QAM	12	13	21.15	0-2	2
	25	0	21.21		2
	1	0	21.54	0-2	2
	1	12	21.48		2
	1	24	21.45	0-3	2
	12	0	20.21		3
64QAM	12	6	20.20		3
	12	13	20.17	0-3	3
	25	0	20.12		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 35 of 98

9.4.3 LTE Band 5 (Cell)

Table 9-12
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.47	0	0
	1	25	24.24		0
	1	49	24.27		0
	25	0	23.45	0-1	1
	25	12	23.38		1
	25	25	23.24		1
	50	0	23.40		1
16QAM	1	0	23.50	0-1	1
	1	25	23.26		1
	1	49	23.42		1
	25	0	22.46	0-2	2
	25	12	22.42		2
	25	25	22.21		2
	50	0	22.39		2
64QAM	1	0	22.50	0-2	2
	1	25	22.31		2
	1	49	22.47		2
	25	0	21.47	0-3	3
	25	12	21.46		3
	25	25	21.32		3
	50	0	21.44		3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-13
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.24	24.49	24.39	0	0
	1	12	24.22	24.18	24.47		0
	1	24	24.23	24.09	22.69		0
	12	0	23.25	23.49	23.46	0-1	1
	12	6	23.27	23.39	23.47		1
	12	13	23.20	23.20	22.92		1
	25	0	23.25	23.37	23.42		1
16QAM	1	0	23.44	23.47	23.50	0-1	1
	1	12	23.41	23.40	23.40		1
	1	24	23.43	23.46	22.31		1
	12	0	22.30	22.39	22.47	0-2	2
	12	6	22.32	22.42	22.44		2
	12	13	22.28	22.23	21.94		2
	25	0	22.24	22.46	22.42		2
64QAM	1	0	22.36	22.50	22.50	0-2	2
	1	12	22.30	22.24	22.45		2
	1	24	22.50	22.27	21.38		2
	12	0	21.23	21.46	21.46	0-3	3
	12	6	21.22	21.50	21.47		3
	12	13	21.17	21.25	21.07		3
	25	0	21.24	21.46	21.44		3

FCC ID: A3LSMG9550			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 36 of 98	

Table 9-14
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.24	24.49	24.41	0	0
	1	7	24.38	24.25	23.64		0
	1	14	24.26	23.99	22.50		0
	8	0	23.26	23.49	23.41	0-1	1
	8	4	23.25	23.34	22.89		1
	8	7	23.22	23.21	22.43		1
	15	0	23.26	23.38	23.00		1
16QAM	1	0	23.27	23.46	23.50	0-1	1
	1	7	23.39	23.48	23.15		1
	1	14	23.41	23.38	21.88		1
	8	0	22.28	22.50	22.41	0-2	2
	8	4	22.29	22.35	21.96		2
	8	7	22.25	22.23	21.44		2
	15	0	22.28	22.34	22.14		2
64QAM	1	0	22.46	22.50	22.50	0-2	2
	1	7	22.50	22.45	22.16		2
	1	14	22.40	22.26	20.95		2
	8	0	21.39	21.49	21.47	0-3	3
	8	4	21.25	21.45	21.15		3
	8	7	21.20	21.26	20.46		3
	15	0	21.31	21.44	21.13		3

Table 9-15
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.10	24.21	23.21	0	0
	1	2	24.18	24.23	23.10		0
	1	5	24.11	23.98	22.51		0
	3	0	24.13	24.19	23.11		0
	3	2	24.17	24.16	22.85		0
	3	3	24.11	24.04	22.62		0
	6	0	23.09	23.24	22.12	0-1	1
16QAM	1	0	23.14	23.50	22.70	0-1	1
	1	2	23.23	23.47	22.38		1
	1	5	23.11	23.28	21.91		1
	3	0	23.25	23.35	22.15		1
	3	2	23.49	23.31	21.93		1
	3	3	23.45	23.20	21.64		1
	6	0	22.21	22.23	21.26	0-2	2
64QAM	1	0	22.47	22.37	21.66	0-2	2
	1	2	22.48	22.39	21.43		2
	1	5	22.34	22.32	20.88		2
	3	0	22.31	22.50	21.17		2
	3	2	22.35	22.47	20.93		2
	3	3	22.29	22.46	20.83		2
	6	0	21.19	21.41	20.25	0-3	3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 37 of 98

9.4.4 LTE Band 26 (Cell)

Table 9-16
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz) Conducted Power [dBm]		
QPSK	1	0	23.77	0	0
	1	36	23.64		0
	1	74	23.45		0
	36	0	22.75	0-1	1
	36	18	22.73		1
	36	37	22.62		1
	75	0	22.65		1
16QAM	1	0	22.74	0-1	1
	1	36	22.63		1
	1	74	22.52		1
	36	0	21.72	0-2	2
	36	18	21.72		2
	36	37	21.61		2
	75	0	21.68		2
64QAM	1	0	21.97	0-2	2
	1	36	21.88		2
	1	74	21.66		2
	36	0	20.72	0-3	3
	36	18	20.68		3
	36	37	20.59		3
	75	0	20.67		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-17
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)	
QPSK	1	0	23.63	23.62	23.78	0
	1	25	23.52	23.55	23.66	
	1	49	23.39	23.48	23.46	
	25	0	22.53	22.65	22.81	0-1
	25	12	22.54	22.61	22.74	
	25	25	22.45	22.54	22.67	
	50	0	22.49	22.59	22.75	
16QAM	1	0	22.91	22.86	23.00	0-1
	1	25	22.95	22.57	22.92	
	1	49	23.00	22.47	22.70	
	25	0	21.52	21.59	21.82	0-2
	25	12	21.55	21.61	21.78	
	25	25	21.47	21.51	21.68	
	50	0	21.48	21.55	21.74	
64QAM	1	0	21.66	22.00	21.91	0-2
	1	25	21.53	21.93	21.76	
	1	49	21.46	21.79	21.60	
	25	0	20.59	20.64	20.80	0-3
	25	12	20.56	20.63	20.77	
	25	25	20.49	20.56	20.69	
	50	0	20.51	20.60	20.78	

FCC ID: A3LSMG9550			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 38 of 98	

Table 9-18
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.62	23.71	23.74	0	0
	1	12	23.58	23.66	23.63		0
	1	24	23.54	23.65	23.57		0
	12	0	22.65	22.66	22.74	0-1	1
	12	6	22.64	22.68	22.68		1
	12	13	22.61	22.61	22.65		1
	25	0	22.62	22.66	22.68		1
16QAM	1	0	22.98	22.67	22.85	0-1	1
	1	12	22.87	22.64	22.81		1
	1	24	22.82	23.00	22.72		1
	12	0	21.69	21.70	21.77	0-2	2
	12	6	21.67	21.72	21.77		2
	12	13	21.60	21.69	21.72		2
	25	0	21.63	21.61	21.64		2
64QAM	1	0	21.82	22.00	21.89	0-2	2
	1	12	21.75	21.92	21.79		2
	1	24	21.71	21.90	21.72		2
	12	0	20.64	20.67	20.71	0-3	3
	12	6	20.63	20.59	20.74		3
	12	13	20.59	20.53	20.68		3
	25	0	20.59	20.64	20.70		3

Table 9-19
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.46	23.66	23.61	0	0
	1	7	23.56	23.73	23.68		0
	1	14	23.42	23.63	23.47		0
	8	0	22.56	22.67	22.68	0-1	1
	8	4	22.54	22.66	22.71		1
	8	7	22.55	22.64	22.65		1
	15	0	22.54	22.65	22.66		1
16QAM	1	0	22.36	22.92	22.93	0-1	1
	1	7	22.46	22.77	23.00		1
	1	14	22.66	22.68	22.88		1
	8	0	21.63	21.60	21.69	0-2	2
	8	4	21.61	21.63	21.68		2
	8	7	21.59	21.62	21.66		2
	15	0	21.48	21.66	21.58		2
64QAM	1	0	21.72	21.97	21.86	0-2	2
	1	7	21.79	21.95	21.98		2
	1	14	21.64	21.81	21.85		2
	8	0	20.57	20.79	20.67	0-3	3
	8	4	20.61	20.81	20.67		3
	8	7	20.68	20.59	20.64		3
	15	0	20.58	20.71	20.69		3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 39 of 98

Table 9-20
LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.48	23.54	23.50	0	0
	1	2	23.55	23.66	23.57		0
	1	5	23.50	23.56	23.46		0
	3	0	23.53	23.55	23.49		0
	3	2	23.56	23.62	23.53		0
	3	3	23.48	23.60	23.48		0
	6	0	22.49	22.56	22.53	0-1	1
16QAM	1	0	22.44	22.85	22.69	0-1	1
	1	2	22.50	22.72	22.78		1
	1	5	22.79	22.75	22.66		1
	3	0	22.69	22.95	22.81		1
	3	2	22.64	22.98	22.87		1
	3	3	22.61	22.94	22.78		1
	6	0	21.61	21.68	21.63	0-2	2
64QAM	1	0	21.55	21.81	21.84	0-2	2
	1	2	21.59	21.86	21.88		2
	1	5	21.51	21.75	21.79		2
	3	0	21.64	21.78	21.74		2
	3	2	21.68	21.83	21.69		2
	3	3	21.74	21.78	21.64		2
	6	0	20.61	20.66	20.63	0-3	3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 40 of 98

9.4.5 LTE Band 4 (AWS)

Table 9-21
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.26	0	0
	1	50	22.74		0
	1	99	22.67		0
	50	0	22.17	0-1	1
	50	25	22.07		1
	50	50	22.02		1
	100	0	22.11		1
16QAM	1	0	22.24	0-1	1
	1	50	21.98		1
	1	99	21.96		1
	50	0	21.09	0-2	2
	50	25	20.99		2
	50	50	20.93		2
	100	0	21.02		2
64QAM	1	0	21.20	0-2	2
	1	50	20.96		2
	1	99	20.92		2
	50	0	20.12	0-3	3
	50	25	20.14		3
	50	50	20.07		3
	100	0	20.03		3

Note: LTE Band 4 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-22
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.31	23.54	23.76	0	0
	1	36	23.13	23.31	23.58		0
	1	74	23.19	23.34	23.58		0
	36	0	22.26	22.43	22.67	0-1	1
	36	18	22.25	22.40	22.66		1
	36	37	22.23	22.36	22.59		1
	75	0	22.26	22.42	22.63		1
16QAM	1	0	22.46	22.73	23.00	0-1	1
	1	36	22.13	22.57	22.76		1
	1	74	22.17	23.00	22.80		1
	36	0	21.28	21.46	21.73	0-2	2
	36	18	21.24	21.47	21.70		2
	36	37	21.30	21.43	21.64		2
	75	0	21.28	21.40	21.64		2
64QAM	1	0	21.62	21.58	21.91	0-2	2
	1	36	21.42	21.44	21.76		2
	1	74	21.44	21.47	21.77		2
	36	0	20.29	20.49	20.71	0-3	3
	36	18	20.27	20.50	20.66		3
	36	37	20.22	20.45	20.63		3
	75	0	20.26	20.44	20.64		3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 41 of 98

Table 9-23
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.12	23.46	23.69	0	0
	1	25	23.10	23.39	23.55		0
	1	49	23.07	23.35	23.50		0
	25	0	22.17	22.46	22.67	0-1	1
	25	12	22.15	22.44	22.67		1
	25	25	22.12	22.38	22.60		1
	50	0	22.15	22.41	22.42		1
16QAM	1	0	22.31	22.71	23.00	0-1	1
	1	25	22.22	22.72	22.88		1
	1	49	22.20	22.98	22.87		1
	25	0	21.21	21.47	21.72	0-2	2
	25	12	21.23	21.45	21.71		2
	25	25	21.16	21.41	21.58		2
	50	0	21.14	21.44	21.44		2
64QAM	1	0	21.39	21.57	21.84	0-2	2
	1	25	21.32	21.47	21.77		2
	1	49	21.29	21.42	21.73		2
	25	0	20.31	20.46	20.66	0-3	3
	25	12	20.26	20.44	20.62		3
	25	25	20.16	20.48	20.59		3
	50	0	20.14	20.45	20.66		3

Table 9-24
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.15	23.43	23.72	0	0
	1	12	22.99	23.36	23.68		0
	1	24	23.05	23.39	23.70		0
	12	0	22.14	22.42	22.74	0-1	1
	12	6	22.19	22.41	22.73		1
	12	13	22.13	22.37	22.68		1
	25	0	22.15	22.38	22.71		1
16QAM	1	0	22.32	22.63	22.95	0-1	1
	1	12	22.27	22.56	23.00		1
	1	24	22.06	22.37	22.99		1
	12	0	21.19	21.45	21.74	0-2	2
	12	6	21.18	21.47	21.75		2
	12	13	21.14	21.42	21.73		2
	25	0	21.18	21.39	21.72		2
64QAM	1	0	21.35	21.76	21.88	0-2	2
	1	12	21.32	21.75	21.84		2
	1	24	21.31	21.70	21.83		2
	12	0	20.12	20.38	20.74	0-3	3
	12	6	20.17	20.47	20.75		3
	12	13	20.14	20.45	20.68		3
	25	0	20.18	20.43	20.70		3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 42 of 98

Table 9-25
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.10	23.42	23.64	0	0
	1	7	23.20	23.51	23.74		0
	1	14	23.07	23.40	23.59		0
	8	0	22.09	22.42	22.71	0-1	1
	8	4	22.12	22.43	22.72		1
	8	7	22.10	22.39	22.66		1
	15	0	22.11	22.38	22.70		1
16QAM	1	0	22.71	22.61	22.97	0-1	1
	1	7	22.85	22.85	23.00		1
	1	14	22.78	22.69	22.95		1
	8	0	21.16	21.60	21.92	0-2	2
	8	4	21.17	21.53	21.89		2
	8	7	21.14	21.53	21.83		2
	15	0	21.12	21.31	21.60		2
64QAM	1	0	21.43	21.73	21.97	0-2	2
	1	7	21.22	21.84	22.00		2
	1	14	21.13	21.64	21.87		2
	8	0	20.09	20.54	20.84	0-3	3
	8	4	20.13	20.53	20.87		3
	8	7	20.16	20.51	20.82		3
	15	0	20.15	20.37	20.67		3

Table 9-26
LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.02	23.34	23.58	0	0
	1	2	23.08	23.39	23.63		0
	1	5	23.00	23.31	23.57		0
	3	0	23.01	23.30	23.58		0
	3	2	23.04	23.35	23.62		0
	3	3	22.99	23.31	23.57		0
	6	0	22.02	22.34	22.59	0-1	1
16QAM	1	0	21.86	22.89	22.60	0-1	1
	1	2	21.92	22.61	22.70		1
	1	5	21.84	22.55	22.59		1
	3	0	22.09	22.51	22.94		1
	3	2	22.15	22.54	22.98		1
	3	3	22.08	22.48	22.94		1
	6	0	20.95	21.34	21.73	0-2	2
64QAM	1	0	21.19	21.39	21.82	0-2	2
	1	2	21.26	21.46	21.85		2
	1	5	21.18	21.36	21.75		2
	3	0	21.17	21.52	21.78		2
	3	2	21.25	21.67	21.82		2
	3	3	21.21	21.63	21.76		2
	6	0	20.01	20.47	20.71	0-3	3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 43 of 98

Table 9-27
Reduced LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth – Hotspot Mode Active

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	20.26	0	0
	1	50	19.78		0
	1	99	19.75		0
	50	0	19.96	0-1	0
	50	25	19.95		0
	50	50	19.88		0
	100	0	19.95		0
16QAM	1	0	20.38	0-1	0
	1	50	20.22		0
	1	99	20.23		0
	50	0	20.21	0-2	0
	50	25	20.12		0
	50	50	19.96		0
	100	0	20.00		0
64QAM	1	0	20.45	0-2	0
	1	50	20.16		0
	1	99	20.15		0
	50	0	20.21	0-3	0
	50	25	20.13		0
	50	50	20.07		0
	100	0	20.03		0

Note: LTE Band 4 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-28
Reduced LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth – Hotspot Mode Active

LTE Band 4 (AWS) 15 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.35	20.40	20.50	0	0
	1	36	20.17	20.21	20.40		0
	1	74	20.15	20.20	20.36		0
	36	0	20.28	20.37	20.50	0-1	0
	36	18	20.28	20.35	20.49		0
	36	37	20.25	20.31	20.48		0
	75	0	20.26	20.32	20.49		0
16QAM	1	0	20.48	20.39	20.50	0-1	0
	1	36	20.28	20.28	20.28		0
	1	74	20.26	20.23	20.24		0
	36	0	20.29	20.42	20.50	0-2	0
	36	18	20.28	20.44	20.49		0
	36	37	20.25	20.38	20.48		0
	75	0	20.31	20.38	20.50		0
64QAM	1	0	20.44	20.40	20.50	0-2	0
	1	36	20.46	20.45	20.47		0
	1	74	20.34	20.48	20.49		0
	36	0	20.20	20.42	20.43	0-3	0
	36	18	20.15	20.30	20.45		0
	36	37	20.16	20.34	20.43		0
	75	0	20.15	20.36	20.44		0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 44 of 98

Table 9-29
Reduced LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth – Hotspot Mode Active

LTE Band 4 (AWS) 10 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.12	20.36	20.44	0	0
	1	25	20.02	20.28	20.32		0
	1	49	20.00	20.25	20.34		0
	25	0	20.13	20.43	20.42	0-1	0
	25	12	20.14	20.42	20.42		0
	25	25	20.11	20.40	20.44		0
	50	0	20.13	20.45	20.40		0
16QAM	1	0	20.26	20.31	20.35	0-1	0
	1	25	20.16	20.21	20.43		0
	1	49	20.11	20.16	20.41		0
	25	0	20.19	20.40	20.44	0-2	0
	25	12	20.18	20.37	20.45		0
	25	25	20.13	20.37	20.43		0
	50	0	20.19	20.48	20.44		0
64QAM	1	0	20.39	20.40	20.49	0-2	0
	1	25	20.26	20.39	20.43		0
	1	49	20.30	20.40	20.42		0
	25	0	20.00	20.33	20.49	0-3	0
	25	12	20.01	20.27	20.45		0
	25	25	19.99	20.36	20.41		0
	50	0	19.99	20.28	20.30		0

Table 9-30
Reduced LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth – Hotspot Mode Active

LTE Band 4 (AWS) 5 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.94	20.16	20.37	0	0
	1	12	19.90	20.11	20.35		0
	1	24	19.81	20.14	20.29		0
	12	0	19.91	20.13	20.40	0-1	0
	12	6	19.88	20.17	20.36		0
	12	13	19.86	20.12	20.38		0
	25	0	19.87	20.16	20.39		0
16QAM	1	0	20.00	20.17	20.39	0-1	0
	1	12	20.08	20.15	20.35		0
	1	24	19.97	20.06	20.39		0
	12	0	19.99	20.19	20.47	0-2	0
	12	6	19.94	20.13	20.45		0
	12	13	20.00	20.12	20.43		0
	25	0	19.94	20.09	20.35		0
64QAM	1	0	19.89	20.05	20.37	0-2	0
	1	12	19.86	20.10	20.35		0
	1	24	19.96	20.01	20.30		0
	12	0	19.90	20.06	20.39	0-3	0
	12	6	19.86	20.10	20.39		0
	12	13	19.90	20.12	20.34		0
	25	0	19.92	20.03	20.44		0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 45 of 98

Table 9-31
Reduced LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth – Hotspot Mode Active

LTE Band 4 (AWS) 3 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.90	20.10	20.38	0	0
	1	7	19.98	20.21	20.45		0
	1	14	19.86	20.11	20.33		0
	8	0	19.89	20.18	20.41	0-1	0
	8	4	19.89	20.13	20.41		0
	8	7	19.86	20.13	20.33		0
	15	0	19.89	20.12	20.41		0
16QAM	1	0	19.96	20.35	20.39	0-1	0
	1	7	19.88	20.36	20.48		0
	1	14	19.95	20.44	20.32		0
	8	0	19.92	20.26	20.43	0-2	0
	8	4	19.91	20.22	20.45		0
	8	7	19.94	20.21	20.38		0
	15	0	19.90	20.15	20.45		0
64QAM	1	0	19.91	20.28	20.38	0-2	0
	1	7	19.92	20.31	20.30		0
	1	14	19.88	20.34	20.25		0
	8	0	19.90	20.23	20.38	0-3	0
	8	4	19.92	20.23	20.44		0
	8	7	19.90	20.18	20.42		0
	15	0	19.91	20.25	20.48		0

Table 9-32
Reduced LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth – Hotspot Mode Active

LTE Band 4 (AWS) 1.4 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.80	20.05	20.22	0	0
	1	2	19.81	20.07	20.23		0
	1	5	19.77	20.01	20.28		0
	3	0	19.83	20.04	20.22		0
	3	2	19.90	20.05	20.28		0
	3	3	19.81	20.02	20.19		0
	6	0	19.85	20.03	20.22	0-1	0
16QAM	1	0	19.99	20.19	20.29	0-1	0
	1	2	19.82	20.03	20.12		0
	1	5	19.97	20.11	20.27		0
	3	0	19.94	20.15	20.39		0
	3	2	19.91	20.10	20.36		0
	3	3	19.95	20.12	20.37		0
	6	0	19.94	20.11	20.26	0-2	0
64QAM	1	0	19.86	20.08	20.23	0-2	0
	1	2	19.92	20.01	20.16		0
	1	5	19.93	20.10	20.38		0
	3	0	19.98	20.11	20.36		0
	3	2	19.94	20.08	20.22		0
	3	3	19.93	20.02	20.37		0
	6	0	19.87	20.09	20.36	0-3	0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 46 of 98

9.4.6 LTE Band 25 (PCS)

Table 9-33
LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.18	23.09	23.32	0	0
	1	50	22.95	22.87	23.11		0
	1	99	22.96	22.84	23.15		0
	50	0	22.15	22.05	22.22	0-1	1
	50	25	22.08	22.00	22.15		1
	50	50	22.01	21.89	22.13		1
	100	0	22.09	22.01	22.20		1
16QAM	1	0	22.47	22.34	22.50	0-1	1
	1	50	22.24	22.12	22.36		1
	1	99	22.25	22.07	22.43		1
	50	0	21.16	21.08	21.23	0-2	2
	50	25	21.07	20.97	21.16		2
	50	50	21.01	20.90	21.18		2
	100	0	21.11	21.01	21.20		2
64QAM	1	0	21.41	21.31	21.49	0-2	2
	1	50	21.16	21.06	21.30		2
	1	99	21.12	21.00	21.37		2
	50	0	20.14	20.07	20.29	0-3	3
	50	25	20.07	20.02	20.19		3
	50	50	20.07	19.94	20.18		3
	100	0	20.08	20.01	20.25		3

Table 9-34
LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) Conducted Power 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.18	23.08	23.12	0	0
	1	36	22.93	22.85	23.08		0
	1	74	22.76	22.79	23.03		0
	36	0	22.12	22.05	22.02	0-1	1
	36	18	21.96	21.95	22.02		1
	36	37	21.94	21.74	22.11		1
	75	0	21.95	21.85	22.00		1
16QAM	1	0	22.31	22.25	22.50	0-1	1
	1	36	22.17	21.92	22.22		1
	1	74	22.25	21.97	22.29		1
	36	0	20.97	21.08	21.17	0-2	2
	36	18	20.92	20.94	21.00		2
	36	37	20.89	20.88	21.14		2
	75	0	20.94	20.83	21.14		2
64QAM	1	0	21.26	21.28	21.46	0-2	2
	1	36	21.09	21.01	21.25		2
	1	74	20.99	20.94	21.36		2
	36	0	20.07	20.06	20.27	0-3	3
	36	18	20.00	20.01	20.16		3
	36	37	20.01	19.87	20.10		3
	75	0	19.88	19.83	20.16		3

FCC ID: A3LSMG9550	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 47 of 98

Table 9-35
LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.15	23.18	23.07	0	0
	1	25	22.83	22.78	23.01		0
	1	49	22.77	22.82	23.01		0
	25	0	22.22	22.10	22.00	0-1	1
	25	12	21.87	21.88	21.95		1
	25	25	21.92	21.82	22.15		1
	50	0	21.91	21.84	21.96		1
16QAM	1	0	22.25	22.26	22.41	0-1	1
	1	25	22.16	21.95	22.18		1
	1	49	22.29	21.95	22.22		1
	25	0	20.95	21.12	21.09	0-2	2
	25	12	20.95	20.88	21.09		2
	25	25	20.92	20.83	21.20		2
	50	0	20.88	20.92	21.12		2
64QAM	1	0	21.34	21.36	21.48	0-2	2
	1	25	21.14	20.91	21.18		2
	1	49	21.04	21.04	21.40		2
	25	0	20.03	20.14	20.18	0-3	3
	25	12	20.05	20.05	20.12		3
	25	25	19.95	19.89	20.07		3
	50	0	19.90	19.81	20.08		3

Table 9-36
LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.22	23.10	23.10	0	0
	1	12	22.74	22.81	22.92		0
	1	24	22.84	22.85	22.97		0
	12	0	22.17	22.15	21.97	0-1	1
	12	6	21.83	21.82	22.05		1
	12	13	21.99	21.82	22.16		1
	25	0	21.95	21.79	22.02		1
16QAM	1	0	22.31	22.29	22.45	0-1	1
	1	12	22.20	21.87	22.08		1
	1	24	22.24	21.97	22.29		1
	12	0	21.01	21.18	20.99	0-2	2
	12	6	20.85	20.78	20.99		2
	12	13	21.00	20.93	21.21		2
	25	0	20.88	20.96	21.09		2
64QAM	1	0	21.35	21.44	21.48	0-2	2
	1	12	21.15	20.85	21.26		2
	1	24	21.04	21.04	21.44		2
	12	0	20.09	20.19	20.17	0-3	3
	12	6	19.99	20.02	20.07		3
	12	13	19.90	19.86	20.04		3
	25	0	19.81	19.79	20.17		3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 48 of 98

Table 9-37
LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.13	23.19	23.04	0	0
	1	7	22.65	22.88	22.85		0
	1	14	22.84	22.90	22.91		0
	8	0	22.10	22.24	21.93	0-1	1
	8	4	21.80	21.80	22.13		1
	8	7	22.07	21.81	22.23		1
	15	0	22.02	21.76	21.99		1
16QAM	1	0	22.35	22.34	22.44	0-1	1
	1	7	22.10	21.97	22.07		1
	1	14	22.18	22.02	22.30		1
	8	0	21.05	21.23	21.03	0-2	2
	8	4	20.84	20.71	21.03		2
	8	7	20.96	20.91	21.17		2
	15	0	20.95	21.06	21.14		2
64QAM	1	0	21.30	21.39	21.49	0-2	2
	1	7	21.10	20.76	21.16		2
	1	14	20.99	21.01	21.46		2
	8	0	20.01	20.09	20.14	0-3	3
	8	4	20.02	20.07	20.03		3
	8	7	19.84	19.83	20.00		3
	15	0	19.77	19.76	20.19		3

Table 9-38
LTE Band 25 (PCS) Conducted Powers - 1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.17	23.14	23.00	0	0
	1	2	22.71	22.90	22.93		0
	1	5	22.85	22.80	22.84		0
	3	0	23.04	23.22	23.03		0
	3	2	22.81	22.75	23.19		0
	3	3	23.14	22.86	23.16		0
	6	0	22.12	21.74	22.00	0-1	1
16QAM	1	0	22.38	22.32	22.47	0-1	1
	1	2	22.18	21.91	22.11		1
	1	5	22.20	22.08	22.36		1
	3	0	21.99	22.25	21.98		1
	3	2	21.89	21.63	22.05		1
	3	3	22.00	21.96	22.15		1
	6	0	20.96	21.01	21.23	0-2	2
64QAM	1	0	21.25	21.42	21.48	0-2	2
	1	2	21.05	20.73	21.21		2
	1	5	20.92	20.99	21.48		2
	3	0	20.99	21.13	21.22		2
	3	2	21.01	21.02	20.97		2
	3	3	20.82	20.90	20.95		2
	6	0	19.78	19.85	20.09	0-3	3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 49 of 98

Table 9-39
Reduced LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth – Hotspot Mode Active

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.16	20.20	20.32	0	0
	1	50	19.95	19.94	20.06		0
	1	99	19.93	19.93	20.10		0
	50	0	20.13	20.15	20.31	0-1	0
	50	25	20.09	20.07	20.20		0
	50	50	20.03	20.02	20.18		0
	100	0	20.08	20.08	20.23		0
16QAM	1	0	20.38	20.42	20.50	0-1	0
	1	50	20.17	20.16	20.31		0
	1	99	20.21	20.18	20.39		0
	50	0	20.16	20.17	20.30	0-2	0
	50	25	20.08	20.10	20.21		0
	50	50	20.05	20.01	20.20		0
	100	0	20.10	20.08	20.25		0
64QAM	1	0	20.40	20.41	20.47	0-2	0
	1	50	20.15	20.23	20.28		0
	1	99	20.18	20.13	20.38		0
	50	0	20.17	20.17	20.30	0-3	0
	50	25	20.11	20.07	20.23		0
	50	50	20.09	20.02	20.21		0
	100	0	20.11	20.12	20.27		0

Table 9-40
Reduced LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth – Hotspot Mode Active

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.22	20.30	20.31	0	0
	1	36	20.15	20.17	20.25		0
	1	74	20.14	20.13	20.27		0
	36	0	20.22	20.26	20.33	0-1	0
	36	18	20.18	20.29	20.26		0
	36	37	20.15	20.18	20.34		0
	75	0	20.16	20.19	20.30		0
16QAM	1	0	20.18	20.10	20.32	0-1	0
	1	36	20.24	20.13	20.36		0
	1	74	20.27	20.13	20.26		0
	36	0	20.25	20.25	20.39	0-2	0
	36	18	20.21	20.17	20.29		0
	36	37	20.20	20.16	20.38		0
	75	0	20.21	20.20	20.31		0
64QAM	1	0	20.11	20.18	20.33	0-2	0
	1	36	20.16	20.16	20.37		0
	1	74	20.19	20.20	20.30		0
	36	0	20.17	20.22	20.34	0-3	0
	36	18	20.12	20.15	20.33		0
	36	37	20.16	20.22	20.35		0
	75	0	20.17	20.20	20.26		0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 50 of 98

Table 9-41
Reduced LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth – Hotspot Mode Active

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.21	20.17	20.28	0	0
	1	25	20.13	20.18	20.22		0
	1	49	20.08	20.19	20.30		0
	25	0	20.13	20.14	20.28	0-1	0
	25	12	20.15	20.15	20.29		0
	25	25	20.14	20.14	20.25		0
	50	0	20.13	20.13	20.31		0
16QAM	1	0	20.12	20.16	20.38	0-1	0
	1	25	20.19	20.16	20.29		0
	1	49	20.21	20.20	20.29		0
	25	0	20.17	20.19	20.23	0-2	0
	25	12	20.13	20.16	20.24		0
	25	25	20.15	20.20	20.23		0
	50	0	20.11	20.17	20.29		0
64QAM	1	0	20.16	20.19	20.30	0-2	0
	1	25	20.10	20.18	20.34		0
	1	49	20.15	20.12	20.22		0
	25	0	20.14	20.16	20.27	0-3	0
	25	12	20.19	20.20	20.26		0
	25	25	20.10	20.13	20.19		0
	50	0	20.17	20.24	20.28		0

Table 9-42
Reduced LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth – Hotspot Mode Active

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.18	20.15	20.23	0	0
	1	12	20.13	20.11	20.18		0
	1	24	20.10	20.08	20.26		0
	12	0	20.15	20.18	20.25	0-1	0
	12	6	20.13	20.19	20.25		0
	12	13	20.06	20.12	20.26		0
	25	0	20.13	20.14	20.20		0
16QAM	1	0	20.11	20.20	20.29	0-1	0
	1	12	20.17	20.19	20.19		0
	1	24	20.11	20.14	20.35		0
	12	0	20.12	20.16	20.21	0-2	0
	12	6	20.13	20.17	20.32		0
	12	13	20.08	20.15	20.26		0
	25	0	20.13	20.05	20.27		0
64QAM	1	0	20.12	20.07	20.20	0-2	0
	1	12	20.08	20.11	20.19		0
	1	24	20.19	20.01	20.21		0
	12	0	20.10	20.18	20.15	0-3	0
	12	6	20.06	20.08	20.22		0
	12	13	20.00	20.08	20.20		0
	25	0	20.11	20.10	20.26		0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 51 of 98

Table 9-43
Reduced LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth – Hotspot Mode Active

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.12	20.13	20.24	0	0
	1	7	20.10	20.12	20.25		0
	1	14	20.04	20.04	20.21		0
	8	0	20.05	20.12	20.24	0-1	0
	8	4	20.10	20.14	20.22		0
	8	7	20.07	20.11	20.25		0
	15	0	20.06	20.09	20.23		0
16QAM	1	0	20.20	20.20	20.37	0-1	0
	1	7	20.13	20.16	20.31		0
	1	14	20.21	20.21	20.40		0
	8	0	20.19	20.12	20.30	0-2	0
	8	4	20.14	20.20	20.23		0
	8	7	20.11	20.18	20.33		0
	15	0	20.08	20.10	20.24		0
64QAM	1	0	20.17	20.08	20.28	0-2	0
	1	7	20.23	20.09	20.19		0
	1	14	20.32	20.07	20.22		0
	8	0	20.18	20.09	20.27	0-3	0
	8	4	20.19	20.15	20.33		0
	8	7	20.15	20.18	20.31		0
	15	0	20.09	20.13	20.20		0

Table 9-44
Reduced LTE Band 25 (PCS) Conducted Powers -1.4 MHz Bandwidth – Hotspot Mode Active

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.01	20.03	20.12	0	0
	1	2	20.00	20.09	20.15		0
	1	5	19.92	19.99	20.18		0
	3	0	19.97	20.05	20.11		0
	3	2	19.99	20.06	20.24		0
	3	3	19.98	20.04	20.14		0
	6	0	20.00	20.00	20.16	0-1	0
16QAM	1	0	20.06	20.17	20.08	0-1	0
	1	2	20.12	20.08	20.11		0
	1	5	20.08	20.20	20.09		0
	3	0	20.19	20.16	20.04		0
	3	2	20.15	20.13	20.04		0
	3	3	20.10	20.10	20.15		0
	6	0	20.11	20.16	20.02	0-2	0
64QAM	1	0	20.12	20.22	20.06	0-2	0
	1	2	20.10	20.05	20.08		0
	1	5	20.18	20.20	20.19		0
	3	0	20.04	20.13	20.10		0
	3	2	20.16	20.07	20.15		0
	3	3	20.14	20.20	20.13		0
	6	0	20.00	20.10	20.12	0-3	0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 52 of 98

9.4.7 LTE Band 41

Table 9-45
LTE Band 41 Power Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.62	24.86	24.65	24.68	24.91	0	0
	1	50	24.58	24.63	24.40	24.46	24.62		0
	1	99	24.55	24.54	24.25	24.37	24.51		0
	50	0	23.61	23.75	23.53	23.65	23.75	0-1	1
	50	25	23.64	23.71	23.52	23.52	23.76		1
	50	50	23.63	23.66	23.38	23.49	23.66		1
16QAM	100	0	23.60	23.68	23.52	23.63	23.64	0-1	1
	1	0	23.78	23.83	23.96	23.79	23.96		1
	1	50	23.62	23.72	23.74	23.57	23.71		1
	1	99	23.63	23.63	23.70	23.51	23.68	0-2	1
	50	0	22.68	22.75	22.92	22.68	22.89		2
	50	25	22.69	22.66	22.81	22.61	22.85		2
64QAM	50	50	22.57	22.65	22.78	22.55	22.78	0-2	2
	100	0	22.70	22.74	22.64	22.59	22.67		2
	1	0	22.44	22.67	22.30	22.22	22.51	0-2	2
	1	50	22.35	22.44	22.01	22.10	22.53		2
	1	99	22.48	22.09	21.96	22.28	22.34	0-3	2
	50	0	21.58	21.91	21.67	21.55	22.00		3
50	25	21.70	21.65	21.49	21.85	21.69	3		
50	50	21.60	21.56	21.36	21.45	21.86	3		
	100	0	21.59	21.66	21.59	21.59	21.90		3

Table 9-46
LTE Band 41 Power Conducted Powers - 15 MHz Bandwidth

LTE Band 41									
15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.70	24.54	24.65	24.62	24.84	0	0
	1	36	24.56	24.44	24.56	24.49	24.69		0
	1	74	24.47	24.39	24.41	24.38	24.58		0
	36	0	23.67	23.63	23.55	23.60	23.76	0-1	1
	36	18	23.64	23.62	23.53	23.52	23.75		1
	36	37	23.60	23.53	23.48	23.47	23.66		1
16QAM	75	0	23.55	23.55	23.49	23.49	23.67	1	
	1	0	23.79	23.59	23.22	23.25	23.87	0-1	1
	1	36	23.66	23.48	23.17	23.11	23.74		1
	1	74	23.59	23.46	22.99	23.02	23.67		1
	36	0	22.79	22.58	22.62	22.62	22.78	0-2	2
	36	18	22.69	22.55	22.61	22.63	22.80		2
36	37	22.62	22.49	22.54	22.59	22.69	2		
64QAM	75	0	22.59	22.54	22.52	22.55	22.70	2	
	1	0	22.44	22.67	22.30	22.22	22.51	0-2	2
	1	36	22.35	22.44	22.01	22.10	22.53		2
	1	74	22.48	22.09	21.96	22.28	22.34		2
	36	0	21.58	21.91	21.67	21.55	22.00	0-3	3
	36	18	21.70	21.65	21.49	21.85	21.69		3
36	37	21.60	21.56	21.36	21.45	21.86	3		
	75	0	21.59	21.66	21.59	21.59	21.90	3	

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 53 of 98

Table 9-47
LTE Band 41 Power Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.64	24.71	24.60	24.54	24.61	0	0
	1	25	24.56	24.65	24.50	24.46	24.57		0
	1	49	24.47	24.62	24.45	24.45	24.50		0
	25	0	23.71	23.69	23.59	23.58	23.70	0-1	1
	25	12	23.72	23.66	23.65	23.49	23.74		1
	25	25	23.68	23.64	23.52	23.48	23.65		1
16QAM	50	0	23.69	23.65	23.53	23.49	23.72	0-1	1
	1	0	23.68	23.53	23.70	23.63	23.71		1
	1	25	23.64	23.49	23.61	23.57	23.64		1
	1	49	23.62	23.46	23.55	23.54	23.56	0-2	2
	25	0	22.76	22.71	22.58	22.51	22.77		2
	25	12	22.70	22.73	22.57	22.52	22.74		2
64QAM	25	25	22.65	22.70	22.53	22.48	22.69	0-2	2
	50	0	22.72	22.65	22.54	22.47	22.70		2
	1	0	22.61	22.73	22.15	22.21	22.63		0-2
	1	25	22.50	22.35	21.86	22.06	22.36	2	
	1	49	22.37	22.29	22.29	22.22	22.77	2	
	25	0	21.71	21.83	21.55	21.61	21.97	0-3	3
25	12	21.75	21.77	21.42	21.58	21.85	3		
25	25	21.65	21.67	21.32	21.80	21.91	3		
	50	0	21.79	21.84	21.41	21.62	21.94		3

Table 9-48
LTE Band 41 Power Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.46	24.59	24.41	24.43	24.63	0	0
	1	12	24.45	24.60	24.39	24.47	24.65		0
	1	24	24.37	24.56	24.34	24.41	24.63		0
	12	0	23.57	23.57	23.52	23.52	23.75	0-1	1
	12	6	23.62	23.58	23.48	23.51	23.77		1
	12	13	23.56	23.50	23.43	23.47	23.73		1
16QAM	25	0	23.60	23.54	23.46	23.46	23.76	0-1	1
	1	0	23.55	23.46	23.60	23.64	23.69		1
	1	12	23.51	23.42	23.56	23.61	23.68		1
	1	24	23.47	23.36	23.55	23.58	23.62	0-2	2
	12	0	22.73	22.62	22.41	22.44	22.91		2
	12	6	22.59	22.59	22.43	22.48	22.76		2
64QAM	12	13	22.57	22.61	22.39	22.43	22.72	0-2	2
	25	0	22.64	22.53	22.40	22.44	22.82		2
	1	0	22.53	22.67	22.48	22.31	22.46		0-2
	1	12	22.50	22.37	21.96	22.00	22.23	2	
	1	24	22.47	22.13	22.12	22.16	22.43	0-3	
	12	0	21.55	21.64	21.75	21.81	21.96		3
12	6	21.64	21.73	21.45	21.86	21.69	3		
64QAM	12	13	21.78	21.54	21.41	21.76	21.92	0-3	3
	25	0	21.56	21.77	21.43	21.70	21.56		3

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 54 of 98	

Table 9-49
Reduced LTE Band 41 Power Conducted Powers - 20 MHz Bandwidth – Hotspot Mode Active

LTE Band 41 20 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	20.65	20.81	20.63	20.74	20.84	0	0
	1	50	20.52	20.64	20.46	20.57	20.73		0
	1	99	20.50	20.53	20.31	20.45	20.66		0
	50	0	20.66	20.71	20.60	20.67	20.86	0-1	0
	50	25	20.64	20.65	20.53	20.55	20.77		0
	50	50	20.55	20.59	20.41	20.48	20.65		0
100	0	20.63	20.68	20.50	20.58	20.72	0		
16QAM	1	0	20.77	20.76	20.65	20.77	20.97	0-1	0
	1	50	20.67	20.55	20.57	20.63	20.75		0
	1	99	20.59	20.50	20.37	20.56	20.68		0
	50	0	20.65	20.77	20.59	20.66	20.89	0-2	0
	50	25	20.70	20.65	20.47	20.65	20.85		0
	50	50	20.62	20.59	20.39	20.50	20.67		0
100	0	20.60	20.63	20.55	20.63	20.81	0		
64QAM	1	0	20.67	20.47	20.34	20.41	20.62	0-2	0
	1	50	20.50	20.20	20.19	20.25	20.44		0
	1	99	20.52	20.25	20.08	20.23	20.22		0
	50	0	20.67	20.80	20.55	20.70	20.86	0-3	0
	50	25	20.57	20.68	20.53	20.63	20.82		0
	50	50	20.53	20.67	20.45	20.60	20.67		0
100	0	20.65	20.66	20.53	20.65	20.84	0		

Table 9-50
Reduced LTE Band 41 Power Conducted Powers - 15 MHz Bandwidth – Hotspot Mode Active

LTE Band 41 15 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	20.86	20.65	20.58	20.62	20.87	0	0
	1	36	20.63	20.51	20.63	20.46	20.70		0
	1	74	20.52	20.44	20.60	20.34	20.57		0
	36	0	20.71	20.66	20.52	20.61	20.79	0-1	0
	36	18	20.72	20.63	20.53	20.59	20.70		0
	36	37	20.63	20.56	20.45	20.53	20.61		0
	75	0	20.66	20.60	20.48	20.55	20.71		0
16QAM	1	0	20.91	20.79	20.74	20.65	20.98	0-1	0
	1	36	20.72	20.65	20.57	20.30	20.72		0
	1	74	20.62	20.60	20.48	20.39	20.67		0
	36	0	20.72	20.67	20.56	20.77	20.82	0-2	0
	36	18	20.66	20.63	20.51	20.70	20.80		0
	36	37	20.59	20.56	20.45	20.57	20.68		0
	75	0	20.69	20.60	20.51	20.55	20.74		0
64QAM	1	0	20.42	20.35	20.26	20.24	20.47	0-2	0
	1	36	20.28	20.13	20.03	20.13	20.19		0
	1	74	20.21	20.07	19.96	20.00	20.18		0
	36	0	20.61	20.57	20.45	20.47	20.67	0-3	0
	36	18	20.59	20.54	20.33	20.43	20.61		0
	36	37	20.44	20.46	20.31	20.32	20.53		0
	75	0	20.62	20.52	20.41	20.44	20.63		0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 55 of 98

Table 9-51
Reduced LTE Band 41 Power Conducted Powers - 10 MHz Bandwidth – Hotspot Mode Active

LTE Band 41 10 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	20.66	20.69	20.60	20.66	20.84	0	0
	1	25	20.57	20.58	20.50	20.57	20.72		0
	1	49	20.47	20.55	20.37	20.47	20.65		0
	25	0	20.71	20.62	20.54	20.62	20.72	0-1	0
	25	12	20.66	20.60	20.46	20.60	20.71		0
	25	25	20.58	20.60	20.44	20.53	20.68		0
50	0	20.66	20.57	20.52	20.56	20.71	0		
16QAM	1	0	20.87	20.70	20.63	20.70	20.83	0-1	0
	1	25	20.79	20.61	20.57	20.57	20.72		0
	1	49	20.75	20.59	20.47	20.56	20.66		0
	25	0	20.70	20.60	20.47	20.59	20.69	0-2	0
	25	12	20.66	20.61	20.52	20.61	20.69		0
	25	25	20.58	20.53	20.45	20.53	20.66		0
50	0	20.61	20.62	20.51	20.60	20.72	0		
64QAM	1	0	20.34	20.26	20.18	20.31	20.27	0-2	0
	1	25	20.12	20.15	20.01	20.10	20.19		0
	1	49	20.11	20.06	20.03	20.01	20.17		0
	25	0	20.67	20.52	20.50	20.47	20.65	0-3	0
	25	12	20.64	20.58	20.42	20.51	20.51		0
	25	25	20.56	20.45	20.45	20.31	20.65		0
50	0	20.57	20.56	20.46	20.39	20.64	0		

Table 9-52
Reduced LTE Band 41 Power Conducted Powers - 5 MHz Bandwidth – Hotspot Mode Active

LTE Band 41 5 MHzBandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	20.70	20.63	20.52	20.55	20.77	0	0
	1	12	20.62	20.62	20.44	20.50	20.71		0
	1	24	20.59	20.59	20.43	20.49	20.69		0
	12	0	20.62	20.60	20.45	20.53	20.69	0-1	0
	12	6	20.60	20.58	20.49	20.55	20.69		0
	12	13	20.62	20.57	20.46	20.50	20.70		0
	25	0	20.66	20.61	20.47	20.55	20.72		0
16QAM	1	0	20.57	20.53	20.64	20.68	20.69	0-1	0
	1	12	20.58	20.50	20.63	20.58	20.56		0
	1	24	20.53	20.51	20.55	20.56	20.69		0
	12	0	20.74	20.69	20.48	20.54	20.64	0-2	0
	12	6	20.75	20.69	20.55	20.55	20.83		0
	12	13	20.74	20.65	20.47	20.50	20.78		0
	25	0	20.65	20.61	20.50	20.49	20.71		0
64QAM	1	0	20.26	20.11	20.00	20.11	20.18	0-2	0
	1	12	20.15	20.06	20.05	20.07	20.18		0
	1	24	20.23	20.11	20.11	20.04	20.27		0
	12	0	20.60	20.60	20.46	20.44	20.66	0-3	0
	12	6	20.62	20.52	20.40	20.51	20.62		0
	12	13	20.58	20.48	20.36	20.36	20.58		0
	25	0	20.63	20.54	20.41	20.47	20.63		0

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 56 of 98	

9.4.8 LTE Carrier Aggregation Conducted Powers

Table 9-53
Two Component Carrier Maximum Conducted Powers

PCC									SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	20	41292	2660.2	24.88	24.91
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	5	39675	2498.5	24.72	24.91

Table 9-54
Three Component Carrier Maximum Conducted Powers

PCC									SCC 1				SCC 2				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	20	41292	2660.2	LTE B41	20	41094	2640.4	24.98	24.91

Table 9-55
Two Component Carrier Reduced Conducted Powers – Hotspot Mode Active

PCC									SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B41	15	41490	2680	16QAM	1	0	41490	2680	LTE B41	20	41316	2662.6	20.80	20.98
LTE B41	15	41490	2680	16QAM	1	0	41490	2680	LTE B41	5	39675	2498.5	20.75	20.98

Table 9-56
Three Component Carrier Reduced Conducted Powers – Hotspot Mode Active

PCC									SCC 1				SCC 2				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B41	15	41490	2680	16QAM	1	0	41490	2680	LTE B41	20	41316	2662.6	LTE B41	20	41118	2642.8	20.96	20.98

Notes:

- For every supported combination of downlink carrier aggregation, power measurements were performed with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.
- All control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- For 3CC downlink carrier aggregation combinations, PCC uplink channel was selected based on section C)3)b)ii) of KBD 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers. All selected downlink channels remained fully within the downlink transmission band of the respective component carrier.



Figure 9-4
Power Measurement Setup

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 57 of 98

9.4.9 LTE Uplink Carrier Aggregation Conducted Powers

Table 9-57
LTE Uplink Carrier Aggregation Conducted Powers

Power State	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	ULCA Tx.Power (dBm)	LTE Rel. 8 PCC Tx.Power (dBm)
Max	LTE B41	20	41490	2680	QPSK	1	0	LTE B41	20	41292	2660.2	QPSK	1	99	24.94	24.91
Reduced	LTE B41	20	41490	2680	QPSK	1	0	LTE B41	20	41292	2660.2	QPSK	1	99	20.99	20.84

Notes:

1. This device supports uplink carrier aggregation for LTE CA_41C with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR for each exposure condition. The power was measured with wideband signal integration over both component carriers (40 MHz Bandwidth).



Figure 9-5
Power Measurement Setup

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 58 of 98

9.5 WLAN Conducted Powers

Table 9-58
2.4 GHz WLAN Maximum Average RF Power – Antenna 1

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11b	802.11g
2412	1	19.54	17.17
2437	6	19.65	16.68
2462	11	19.32	17.00

Table 9-59
2.4 GHz WLAN Maximum Average RF Power – Antenna 2

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11b	802.11g
2412	1	18.98	16.74
2437	6	18.79	16.58
2462	11	18.91	16.93

Table 9-60
2.4 GHz WLAN Reduced Average RF Power – Antenna 1 (Held-to-ear)

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	16.41	15.92	15.75
2437	6	16.49	16.30	16.12
2462	11	16.29	15.65	15.56

Table 9-61
2.4 GHz WLAN Reduced Average RF Power – Antenna 2

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	15.75	16.40	16.32
2437	6	15.69	16.14	16.03
2462	11	16.07	15.57	16.46

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 59 of 98

Table 9-62
5 GHz WLAN Maximum Average RF Power – Antenna 1

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	14.89
5290	58	14.56
5530	106	15.16
5610	122	15.34
5690	138	15.33
5775	155	15.04

Table 9-63
5 GHz WLAN Maximum Average RF Power – Antenna 2

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	14.89
5290	58	15.11
5530	106	14.80
5610	122	14.82
5690	138	14.69
5775	155	15.01

Table 9-64
5 GHz WLAN Reduced Average RF Power – Antenna 1 (Held-to-ear)

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	12.90
5290	58	13.30
5530	106	12.95
5610	122	12.90
5690	138	12.93
5775	155	13.20

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 60 of 98

Table 9-65
5 GHz WLAN Reduced Average RF Power – Antenna 2 (Held-to-ear)

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	12.88
5290	58	13.02
5530	106	13.07
5610	122	12.87
5690	138	12.77
5775	155	13.21

Table 9-66
Maximum Output Powers During Conditions with 2.4 GHz and 5 GHz WLAN

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		802.11n	
		ANT1	ANT2
2412	1	12.65	13.04
2437	6	12.96	12.72
2462	11	12.50	13.13
Freq [MHz]	Channel	5GHz (80MHz) Conducted Power [dBm]	
		802.11ac	
		ANT1	ANT2
5210	42	12.90	12.88
5290	58	13.30	13.02
5530	106	12.95	13.07
5610	122	12.90	12.87
5690	138	12.93	12.77
5775	155	13.20	13.21

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 61 of 98

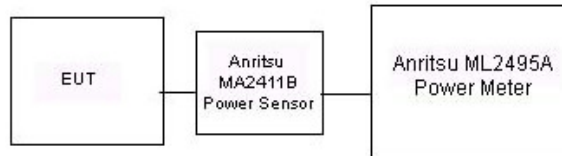


Figure 9-6

Power Measurement Setup for Bandwidths < 50 MHz




Figure 9-7

Power Measurement Setup for Bandwidths > 50 MHz

9.6 Bluetooth Conducted Powers

Table 9-67
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	14.89	30.818
2441	1.0	39	15.65	36.721
2480	1.0	78	15.50	35.493
2402	2.0	0	9.04	8.024
2441	2.0	39	9.97	9.923
2480	2.0	78	9.73	9.402
2402	3.0	0	9.02	7.975
2441	3.0	39	9.82	9.597
2480	3.0	78	9.90	9.769

Note: The bolded data rates and channel above were tested for SAR.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 62 of 98

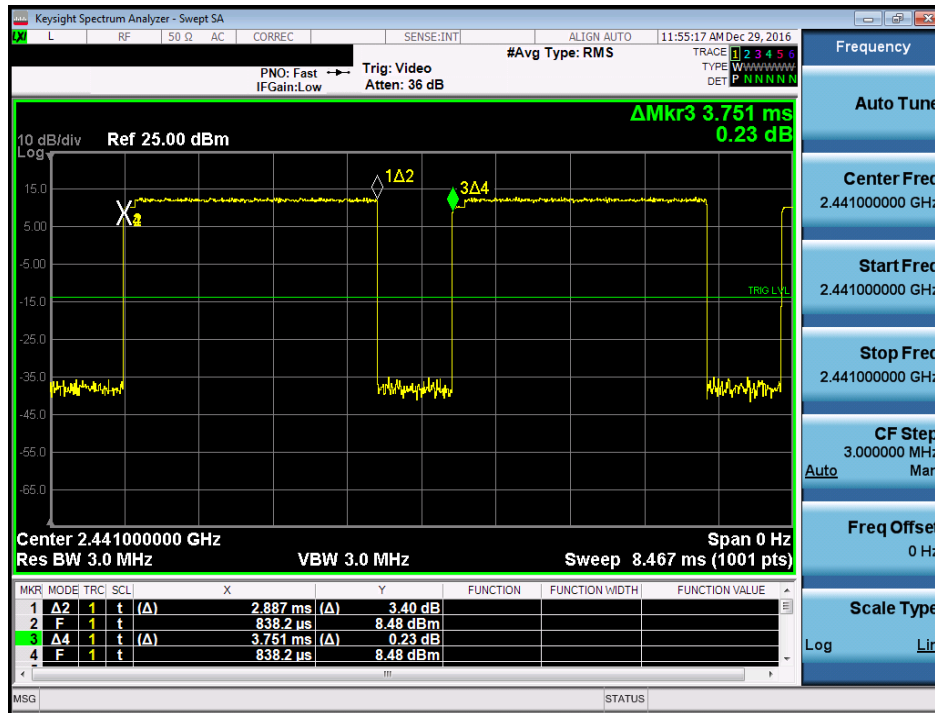


Figure 9-8
Bluetooth Transmission Plot

Equation 2 Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse Width} \times 100\% = \frac{2.887\text{ms}}{3.751\text{ms}} \times 100\% = 77.0\%$$

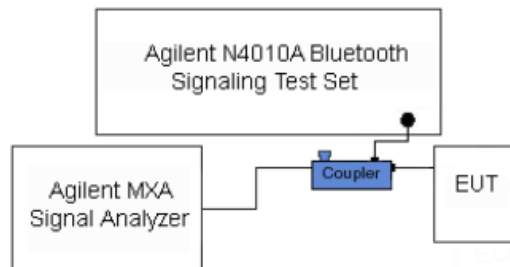


Figure 9-9
Power Measurement Setup

FCC ID: A3LSMG9550	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 63 of 98

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/18/2017	750H	23.0	700	0.852	42.268	0.889	42.201	-4.16%	0.16%
			710	0.860	42.127	0.890	42.149	-3.37%	-0.05%
			740	0.888	41.693	0.893	41.994	-0.56%	-0.72%
			755	0.902	41.482	0.894	41.916	0.89%	-1.04%
			770	0.916	41.271	0.895	41.838	2.35%	-1.36%
			785	0.929	41.052	0.896	41.760	3.68%	-1.70%
01/19/2017	835H	22.0	820	0.902	40.970	0.899	41.578	0.33%	-1.46%
			835	0.918	40.832	0.900	41.500	2.00%	-1.61%
			850	0.934	40.676	0.916	41.500	1.97%	-1.99%
02/13/2017	835H	20.4	820	0.887	41.343	0.899	41.578	-1.33%	-0.57%
			835	0.902	41.153	0.900	41.500	0.22%	-0.84%
			850	0.916	40.959	0.916	41.500	0.00%	-1.30%
01/20/2017	1750H	23.0	1710	1.374	38.911	1.348	40.142	1.93%	-3.07%
			1750	1.415	38.753	1.371	40.079	3.21%	-3.31%
			1790	1.450	38.547	1.394	40.016	4.02%	-3.67%
01/18/2017	1900H	22.3	1850	1.367	38.433	1.400	40.000	-2.36%	-3.92%
			1880	1.400	38.303	1.400	40.000	0.00%	-4.24%
			1910	1.432	38.185	1.400	40.000	2.29%	-4.54%
01/10/2017	2450H	23.5	2400	1.812	39.376	1.756	39.289	3.19%	0.22%
			2450	1.867	39.124	1.800	39.200	3.72%	-0.19%
			2500	1.933	38.944	1.855	39.136	4.20%	-0.49%
01/22/2017	2450H	24.0	2400	1.814	38.386	1.756	39.289	3.30%	-2.30%
			2450	1.869	38.155	1.800	39.200	3.83%	-2.67%
			2500	1.931	37.926	1.855	39.136	4.10%	-3.09%
01/16/2017	2600H	23.8	2600	2.052	38.606	1.964	39.009	4.48%	-1.03%
			2650	2.116	38.432	2.018	38.945	4.86%	-1.32%
			2700	2.170	38.212	2.073	38.882	4.68%	-1.72%
01/23/2017	5200H-5800H	20.3	5240	4.554	34.993	4.696	35.940	-3.02%	-2.63%
			5260	4.590	34.983	4.717	35.917	-2.69%	-2.60%
			5280	4.598	34.958	4.737	35.894	-2.93%	-2.61%
			5300	4.613	34.928	4.758	35.871	-3.05%	-2.63%
			5520	4.831	34.614	4.983	35.620	-3.05%	-2.82%
			5540	4.852	34.604	5.004	35.597	-3.04%	-2.79%
			5600	4.914	34.502	5.065	35.529	-2.98%	-2.89%
			5745	5.070	34.326	5.214	35.363	-2.76%	-2.93%
			5765	5.085	34.297	5.234	35.340	-2.85%	-2.95%
			5785	5.101	34.275	5.255	35.317	-2.93%	-2.95%

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 64 of 98

Table 10-2
Measured Body Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/19/2017	750B	21.5	700	0.924	55.242	0.959	55.726	-3.65%	-0.87%
			710	0.931	55.012	0.960	55.687	-3.02%	-1.21%
			740	0.961	54.740	0.963	55.570	-0.21%	-1.49%
			755	0.979	54.588	0.964	55.512	1.56%	-1.66%
			770	0.992	54.448	0.965	55.453	2.80%	-1.81%
			785	1.003	54.255	0.966	55.395	3.83%	-2.06%
01/17/2017	835B	20.9	820	0.979	54.076	0.969	55.258	1.03%	-2.14%
			835	0.993	53.907	0.970	55.200	2.37%	-2.34%
			850	1.008	53.748	0.988	55.154	2.02%	-2.55%
02/13/2017	835B	20.2	820	0.973	54.367	0.969	55.258	0.41%	-1.61%
			835	0.988	54.224	0.970	55.200	1.86%	-1.77%
			850	1.002	54.082	0.988	55.154	1.42%	-1.94%
01/16/2017	1750B	21.5	1710	1.452	51.987	1.463	53.537	-0.75%	-2.90%
			1750	1.492	51.877	1.488	53.432	0.27%	-2.91%
			1790	1.543	51.722	1.514	53.326	1.92%	-3.01%
01/16/2017	1900B	22.7	1850	1.514	51.467	1.520	53.300	-0.39%	-3.44%
			1880	1.550	51.400	1.520	53.300	1.97%	-3.56%
			1910	1.582	51.286	1.520	53.300	4.08%	-3.78%
01/23/2017	1900B	23.0	1850	1.480	52.091	1.520	53.300	-2.63%	-2.27%
			1880	1.512	51.983	1.520	53.300	-0.53%	-2.47%
			1910	1.544	51.897	1.520	53.300	1.58%	-2.63%
01/04/2017	2450B	22.6	2400	1.935	51.097	1.902	52.767	1.74%	-3.16%
			2450	2.006	50.885	1.950	52.700	2.87%	-3.44%
			2500	2.073	50.681	2.021	52.636	2.57%	-3.71%
01/12/2017	2450B	22.7	2400	1.963	51.025	1.902	52.767	3.21%	-3.30%
			2450	2.035	50.856	1.950	52.700	4.36%	-3.50%
			2500	2.103	50.608	2.021	52.636	4.06%	-3.85%
01/24/2017	2450B	23.7	2400	1.951	52.052	1.902	52.767	2.58%	-1.36%
			2450	2.014	51.856	1.950	52.700	3.28%	-1.60%
			2500	2.086	51.676	2.021	52.636	3.22%	-1.82%
01/21/2017	2600B	21.9	2600	2.238	50.667	2.163	52.509	3.47%	-3.51%
			2650	2.314	50.507	2.234	52.445	3.58%	-3.70%
			2700	2.383	50.275	2.305	52.382	3.38%	-4.02%
01/02/2017	5200B-5800B	22.0	5240	5.465	48.704	5.346	48.960	2.23%	-0.52%
			5260	5.482	48.680	5.369	48.933	2.10%	-0.52%
			5280	5.502	48.624	5.393	48.906	2.02%	-0.58%
			5300	5.520	48.552	5.416	48.879	1.92%	-0.67%
			5600	5.917	48.062	5.766	48.471	2.62%	-0.84%
			5620	5.948	48.086	5.790	48.444	2.73%	-0.74%
			5745	6.127	47.855	5.936	48.275	3.22%	-0.87%
			5765	6.159	47.823	5.959	48.248	3.36%	-0.88%
			5785	6.163	47.808	5.982	48.220	3.03%	-0.85%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 65 of 98

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-3
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
I	750	HEAD	01/18/2017	24.3	23.0	0.200	1161	3209	1.570	8.170	7.850	-3.92%
G	835	HEAD	01/19/2017	23.9	22.0	0.200	4d047	3287	1.940	9.130	9.700	6.24%
K	835	HEAD	02/13/2017	21.7	20.4	0.200	4d133	7409	1.760	9.320	8.800	-5.58%
I	1750	HEAD	01/20/2017	23.5	23.0	0.100	1148	3209	3.510	36.200	35.100	-3.04%
G	1900	HEAD	01/18/2017	23.9	22.3	0.100	5d149	3287	4.080	40.100	40.800	1.75%
G	2450	HEAD	01/10/2017	23.6	23.0	0.100	797	3287	5.450	52.100	54.500	4.61%
G	2450	HEAD	01/22/2017	23.2	22.5	0.100	981	3287	5.640	52.800	56.400	6.82%
G	2600	HEAD	01/16/2017	24.0	23.1	0.100	1126	3287	5.620	56.300	56.200	-0.18%
J	5250	HEAD	01/23/2017	20.9	20.3	0.050	1191	7357	3.880	78.900	77.600	-1.65%
J	5600	HEAD	01/23/2017	20.9	20.3	0.050	1191	7357	4.120	83.600	82.400	-1.44%
J	5750	HEAD	01/23/2017	20.9	20.3	0.050	1191	7357	3.910	79.100	78.200	-1.14%
J	750	BODY	01/19/2017	20.0	21.5	0.200	1161	3318	1.740	8.430	8.700	3.20%
H	835	BODY	01/17/2017	22.8	21.1	0.200	4d047	3319	2.040	9.570	10.200	6.58%
H	835	BODY	02/13/2017	21.6	20.6	0.200	4d047	3319	2.060	9.570	10.300	7.63%
I	1750	BODY	01/16/2017	22.5	21.5	0.100	1148	3209	3.750	37.100	37.500	1.08%
K	1900	BODY	01/16/2017	22.3	22.7	0.100	5d149	7409	4.150	39.900	41.500	4.01%
E	2450	BODY	01/04/2017	24.3	22.6	0.100	981	7406	5.030	50.800	50.300	-0.98%
E	2450	BODY	01/12/2017	24.5	22.7	0.100	981	7406	5.260	50.800	52.600	3.54%
H	2450	BODY	01/24/2017	22.4	22.7	0.100	797	3319	5.210	50.700	52.100	2.76%
E	2600	BODY	01/21/2017	23.5	21.9	0.100	1071	7406	5.570	54.200	55.700	2.77%
D	5250	BODY	01/02/2017	21.6	21.1	0.050	1237	3914	3.430	74.800	68.600	-8.29%
D	5600	BODY	01/02/2017	21.6	21.1	0.050	1237	3914	3.760	77.000	75.200	-2.34%
D	5750	BODY	01/02/2017	21.6	21.1	0.050	1237	3914	3.450	75.400	69.000	-8.49%

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 66 of 98

Table 10-4
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
K	1900	BODY	01/16/2017	22.3	22.7	0.100	5d149	7409	2.130	21.100	21.300	0.95%
K	1900	BODY	01/23/2017	23.9	23.4	0.100	5d149	7409	2.030	21.100	20.300	-3.79%
E	2450	BODY	01/12/2017	24.5	22.7	0.100	981	7406	2.430	23.800	24.300	2.10%
D	5250	BODY	01/02/2017	21.6	21.1	0.050	1237	3914	0.969	21.000	19.380	-7.71%
D	5600	BODY	01/02/2017	21.6	21.1	0.050	1237	3914	1.060	21.500	21.200	-1.40%

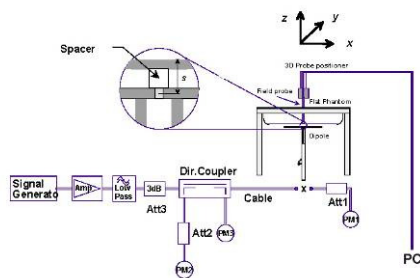


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 67 of 98

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.0	32.96	0.02	Right	Cheek	F7CA0	1:8.3	0.154	1.009	0.155	A1
836.60	190	GSM 850	GSM	33.0	32.96	0.03	Right	Tilt	F7CA0	1:8.3	0.054	1.009	0.054	
836.60	190	GSM 850	GSM	33.0	32.96	0.17	Left	Cheek	F7CA0	1:8.3	0.113	1.009	0.114	
836.60	190	GSM 850	GSM	33.0	32.96	-0.12	Left	Tilt	F7CA0	1:8.3	0.054	1.009	0.054	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-2
GSM 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.0	29.98	0.00	Right	Cheek	07EFF	1:8.3	0.057	1.005	0.057	A2
1880.00	661	GSM 1900	GSM	30.0	29.98	-0.02	Right	Tilt	07EFF	1:8.3	0.028	1.005	0.028	
1880.00	661	GSM 1900	GSM	30.0	29.98	0.21	Left	Cheek	07EFF	1:8.3	0.055	1.005	0.055	
1880.00	661	GSM 1900	GSM	30.0	29.98	-0.09	Left	Tilt	07EFF	1:8.3	0.017	1.005	0.017	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-3
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.5	23.23	0.03	Right	Cheek	F7CA0	1:1	0.142	1.064	0.151	A3
836.60	4183	UMTS 850	RMC	23.5	23.23	0.01	Right	Tilt	F7CA0	1:1	0.054	1.064	0.057	
836.60	4183	UMTS 850	RMC	23.5	23.23	0.01	Left	Cheek	F7CA0	1:1	0.108	1.064	0.115	
836.60	4183	UMTS 850	RMC	23.5	23.23	-0.01	Left	Tilt	F7CA0	1:1	0.056	1.064	0.060	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 68 of 98

Table 11-4
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	23.5	23.05	-0.04	Right	Cheek	07EFF	1:1	0.086	1.109	0.095	
1880.00	9400	UMTS 1900	RMC	23.5	23.05	0.18	Right	Tilt	07EFF	1:1	0.048	1.109	0.053	
1880.00	9400	UMTS 1900	RMC	23.5	23.05	0.05	Left	Cheek	07EFF	1:1	0.100	1.109	0.111	A4
1880.00	9400	UMTS 1900	RMC	23.5	23.05	-0.17	Left	Tilt	07EFF	1:1	0.028	1.109	0.031	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-5
CDMA BC0 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	Cell. CDMA	RC3 / SO55	26.0	25.27	0.06	Right	Cheek	07EFF	1:1	0.224	1.183	0.265	A5
836.52	384	Cell. CDMA	RC3 / SO55	26.0	25.27	-0.07	Right	Tilt	07EFF	1:1	0.075	1.183	0.089	
836.52	384	Cell. CDMA	RC3 / SO55	26.0	25.27	0.01	Left	Cheek	07EFF	1:1	0.178	1.183	0.211	
836.52	384	Cell. CDMA	RC3 / SO55	26.0	25.27	0.05	Left	Tilt	07EFF	1:1	0.077	1.183	0.091	
836.52	384	Cell. CDMA	EVDO Rev. A	26.0	25.25	-0.01	Right	Cheek	07EFF	1:1	0.215	1.189	0.256	
836.52	384	Cell. CDMA	EVDO Rev. A	26.0	25.25	0.05	Right	Tilt	07EFF	1:1	0.077	1.189	0.092	
836.52	384	Cell. CDMA	EVDO Rev. A	26.0	25.25	0.13	Left	Cheek	07EFF	1:1	0.170	1.189	0.202	
836.52	384	Cell. CDMA	EVDO Rev. A	26.0	25.25	-0.04	Left	Tilt	07EFF	1:1	0.076	1.189	0.090	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-6
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot
MHz	Ch.	(W/kg)														(W/kg)			
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.03	0	Right	Cheek	QPSK	1	25	F80C4	1:1	0.050	1.178	0.059	A6
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	0.04	1	Right	Cheek	QPSK	25	0	F80C4	1:1	0.041	1.146	0.047	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.01	0	Right	Tilt	QPSK	1	25	F80C4	1:1	0.021	1.178	0.025	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.01	1	Right	Tilt	QPSK	25	0	F80C4	1:1	0.017	1.146	0.019	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.04	0	Left	Cheek	QPSK	1	25	F80C4	1:1	0.045	1.178	0.053	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	0.07	1	Left	Cheek	QPSK	25	0	F80C4	1:1	0.039	1.146	0.045	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.19	0	Left	Tilt	QPSK	1	25	F80C4	1:1	0.028	1.178	0.033	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.03	1	Left	Tilt	QPSK	25	0	F80C4	1:1	0.023	1.146	0.026	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 69 of 98

Table 11-7
LTE Band 13 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.02	0	Right	Cheek	QPSK	1	0	F80C4	1:1	0.121	1.186	0.144	A7
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.01	1	Right	Cheek	QPSK	25	0	F80C4	1:1	0.102	1.191	0.121	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.01	0	Right	Tilt	QPSK	1	0	F80C4	1:1	0.048	1.186	0.057	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.10	1	Right	Tilt	QPSK	25	0	F80C4	1:1	0.042	1.191	0.050	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.01	0	Left	Cheek	QPSK	1	0	F80C4	1:1	0.108	1.186	0.128	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.02	1	Left	Cheek	QPSK	25	0	F80C4	1:1	0.086	1.191	0.102	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.01	0	Left	Tilt	QPSK	1	0	F80C4	1:1	0.048	1.186	0.057	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.12	1	Left	Tilt	QPSK	25	0	F80C4	1:1	0.034	1.191	0.040	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-8
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	0.06	0	Right	Cheek	QPSK	1	0	F7CA0	1:1	0.213	1.007	0.214	A8
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	-0.02	1	Right	Cheek	QPSK	25	0	F7CA0	1:1	0.157	1.012	0.159	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	0.04	0	Right	Tilt	QPSK	1	0	F7CA0	1:1	0.087	1.007	0.088	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	0.03	1	Right	Tilt	QPSK	25	0	F7CA0	1:1	0.061	1.012	0.062	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	-0.06	0	Left	Cheek	QPSK	1	0	F7CA0	1:1	0.149	1.007	0.150	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	0.05	1	Left	Cheek	QPSK	25	0	F7CA0	1:1	0.114	1.012	0.115	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	0.05	0	Left	Tilt	QPSK	1	0	F7CA0	1:1	0.070	1.007	0.070	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	0.08	1	Left	Tilt	QPSK	25	0	F7CA0	1:1	0.056	1.012	0.057	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-9
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	-0.17	0	Right	Cheek	QPSK	1	0	F7CA0	1:1	0.191	1.054	0.201	A9
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.04	1	Right	Cheek	QPSK	36	0	F7CA0	1:1	0.144	1.059	0.152	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	0.12	0	Right	Tilt	QPSK	1	0	F7CA0	1:1	0.079	1.054	0.083	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.01	1	Right	Tilt	QPSK	36	0	F7CA0	1:1	0.062	1.059	0.066	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	0.04	0	Left	Cheek	QPSK	1	0	F7CA0	1:1	0.143	1.054	0.151	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.08	1	Left	Cheek	QPSK	36	0	F7CA0	1:1	0.095	1.059	0.101	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	0.06	0	Left	Tilt	QPSK	1	0	F7CA0	1:1	0.068	1.054	0.072	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.10	1	Left	Tilt	QPSK	36	0	F7CA0	1:1	0.049	1.059	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 70 of 98

Table 11-10
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.26	0.06	0	Right	Cheek	QPSK	1	0	07EFF	1:1	0.078	1.186	0.093	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.17	0.00	1	Right	Cheek	QPSK	50	0	07EFF	1:1	0.056	1.211	0.068	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.26	-0.05	0	Right	Tilt	QPSK	1	0	07EFF	1:1	0.065	1.186	0.077	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.17	0.09	1	Right	Tilt	QPSK	50	0	07EFF	1:1	0.056	1.211	0.068	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.26	0.06	0	Left	Cheek	QPSK	1	0	07EFF	1:1	0.108	1.186	0.128	A10
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.17	0.08	1	Left	Cheek	QPSK	50	0	07EFF	1:1	0.081	1.211	0.098	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.26	-0.02	0	Left	Tilt	QPSK	1	0	07EFF	1:1	0.059	1.186	0.070	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.17	0.14	1	Left	Tilt	QPSK	50	0	07EFF	1:1	0.043	1.211	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-11
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.32	-0.01	0	Right	Cheek	QPSK	1	0	07EFF	1:1	0.117	1.042	0.122	
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.22	0.13	1	Right	Cheek	QPSK	50	0	07EFF	1:1	0.081	1.067	0.086	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.32	0.09	0	Right	Tilt	QPSK	1	0	07EFF	1:1	0.051	1.042	0.053	
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.22	0.06	1	Right	Tilt	QPSK	50	0	07EFF	1:1	0.038	1.067	0.041	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.32	0.18	0	Left	Cheek	QPSK	1	0	07EFF	1:1	0.141	1.042	0.147	A11
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.22	0.05	1	Left	Cheek	QPSK	50	0	07EFF	1:1	0.097	1.067	0.103	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.32	-0.13	0	Left	Tilt	QPSK	1	0	07EFF	1:1	0.036	1.042	0.038	
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.22	0.11	1	Left	Tilt	QPSK	50	0	07EFF	1:1	0.028	1.067	0.030	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-12
LTE Band 41 Head SAR

MEASUREMENT RESULTS																					
1 CC Uplink/ 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR[dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.91	0.21	0	Right	Cheek	QPSK	1	0	F7CF0	1:1.58	0.062	1.021	0.063	
2 CC Uplink	PCC	2680.00	41490	High	LTE Band 41	20	25.0	24.94	0.04	0	Right	Cheek	QPSK	1	0	F7CF0	1:1.58	0.062	1.014	0.063	A12
	SCC	2660.20	41292	High	LTE Band 41	20															
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	23.76	-0.16	1	Right	Cheek	QPSK	50	25	F7CF0	1:1.58	0.048	1.057	0.051	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.91	0.18	0	Right	Tilt	QPSK	1	0	F7CF0	1:1.58	0.056	1.021	0.057	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	23.76	-0.07	1	Right	Tilt	QPSK	50	25	F7CF0	1:1.58	0.043	1.057	0.045	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.91	-0.18	0	Left	Cheek	QPSK	1	0	F7CF0	1:1.58	0.058	1.021	0.059	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	23.76	0.06	1	Left	Cheek	QPSK	50	25	F7CF0	1:1.58	0.053	1.057	0.056	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.91	-0.08	0	Left	Tilt	QPSK	1	0	F7CF0	1:1.58	0.036	1.021	0.037	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	23.76	-0.02	1	Left	Tilt	QPSK	50	25	F7CF0	1:1.58	0.033	1.057	0.035	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 71 of 98

**Table 11-13
DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	16.5	16.49	0.18	Right	Cheek	1	0910E	1	99.8	0.503	0.458	1.002	1.002	0.460	A13
2437	6	802.11b	DSSS	22	16.5	16.49	0.03	Right	Tilt	1	0910E	1	99.8	0.454	0.380	1.002	1.002	0.382	
2437	6	802.11b	DSSS	22	16.5	16.49	0.01	Left	Cheek	1	0910E	1	99.8	0.147	-	1.002	1.002	-	
2437	6	802.11b	DSSS	22	16.5	16.49	0.21	Left	Tilt	1	0910E	1	99.8	0.199	-	1.002	1.002	-	
2462	11	802.11b	DSSS	22	16.5	16.07	0.12	Right	Cheek	2	0910E	1	99.8	0.383	0.380	1.104	1.002	0.420	
2462	11	802.11b	DSSS	22	16.5	16.07	0.06	Right	Tilt	2	0910E	1	99.8	0.209	0.195	1.104	1.002	0.216	
2462	11	802.11b	DSSS	22	16.5	16.07	-0.17	Left	Cheek	2	0910E	1	99.8	0.137	-	1.104	1.002	-	
2462	11	802.11b	DSSS	22	16.5	16.07	-0.05	Left	Tilt	2	0910E	1	99.8	0.103	-	1.104	1.002	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-14
DTS MIMO Operations with Simultaneous with 2.4 GHz and 5 GHz WLAN Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm] (per Antenna)	Ant 1 Conducted Power [dBm]	Ant 2 Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.														W/kg	(W/kg)			(W/kg)	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.05	Right	Cheek	MIMO	0910E	13	98.9	0.371	0.270	1.216	1.011	0.332	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.03	Right	Tilt	MIMO	0910E	13	98.9	0.269	-	1.216	1.011	-	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.16	Left	Cheek	MIMO	0910E	13	98.9	0.128	-	1.216	1.011	-	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.21	Left	Tilt	MIMO	0910E	13	98.9	0.130	-	1.216	1.011	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: DTS MIMO was additionally evaluated at the maximum allowed output power for operations with Simultaneous 2.4 GHz and 5 GHz WLAN. 5 GHz WLAN was not transmitting during the above evaluations.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 72 of 98

**Table 11-15
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)			
5290	58	802.11ac	OFDM	80	13.5	13.30	-0.11	Right	Cheek	1	F7CA0	29.3	95.5	0.124	-	1.047	1.047	-	
5290	58	802.11ac	OFDM	80	13.5	13.30	0.15	Right	Tilt	1	F7CA0	29.3	95.5	0.139	0.067	1.047	1.047	0.073	
5290	58	802.11ac	OFDM	80	13.5	13.30	0.19	Left	Cheek	1	F7CA0	29.3	95.5	0.061	-	1.047	1.047	-	
5290	58	802.11ac	OFDM	80	13.5	13.30	0.12	Left	Tilt	1	F7CA0	29.3	95.5	0.056	-	1.047	1.047	-	
5290	58	802.11ac	OFDM	80	13.5	13.02	0.20	Right	Cheek	2	F7CA0	29.3	93.2	0.350	0.126	1.117	1.073	0.151	
5290	58	802.11ac	OFDM	80	13.5	13.02	0.20	Right	Tilt	2	F7CA0	29.3	93.2	0.264	-	1.117	1.073	-	
5290	58	802.11ac	OFDM	80	13.5	13.02	0.16	Left	Cheek	2	F7CA0	29.3	93.2	0.133	-	1.117	1.073	-	
5290	58	802.11ac	OFDM	80	13.5	13.02	0.19	Left	Tilt	2	F7CA0	29.3	93.2	0.121	-	1.117	1.073	-	
5530	106	802.11ac	OFDM	80	13.5	12.95	0.03	Right	Cheek	1	F7CA0	29.3	95.5	0.611	0.232	1.135	1.047	0.276	
5530	106	802.11ac	OFDM	80	13.5	12.95	0.10	Right	Tilt	1	F7CA0	29.3	95.5	0.420	-	1.135	1.047	-	
5530	106	802.11ac	OFDM	80	13.5	12.95	-0.15	Left	Cheek	1	F7CA0	29.3	95.5	0.373	-	1.135	1.047	-	
5530	106	802.11ac	OFDM	80	13.5	12.95	0.14	Left	Tilt	1	F7CA0	29.3	95.5	0.366	-	1.135	1.047	-	
5530	106	802.11ac	OFDM	80	13.5	13.07	0.13	Right	Cheek	2	F7CA0	29.3	93.2	0.435	0.217	1.104	1.073	0.257	
5530	106	802.11ac	OFDM	80	13.5	13.07	0.19	Right	Tilt	2	F7CA0	29.3	93.2	0.326	-	1.104	1.073	-	
5530	106	802.11ac	OFDM	80	13.5	13.07	0.21	Left	Cheek	2	F7CA0	29.3	93.2	0.262	-	1.104	1.073	-	
5530	106	802.11ac	OFDM	80	13.5	13.07	0.16	Left	Tilt	2	F7CA0	29.3	93.2	0.211	-	1.104	1.073	-	
5775	155	802.11ac	OFDM	80	13.5	13.20	0.14	Right	Cheek	1	F7CA0	29.3	95.5	0.797	0.436	1.072	1.047	0.489	A14
5775	155	802.11ac	OFDM	80	13.5	13.20	0.19	Right	Tilt	1	F7CA0	29.3	95.5	1.018	0.404	1.072	1.047	0.453	
5775	155	802.11ac	OFDM	80	13.5	13.20	-0.13	Left	Cheek	1	F7CA0	29.3	95.5	0.558	-	1.072	1.047	-	
5775	155	802.11ac	OFDM	80	13.5	13.20	0.18	Left	Tilt	1	F7CA0	29.3	95.5	0.458	-	1.072	1.047	-	
5775	155	802.11ac	OFDM	80	13.5	13.21	-0.20	Right	Cheek	2	F7CA0	29.3	93.2	0.676	0.273	1.069	1.073	0.313	
5775	155	802.11ac	OFDM	80	13.5	13.21	-0.12	Right	Tilt	2	F7CA0	29.3	93.2	0.472	-	1.069	1.073	-	
5775	155	802.11ac	OFDM	80	13.5	13.21	0.21	Left	Cheek	2	F7CA0	29.3	93.2	0.377	-	1.069	1.073	-	
5775	155	802.11ac	OFDM	80	13.5	13.21	0.20	Left	Tilt	2	F7CA0	29.3	93.2	0.254	-	1.069	1.073	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Head										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

**Table 11-16
Bluetooth Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Device Serial Number	Data Rate (Mbps)	Side	Test Position	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	10.0	9.97	0.15	0910E	2	Right	Cheek	77.0	0.079	1.007	1.299	0.103	A15
2441	39	Bluetooth	FHSS	10.0	9.97	0.12	0910E	2	Right	Tilt	77.0	0.043	1.007	1.299	0.056	
2441	39	Bluetooth	FHSS	10.0	9.97	-0.12	0910E	2	Left	Cheek	77.0	0.023	1.007	1.299	0.030	
2441	39	Bluetooth	FHSS	10.0	9.97	0.21	0910E	2	Left	Tilt	77.0	0.014	1.007	1.299	0.018	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 73 of 98

11.2 Standalone Body-Worn SAR Data

Table 11-17
GSM/UMTS/CDMA Body-Worn SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.0	32.96	-0.03	15 mm	0813A	1	1:8.3	back	0.263	1.009	0.265	A16
1880.00	661	GSM 1900	GSM	30.0	29.98	-0.15	15 mm	07CF0	1	1:8.3	back	0.153	1.005	0.154	A18
836.60	4183	UMTS 850	RMC	23.5	23.23	-0.01	15 mm	0813A	N/A	1:1	back	0.236	1.064	0.251	A20
1880.00	9400	UMTS 1900	RMC	23.5	23.05	-0.03	15 mm	07CF0	N/A	1:1	back	0.449	1.109	0.498	A22
836.52	384	Cell. CDMA	TDSO / SO32	26.0	25.26	-0.02	15 mm	0813A	N/A	1:1	back	0.372	1.186	0.441	A24
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-18
LTE FDD Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	-0.16	0	F80C4	QPSK	1	25	15 mm	back	1:1	0.087	1.178	0.102	A26
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.01	1	F80C4	QPSK	25	0	15 mm	back	1:1	0.073	1.146	0.084	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.03	0	F80C4	QPSK	1	0	15 mm	back	1:1	0.156	1.186	0.185	A28
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.05	1	F80C4	QPSK	25	0	15 mm	back	1:1	0.134	1.191	0.160	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	0.01	0	0813A	QPSK	1	0	15 mm	back	1:1	0.328	1.007	0.330	A30
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	-0.02	1	0813A	QPSK	25	0	15 mm	back	1:1	0.263	1.012	0.266	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	-0.01	0	0813A	QPSK	1	0	15 mm	back	1:1	0.253	1.054	0.267	A32
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	-0.03	1	0813A	QPSK	36	0	15 mm	back	1:1	0.208	1.059	0.220	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.26	0.00	0	07EFF	QPSK	1	0	15 mm	back	1:1	0.536	1.186	0.636	A34
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.17	-0.01	1	07EFF	QPSK	50	0	15 mm	back	1:1	0.414	1.211	0.501	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.32	-0.04	0	07CF0	QPSK	1	0	15 mm	back	1:1	0.519	1.042	0.541	A36
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.22	-0.01	1	07CF0	QPSK	50	0	15 mm	back	1:1	0.412	1.067	0.440	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-19
LTE Band 41 Body-Worn SAR

MEASUREMENT RESULTS																					
1 CC Uplink/ 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR(1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.91	0.01	0	0813A	QPSK	1	0	15 mm	back	1:1.58	0.295	1.021	0.301	
2 CC Uplink	PCC	2680.00	41490	High	LTE Band 41	20	25.0	24.94	0.02	0	0813A	QPSK	1	0	15 mm	back	1:1.58	0.313	1.014	0.317	A38
	SCC	2660.20	41292	High	LTE Band 41	20							99								
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	23.76	0.01	1	0813A	QPSK	50	25	15 mm	back	1:1.58	0.248	1.057	0.262	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG9550			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 74 of 98	

**Table 11-20
DTS Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	20.5	19.65	0.05	15 mm	1	0910E	1	back	99.8	0.244	0.163	1.216	1.002	0.199	A40
2412	1	802.11b	DSSS	22	20.5	18.98	0.02	15 mm	2	0910E	1	back	99.8	0.129	0.100	1.419	1.002	0.142	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-21
DTS Body-Worn MIMO Operations with Simultaneous 2.4 GHz and 5 GHz WLAN Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm] (per Antenna)	Ant 1 Conducted Power [dBm]	Ant 2 Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.														W/kg	(W/kg)		(W/kg)		
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.12	15 mm	MIMO	0910E	13	back	98.9	0.060	0.042	1.216	1.011	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: DTS MIMO was additionally evaluated at the maximum allowed output power for operations with Simultaneous 2.4 GHz and 5 GHz WLAN. 5 GHz WLAN was not transmitting during the above evaluations.

**Table 11-22
NII Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5290	58	802.11ac	OFDM	80	15.5	14.56	0.19	15 mm	1	0910E	29.3	back	95.5	0.396	0.179	1.242	1.047	0.233	
5290	58	802.11ac	OFDM	80	15.5	15.11	0.14	15 mm	2	0910E	29.3	back	93.2	0.337	0.168	1.094	1.073	0.197	
5610	122	802.11ac	OFDM	80	15.5	15.34	0.00	15 mm	1	0910E	29.3	back	95.5	0.446	0.218	1.038	1.047	0.237	
5610	122	802.11ac	OFDM	80	15.5	14.82	-0.02	15 mm	2	0910E	29.3	back	93.2	0.489	0.228	1.169	1.073	0.286	A42
5775	155	802.11ac	OFDM	80	15.5	15.04	0.11	15 mm	1	0910E	29.3	back	95.5	0.220	0.137	1.112	1.047	0.160	
5775	155	802.11ac	OFDM	80	15.5	15.01	-0.15	15 mm	2	0910E	29.3	back	93.2	0.190	0.111	1.119	1.073	0.133	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

**Table 11-23
NII MIMO Operations with Simultaneous 2.4 GHz and 5 GHz WLAN Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm] (per Antenna)	Ant 1 Conducted Power [dBm]	Ant 2 Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.														W/kg	(W/kg)	(W/kg)			
5290	58	802.11ac	OFDM	80	13.5	13.30	13.02	-0.10	15 mm	MIMO	0910E	58.5	back	88.9	0.237	0.109	1.117	1.125	0.137	
5530	106	802.11ac	OFDM	80	13.5	12.95	13.07	0.12	15 mm	MIMO	0910E	58.5	back	88.9	0.305	0.107	1.135	1.125	0.137	
5775	155	802.11ac	OFDM	80	13.5	13.20	13.21	0.17	15 mm	MIMO	0910E	58.5	back	88.9	0.116	0.039	1.072	1.125	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											

Note: NII MIMO was additionally evaluated at the maximum allowed output power for operations with Simultaneous 2.4 GHz and 5 GHz WLAN. 2.4 GHz WLAN was not transmitting during the above evaluations.

**Table 11-24
Bluetooth Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	16.0	15.65	-0.12	15 mm	0910E	1	back	77.0	0.027	1.084	1.299	0.038	A44
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 75 of 98

11.3 Standalone Hotspot SAR Data

Table 11-25
GPRS/UMTS/CDMA Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	29.8	29.04	-0.01	10 mm	0813A	3	1:2.76	back	0.452	1.191	0.538	A17
836.60	190	GSM 850	GPRS	29.8	29.04	-0.08	10 mm	0813A	3	1:2.76	front	0.391	1.191	0.466	
836.60	190	GSM 850	GPRS	29.8	29.04	0.02	10 mm	0813A	3	1:2.76	bottom	0.259	1.191	0.308	
836.60	190	GSM 850	GPRS	29.8	29.04	-0.14	10 mm	0813A	3	1:2.76	right	0.267	1.191	0.318	
836.60	190	GSM 850	GPRS	29.8	29.04	-0.04	10 mm	0813A	3	1:2.76	left	0.111	1.191	0.132	
1880.00	661	GSM 1900	GPRS	25.0	24.47	0.02	10 mm	07CF0	3	1:2.76	back	0.396	1.130	0.447	
1880.00	661	GSM 1900	GPRS	25.0	24.47	0.00	10 mm	07CF0	3	1:2.76	front	0.297	1.130	0.336	
1880.00	661	GSM 1900	GPRS	25.0	24.47	0.05	10 mm	07CF0	3	1:2.76	bottom	0.655	1.130	0.740	A19
1880.00	661	GSM 1900	GPRS	25.0	24.47	-0.15	10 mm	07CF0	3	1:2.76	right	0.065	1.130	0.073	
1880.00	661	GSM 1900	GPRS	25.0	24.47	-0.06	10 mm	07CF0	3	1:2.76	left	0.061	1.130	0.069	
836.60	4183	UMTS 850	RMC	23.5	23.23	0.01	10 mm	0813A	N/A	1:1	back	0.398	1.064	0.423	A21
836.60	4183	UMTS 850	RMC	23.5	23.23	-0.02	10 mm	0813A	N/A	1:1	front	0.363	1.064	0.386	
836.60	4183	UMTS 850	RMC	23.5	23.23	-0.02	10 mm	0813A	N/A	1:1	bottom	0.229	1.064	0.244	
836.60	4183	UMTS 850	RMC	23.5	23.23	-0.03	10 mm	0813A	N/A	1:1	right	0.268	1.064	0.285	
836.60	4183	UMTS 850	RMC	23.5	23.23	0.01	10 mm	0813A	N/A	1:1	left	0.115	1.064	0.122	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	-0.05	10 mm	07CF0	N/A	1:1	back	0.443	1.138	0.504	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	0.00	10 mm	07CF0	N/A	1:1	front	0.295	1.138	0.336	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	-0.03	10 mm	07CF0	N/A	1:1	bottom	0.645	1.138	0.734	A23
1880.00	9400	UMTS 1900	RMC	20.5	19.94	-0.07	10 mm	07CF0	N/A	1:1	right	0.069	1.138	0.079	
1880.00	9400	UMTS 1900	RMC	20.5	19.94	-0.15	10 mm	07CF0	N/A	1:1	left	0.058	1.138	0.066	
836.52	384	Cell. CDMA	EVDO Rev. 0	26.0	25.32	-0.07	10 mm	0813A	N/A	1:1	back	0.542	1.169	0.634	A25
836.52	384	Cell. CDMA	EVDO Rev. 0	26.0	25.32	-0.03	10 mm	0813A	N/A	1:1	front	0.476	1.169	0.556	
836.52	384	Cell. CDMA	EVDO Rev. 0	26.0	25.32	0.00	10 mm	0813A	N/A	1:1	bottom	0.288	1.169	0.337	
836.52	384	Cell. CDMA	EVDO Rev. 0	26.0	25.32	0.01	10 mm	0813A	N/A	1:1	right	0.318	1.169	0.372	
836.52	384	Cell. CDMA	EVDO Rev. 0	26.0	25.32	0.00	10 mm	0813A	N/A	1:1	left	0.127	1.169	0.148	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body								
Spatial Peak							1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 1 gram								

FCC ID: A3LSMG9550	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 76 of 98

Table 11-26
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.01	0	F80C4	QPSK	1	25	10 mm	back	1:1	0.140	1.178	0.165	A27
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.02	1	F80C4	QPSK	25	0	10 mm	back	1:1	0.117	1.146	0.134	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.02	0	F80C4	QPSK	1	25	10 mm	front	1:1	0.099	1.178	0.117	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.06	1	F80C4	QPSK	25	0	10 mm	front	1:1	0.081	1.146	0.093	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	-0.02	0	F80C4	QPSK	1	25	10 mm	bottom	1:1	0.037	1.178	0.044	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.02	1	F80C4	QPSK	25	0	10 mm	bottom	1:1	0.029	1.146	0.033	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	0.01	0	F80C4	QPSK	1	25	10 mm	right	1:1	0.090	1.178	0.106	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.02	1	F80C4	QPSK	25	0	10 mm	right	1:1	0.077	1.146	0.088	
707.50	23095	Mid	LTE Band 12	10	24.0	23.29	-0.03	0	F80C4	QPSK	1	25	10 mm	left	1:1	0.093	1.178	0.110	
707.50	23095	Mid	LTE Band 12	10	23.0	22.41	-0.01	1	F80C4	QPSK	25	0	10 mm	left	1:1	0.070	1.146	0.080	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-27
LTE Band 13 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR(1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	-0.01	0	F80C4	QPSK	1	0	10 mm	back	1:1	0.256	1.186	0.304	A29
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.01	1	F80C4	QPSK	25	0	10 mm	back	1:1	0.208	1.191	0.248	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.04	0	F80C4	QPSK	1	0	10 mm	front	1:1	0.236	1.186	0.280	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	-0.04	1	F80C4	QPSK	25	0	10 mm	front	1:1	0.192	1.191	0.229	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	-0.04	0	F80C4	QPSK	1	0	10 mm	bottom	1:1	0.127	1.186	0.151	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.00	1	F80C4	QPSK	25	0	10 mm	bottom	1:1	0.106	1.191	0.126	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.00	0	F80C4	QPSK	1	0	10 mm	right	1:1	0.197	1.186	0.234	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.00	1	F80C4	QPSK	25	0	10 mm	right	1:1	0.154	1.191	0.183	
782.00	23230	Mid	LTE Band 13	10	24.0	23.26	0.02	0	F80C4	QPSK	1	0	10 mm	left	1:1	0.109	1.186	0.129	
782.00	23230	Mid	LTE Band 13	10	23.0	22.24	0.05	1	F80C4	QPSK	25	0	10 mm	left	1:1	0.094	1.191	0.112	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Body											
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-28
LTE Band 5 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	-0.05	0	0813A	QPSK	1	0	10 mm	back	1:1	0.527	1.007	0.531	A31
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	0.04	1	0813A	QPSK	25	0	10 mm	back	1:1	0.426	1.012	0.431	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	-0.05	0	0813A	QPSK	1	0	10 mm	front	1:1	0.474	1.007	0.477	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	0.02	1	0813A	QPSK	25	0	10 mm	front	1:1	0.375	1.012	0.380	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	0.03	0	0813A	QPSK	1	0	10 mm	bottom	1:1	0.028	1.007	0.028	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	-0.01	1	0813A	QPSK	25	0	10 mm	bottom	1:1	0.022	1.012	0.022	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	-0.02	0	0813A	QPSK	1	0	10 mm	right	1:1	0.309	1.007	0.311	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	-0.01	1	0813A	QPSK	25	0	10 mm	right	1:1	0.250	1.012	0.253	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.47	0.04	0	0813A	QPSK	1	0	10 mm	left	1:1	0.132	1.007	0.133	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.45	-0.02	1	0813A	QPSK	25	0	10 mm	left	1:1	0.112	1.012	0.113	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 77 of 98	

Table 11-29
LTE Band 26 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	-0.02	0	0813A	QPSK	1	0	10 mm	back	1:1	0.410	1.054	0.432	A33
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	-0.01	1	0813A	QPSK	36	0	10 mm	back	1:1	0.335	1.059	0.355	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	-0.01	0	0813A	QPSK	1	0	10 mm	front	1:1	0.380	1.054	0.401	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.02	1	0813A	QPSK	36	0	10 mm	front	1:1	0.302	1.059	0.320	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	-0.05	0	0813A	QPSK	1	0	10 mm	bottom	1:1	0.027	1.054	0.028	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.10	1	0813A	QPSK	36	0	10 mm	bottom	1:1	0.018	1.059	0.019	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	-0.03	0	0813A	QPSK	1	0	10 mm	right	1:1	0.251	1.054	0.265	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.00	1	0813A	QPSK	36	0	10 mm	right	1:1	0.203	1.059	0.215	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.0	23.77	0.05	0	0813A	QPSK	1	0	10 mm	left	1:1	0.108	1.054	0.114	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.0	22.75	0.01	1	0813A	QPSK	36	0	10 mm	left	1:1	0.092	1.059	0.097	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-30
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.26	0.02	0	07EFF	QPSK	1	0	10 mm	back	1:1	0.347	1.057	0.367	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.96	0.00	0	07EFF	QPSK	50	0	10 mm	back	1:1	0.338	1.132	0.383	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.26	0.02	0	07EFF	QPSK	1	0	10 mm	front	1:1	0.329	1.057	0.348	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.96	0.03	0	07EFF	QPSK	50	0	10 mm	front	1:1	0.323	1.132	0.366	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.26	0.00	0	07EFF	QPSK	1	0	10 mm	bottom	1:1	0.506	1.057	0.535	A35
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.96	0.00	0	07EFF	QPSK	50	0	10 mm	bottom	1:1	0.487	1.132	0.551	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.26	-0.01	0	07EFF	QPSK	1	0	10 mm	right	1:1	0.046	1.057	0.049	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.96	0.06	0	07EFF	QPSK	50	0	10 mm	right	1:1	0.046	1.132	0.052	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.26	0.00	0	07EFF	QPSK	1	0	10 mm	left	1:1	0.070	1.057	0.074	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.96	0.03	0	07EFF	QPSK	50	0	10 mm	left	1:1	0.070	1.132	0.079	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-31
LTE Band 25 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.32	0.02	0	07CF0	QPSK	1	0	10 mm	back	1:1	0.513	1.042	0.535	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.31	-0.02	0	07CF0	QPSK	50	0	10 mm	back	1:1	0.512	1.045	0.535	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.32	-0.01	0	07CF0	QPSK	1	0	10 mm	front	1:1	0.372	1.042	0.388	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.31	-0.01	0	07CF0	QPSK	50	0	10 mm	front	1:1	0.367	1.045	0.384	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.32	-0.12	0	07CF0	QPSK	1	0	10 mm	bottom	1:1	0.755	1.042	0.787	A37
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.31	0.00	0	07CF0	QPSK	50	0	10 mm	bottom	1:1	0.722	1.045	0.754	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.32	-0.21	0	07CF0	QPSK	1	0	10 mm	right	1:1	0.073	1.042	0.076	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.31	-0.08	0	07CF0	QPSK	50	0	10 mm	right	1:1	0.072	1.045	0.075	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.32	-0.08	0	07CF0	QPSK	1	0	10 mm	left	1:1	0.082	1.042	0.085	
1905.00	26590	High	LTE Band 25 (PCS)	20	20.5	20.31	-0.21	0	07CF0	QPSK	50	0	10 mm	left	1:1	0.081	1.045	0.085	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 78 of 98

Table 11-32
LTE Band 41 Hotspot SAR

MEASUREMENT RESULTS																					
1 CC Uplink/ 2 CC Uplink	Component Carrier	FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
		MHz		Ch.														(W/kg)		(W/kg)	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.84	0.01	0	F7CF5	QPSK	1	0	10 mm	back	1:1.58	0.203	1.038	0.211	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.86	0.00	0	F7CF5	QPSK	50	0	10 mm	back	1:1.58	0.198	1.033	0.205	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.84	0.09	0	F7CF5	QPSK	1	0	10 mm	front	1:1.58	0.181	1.038	0.188	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.86	0.07	0	F7CF5	QPSK	50	0	10 mm	front	1:1.58	0.177	1.033	0.183	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.84	0.02	0	F7CF5	QPSK	1	0	10 mm	bottom	1:1.58	0.389	1.038	0.404	A39
2 CC Uplink	PCC	2680.00	41490	High	LTE Band 41	20	21.0	20.99	-0.03	0	F7CF5	QPSK	1	0	10 mm	bottom	1:1.58	0.327	1.002	0.328	
	SCC	2660.20	41292	High	LTE Band 41								99								
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.86	0.05	0	F7CF5	QPSK	50	0	10 mm	bottom	1:1.58	0.376	1.033	0.388	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.84	-0.04	0	F7CF5	QPSK	1	0	10 mm	left	1:1.58	0.129	1.038	0.134	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	21.0	20.86	0.08	0	F7CF5	QPSK	50	0	10 mm	left	1:1.58	0.127	1.033	0.131	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-33
WLAN Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	20.5	19.65	0.16	10 mm	1	0910E	1	back	99.8	0.447	0.306	1.216	1.002	0.373	A41
2437	6	802.11b	DSSS	22	20.5	19.65	0.10	10 mm	1	0910E	1	front	99.8	0.135	-	1.216	1.002	-	
2437	6	802.11b	DSSS	22	20.5	19.65	-0.10	10 mm	1	0910E	1	top	99.8	0.420	-	1.216	1.002	-	
2437	6	802.11b	DSSS	22	20.5	19.65	-0.01	10 mm	1	0910E	1	left	99.8	0.040	-	1.216	1.002	-	
2412	1	802.11b	DSSS	22	20.5	18.98	0.03	10 mm	2	0910E	1	back	99.8	0.314	0.256	1.419	1.002	0.364	
2412	1	802.11b	DSSS	22	20.5	18.98	0.15	10 mm	2	0910E	1	front	99.8	0.128	-	1.419	1.002	-	
2412	1	802.11b	DSSS	22	20.5	18.98	0.20	10 mm	2	0910E	1	top	99.8	0.036	-	1.419	1.002	-	
2412	1	802.11b	DSSS	22	20.5	18.98	0.00	10 mm	2	0910E	1	left	99.8	0.146	-	1.419	1.002	-	
5775	155	802.11ac	OFDM	80	15.5	15.04	0.02	10 mm	1	0910E	29.3	back	95.5	0.392	0.166	1.112	1.047	0.193	A43
5775	155	802.11ac	OFDM	80	15.5	15.04	0.12	10 mm	1	0910E	29.3	front	95.5	0.142	-	1.112	1.047	-	
5775	155	802.11ac	OFDM	80	15.5	15.04	0.20	10 mm	1	0910E	29.3	top	95.5	0.167	-	1.112	1.047	-	
5775	155	802.11ac	OFDM	80	15.5	15.04	0.17	10 mm	1	0910E	29.3	left	95.5	0.057	-	1.112	1.047	-	
5775	155	802.11ac	OFDM	80	15.5	15.01	-0.14	10 mm	2	0910E	29.3	back	93.2	0.271	0.137	1.119	1.073	0.164	
5775	155	802.11ac	OFDM	80	15.5	15.01	0.21	10 mm	2	0910E	29.3	front	93.2	0.197	-	1.119	1.073	-	
5775	155	802.11ac	OFDM	80	15.5	15.01	0.13	10 mm	2	0910E	29.3	top	93.2	0.200	-	1.119	1.073	-	
5775	155	802.11ac	OFDM	80	15.5	15.01	0.17	10 mm	2	0910E	29.3	left	93.2	0.064	-	1.119	1.073	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 79 of 98

Table 11-34
WLAN MIMO Operations with Simultaneous 2.4 GHz and 5 GHz WLAN Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm] (per Antenna)	Ant 1 Conducted Power [dBm]	Ant 2 Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.														W/kg	(W/kg)			(W/kg)	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.14	10 mm	MIMO	0910E	13	back	98.9	0.132	0.093	1.216	1.011	0.114	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.17	10 mm	MIMO	0910E	13	front	98.9	0.048	-	1.216	1.011	-	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.09	10 mm	MIMO	0910E	13	top	98.9	0.089	-	1.216	1.011	-	
2412	1	802.11n	OFDM	20	13.5	12.65	13.04	0.17	10 mm	MIMO	0910E	13	left	98.9	0.044	-	1.216	1.011	-	
5775	155	802.11ac	OFDM	80	13.5	13.20	13.21	0.17	10 mm	MIMO	0910E	58.5	back	88.9	0.183	0.056	1.072	1.125	0.068	
5775	155	802.11ac	OFDM	80	13.5	13.20	13.21	-0.21	10 mm	MIMO	0910E	58.5	front	88.9	0.089	-	1.072	1.125	-	
5775	155	802.11ac	OFDM	80	13.5	13.20	13.21	-0.13	10 mm	MIMO	0910E	58.5	top	88.9	0.048	-	1.072	1.125	-	
5775	155	802.11ac	OFDM	80	13.5	13.20	13.21	0.00	10 mm	MIMO	0910E	58.5	left	88.9	0.021	-	1.072	1.125	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											

Note: DTS and NII MIMO were additionally evaluated at the maximum allowed output power during operations with Simultaneous 2.4 GHz and 5 GHz WLAN. 5 GHz WIFI was not transmitting during the DTS evaluations and 2.4 GHz WIFI was not transmitting during the NII evaluations.

Table 11-35
Bluetooth Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	10.0	9.97	-0.20	10 mm	0910E	2	back	77.0	0.030	1.007	1.299	0.039	A45
2441	39	Bluetooth	FHSS	10.0	9.97	0.08	10 mm	0910E	2	front	77.0	0.009	1.007	1.299	0.012	
2441	39	Bluetooth	FHSS	10.0	9.97	-0.13	10 mm	0910E	2	top	77.0	0.001	1.007	1.299	0.001	
2441	39	Bluetooth	FHSS	10.0	9.97	0.16	10 mm	0910E	2	left	77.0	0.009	1.007	1.299	0.012	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

11.4 Standalone Phablet SAR Data

Table 11-36
UMTS Phablet SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1852.40	9262	UMTS 1900	RMC	23.5	23.06	0.07	0 mm	07CF0	1:1	bottom	2.900	1.107	3.210	A46
1880.00	9400	UMTS 1900	RMC	23.5	23.05	0.06	0 mm	07CF0	1:1	bottom	2.660	1.109	2.950	
1907.60	9538	UMTS 1900	RMC	23.5	23.17	0.12	0 mm	07CF0	1:1	bottom	2.320	1.079	2.503	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 80 of 98

Table 11-37
LTE Band 25 Phablet SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.															(W/kg)		(W/kg)	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.18	0.07	0	07CF0	QPSK	1	0	0 mm	bottom	1:1	3.030	1.076	3.260	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.5	23.09	0.09	0	07CF0	QPSK	1	0	0 mm	bottom	1:1	2.880	1.099	3.165	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.32	0.06	0	07CF0	QPSK	1	0	0 mm	bottom	1:1	2.600	1.042	2.709	
1860.00	26140	Low	LTE Band 25 (PCS)	20	22.5	22.15	0.10	1	07CF0	QPSK	50	0	0 mm	bottom	1:1	2.380	1.084	2.580	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	22.5	22.05	0.07	1	07CF0	QPSK	50	0	0 mm	bottom	1:1	2.240	1.109	2.484	
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.22	0.08	1	07CF0	QPSK	50	0	0 mm	bottom	1:1	2.010	1.067	2.145	
1905.00	26590	High	LTE Band 25 (PCS)	20	22.5	22.20	0.07	1	07CF0	QPSK	100	0	0 mm	bottom	1:1	1.970	1.072	2.112	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.18	0.09	0	07CF0	QPSK	1	0	0 mm	bottom	1:1	3.060	1.076	3.293	A47
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

Note: Blue entry represents variability data.

Table 11-38
WLAN Phablet SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5290	58	802.11ac	OFDM	80	15.5	14.56	-0.19	0 mm	1	0910E	29.3	back	95.5	10.181	0.624	1.242	1.047	0.811	
5290	58	802.11ac	OFDM	80	15.5	14.56	0.19	0 mm	1	0910E	29.3	front	95.5	2.455	-	1.242	1.047	-	
5290	58	802.11ac	OFDM	80	15.5	14.56	0.16	0 mm	1	0910E	29.3	top	95.5	1.008	-	1.242	1.047	-	
5290	58	802.11ac	OFDM	80	15.5	14.56	0.12	0 mm	1	0910E	29.3	left	95.5	0.186	-	1.242	1.047	-	
5290	58	802.11ac	OFDM	80	15.5	15.11	-0.16	0 mm	2	0910E	29.3	back	93.2	9.820	0.737	1.094	1.073	0.865	
5290	58	802.11ac	OFDM	80	15.5	15.11	0.18	0 mm	2	0910E	29.3	front	93.2	2.676	-	1.094	1.073	-	
5290	58	802.11ac	OFDM	80	15.5	15.11	0.14	0 mm	2	0910E	29.3	top	93.2	1.877	-	1.094	1.073	-	
5290	58	802.11ac	OFDM	80	15.5	15.11	0.17	0 mm	2	0910E	29.3	left	93.2	0.272	-	1.094	1.073	-	
5610	122	802.11ac	OFDM	80	15.5	15.34	0.13	0 mm	1	0910E	29.3	back	95.5	10.005	0.851	1.038	1.047	0.925	A48
5610	122	802.11ac	OFDM	80	15.5	15.34	0.13	0 mm	1	0910E	29.3	front	95.5	4.338	-	1.038	1.047	-	
5610	122	802.11ac	OFDM	80	15.5	15.34	0.16	0 mm	1	0910E	29.3	top	95.5	1.512	-	1.038	1.047	-	
5610	122	802.11ac	OFDM	80	15.5	15.34	0.21	0 mm	1	0910E	29.3	left	95.5	0.585	-	1.038	1.047	-	
5610	122	802.11ac	OFDM	80	15.5	14.82	0.06	0 mm	2	0910E	29.3	back	93.2	12.605	0.688	1.169	1.073	0.863	
5610	122	802.11ac	OFDM	80	15.5	14.82	0.19	0 mm	2	0910E	29.3	front	93.2	3.448	-	1.169	1.073	-	
5610	122	802.11ac	OFDM	80	15.5	14.82	0.20	0 mm	2	0910E	29.3	top	93.2	2.368	-	1.169	1.073	-	
5610	122	802.11ac	OFDM	80	15.5	14.82	0.20	0 mm	2	0910E	29.3	left	93.2	0.378	-	1.169	1.073	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Phablet											
Uncontrolled Exposure/General Population								4.0 W/kg (mW/g) averaged over 10 grams											

Table 11-39
Bluetooth Phablet SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Duty Cycle	SAR (10g)	Scaling Factor	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	16.0	15.65	0.09	0 mm	0910E	1	back	77.0	1:1	0.482	1.084	1.299	0.679	A49
2441	39	Bluetooth	FHSS	16.0	15.65	0.15	0 mm	0910E	1	front	77.0	1:1	0.208	1.084	1.299	0.293	
2441	39	Bluetooth	FHSS	16.0	15.65	-0.20	0 mm	0910E	1	top	77.0	1:1	0.065	1.084	1.299	0.092	
2441	39	Bluetooth	FHSS	16.0	15.65	0.12	0 mm	0910E	1	left	77.0	1:1	0.043	1.084	1.299	0.061	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 81 of 98

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg for 1g SAR and 2.0 W/kg for 10g SAR. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
11. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 82 of 98

Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.

4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for LTE DLCA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. For LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 83 of 98

Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.7.6 for more information.
4. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
6. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.
7. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes:

1. Body worn and Phablet Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR was evaluated for BT EDR tethering applications.
3. Head and hotspot Bluetooth SAR was measured with the device connected to a call box with hopping disabled with 2DH5 operations and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time-domain plot and calculation for the duty factor of the device.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 84 of 98

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB Publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 85 of 98

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.155	0.460	0.420	0.615	0.575	1.035
	GSM 1900	0.057	0.460	0.420	0.517	0.477	0.937
	UMTS 850	0.151	0.460	0.420	0.611	0.571	1.031
	UMTS 1900	0.111	0.460	0.420	0.571	0.531	0.991
	Cell. CDMA/EVDO	0.265	0.460	0.420	0.725	0.685	1.145
	LTE Band 12	0.059	0.460	0.420	0.519	0.479	0.939
	LTE Band 13	0.144	0.460	0.420	0.604	0.564	1.024
	LTE Band 5 (Cell)	0.214	0.460	0.420	0.674	0.634	1.094
	LTE Band 26 (Cell)	0.201	0.460	0.420	0.661	0.621	1.081
	LTE Band 4 (AWS)	0.128	0.460	0.420	0.588	0.548	1.008
	LTE Band 25 (PCS)	0.147	0.460	0.420	0.607	0.567	1.027
	LTE Band 41	0.063	0.460	0.420	0.523	0.483	0.943

Table 12-2
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.155	0.489	0.313	0.644	0.468	0.957
	GSM 1900	0.057	0.489	0.313	0.546	0.370	0.859
	UMTS 850	0.151	0.489	0.313	0.640	0.464	0.953
	UMTS 1900	0.111	0.489	0.313	0.600	0.424	0.913
	Cell. CDMA/EVDO	0.265	0.489	0.313	0.754	0.578	1.067
	LTE Band 12	0.059	0.489	0.313	0.548	0.372	0.861
	LTE Band 13	0.144	0.489	0.313	0.633	0.457	0.946
	LTE Band 5 (Cell)	0.214	0.489	0.313	0.703	0.527	1.016
	LTE Band 26 (Cell)	0.201	0.489	0.313	0.690	0.514	1.003
	LTE Band 4 (AWS)	0.128	0.489	0.313	0.617	0.441	0.930
	LTE Band 25 (PCS)	0.147	0.489	0.313	0.636	0.460	0.949
	LTE Band 41	0.063	0.489	0.313	0.552	0.376	0.865

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 86 of 98

Table 12-3
Simultaneous Transmission Scenario with 2.4 GHz MIMO and 5 GHz MIMO WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Head SAR	GSM 850	0.155	0.332	0.489	0.313	1.289
	GSM 1900	0.057	0.332	0.489	0.313	1.191
	UMTS 850	0.151	0.332	0.489	0.313	1.285
	UMTS 1900	0.111	0.332	0.489	0.313	1.245
	Cell. CDMA/EVDO	0.265	0.332	0.489	0.313	1.399
	LTE Band 12	0.059	0.332	0.489	0.313	1.193
	LTE Band 13	0.144	0.332	0.489	0.313	1.278
	LTE Band 5 (Cell)	0.214	0.332	0.489	0.313	1.348
	LTE Band 26 (Cell)	0.201	0.332	0.489	0.313	1.335
	LTE Band 4 (AWS)	0.128	0.332	0.489	0.313	1.262
	LTE Band 25 (PCS)	0.147	0.332	0.489	0.313	1.281
	LTE Band 41	0.063	0.332	0.489	0.313	1.197

Table 12-4
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.155	0.103	0.258
	GSM 1900	0.057	0.103	0.160
	UMTS 850	0.151	0.103	0.254
	UMTS 1900	0.111	0.103	0.214
	Cell. CDMA/EVDO	0.265	0.103	0.368
	LTE Band 12	0.059	0.103	0.162
	LTE Band 13	0.144	0.103	0.247
	LTE Band 5 (Cell)	0.214	0.103	0.317
	LTE Band 26 (Cell)	0.201	0.103	0.304
	LTE Band 4 (AWS)	0.128	0.103	0.231
	LTE Band 25 (PCS)	0.147	0.103	0.250
	LTE Band 41	0.063	0.103	0.166

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 87 of 98

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.265	0.199	0.142	0.464	0.407	0.606
	GSM 1900	0.154	0.199	0.142	0.353	0.296	0.495
	UMTS 850	0.251	0.199	0.142	0.450	0.393	0.592
	UMTS 1900	0.498	0.199	0.142	0.697	0.640	0.839
	Cell. CDMA	0.441	0.199	0.142	0.640	0.583	0.782
	LTE Band 12	0.102	0.199	0.142	0.301	0.244	0.443
	LTE Band 13	0.185	0.199	0.142	0.384	0.327	0.526
	LTE Band 5 (Cell)	0.330	0.199	0.142	0.529	0.472	0.671
	LTE Band 26 (Cell)	0.267	0.199	0.142	0.466	0.409	0.608
	LTE Band 4 (AWS)	0.636	0.199	0.142	0.835	0.778	0.977
	LTE Band 25 (PCS)	0.541	0.199	0.142	0.740	0.683	0.882
	LTE Band 41	0.317	0.199	0.142	0.516	0.459	0.658

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.265	0.237	0.286	0.502	0.551	0.788
	GSM 1900	0.154	0.237	0.286	0.391	0.440	0.677
	UMTS 850	0.251	0.237	0.286	0.488	0.537	0.774
	UMTS 1900	0.498	0.237	0.286	0.735	0.784	1.021
	Cell. CDMA	0.441	0.237	0.286	0.678	0.727	0.964
	LTE Band 12	0.102	0.237	0.286	0.339	0.388	0.625
	LTE Band 13	0.185	0.237	0.286	0.422	0.471	0.708
	LTE Band 5 (Cell)	0.330	0.237	0.286	0.567	0.616	0.853
	LTE Band 26 (Cell)	0.267	0.237	0.286	0.504	0.553	0.790
	LTE Band 4 (AWS)	0.636	0.237	0.286	0.873	0.922	1.159
	LTE Band 25 (PCS)	0.541	0.237	0.286	0.778	0.827	1.064
	LTE Band 41	0.317	0.237	0.286	0.554	0.603	0.840

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset	Page 88 of 98	

Table 12-7

Simultaneous Transmission Scenario with 2.4 GHz MIMO and 5 GHz MIMO WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.265	0.052	0.137	0.454
	GSM 1900	0.154	0.052	0.137	0.343
	UMTS 850	0.251	0.052	0.137	0.440
	UMTS 1900	0.498	0.052	0.137	0.687
	Cell. CDMA	0.441	0.052	0.137	0.630
	LTE Band 12	0.102	0.052	0.137	0.291
	LTE Band 13	0.185	0.052	0.137	0.374
	LTE Band 5 (Cell)	0.330	0.052	0.137	0.519
	LTE Band 26 (Cell)	0.267	0.052	0.137	0.456
	LTE Band 4 (AWS)	0.636	0.052	0.137	0.825
	LTE Band 25 (PCS)	0.541	0.052	0.137	0.730
	LTE Band 41	0.317	0.052	0.137	0.506

Table 12-8

Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.265	0.038	0.303
	GSM 1900	0.154	0.038	0.192
	UMTS 850	0.251	0.038	0.289
	UMTS 1900	0.498	0.038	0.536
	Cell. CDMA	0.441	0.038	0.479
	LTE Band 12	0.102	0.038	0.140
	LTE Band 13	0.185	0.038	0.223
	LTE Band 5 (Cell)	0.330	0.038	0.368
	LTE Band 26 (Cell)	0.267	0.038	0.305
	LTE Band 4 (AWS)	0.636	0.038	0.674
	LTE Band 25 (PCS)	0.541	0.038	0.579
	LTE Band 41	0.317	0.038	0.355

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 89 of 98

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-9
Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.538	0.373	0.364	0.911	0.902	1.275
	GPRS 1900	0.740	0.373	0.364	1.113	1.104	1.477
	UMTS 850	0.423	0.373	0.364	0.796	0.787	1.160
	UMTS 1900	0.734	0.373	0.364	1.107	1.098	1.471
	Cell. EVDO	0.634	0.373	0.364	1.007	0.998	1.371
	LTE Band 12	0.165	0.373	0.364	0.538	0.529	0.902
	LTE Band 13	0.304	0.373	0.364	0.677	0.668	1.041
	LTE Band 5 (Cell)	0.531	0.373	0.364	0.904	0.895	1.268
	LTE Band 26 (Cell)	0.432	0.373	0.364	0.805	0.796	1.169
	LTE Band 4 (AWS)	0.551	0.373	0.364	0.924	0.915	1.288
	LTE Band 25 (PCS)	0.787	0.373	0.364	1.160	1.151	1.524
	LTE Band 41	0.404	0.373	0.364	0.777	0.768	1.141

Table 12-10
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.538	0.193	0.164	0.731	0.702	0.895
	GPRS 1900	0.740	0.193	0.164	0.933	0.904	1.097
	UMTS 850	0.423	0.193	0.164	0.616	0.587	0.780
	UMTS 1900	0.734	0.193	0.164	0.927	0.898	1.091
	Cell. EVDO	0.634	0.193	0.164	0.827	0.798	0.991
	LTE Band 12	0.165	0.193	0.164	0.358	0.329	0.522
	LTE Band 13	0.304	0.193	0.164	0.497	0.468	0.661
	LTE Band 5 (Cell)	0.531	0.193	0.164	0.724	0.695	0.888
	LTE Band 26 (Cell)	0.432	0.193	0.164	0.625	0.596	0.789
	LTE Band 4 (AWS)	0.551	0.193	0.164	0.744	0.715	0.908
	LTE Band 25 (PCS)	0.787	0.193	0.164	0.980	0.951	1.144
	LTE Band 41	0.404	0.193	0.164	0.597	0.568	0.761

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 90 of 98

Table 12-11
Simultaneous Transmission Scenario with 2.4 GHz MIMO and 5 GHz MIMO WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.538	0.114	0.068	0.720
	GPRS 1900	0.740	0.114	0.068	0.922
	UMTS 850	0.423	0.114	0.068	0.605
	UMTS 1900	0.734	0.114	0.068	0.916
	Cell. EVDO	0.634	0.114	0.068	0.816
	LTE Band 12	0.165	0.114	0.068	0.347
	LTE Band 13	0.304	0.114	0.068	0.486
	LTE Band 5 (Cell)	0.531	0.114	0.068	0.713
	LTE Band 26 (Cell)	0.432	0.114	0.068	0.614
	LTE Band 4 (AWS)	0.551	0.114	0.068	0.733
	LTE Band 25 (PCS)	0.787	0.114	0.068	0.969
	LTE Band 41	0.404	0.114	0.068	0.586

Table 12-12
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.538	0.039	0.577
	GPRS 1900	0.740	0.039	0.779
	UMTS 850	0.423	0.039	0.462
	UMTS 1900	0.734	0.039	0.773
	Cell. EVDO	0.634	0.039	0.673
	LTE Band 12	0.165	0.039	0.204
	LTE Band 13	0.304	0.039	0.343
	LTE Band 5 (Cell)	0.531	0.039	0.570
	LTE Band 26 (Cell)	0.432	0.039	0.471
	LTE Band 4 (AWS)	0.551	0.039	0.590
	LTE Band 25 (PCS)	0.787	0.039	0.826
	LTE Band 41	0.404	0.039	0.443

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 91 of 98

12.6 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required for 2.4Ghz WLAN Phablet Simultaneous Transmission Analysis.

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

Per KDB 648474 D04v01r03, the device edges with hotspot mode scaled to the maximum output power (including tolerance) < 1.2 W/kg are not required to be evaluated for 10g SAR (N/A).

Table 12-13
Simultaneous Transmission Scenario – 5 GHz WLAN (Phablet)

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Phablet SAR	Back	N/A	0.925	0.865	0.925	0.865	1.790
	Front	N/A	0.925*	0.865*	0.925	0.865	1.790
	Top	-	0.925*	0.865*	0.925	0.865	1.790
	Bottom	3.210	-	-	3.210	3.210	3.210
	Left	N/A	0.925*	0.865*	0.925	0.865	1.790
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Phablet SAR	Back	N/A	0.925	0.865	0.925	0.865	1.790
	Front	N/A	0.925*	0.865*	0.925	0.865	1.790
	Top	-	0.925*	0.865*	0.925	0.865	1.790
	Bottom	3.293	-	-	3.293	3.293	3.293
	Left	N/A	0.925*	0.865*	0.925	0.865	1.790

Table 12-14
Simultaneous Transmission Scenario – Bluetooth (Phablet)

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	UMTS 1900	3.210	0.679	3.889
	LTE Band 25 (PCS)	3.293	0.679	3.972

12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 92 of 98

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Table 13-1
Phablet SAR Measurement Variability Results

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1860.00	26140	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	bottom	0 mm	3.030	3.060	1.01	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams						

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g SAR and <3.75 for 10g SAR for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 93 of 98

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753E	(30kHz-6GHz) Network Analyzer	3/2/2016	Annual	3/2/2017	JP38020182
Agilent	8753ES	S-Parameter Network Analyzer	3/3/2016	Annual	3/3/2017	US39170122
Agilent	E4432B	ESG-D Series Signal Generator	3/5/2016	Annual	3/5/2017	US40053896
Agilent	E4438C	ESG Vector Signal Generator	3/12/2015	Biennial	3/12/2017	MY45090700
Agilent	E5515C	Wireless Communications Test Set	1/29/2016	Biennial	1/29/2018	GB46310798
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	10/5/2016	Annual	10/5/2017	GB42230325
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/2/2016	Annual	3/2/2017	MY45470194
Agilent	N4010A	Wireless Connectivity Test Set	CBT	N/A	CBT	GB46170464
Agilent	N5182A	MXG Vector Signal Generator	10/27/2016	Annual	10/27/2017	MY47420603
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA24106A	USB Power Sensor	3/4/2016	Annual	3/4/2017	1344555
Anritsu	MA24106A	USB Power Sensor	3/4/2016	Annual	3/4/2017	1344556
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1126066
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1207470
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	ML2496A	Power Meter	3/5/2016	Annual	3/5/2017	1351001
Anritsu	MT8820C	Radio Communication Analyzer	4/14/2016	Annual	4/14/2017	6201240328
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M15SA00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Digital Thermometer	3/18/2015	Biennial	3/18/2017	150194896
Control Company	4352	Ultra Long Stem Thermometer	3/8/2016	Biennial	3/8/2018	160261701
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6"CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264162
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	NC-100	Torque Wrench	5/21/2015	Biennial	5/21/2017	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	3/29/2016	Annual	3/29/2017	836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	3/25/2016	Annual	3/25/2017	128633
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	8/30/2016	Biennial	8/30/2018	N/A
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	1161
SPEAG	D835V2	835 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	4d047
SPEAG	D835V2	835 MHz SAR Dipole	7/14/2016	Annual	7/14/2017	4d133
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2016	Annual	5/9/2017	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/15/2016	Annual	7/15/2017	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	797
SPEAG	D2450V2	2450 MHz SAR Dipole	7/25/2016	Annual	7/25/2017	981
SPEAG	D2600V2	2600 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	1071
SPEAG	D2600V2	2600 MHz SAR Dipole	7/25/2016	Annual	7/25/2017	1126
SPEAG	D5GHzV2	5 GHz SAR Dipole	9/21/2016	Annual	9/21/2017	1191
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/2/2016	Annual	8/2/2017	1237
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/22/2016	Annual	8/22/2017	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/14/2016	Annual	9/14/2017	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/11/2016	Annual	5/11/2017	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/19/2016	Annual	2/19/2017	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/14/2016	Annual	3/14/2017	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/14/2016	Annual	4/14/2017	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2016	Annual	2/18/2017	1272
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2016	Annual	5/10/2017	1070
SPEAG	ES3DV3	SAR Probe	3/18/2016	Annual	3/18/2017	3209
SPEAG	ES3DV3	SAR Probe	9/19/2016	Annual	9/19/2017	3287
SPEAG	EX3DV4	SAR Probe	5/17/2016	Annual	5/17/2017	7409
SPEAG	EX3DV4	SAR Probe	4/19/2016	Annual	4/19/2017	7357
SPEAG	ES3DV3	SAR Probe	2/19/2016	Annual	2/19/2017	3318
SPEAG	ES3DV3	SAR Probe	3/18/2016	Annual	3/18/2017	3319
SPEAG	EX3DV4	SAR Probe	4/19/2016	Annual	4/19/2017	7406
SPEAG	EX3DV4	SAR Probe	2/22/2016	Annual	2/22/2017	3914

Note:

-CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

-Each equipment item was used solely within its respective calibration period.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 94 of 98

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 95 of 98

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 96 of 98

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 97 of 98

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMG9550		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701160026-01.A3L	Test Dates: 01/02/17 – 02/13/17	DUT Type: Portable Handset		Page 98 of 98

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CA0

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 40.815$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.28 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.154 W/kg

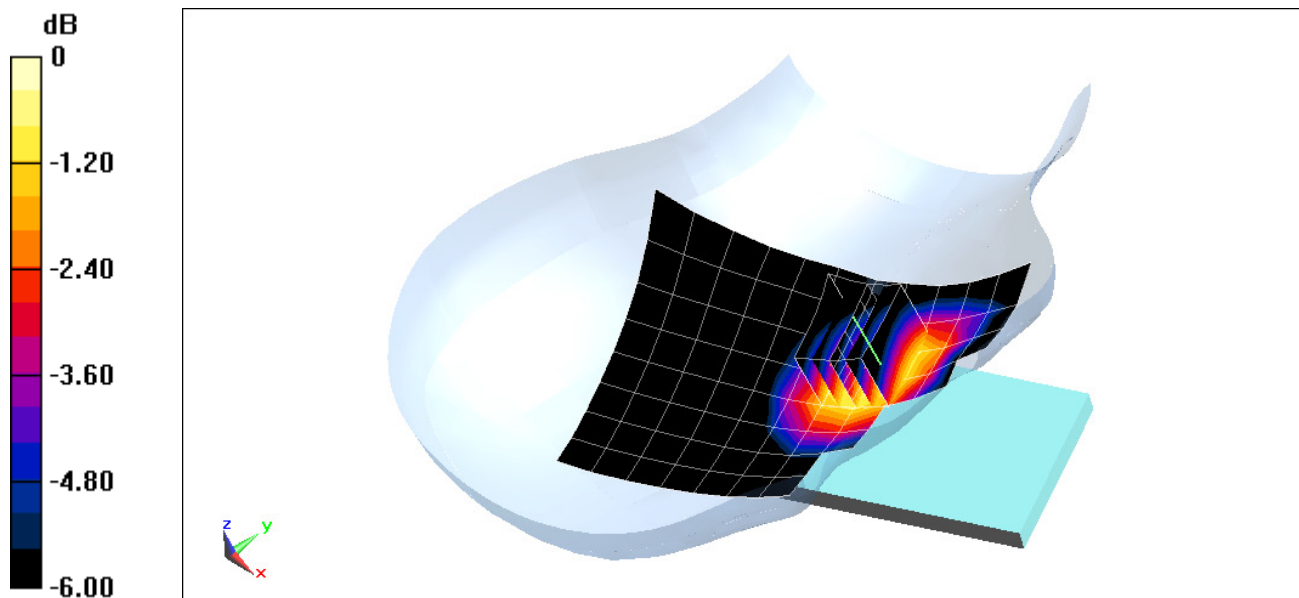

0 dB = 0.168 W/kg = -7.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 38.303$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-18-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3287; ConvF(5.27, 5.27, 5.27); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Right Head, Cheek, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.789 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.057 W/kg

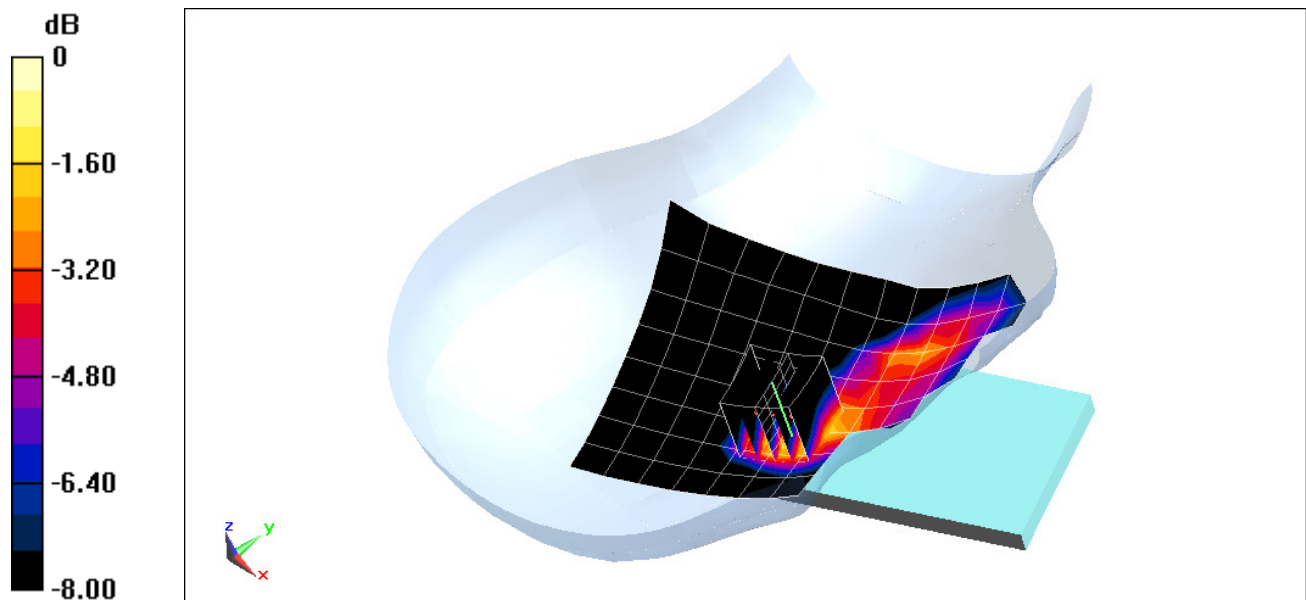

0 dB = 0.0682 W/kg = -11.66 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CA0

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated)

$f = 836.6 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 40.815$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.85 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.142 W/kg

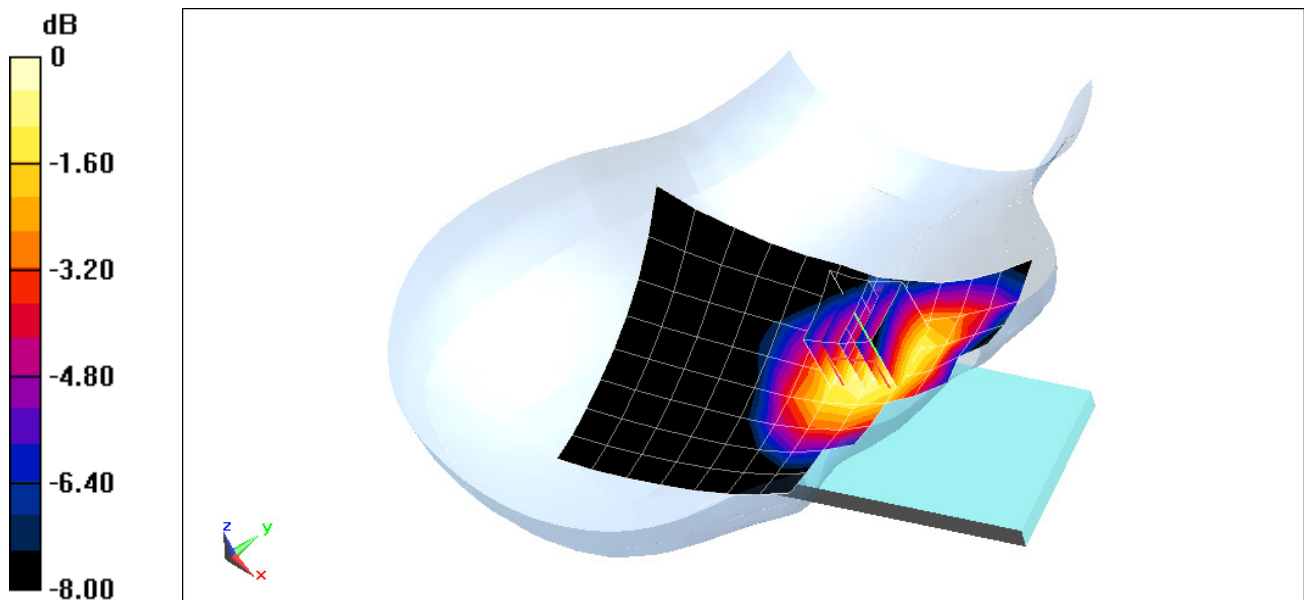

0 dB = 0.156 W/kg = -8.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 38.303$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01-18-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3287; ConvF(5.27, 5.27, 5.27); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.875 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.100 W/kg

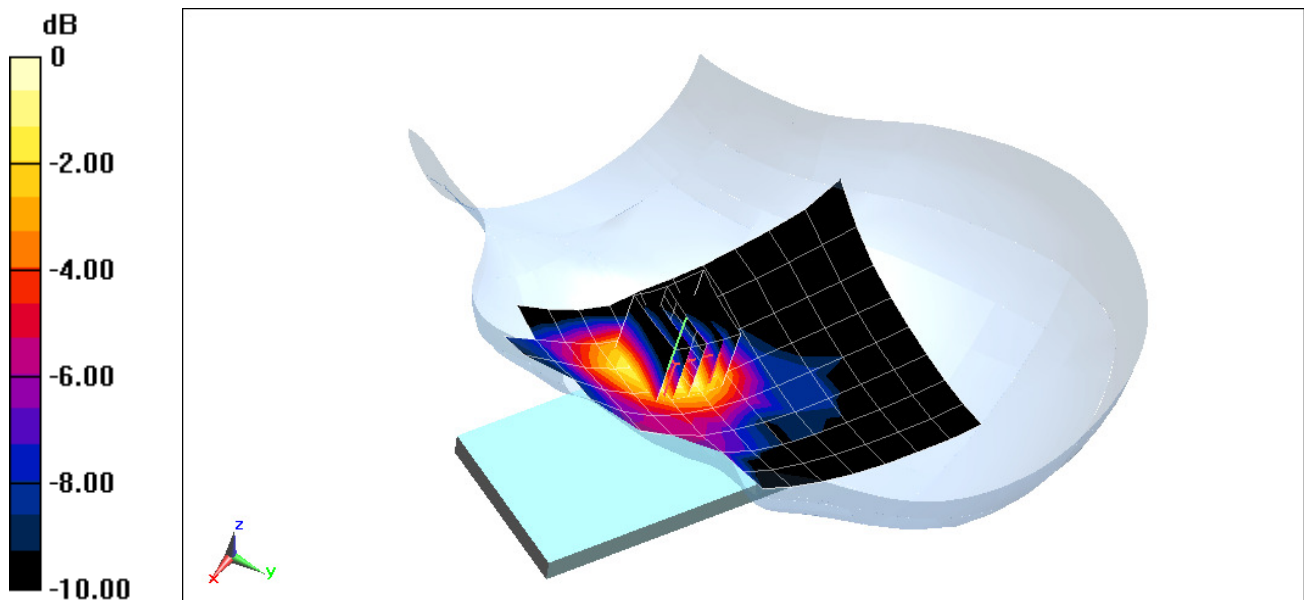

0 dB = 0.116 W/kg = -9.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.52 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 41.133$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 02-13-2017; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(10.04, 10.04, 10.04); Calibrated: 5/17/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 5/11/2016
Phantom: SAM Right; Type: QD000P40CD; Serial: TP:7535
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. CDMA, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.03 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.224 W/kg

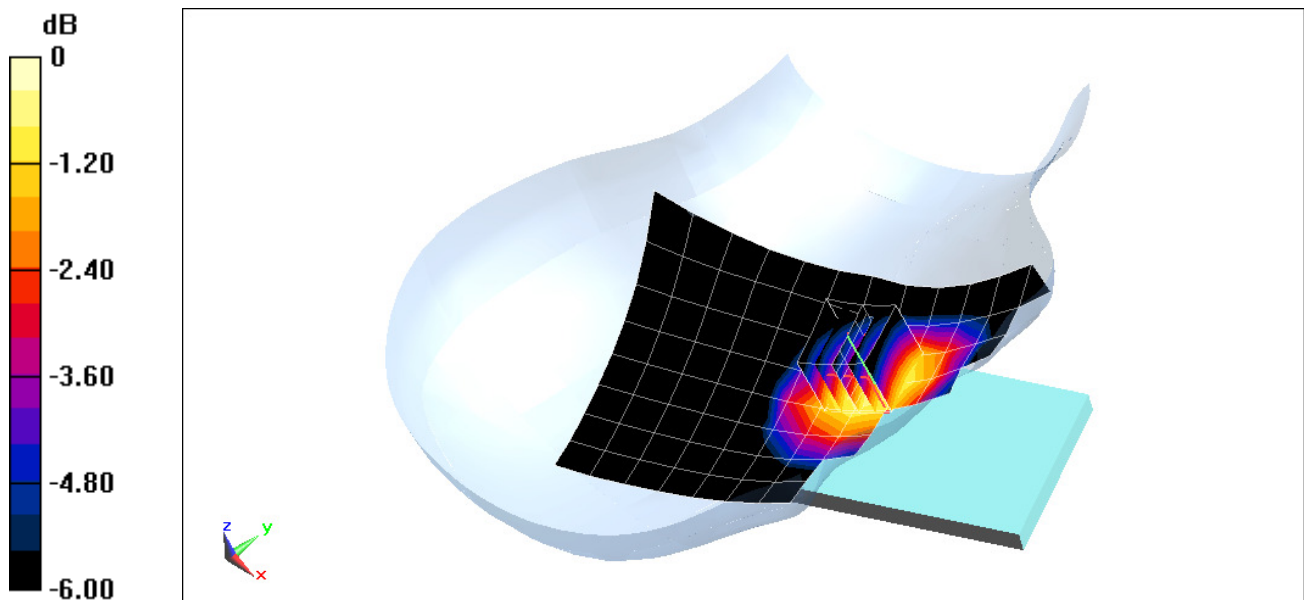

0 dB = 0.262 W/kg = -5.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F80C4

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.162$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-18-2017; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(6.6, 6.6, 6.6); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Right; Type: SAM; Serial: 1757

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.158 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0600 W/kg

SAR(1 g) = 0.050 W/kg

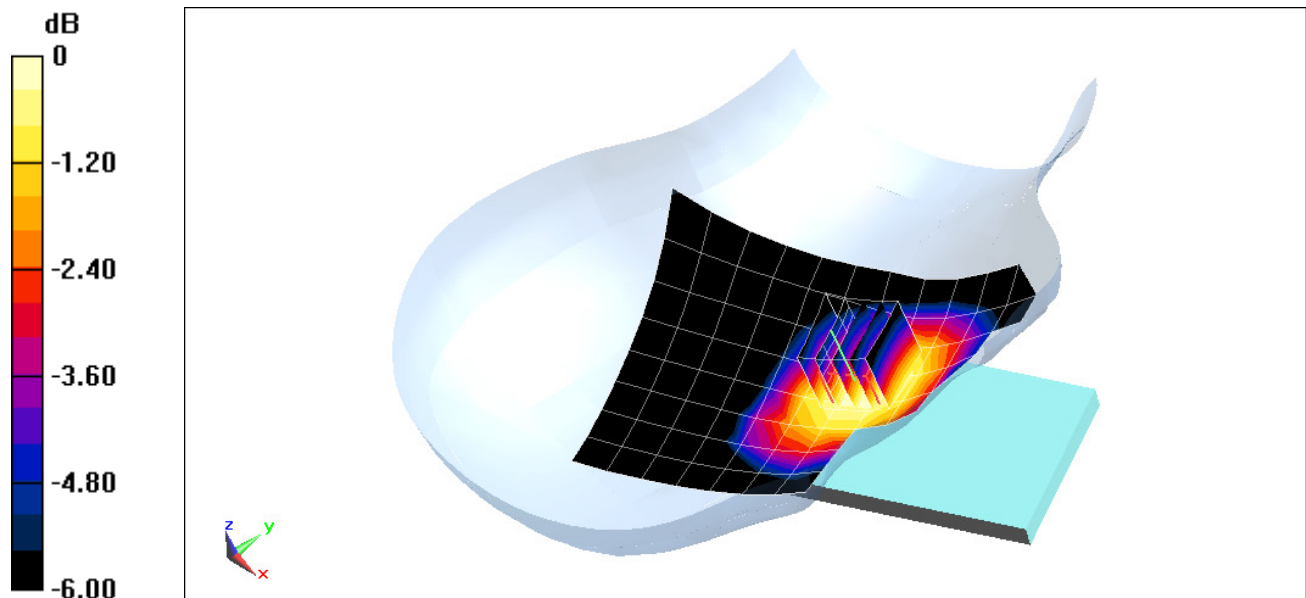

0 dB = 0.0532 W/kg = -12.74 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F80C4

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 41.096$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-18-2017; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(6.6, 6.6, 6.6); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Right; Type: SAM; Serial: 1757

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.39 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.121 W/kg

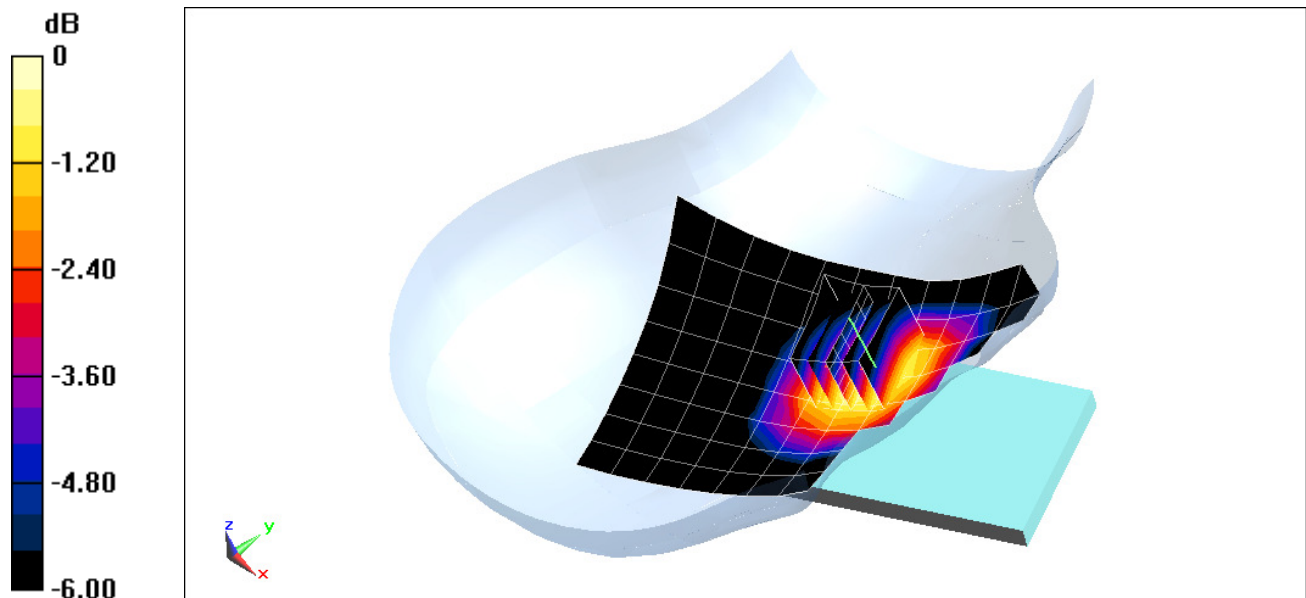

0 dB = 0.131 W/kg = -8.83 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CA0

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 40.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.10 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.213 W/kg

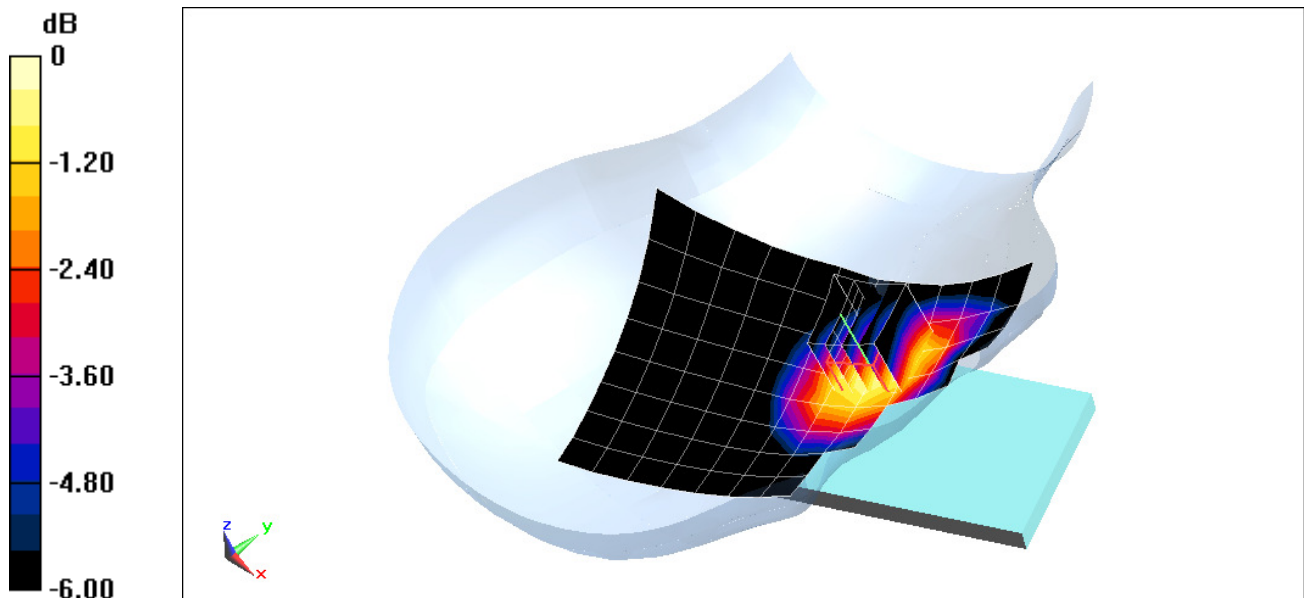

0 dB = 0.236 W/kg = -6.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CA0

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 40.864$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch, 15 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.75 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.191 W/kg

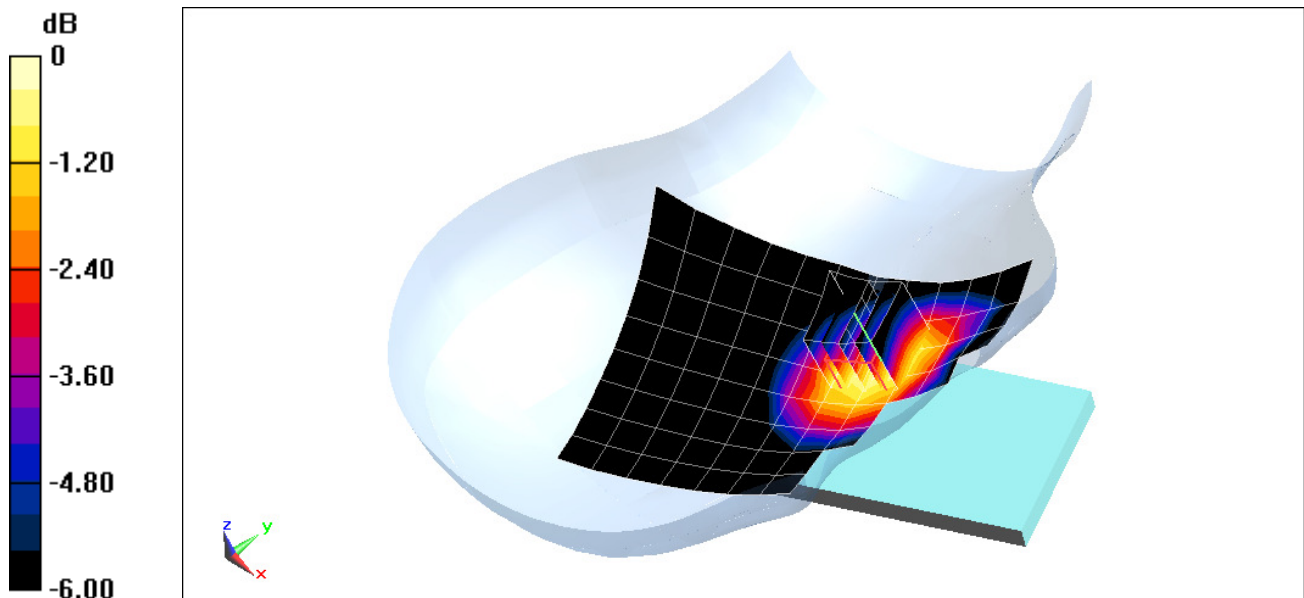

0 dB = 0.210 W/kg = -6.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 38.822$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01-20-2017; Ambient Temp: 23.5°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(5.28, 5.28, 5.28); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.782 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.108 W/kg

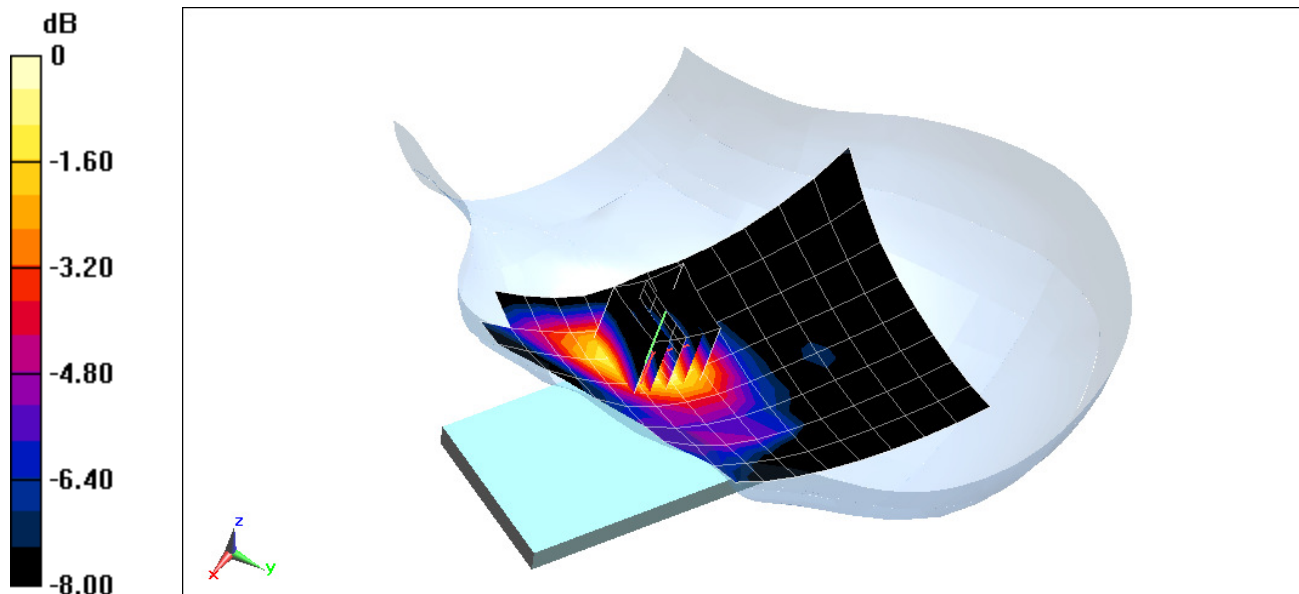

0 dB = 0.123 W/kg = -9.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.427 \text{ S/m}$; $\epsilon_r = 38.205$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01-18-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3287; ConvF(5.27, 5.27, 5.27); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.77 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.141 W/kg

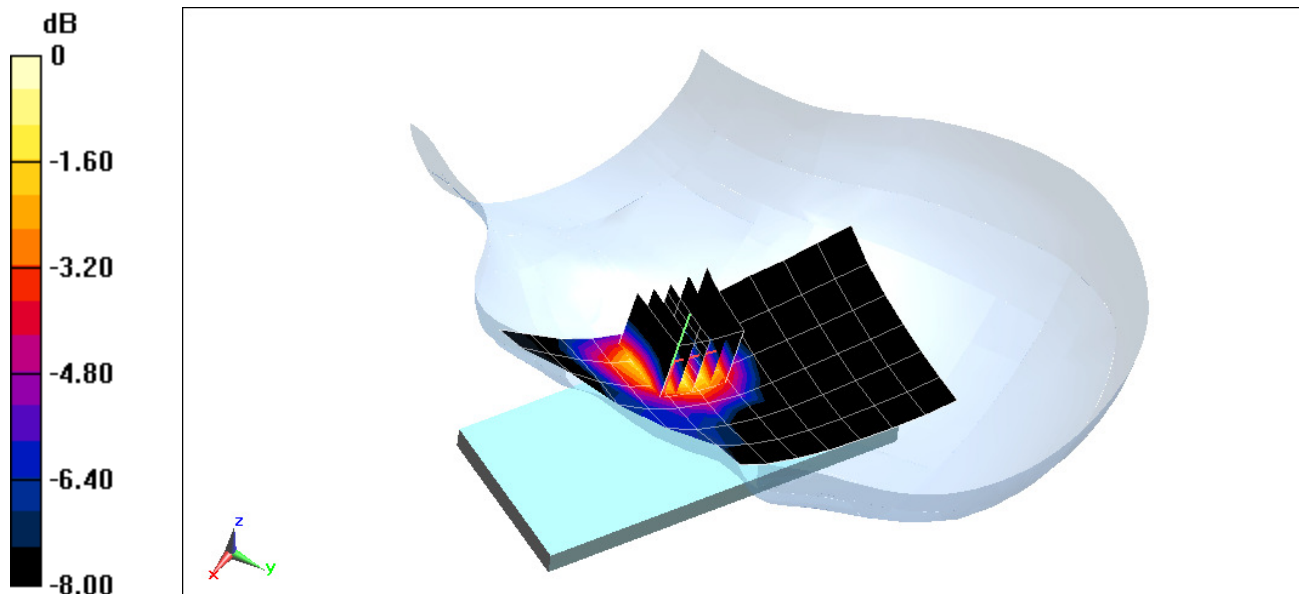

0 dB = 0.166 W/kg = -7.80 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CF0

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2600 Head; Medium parameters used (interpolated):

$f = 2680 \text{ MHz}$; $\sigma = 2.148 \text{ S/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-16-2017; Ambient Temp: 24.0°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(4.41, 4.41, 4.41); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 41 ULCA, Right Head, Cheek,

PCC: 20 MHz Bandwidth, Ch 41490, QPSK, 1 RB, 0 RB Offset

SCC: 20 MHz Bandwidth, Ch 41292, QPSK, 1 RB, 99 RB Offset


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.007 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.062 W/kg

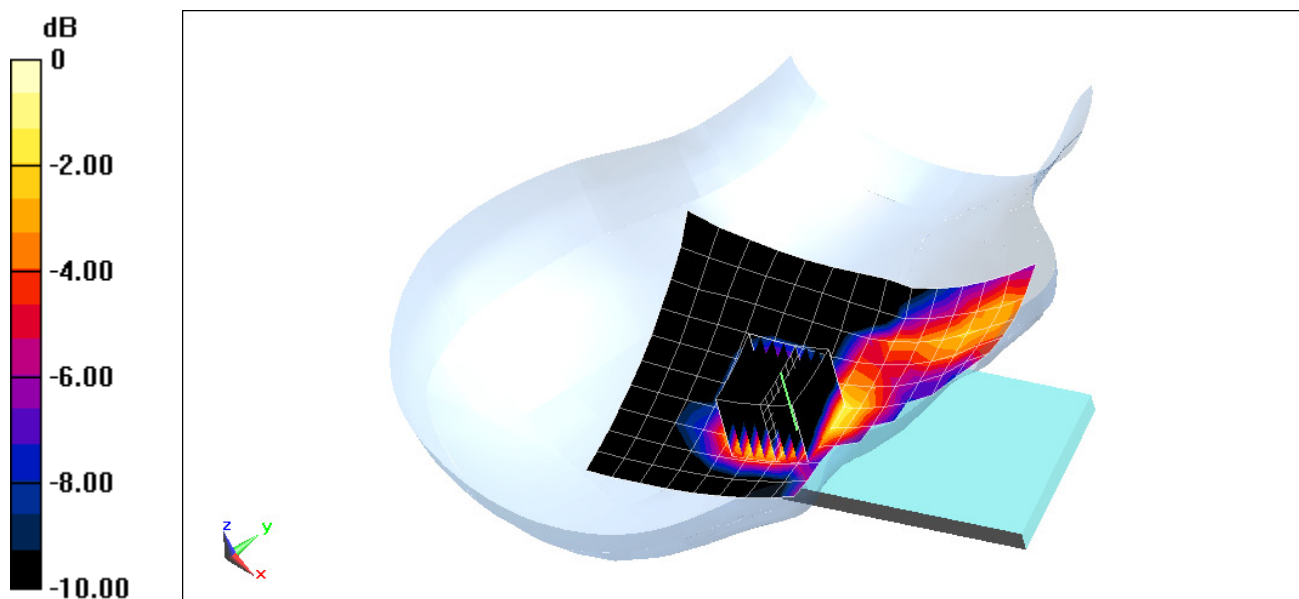

0 dB = 0.0772 W/kg = -11.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.853 \text{ S/m}$; $\epsilon_r = 39.19$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-10-2017; Ambient Temp: 23.6°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(4.54, 4.54, 4.54); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth,
Right Head, Cheek, Ch 6, 1 Mbps**


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.11 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.458 W/kg

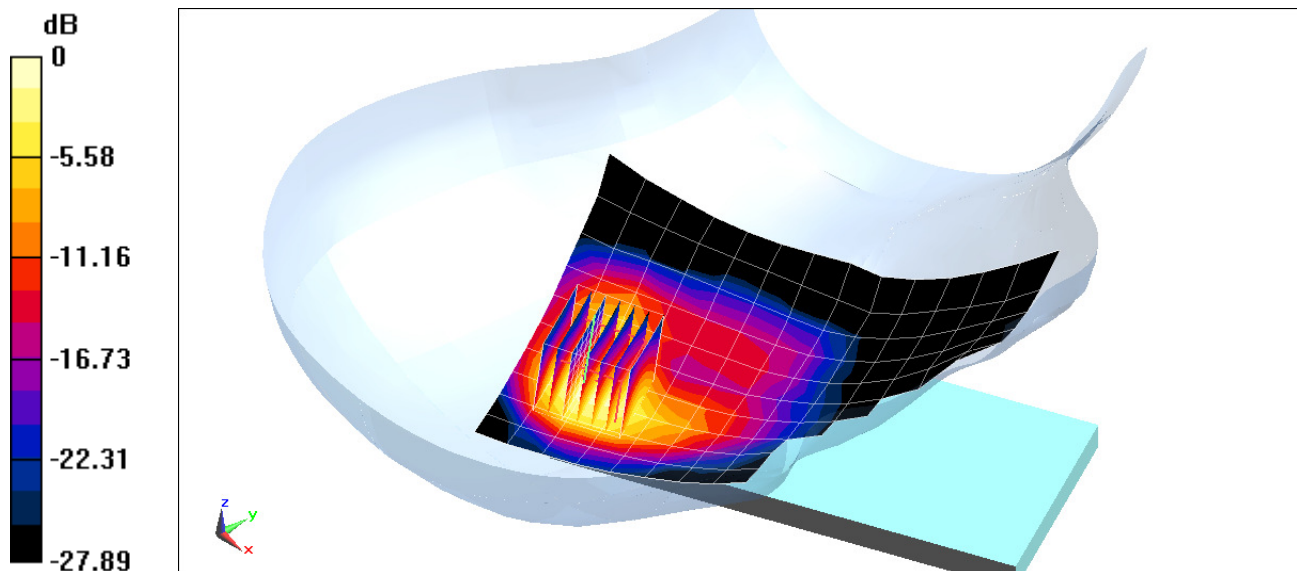

0 dB = 0.631 W/kg = -2.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CA0

Communication System: UID 0, 802.11ac 5.2-5.8 GHz Band; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used (interpolated):

$f = 5775 \text{ MHz}$; $\sigma = 5.093 \text{ S/m}$; $\epsilon_r = 34.286$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(4.65, 4.65, 4.65); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11ac, Antenna 1, U-NII-3, 80 MHz Bandwidth,
Right Head, Cheek, Ch 155, 29.3 Mbps**


Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 3.665 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.436 W/kg

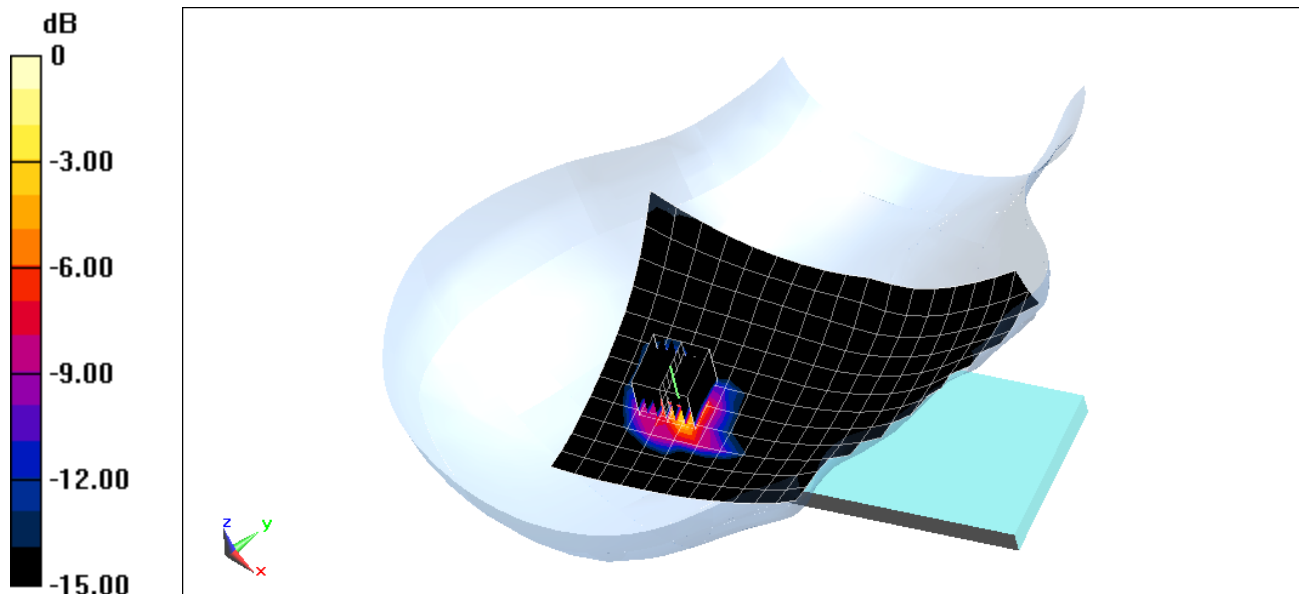

0 dB = 1.27 W/kg = 1.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.299

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.859 \text{ S/m}$; $\epsilon_r = 38.197$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-22-2017; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3287; ConvF(4.54, 4.54, 4.54); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Right Head, Cheek, Ch 39, 2 Mbps


Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (11x10x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.710 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.079 W/kg

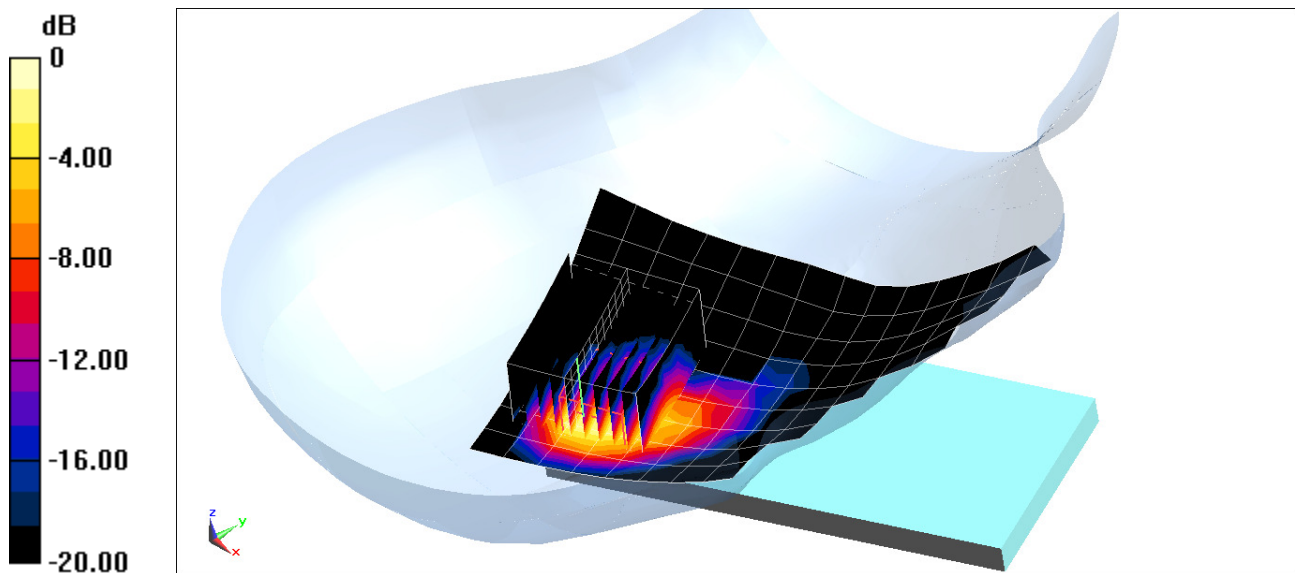

0 dB = 0.107 W/kg = -9.71 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.74 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.263 W/kg

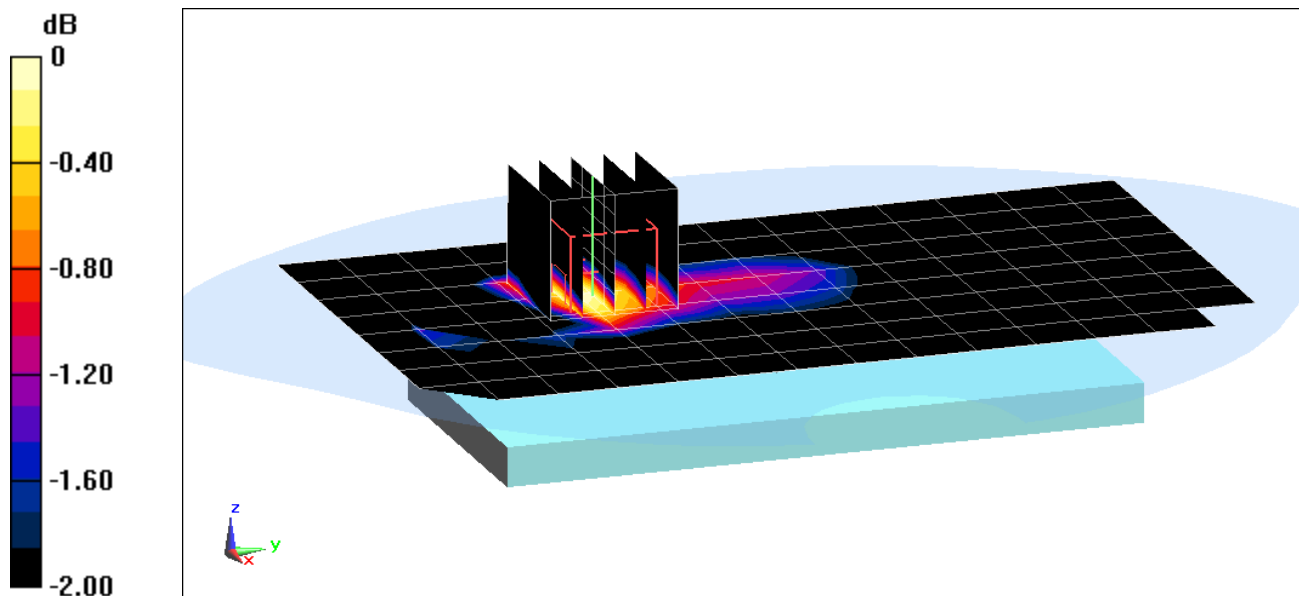

0 dB = 0.289 W/kg = -5.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back Side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.04 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.452 W/kg

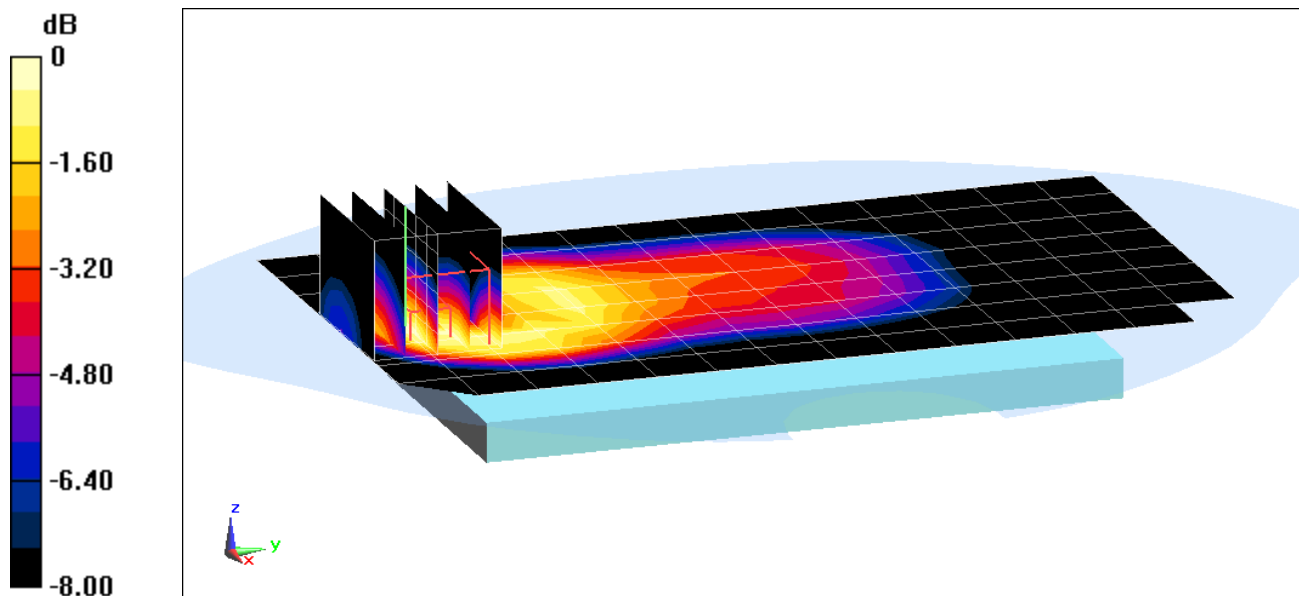

0 dB = 0.521 W/kg = -2.83 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.45 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.153 W/kg

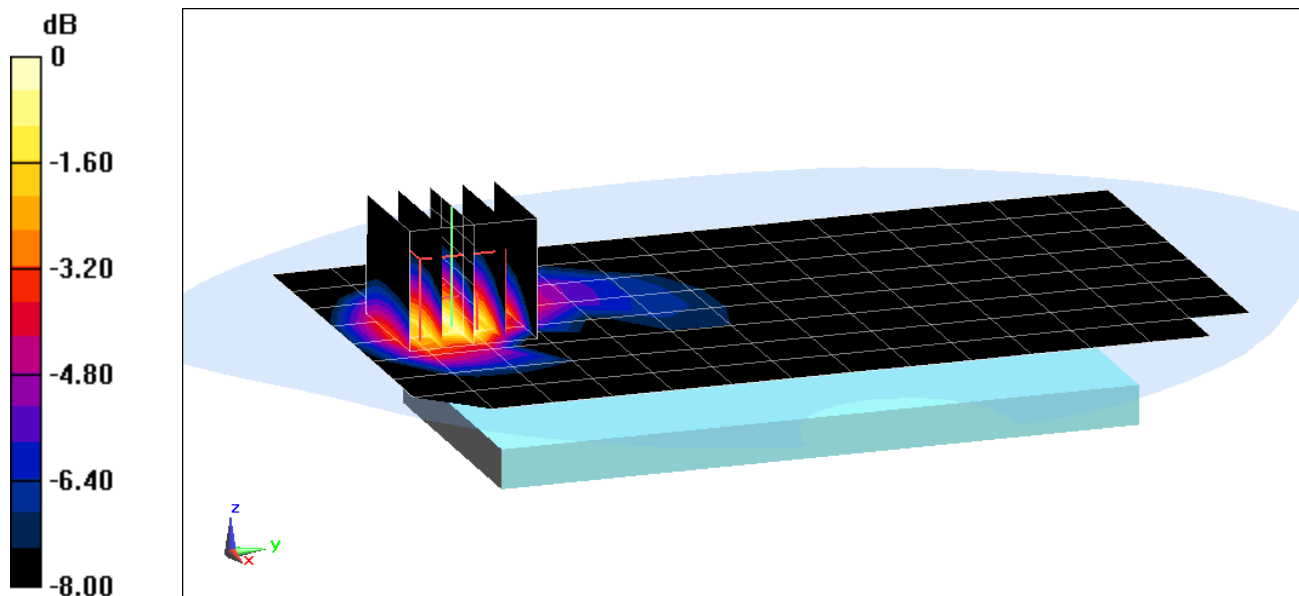

0 dB = 0.218 W/kg = -6.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.54 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.655 W/kg

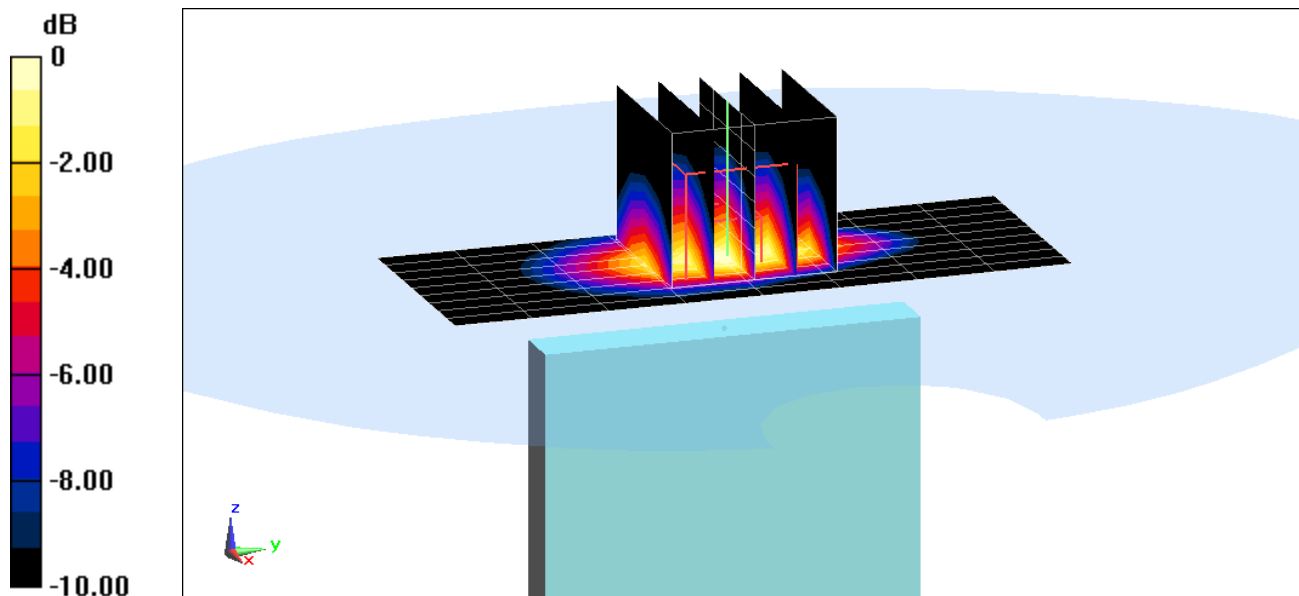

0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.97 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.236 W/kg

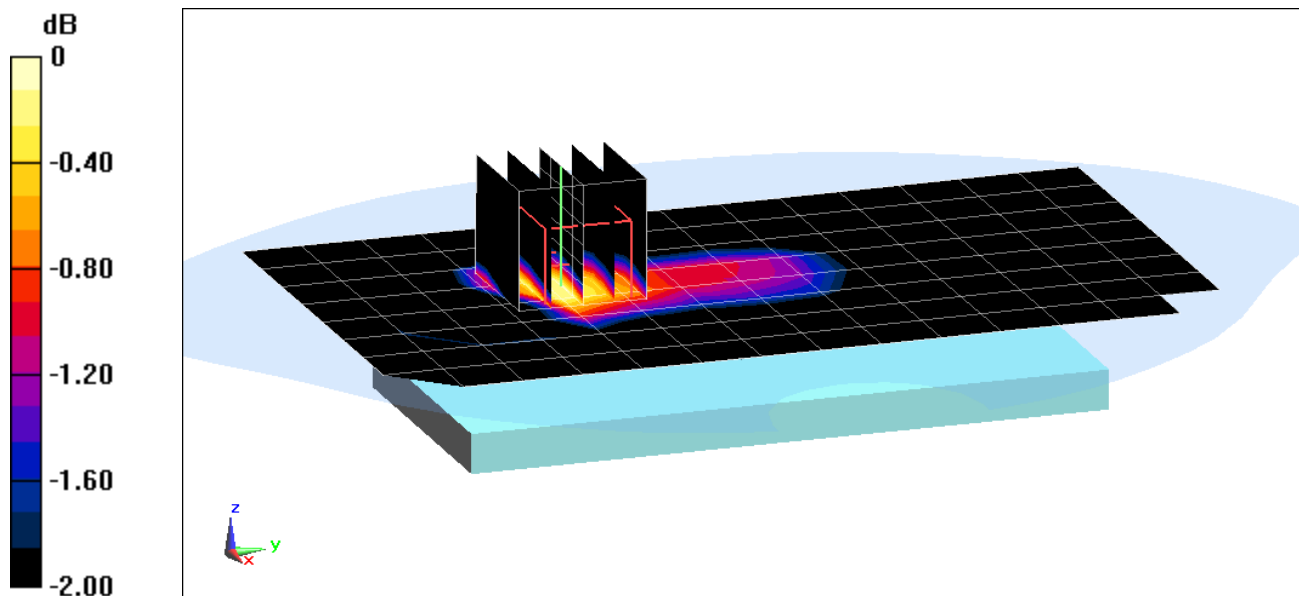

0 dB = 0.261 W/kg = -5.83 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.05 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.398 W/kg

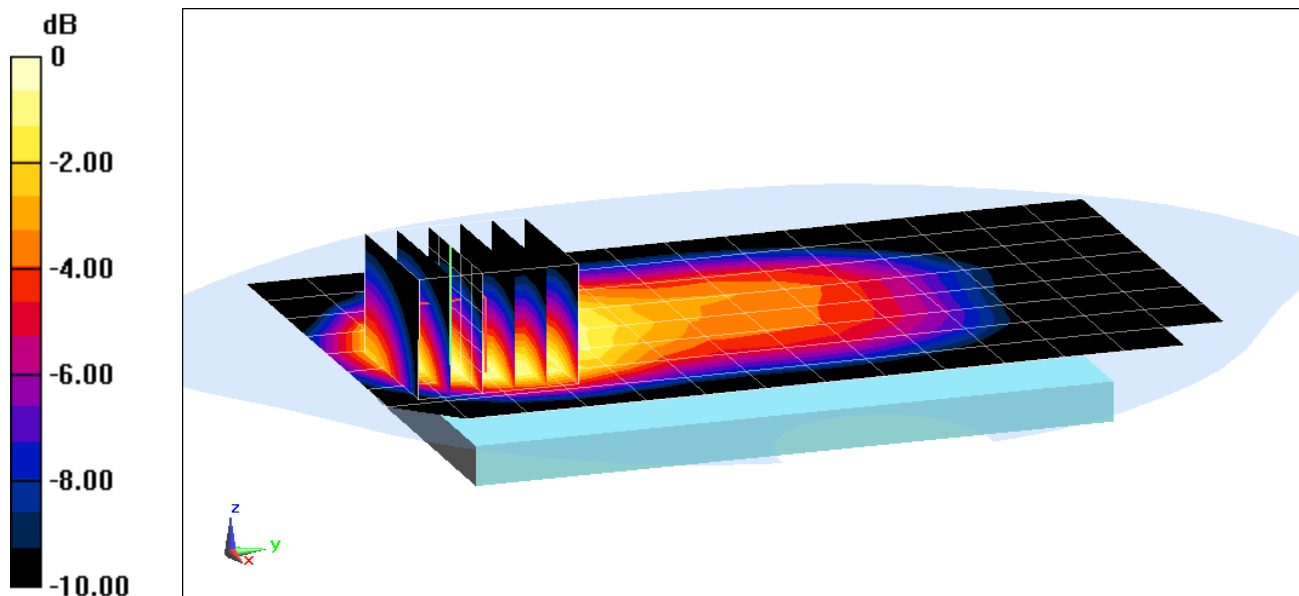

0 dB = 0.469 W/kg = -3.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.81 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.449 W/kg

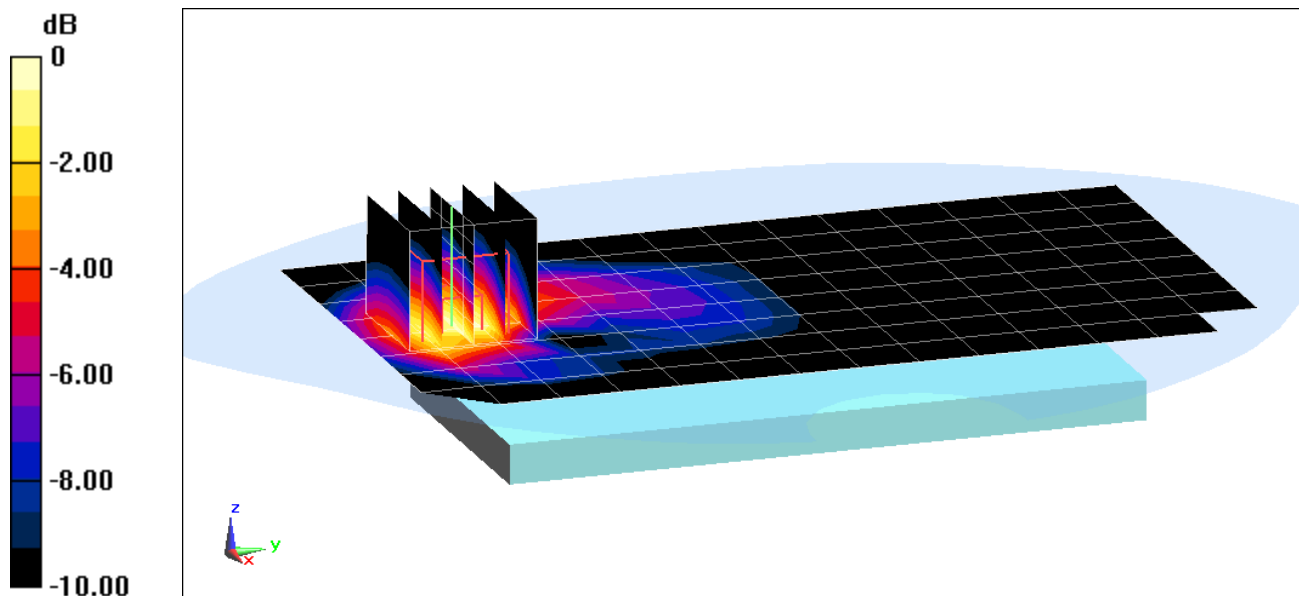

0 dB = 0.636 W/kg = -1.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Bottom Edge, Mid.ch


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.43 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.645 W/kg

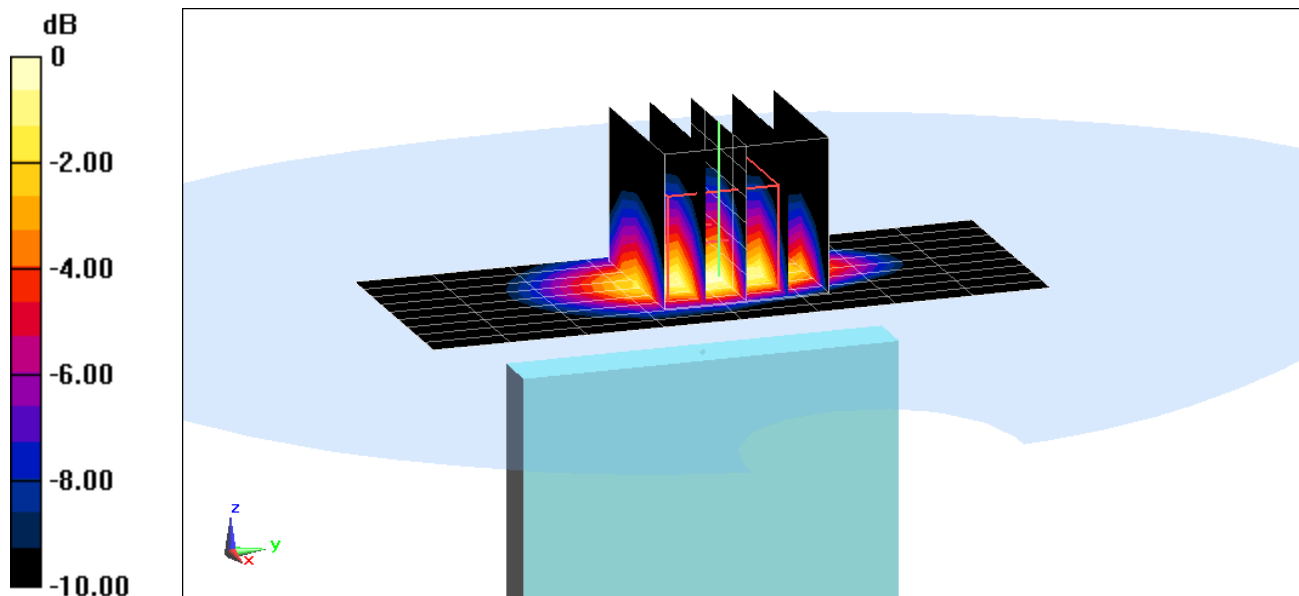

0 dB = 0.984 W/kg = -0.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.52 \text{ MHz}$; $\sigma = 0.989 \text{ S/m}$; $\epsilon_r = 54.21$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-13-2017; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. CDMA, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.02 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.372 W/kg

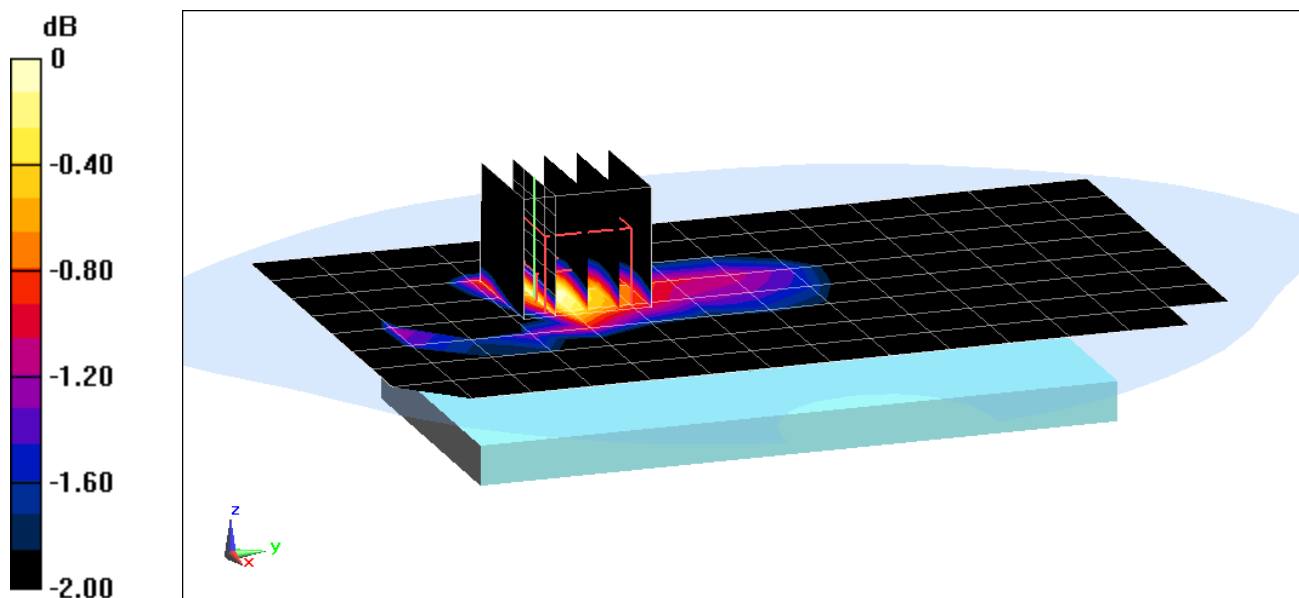

0 dB = 0.409 W/kg = -3.88 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.52 \text{ MHz}$; $\sigma = 0.989 \text{ S/m}$; $\epsilon_r = 54.21$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-13-2017; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. EVDO, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.82 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.890 W/kg

SAR(1 g) = 0.542 W/kg

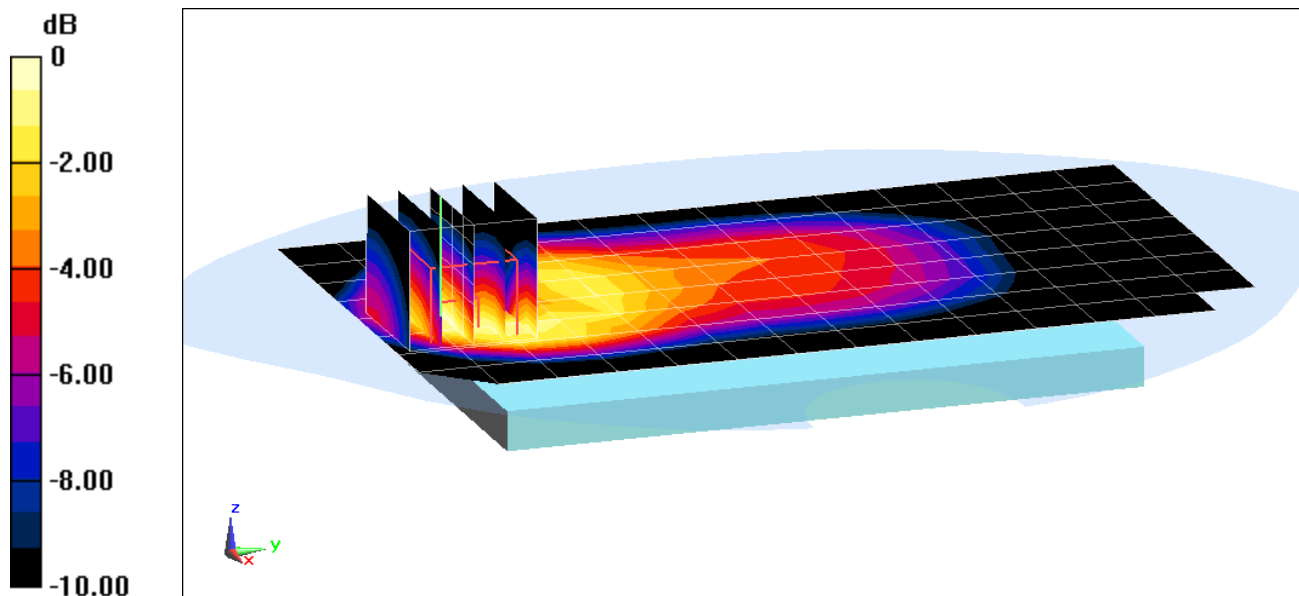

0 dB = 0.663 W/kg = -1.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F80C4

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 55.07$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.19, 6.19, 6.19); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0 Left; Type: QD000P40CD; Serial: TP:1692

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.10 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.087 W/kg

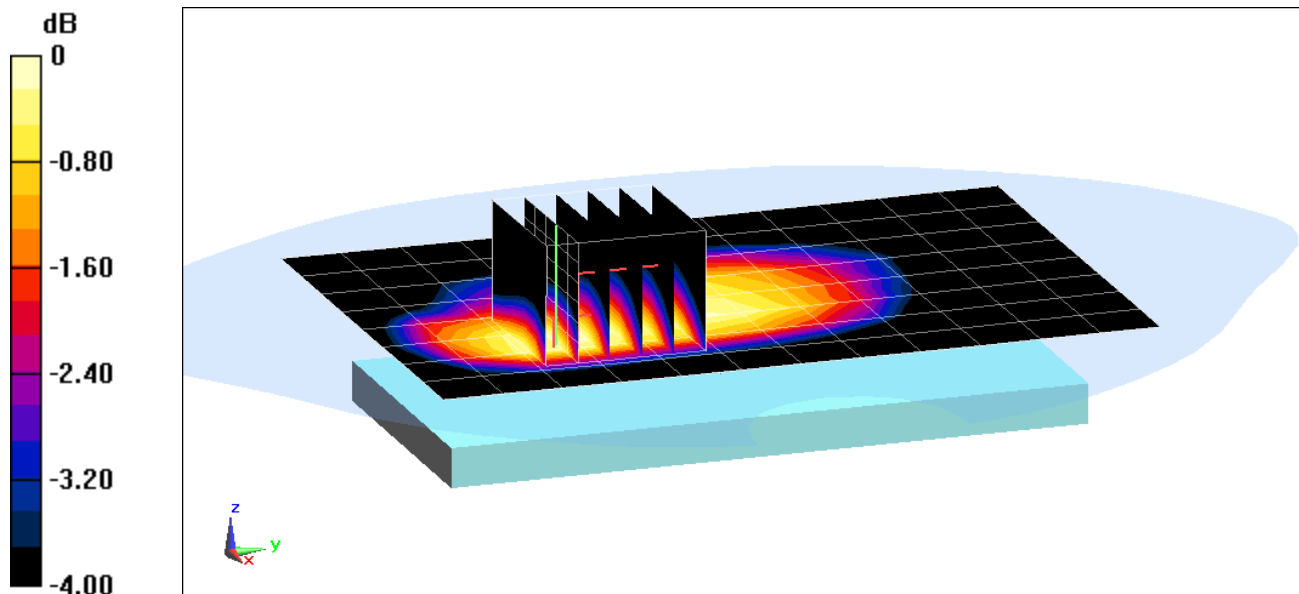

0 dB = 0.0955 W/kg = -10.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F80C4

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 55.07$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.19, 6.19, 6.19); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0 Left; Type: QD000P40CD; Serial: TP:1692

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.140 W/kg

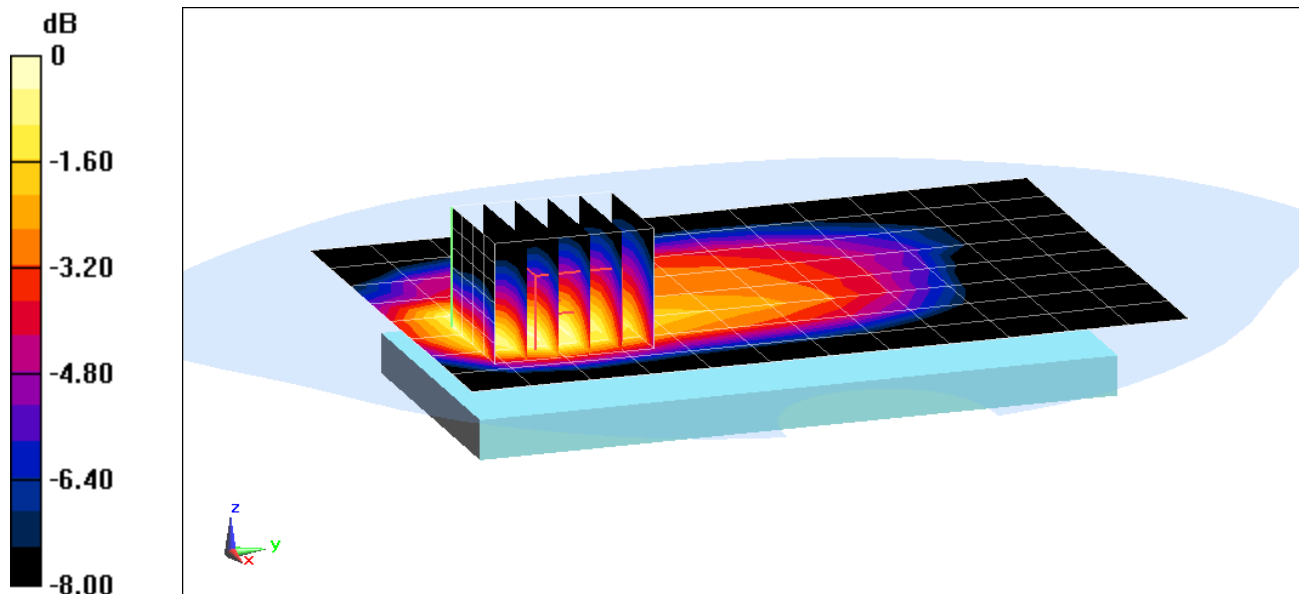

0 dB = 0.167 W/kg = -7.77 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F80C4

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 54.294$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.19, 6.19, 6.19); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0 Left; Type: QD000P40CD; Serial: TP:1692

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.93 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.156 W/kg

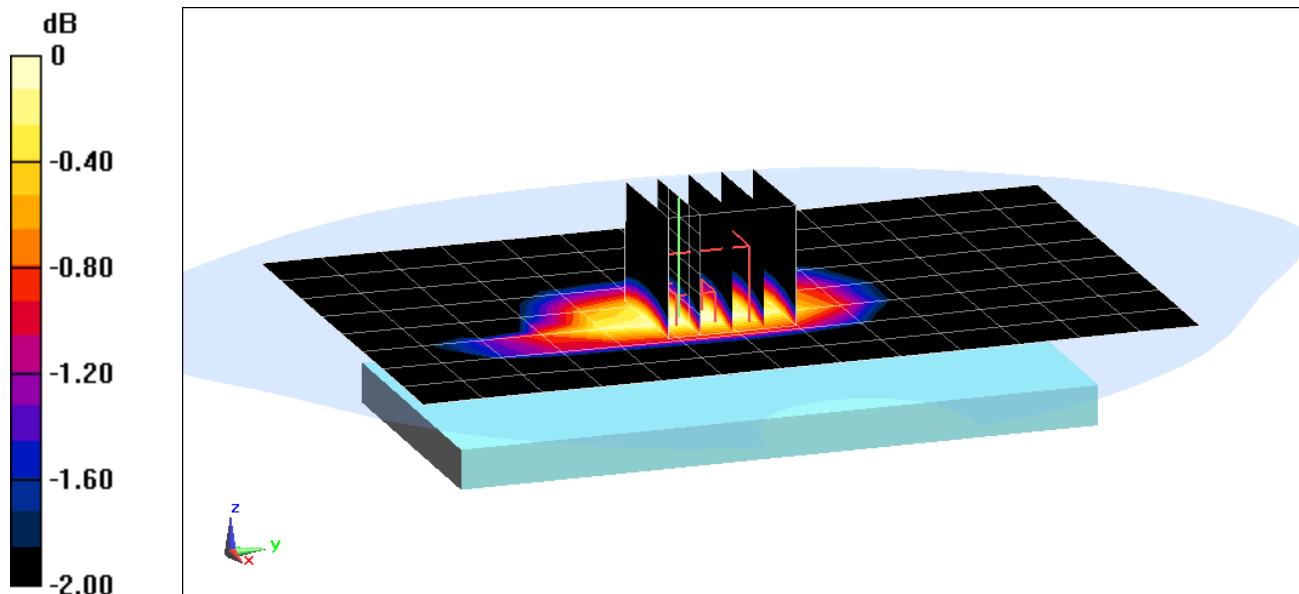

0 dB = 0.172 W/kg = -7.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F80C4

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 54.294$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.19, 6.19, 6.19); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0 Left; Type: QD000P40CD; Serial: TP:1692

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x8x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.256 W/kg

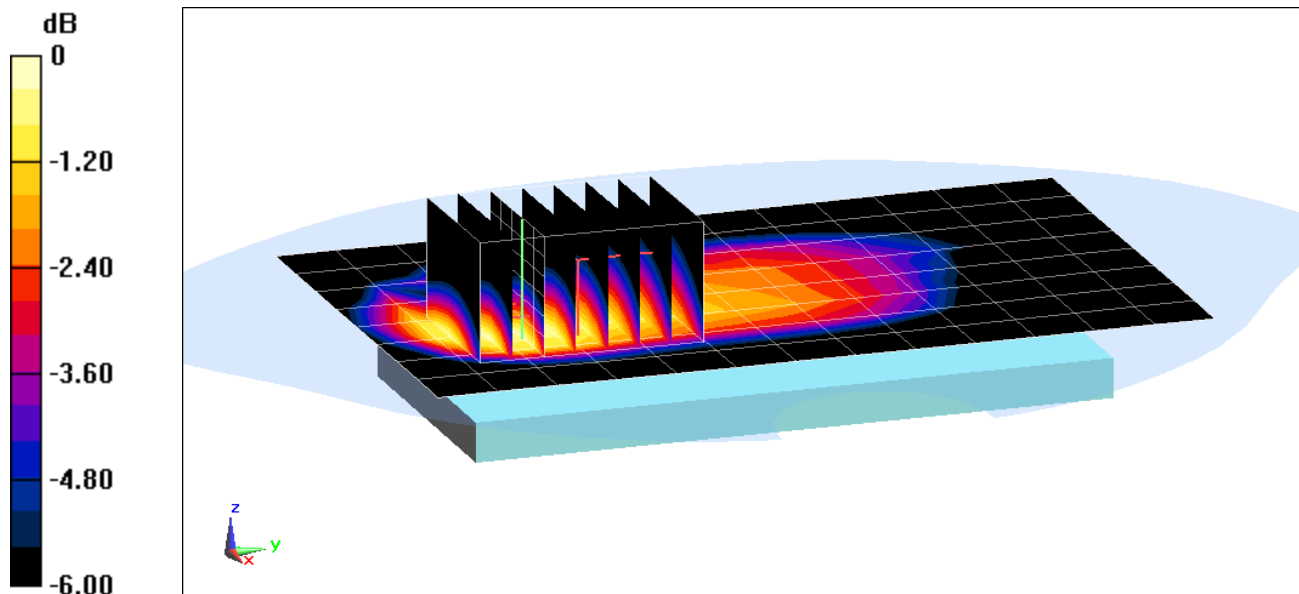

0 dB = 0.298 W/kg = -5.26 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.88 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.328 W/kg

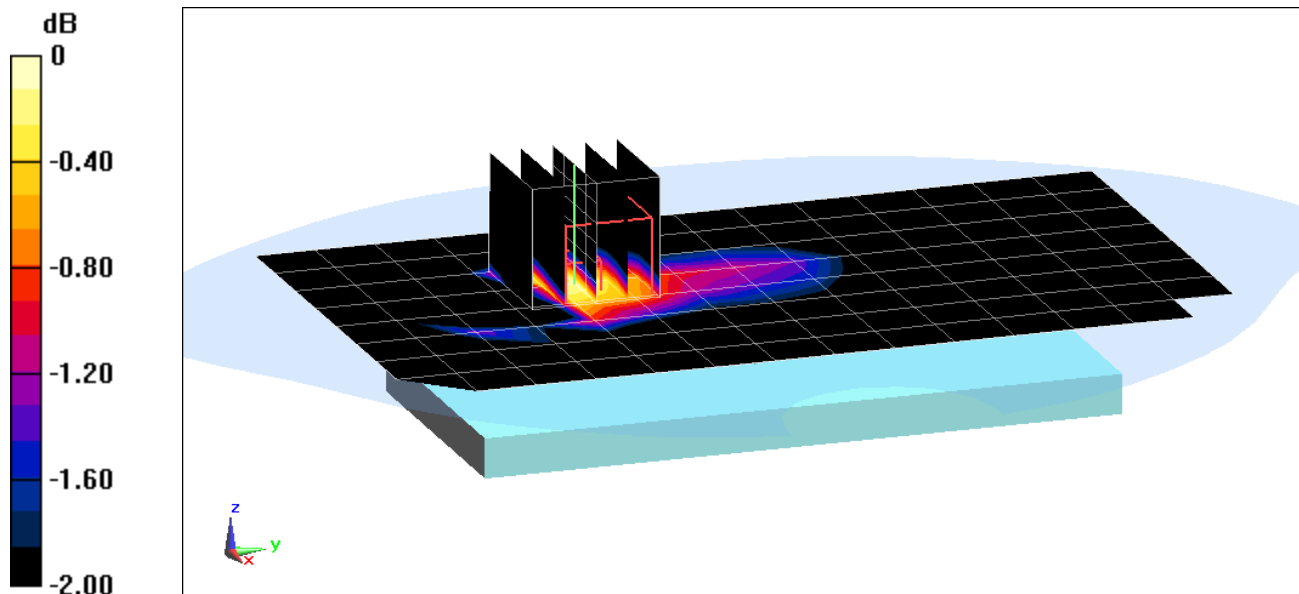

0 dB = 0.365 W/kg = -4.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 53.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.87 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.527 W/kg

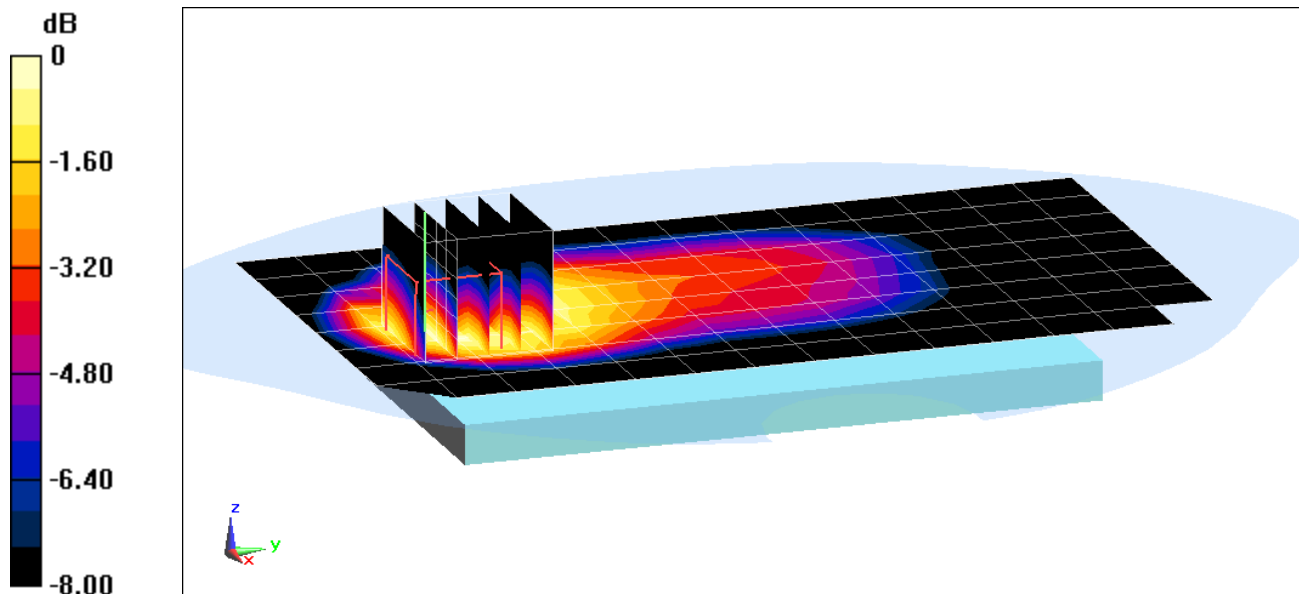

0 dB = 0.629 W/kg = -2.01 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 53.946$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Body SAR, Back Side, Mid.ch, 15 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.63 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.253 W/kg

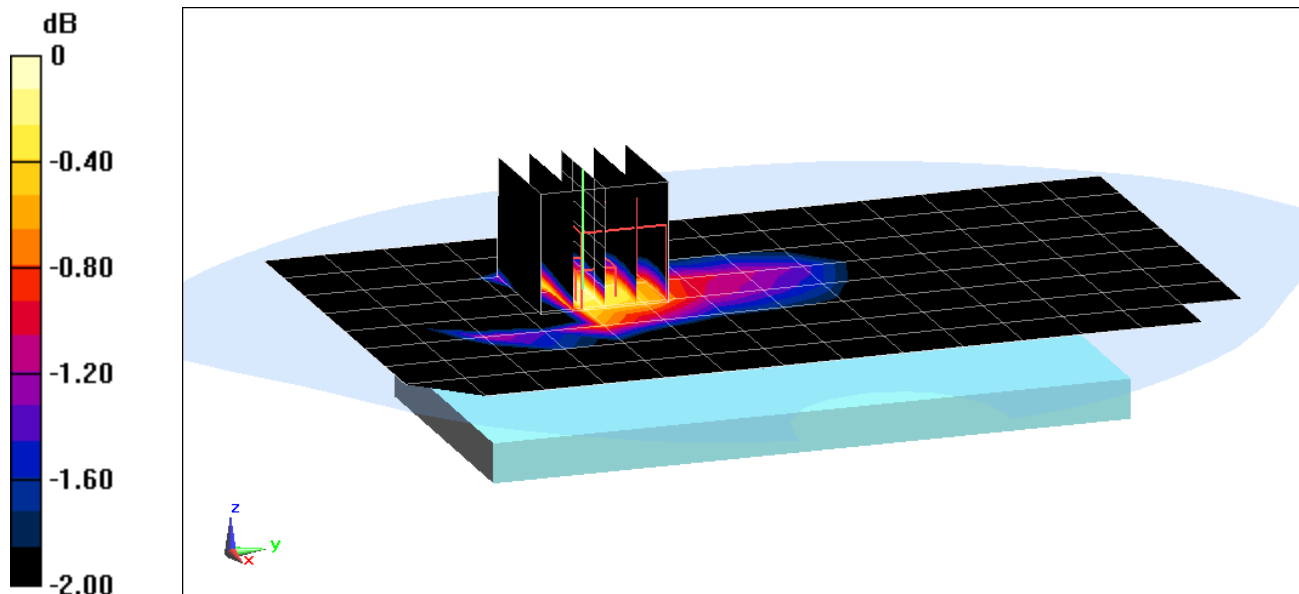

0 dB = 0.282 W/kg = -5.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 53.946$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-17-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Body SAR, Back Side, Mid.ch, 15 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.63 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.410 W/kg

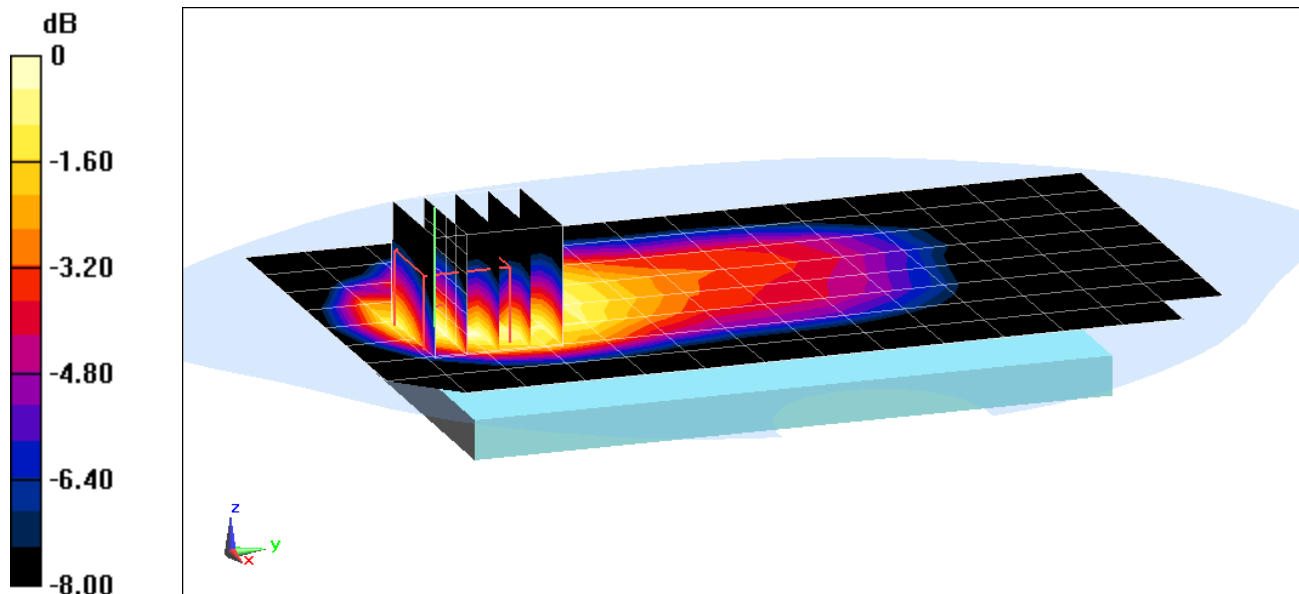

0 dB = 0.493 W/kg = -3.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.475 \text{ S/m}$; $\epsilon_r = 51.925$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-16-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3209; ConvF(4.99, 4.99, 4.99); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back Side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.27 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.536 W/kg

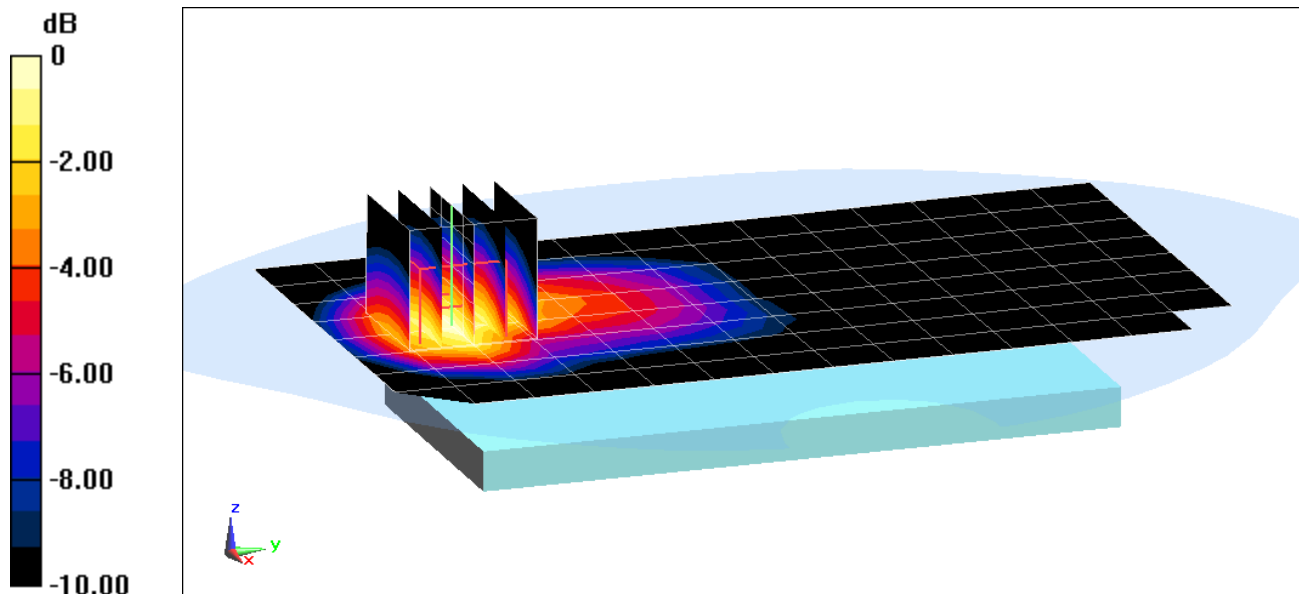

0 dB = 0.632 W/kg = -1.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07EFF

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.475 \text{ S/m}$; $\epsilon_r = 51.925$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3209; ConvF(4.99, 4.99, 4.99); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Bottom Edge, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (11x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.03 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.506 W/kg

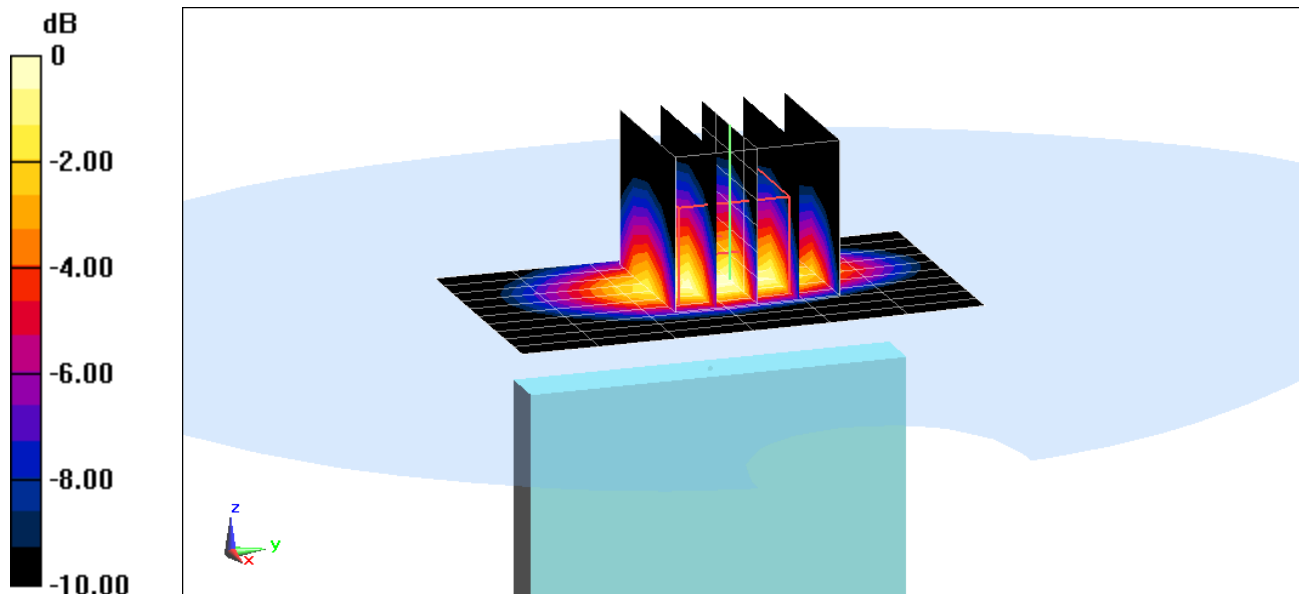

0 dB = 0.622 W/kg = -2.06 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.577 \text{ S/m}$; $\epsilon_r = 51.305$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Body SAR, Back Side, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.01 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.519 W/kg

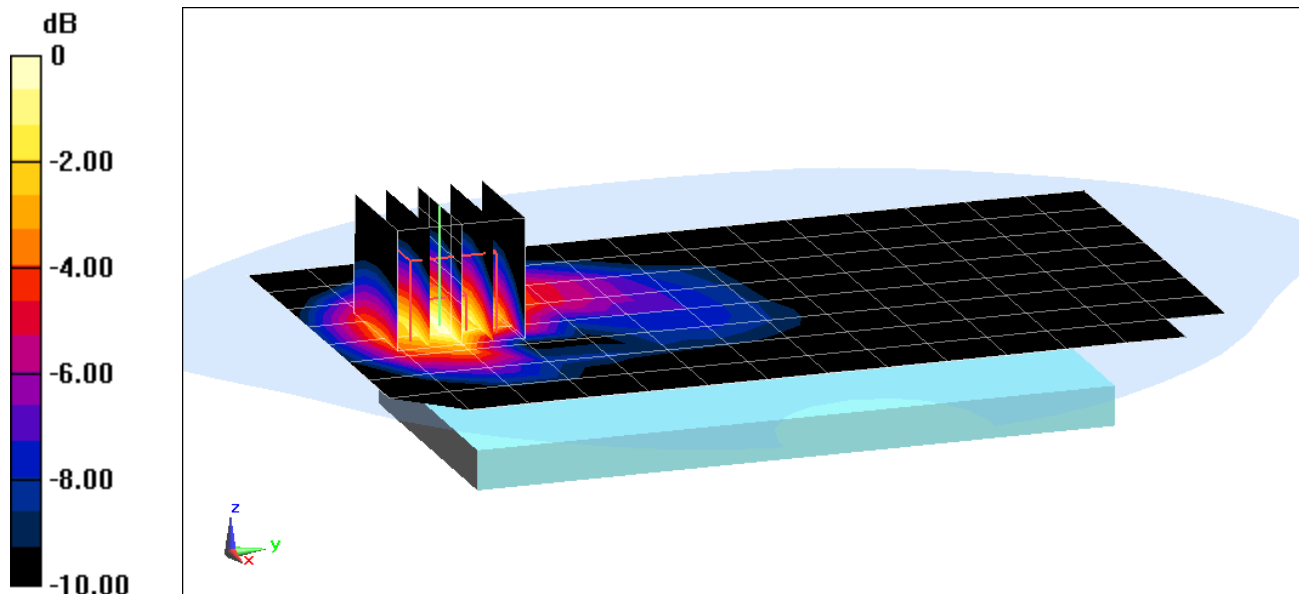

0 dB = 0.745 W/kg = -1.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$; $\sigma = 1.577 \text{ S/m}$; $\epsilon_r = 51.305$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.61 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.755 W/kg

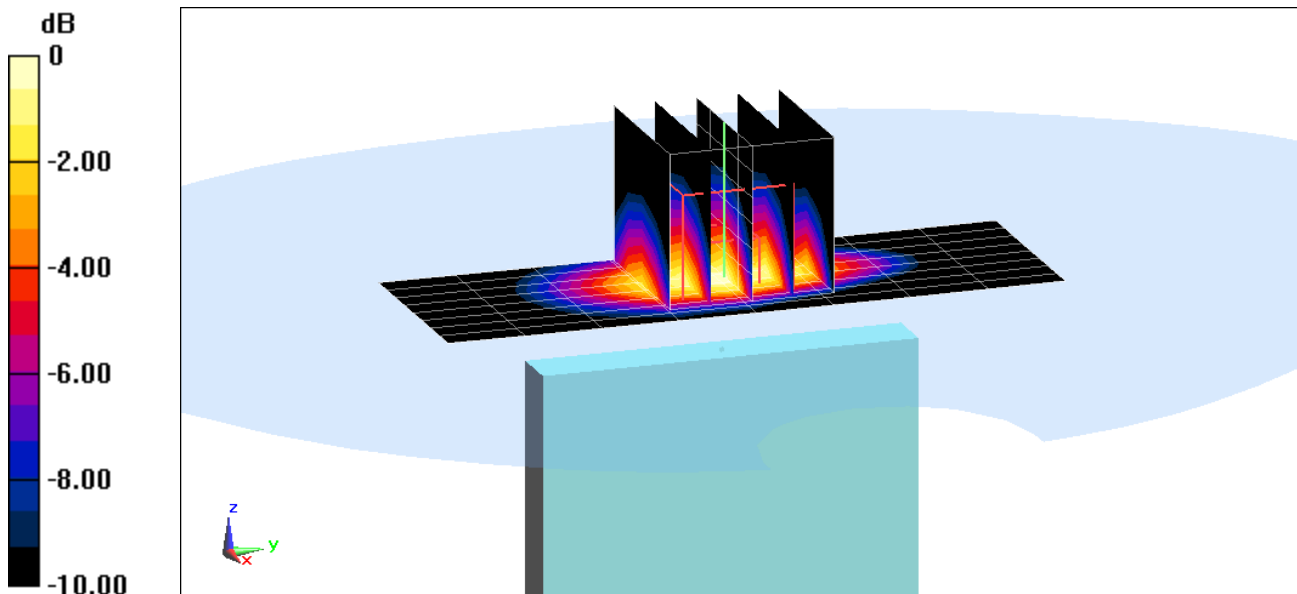

0 dB = 1.15 W/kg = 0.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0813A

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body; Medium parameters used (interpolated):

$f = 2680 \text{ MHz}$; $\sigma = 2.355 \text{ S/m}$; $\epsilon_r = 50.368$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-21-2017; Ambient Temp: 23.5°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7406; ConvF(6.94, 6.94, 6.94); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 41, Body SAR, Back Side

PCC: 20 MHz Bandwidth, QPSK, Ch 41490, 1 RB, 0 RB Offset

SCC: 20 MHz Bandwidth, QPSK, Ch 41292, 1 RB, 99 RB Offset


Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.90 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.313 W/kg

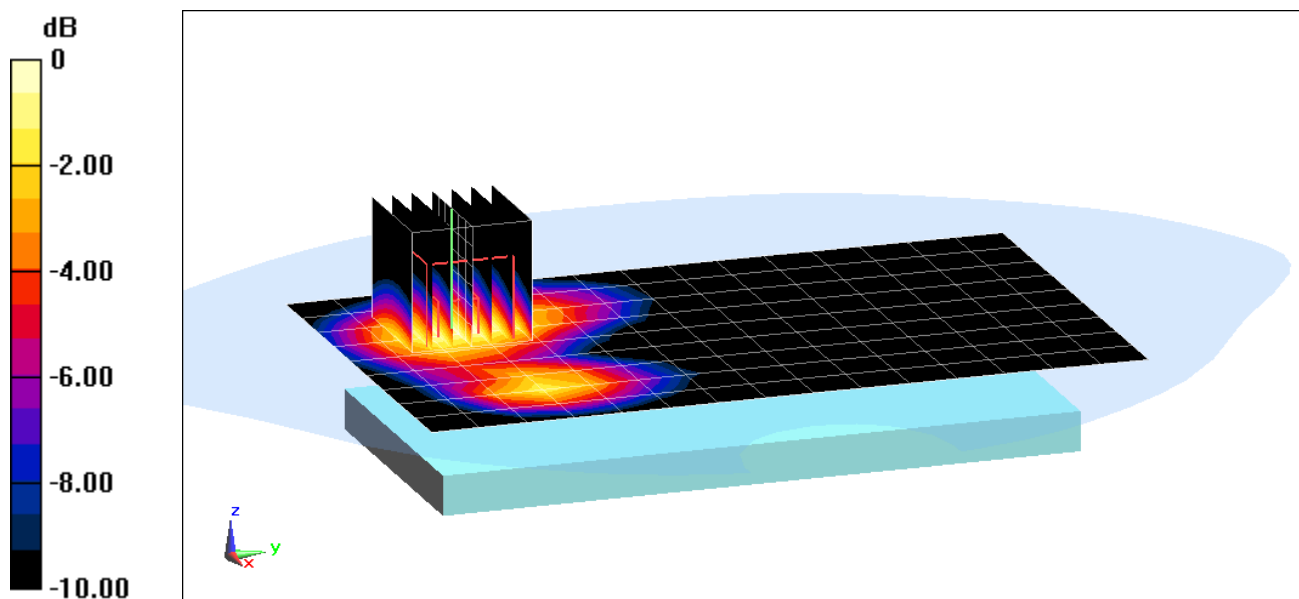

0 dB = 0.490 W/kg = -3.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: F7CF5

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body; Medium parameters used (interpolated):

$f = 2680 \text{ MHz}$; $\sigma = 2.355 \text{ S/m}$; $\epsilon_r = 50.368$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-21-2017; Ambient Temp: 23.5°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7406; ConvF(6.94, 6.94, 6.94); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Bottom Edge, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.61 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.389 W/kg

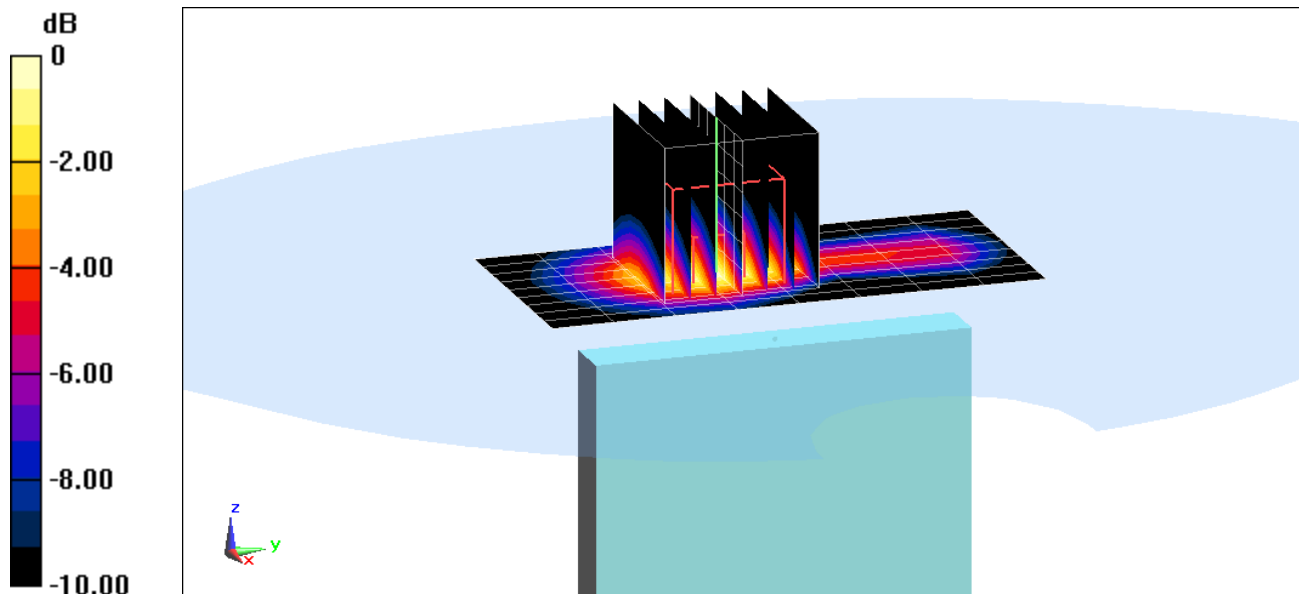

0 dB = 0.645 W/kg = -1.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.988 \text{ S/m}$; $\epsilon_r = 50.94$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-04-2017; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7406; ConvF(7.24, 7.24, 7.24); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth

Body SAR, Ch 06, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (9x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.421 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.163 W/kg

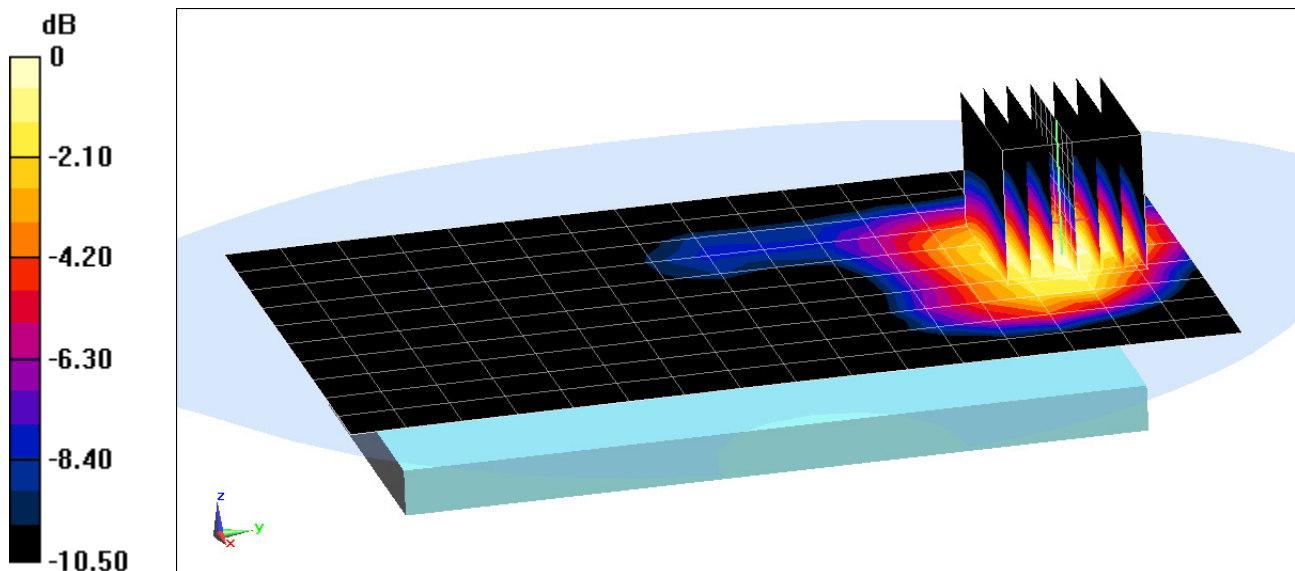

0 dB = 0.245 W/kg = -6.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.988 \text{ S/m}$; $\epsilon_r = 50.94$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-04-2017; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7406; ConvF(7.24, 7.24, 7.24); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth

Body SAR, Ch 06, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.14 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.306 W/kg

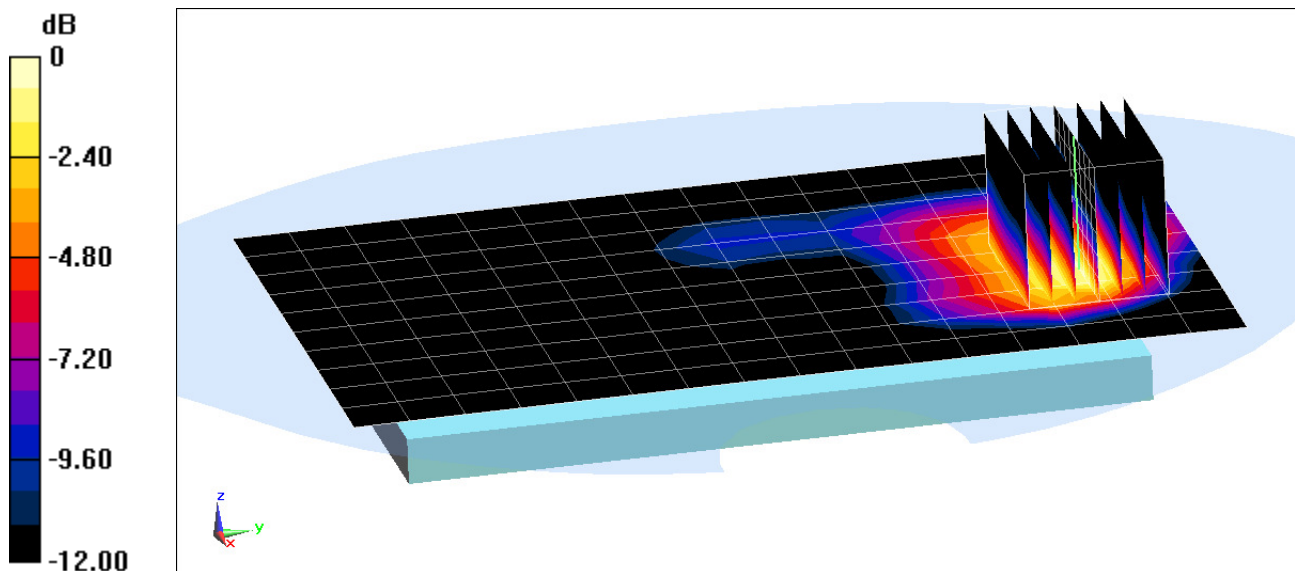

0 dB = 0.489 W/kg = -3.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, IEEE 802.11ac; Frequency: 5610 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5610 \text{ MHz}$; $\sigma = 5.933 \text{ S/m}$; $\epsilon_r = 48.074$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-02-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11ac, UNII-2C, Antenna 2, 80 MHz Bandwidth
Body SAR, Ch 122, 29.3 Mbps, Back Side


Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 6.715 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.228 W/kg

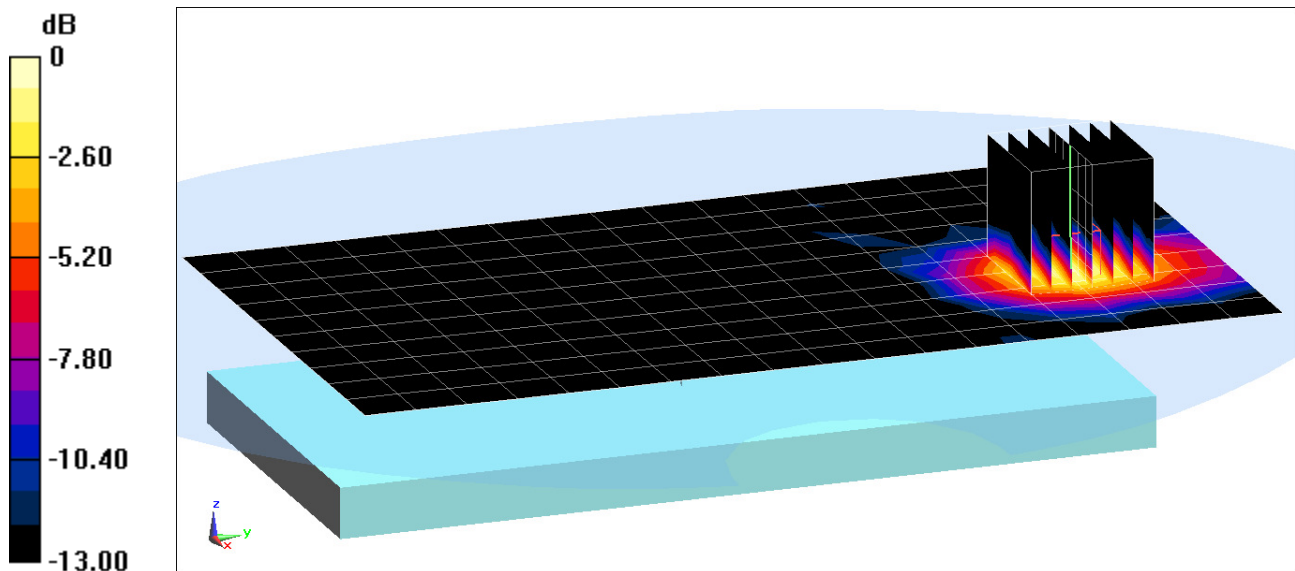

0 dB = 0.495 W/kg = -3.05 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, IEEE 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5775 \text{ MHz}$; $\sigma = 6.161 \text{ S/m}$; $\epsilon_r = 47.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11ac, UNII-3, Antenna 1, 80 MHz Bandwidth

Body SAR, Ch 155, 29.3 Mbps, Back Side


Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 5.759 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.166 W/kg

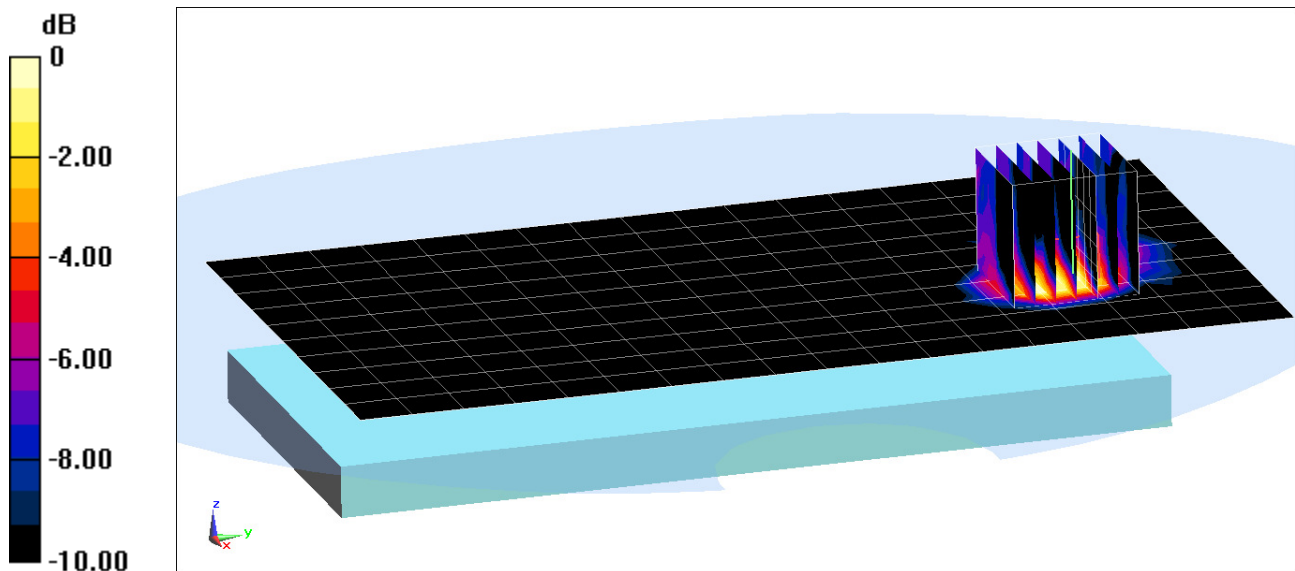

0 dB = 0.305 W/kg = -5.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.299

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.022 \text{ S/m}$; $\epsilon_r = 50.886$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-12-2017; Ambient Temp: 24.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7406; ConvF(7.24, 7.24, 7.24); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.815 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.027 W/kg

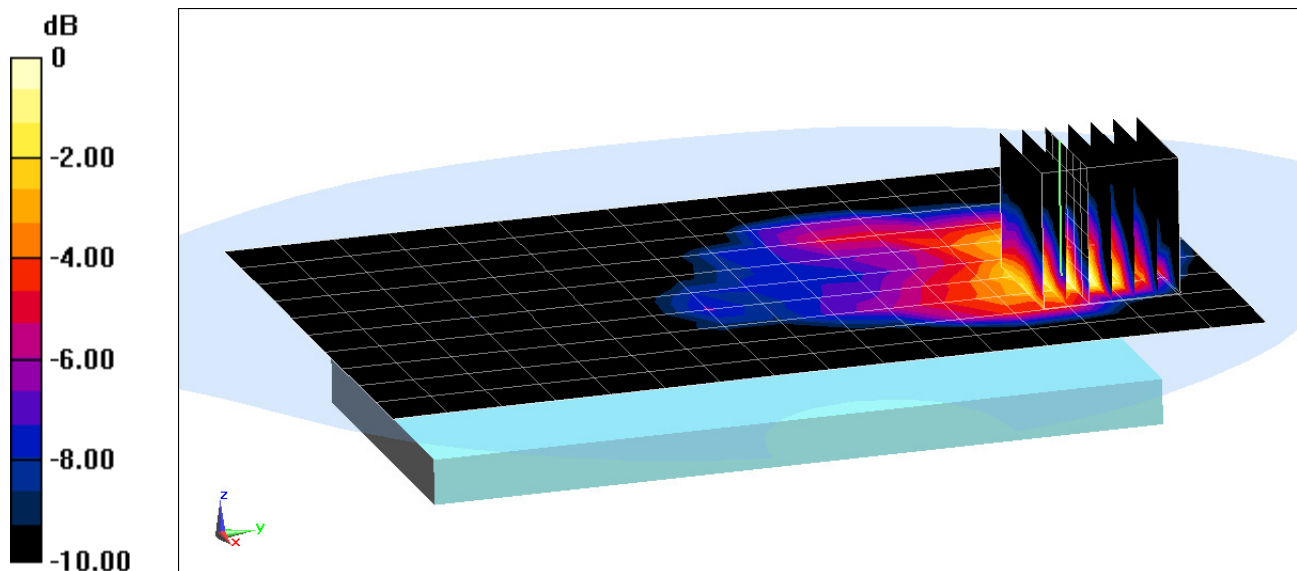

0 dB = 0.0402 W/kg = -13.96 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.299

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.003 \text{ S/m}$; $\epsilon_r = 51.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(4.2, 4.2, 4.2); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Body SAR, Ch 39, 2 Mbps, Back Side


Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.730 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.030 W/kg

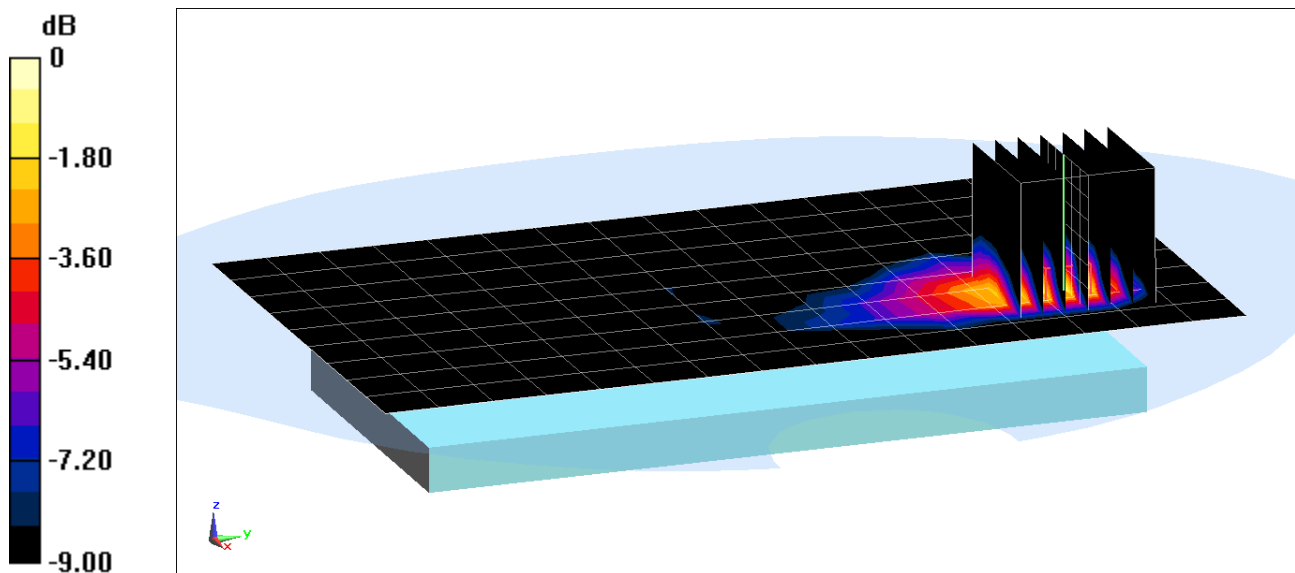

0 dB = 0.0431 W/kg = -13.66 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, UMTS, Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 51.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Phablet SAR, Bottom Edge, Low.ch


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x8x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.06 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(10 g) = 2.90 W/kg

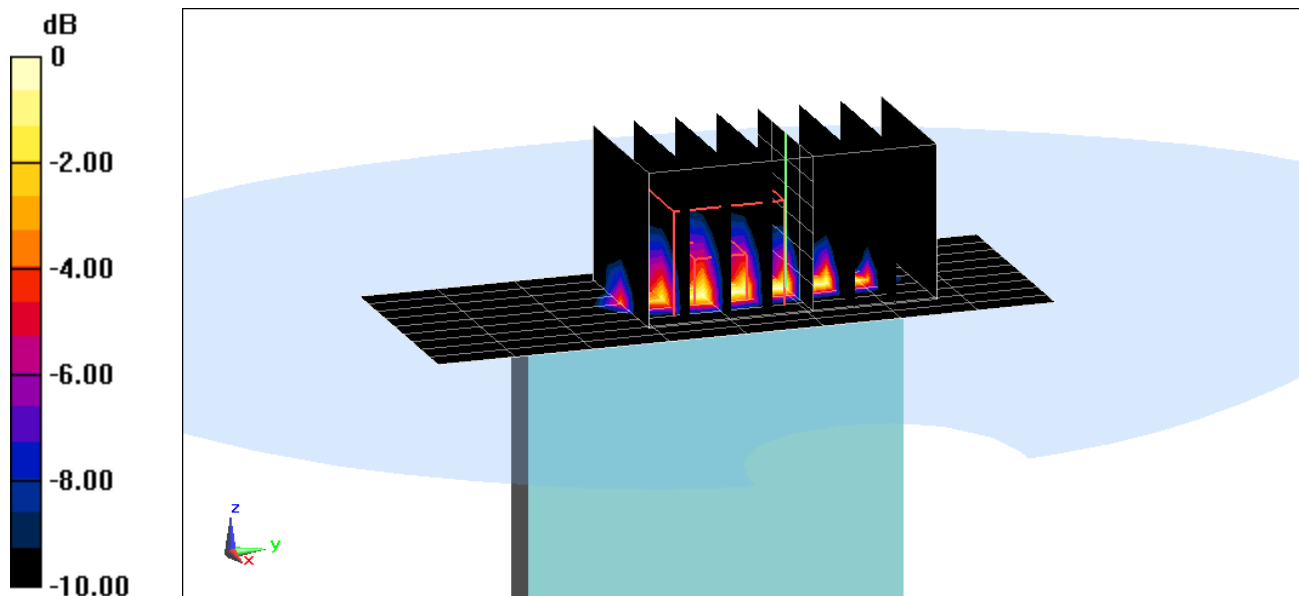

0 dB = 12.7 W/kg = 11.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 07CF0

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.491 \text{ S/m}$; $\epsilon_r = 52.055$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-23-2017; Ambient Temp: 23.9°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Phablet SAR, Bottom Edge, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 64.60 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(10 g) = 3.06 W/kg

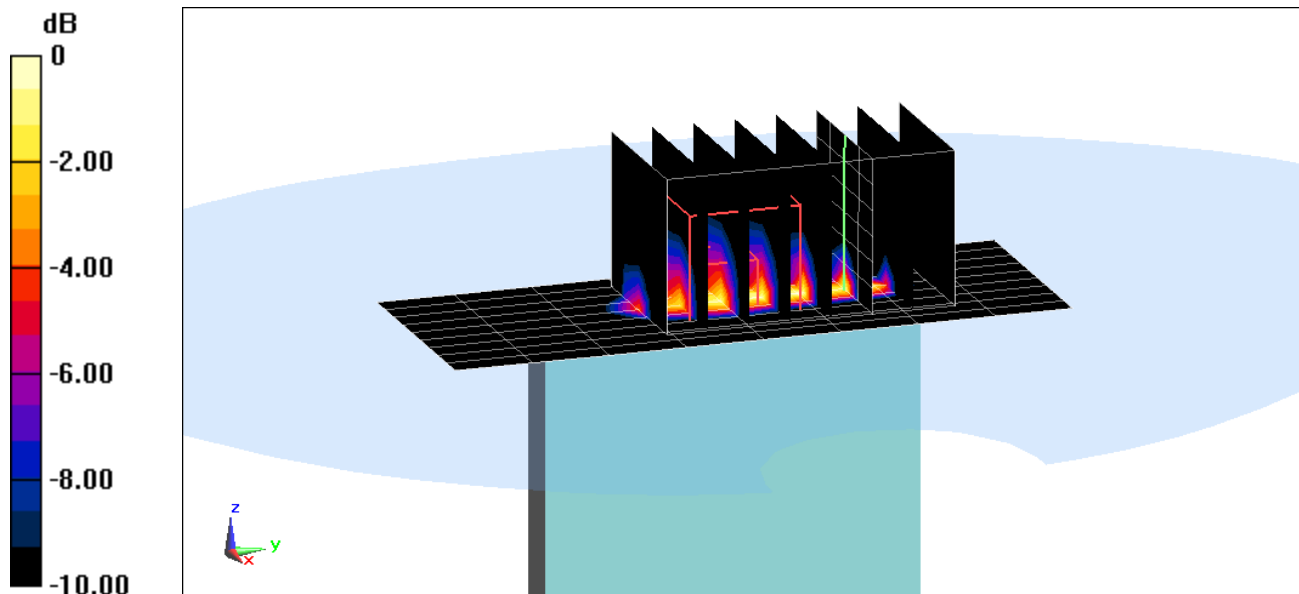

0 dB = 14.2 W/kg = 11.52 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, IEEE 802.11ac; Frequency: 5610 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5610 \text{ MHz}$; $\sigma = 5.933 \text{ S/m}$; $\epsilon_r = 48.074$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-02-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11ac, U-NII-2C, Antenna 1, 80 MHz Bandwidth,
Phablet SAR, Ch 122, 29.3 Mbps, Back Side**


Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 28.72 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 23.8 W/kg

SAR(10 g) = 0.851 W/kg

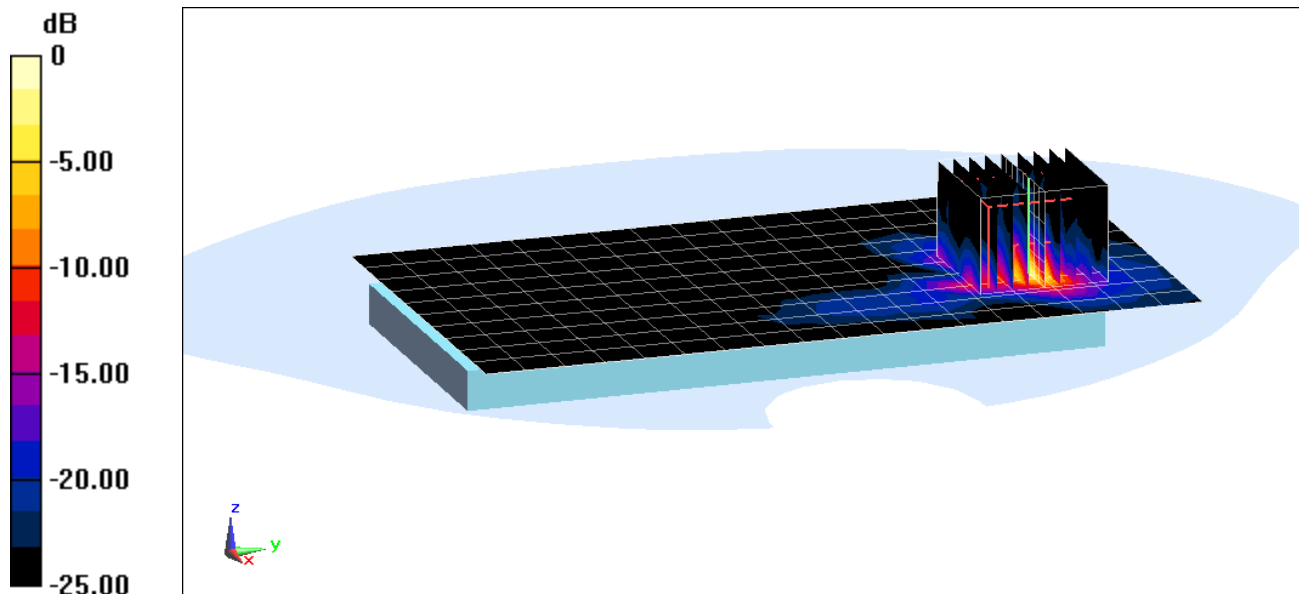

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG9550; Type: Portable Handset; Serial: 0910E

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.299

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.022 \text{ S/m}$; $\epsilon_r = 50.886$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-12-2017; Ambient Temp: 24.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7406; ConvF(7.24, 7.24, 7.24); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Phablet SAR, Ch 39, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.01 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.27 W/kg

SAR(10 g) = 0.482 W/kg

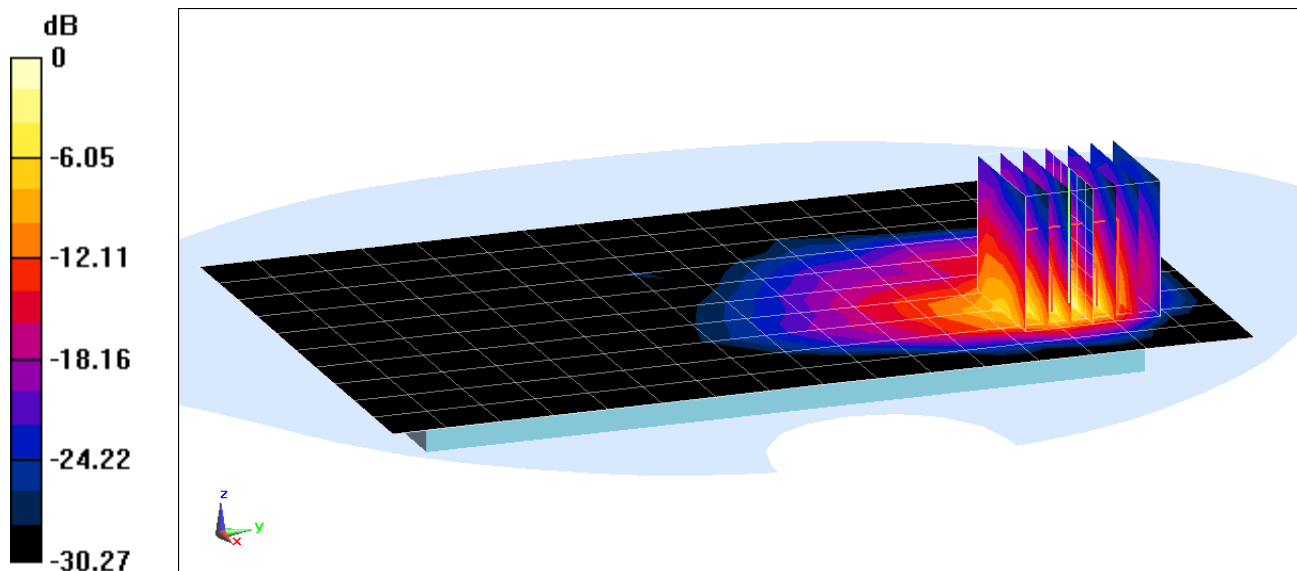

0 dB = 3.51 W/kg = 5.45 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 41.552$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-18-2017; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(6.6, 6.6, 6.6); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Right; Type: SAM; Serial: 1757

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 1.57 W/kg

Deviation(1 g) = -3.92%

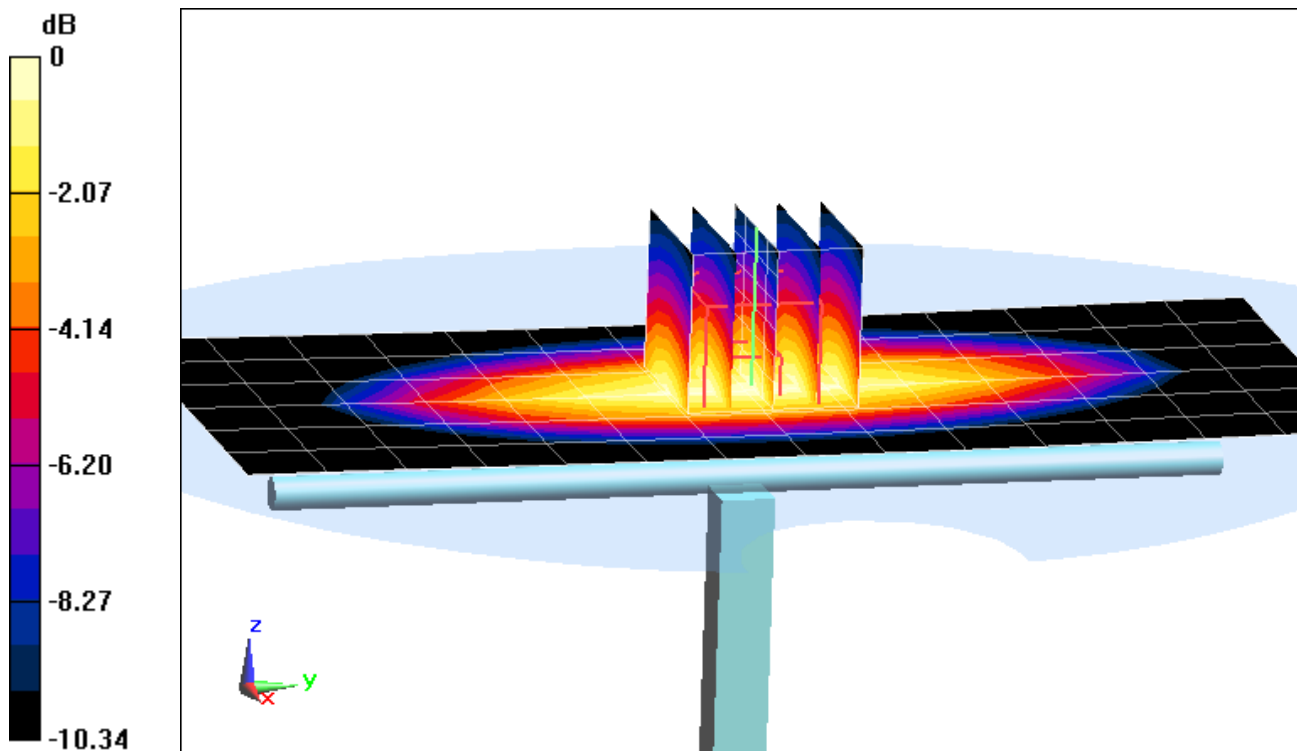

0 dB = 1.83 W/kg = 2.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 40.832$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.87 W/kg

SAR(1 g) = 1.94 W/kg

Deviation(1 g) = 6.24%

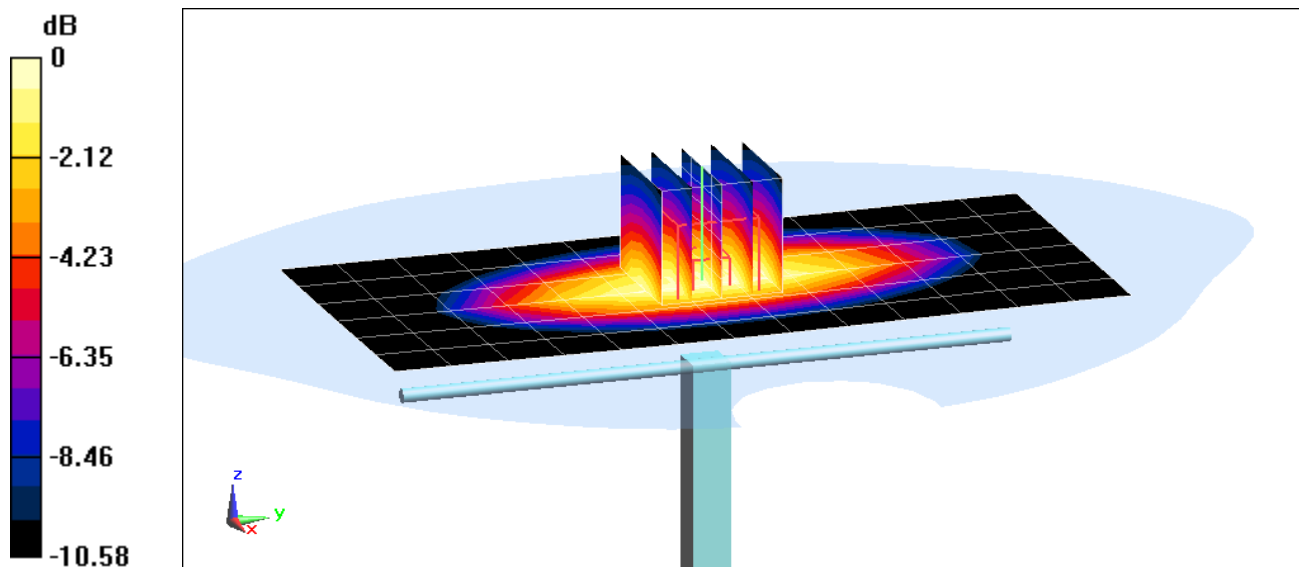

0 dB = 2.27 W/kg = 3.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 41.153$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-13-2017; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(10.04, 10.04, 10.04); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Right; Type: QD000P40CD; Serial: TP:7535

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.76 W/kg

Deviation(1 g) = -5.58 %

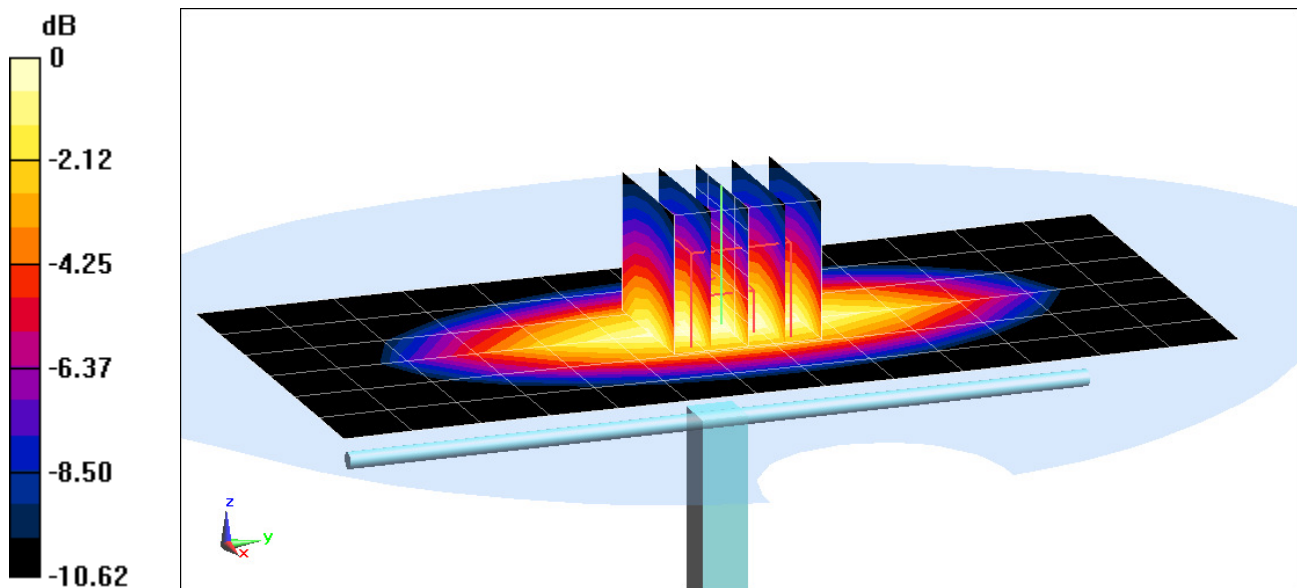

0 dB = 2.34 W/kg = 3.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.415 \text{ S/m}$; $\epsilon_r = 38.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-20-2017; Ambient Temp: 23.5°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(5.28, 5.28, 5.28); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.26 W/kg

SAR(1 g) = 3.51 W/kg

Deviation(1 g) = -3.04%

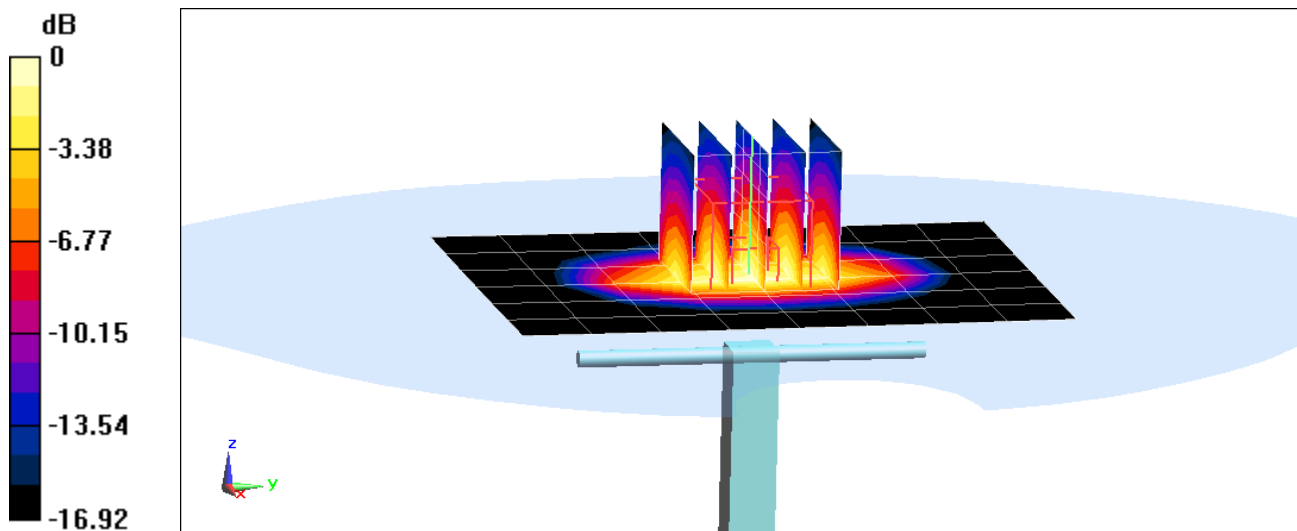

0 dB = 4.39 W/kg = 6.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.421 \text{ S/m}$; $\epsilon_r = 38.224$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-18-2017; Ambient Temp: 23.9°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3287; ConvF(5.27, 5.27, 5.27); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 4.08 W/kg

Deviation(1 g) = 1.75%

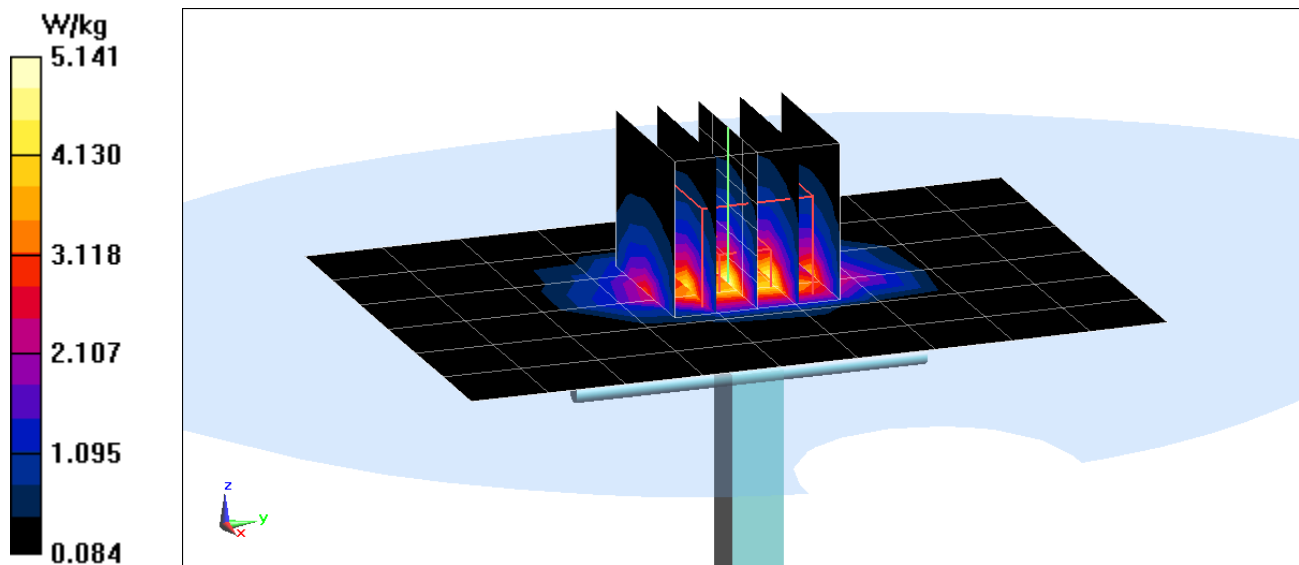

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.867 \text{ S/m}$; $\epsilon_r = 39.124$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-10-2017; Ambient Temp: 23.6°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(4.54, 4.54, 4.54); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.45 W/kg

Deviation(1 g) = 4.61%

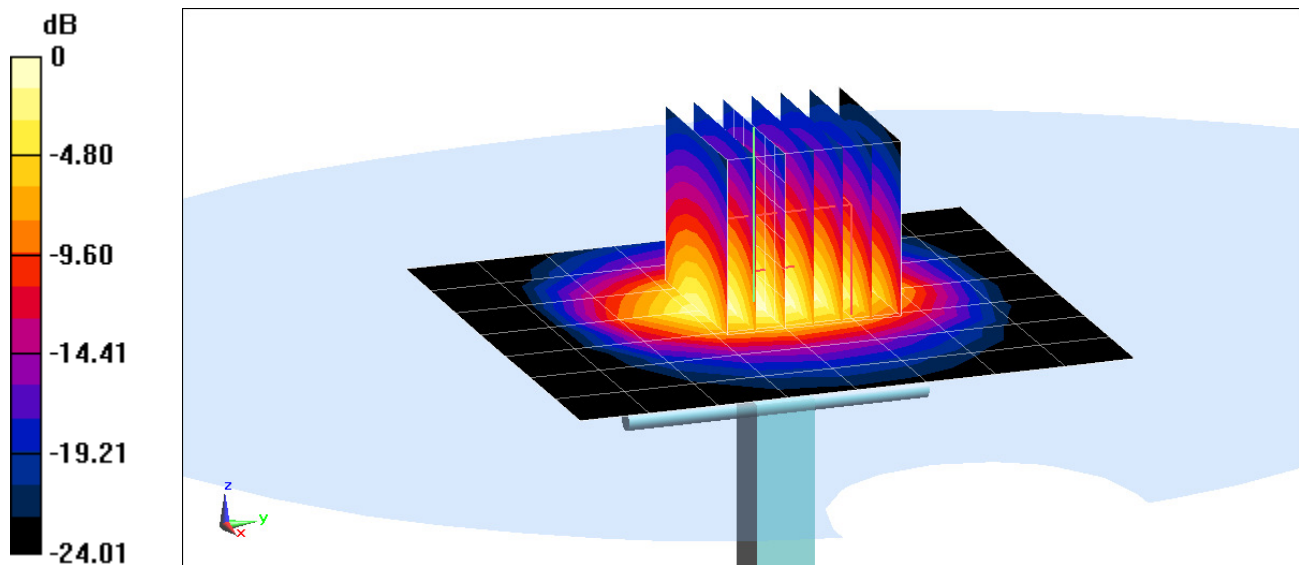

0 dB = 7.27 W/kg = 8.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.869 \text{ S/m}$; $\epsilon_r = 38.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2017; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3287; ConvF(4.54, 4.54, 4.54); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 5.64 W/kg

Deviation(1 g) = 6.82%

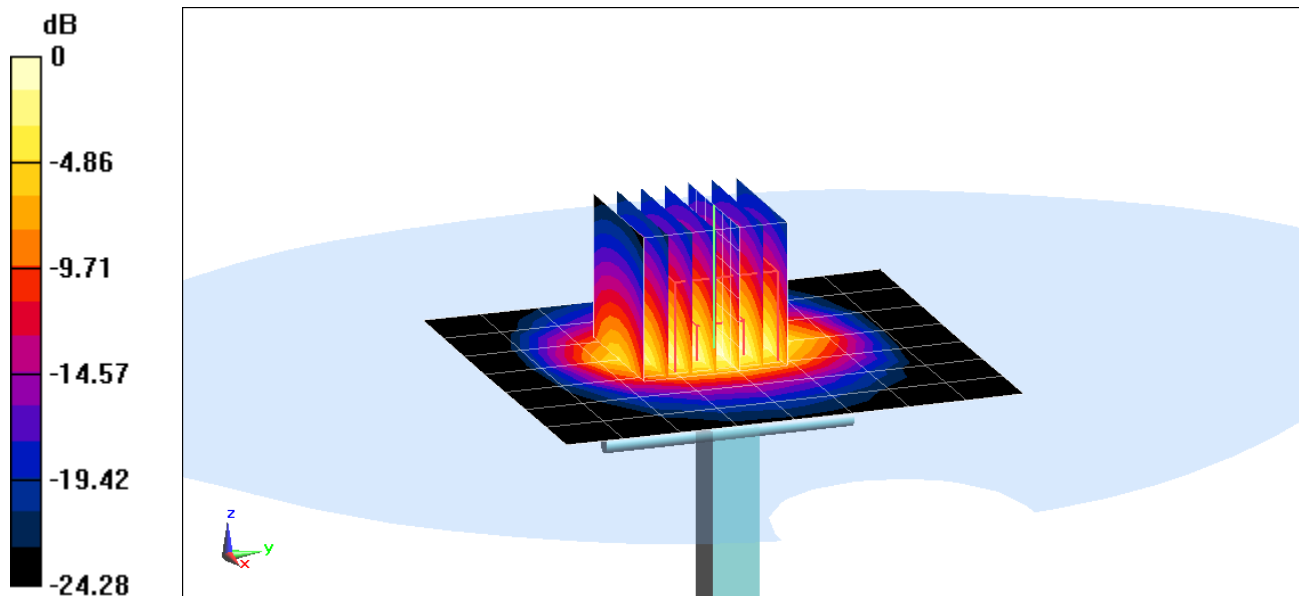

0 dB = 7.52 W/kg = 8.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head; Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.052 \text{ S/m}$; $\epsilon_r = 38.606$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 24.0°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(4.41, 4.41, 4.41); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.62 W/kg

Deviation(1 g) = -0.18%

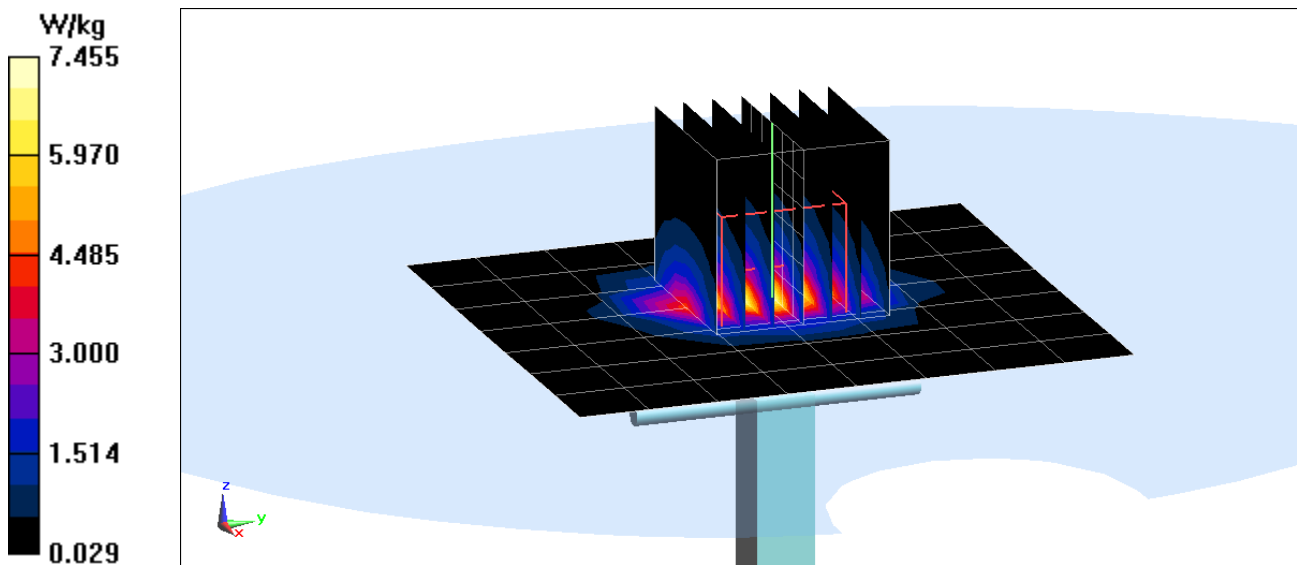

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 4.572 \text{ S/m}$; $\epsilon_r = 34.988$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(5.1, 5.1, 5.1); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 3.88 W/kg

Deviation(1 g) = -1.65%

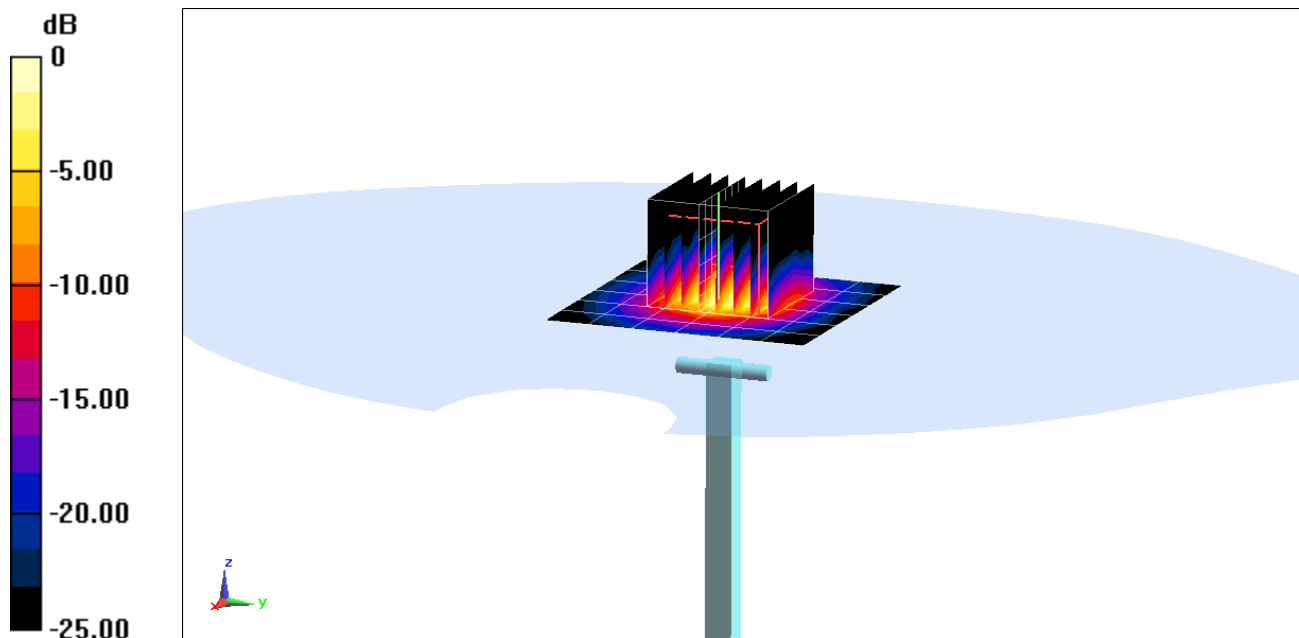

0 dB = 9.08 W/kg = 9.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.914 \text{ S/m}$; $\epsilon_r = 34.502$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(4.41, 4.41, 4.41); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 4.12 W/kg

Deviation(1 g) = -1.44%

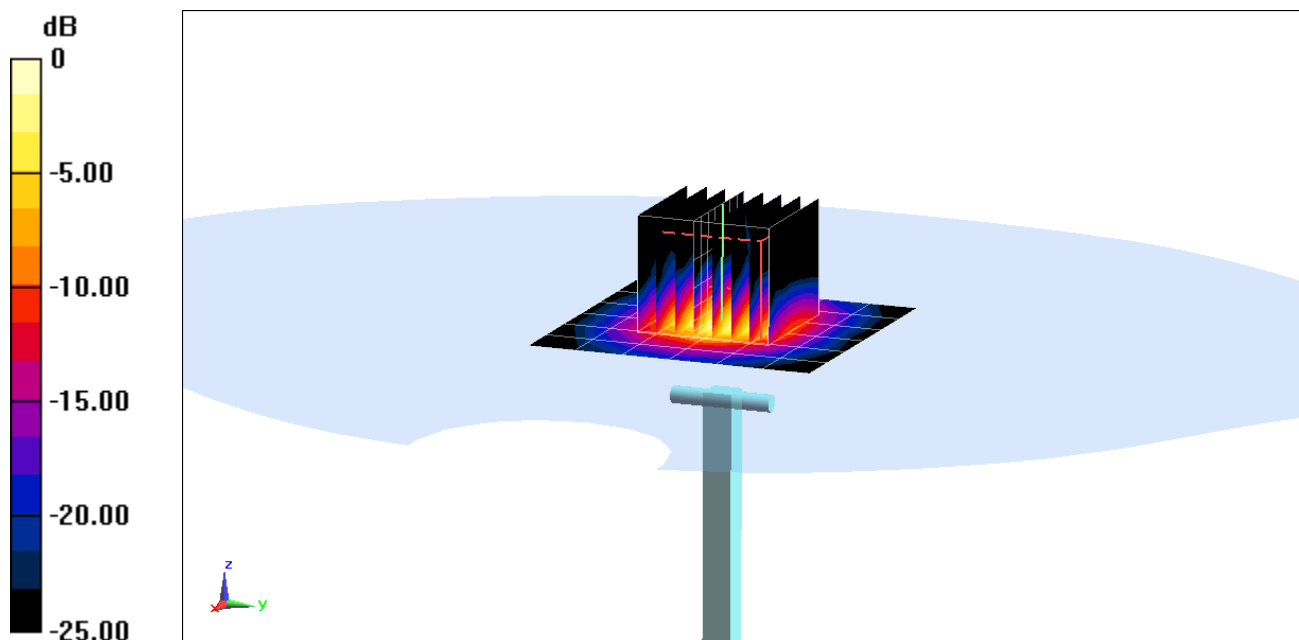

0 dB = 10.1 W/kg = 10.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 5.074 \text{ S/m}$; $\epsilon_r = 34.319$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(4.65, 4.65, 4.65); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.91 W/kg

Deviation(1 g) = -1.14%

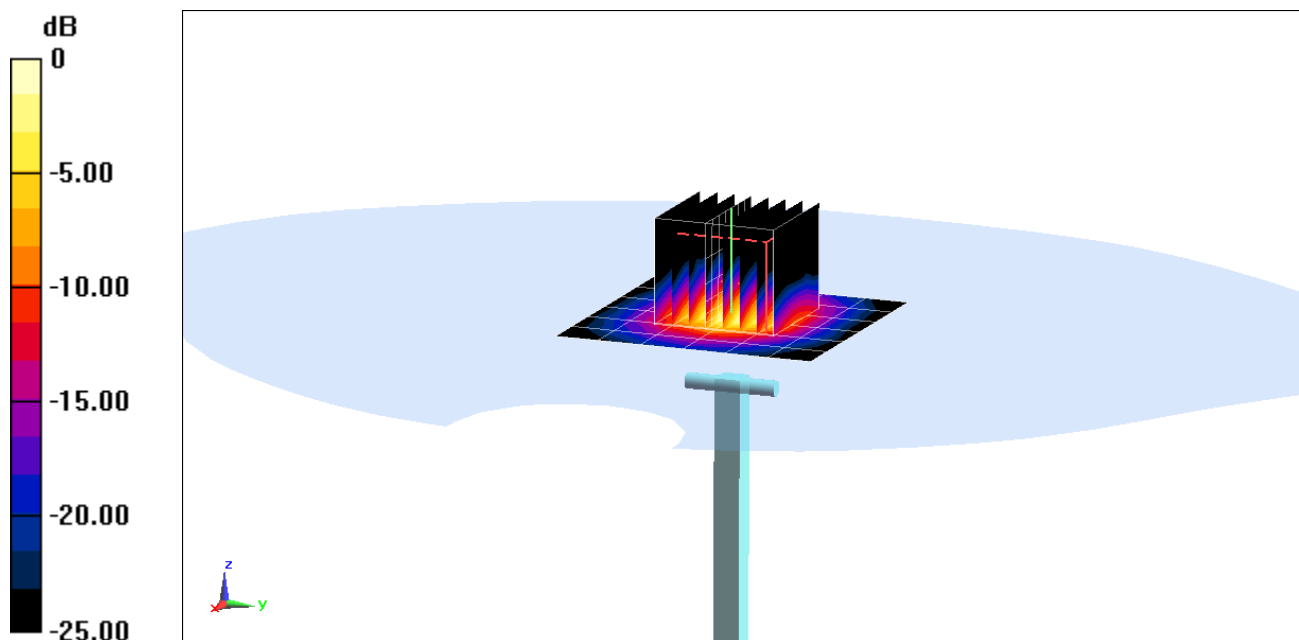

0 dB = 9.67 W/kg = 9.85 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 54.639$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2017; Ambient Temp: 20.0°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.19, 6.19, 6.19); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0 Left; Type: QD000P40CD; Serial: TP:1692

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.74 W/kg

Deviation(1 g) = 3.20%

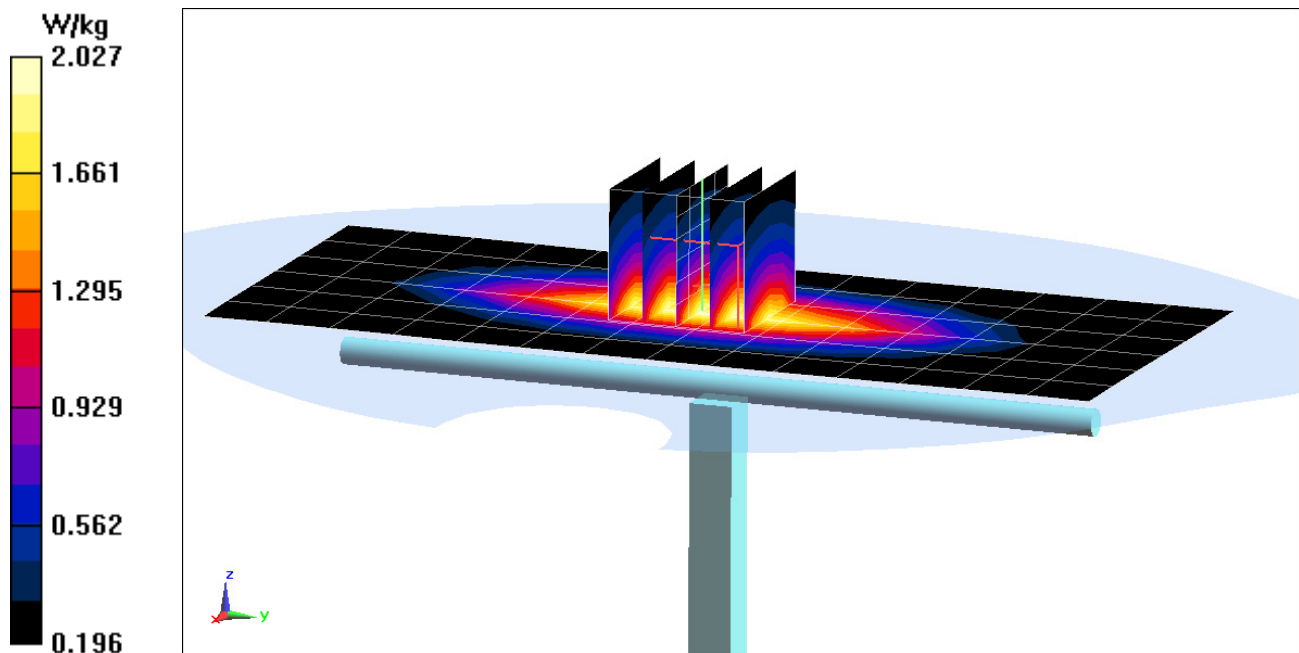

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.988 \text{ S/m}$; $\epsilon_r = 54.224$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-13-2017; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 2.06 W/kg

Deviation(1 g) = 7.63%

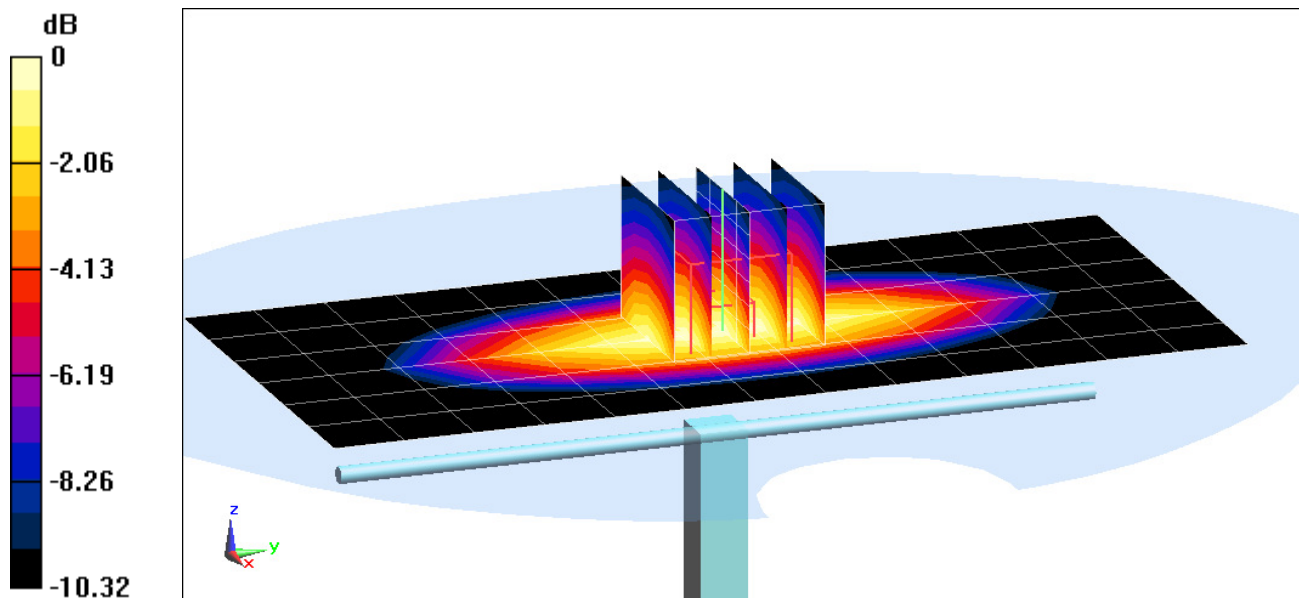

0 dB = 2.41 W/kg = 3.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 51.877$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3209; ConvF(4.99, 4.99, 4.99); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.55 W/kg

SAR(1 g) = 3.75 W/kg

Deviation(1 g) = 1.08%

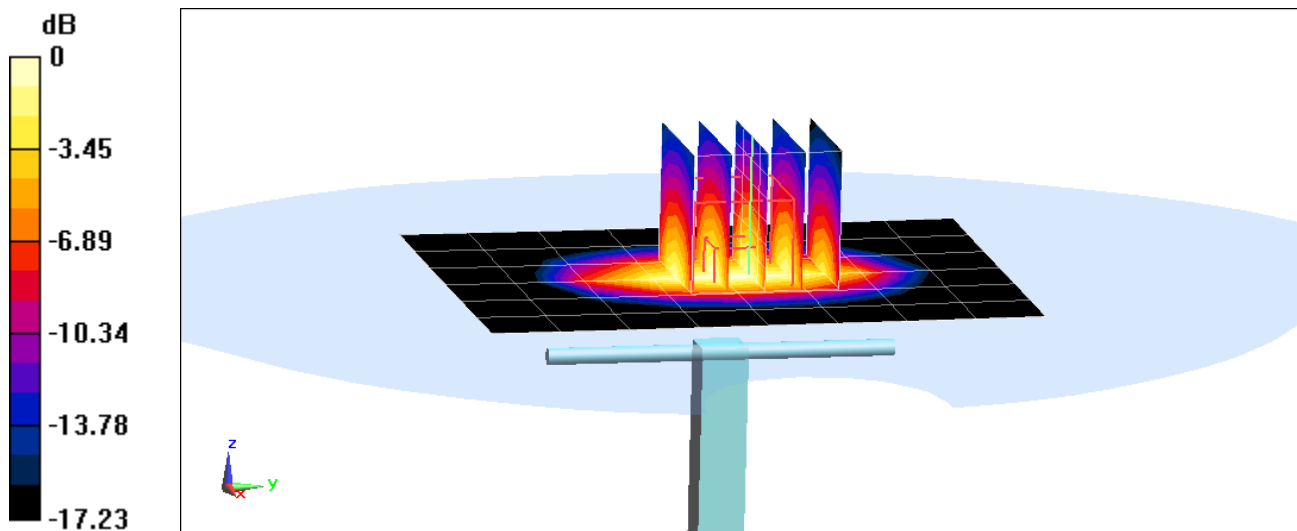

0 dB = 4.62 W/kg = 6.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.571 \text{ S/m}$; $\epsilon_r = 51.324$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-16-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.73 W/kg

SAR(1 g) = 4.15 W/kg; SAR(10 g) = 2.13 W/kg

Deviation(1 g) = 4.01%; Deviation(10 g) = 0.95%

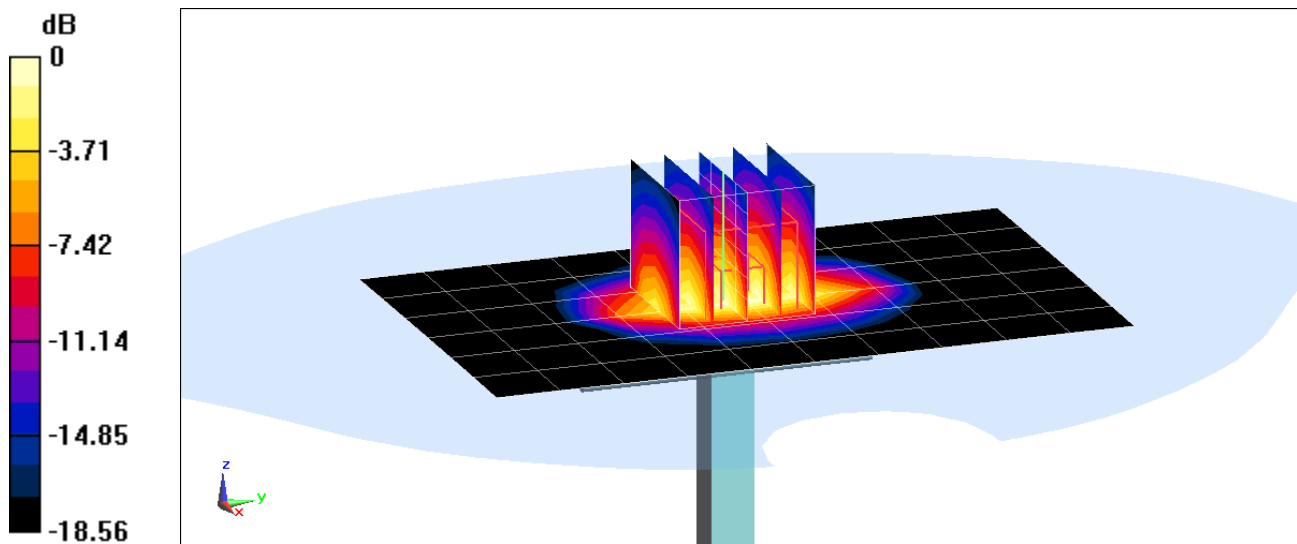

0 dB = 6.48 W/kg = 8.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.533 \text{ S/m}$; $\epsilon_r = 51.926$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 23.9°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.33 W/kg

SAR(10 g) = 2.03 W/kg

Deviation(10 g) = -3.79%

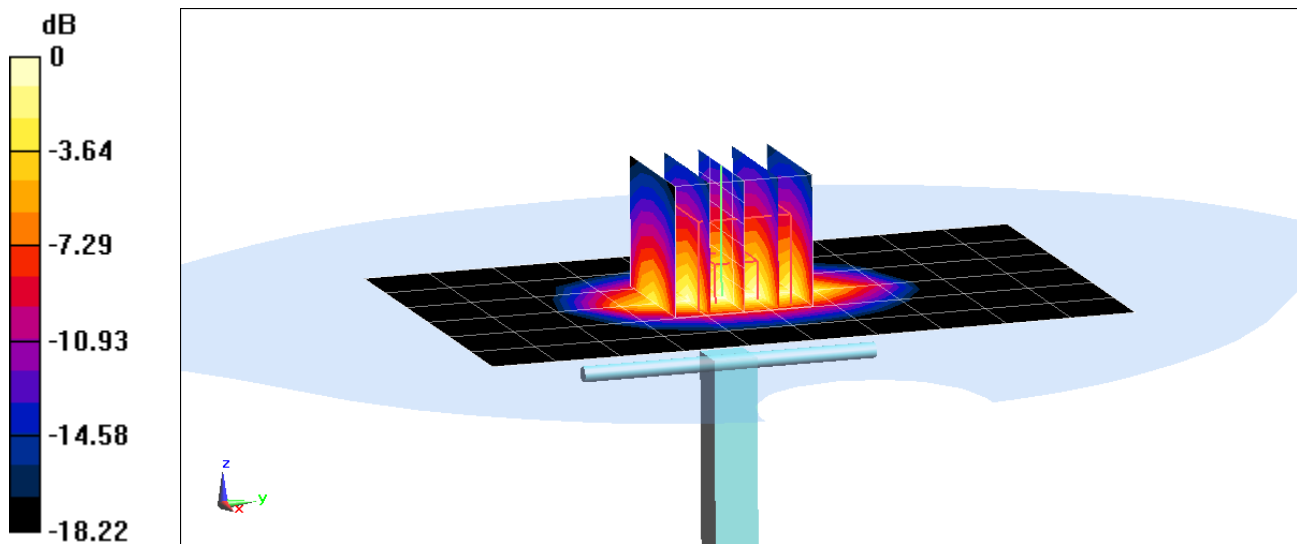

0 dB = 6.13 W/kg = 7.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.035 \text{ S/m}$; $\epsilon_r = 50.856$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-12-2017; Ambient Temp: 24.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7406; ConvF(7.24, 7.24, 7.24); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.26 W/kg; SAR(10 g) = 2.43 W/kg

Deviation(1 g) = 3.54%; Deviation(10 g) = 2.10%

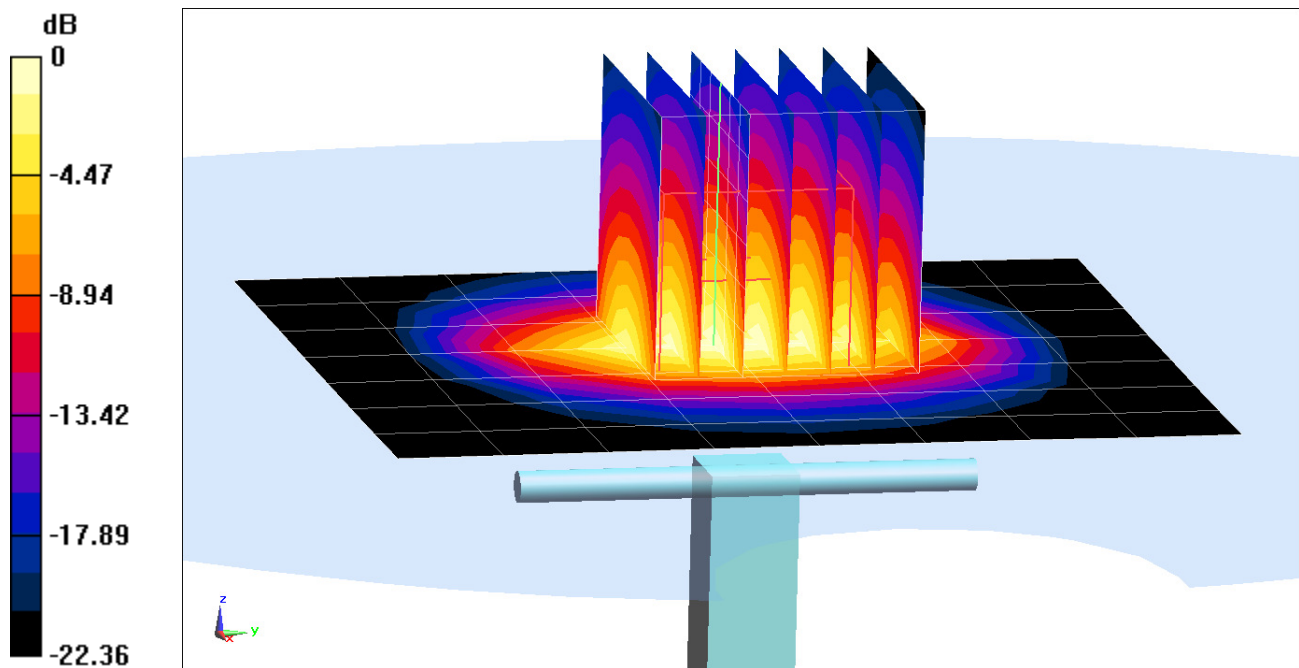

0 dB = 8.69 W/kg = 9.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.014 \text{ S/m}$; $\epsilon_r = 51.856$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(4.2, 4.2, 4.2); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.21 W/kg

Deviation(1 g) = 2.76%

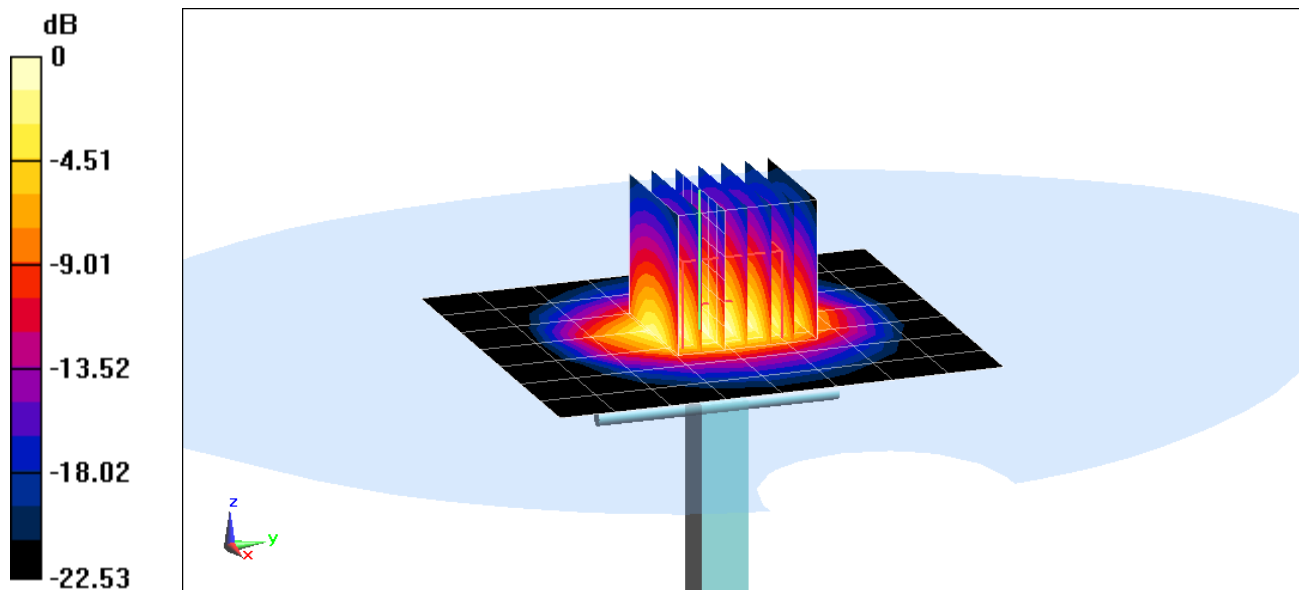

0 dB = 6.85 W/kg = 8.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body; Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.238 \text{ S/m}$; $\epsilon_r = 50.667$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-21-2017; Ambient Temp: 23.5°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7406; ConvF(6.94, 6.94, 6.94); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.57 W/kg

Deviation(1 g) = 2.77%

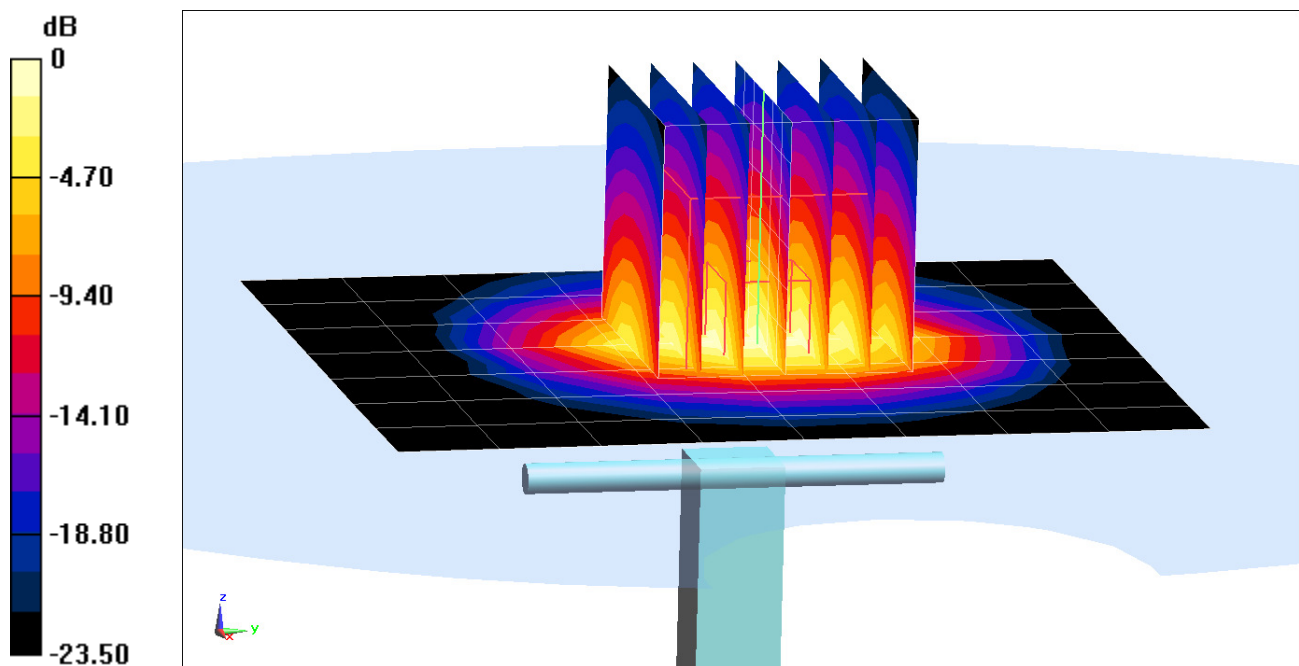

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.473 \text{ S/m}$; $\epsilon_r = 48.692$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(4.32, 4.32, 4.32); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.1 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 0.969 W/kg

Deviation(1 g) = -8.29%; Deviation(10 g) = -7.71%

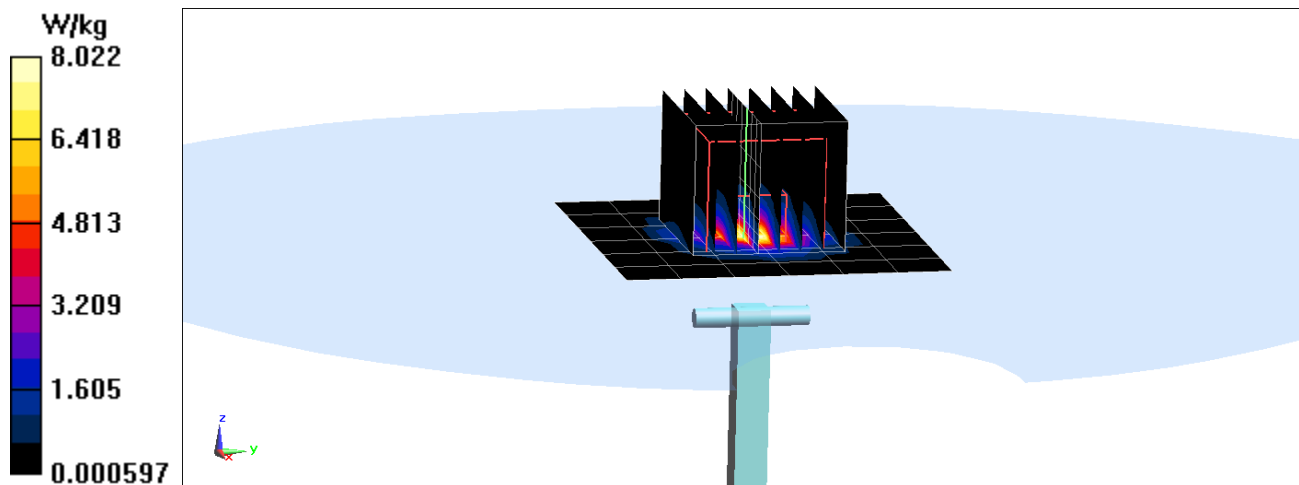

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.917 \text{ S/m}$; $\epsilon_r = 48.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.06 W/kg

Deviation(1 g) = -2.34%; Deviation(10 g) = -1.40%

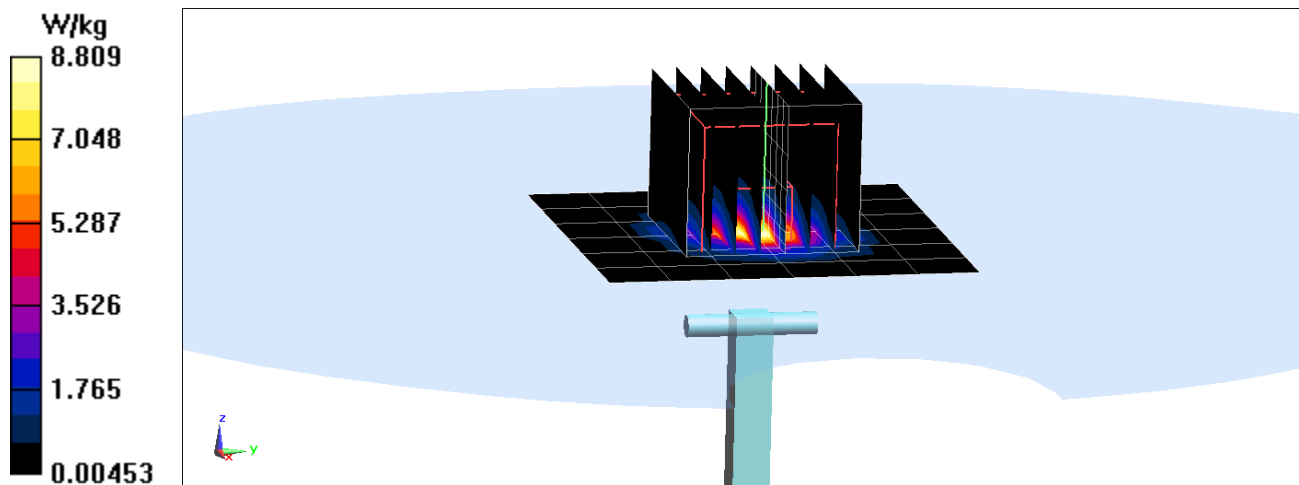

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.135 \text{ S/m}$; $\epsilon_r = 47.847$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5750 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 3.45 W/kg

Deviation(1 g) = -8.49%

