



CERTIFICATION TEST REPORT

Report Number. : 12563988-E9V2

Applicant : Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

Model : SM-G975N

FCC ID : A3LSMG975KOR

EUT Description : GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE 20/40/80,
ANT+ and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

January 30, 2019

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	1/29/2019	Initial Issue	
V2	1/30/2019	Updated Section 6.4	Steven Tran

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. INTRODUCTION OF TEST DATA REUSE.....	6
2.1. INTRODUCTION	6
2.2. DEVICES DIFFERENCES.....	6
2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY	7
2.4. SPOT CHECK DATA – SM-G975N (GLASS)	8
2.4.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9kHz TO 30 MHz	8
2.4.2. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz	9
2.5. REFERENCE DETAIL	11
3. TEST METHODOLOGY	12
4. FACILITIES AND ACCREDITATION	12
5. CALIBRATION AND UNCERTAINTY	12
5.1. MEASURING INSTRUMENT CALIBRATION	12
5.2. SAMPLE CALCULATION	12
5.3. MEASUREMENT UNCERTAINTY.....	13
6. EQUIPMENT UNDER TEST	14
6.1. DESCRIPTION OF EUT	14
6.2. MAXIMUM OUTPUT POWER.....	14
6.3. SOFTWARE AND FIRMWARE.....	14
6.4. WORST-CASE CONFIGURATION AND MODE.....	15
6.5. DESCRIPTION OF TEST SETUP.....	17
7. TEST AND MEASUREMENT EQUIPMENT	21
8. RADIATED EMISSION TEST RESULTS.....	22
8.1. LIMITS AND PROCEDURE	22
8.2. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz ..	23
8.2.1. OPERATING CONFIGURATION WITH PHONE	23
8.3. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz	24
8.3.1. OPERATING CONFIGURATION WITH PHONE	24
8.4. SPOT CHECK DATA SM-G975F (CERAMIC)	26
8.4.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9kHz TO 30 MHz	26
8.4.2. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz	27

8.5.	SPOT CHECK DATA – SM-G975N (CERAMIC).....	29
8.5.1.	FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9kHz TO 30 MHz 29	
8.5.2.	FCC TX SPURIOUS EMISSION 30 TO 1000 MHz	30
9.	AC POWER LINE CONDUCTED EMISSIONS	32
9.1.	OPERATING CONFIGURATION WITH PHONE.....	33
10.	SETUP PHOTOS	35
10.1.	SM-G975F (GLASS)	35
10.2.	SM-G975N(GLASS)	37
10.3.	SM-G975N(CERAMIC).....	38

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

EUT DESCRIPTION: GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE
20/40/80, ANT+ and NFC

MODEL NAME: SM-G975N

SERIAL NUMBER: SM-G975F (Glass): R38KA0L97DV (ORIGINAL)
SM-G975F (Ceramic): R38KA092LGJ (ORIGINAL)
SM-G975N (Glass): R39KA0KPK8P (SPOTCHECK)
SM-G975N (Ceramic): R39KB0A1YV (SPOTCHECK)

DATE TESTED: DECEMBER 13, 2018 – JANUARY 23, 2019 (ORIGINAL)
DECEMBER 27, 2018 – JANUARY 16, 2019 (SPOTCHECK)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc By

Reviewed By:



Dan Corona
Operations Leader
UL Verification Services Inc.



Steven Tran
Project Engineer
UL Verification Services Inc.

2. INTRODUCTION OF TEST DATA REUSE

2.1. INTRODUCTION

According to the manufacturer, FCC ID: A3LSMG975F and FCC ID: A3LSMG975KOR non-licensed radios are electrically identical. The FCC ID: A3LSMG975F test data shall remain representative of FCC ID: A3LSMG975KOR.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

2.2. DEVICES DIFFERENCES

The FCC ID: A3LSMG975F, shares the same enclosure and circuit board as FCC ID: A3LSMG975KOR. The WPC antennas and surrounding circuitry and layout are identical between two models.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG975F remains representative of FCC ID: A3LSMG975KOR. The test data of FCC ID: A3LSMG975F being submitted for this application to cover WPC features.

2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device A3LSMG975KOR (Glass and Ceramic) for radiated harmonic spurious and radiated fundamental. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary below.


A3LSMG975KOR SPOT CHECK RESULTS					
Technology	Test Item	Measured	Original model	Spot check model	Delta (dB)
			SM-G975F	SM-G975N	
		Frequency	A3LSMG975F	A3LSMG975KOR	Peak/Quasi-Peak (dBμV)
WPC	Fundamental	110-148 kHz	-11.81 Pk	-12.01 Pk	-0.2
	Spurious Emissions	50.83MHz	34.43 QP	21.69 QP	-12.74

Comparison of two models, upper deviation is within 3dB range and all test are under FCC Technical Limits.

2.4. SPOT CHECK DATA – SM-G975N (GLASS)

2.4.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9kHz TO 30 MHz

OPERATING CONFIGURATION WITH PHONE

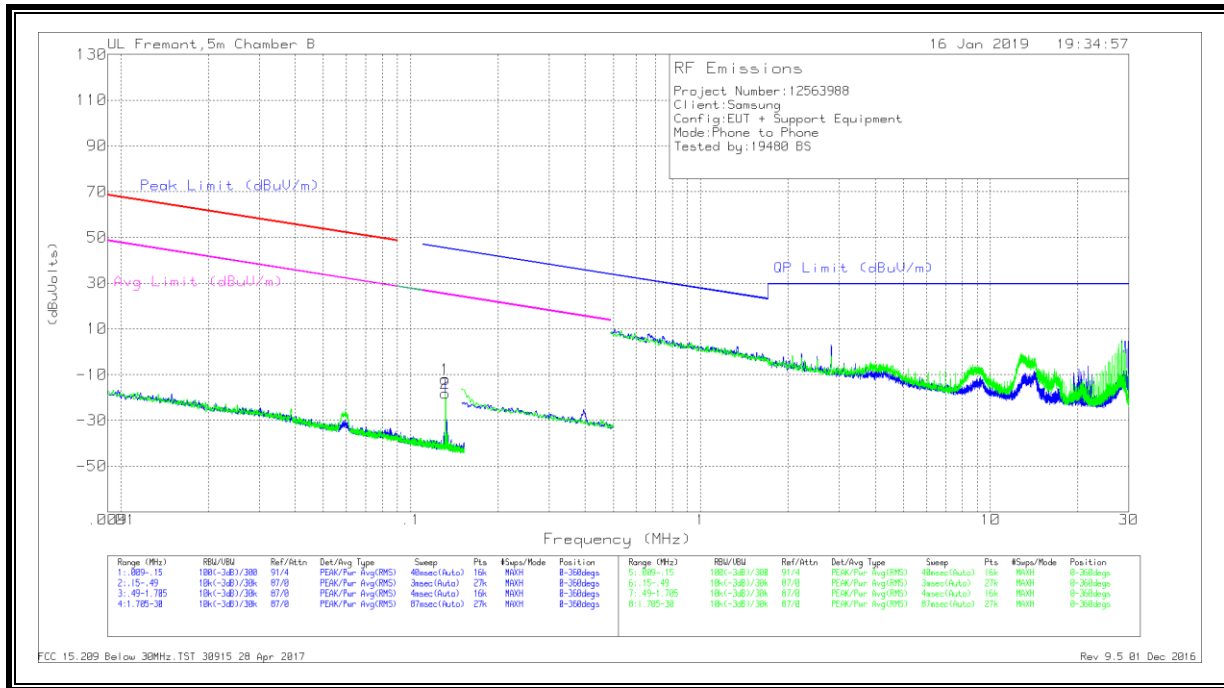

DATA



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cables (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.13156	56.59	Pk	11.4	0	-80	-12.01	45.24	-57.25	25.24	-37.25	0-360
2	.13185	50.37	Pk	11.4	0	-80	-18.23	45.22	-63.45	25.22	-43.45	0-360

Pk - Peak detector

2.4.2. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz

OPERATING CONFIGURATION WITH PHONE

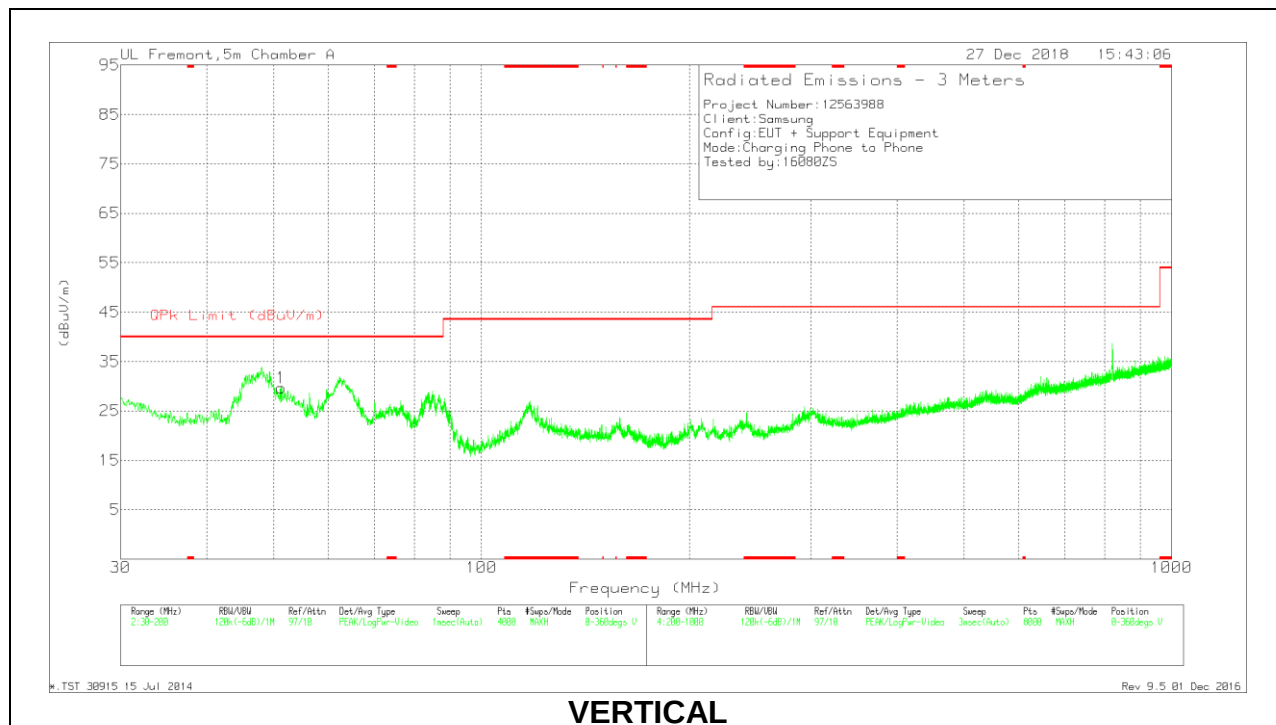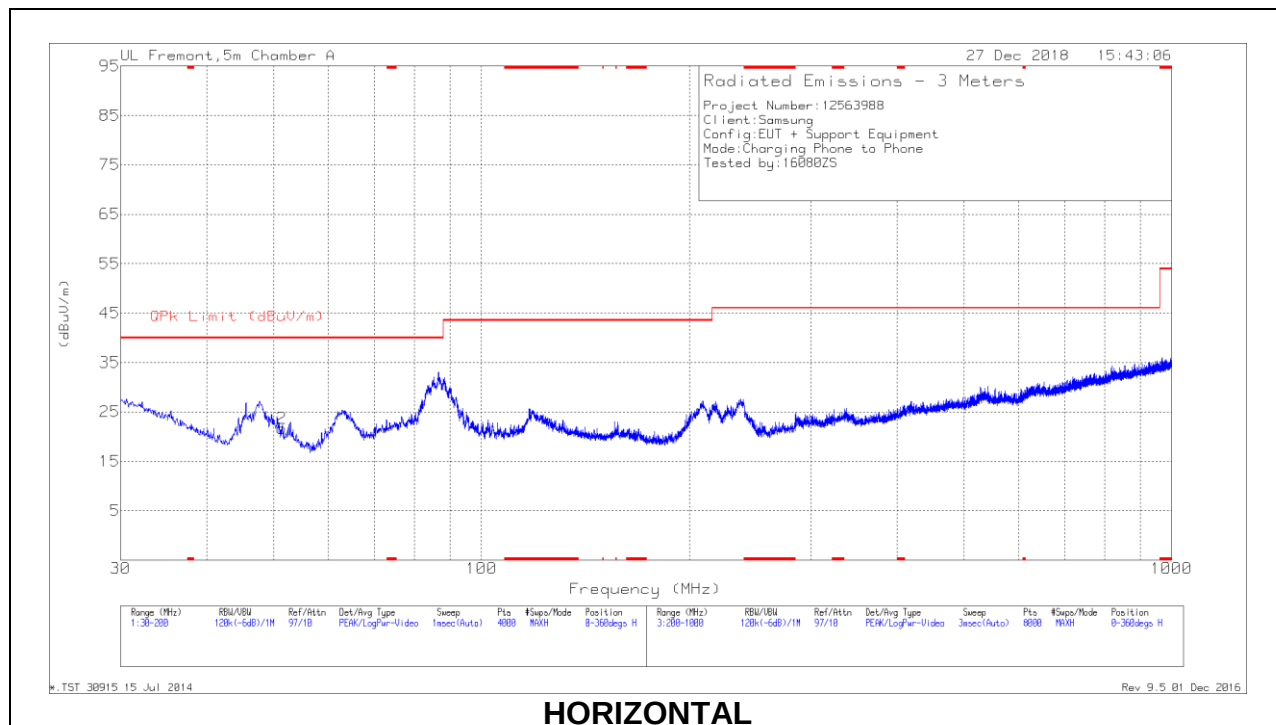

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	51.2555	43.01	Pk	13.5	-26.9	29.61	40	-10.39	0-360	100	V
	51.3021	37.44	Qp	13.5	-26.9	24.04	40	-15.96	145	103	V
2	51.4255	35.09	Pk	13.5	-26.9	21.69	40	-18.31	0-360	101	H

Pk - Peak detector

Qp - Quasi-Peak detector

2.5. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/ Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title/Section
PCE	A3LSMG975F	Grant	12563708-E1	Test	FCC Report WWAN / All sections except Appendix A
DSS	A3LSMG975F	Grant	12563708-E2	Test	FCC Report BT / All sections
DTS	A3LSMG975F	Grant	12563708-E3	Test	FCC Report BLE / All sections
	A3LSMG975F	Grant	12563708-E4	Test	FCC Report DTS WLAN / All sections
NII	A3LSMG975F	Grant	12563708-E5	Test	FCC Report UNII WLAN / All sections except DFS
DXX	A3LSMG975F	Grant	12563708-E7	Test	FCC Report NFC / All sections
			12563708-E8	Test	FCC Report ANT+ / All sections
DCD	A3LSMG975F	Grant	12563708-E9	Test	FCC Report Wireless Charging / All sections

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☒ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)	☐ Chamber I (ISED:2324A-5)
☒ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)	☐ Chamber J (ISED:2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☐ Chamber K (ISED:2324A-1)
	☐ Chamber G (ISED:22541-4)	☐ Chamber L (ISED:2324A-3)
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE 20/40/80, ANT+ and NFC. The model SM-G975F was used for final testing and is representative of the test results in this report.

6.2. MAXIMUM OUTPUT POWER

The transmitter has maximum peak radiated electric and magnetic field strength as follows:

Fundamental Frequency (KHz)	Mode	E field (300m distance) FCC (dBuV/m)
110-148	Charging (Phone)	-11.81

6.3. SOFTWARE AND FIRMWARE

The test utility software used during testing was G975F.001 (SM-G975F) and G975N.001(SM-G975N).

6.4. WORST-CASE CONFIGURATION AND MODE

WORST-CASE CONFIGURATION AND MODE FOR FINAL TEST

This device may be formed with two different exterior materials: Glass and Ceramic. Glass model was set for full test and additional spot check verification was done with Ceramic model for radiated harmonic spurious and radiated fundamental as documented.

The EUT is a single frequency magnetic charger enclosed in a plastic case. For the entire radiated emissions test, the EUT was examined with the following configuration:

Configuration	Mode	Descriptions
1	Operating (With Phone)	EUT and real phone
2	Operating (With Phone with TA)	EUT and real phone powered by AC/DC adapter
3	Operating (With Phone Across on the EUT)	EUT and real phone
4	Operating (With Phone Across on the EUT with TA)	EUT and real phone powered by AC/DC adapter
5	Operating (With Wearable)	EUT and real smart watch
6	Operating (With Wearable and TA)	EUT and real smart watch powered by AC/DC adapter

Note: Preliminary tests were conducted and it was determined that configuration 4 was the worst case configurations for the EUT, therefore configuration 4 were set for final test. Also, the maximum transfer power is 9W, depending on the power requested by the Rx device.

AC power line conducted emissions were also investigated on the following configurations.

Configuration	Mode	Descriptions
1	Operating (With Phone and TA)	EUT and real phone powered by AC/DC adapter
2	Operating (With Phone Across on the EUT with TA)	EUT and real phone powered by AC/DC adapter
3	Operating (With Wearable)	EUT and real smart watch powered by AC/DC adapter

Note: Preliminary tests were conducted and it was determined that configuration 2 was the worst case configurations; therefore configuration 2 was set for final test. Also, the maximum transfer power is 9W, depending on the power requested by the Rx device.

Remark: In order to enable wireless charging, EUT must turn on power sharing mode. Also, the EUT must have battery level over 30% to support power sharing mode. Confirmed that full charging and 30% of the data was the same. Thus, when EUT operates in standalone, EUT was tested in full charging condition. Each charging mode with client device (1-20%, 40-60%, and 90-100%) was tested. The worst condition has been determined to be 1-20%, therefore this battery level is reported.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 300 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

6.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS

SUPPORT EQUIPMENT & PERIPHERALS LIST			
Description	Manufacturer	Model	Serial Number
Phone	Samsung	G965F/DS	RF8K11FQ5NP
Smartwatch	Samsung	SM-R805U	R5AK704QDRJ
Travel Adapter	Samsung	EP-TA300	R3KB5B01S1SE3
USB Data Cable	Samsung	N/A	N/A


I/O CABLES


N/A


TEST SETUP

Please see the following configurations for the test setups. Both configurations indicate that the EUT is directly connected to an AC/DC adapter.

CONFIGURATION 1: OPERATING MODE WITH PHONE

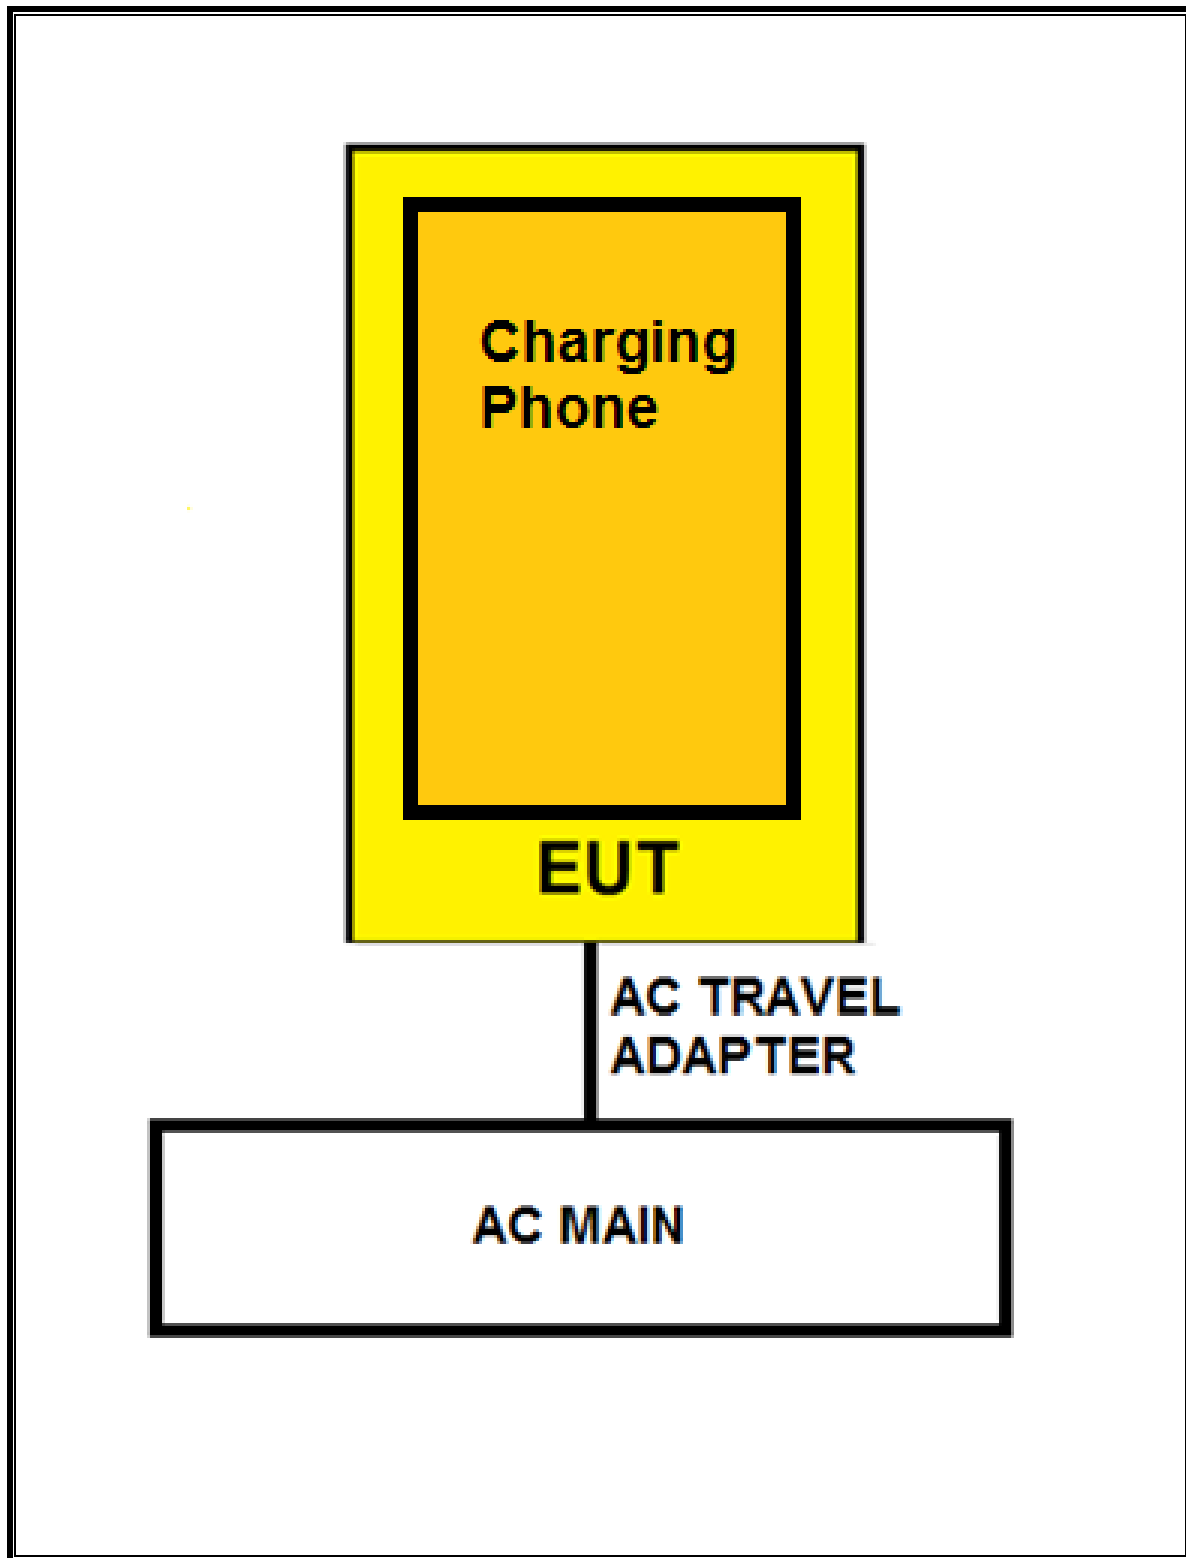

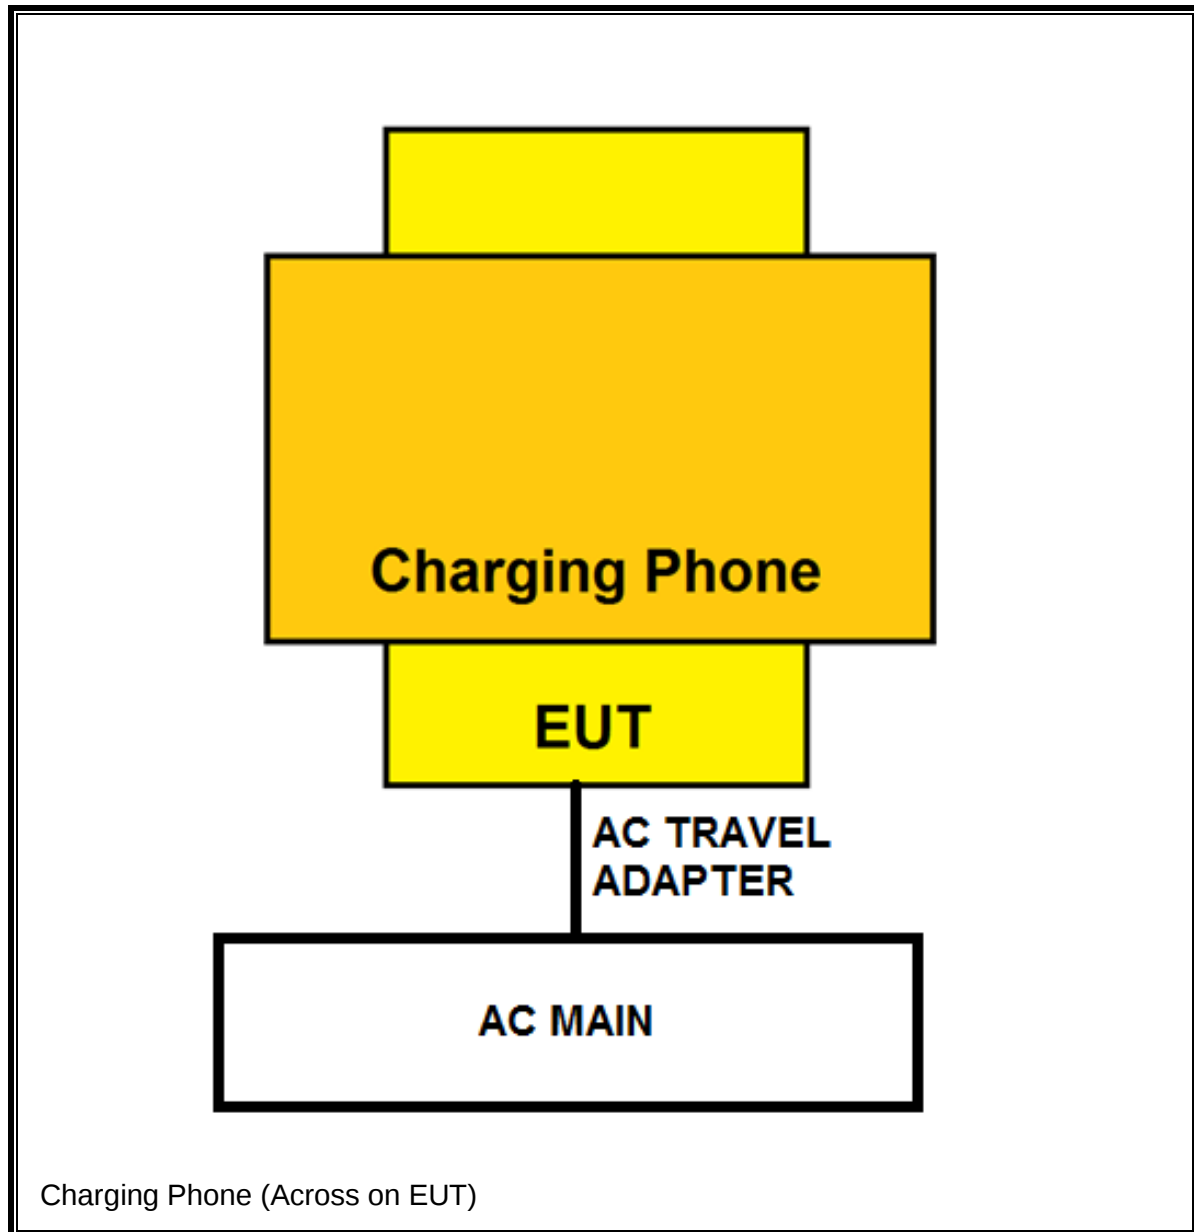CONFIGURATION 2: OPERATING MODE WITH PHONE ACROSS

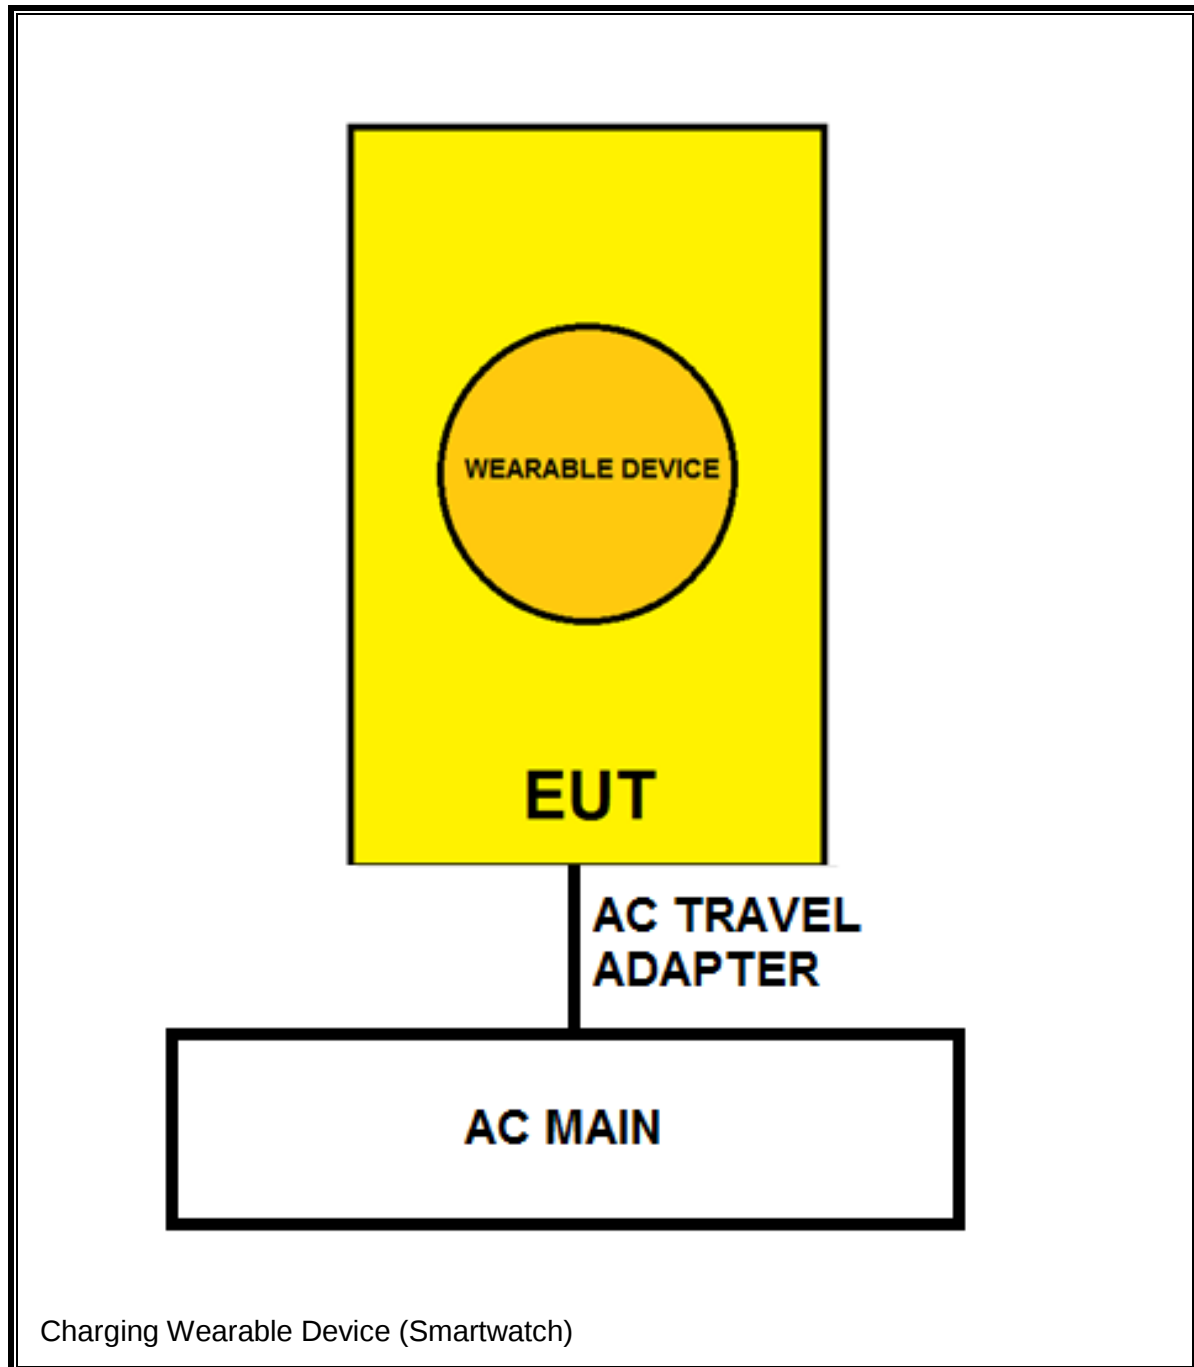CONFIGURATION 2: OPERATING MODE WITH SMARTWATCH

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	05/10/2019	05/10/2018
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T900	06/18/2019	06/18/2018
Amplifier, 9kHz to 1GHz, 32dB	Sonoma Instrument	310	170649	11/01/2019	11/01/2018
EMI Reciever	Rohde & Schwarz	ESR	T1436	02/21/2019	02/21/2018
L.I.S.N.	FCC INC.	FCC LISN 50/250	T1310	06/15/2019	06/15/2018
L.I.S.N.	FCC INC.	FCC LISN 50/250	T24	03/06/2019	03/06/2018
Antenna, Active Loop 9kHz-30MHz	ETS-Lindgren	6502	T1683	02/21/2019	02/21/2018
Antenna, Active Loop 9kHz-30MHz	Com-Power Corp.	AL-130R	PRE0165308	01/08/2020	01/08/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	02/05/2019	02/05/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/2019	01/08/2018

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Dec 01, 2016

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS


FCC §15.209 (a)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

RESULTS

8.2. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9 kHz TO 30 MHz

8.2.1. OPERATING CONFIGURATION WITH PHONE

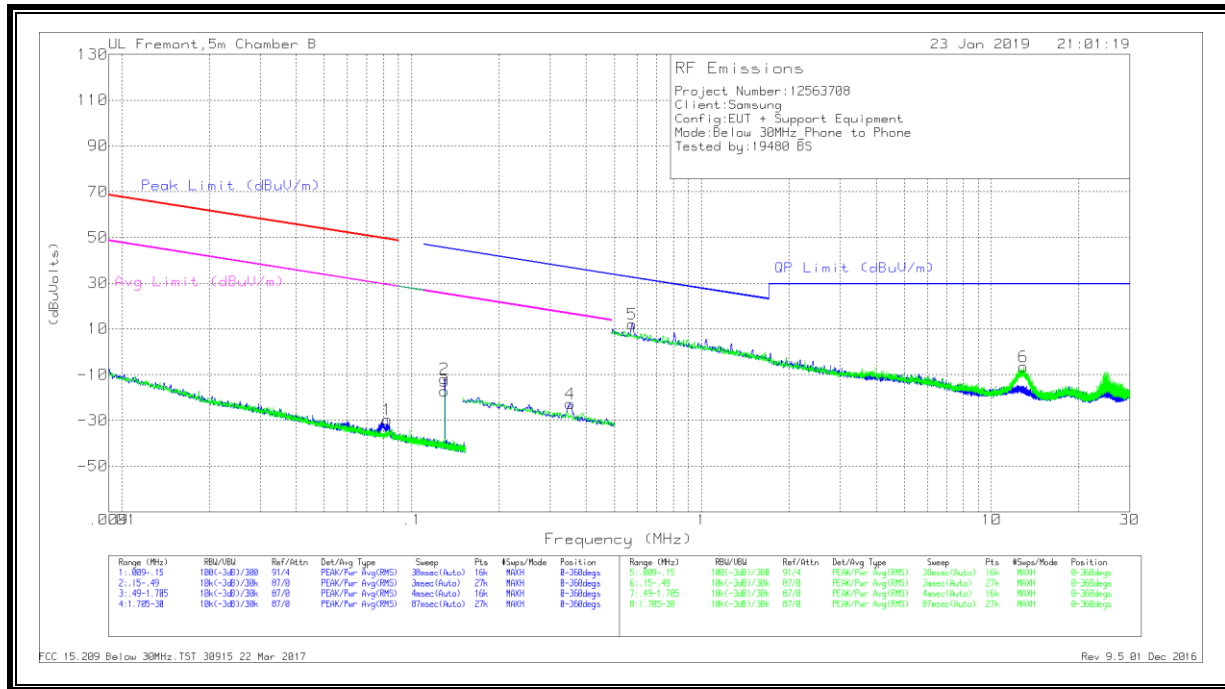

DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
1	.08224	38.86	Pk	11.4	0	-80	-29.74	49.28	-79.02	29.28	-59.02	-	-	-	-	0-360	Face-On
2	.12983	57.09	Pk	11.1	0	-80	-11.81	-	-	-	-	45.36	-57.17	25.36	-37.17	0-360	Face-On
3	.12983	51.66	Pk	11.1	0	-80	-17.24	-	-	-	-	45.36	-62.6	25.36	-42.6	0-360	Face-Off
4	.35169	46.16	Pk	10.9	.1	-80	-22.84	-	-	-	-	36.69	-59.53	16.69	-39.53	0-360	Face-On



Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cables (dB)	Dist Corr (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
5	.57725	40.98	Pk	11.1	.1	-40	12.18	32.38	-20.2	0-360	Face-On
6	12.86568	22.01	Pk	11	.5	-40	-6.49	29.5	-35.99	0-360	Face-Off

Pk - Peak detector

8.3. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz

8.3.1. OPERATING CONFIGURATION WITH PHONE

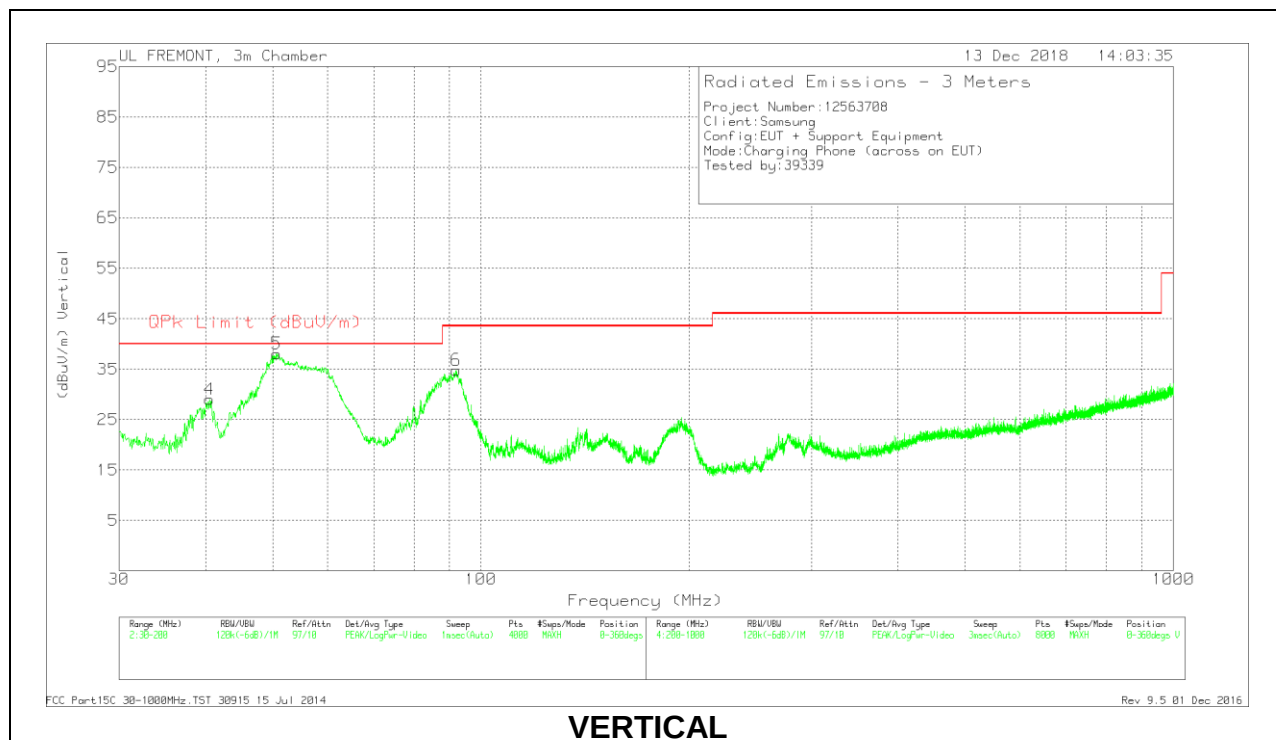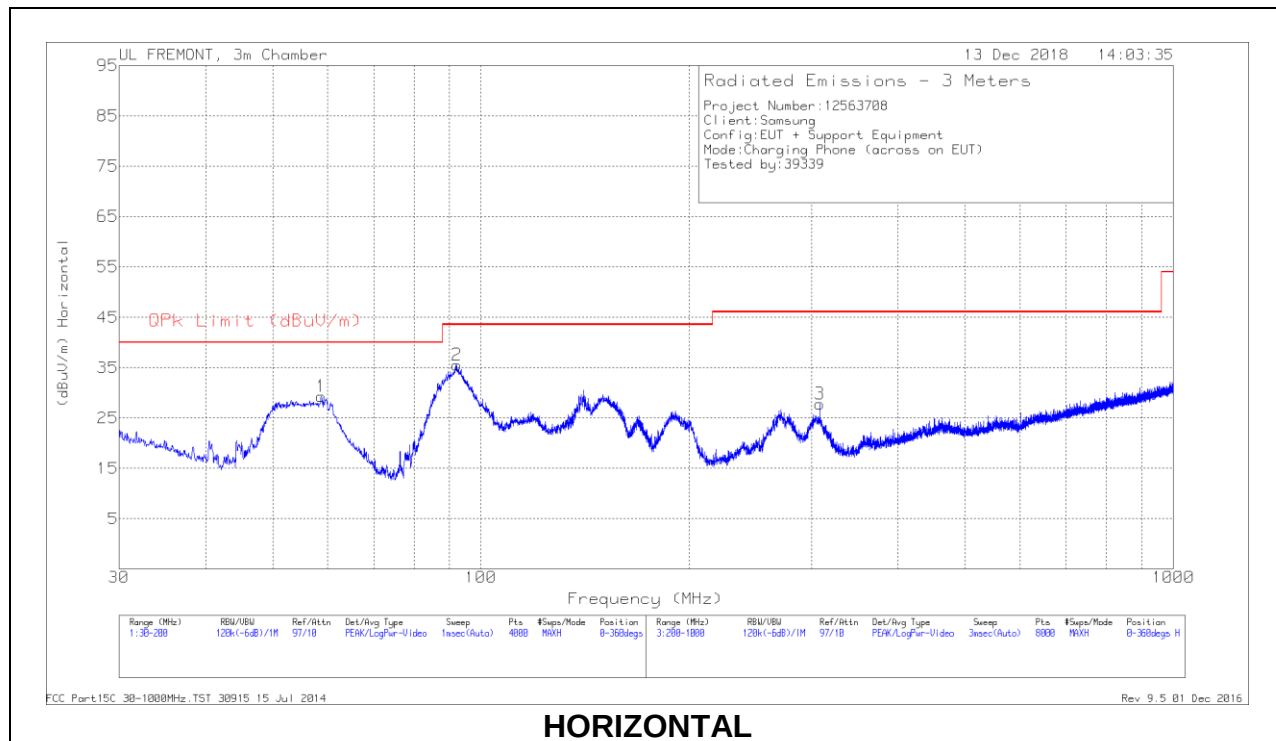

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T900 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	40.5427	42.02	Pk	17.9	-30.9	29.02	40	-10.98	0-360	100	V
5	50.6603	57.55	Pk	11.3	-30.8	38.05	40	-1.95	0-360	100	V
	50.883	54.03	Qp	11.2	-30.8	34.43	40	-5.57	88	103	V
1	58.8225	48.39	Pk	11.6	-30.7	29.29	40	-10.71	0-360	400	H
6	92.1511	53.3	Pk	11.9	-30.4	34.8	43.52	-8.72	0-360	100	V
	92.0565	49.56	Qp	11.9	-30.4	31.06	43.52	-12.46	308	100	V
2	92.2786	53.94	Pk	12	-30.4	35.54	43.52	-7.98	0-360	200	H
	92.0511	50.58	Qp	11.9	-30.4	32.08	43.52	-11.44	196	194	H
3	308.4141	38.92	Pk	17.6	-28.7	27.82	46.02	-18.2	0-360	100	H


Pk - Peak detector

Qp - Quasi-Peak detector

8.4. SPOT CHECK DATA SM-G975F (CERAMIC)

8.4.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9kHz TO 30 MHz

OPERATING CONFIGURATION WITH PHONE


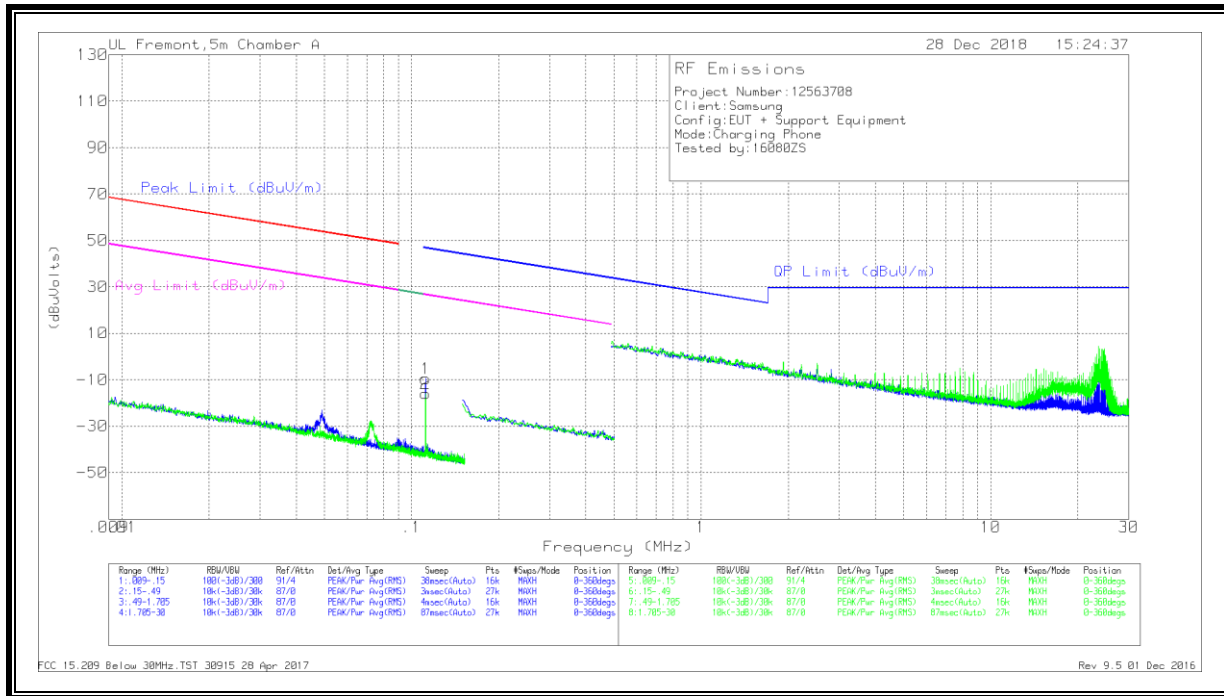


DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cables (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
1	.11188	58.86	Pk	11.5	.1	-80	-9.54	46.65	-56.19	26.65	-36.19	0-360	Face-On
2	.11188	52.52	Pk	11.5	.1	-80	-15.88	46.65	-62.53	26.65	-42.53	0-360	Face-Off

Pk - Peak detector

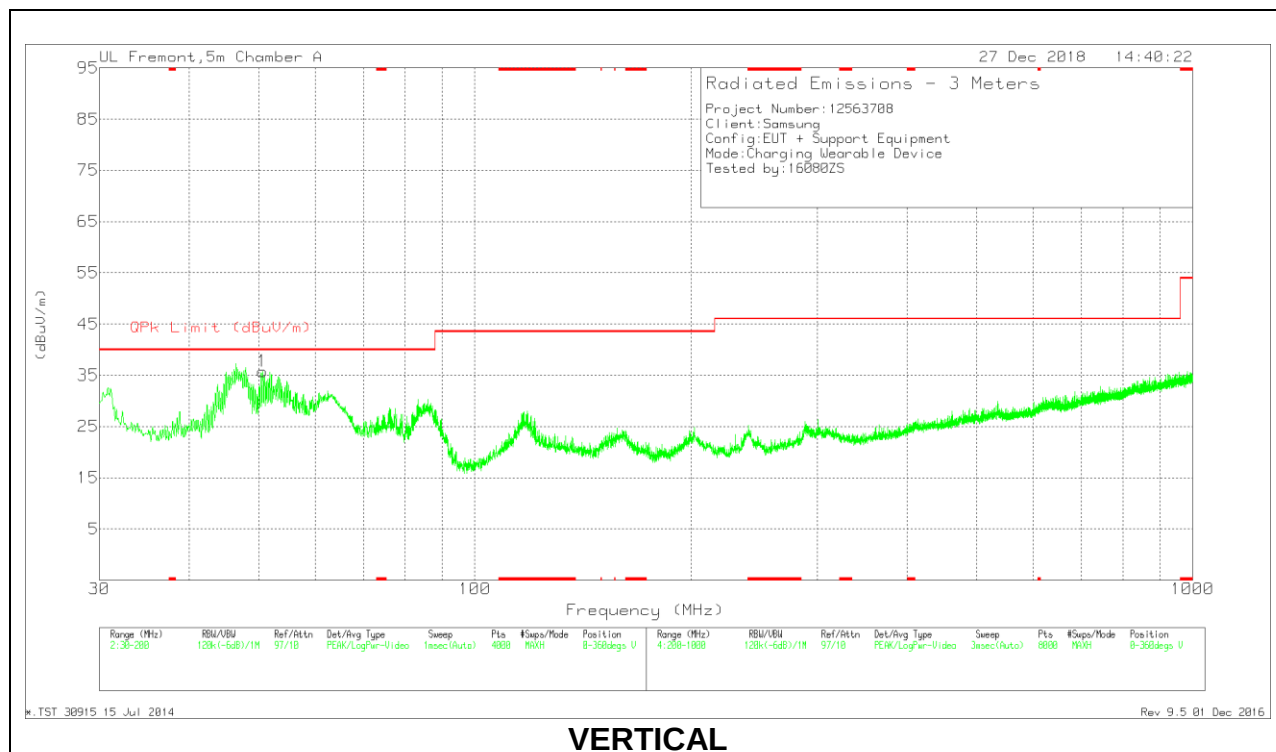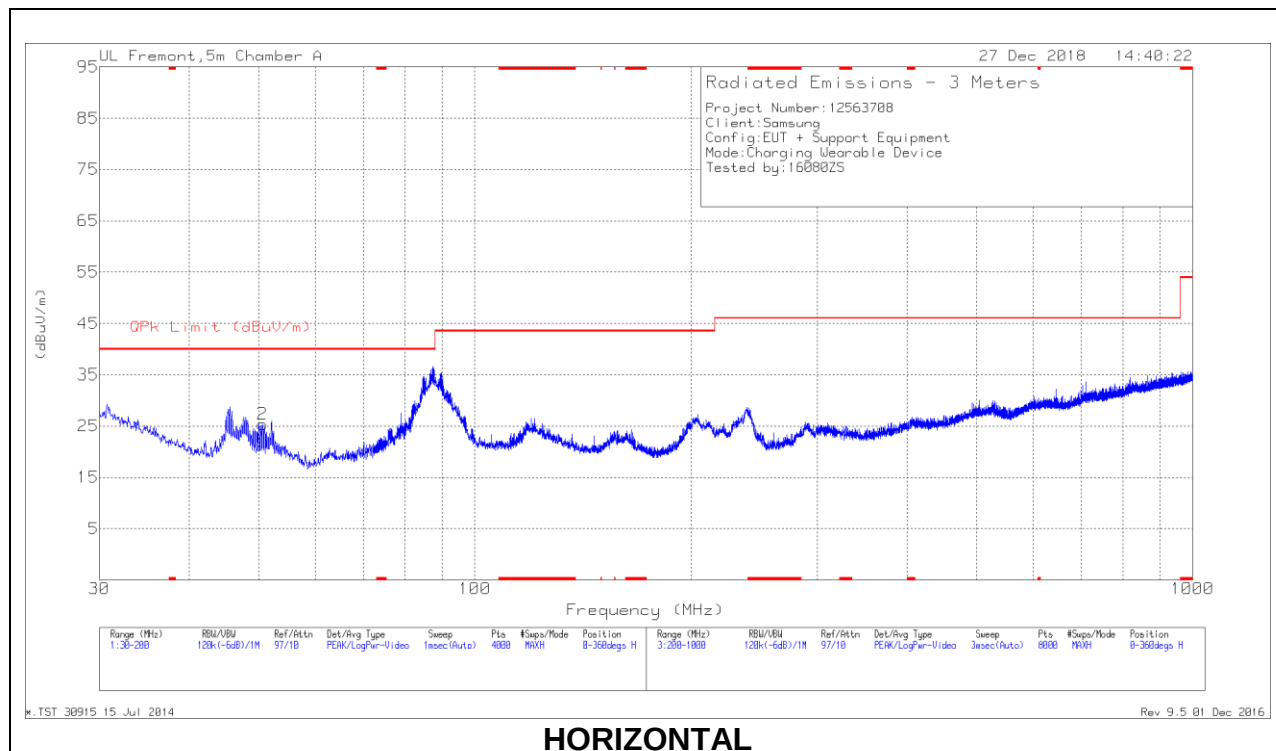8.4.2. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz**OPERATING CONFIGURATION WITH PHONE**

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	50.6178	38.54	Pk	13.7	-26.9	25.34	40	-14.66	0-360	400	H
1	50.6178	48.98	Pk	13.7	-26.9	35.78	40	-4.22	0-360	100	V
	50.6207	45.3	Qp	13.7	-26.9	32.1	40	-7.9	163	124	V


Pk - Peak detector

Qp - Quasi-Peak detector

8.5. SPOT CHECK DATA – SM-G975N (CERAMIC)

8.5.1. FCC TX FUNDAMENTAL AND SPURIOUS EMISSIONS FROM 9kHz TO 30 MHz

OPERATING CONFIGURATION WITH PHONE


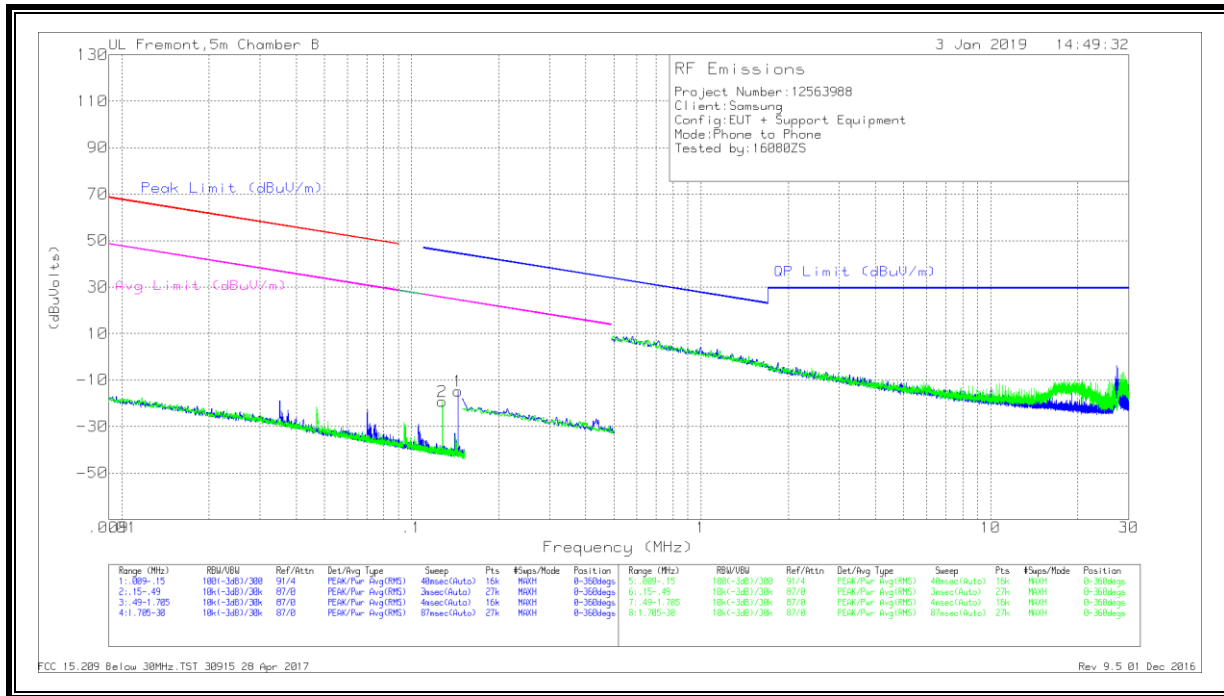


DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cables (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Polarity
2	.12795	49.36	Pk	11.4	0	-80	-19.24	45.48	-64.72	25.48	-44.72	0-360	Face-Off
1	.14496	53.86	Pk	11.3	0	-80	-14.84	44.4	-59.24	24.4	-39.24	0-360	Face-On

Pk - Peak detector

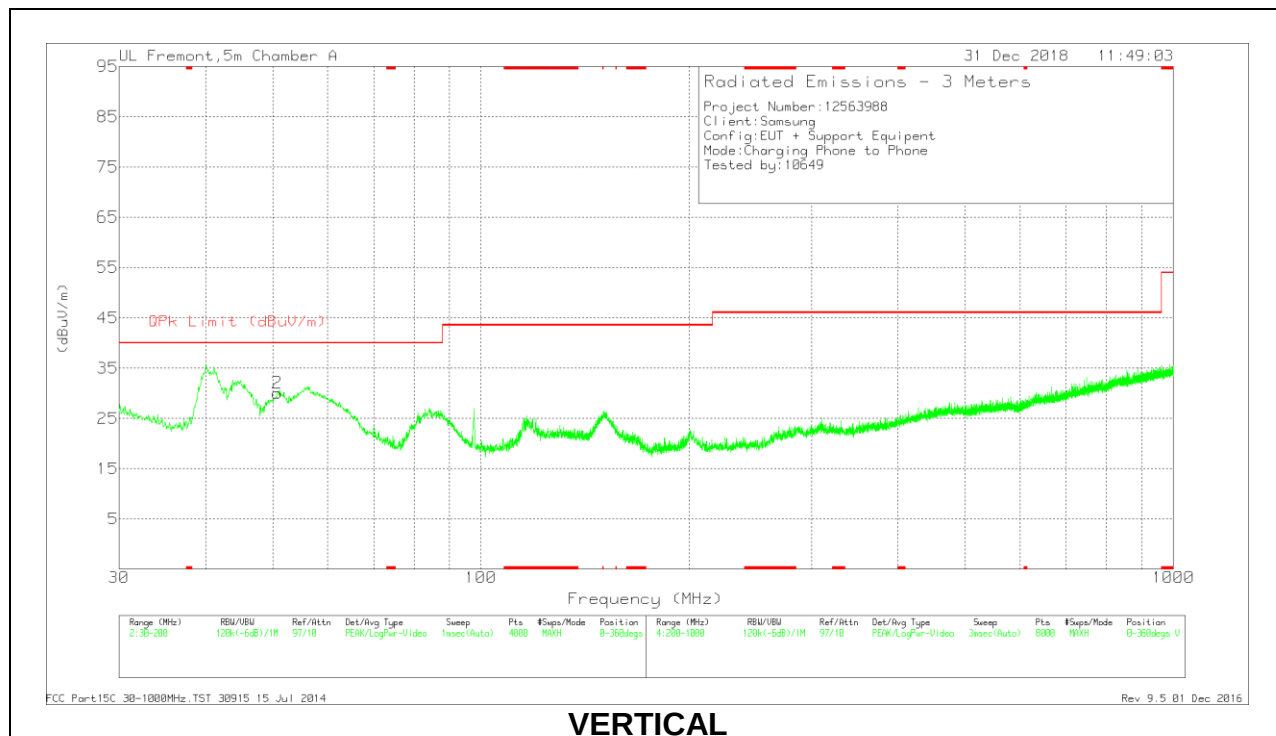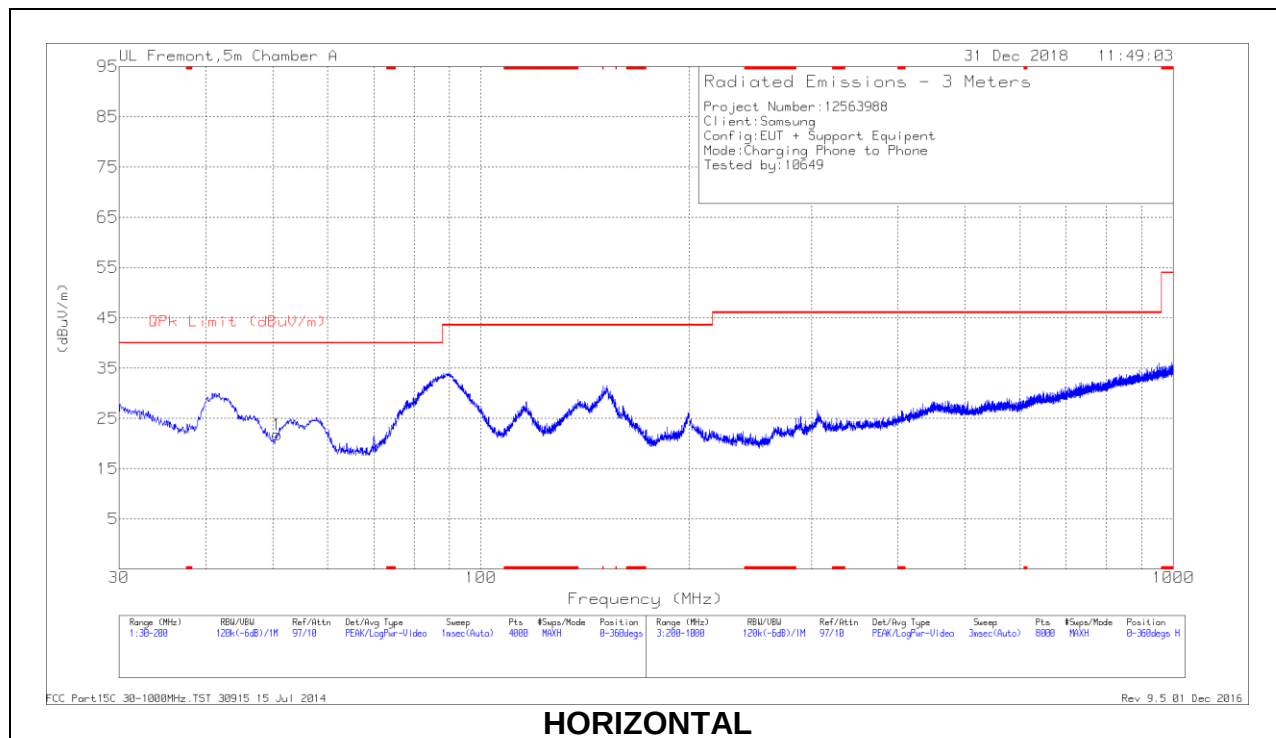8.5.2. FCC TX SPURIOUS EMISSION 30 TO 1000 MHz**OPERATING CONFIGURATION WITH PHONE**

DATA

Marker	Frequency(MHz)	Meter Reading (dBuV)	Det	AF PRE0181574 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	50.8304	35.06	Pk	13.6	-26.9	21.76	40	-18.24	0-360	101	H
2	50.8304	43.36	Pk	13.6	-26.9	30.06	40	-9.94	0-360	100	V
	50.9024	37.72	Qp	13.6	-26.9	24.42	40	-15.58	144	105	V

Pk - Peak detector

Qp - Quasi-Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

9.1. OPERATING CONFIGURATION WITH PHONE

LINE 1 RESULTS

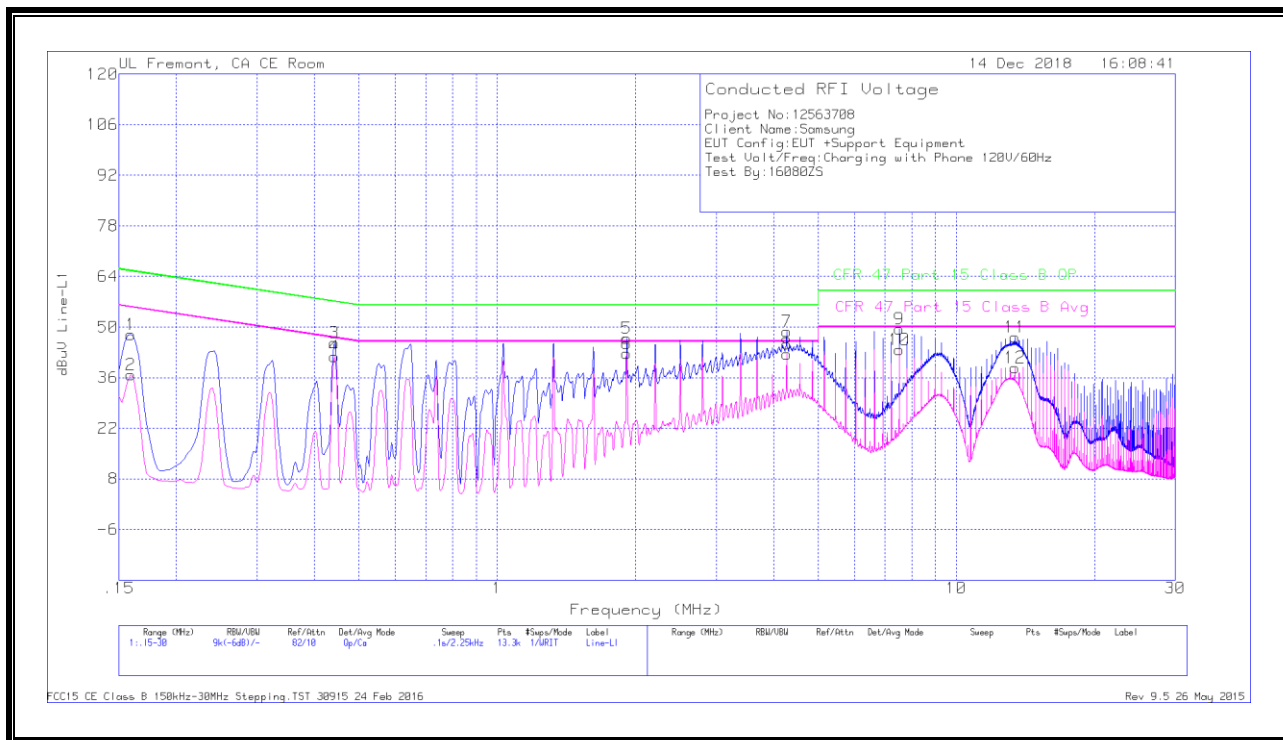


WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.159	37.71	Qp	.1	0	10.1	47.91	65.52	-17.61	-	-
2	.159	26.6	Ca	.1	0	10.1	36.8	-	-	55.52	-18.72
3	.4425	35.52	Qp	0	0	10.1	45.62	57.01	-11.39	-	-
4	.4425	31.68	Ca	0	0	10.1	41.78	-	-	47.01	-5.23
5	1.91625	36.7	Qp	0	.1	10.1	46.9	56	-9.1	-	-
6	1.914	32.46	Ca	0	.1	10.1	42.66	-	-	46	-3.34
7	4.272	38.64	Qp	0	.1	10.1	48.84	56	-7.16	-	-
8	4.272	32.28	Ca	0	.1	10.1	42.48	-	-	46	-3.52
9	7.51425	39.09	Qp	0	.2	10.2	49.49	60	-10.51	-	-
10	7.51425	33.38	Ca	0	.2	10.2	43.78	-	-	50	-6.22
11	13.407	36.77	Qp	.1	.2	10.2	47.27	60	-12.73	-	-
12	13.407	28.28	Ca	.1	.2	10.2	38.78	-	-	50	-11.22

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

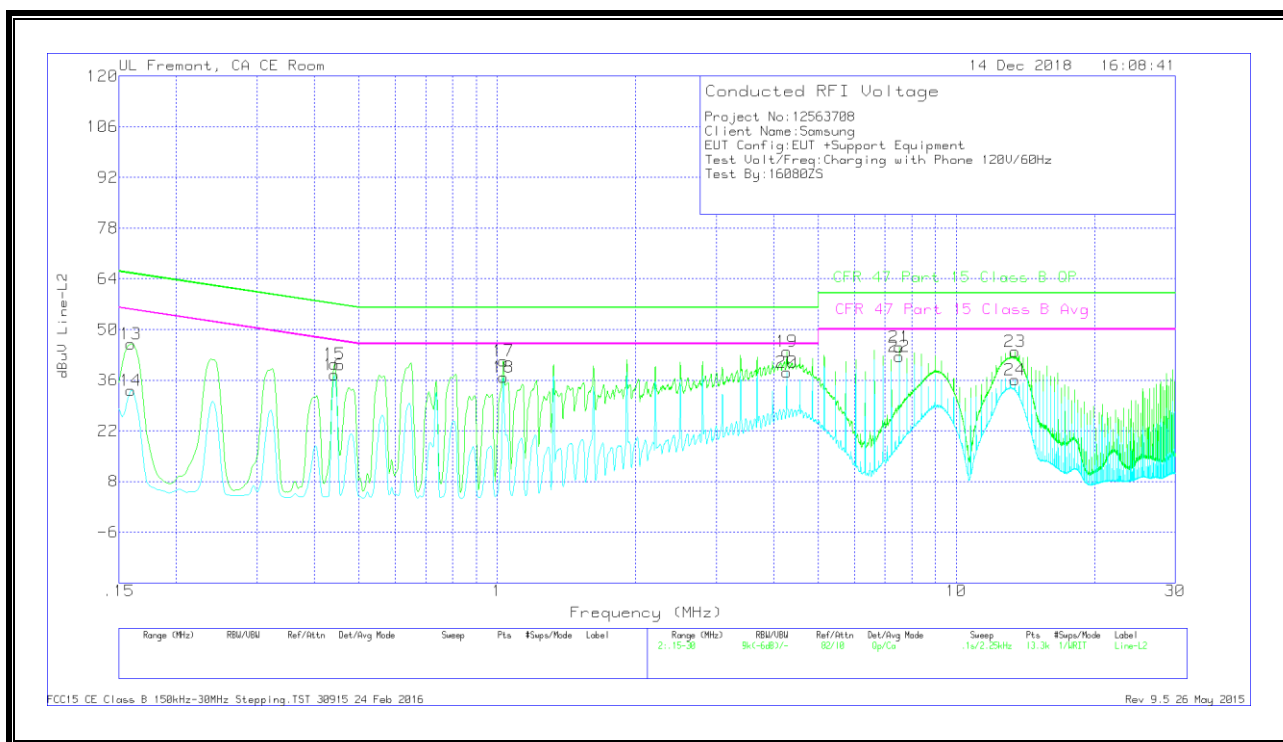

WORST EMISSIONS

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.159	35.8	Qp	.1	0	10.1	46	65.52	-19.52	-	-
14	.159	22.88	Ca	.1	0	10.1	33.08	-	-	55.52	-22.44
15	.4425	30.39	Qp	0	0	10.1	40.49	57.01	-16.52	-	-
16	.4425	27.4	Ca	0	0	10.1	37.5	-	-	47.01	-9.51
17	1.032	31.14	Qp	0	.1	10.1	41.34	56	-14.66	-	-
18	1.032	26.58	Ca	0	.1	10.1	36.78	-	-	46	-9.22
19	4.272	33.66	Qp	0	.1	10.1	43.86	56	-12.14	-	-
20	4.272	28.03	Ca	0	.1	10.1	38.23	-	-	46	-7.77
21	7.51425	34.69	Qp	0	.2	10.2	45.09	60	-14.91	-	-
22	7.51425	32.11	Ca	0	.2	10.2	42.51	-	-	50	-7.49
23	13.407	33.34	Qp	.1	.2	10.2	43.84	60	-16.16	-	-
24	13.407	25.6	Ca	.1	.2	10.2	36.1	-	-	50	-13.9

Qp - Quasi-Peak detector

Ca - CISPR average detection