

GSM 850

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

GSM850 E-Field measurement/Voice_ch 128/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 47.75 V/m; Power Drift = -0.02 dB


Applied MIF = 3.63 dB

RF audio interference level = 34.64 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 34.01 dBV/m	Grid 2 M4 34.52 dBV/m	Grid 3 M4 34.07 dBV/m
Grid 4 M4 34.33 dBV/m	Grid 5 M4 34.64 dBV/m	Grid 6 M4 34.04 dBV/m
Grid 7 M4 34.81 dBV/m	Grid 8 M4 34.81 dBV/m	Grid 9 M4 33.81 dBV/m

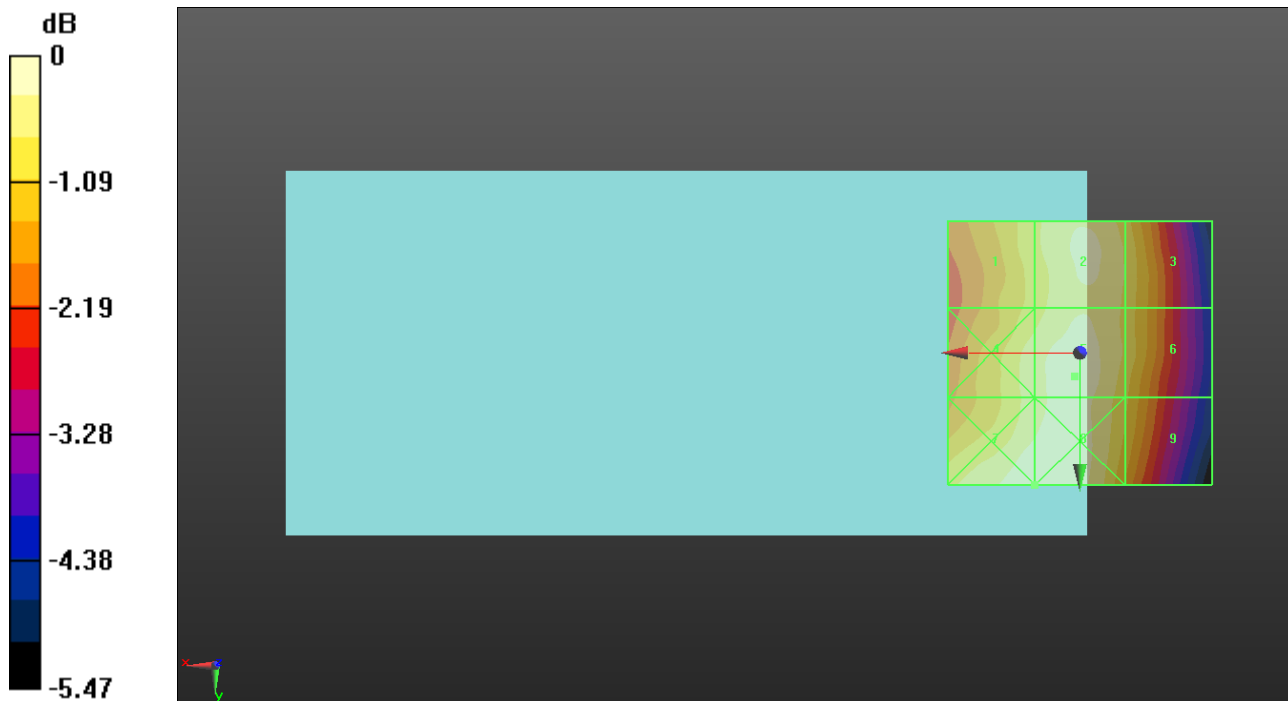

0 dB = 55.00 V/m = 34.81 dBV/m

GSM 850

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 836.6 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

GSM850 E-Field measurement/Voice_ch 190/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 46.31 V/m; Power Drift = -0.03 dB


Applied MIF = 3.63 dB

RF audio interference level = 34.53 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.66 dBV/m	Grid 2 M4 34.22 dBV/m	Grid 3 M4 33.77 dBV/m
Grid 4 M4 34.24 dBV/m	Grid 5 M4 34.53 dBV/m	Grid 6 M4 33.78 dBV/m
Grid 7 M4 34.86 dBV/m	Grid 8 M4 34.94 dBV/m	Grid 9 M4 33.64 dBV/m

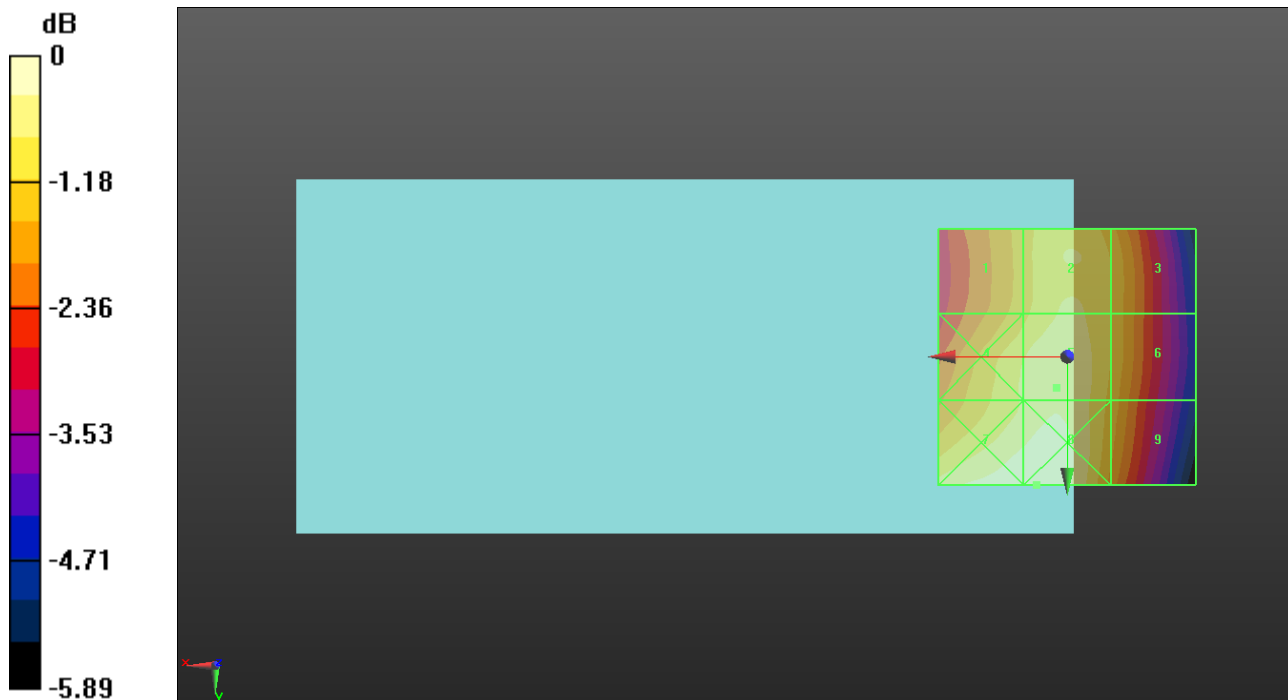

0 dB = 55.87 V/m = 34.94 dBV/m

GSM 850

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 848.6 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

GSM850 E-Field measurement/Voice_ch 251/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 49.02 V/m; Power Drift = 0.03 dB


Applied MIF = 3.63 dB

RF audio interference level = 35.06 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 34.31 dBV/m	Grid 2 M4 34.79 dBV/m	Grid 3 M4 34.27 dBV/m
Grid 4 M4 34.8 dBV/m	Grid 5 M4 35.06 dBV/m	Grid 6 M4 34.27 dBV/m
Grid 7 M4 35.34 dBV/m	Grid 8 M4 35.4 dBV/m	Grid 9 M4 34.17 dBV/m

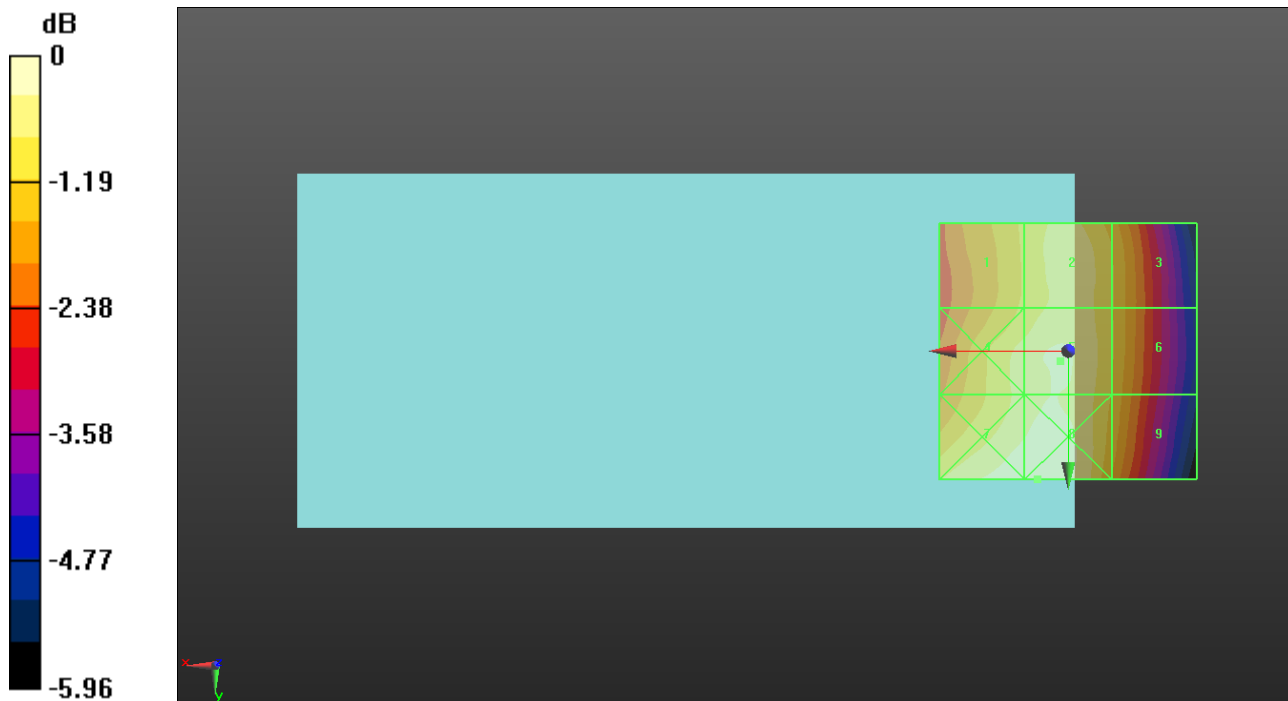

0 dB = 58.87 V/m = 35.40 dBV/m

GSM 1900

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896
Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

GSM1900 E-Field measurement/Voice_ch 512/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.089 V/m; Power Drift = 0.12 dB


Applied MIF = 3.63 dB

RF audio interference level = 25.69 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 26.82 dBV/m	Grid 2 M4 27.41 dBV/m	Grid 3 M4 27.06 dBV/m
Grid 4 M4 21.78 dBV/m	Grid 5 M4 22.86 dBV/m	Grid 6 M4 22.86 dBV/m
Grid 7 M4 25.47 dBV/m	Grid 8 M4 25.69 dBV/m	Grid 9 M4 24.78 dBV/m

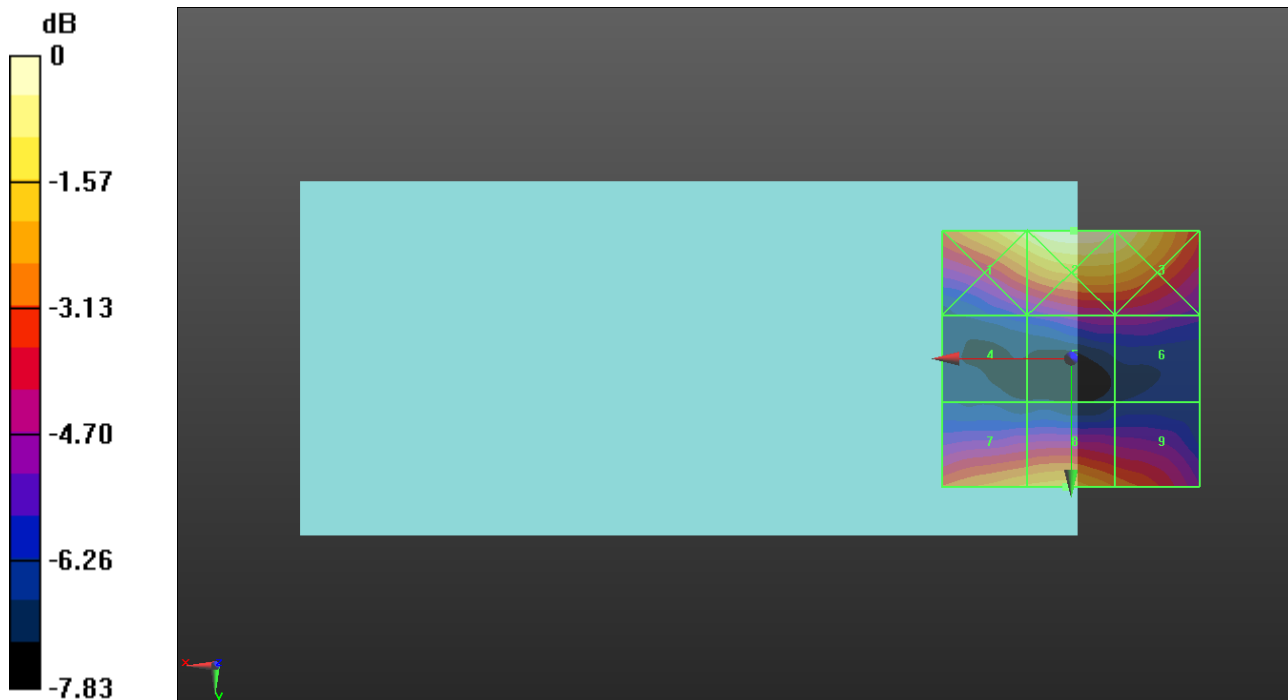

0 dB = 23.46 V/m = 27.41 dBV/m

GSM 1900

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

GSM1900 E-Field measurement/Voice_ch 661/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.158 V/m; Power Drift = 0.07 dB


Applied MIF = 3.63 dB

RF audio interference level = 25.84 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.07 dBV/m	Grid 2 M4 27.59 dBV/m	Grid 3 M4 27.08 dBV/m
Grid 4 M4 22.14 dBV/m	Grid 5 M4 22.88 dBV/m	Grid 6 M4 22.91 dBV/m
Grid 7 M4 25.7 dBV/m	Grid 8 M4 25.84 dBV/m	Grid 9 M4 25 dBV/m

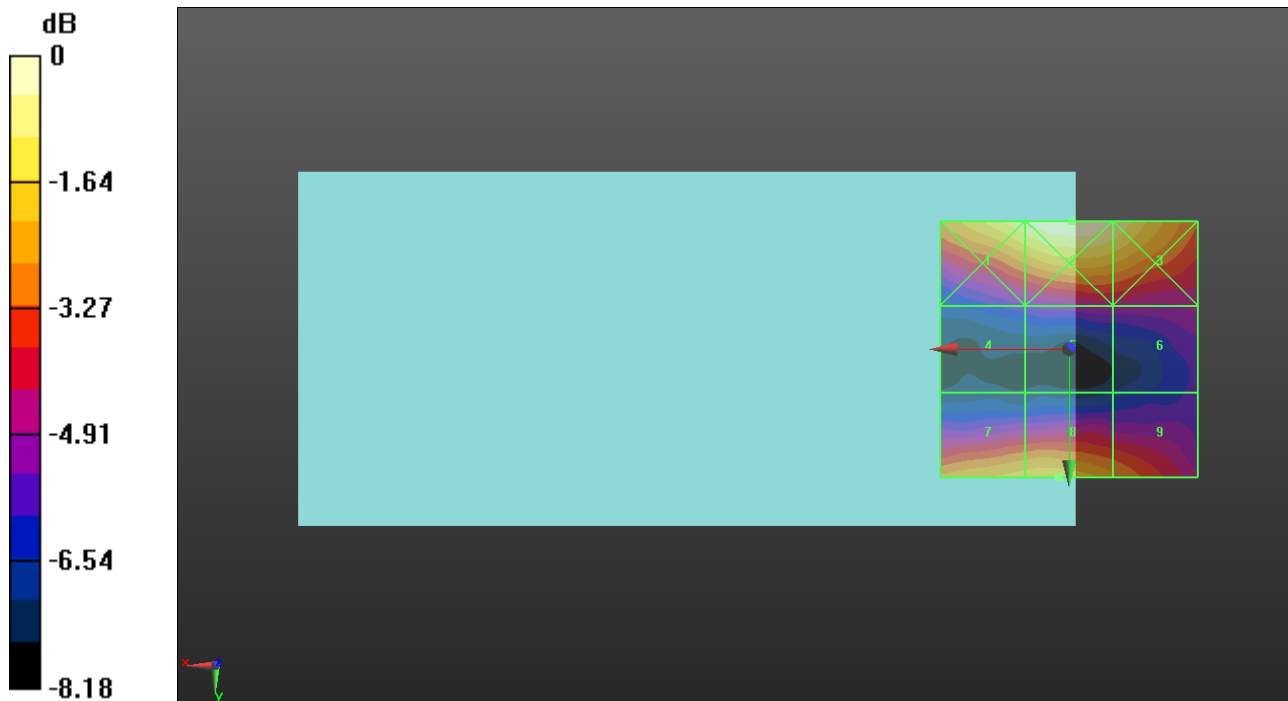

0 dB = 23.97 V/m = 27.59 dBV/m

GSM 1900

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896
Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

GSM1900 E-Field measurement/Voice_ch 810/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.097 V/m; Power Drift = -0.18 dB


Applied MIF = 3.63 dB

RF audio interference level = 26.03 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 27.86 dBV/m	Grid 2 M4 28.77 dBV/m	Grid 3 M4 28.35 dBV/m
Grid 4 M4 23.11 dBV/m	Grid 5 M4 24.3 dBV/m	Grid 6 M4 24.29 dBV/m
Grid 7 M4 25.96 dBV/m	Grid 8 M4 26.03 dBV/m	Grid 9 M4 24.97 dBV/m

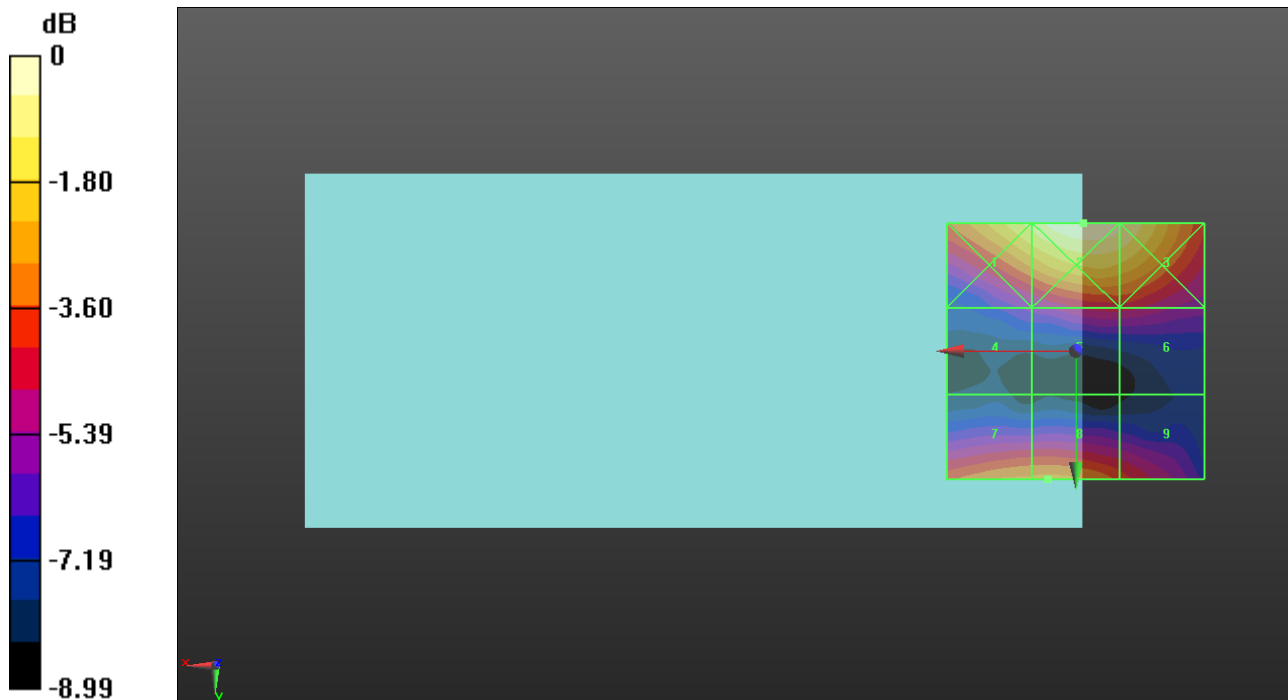

0 dB = 27.45 V/m = 28.77 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2506 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 E-Field measurement/Voice_ch 39750 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.23 V/m; Power Drift = -0.03 dB


Applied MIF = -1.44 dB

RF audio interference level = 18.72 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 19.45 dBV/m	Grid 2 M4 20.92 dBV/m	Grid 3 M4 20.86 dBV/m
Grid 4 M4 16.55 dBV/m	Grid 5 M4 18.72 dBV/m	Grid 6 M4 18.7 dBV/m
Grid 7 M4 13.21 dBV/m	Grid 8 M4 12.96 dBV/m	Grid 9 M4 14.56 dBV/m

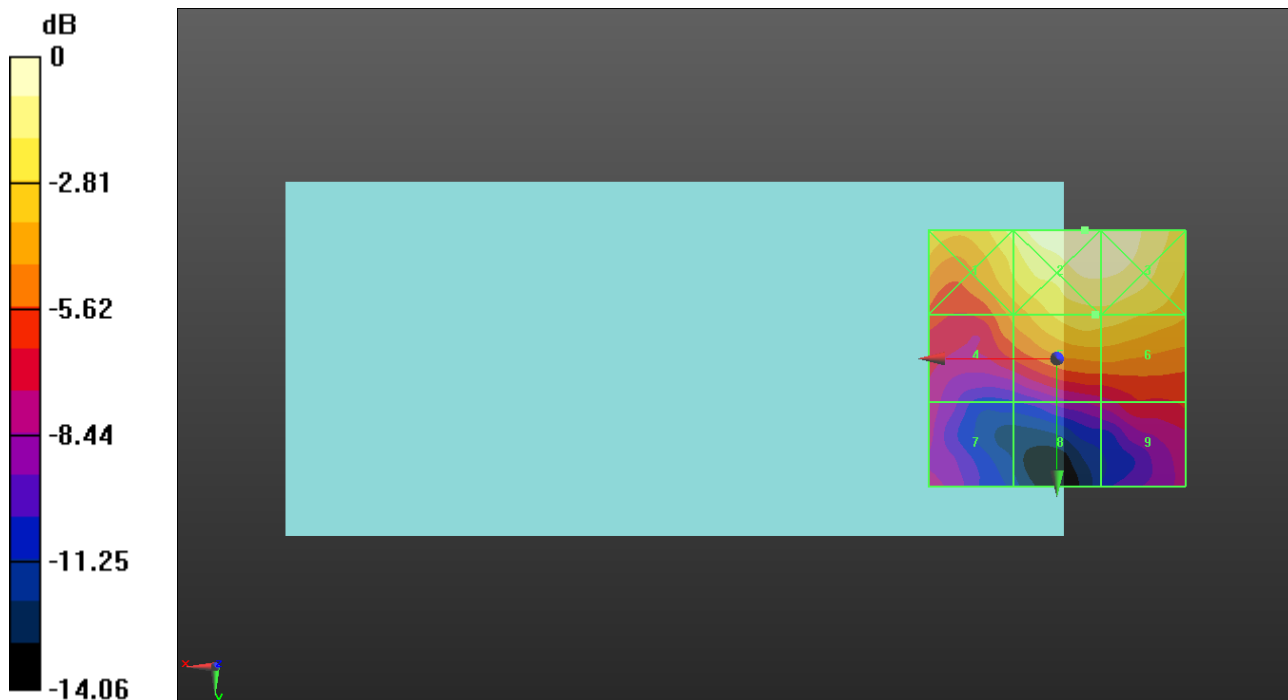

0 dB = 11.12 V/m = 20.92 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2549.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 E-Field measurement/Voice_ch 40185 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.31 V/m; Power Drift = -0.10 dB


Applied MIF = -1.44 dB

RF audio interference level = 18.50 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 18.42 dBV/m	Grid 2 M4 20.46 dBV/m	Grid 3 M4 20.25 dBV/m
Grid 4 M4 15.57 dBV/m	Grid 5 M4 18.5 dBV/m	Grid 6 M4 18.42 dBV/m
Grid 7 M4 11.28 dBV/m	Grid 8 M4 13.39 dBV/m	Grid 9 M4 13.72 dBV/m

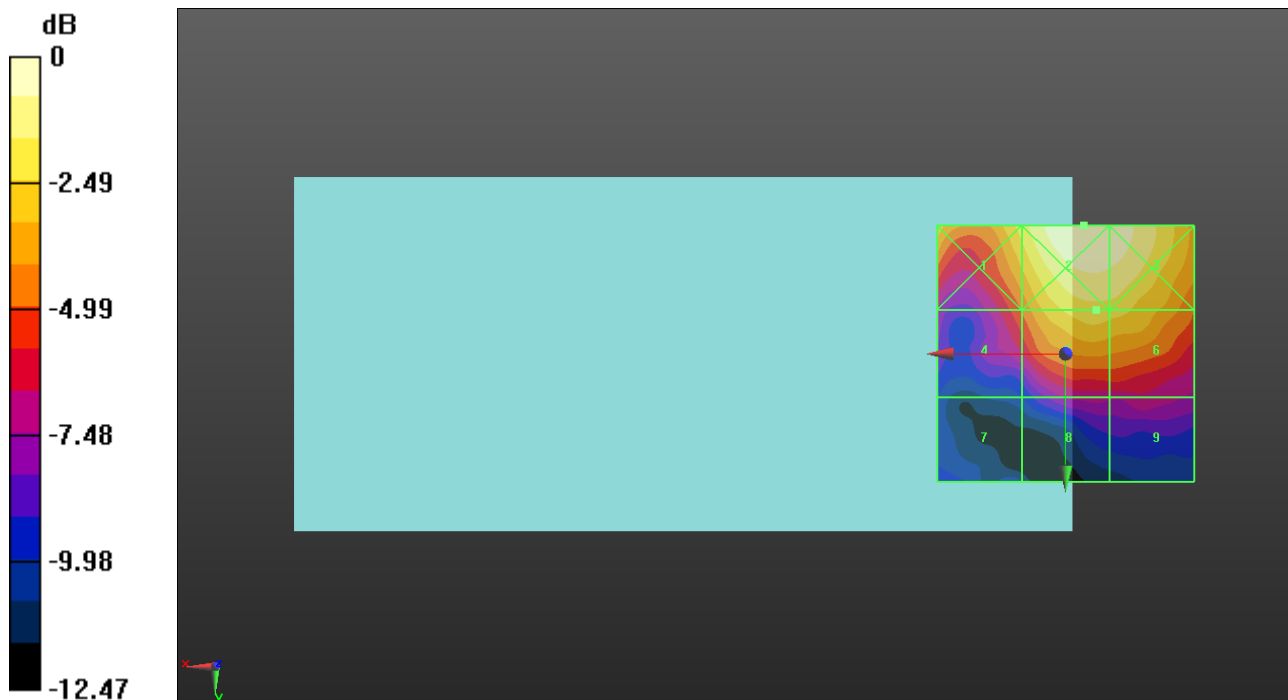

0 dB = 10.55 V/m = 20.47 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2593 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 E-Field measurement/Voice_ch 40620 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.06 V/m; Power Drift = -0.15 dB


Applied MIF = -1.44 dB

RF audio interference level = 18.10 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.33 dBV/m	Grid 2 M4 19.62 dBV/m	Grid 3 M4 19.55 dBV/m
Grid 4 M4 14.99 dBV/m	Grid 5 M4 18.1 dBV/m	Grid 6 M4 18.07 dBV/m
Grid 7 M4 13.62 dBV/m	Grid 8 M4 13.71 dBV/m	Grid 9 M4 13.97 dBV/m

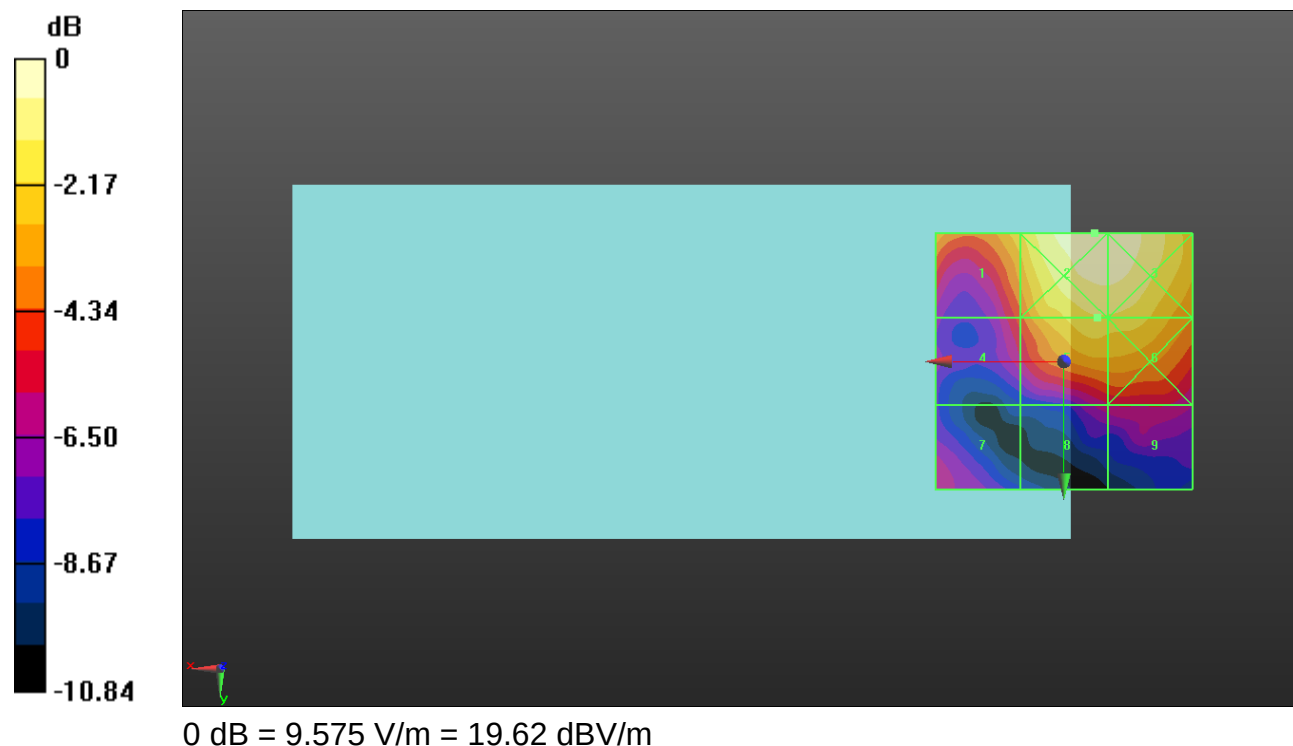

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2636.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 E-Field measurement/Voice_ch 41055 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.841 V/m; Power Drift = 0.04 dB


Applied MIF = -1.44 dB

RF audio interference level = 18.05 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.35 dBV/m	Grid 2 M4 19.42 dBV/m	Grid 3 M4 19.35 dBV/m
Grid 4 M4 14.46 dBV/m	Grid 5 M4 18.05 dBV/m	Grid 6 M4 18.02 dBV/m
Grid 7 M4 12.96 dBV/m	Grid 8 M4 13.86 dBV/m	Grid 9 M4 14.2 dBV/m

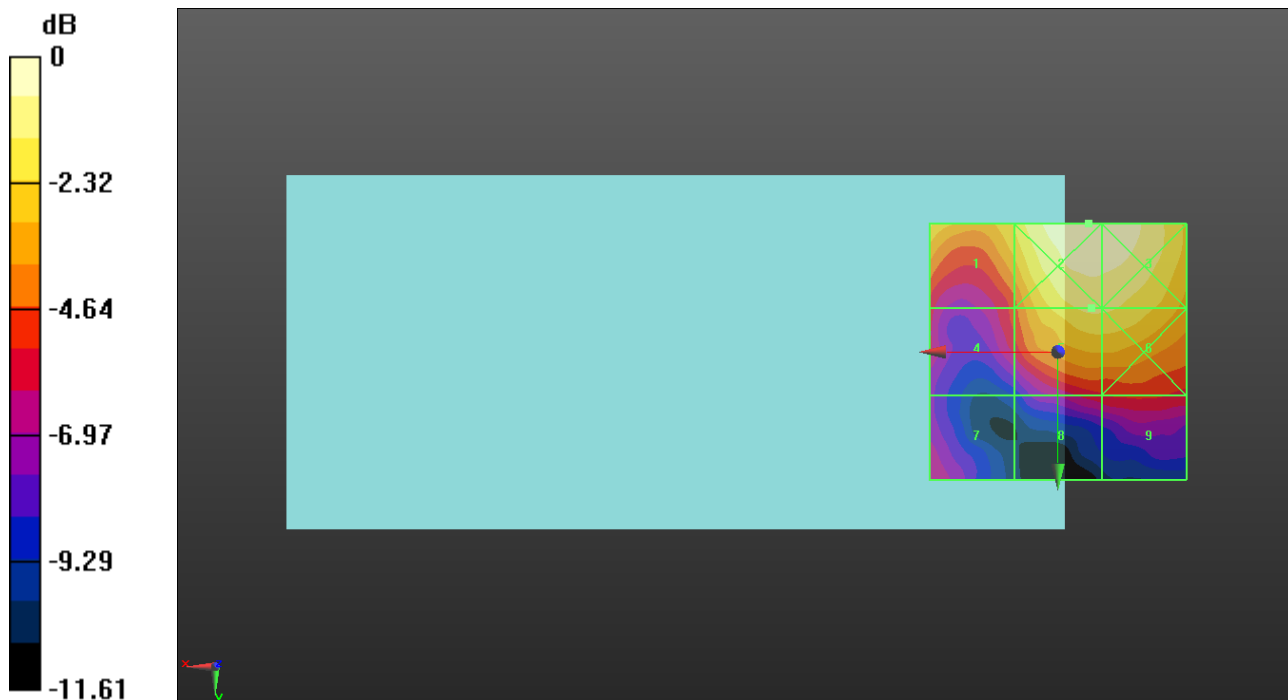

0 dB = 9.350 V/m = 19.42 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2680 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 E-Field measurement/Voice_ch 41490 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.690 V/m; Power Drift = 0.06 dB


Applied MIF = -1.44 dB

RF audio interference level = 17.85 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.82 dBV/m	Grid 2 M4 19.42 dBV/m	Grid 3 M4 19.31 dBV/m
Grid 4 M4 14.34 dBV/m	Grid 5 M4 17.85 dBV/m	Grid 6 M4 17.85 dBV/m
Grid 7 M4 12.38 dBV/m	Grid 8 M4 12.2 dBV/m	Grid 9 M4 12.77 dBV/m

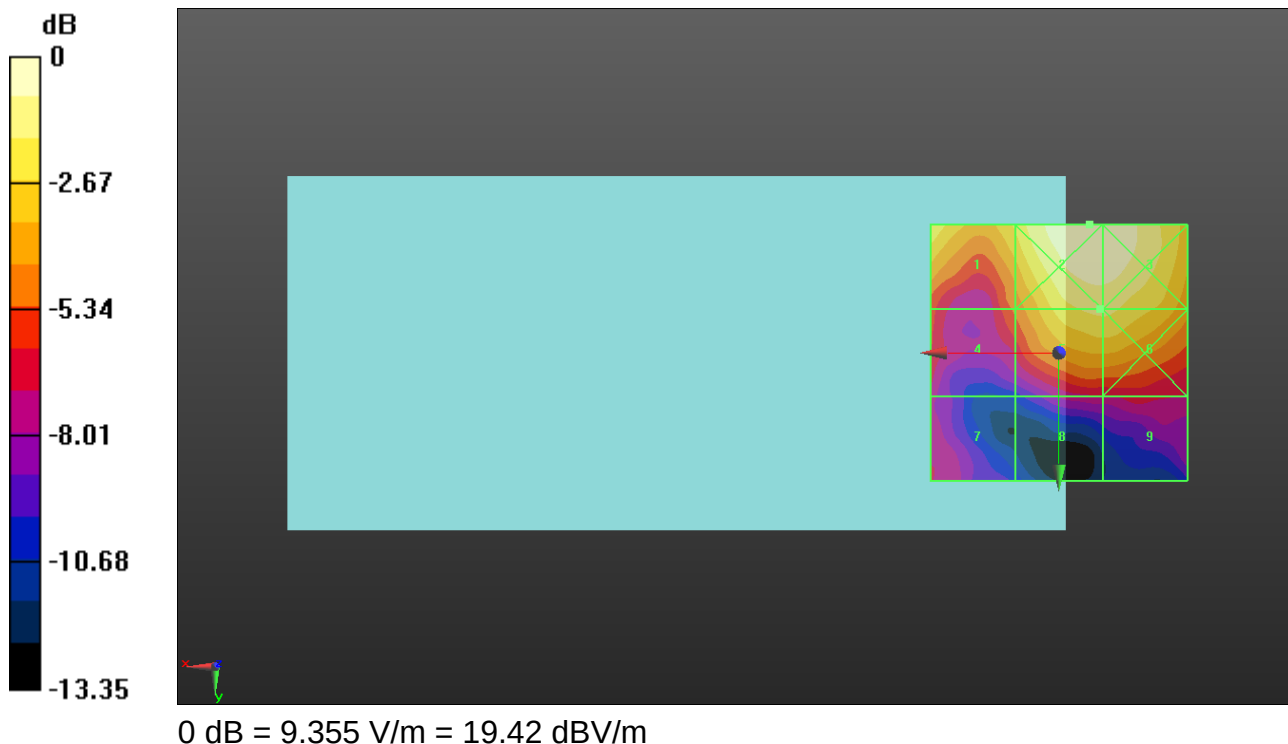

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2506 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 PC2 E-Field measurement/Voice_ch 39750 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.39 V/m; Power Drift = 0.02 dB


Applied MIF = -1.44 dB

RF audio interference level = 20.01 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 20.57 dBV/m	Grid 2 M4 22.29 dBV/m	Grid 3 M4 22.12 dBV/m
Grid 4 M4 17.56 dBV/m	Grid 5 M4 20.01 dBV/m	Grid 6 M4 20 dBV/m
Grid 7 M4 13.95 dBV/m	Grid 8 M4 14.77 dBV/m	Grid 9 M4 15.67 dBV/m

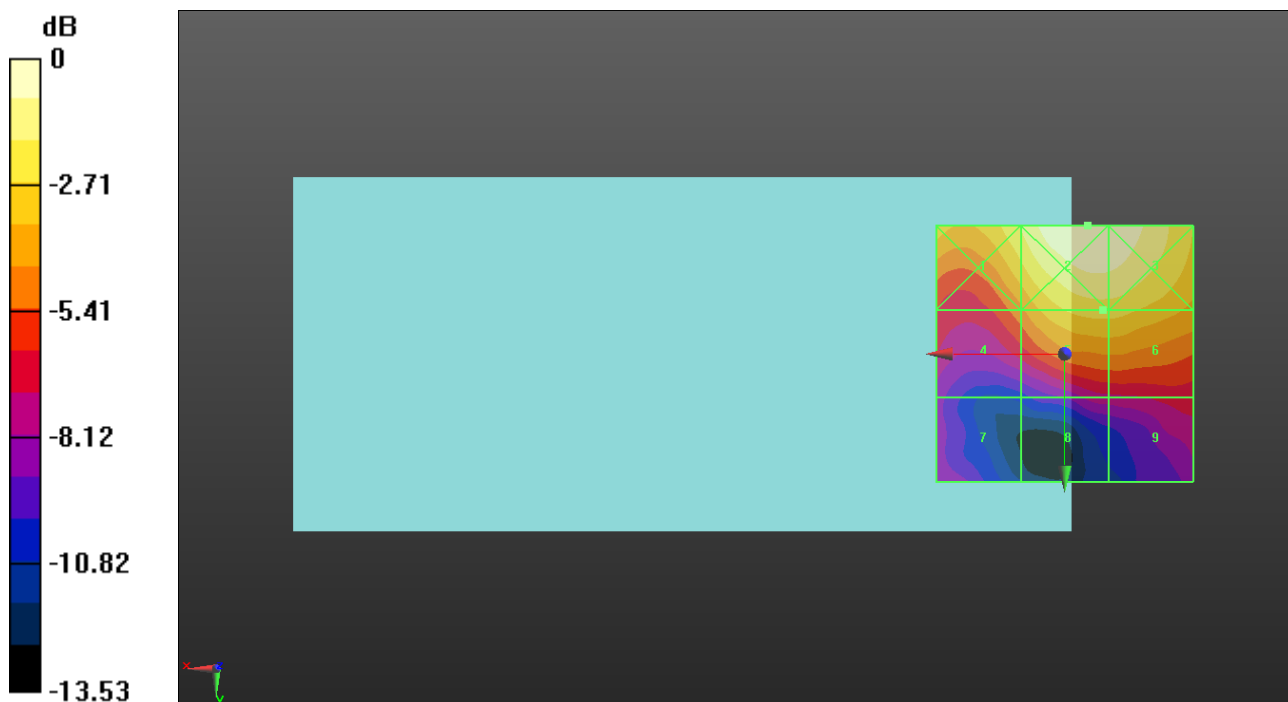

0 dB = 13.02 V/m = 22.29 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2549.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 PC2 E-Field measurement/Voice_ch 40185 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.37 V/m; Power Drift = 0.09 dB


Applied MIF = -1.44 dB

RF audio interference level = 19.70 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 19.36 dBV/m	Grid 2 M4 21.61 dBV/m	Grid 3 M4 21.41 dBV/m
Grid 4 M4 16.65 dBV/m	Grid 5 M4 19.7 dBV/m	Grid 6 M4 19.56 dBV/m
Grid 7 M4 12.07 dBV/m	Grid 8 M4 15.12 dBV/m	Grid 9 M4 15.04 dBV/m

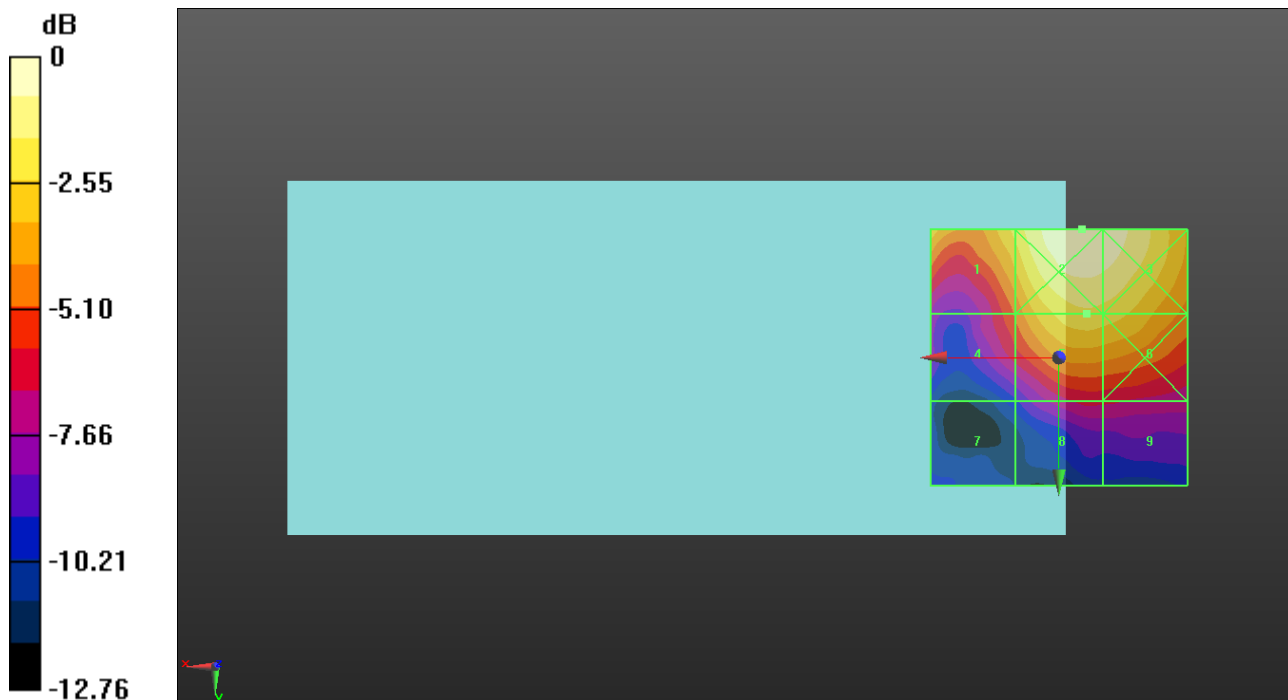

0 dB = 12.04 V/m = 21.61 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2593 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

LTE Band 41 PC2 E-Field measurement/Voice_ch 40620 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.39 V/m; Power Drift = 0.07 dB


Applied MIF = -1.44 dB

RF audio interference level = 19.59 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 18.77 dBV/m	Grid 2 M4 21.17 dBV/m	Grid 3 M4 21 dBV/m
Grid 4 M4 16.47 dBV/m	Grid 5 M4 19.59 dBV/m	Grid 6 M4 19.57 dBV/m
Grid 7 M4 14.09 dBV/m	Grid 8 M4 14.94 dBV/m	Grid 9 M4 14.93 dBV/m

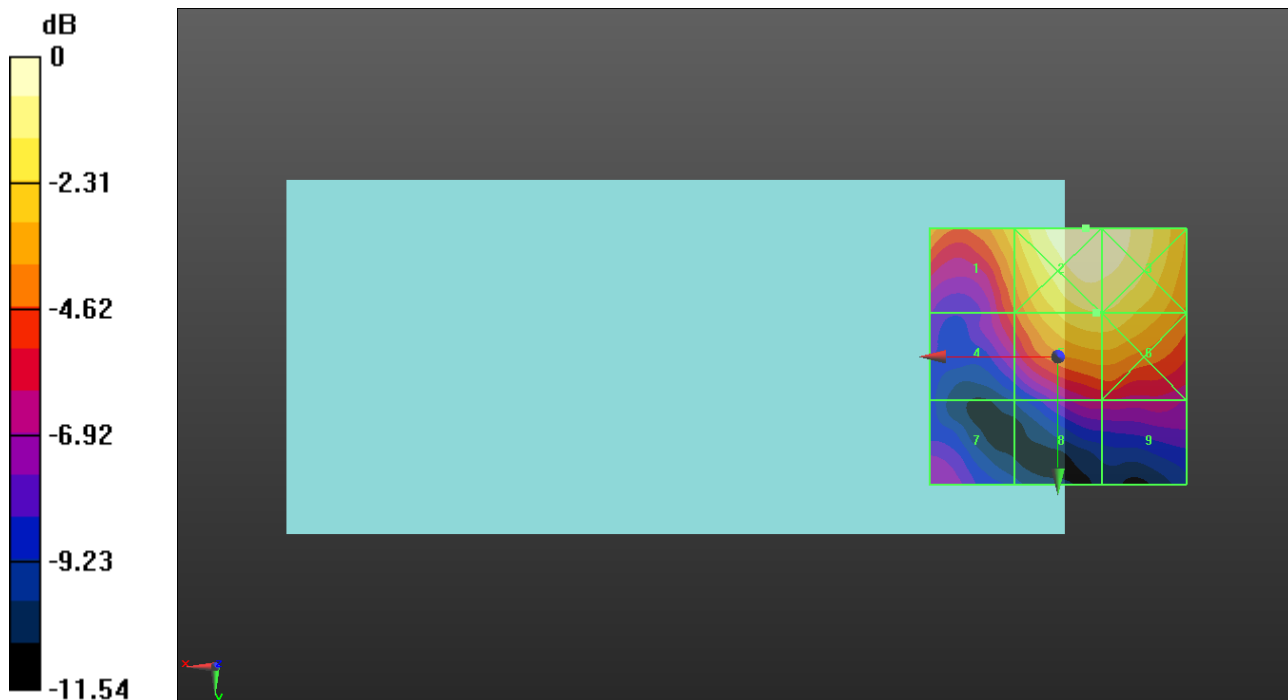

0 dB = 11.45 V/m = 21.18 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2636.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 PC2 E-Field measurement/Voice_ch 41055 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.33 V/m; Power Drift = -0.04 dB


Applied MIF = -1.44 dB

RF audio interference level = 19.34 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 18.79 dBV/m	Grid 2 M4 20.75 dBV/m	Grid 3 M4 20.67 dBV/m
Grid 4 M4 15.8 dBV/m	Grid 5 M4 19.34 dBV/m	Grid 6 M4 19.31 dBV/m
Grid 7 M4 14.13 dBV/m	Grid 8 M4 15 dBV/m	Grid 9 M4 15.06 dBV/m

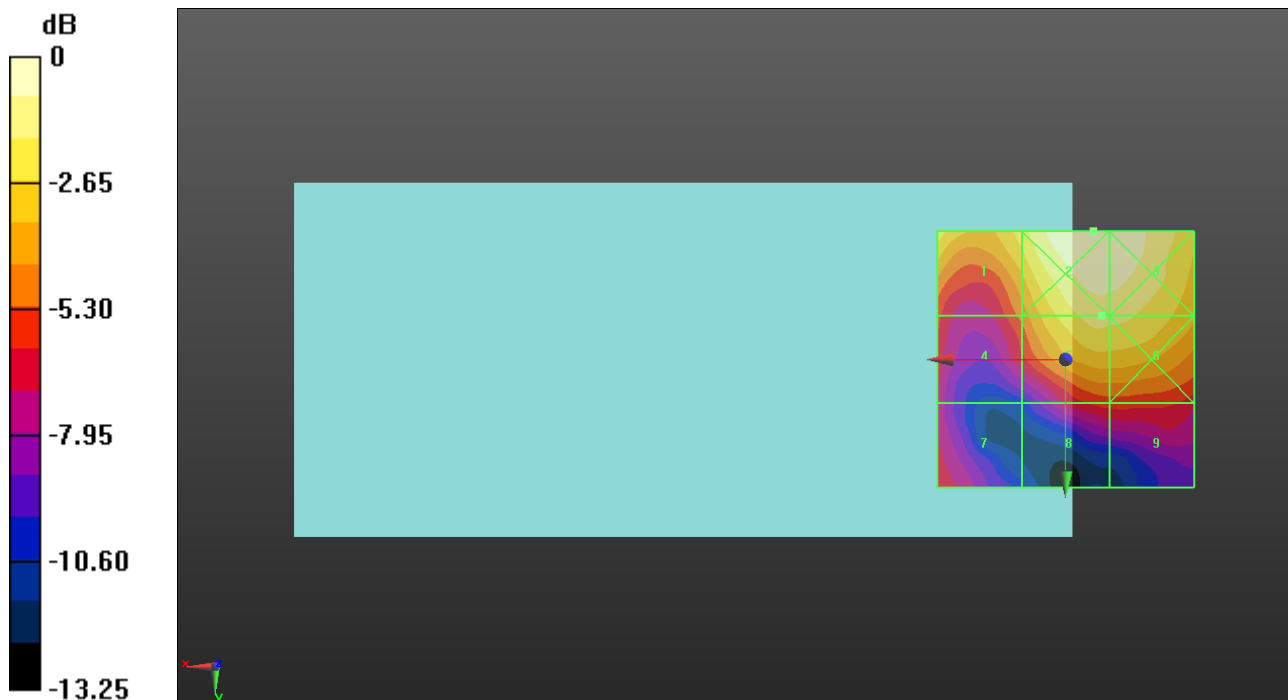

0 dB = 10.91 V/m = 20.76 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2680 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4066; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2019-09-24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1447; Calibrated: 2019-03-21
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

LTE Band 41 PC2 E-Field measurement/Voice_ch 41490 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.01 V/m; Power Drift = -0.09 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.25 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 19.14 dBV/m	Grid 2 M4 20.73 dBV/m	Grid 3 M4 20.6 dBV/m
Grid 4 M4 15.79 dBV/m	Grid 5 M4 19.25 dBV/m	Grid 6 M4 19.22 dBV/m
Grid 7 M4 13.35 dBV/m	Grid 8 M4 14.24 dBV/m	Grid 9 M4 14.61 dBV/m

