

MEASUREMENT REPORT**FCC Part 15.407 802.11ax/be WiFi 6GHz (OFDMA)****Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

07/30/2024 – 7/16/2025

Test Report Issue Date:

7/16/2025

Test Site/Location:

Element lab., Columbia, MD, USA

Test Report Serial No.:

1M2406060046-09-R1.A3L

FCC ID:

A3LSMI610

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-I610

EUT Type:

Portable Device

Frequency Range:

5935 – 7115MHz

Modulation Type:

OFDMA

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 987594 D02 v03,
KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2406060046-09-R1.A3L) supersedes and replaces all previously issued test reports on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



R.J. Ortanez
Executive Vice President



FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 1 of 145

T A B L E O F C O N T E N T S

1	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations	5
2	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description	10
2.4	Test Configuration	10
2.5	Software and Firmware	10
2.6	EMI Suppression Device(s) / Modifications.....	10
3	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure	11
3.2	AC Line Conducted Emissions	11
3.3	Radiated Emissions.....	12
3.4	Environmental Conditions.....	12
4	ANTENNA REQUIREMENTS	13
5	MEASUREMENT UNCERTAINTY	14
6	TEST EQUIPMENT CALIBRATION DATA.....	15
7	TEST RESULTS	16
7.1	Summary.....	16
7.2	26dB Bandwidth Measurement.....	18
7.2.1	MIMO Antenna-1 Bandwidth Measurements - (Partial Tones)	23
7.2.2	MIMO Antenna-1 Bandwidth Measurements - (Full Tones)	26
7.2.3	MIMO Antenna-2 Bandwidth Measurements – (Partial Tones)	32
7.2.4	MIMO Antenna-2 Bandwidth Measurements – (Full Tones).....	35
7.3	UNII Output Power Measurement.....	40
7.4	Maximum Power Spectral Density	60
7.4.1	MIMO Antenna-1 Power Spectral Density Measurements	63
7.4.2	MIMO Antenna-2 Power Spectral Density Measurements	72
7.5	In-Band Emissions	82
7.5.1	MIMO Antenna-1 In-Band Emission Measurements	87
7.5.2	MIMO Antenna-2 In-Band Emission Measurements	95
7.6	Contention Based Protocol	103
7.6.1	AWGN Plots.....	107
7.6.2	CBP Timing Plots	108
7.6.3	Channel Move Plots	116
7.7	Radiated Emission Measurements	118
7.7.1	MIMO Radiated Spurious Emission Measurements (26 Tones).....	122

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 2 of 145



7.7.2 MIMO Radiated Spurious Emission Measurements (242 Tones)..... 128

7.7.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)..... 135

7.7.4 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)..... 136

7.7.5 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)..... 137

7.7.6 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)..... 138

7.7.7 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)..... 139

7.7.8 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T) 140

7.7.9 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T)..... 142

8 CONCLUSION..... 144

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 3 of 145

MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	Antenna-1		Antenna-2		MIMO	
			Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	5		2.19	3.41	2.37	3.74	7.85	8.95
	6	6435 - 6515	2.29	3.60	2.80	4.47	8.87	9.48
	7	6535 - 6875	2.48	3.95	2.59	4.14	9.55	9.80
	8	6895 - 7115	2.17	3.37	2.06	3.14	7.21	8.58
40	5	5965 - 6405	4.26	6.29	4.58	6.61	16.43	12.16
	6	6445 - 6525	4.47	6.50	5.36	7.29	18.14	12.59
	7	6565 - 6845	4.63	6.66	5.06	7.04	18.89	12.76
	8	6885 - 7085	4.25	6.28	3.94	5.96	15.09	11.79
80	5	5985 - 6385	8.83	9.46	9.38	9.72	33.15	15.21
	6	6465	8.34	9.21	10.42	10.18	33.67	15.27
	7	6545 - 6865	9.84	9.93	9.84	9.93	38.32	15.83
	8	6945 - 7025	8.59	9.34	8.34	9.21	30.02	14.77
160	5	6025 - 6345	8.71	9.40	9.59	9.82	32.41	15.11
	6	6505	8.83	9.46	9.64	9.84	34.90	15.43
	7	6665 - 6825	9.82	9.92	9.53	9.79	38.08	15.81
	8	6985	8.65	9.37	8.17	9.12	31.20	14.94
320	5	6105 - 6265	7.05	8.48	8.13	9.10	32.36	15.10
	6	6425	7.66	8.84	9.79	9.91	34.86	15.42
	7	6585 - 6745	8.43	9.26	9.46	9.76	37.75	15.77
	8	6905	7.53	8.77	7.11	8.52	30.58	14.85

EUT Overview – EIRP

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 4 of 145

1 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO\IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 5 of 145

2 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Electronics Co., Ltd. Portable Device FCC: A3LSMI610**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 2054M, 2284M, 1150M, 1292M, 1182M, 1250M, 2066M, 1295M, 1259M, 1258M

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), ESB

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
2	5935	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11ax/be (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 6 of 145

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
:	:			:	:		
47	6185			175	6825		
:	:						
79	6345						

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
31	6105	95	6425	127	6585	191	6905
63	6265			159	6745		

Table 2-5. 802.11be (320MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, 160MHz, and 320MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 7 of 145

Band	Bandwidth	Tone Type	Tone Size	MIMO (1+2)	
				Duty Cycle [%]	Radiated DCCF [dB]
6GHz	20MHz	RU	26T	99.32	N/A
			52T	99.32	N/A
			106T	98.79	N/A
			242T	98.60	N/A
		MRU	52+26T	99.12	N/A
			106+26T	98.53	N/A
	40MHz	RU	26T	98.99	N/A
			52T	99.36	N/A
			106T	98.92	N/A
			242T	98.67	N/A
			484T	98.66	N/A
	80MHz	RU	26T	99.36	N/A
			52T	99.36	N/A
			106T	98.87	N/A
			242T	98.69	N/A
			484T	98.66	N/A
			996T	98.60	N/A
		MRU	484+242T	98.13	N/A
	160MHz	RU	26T	99.36	N/A
			52T	99.36	N/A
			106T	98.85	N/A
			242T	98.67	N/A
			484T	98.66	N/A
			996T	98.60	N/A
			2x996T	98.59	N/A
		MRU	996+484T	99.71	N/A
	320MHz	RU	26T	99.36	N/A
			52T	99.36	N/A
			106T	98.85	N/A
			242T	98.67	N/A
			484T	98.66	N/A
			996T	98.60	N/A
			2x996T	98.59	N/A
			4x996T	98.59	N/A
		MRU	2x996+484T	99.03	N/A
			3x996T	98.85	N/A
			3x996+484T	98.68	N/A

Table 2-6. Measured Duty Cycles

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
6 GHz	11ax	✓	✓	✓	✓	✓	✓
	11be	✓	✓	✓	✓	✓	✓

Table 2-7. Frequency / Channel Operations

✓ = Support; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

FCC ID: A3LSMI610	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device		Page 8 of 145

CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index	Spatial Stream	OFDMA (802.11ax)																	
		26T			52T			106T			242T			484T			996T		
		0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6
1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3
2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9
3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5
4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8
5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245
6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6
7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3
8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5
9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3
10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4
11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4
0	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3
1	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5
2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8
3	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245
4	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5
5	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117	275.3	260	234	576.5	544.4	490
6	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3
7	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5
8	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5	412.9	390	351	864.7	816.7	735
9	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7
10	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8
11	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8

Table 2-8. Supported Data Rates

4. The device supports either Standard Power (SP) or Low Power Indoor (LPI) operation in the following UNII bands:

UNII Band	Standard Power (SP)	Low Power Indoor (LPI)	Very Low Power (VLP)
UNII 5	✓	✓	✓
UNII 6	✗	✓	✗
UNII 7	✓	✓	✓
UNII 8	✗	✓	✗

Table 2-9. Power Operation

✓ = Support; ✗ = NOT Support

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 9 of 145

2.3 Antenna Description

The following antenna gains were used for the testing.

Frequency	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 MHz	-4.64	-3.84	-1.22
6425 MHz	-3.53	-3.16	-0.33
6500 MHz	-3.39	-2.31	0.18
6525MHz	-3.04	-2.54	0.22
6875MHz	-4.63	-3.21	-0.88
7125MHz	-3.62	-3.76	-0.68

Table 2-10 Antenna Peak Gain per Frequency

	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 – 6425 MHz	-3.53	-3.16	-0.33
6425 – 6525 MHz	-3.04	-2.54	0.22
6525 – 6875 MHz	-4.63	-3.21	-0.88
6875 – 7125 MHz	-3.62	-3.76	-0.68

Table 2-11. Antenna Peak Gain

2.4 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

This device operates in the 5.925-7.125 GHz band when under control of an indoor access point. Additionally, the device may operate in the 5.925-6.425 GHz and 6.525-6.875 GHz bands when under control of a standard power access point. Power for the EUT may vary depending on whether the device is connected to a standard access point (SP Operation) or a low-power indoor access point (LPI Operation). In cases where these targets differ two data sets have been provided to demonstrate compliance. The worst-case emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: NQ-WC-06 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with firmware version I610UEU0AXGP installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 10 of 145

3 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 987594 D02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 11 of 145

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 12 of 145

4 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 13 of 145

5 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Contention Based Protocol Conducted Measurements	0.86
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget – MD

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 14 of 145

6 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	4/2/2024	Annual	4/2/2025	WL40-1
-	AP1-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP1-002
-	ETS-001	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-001
-	ETS-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-002
-	MD 1M 18-40	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	MD 1M 18-40
Anritsu	MA24408A	Microwave Peak Power Sensor	5/21/2024	Annual	5/21/2025	11675
Anritsu	MA24408A	Microwave Peak Power Sensor	4/10/2024	Annual	4/10/2025	12798
ETS-Lindgren	3116C	Horn Antenna (18-40GHz)	2/27/2023	Biennial	2/27/2025	218893
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	2/23/2023	Biennial	2/23/2025	26040036
Rohde & Schwarz	FSW26	Signal and Spectrum Analyzer (26.5GHz)	3/8/2024	Annual	3/8/2025	103187
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/11/2023	Annual	9/11/2024	100348
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	4/5/2024	Annual	4/5/2025	101716
Pasternak	NMLC-2	EMI Test Receiver (2Hz to 44GHz)	4/2/2024	Annual	4/2/2025	NMLC-2
Rohde & Schwarz	ENV216	Two-Line V-Network	1/31/2023	Biennial	1/31/2025	101379
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	4/9/2024	Annual	4/9/2025	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	2/29/2024	Annual	3/1/2025	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/19/2024	Annual	9/19/2025	MY57141001
Sunol	JB6	JB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Rohde & Schwarz	SMM200A	Vector Signal Generator	4/4/2024	Annual	4/4/2025	109456

Table 6-1. Annual Test Equipment Calibration Schedule – MD

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 15 of 145

7 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMI610
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046, 15.407(a)(11)	Maximum Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.3
15.407(a)(8), 15.407(a)(7)	Maximum Radiated Output Power	< 24dBm over the frequency band of operation <30dBm over the frequency band of operation when connecting to a standard power access point		PASS	Section 7.3
2.1049, 15.407(a)(10)	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.		PASS	Section 7.2
15.407(a)(8), 15.407(a)(7)	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. <17dBm/MHz when operating with a standard power access point		PASS	Section 7.4
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(6)		PASS	Section 7.5
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty	RADIATED	PASS	Section 7.6
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band		PASS	Section 7.7
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7
15.407	AC Conducted Emissions 150kHz – 30MHz	<FCC 15.207 limits	LINE CONDUCTED	PASS	Please see UNII 6GHz OFDM report

Table 7-1. Summary of Test Results

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 16 of 145

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.
- 6) Per 15.407(a)(7), a device operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands must not have the maximum power spectral density exceed 17 dBm/MHz e.i.r.p., must limit the maximum e.i.r.p. over the frequency band of operation not exceed 30 dBm, and must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.
- 7) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 8) Only one RU index could be selected at a time, so no contiguous or non-contiguous RUs were considered for testing.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 17 of 145

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 18 of 145

Test Notes

1. All cases were investigated; a subset of the taken plots were included to represent relevant settings and measurements.
2. In this section, the bandwidth data tables include mainly the 26dB bandwidth measurements. In case of 320MHz operation, an occupied bandwidth measurement was included in the table to demonstrate compliance. Thus, all measurements in the tables are 26dB bandwidth measurements except for the 320MHz bandwidth cases which are occupied bandwidth measurements.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 19 of 145

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]
Band 5	5935	2	be (20MHz)	18.06	18.28
	6175	45	be (20MHz)	18.40	18.48
	6415	93	be (20MHz)	18.31	18.41
	5965	3	be (40MHz)	23.87	23.39
	6165	43	be (40MHz)	23.02	24.26
	6405	91	be (40MHz)	24.44	24.65
	5985	7	be (80MHz)	34.53	37.26
	6145	39	be (80MHz)	33.95	37.12
	6385	87	be (80MHz)	29.82	37.11
	6025	15	be (160MHz)	38.42	33.34
	6185	47	be (160MHz)	38.95	39.05
	6345	79	be (160MHz)	35.32	38.93
	6105	31	be (320MHz)	44.74	51.64
	6265	63	be (320MHz)	45.27	42.66
Band 6	6435	97	be (20MHz)	17.47	18.23
	6475	105	be (20MHz)	18.29	17.66
	6515	113	be (20MHz)	18.40	18.42
	6445	99	be (40MHz)	24.81	23.91
	6485	107	be (40MHz)	24.29	24.38
	6525	115	be (40MHz)	24.04	26.35
	6465	103	be (80MHz)	34.88	33.17
	6505	111	be (160MHz)	38.26	36.59
Band 5/6/7	6425	95	be (320MHz)	33.65	45.70
Band 7	6695	117	be (20MHz)	18.49	18.47
	6695	149	be (20MHz)	18.75	16.29
	6875	185	be (20MHz)	18.30	18.57
	6565	123	be (40MHz)	23.79	24.24
	6685	155	be (40MHz)	23.63	24.73
	6845	179	be (40MHz)	23.49	24.31
	6545	119	be (80MHz)	33.14	33.57
	6705	151	be (80MHz)	34.43	41.05
	6865	183	be (80MHz)	31.34	36.16
	6665	143	be (160MHz)	42.57	38.93
Band 6/7	6825	175	be (160MHz)	40.94	41.35
	6585	127	be (320MHz)	42.58	40.14
Band 7/8	6745	159	be (320MHz)	34.34	43.18
Band 8	7115	189	be (20MHz)	18.23	18.29
	6995	209	be (20MHz)	18.68	18.07
	7115	233	be (20MHz)	17.33	15.74
	6885	187	be (40MHz)	23.41	24.67
	6965	211	be (40MHz)	24.93	24.65
	7085	227	be (40MHz)	23.99	24.03
	6945	199	be (80MHz)	36.70	39.54
	7025	215	be (80MHz)	35.31	36.72
	6985	207	be (160MHz)	42.85	35.62
Band 7/8	6905	191	be (320MHz)	48.94	43.24

Table 7-2. Bandwidth Results (26 Tones)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 20 of 145

	Frequency [MHz]	Channel	802.11 MODE	MRU Configuration	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	6175	45	be (20MHz)	106+26T	19.85	20.04		
	6145	39	be (80MHz)	484+242T	90.67	89.64		
	6185	47	be (160MHz)	996+484T	174.00	176.20		
	6105	31	be (320MHz)	3x996+484T	334.20	333.90	315.67	315.38
Band 6	6475	105	be (20MHz)	106+26T	19.77	20.08		
	6465	103	be (80MHz)	484+242T	89.04	89.90		
	6505	111	be (160MHz)	996+484T	176.30	182.30		
Band 5/6/7	6425	95	be (320MHz)	3x996+484T	330.20	332.90	315.30	315.55
Band 7	6695	149	be (20MHz)	106+26T	20.02	19.82		
	6705	151	be (80MHz)	484+242T	88.15	89.90		
	6665	143	be (160MHz)	996+484T	173.50	222.20		
Band 7/8	6745	159	be (320MHz)	3x996+484T	335.10	433.40	315.87	316.27
Band 8	6995	209	be (20MHz)	106+26T	20.30	20.10		
	6945	199	be (80MHz)	484+242T	89.72	90.28		
	6985	207	be (160MHz)	996+484T	175.30	174.10		
Band 7/8	6905	191	be (320MHz)	3x996+484T	330.80	454.10	315.03	316.09

Table 7-3. Bandwidth Results (MRU)


FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 21 of 145

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 OBW [MHz]	Antenna-2 OBW [MHz]
Band 5	5935	2	be (20MHz)	21.68	20.96	19.20	19.14
	6175	45	be (20MHz)	21.53	21.29	19.21	19.17
	6415	93	be (20MHz)	21.61	21.47	19.20	19.17
	5965	3	be (40MHz)	42.97	42.32	38.31	38.20
	6165	43	be (40MHz)	43.19	42.46	38.27	38.20
	6405	91	be (40MHz)	43.64	42.66	38.22	38.20
	5985	7	be (80MHz)	93.67	88.36	78.44	78.34
	6145	39	be (80MHz)	94.22	89.00	78.41	78.38
	6385	87	be (80MHz)	94.34	89.40	78.69	78.27
	6025	15	be (160MHz)	174.21	174.23	157.71	157.61
	6185	47	be (160MHz)	174.90	174.38	157.61	157.64
	6345	79	be (160MHz)	180.74	178.08	157.73	157.52
	6105	31	be (320MHz)	330.70	333.69	314.32	315.37
Band 6	6265	63	be (320MHz)	335.03	334.82	315.32	314.98
	6435	97	be (20MHz)	21.82	21.39	19.21	19.15
	6475	105	be (20MHz)	21.65	21.32	19.19	19.12
	6515	113	be (20MHz)	21.74	21.19	19.21	19.14
	6445	99	be (40MHz)	42.77	42.57	38.23	38.25
	6485	107	be (40MHz)	43.70	42.49	38.19	38.15
	6525	115	be (40MHz)	42.94	43.04	38.38	38.19
	6465	103	be (80MHz)	93.75	90.68	78.38	78.19
Band 5/6/7	6505	111	be (160MHz)	179.46	183.00	157.87	157.49
	6425	95	be (320MHz)	314.30	331.51	314.73	314.65
Band 7	6695	117	be (20MHz)	21.46	21.40	19.20	19.17
	6695	149	be (20MHz)	21.49	21.17	19.19	19.16
	6875	185	be (20MHz)	21.44	21.21	19.21	19.16
	6565	123	be (40MHz)	43.28	43.06	38.30	38.17
	6685	155	be (40MHz)	42.92	42.45	38.29	38.17
	6845	179	be (40MHz)	43.08	42.33	38.34	38.14
	6545	119	be (80MHz)	92.93	89.24	78.40	78.20
	6705	151	be (80MHz)	92.91	91.10	78.45	78.50
	6865	183	be (80MHz)	90.44	91.20	78.46	78.47
	6665	143	be (160MHz)	177.60	182.36	157.76	157.64
Band 6/7	6825	175	be (160MHz)	182.93	183.69	157.51	157.40
	6585	127	be (320MHz)	314.50	332.57	314.77	314.70
Band 7/8	6745	159	be (320MHz)	314.58	335.18	314.71	314.79
Band 8	7115	189	be (20MHz)	21.57	21.40	19.18	19.13
	6995	209	be (20MHz)	21.62	21.33	19.18	19.15
	7115	233	be (20MHz)	21.70	21.62	19.23	19.14
	6885	187	be (40MHz)	42.83	42.82	38.18	38.16
	6965	211	be (40MHz)	42.90	42.49	38.29	38.06
	7085	227	be (40MHz)	43.67	42.31	38.23	38.24
	6945	199	be (80MHz)	92.96	90.79	78.49	78.42
	7025	215	be (80MHz)	93.85	88.53	78.29	78.09
	6985	207	be (160MHz)	180.09	176.31	157.62	157.28
Band 7/8	6905	191	be (320MHz)	334.19	333.73	314.15	314.90


Table 7-4. Bandwidth Results (Full Tones)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 22 of 145

7.2.1 MIMO Antenna-1 Bandwidth Measurements - (Partial Tones)

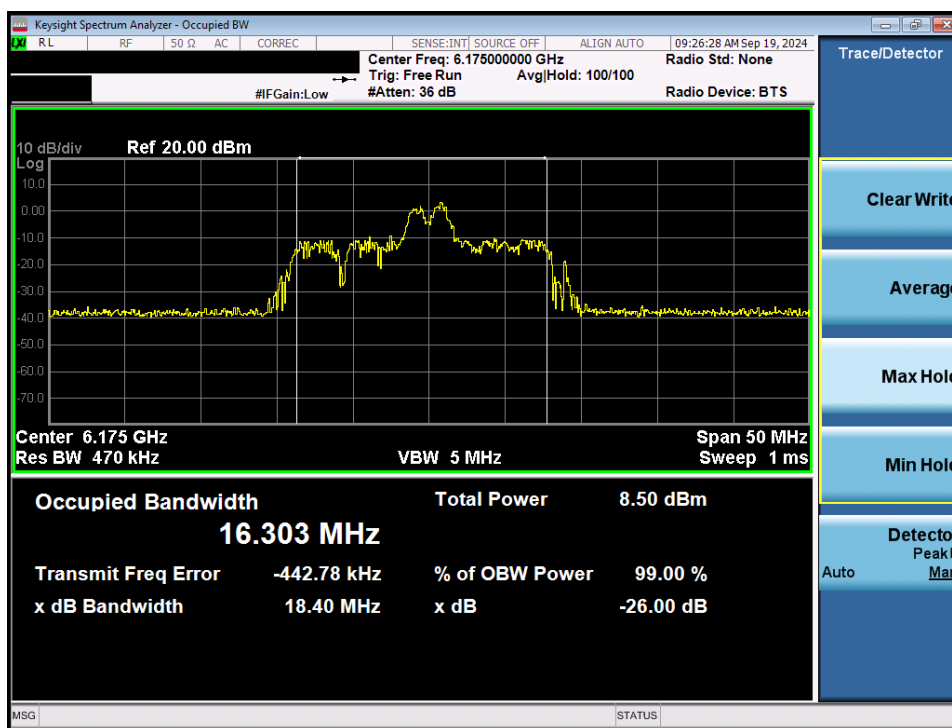


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

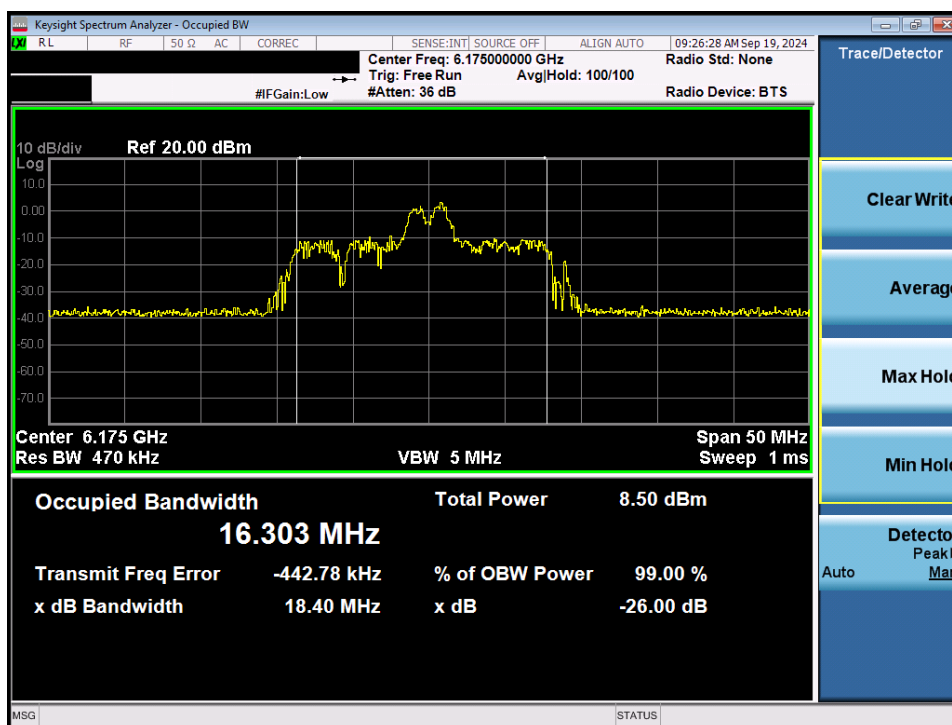


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 23 of 145

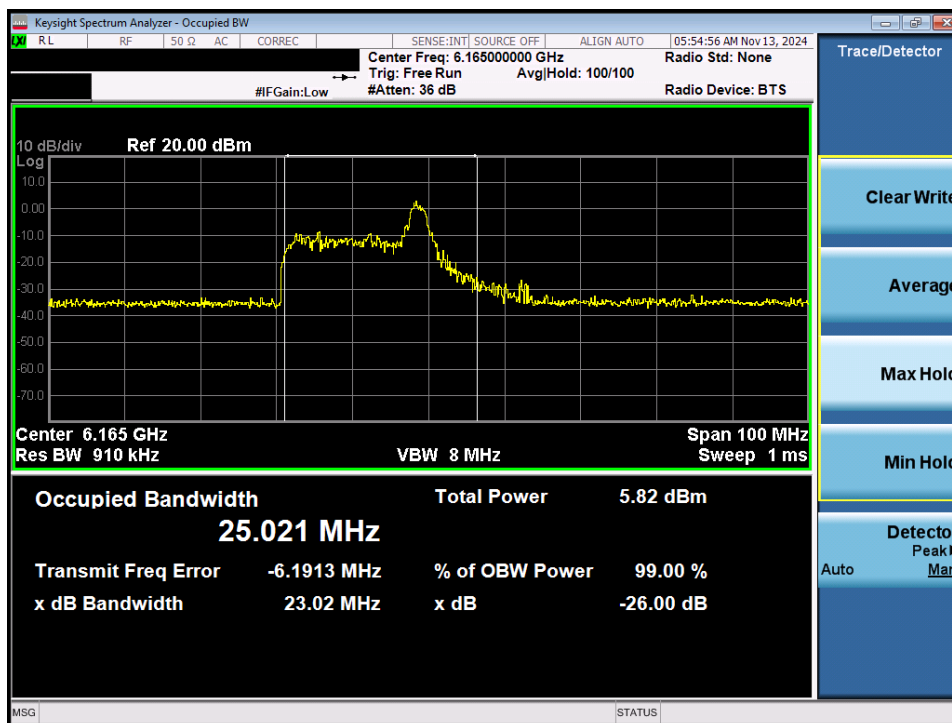


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

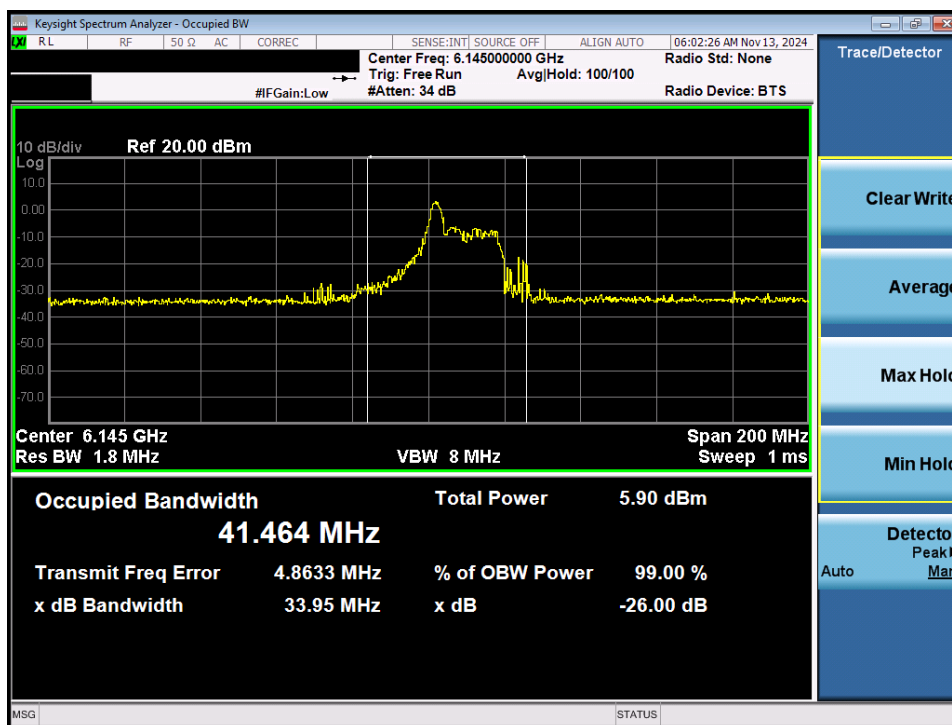


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 24 of 145

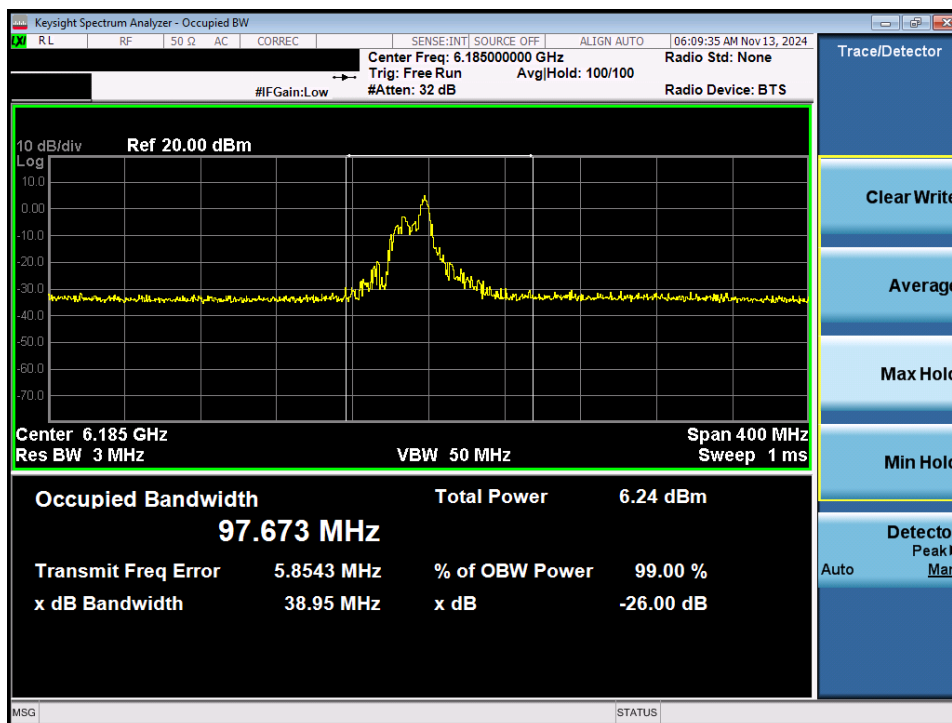


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

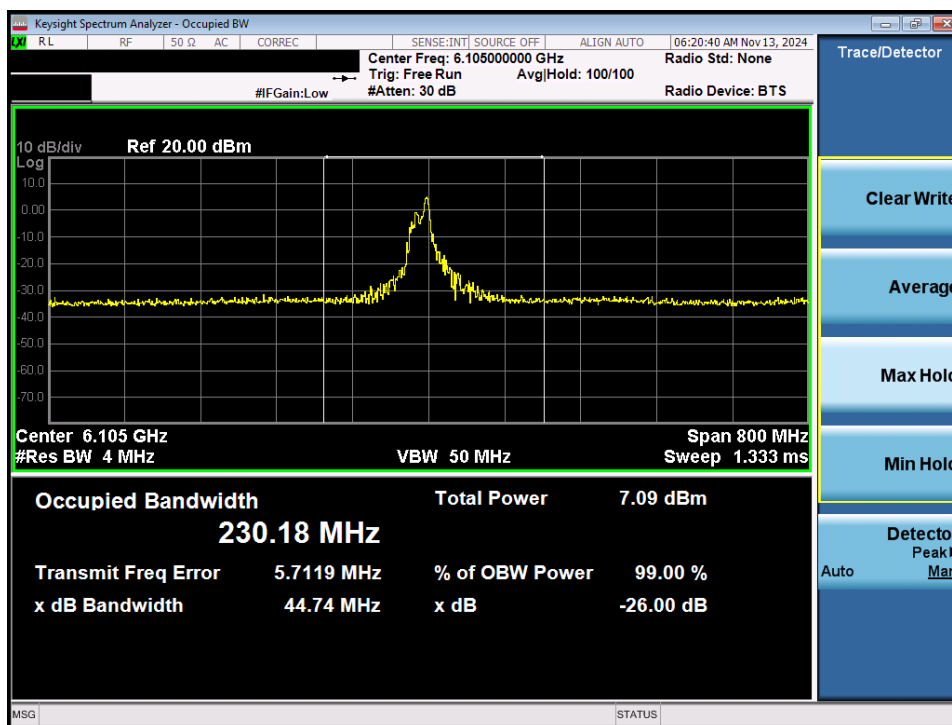


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 25 of 145

7.2.2 MIMO Antenna-1 Bandwidth Measurements - (Full Tones)

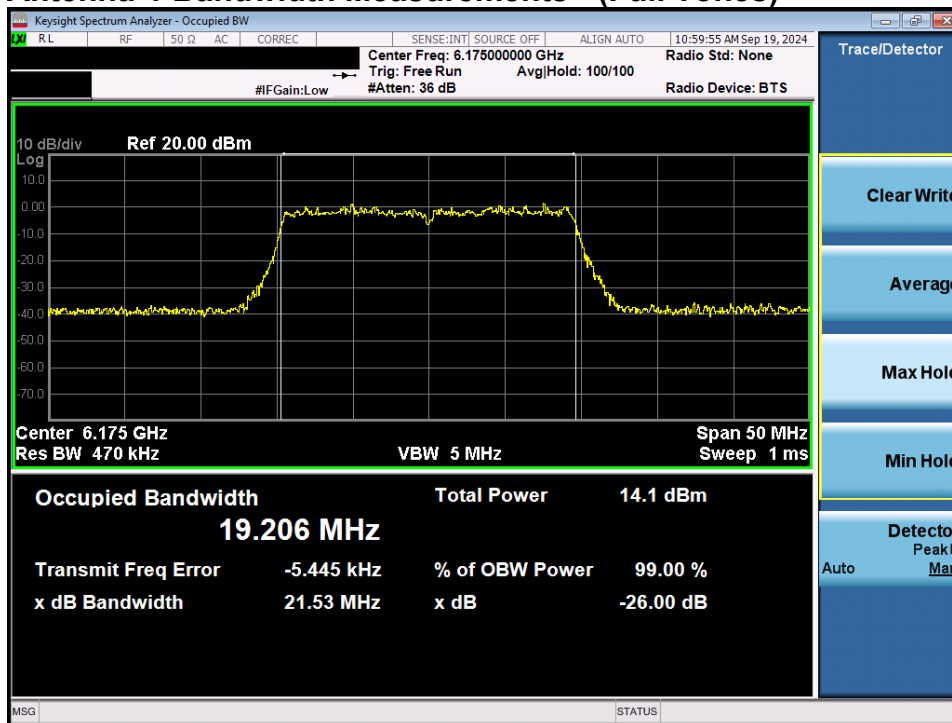


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

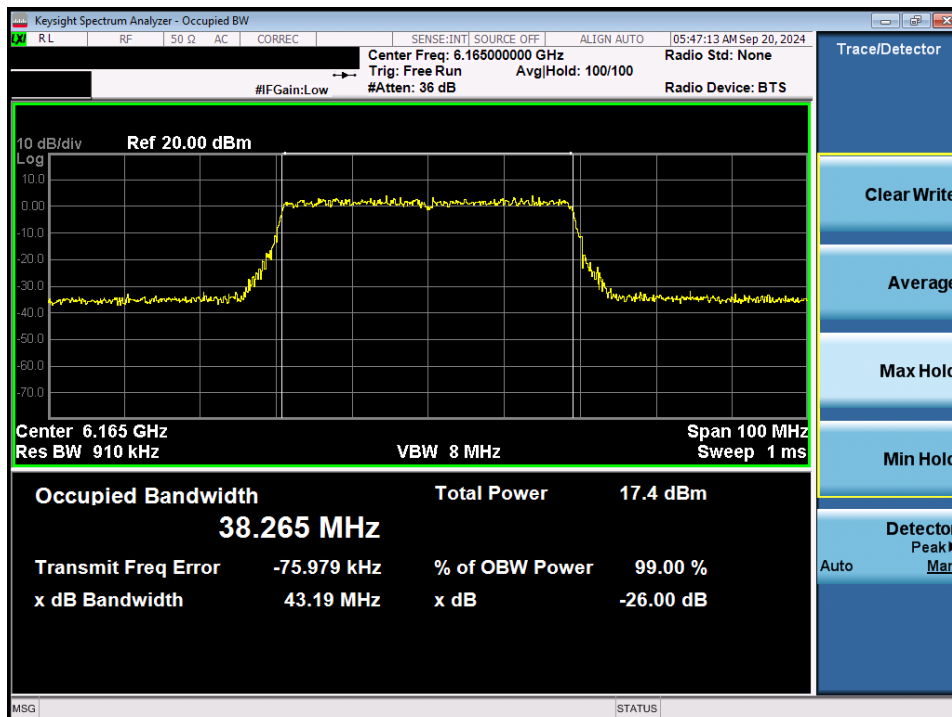


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 26 of 145

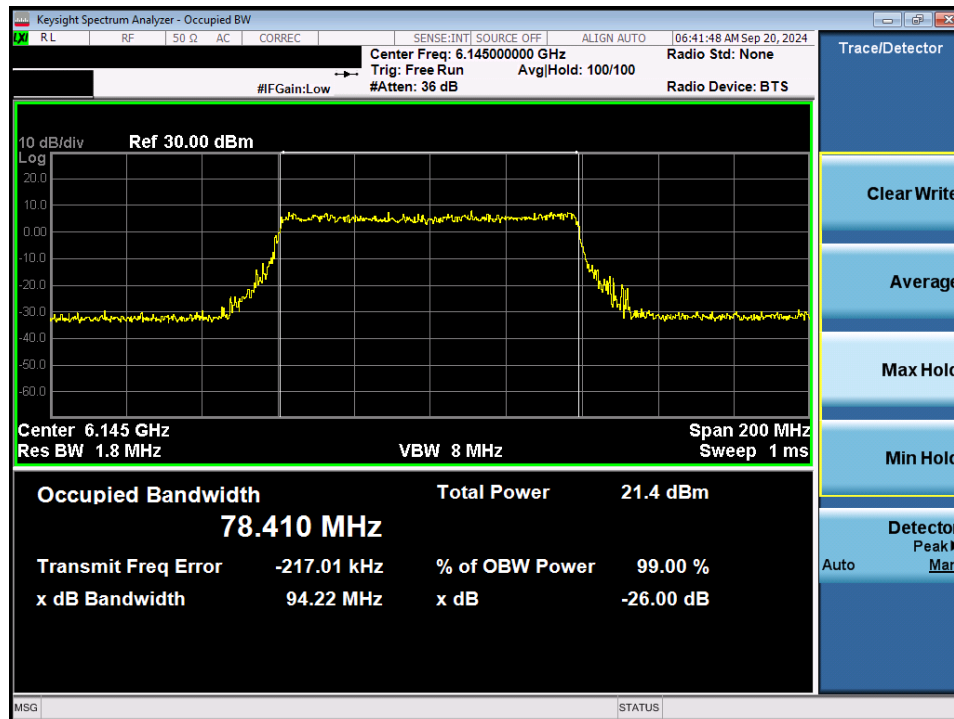


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

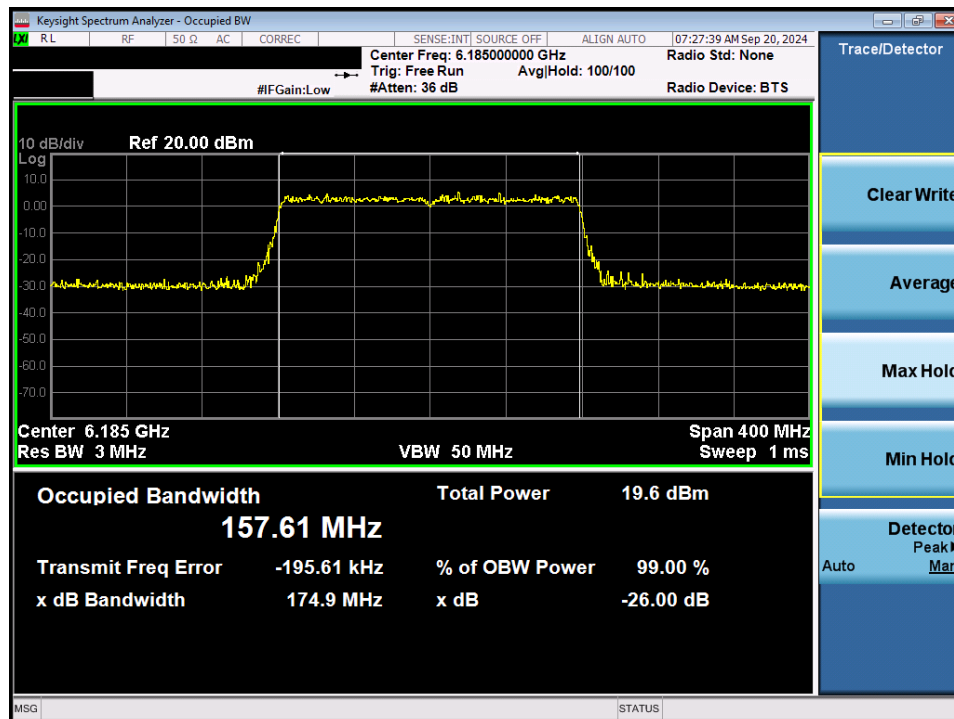


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 27 of 145

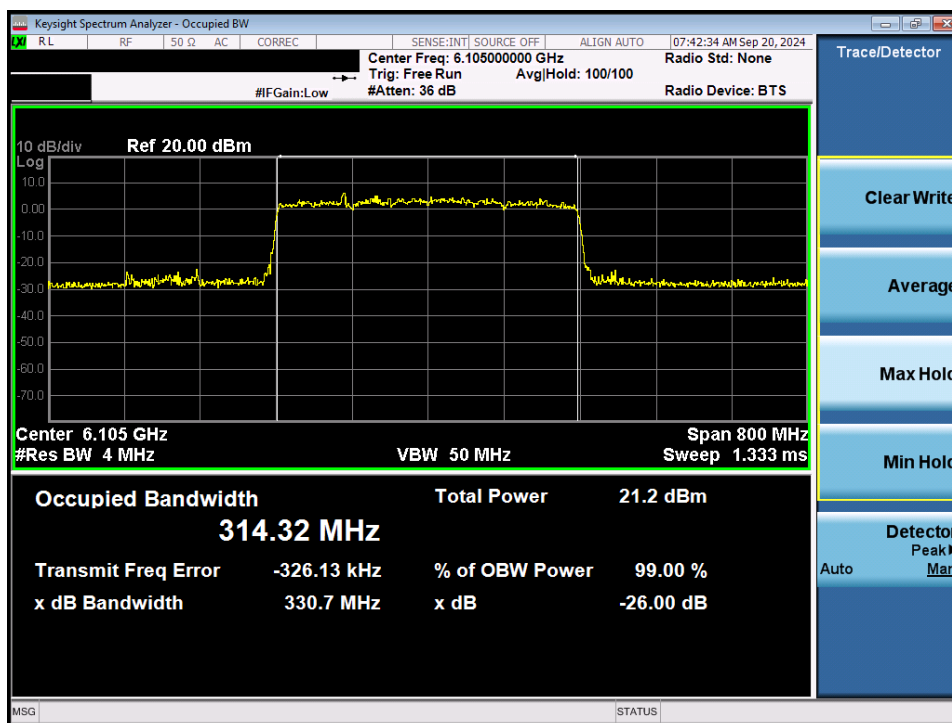


Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 28 of 145

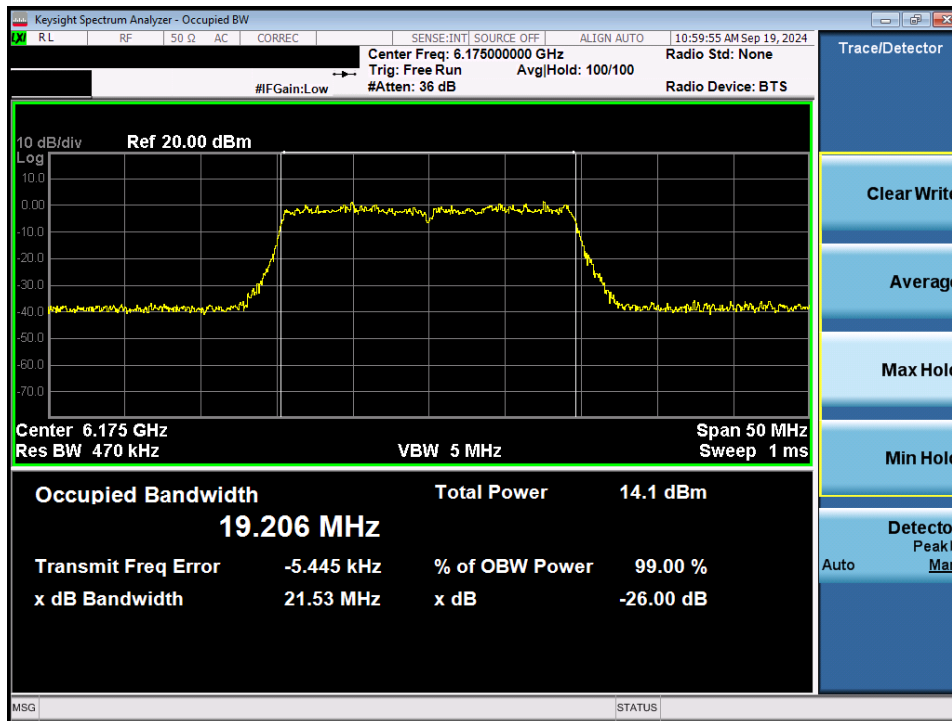


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

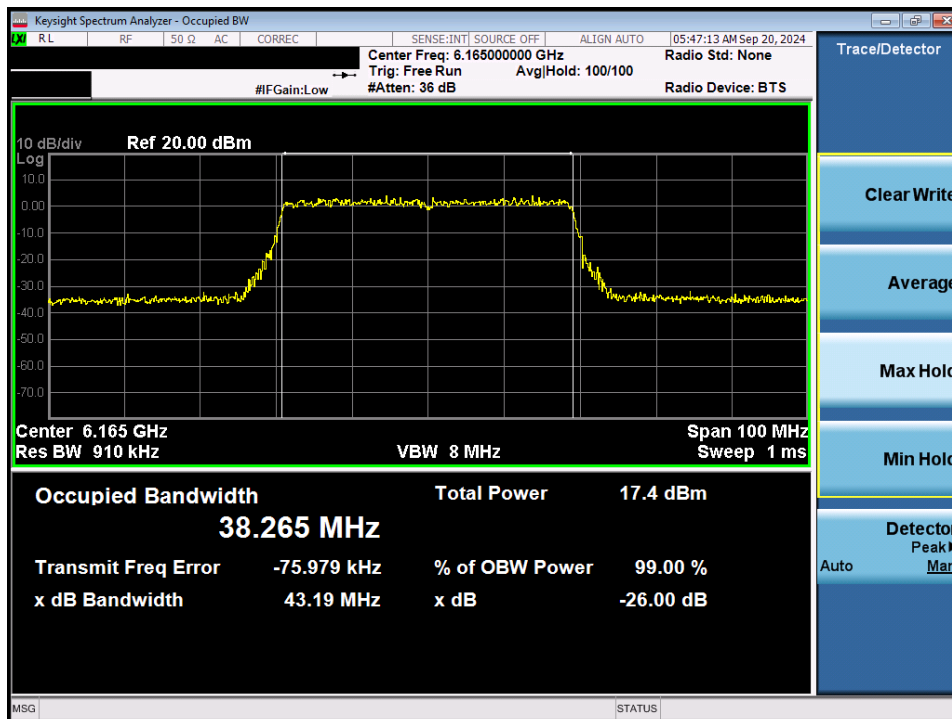


Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 29 of 145

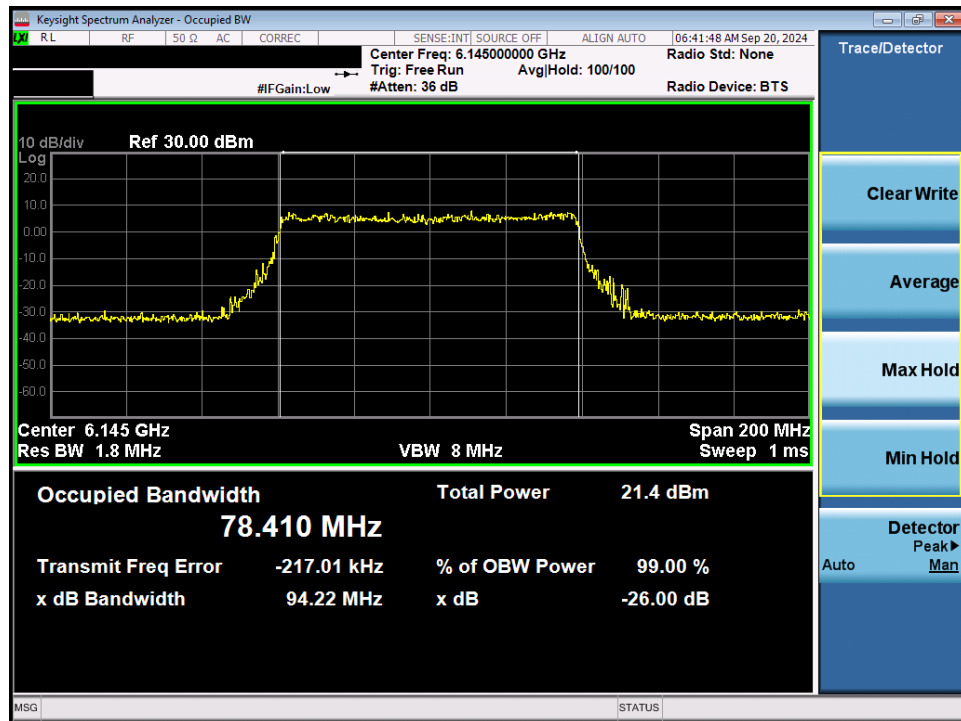


Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

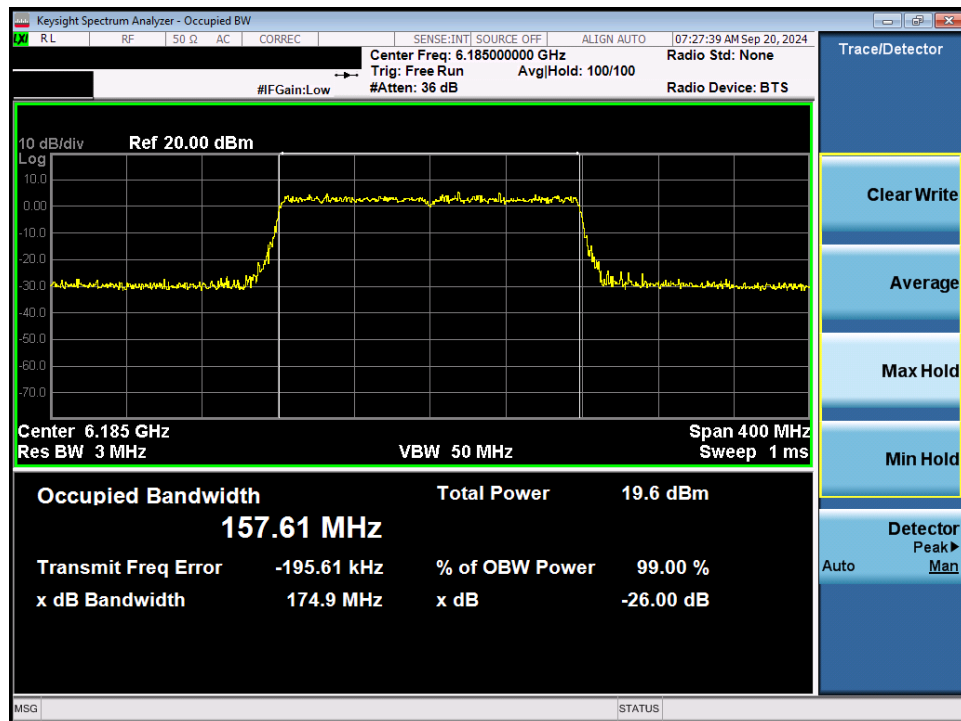

Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI


FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 30 of 145

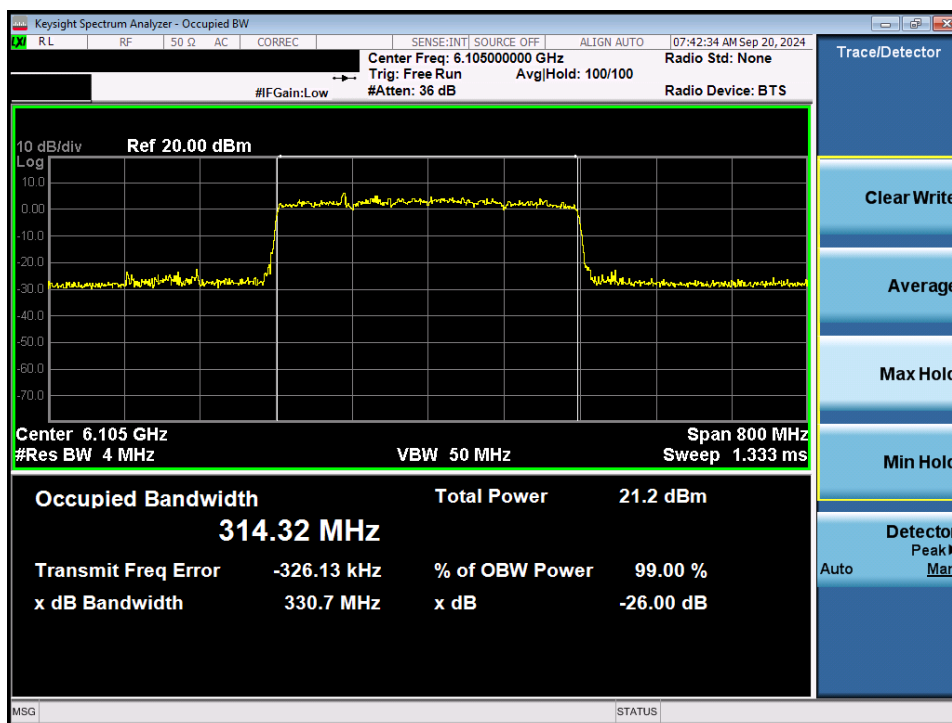


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 31 of 145

7.2.3 MIMO Antenna-2 Bandwidth Measurements – (Partial Tones)

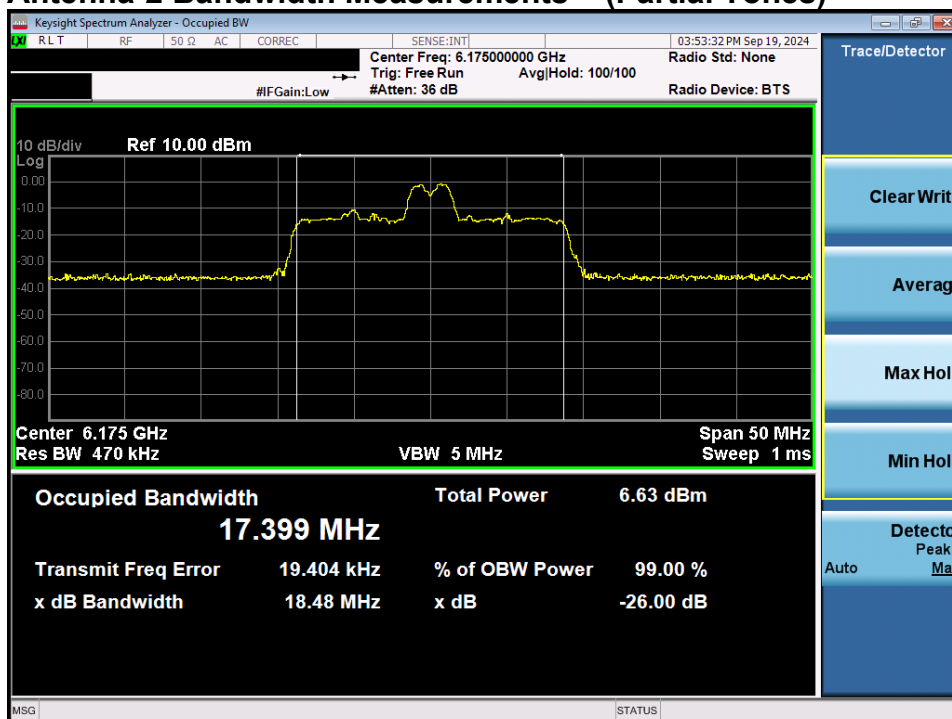


Plot 7-17. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

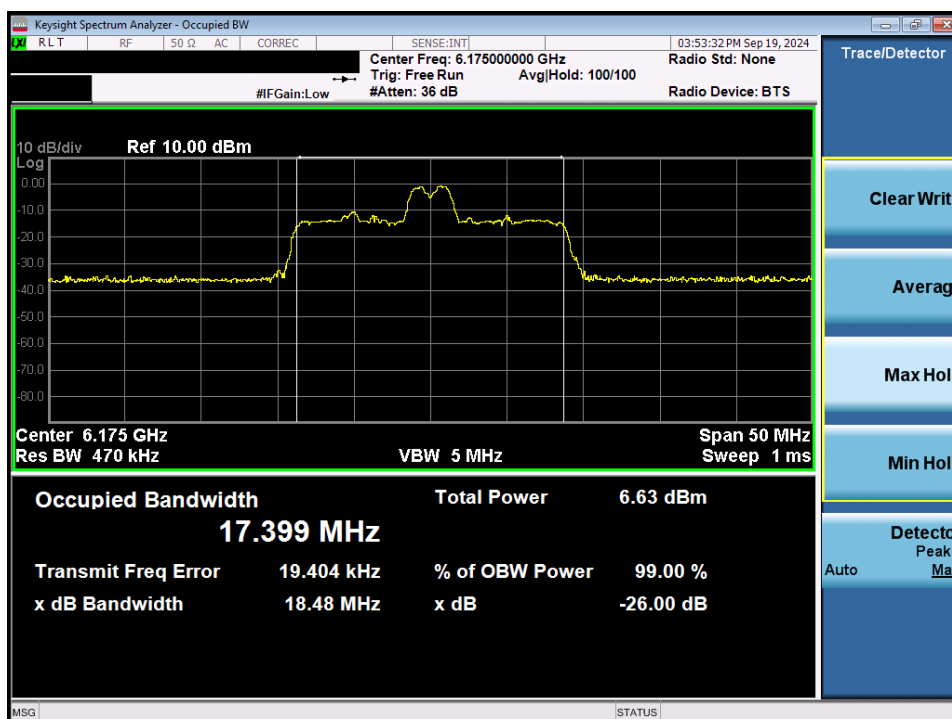


Plot 7-18. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 32 of 145

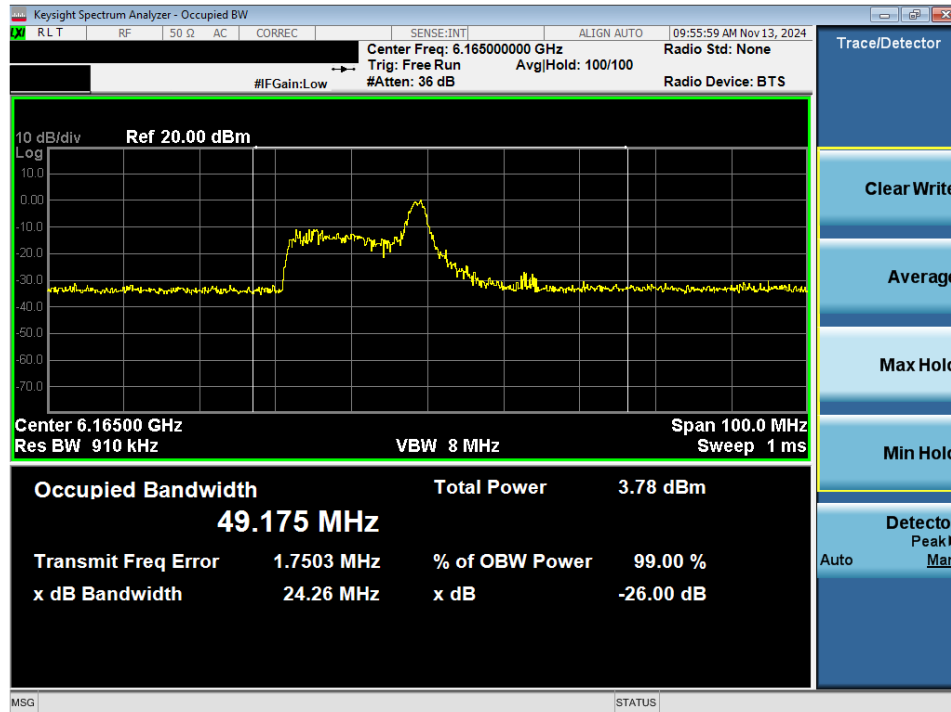


Plot 7-19. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

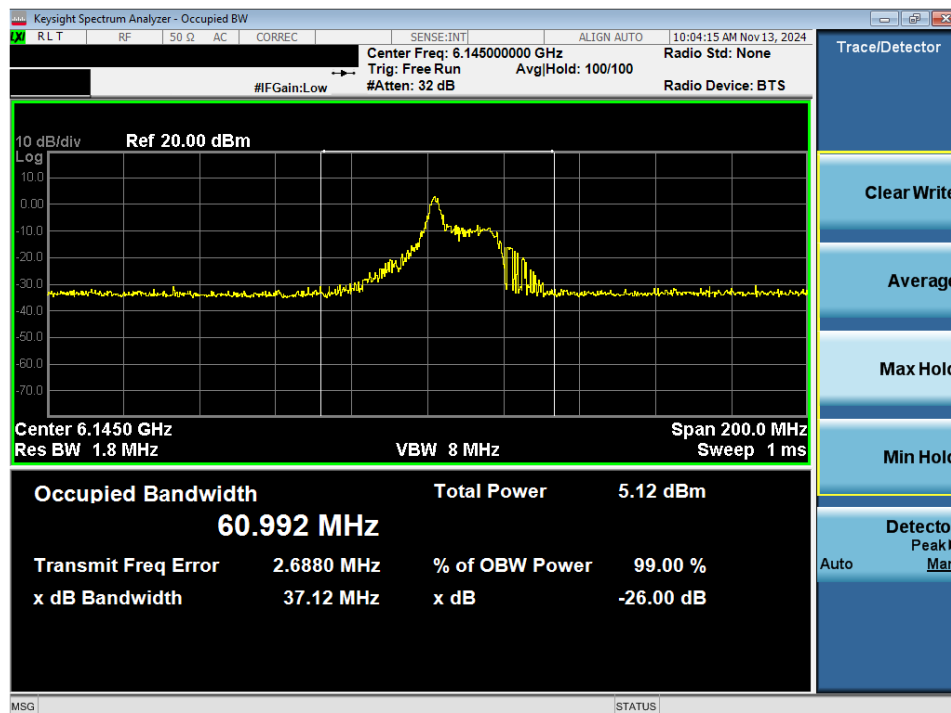


Plot 7-20. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 33 of 145

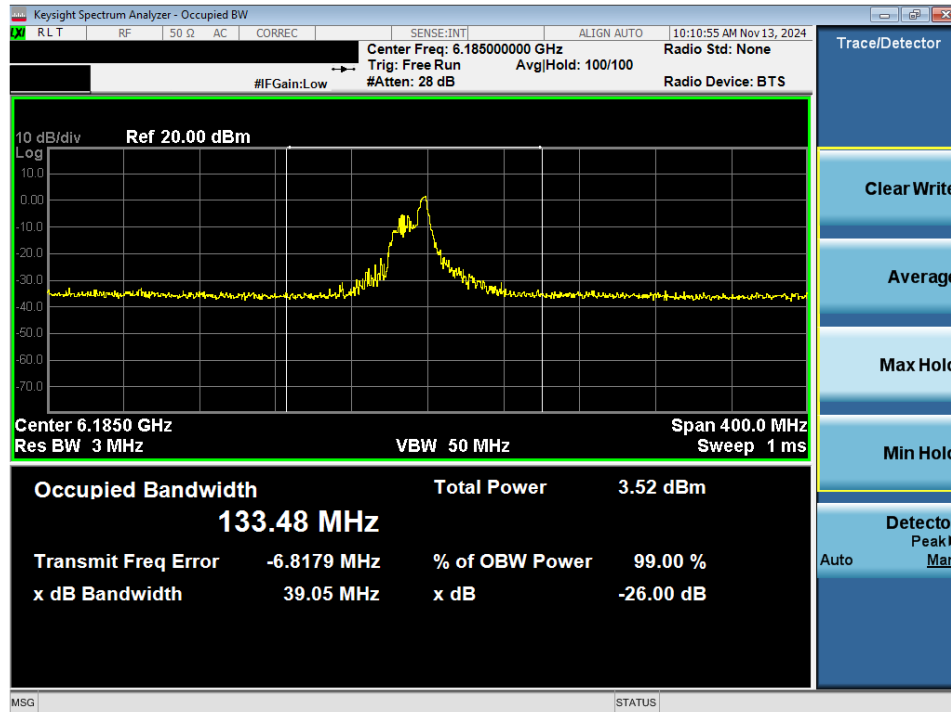


Plot 7-21. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

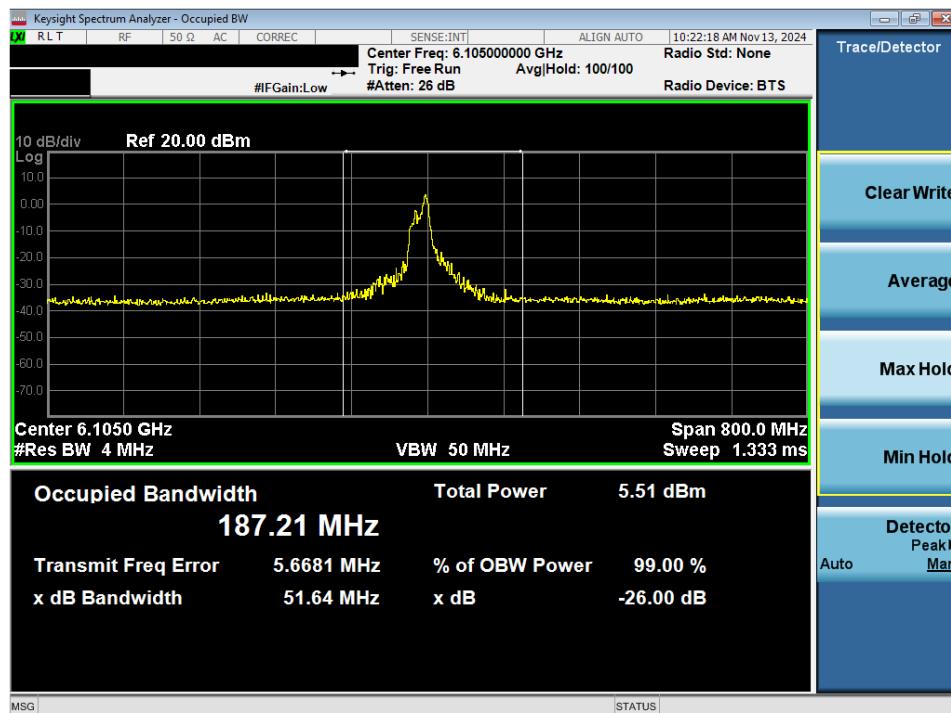


Plot 7-22. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 34 of 145

7.2.4 MIMO Antenna-2 Bandwidth Measurements – (Full Tones)

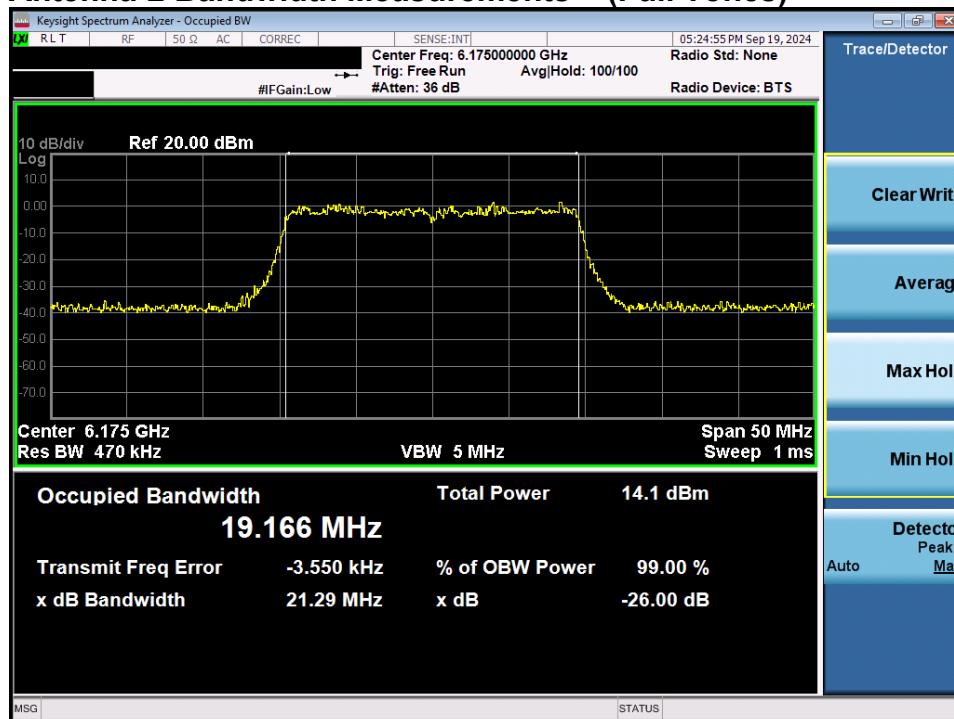


Plot 7-23. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

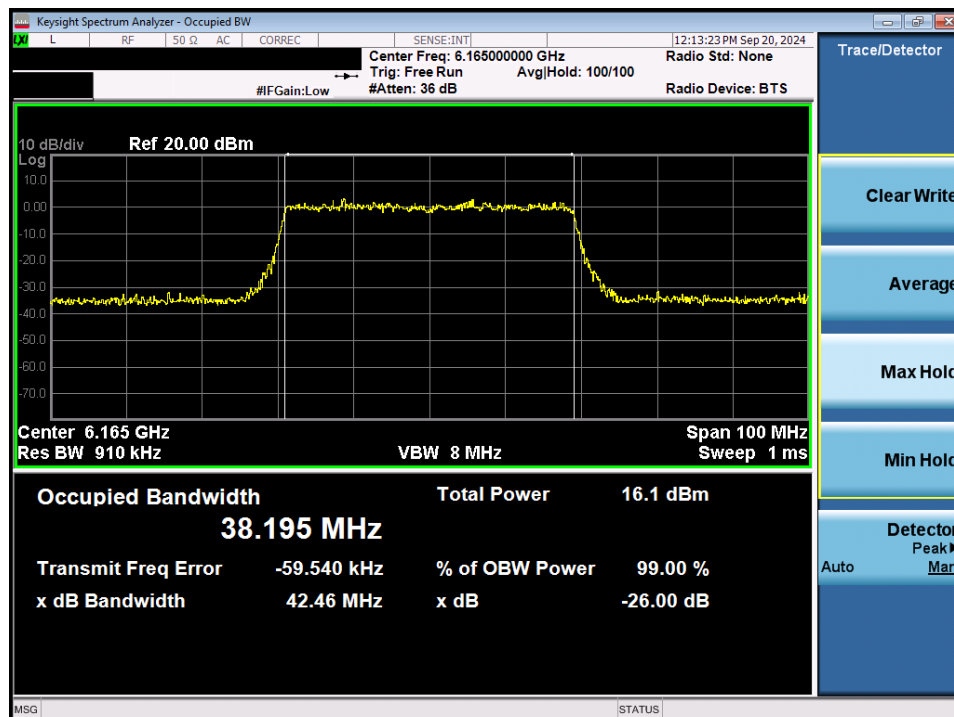


Plot 7-24. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 35 of 145

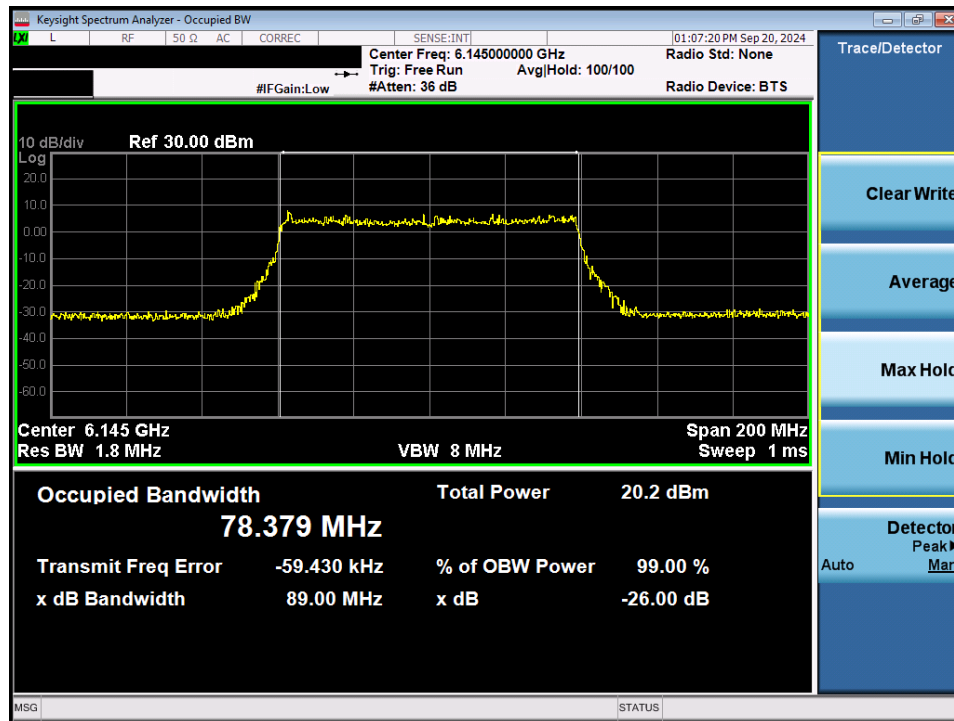


Plot 7-25. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

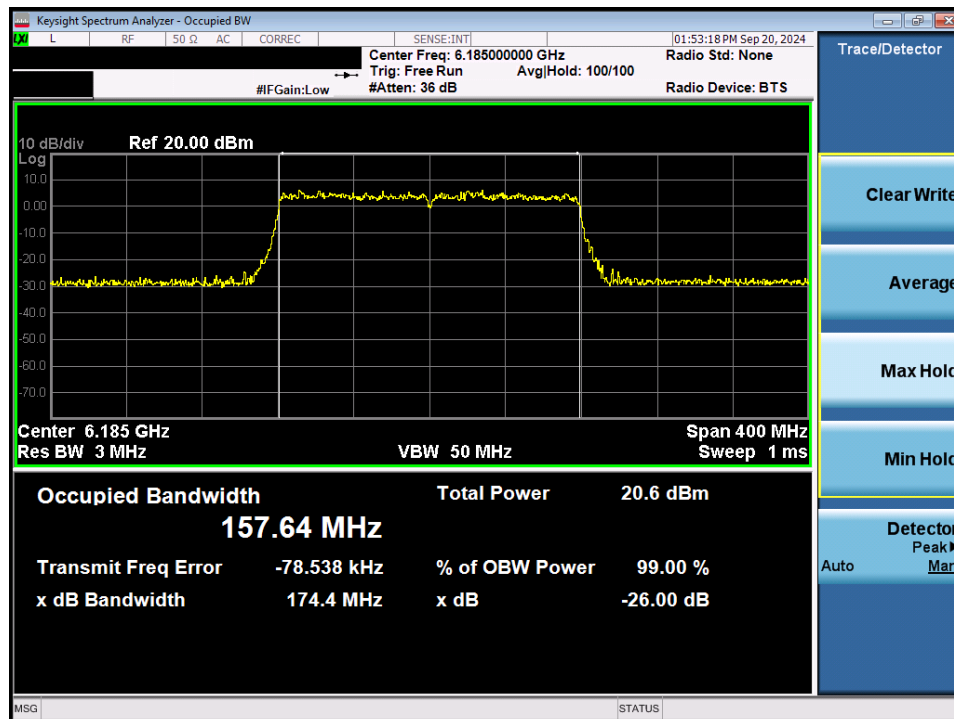


Plot 7-26. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 36 of 145

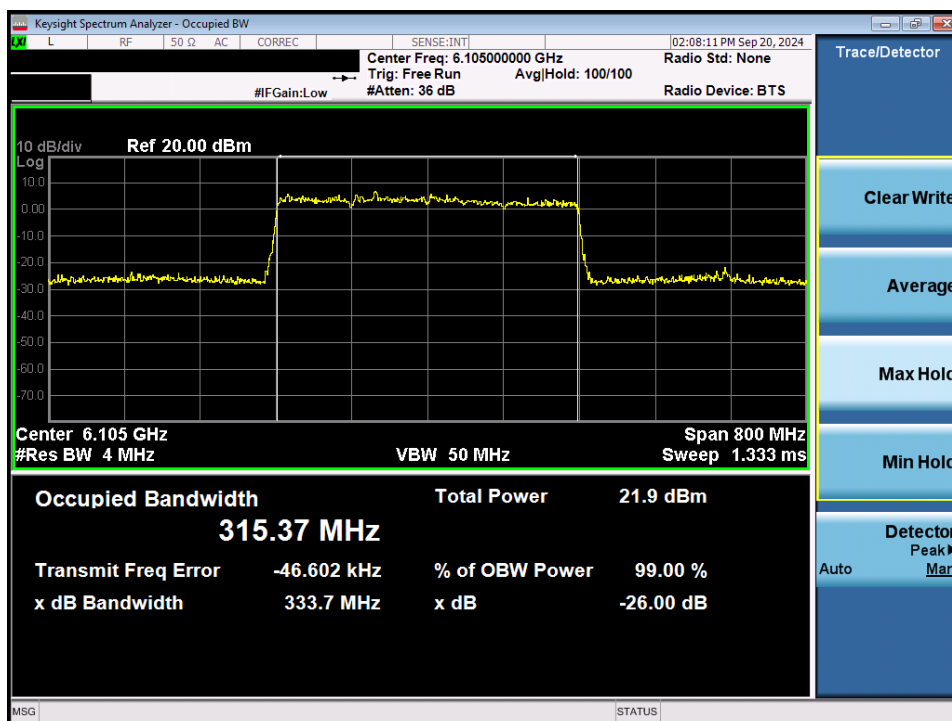


Plot 7-27. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

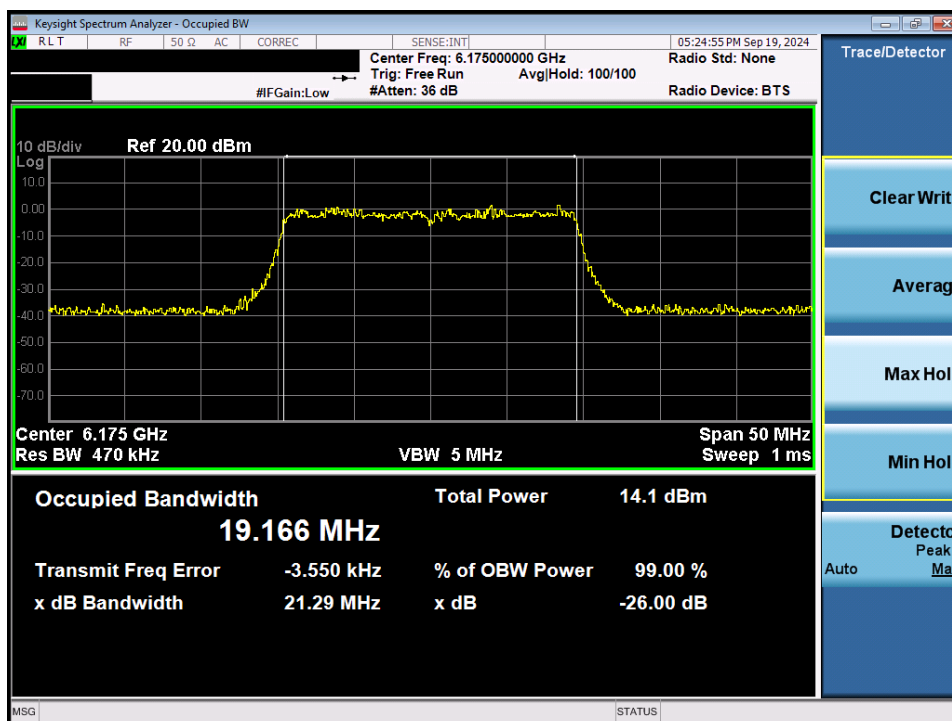


Plot 7-28. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 37 of 145

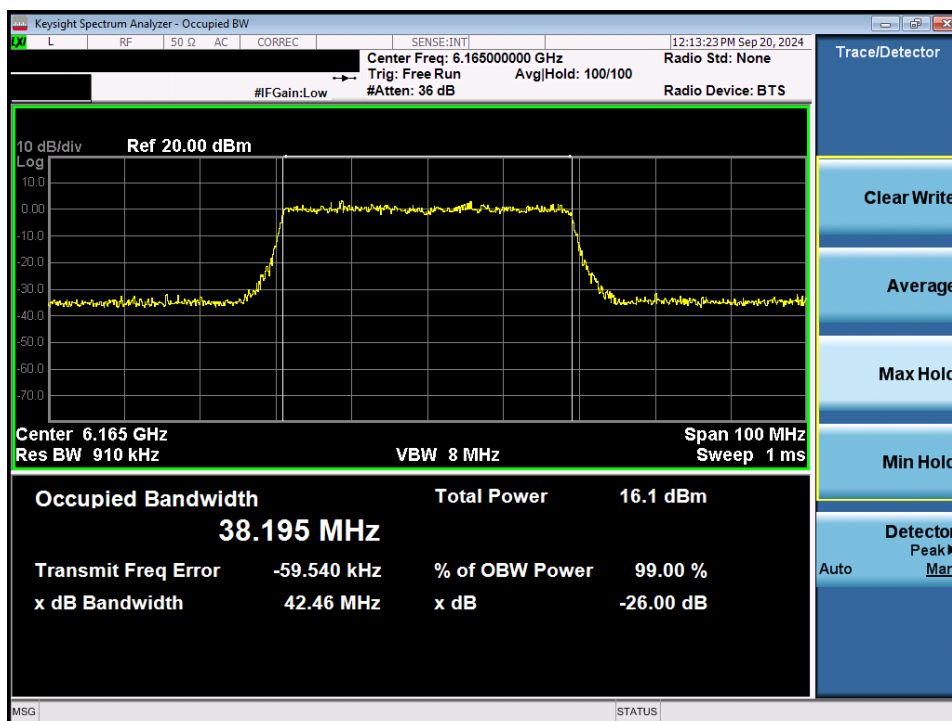


Plot 7-29. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

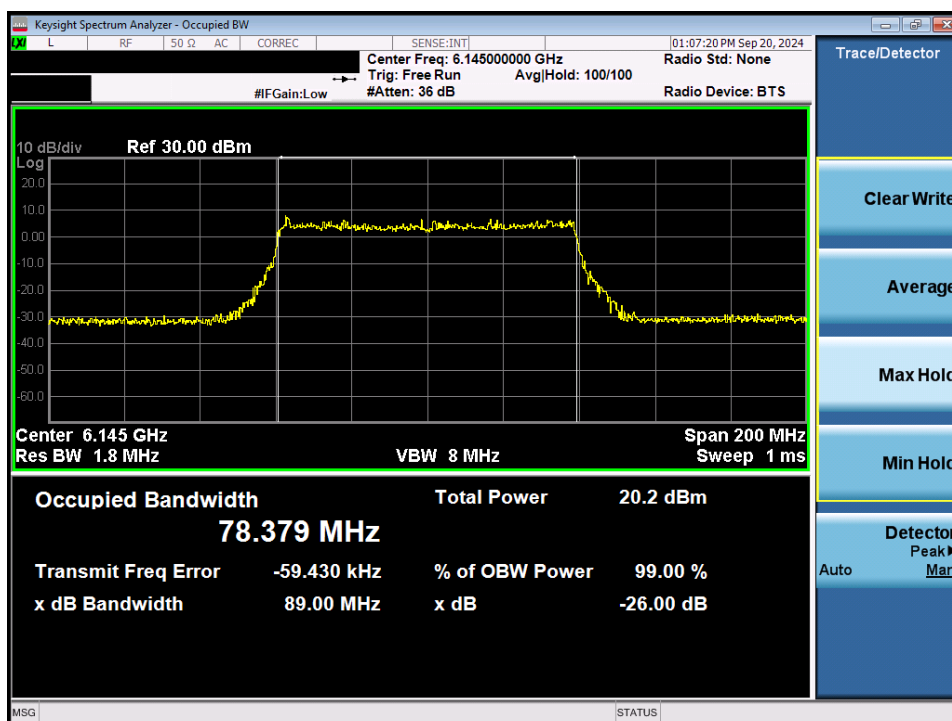


Plot 7-30. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 38 of 145

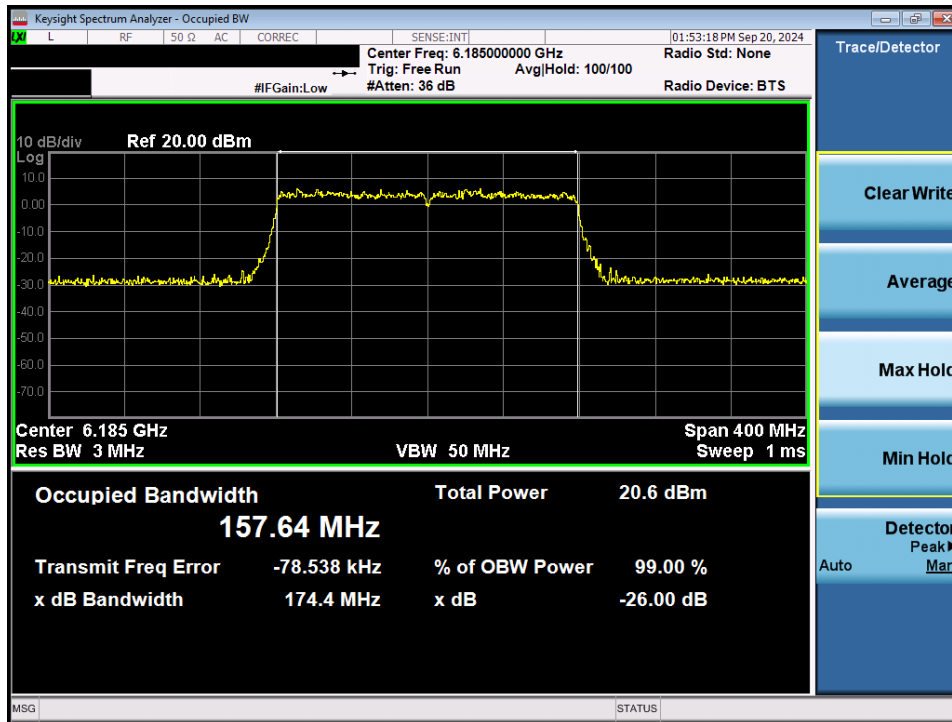

Plot 7-31. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

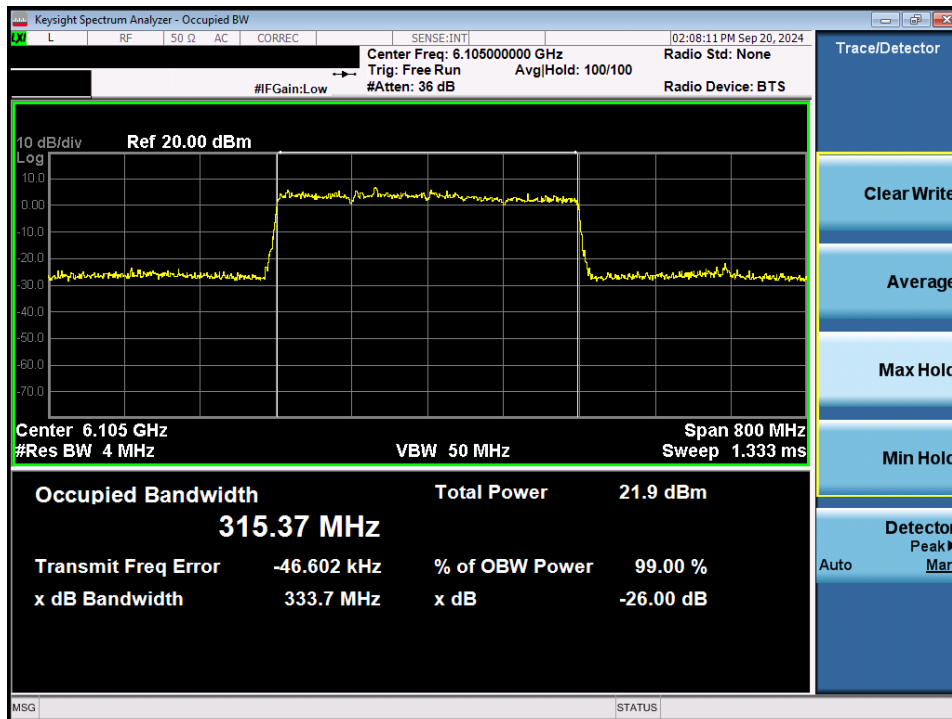

Plot 7-32. 26dB Bandwidth Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 39 of 145

7.3 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm. For client devices operating under the control of a standard power access point, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

Compliance for this device while operating under the control of either an indoor low power access point or a standard power access point is demonstrated by applying the tighter low power indoor access point limit of 24dBm e.i.r.p. for both cases.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 40 of 145

SISO Maximum Conducted Output Power Measurements (26 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				0	4	8				
5	5935	2	26T	-3.3	-3.1	-3.2	-3.5	-6.6	24.0	-30.63
	6175	45	26T	-3.12	-3.45	-3.21	-3.5	-6.7	24.0	-30.65
	6415	93	26T	-3.40	-3.70	-3.44	-3.5	-6.9	24.0	-30.93
6	6435	97	26T	-3.10	-3.48	-3.18	-3.4	-6.5	24.0	-30.49
	6475	105	26T	-3.14	-3.49	-3.17	-3.4	-6.5	24.0	-30.53
	6515	113	26T	-3.01	-3.31	-3.08	-3.4	-6.4	24.0	-30.40
7	6535	117	26T	-3.20	-3.10	-3.28	-3.0	-6.1	24.0	-30.14
	6695	149	26T	-3.10	-3.60	-3.26	-3.0	-6.1	24.0	-30.14
	6875	185	26T	-3.51	-3.81	-3.54	-3.0	-6.6	24.0	-30.55
8	6895	189	26T	-3.64	-3.89	-3.62	-3.6	-7.2	24.0	-31.24
	6995	209	26T	-3.85	-3.30	-3.83	-3.6	-6.9	24.0	-30.92
	7115	233	26T	-4.00	-3.18	-3.57	-3.6	-6.8	24.0	-30.80

Table 7-5. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				0	4	8				
5	5935	2	26T	-3.3	-3.1	-3.2	-3.2	-6.3	24.0	-30.26
	6175	45	26T	-3.12	-3.45	-3.21	-3.2	-6.3	24.0	-30.28
	6415	93	26T	-3.30	-3.42	-3.60	-3.2	-6.5	24.0	-30.46
6	6435	97	26T	-3.20	-3.60	-3.26	-2.3	-5.5	24.0	-29.51
	6475	105	26T	-3.23	-3.61	-3.35	-2.3	-5.5	24.0	-29.54
	6515	113	26T	-3.38	-3.73	-3.45	-2.3	-5.7	24.0	-29.69
7	6535	117	26T	-3.44	-3.80	-3.53	-2.5	-6.0	24.0	-29.98
	6695	149	26T	-3.60	-3.89	-3.60	-2.5	-6.1	24.0	-30.14
	6875	185	26T	-3.58	-3.90	-3.70	-2.5	-6.1	24.0	-30.12
8	6895	189	26T	-3.40	-3.80	-3.50	-3.8	-7.2	24.0	-31.16
	6995	209	26T	-3.01	-3.40	-3.05	-3.8	-6.8	24.0	-30.77
	7115	233	26T	-3.36	-3.73	-3.50	-3.8	-7.1	24.0	-31.12

Table 7-6. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 41 of 145

SISO Maximum Conducted Output Power Measurements (52 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				37	39	40				
5	5935	2	52T	-0.2	-0.4	-0.2	-3.5	-3.7	24.0	-27.73
	6175	45	52T	-0.23	-0.44	-0.26	-3.5	-3.8	24.0	-27.76
	6415	93	52T	-0.10	-0.30	-0.12	-3.5	-3.6	24.0	-27.63
6	6435	97	52T	-0.08	-0.31	-0.12	-3.4	-3.5	24.0	-27.47
	6475	105	52T	-0.12	-0.30	-0.16	-3.4	-3.5	24.0	-27.51
	6515	113	52T	-0.47	-0.12	-0.50	-3.4	-3.5	24.0	-27.51
7	6535	117	52T	-0.20	-0.40	-0.26	-3.0	-3.2	24.0	-27.24
	6695	149	52T	-0.01	-0.30	-0.15	-3.0	-3.1	24.0	-27.05
	6875	185	52T	-0.01	-0.12	-0.10	-3.0	-3.1	24.0	-27.05
8	6895	189	52T	-0.42	-0.53	-0.43	-3.6	-4.0	24.0	-28.04
	6995	209	52T	-0.38	-0.42	-0.14	-3.6	-3.8	24.0	-27.76
	7115	233	52T	-0.55	-0.21	-0.22	-3.6	-3.8	24.0	-27.83

Table 7-7. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				37	39	40				
5	5935	2	52T	-0.30	-0.40	-0.34	-3.2	-3.5	24.0	-27.46
	6175	45	52T	-0.10	-0.26	-0.09	-3.2	-3.3	24.0	-27.25
	6415	93	52T	-0.27	-0.44	-0.53	-3.2	-3.4	24.0	-27.43
6	6435	97	52T	-0.36	-0.60	-0.43	-2.3	-2.7	24.0	-26.67
	6475	105	52T	-0.34	-0.53	-0.39	-2.3	-2.7	24.0	-26.65
	6515	113	52T	-0.44	-0.66	-0.52	-2.3	-2.8	24.0	-26.75
7	6535	117	52T	-0.51	-0.80	-0.57	-2.5	-3.1	24.0	-27.05
	6695	149	52T	-0.51	-0.72	-0.56	-2.5	-3.1	24.0	-27.05
	6875	185	52T	-0.60	-0.82	-0.62	-2.5	-3.1	24.0	-27.14
8	6895	189	52T	-0.40	-0.62	-0.43	-3.8	-4.2	24.0	-28.16
	6995	209	52T	-0.10	-0.25	-0.10	-3.8	-3.9	24.0	-27.86
	7115	233	52T	-0.50	-0.71	-0.51	-3.8	-4.3	24.0	-28.26

Table 7-8. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 42 of 145

SISO Maximum Conducted Output Power Measurements (106 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index					
				53	54				
6	5935	2	106T	2.99	2.98	-3.5	-0.5	24.0	-24.54
	6175	45	106T	2.65	2.70	-3.5	-0.8	24.0	-24.83
	6415	93	106T	2.71	2.67	-3.5	-0.8	24.0	-24.82
	6435	97	106T	2.86	2.73	-3.4	-0.5	24.0	-24.53
	6475	105	106T	2.67	2.67	-3.4	-0.7	24.0	-24.72
	6515	113	106T	2.40	2.38	-3.4	-1.0	24.0	-24.99
7	6535	117	106T	2.60	2.50	-3.0	-0.4	24.0	-24.44
	6695	149	106T	2.87	2.82	-3.0	-0.2	24.0	-24.17
	6875	185	106T	2.65	2.61	-3.0	-0.4	24.0	-24.39
8	6895	189	106T	2.82	2.82	-3.6	-0.8	24.0	-24.80
	6995	209	106T	2.75	2.72	-3.6	-0.9	24.0	-24.87
	7115	233	106T	2.56	2.50	-3.6	-1.1	24.0	-25.06

Table 7-9. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index					
				53	54				
	5935	2	106T	2.56	2.60	-3.2	-0.6	24.0	-24.56
	6175	45	106T	2.69	2.64	-3.2	-0.5	24.0	-24.47
	6415	93	106T	2.96	2.77	-3.2	-0.2	24.0	-24.20
6	6435	97	106T	2.90	2.86	-2.3	0.6	24.0	-23.41
	6475	105	106T	2.93	2.89	-2.3	0.6	24.0	-23.38
	6515	113	106T	2.80	2.76	-2.3	0.5	24.0	-23.51
7	6535	117	106T	2.72	2.68	-2.5	0.2	24.0	-23.82
	6695	149	106T	2.70	2.73	-2.5	0.2	24.0	-23.81
	6875	185	106T	2.55	2.50	-2.5	0.0	24.0	-23.99
8	6895	189	106T	2.78	2.70	-3.8	-1.0	24.0	-24.98
	6995	209	106T	2.56	2.51	-3.8	-1.2	24.0	-25.20
	7115	233	106T	2.76	2.69	-3.8	-1.0	24.0	-25.00

Table 7-10. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 43 of 145

SISO Maximum Conducted Output Power Measurements (242 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index				
				61				
5	5935	2	242T	6.74	-3.5	3.2	24.0	-20.79
	6175	45	242T	6.70	-3.5	3.2	24.0	-20.83
	6415	93	242T	6.94	-3.5	3.4	24.0	-20.59
6	6435	97	242T	6.86	-3.4	3.5	24.0	-20.53
	6475	105	242T	6.63	-3.4	3.2	24.0	-20.76
	6515	113	242T	6.99	-3.4	3.6	24.0	-20.40
7	6535	117	242T	6.74	-3.0	3.7	24.0	-20.30
	6695	149	242T	6.90	-3.0	3.9	24.0	-20.14
	6875	185	242T	6.99	-3.0	4.0	24.0	-20.05
8	6895	189	242T	6.52	-3.6	2.9	24.0	-21.10
	6995	209	242T	6.99	-3.6	3.4	24.0	-20.63
	7115	233	242T	6.98	-3.6	3.4	24.0	-20.64

Table 7-11. SISO ANT1 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index				
				61				
5	5935	2	242T	6.90	-3.2	3.7	24.0	-20.26
	6175	45	242T	6.60	-3.2	3.4	24.0	-20.56
	6415	93	242T	6.44	-3.2	3.3	24.0	-20.72
6	6435	97	242T	6.78	-2.3	4.5	24.0	-19.53
	6475	105	242T	6.29	-2.3	4.0	24.0	-20.02
	6515	113	242T	6.70	-2.3	4.4	24.0	-19.61
7	6535	117	242T	6.68	-2.5	4.1	24.0	-19.86
	6695	149	242T	6.60	-2.5	4.1	24.0	-19.94
	6875	185	242T	6.47	-2.5	3.9	24.0	-20.07
8	6895	189	242T	6.62	-3.8	2.9	24.0	-21.14
	6995	209	242T	6.90	-3.8	3.1	24.0	-20.86
	7115	233	242T	6.50	-3.8	2.7	24.0	-21.26

Table 7-12. SISO ANT2 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 44 of 145

SISO Maximum Conducted Output Power Measurements (484 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				65				
5	5965	3	484T	9.61	-3.5	6.1	24.0	-17.92
	6005	11	484T	9.60	-3.5	6.1	24.0	-17.93
	6165	43	484T	9.74	-3.5	6.2	24.0	-17.79
	6405	91	484T	9.82	-3.5	6.3	24.0	-17.71
6	6445	99	484T	9.70	-3.4	6.3	24.0	-17.69
	6485	107	484T	9.60	-3.4	6.2	24.0	-17.79
	6525	115	484T	9.89	-3.4	6.5	24.0	-17.50
7	6565	123	484T	9.65	-3.0	6.6	24.0	-17.39
	6685	147	484T	9.50	-3.0	6.5	24.0	-17.54
	6845	179	484T	9.70	-3.0	6.7	24.0	-17.34
8	6885	187	484T	9.68	-3.6	6.1	24.0	-17.94
	7005	211	484T	9.90	-3.6	6.3	24.0	-17.72
	7085	227	484T	9.87	-3.6	6.3	24.0	-17.75

Table 7-13. SISO ANT1 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted RU Index	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				65				
5	5965	3	484T	9.77	-3.2	6.6	24.0	-17.39
	6005	11	484T	9.70	-3.2	6.5	24.0	-17.46
	6165	43	484T	9.47	-3.2	6.3	24.0	-17.69
	6405	91	484T	9.68	-3.2	6.5	24.0	-17.48
6	6445	99	484T	9.60	-2.3	7.3	24.0	-16.71
	6485	107	484T	9.60	-2.3	7.3	24.0	-16.71
	6525	115	484T	9.53	-2.3	7.2	24.0	-16.78
7	6565	123	484T	9.45	-2.5	6.9	24.0	-17.09
	6685	147	484T	9.24	-2.5	6.7	24.0	-17.30
	6845	179	484T	9.58	-2.5	7.0	24.0	-16.96
8	6885	187	484T	9.48	-3.8	5.7	24.0	-18.28
	7005	211	484T	9.72	-3.8	6.0	24.0	-18.04
	7085	227	484T	9.60	-3.8	5.8	24.0	-18.16

Table 7-14. SISO ANT2 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 45 of 145

SISO Maximum Conducted Output Power Measurements (996 Tones)

Band	Freq [MHz]	Channel	Tones	Avg	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Conducted				
				RU Index				
				67				
5	5985	7	996T	12.99	-3.5	9.5	24.0	-14.54
	6145	39	996T	12.84	-3.5	9.3	24.0	-14.69
	6385	87	996T	12.80	-3.5	9.3	24.0	-14.73
6	6465	103	996T	12.60	-3.4	9.2	24.0	-14.79
7	6545	119	996T	12.94	-3.0	9.9	24.0	-14.10
	6705	151	996T	12.97	-3.0	9.9	24.0	-14.07
	6865	183	996T	12.59	-3.0	9.6	24.0	-14.45
8	6945	199	996T	12.96	-3.6	9.3	24.0	-14.66
	7025	215	996T	12.95	-3.6	9.3	24.0	-14.67

Table 7-15. SISO ANT1 80MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

Band	Freq [MHz]	Channel	Tones	Avg	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Conducted				
				RU Index				
				67				
5	5985	7	996T	12.88	-3.2	9.7	24.0	-14.28
	6145	39	996T	12.52	-3.2	9.4	24.0	-14.64
	6385	87	996T	12.48	-3.2	9.3	24.0	-14.68
6	6465	103	996T	12.49	-2.3	10.2	24.0	-13.82
7	6545	119	996T	12.27	-2.5	9.7	24.0	-14.27
	6705	151	996T	12.00	-2.5	9.5	24.0	-14.54
	6865	183	996T	12.47	-2.5	9.9	24.0	-14.07
8	6945	199	996T	12.70	-3.8	8.9	24.0	-15.06
	7025	215	996T	12.97	-3.8	9.2	24.0	-14.79

Table 7-16. SISO ANT2 80MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 46 of 145

SISO Maximum Conducted Output Power Measurements (2x996 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index				
				68				
5	6025	15	2x996T	12.55	-3.5	9.0	24.0	-14.98
	6185	47	2x996T	12.65	-3.5	9.1	24.0	-14.88
	6345	79	2x996T	12.93	-3.5	9.4	24.0	-14.60
6	6505	111	2x996T	12.85	-3.4	9.5	24.0	-14.54
7	6665	143	2x996T	12.96	-3.0	9.9	24.0	-14.08
	6825	175	2x996T	12.57	-3.0	9.5	24.0	-14.47
8	6985	207	2x996T	12.99	-3.6	9.4	24.0	-14.63

Table 7-17. SISO ANT1 160MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index				
				68				
5	6025	15	2x996T	12.98	-3.2	9.8	24.0	-14.18
	6185	47	2x996T	12.50	-3.2	9.3	24.0	-14.66
	6345	79	2x996T	12.00	-3.2	8.8	24.0	-15.16
	6505	111	2x996T	12.15	-2.3	9.8	24.0	-14.16
7	6665	143	2x996T	12.33	-2.5	9.8	24.0	-14.21
	6825	175	2x996T	12.06	-2.5	9.5	24.0	-14.48
	6985	207	2x996T	12.88	-3.8	9.1	24.0	-14.88

Table 7-18. SISO ANT2 160MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 47 of 145

SISO Maximum Conducted Output Power Measurements (4x996 Tones)

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index				
				69				
5	6105	31	4x996T	12.00	-3.5	8.5	24.0	-15.53
	6265	63	4x996T	12.01	-3.5	8.5	24.0	-15.52
6	6425	95	4x996T	12.23	-3.4	8.8	24.0	-15.16
7	6585	127	4x996T	12.30	-3.0	9.3	24.0	-14.74
	6745	159	4x996T	12.20	-3.0	9.2	24.0	-14.84
8	6905	191	4x996T	12.39	-3.6	8.8	24.0	-15.23

Table 7-19. SISO ANT1 320MHz BW 802.11be (UNII) Maximum Conducted Output Power – LPI

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index				
				69				
5	6105	31	4x996T	12.26	-3.2	9.1	24.0	-14.90
	6265	63	4x996T	12.00	-3.2	8.8	24.0	-15.16
	6425	95	4x996T	12.22	-2.3	9.9	24.0	-14.09
7	6585	127	4x996T	12.30	-2.5	9.8	24.0	-14.24
	6745	159	4x996T	12.00	-2.5	9.5	24.0	-14.54
	6905	191	4x996T	12.28	-3.8	8.5	24.0	-15.48

Table 7-20. SISO ANT2 320MHz BW 802.11be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 48 of 145

MIMO Maximum Conducted Output Power Measurements (26 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)												Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index															
				0			4			8									
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO							
5	5935	2	26T	-4.6	-4.2	-1.39	-4.9	-4.7	-1.77	-4.5	-4.2	-1.34	-0.33	-1.7	24.0	-25.67			
	6175	45	26T	-4.67	-4.80	-1.72	-4.61	-4.80	-1.69	-4.25	-4.36	-1.29	-0.33	-1.6	24.0	-25.63			
	6415	93	26T	-3.75	-4.66	-1.17	-3.78	-4.61	-1.16	-3.70	-4.61	-1.12	-0.33	-1.5	24.0	-25.45			
	6435	97	26T	-3.23	-4.16	-0.66	-3.09	-4.09	-0.55	-3.20	-4.20	-0.66	0.18	-0.4	24.0	-24.37			
6	6475	105	26T	-3.21	-3.44	-0.31	-3.68	-3.83	-0.74	-3.27	-3.42	-0.33	0.18	-0.1	24.0	-24.14			
	6515	113	26T	-3.28	-3.29	-0.27	-3.65	-3.72	-0.67	-3.30	-3.32	-0.30	0.18	-0.1	24.0	-24.10			
	6535	117	26T	-3.57	-3.23	-0.39	-3.93	-3.50	-0.70	-3.36	-3.01	-0.27	0.22	0.0	24.0	-24.04			
	6695	149	26T	-4.20	-3.20	-0.66	-4.09	-3.16	-0.59	-4.14	-3.23	-0.65	0.22	-0.4	24.0	-24.37			
7	6875	185	26T	-3.50	-3.94	-0.70	-3.45	-3.86	-0.64	-3.09	-3.45	-0.26	0.22	0.0	24.0	-24.03			
	6895	189	26T	-3.20	-3.48	-0.33	-3.59	-3.99	-0.78	-3.80	-4.22	-0.99	-0.68	-1.0	24.0	-25.01			
	6995	209	26T	-4.82	-4.88	-1.84	-4.82	-4.83	-1.81	-4.45	-4.48	-1.45	-0.68	-2.1	24.0	-26.13			
	7115	233	26T	-4.91	-4.65	-1.77	-4.88	-4.57	-1.71	-4.44	-4.18	-1.30	-0.68	-2.0	24.0	-25.98			

Table 7-21. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 49 of 145

MIMO Maximum Conducted Output Power Measurements (52 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)												Dir. Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index															
				37			39			40									
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
5	5935	2	52T	-1.00	-0.60	2.21	-0.72	-0.45	2.43	-0.38	-0.26	2.59	-0.33	2.3	24.0	-21.74			
	6175	45	52T	-0.42	-0.56	2.52	-0.56	-0.98	2.25	-0.39	-0.98	2.34	-0.33	2.2	24.0	-21.81			
	6415	93	52T	-0.41	-0.99	2.32	-0.54	-0.98	2.26	-0.27	-0.97	2.40	-0.33	2.1	24.0	-21.93			
	6435	97	52T	-0.21	-0.96	2.44	-0.49	-0.63	2.45	-0.28	-0.95	2.41	0.18	2.6	24.0	-21.37			
6	6475	105	52T	-0.33	-0.17	2.76	-0.65	-0.35	2.51	-0.42	-0.10	2.76	0.18	2.9	24.0	-21.06			
	6515	113	52T	-0.44	-0.09	2.75	-0.64	-0.27	2.56	-0.35	-0.03	2.82	0.18	3.0	24.0	-21.00			
	6535	117	52T	-0.64	-0.27	2.56	-0.91	-0.50	2.31	-0.72	-0.23	2.54	0.22	2.8	24.0	-21.22			
	6695	149	52T	-1.18	-0.20	2.35	-1.44	-0.28	2.19	-1.27	-0.09	2.37	0.22	2.6	24.0	-21.41			
7	6875	185	52T	-0.45	-0.88	2.35	-0.75	-0.98	2.15	-0.56	-0.99	2.24	0.22	2.6	24.0	-21.43			
	6895	189	52T	-0.65	-0.99	2.19	-0.90	-0.79	2.17	-0.78	-0.99	2.13	-0.68	1.5	24.0	-22.49			
	6995	209	52T	-0.96	-0.86	2.10	-0.20	-0.20	2.81	-0.10	-0.80	2.57	-0.68	2.1	24.0	-21.87			
	7115	233	52T	-0.51	-0.03	2.75	-0.70	-0.04	2.65	-0.60	-0.01	2.72	-0.68	2.1	24.0	-21.93			

Table 7-22. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 50 of 145

MIMO Maximum Conducted Output Power Measurements (106 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Dir. Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index									
				53			54						
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
6	5935	2	106T	2.93	2.12	5.55	2.56	1.60	5.12	-0.33	5.2	24.0	-18.78
	6175	45	106T	1.30	2.99	5.24	1.33	2.99	5.25	-0.33	4.9	24.0	-19.08
	6415	93	106T	2.65	2.62	5.65	2.60	2.59	5.61	-0.33	5.3	24.0	-18.69
	6435	97	106T	2.69	2.57	5.64	2.65	2.52	5.60	0.18	5.8	24.0	-18.18
	6475	105	106T	2.50	2.60	5.56	2.56	2.55	5.57	0.18	5.7	24.0	-18.26
	6515	113	106T	2.63	2.51	5.58	2.61	2.48	5.56	0.18	5.8	24.0	-18.24
7	6535	117	106T	2.70	2.44	5.58	2.80	2.45	5.64	0.22	5.9	24.0	-18.14
	6695	149	106T	2.57	1.50	5.08	2.60	1.50	5.10	0.22	5.3	24.0	-18.68
	6875	185	106T	2.02	1.89	4.97	2.90	1.56	5.29	0.22	5.5	24.0	-18.48
8	6895	189	106T	2.90	1.60	5.31	2.90	1.60	5.31	-0.68	4.6	24.0	-19.37
	6995	209	106T	2.26	2.80	5.55	2.20	2.78	5.51	-0.68	4.9	24.0	-19.13
	7115	233	106T	2.04	2.36	5.21	2.01	2.30	5.17	-0.68	4.5	24.0	-19.47

Table 7-23. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 51 of 145

MIMO Maximum Conducted Output Power Measurements (242 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				61						
				ANT1	ANT2	MIMO				
5	5935	2	242T	6.8	5.3	9.12	-0.33	8.8	24.0	-15.21
	6175	45	242T	6.10	6.44	9.28	-0.33	9.0	24.0	-15.05
	6415	93	242T	5.94	6.30	9.13	-0.33	8.8	24.0	-15.20
6	6435	97	242T	6.11	6.26	9.20	0.18	9.4	24.0	-14.63
	6475	105	242T	5.90	6.30	9.11	0.18	9.3	24.0	-14.71
	6515	113	242T	6.38	6.20	9.30	0.18	9.5	24.0	-14.52
7	6535	117	242T	6.36	6.10	9.24	0.22	9.5	24.0	-14.53
	6695	149	242T	6.98	6.10	9.57	0.22	9.8	24.0	-14.20
	6875	185	242T	6.99	6.10	9.58	0.22	9.8	24.0	-14.20
8	6895	189	242T	6.64	5.30	9.03	-0.68	8.4	24.0	-15.65
	6995	209	242T	5.98	6.50	9.26	-0.68	8.6	24.0	-15.42
	7115	233	242T	5.69	6.28	9.01	-0.68	8.3	24.0	-15.67

Table 7-24. MIMO 20MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 52 of 145

MIMO Maximum Conducted Output Power Measurements (484 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				65						
				ANT1	ANT2	MIMO				
5	5965	3	484T	9.90	9.01	12.49	-0.33	12.2	24.0	-11.84
	6005	11	484T	9.56	9.01	12.30	-0.33	12.0	24.0	-12.03
	6165	43	484T	8.85	9.86	12.39	-0.33	12.1	24.0	-11.94
	6405	91	484T	9.20	9.04	12.13	-0.33	11.8	24.0	-12.20
6	6445	99	484T	9.40	9.40	12.41	0.18	12.6	24.0	-11.41
	6485	107	484T	9.11	9.50	12.32	0.18	12.5	24.0	-11.50
	6525	115	484T	9.30	9.46	12.39	0.18	12.6	24.0	-11.43
	6565	123	484T	9.47	9.32	12.41	0.22	12.6	24.0	-11.37
7	6685	147	484T	9.50	9.21	12.37	0.22	12.6	24.0	-11.41
	6845	179	484T	9.99	9.01	12.54	0.22	12.8	24.0	-11.24
	6885	187	484T	9.85	9.02	12.47	-0.68	11.8	24.0	-12.21
8	7005	211	484T	9.07	9.50	12.30	-0.68	11.6	24.0	-12.38
	7085	227	484T	9.01	9.40	12.22	-0.68	11.5	24.0	-12.46

Table 7-25. MIMO 40MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 53 of 145

MIMO Maximum Conducted Output Power Measurements (996 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				67						
				ANT1	ANT2	MIMO				
5	5985	7	996T	12.75	12.01	15.41	-0.33	15.1	24.0	-8.93
	6145	39	996T	12.01	12.99	15.54	-0.33	15.2	24.0	-8.79
	6385	87	996T	12.40	12.08	15.25	-0.33	14.9	24.0	-9.08
6	6465	103	996T	12.12	12.05	15.10	0.18	15.3	24.0	-8.73
7	6545	119	996T	12.88	12.30	15.61	0.22	15.8	24.0	-8.17
	6705	151	996T	12.82	12.04	15.46	0.22	15.7	24.0	-8.32
	6865	183	996T	12.99	12.03	15.55	0.22	15.8	24.0	-8.23
8	6945	199	996T	12.62	12.26	15.45	-0.68	14.8	24.0	-9.23
	7025	215	996T	12.23	12.50	15.38	-0.68	14.7	24.0	-9.30

Table 7-26. MIMO 80MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 54 of 145

MIMO Maximum Conducted Output Power Measurements (2x996 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				68						
				ANT1	ANT2	MIMO				
5	6025	15	2x996T	12.70	12.01	15.38	-0.33	15.0	24.0	-8.95
	6185	47	2x996T	11.08	12.99	15.15	-0.33	14.8	24.0	-9.18
	6345	79	2x996T	12.70	12.14	15.44	-0.33	15.1	24.0	-8.89
6	6505	111	2x996T	12.34	12.14	15.25	0.18	15.4	24.0	-8.57
7	6665	143	2x996T	12.47	12.10	15.30	0.22	15.5	24.0	-8.48
	6825	175	2x996T	12.99	12.11	15.58	0.22	15.8	24.0	-8.19
8	6985	207	2x996T	12.30	12.90	15.62	-0.68	14.9	24.0	-9.06

Table 7-27. MIMO 160MHz BW 802.11ax/be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 55 of 145

MIMO Maximum Conducted Output Power Measurements (4x996 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index						
				69						
				ANT1	ANT2	MIMO				
5	6105	31	4x996T	12.80	12.01	15.43	-0.33	15.1	24.0	-8.90
	6265	63	4x996T	12.10	12.39	15.26	-0.33	14.9	24.0	-9.08
6	6425	95	4x996T	12.45	12.01	15.25	0.18	15.4	24.0	-8.58
7	6585	127	4x996T	12.83	12.01	15.45	0.22	15.7	24.0	-8.33
	6745	159	4x996T	12.98	12.04	15.55	0.22	15.8	24.0	-8.23
8	6905	191	4x996T	12.99	12.00	15.53	-0.68	14.9	24.0	-9.15

Table 7-28. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 56 of 145

MIMO Maximum Conducted Output Power Measurements (MRU)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)			Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index						
				90						
				ANT1	ANT2	MIMO				
5	5985	7	242+484T	11.40	11.78	14.60	-0.33	14.3	24.0	-9.73
	6145	39	242+484T	11.13	11.97	14.58	-0.33	14.2	24.0	-9.75
	6385	87	242+484T	11.13	11.34	14.25	-0.33	13.9	24.0	-10.09
6	6465	103	242+484T	11.10	11.80	14.47	0.18	14.7	24.0	-9.35
7	6545	119	242+484T	11.01	11.76	14.41	0.22	14.6	24.0	-9.36
	6705	151	242+484T	11.49	11.46	14.49	0.22	14.7	24.0	-9.29
	6865	183	242+484T	11.34	11.90	14.64	0.22	14.9	24.0	-9.14
8	6945	199	242+484T	10.92	11.99	14.50	-0.68	13.8	24.0	-10.18
	7025	215	242+484T	10.60	11.76	14.23	-0.68	13.5	24.0	-10.45

Table 7-29. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (52+26 Tones) – LPI

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index									
				82			83						
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6175	45	106+26T	4.50	5.50	8.04	4.49	5.50	8.03	-0.33	7.7	24.0	-16.29
6	6475	105	106+26T	4.60	5.70	8.20	4.59	5.60	8.13	0.18	8.4	24.0	-15.63
7	6695	149	106+26T	4.98	5.20	8.10	4.90	5.10	8.01	0.22	8.3	24.0	-15.67
8	6995	209	106+26T	4.20	5.70	8.02	4.15	5.70	8.00	-0.68	7.3	24.0	-16.65

Table 7-30. MIMO 20MHz BW 802.11be (UNII) Maximum Conducted Output Power (106+26 Tones) – LPI

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index												
				90			91			92						
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	5985	7	242+484T	11.40	11.78	14.60	11.27	11.64	14.47	11.29	11.66	14.49	-0.33	14.3	24.0	-9.73
	6145	39	242+484T	11.13	11.97	14.58	10.95	11.84	14.43	10.96	11.88	14.45	-0.33	14.2	24.0	-9.75
	6385	87	242+484T	11.13	11.34	14.25	10.99	11.23	14.12	10.98	11.25	14.13	-0.33	13.9	24.0	-10.09
6	6465	103	242+484T	11.10	11.80	14.47	10.98	11.74	14.39	10.98	11.74	14.39	0.18	14.7	24.0	-9.35
	6545	119	242+484T	11.01	11.76	14.41	10.98	11.65	14.34	10.99	11.60	14.32	0.22	14.6	24.0	-9.36
	6705	151	242+484T	11.49	11.46	14.49	11.40	11.39	14.41	11.44	11.42	14.44	0.22	14.7	24.0	-9.29
7	6865	183	242+484T	11.34	11.90	14.64	11.23	11.87	14.57	11.30	11.82	14.58	0.22	14.9	24.0	-9.14
	6945	199	242+484T	10.92	11.99	14.50	10.80	11.90	14.40	10.80	11.90	14.40	-0.68	13.8	24.0	-10.18
	7025	215	242+484T	10.60	11.76	14.23	10.50	11.65	14.12	10.50	11.60	14.10	-0.68	13.5	24.0	-10.45

Table 7-31. MIMO 80MHz BW 802.11be (UNII) Maximum Conducted Output Power (484+242 Tones) – LPI

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index												
				094			095			1095						
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6025	15	996+484T	10.90	11.99	14.49	10.70	11.74	14.26	10.40	11.56	14.03	-0.33	14.2	24.0	-9.84
	6185	47	996+484T	10.90	11.62	14.29	10.60	11.40	14.03	10.74	11.70	14.26	-0.33	14.0	24.0	-10.05
6	6345	79	996+484T	11.35	11.47	14.42	11.02	11.26	14.15	11.25	11.60	14.44	-0.33	14.1	24.0	-9.89
	6505	111	996+484T	10.90	11.70	14.33	11.07	11.90	14.51	10.98	11.84	14.44	0.18	14.7	24.0	-9.31
7	6665	143	996+484T	11.22	11.95	14.61	10.99	11.72	14.38	11.00	11.65	14.35	0.22	14.8	24.0	-9.17
	6825	175	996+484T	11.27	11.63	14.46	11.07	11.37	14.23	11.43	11.72	14.59	0.22	14.8	24.0	-9.19
8	6985	207	996+484T	10.45	11.80	14.19	10.20	11.50	13.91	10.43	11.90	14.24	-0.68	13.6	24.0	-10.44

Table 7-32. MIMO 160MHz BW 802.11be (UNII) Maximum Conducted Output Power (996+484 Tones) – LPI

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)										Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index													
				00100			01100			11103							
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
5	6105	31	2*996+484T	11.20	11.60	14.41	10.90	11.50	14.22	11.22	11.50	14.37	-0.33	14.1	24.0	-9.92	
	6265	63	2*996+484T	10.65	11.50	14.11	10.60	11.50	14.08	10.60	11.40	14.03	-0.33	13.8	24.0	-10.23	
6	6425	95	2*996+484T	10.90	11.30	14.11	10.90	11.30	14.11	10.66	11.30	14.00	0.18	14.3	24.0	-9.71	
	6585	127	2*996+484T	11.50	11.90	14.71	11.60	11.80	14.71	11.23	11.77	14.52	0.22	14.9	24.0	-9.06	
7	6745	159	2*996+484T	11.56	11.89	14.74	11.30	11.80	14.57	11.20	11.80	14.52	0.22	15.0	24.0	-9.04	
	6905	191	2*996+484T	10.90	11.80	14.38	11.00	11.60	14.32	10.90	11.70	14.33	-0.68	13.7	24.0	-10.30	

Table 7-33. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (2*996+484 Tones) – LPI

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index												
				00104			01104			11104						
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6105	31	3x996T	11.46	11.75	14.62	11.00	11.32	14.17	11.20	11.87	14.56	-0.33	14.3	24.0	-9.72
	6265	63	3x996T	10.85	11.65	14.28	11.00	11.77	14.41	11.00	11.77	14.41	-0.33	14.1	24.0	-9.92
	6425	95	3x996T	11.43	11.90	14.68	11.20	11.45	14.34	11.25	11.70	14.49	0.18	14.9	24.0	-9.14
7	6585	127	3x996T	11.55	11.97	14.78	11.36	11.74	14.56	11.51	11.77	14.65	0.22	15.0	24.0	-9.00
	6745	159	3x996T	11.42	11.99	14.72	11.13	11.73	14.45	11.00	11.80	14.43	0.22	14.9	24.0	-9.05
	6905	191	3x996T	11.00	11.98	14.53	10.77	11.54	14.18	11.20	11.99	14.62	-0.68	13.9	24.0	-10.06

Table 7-34. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996 Tones) – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 57 of 145

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Dir. Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				MRU Index												
				00105			01106			11106						
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO				
5	6105	31	3x996+484T	10.89	11.25	14.08	10.70	11.30	14.02	10.78	11.25	14.03	-0.33	13.8	24.0	-10.25
	6265	63	3x996+484T	11.00	11.60	14.32	10.80	11.40	14.12	10.95	11.65	14.32	-0.33	14.0	24.0	-10.01
6	6425	95	3x996+484T	10.99	11.50	14.26	10.90	11.20	14.06	11.23	11.45	14.35	0.18	14.5	24.0	-9.47
	6585	127	3x996+484T	11.53	11.98	14.77	11.42	11.87	14.66	11.40	11.70	14.56	0.22	15.0	24.0	-9.00
7	6745	159	3x996+484T	10.99	11.55	14.29	10.80	11.40	14.12	10.92	11.55	14.26	0.22	14.5	24.0	-9.49
	6905	191	3x996+484T	11.59	11.37	14.49	10.55	11.50	14.06	10.70	11.50	14.13	-0.68	13.8	24.0	-10.19

Table 7-35. MIMO 320MHz BW 802.11be (UNII) Maximum Conducted Output Power (3*996+484 Tones) – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 58 of 145

Sample MIMO Calculation:

At 5935MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average conducted output power was measured to be 0.50 dBm for Antenna-1 and 1.98 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(0.50 \text{ dBm} + 1.98 \text{ dBm}) = (1.122 \text{ mW} + 1.578 \text{ mW}) = 2.700 \text{ mW} = 4.31 \text{ dBm}$$

Sample Directional Gain Calculation:

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

Sample e.i.r.p. Calculation:

At 5935MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average MIMO conducted power was calculated to be 4.31 dBm with directional gain of -2.79 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$4.31 \text{ dBm} + -2.79 \text{ dBi} = 1.52 \text{ dBm}$$

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 59 of 145

7.4 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density.

In the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band. For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm/MHz e.i.r.p.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

SP 80/160/320MHz BW share same target as LPI 80/160/320MHz BW, and only the emissions from worst case have been reported

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 60 of 145

MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	be (20MHz)	-4.85	-4.58	-3.53	-3.16	-1.70	-0.33	-2.03	-1	-1.03
	6175	45	be (20MHz)	-7.93	-7.85	-3.53	-3.16	-4.88	-0.33	-5.21	-1	-4.21
	6415	93	be (20MHz)	-3.62	-4.26	-3.53	-3.16	-0.91	-0.33	-1.25	-1	-0.25
	5965	3	be (40MHz)	-6.85	-5.73	-3.53	-3.16	-3.24	-0.33	-3.57	-1	-2.57
	6165	43	be (40MHz)	-6.74	-8.78	-3.53	-3.16	-4.63	-0.33	-4.96	-1	-3.96
	6405	91	be (40MHz)	-5.33	-5.80	-3.53	-3.16	-2.55	-0.33	-2.88	-1	-1.88
	5985	7	be (80MHz)	-7.39	-6.65	-3.53	-3.16	-3.99	-0.33	-4.33	-1	-3.33
	6145	39	be (80MHz)	-7.69	-8.82	-3.53	-3.16	-5.21	-0.33	-5.54	-1	-4.54
	6385	87	be (80MHz)	-7.09	-6.70	-3.53	-3.16	-3.88	-0.33	-4.21	-1	-3.21
	6025	15	be (160MHz)	-8.94	-7.83	-3.53	-3.16	-5.34	-0.33	-5.67	-1	-4.67
	6185	47	be (160MHz)	-9.10	-11.21	-3.53	-3.16	-7.01	-0.33	-7.35	-1	-6.35
	6345	79	be (160MHz)	-7.55	-8.84	-3.53	-3.16	-5.13	-0.33	-5.47	-1	-4.47
Band 6	6105	31	be (320MHz)	-9.09	-11.42	-3.53	-3.16	-7.09	-0.33	-7.42	-1	-6.42
	6265	63	be (320MHz)	-9.26	-9.29	-3.53	-3.16	-6.26	-0.33	-6.60	-1	-5.60
	6435	97	be (20MHz)	-4.04	-5.13	-3.04	-3.16	-1.54	-0.09	-1.63	-1	-0.63
	6475	105	be (20MHz)	-4.39	-4.72	-3.04	-3.16	-1.54	-0.09	-1.63	-1	-0.63
	6515	113	be (20MHz)	-4.60	-3.64	-3.04	-3.16	-1.08	-0.09	-1.17	-1	-0.17
	6445	99	be (40MHz)	-5.09	-5.63	-3.04	-3.16	-2.34	-0.09	-2.43	-1	-1.43
	6485	107	be (40MHz)	-5.47	-4.39	-3.04	-3.16	-1.89	-0.09	-1.97	-1	-0.97
Band 7	6525	115	be (40MHz)	-5.76	-4.59	-3.04	-3.16	-2.12	-0.09	-2.21	-1	-1.21
	6465	103	be (80MHz)	-6.64	-6.50	-3.04	-3.16	-3.56	-0.09	-3.65	-1	-2.65
	6505	111	be (160MHz)	-7.70	-6.51	-3.04	-3.16	-4.05	-0.09	-4.14	-1	-3.14
	6425	95	be (320MHz)	-7.28	-8.27	-3.04	-3.16	-4.73	-0.09	-4.82	-1	-3.82
	6695	117	be (20MHz)	-10.49	-8.37	-3.04	-3.53	-6.29	-0.27	-6.56	-1	-5.56
	6695	149	be (20MHz)	-4.51	-3.48	-3.04	-3.53	-0.95	-0.27	-1.22	-1	-0.22
	6875	185	be (20MHz)	-4.02	-4.65	-3.04	-3.53	-1.31	-0.27	-1.58	-1	-0.58
	6565	123	be (40MHz)	-5.05	-4.33	-3.04	-3.53	-1.67	-0.27	-1.94	-1	-0.94
	6725	155	be (40MHz)	-6.57	-4.14	-3.04	-3.53	-2.18	-0.27	-2.45	-1	-1.45
	6845	179	be (40MHz)	-6.11	-6.07	-3.04	-3.53	-3.08	-0.27	-3.35	-1	-2.35
	6545	119	be (80MHz)	-6.83	-5.40	-3.04	-3.53	-3.04	-0.27	-3.31	-1	-2.31
	6705	151	be (80MHz)	-7.93	-6.48	-3.04	-3.53	-4.14	-0.27	-4.41	-1	-3.41
Band 8	6865	183	be (80MHz)	-7.40	-7.83	-3.04	-3.53	-4.60	-0.27	-4.87	-1	-3.87
	6665	143	be (160MHz)	-9.29	-5.62	-3.04	-3.53	-4.07	-0.27	-4.34	-1	-3.34
	6825	175	be (160MHz)	-9.68	-7.16	-3.04	-3.53	-5.23	-0.27	-5.50	-1	-4.50
	6585	127	be (320MHz)	-8.80	-8.20	-3.04	-3.53	-5.48	-0.27	-5.75	-1	-4.75
	6745	159	be (320MHz)	-8.00	-7.34	-3.04	-3.53	-4.65	-0.27	-4.92	-1	-3.92
	6895	189	be (20MHz)	-4.23	-5.00	-3.62	-3.76	-1.59	-0.68	-2.26	-1	-1.26
	6995	209	be (20MHz)	-6.40	-7.40	-3.62	-3.76	-3.86	-0.68	-4.54	-1	-3.54
	7115	233	be (20MHz)	-3.41	-3.82	-3.62	-3.76	-0.60	-0.68	-1.28	-1	-0.28
	6885	187	be (40MHz)	-5.97	-6.62	-3.62	-3.76	-3.27	-0.68	-3.95	-1	-2.95
	6965	211	be (40MHz)	-7.32	-7.96	-3.62	-3.76	-4.62	-0.68	-5.30	-1	-4.30
	7085	227	be (40MHz)	-6.58	-8.45	-3.62	-3.76	-4.41	-0.68	-5.09	-1	-4.09
	6945	199	be (80MHz)	-7.97	-8.79	-3.62	-3.76	-5.35	-0.68	-6.03	-1	-5.03
Band 7/8	7025	215	be (80MHz)	-7.18	-9.84	-3.62	-3.76	-5.30	-0.68	-5.98	-1	-4.98
	6985	207	be (160MHz)	-9.00	-9.45	-3.62	-3.76	-6.21	-0.68	-6.89	-1	-5.89
Band 7/8	6985	191	be (320MHz)	-8.20	-8.47	-3.04	-3.53	-5.32	-0.27	-5.59	-1	-4.59

Table 7-36. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (26 Tones) – LPI

	Frequency [MHz]	Channel	802.11 MODE	MRU Cases	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	6145	39	be (80MHz)	484+242T	-4.71	-4.10	-3.53	-3.16	-1.38	-0.33	-1.72	-1	-0.72
	6185	47	be (160MHz)	996+484T	-5.94	-4.85	-3.53	-3.16	-2.35	-0.33	-2.68	-1	-1.68
	6105	31	be (320MHz)	2x996+484T	-7.97	-6.24	-3.53	-3.16	-4.01	-0.33	-4.34	-1	-3.34
Band 6	6465	103	be (80MHz)	484+242T	-5.46	-5.68	-3.04	-3.16	-2.56	-0.09	-2.65	-1	-1.65
	6505	111	be (160MHz)	996+484T	-6.49	-6.26	-3.04	-3.16	-3.36	-0.09	-3.45	-1	-2.45
Band 7	6705	151	be (80MHz)	484+242T	-5.76	-4.61	-3.04	-3.53	-2.14	-0.27	-2.41	-1	-1.41
Band 7/8	6745	159	be (320MHz)	2x996+484T	-8.24	-7.22	-3.04	-3.53	-4.69	-0.27	-4.96	-1	-3.96
Band 8	6945	199	be (80MHz)	484+242T	-5.05	-4.74	-3.62	-3.76	-1.88	-0.68	-2.56	-1	-1.56
	6985	207	be (160MHz)	996+484T	-6.34	-5.86	-3.62	-3.76	-3.08	-0.68	-3.76	-1	-2.76
Band 7/8	6905	191	be (320MHz)	2x996+484T	-8.98	-6.95	-3.04	-3.53	-4.84	-0.27	-5.11	-1	-4.11

Table 7-37. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (MRU Cases) – LPI


FCC ID: A3LSMI610	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device		Page 61 of 145

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm]	Directional Gain [dBi]	EIRP [dBm]	Max EIRP [dBm]	Margin [dB]
Band 5	5935	2	be (20MHz)	-4.54	-4.56	-3.53	-3.16	-1.54	-0.33	-1.87	-1	-0.87
	6175	45	be (20MHz)	-5.22	-4.85	-3.53	-3.16	-2.02	-0.33	-2.35	-1	-1.35
	6415	93	be (20MHz)	-6.54	-5.27	-3.53	-3.16	-2.85	-0.33	-3.18	-1	-2.18
	5965	3	be (40MHz)	-4.90	-6.52	-3.53	-3.16	-2.62	-0.33	-2.96	-1	-1.96
	6165	43	be (40MHz)	-5.43	-6.77	-3.53	-3.16	-3.04	-0.33	-3.37	-1	-2.37
	6405	91	be (40MHz)	-5.07	-5.75	-3.53	-3.16	-2.39	-0.33	-2.72	-1	-1.72
	5985	7	be (80MHz)	-4.39	-5.65	-3.53	-3.16	-1.97	-0.33	-2.30	-1	-1.30
	6145	39	be (80MHz)	-4.67	-6.04	-3.53	-3.16	-2.29	-0.33	-2.62	-1	-1.62
	6385	87	be (80MHz)	-5.63	-6.49	-3.53	-3.16	-3.03	-0.33	-3.36	-1	-2.36
	6025	15	be (160MHz)	-9.83	-8.65	-3.53	-3.16	-6.19	-0.33	-6.52	-1	-5.52
	6185	47	be (160MHz)	-9.97	-9.22	-3.53	-3.16	-6.57	-0.33	-6.90	-1	-5.90
	6345	79	be (160MHz)	-9.60	-8.99	-3.53	-3.16	-6.28	-0.33	-6.61	-1	-5.61
Band 6	6105	31	be (320MHz)	-11.45	-10.89	-3.53	-3.16	-8.15	-0.33	-8.48	-1	-7.48
	6265	63	be (320MHz)	-12.81	-11.96	-3.53	-3.16	-9.35	-0.33	-9.69	-1	-8.69
	6435	97	be (20MHz)	-6.34	-4.93	-3.04	-3.16	-2.57	-0.09	-2.66	-1	-1.66
	6475	105	be (20MHz)	-6.58	-5.22	-3.04	-3.16	-2.84	-0.09	-2.93	-1	-1.93
	6515	113	be (20MHz)	-6.14	-5.06	-3.04	-3.16	-2.55	-0.09	-2.64	-1	-1.64
	6445	99	be (40MHz)	-5.73	-5.93	-3.04	-3.16	-2.82	-0.09	-2.91	-1	-1.91
	6485	107	be (40MHz)	-6.04	-5.88	-3.04	-3.16	-2.95	-0.09	-3.04	-1	-2.04
	6525	115	be (40MHz)	-4.72	-4.61	-3.04	-3.16	-1.65	-0.09	-1.74	-1	-0.74
Band 5/6/7	6465	103	be (80MHz)	-6.43	-6.12	-3.04	-3.16	-3.26	-0.09	-3.35	-1	-2.35
	6505	111	be (160MHz)	-9.56	-8.78	-3.04	-3.16	-6.14	-0.09	-6.23	-1	-5.23
	6425	95	be (320MHz)	-12.64	-11.98	-3.04	-3.16	-9.29	-0.09	-9.38	-1	-8.38
	6695	117	be (20MHz)	-5.83	-4.92	-3.04	-3.53	-2.34	-0.27	-2.61	-1	-1.61
	6695	149	be (20MHz)	-5.36	-5.72	-3.04	-3.53	-2.52	-0.27	-2.79	-1	-1.79
	6875	185	be (20MHz)	-4.81	-4.64	-3.04	-3.53	-1.71	-0.27	-1.98	-1	-0.98
	6565	123	be (40MHz)	-4.42	-4.96	-3.04	-3.53	-1.67	-0.27	-1.94	-1	-0.94
	6725	155	be (40MHz)	-4.21	-5.94	-3.04	-3.53	-1.98	-0.27	-2.25	-1	-1.25
	6845	179	be (40MHz)	-4.14	-7.00	-3.04	-3.53	-2.32	-0.27	-2.60	-1	-1.60
	6545	119	be (80MHz)	-5.86	-6.55	-3.04	-3.53	-3.18	-0.27	-3.45	-1	-2.45
	6705	151	be (80MHz)	-6.58	-7.68	-3.04	-3.53	-4.08	-0.27	-4.36	-1	-3.36
	6865	183	be (80MHz)	-6.53	-6.78	-3.04	-3.53	-3.64	-0.27	-3.91	-1	-2.91
Band 7	6665	143	be (160MHz)	-9.65	-9.12	-3.04	-3.53	-6.37	-0.27	-6.64	-1	-5.64
	6825	175	be (160MHz)	-8.03	-8.71	-3.04	-3.53	-5.35	-0.27	-5.62	-1	-4.62
Band 6/7	6585	127	be (320MHz)	-12.17	-11.75	-3.04	-3.53	-8.94	-0.27	-9.21	-1	-8.21
Band 7/8	6745	159	be (320MHz)	-11.62	-11.25	-3.04	-3.53	-8.42	-0.27	-8.69	-1	-7.69
Band 8	6895	189	be (20MHz)	-5.05	-4.40	-3.62	-3.76	-1.70	-0.68	-2.38	-1	-1.38
	6995	209	be (20MHz)	-5.39	-3.57	-3.62	-3.76	-1.38	-0.68	-2.06	-1	-1.06
	7115	233	be (20MHz)	-5.55	-4.75	-3.62	-3.76	-2.12	-0.68	-2.80	-1	-1.80
	6885	187	be (40MHz)	-4.23	-6.47	-3.62	-3.76	-2.19	-0.68	-2.87	-1	-1.87
	6965	211	be (40MHz)	-6.13	-5.02	-3.62	-3.76	-2.53	-0.68	-3.21	-1	-2.21
	7085	227	be (40MHz)	-6.17	-5.83	-3.62	-3.76	-2.98	-0.68	-3.66	-1	-2.66
	6945	199	be (80MHz)	-6.97	-5.59	-3.62	-3.76	-3.21	-0.68	-3.89	-1	-2.89
	7025	215	be (80MHz)	-6.42	-4.94	-3.62	-3.76	-2.61	-0.68	-3.29	-1	-2.29
Band 7/8	6985	207	be (160MHz)	-8.75	-6.82	-3.62	-3.76	-4.67	-0.68	-5.35	-1	-4.35
	6905	191	be (320MHz)	-11.00	-11.03	-3.04	-3.53	-8.01	-0.27	-8.28	-1	-7.28


Table 7-38. MIMO e.i.r.p. Conducted Power Spectral Density Measurements (Full Tones) – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 62 of 145

7.4.1 MIMO Antenna-1 Power Spectral Density Measurements

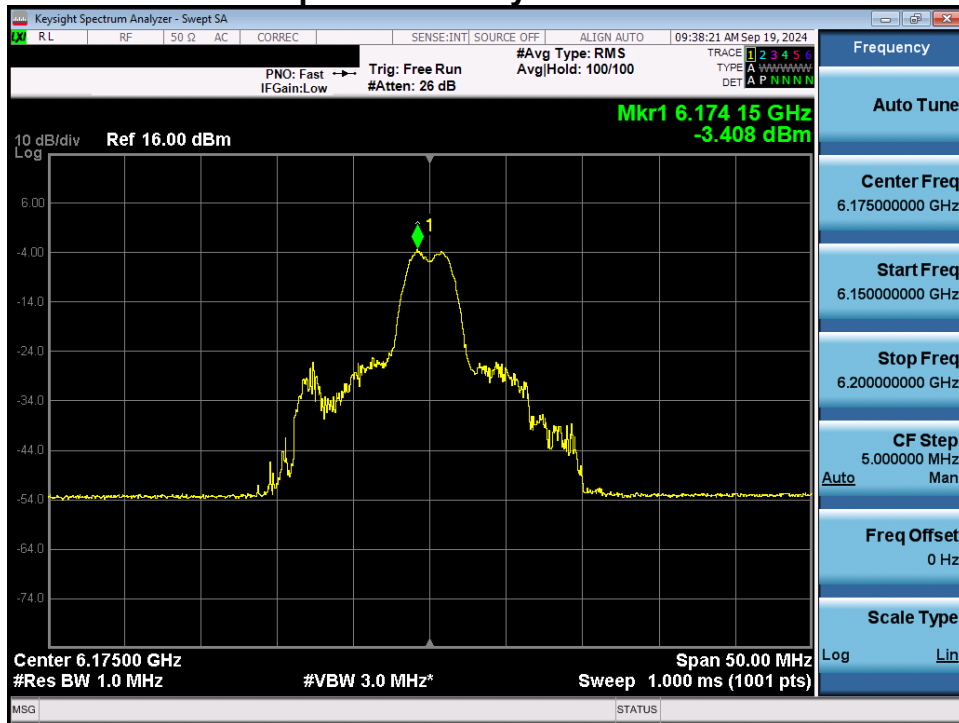


Plot 7-33. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

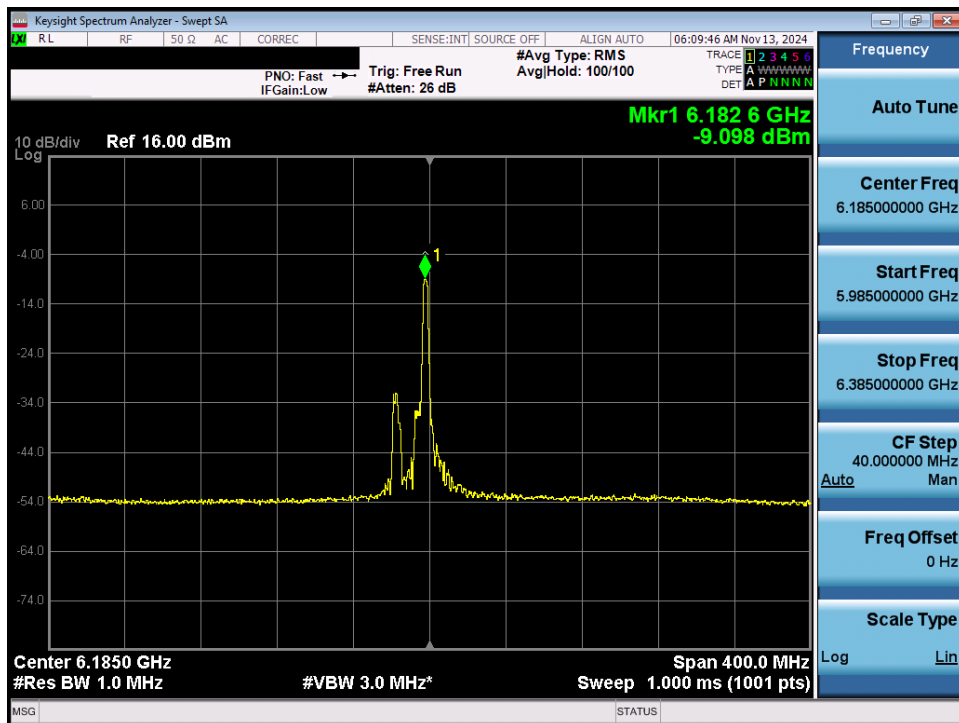


Plot 7-34. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 63 of 145

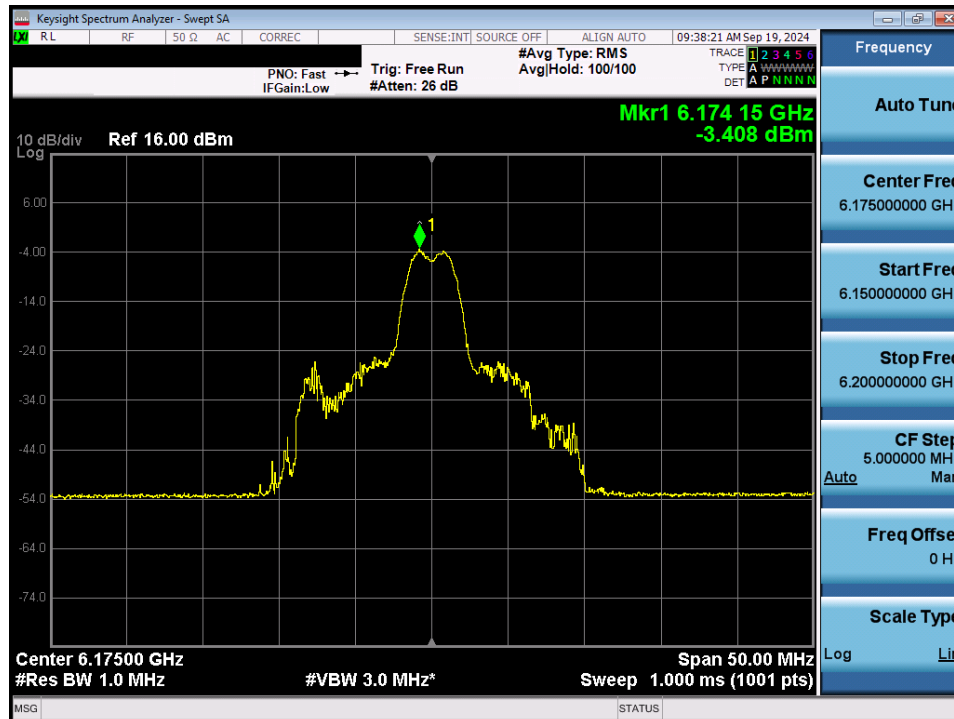


Plot 7-35. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

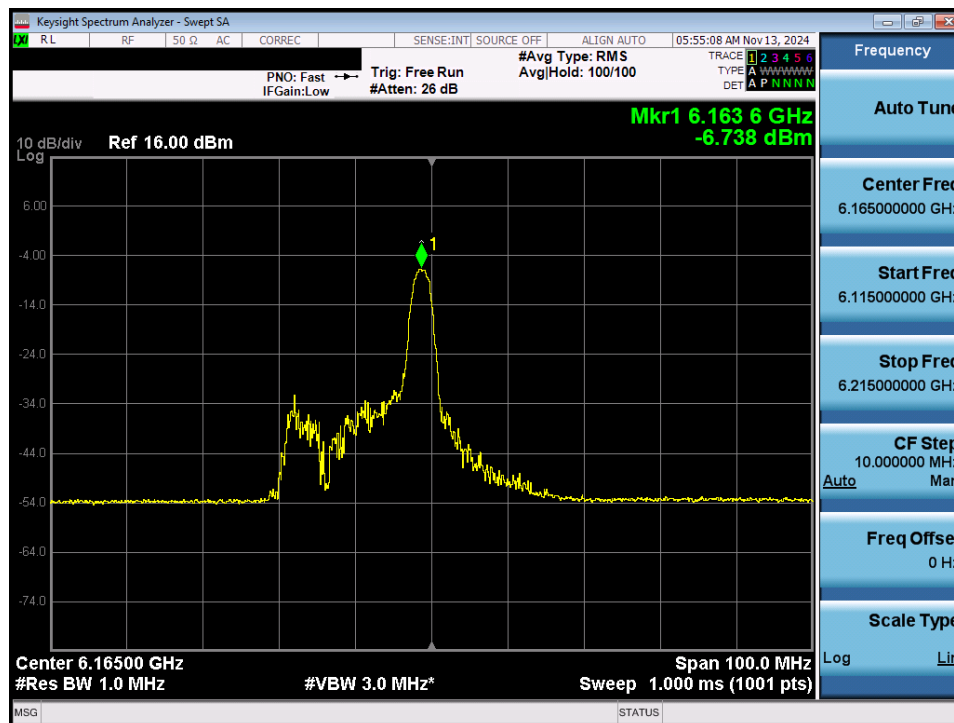


Plot 7-36. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 64 of 145

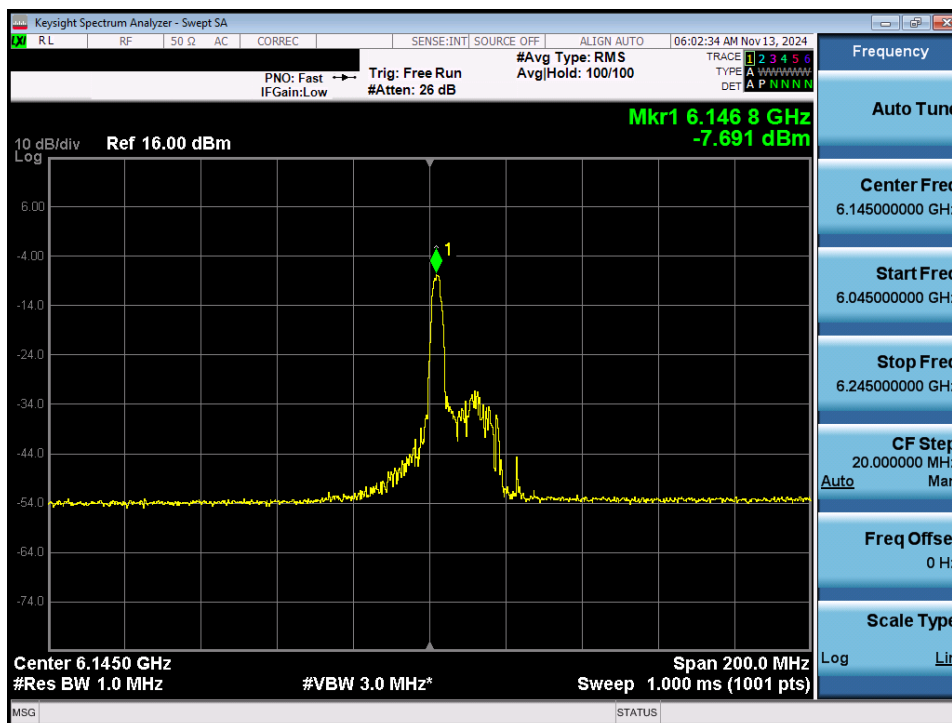


Plot 7-37. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

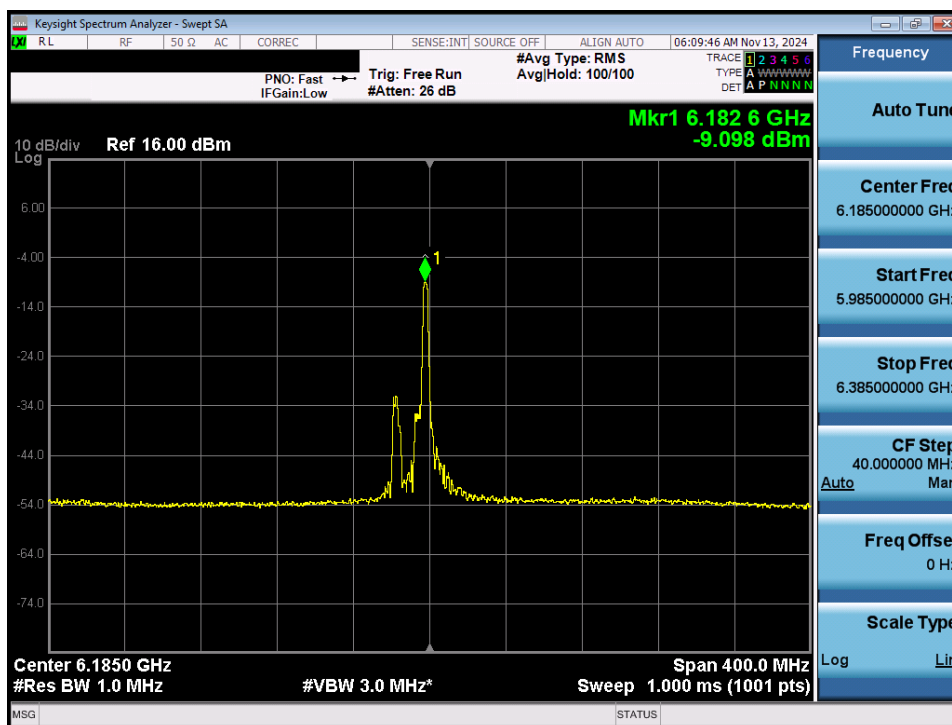


Plot 7-38. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 65 of 145

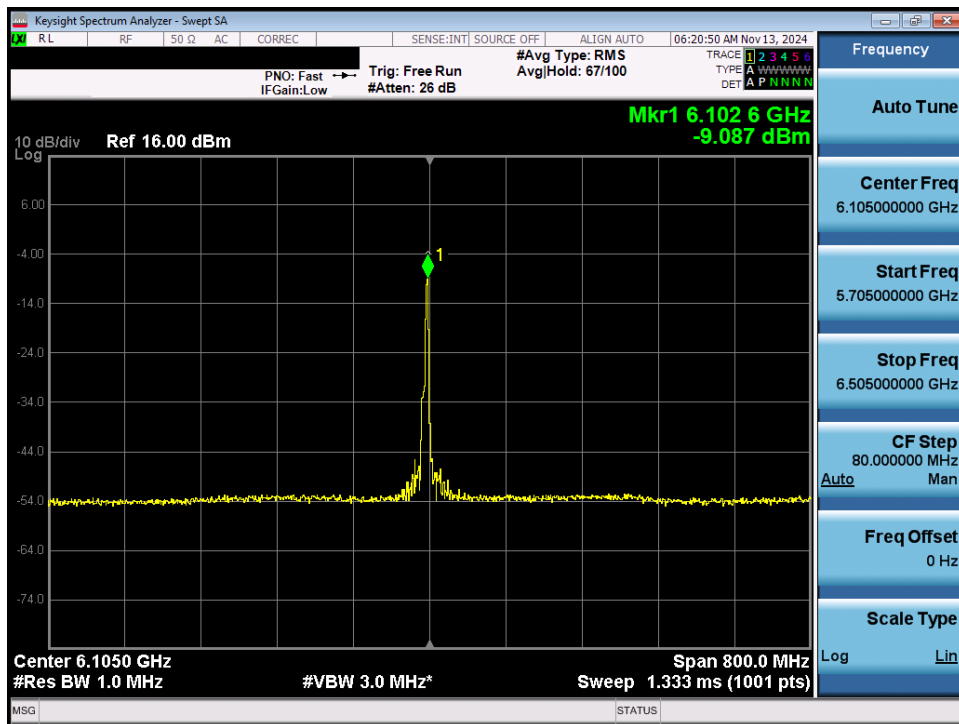


Plot 7-39. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) – LPI

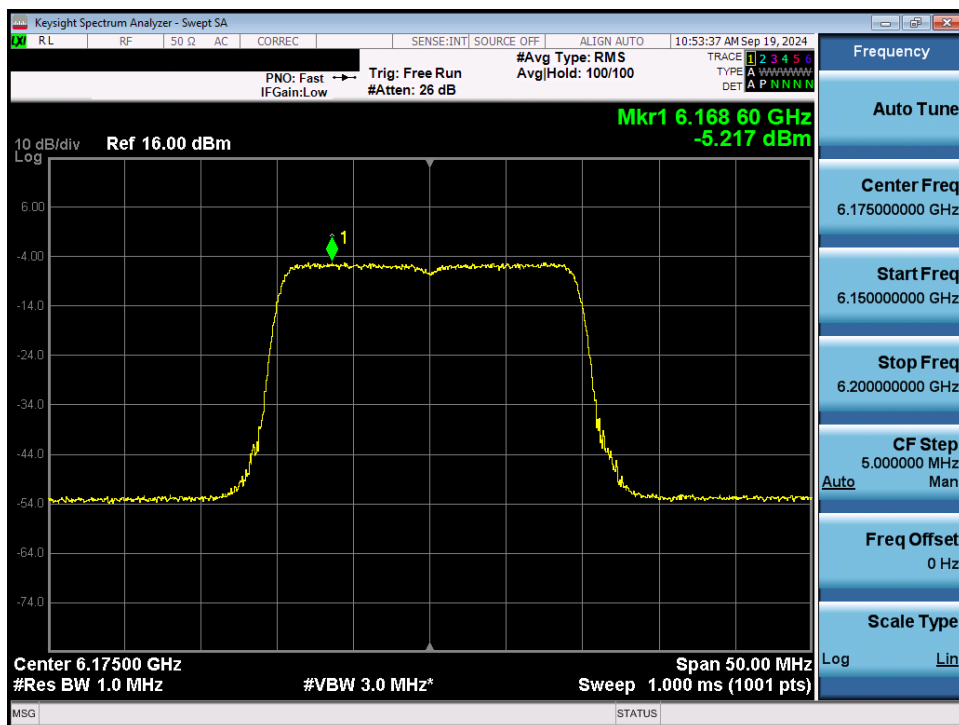


Plot 7-40. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 66 of 145

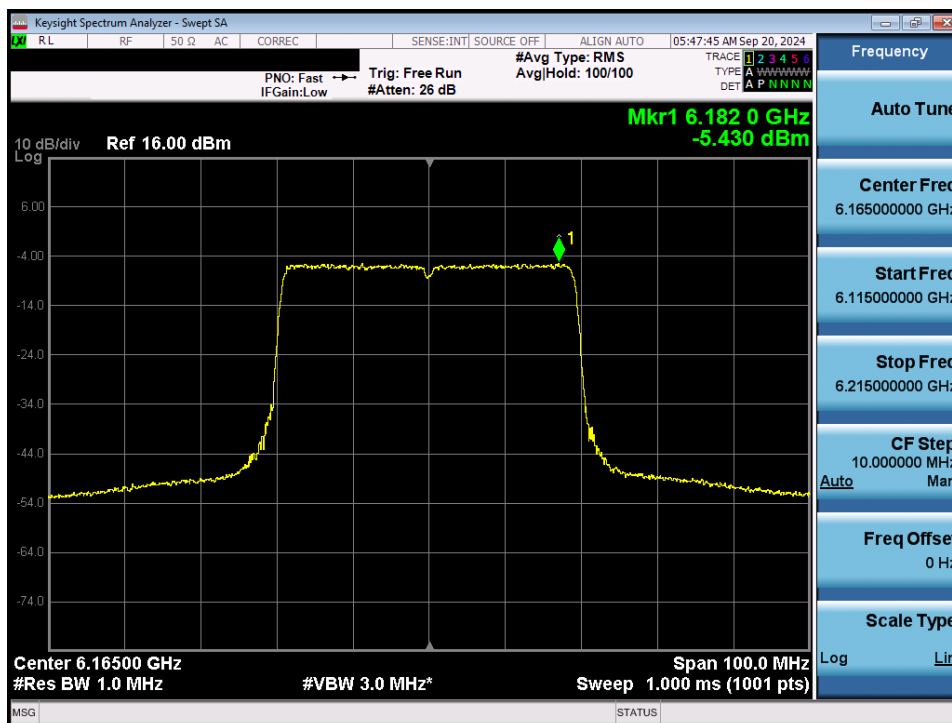


Plot 7-41. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

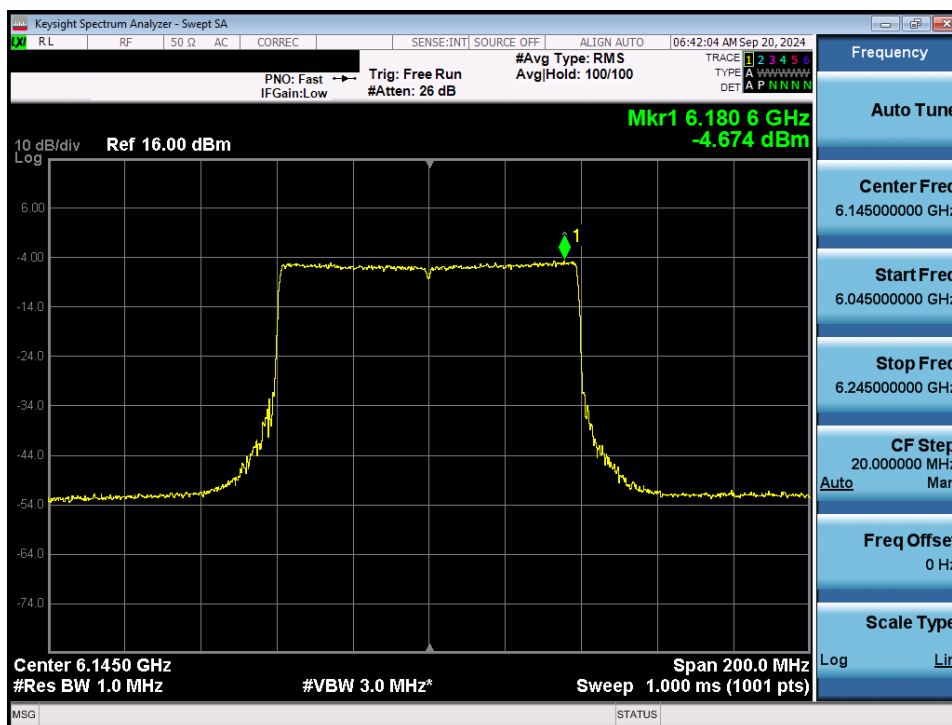


Plot 7-42. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 67 of 145

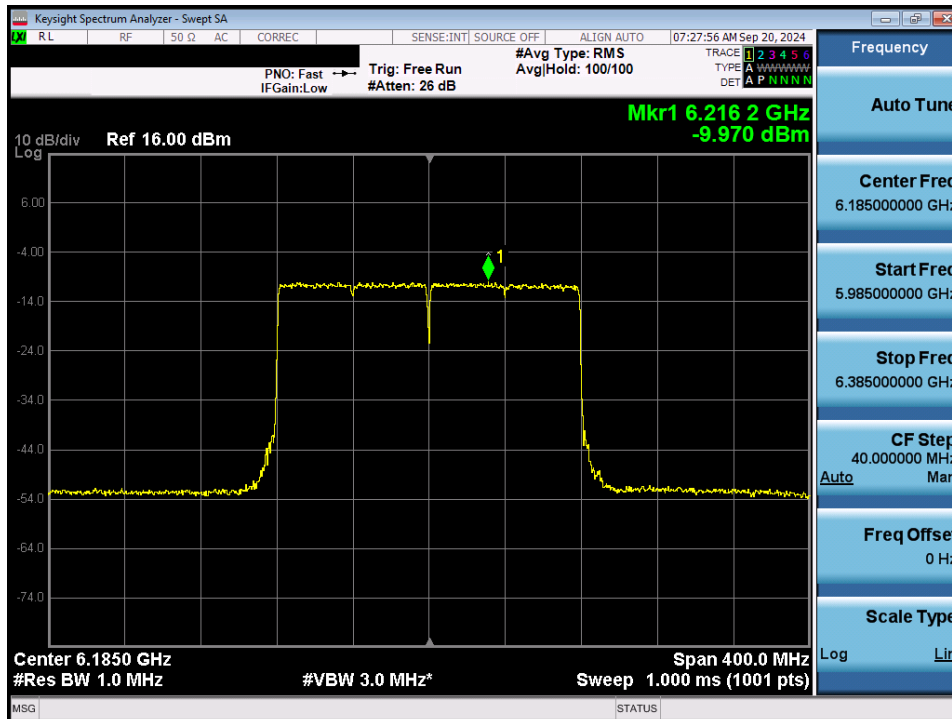


Plot 7-43. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

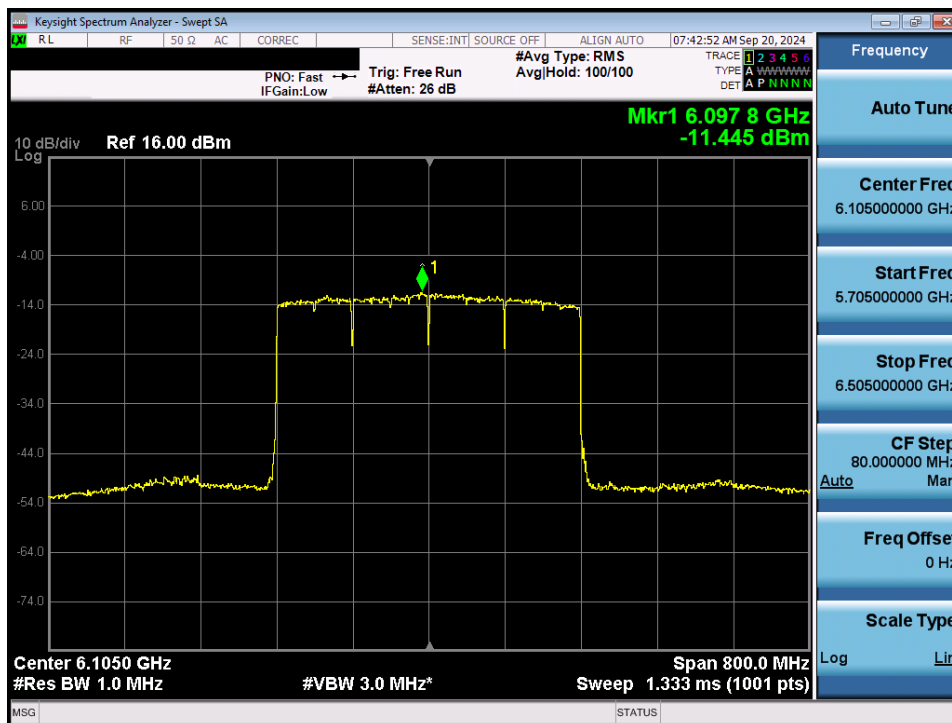


Plot 7-44. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 68 of 145

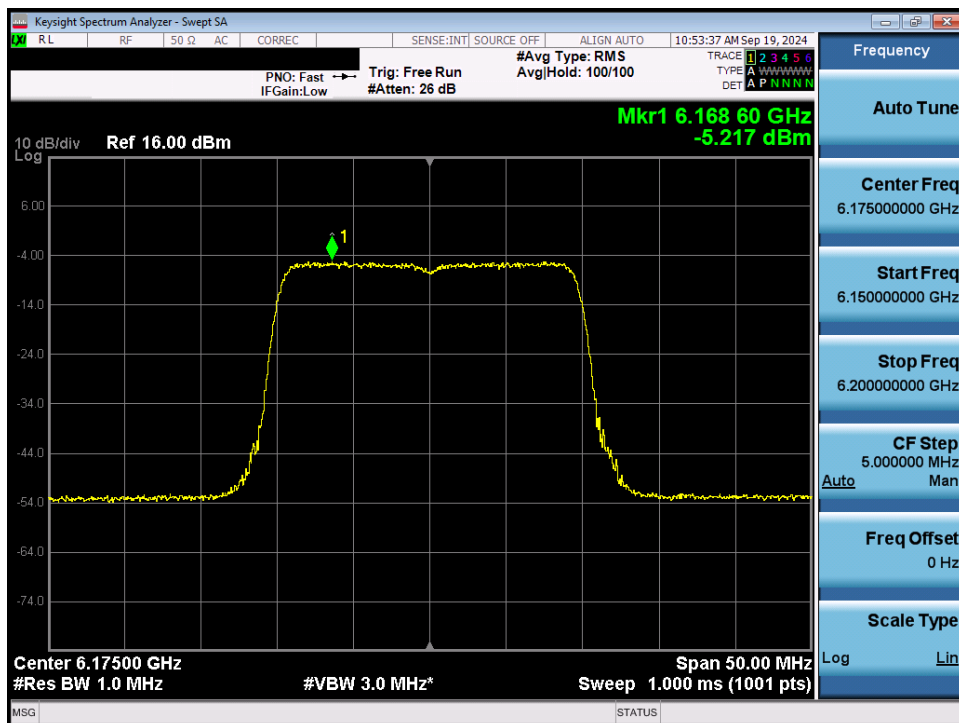


Plot 7-45. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

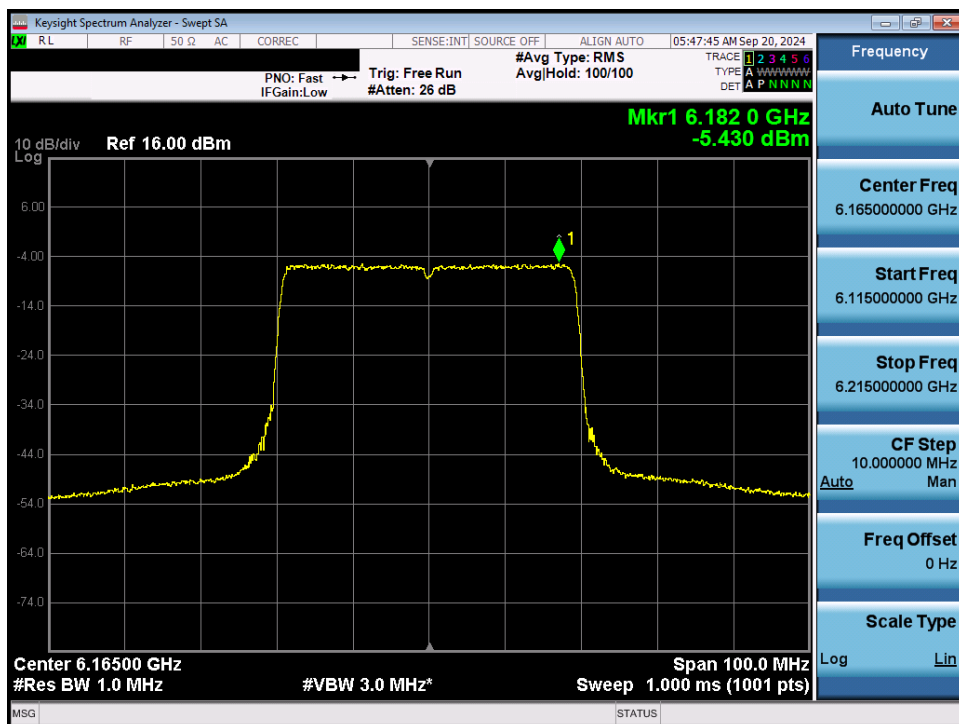


Plot 7-46. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 69 of 145

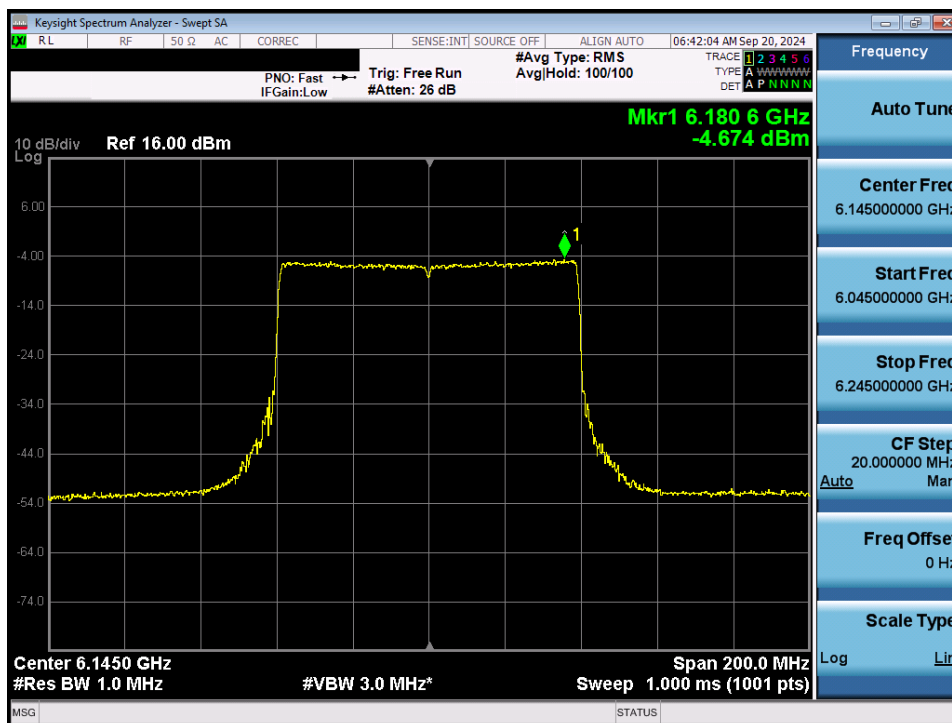


Plot 7-47. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

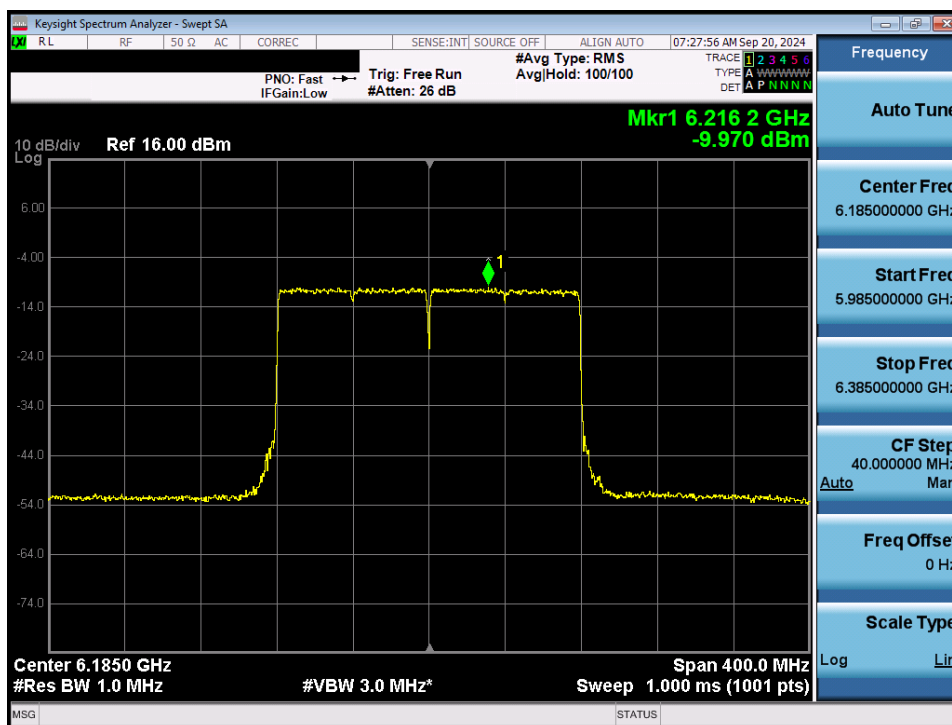

Plot 7-48. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI


FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 70 of 145

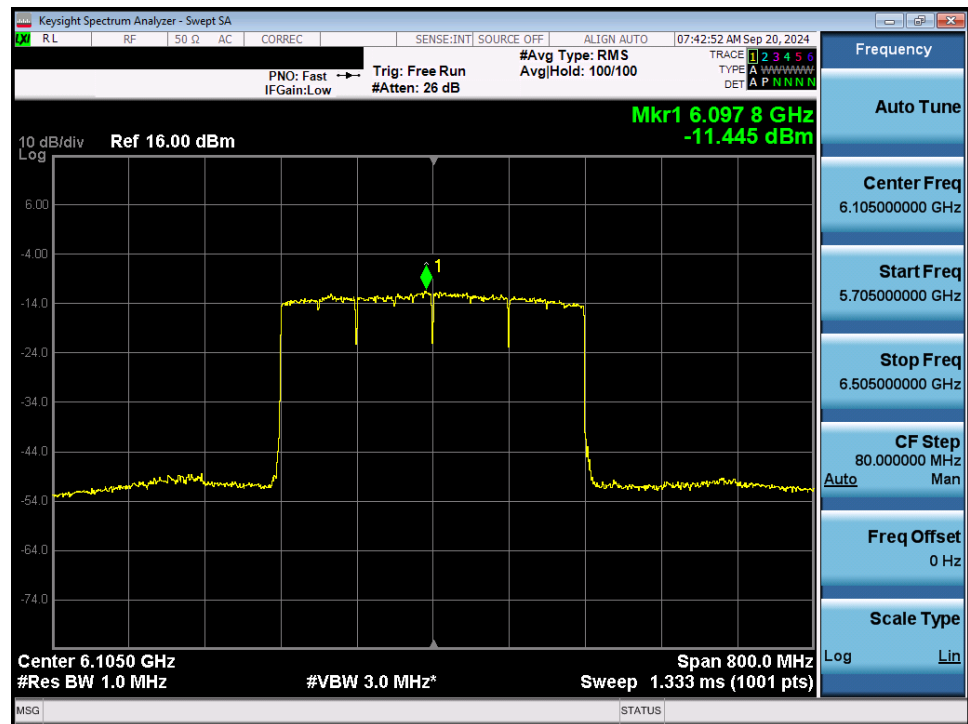


Plot 7-49. Power Spectral Density Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 71 of 145

7.4.2 MIMO Antenna-2 Power Spectral Density Measurements

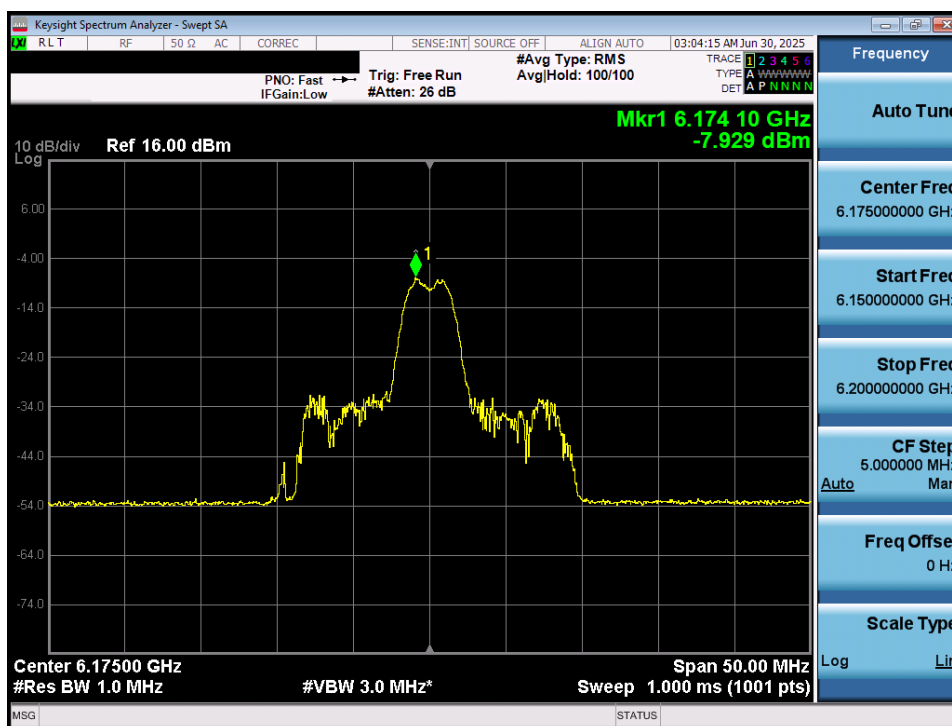


Plot 7-50. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

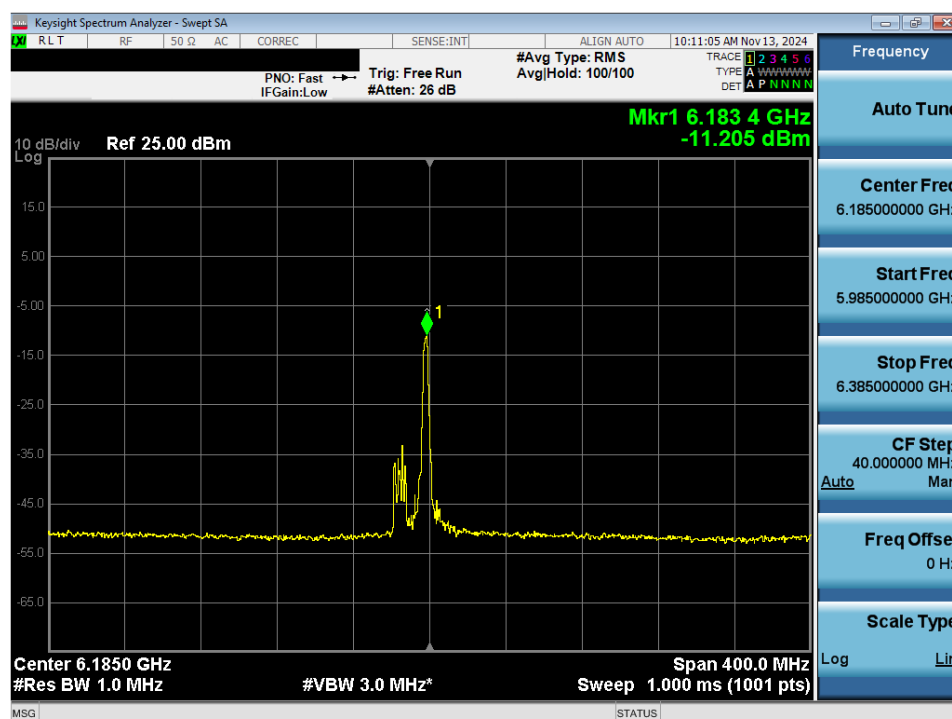


Plot 7-51. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 72 of 145

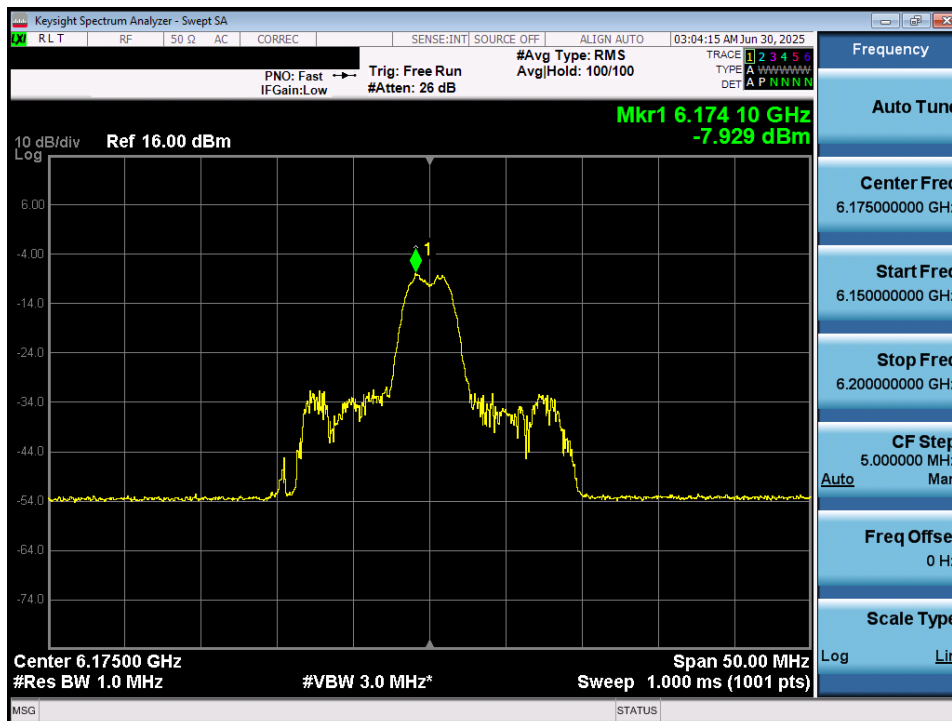


Plot 7-52. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

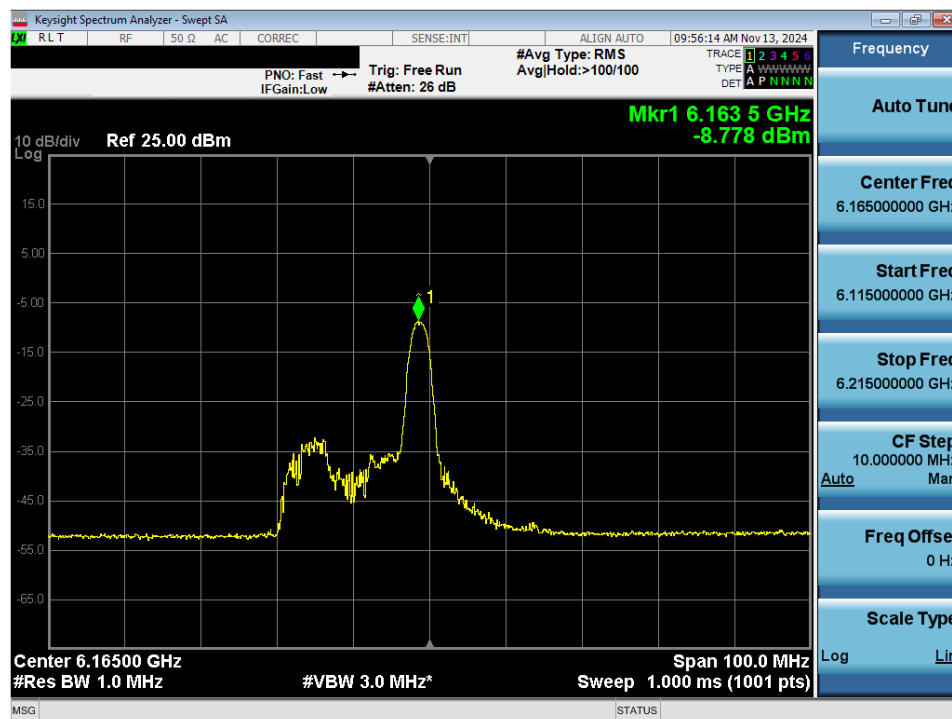


Plot 7-53. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 73 of 145

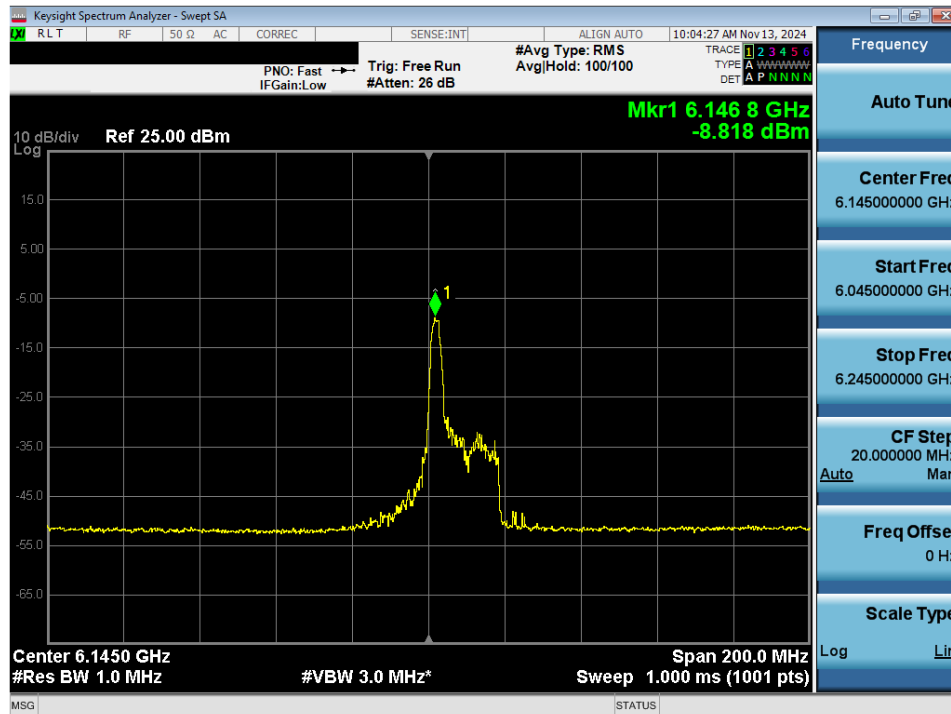


Plot 7-54. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

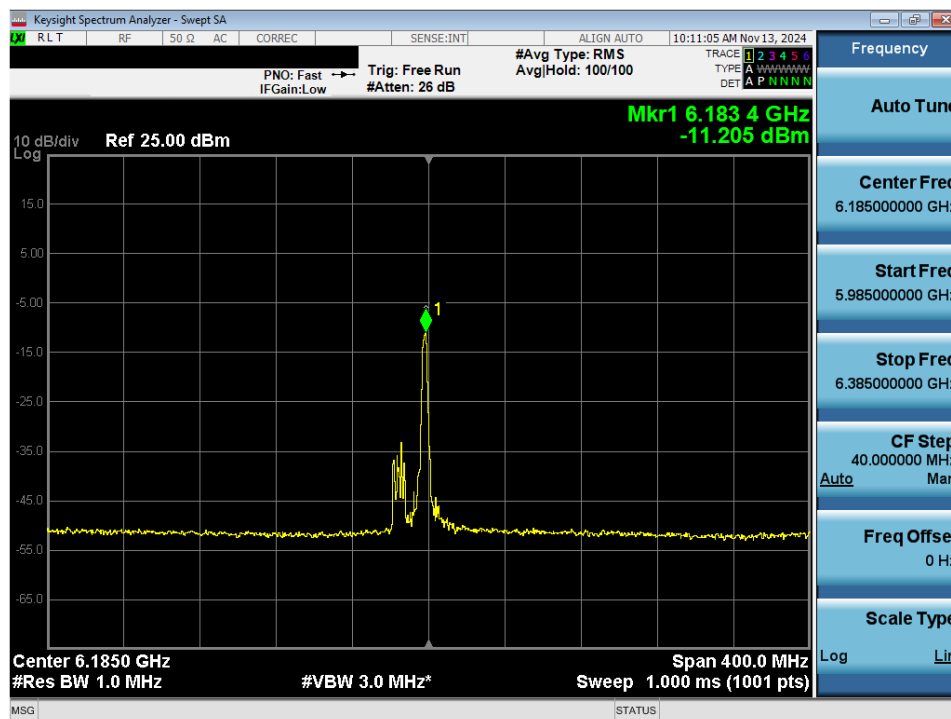


Plot 7-55. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 74 of 145

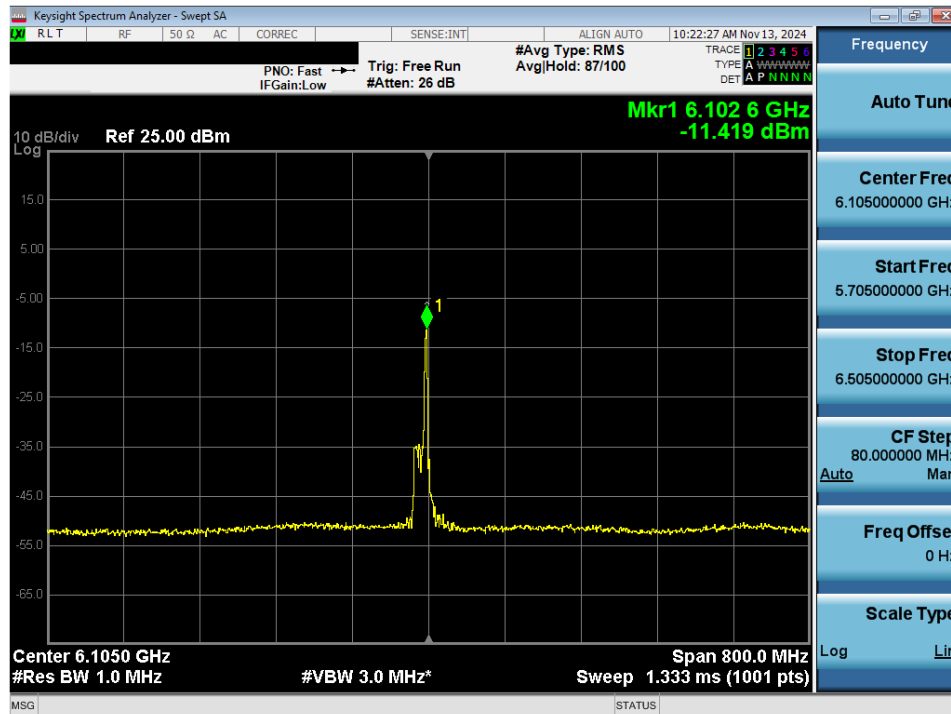


Plot 7-56. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

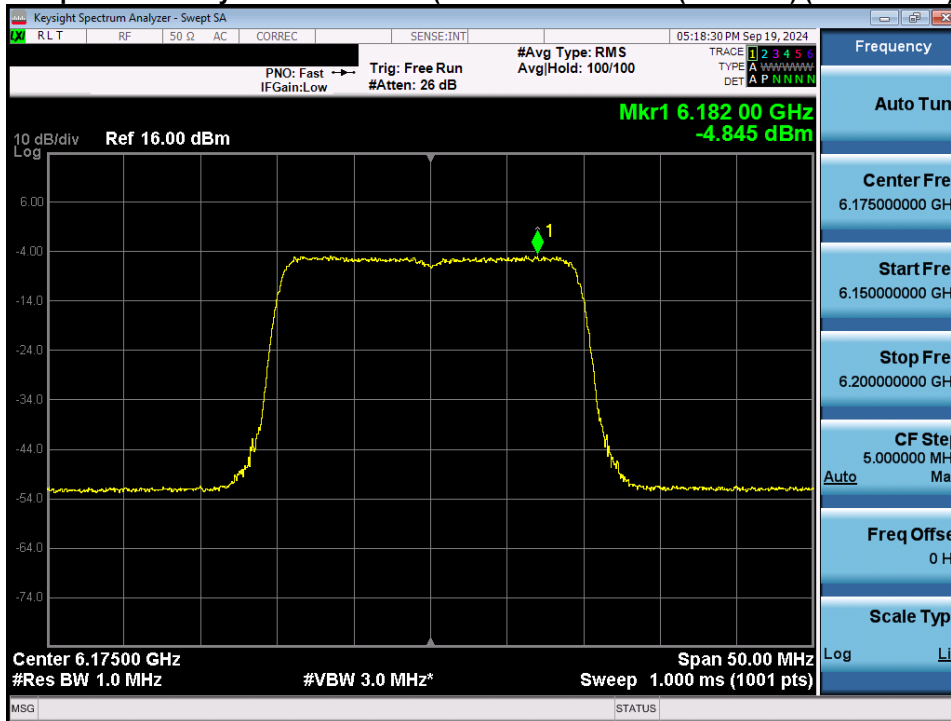


Plot 7-57. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 75 of 145

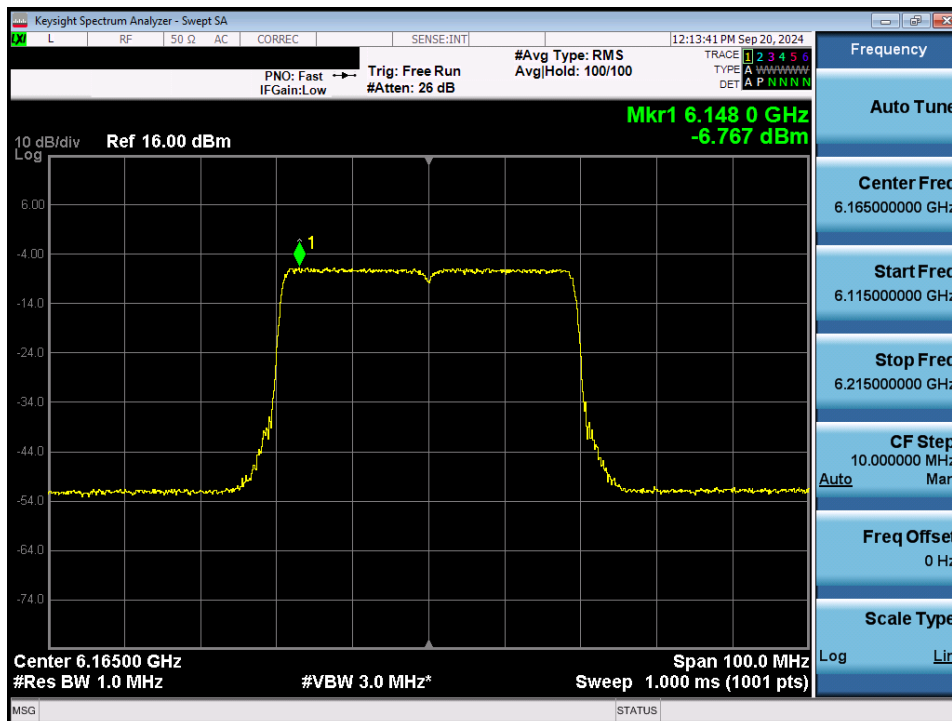


Plot 7-58. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

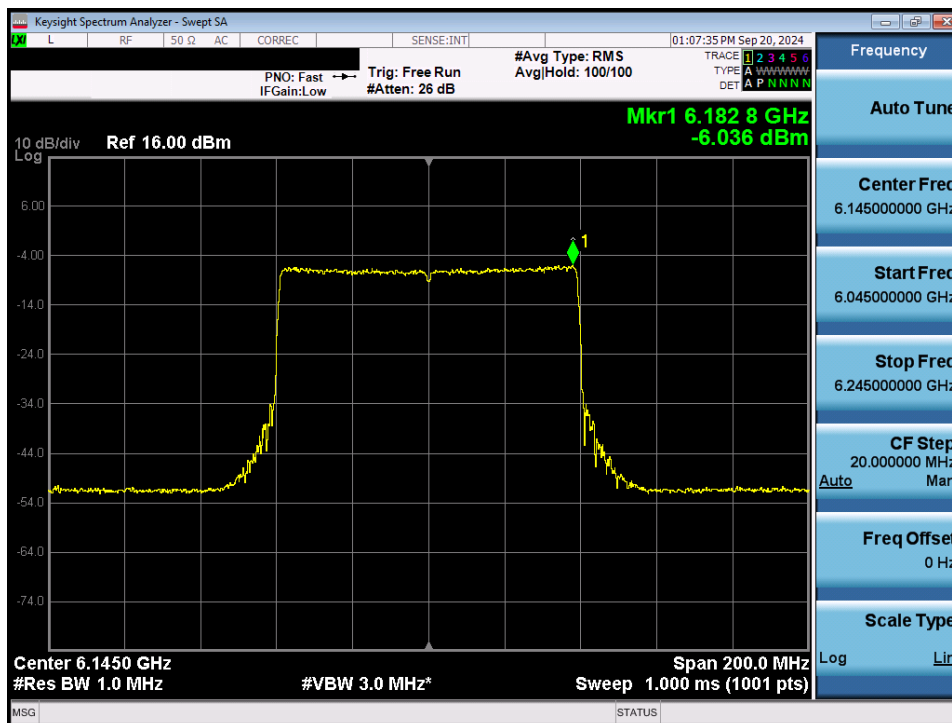


Plot 7-59. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 76 of 145

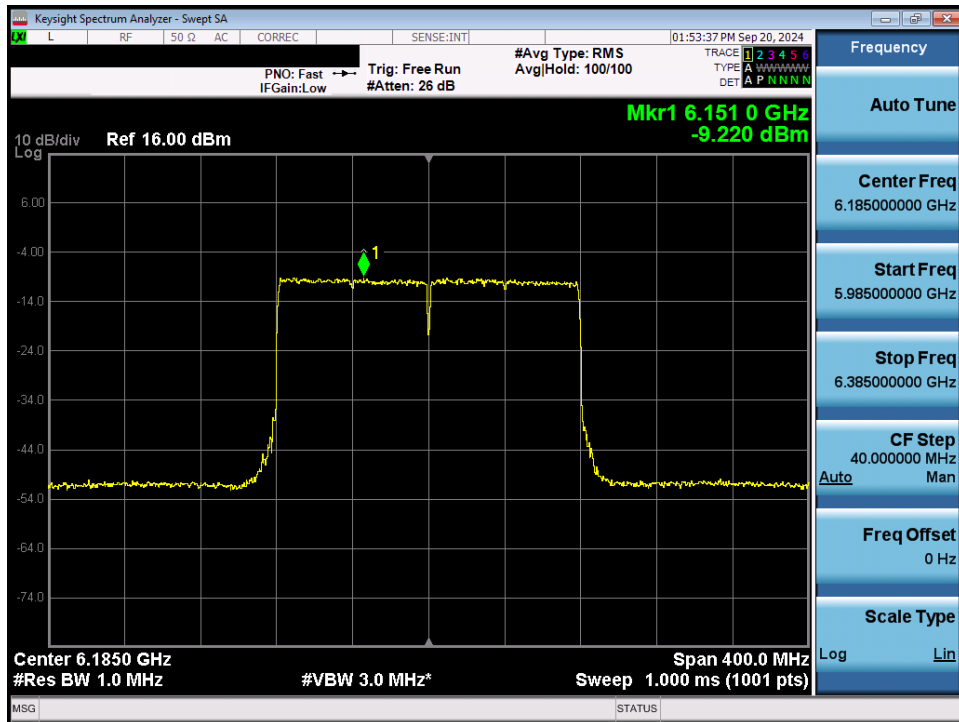


Plot 7-60. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

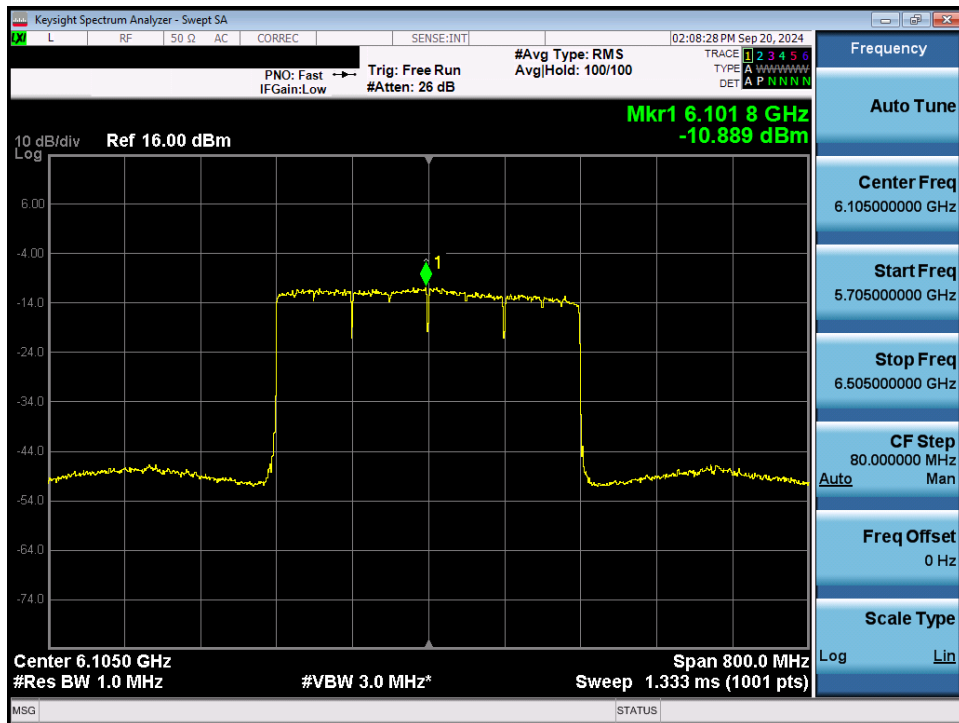


Plot 7-61. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 77 of 145

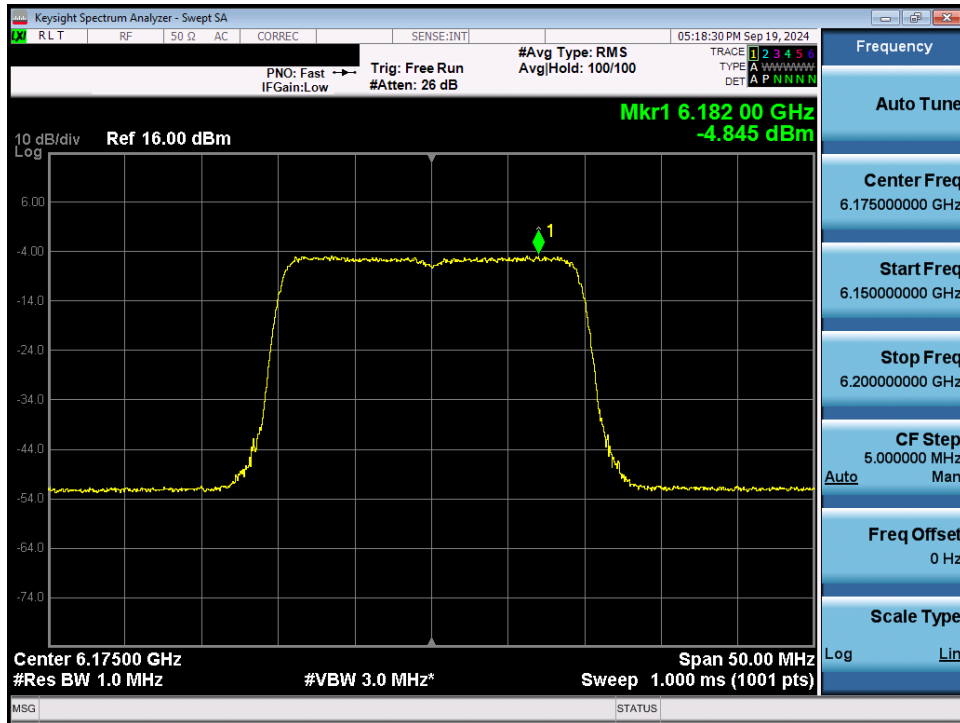


Plot 7-62. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

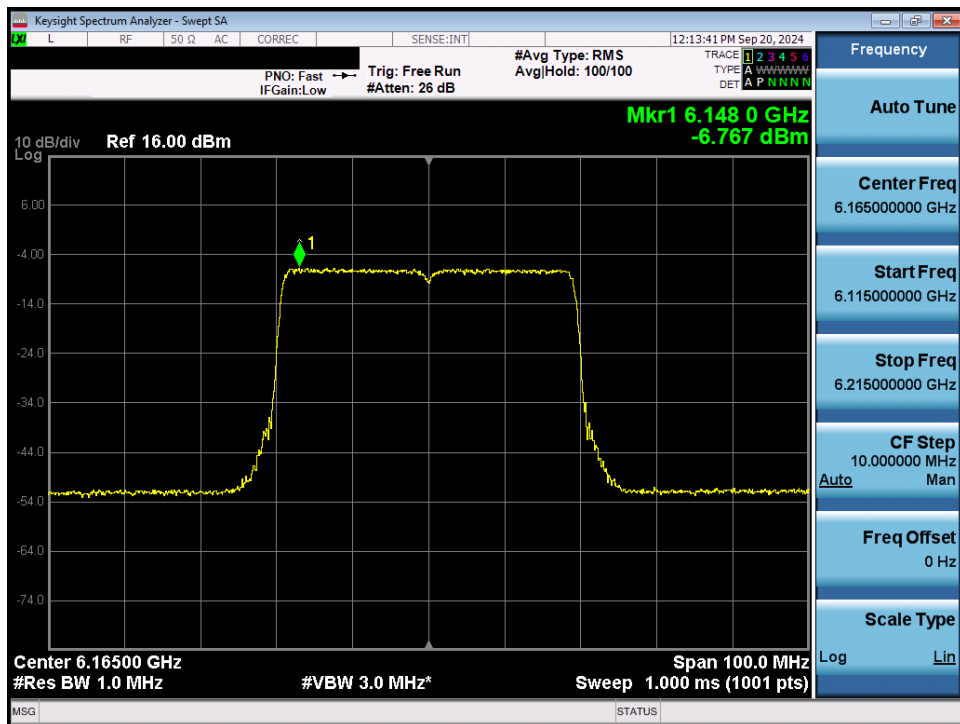


Plot 7-63. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 78 of 145

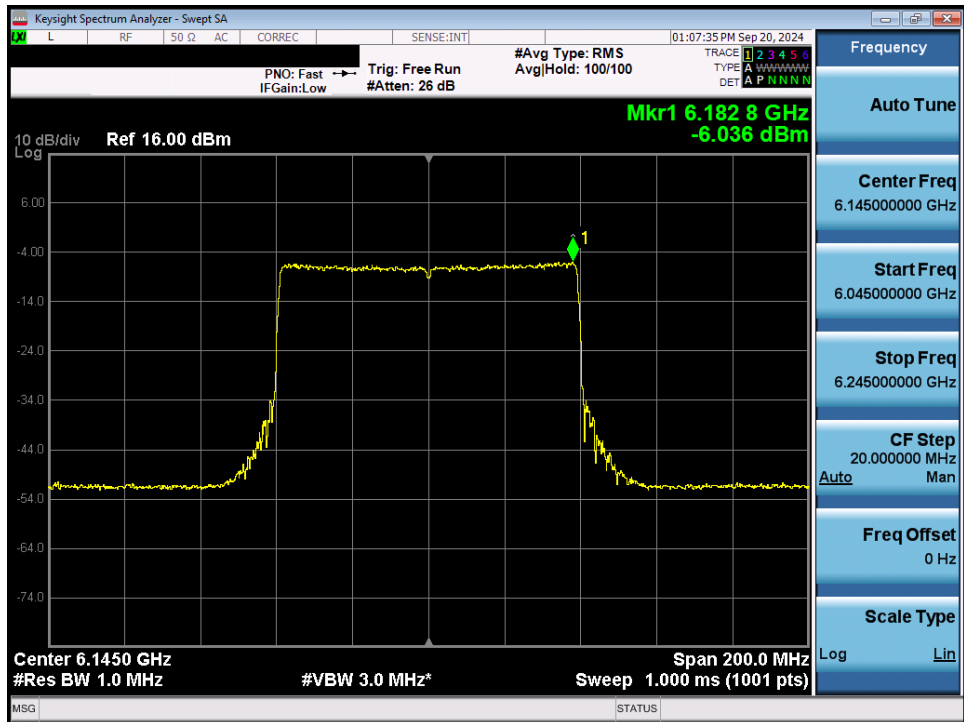


Plot 7-64. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

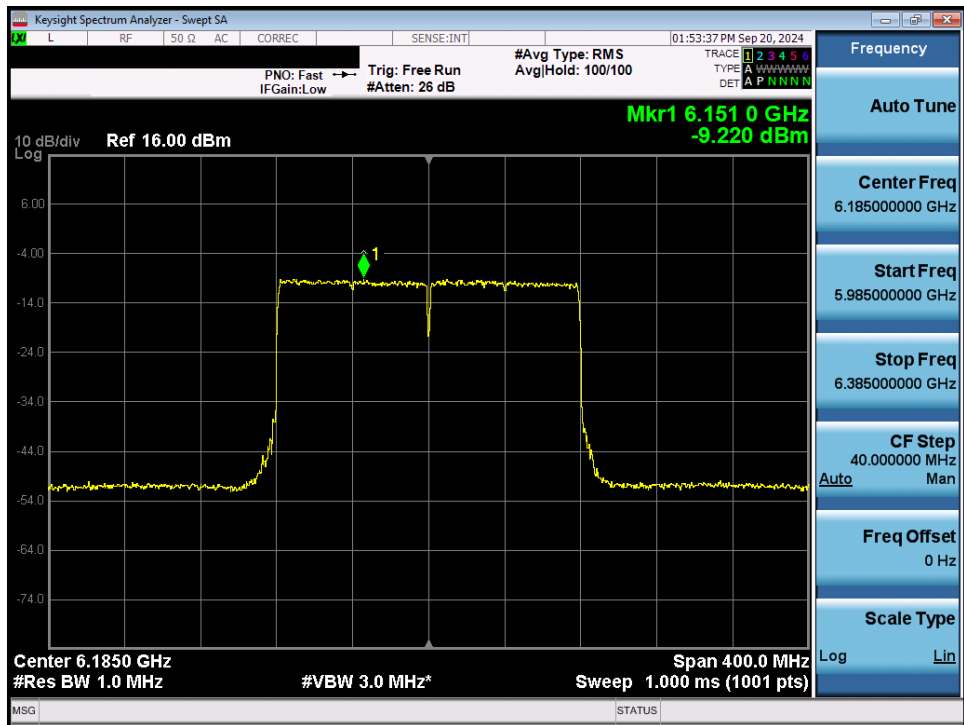

Plot 7-65. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 79 of 145

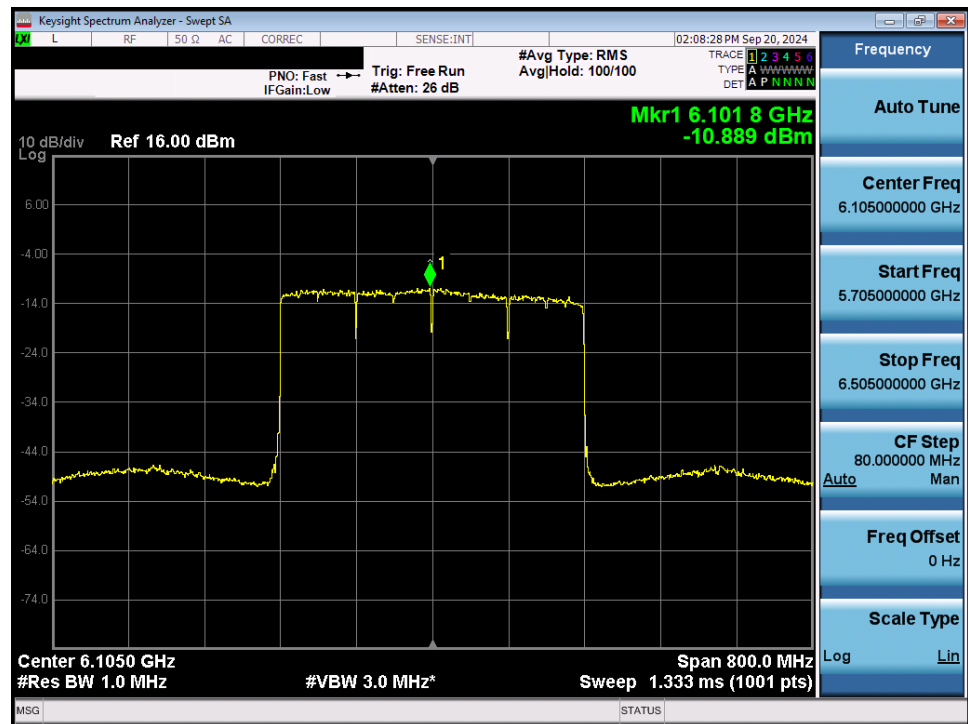

Plot 7-66. Power Spectral Density Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 80 of 145

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5935MHz in 802.11be (20MHz BW) mode, the average conducted power spectral density was measured to be -2.28 dBm for Antenna-1 and -0.74 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-2.28 \text{ dBm} + -0.74 \text{ dBm}) = (0.591 \text{ mW} + 0.844 \text{ mW}) = 1.435 \text{ mW} = 1.57 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5935 MHz in 802.11be (20MHz BW) mode, the average MIMO power density was calculated to be 1.57 dBm with directional gain of -2.79 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$1.57 \text{ dBm} + -2.79 \text{ dBi} = -1.22 \text{ dBm}$$

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 81 of 145

7.5 In-Band Emissions

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

Test Procedure Used

KDB 987594 D02

Test Settings

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 82 of 145

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 83 of 145

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	be (20MHz)	PASS	PASS
	6175	45	be (20MHz)	PASS	PASS
	6415	93	be (20MHz)	PASS	PASS
	5965	3	be (40MHz)	PASS	PASS
	6165	43	be (40MHz)	PASS	PASS
	6405	91	be (40MHz)	PASS	PASS
	5985	7	be (80MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6385	87	be (80MHz)	PASS	PASS
	6025	15	be (160MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6345	79	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 6	6435	97	be (20MHz)	PASS	PASS
	6475	105	be (20MHz)	PASS	PASS
	6515	113	be (20MHz)	PASS	PASS
	6445	99	be (40MHz)	PASS	PASS
	6485	107	be (40MHz)	PASS	PASS
	6525	115	be (40MHz)	PASS	PASS
	6465	103	be (80MHz)	PASS	PASS
	6505	111	be (160MHz)	PASS	PASS
Band 5/6/7	6425	95	be (320MHz)	PASS	PASS
Band 7	6695	117	be (20MHz)	PASS	PASS
	6695	149	be (20MHz)	PASS	PASS
	6875	185	be (20MHz)	PASS	PASS
	6565	123	be (40MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6845	179	be (40MHz)	PASS	PASS
	6545	119	be (80MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6865	183	be (80MHz)	PASS	PASS
	6665	143	be (160MHz)	PASS	PASS
Band 6/7	6825	175	be (160MHz)	PASS	PASS
	6585	127	be (320MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS
Band 8	6895	189	be (20MHz)	PASS	PASS
	6995	209	be (20MHz)	PASS	PASS
	7115	233	be (20MHz)	PASS	PASS
	6885	187	be (40MHz)	PASS	PASS
	6965	211	be (40MHz)	PASS	PASS
	7085	227	be (40MHz)	PASS	PASS
	6945	199	be (80MHz)	PASS	PASS
	7025	215	be (80MHz)	PASS	PASS
Band 7/8	6985	207	be (160MHz)	PASS	PASS
	6985	191	be (320MHz)	PASS	PASS

Table 7-39. In Band Emissions Results Measurements (26 Tones) – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 84 of 145

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	be (20MHz)	PASS	PASS
	6175	45	be (20MHz)	PASS	PASS
	6415	93	be (20MHz)	PASS	PASS
	5965	3	be (40MHz)	PASS	PASS
	6165	43	be (40MHz)	PASS	PASS
	6405	91	be (40MHz)	PASS	PASS
	5985	7	be (80MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6385	87	be (80MHz)	PASS	PASS
	6025	15	be (160MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6345	79	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
	6265	63	be (320MHz)	PASS	PASS
Band 6	6435	97	be (20MHz)	PASS	PASS
	6475	105	be (20MHz)	PASS	PASS
	6515	113	be (20MHz)	PASS	PASS
	6445	99	be (40MHz)	PASS	PASS
	6485	107	be (40MHz)	PASS	PASS
	6525	115	be (40MHz)	PASS	PASS
	6465	103	be (80MHz)	PASS	PASS
	6505	111	be (160MHz)	PASS	PASS
Band 5/6/7	6425	95	be (320MHz)	PASS	PASS
Band 7	6695	117	be (20MHz)	PASS	PASS
	6695	149	be (20MHz)	PASS	PASS
	6875	185	be (20MHz)	PASS	PASS
	6565	123	be (40MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6845	179	be (40MHz)	PASS	PASS
	6545	119	be (80MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6865	183	be (80MHz)	PASS	PASS
	6665	143	be (160MHz)	PASS	PASS
Band 6/7	6585	127	be (320MHz)	PASS	PASS
	6745	159	be (320MHz)	PASS	PASS
Band 8	6895	189	be (20MHz)	PASS	PASS
	6995	209	be (20MHz)	PASS	PASS
	7115	233	be (20MHz)	PASS	PASS
	6885	187	be (40MHz)	PASS	PASS
	6965	211	be (40MHz)	PASS	PASS
	7085	227	be (40MHz)	PASS	PASS
	6945	199	be (80MHz)	PASS	PASS
	7025	215	be (80MHz)	PASS	PASS
	6985	207	be (160MHz)	PASS	PASS
	6985	191	be (320MHz)	PASS	PASS

Table 7-40. In Band Emissions Results Measurements (Full Tones) – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 85 of 145

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	6175	45	be (20MHz)	PASS	PASS
	6145	39	be (80MHz)	PASS	PASS
	6185	47	be (160MHz)	PASS	PASS
	6105	31	be (320MHz)	PASS	PASS
Band 6	6475	105	be (20MHz)	PASS	PASS
	6465	103	be (80MHz)	PASS	PASS
	6505	111	be (160MHz)	PASS	PASS
Band 5/6/7	6425	95	be (320MHz)	PASS	PASS
Band 7	6695	149	be (20MHz)	PASS	PASS
	6725	155	be (40MHz)	PASS	PASS
	6705	151	be (80MHz)	PASS	PASS
	6825	175	be (160MHz)	PASS	PASS
Band 6/7	6585	127	be (320MHz)	PASS	PASS
Band 7/8	6745	159	be (320MHz)	PASS	PASS
Band 8	6995	209	be (20MHz)	PASS	PASS
	6965	211	be (40MHz)	PASS	PASS
	6945	199	be (80MHz)	PASS	PASS
	6985	207	be (160MHz)	PASS	PASS
Band 7/8	6905	191	be (320MHz)	PASS	PASS

Table 7-41. In Band Emissions Results Measurements (MRU) – LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 86 of 145

7.5.1 MIMO Antenna-1 In-Band Emission Measurements




Plot 7-67. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI




Plot 7-68. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 87 of 145

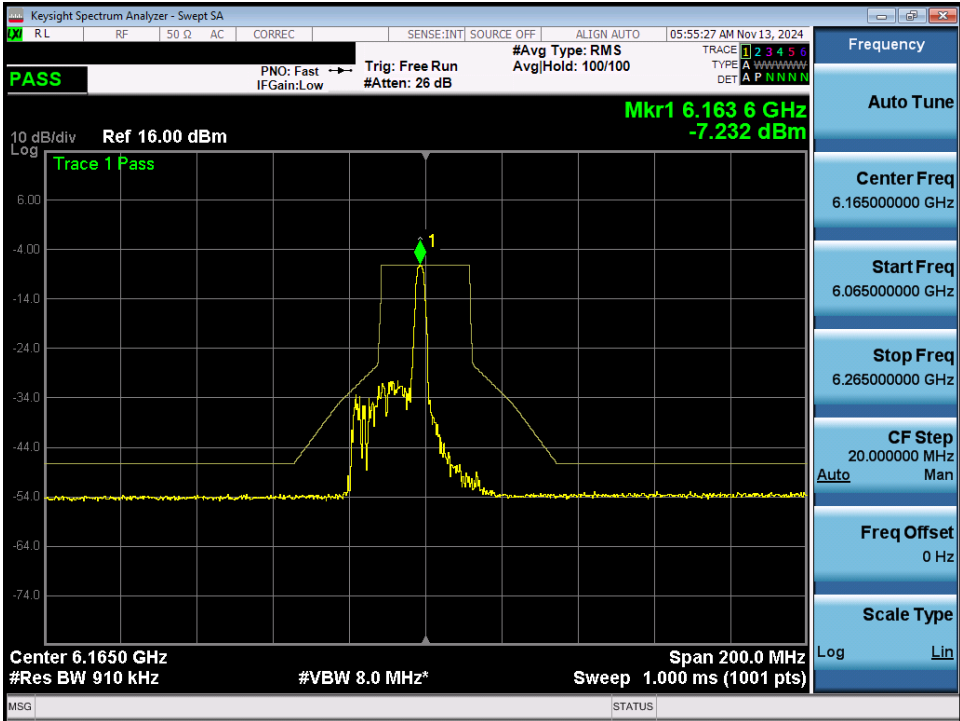


Plot 7-69. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

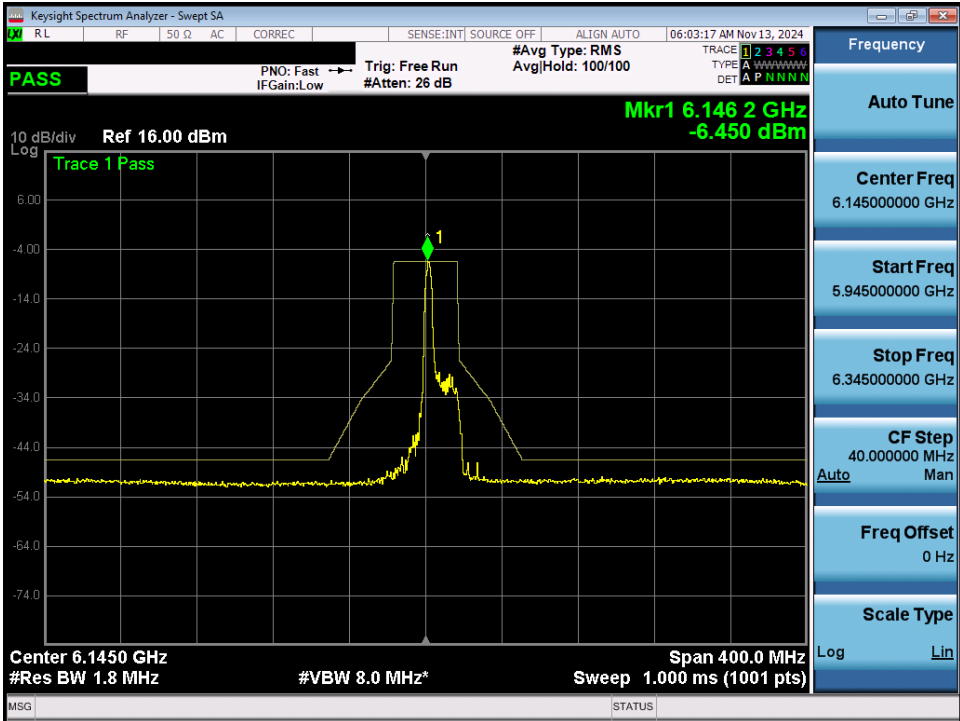


Plot 7-70. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 88 of 145

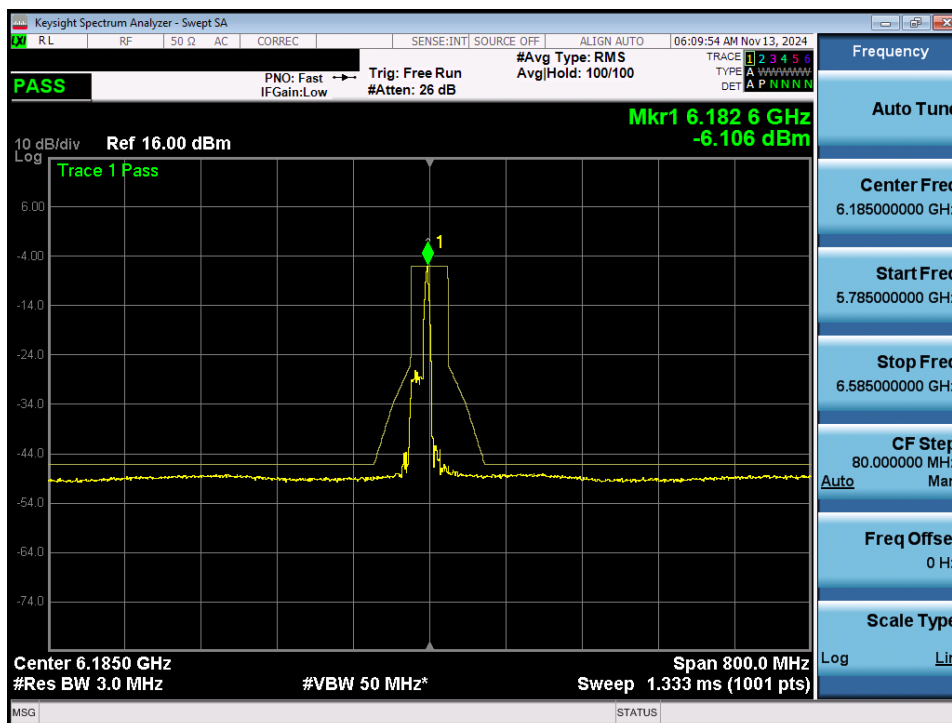


Plot 7-71. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

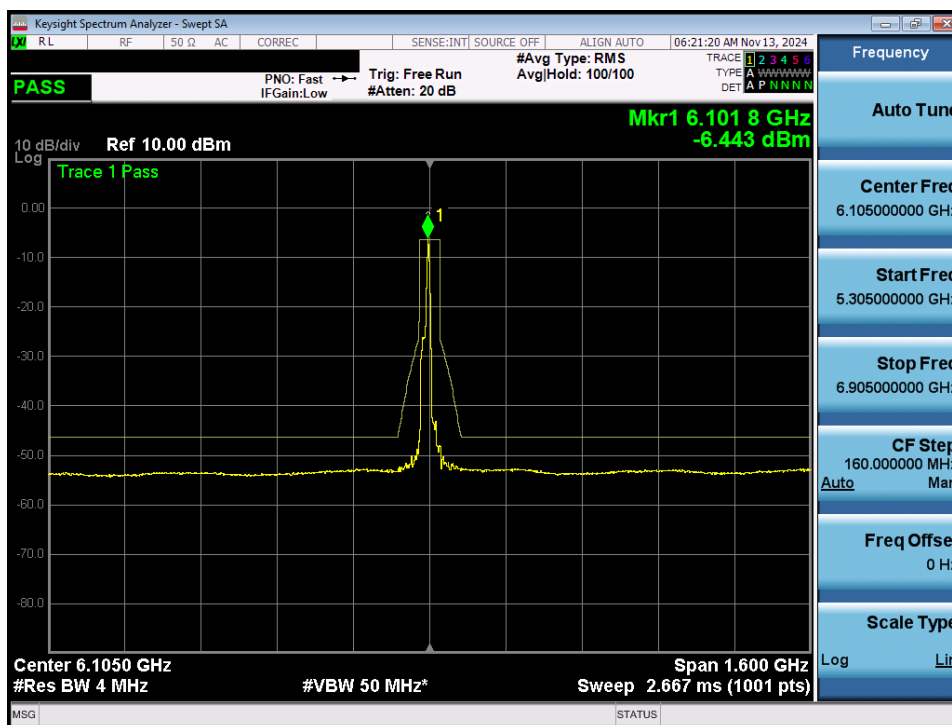


Plot 7-72. In Band Emissions Plot MIMO ANT1 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 89 of 145

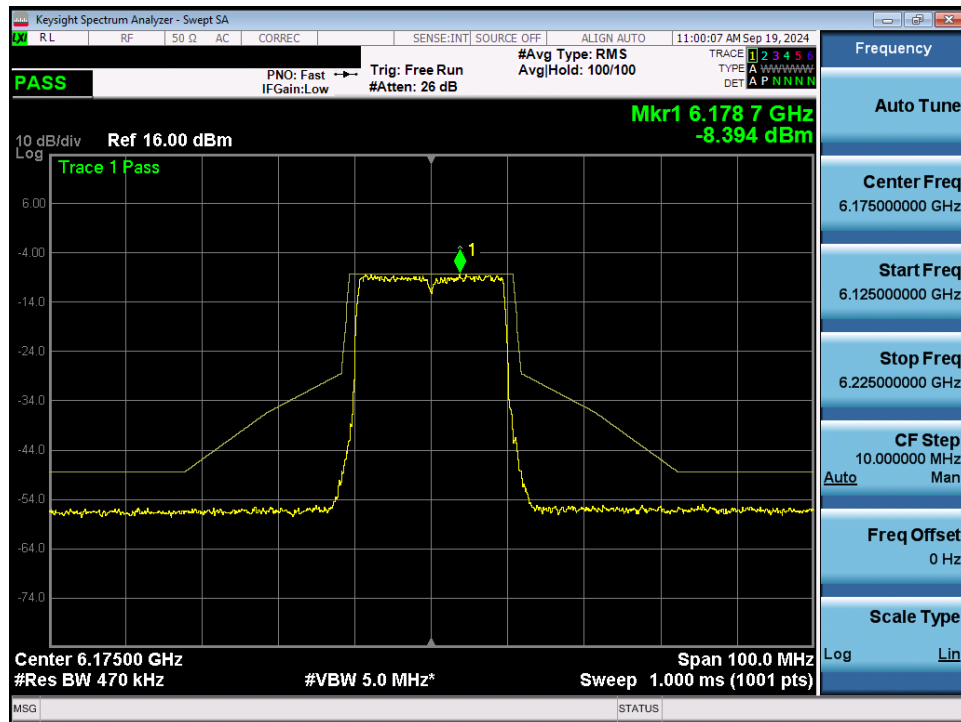


Plot 7-73. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

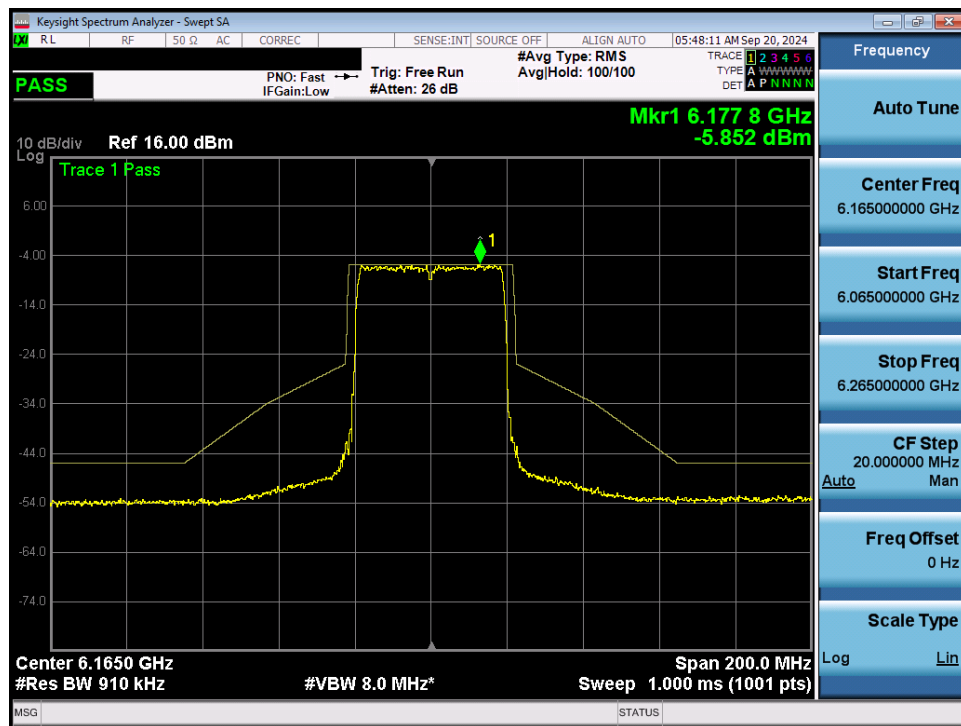


Plot 7-74. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 90 of 145

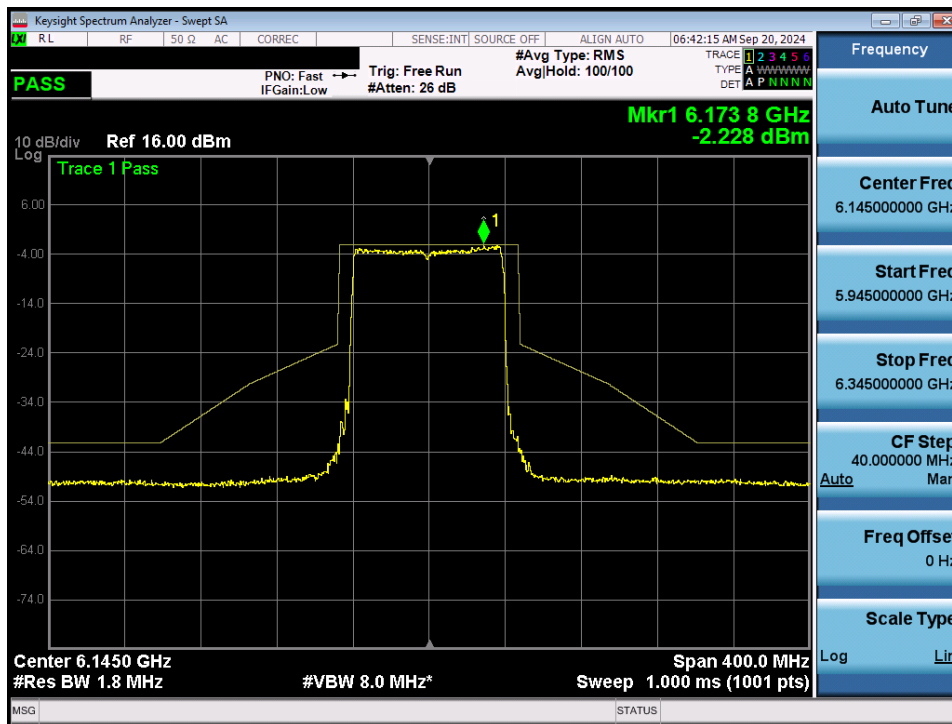


Plot 7-75. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

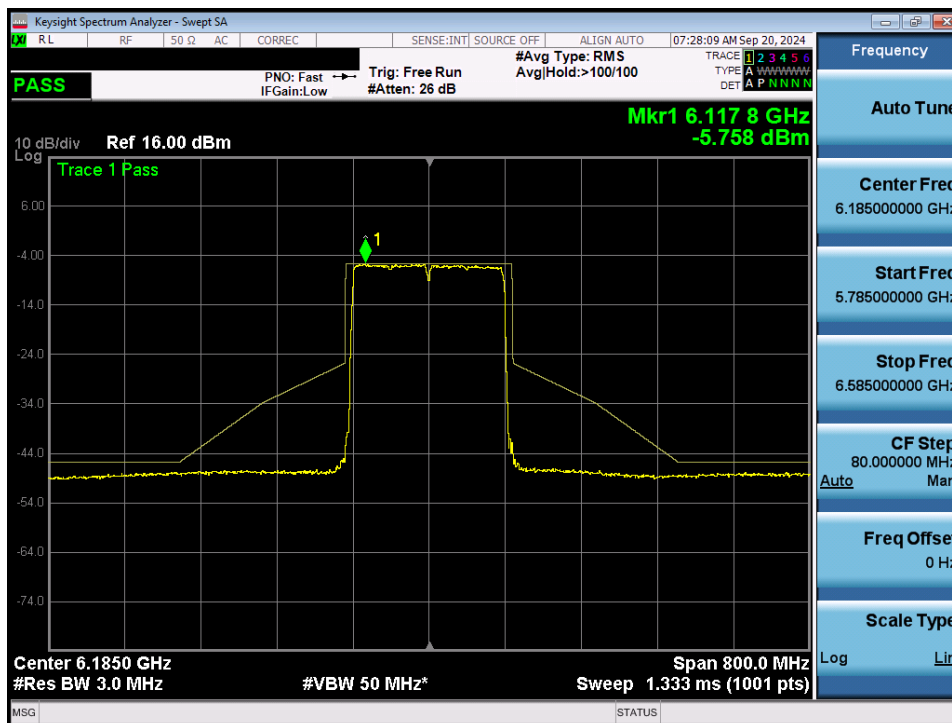


Plot 7-76. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 91 of 145

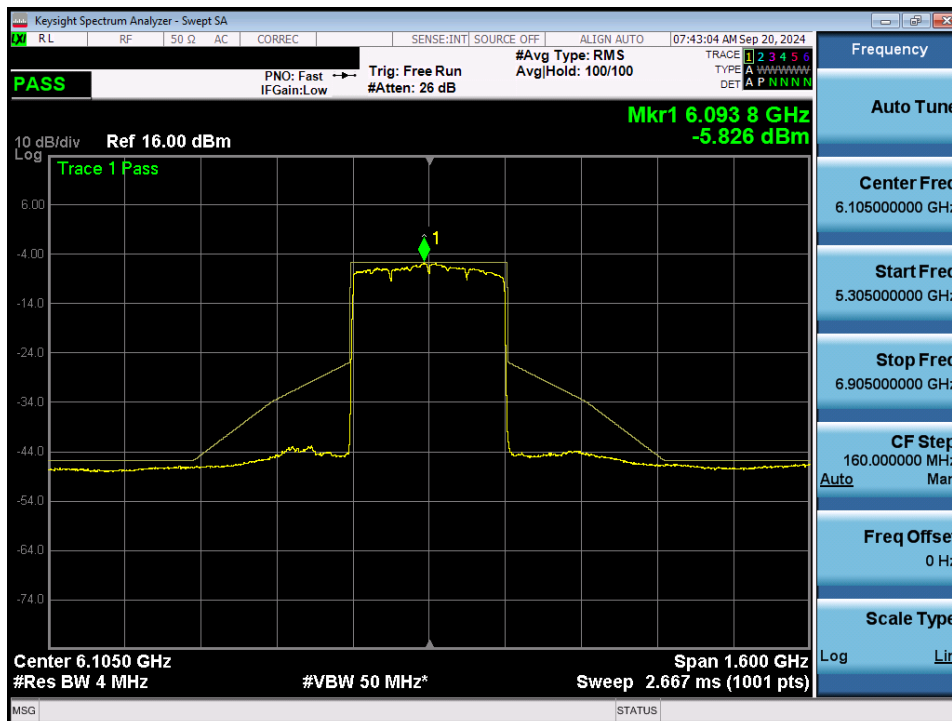


Plot 7-77. In Band Emissions Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

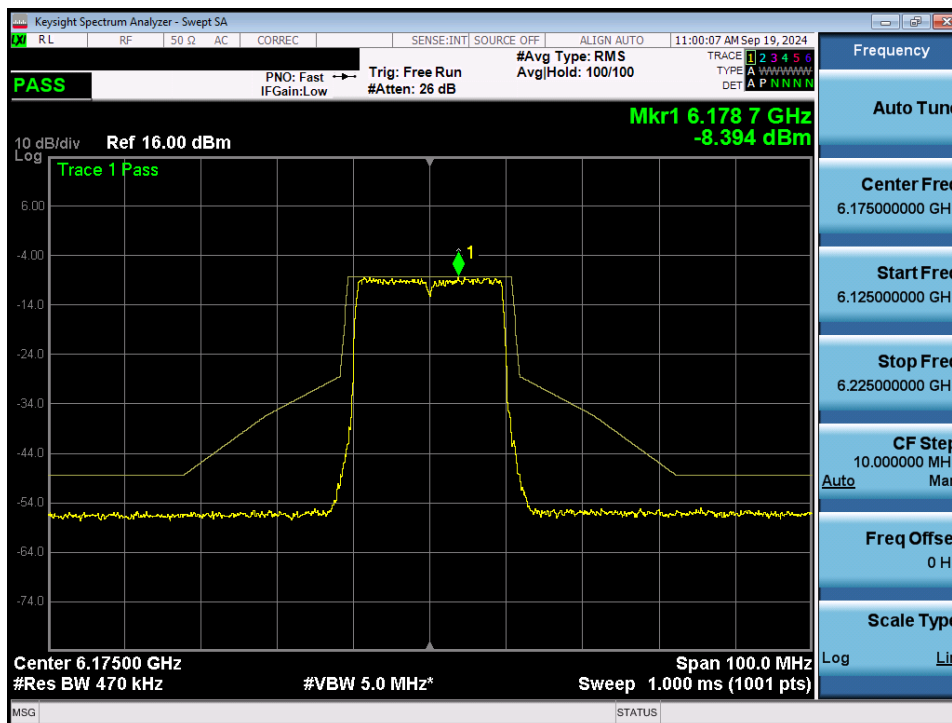


Plot 7-78. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 92 of 145

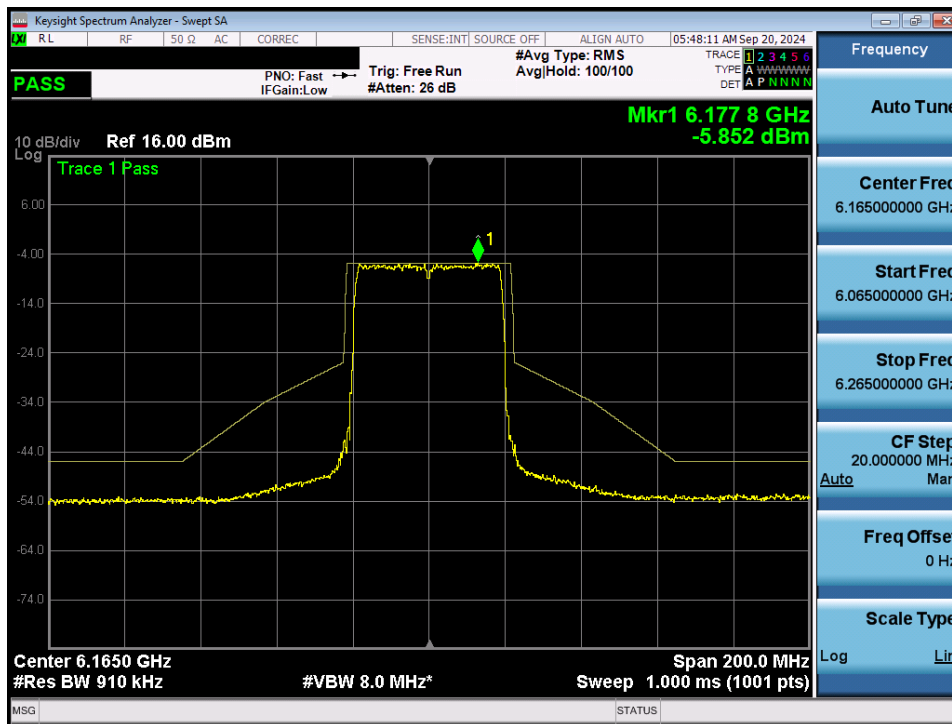


Plot 7-79. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

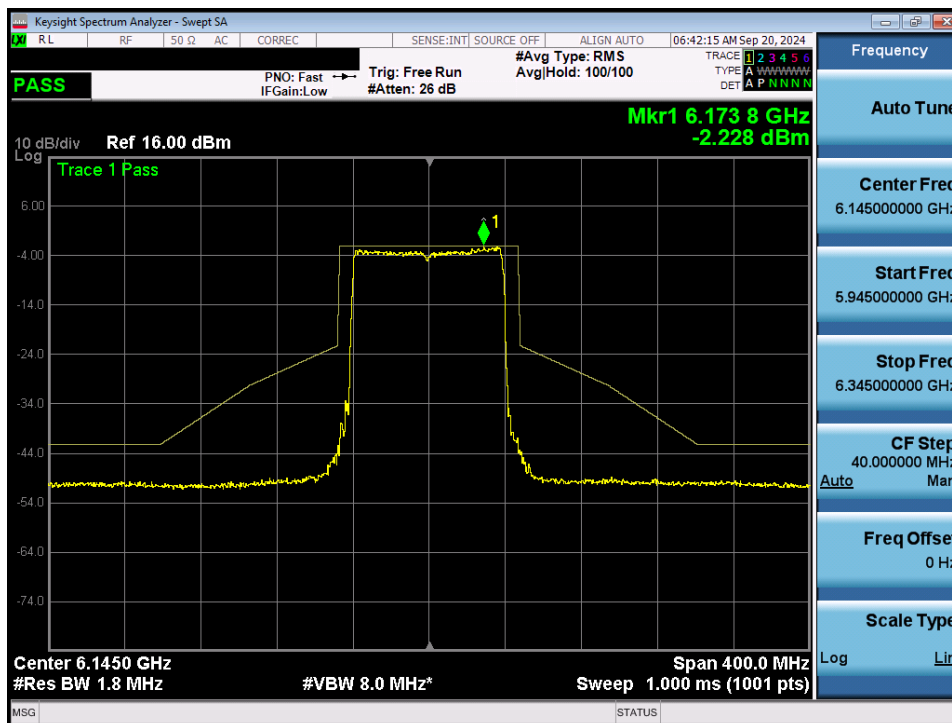


Plot 7-80. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 93 of 145

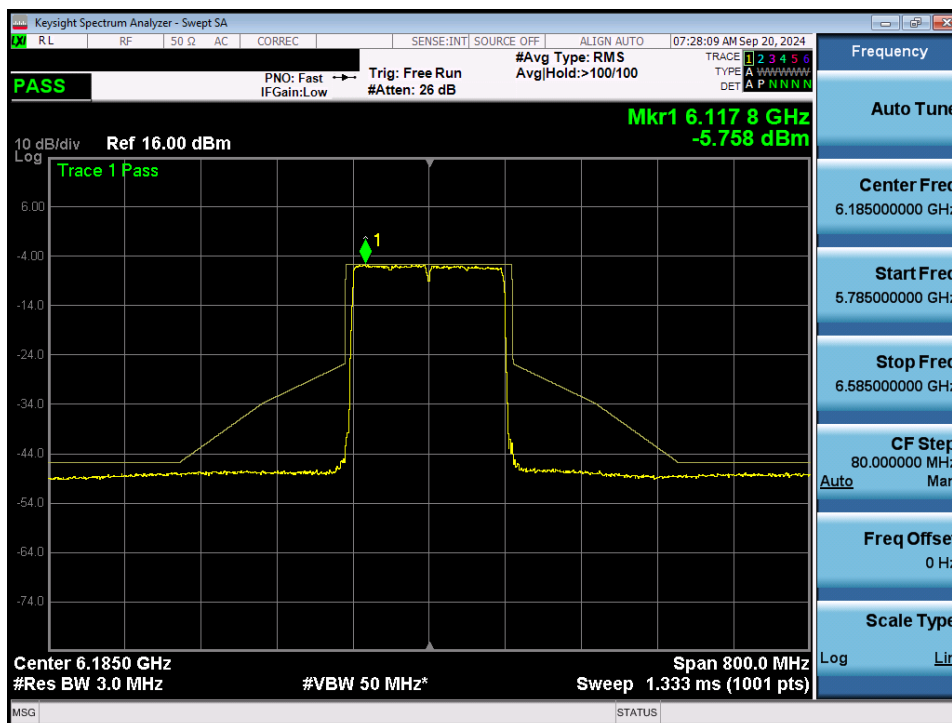


Plot 7-81. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

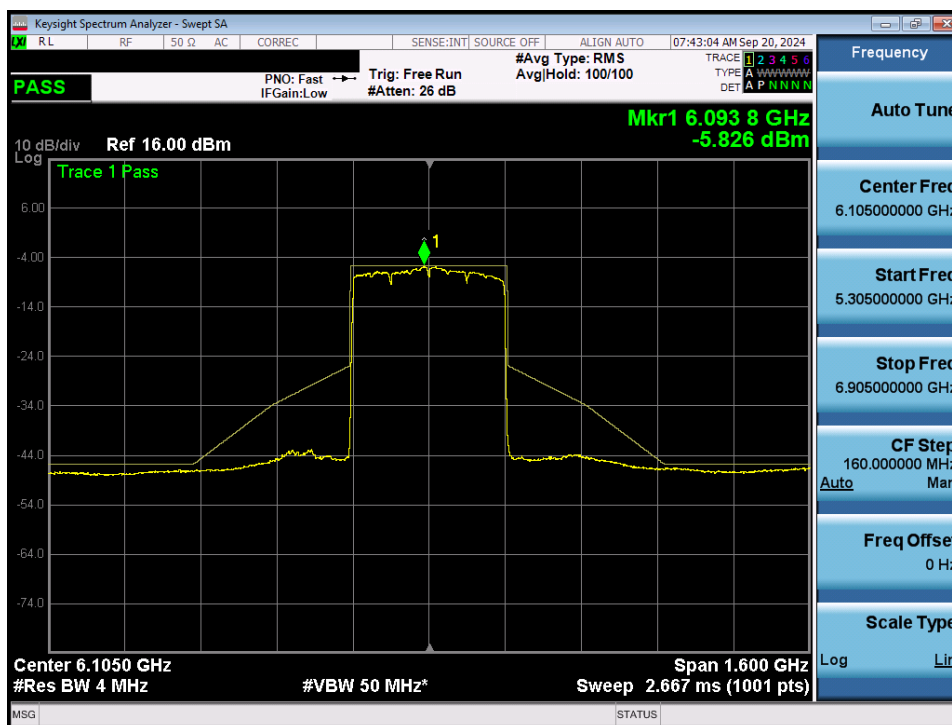

Plot 7-82. In Band Emissions Plot MIMO ANT1 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 94 of 145

7.5.2 MIMO Antenna-2 In-Band Emission Measurements

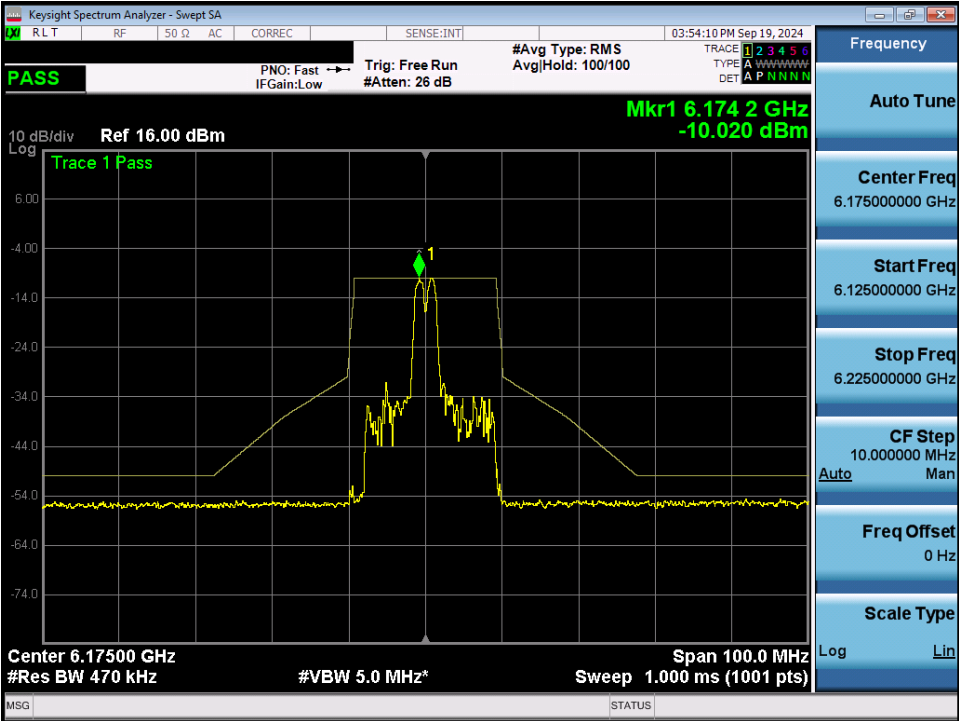


Plot 7-83. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI




Plot 7-84. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 95 of 145

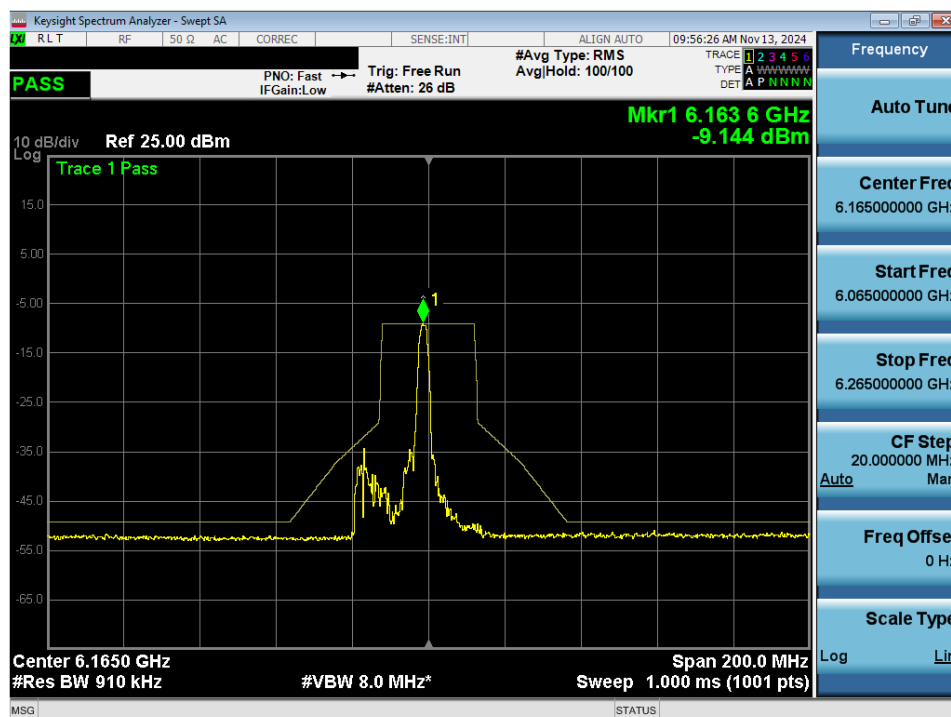


Plot 7-85. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 43) - LPI

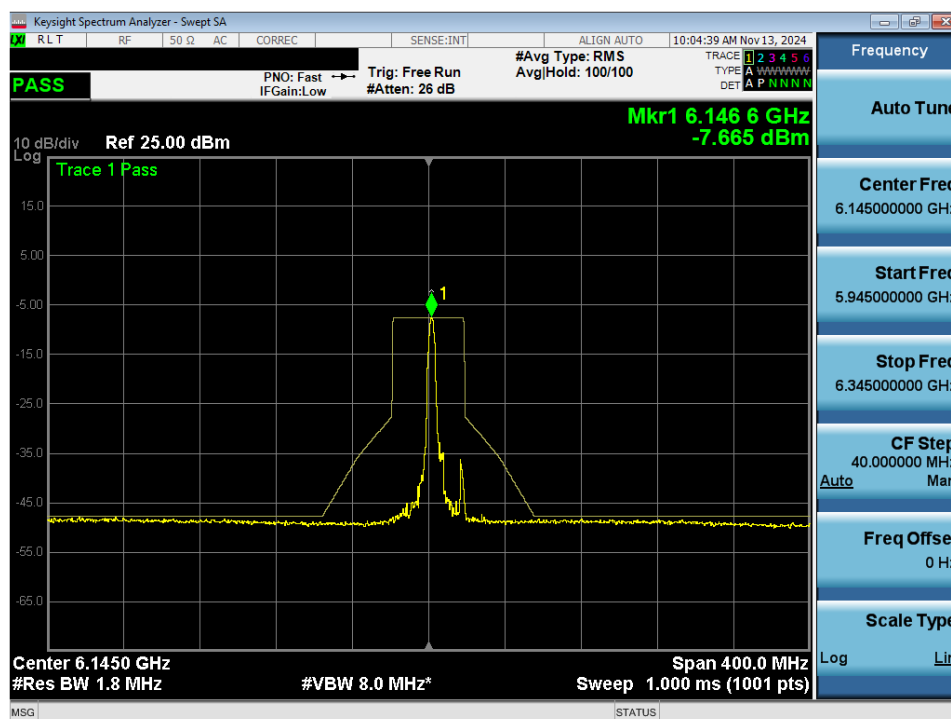


Plot 7-86. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 96 of 145

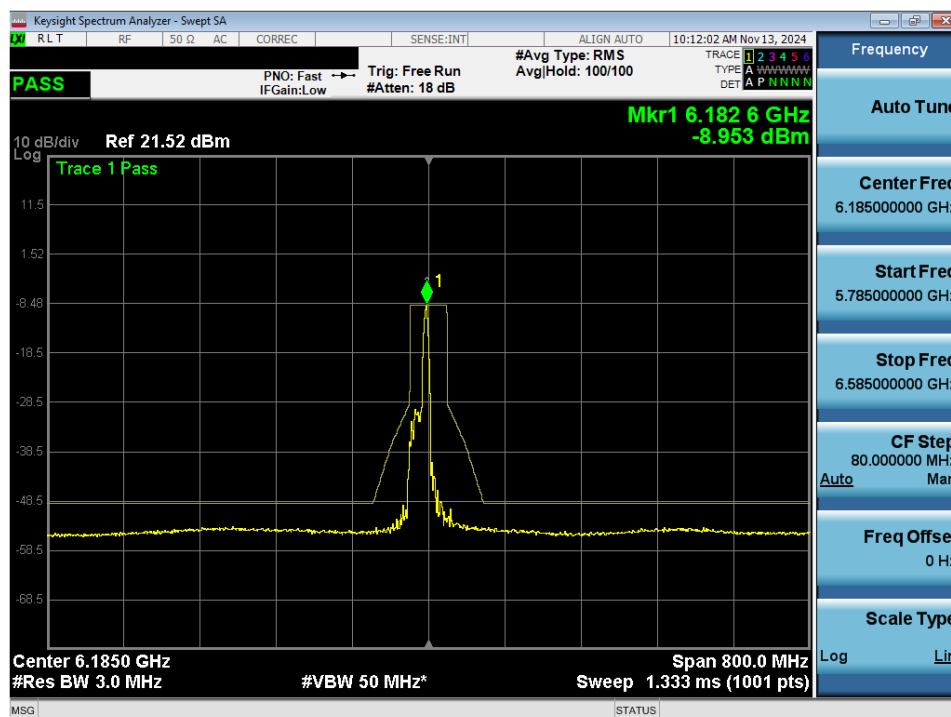


Plot 7-87. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 47) - LPI

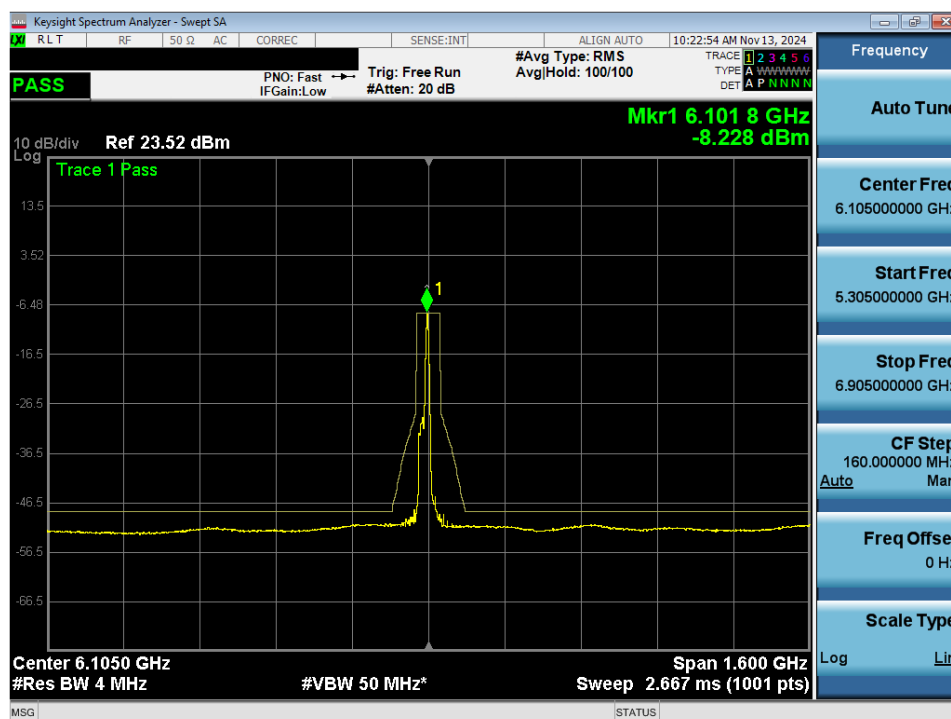


Plot 7-88. In Band Emissions Plot MIMO ANT2 (320MHz 802.11ax/be (26 Tones) (UNII Band 5) – Ch. 31) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 97 of 145

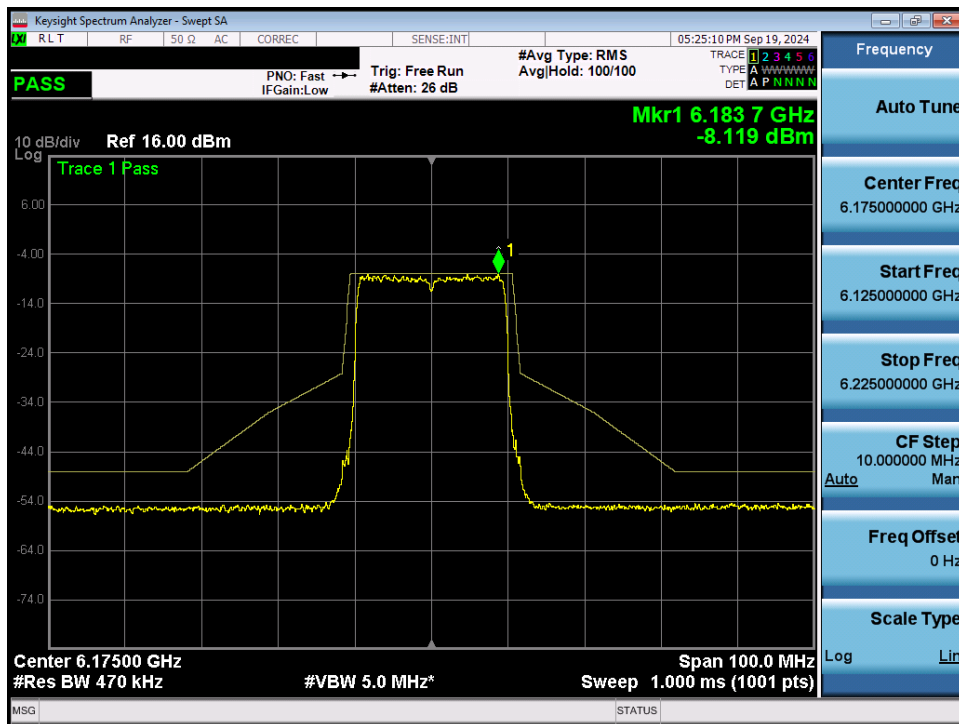


Plot 7-89. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

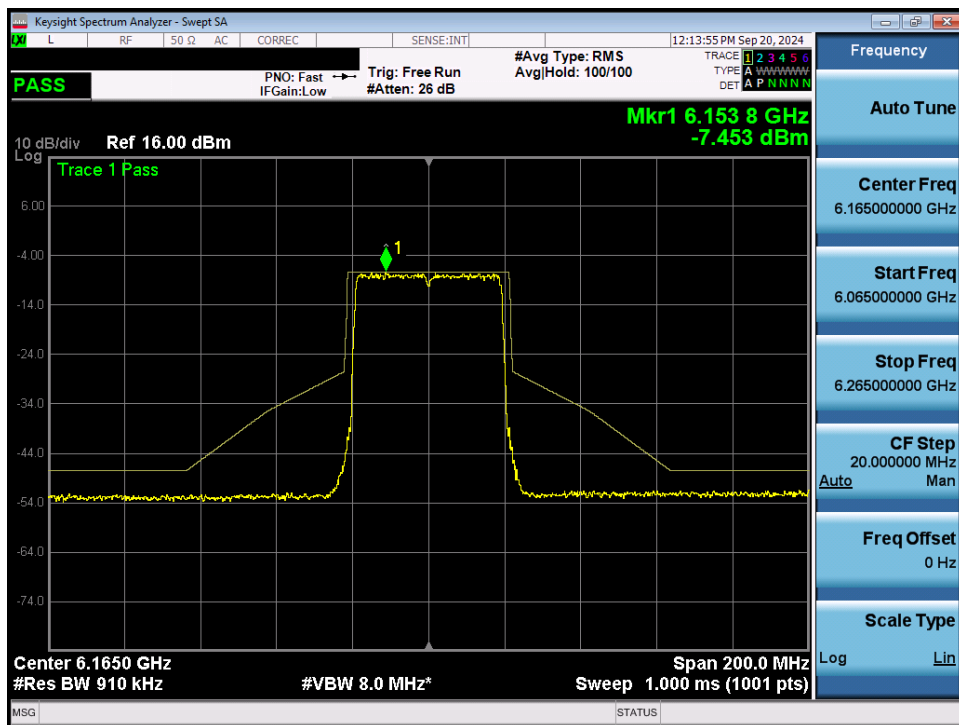


Plot 7-90. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 98 of 145

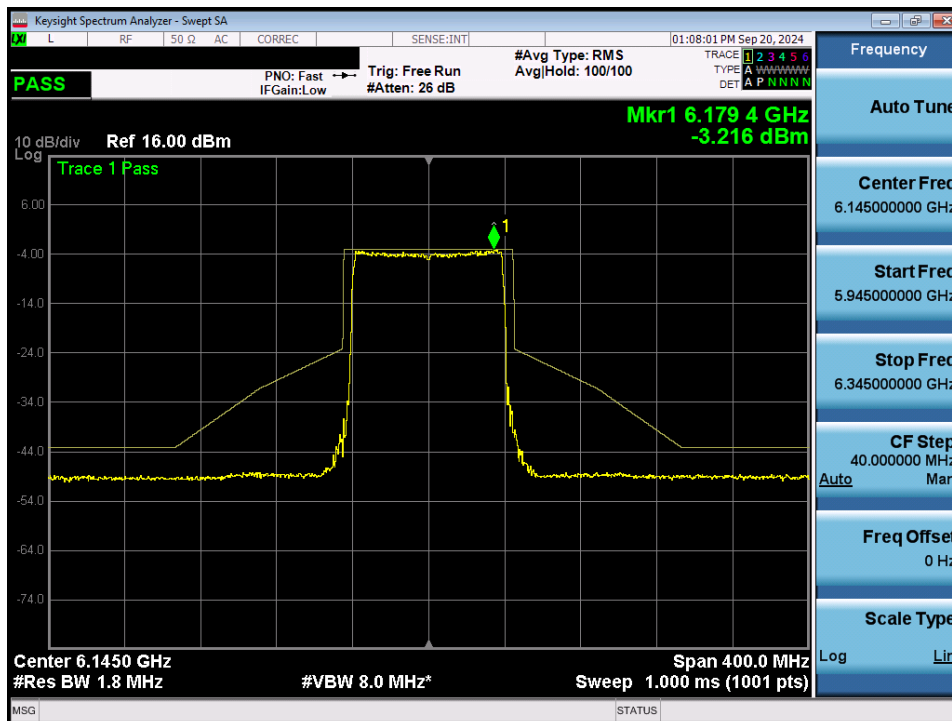


Plot 7-91. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

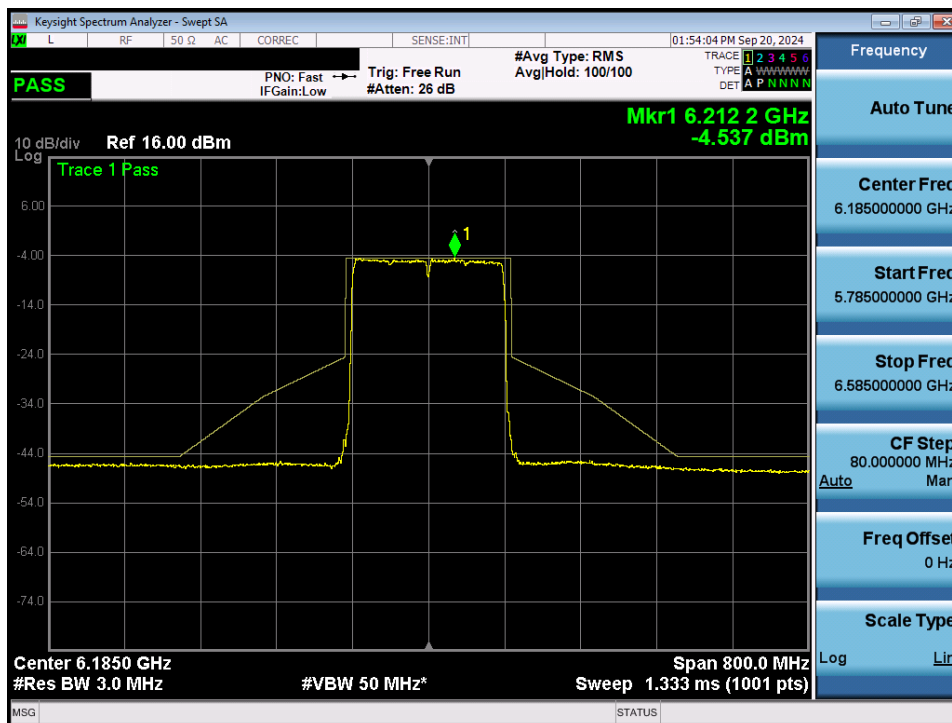


Plot 7-92. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 47) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 99 of 145

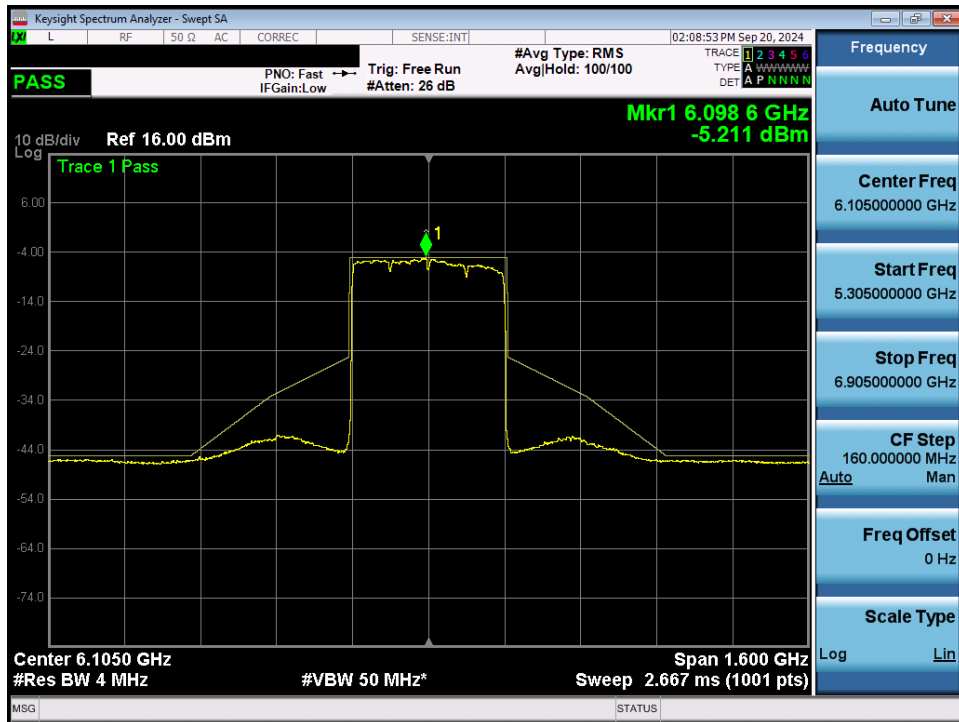


Plot 7-93. In Band Emissions Plot MIMO ANT2 (320MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 31) - LPI

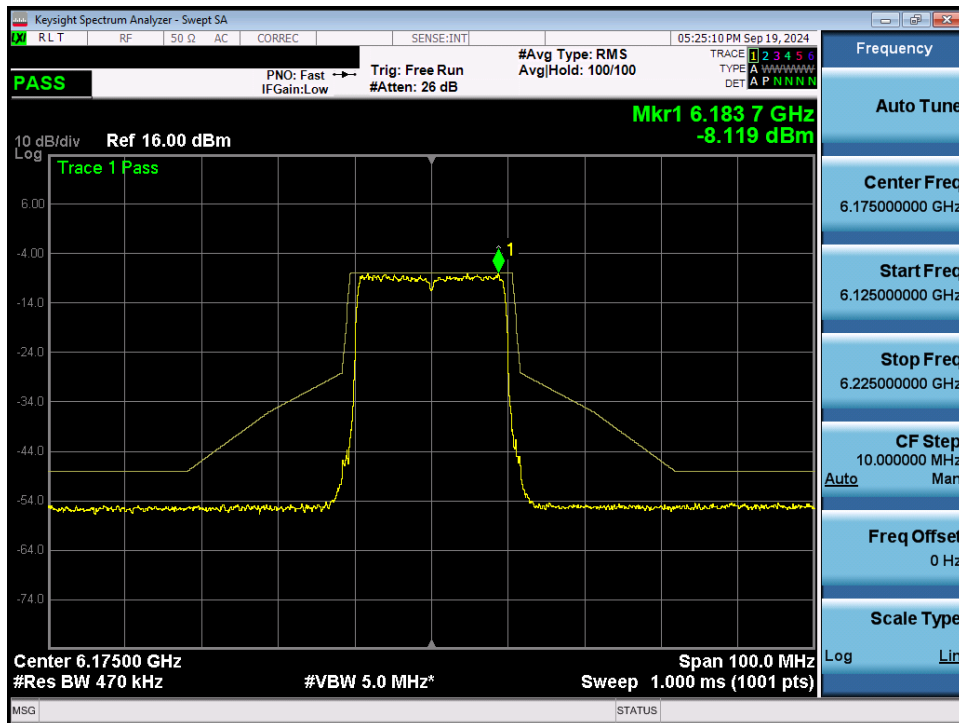


Plot 7-94. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 100 of 145

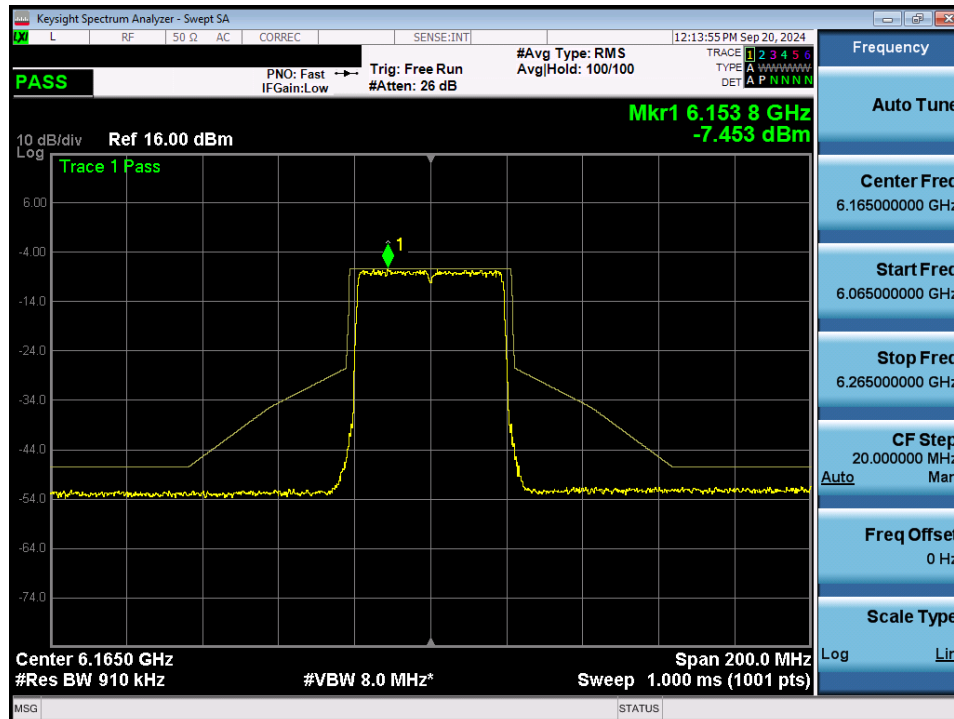

Plot 7-95. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 43) - LPI

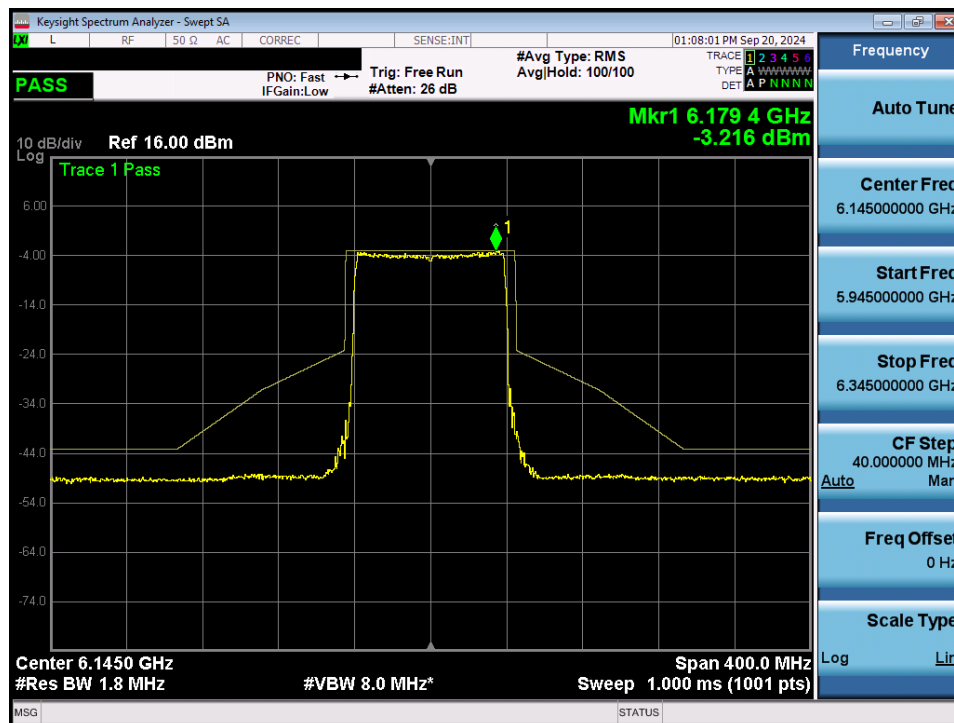

Plot 7-96. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax/be (Full Tones) (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 101 of 145

7.6 Contention Based Protocol

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel if detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594 D02

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation, and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 of KDB 987594 D02 v01r01 to determine the number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal, and repeat the process.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 103 of 145

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

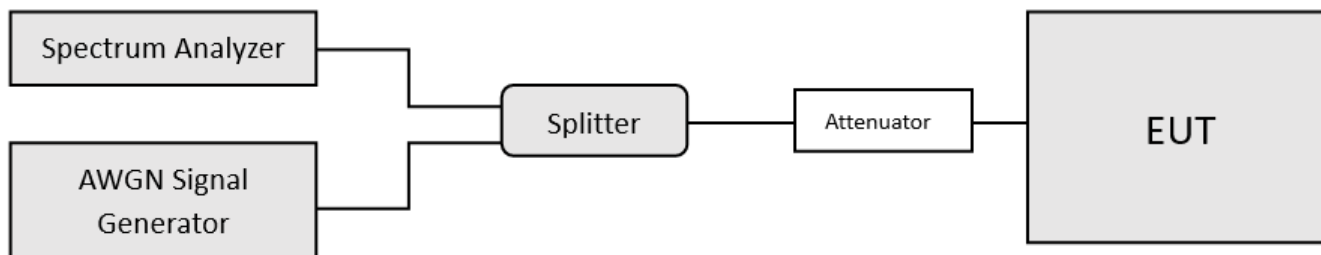


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. Per guidance from KDB 987594 D02 v01r01, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz (see Plot 7-167). The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission (see Plot 7-168), M1 indicates the point at which the AWGN signal is introduced. D1 indicates where the AWGN signal is terminated, at least 10 seconds following M1.
2. 15 trials were run to assure that at least 90% of certainty was met.
3. Per Guidance from KDB 987594 D04 v01, contention-based protocol was tested with receiver with the lowest antenna gain.
4. All CBP Timing Plots shown are for the ceased condition. Some spikes that may be shown are from adjacent portions of the spectrum that are still transmitting.
5. In the presence of an AWGN signal, the EUT was shown to either completely move out of the channel or to reduce its bandwidth for the purpose of incumbent avoidance. Representative channel move plots are included for one sub-band to show how the channel reduces when the AWGN is injected at the lower edge, the center, and the upper edge of a channel.
6. This device only punctures to optimize network performance and never to avoid licensed incumbents.
7. For the channel move demonstration in Section 7.6.3, only plots from UNII-5 band are included. Additionally, the AWGN signal is not visible because the AWGN level is well below the noise floor.

$$\text{Detection Level} = \text{Injected AWGN Power (dBm)} - \text{Antenna Gain (dBi)} + \text{Path Loss (dB)}$$

Equation 7-1. Detection Level Calculation

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 104 of 145

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Path Loss (dB)	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-74.70	-4.64	1.10	-68.96	-62.0	-6.96
				6110	-72.47	-4.64	1.10	-66.73	-62.0	-4.73
	31	6265	320	6265	-70.19	-4.64	1.10	-64.45	-62.0	-2.45
				6420	-72.36	-4.64	1.10	-66.62	-62.0	-4.62
UNII Band 6	101	6455	20	6455	-74.97	-3.53	1.10	-70.34	-62.0	-8.34
				6270	-75.52	-3.53	1.10	-70.89	-62.0	-8.89
	95	6425	320	6425	-72.61	-3.53	1.10	-67.98	-62.0	-5.98
				6580	-74.44	-3.53	1.10	-69.81	-62.0	-7.81
UNII Band 7	149	6695	20	6695	-68.52	-4.63	1.10	-62.79	-62.0	-0.79
				6590	-75.01	-4.63	1.10	-69.28	-62.0	-7.28
	159	6745	320	6745	-71.92	-4.63	1.10	-66.19	-62.0	-4.19
				6900	-74.25	-4.63	1.10	-68.52	-62.0	-6.52
UNII Band 8	197	6935	20	6935	-72.90	-3.76	1.10	-68.04	-62.0	-6.04
				6750	-74.68	-3.76	1.10	-69.82	-62.0	-7.82
	191	6905	320	6905	-71.10	-3.76	1.10	-66.24	-62.0	-4.24
				7060	-70.94	-3.76	1.10	-66.08	-62.0	-4.08

Table 7-42. Contention Based Protocol – Incumbent Detection Results

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Antenna Gain [dBi]	EUT Transmission Status			Detection Limit [dBm]	Margin [dB]
						Adjusted AWGN Power (dBm)				
						Normal	Minimal	Ceased		
UNII Band 5	53	6215	20	6215	-0.82	-70.41	-69.69	-68.96	-62.0	-6.96
				6110	-0.82	-67.70	-67.46	-66.73	-62.0	-4.73
	31	6265	320	6265	-0.82	-65.90	-65.18	-64.45	-62.0	-2.45
				6420	-0.82	-67.23	-66.86	-66.62	-62.0	-4.62
UNII Band 6	101	6455	20	6455	-0.86	-71.67	-71.07	-70.34	-62.0	-8.34
				6270	-0.86	-71.86	-71.50	-70.89	-62.0	-8.89
	95	6425	320	6425	-0.86	-69.31	-68.71	-67.98	-62.0	-5.98
				6580	-0.86	-70.54	-70.17	-69.81	-62.0	-7.81
UNII Band 7	149	6695	20	6695	-0.87	-64.24	-63.52	-62.79	-62.0	-0.79
				6590	-0.87	-70.25	-69.64	-69.28	-62.0	-7.28
	159	6745	320	6745	-0.87	-66.92	-66.67	-66.19	-62.0	-4.19
				6900	-0.87	-69.25	-69.00	-68.52	-62.0	-6.52
UNII Band 8	197	6935	20	6935	-1.29	-69.13	-68.40	-68.04	-62.0	-6.04
				6750	-1.29	-70.91	-70.43	-69.82	-62.0	-7.82
	191	6905	320	6905	-1.29	-67.21	-66.72	-66.24	-62.0	-4.24
				7060	-1.29	-67.29	-66.56	-66.08	-62.0	-4.08

Table 7-43. Contention Based Protocol – Detection Results – All Tx Cases


FCC ID: A3LSMI610	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device		Page 105 of 145

CBP Detection (1 = Detection, Blank = No Detection)																				
Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate (%)
UNII Band 5	53	6215	20	6215	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6110	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	31	6265	320	6265	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6420	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 6	101	6455	20	6455	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6270	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	95	6425	320	6425	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6580	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 7	149	6695	20	6695	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6590	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	159	6745	320	6745	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6900	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 8	197	6935	20	6935	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6750	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	191	6905	320	6905	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				7060	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Table 7-44. Contention Based Protocol – Incumbent Detection Trial Results

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 106 of 145


7.6.1 AWGN Plots

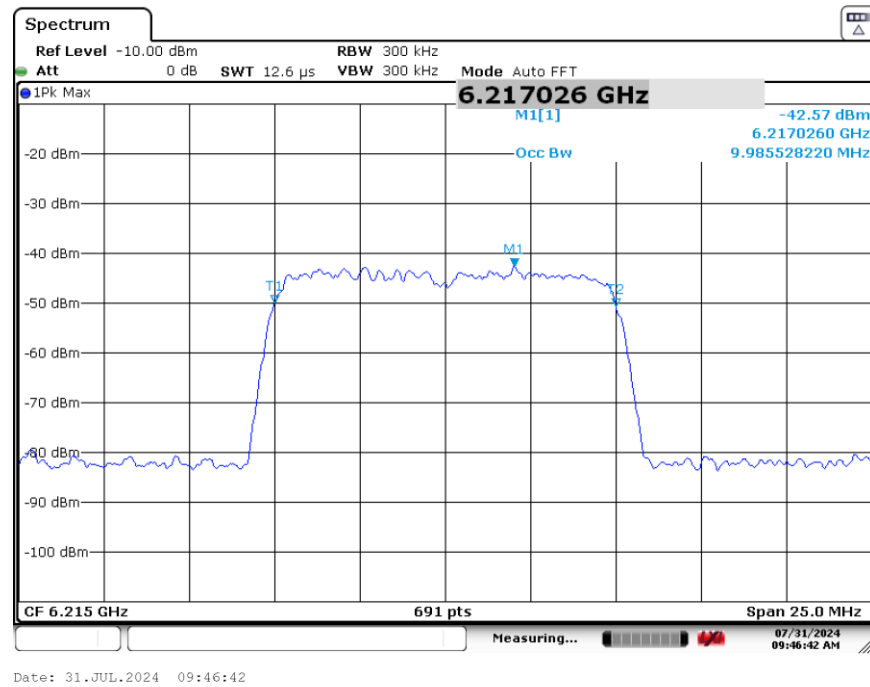

Plot 7-99. AWGN Signal (Demonstration)


FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 107 of 145

7.6.2 CBP Timing Plots

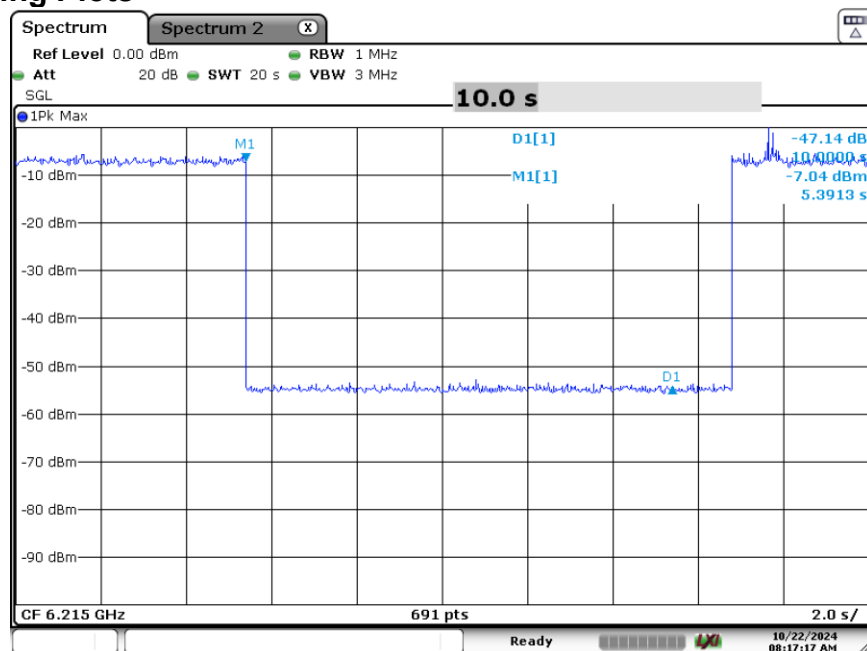

Date: 22.OCT.2024 08:17:17


Plot 7-100. Contention Based Protocol Timing Plot (20MHz (UNII Band 5) – Ch. 53)

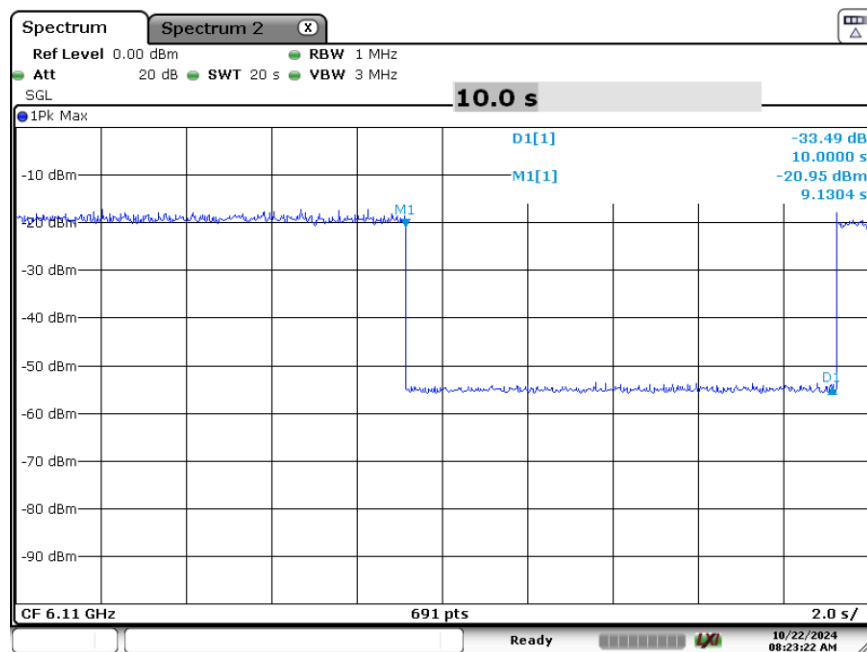


Date: 22.OCT.2024 08:23:22

Plot 7-101. Contention Based Protocol Timing Plot (320MHz (UNII Band 5) – Ch. 31 Low)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 108 of 145

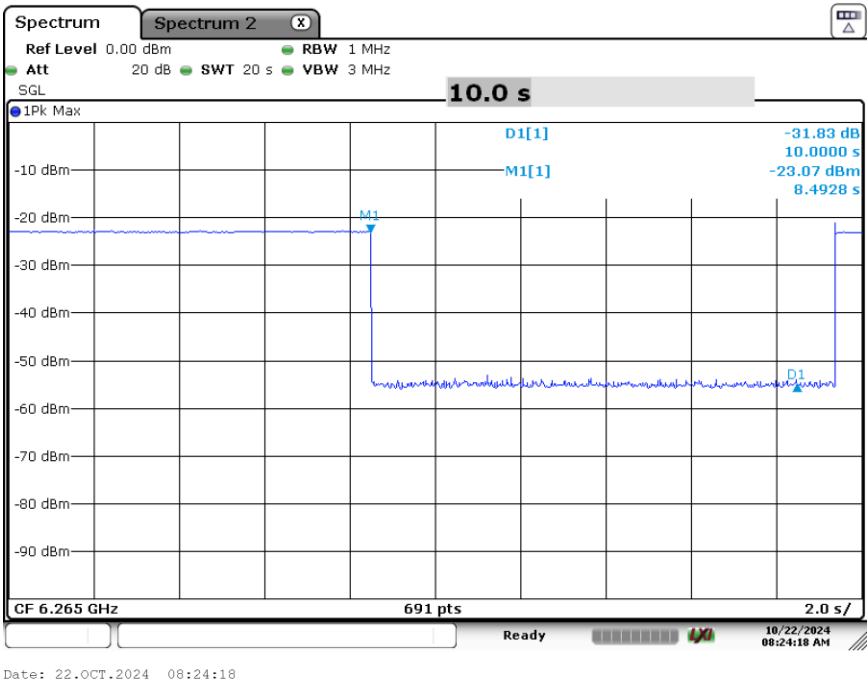


Plot 7-102. Contention Based Protocol Timing Plot (320MHz (UNII Band 5) – Ch. 31 Mid)

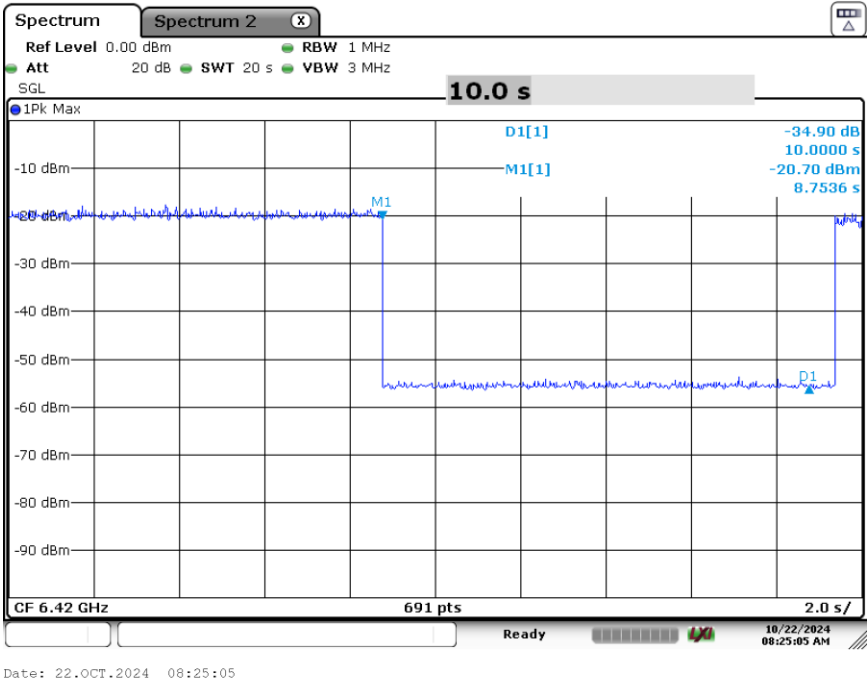


Plot 7-103. Contention Based Protocol Timing Plot (320MHz (UNII Band 5) – Ch. 31 High)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 109 of 145

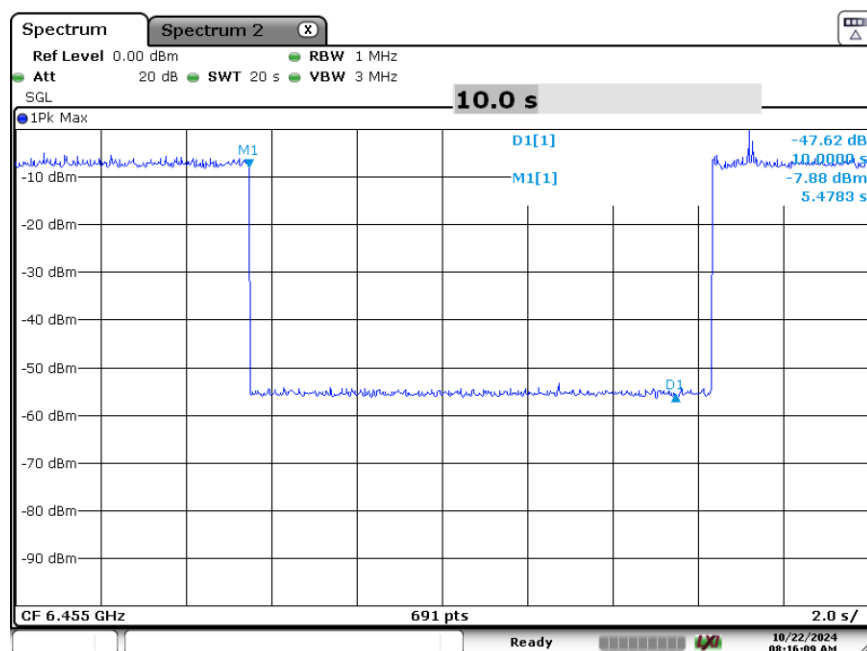

Date: 22.OCT.2024 08:16:09


Plot 7-104. Contention Based Protocol Timing Plot (20MHz (UNII Band 6) – Ch. 101)

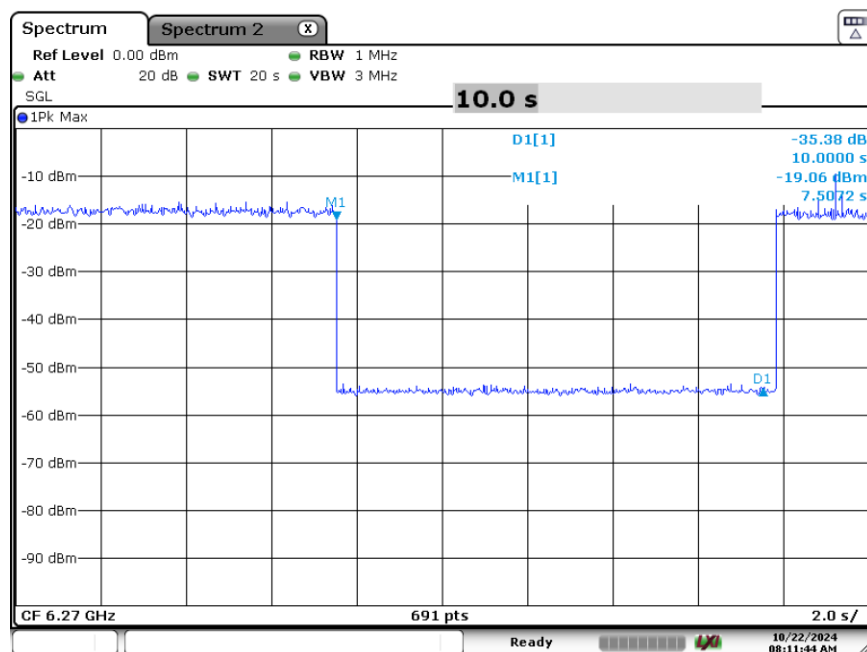

Date: 22.OCT.2024 08:11:44


Plot 7-105. Contention Based Protocol Timing Plot (320MHz (UNII Band 6) – Ch. 95 Low)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 110 of 145

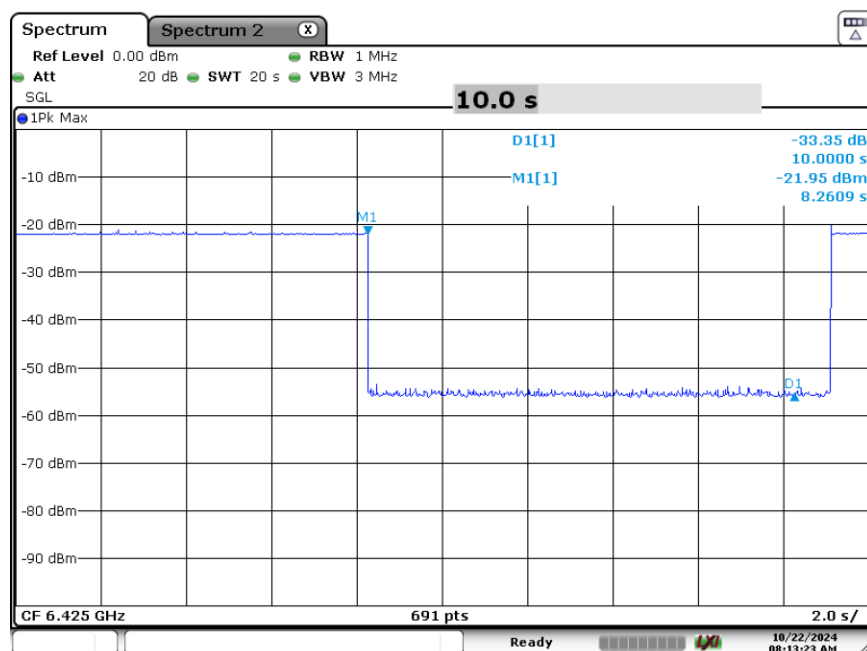

Date: 22.OCT.2024 08:13:23


Plot 7-106. Contention Based Protocol Timing Plot (320MHz (UNII Band 6) – Ch. 95 Mid)

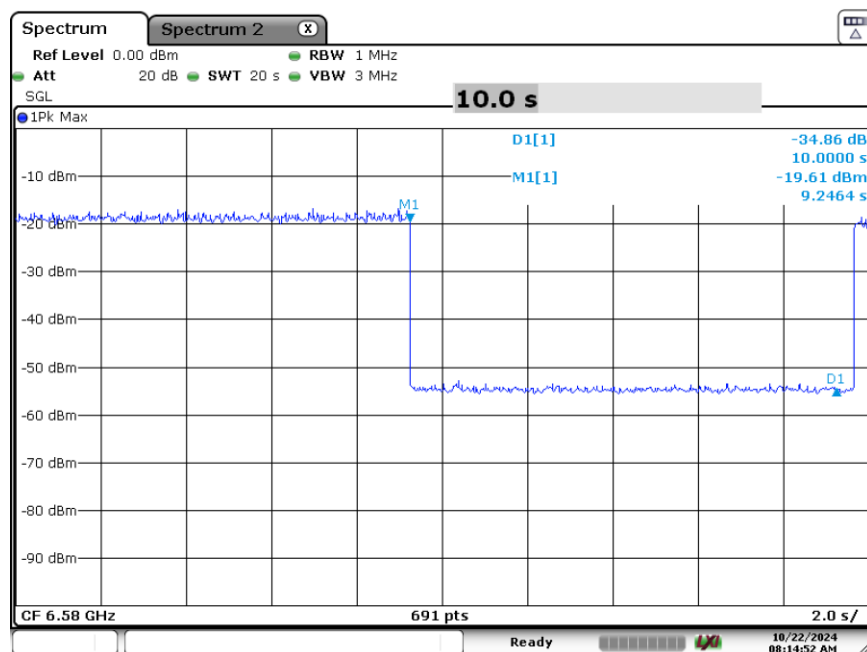


Date: 22.OCT.2024 08:14:52

Plot 7-107. Contention Based Protocol Timing Plot (320MHz (UNII Band 6) – Ch. 95 High)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 111 of 145

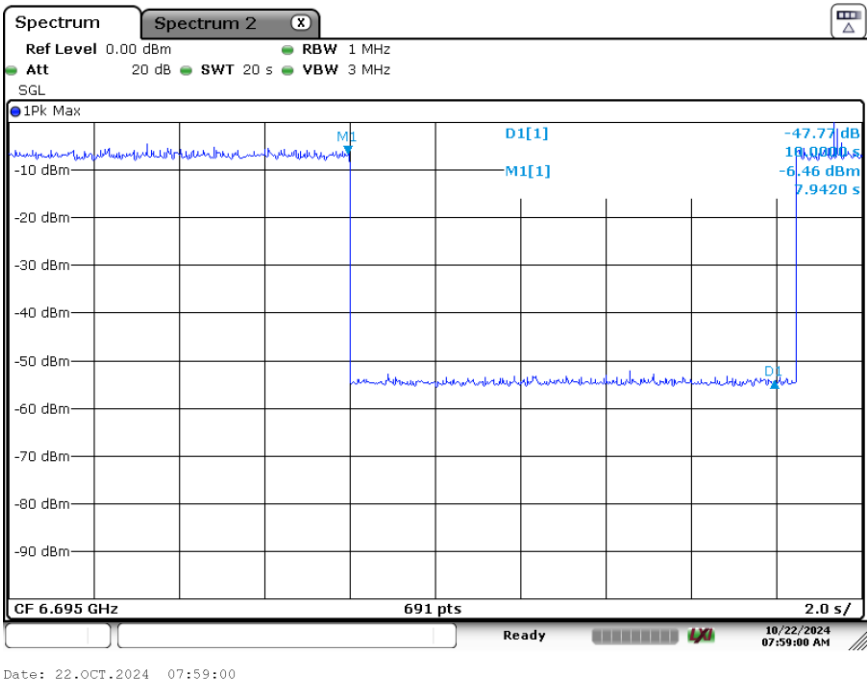


Plot 7-108. Contention Based Protocol Timing Plot (20MHz (UNII Band 7) – Ch. 149)

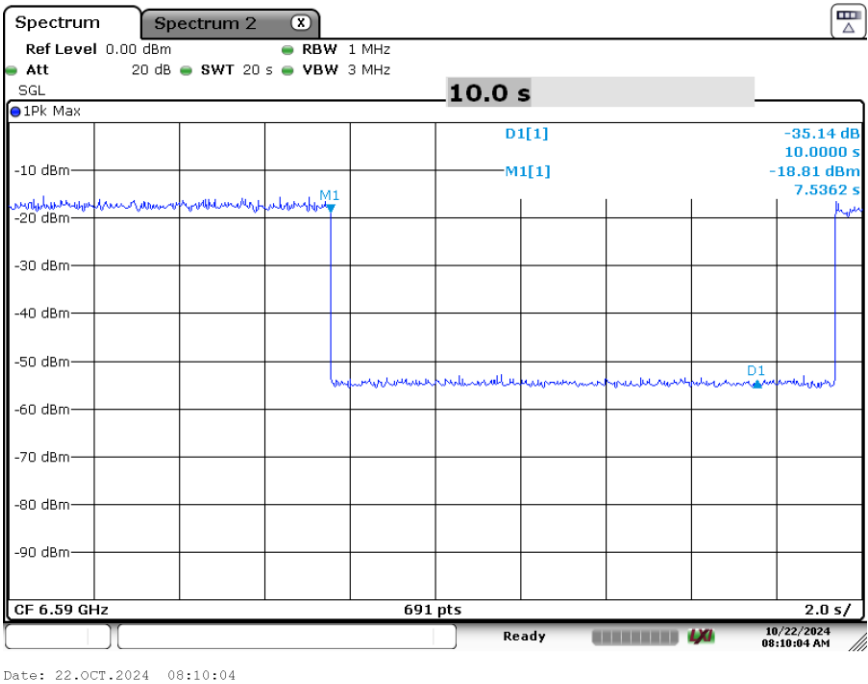


Plot 7-109. Contention Based Protocol Timing Plot (320MHz (UNII Band 7) – Ch. 159 Low)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 112 of 145

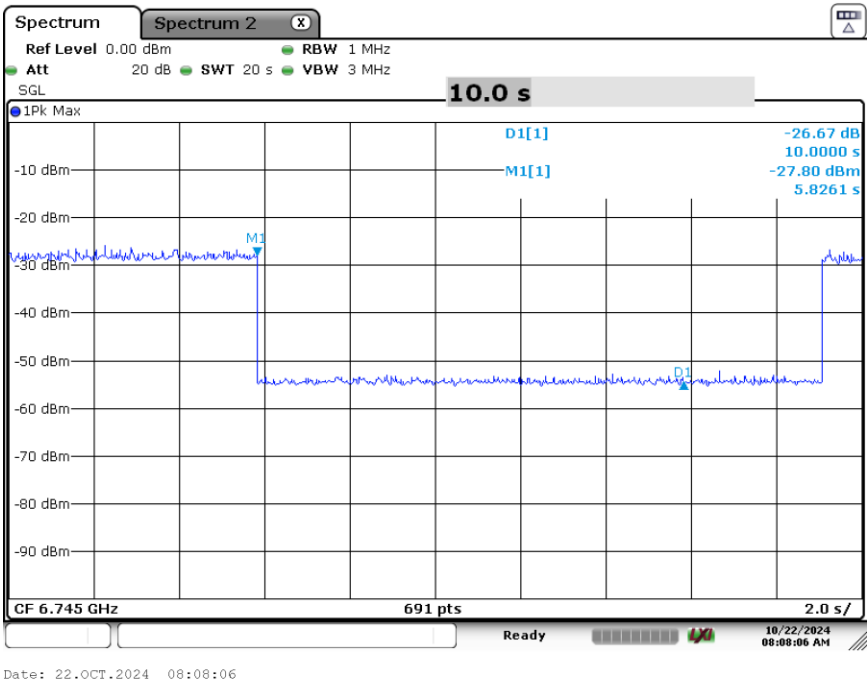


Plot 7-110. Contention Based Protocol Timing Plot (320MHz (UNII Band 7) – Ch. 159 Mid)

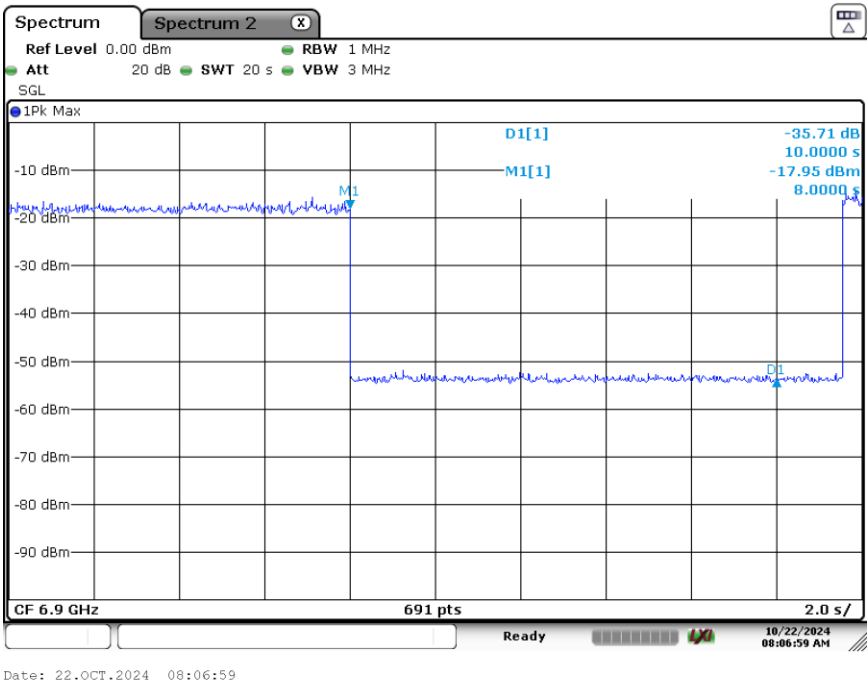


Plot 7-111. Contention Based Protocol Timing Plot (320MHz (UNII Band 7) – Ch. 159 High)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 113 of 145

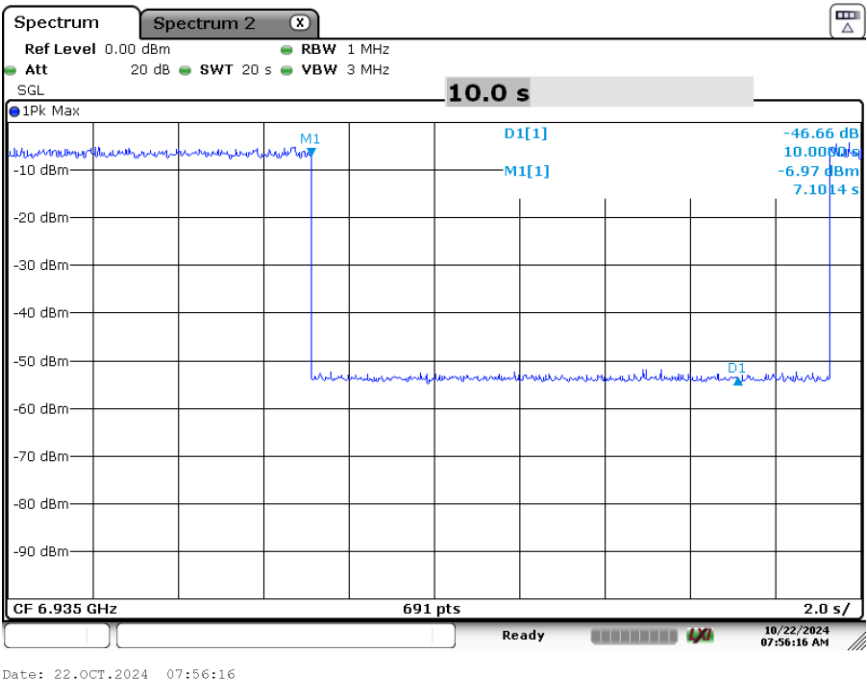


Plot 7-112. Contention Based Protocol Timing Plot (20MHz (UNII Band 8) – Ch. 197)

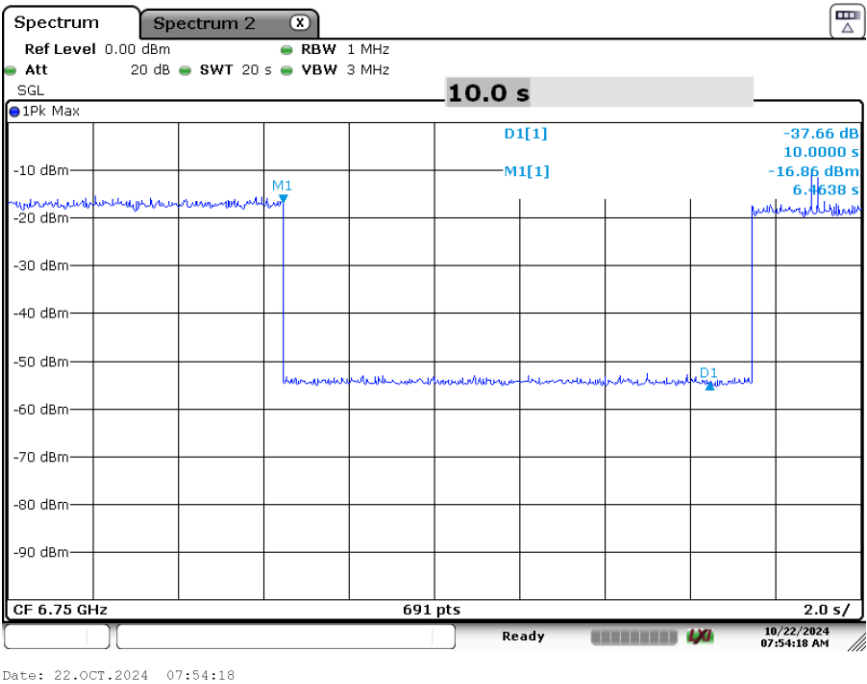


Plot 7-113. Contention Based Protocol Timing Plot (320MHz (UNII Band 8) – Ch. 191 Low)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 114 of 145

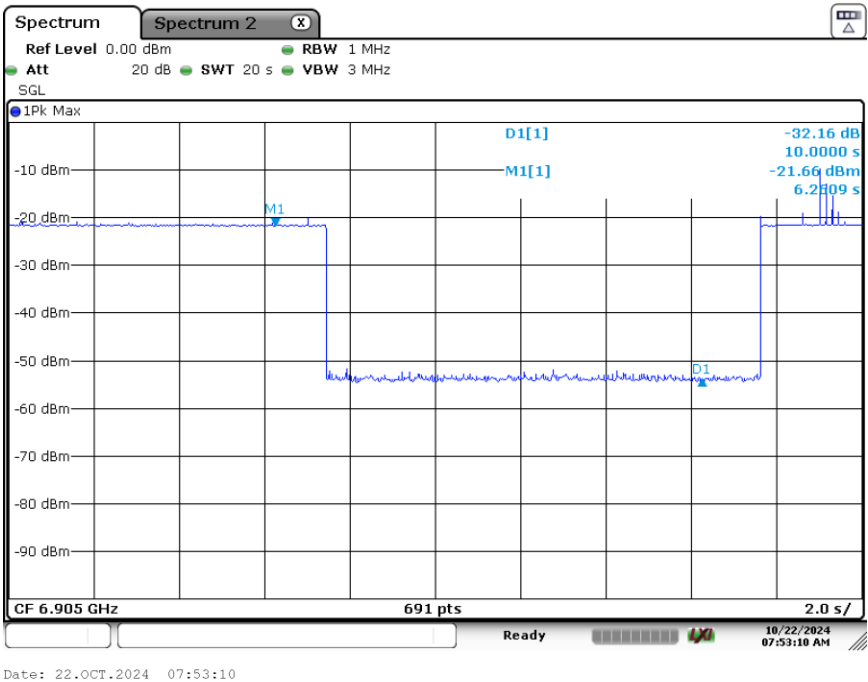

Plot 7-114. Contention Based Protocol Timing Plot (320MHz (UNII Band 8) – Ch. 191 Mid)

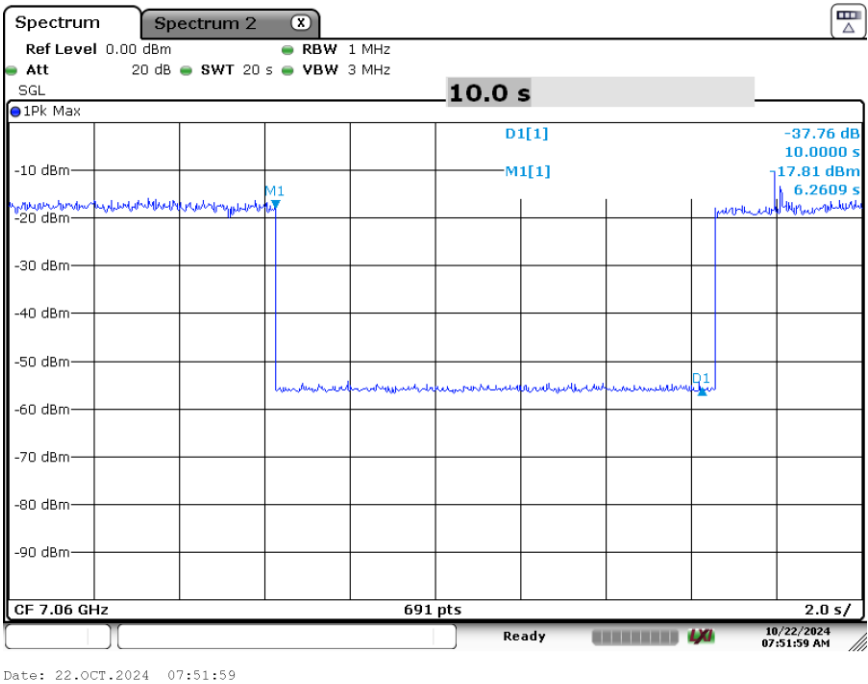


Plot 7-115. Contention Based Protocol Timing Plot (320MHz (UNII Band 8) – Ch. 191 High)

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 115 of 145

7.6.3 Channel Move Plots

This section demonstrates the effect of injecting the AWGN signal at various locations throughout the 802.11be 320MHz signal. The blue trace shows the full 320MHz signal prior to AWGN injection while the black trace shows the spectrum following AWGN injection. The following items were observed as demonstrated in the three plots shown below:


- When a 10 MHz AWGN signal centered at 6110 MHz (lower edge of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 6265 MHz (middle of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 6420 MHz (upper edge of channel) is injected, the channel completely stops transmitting.

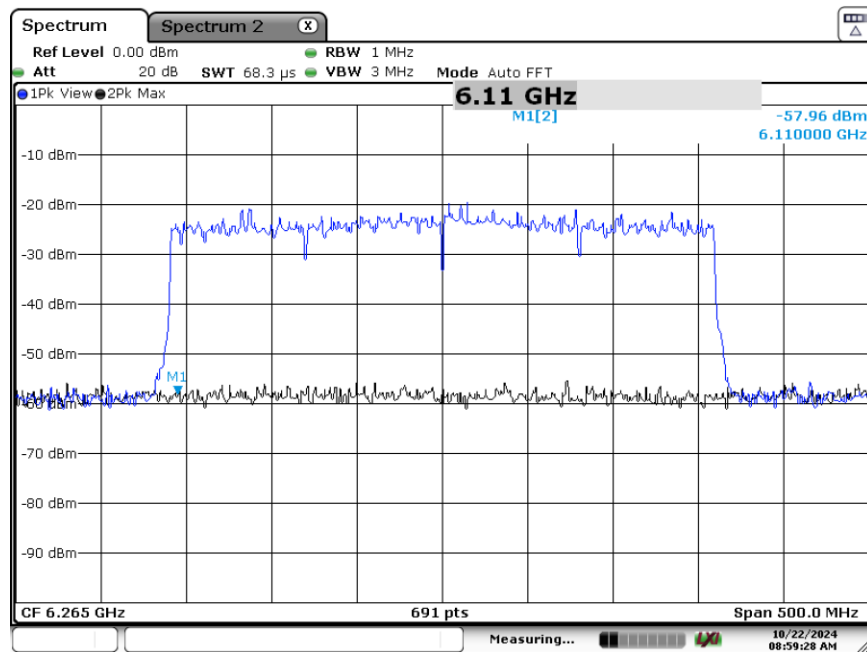

Date: 22.OCT.2024 08:59:28


Plot 7-116. CBP 320MHz Channel - Injection Lower Edge – [6110 MHz]

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 116 of 145

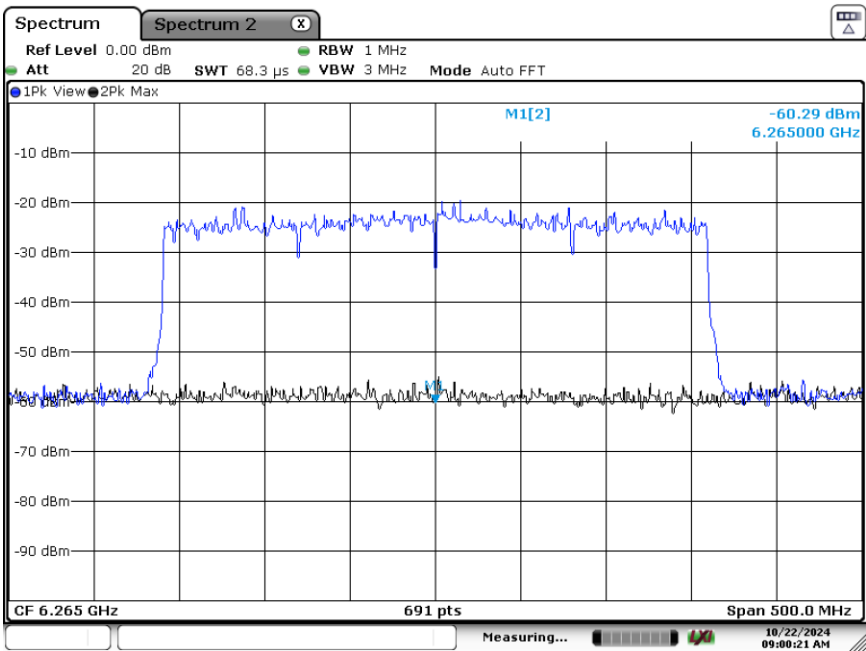

Date: 22.OCT.2024 09:00:21

Plot 7-117. CBP 320MHz Channel - Injection Center – [6265 MHz]

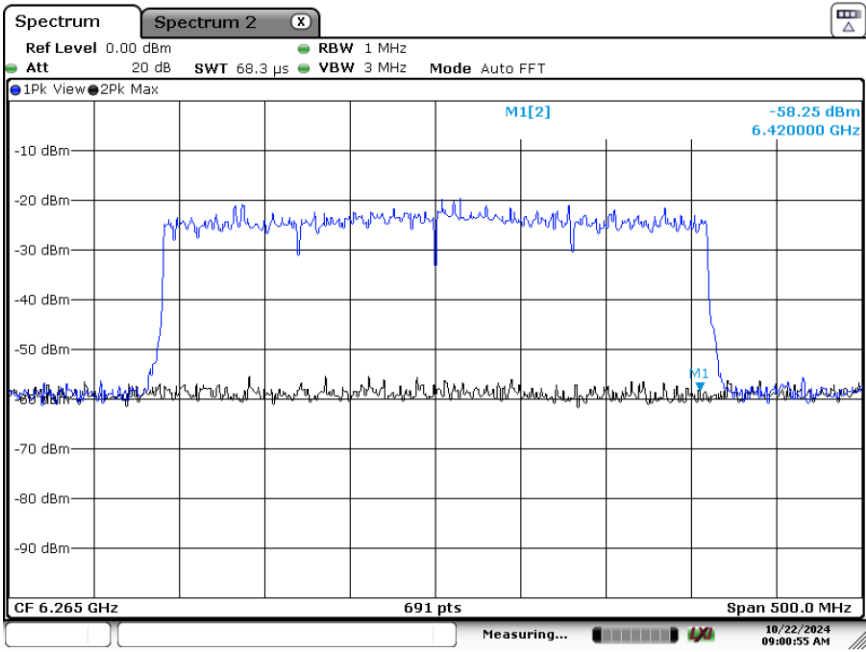

Date: 22.OCT.2024 09:00:55

Plot 7-118. CBP 320MHz Channel - Injection Upper Edge – [6420 MHz]

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 117 of 145

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. All channels, modes (e.g. 802.11ax (20/40/80/160MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz

Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-45. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 118 of 145

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

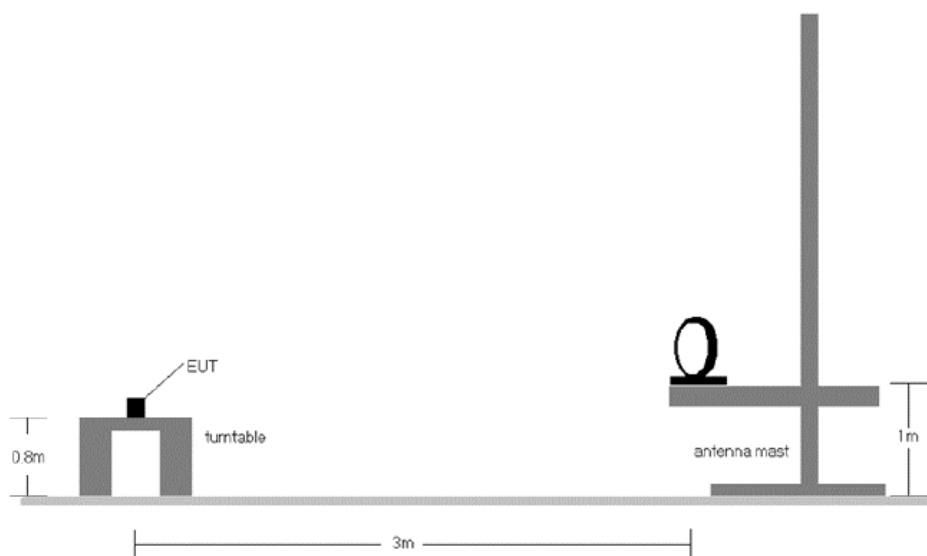


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 119 of 145

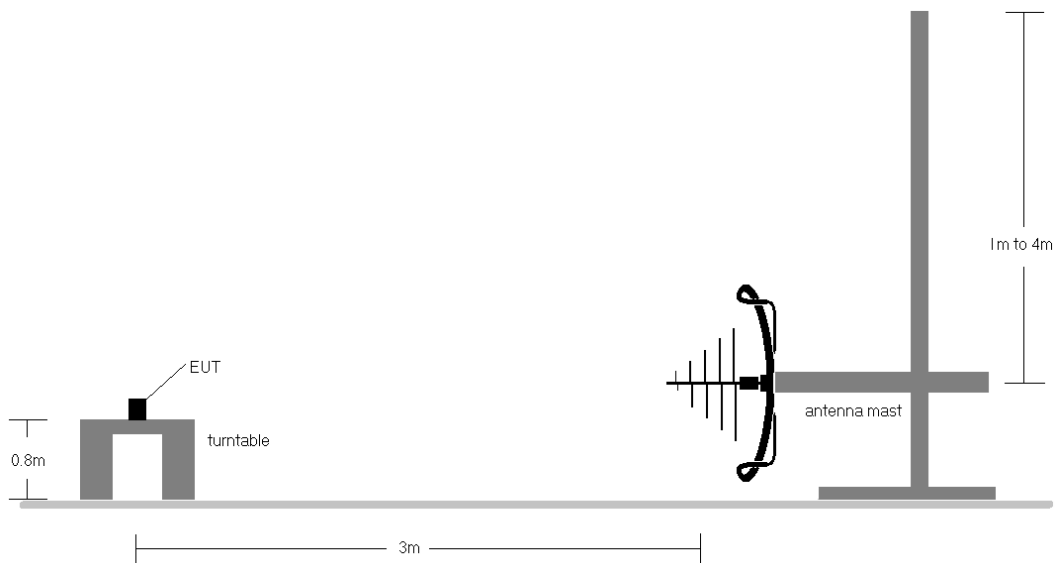


Figure 7-7. Radiated Test Setup < 1GHz

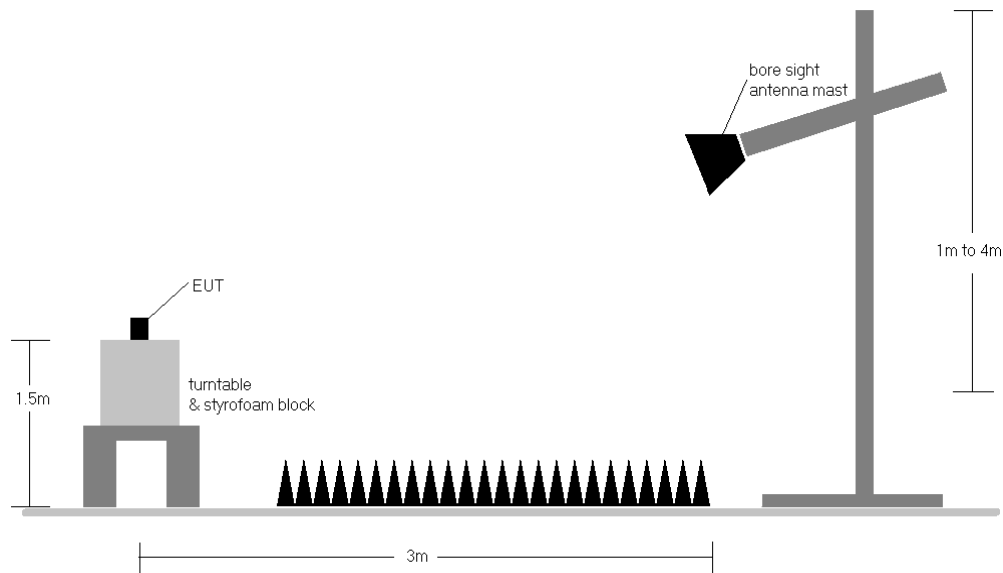


Figure 7-8. Radiated Test Setup > 1GHz

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 120 of 145

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with an external battery pack (Model: EB-P3400)
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMI610	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2406060046-09-R1.A3L	Test Dates: 07/30/2024 – 07/16/2025	EUT Type: Portable Device	Page 121 of 145