



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

GSM PHONE + BLUETOOTH and WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-J110H/DS and SM-J110H/DD

FCC ID: A3LSMJ110H

REPORT NUMBER: 15I21230-E1 REVISION A

ISSUE DATE: JULY 20, 2015

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
--	7/13/15	Initial issue	P. Zhang
A	7/20/15	Updated antenna gain info	P. Zhang

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	7
4.1.	MEASURING INSTRUMENT CALIBRATION	7
4.2.	SAMPLE CALCULATION	7
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4.	DESCRIPTION OF TEST SETUP.....	10
6.	TEST AND MEASUREMENT EQUIPMENT	13
7.	Summary Table.....	14
8.	RF POWER OUTPUT VERIFICATION.....	15
8.1.	GSM/GPRS/EDGE	15
8.1.1.	GSM OUTPUT POWER RESULT	16
9.	PEAK TO AVERAGE RATIO	18
9.1.	CONDUCTED PEAK TO AVERAGE RESULT	18
10.	LIMITS AND CONDUCTED RESULTS	20
10.1.	OCCUPIED BANDWIDTH	20
10.1.1.	OCCUPIED BANDWIDTH RESULTS	21
10.1.1.	OCCUPIED BANDWIDTH PLOTS	22
10.2.	BAND EDGE EMISSIONS	23
10.2.1.	BAND EDGE PLOTS	24
10.3.	OUT OF BAND EMISSIONS	25
10.3.1.	OUT OF BAND EMISSIONS RESULT	26
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	27
10.4.	FREQUENCY STABILITY	29
10.4.1.	FREQUENCY STABILITY RESULTS	30
11.	RADIATED TEST RESULTS	32
11.1.	RADIATED POWER (ERP & EIRP).....	32

11.1.1.	ERP/EIRP Results.....	33
11.1.2.	ERP/EIRP DATA.....	34
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	36
11.2.1.	SPURIOUS RADIATION DATA.....	37
12.	SETUP PHOTOS	39
	END OF REPORT	40

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM Phone + Bluetooth and WLAN 2.4GHz b/g/n
MODEL: SM-J110H/DS and SM-J110H/DD
SERIAL NUMBER: R31G600HD0B(Conducted), R31G600HJNP(Radiated)
DATE TESTED: JULY 2 – 13, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H and 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL VERIFICATION SERVICES INC



ROLLY ALEGRE
CONSUMER TECHNOLOGY DIVISION
LAB TECHNICIAN
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address.

The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☒ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (dB)}$$

$$+ \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (dB)}$$

$$+ \text{Substitution Antenna Factor (dBi)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM Phone + Bluetooth and WLAN 2.4GHz b/g/n

5.2. MAXIMUM OUTPUT POWER

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
GSM850	824~849	GMSK	31.8	1513.56		
	824~849	GPRS	31.8	1513.56	33.41	2192.80
GSM1900	1850~1910	GMSK	29.8	954.99		
	1850~1910	GPRS	29.8	954.99	32.28	1690.44

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM1900, 1850~1910MHz	-1.3dBi
GSM850, 824~849MHz	-2.6dBi

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETAOU10EBE	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

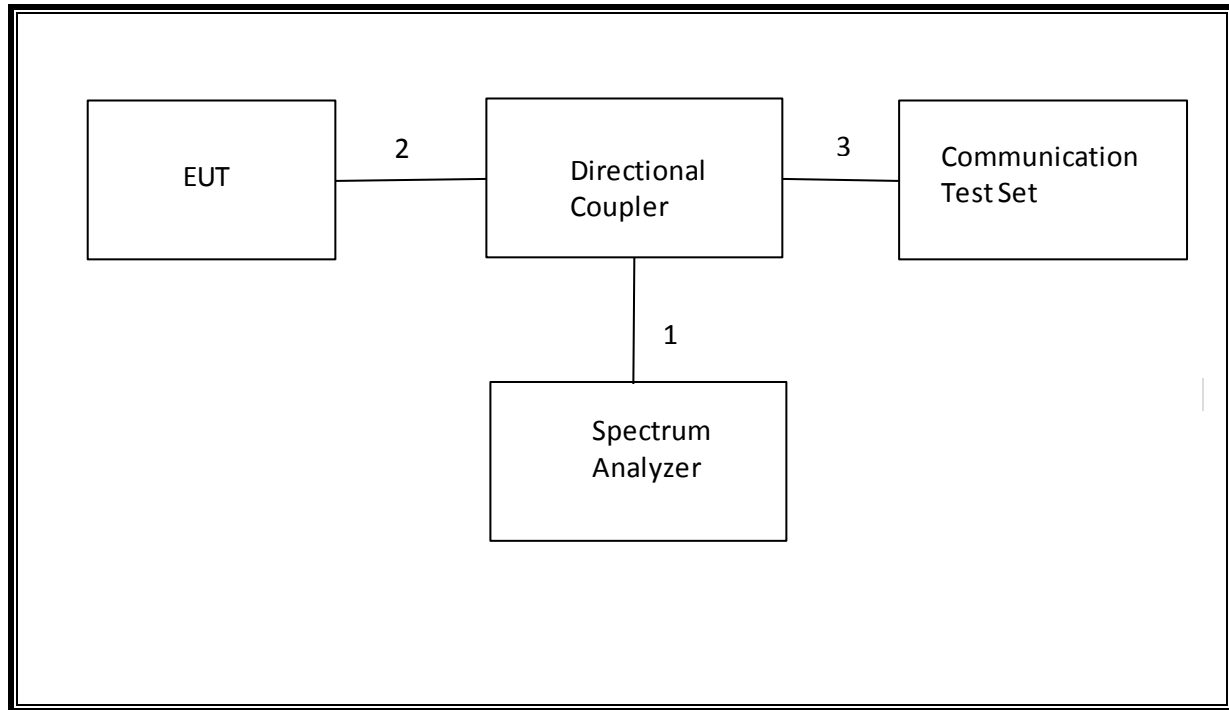
I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

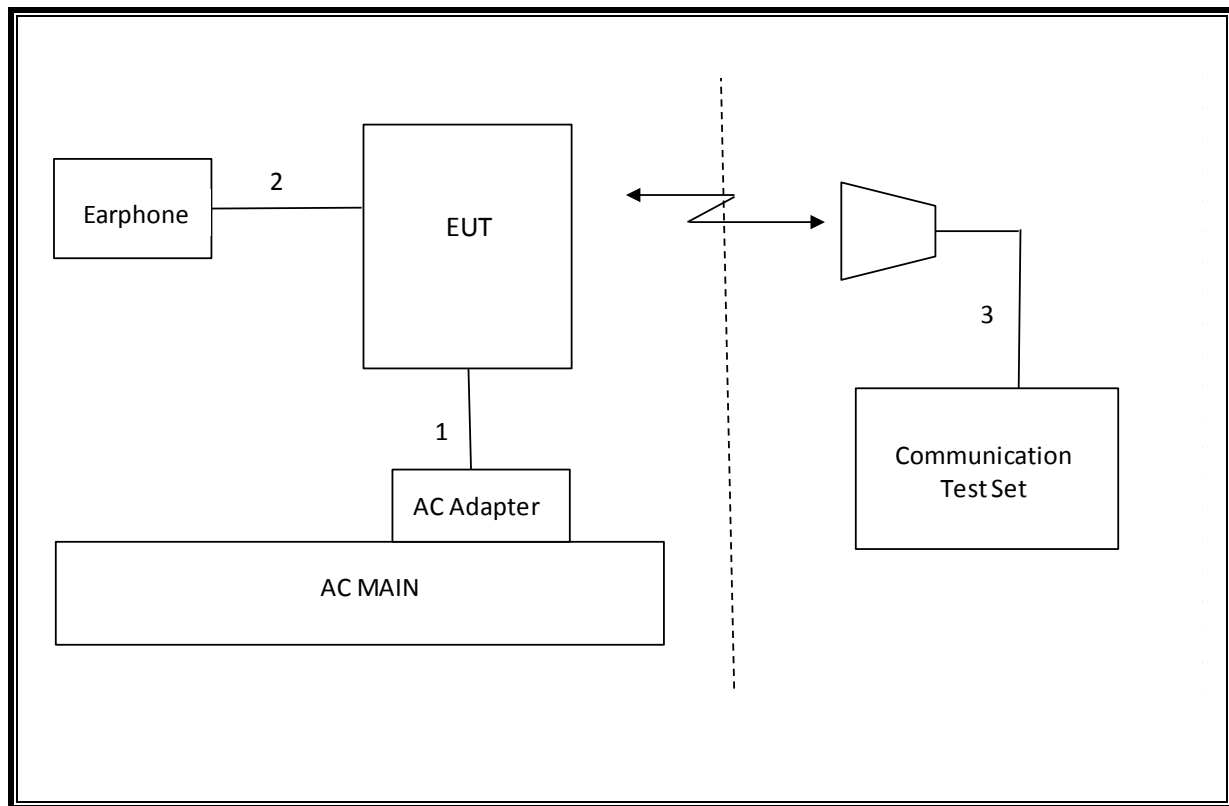
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/16
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/16
Communications Test Set	R&S	CMW500	T159	07/02/16
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/16
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15
Multimeter	Fluke	26111	74320701	4/15/2016

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	244.7KHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-23.608dBm
2.1046	N/A	Conducted output power	N/A		Pass	31.8 dBm
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.005 PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	32.28 dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	33.41 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-31.9 dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.2	31.8	22.8
			190	836.6	31.8	22.8
			251	848.8	31.8	22.8
GPRS (GMSK)	CS1	1	128	824.2	31.8	22.8
			190	836.6	31.8	22.8
			251	848.8	31.8	22.8
		2	128	824.2	29.5	23.5
			190	836.6	29.5	23.5
			251	848.8	29.5	23.5
		3	128	824.2	27.5	23.2
			190	836.6	27.5	23.2
			251	848.8	27.5	23.2
		4	128	824.2	25.5	22.5
			190	836.6	25.5	22.5
			251	848.8	25.5	22.5

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	29.8	20.8
			661	1880.0	29.6	20.6
			810	1909.8	29.7	20.7
GPRS (GMSK)	CS1	1	512	1850.2	29.8	20.8
			661	1880.0	29.6	20.6
			810	1909.8	29.7	20.7
		2	512	1850.2	26.5	20.5
			661	1880.0	26.5	20.5
			810	1909.8	26.5	20.5
		3	512	1850.2	24.6	20.3
			661	1880.0	24.5	20.2
			810	1909.8	24.4	20.1
		4	512	1850.2	23.1	20.1
			661	1880.0	23.0	20.0
			810	1909.8	22.9	19.9

9. PEAK TO AVERAGE RATIO

Test Procedure

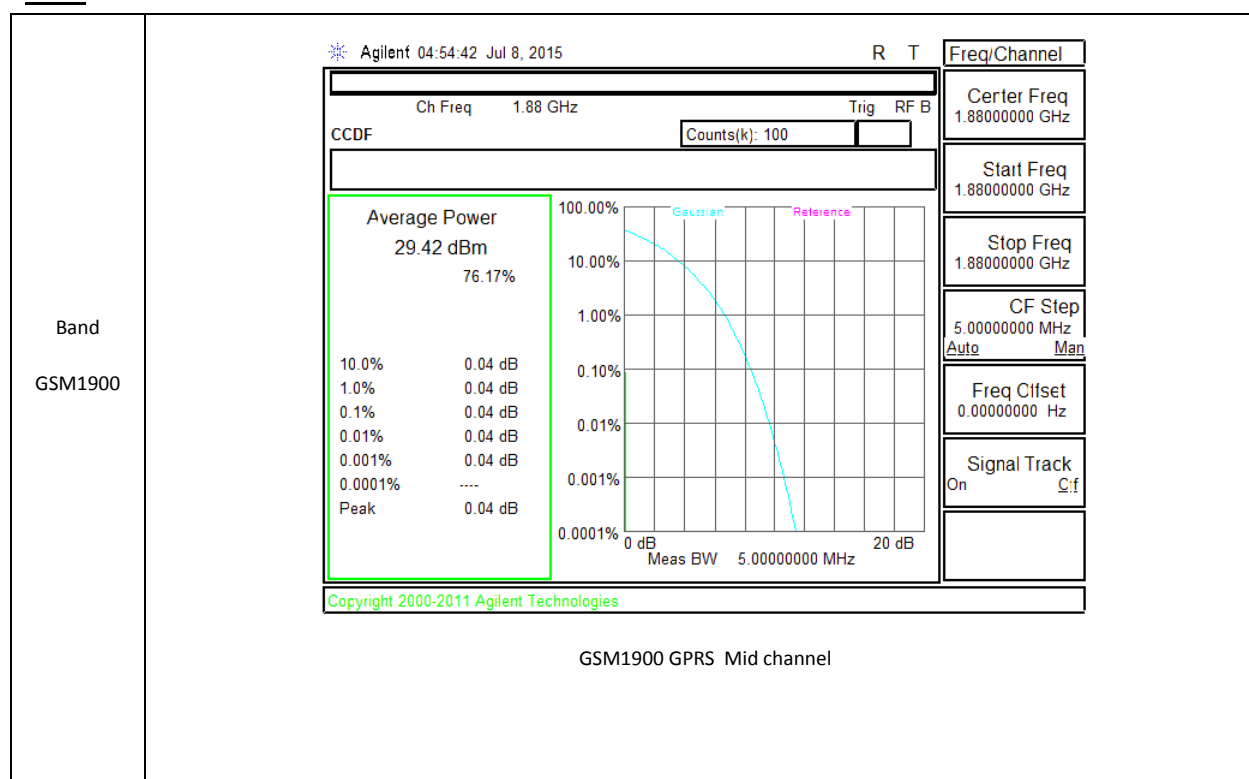
Per KDB 971168 D01 Power Meas License Digital Systems v02r02

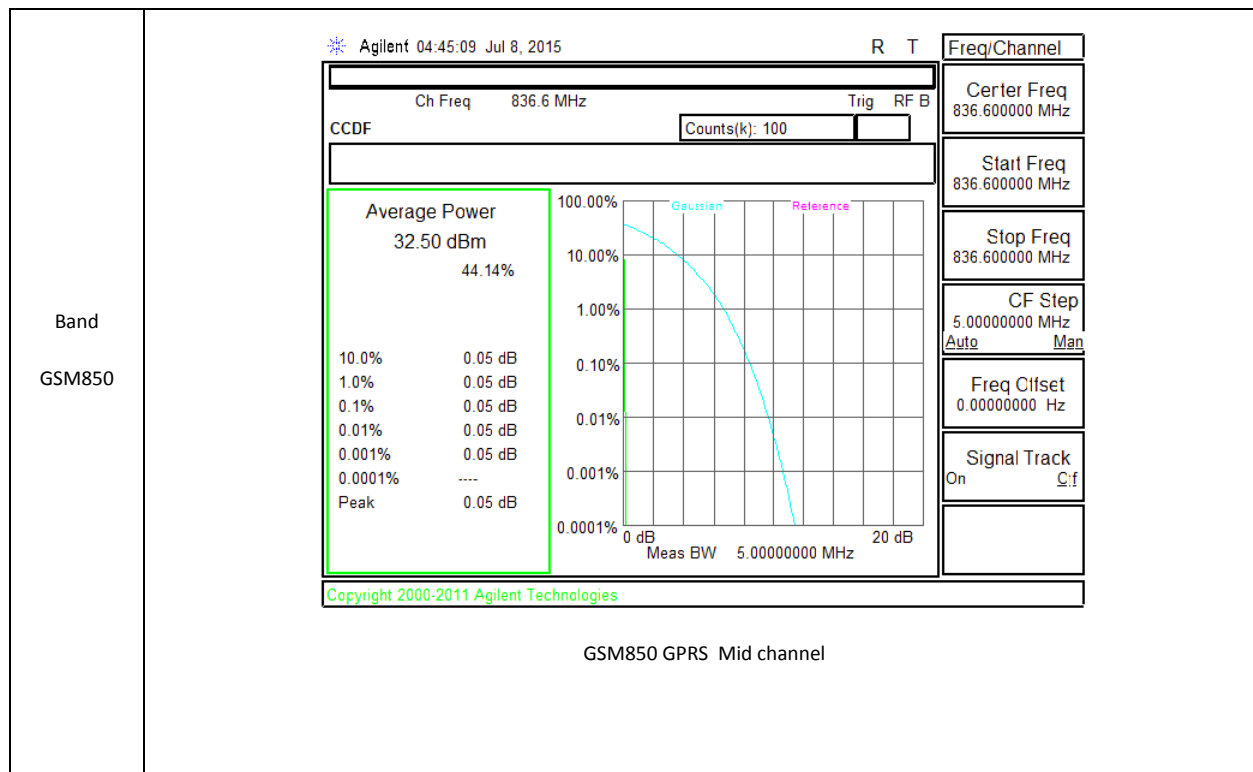
Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM





10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

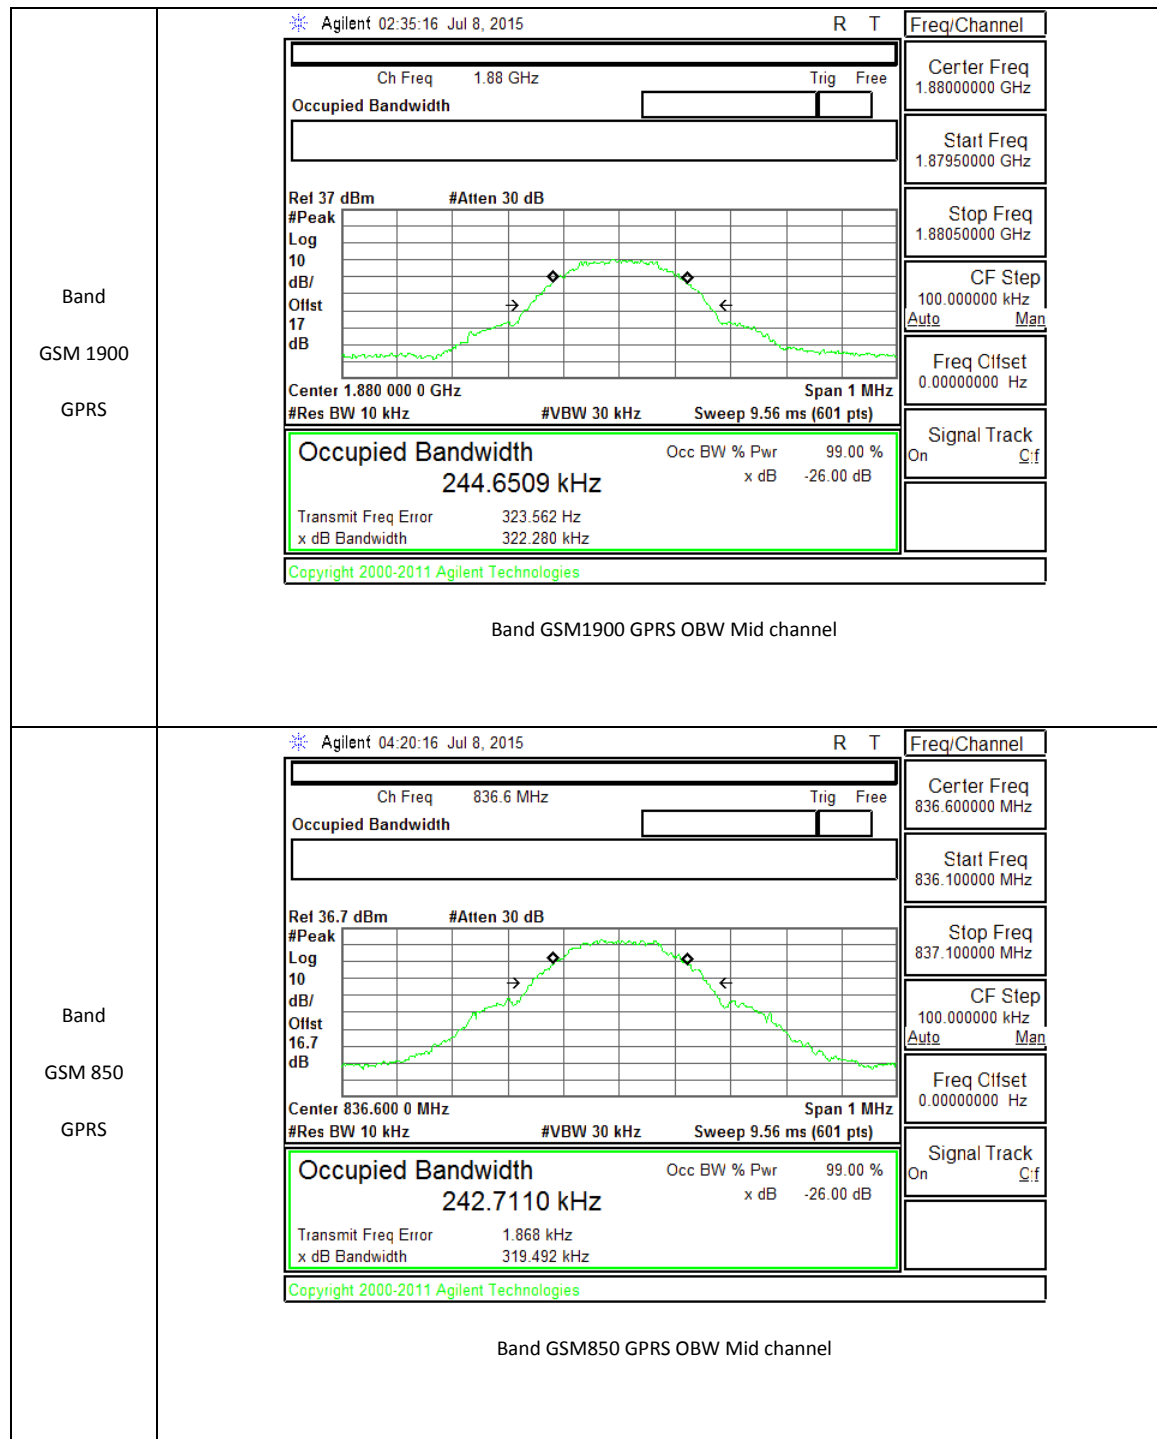
The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

MODES TESTED

10.1.1. OCCUPIED BANDWIDTH RESULTS**GSM**

Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB (kHz)
GSM 850	GPRS	128	824.2	242.6	323.9
		190	836.6	242.7	319.5
		251	848.8	244.1	317.5
GSM 1900	GPRS	512	1850.2	244.4	318.1
		661	1880	244.7	322.3
		810	1909.8	243.7	321.5

10.1.1. OCCUPIED BANDWIDTH PLOTS**GSM**

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359 and §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

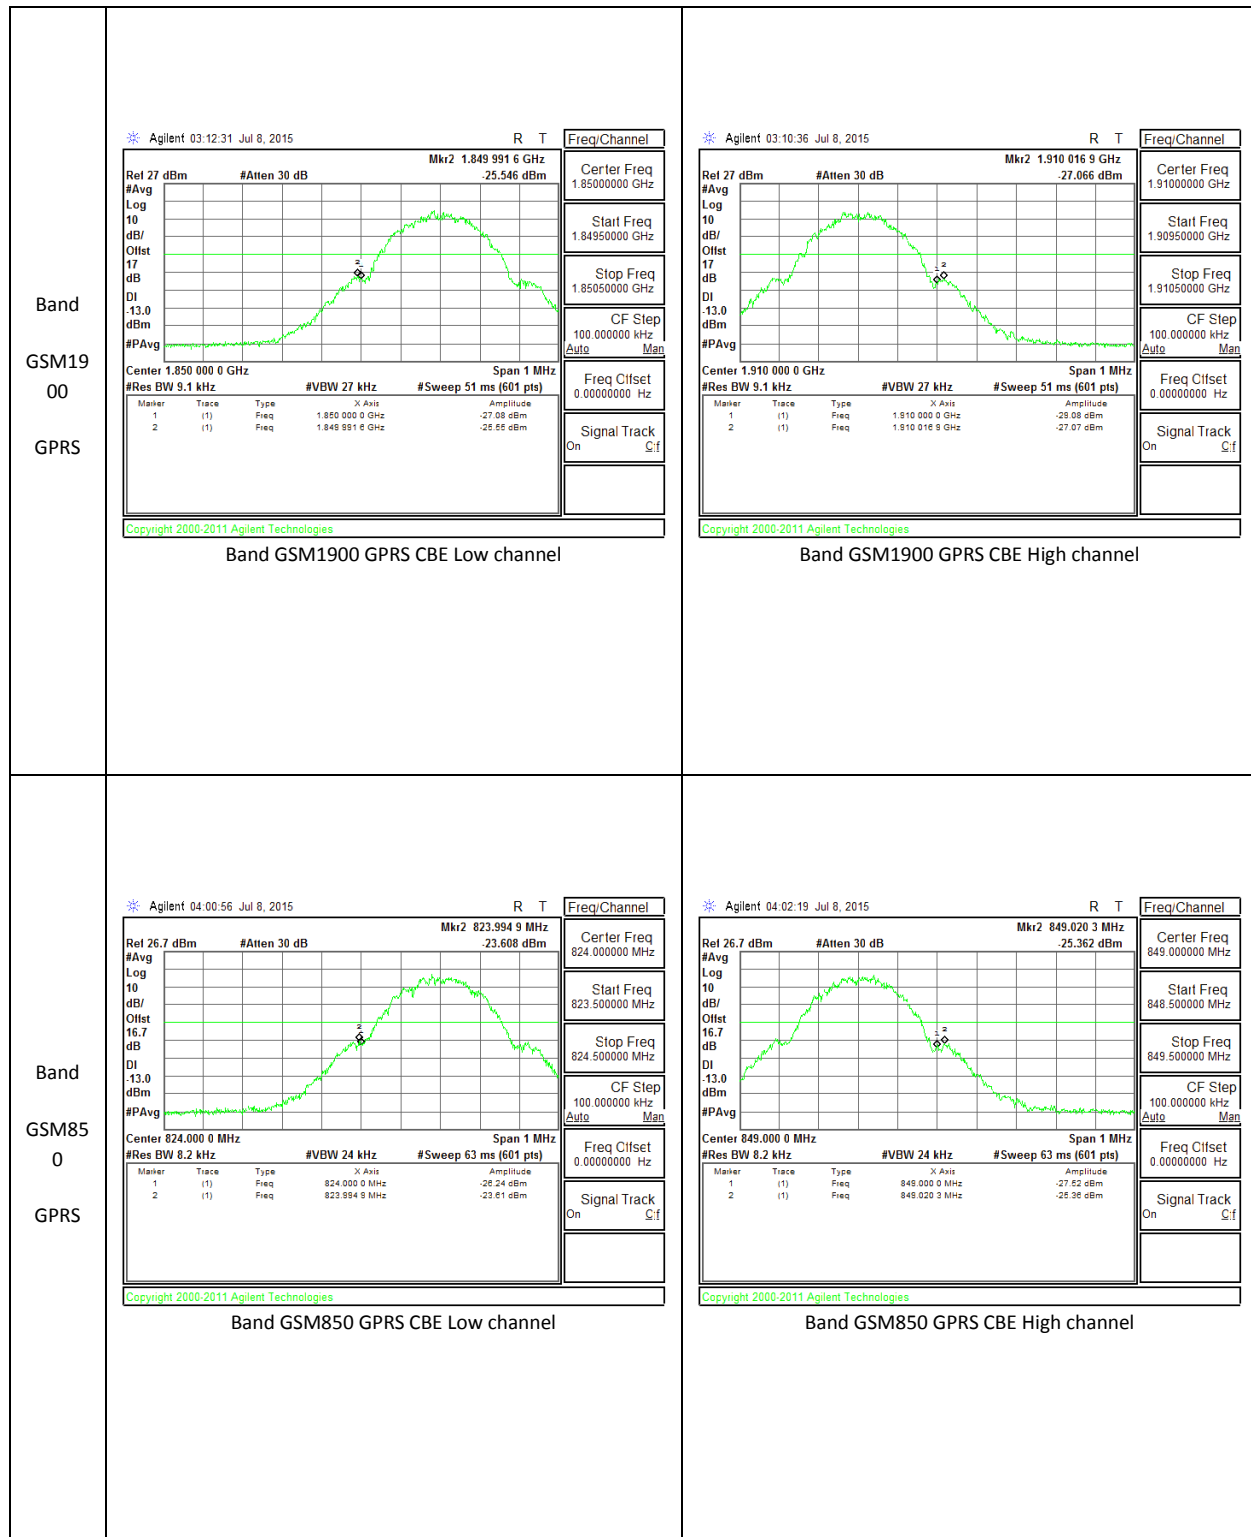
Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

1. Change the center frequency as shown in the table above
2. Set the span to clearly show Lower & Upper frequencies + 1MHz
3. Open screen capture application for PXA/PSA.
4. Load emission mask file
5. Press Run.

If screen capture program is not available or unable to locate the emission mask file, please contact PM or PL right away.

RESULTS

10.2.1. BAND EDGE PLOTS

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

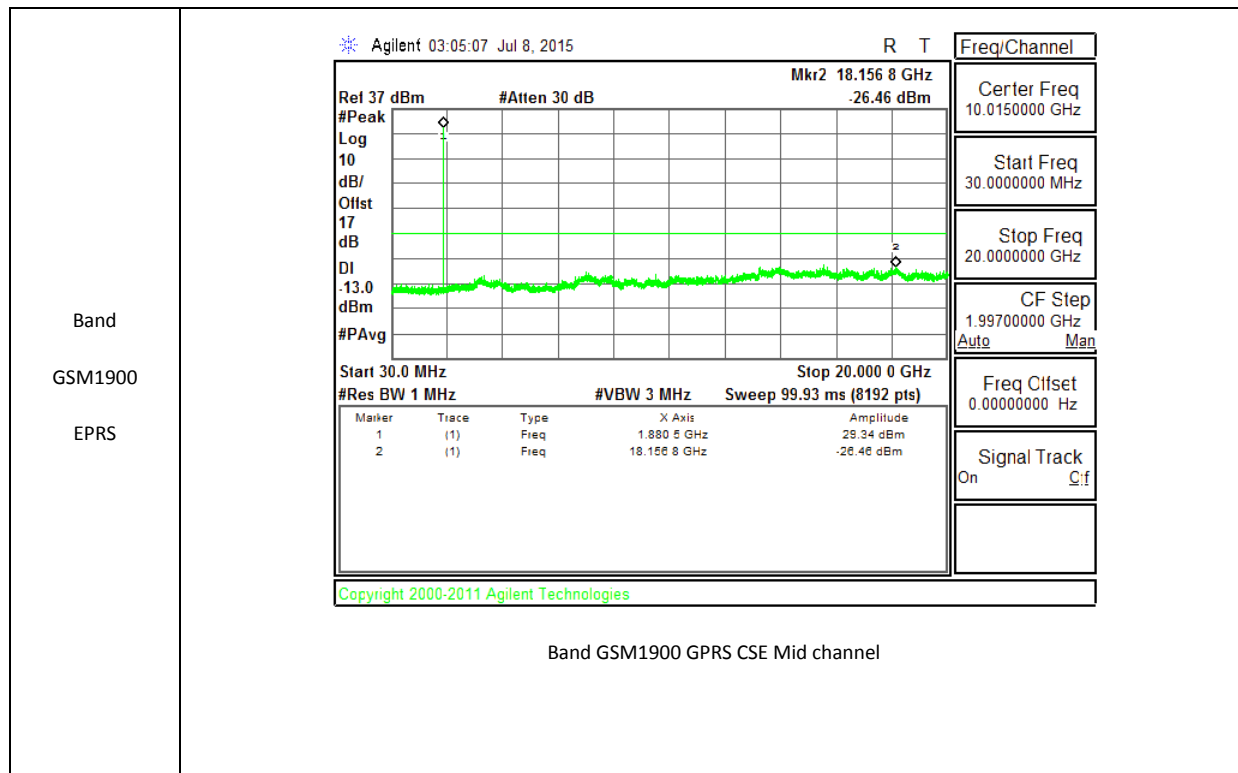
Per KDB 971168 D01 Power Meas License Digital Systems v02r02

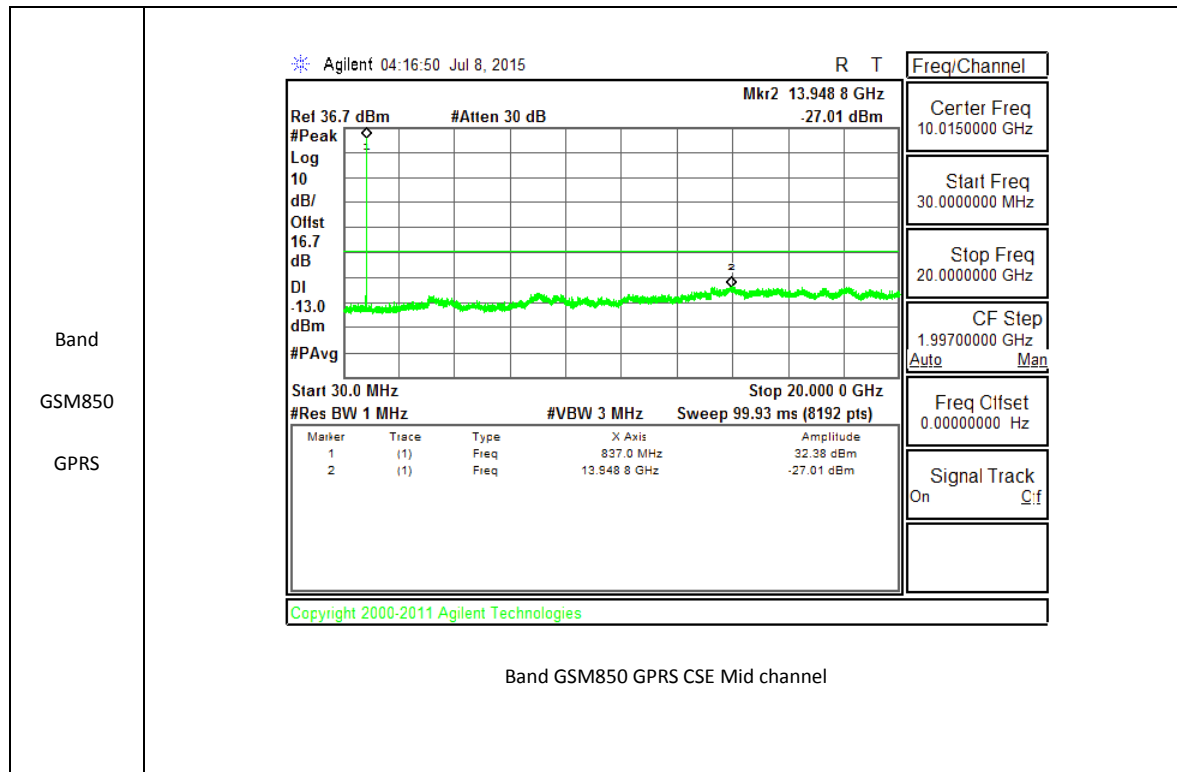
The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT**GSM**

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM 850	GPRS	824.2	-27.21	-13	-14.21
		836.6	-27.01	-13	-14.01
		848.8	-26.52	-13	-13.52
GSM 1900	GPRS	1850.2	-25.53	-13	-12.53
		1880	-26.46	-13	-13.46
		1909.8	-26.67	-13	-13.67

10.3.2. OUT OF BAND EMISSIONS PLOTS



10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355 and §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

MODES TESTED

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS**GSM850 Frequency 836.6MHz**

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599984	0.045	2.5
3.80	40	836.599983	0.046	2.5
3.80	30	836.600021	0.000	2.5
3.80	20	836.600022	0	2.5
3.80	10	836.600023	-0.002	2.5
3.80	0	836.600025	-0.004	2.5
3.80	-10	836.600020	0.002	2.5
3.80	-20	836.600025	-0.004	2.5
3.80	-30	836.600023	-0.001	2.5

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.600022	0	2.5
4.37	20	836.5999804	0.049	2.5
3.23	20	836.6000203	0.002	2.5

GSM1900 Frequency 1880MHz

Reference Frequency: PCS Mid Channel Limit: to stay +/- 2.5 ppm =				
		1880	MHz @ 20°C	
		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999960	0.046	2.5
3.80	40	1880.000040	0.003	2.5
3.80	30	1880.000045	0.001	2.5
3.80	20	1880.000047	0	2.5
3.80	10	1880.000050	-0.002	2.5
3.80	0	1880.000052	-0.003	2.5
3.80	-10	1880.000054	-0.004	2.5
3.80	-20	1880.000053	-0.003	2.5
3.80	-30	1879.999953	0.050	2.5

Reference Frequency: PCS Mid Channel Limit: to stay +/- 2.5 ppm =				
		1880	MHz @ 20°C	
		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1880.000047	0	2.5
4.37	20	1880.000042	0.002	2.5
3.23	20	1880.000046	0.001	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913 and §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	31.63	1455.46
		661	1880	30.43	1104.08
		810	1909.8	32.28	1690.44

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	31.29	1345.86
		190	836.6	32.50	1778.28
		251	848.8	33.41	2192.80

11.1.2. ERP/EIRP DATA**GSM**

Band GSM 1900 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C Company: Samsung Project #: 15I21230 Date: 7/8/2015 Test Engineer: R.A Configuration: EUT Only Mode: GPRS1900 Test Equipment: Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1850.20	18.35	V	0.9	8.0	25.46	33.0	-7.5	
	1850.20	24.52	H	0.9	8.0	31.63	33.0	-1.4	
	Mid Ch								
	1880.00	18.06	V	0.9	8.0	25.17	33.0	-7.8	
	1880.00	23.32	H	0.9	8.0	30.43	33.0	-2.6	
	High Ch								
	1909.80	18.34	V	0.9	8.0	25.45	33.0	-7.6	
	1909.80	25.17	H	0.9	8.0	32.28	33.0	-0.7	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

High Frequency Substitution Measurement UL Verification Services, Inc.									
Company:		Samsung							
Project #:		15I21230							
Date:		7/8/2015							
Test Engineer:		R.A							
Configuration:		EUT Only							
Mode:		GPRS850							
Test Equipment:									
Receiving: Sunol T185, and 3m Chamber C N-type Cable									
Substitution: Dipole T416, 4ft SMA Cable (SN: 506392) Warehouse.									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch									
824.20	32.19	V	0.9	0.0	31.29	38.5	-7.2		
824.20	16.13	H	0.9	0.0	15.23	38.5	-23.2		
Mid Ch									
836.60	33.40	V	0.9	0.0	32.50	38.5	-5.9		
836.60	16.20	H	0.9	0.0	15.30	38.5	-23.1		
High Ch									
848.80	34.31	V	0.9	0.0	33.41	38.5	-5.0		
848.80	15.93	H	0.9	0.0	15.03	38.5	-23.4		
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917 and §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION DATA**GSM**

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		15I21230							
Date:		07/07/15							
Test Engineer:		O. Stoelting							
Configuration:		y-pos EUT w/ AC Adaptor and HS							
Mode:		GPRS1900 Harm							
Chamber		Pre-amplifier		Filter		Limit			
3m Chamber		T34 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.700	-19.1	V	3.0	35.4	1.0	-53.5	-13.0	-40.5	
5.551	-22.4	V	3.0	34.7	1.0	-56.1	-13.0	-43.1	
7.401	-19.8	V	3.0	34.9	1.0	-53.8	-13.0	-40.8	
3.700	-13.2	H	3.0	35.4	1.0	-47.6	-13.0	-34.6	
5.551	-18.5	H	3.0	34.7	1.0	-52.2	-13.0	-39.2	
7.401	-18.7	H	3.0	34.9	1.0	-52.6	-13.0	-39.6	
Mid Ch, 1880.0MHz									
3.760	-21.5	V	3.0	35.3	1.0	-55.9	-13.0	-42.9	
5.640	-22.5	V	3.0	34.7	1.0	-56.3	-13.0	-43.3	
7.520	-17.7	V	3.0	34.9	1.0	-51.6	-13.0	-38.6	
3.760	-16.2	H	3.0	35.3	1.0	-50.6	-13.0	-37.6	
5.640	-22.0	H	3.0	34.7	1.0	-55.7	-13.0	-42.7	
7.520	-12.1	H	3.0	34.9	1.0	-46.0	-13.0	-33.0	
High Ch, 1909.8MHz									
3.820	-24.7	V	3.0	35.3	1.0	-59.0	-13.0	-46.0	
5.729	-16.1	V	3.0	34.7	1.0	-49.8	-13.0	-36.8	
7.639	-14.6	V	3.0	35.0	1.0	-48.5	-13.0	-35.5	
3.820	-24.9	H	3.0	35.3	1.0	-59.2	-13.0	-46.2	
5.729	-17.0	H	3.0	34.7	1.0	-50.7	-13.0	-37.7	
7.639	-13.8	H	3.0	35.0	1.0	-47.8	-13.0	-34.8	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	15I21230									
Date:	07/07/15									
Test Engineer:	O. Stoelting									
Configuration:	x-pos EUT w/ AC Adaptor and HS									
Mode:	GPRS850 Harm									
Chamber Pre-amplifier Filter Limit 5m Chamber B T34 8449B Filter 1 Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM 850 GPRS	Low Ch, 824.2MHz									
	1.648	-1.0	V	3.0	37.4	1.0	-37.4	-13.0	-24.4	
	2.473	-11.5	V	3.0	36.4	1.0	-46.9	-13.0	-33.9	
	3.297	-25.6	V	3.0	35.8	1.0	-60.4	-13.0	-47.4	
	1.648	2.6	H	3.0	37.4	1.0	-33.8	-13.0	-20.8	
	2.473	-16.7	H	3.0	36.4	1.0	-52.1	-13.0	-39.1	
	3.297	-27.0	H	3.0	35.8	1.0	-61.8	-13.0	-48.8	
	Mid Ch, 836.6MHz									
	1.673	-1.2	V	3.0	37.3	1.0	-37.5	-13.0	-24.5	
	2.510	-11.1	V	3.0	36.4	1.0	-46.5	-13.0	-33.5	
	3.346	-14.5	V	3.0	35.8	1.0	-49.3	-13.0	-36.3	
	1.673	4.4	H	3.0	37.3	1.0	-31.9	-13.0	-18.9	
	2.510	-14.3	H	3.0	36.4	1.0	-49.6	-13.0	-36.6	
	3.346	-22.9	H	3.0	35.8	1.0	-57.7	-13.0	-44.7	
	High Ch, 848.8MHz									
	1.698	0.1	V	3.0	37.3	1.0	-36.2	-13.0	-23.2	
	2.547	-11.7	V	3.0	36.3	1.0	-47.0	-13.0	-34.0	
	3.395	-15.4	V	3.0	35.7	1.0	-50.1	-13.0	-37.1	
1.698	2.4	H	3.0	37.3	1.0	-33.9	-13.0	-20.9		
2.547	-16.7	H	3.0	36.3	1.0	-52.1	-13.0	-39.1		
3.395	-19.4	H	3.0	35.7	1.0	-54.1	-13.0	-41.1		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										