

FCC 2G, 3G REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

July 09, 2018

Location:

HCT CO., LTD.,

Address:129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-1807-FC003-R1**FCC ID:** A3LSMJ260G**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-J260G/DS
Additional Model(s): SM-J260Y/DS, SM-J260Y
EUT Type: Mobile Phone
FCC Classification: Licensed Non-Broadcast Transmitter Held to Ear (TNE)
FCC Rule Part(s): §22, §2

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	245 KGXW	0.414	26.17
GSM850 EDGE			243 KG7W	0.112	20.48
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M17F9W	0.077	18.89

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1807-FC003	July 04, 2018	- First Approval Report
HCT-RF-1807-FC003-R1	July 09, 2018	- Revised the FCC Classification on page 1, 4

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 OCCUPIED BANDWIDTH.	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.6 BAND EDGE	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
3.8 WORST CASE(RADIATED TEST)	13
4. LIST OF TEST EQUIPMENT	14
5. MEASUREMENT UNCERTAINTY	15
6. SUMMARY OF TEST RESULTS	16
7. SAMPLE CALCULATION	17
8. TEST DATA	19
8.1 EFFECTIVE RADIATED POWER	19
8.1.1 Model : SM-J260G/DS	19
8.1.2 Additional Model : SM-J260Y/DS	20
8.1.3 Additional Model : SM-J260Y	20
8.2 RADIATED SPURIOUS EMISSIONS	21
8.2.1 Model : SM-J260G/DS	21
8.2.2 Additional Model : SM-J260Y/DS	23
8.2.3 Additional Model : SM-J260Y	24
8.3 OCCUPIED BANDWIDTH	25
8.4 CONDUCTED SPURIOUS EMISSIONS	26
8.5 BAND EDGE	26
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	27
9. TEST PLOTS.....	29
10. APPENDIX A_ TEST SETUP PHOTO	59

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMJ260G
Application Type:	Certification
FCC Classification:	Licensed Non-Broadcast Transmitter Held to Ear (TNE)
FCC Rule Part(s):	§22, §2
EUT Type:	Mobile Phone
Model(s):	SM-J260G/DS
Additional Model(s):	SM-J260Y/DS, SM-J260Y
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850)
Date(s) of Tests:	June 18, 2018 ~ June 29, 2018

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11b/g/n (HT20), Bluetooth.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

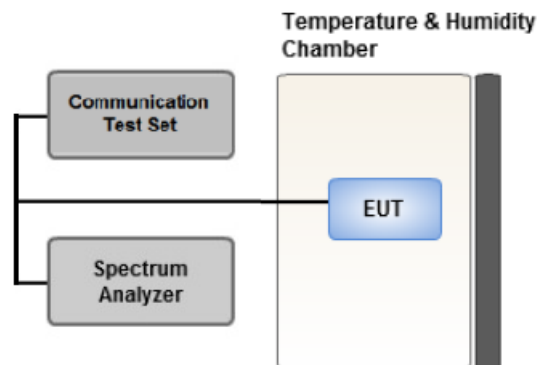

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

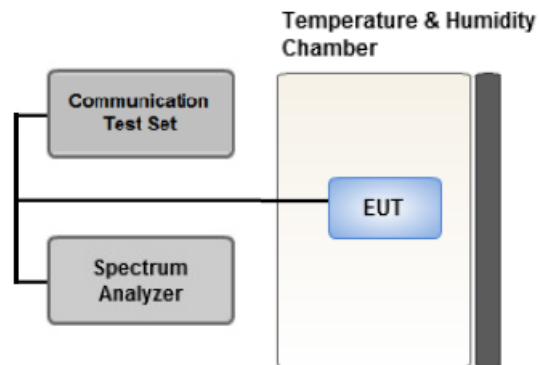

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.6 BAND EDGE

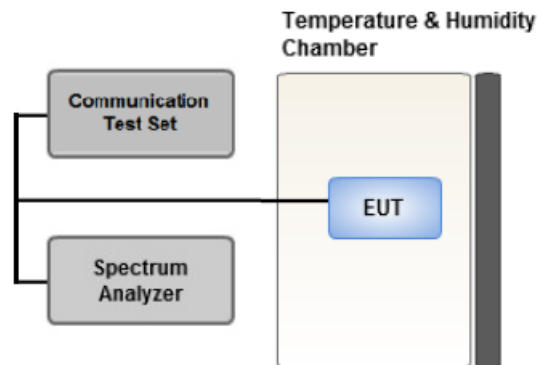

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

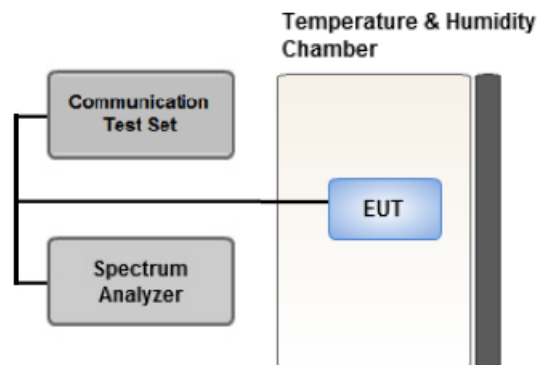

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis
Effective Radiated Power	(WCDMA)	RMC	WCDMA B5 : Y
Radiated Spurious and Harmonic Emissions	(WCDMA)	RMC	WCDMA B5 : Z

[Worst case_2G]

Test Description	Mod	Axis
Effective Radiated Power	Voice, EDGE(1 TX Slot)	Y
Radiated Spurious and Harmonic Emissions	Voice	Z

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	07/21/2017	Annual	07/21/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/14/2016	Biennial	10/14/2018
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/30/2017	Annual	10/30/2018
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/26/2017	Annual	09/26/2018
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/19/2017	Biennial	04/19/2019
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	9360-3368	10/14/2016	Biennial	10/14/2018
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	02/13/2018	Annual	02/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/18/2017	Annual	07/18/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	100931	10/30/2017	Annual	10/30/2018
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	08/16/2017	Annual	08/16/2018
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	< 2.5 ppm	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

8.1.1 Model : SM-J260G/DS

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-24.32	37.86	-10.59	1.31	V	< 7.00	0.394	25.96
	190	836.6	-24.55	38.03	-10.54	1.32	V		0.414	26.17
	251	848.8	-24.77	37.30	-10.49	1.33	V		0.353	25.48
EDGE	190	836.6	-30.24	32.34	-10.54	1.32	V		0.112	20.48

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-32.17	30.78	-10.58	1.31	V	< 7.00	0.077	18.89
	4183	836.6	-32.92	30.52	-10.54	1.32	V		0.073	18.66
	4233	846.6	-32.91	30.32	-10.50	1.33	V		0.071	18.49

8.1.2 Additional Model : SM-J260Y/DS

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	190	836.6	-23.87	38.71	-10.54	1.32	H	< 7.00	0.484	26.85

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-31.88	31.07	-10.58	1.31	H	< 7.00	0.083	19.18

Note:

1. All modes of operation were investigated and the ERP result for SM-J260Y/DS are worst case in all mode & channel.

8.1.3 Additional Model : SM-J260Y

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	190	836.6	-23.34	39.24	-10.54	1.32	H	< 7.00	0.547	27.38

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-31.46	31.49	-10.58	1.31	H	< 7.00	0.091	19.60

Note:

1. All modes of operation were investigated and the ERP result for SM-J260Y are worst case in all mode & channel.
2. SM-J260Y and SM-J260Y/DS are same hardware, but for different only number of SIM card slot.
 - SM-J260Y : Single SIM
 - SM-J260Y/DS : Dual SIM

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Model : SM-J260G/DS

- MEASURED OUTPUT POWER: 26.17 dBm = 0.414 W
- MODULATION SIGNAL: GSM850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 39.17 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
128 (824.2)	1,648.40	-40.64	9.15	-53.06	1.88	V	-45.79	71.96
	2,472.60	-53.97	10.92	-62.87	2.33	V	-54.28	80.45
	3,296.80	-56.79	11.93	-66.03	2.72	V	-56.82	82.99
190 (836.6)	1,673.20	-43.89	9.23	-56.36	1.90	H	-49.03	75.20
	2,509.80	-56.61	10.96	-65.87	2.36	V	-57.27	83.44
	3,346.40	-57.01	12.04	-66.57	2.74	H	-57.27	83.44
251 (848.8)	1,697.60	-45.97	9.33	-58.41	1.92	H	-51.00	77.17
	2,546.40	-50.03	10.98	-59.08	2.39	H	-50.49	76.66
	3,395.20	-56.78	12.14	-66.20	2.77	V	-56.83	83.00

- MEASURED OUTPUT POWER: 18.89 dBm = 0.077 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.89 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
4132 (826.4)	1,652.80	-56.89	9.17	-69.35	1.88	H	-62.06	80.95
	2,479.20	-57.12	10.93	-66.40	2.34	H	-57.81	76.70
	3,305.60	-51.25	11.95	-60.48	2.72	H	-51.25	70.14
	4,132.00	-43.41	12.73	-50.73	3.07	H	-41.07	59.96
	4,958.40	-52.35	12.58	-56.97	3.38	V	-47.77	66.66
4183 (836.6)	1,673.20	-56.10	9.24	-68.58	1.90	H	-61.24	80.13
	2,509.80	-56.74	10.96	-66.00	2.36	H	-57.40	76.29
	3,346.40	-48.75	12.04	-58.31	2.74	V	-49.01	67.90
	4,183.00	-45.94	12.74	-53.29	3.08	V	-43.63	62.52
	5,019.60	-53.55	12.60	-57.14	3.40	H	-47.94	66.83
4233 (846.6)	1,693.20	-56.85	9.30	-69.32	1.91	H	-61.93	80.82
	2,539.80	-55.24	10.98	-63.99	2.39	H	-55.40	74.29
	3,386.40	-48.88	12.12	-58.43	2.77	H	-49.08	67.97
	4,233.00	-47.41	12.74	-54.66	3.10	V	-45.02	63.91

8.2.2 Additional Model : SM-J260Y/DS

■ MODULATION SIGNAL: GSM850

■ DISTANCE: 3 meters

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
128 (824.2)	1,648.40	-38.78	9.15	-51.20	1.88	H	-43.93

Note:

1. All modes of operation were investigated and the RSE result for SM-J260Y/DS are worst case in all mode & channel.

■ MODULATION SIGNAL: WCDMA850

■ DISTANCE: 3 meters

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
4132 (826.4)	4,132.00	-37.87	12.73	-45.19	3.07	H	-35.53

Note:

1. All modes of operation were investigated and the RSE result for SM-J260Y/DS are worst case in all mode & channel.

8.2.3 Additional Model : SM-J260Y

■ MODULATION SIGNAL: GSM850

■ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBd)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)
128 (824.2)	1,648.40	-39.02	9.15	-51.44	1.88	H	-44.17

Note:

1. All modes of operation were investigated and the RSE result for SM-J260Y are worst case in all mode & channel.
2. SM-J260Y and SM-J260Y/DS are same hardware, but for different only number of SIM card slot.
 - SM-J260Y : Single SIM
 - SM-J260Y/DS : Dual SIM

■ MODULATION SIGNAL: WCDMA850

■ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBd)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)
4132 (826.4)	4,132.00	-37.60	12.73	-44.92	3.07	H	-35.26

Note:

1. All modes of operation were investigated and the RSE result for SM-J260Y are worst case in all mode & channel.
2. SM-J260Y and SM-J260Y/DS are same hardware, but for different only number of SIM card slot.
 - SM-J260Y : Single SIM
 - SM-J260Y/DS : Dual SIM

8.3 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	244.62
	190	836.60	243.92
	251	848.80	243.76
GSM850 EDGE	128	824.20	242.59
WCDMA850	4132	826.40	4.1650
	4183	836.60	4.1332
	4233	846.60	4.1442

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 30 ~ 36.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	2.6626	27.976	-57.352	-29.376	-13.00
	190	6.7827	28.591	-58.199	-29.608	
	251	3.0918	27.976	-57.326	-29.350	
WCDMA850	4132	4.1277	27.976	-69.298	-41.322	
	4183	4.1790	27.976	-67.789	-39.813	
	4233	4.2383	27.976	-70.035	-42.059	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 53 ~ 58.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 37 ~ 52.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: GSM850
- OPERATING FREQUENCY: 836.600.000 Hz
- CHANNEL: 190
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 599 983	0.0	0.000 000	0.0000
100%		-30	836 599 966	-17.1	-0.000 002	-0.0205
100%		-20	836 599 965	-17.6	-0.000 002	-0.0210
100%		-10	836 599 966	-16.5	-0.000 002	-0.0197
100%		0	836 599 967	-16.2	-0.000 002	-0.0194
100%		+10	836 599 973	-9.4	-0.000 001	-0.0113
100%		+30	836 599 973	-9.5	-0.000 001	-0.0114
100%		+40	836 599 973	-9.9	-0.000 001	-0.0118
100%		+50	836 599 974	-8.8	-0.000 001	-0.0105
Batt. Endpoint	3.40	+20	836 599 974	-9.0	-0.000 001	-0.0108

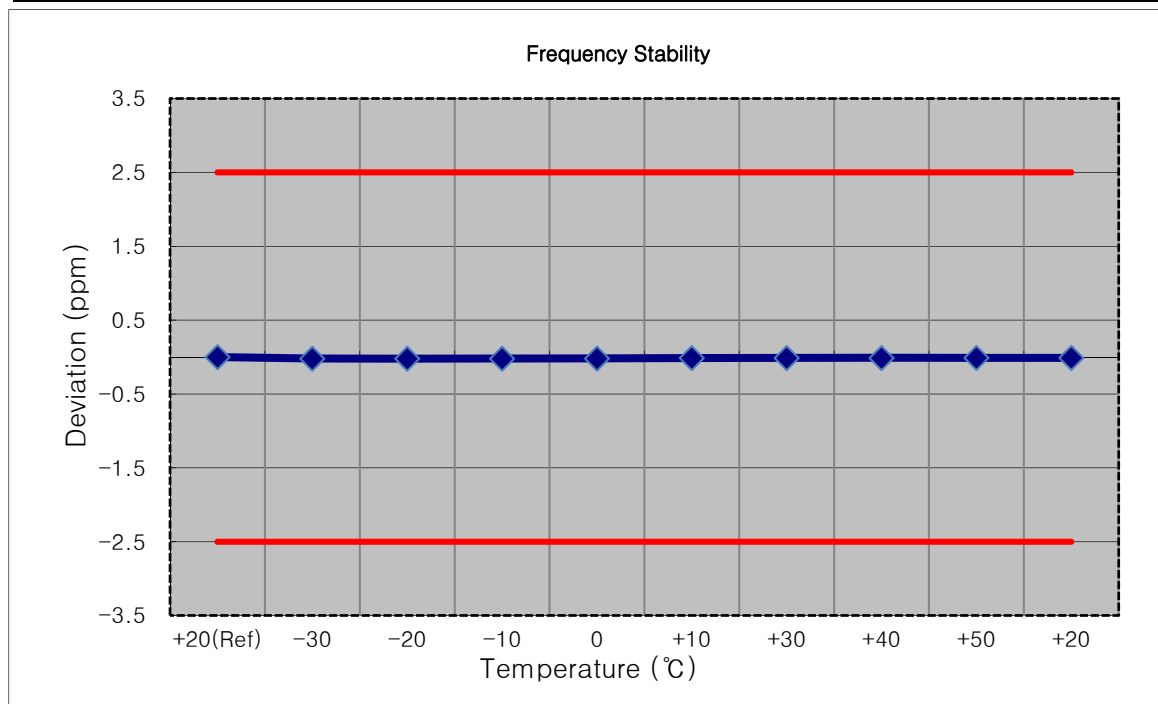


- Mode: WCDMA850
- OPERATING FREQUENCY: 836.600.000 Hz
- CHANNEL: 4183
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 599 998	0.0	0.000 000	0.0000
100%		-30	836 599 996	-1.2	0.000 000	-0.0015
100%		-20	836 599 995	-2.2	0.000 000	-0.0026
100%		-10	836 599 995	-2.3	0.000 000	-0.0027
100%		0	836 599 996	-1.7	0.000 000	-0.0020
100%		+10	836 599 996	-1.7	0.000 000	-0.0020
100%		+30	836 599 996	-2.2	0.000 000	-0.0026
100%		+40	836 599 996	-2.1	0.000 000	-0.0025
100%		+50	836 599 996	-2.1	0.000 000	-0.0025
Batt. Endpoint	3.40	+20	836 599 995	-2.6	0.000 000	-0.0031

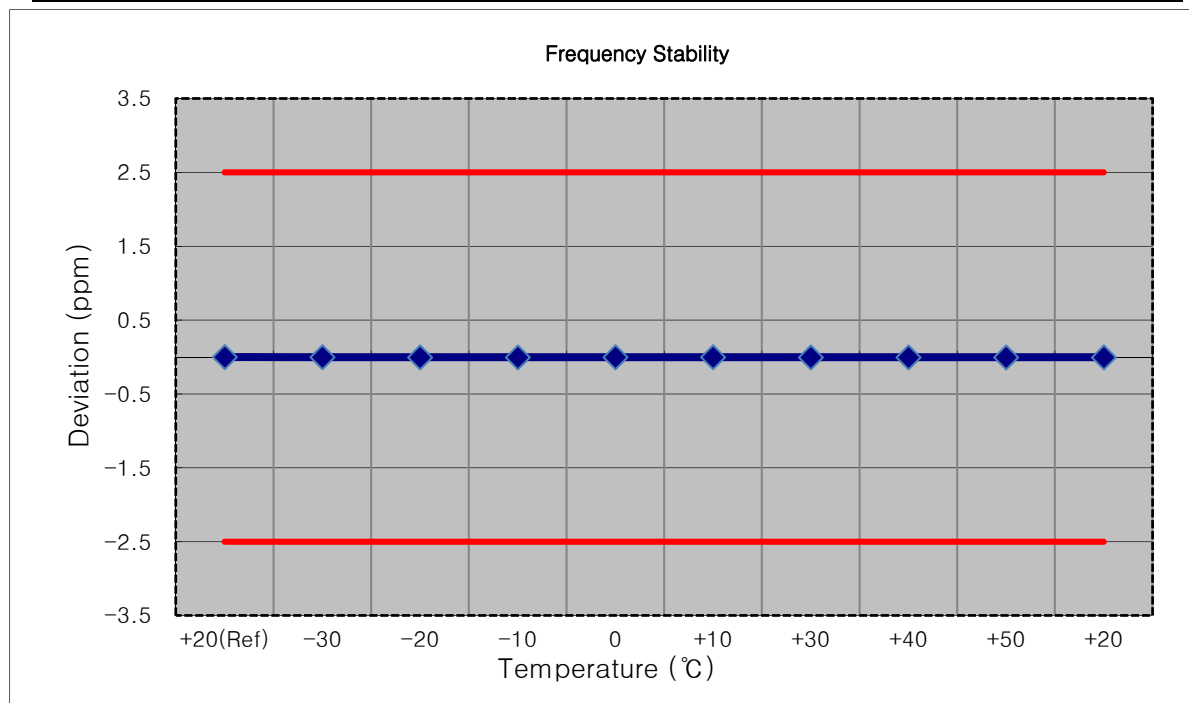


9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

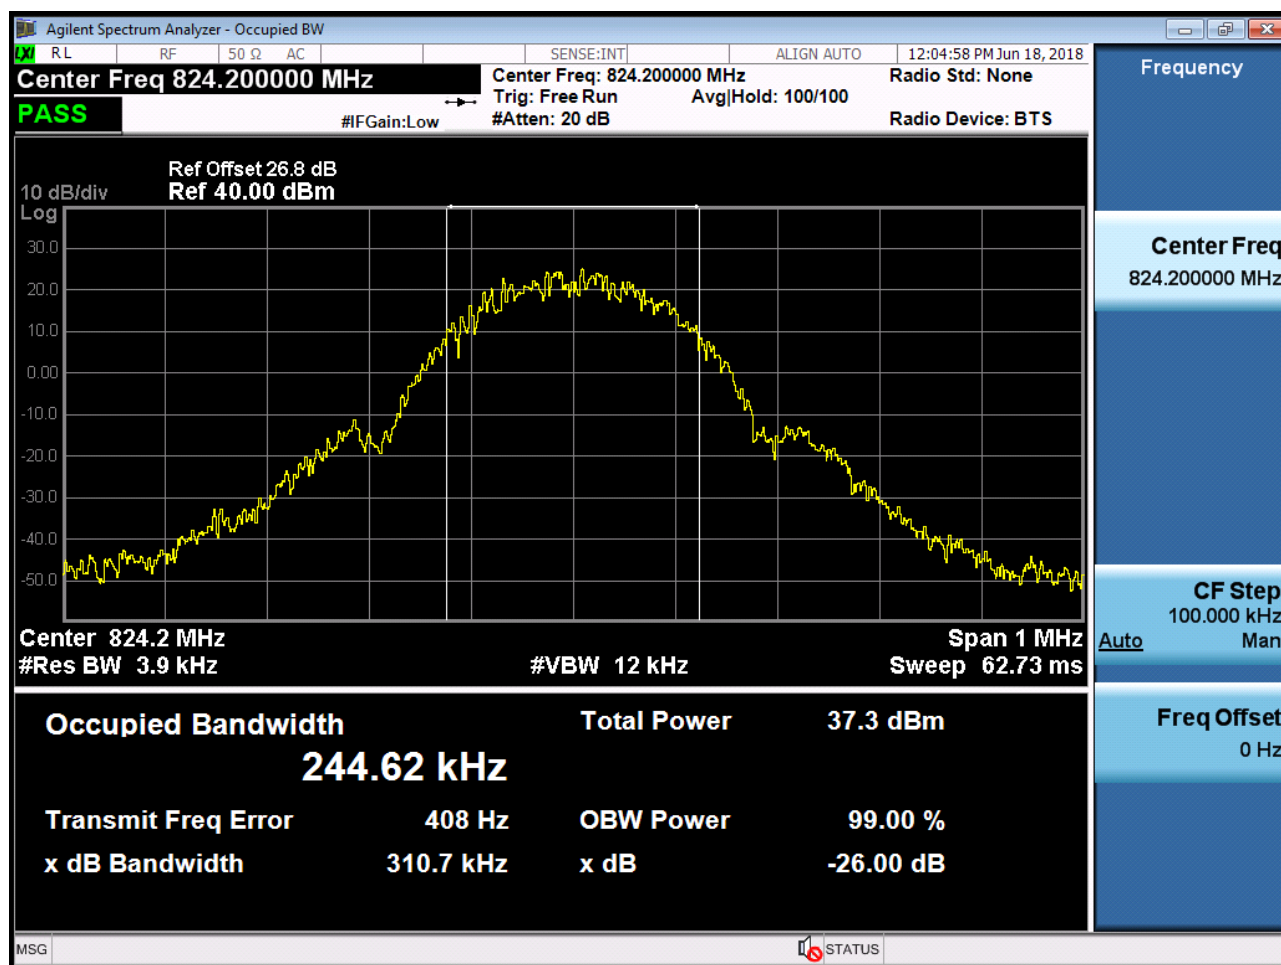


■ GSM850 MODE (190 CH.) Occupied Bandwidth

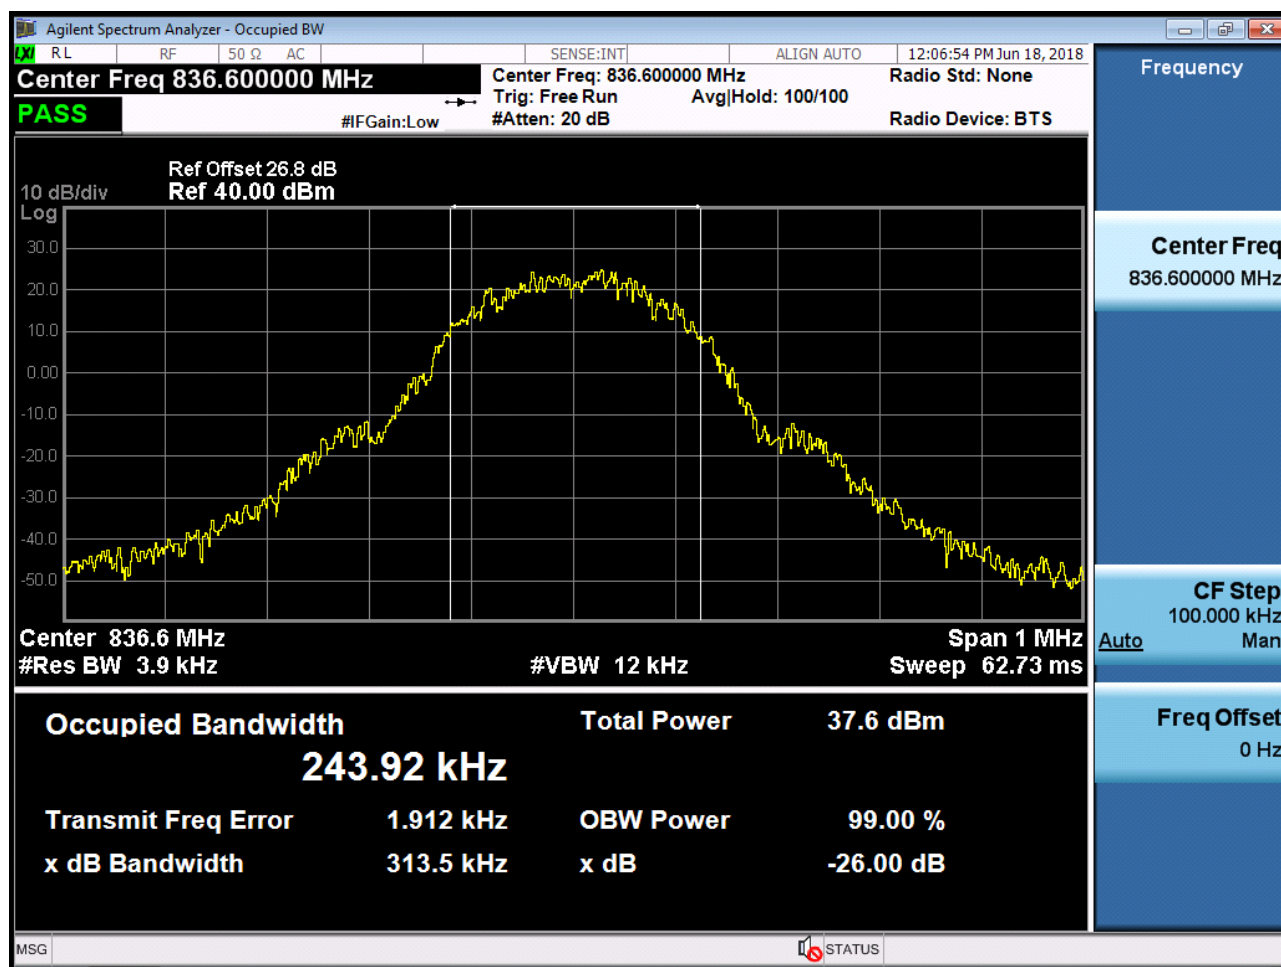


■ GSM850 MODE (251 CH.) Occupied Bandwidth

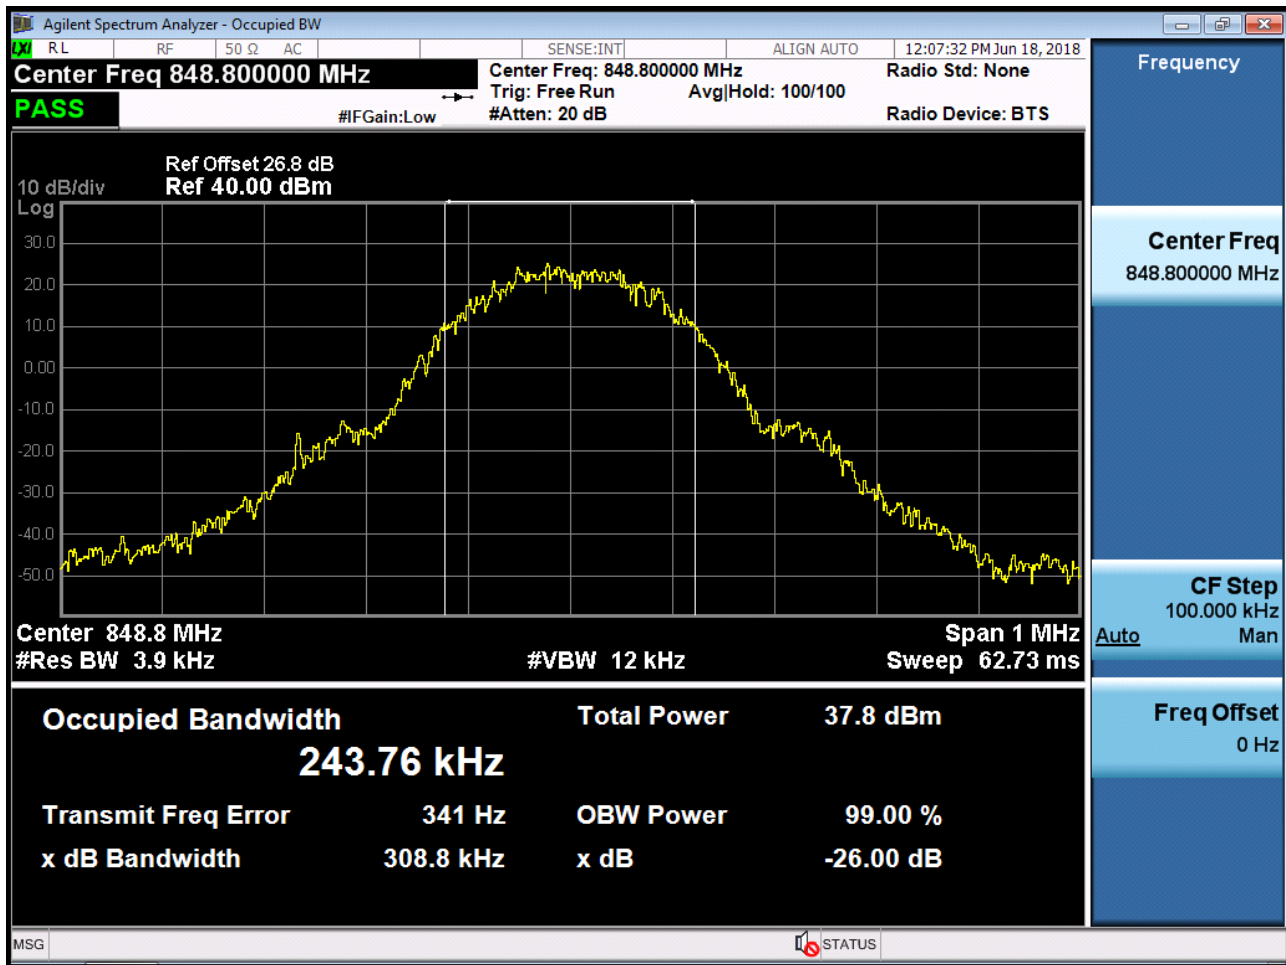


■ GSM850 EDGE (128 CH.) Occupied Bandwidth

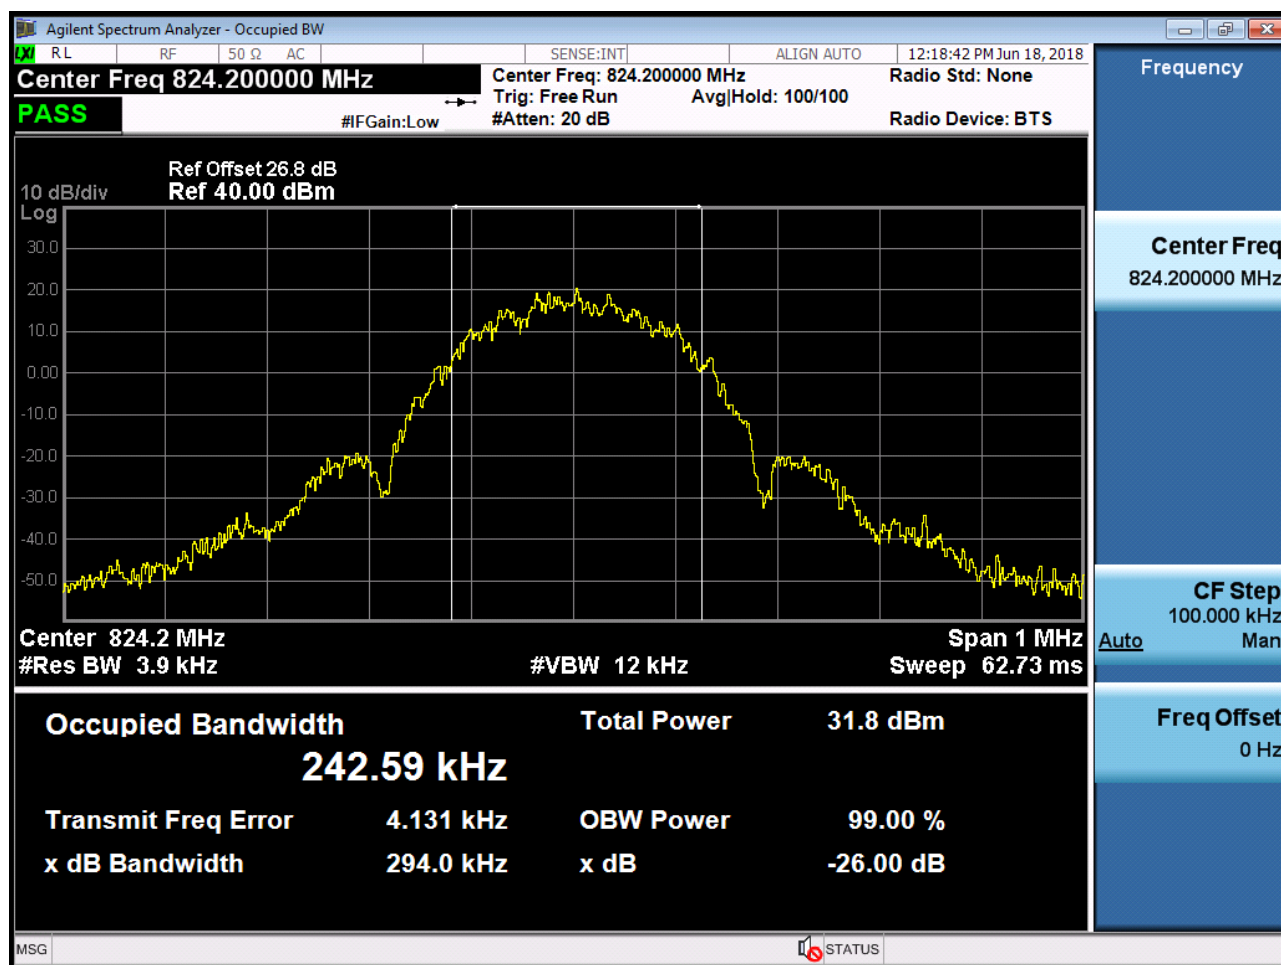


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

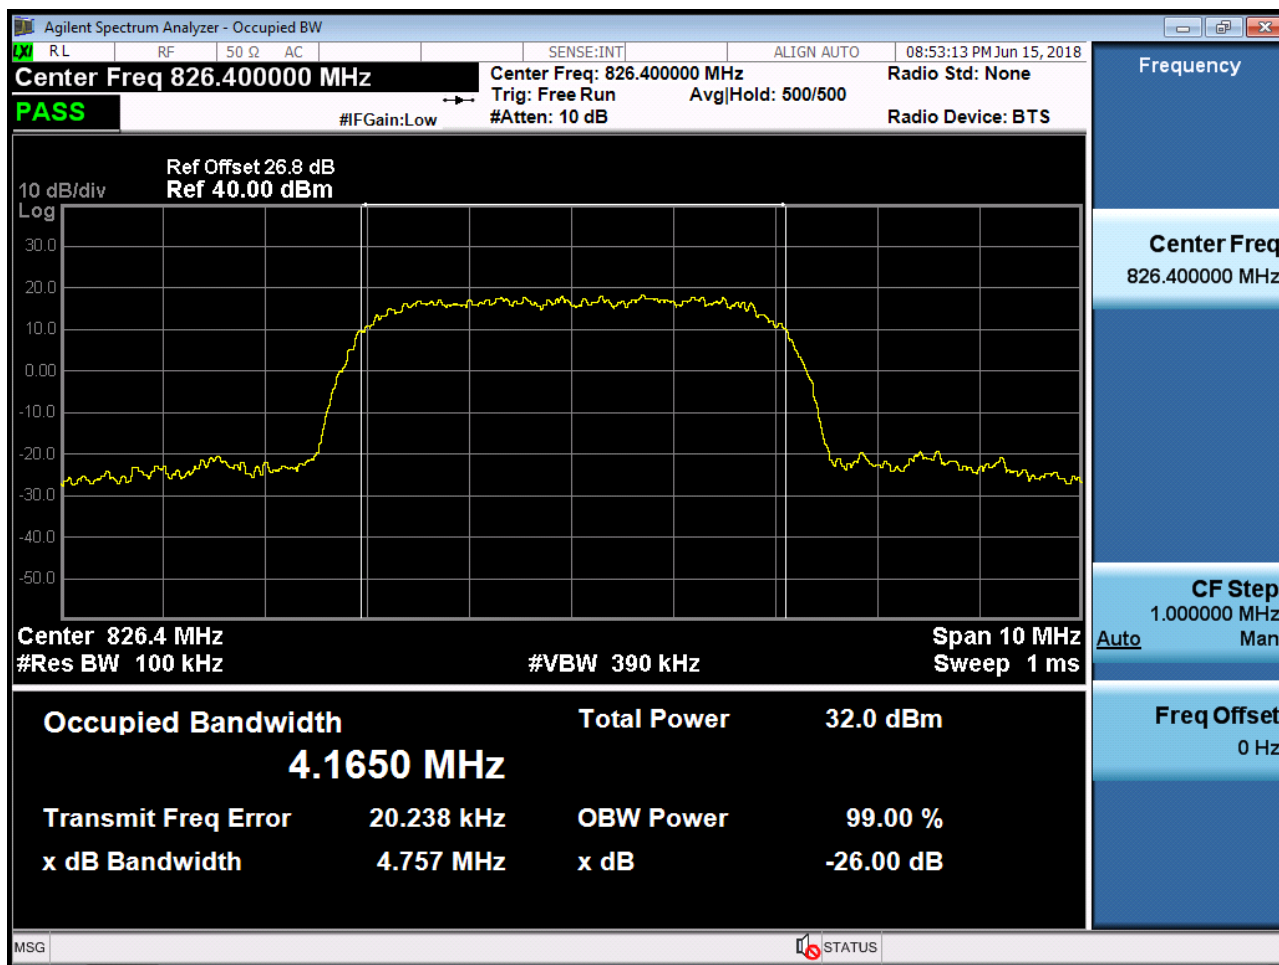


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

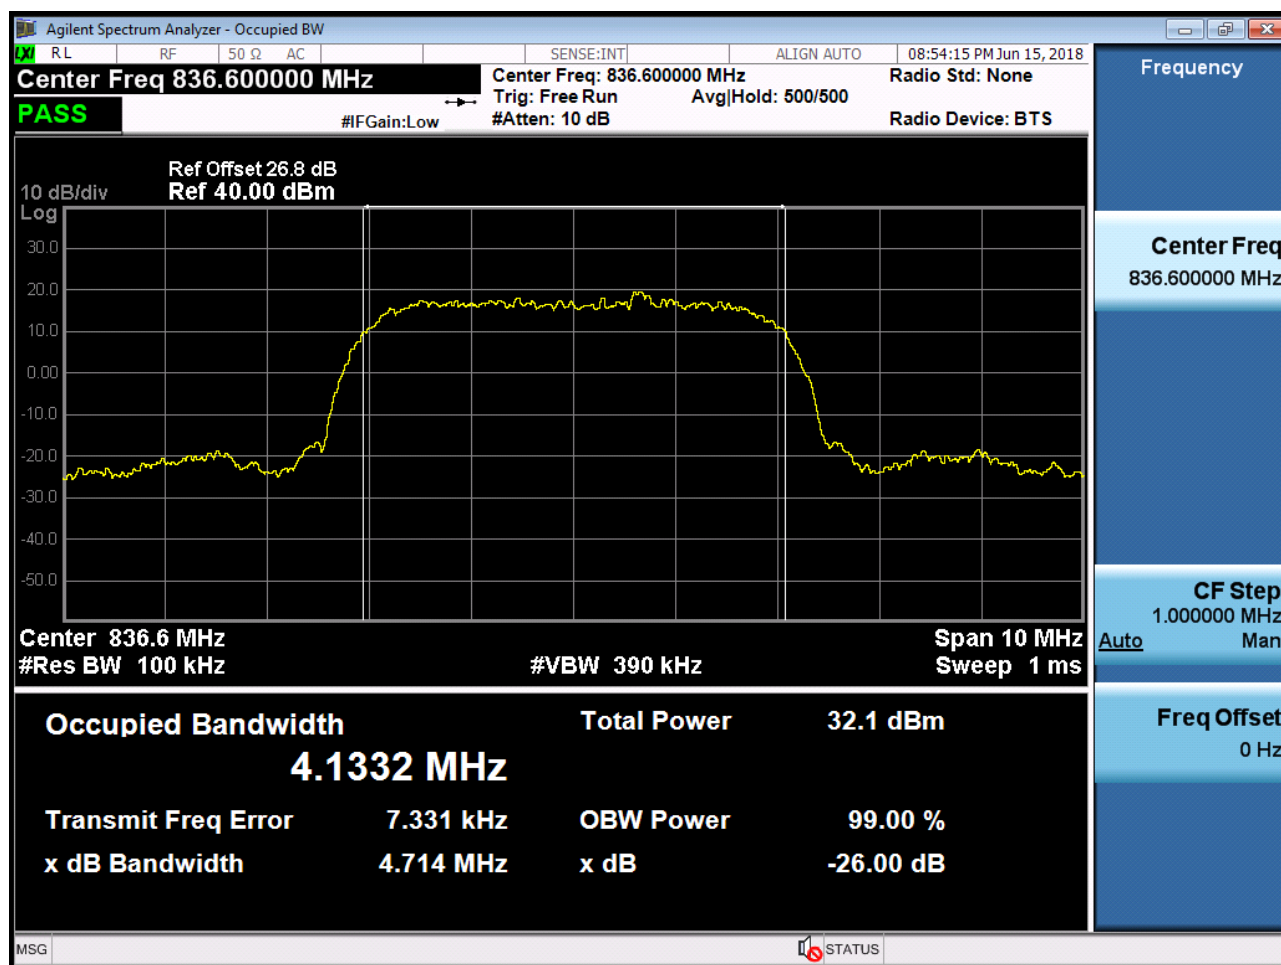

■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

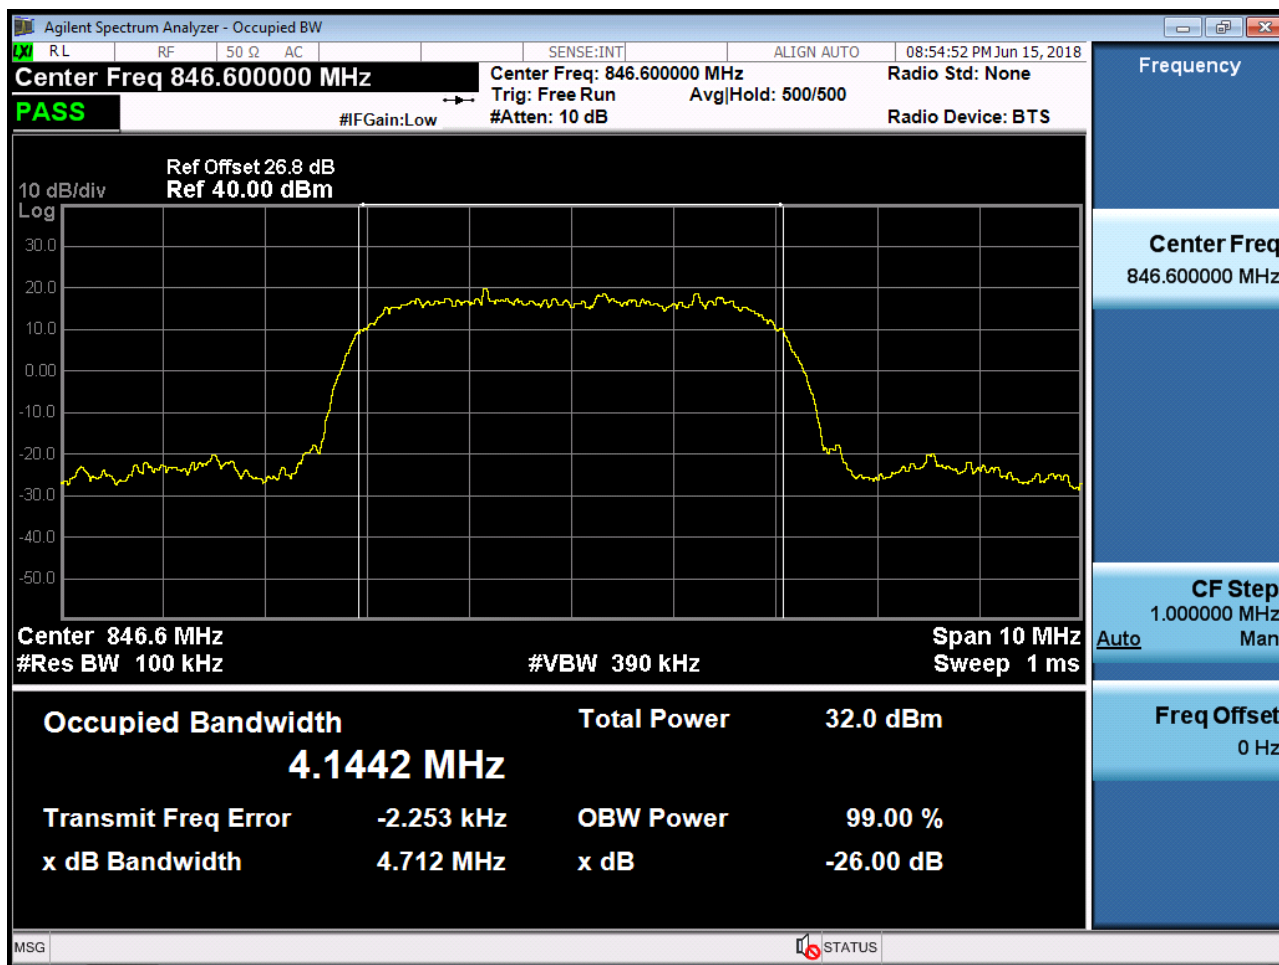


■ GSM850 MODE (128 CH.) Block Edge 1

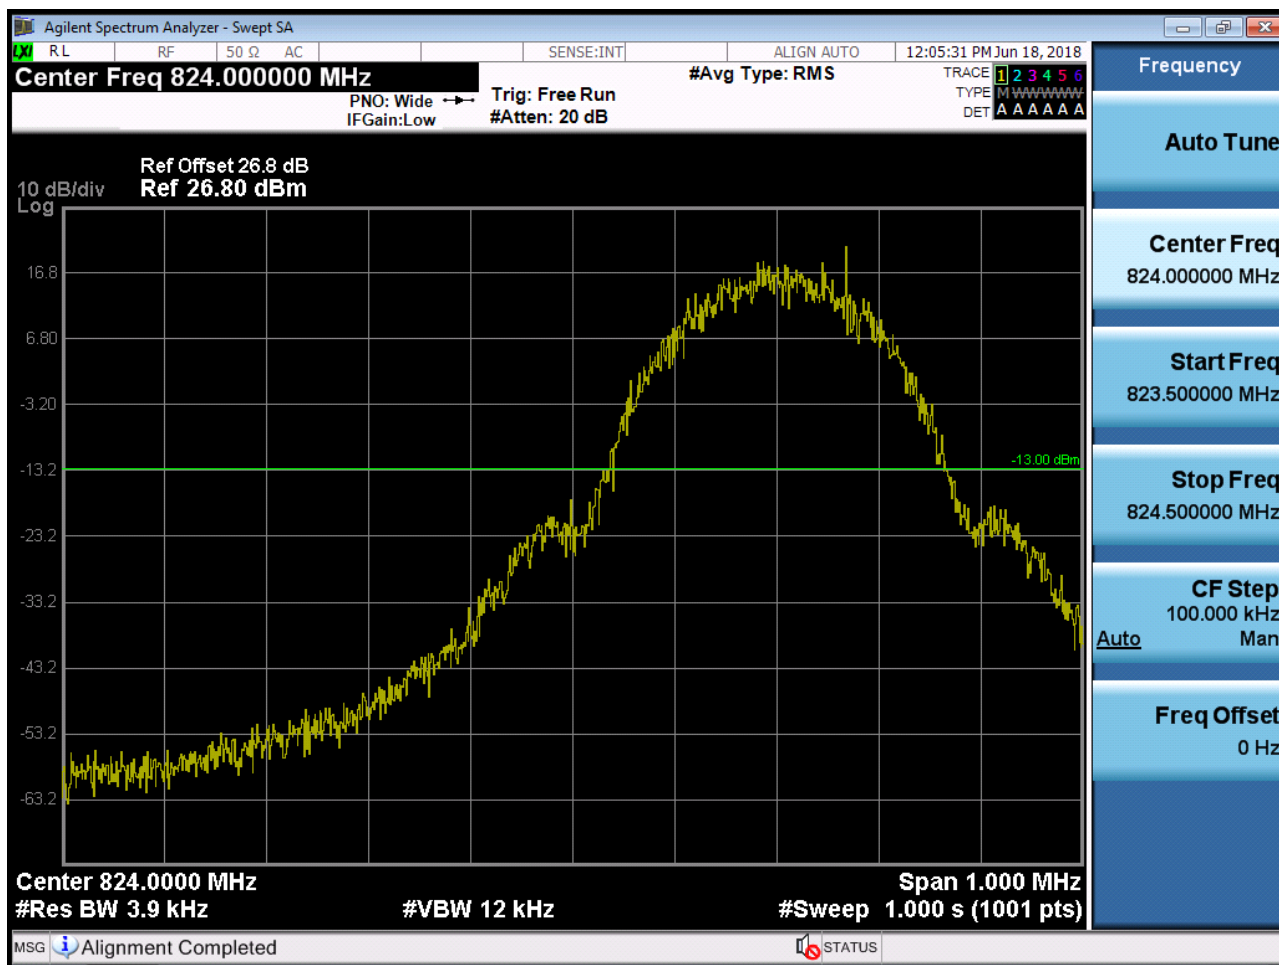


HCT CO., LTD.


■ GSM850 MODE (128 CH.) Block Edge 3

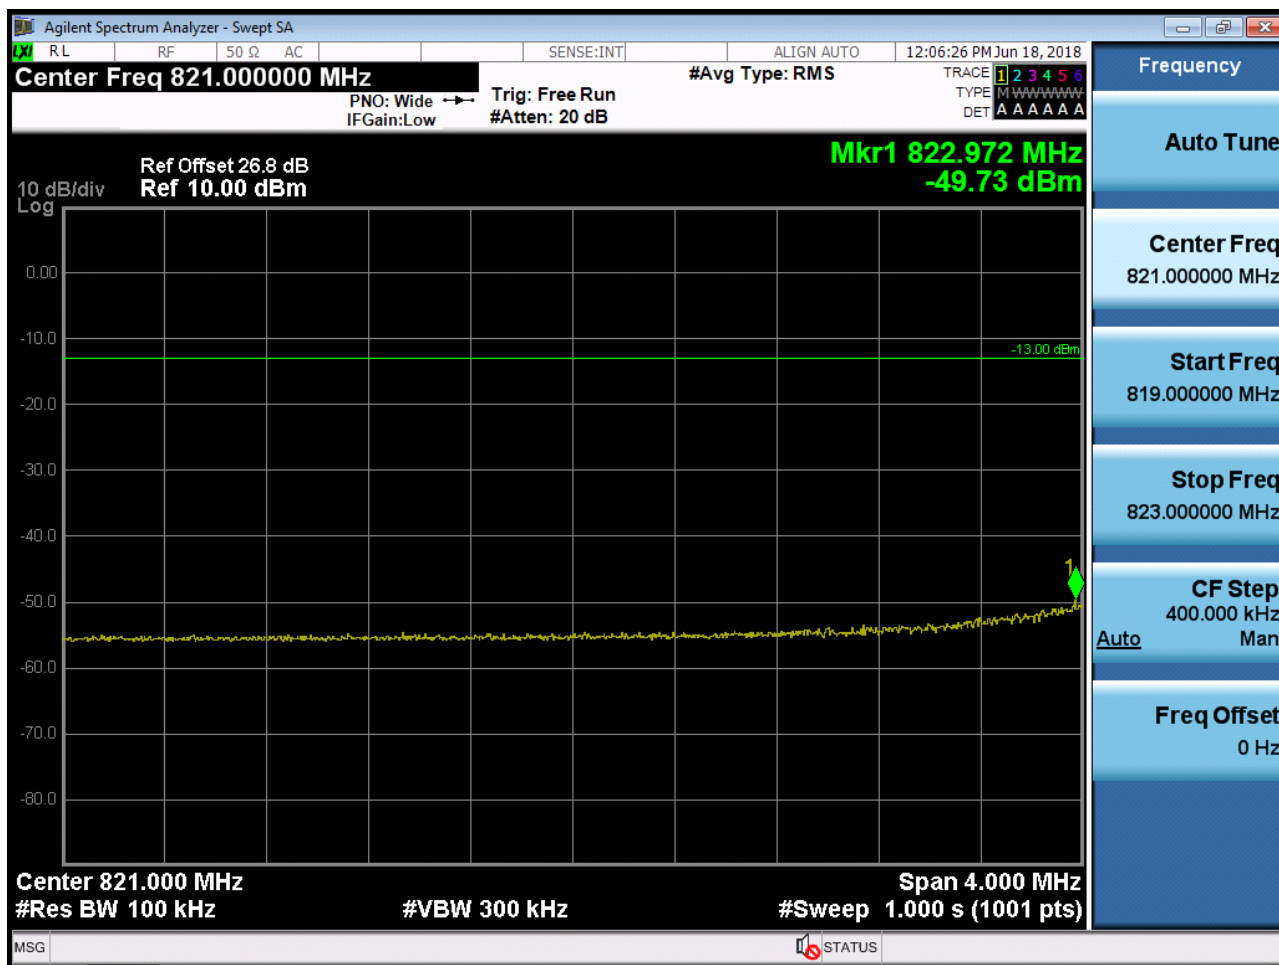


■ GSM850 MODE (251 CH.) Block Edge 1

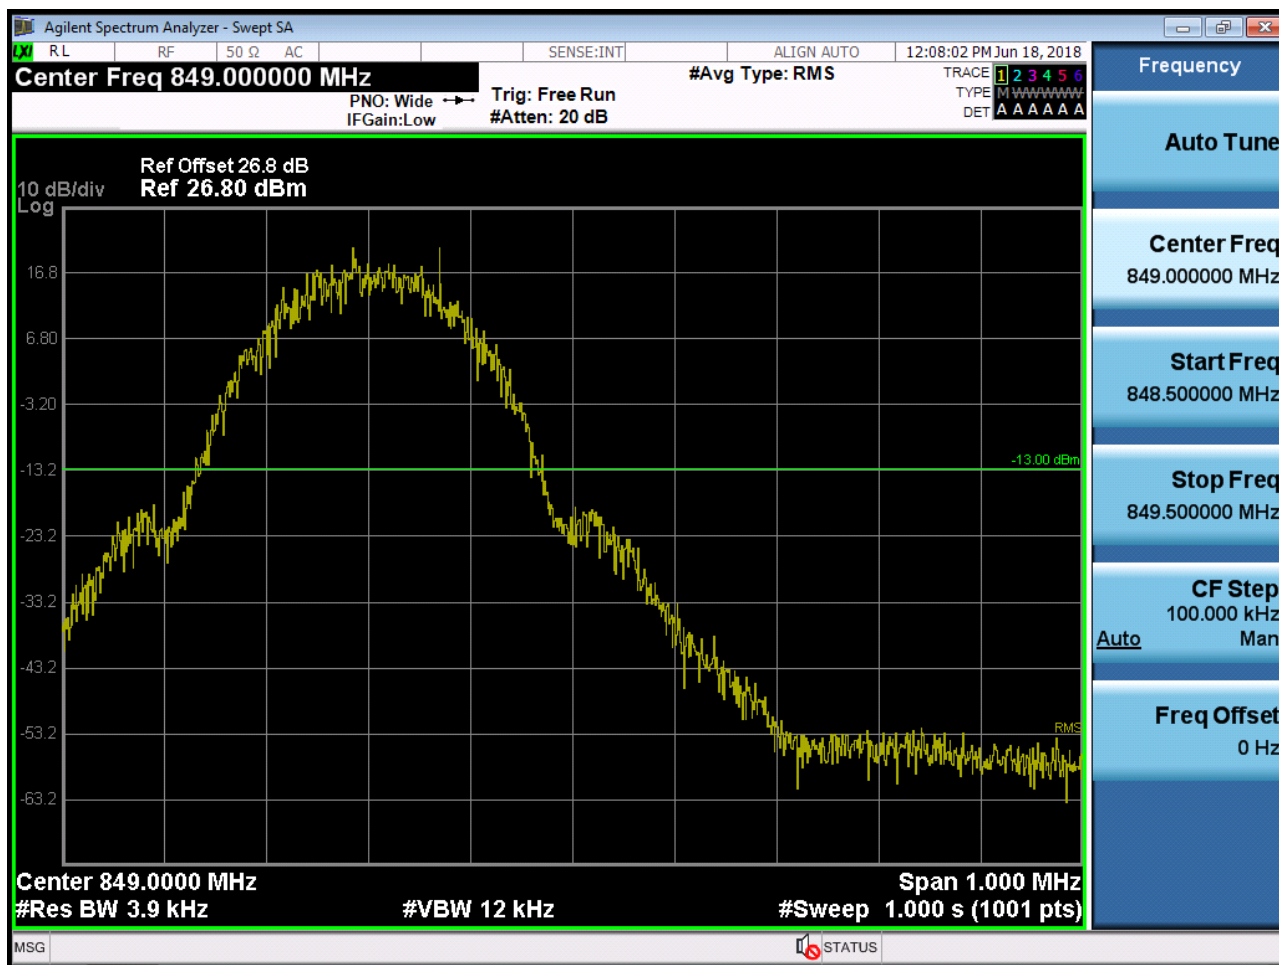


■ GSM850 MODE (251 CH.) Block Edge 2

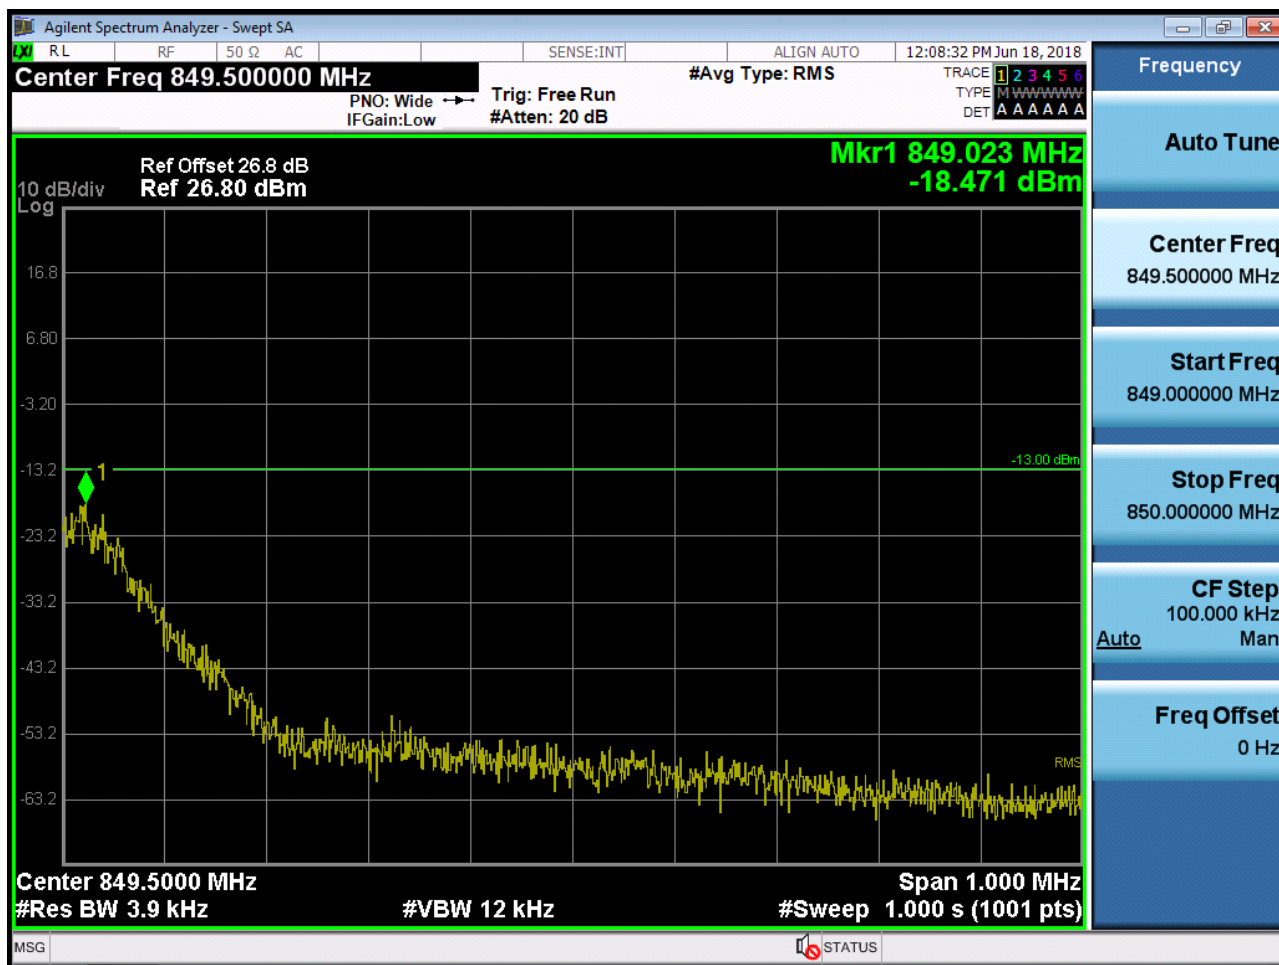


■ GSM850 MODE (251 CH.) Block Edge 3

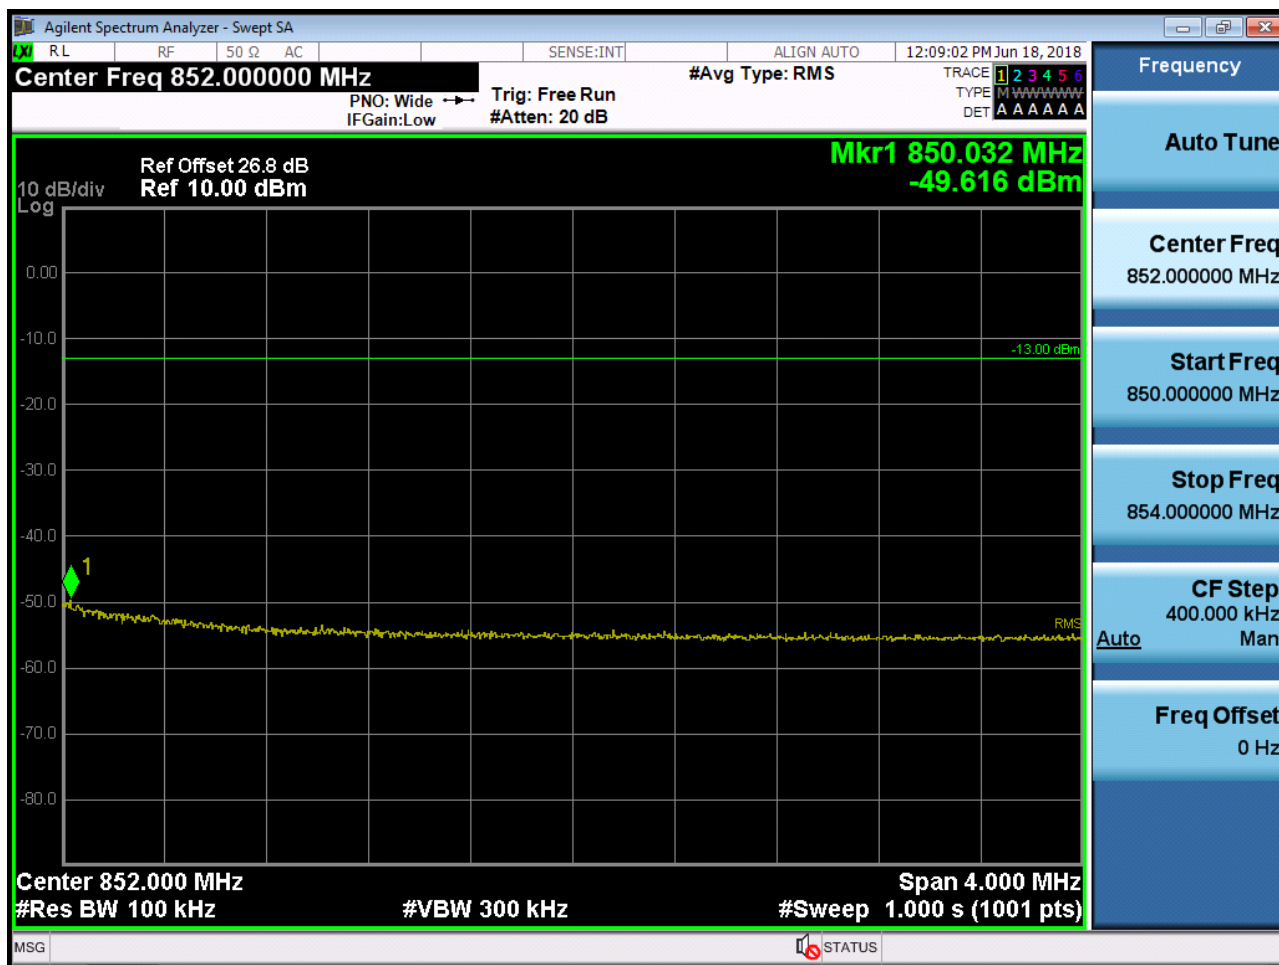

■ EDGE MODE (128 CH.) Block Edge 1

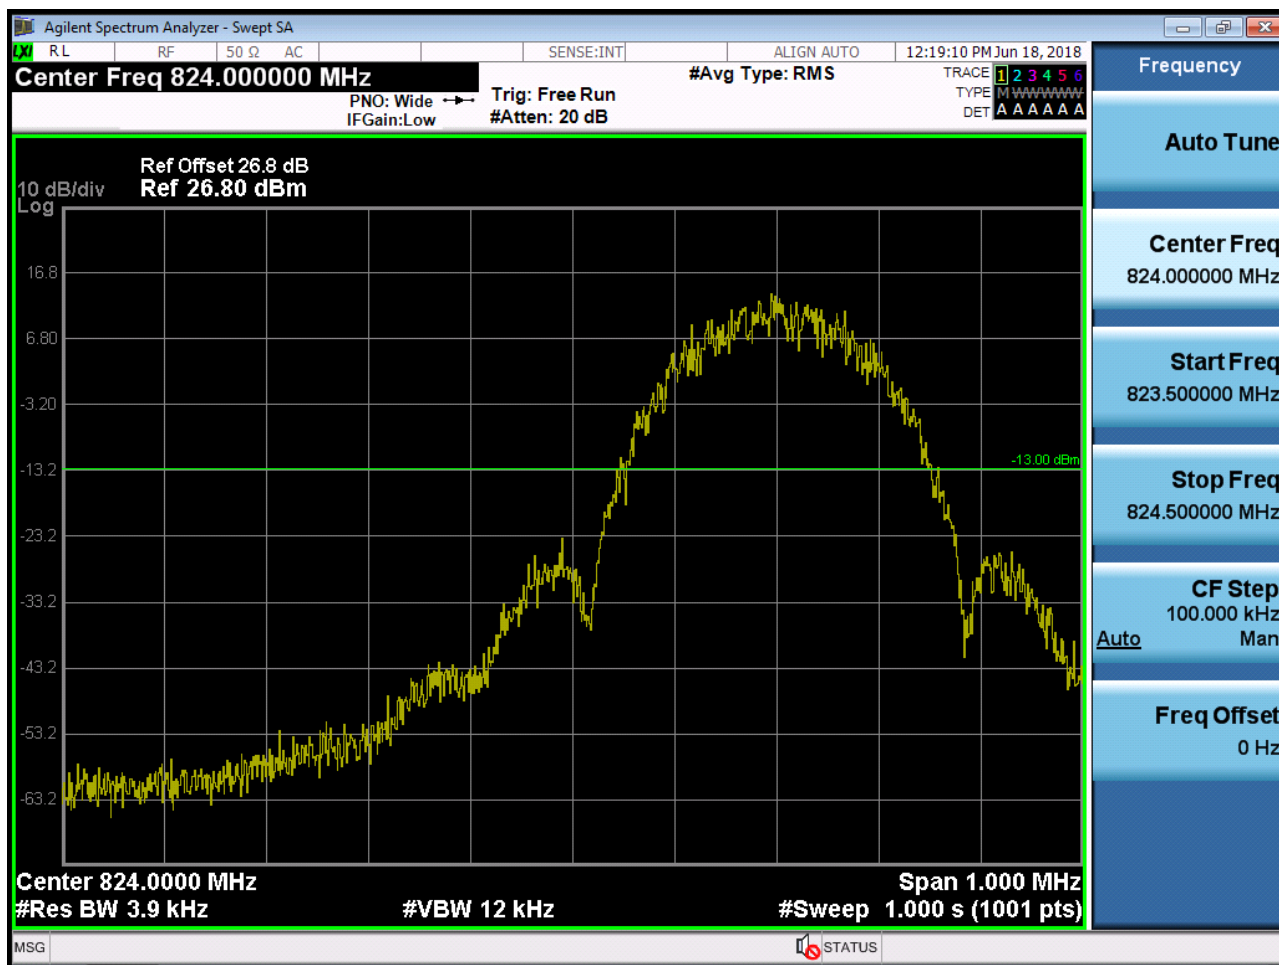


■ EDGE MODE (128 CH.) Block Edge 2

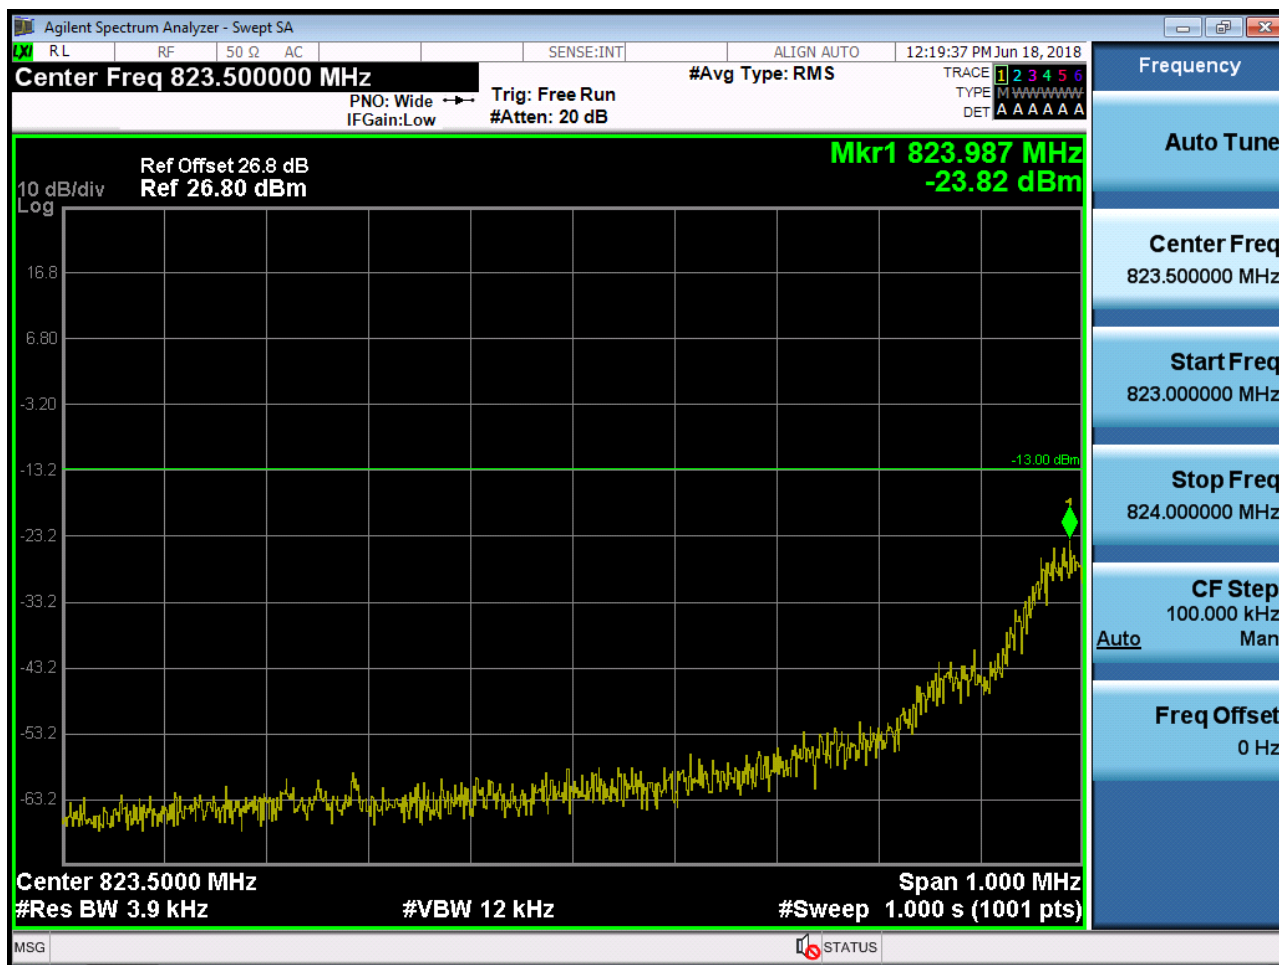


■ EDGE MODE (128 CH.) Block Edge 3



■ EDGE MODE (251 CH.) Block Edge 1

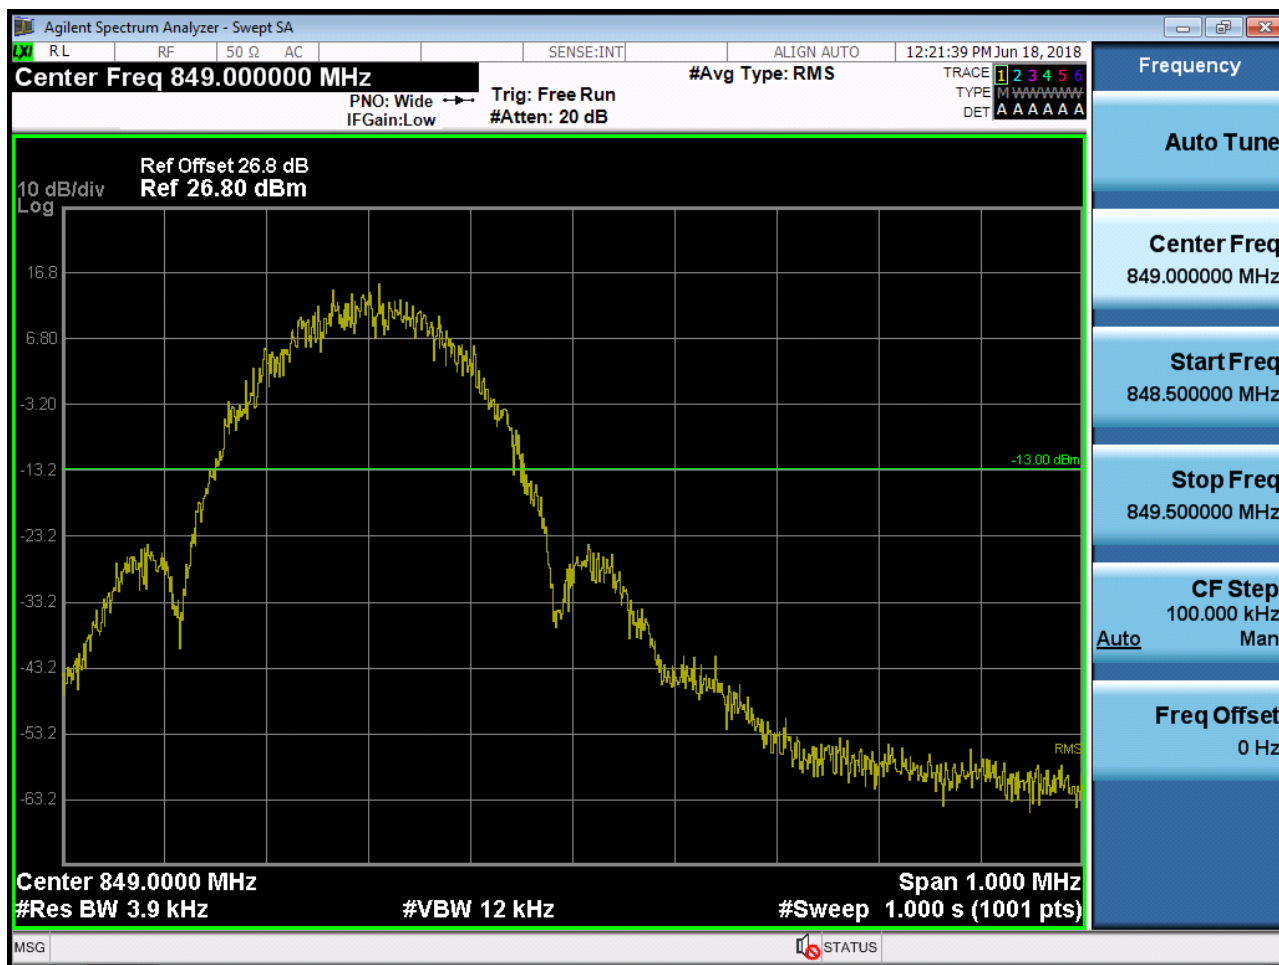

■ EDGE MODE (251 CH.) Block Edge 2

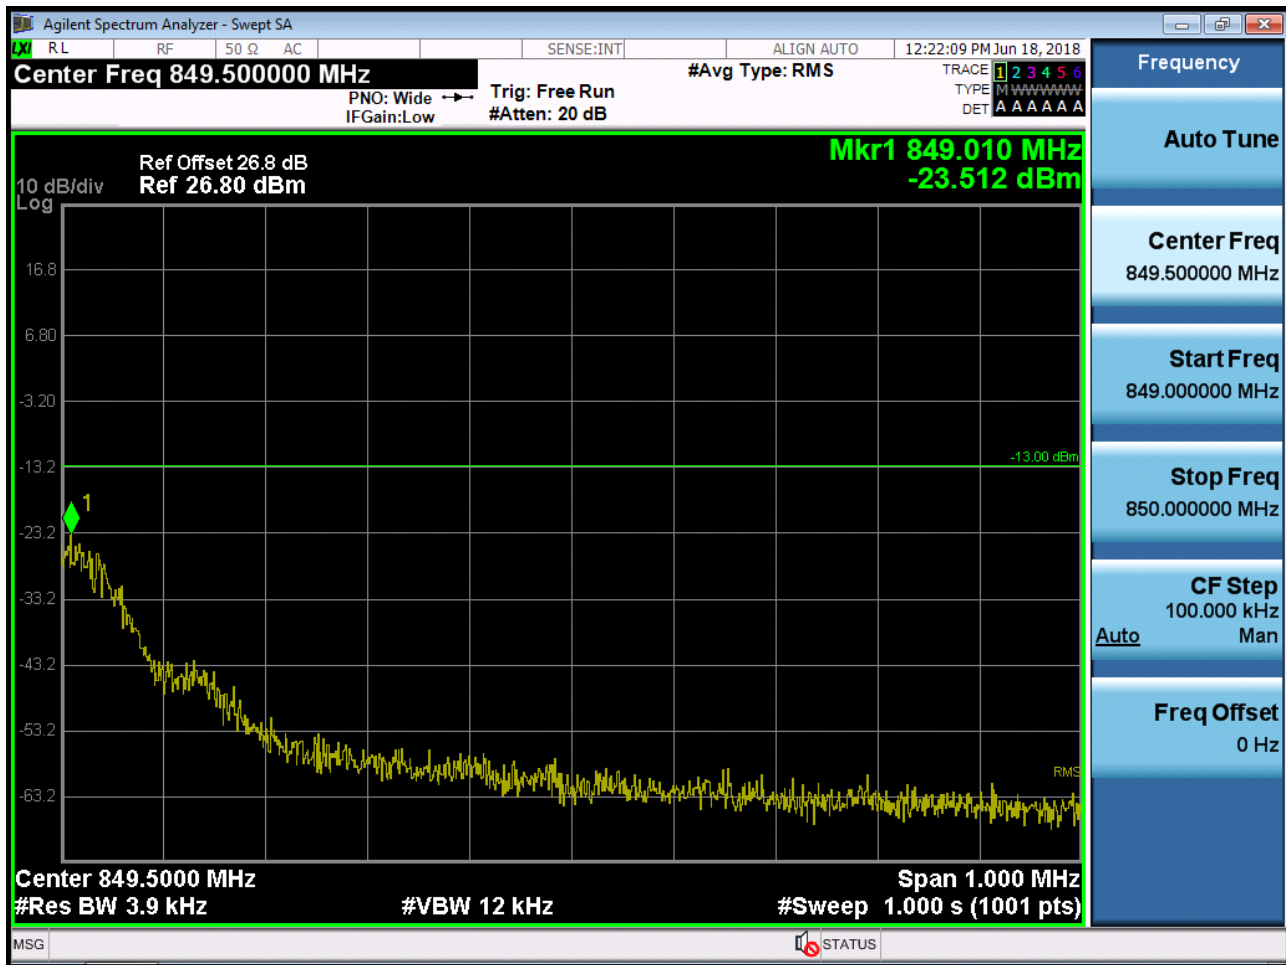

■ EDGE MODE (251 CH.) Block Edge 3



■ WCDMA850 MODE (4132 CH.) Block Edge




■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span

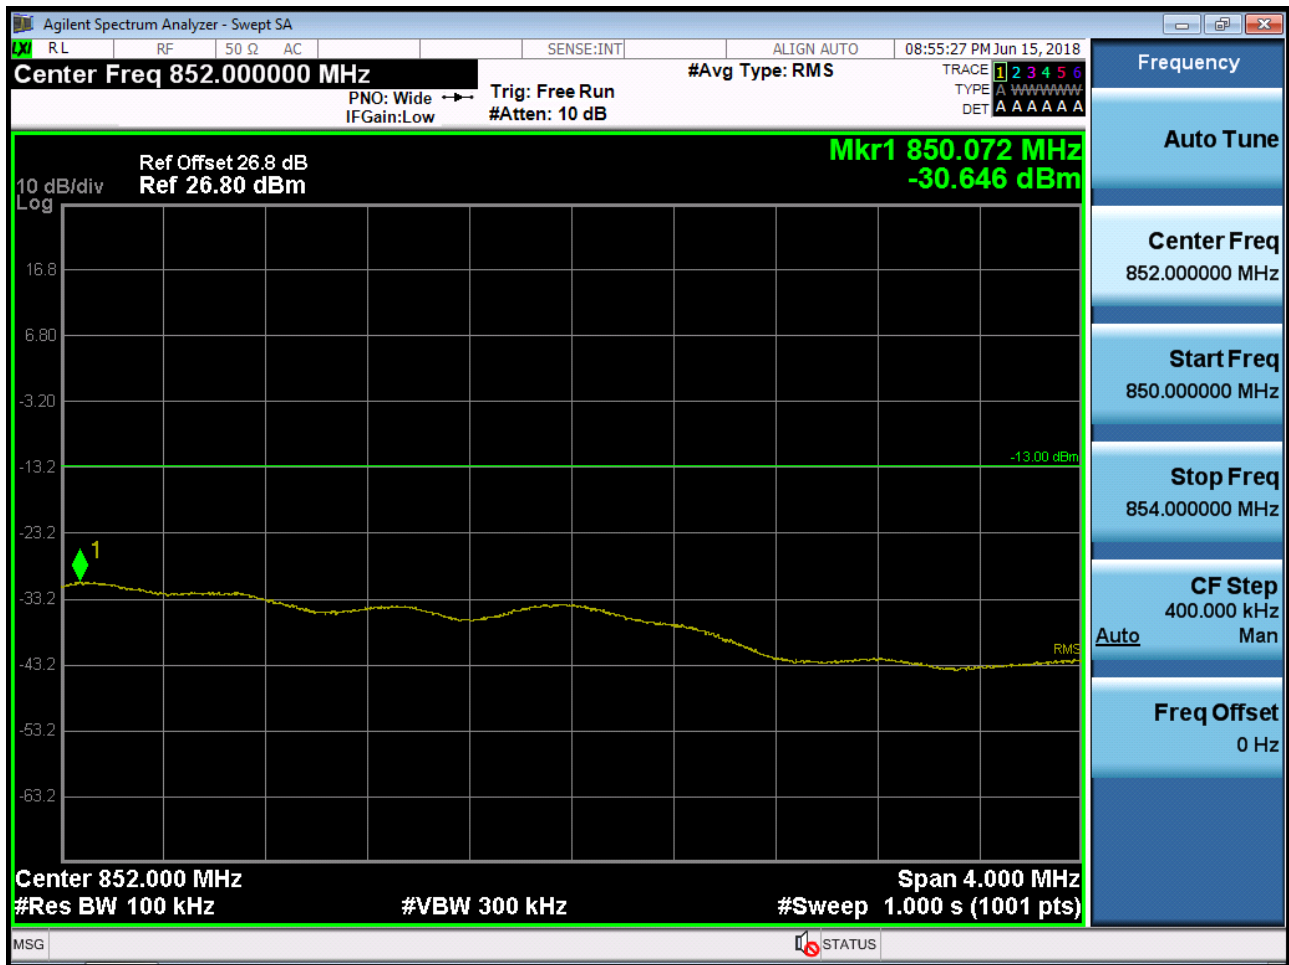

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 12:06:38 PM Jun 18, 2018

Center Freq 5.01500000 GHz #Avg Type: RMS

PNO: Fast Trg: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE M
DET P P P P P P

Mkr1 2.662 6 GHz
-57.352 dBm

10 dB/div Ref 10.00 dBm


Start 30 MHz Stop 10.000 GHz
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 17.33 ms (20001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.662 6 GHz	-57.352 dBm			
2	N	1	f	824.6 MHz	5.340 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								


Frequency
Auto Tune
Center Freq
5.01500000 GHz
Start Freq
30.000000 MHz
Stop Freq
10.00000000 GHz
CF Step
997.000000 MHz
Auto Man
Freq Offset
0 Hz

MSG STATUS


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

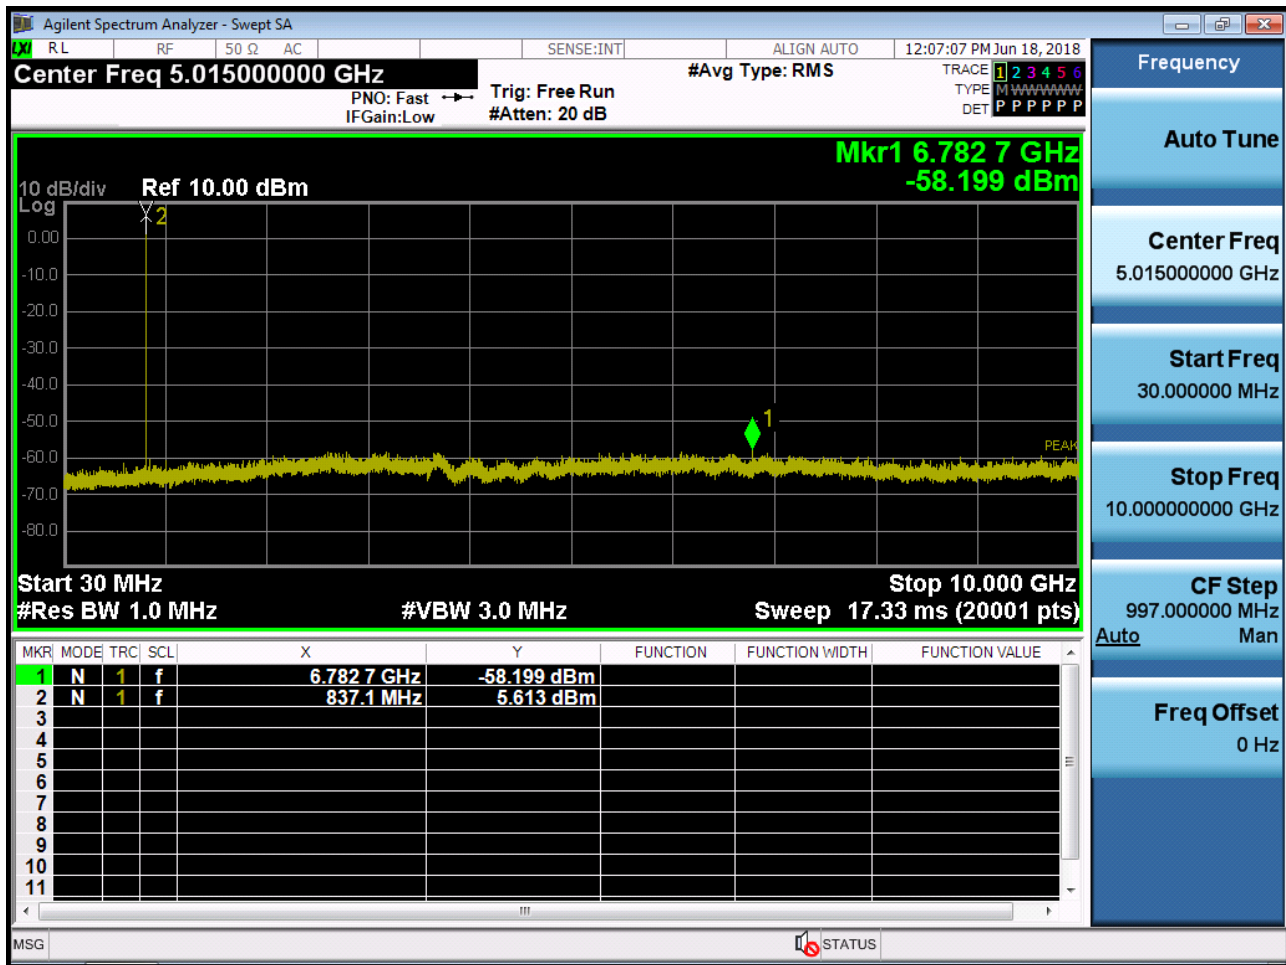


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

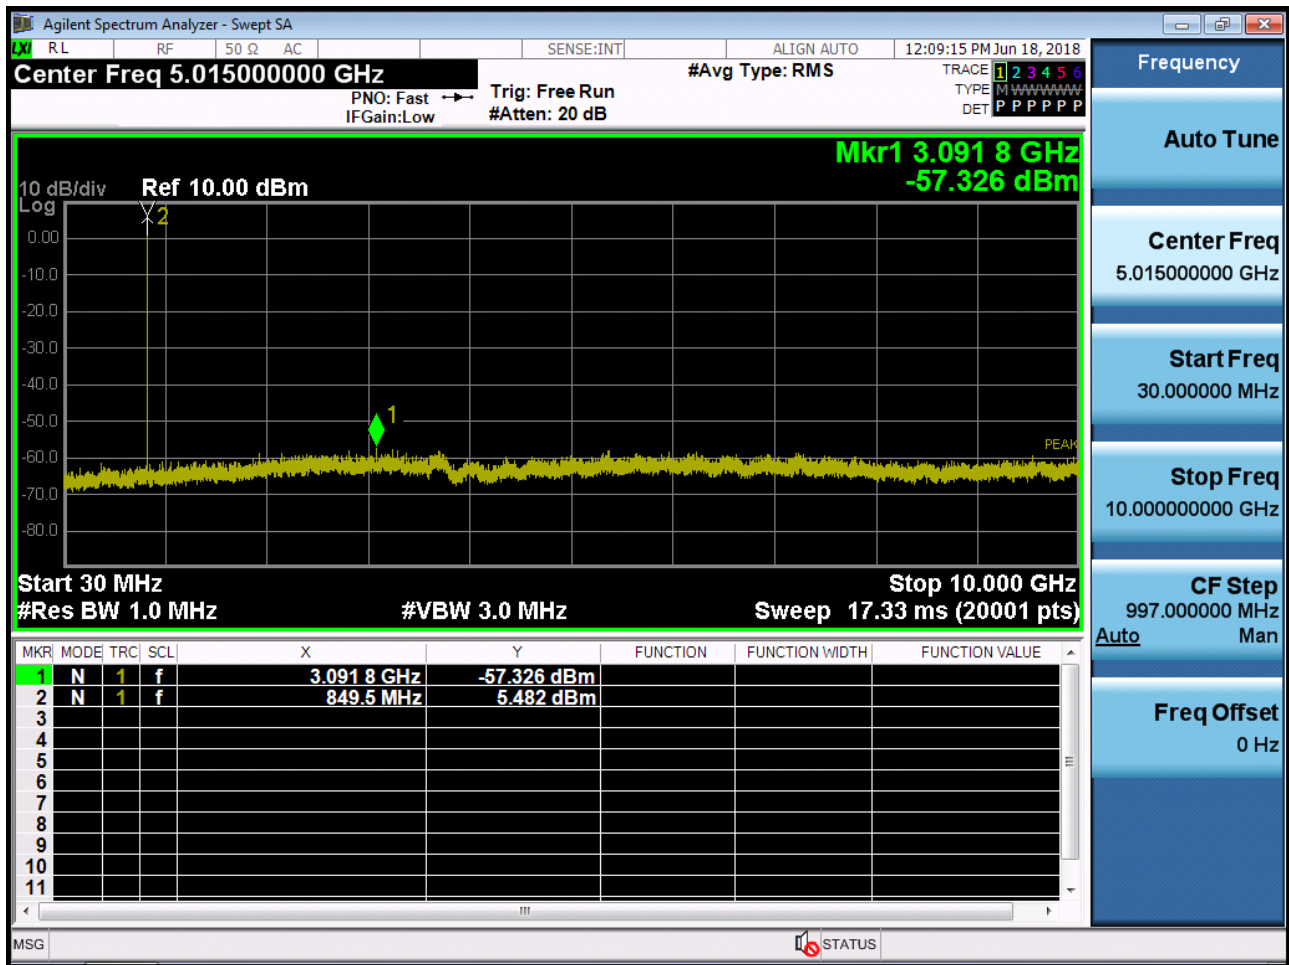


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

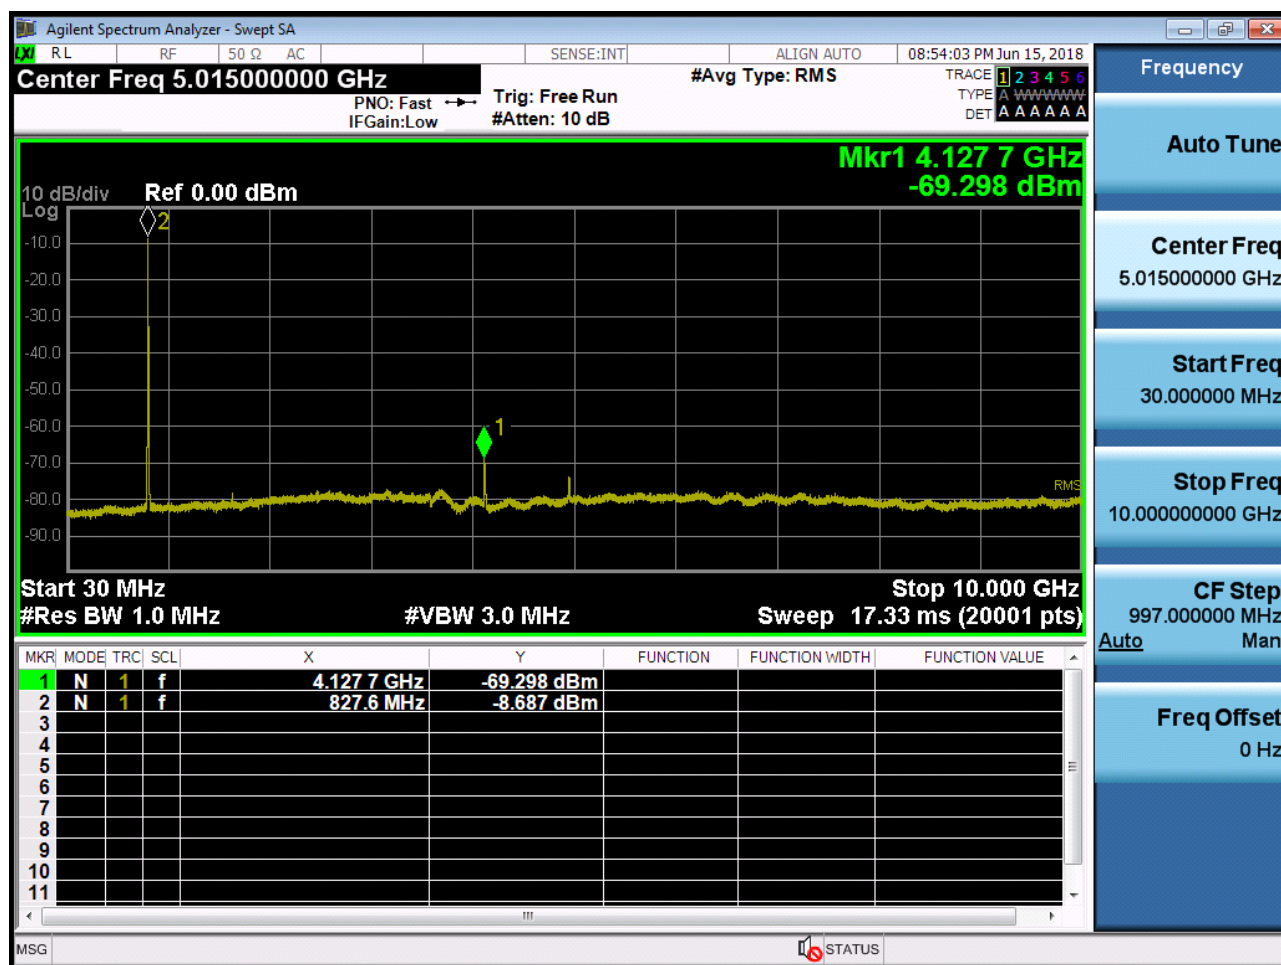

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

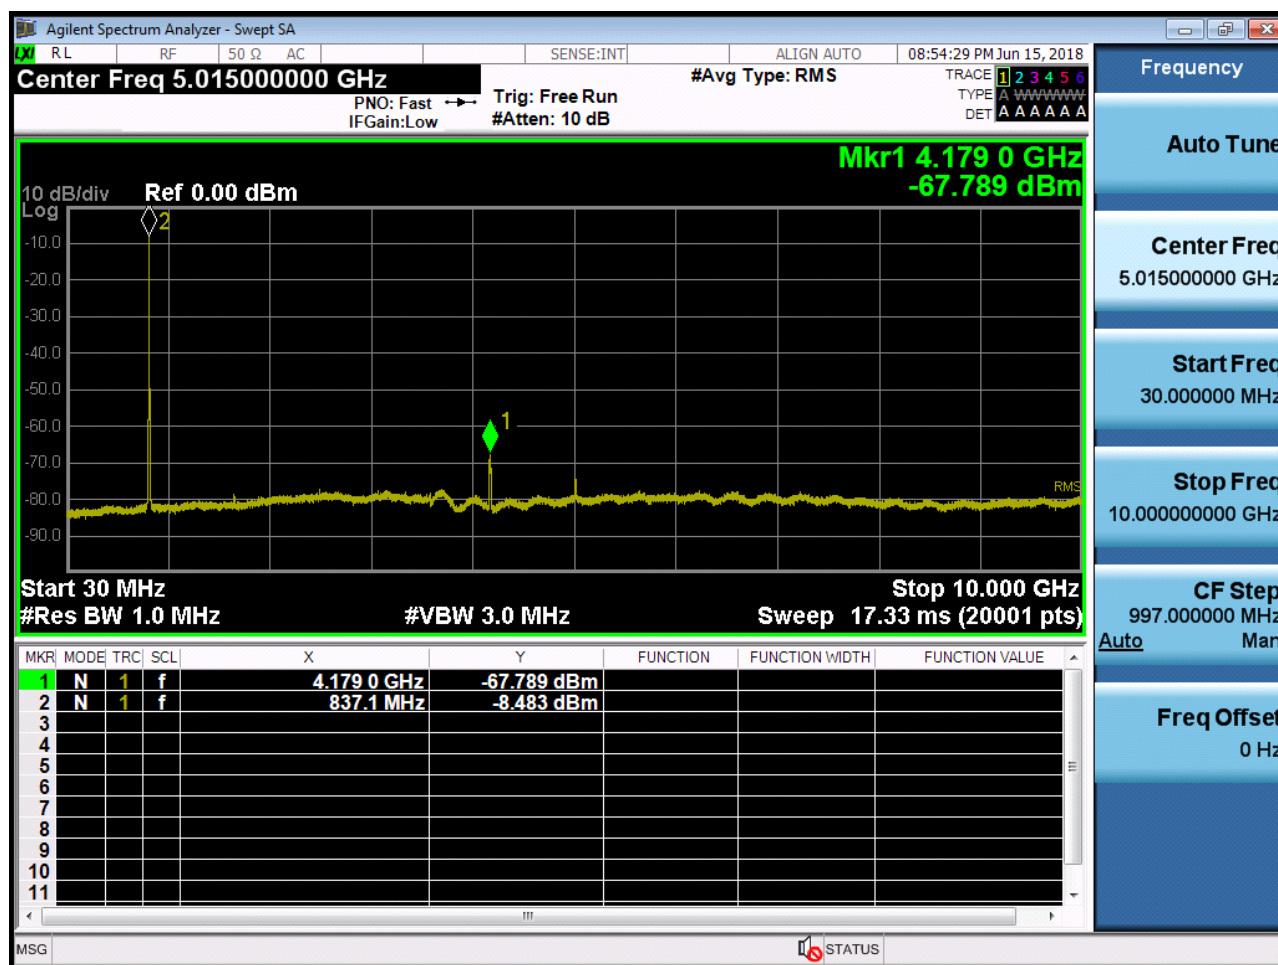

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

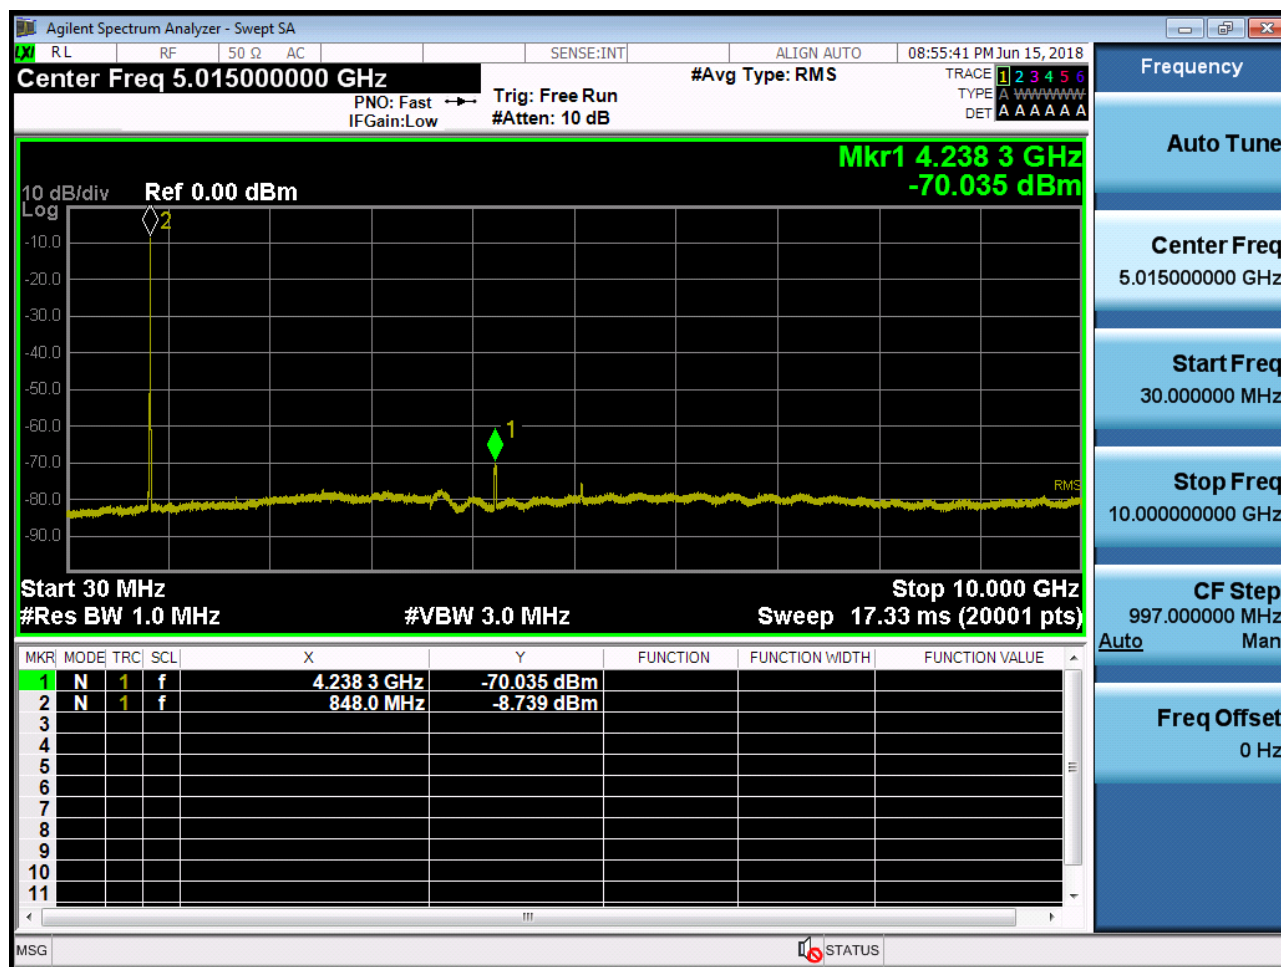

10. APPENDIX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1807-FC003-R1-P
2	HCT-RF-1807-FC004-R1-P
3	HCT-RF-1807-FC005-R1-P