



**FCC CFR47 PART 15 SUBPART C**

**NFC**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n and NFC**

**MODEL NUMBER : SM-J320ZN, SM-J320N0**

**FCC ID: A3LSMJ320ZN**

**REPORT NUMBER: 16K23140-E5V2**

**ISSUE DATE: APR 20, 2016**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



Revision History

| Rev. | Issue Date | Revisions                        | Revised By  |
|------|------------|----------------------------------|-------------|
| V1   | 04/06/16   | Initial issue                    | Junwhan Lee |
| V2   | 04/20/16   | Revised AC Conducted test result | Junwhan Lee |

## TABLE OF CONTENTS

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b>                     | <b>4</b>  |
| <b>2. TEST METHODOLOGY</b>                                | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION</b>                    | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY</b>                     | <b>5</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION                     | 5         |
| 4.2. SAMPLE CALCULATION                                   | 5         |
| 4.3. MEASUREMENT UNCERTAINTY                              | 5         |
| <b>5. EQUIPMENT UNDER TEST</b>                            | <b>6</b>  |
| 5.1. DESCRIPTION OF EUT                                   | 6         |
| 5.2. MAXIMUM OUTPUT POWER                                 | 6         |
| 5.3. WORST-CASE CONFIGURATION AND MODE                    | 6         |
| 5.4. MODIFICATIONS                                        | 6         |
| 5.5. DESCRIPTION OF TEST SETUP                            | 7         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT</b>                  | <b>10</b> |
| <b>7. 20dB BANDWIDTH</b>                                  | <b>11</b> |
| <b>8. RADIATED EMISSION TEST RESULTS</b>                  | <b>12</b> |
| 8.1. LIMITS AND PROCEDURE                                 | 12        |
| 8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) | 14        |
| 8.1.2. TX SPURIOUS EMISSION 30 TO 1000 MHz                | 15        |
| <b>9. AC MAINS LINE CONDUCTED EMISSIONS</b>               | <b>17</b> |
| <b>10. FREQUENCY STABILITY</b>                            | <b>22</b> |
| <b>11. SETUP PHOTOS</b>                                   | <b>23</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n and NFC

**MODEL NUMBER:** SM-J320ZN, SM-J320N0

**SERIAL NUMBER:** R38H308DJWH (RADIATED),  
R37H308DM3E (CONDUCTED)

**DATE TESTED:** MAR 30, 2016 - APR 20, 2016

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass         |

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 218 Maeyeong-ro                     |           |
|-------------------------------------|-----------|
| <input checked="" type="checkbox"/> | Chamber 1 |
| <input type="checkbox"/>            | Chamber 2 |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 2.32 dB     |
| Radiated Disturbance, Below 1GHz      | 4.14 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n and NFC.  
This test report addresses the DXX (NFC) operational mode.

SM-J320ZN and SM-J320N0 are same hardware and only difference is existence of non-USA LTE band. SM-J320ZN supports LTE band 28/40. SM-J320N0 did not support LTE band 28/40. SM-J320ZN was used for the test.

### **5.2. MAXIMUM OUTPUT POWER**

The testing was performed at 1 meter. The transmitter maximum E-field at 30m distance is 12.29 dBuV/m which convert from 1 meter data.

### **5.3. WORST-CASE CONFIGURATION AND MODE**

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z-orientation was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Z-orientation while generating continuous emissions.

### **5.4. MODIFICATIONS**

No modifications were made during testing.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |            |               |        |
|------------------------|--------------|------------|---------------|--------|
| Description            | Manufacturer | Model      | Serial Number | FCC ID |
| Charger                | SAMSUNG      | ETA0U83HWE | DW2H226DS/A-E | N/A    |
| Data Cable             | SAMSUNG      | ECB-DU68WE | N/A           | N/A    |
| Earphone               | SAMSUNG      | EHS61ASFWE | N/A           | N/A    |

### I/O CABLES

| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | Mini-USB       | Shielded   | 0.8m             | N/A     |
| 2              | Audio    | 1                    | Mini-Jack      | Unshielded | 1.0m             | N/A     |


### TEST SETUP

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: worst case is using worst case orientation with AC charger and headset attached to the EUT with NFC signal continuously transmitting.


**SETUP DIAGRAM FOR TESTS**

**Radiated Emissions Below 30 MHz:**

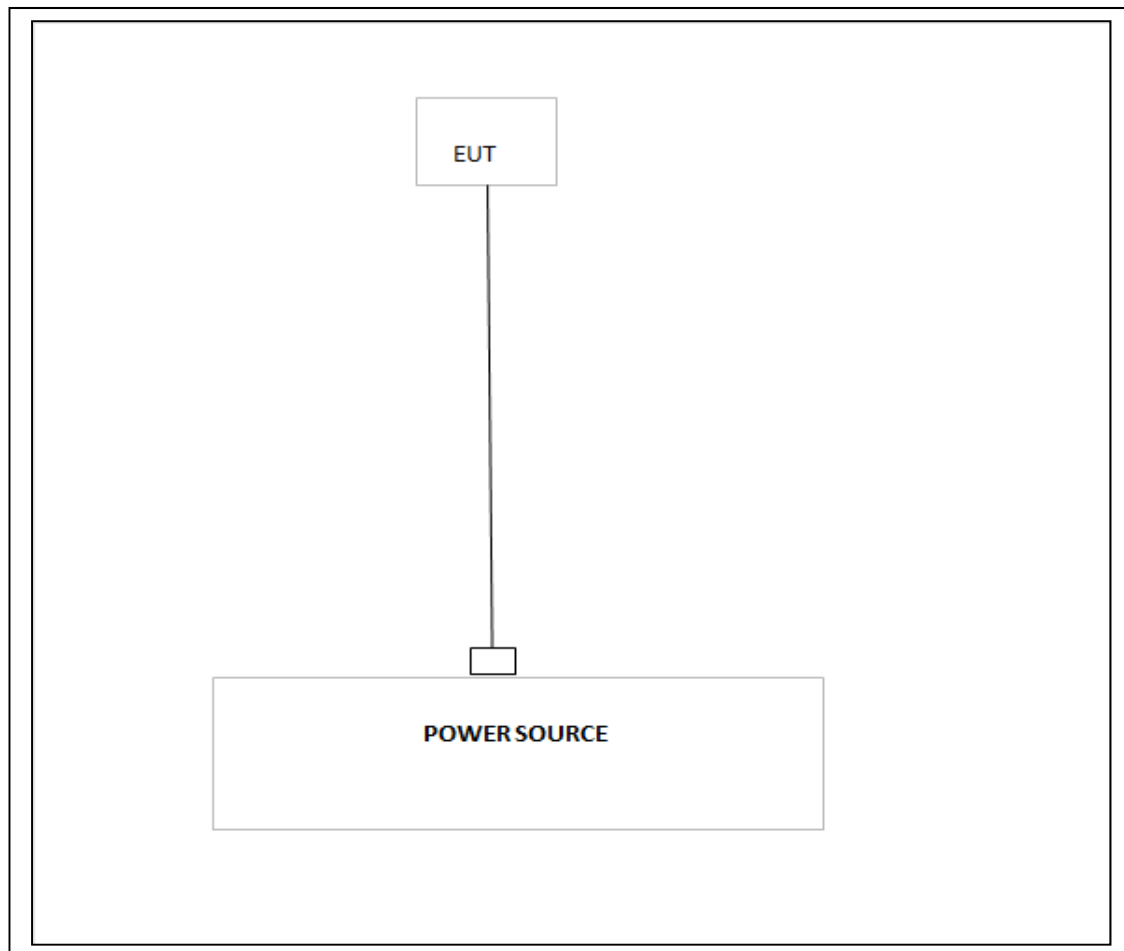



**Radiated Emissions Above 30 MHz, AC Line Conducted Emissions:**

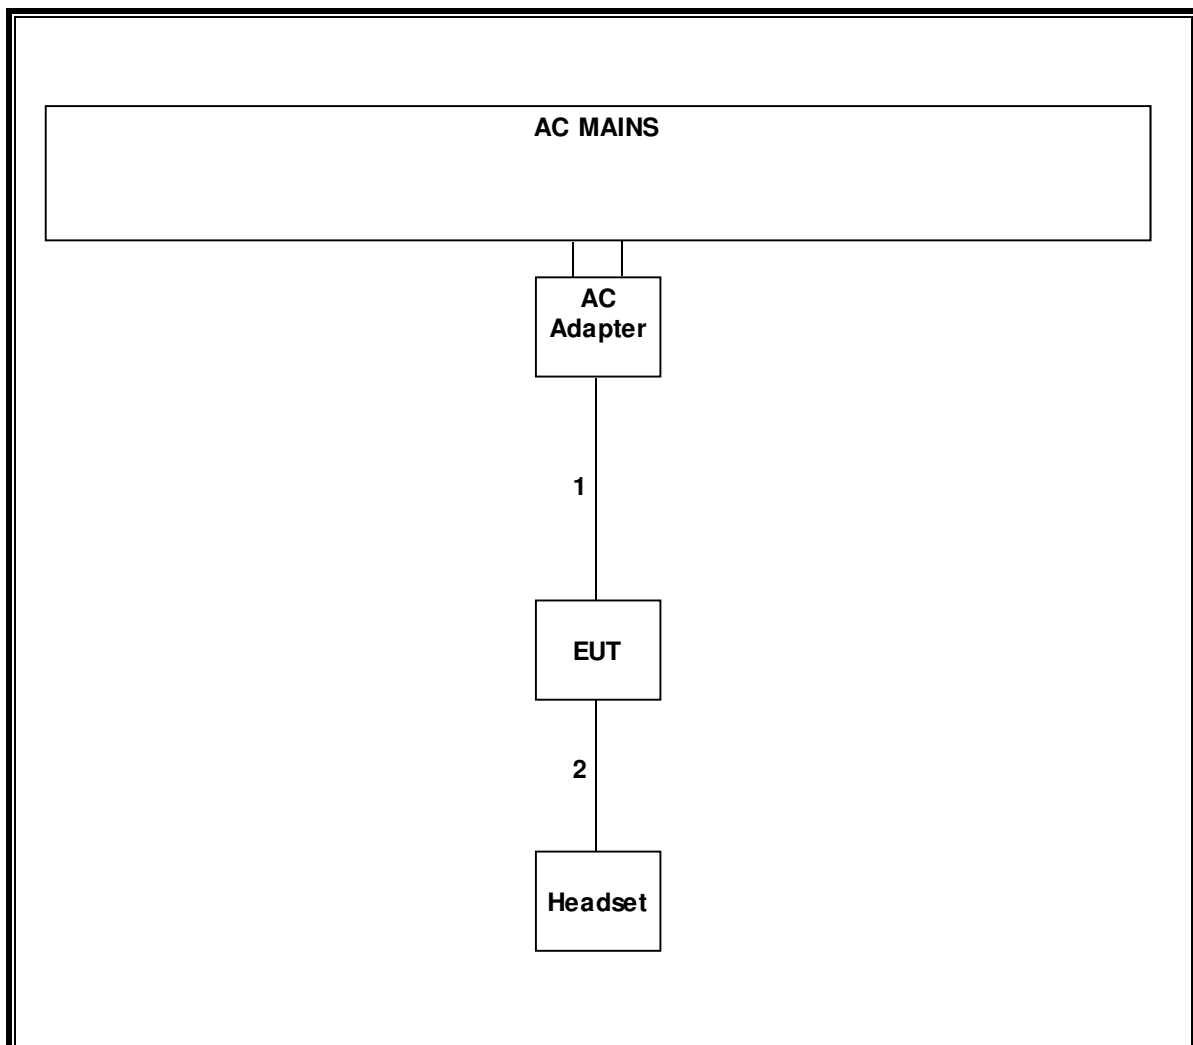

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List        |              |          |            |          |
|----------------------------|--------------|----------|------------|----------|
| Description                | Manufacturer | Model    | S/N        | Cal Due  |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK  | VULB9163 | 750        | 11-17-16 |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK  | VULB9163 | 749        | 04-25-17 |
| Antenna, Loop, 9kHz-30MHz  | R&S          | HFH2-Z2  | 100418     | 11-25-17 |
| Preamplifier, 1000 MHz     | Sonoma       | 310N     | 341282     | 08-18-16 |
| Spectrum Analyzer, 44 GHz  | Agilent / HP | N9030A   | MY54170614 | 08-19-16 |
| EMI Test Receive, 40 GHz   | R&S          | ESU40    | 100439     | 08-19-16 |
| DC Power Supply            | Agilent / HP | E3640A   | MY54226395 | 08-18-16 |
| Temperature Chamber        | ESPEC        | SH-642   | 93001109   | 08-18-16 |
| LISN                       | R&S          | ENV216   | 101836     | 08-19-16 |
| LISN                       | R&S          | ENV216   | 101837     | 08-19-16 |

## 7. 20dB BANDWIDTH

### LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz

### TEST PROCEDURE


The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10KHz. The VBW is set to 3 times the RBW. The sweep time is coupled.

### RESULTS

| Frequency<br>[MHz] | 20dB Bandwidth<br>[KHz] |
|--------------------|-------------------------|
| 13.56              | 433.2                   |

Note : The measured point from marker 2 to marker 3 is within the frequency operation band  
13.110MHz ~ 14.011MHz

### 20dB Bandwidth Plot

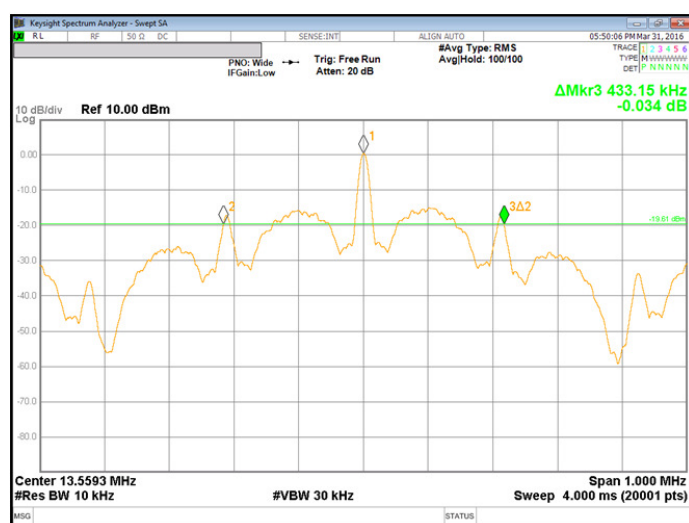

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Limits for radiated disturbance of an intentional radiator |                 |                          |
|------------------------------------------------------------|-----------------|--------------------------|
| Frequency range (MHz)                                      | Limits (µV/m)   | Measurement Distance (m) |
| 0.009 – 0.490                                              | 2400 / F (kHz)  | 300                      |
| 0.490 – 1.705                                              | 24000 / F (kHz) | 30                       |
| 1.705 – 30.0                                               | 30              | 30                       |
| 30 – 88                                                    | 100**           | 3                        |
| 88 - 216                                                   | 150**           | 3                        |
| 216 – 960                                                  | 200**           | 3                        |
| Above 960                                                  | 500             | 3                        |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

### **TEST PROCEDURE**

ANSI C63.10-2009

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

### **RESULTS**

No non-compliance noted:

## 8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)


| FCC Part 15, Subpart B & C                                                                                                                                                                                                                                               |           |           |           |           | 1 Meter Distance Measurement At Chamber 1 |                               |                               |                   |                   |                |                |                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|-------------------------------------------|-------------------------------|-------------------------------|-------------------|-------------------|----------------|----------------|-----------------------|
| Company: Samsung                                                                                                                                                                                                                                                         |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Project #: 16K23140                                                                                                                                                                                                                                                      |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Model #: SM-J320ZN                                                                                                                                                                                                                                                       |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Tester: Steven.Kim                                                                                                                                                                                                                                                       |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Date: 2016/03/30                                                                                                                                                                                                                                                         |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Frequency (MHz)                                                                                                                                                                                                                                                          | PK (dBuV) | QP (dBuV) | AV (dBuV) | AF (dB/m) | Distance Correction (dB)                  | PK Corrected Reading (dBuV/m) | AV Corrected Reading (dBuV/m) | QP Limit (dBuV/m) | AV Limit (dBuV/m) | PK Margin (dB) | AV Margin (dB) | Notes                 |
| Loop Antenna Face on: Z position worst                                                                                                                                                                                                                                   |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| 13.56                                                                                                                                                                                                                                                                    | 52.34     |           | N/A       | 19.03     | -59.08                                    | 12.29                         | N/A                           | 84.00             | N/A               | -71.7          | N/A            | Fundamental @ 1m Dist |
| 13.55                                                                                                                                                                                                                                                                    | 42.71     |           | N/A       | 19.03     | -59.08                                    | 2.66                          | N/A                           | 50.48             | N/A               | -47.8          | N/A            | 13.41MHz-13.553MHz    |
| 13.57                                                                                                                                                                                                                                                                    | 38.21     |           | N/A       | 19.03     | -59.08                                    | -1.85                         | N/A                           | 50.48             | N/A               | -52.3          | N/A            | 13.567MHz-13.71MHz    |
| 13.35                                                                                                                                                                                                                                                                    | 34.26     |           | N/A       | 19.06     | -59.08                                    | -5.76                         | N/A                           | 40.51             | N/A               | -46.3          | N/A            | 13.110-13.410MHz      |
| 13.77                                                                                                                                                                                                                                                                    | 33.43     |           | N/A       | 19        | -59.08                                    | -6.66                         | N/A                           | 41.51             | N/A               | -48.2          | N/A            | 13.71-14.01MHz        |
| 5.60                                                                                                                                                                                                                                                                     | 34.49     |           | N/A       | 19.78     | -59.08                                    | -4.82                         | N/A                           | 29.54             | N/A               | -34.4          | N/A            | 9k-13.11MHz           |
| 14.09                                                                                                                                                                                                                                                                    | 20.47     |           | N/A       | 18.95     | -59.08                                    | -19.67                        | N/A                           | 29.54             | N/A               | -49.2          | N/A            | 14.01MHz-30MHz        |
|                                                                                                                                                                                                                                                                          |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
|                                                                                                                                                                                                                                                                          |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Loop Antenna Face off: Z position                                                                                                                                                                                                                                        |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| 13.56                                                                                                                                                                                                                                                                    | 43.23     |           | N/A       | 19.03     | -59.08                                    | 3.18                          | N/A                           | 84.00             | N/A               | -80.8          | N/A            | Fundamental @ 1m Dist |
| 13.55                                                                                                                                                                                                                                                                    | 33.42     |           | N/A       | 19.03     | -59.08                                    | -6.63                         | N/A                           | 50.48             | N/A               | -57.1          | N/A            | 13.41MHz-13.553MHz    |
| 13.57                                                                                                                                                                                                                                                                    | 29.09     |           | N/A       | 19.03     | -59.08                                    | -10.97                        | N/A                           | 50.48             | N/A               | -61.4          | N/A            | 13.567MHz-13.71MHz    |
| 13.35                                                                                                                                                                                                                                                                    | 23.86     |           | N/A       | 19.06     | -59.08                                    | -16.16                        | N/A                           | 40.51             | N/A               | -56.7          | N/A            | 13.110-13.410MHz      |
| 13.77                                                                                                                                                                                                                                                                    | 23.33     |           | N/A       | 19        | -59.08                                    | -16.76                        | N/A                           | 40.51             | N/A               | -57.3          | N/A            | 13.71-14.01MHz        |
| 5.55                                                                                                                                                                                                                                                                     | 32.85     |           | N/A       | 19.78     | -59.08                                    | -6.46                         | N/A                           | 29.54             | N/A               | -36.0          | N/A            | 9k-13.11MHz           |
| 28.31                                                                                                                                                                                                                                                                    | 17.88     |           | N/A       | 19.3      | -59.08                                    | -21.91                        | N/A                           | 29.54             | N/A               | -51.4          | N/A            | 14.01MHz-30MHz        |
| * No more emissions were found up to 30MHz                                                                                                                                                                                                                               |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Note: The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000Mhz. Radiated emission limits in these three bands are based on measurements employing an average detector. |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| P.K. = Peak                                                                                                                                                                                                                                                              |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Q.P. = Quasi Peak Reading                                                                                                                                                                                                                                                |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| A.F. = Antenna factor                                                                                                                                                                                                                                                    |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |
| Rev. 10.23.09                                                                                                                                                                                                                                                            |           |           |           |           |                                           |                               |                               |                   |                   |                |                |                       |

Note : Radiated test of below 30MHz was performed inside anechoic chamber.


For check the correlation with open air site, comparison test was conducted between chamber and open site. The test results indicated that there is a close correlation.

## 8.1.2. TX SPURIOUS EMISSION 30 TO 1000 MHz

### HORIZONTAL

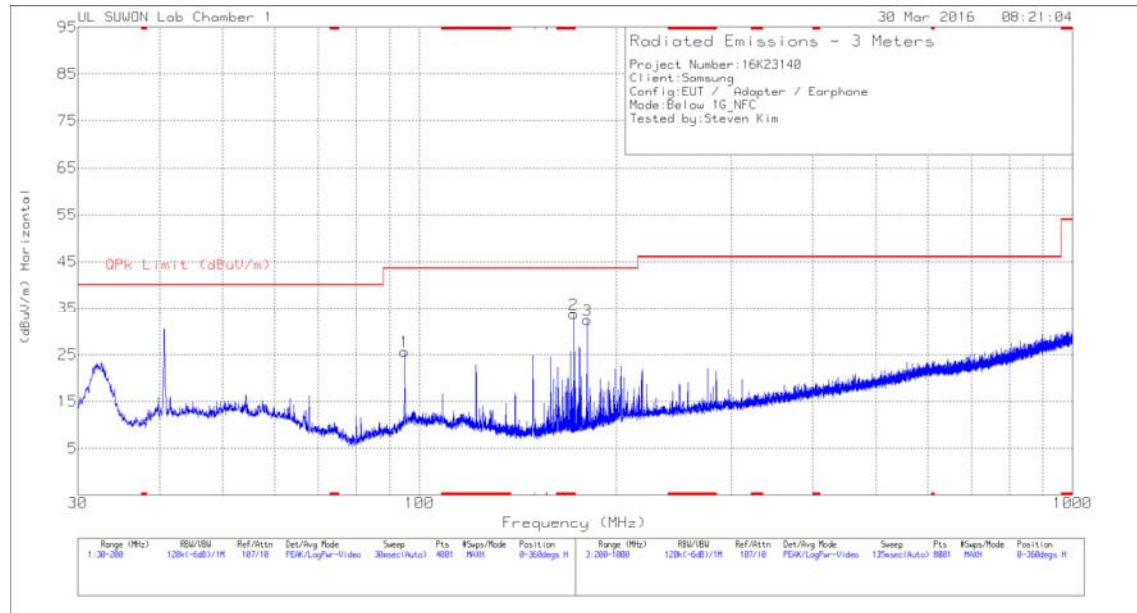

### VERTICAL

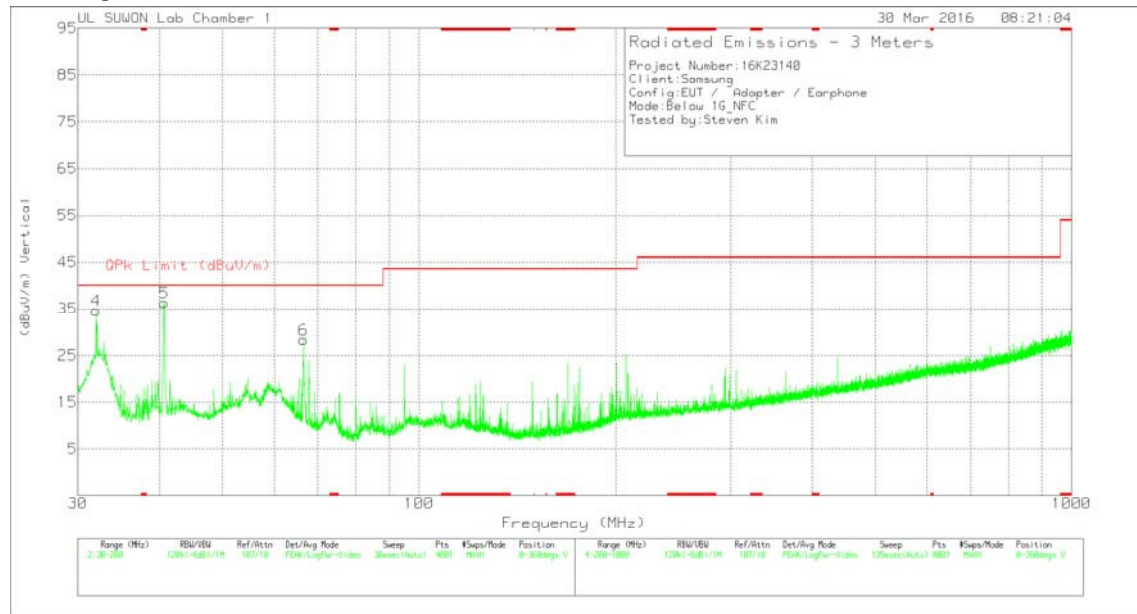

## Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | VULB9163-750 | Bi-Log | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|--------------|--------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 94.8975         | 44.38                | Pk  | 10.5         | -29.3  | 25.58                      | 43.52              | -17.94      | 0-360          | 300         | H        |
| 2      | * 172.0775      | 53.13                | Pk  | 9            | -28.4  | 33.73                      | 43.52              | -9.79       | 0-360          | 300         | H        |
| 3      | 180.5775        | 51.2                 | Pk  | 9.5          | -28.3  | 32.4                       | 43.52              | -11.12      | 0-360          | 100         | H        |
| 4      | 31.9975         | 54.91                | Pk  | 10.3         | -30.5  | 34.71                      | 40                 | -5.29       | 0-360          | 200         | V        |
| 5      | 40.6675         | 54.03                | Pk  | 12.6         | -30.3  | 36.33                      | 40                 | -3.67       | 0-360          | 100         | V        |
| 6      | 66.5075         | 47.46                | Pk  | 10.7         | -29.8  | 28.36                      | 40                 | -11.64      | 0-360          | 100         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

## Radiated Emissions

| Frequency (MHz) | Meter Reading (dBuV) | Det | VULB9163-750 | Bi-Log | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|-----|--------------|--------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 94.9152         | 44.67                | Qp  | 10.5         | -29.3  | 25.87                      | 43.52              | -17.65      | 335            | 303         | H        |
| * 172.0775      | 22.89                | Qp  | 9            | -28.4  | 3.49                       | 43.52              | -40.03      | 202            | 143         | H        |
| 180.5775        | 21.44                | Qp  | 9.5          | -28.3  | 2.64                       | 43.52              | -40.88      | 202            | 119         | H        |
| 31.9975         | 38.85                | Qp  | 10.3         | -30.5  | 18.65                      | 40                 | -21.35      | 347            | 154         | V        |
| 40.6781         | 52.05                | Qp  | 12.6         | -30.3  | 34.35                      | 40                 | -5.65       | 75             | 100         | V        |
| 66.5075         | 22.81                | Qp  | 10.7         | -29.8  | 3.71                       | 40                 | -36.29      | 302            | 100         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Qp - Quasi-Peak detector



## 9. AC MAINS LINE CONDUCTED EMISSIONS

### LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency range<br>(MHz) | Limits (dB $\mu$ V) |          |
|--------------------------|---------------------|----------|
|                          | Quasi-peak          | Average  |
| 0.15 to 0.50             | 66 to 56            | 56 to 46 |
| 0.50 to 5                | 56                  | 46       |
| 5 to 30                  | 60                  | 50       |

Notes:  
1. The lower limit shall apply at the transition frequencies  
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### TEST PROCEDURE


ANSI C63.10-2009

### RESULTS

No non-compliance noted:

**WORST EMISSIONS**

**LINE 1 PLOT**

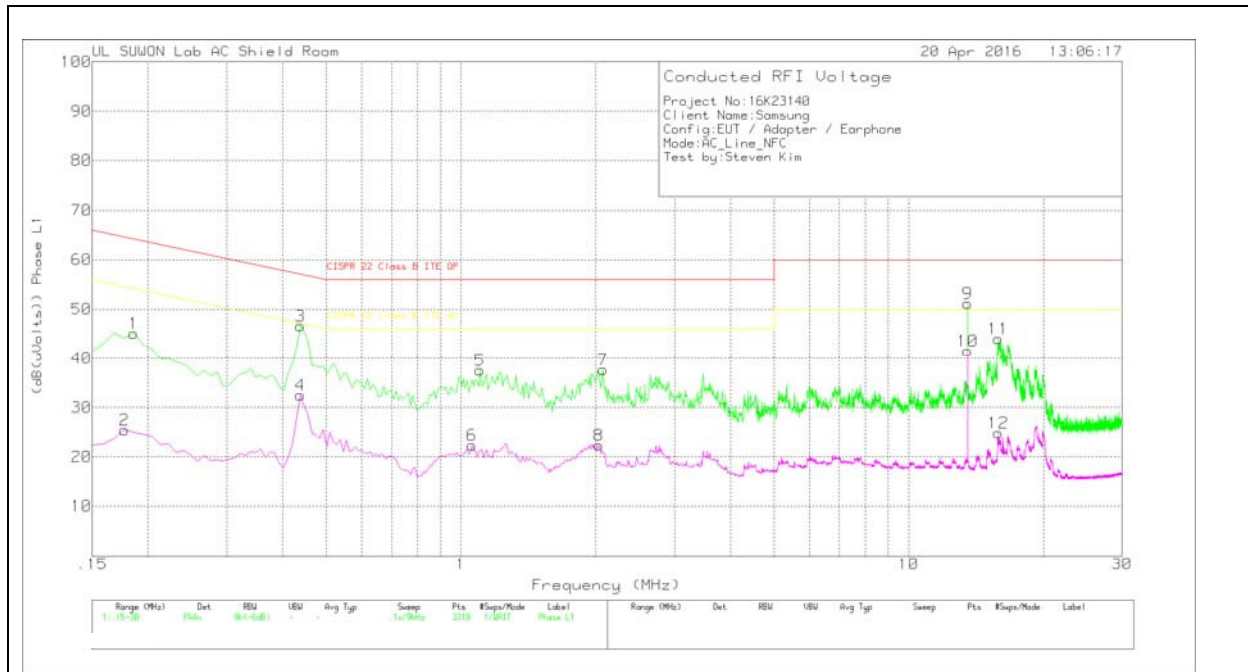

## LINE 1 RESULTS

### Trace Markers

#### Phase L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_w<br>ith ex-<br>cord_L1 | CE Shield Room | Corrected Reading (dB(uVolts)) | CISPR 22 Class B ITE QP | Margin (dB) | CISPR 22 Class B ITE AV | Margin (dB) |
|--------|-----------------|----------------------|-----|--------------------------------|----------------|--------------------------------|-------------------------|-------------|-------------------------|-------------|
| 1      | .186            | 35.03                | Pk  | 10.1                           | 0              | 45.13                          | 64.21                   | -19.08      | -                       | -           |
| 2      | .177            | 15.27                | Av  | 10.2                           | 0              | 25.47                          | -                       | -           | 54.63                   | -29.16      |
| 3      | .438            | 36.52                | Pk  | 10.1                           | 0              | 46.62                          | 57.1                    | -10.48      | -                       | -           |
| 4      | .438            | 22.44                | Av  | 10.1                           | 0              | 32.54                          | -                       | -           | 47.1                    | -14.56      |
| 5      | 1.104           | 27.69                | Pk  | 9.9                            | 0              | 37.59                          | 56                      | -18.41      | -                       | -           |
| 6      | 1.059           | 12.47                | Av  | 9.9                            | 0              | 22.37                          | -                       | -           | 46                      | -23.63      |
| 7      | 2.076           | 27.78                | Pk  | 9.8                            | .1             | 37.68                          | 56                      | -18.32      | -                       | -           |
| 8      | 2.031           | 12.46                | Av  | 9.8                            | .1             | 22.36                          | -                       | -           | 46                      | -23.64      |
| 9      | 13.56           | 40.86                | Pk  | 10.1                           | .2             | 51.16                          | 60                      | -8.84       | -                       | -           |
| 10     | 13.56           | 31.24                | Av  | 10.1                           | .2             | 41.54                          | -                       | -           | 50                      | -8.46       |
| 11     | 15.855          | 33.59                | Pk  | 10.2                           | .2             | 43.99                          | 60                      | -16.01      | -                       | -           |
| 12     | 15.882          | 14.43                | Av  | 10.2                           | .2             | 24.83                          | -                       | -           | 50                      | -25.17      |

Pk - Peak detector


Av - Average detection

#### Phase L1 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_wit<br>h ex-cord_L1 | CE Shield Room | Corrected Reading (dB(uVolts)) | CISPR 22 Class B ITE QP | Margin (dB) | CISPR 22 Class B ITE AV | Margin (dB) |
|-----------------|----------------------|-----|----------------------------|----------------|--------------------------------|-------------------------|-------------|-------------------------|-------------|
| .4407           | 29.09                | Qp  | 10.1                       | 0              | 39.19                          | 57.05                   | -17.86      | -                       | -           |
| 13.5609         | 15.05                | Qp  | 10.1                       | .2             | 25.35                          | 60                      | -34.65      | -                       | -           |

Qp - Quasi-Peak detector

## LINE 2 PLOT

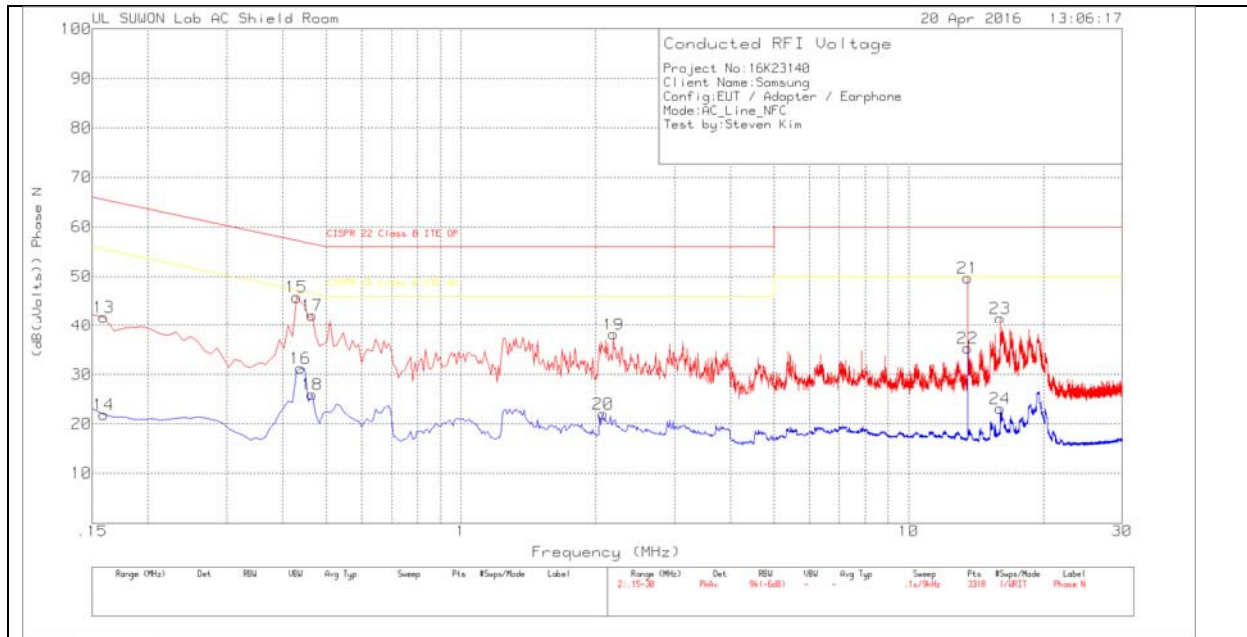

## LINE 2 RESULTS

Phase N .15 - 30MHz

| Marker | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Det | 101837_w<br>ith ex-<br>cord_N | CE Shield<br>Room | Corrected<br>Reading<br>(dB(uVolts<br>) | CISPR 22<br>Class B ITE<br>QP | Margin<br>(dB) | CISPR 22<br>Class B ITE<br>AV | Margin<br>(dB) |
|--------|--------------------|----------------------------|-----|-------------------------------|-------------------|-----------------------------------------|-------------------------------|----------------|-------------------------------|----------------|
| 13     | .159               | 31.79                      | Pk  | 10                            | 0                 | 41.79                                   | 65.52                         | -23.73         | -                             | -              |
| 14     | .159               | 11.88                      | Av  | 10                            | 0                 | 21.88                                   | -                             | -              | 55.52                         | -33.64         |
| 15     | .429               | 35.7                       | Pk  | 10.1                          | 0                 | 45.8                                    | 57.27                         | -11.47         | -                             | -              |
| 16     | .438               | 21.14                      | Av  | 10.1                          | 0                 | 31.24                                   | -                             | -              | 47.1                          | -15.86         |
| 17     | .465               | 32.01                      | Pk  | 10.1                          | 0                 | 42.11                                   | 56.6                          | -14.49         | -                             | -              |
| 18     | .465               | 15.85                      | Av  | 10.1                          | 0                 | 25.95                                   | -                             | -              | 46.6                          | -20.65         |
| 19     | 2.193              | 28.31                      | Pk  | 9.8                           | .1                | 38.21                                   | 56                            | -17.79         | -                             | -              |
| 20     | 2.076              | 12.1                       | Av  | 9.8                           | .1                | 22                                      | -                             | -              | 46                            | -24            |
| 21     | 13.56              | 39.3                       | Pk  | 10.2                          | .2                | 49.7                                    | 60                            | -10.3          | -                             | -              |
| 22     | 13.56              | 24.96                      | Av  | 10.2                          | .2                | 35.36                                   | -                             | -              | 50                            | -14.64         |
| 23     | 16.008             | 30.9                       | Pk  | 10.4                          | .2                | 41.5                                    | 60                            | -18.5          | -                             | -              |
| 24     | 16.026             | 12.52                      | Av  | 10.4                          | .2                | 23.12                                   | -                             | -              | 50                            | -26.88         |

Pk - Peak detector

Av - Average detection

Phase N .15 - 30MHz

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Det | 101837_wit<br>h ex-cord_N | CE Shield<br>Room | Corrected<br>Reading<br>(dB(uVolts)) | CISPR 22<br>Class B ITE<br>QP | Margin<br>(dB) | CISPR 22<br>Class B ITE<br>AV | Margin<br>(dB) |
|--------------------|----------------------------|-----|---------------------------|-------------------|--------------------------------------|-------------------------------|----------------|-------------------------------|----------------|
| .4317              | 27.44                      | Qp  | 10.1                      | 0                 | 37.54                                | 57.22                         | -19.68         | -                             | -              |
| 13.5609            | 32.21                      | Qp  | 10.2                      | .2                | 42.61                                | 60                            | -17.39         | -                             | -              |

Qp - Quasi-Peak detector

## 10. FREQUENCY STABILITY

### LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### TEST PROCEDURE

ANSI C63.10 §6.8

### RESULTS

| Reference Frequency: EUT Channel 13.56 MHz @ 20°C |                                 |                                               |             |             |
|---------------------------------------------------|---------------------------------|-----------------------------------------------|-------------|-------------|
| Limit: $\pm 100$ ppm = 1.356 KHz                  |                                 |                                               |             |             |
| Power Supply<br>(Vdc)                             | Environment<br>Temperature (°C) | Frequency Deviation Measured with Time Elapse |             |             |
|                                                   |                                 | (MHz)                                         | Delta (ppm) | Limit (ppm) |
| 3.80                                              | 50                              | 13.559271496                                  | 4.377       | 100         |
| 3.80                                              | 40                              | 13.559281530                                  | 3.637       | 100         |
| 3.80                                              | 30                              | 13.559300538                                  | 2.235       | 100         |
| <b>3.80</b>                                       | <b>20</b>                       | <b>13.559330846</b>                           | <b>0</b>    | <b>100</b>  |
| 3.80                                              | 10                              | 13.559357619                                  | -1.975      | 100         |
| 3.80                                              | 0                               | 13.559384683                                  | -3.970      | 100         |
| 3.80                                              | -10                             | 13.559401718                                  | -5.227      | 100         |
| 3.80                                              | -20                             | 13.559404034                                  | -5.398      | 100         |
| 3.80                                              | -30                             | 13.559361328                                  | -2.248      | 100         |

| Reference Frequency: EUT Channel 13.56 MHz @ 20°C |                                 |                                               |             |             |
|---------------------------------------------------|---------------------------------|-----------------------------------------------|-------------|-------------|
| Limit: $\pm 100$ ppm = 1.356 kHz                  |                                 |                                               |             |             |
| Power Supply<br>(Vdc)                             | Environment<br>Temperature (°C) | Frequency Deviation Measured with Time Elapse |             |             |
|                                                   |                                 |                                               | Delta (ppm) | Limit (ppm) |
| <b>3.80</b>                                       | <b>20</b>                       | <b>13.559330846</b>                           | <b>0</b>    | <b>100</b>  |
| 4.20                                              | 20                              | 13.559330757                                  | 0.007       | 100         |
| 3.40                                              | 20                              | 13.559330959                                  | -0.008      | 100         |

No non-compliance noted.