





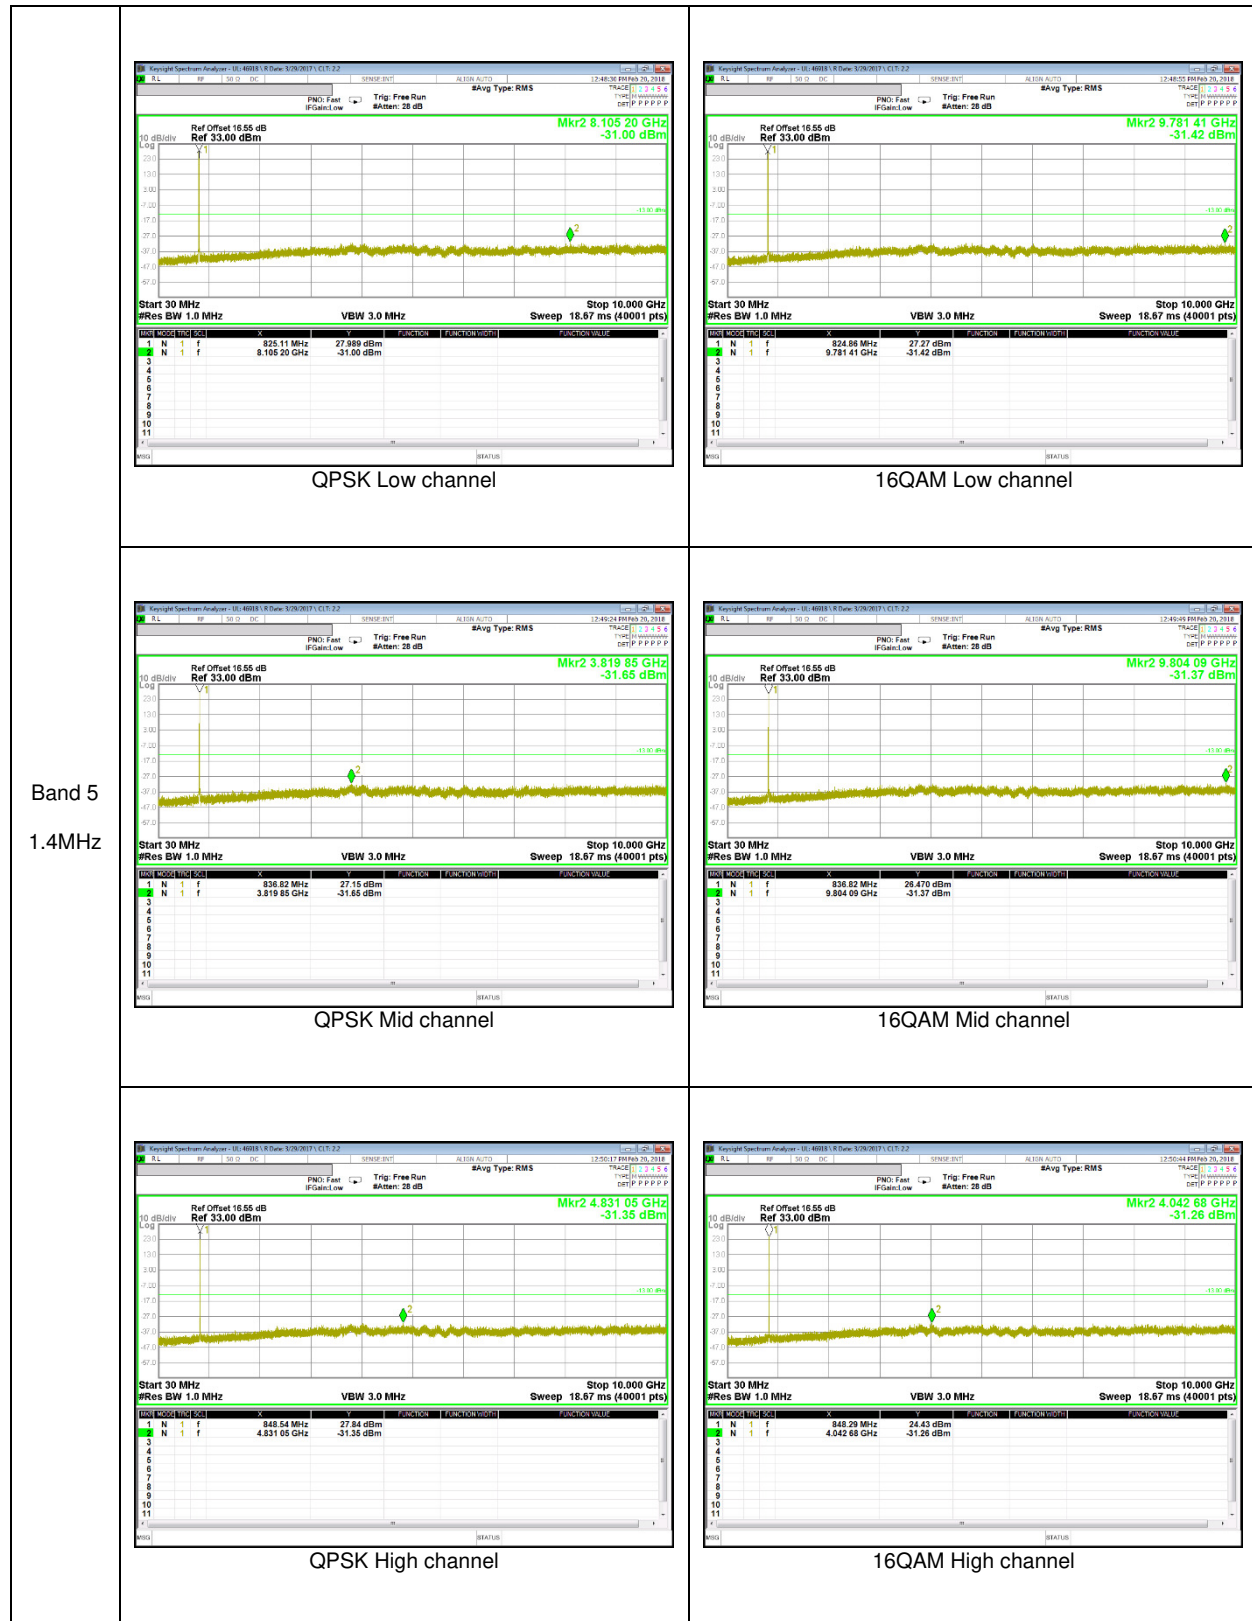


LTE Band 7

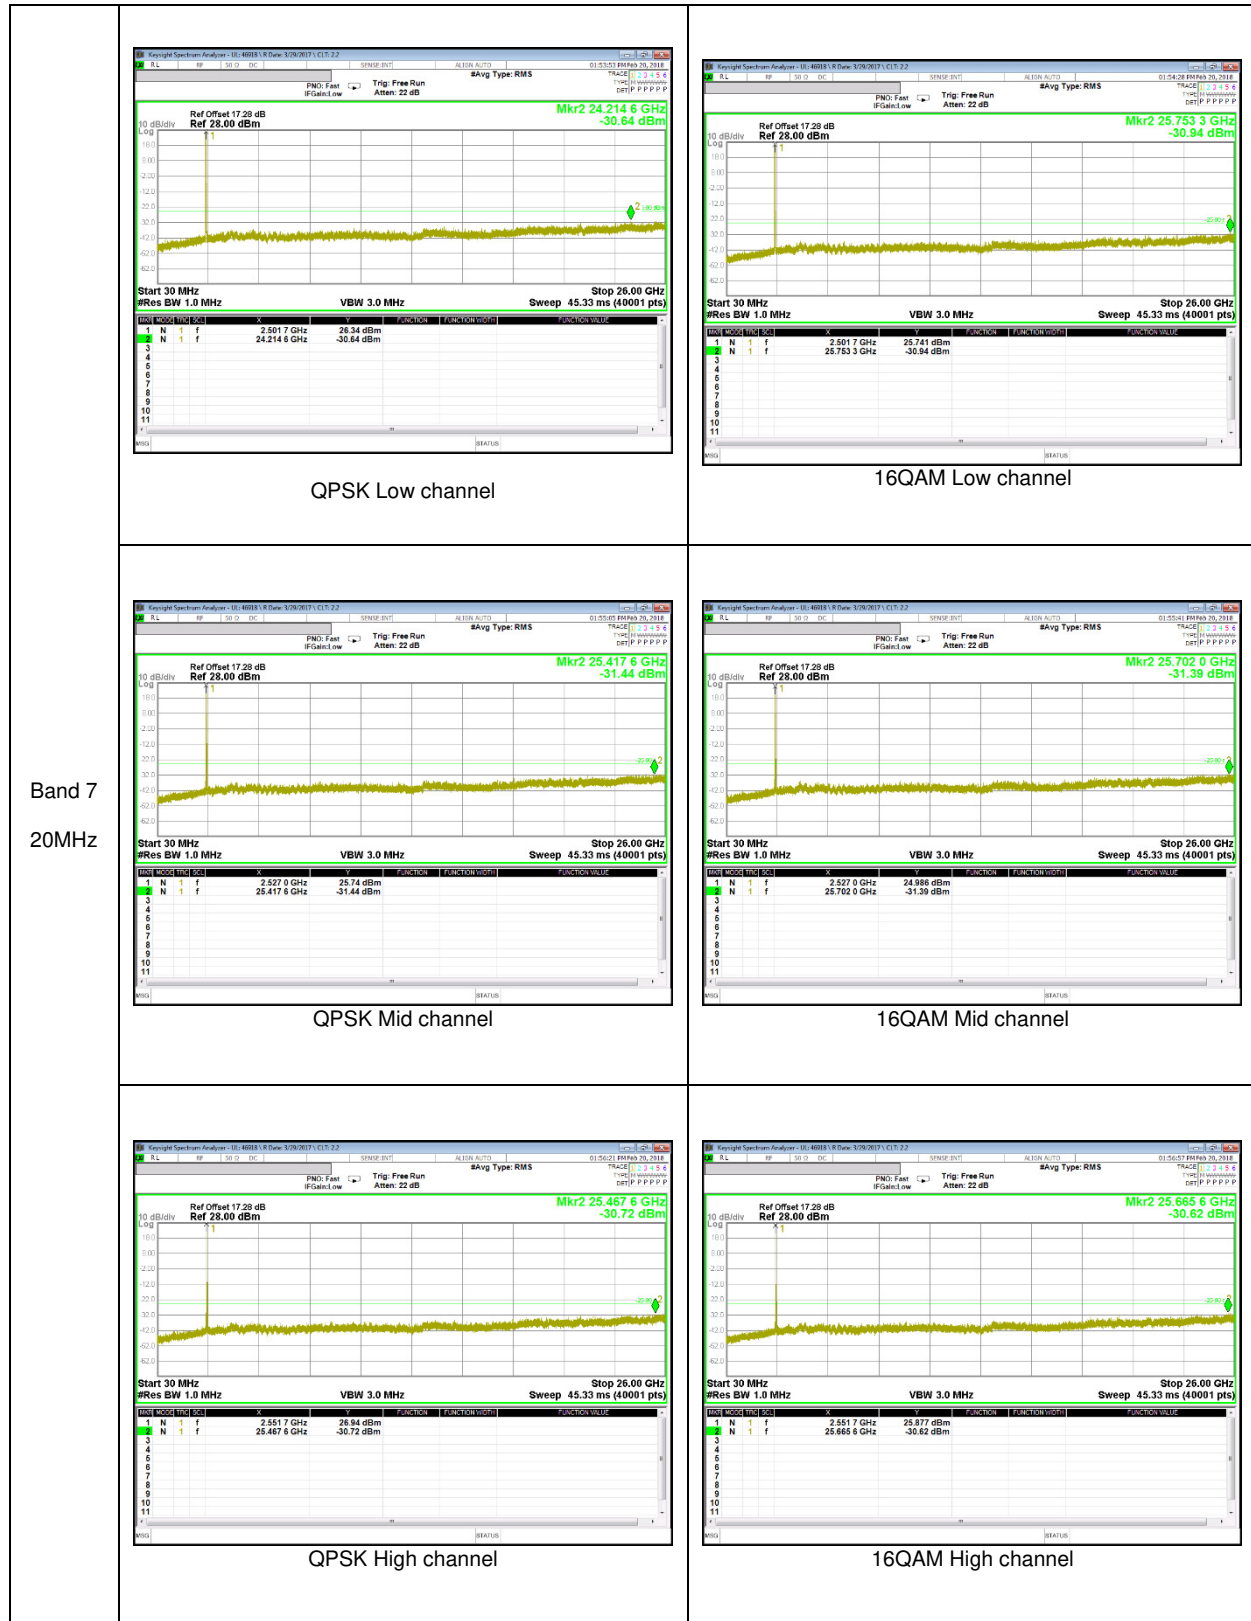


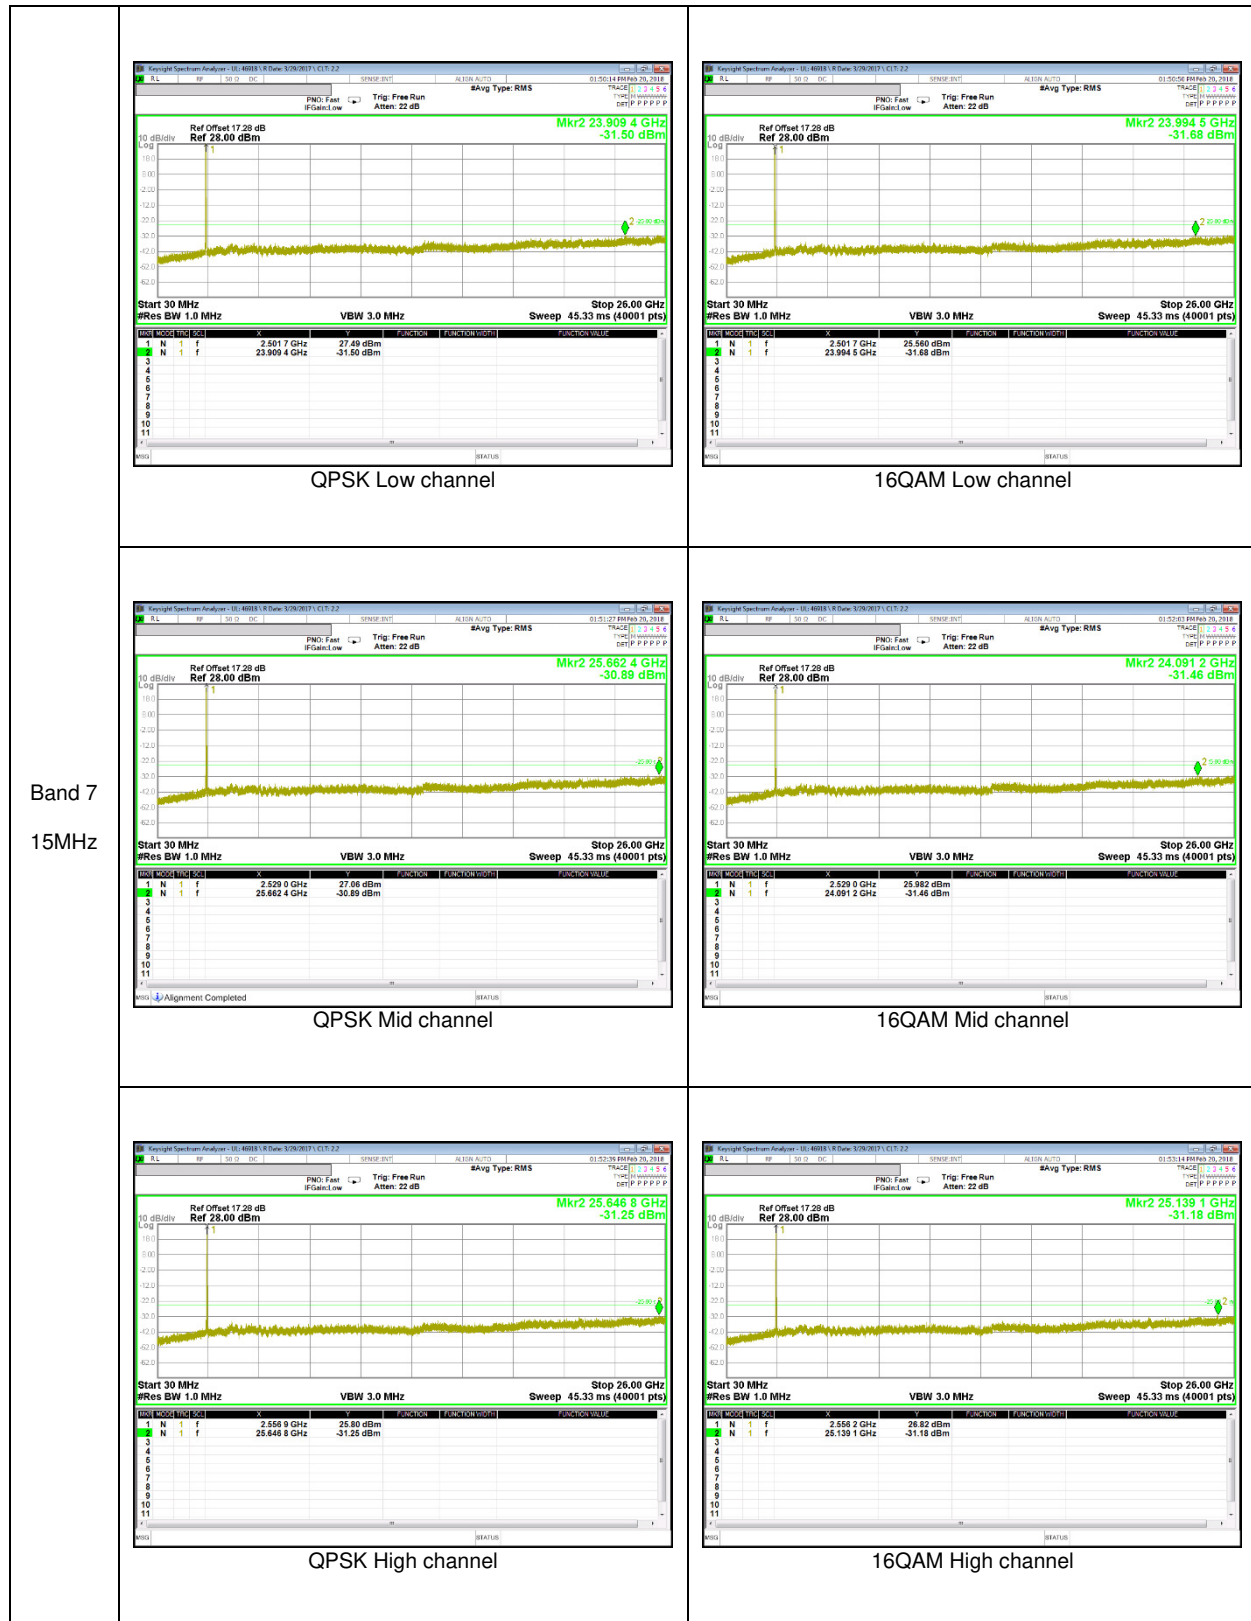


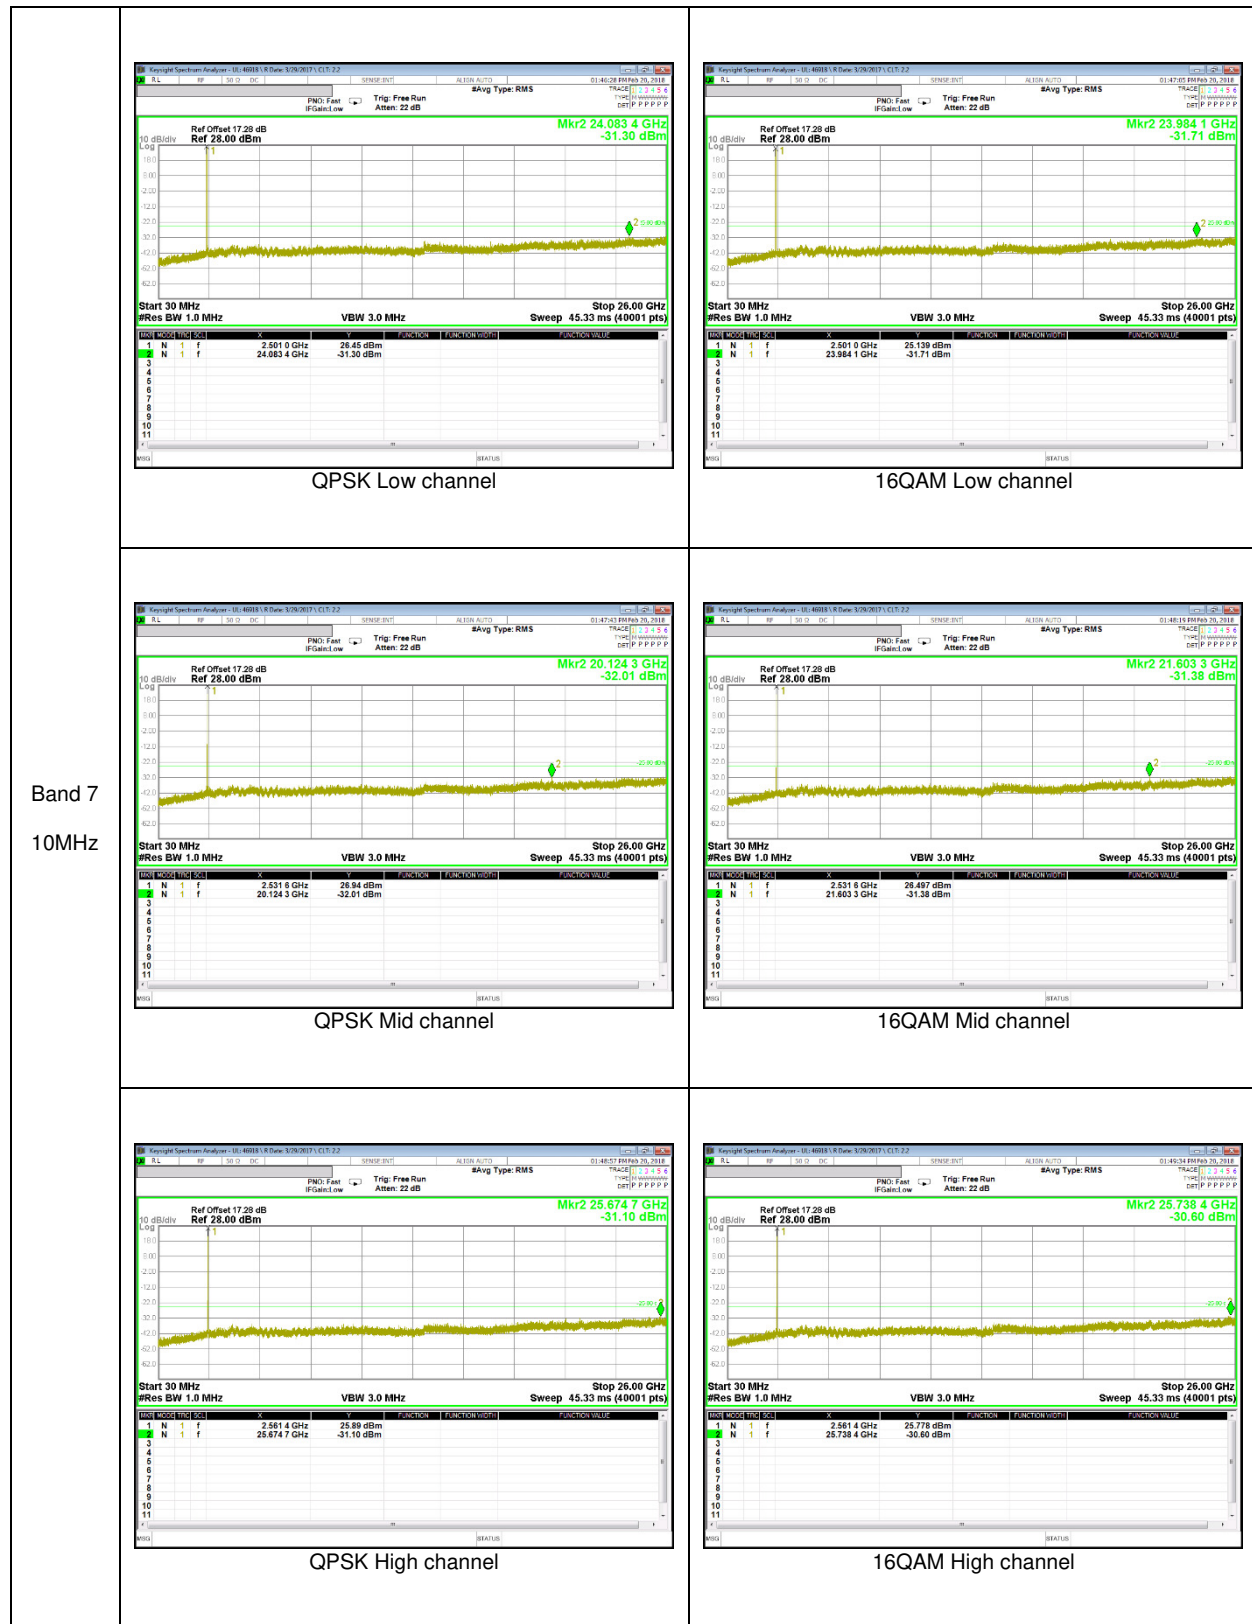


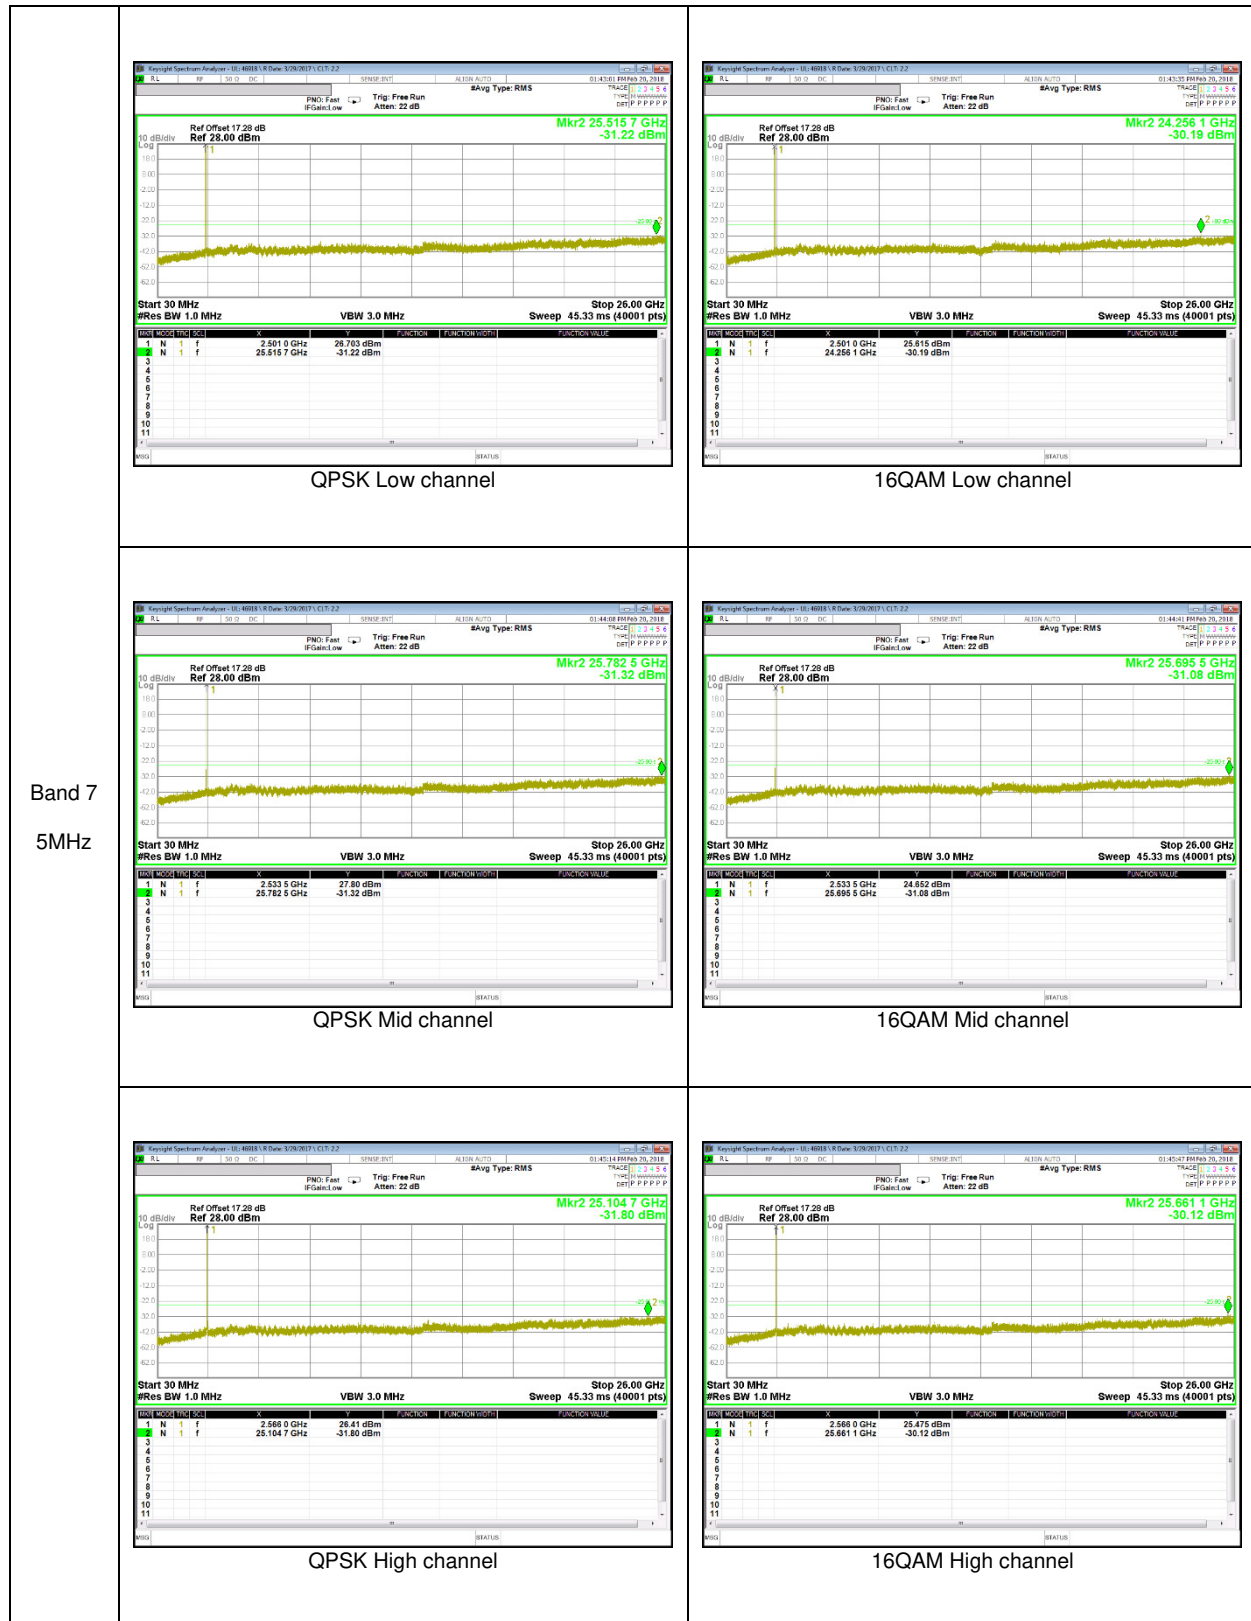


LTE Band 41

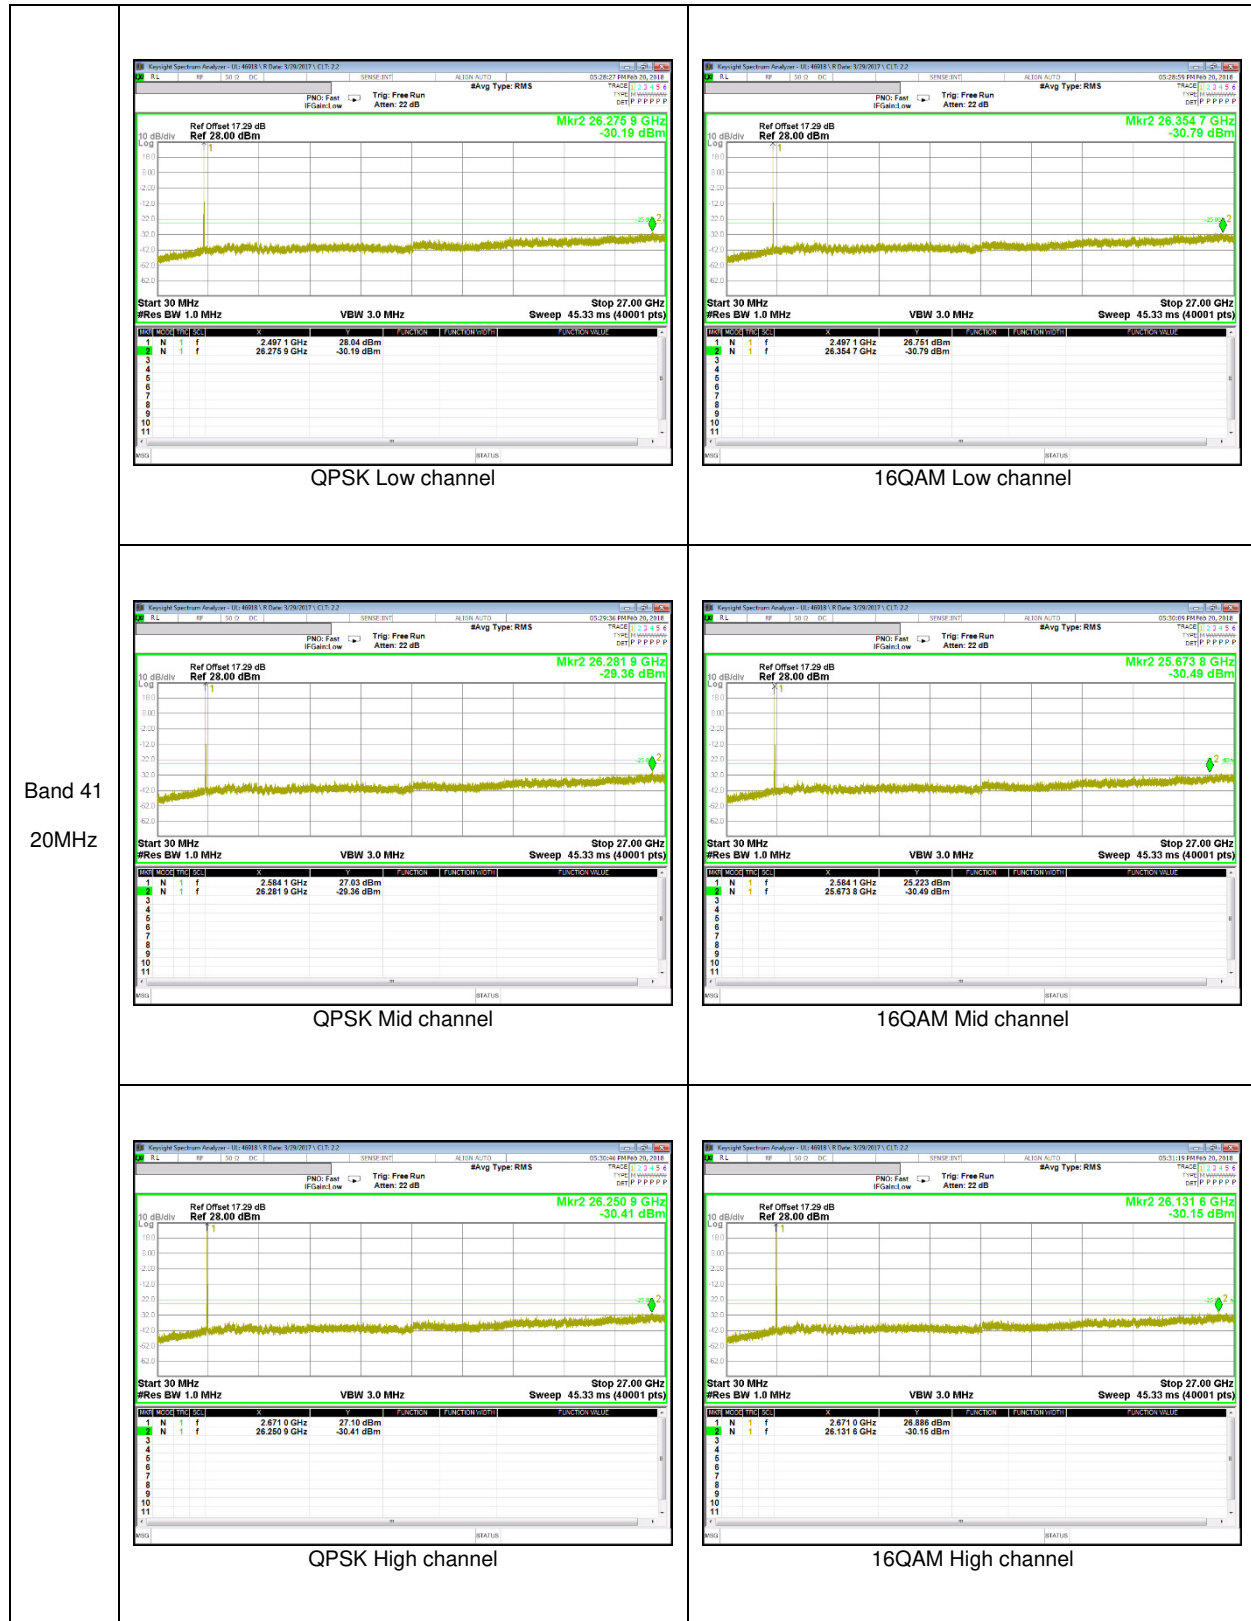

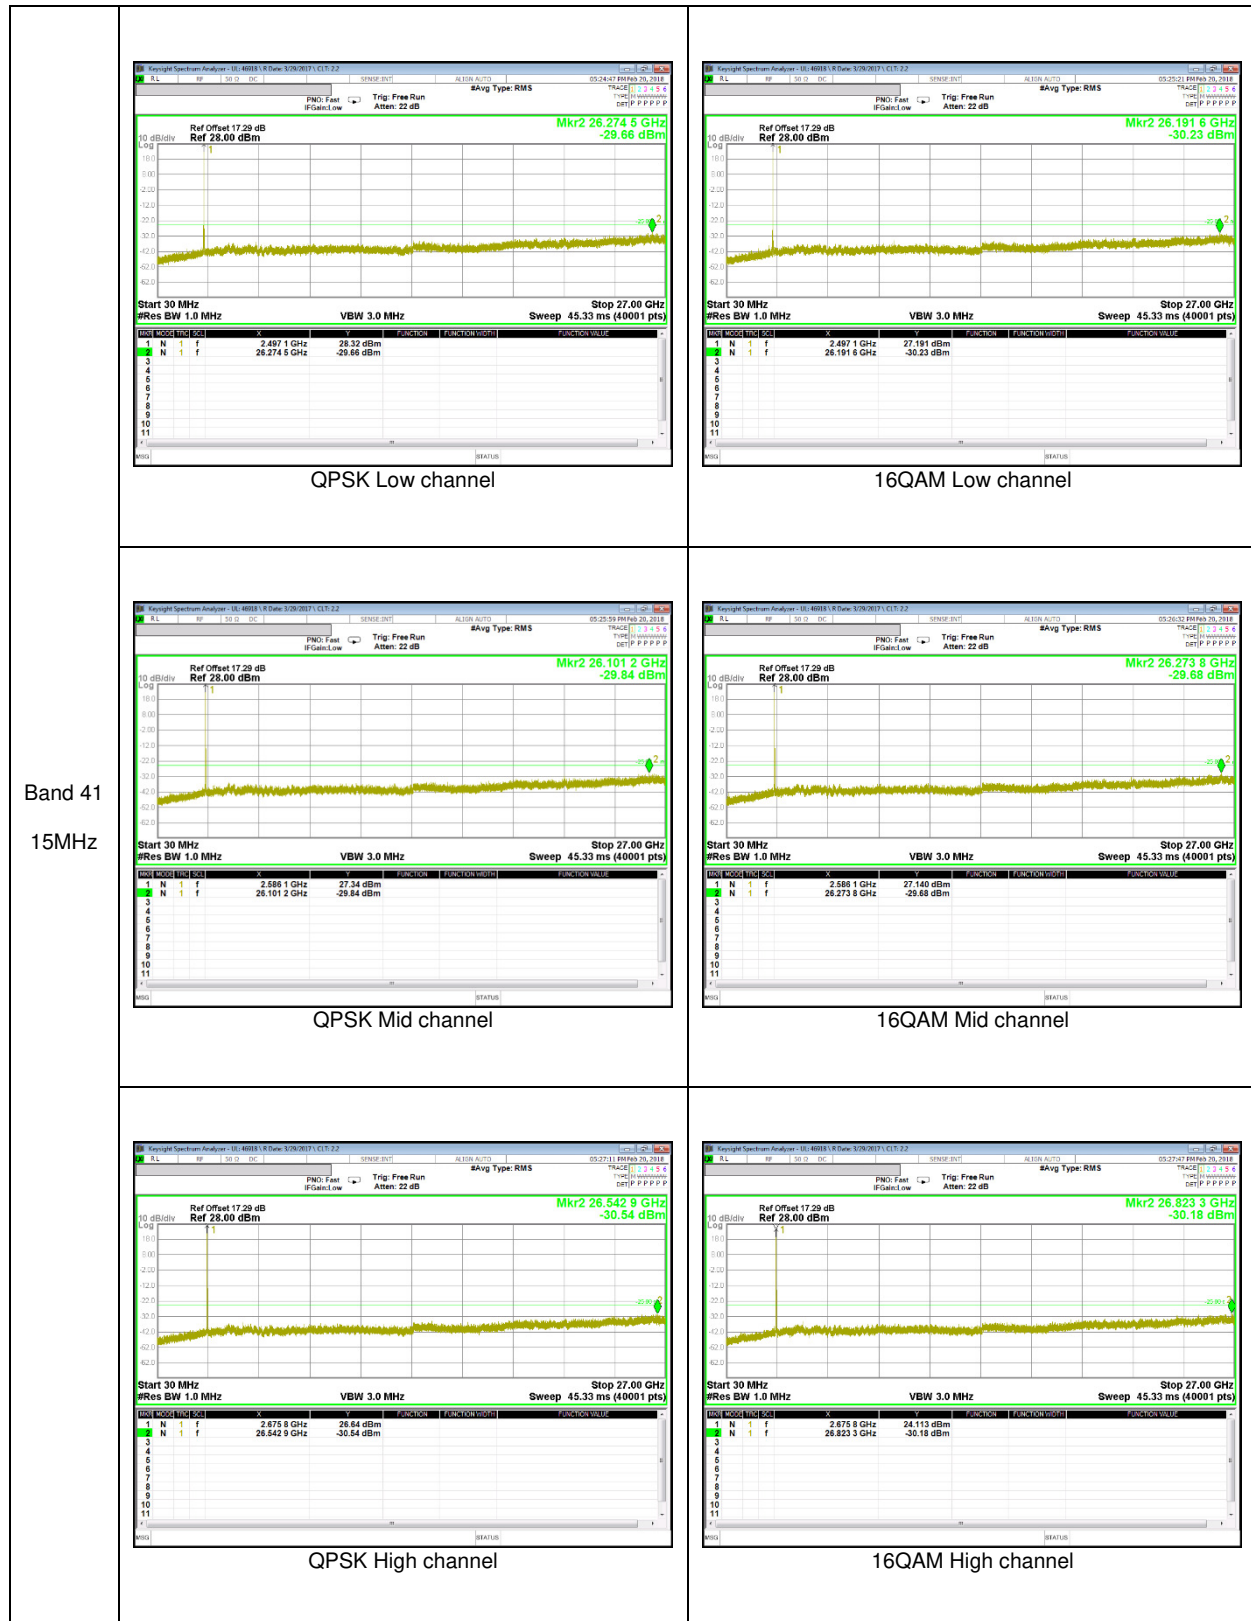

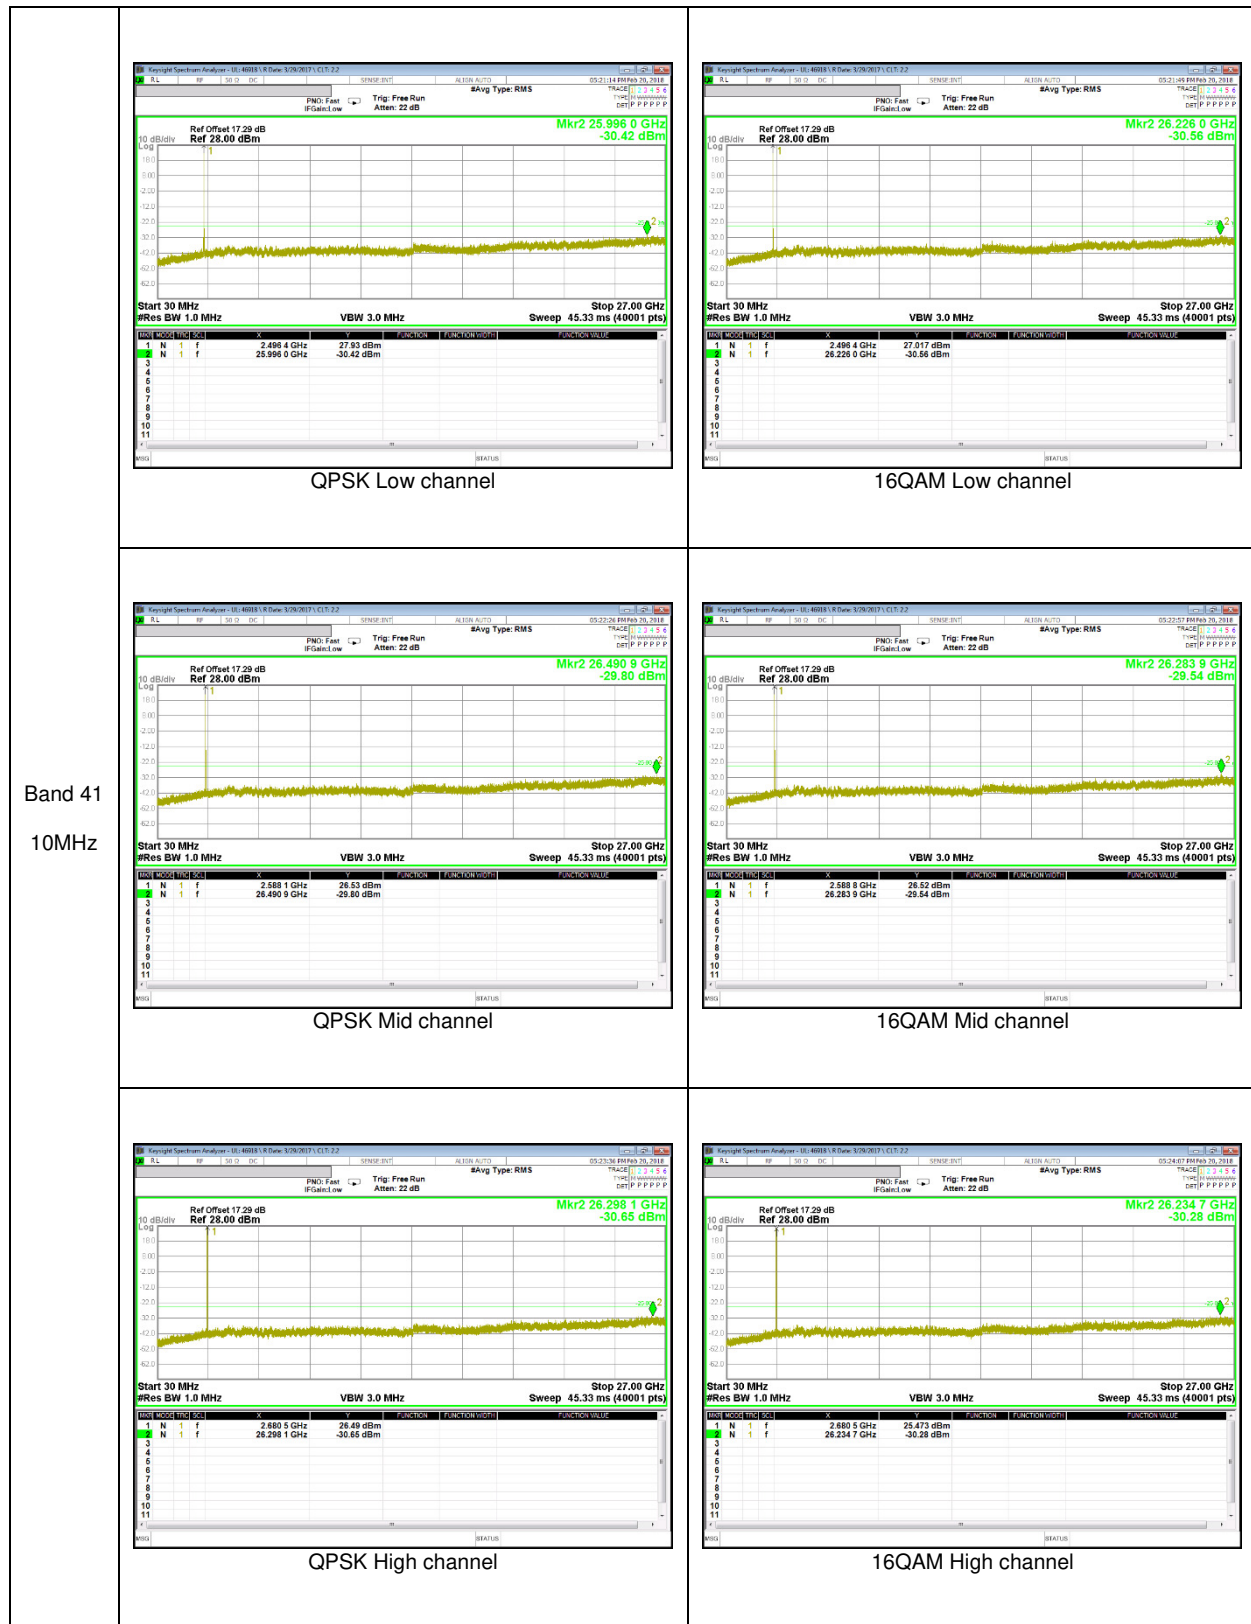

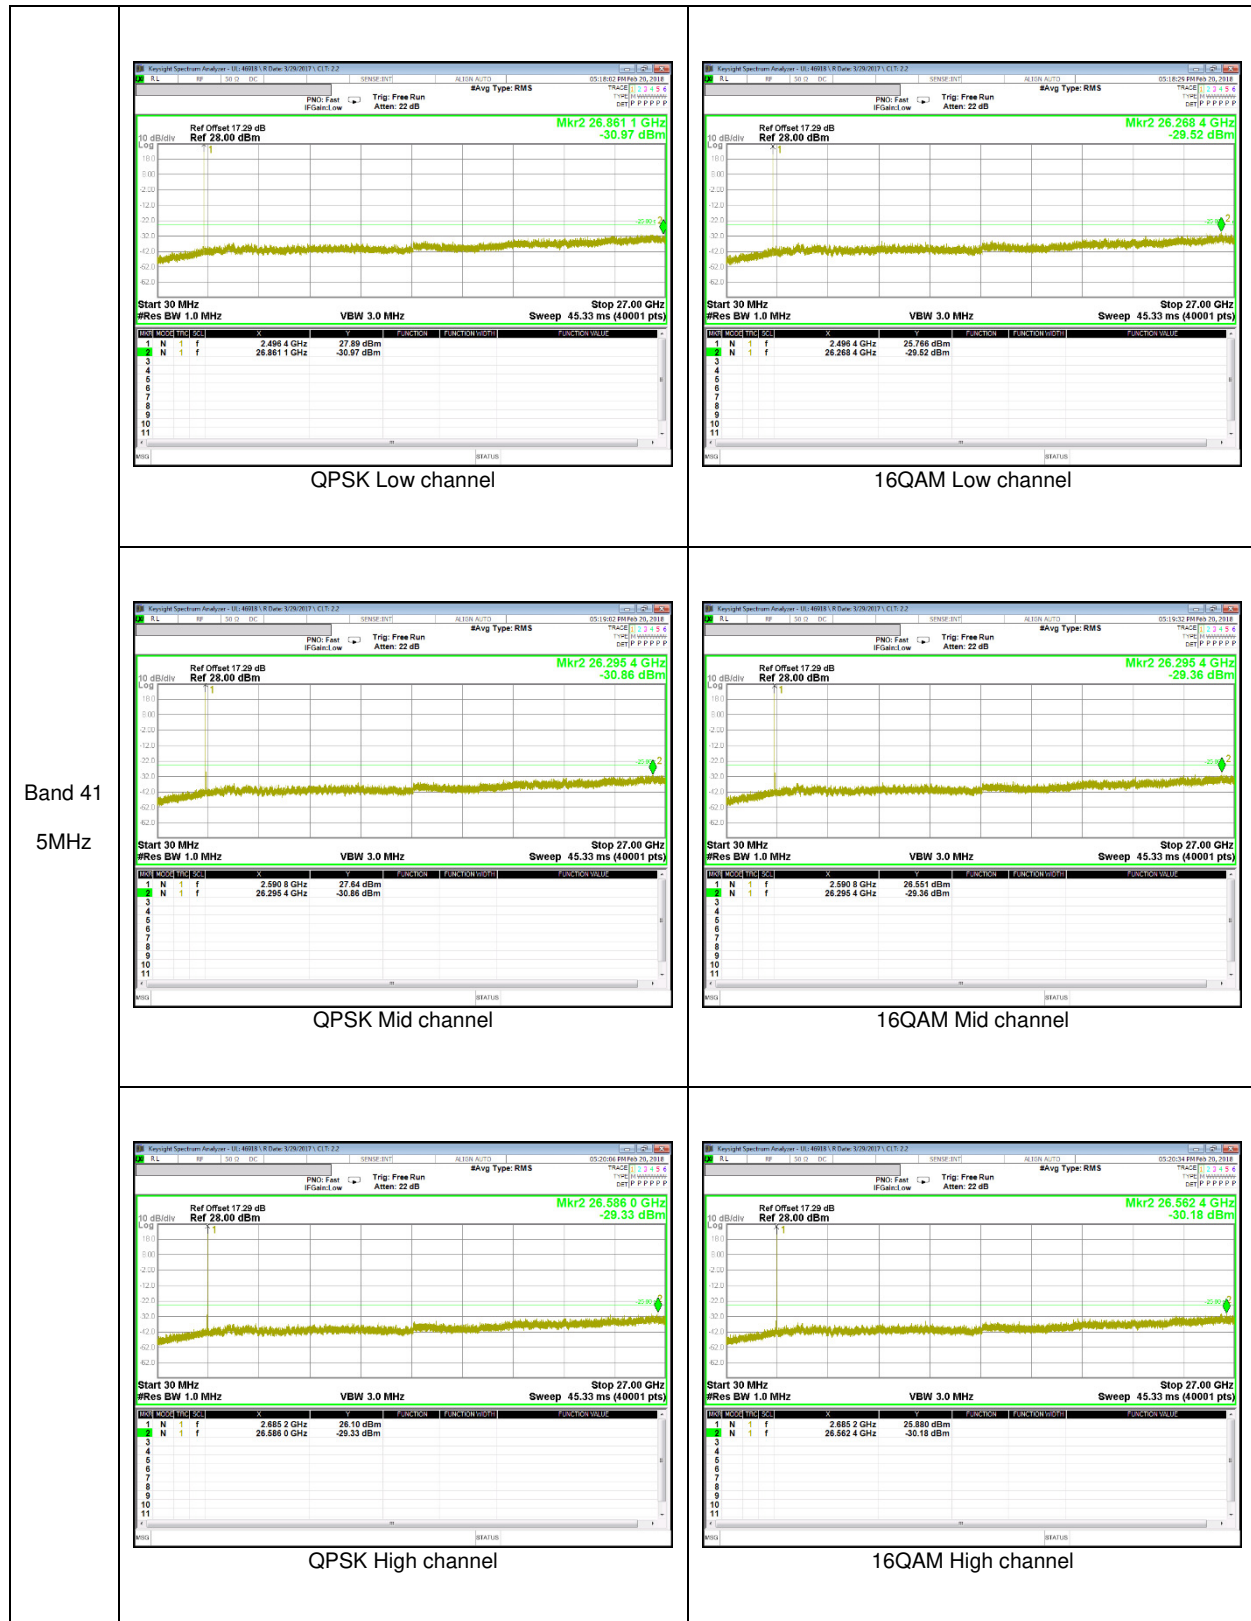

9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235 and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03

RESULTS

See the following pages.

9.4.1. FREQUENCY STABILITY RESULTS

GSM 850, Channel 190, Frequency 836.6 MHz

Reference Frequency : GSM850 Mid Channel 836.6 MHz @ 20°C Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	836.59997625	-0.001	2.5
3.85	40	836.59997663	-0.002	2.5
3.85	30	836.59998331	-0.010	2.5
3.85	20	836.59997516	0	2.5
3.85	10	836.59998182	-0.008	2.5
3.85	0	836.59998063	-0.007	2.5
3.85	-10	836.59998407	-0.011	2.5
3.85	-20	836.59998360	-0.010	2.5
3.85	-30	836.59997922	-0.005	2.5

Reference Frequency : GSM850 Mid Channel 836.6 MHz @ 20°C Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	836.59997516	0	2.5
4.40	20	836.59997788	-0.003	2.5
3.60	20	836.59998210	-0.008	2.5

GSM 1900, Channel 661, Frequency 1880.0 MHz

Reference Frequency: GSM1900 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	1879.99996924	0.000	2.5
3.85	40	1879.99997274	-0.002	2.5
3.85	30	1879.99997371	-0.003	2.5
3.85	20	1879.99996855	0	2.5
3.85	10	1879.99997185	-0.002	2.5
3.85	0	1879.99997021	-0.001	2.5
3.85	-10	1879.99996658	0.001	2.5
3.85	-20	1879.99997528	-0.004	2.5
3.85	-30	1879.99996549	0.002	2.5

Reference Frequency: GSM1900 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	1879.99996855	0	2.5
4.40	20	1879.99997448	-0.003	2.5
3.60	20	1879.99996920	0.000	2.5

WCDMA Band 5 , Channel 4183, Frequency 836.6 MHz

Reference Frequency: WCDMA Band 5 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	836.59997972	0.007	2.5
3.85	40	836.59997791	0.009	2.5
3.85	30	836.59998434	0.002	2.5
3.85	20	836.59998572	0	2.5
3.85	10	836.59997762	0.010	2.5
3.85	0	836.59998152	0.005	2.5
3.85	-10	836.59997573	0.012	2.5
3.85	-20	836.59997651	0.011	2.5
3.85	-30	836.59998263	0.004	2.5

Reference Frequency: WCDMA Band 5 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	836.59998572	0	2.5
4.40	20	836.59997889	0.008	2.5
3.60	20	836.59998341	0.003	2.5

WCDMA Band 2 , Channel 9400, Frequency 1880.0 MHz

Reference Frequency: WCDMA Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	1879.99997385	-0.001	2.5
3.85	40	1879.99996647	0.002	2.5
3.85	30	1879.99997047	0.000	2.5
3.85	20	1879.99997112	0	2.5
3.85	10	1879.99997119	0.000	2.5
3.85	0	1879.99996656	0.002	2.5
3.85	-10	1879.99997186	0.000	2.5
3.85	-20	1879.99996804	0.002	2.5
3.85	-30	1879.99997172	0.000	2.5

Reference Frequency: WCDMA Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	1879.99997112	0	2.5
4.40	20	1879.99997334	-0.001	2.5
3.60	20	1879.99996952	0.001	2.5

LTE Band 5 , Channel 20524, Frequency 836.5 MHz

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	836.49998014	0.004	2.5
3.85	40	836.49997590	0.010	2.5
3.85	30	836.49997844	0.006	2.5
3.85	20	836.49998387	0	2.5
3.85	10	836.49998472	-0.001	2.5
3.85	0	836.49997589	0.010	2.5
3.85	-10	836.49997609	0.009	2.5
3.85	-20	836.49998402	0.000	2.5
3.85	-30	836.49998127	0.003	2.5

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	836.49998387	0	2.5
4.40	20	836.49997743	0.008	2.5
3.60	20	836.49997838	0.007	2.5

LTE Band 7, Channel 21100, Frequency 2535.0 MHz

Reference Frequency: LTE Band 7 Mid Channel 2535 MHz @ 20°C				
Limit: +- 2.5 ppm = 6337.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	2534.99998085	-0.001	2.5
3.85	40	2534.99997633	0.001	2.5
3.85	30	2534.99998088	-0.001	2.5
3.85	20	2534.99997790	0	2.5
3.85	10	2534.99997585	0.001	2.5
3.85	0	2534.99997436	0.001	2.5
3.85	-10	2534.99997898	0.000	2.5
3.85	-20	2534.99997813	0.000	2.5
3.85	-30	2534.99997923	-0.001	2.5

Reference Frequency: LTE Band 7 Mid Channel 2535 MHz @ 20°C				
Limit: +- 2.5 ppm = 6337.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	2534.99997790	0	2.5
4.40	20	2534.99997845	0.000	2.5
3.60	20	2534.99997933	-0.001	2.5

LTE Band 41 , Channel 40620, Frequency 2593.0 MHz

Reference Frequency: LTE Band 41 Mid Channel 2593 MHz @ 20°C				
Limit: +- 2.5 ppm = 6482.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	2592.99997065	0.001	2.5
3.85	40	2592.99997658	-0.002	2.5
3.85	30	2592.99997096	0.000	2.5
3.85	20	2592.99997198	0	2.5
3.85	10	2592.99997048	0.001	2.5
3.85	0	2592.99997573	-0.001	2.5
3.85	-10	2592.99997312	0.000	2.5
3.85	-20	2592.99997623	-0.002	2.5
3.85	-30	2592.99998030	-0.003	2.5

Reference Frequency: LTE Band 41 Mid Channel 2593 MHz @ 20°C				
Limit: +- 2.5 ppm = 6482.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	2592.99997198	0	2.5
4.40	20	2592.99997165	0.000	2.5
3.60	20	2592.99997534	-0.001	2.5

LTE Band 38

Due to frequency range and same output power setting, test was carried in LTE Band 41 to cover both LTE Band 41 and LTE Band 38.

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(h) - (2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03

For peak power measurement with a ESU40:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a ESU40:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function. (RBW/VBW are automatically set for LTE B41)

TEST RESULTS

10.1.1. ERP/EIRP Results

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	512	824.2	30.20	1047.13
		661	836.6	30.78	1196.74
		810	848.8	31.09	1285.29
	EGPRS	512	824.2	22.03	159.59
		661	836.6	22.79	190.11
		810	848.8	24.06	254.68
GSM1900	GPRS	512	1850.2	25.16	328.10
		661	1880.0	25.93	391.74
		810	1909.8	24.64	291.07
	EGPRS	512	1850.2	22.68	185.35
		661	1880.0	23.28	212.81
		810	1909.8	20.76	119.12

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	20.50	112.20
		4183	836.6	19.70	93.33
		4233	846.6	19.64	92.04
	HSDPA	4132	826.4	19.41	87.30
		4183	836.6	18.82	76.21
		4233	846.6	19.27	84.53
Band 2	REL99	9262	1852.4	19.96	99.08
		9400	1880.0	19.47	88.51
		9538	1907.6	19.24	83.95
	HSDPA	9262	1852.4	17.79	60.12
		9400	1880.0	17.80	60.26
		9538	1907.6	17.67	58.48

LTE Band 5

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 5	10	QPSK	50/0	829.0	17.59	57.41
			50/0	836.5	17.02	50.35
			50/0	844.0	16.82	48.08
		16QAM	50/0	829.0	16.55	45.19
			50/0	836.5	16.02	39.99
			50/0	844.0	15.77	37.76
	5	QPSK	25/0	826.5	16.89	48.87
			25/0	836.5	17.18	52.24
			25/0	846.5	15.83	38.28
		16QAM	25/0	826.5	15.83	38.28
			25/0	836.5	15.98	39.63
			25/0	846.5	14.77	29.99
	3	QPSK	15/0	825.5	17.13	51.64
			15/0	836.5	16.62	45.92
			15/0	847.5	16.44	44.06
		16QAM	15/0	825.5	16.05	40.27
			15/0	836.5	15.57	36.06
			15/0	847.5	15.32	34.04
	1.4	QPSK	6/0	824.7	16.05	40.27
			6/0	836.5	14.79	30.13
			6/0	848.3	14.44	27.80
		16QAM	6/0	824.7	14.31	26.98
			6/0	836.5	13.17	20.75
			6/0	848.3	12.80	19.05

LTE Band 7

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 7	20	QPSK	100/0	2510.0	17.79	60.12
			100/0	2535.0	19.02	79.80
			100/0	2560.0	20.24	105.68
		16QAM	100/0	2510.0	16.75	47.32
			100/0	2535.0	17.98	62.81
			100/0	2560.0	19.21	83.37
	15	QPSK	75/0	2507.5	17.30	53.70
			75/0	2535.0	18.69	73.96
			75/0	2562.5	20.55	113.50
		16QAM	75/0	2507.5	16.22	41.88
			75/0	2535.0	17.61	57.68
			75/0	2562.5	19.52	89.54
	10	QPSK	50/0	2505.0	17.73	59.29
			50/0	2535.0	18.37	68.71
			50/0	2565.0	19.47	88.51
		16QAM	50/0	2505.0	16.68	46.56
			50/0	2535.0	17.32	53.95
			50/0	2565.0	18.39	69.02
	5	QPSK	25/0	2502.5	16.72	46.99
			25/0	2535.0	17.23	52.84
			25/0	2567.5	19.68	92.90
		16QAM	25/0	2502.5	15.26	33.57
			25/0	2535.0	16.20	41.69
			25/0	2567.5	18.65	73.28

LTE Band 41

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 41	20	QPSK	100/0	2506.0	15.16	32.81
			100/0	2593.0	14.93	31.12
			100/0	2680.0	17.32	53.95
		16QAM	100/0	2506.0	14.27	26.73
			100/0	2593.0	14.14	25.94
			100/0	2680.0	16.32	42.85
	15	QPSK	75/0	2503.5	15.65	36.73
			75/0	2593.0	14.94	31.19
			75/0	2682.5	17.85	60.95
		16QAM	75/0	2503.5	14.66	29.24
			75/0	2593.0	14.19	26.24
			75/0	2682.5	18.56	71.78
	10	QPSK	50/0	2501.0	15.63	36.56
			50/0	2593.0	16.47	44.36
			50/0	2685.0	18.75	74.99
		16QAM	50/0	2501.0	14.73	29.72
			50/0	2593.0	15.61	36.39
			50/0	2685.0	17.84	60.81
	5	QPSK	25/0	2498.5	16.08	40.55
			25/0	2593.0	16.66	46.34
			25/0	2687.5	19.05	80.35
		16QAM	25/0	2498.5	15.29	33.81
			25/0	2593.0	15.53	35.73
			25/0	2687.5	18.19	65.92

LTE Band 38

Due to frequency range and same output power setting, test was carried in LTE Band 41 to cover both LTE Band 41 and LTE Band 38.

10.1.2. ERP/EIRP DATA

GSM 850

GSM GSM850 GPRS	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4788334019																																																																																															
	Date:		2018-02-09																																																																																															
	Test Engineer:		47989																																																																																															
	Configuration:		EUT / Z-Position																																																																																															
	Location:		Chamber 2																																																																																															
	Mode:		GPRS 850 MHz Fundamentals																																																																																															
	Test Equipment:																																																																																																	
	Receiving: VULB9163-749, and Chamber 2 SMA Cables																																																																																																	
Substitution: Dipole 3121_DB4, 3m N-type Cable																																																																																																		
<table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>824.20</td><td>32.63</td><td>V</td><td>1.0</td><td>-1.5</td><td>30.20</td><td>38.5</td><td>-8.3</td><td></td></tr><tr><td>824.20</td><td>20.35</td><td>H</td><td>1.0</td><td>-1.5</td><td>17.92</td><td>38.5</td><td>-20.6</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.60</td><td>33.16</td><td>V</td><td>1.0</td><td>-1.4</td><td>30.78</td><td>38.5</td><td>-7.7</td><td></td></tr><tr><td>836.60</td><td>21.52</td><td>H</td><td>1.0</td><td>-1.4</td><td>19.14</td><td>38.5</td><td>-19.4</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>848.80</td><td>33.44</td><td>V</td><td>1.0</td><td>-1.4</td><td>31.09</td><td>38.5</td><td>-7.4</td><td></td></tr><tr><td>848.80</td><td>21.88</td><td>H</td><td>1.0</td><td>-1.4</td><td>19.53</td><td>38.5</td><td>-19.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									824.20	32.63	V	1.0	-1.5	30.20	38.5	-8.3		824.20	20.35	H	1.0	-1.5	17.92	38.5	-20.6		Mid Ch									836.60	33.16	V	1.0	-1.4	30.78	38.5	-7.7		836.60	21.52	H	1.0	-1.4	19.14	38.5	-19.4		High Ch									848.80	33.44	V	1.0	-1.4	31.09	38.5	-7.4		848.80	21.88	H	1.0	-1.4	19.53	38.5	-19.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
824.20	32.63	V	1.0	-1.5	30.20	38.5	-8.3																																																																																											
824.20	20.35	H	1.0	-1.5	17.92	38.5	-20.6																																																																																											
Mid Ch																																																																																																		
836.60	33.16	V	1.0	-1.4	30.78	38.5	-7.7																																																																																											
836.60	21.52	H	1.0	-1.4	19.14	38.5	-19.4																																																																																											
High Ch																																																																																																		
848.80	33.44	V	1.0	-1.4	31.09	38.5	-7.4																																																																																											
848.80	21.88	H	1.0	-1.4	19.53	38.5	-19.0																																																																																											
GSM GSM850 EGPRS	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4788334019																																																																																															
	Date:		2018-02-21																																																																																															
	Test Engineer:		47989																																																																																															
	Configuration:		EUT / Z-Position																																																																																															
	Location:		Chamber 2																																																																																															
	Mode:		EGPRS 850 MHz Fundamentals																																																																																															
	Test Equipment:																																																																																																	
	Receiving: VULB9163-749, and Chamber 2 SMA Cables																																																																																																	
Substitution: Dipole 3121_DB4, 3m N-type Cable																																																																																																		
<table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>824.20</td><td>24.46</td><td>V</td><td>1.0</td><td>-1.5</td><td>22.03</td><td>38.5</td><td>-16.5</td><td></td></tr><tr><td>824.20</td><td>11.50</td><td>H</td><td>1.0</td><td>-1.5</td><td>9.07</td><td>38.5</td><td>-29.4</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.60</td><td>25.17</td><td>V</td><td>1.0</td><td>-1.4</td><td>22.79</td><td>38.5</td><td>-15.7</td><td></td></tr><tr><td>836.60</td><td>12.96</td><td>H</td><td>1.0</td><td>-1.4</td><td>10.58</td><td>38.5</td><td>-27.9</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>848.80</td><td>26.41</td><td>V</td><td>1.0</td><td>-1.4</td><td>24.06</td><td>38.5</td><td>-14.4</td><td></td></tr><tr><td>848.80</td><td>14.48</td><td>H</td><td>1.0</td><td>-1.4</td><td>12.13</td><td>38.5</td><td>-26.4</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									824.20	24.46	V	1.0	-1.5	22.03	38.5	-16.5		824.20	11.50	H	1.0	-1.5	9.07	38.5	-29.4		Mid Ch									836.60	25.17	V	1.0	-1.4	22.79	38.5	-15.7		836.60	12.96	H	1.0	-1.4	10.58	38.5	-27.9		High Ch									848.80	26.41	V	1.0	-1.4	24.06	38.5	-14.4		848.80	14.48	H	1.0	-1.4	12.13	38.5	-26.4	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
824.20	24.46	V	1.0	-1.5	22.03	38.5	-16.5																																																																																											
824.20	11.50	H	1.0	-1.5	9.07	38.5	-29.4																																																																																											
Mid Ch																																																																																																		
836.60	25.17	V	1.0	-1.4	22.79	38.5	-15.7																																																																																											
836.60	12.96	H	1.0	-1.4	10.58	38.5	-27.9																																																																																											
High Ch																																																																																																		
848.80	26.41	V	1.0	-1.4	24.06	38.5	-14.4																																																																																											
848.80	14.48	H	1.0	-1.4	12.13	38.5	-26.4																																																																																											

GSM 1900

GSM GSM1900 GPRS	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4788334019																																																																																															
	Date:		2018-02-12																																																																																															
	Test Engineer:		47989																																																																																															
	Configuration:		EUT / X-Position																																																																																															
	Location:		Chamber 2																																																																																															
	Mode:		GPRS 1900 MHz Fundamentals																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable																																																																																																	
<table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1850.20</td><td>19.64</td><td>V</td><td>4.5</td><td>9.5</td><td>24.65</td><td>33.0</td><td>-8.3</td><td></td></tr><tr><td>1850.20</td><td>20.15</td><td>H</td><td>4.5</td><td>9.5</td><td>25.16</td><td>33.0</td><td>-7.8</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>20.31</td><td>V</td><td>4.5</td><td>9.2</td><td>24.99</td><td>33.0</td><td>-8.0</td><td></td></tr><tr><td>1880.00</td><td>21.25</td><td>H</td><td>4.5</td><td>9.2</td><td>25.93</td><td>33.0</td><td>-7.1</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1909.80</td><td>19.63</td><td>V</td><td>4.6</td><td>8.9</td><td>23.94</td><td>33.0</td><td>-9.1</td><td></td></tr><tr><td>1909.80</td><td>20.33</td><td>H</td><td>4.6</td><td>8.9</td><td>24.64</td><td>33.0</td><td>-8.4</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	19.64	V	4.5	9.5	24.65	33.0	-8.3		1850.20	20.15	H	4.5	9.5	25.16	33.0	-7.8		Mid Ch									1880.00	20.31	V	4.5	9.2	24.99	33.0	-8.0		1880.00	21.25	H	4.5	9.2	25.93	33.0	-7.1		High Ch									1909.80	19.63	V	4.6	8.9	23.94	33.0	-9.1		1909.80	20.33	H	4.6	8.9	24.64	33.0	-8.4	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.20	19.64	V	4.5	9.5	24.65	33.0	-8.3																																																																																											
1850.20	20.15	H	4.5	9.5	25.16	33.0	-7.8																																																																																											
Mid Ch																																																																																																		
1880.00	20.31	V	4.5	9.2	24.99	33.0	-8.0																																																																																											
1880.00	21.25	H	4.5	9.2	25.93	33.0	-7.1																																																																																											
High Ch																																																																																																		
1909.80	19.63	V	4.6	8.9	23.94	33.0	-9.1																																																																																											
1909.80	20.33	H	4.6	8.9	24.64	33.0	-8.4																																																																																											
GSM GSM1900 EGPRS	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4788334019																																																																																															
	Date:		2018-02-20																																																																																															
	Test Engineer:		47989																																																																																															
	Configuration:		EUT / X-Position																																																																																															
	Location:		Chamber 2																																																																																															
	Mode:		EGPRS 1900 MHz Fundamentals																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable																																																																																																	
<table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1850.20</td><td>17.19</td><td>V</td><td>4.5</td><td>9.5</td><td>22.20</td><td>33.0</td><td>-10.8</td><td></td></tr><tr><td>1850.20</td><td>17.67</td><td>H</td><td>4.5</td><td>9.5</td><td>22.68</td><td>33.0</td><td>-10.3</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>17.74</td><td>V</td><td>4.5</td><td>9.2</td><td>22.42</td><td>33.0</td><td>-10.6</td><td></td></tr><tr><td>1880.00</td><td>18.60</td><td>H</td><td>4.5</td><td>9.2</td><td>23.28</td><td>33.0</td><td>-9.7</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1909.80</td><td>16.31</td><td>V</td><td>4.6</td><td>8.9</td><td>20.62</td><td>33.0</td><td>-12.4</td><td></td></tr><tr><td>1909.80</td><td>16.45</td><td>H</td><td>4.6</td><td>8.9</td><td>20.76</td><td>33.0</td><td>-12.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	17.19	V	4.5	9.5	22.20	33.0	-10.8		1850.20	17.67	H	4.5	9.5	22.68	33.0	-10.3		Mid Ch									1880.00	17.74	V	4.5	9.2	22.42	33.0	-10.6		1880.00	18.60	H	4.5	9.2	23.28	33.0	-9.7		High Ch									1909.80	16.31	V	4.6	8.9	20.62	33.0	-12.4		1909.80	16.45	H	4.6	8.9	20.76	33.0	-12.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.20	17.19	V	4.5	9.5	22.20	33.0	-10.8																																																																																											
1850.20	17.67	H	4.5	9.5	22.68	33.0	-10.3																																																																																											
Mid Ch																																																																																																		
1880.00	17.74	V	4.5	9.2	22.42	33.0	-10.6																																																																																											
1880.00	18.60	H	4.5	9.2	23.28	33.0	-9.7																																																																																											
High Ch																																																																																																		
1909.80	16.31	V	4.6	8.9	20.62	33.0	-12.4																																																																																											
1909.80	16.45	H	4.6	8.9	20.76	33.0	-12.2																																																																																											

WCDMA Band 5

WCDMA

Band 5

REL99

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company:

Samsung

Project #:

4788334019

Date:

2018-02-09

Test Engineer:

47989

Configuration:

EUT / Z-Position

Location:

Chamber 2

Mode:

Rel99 Band 5 Fundamentals

Test Equipment:

Receiving: VULB9163-749, and Chamber 2 SMA Cables

Substitution: Dipole 3121_DB4, 3m N-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
826.40	22.92	V	1.0	-1.5	20.50	38.5	-18.0	
826.40	10.49	H	1.0	-1.5	8.07	38.5	-30.4	
Mid Ch								
836.60	22.08	V	1.0	-1.4	19.70	38.5	-18.8	
836.60	10.80	H	1.0	-1.4	8.42	38.5	-30.1	
High Ch								
846.60	21.99	V	1.0	-1.4	19.64	38.5	-18.9	
846.60	11.01	H	1.0	-1.4	8.66	38.5	-29.8	

WCDMA

Band 5

HSDPA

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company:

Samsung

Project #:

4788334019

Date:

2018-02-09

Test Engineer:

47989

Configuration:

EUT / Z-Position

Location:

Chamber 2

Mode:

HSDPA Band 5 Fundamentals

Test Equipment:

Receiving: VULB9163-749, and Chamber 2 SMA Cables

Substitution: Dipole 3121_DB4, 3m N-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
826.40	22.38	V	1.0	-1.5	19.96	38.5	-18.5	
826.40	11.05	H	1.0	-1.5	8.63	38.5	-29.9	
Mid Ch								
836.60	21.85	V	1.0	-1.4	19.47	38.5	-19.0	
836.60	11.78	H	1.0	-1.4	9.40	38.5	-29.1	
High Ch								
846.60	21.59	V	1.0	-1.4	19.24	38.5	-19.3	
846.60	11.70	H	1.0	-1.4	9.35	38.5	-29.1	

WCDMA Band 2

WCDMA

Band 2

REL99

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company:

Samsung

Project #:

4788334019

Date:

2018-02-12

Test Engineer:

47989

Configuration:

EUT / X Position

Location:

Chamber 2

Mode:

Rel99 Band 2 Fundamentals

Test Equipment:

Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables

Substitution: Horn 3115[00161451], 3m N-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1852.40	14.42	V	4.5	9.5	19.41	33.0	-13.6	
1852.40	14.16	H	4.5	9.5	19.15	33.0	-13.9	
Mid Ch								
1880.00	13.72	V	4.5	9.2	18.40	33.0	-14.6	
1880.00	14.14	H	4.5	9.2	18.82	33.0	-14.2	
High Ch								
1907.60	14.93	V	4.6	8.9	19.27	33.0	-13.7	
1907.60	14.90	H	4.6	8.9	19.24	33.0	-13.8	

WCDMA

Band 2

HSDPA

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company:

Samsung

Project #:

4788334019

Date:

2018-02-12

Test Engineer:

47989

Configuration:

EUT / X Position

Location:

Chamber 2

Mode:

HSDPA Band 2 Fundamentals

Test Equipment:

Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables

Substitution: Horn 3115[00161451], 3m N-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1852.40	12.80	V	4.5	9.5	17.79	33.0	-15.2	
1852.40	12.55	H	4.5	9.5	17.54	33.0	-15.5	
Mid Ch								
1880.00	12.29	V	4.5	9.2	16.97	33.0	-16.0	
1880.00	13.12	H	4.5	9.2	17.80	33.0	-15.2	
High Ch								
1907.60	12.69	V	4.6	8.9	17.03	33.0	-16.0	
1907.60	13.33	H	4.6	8.9	17.67	33.0	-15.3	

LTE Band 5

LTE Band 5 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	829.00	20.00	V	1.0	-1.5	17.59	38.5	-20.9	
	829.00	7.37	H	1.0	-1.5	4.96	38.5	-33.5	
	Mid Ch								
	836.50	19.40	V	1.0	-1.4	17.02	38.5	-21.5	
LTE Band 5 10MHz 16QAM	836.50	8.20	H	1.0	-1.4	5.82	38.5	-32.7	
	High Ch								
	844.00	19.17	V	1.0	-1.4	16.82	38.5	-21.7	
	844.00	9.23	H	1.0	-1.4	6.87	38.5	-31.6	
LTE Band 5 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	829.00	18.96	V	1.0	-1.5	16.55	38.5	-21.9	
	829.00	6.31	H	1.0	-1.5	3.90	38.5	-34.6	
	Mid Ch								
	836.50	18.40	V	1.0	-1.4	16.02	38.5	-22.5	
	836.50	7.29	H	1.0	-1.4	4.91	38.5	-33.6	
LTE Band 5 10MHz 16QAM	High Ch								
	844.00	18.12	V	1.0	-1.4	15.77	38.5	-22.7	
	844.00	8.47	H	1.0	-1.4	6.11	38.5	-32.4	

LTE Band 5 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>826.50</td><td>19.31</td><td>V</td><td>1.0</td><td>-1.5</td><td>16.89</td><td>38.5</td><td>-21.6</td></tr><tr><td>826.50</td><td>7.19</td><td>H</td><td>1.0</td><td>-1.5</td><td>4.77</td><td>38.5</td><td>-33.7</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.50</td><td>19.56</td><td>V</td><td>1.0</td><td>-1.4</td><td>17.18</td><td>38.5</td><td>-21.3</td></tr><tr><td>836.50</td><td>8.13</td><td>H</td><td>1.0</td><td>-1.4</td><td>5.75</td><td>38.5</td><td>-32.8</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>846.50</td><td>18.18</td><td>V</td><td>1.0</td><td>-1.4</td><td>15.83</td><td>38.5</td><td>-22.7</td></tr><tr><td>846.50</td><td>9.29</td><td>H</td><td>1.0</td><td>-1.4</td><td>6.94</td><td>38.5</td><td>-31.6</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								826.50	19.31	V	1.0	-1.5	16.89	38.5	-21.6	826.50	7.19	H	1.0	-1.5	4.77	38.5	-33.7	Mid Ch								836.50	19.56	V	1.0	-1.4	17.18	38.5	-21.3	836.50	8.13	H	1.0	-1.4	5.75	38.5	-32.8	High Ch								846.50	18.18	V	1.0	-1.4	15.83	38.5	-22.7	846.50	9.29	H	1.0	-1.4	6.94	38.5	-31.6
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	826.50	19.31	V	1.0	-1.5	16.89	38.5	-21.6																																																																																		
	826.50	7.19	H	1.0	-1.5	4.77	38.5	-33.7																																																																																		
	Mid Ch																																																																																									
	836.50	19.56	V	1.0	-1.4	17.18	38.5	-21.3																																																																																		
	836.50	8.13	H	1.0	-1.4	5.75	38.5	-32.8																																																																																		
	High Ch																																																																																									
	846.50	18.18	V	1.0	-1.4	15.83	38.5	-22.7																																																																																		
846.50	9.29	H	1.0	-1.4	6.94	38.5	-31.6																																																																																			
LTE Band 5 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>826.50</td><td>18.25</td><td>V</td><td>1.0</td><td>-1.5</td><td>15.83</td><td>38.5</td><td>-22.7</td></tr><tr><td>826.50</td><td>6.15</td><td>H</td><td>1.0</td><td>-1.5</td><td>3.73</td><td>38.5</td><td>-34.8</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.50</td><td>18.36</td><td>V</td><td>1.0</td><td>-1.4</td><td>15.98</td><td>38.5</td><td>-22.5</td></tr><tr><td>836.50</td><td>7.16</td><td>H</td><td>1.0</td><td>-1.4</td><td>4.78</td><td>38.5</td><td>-33.7</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>846.50</td><td>17.12</td><td>V</td><td>1.0</td><td>-1.4</td><td>14.77</td><td>38.5</td><td>-23.7</td></tr><tr><td>846.50</td><td>8.21</td><td>H</td><td>1.0</td><td>-1.4</td><td>5.86</td><td>38.5</td><td>-32.6</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								826.50	18.25	V	1.0	-1.5	15.83	38.5	-22.7	826.50	6.15	H	1.0	-1.5	3.73	38.5	-34.8	Mid Ch								836.50	18.36	V	1.0	-1.4	15.98	38.5	-22.5	836.50	7.16	H	1.0	-1.4	4.78	38.5	-33.7	High Ch								846.50	17.12	V	1.0	-1.4	14.77	38.5	-23.7	846.50	8.21	H	1.0	-1.4	5.86	38.5	-32.6
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	826.50	18.25	V	1.0	-1.5	15.83	38.5	-22.7																																																																																		
	826.50	6.15	H	1.0	-1.5	3.73	38.5	-34.8																																																																																		
	Mid Ch																																																																																									
	836.50	18.36	V	1.0	-1.4	15.98	38.5	-22.5																																																																																		
	836.50	7.16	H	1.0	-1.4	4.78	38.5	-33.7																																																																																		
	High Ch																																																																																									
	846.50	17.12	V	1.0	-1.4	14.77	38.5	-23.7																																																																																		
846.50	8.21	H	1.0	-1.4	5.86	38.5	-32.6																																																																																			

LTE Band 5 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 3MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	825.50	19.55	V	1.0	-1.5	17.13	38.5	-21.4	
	825.50	7.24	H	1.0	-1.5	4.82	38.5	-33.7	
	Mid Ch								
	836.50	19.00	V	1.0	-1.4	16.62	38.5	-21.9	
	836.50	8.63	H	1.0	-1.4	6.25	38.5	-32.3	
LTE Band 5 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 3MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	825.50	18.47	V	1.0	-1.5	16.05	38.5	-22.4	
	825.50	6.15	H	1.0	-1.5	3.73	38.5	-34.8	
	Mid Ch								
	836.50	17.95	V	1.0	-1.4	15.57	38.5	-22.9	
	836.50	7.58	H	1.0	-1.4	5.20	38.5	-33.3	
LTE Band 5 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 3MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	825.50	18.47	V	1.0	-1.5	16.05	38.5	-22.4	
	825.50	6.15	H	1.0	-1.5	3.73	38.5	-34.8	
	Mid Ch								
	836.50	17.95	V	1.0	-1.4	15.57	38.5	-22.9	
	836.50	7.58	H	1.0	-1.4	5.20	38.5	-33.3	
LTE Band 5 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 3MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	825.50	18.47	V	1.0	-1.5	16.05	38.5	-22.4	
	825.50	6.15	H	1.0	-1.5	3.73	38.5	-34.8	
	Mid Ch								
	836.50	17.95	V	1.0	-1.4	15.57	38.5	-22.9	
	836.50	7.58	H	1.0	-1.4	5.20	38.5	-33.3	

LTE Band 5 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>824.70</td><td>17.53</td><td>V</td><td>1.0</td><td>-1.5</td><td>15.10</td><td>38.5</td><td>-23.4</td></tr><tr><td>824.70</td><td>3.84</td><td>H</td><td>1.0</td><td>-1.5</td><td>1.41</td><td>38.5</td><td>-37.1</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.50</td><td>17.17</td><td>V</td><td>1.0</td><td>-1.4</td><td>14.79</td><td>38.5</td><td>-23.7</td></tr><tr><td>836.50</td><td>6.25</td><td>H</td><td>1.0</td><td>-1.4</td><td>3.87</td><td>38.5</td><td>-34.6</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>848.30</td><td>16.79</td><td>V</td><td>1.0</td><td>-1.4</td><td>14.44</td><td>38.5</td><td>-24.1</td></tr><tr><td>848.30</td><td>7.96</td><td>H</td><td>1.0</td><td>-1.4</td><td>5.61</td><td>38.5</td><td>-32.9</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								824.70	17.53	V	1.0	-1.5	15.10	38.5	-23.4	824.70	3.84	H	1.0	-1.5	1.41	38.5	-37.1	Mid Ch								836.50	17.17	V	1.0	-1.4	14.79	38.5	-23.7	836.50	6.25	H	1.0	-1.4	3.87	38.5	-34.6	High Ch								848.30	16.79	V	1.0	-1.4	14.44	38.5	-24.1	848.30	7.96	H	1.0	-1.4	5.61	38.5	-32.9
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	824.70	17.53	V	1.0	-1.5	15.10	38.5	-23.4																																																																																		
	824.70	3.84	H	1.0	-1.5	1.41	38.5	-37.1																																																																																		
	Mid Ch																																																																																									
	836.50	17.17	V	1.0	-1.4	14.79	38.5	-23.7																																																																																		
	836.50	6.25	H	1.0	-1.4	3.87	38.5	-34.6																																																																																		
	High Ch																																																																																									
	848.30	16.79	V	1.0	-1.4	14.44	38.5	-24.1																																																																																		
848.30	7.96	H	1.0	-1.4	5.61	38.5	-32.9																																																																																			
LTE Band 5 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 3m N-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>824.70</td><td>16.74</td><td>V</td><td>1.0</td><td>-1.5</td><td>14.31</td><td>38.5</td><td>-24.2</td></tr><tr><td>824.70</td><td>3.91</td><td>H</td><td>1.0</td><td>-1.5</td><td>1.48</td><td>38.5</td><td>-37.0</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.50</td><td>15.55</td><td>V</td><td>1.0</td><td>-1.4</td><td>13.17</td><td>38.5</td><td>-25.3</td></tr><tr><td>836.50</td><td>5.17</td><td>H</td><td>1.0</td><td>-1.4</td><td>2.79</td><td>38.5</td><td>-35.7</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>848.30</td><td>15.15</td><td>V</td><td>1.0</td><td>-1.4</td><td>12.80</td><td>38.5</td><td>-25.7</td></tr><tr><td>848.30</td><td>7.31</td><td>H</td><td>1.0</td><td>-1.4</td><td>4.96</td><td>38.5</td><td>-33.5</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								824.70	16.74	V	1.0	-1.5	14.31	38.5	-24.2	824.70	3.91	H	1.0	-1.5	1.48	38.5	-37.0	Mid Ch								836.50	15.55	V	1.0	-1.4	13.17	38.5	-25.3	836.50	5.17	H	1.0	-1.4	2.79	38.5	-35.7	High Ch								848.30	15.15	V	1.0	-1.4	12.80	38.5	-25.7	848.30	7.31	H	1.0	-1.4	4.96	38.5	-33.5
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	824.70	16.74	V	1.0	-1.5	14.31	38.5	-24.2																																																																																		
	824.70	3.91	H	1.0	-1.5	1.48	38.5	-37.0																																																																																		
	Mid Ch																																																																																									
	836.50	15.55	V	1.0	-1.4	13.17	38.5	-25.3																																																																																		
	836.50	5.17	H	1.0	-1.4	2.79	38.5	-35.7																																																																																		
	High Ch																																																																																									
	848.30	15.15	V	1.0	-1.4	12.80	38.5	-25.7																																																																																		
848.30	7.31	H	1.0	-1.4	4.96	38.5	-33.5																																																																																			

LTE Band 7

LTE Band 7 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 7 Fundamentals, 20MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2510.00	8.93	V	5.3	10.3	13.85	33.0	-19.1	
	2510.00	12.86	H	5.3	10.3	17.79	33.0	-15.2	
	Mid Ch								
	2535.00	9.10	V	5.4	10.2	13.95	33.0	-19.0	
	2535.00	14.17	H	5.4	10.2	19.02	33.0	-14.0	
	High Ch								
	2560.00	10.19	V	5.4	10.2	14.96	33.0	-18.0	
	2560.00	15.47	H	5.4	10.2	20.24	33.0	-12.8	
LTE Band 7 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 7 Fundamentals, 20MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2510.00	7.89	V	5.3	10.3	12.81	33.0	-20.2	
	2510.00	11.82	H	5.3	10.3	16.75	33.0	-16.3	
	Mid Ch								
	2535.00	8.07	V	5.4	10.2	12.92	33.0	-20.1	
	2535.00	13.13	H	5.4	10.2	17.98	33.0	-15.0	
	High Ch								
	2560.00	9.14	V	5.4	10.2	13.91	33.0	-19.1	
	2560.00	14.44	H	5.4	10.2	19.21	33.0	-13.8	

LTE Band 7 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 7 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2507.50</td><td>9.55</td><td>V</td><td>5.3</td><td>10.3</td><td>14.49</td><td>33.0</td><td>-18.5</td></tr><tr><td>2507.50</td><td>12.36</td><td>H</td><td>5.3</td><td>10.3</td><td>17.30</td><td>33.0</td><td>-15.7</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2535.00</td><td>9.19</td><td>V</td><td>5.4</td><td>10.2</td><td>14.04</td><td>33.0</td><td>-19.0</td></tr><tr><td>2535.00</td><td>13.84</td><td>H</td><td>5.4</td><td>10.2</td><td>18.69</td><td>33.0</td><td>-14.3</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2562.50</td><td>10.29</td><td>V</td><td>5.4</td><td>10.1</td><td>15.05</td><td>33.0</td><td>-17.9</td></tr><tr><td>2562.50</td><td>15.78</td><td>H</td><td>5.4</td><td>10.1</td><td>20.55</td><td>33.0</td><td>-12.5</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								2507.50	9.55	V	5.3	10.3	14.49	33.0	-18.5	2507.50	12.36	H	5.3	10.3	17.30	33.0	-15.7	Mid Ch								2535.00	9.19	V	5.4	10.2	14.04	33.0	-19.0	2535.00	13.84	H	5.4	10.2	18.69	33.0	-14.3	High Ch								2562.50	10.29	V	5.4	10.1	15.05	33.0	-17.9	2562.50	15.78	H	5.4	10.1	20.55	33.0	-12.5
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	2507.50	9.55	V	5.3	10.3	14.49	33.0	-18.5																																																																																		
	2507.50	12.36	H	5.3	10.3	17.30	33.0	-15.7																																																																																		
	Mid Ch																																																																																									
	2535.00	9.19	V	5.4	10.2	14.04	33.0	-19.0																																																																																		
	2535.00	13.84	H	5.4	10.2	18.69	33.0	-14.3																																																																																		
	High Ch																																																																																									
	2562.50	10.29	V	5.4	10.1	15.05	33.0	-17.9																																																																																		
2562.50	15.78	H	5.4	10.1	20.55	33.0	-12.5																																																																																			
LTE Band 7 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 7 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2507.50</td><td>8.48</td><td>V</td><td>5.3</td><td>10.3</td><td>13.42</td><td>33.0</td><td>-19.6</td></tr><tr><td>2507.50</td><td>11.28</td><td>H</td><td>5.3</td><td>10.3</td><td>16.22</td><td>33.0</td><td>-16.8</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2535.00</td><td>8.11</td><td>V</td><td>5.4</td><td>10.2</td><td>12.96</td><td>33.0</td><td>-20.0</td></tr><tr><td>2535.00</td><td>12.76</td><td>H</td><td>5.4</td><td>10.2</td><td>17.61</td><td>33.0</td><td>-15.4</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2562.50</td><td>9.21</td><td>V</td><td>5.4</td><td>10.1</td><td>13.97</td><td>33.0</td><td>-19.0</td></tr><tr><td>2562.50</td><td>14.75</td><td>H</td><td>5.4</td><td>10.1</td><td>19.52</td><td>33.0</td><td>-13.5</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								2507.50	8.48	V	5.3	10.3	13.42	33.0	-19.6	2507.50	11.28	H	5.3	10.3	16.22	33.0	-16.8	Mid Ch								2535.00	8.11	V	5.4	10.2	12.96	33.0	-20.0	2535.00	12.76	H	5.4	10.2	17.61	33.0	-15.4	High Ch								2562.50	9.21	V	5.4	10.1	13.97	33.0	-19.0	2562.50	14.75	H	5.4	10.1	19.52	33.0	-13.5
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	2507.50	8.48	V	5.3	10.3	13.42	33.0	-19.6																																																																																		
	2507.50	11.28	H	5.3	10.3	16.22	33.0	-16.8																																																																																		
	Mid Ch																																																																																									
	2535.00	8.11	V	5.4	10.2	12.96	33.0	-20.0																																																																																		
	2535.00	12.76	H	5.4	10.2	17.61	33.0	-15.4																																																																																		
	High Ch																																																																																									
	2562.50	9.21	V	5.4	10.1	13.97	33.0	-19.0																																																																																		
2562.50	14.75	H	5.4	10.1	19.52	33.0	-13.5																																																																																			

LTE Band 7 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 7 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2505.00	9.32	V	5.3	10.3	14.27	33.0	-18.7	
	2505.00	12.78	H	5.3	10.3	17.73	33.0	-15.3	
	Mid Ch								
	2535.00	9.84	V	5.4	10.2	14.69	33.0	-18.3	
	2535.00	13.52	H	5.4	10.2	18.37	33.0	-14.6	
	High Ch								
LTE Band 7 10MHz 16QAM	2565.00	9.78	V	5.4	10.1	14.53	33.0	-18.5	
	2565.00	14.72	H	5.4	10.1	19.47	33.0	-13.5	
LTE Band 7 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 7 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2505.00	8.24	V	5.3	10.3	13.19	33.0	-19.8	
	2505.00	11.73	H	5.3	10.3	16.68	33.0	-16.3	
	Mid Ch								
	2535.00	8.81	V	5.4	10.2	13.66	33.0	-19.3	
	2535.00	12.47	H	5.4	10.2	17.32	33.0	-15.7	
	High Ch								
LTE Band 7 10MHz 16QAM	2565.00	8.72	V	5.4	10.1	13.47	33.0	-19.5	
	2565.00	13.64	H	5.4	10.1	18.39	33.0	-14.6	

LTE Band 7 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 7 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2502.50	7.94	V	5.3	10.3	12.89	33.0	-20.1	
	2502.50	11.76	H	5.3	10.3	16.72	33.0	-16.3	
	Mid Ch								
	2535.00	9.71	V	5.4	10.2	14.56	33.0	-18.4	
	2535.00	12.38	H	5.4	10.2	17.23	33.0	-15.8	
	High Ch								
	2567.50	9.44	V	5.4	10.1	14.19	33.0	-18.8	
	2567.50	14.93	H	5.4	10.1	19.68	33.0	-13.3	
LTE Band 7 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 7 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2502.50	6.85	V	5.3	10.3	11.80	33.0	-21.2	
	2502.50	10.30	H	5.3	10.3	15.26	33.0	-17.7	
	Mid Ch								
	2535.00	8.70	V	5.4	10.2	13.55	33.0	-19.4	
	2535.00	11.35	H	5.4	10.2	16.20	33.0	-16.8	
	High Ch								
	2567.50	8.37	V	5.4	10.1	13.12	33.0	-19.9	
	2567.50	13.90	H	5.4	10.1	18.65	33.0	-14.4	

LTE Band 41

LTE Band 41 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-20 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 20MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2506.00	10.22	V	5.3	10.3	15.16	33.0	-17.8	
	2506.00	7.79	H	5.3	10.3	12.72	33.0	-20.3	
	Mid Ch								
	2593.00	10.26	V	5.4	10.1	14.93	33.0	-18.1	
	2593.00	9.25	H	5.4	10.1	13.92	33.0	-19.1	
	High Ch								
	2680.00	12.69	V	5.5	10.2	17.32	33.0	-15.7	
	2680.00	9.97	H	5.5	10.2	14.60	33.0	-18.4	
LTE Band 41 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-20 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 20MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2506.00	9.33	V	5.3	10.3	14.27	33.0	-18.7	
	2506.00	6.67	H	5.3	10.3	11.60	33.0	-21.4	
	Mid Ch								
	2593.00	9.47	V	5.4	10.1	14.14	33.0	-18.9	
	2593.00	8.42	H	5.4	10.1	13.09	33.0	-19.9	
	High Ch								
	2680.00	11.69	V	5.5	10.2	16.32	33.0	-16.7	
	2680.00	9.24	H	5.5	10.2	13.87	33.0	-19.1	

LTE Band 41 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-20 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 15MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2503.50	10.11	V	5.3	10.3	15.07	33.0	-17.9	
	2503.50	10.70	H	5.3	10.3	15.65	33.0	-17.3	
	Mid Ch								
	2593.00	9.99	V	5.4	10.1	14.66	33.0	-18.3	
LTE Band 41 15MHz 16QAM	2593.00	10.27	H	5.4	10.1	14.94	33.0	-18.1	
	High Ch								
	2682.50	13.22	V	5.5	10.2	17.85	33.0	-15.2	
	2682.50	12.43	H	5.5	10.2	17.06	33.0	-15.9	
LTE Band 41 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-20 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 15MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2503.50	9.43	V	5.3	10.3	14.39	33.0	-18.6	
	2503.50	9.71	H	5.3	10.3	14.66	33.0	-18.3	
	Mid Ch								
	2593.00	9.01	V	5.4	10.1	13.68	33.0	-19.3	
	2593.00	9.52	H	5.4	10.1	14.19	33.0	-18.8	
LTE Band 41 15MHz 16QAM	High Ch								
	2682.50	13.93	V	5.5	10.2	18.56	33.0	-14.4	
	2682.50	11.77	H	5.5	10.2	16.40	33.0	-16.6	

LTE Band 41 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2501.00	10.67	V	5.3	10.3	15.63	33.0	-17.4	
	2501.00	9.68	H	5.3	10.3	14.65	33.0	-18.4	
	Mid Ch								
	2593.00	10.75	V	5.4	10.1	15.42	33.0	-17.6	
LTE Band 41 10MHz 16QAM	2593.00	11.80	H	5.4	10.1	16.47	33.0	-16.5	
	High Ch								
	2685.00	14.12	V	5.5	10.2	18.75	33.0	-14.2	
	2685.00	10.30	H	5.5	10.2	14.93	33.0	-18.1	
LTE Band 41 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2501.00	9.77	V	5.3	10.3	14.73	33.0	-18.3	
	2501.00	8.81	H	5.3	10.3	13.78	33.0	-19.2	
	Mid Ch								
	2593.00	9.66	V	5.4	10.1	14.33	33.0	-18.7	
	2593.00	10.94	H	5.4	10.1	15.61	33.0	-17.4	
LTE Band 41 10MHz 16QAM	High Ch								
	2685.00	13.21	V	5.5	10.2	17.84	33.0	-15.2	
	2685.00	11.14	H	5.5	10.2	15.77	33.0	-17.2	

LTE Band 41 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 5MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2498.50	11.08	V	5.3	10.3	16.08	33.0	-16.9	
	2498.50	8.43	H	5.3	10.3	13.43	33.0	-19.6	
	Mid Ch								
	2593.00	11.99	V	5.4	10.1	16.66	33.0	-16.3	
LTE Band 41 5MHz 16QAM	2593.00	9.33	H	5.4	10.1	14.00	33.0	-19.0	
	High Ch								
	2687.50	14.43	V	5.5	10.2	19.05	33.0	-13.9	
	2687.50	9.19	H	5.5	10.2	13.81	33.0	-19.2	
LTE Band 41 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 5MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 3m N-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2498.50	10.29	V	5.3	10.3	15.29	33.0	-17.7	
	2498.50	7.74	H	5.3	10.3	12.74	33.0	-20.3	
	Mid Ch								
	2593.00	10.86	V	5.4	10.1	15.53	33.0	-17.5	
	2593.00	9.68	H	5.4	10.1	14.35	33.0	-18.7	
LTE Band 41 5MHz 16QAM	High Ch								
	2687.50	13.57	V	5.5	10.2	18.19	33.0	-14.8	
	2687.50	10.01	H	5.5	10.2	14.63	33.0	-18.4	

10.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238 and §27. 53

LIMIT

Part 22.917(a) & Part 24.238(a) & Part 27.53(h) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge and $(55 + 10 \log (P))$ dB at the 5.5 MHz from the channel edges.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03

For peak power measurement with a ESU40:

- a) Set the RBW = 100 KHz for emission below 1GHz and 1MHz for emissions above 1GHz
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = peak(GSM, WCDMA), rms(LTE);
- f) Ensure that the number of measurement points $\geq$ span/RBW;
- g) Trace mode = max hold(GSM, WCDMA, LTE B41), average(LTE);

NOTE : Radiated spurious emissions were investigated below 30MHz, 30MHz – 1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz – 1GHz.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

RESULTS

10.2.1. SPURIOUS RADIATION PLOTS

GSM 850

GSM GSM850 GPRS	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung									
	Project #: 4788334019									
	Date: 2018-02-12									
	Test Engineer: 47989									
	Configuration: EUT / AC Adapter / Earphone, Z Position									
	Location: Chamber 2									
	Mode: GPRS 850 MHz Harmonics									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.2MHz									
	1648.40	-7.6	V	3.0	38.2	1.0	-44.8	-13.0	-31.8	
	2472.60	0.6	V	3.0	38.8	1.0	-37.2	-13.0	-24.2	
	3296.80	-13.8	V	3.0	39.4	1.0	-52.2	-13.0	-39.2	
	1648.40	-9.3	H	3.0	38.2	1.0	-46.5	-13.0	-33.5	
	2472.60	-2.4	H	3.0	38.8	1.0	-40.2	-13.0	-27.2	
	3296.80	-14.4	H	3.0	39.4	1.0	-52.8	-13.0	-39.8	
	Mid Ch, 836.6MHz									
	1673.20	-7.3	V	3.0	38.2	1.0	-44.5	-13.0	-31.5	
	2509.80	1.2	V	3.0	38.8	1.0	-36.6	-13.0	-23.6	
	3346.40	-14.4	V	3.0	39.5	1.0	-52.8	-13.0	-39.8	
	1673.20	-6.0	H	3.0	38.2	1.0	-43.3	-13.0	-30.3	
	2509.80	-1.9	H	3.0	38.8	1.0	-39.7	-13.0	-26.7	
	3346.40	-14.3	H	3.0	39.5	1.0	-52.8	-13.0	-39.8	
	High Ch, 848.8MHz									
	1697.60	-6.7	V	3.0	38.2	1.0	-43.9	-13.0	-30.9	
2546.40	-3.5	V	3.0	38.9	1.0	-41.4	-13.0	-28.4		
3395.20	-13.6	V	3.0	39.5	1.0	-52.1	-13.0	-39.1		
1697.60	-3.8	H	3.0	38.2	1.0	-41.0	-13.0	-28.0		
2546.40	-4.6	H	3.0	38.9	1.0	-42.4	-13.0	-29.4		
3395.20	-13.6	H	3.0	39.5	1.0	-52.1	-13.0	-39.1		
GSM GSM850 EGPRS	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung									
	Project #: 4788334019									
	Date: 2018-02-21									
	Test Engineer: 47989									
	Configuration: EUT / AC Adapter / Earphone, Z-Position									
	Location: Chamber 2									
	Mode: EGPRS 850 MHz Harmonics									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.2MHz									
	1648.40	-8.6	V	3.0	38.2	1.0	-45.8	-13.0	-32.8	
	2472.60	-7.3	V	3.0	38.8	1.0	-45.1	-13.0	-32.1	
	3296.80	-16.8	V	3.0	39.4	1.0	-55.3	-13.0	-42.3	
	1648.40	-9.5	H	3.0	38.2	1.0	-46.8	-13.0	-33.8	
	2472.60	-8.6	H	3.0	38.8	1.0	-46.4	-13.0	-33.4	
	3296.80	-15.4	H	3.0	39.4	1.0	-53.9	-13.0	-40.9	
	Mid Ch, 836.6MHz									
	1673.20	-9.3	V	3.0	38.2	1.0	-46.5	-13.0	-33.5	
	2509.80	-6.7	V	3.0	38.8	1.0	-44.5	-13.0	-31.5	
	3346.40	-15.5	V	3.0	39.5	1.0	-53.9	-13.0	-40.9	
	1673.20	-11.2	H	3.0	38.2	1.0	-48.4	-13.0	-35.4	
	2509.80	-7.1	H	3.0	38.8	1.0	-44.9	-13.0	-31.9	
	3346.40	-16.0	H	3.0	39.5	1.0	-54.5	-13.0	-41.5	
	High Ch, 848.8MHz									
	1697.60	-11.4	V	3.0	38.2	1.0	-48.7	-13.0	-35.7	
2546.40	-8.8	V	3.0	38.9	1.0	-46.7	-13.0	-33.7		
3395.20	-15.6	V	3.0	39.5	1.0	-54.1	-13.0	-41.1		
1697.60	-9.4	H	3.0	38.2	1.0	-46.7	-13.0	-33.7		
2546.40	-7.3	H	3.0	38.9	1.0	-45.2	-13.0	-32.2		
3395.20	-15.9	H	3.0	39.5	1.0	-54.4	-13.0	-41.4		

GSM 1900

GSM GSM1900 GPRS	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-12 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, X-Position Location: Chamber 2 Mode: GPRS 1900 MHz Harmonics									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850.2MHz									
	3700.40	-13.5	V	3.0	39.7	1.0	-52.2	-13.0	-39.2	
	5550.60	-10.0	V	3.0	39.9	1.0	-48.9	-13.0	-35.9	
	7400.80	-10.6	V	3.0	39.4	1.0	-49.0	-13.0	-36.0	
	3700.40	-12.8	H	3.0	39.7	1.0	-51.5	-13.0	-38.5	
	5550.60	-11.2	H	3.0	39.9	1.0	-50.2	-13.0	-37.2	
	7400.80	-10.1	H	3.0	39.4	1.0	-48.6	-13.0	-35.6	
	Mid Ch, 1880MHz									
	3760.00	-12.9	V	3.0	39.7	1.0	-51.6	-13.0	-38.6	
	5640.00	-8.6	V	3.0	40.0	1.0	-47.5	-13.0	-34.5	
	7520.00	-9.8	V	3.0	39.4	1.0	-48.2	-13.0	-35.2	
	3760.00	-10.7	H	3.0	39.7	1.0	-49.4	-13.0	-36.4	
	5640.00	-8.8	H	3.0	40.0	1.0	-47.7	-13.0	-34.7	
	7520.00	-9.3	H	3.0	39.4	1.0	-47.7	-13.0	-34.7	
	High Ch, 1909.8MHz									
	3819.60	-13.0	V	3.0	39.7	1.0	-51.7	-13.0	-38.7	
	5729.40	-10.0	V	3.0	40.0	1.0	-49.0	-13.0	-36.0	
	7639.20	-10.1	V	3.0	39.3	1.0	-48.4	-13.0	-35.4	
	3819.60	-11.3	H	3.0	39.7	1.0	-50.0	-13.0	-37.0	
	5729.40	-10.5	H	3.0	40.0	1.0	-49.5	-13.0	-36.5	
	7639.20	-9.7	H	3.0	39.3	1.0	-48.0	-13.0	-35.0	
GSM GSM1900 EGPRS	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-20 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, X-Position Location: Chamber 2 Mode: EGPRS 1900 MHz Harmonics									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850.2MHz									
	3700.40	-14.6	V	3.0	39.7	1.0	-53.3	-13.0	-40.3	
	5550.60	-11.6	V	3.0	39.9	1.0	-50.5	-13.0	-37.5	
	7400.80	-11.1	V	3.0	39.4	1.0	-49.5	-13.0	-36.5	
	3700.40	-14.3	H	3.0	39.7	1.0	-52.9	-13.0	-39.9	
	5550.60	-12.0	H	3.0	39.9	1.0	-51.0	-13.0	-38.0	
	7400.80	-10.3	H	3.0	39.4	1.0	-48.8	-13.0	-35.8	
	Mid Ch, 1880MHz									
	3760.00	-14.0	V	3.0	39.7	1.0	-52.6	-13.0	-39.6	
	5640.00	-9.8	V	3.0	40.0	1.0	-48.7	-13.0	-35.7	
	7520.00	-9.8	V	3.0	39.4	1.0	-48.2	-13.0	-35.2	
	3760.00	-13.8	H	3.0	39.7	1.0	-52.5	-13.0	-39.5	
	5640.00	-11.5	H	3.0	40.0	1.0	-50.4	-13.0	-37.4	
	7520.00	-9.9	H	3.0	39.4	1.0	-48.3	-13.0	-35.3	
	High Ch, 1909.8MHz									
	3819.60	-13.2	V	3.0	39.7	1.0	-51.9	-13.0	-38.9	
	5729.40	-11.4	V	3.0	40.0	1.0	-50.3	-13.0	-37.3	
	7639.20	-9.7	V	3.0	39.3	1.0	-48.0	-13.0	-35.0	
	3819.60	-12.9	H	3.0	39.7	1.0	-51.6	-13.0	-38.6	
	5729.40	-11.0	H	3.0	40.0	1.0	-50.0	-13.0	-37.0	
	7639.20	-9.7	H	3.0	39.3	1.0	-48.1	-13.0	-35.1	

WCDMA Band 5 REL99		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		Company: Samsung Project #: 4788334019 Date: 2018-02-12 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, Z Position Location: Chamber 2 Mode: Rel99 Band 5 Harmonics									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Ch, 826.4MHz									
		1652.80	-14.0	V	3.0	38.2	1.0	-51.3	-13.0	-38.3	
		2479.20	-14.2	V	3.0	38.8	1.0	-52.0	-13.0	-39.0	
		3305.60	-13.6	V	3.0	39.4	1.0	-52.0	-13.0	-39.0	
		1652.80	-16.0	H	3.0	38.2	1.0	-53.2	-13.0	-40.2	
		2479.20	-14.3	H	3.0	38.8	1.0	-52.1	-13.0	-39.1	
		3305.60	-13.2	H	3.0	39.4	1.0	-51.6	-13.0	-38.6	
		Mid Ch, 836.6MHz									
		1673.20	-15.8	V	3.0	38.2	1.0	-53.0	-13.0	-40.0	
		2509.80	-14.5	V	3.0	38.8	1.0	-52.3	-13.0	-39.3	
		3346.40	-13.3	V	3.0	39.5	1.0	-51.8	-13.0	-38.8	
		1673.20	-16.6	H	3.0	38.2	1.0	-53.8	-13.0	-40.8	
		2509.80	-15.6	H	3.0	38.8	1.0	-53.5	-13.0	-40.5	
		3346.40	-14.4	H	3.0	39.5	1.0	-52.8	-13.0	-39.8	
		High Ch, 846.6MHz									
		1693.20	-15.9	V	3.0	38.2	1.0	-53.2	-13.0	-40.2	
		2539.80	-14.7	V	3.0	38.9	1.0	-52.6	-13.0	-39.6	
		3386.40	-13.9	V	3.0	39.5	1.0	-52.3	-13.0	-39.3	
		1693.20	-16.5	H	3.0	38.2	1.0	-53.7	-13.0	-40.7	
		2539.80	-15.1	H	3.0	38.9	1.0	-53.0	-13.0	-40.0	
		3386.40	-13.4	H	3.0	39.5	1.0	-51.9	-13.0	-38.9	
WCDMA Band 5 HSDPA		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		Company: Samsung Project #: 4788334019 Date: 2018-02-12 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, Z Position Location: Chamber 2 Mode: HSDPA Band 5 Harmonics									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Ch, 826.4MHz									
		1652.80	-14.9	V	3.0	38.2	1.0	-52.1	-13.0	-39.1	
		2479.20	-15.0	V	3.0	38.8	1.0	-52.8	-13.0	-39.8	
		3305.60	-13.3	V	3.0	39.4	1.0	-51.7	-13.0	-38.7	
		1652.80	-16.1	H	3.0	38.2	1.0	-53.3	-13.0	-40.3	
		2479.20	-14.5	H	3.0	38.8	1.0	-52.3	-13.0	-39.3	
		3305.60	-13.2	H	3.0	39.4	1.0	-51.6	-13.0	-38.6	
		Mid Ch, 836.6MHz									
		1673.20	-14.4	V	3.0						

WCDMA Band 2

WCDMA Band 2 REL99	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-13 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, X-Position Location: Chamber 2 Mode: Rel99 Band 2 Harmonics <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="10">Low Ch, 1852.4MHz</td></tr><tr><td>3704.80</td><td>-10.0</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-48.7</td><td>-13.0</td><td>-35.7</td><td></td></tr><tr><td>5557.20</td><td>-11.6</td><td>V</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-50.5</td><td>-13.0</td><td>-37.5</td><td></td></tr><tr><td>7409.60</td><td>-10.1</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-48.5</td><td>-13.0</td><td>-35.5</td><td></td></tr><tr><td>3704.80</td><td>-3.2</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-41.9</td><td>-13.0</td><td>-28.9</td><td></td></tr><tr><td>5557.20</td><td>-9.9</td><td>H</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-48.8</td><td>-13.0</td><td>-35.8</td><td></td></tr><tr><td>7409.60</td><td>-9.6</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-48.0</td><td>-13.0</td><td>-35.0</td><td></td></tr><tr><td colspan="10">Mid Ch, 1880MHz</td></tr><tr><td>3760.00</td><td>-9.5</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-48.2</td><td>-13.0</td><td>-35.2</td><td></td></tr><tr><td>5640.00</td><td>-10.9</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.9</td><td>-13.0</td><td>-36.9</td><td></td></tr><tr><td>7520.00</td><td>-9.5</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-47.9</td><td>-13.0</td><td>-34.9</td><td></td></tr><tr><td>3760.00</td><td>-6.6</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-45.3</td><td>-13.0</td><td>-32.3</td><td></td></tr><tr><td>5640.00</td><td>-11.3</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-50.2</td><td>-13.0</td><td>-37.2</td><td></td></tr><tr><td>7520.00</td><td>-9.5</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-47.9</td><td>-13.0</td><td>-34.9</td><td></td></tr><tr><td colspan="10">High Ch, 1907.6MHz</td></tr><tr><td>3815.20</td><td>-10.0</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-48.7</td><td>-13.0</td><td>-35.7</td><td></td></tr><tr><td>5722.80</td><td>-10.8</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.8</td><td>-13.0</td><td>-36.8</td><td></td></tr><tr><td>7630.40</td><td>-8.7</td><td>V</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-47.0</td><td>-13.0</td><td>-34.0</td><td></td></tr><tr><td>3815.20</td><td>-5.9</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-44.6</td><td>-13.0</td><td>-31.6</td><td></td></tr><tr><td>5722.80</td><td>-10.2</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.1</td><td>-13.0</td><td>-36.1</td><td></td></tr><tr><td>7630.40</td><td>-9.1</td><td>H</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-47.4</td><td>-13.0</td><td>-34.4</td><td></td></tr></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 1852.4MHz										3704.80	-10.0	V	3.0	39.7	1.0	-48.7	-13.0	-35.7		5557.20	-11.6	V	3.0	39.9	1.0	-50.5	-13.0	-37.5		7409.60	-10.1	V	3.0	39.4	1.0	-48.5	-13.0	-35.5		3704.80	-3.2	H	3.0	39.7	1.0	-41.9	-13.0	-28.9		5557.20	-9.9	H	3.0	39.9	1.0	-48.8	-13.0	-35.8		7409.60	-9.6	H	3.0	39.4	1.0	-48.0	-13.0	-35.0		Mid Ch, 1880MHz										3760.00	-9.5	V	3.0	39.7	1.0	-48.2	-13.0	-35.2		5640.00	-10.9	V	3.0	40.0	1.0	-49.9	-13.0	-36.9		7520.00	-9.5	V	3.0	39.4	1.0	-47.9	-13.0	-34.9		3760.00	-6.6	H	3.0	39.7	1.0	-45.3	-13.0	-32.3		5640.00	-11.3	H	3.0	40.0	1.0	-50.2	-13.0	-37.2		7520.00	-9.5	H	3.0	39.4	1.0	-47.9	-13.0	-34.9		High Ch, 1907.6MHz										3815.20	-10.0	V	3.0	39.7	1.0	-48.7	-13.0	-35.7		5722.80	-10.8	V	3.0	40.0	1.0	-49.8	-13.0	-36.8		7630.40	-8.7	V	3.0	39.3	1.0	-47.0	-13.0	-34.0		3815.20	-5.9	H	3.0	39.7	1.0	-44.6	-13.0	-31.6		5722.80	-10.2	H	3.0	40.0	1.0	-49.1	-13.0	-36.1		7630.40	-9.1	H	3.0	39.3	1.0	-47.4	-13.0	-34.4	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																			
Low Ch, 1852.4MHz																																																																																																																																																																																																																													
3704.80	-10.0	V	3.0	39.7	1.0	-48.7	-13.0	-35.7																																																																																																																																																																																																																					
5557.20	-11.6	V	3.0	39.9	1.0	-50.5	-13.0	-37.5																																																																																																																																																																																																																					
7409.60	-10.1	V	3.0	39.4	1.0	-48.5	-13.0	-35.5																																																																																																																																																																																																																					
3704.80	-3.2	H	3.0	39.7	1.0	-41.9	-13.0	-28.9																																																																																																																																																																																																																					
5557.20	-9.9	H	3.0	39.9	1.0	-48.8	-13.0	-35.8																																																																																																																																																																																																																					
7409.60	-9.6	H	3.0	39.4	1.0	-48.0	-13.0	-35.0																																																																																																																																																																																																																					
Mid Ch, 1880MHz																																																																																																																																																																																																																													
3760.00	-9.5	V	3.0	39.7	1.0	-48.2	-13.0	-35.2																																																																																																																																																																																																																					
5640.00	-10.9	V	3.0	40.0	1.0	-49.9	-13.0	-36.9																																																																																																																																																																																																																					
7520.00	-9.5	V	3.0	39.4	1.0	-47.9	-13.0	-34.9																																																																																																																																																																																																																					
3760.00	-6.6	H	3.0	39.7	1.0	-45.3	-13.0	-32.3																																																																																																																																																																																																																					
5640.00	-11.3	H	3.0	40.0	1.0	-50.2	-13.0	-37.2																																																																																																																																																																																																																					
7520.00	-9.5	H	3.0	39.4	1.0	-47.9	-13.0	-34.9																																																																																																																																																																																																																					
High Ch, 1907.6MHz																																																																																																																																																																																																																													
3815.20	-10.0	V	3.0	39.7	1.0	-48.7	-13.0	-35.7																																																																																																																																																																																																																					
5722.80	-10.8	V	3.0	40.0	1.0	-49.8	-13.0	-36.8																																																																																																																																																																																																																					
7630.40	-8.7	V	3.0	39.3	1.0	-47.0	-13.0	-34.0																																																																																																																																																																																																																					
3815.20	-5.9	H	3.0	39.7	1.0	-44.6	-13.0	-31.6																																																																																																																																																																																																																					
5722.80	-10.2	H	3.0	40.0	1.0	-49.1	-13.0	-36.1																																																																																																																																																																																																																					
7630.40	-9.1	H	3.0	39.3	1.0	-47.4	-13.0	-34.4																																																																																																																																																																																																																					
WCDMA Band 2 HSDPA	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-13 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, X-Position Location: Chamber 2 Mode: HSDPA Band 2 Harmonics <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="10">Low Ch, 1852.4MHz</td></tr><tr><td>3704.80</td><td>-9.9</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-48.6</td><td>-13.0</td><td>-35.6</td><td></td></tr><tr><td>5557.20</td><td>-11.2</td><td>V</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-50.1</td><td>-13.0</td><td>-37.1</td><td></td></tr><tr><td>7409.60</td><td>-9.9</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-48.3</td><td>-13.0</td><td>-35.3</td><td></td></tr><tr><td>3704.80</td><td>-4.4</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-43.1</td><td>-13.0</td><td>-30.1</td><td></td></tr><tr><td>5557.20</td><td>-10.4</td><td>H</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-49.3</td><td>-13.0</td><td>-36.3</td><td></td></tr><tr><td>7409.60</td><td>-10.3</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-48.8</td><td>-13.0</td><td>-35.8</td><td></td></tr><tr><td colspan="10">Mid Ch, 1880MHz</td></tr><tr><td>3760.00</td><td>-9.5</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-48.2</td><td>-13.0</td><td>-35.2</td><td></td></tr><tr><td>5640.00</td><td>-10.3</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.2</td><td>-13.0</td><td>-36.2</td><td></td></tr><tr><td>7520.00</td><td>-8.7</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-47.1</td><td>-13.0</td><td>-34.1</td><td></td></tr><tr><td>3760.00</td><td>-4.5</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-43.2</td><td>-13.0</td><td>-30.2</td><td></td></tr><tr><td>5640.00</td><td>-10.3</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.3</td><td>-13.0</td><td>-36.3</td><td></td></tr><tr><td>7520.00</td><td>-7.9</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-46.3</td><td>-13.0</td><td>-33.3</td><td></td></tr><tr><td colspan="10">High Ch, 1907.6MHz</td></tr><tr><td>3815.20</td><td>-9.9</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-48.6</td><td>-13.0</td><td>-35.6</td><td></td></tr><tr><td>5722.80</td><td>-10.7</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.7</td><td>-13.0</td><td>-36.7</td><td></td></tr><tr><td>7630.40</td><td>-9.0</td><td>V</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-47.4</td><td>-13.0</td><td>-34.4</td><td></td></tr><tr><td>3815.20</td><td>-6.5</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-45.2</td><td>-13.0</td><td>-32.2</td><td></td></tr><tr><td>5722.80</td><td>-10.1</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.1</td><td>-13.0</td><td>-36.1</td><td></td></tr><tr><td>7630.40</td><td>-8.0</td><td>H</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-46.4</td><td>-13.0</td><td>-33.4</td><td></td></tr></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 1852.4MHz										3704.80	-9.9	V	3.0	39.7	1.0	-48.6	-13.0	-35.6		5557.20	-11.2	V	3.0	39.9	1.0	-50.1	-13.0	-37.1		7409.60	-9.9	V	3.0	39.4	1.0	-48.3	-13.0	-35.3		3704.80	-4.4	H	3.0	39.7	1.0	-43.1	-13.0	-30.1		5557.20	-10.4	H	3.0	39.9	1.0	-49.3	-13.0	-36.3		7409.60	-10.3	H	3.0	39.4	1.0	-48.8	-13.0	-35.8		Mid Ch, 1880MHz										3760.00	-9.5	V	3.0	39.7	1.0	-48.2	-13.0	-35.2		5640.00	-10.3	V	3.0	40.0	1.0	-49.2	-13.0	-36.2		7520.00	-8.7	V	3.0	39.4	1.0	-47.1	-13.0	-34.1		3760.00	-4.5	H	3.0	39.7	1.0	-43.2	-13.0	-30.2		5640.00	-10.3	H	3.0	40.0	1.0	-49.3	-13.0	-36.3		7520.00	-7.9	H	3.0	39.4	1.0	-46.3	-13.0	-33.3		High Ch, 1907.6MHz										3815.20	-9.9	V	3.0	39.7	1.0	-48.6	-13.0	-35.6		5722.80	-10.7	V	3.0	40.0	1.0	-49.7	-13.0	-36.7		7630.40	-9.0	V	3.0	39.3	1.0	-47.4	-13.0	-34.4		3815.20	-6.5	H	3.0	39.7	1.0	-45.2	-13.0	-32.2		5722.80	-10.1	H	3.0	40.0	1.0	-49.1	-13.0	-36.1		7630.40	-8.0	H	3.0	39.3	1.0	-46.4	-13.0	-33.4	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																			
Low Ch, 1852.4MHz																																																																																																																																																																																																																													
3704.80	-9.9	V	3.0	39.7	1.0	-48.6	-13.0	-35.6																																																																																																																																																																																																																					
5557.20	-11.2	V	3.0	39.9	1.0	-50.1	-13.0	-37.1																																																																																																																																																																																																																					
7409.60	-9.9	V	3.0	39.4	1.0	-48.3	-13.0	-35.3																																																																																																																																																																																																																					
3704.80	-4.4	H	3.0	39.7	1.0	-43.1	-13.0	-30.1																																																																																																																																																																																																																					
5557.20	-10.4	H	3.0	39.9	1.0	-49.3	-13.0	-36.3																																																																																																																																																																																																																					
7409.60	-10.3	H	3.0	39.4	1.0	-48.8	-13.0	-35.8																																																																																																																																																																																																																					
Mid Ch, 1880MHz																																																																																																																																																																																																																													
3760.00	-9.5	V	3.0	39.7	1.0	-48.2	-13.0	-35.2																																																																																																																																																																																																																					
5640.00	-10.3	V	3.0	40.0	1.0	-49.2	-13.0	-36.2																																																																																																																																																																																																																					
7520.00	-8.7	V	3.0	39.4	1.0	-47.1	-13.0	-34.1																																																																																																																																																																																																																					
3760.00	-4.5	H	3.0	39.7	1.0	-43.2	-13.0	-30.2																																																																																																																																																																																																																					
5640.00	-10.3	H	3.0	40.0	1.0	-49.3	-13.0	-36.3																																																																																																																																																																																																																					
7520.00	-7.9	H	3.0	39.4	1.0	-46.3	-13.0	-33.3																																																																																																																																																																																																																					
High Ch, 1907.6MHz																																																																																																																																																																																																																													
3815.20	-9.9	V	3.0	39.7	1.0	-48.6	-13.0	-35.6																																																																																																																																																																																																																					
5722.80	-10.7	V	3.0	40.0	1.0	-49.7	-13.0	-36.7																																																																																																																																																																																																																					
7630.40	-9.0	V	3.0	39.3	1.0	-47.4	-13.0	-34.4																																																																																																																																																																																																																					
3815.20	-6.5	H	3.0	39.7	1.0	-45.2	-13.0	-32.2																																																																																																																																																																																																																					
5722.80	-10.1	H	3.0	40.0	1.0	-49.1	-13.0	-36.1																																																																																																																																																																																																																					
7630.40	-8.0	H	3.0	39.3	1.0	-46.4	-13.0	-33.4																																																																																																																																																																																																																					

LTE Band 5

LTE Band 5 10MHz QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Hamonics, 10MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 829MHz									
	1658.00	-27.9	V	3.0	38.2	1.0	-65.1	-13.0	-52.1	
	2487.00	-27.9	V	3.0	38.8	1.0	-65.7	-13.0	-52.7	
	3316.00	-28.7	V	3.0	39.4	1.0	-67.1	-13.0	-54.1	
	1658.00	-29.7	H	3.0	38.2	1.0	-66.9	-13.0	-53.9	
	2487.00	-28.4	H	3.0	38.8	1.0	-66.2	-13.0	-53.2	
	3316.00	-28.4	H	3.0	39.4	1.0	-66.8	-13.0	-53.8	
	Mid Ch, 836.5MHz									
	1673.00	-27.9	V	3.0	38.2	1.0	-65.1	-13.0	-52.1	
	2509.50	-27.6	V	3.0	38.8	1.0	-65.4	-13.0	-52.4	
	3346.00	-29.0	V	3.0	39.5	1.0	-67.5	-13.0	-54.5	
	1673.00	-29.9	H	3.0	38.2	1.0	-67.1	-13.0	-54.1	
	2509.50	-28.4	H	3.0	38.8	1.0	-66.2	-13.0	-53.2	
	3346.00	-28.4	H	3.0	39.5	1.0	-66.9	-13.0	-53.9	
	High Ch, 844MHz									
	1688.00	-28.0	V	3.0	38.2	1.0	-65.2	-13.0	-52.2	
	2532.00	-27.4	V	3.0	38.9	1.0	-65.3	-13.0	-52.3	
	3376.00	-28.5	V	3.0	39.5	1.0	-67.0	-13.0	-54.0	
1688.00	-28.1	H	3.0	38.2	1.0	-65.4	-13.0	-52.4		
2532.00	-28.1	H	3.0	38.9	1.0	-66.0	-13.0	-53.0		
3376.00	-28.2	H	3.0	39.5	1.0	-66.7	-13.0	-53.7		
LTE Band 5 10MHz 16QAM	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4788334019 Date: 2018-02-19 Test Engineer: 47989 Configuration: EUT / AC Adapter / Earphone, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Harmonics , 10MHz Bandwidth									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 829MHz									
	1658.00	-28.3	V	3.0	38.2	1.0	-65.5	-13.0	-52.5	
	2487.00	-28.7	V	3.0	38.8	1.0	-66.5	-13.0	-53.5	
	3316.00	-29.1	V	3.0	39.4	1.0	-67.5	-13.0	-54.5	
	1658.00	-31.2	H	3.0	38.2	1.0	-68.4	-13.0	-55.4	
	2487.00	-29.2	H	3.0	38.8	1.0	-67.0	-13.0	-54.0	
	3316.00	-28.7	H	3.0	39.4	1.0	-67.1	-13.0	-54.1	
	Mid Ch, 836.5MHz									
	1673.00	-28.2	V	3.0	38.2	1.0	-65.5	-13.0	-52.5	
	2509.50	-28.2	V	3.0	38.8	1.0	-66.0	-13.0	-53.0	
	3346.00	-28.5	V	3.0	39.5	1.0	-66.9	-13.0	-53.9	
	1673.00	-30.2	H	3.0	38.2	1.0	-67.5	-13.0	-54.5	
	2509.50	-29.5	H	3.0	38.8	1.0	-67.3	-13.0	-54.3	
	3346.00	-28.5	H	3.0	39.5	1.0	-67.0	-13.0	-54.0	
	High Ch, 844MHz									
	1688.00	-28.5	V	3.0	38.2	1.0	-65.7	-13.0	-52.7	
	2532.00	-28.3	V	3.0	38.9	1.0	-66.2	-13.0	-53.2	
	3376.00	-28.5	V	3.0	39.5	1.0	-66.9	-13.0	-53.9	
1688.00	-31.8	H	3.0	38.2	1.0	-69.0	-13.0	-56.0		
2532.00	-29.1	H	3.0	38.9	1.0	-67.0	-13.0	-54.0		
3376.00	-28.3	H	3.0	39.5	1.0	-66.8	-13.0	-53.8		

UL Korea, Ltd. Suwon Laboratory FORM ID: FCC_22/24/27
218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea TEL: (031) 337-9902 FAX: (031) 213-5433
UL Korea, Ltd. Confidential
This report shall not be reproduced except in full, without the written approval of UL Korea, Ltd.