

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1); Calibrated: 7/24/2017;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1343; Calibrated: 8/21/2017
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field measurement 835MHz/835 MHz/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 144.6 V/m; Power Drift = -0.01 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 137.6 V/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M4 112.5 V/m	Grid 2 M4 113.5 V/m	Grid 3 M4 109.9 V/m
Grid 4 M4 69.76 V/m	Grid 5 M4 69.89 V/m	Grid 6 M4 66.69 V/m
Grid 7 M4 136.6 V/m	Grid 8 M4 137.6 V/m	Grid 9 M4 130.0 V/m

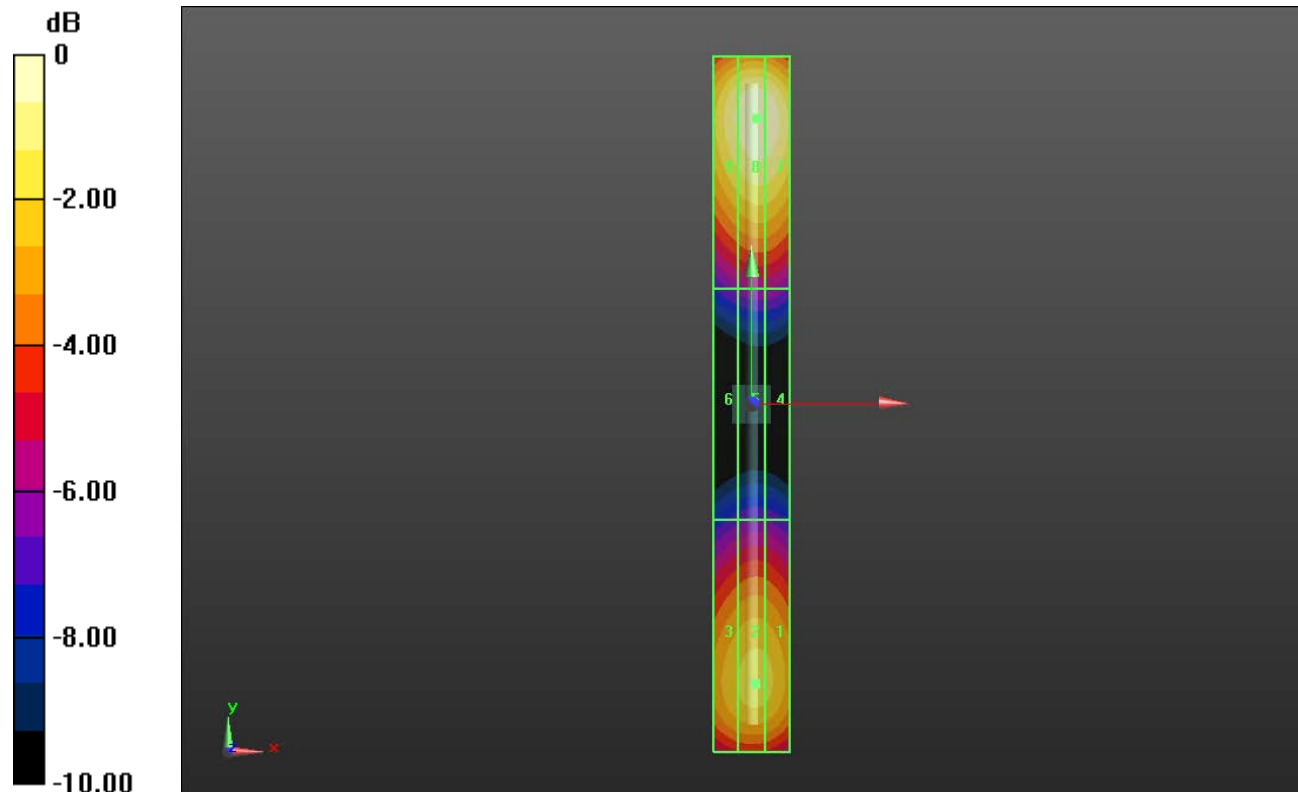

0 dB = 137.6 V/m = 42.77 dBV/m

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1); Calibrated: 7/24/2017;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1343; Calibrated: 8/21/2017
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field Measurement 1880MHz/1880 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 171.5 V/m; Power Drift = 0.02 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 99.19 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 91.18 V/m	Grid 2 M3 91.81 V/m	Grid 3 M3 88.70 V/m
Grid 4 M3 68.53 V/m	Grid 5 M3 68.56 V/m	Grid 6 M3 67.36 V/m
Grid 7 M3 97.89 V/m	Grid 8 M3 99.19 V/m	Grid 9 M3 95.91 V/m

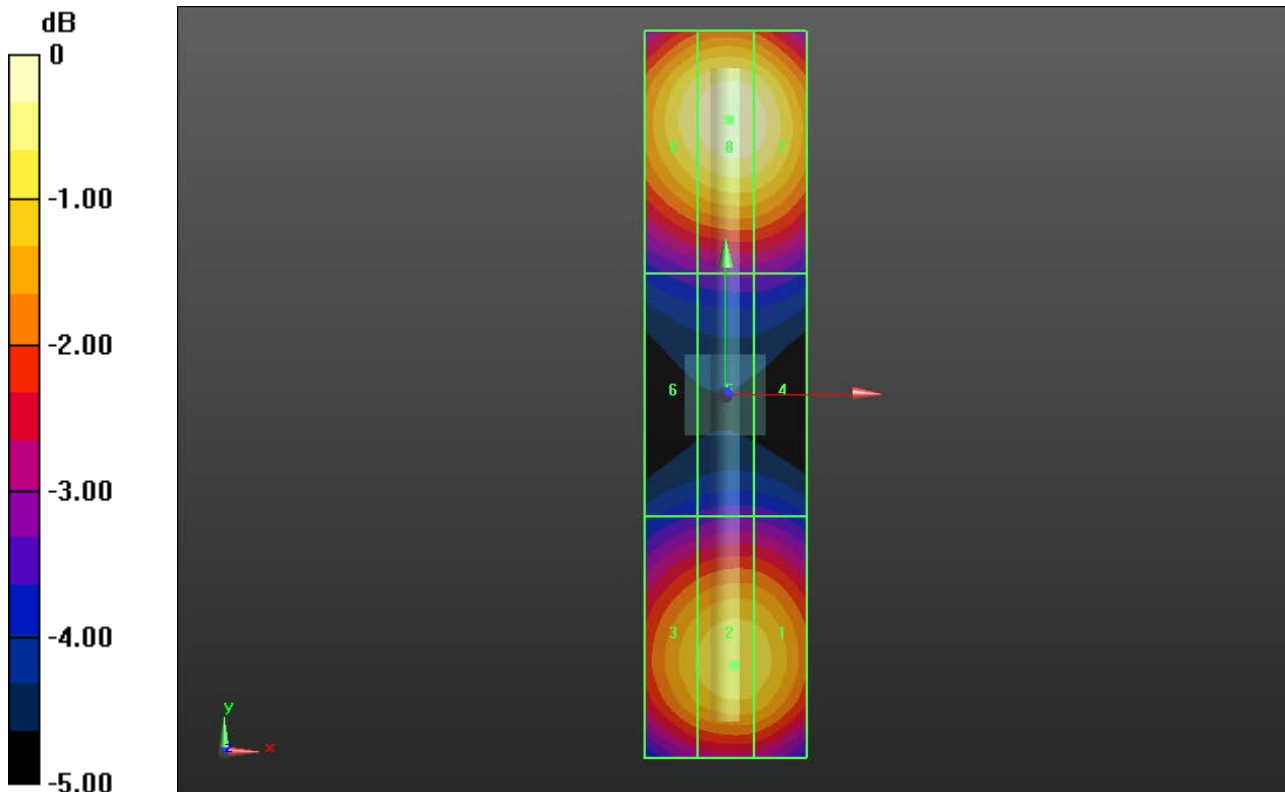

0 dB = 99.19 V/m = 39.93 dBV/m

HAC-RF Emission

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4028; ConvF(1, 1, 1); Calibrated: 7/24/2017;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1343; Calibrated: 8/21/2017
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Dipole E-Field Measurement 2600MHz/2600 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 71.43 V/m; Power Drift = 0.03 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 95.09 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 93.84 V/m	Grid 2 M3 95.09 V/m	Grid 3 M3 92.19 V/m
Grid 4 M3 85.19 V/m	Grid 5 M3 86.03 V/m	Grid 6 M3 84.13 V/m
Grid 7 M3 92.13 V/m	Grid 8 M3 92.92 V/m	Grid 9 M3 90.05 V/m

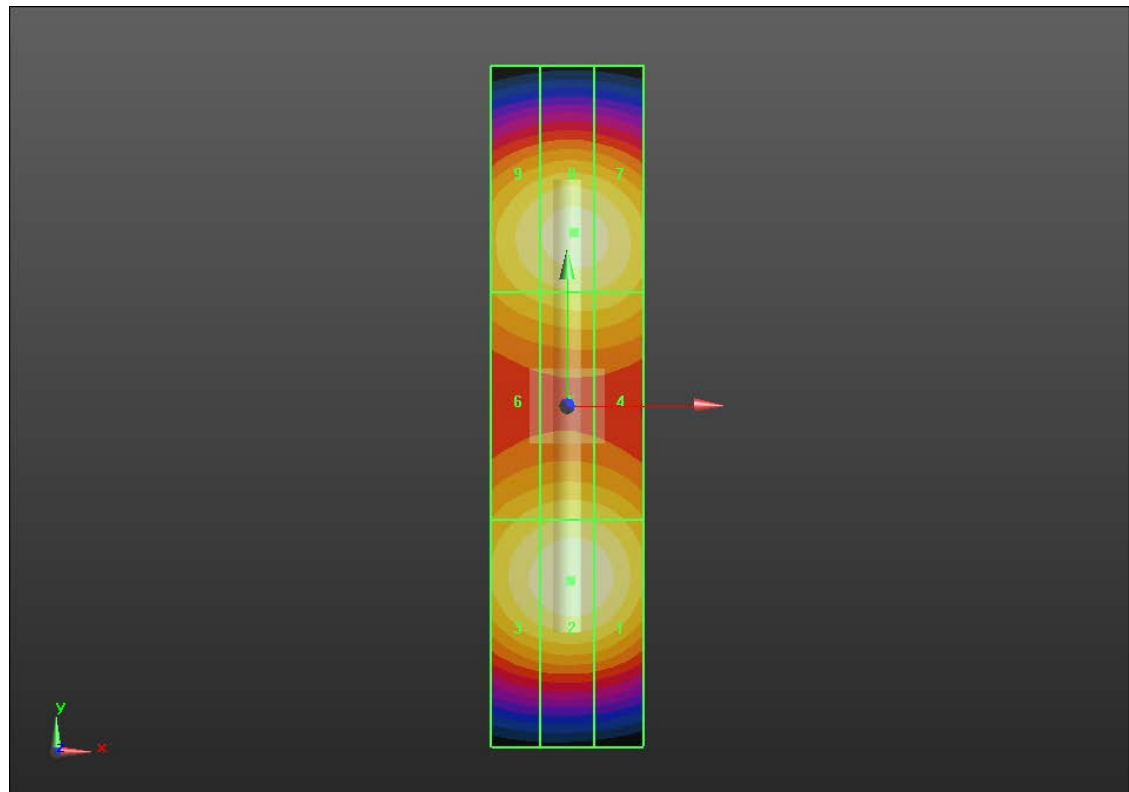

0 dB = 95.09 V/m = 39.56 dBV/m