



FCC 47 CFR PART 15 SUBPART E

UNII

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-J720M/DS, SM-J720M

FCC ID: A3LSMJ720M

REPORT NUMBER: 4788364119-E4V1

ISSUE DATE: MAR 19, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED*

Testing
Laboratory

TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	03/19/18	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
1.1. INTRODUCTION OF TEST DATA REUSE	8
1.2. DIFFERENCE	8
1.3. SPOT CHECK VERIFICATION DATA	8
1.4. REFERENCE DETAIL	9
2. TEST METHODOLOGY	10
3. FACILITIES AND ACCREDITATION	10
4. CALIBRATION AND UNCERTAINTY	10
4.1. MEASURING INSTRUMENT CALIBRATION	10
4.2. SAMPLE CALCULATION	10
4.3. MEASUREMENT UNCERTAINTY	11
5. EQUIPMENT UNDER TEST	12
5.1. DESCRIPTION OF EUT	12
5.2. MAXIMUM OUTPUT POWER	12
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	13
5.4. WORST-CASE CONFIGURATION AND MODE	13
5.5. DESCRIPTION OF TEST SETUP	14
6. TEST AND MEASUREMENT EQUIPMENT	16
7. SUMMARY TABLE	17
8. MEASUREMENT METHODS	18
9. REFERENCE MEASUREMENTS RESULTS	19
9.1. ON TIME AND DUTY CYCLE RESULTS	19
9.2. DUTY CYCLE PLOTS	19
9.3. 26 dB BANDWIDTH	22
9.3.1. 802.11a MODE IN THE 5.2 GHz BAND	23
9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	23
9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	23
9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	23
9.3.5. 802.11a MODE IN THE 5.3 GHz BAND	24
9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND	24
9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND	24
9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND	24
9.3.9. 802.11a MODE IN THE 5.5 GHz BAND	25
9.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND	25

9.3.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	25
9.3.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	25
9.3.13.	802.11a MODE IN THE 5.8 GHz BAND	26
9.3.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	26
9.3.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	26
9.3.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	26
9.3.17.	26 dB BANDWIDTH PLOTS	27
9.4.	99% BANDWIDTH	41
9.4.1.	802.11a MODE IN THE 5.2 GHz BAND	42
9.4.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	42
9.4.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	42
9.4.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	42
9.4.5.	802.11a MODE IN THE 5.3 GHz BAND	43
9.4.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	43
9.4.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	43
9.4.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	43
9.4.9.	802.11a MODE IN THE 5.5 GHz BAND	44
9.4.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	44
9.4.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	44
9.4.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	44
9.4.13.	802.11a MODE IN THE 5.8 GHz BAND	45
9.4.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	45
9.4.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	45
9.4.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	45
9.4.17.	99% BANDWIDTH PLOTS	46
10.	ANTENNA PORT TEST RESULTS	60
10.1.	6 dB BANDWIDTH	60
10.1.1.	802.11a MODE IN THE 5.8 GHz BAND	61
10.1.2.	802.11n HT20 MODE IN THE 5.8 GHz BAND	61
10.1.3.	802.11n HT40 MODE IN THE 5.8 GHz BAND	61
10.1.4.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	61
10.1.5.	6 dB BANDWIDTH PLOTS	62
10.2.	OUTPUT POWER AND PPSD	66
10.2.1.	802.11a MODE IN THE 5.2 GHz BAND	67
10.2.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	68
10.2.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	69
10.2.4.	802.11ac VHT80 MODE IN THE 5.2 GHz BAND	70
10.2.5.	802.11a MODE IN THE 5.3 GHz BAND	71
10.2.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	72
10.2.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	73
10.2.8.	802.11ac VHT80 MODE IN THE 5.3 GHz BAND	74
10.2.9.	802.11a MODE IN THE 5.5 GHz BAND	75
10.2.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	76
10.2.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	77
10.2.12.	802.11ac VHT80 MODE IN THE 5.5 GHz BAND	78
10.2.13.	802.11a MODE IN THE 5.8 GHz BAND	79
10.2.14.	802.11n HT20 MODE IN THE 5.8 GHz BAND	80
10.2.15.	802.11n HT40 MODE IN THE 5.8 GHz BAND	81
10.2.16.	802.11ac VHT80 MODE IN THE 5.8 GHz BAND	82

10.2.17. 802.11a MODE AT STRADDLE CHANNEL.....	83
10.2.18. 802.11n HT20 MODE AT STRADDLE CHANNEL.....	84
10.2.19. 802.11n HT40 MODE AT STRADDLE CHANNEL.....	85
10.2.20. 802.11ac80 VHT80 MODE AT STRADDLE CHANNEL.....	86
10.2.21. OUTPUT POWER AND PPSD PLOTS.....	87
11. TRANSMITTER ABOVE 1 GHz.....	105
11.1. 5.2 GHz.....	107
11.1.1. TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND.....	107
11.1.2. TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND.....	115
11.1.3. TX Above 1GHz 802.11n HT40 MODE IN THE 5.2GHz BAND.....	123
11.1.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.2GHz BAND.....	129
11.2. 5.3 GHz.....	133
11.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND.....	133
11.2.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.3GHz BAND.....	141
11.2.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.3GHz BAND.....	149
11.2.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.3GHz BAND.....	155
11.3. 5.5-5.6 GHz.....	159
11.3.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND.....	159
11.3.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND.....	171
11.3.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND.....	183
11.3.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.5GHz BAND.....	195
11.4. 5.8 GHz.....	203
11.4.1. TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND.....	203
11.4.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND.....	213
11.4.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.8GHz BAND.....	223
11.4.4. TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.8GHz BAND.....	231
12. WORST-CASE BELOW 1 GHz (in the 5.2 GHz Band).....	237
13. AC POWER LINE CONDUCTED EMISSIONS.....	239
14. DYNAMIC FREQUENCY SELECTION.....	242
14.1. OVERVIEW.....	242
14.1.1. LIMITS.....	242
14.1.1. TEST AND MEASUREMENT SYSTEM.....	246
14.1.2. SETUP OF EUT.....	249
14.1.3. DESCRIPTION OF EUT.....	250
14.2. RESULTS FOR 20 MHz BANDWIDTH.....	251
14.2.1. TEST CHANNEL.....	251
14.2.2. RADAR WAVEFORM AND TRAFFIC.....	251
14.2.3. OVERLAPPING CHANNEL TESTS.....	253
14.2.4. MOVE AND CLOSING TIME.....	253
14.3. RESULTS FOR 40 MHz BANDWIDTH.....	256
14.3.1. TEST CHANNEL.....	256
14.3.2. RADAR WAVEFORM AND TRAFFIC.....	256
14.3.3. OVERLAPPING CHANNEL TESTS.....	258
14.3.4. MOVE AND CLOSING TIME.....	258

14.4.	RESULTS FOR 80 MHz BANDWIDTH.....	261
14.4.1.	TEST CHANNEL	261
14.4.2.	RADAR WAVEFORM AND TRAFFIC	261
14.4.3.	OVERLAPPING CHANNEL TESTS	263
14.4.4.	MOVE AND CLOSING TIME	263
15.	SETUP PHOTOS.....	266

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER: SM-J720M/DS, SM-J720M

SERIAL NUMBER: R38K10A6F9Z (RADIATED, Original);
R38K10A728Y, R38K10A6KCP (CONDUCTED, Original);
R38K204GQND (RADIATED, Spot check);
R38K10BCS4E, R38K204GW7X (CONDUCTED, Spot check);

DATE TESTED: FEB 12, 2018 - MAR 02, 2018 (Original);
MAR 06, 2018 - MAR 09, 2018 (Spot check)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMJ720F UNII WLAN(FCC CFR 47 Part 15E). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMJ720M shares the same enclosure and circuit board as FCC ID: A3LSMTJ720F. The WLAN antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMJ720F remains representative of FCC ID: A3LSMJ720M. The test data of FCC ID: A3LSMJ720F being submitted for this application to cover WLAN features.

Also SM-J720M/DS and SM-J720M are same hardware, but for different number of SIM card slot. SM-J720M has one slot and SM-J720M/DS is dual SIM version. SM-J720M/DS used for the spot check tests.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-J720F/DS Results	SM-J720M/DS Results		
					FCC ID : A3LSMJ720F	FCC ID : A3LSMJ720M		
UNII WLAN (5GHz)	Band Edge	802.11 ac VHT80	5210 MHz	54 dBuV/m	51.16 dBuV/m	48.22 dBuV/m	-2.94 dB	
	RSE	802.11 a	5240 MHz	54 dBuV/m	45.21 dBuV/m	43.86 dBuV/m	-1.35 dB	
	Band Edge	802.11 n HT40	5310 MHz	54 dBuV/m	51.96 dBuV/m	50.09 dBuV/m	-1.87 dB	
	RSE	802.11 n HT20	5260 MHz	54 dBuV/m	46.07 dBuV/m	43.33 dBuV/m	-2.74 dB	
	Band Edge	802.11 n HT40	5510 MHz	68.2 dBuV/m	64.83 dBuV/m	65.47 dBuV/m	0.64 dB	
	RSE	802.11 n HT40	5670 MHz	54 dBuV/m	42.84 dBuV/m	44.99 dBuV/m	2.15 dB	
	Band Edge	802.11 n HT20	5745 MHz	-27 dBm	-38.19 dBm	-40.26 dBm	-2.07 dB	
	RSE	802.11 n HT20	5745 MHz	54 dBuV/m	47.63 dBuV/m	46.35 dBuV/m	-1.28 dB	

Comparison of two models, higher deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
DTS	A3LSMJ720F	Grant	4788334019-E1V3	Test	FCC Report DTS WLAN All sections
			4788334019-E2V2	Test	FCC Report BLE All sections
DSS	A3LSMJ720F	Grant	4788334019-E3V3	Test	FCC Report BT / All sections
NII	A3LSMJ720F	Grant	4788334019-E4V2	Test	FCC Report UNII WALN / All sections
DXX	A3LSMJ720F	Grant	4788334019-E5V3	Test	FCC Report ANT+ / All sections
PCE	A3LSMJ720F	Grant	4788334019-E6V2	Test	FCC Report WWAN / All sections (Except Conducted Output Power)

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☒ Chamber 2
☒ Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+.
This test report addresses the NII (UNII) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5180 - 5240	802.11a	14.79	30.13
	802.11n HT20	14.74	29.81
5190 - 5230	802.11n HT40	12.58	18.10
5210	802.11ac VHT80	10.93	12.38
5260 - 5320	802.11a	15.18	32.95
	802.11n HT20	14.95	31.25
5270 - 5310	802.11n HT40	12.70	18.62
5290	802.11ac VHT80	11.21	13.23
5500 - 5720	802.11a	15.14	32.62
	802.11n HT20	15.11	32.43
5510 - 5710	802.11n HT40	12.94	19.67
5530 - 5690	802.11ac VHT80	11.38	13.74
5745 - 5825	802.11a	15.19	33.00
	802.11n HT20	15.18	32.95
5755 - 5795	802.11n HT40	13.08	20.32
5775	802.11ac VHT80	10.53	11.31

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of:

Frequency Range [MHz]	Antenna Gain [dBi]
UNII 1 5150 – 5250	2.84
UNII 2A 5250 – 5350	2.84
UNII 2C 5470 – 5725	-0.55
UNII 3 5725 – 5850	-0.51

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are covered by 802.11n HT20 and HT40 mode.
802.11n HT20 and HT40 mode are more worst than 802.11ac VHT20 and VHT40 mode on the baseline scan.

Note : All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50EWE	DK5J112VS/A- E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

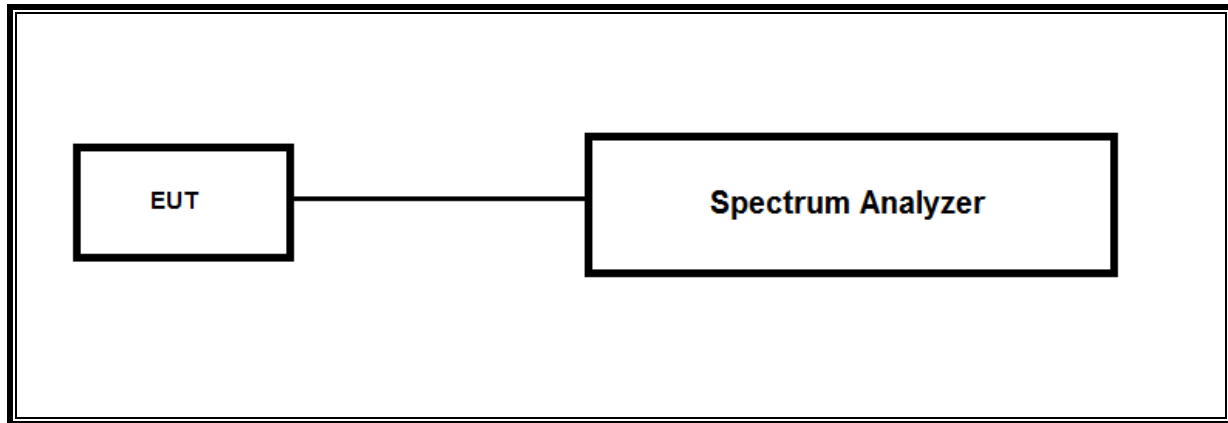

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

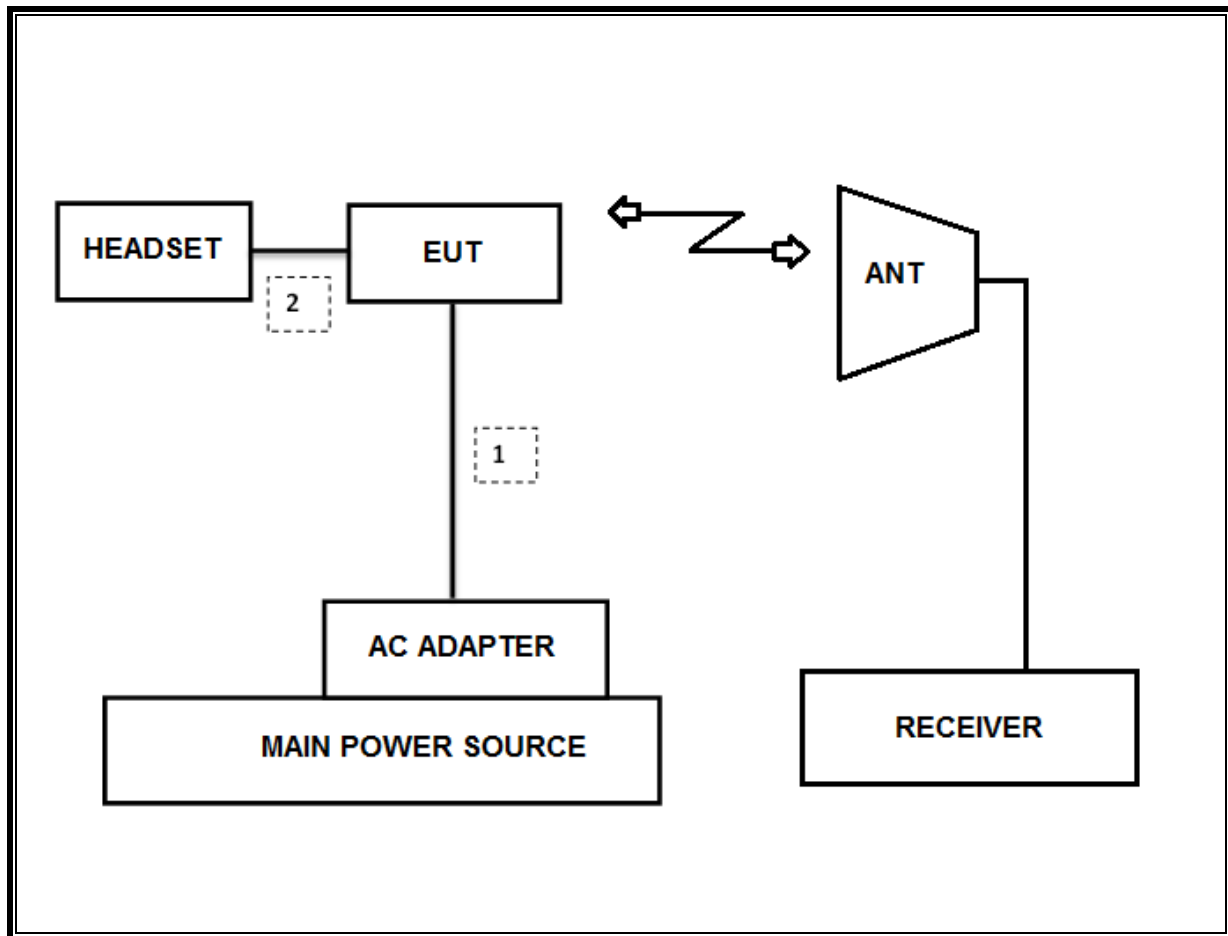

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
Attenuator	PASTERNAK	PE7087-10	A009	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8Ghz)	500KHz	Condcuted	PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	PASS

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section B.

6dB Emission BW : KDB 789033 D02 v02r01, Section C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section D.

Conducted Output Power : KDB 789033 D02 v02r01, Section E.2.d(Method SA-2)

Power Spectral Density : KDB 789033 D02 v02r01, Section F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section G.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section G.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.


9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
802.11a	2.707	2.783	0.973	97.3%	0.12	0.369
802.11n HT20	2.515	2.591	0.971	97.1%	0.13	0.398
802.11n HT40	1.232	1.301	0.947	94.7%	0.24	0.812
802.11ac VHT80	0.596	0.665	0.896	89.6%	0.48	1.678

9.2. DUTY CYCLE PLOTS

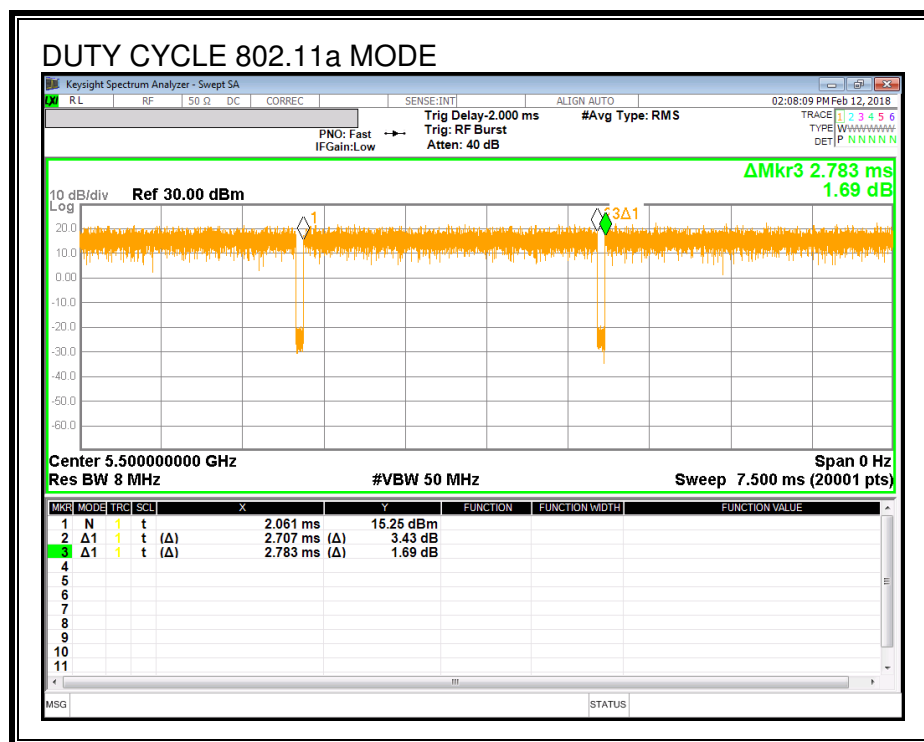

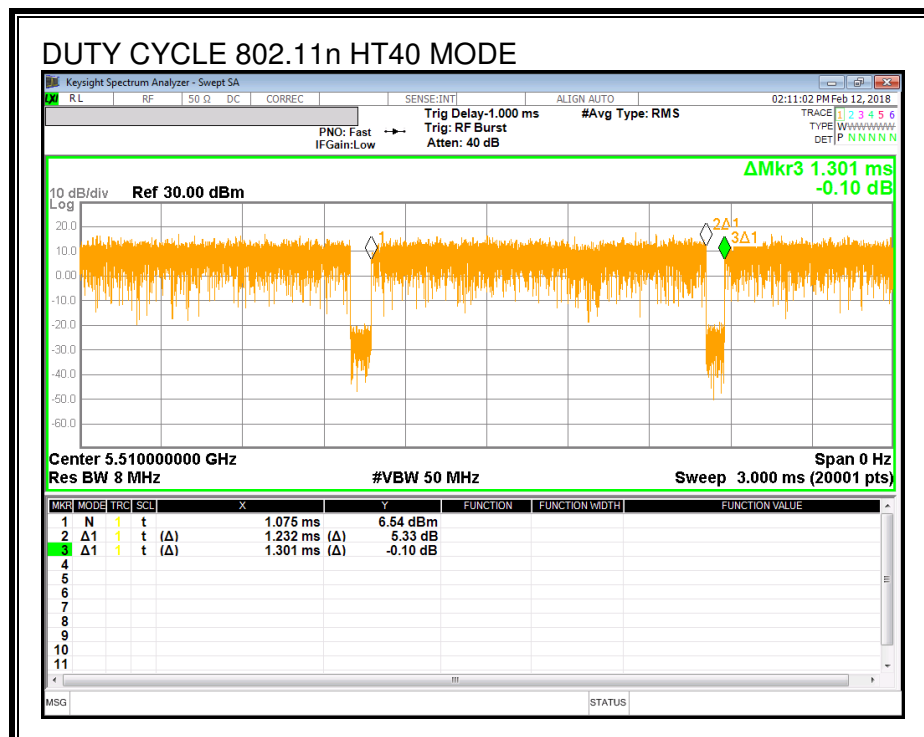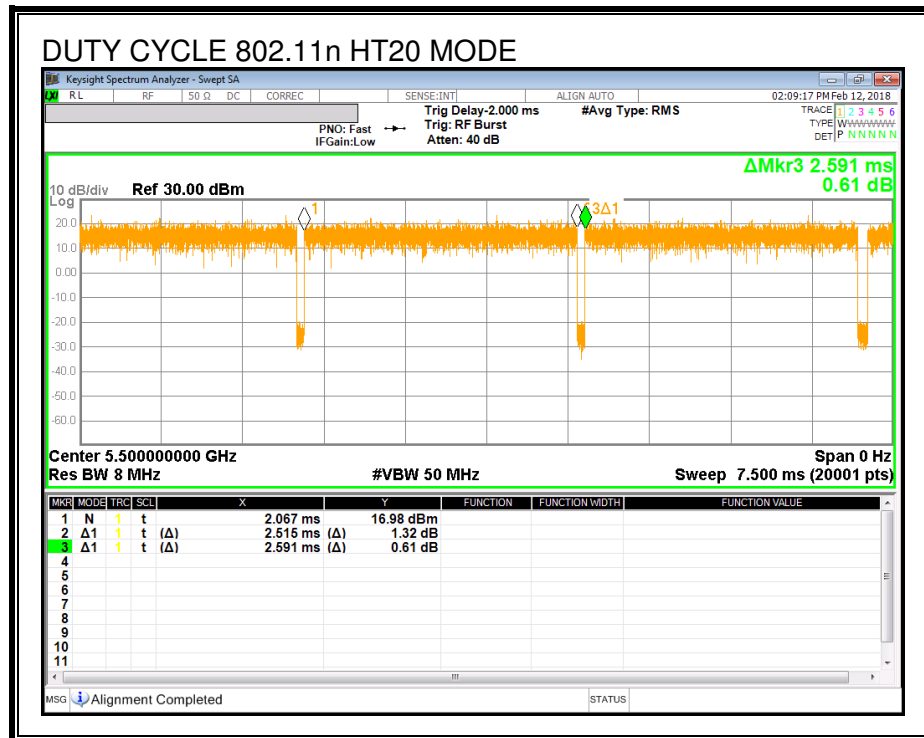



9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 26dB Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 26dB BW : 21.00MHz
- Turning Frequency : 5725MHz
- 26dB Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 - (21.00 / 2))) = 15.50 \text{ MHz}$
- 26dB Bandwidth of UNII-3 band Portion
 $= (5720 + (21.00 / 2) - 5725) = 5.50 \text{ MHz}$

RESULTS

9.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	20.57
Mid	5200	20.93
High	5240	20.47
Worst		20.93

9.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5180	23.79
Mid	5200	24.51
High	5240	23.29
Worst		24.51

9.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5190	42.21
High	5230	42.77
Worst		42.77

9.3.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Mid	5210	99.44
Worst		99.44

9.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	20.19
Mid	5300	20.87
High	5320	20.43
Worst		20.87

9.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5260	26.13
Mid	5300	26.47
High	5320	23.47
Worst		26.47

9.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5270	42.11
High	5310	42.10
Worst		42.11

9.3.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Middle	5290	105.20
Worst		105.20

9.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	20.53
Mid	5580	20.57
High	5700	20.50
Straddle	5720	15.42
Worst		20.57

9.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5500	24.87
Mid	5580	21.77
High	5700	21.22
Straddle	5720	17.37
Worst		24.87

9.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Low	5510	41.85
Mid	5590	41.94
High	5670	41.76
Straddle	5710	35.90
Worst		41.94

9.3.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth
		[MHz]
Low	5530	85.88
High	5610	103.20
Straddle	5690	87.85
Worst		85.88

9.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	5.42
Low	5745	20.34
Mid	5785	20.40
High	5825	21.96
Worst		21.96

9.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5720	7.37
Low	5745	21.99
Mid	5785	24.73
High	5825	22.72
Worst		24.73

9.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5710	5.90
Low	5755	42.34
High	5795	42.33
Worst		42.34


9.3.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth [MHz]
Straddle	5690	17.85
Middle	5775	81.14
Worst		81.14


9.3.17. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

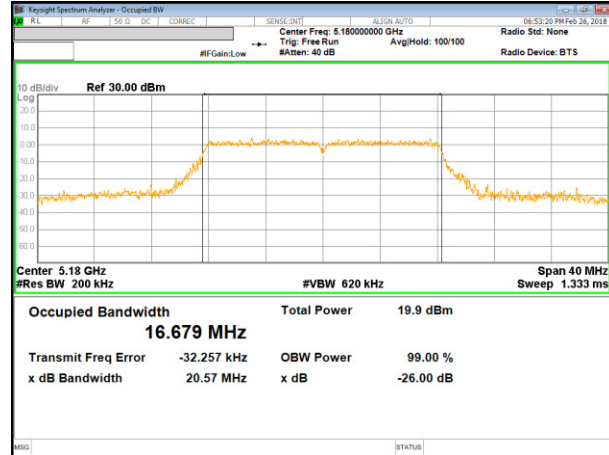

11a Mode Middle Channel

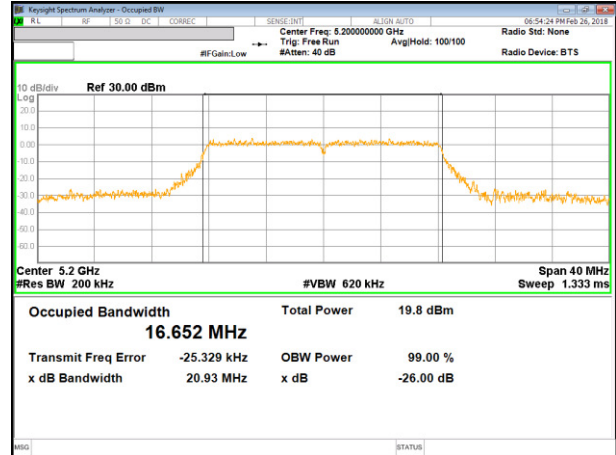


11a Mode High Channel

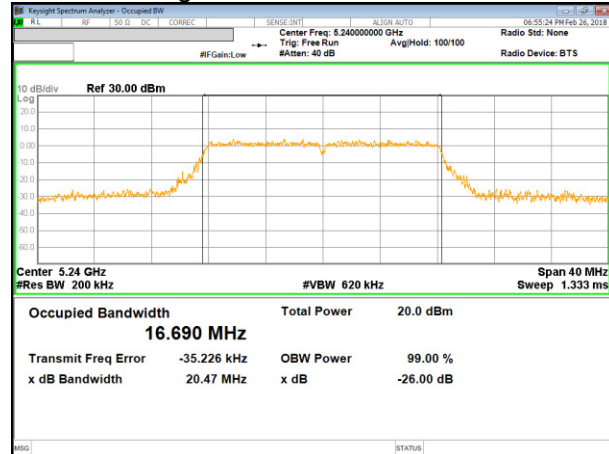


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

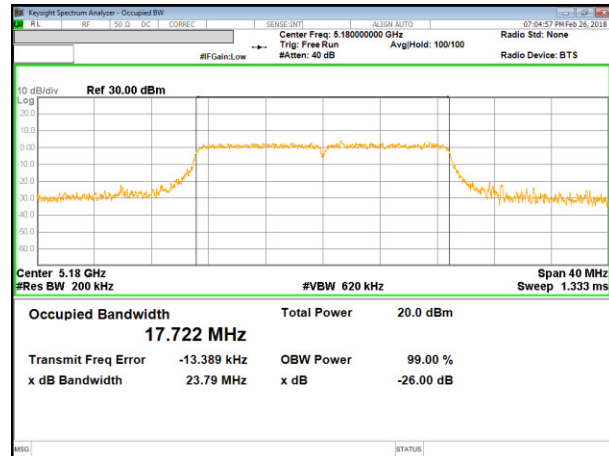


11n HT20 Mode Middle Channel

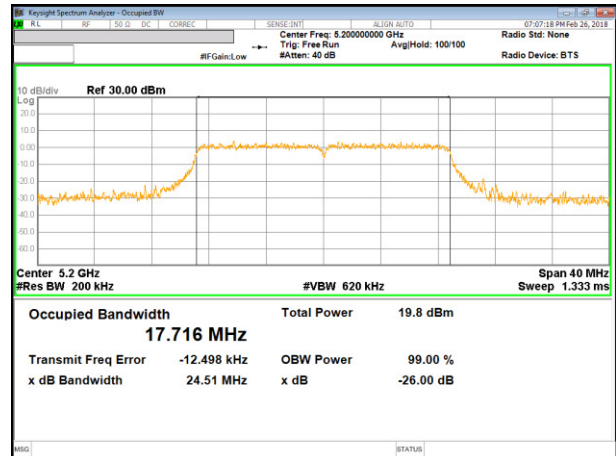


11n HT20 Mode High Channel

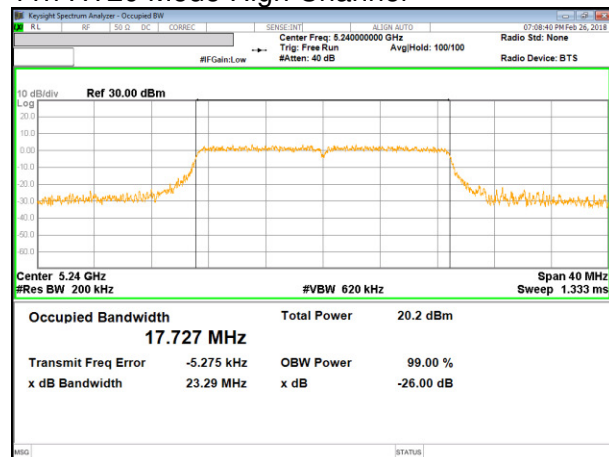

UNII 5.2 GHz IEEE 802.11n HT40 mode

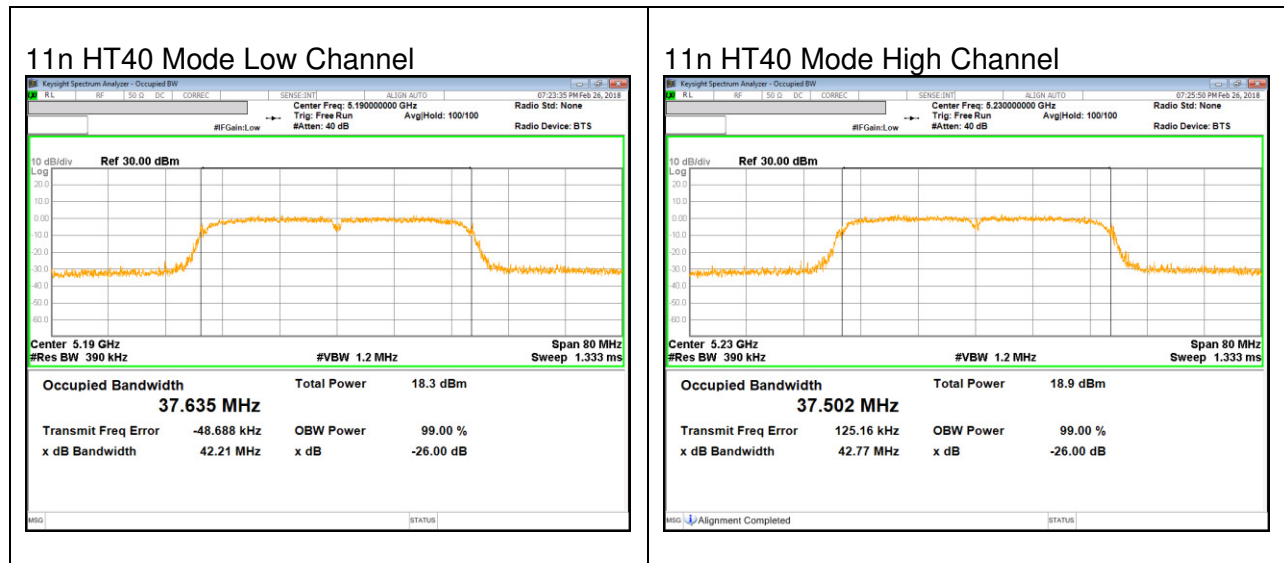


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

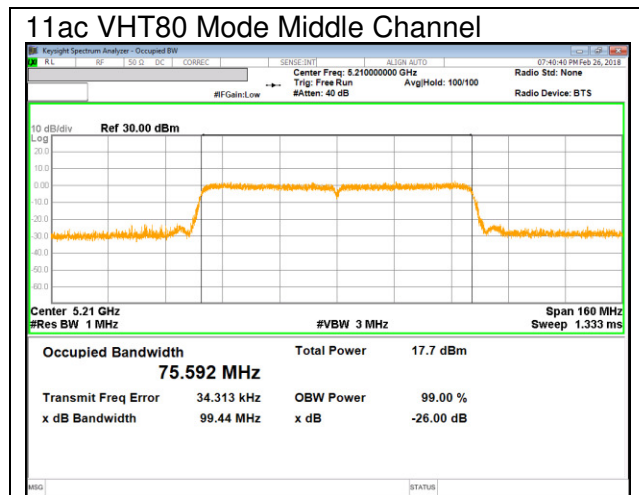


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

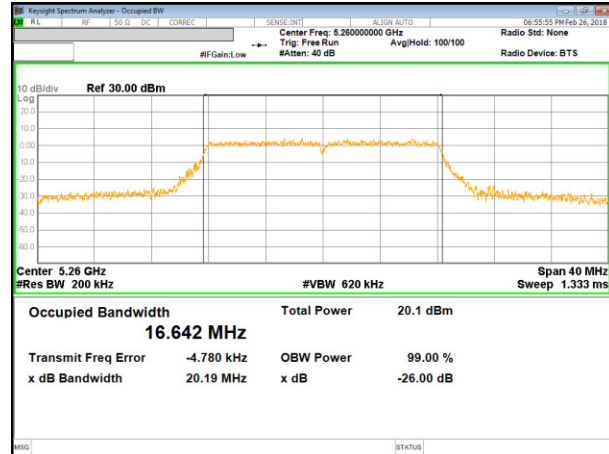

11a Mode Middle Channel

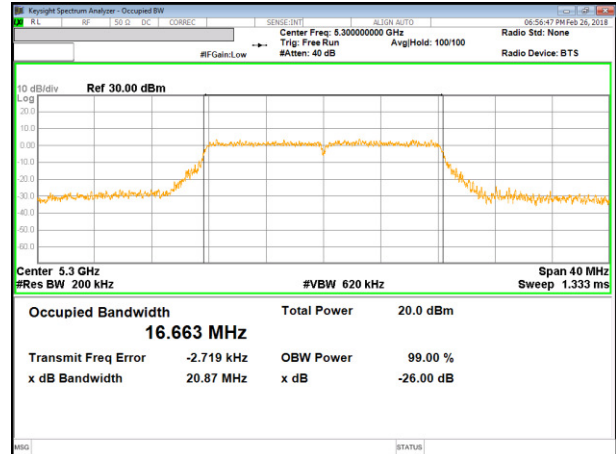


11a Mode High Channel

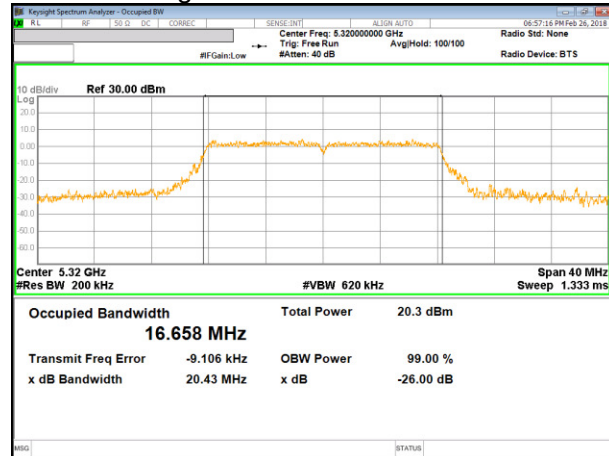


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

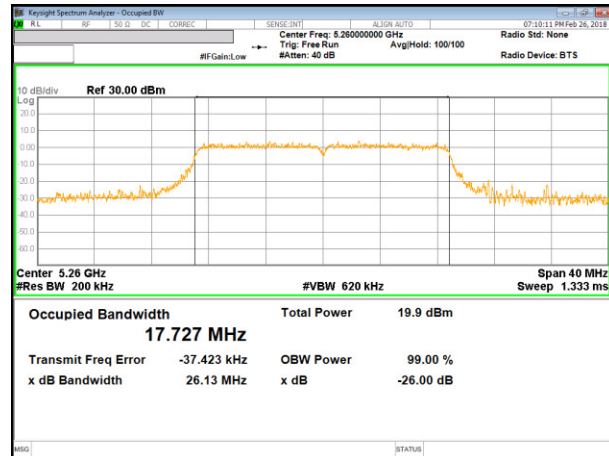

11n HT20 Mode Middle Channel

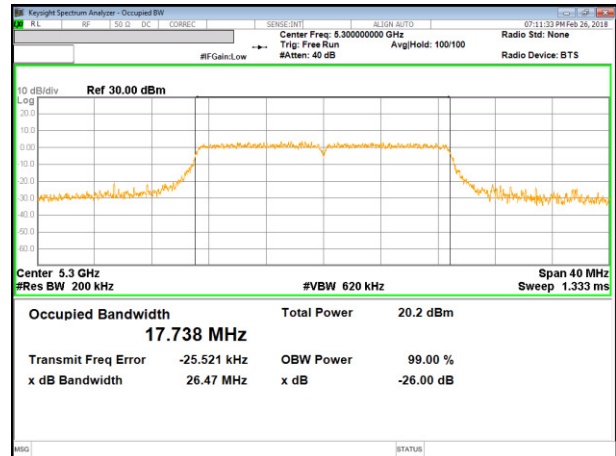


11n HT20 Mode High Channel

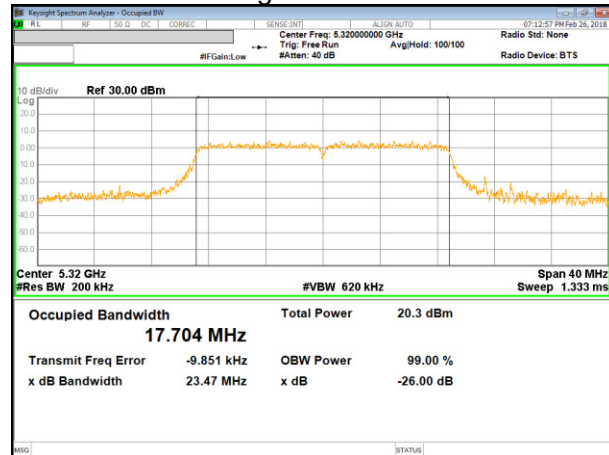


UNII 5.3 GHz IEEE 802.11n HT40 mode

11n HT40 Mode Low Channel

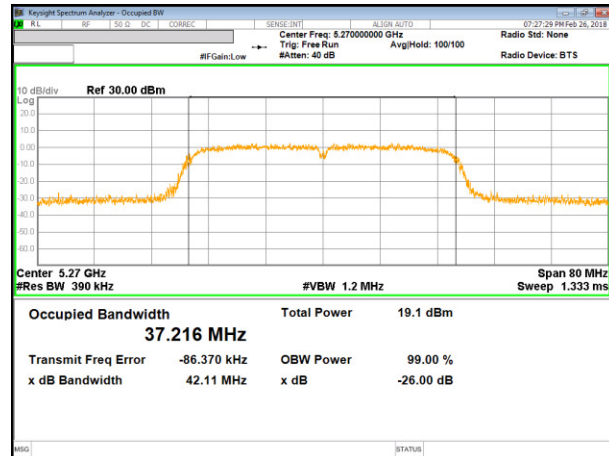


11n HT40 Mode High Channel

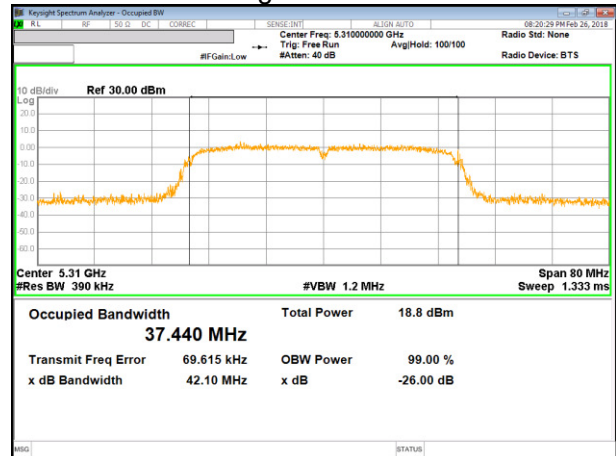


UNII 5.3 GHz IEEE 802.11ac VHT80 mode

11ac VHT80 Mode Middle Channel

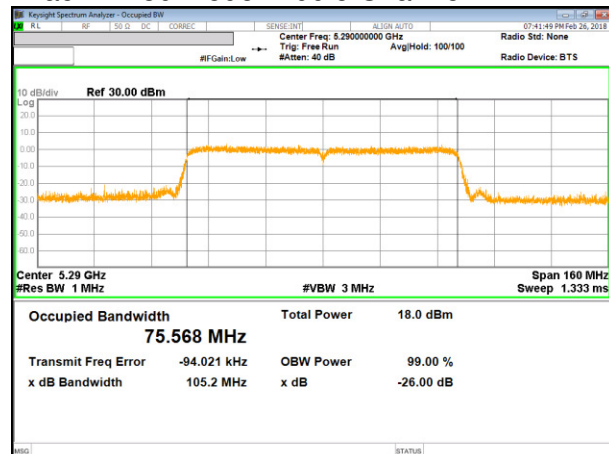


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

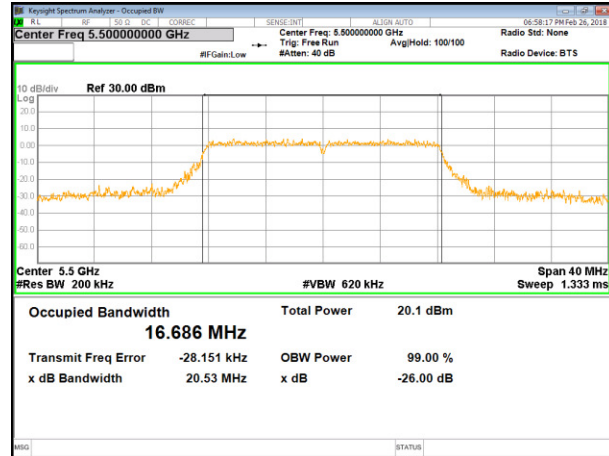


11a Mode Middle Channel

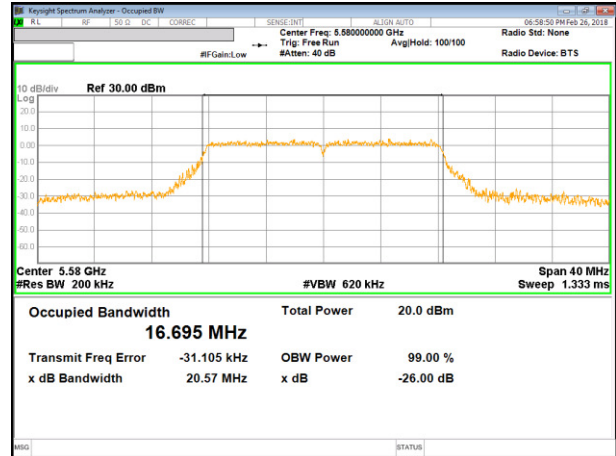

11a Mode High Channel

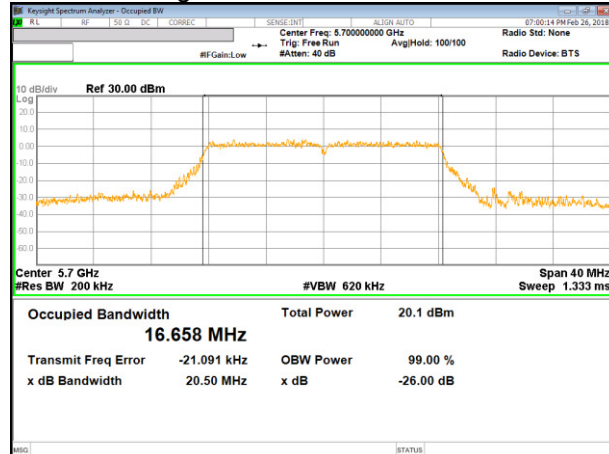


11a Mode Straddle Channel

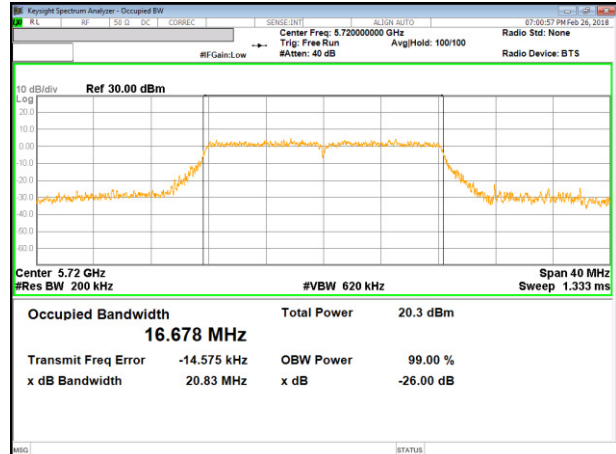


UNII 5.5 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

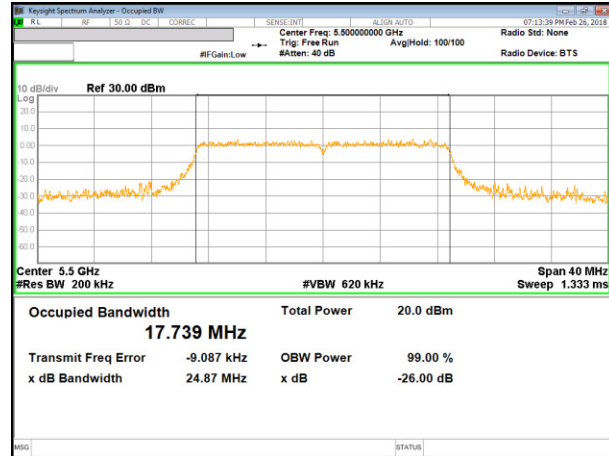


11n HT20 Mode Middle Channel

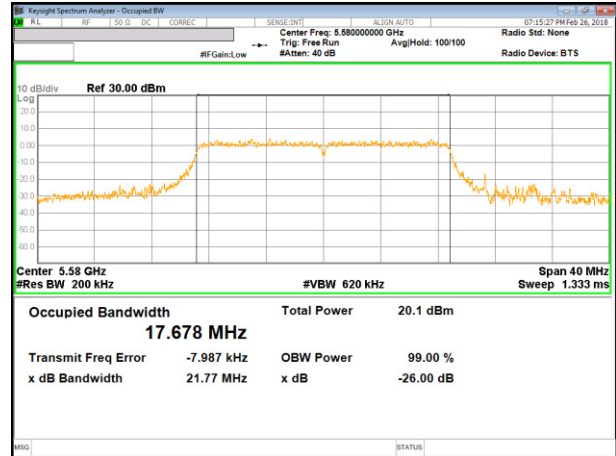

11n HT20 Mode High Channel

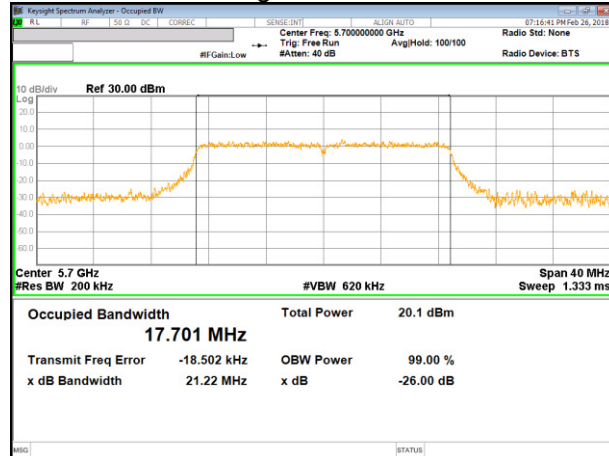


11n HT20 Mode Straddle Channel

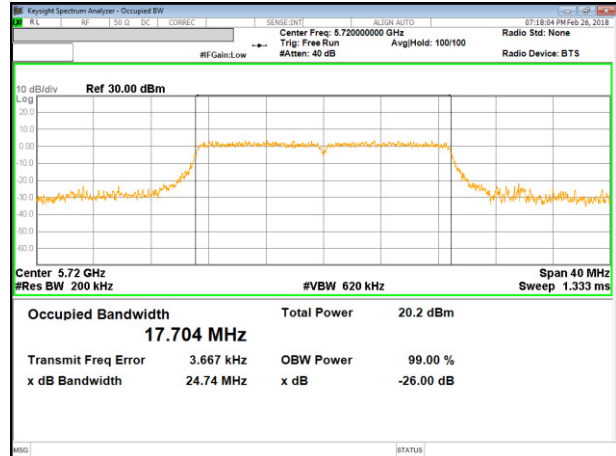


UNII 5.5 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Low Channel

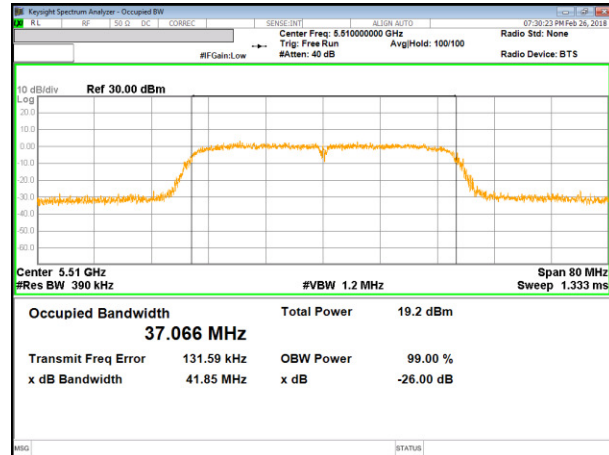


11n HT40 Mode Middle Channel

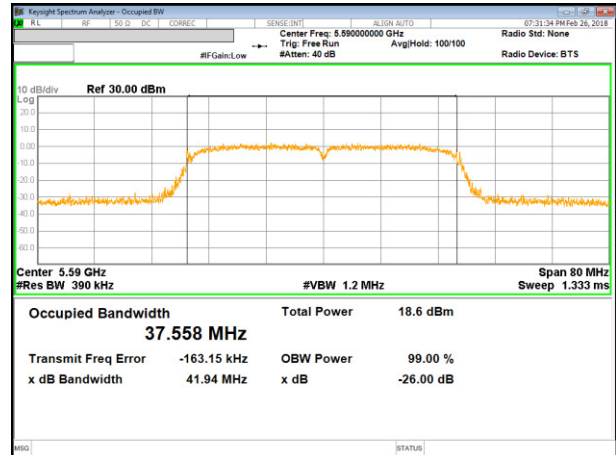

11n HT40 Mode High Channel

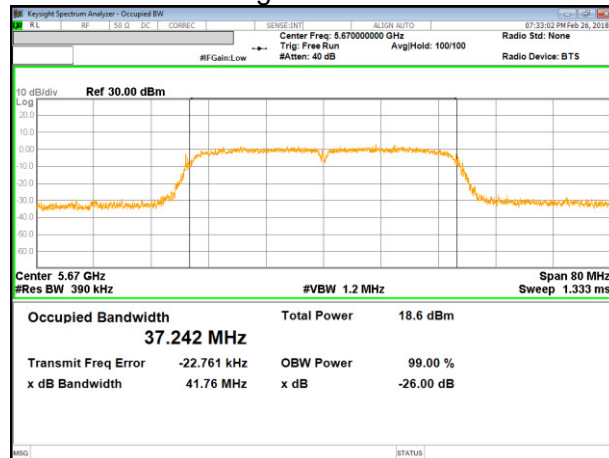


11n HT40 Mode Straddle Channel

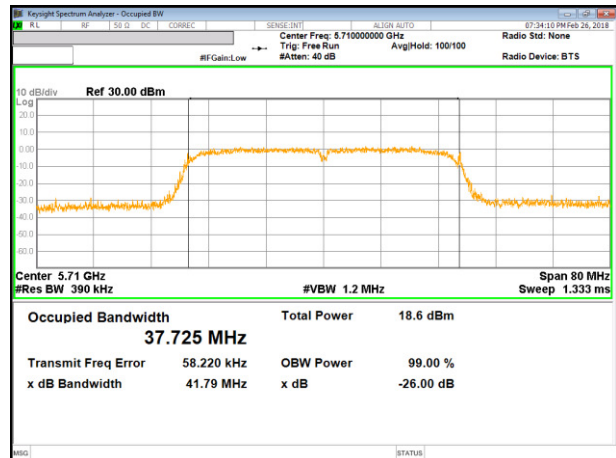


UNII 5.5 GHz IEEE 802.11ac VHT80 mode


11ac VHT80 Mode Low Channel

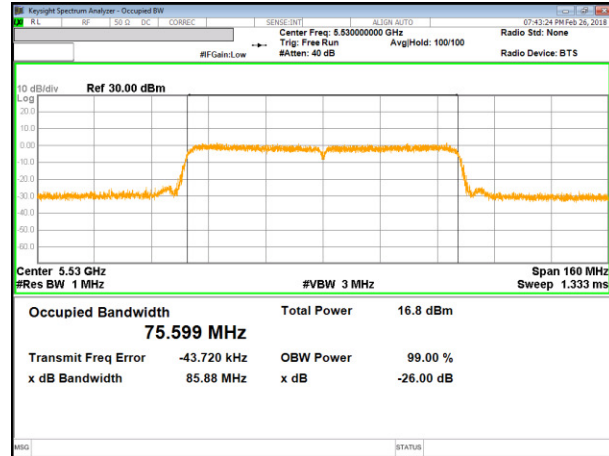

11ac VHT80 Mode High Channel

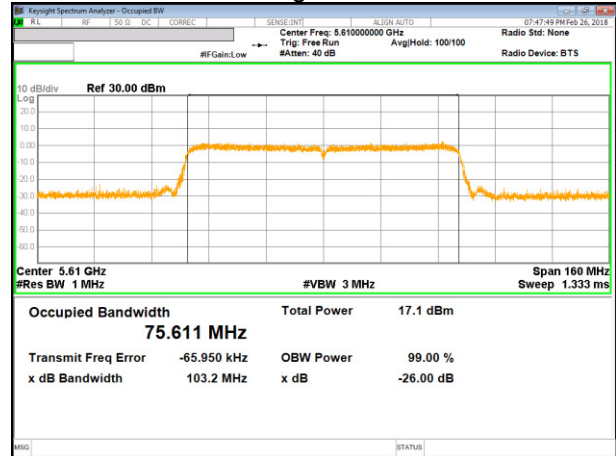


11ac VHT80 Mode Straddle Channel

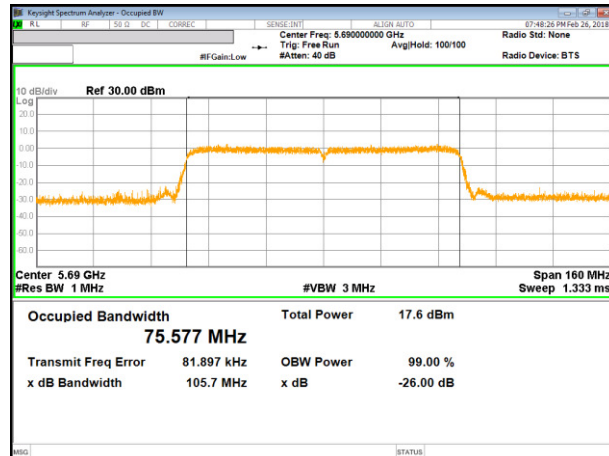


UNII 5.8 GHz IEEE 802.11a mode


11a Mode Straddle Channel

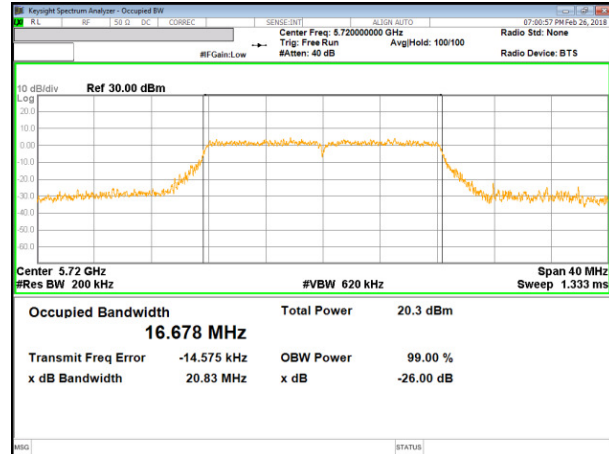


11a Mode Low Channel

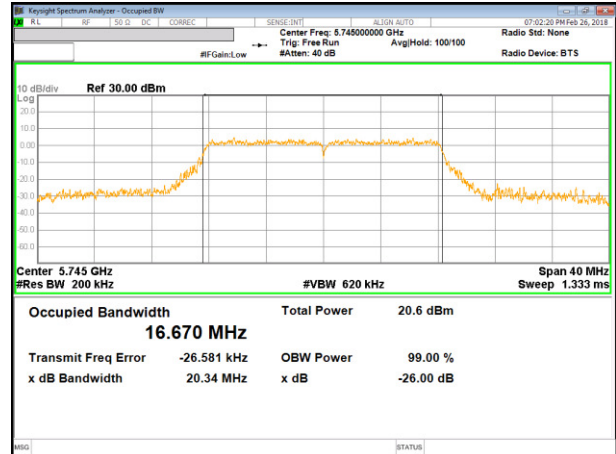

11a Mode Middle Channel

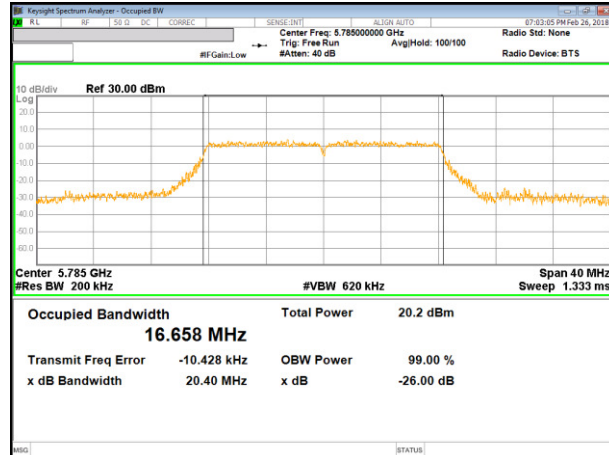


11a Mode High Channel

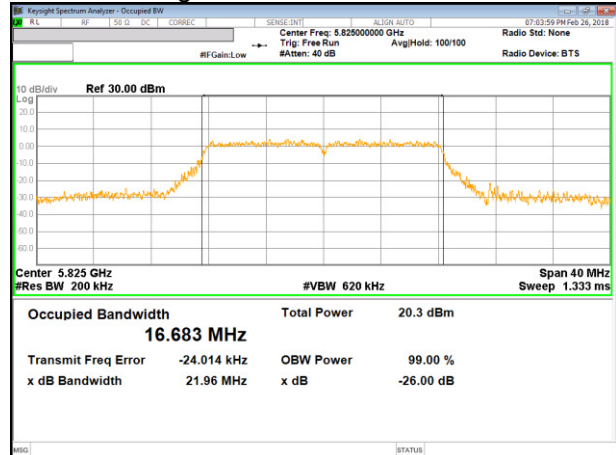


UNII 5.8 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Straddle Channel

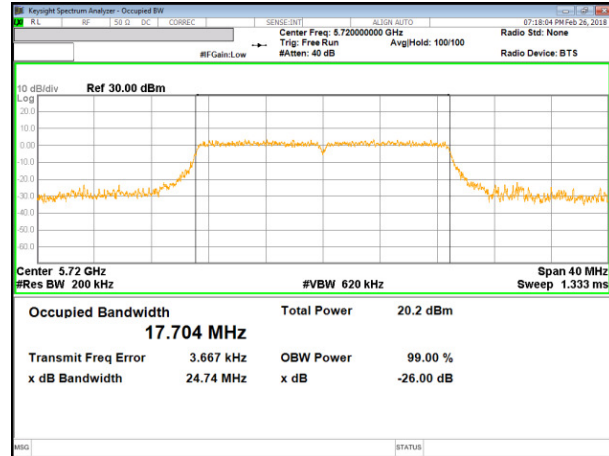


11n HT20 Mode Low Channel

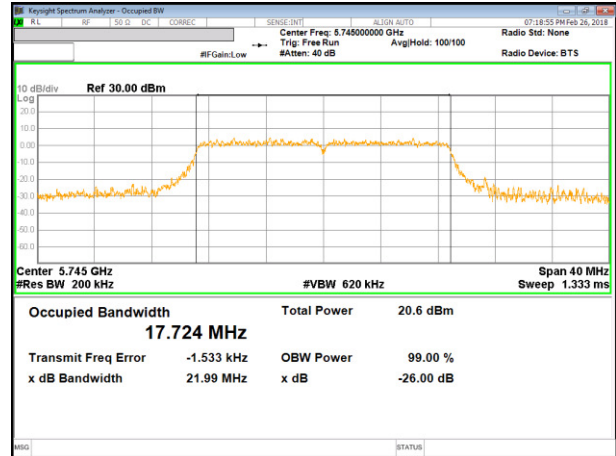

11n HT20 Mode Middle Channel

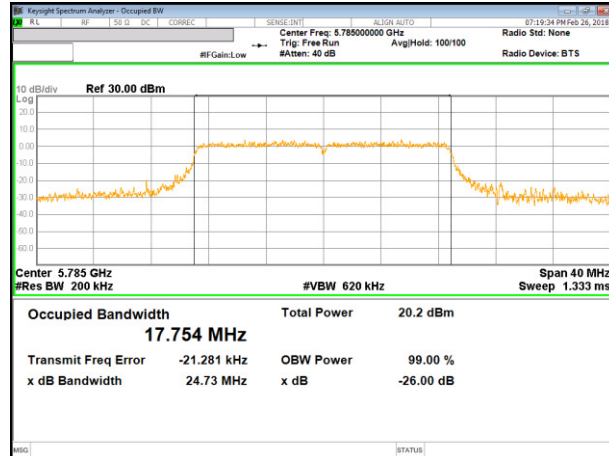


11n HT20 Mode High Channel

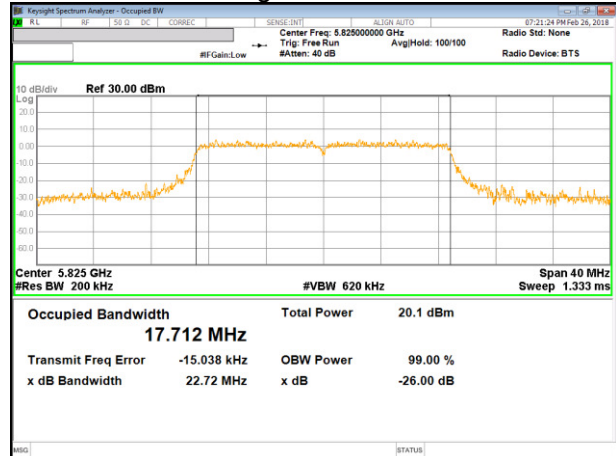


UNII 5.8 GHz IEEE 802.11n HT40 mode


11n HT40 Mode Straddle Channel

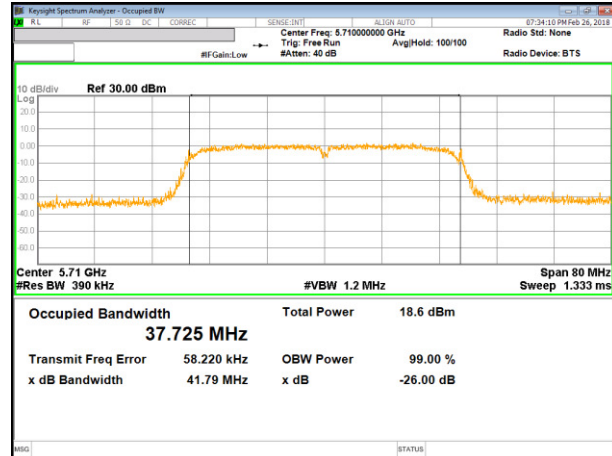


11n HT40 Mode Low Channel

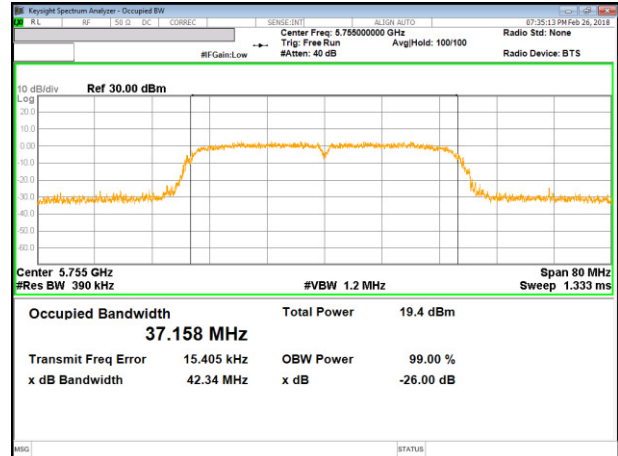

11n HT40 Mode High Channel

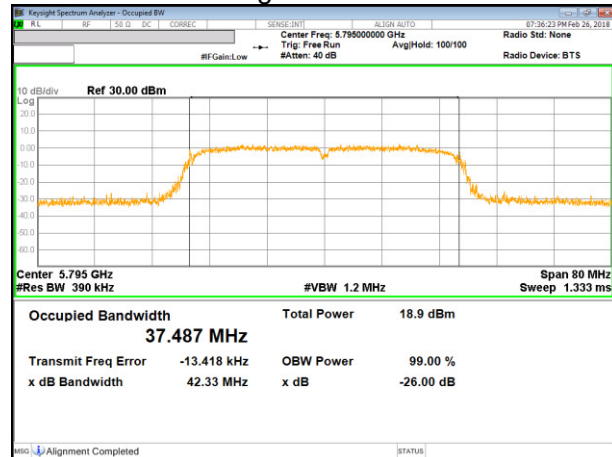

UNII 5.8 GHz IEEE 802.11ac VHT80 mode

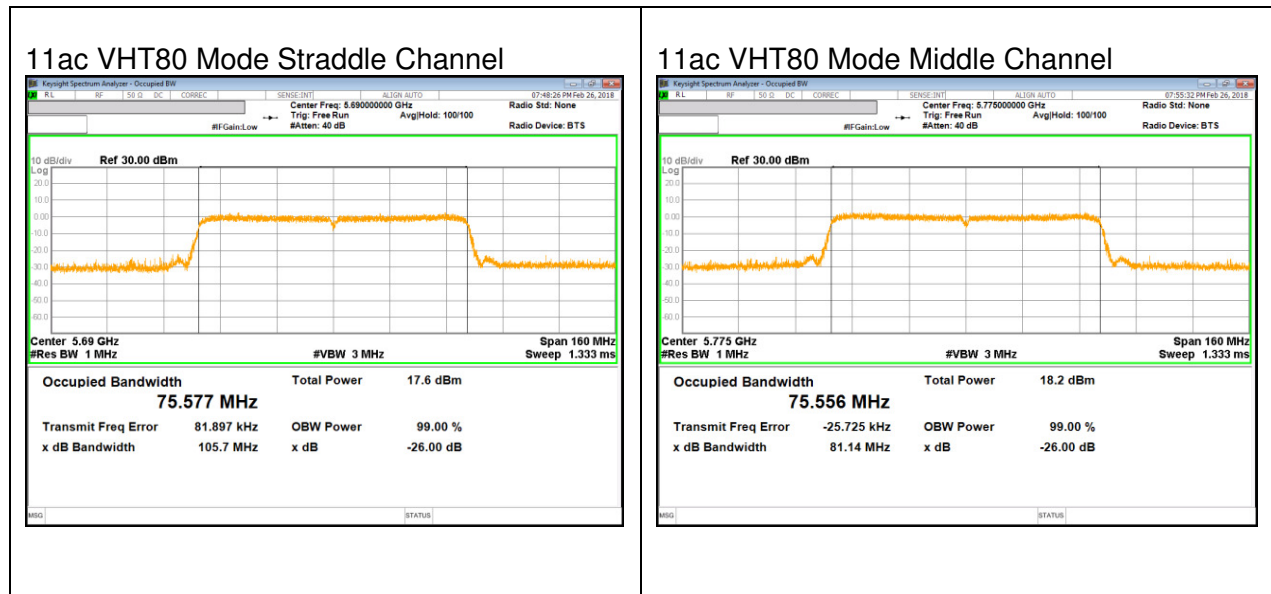

9.4. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

NOTE

- Calculation for 99% Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 99% BW : 21.00MHz
- Turning Frequency : 5725MHz
- 99% Bandwidth of UNII-2C band Portion
 $= (5725 - (5720 - (21.00 / 2))) = 15.50 \text{ MHz}$
- 99% Bandwidth of UNII-3 band Portion
 $= (5720 + (21.00 / 2) - 5725) = 5.50 \text{ MHz}$

RESULTS

9.4.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5180	16.51
Mid	5200	16.55
High	5240	16.53
Worst		16.55

9.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5180	17.67
Mid	5200	17.69
High	5240	17.70
Worst		17.70

9.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5190	36.06
High	5230	36.05
Worst		36.06

9.4.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Mid	5210	75.36
Worst		75.36

9.4.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5260	16.52
Mid	5300	16.53
High	5320	16.52
Worst		16.53

9.4.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5260	17.67
Mid	5300	17.71
High	5320	17.70
Worst		17.71

9.4.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5270	36.14
High	5310	36.04
Worst		36.14

9.4.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Middle	5290	75.26
Worst		75.26

9.4.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5500	16.53
Mid	5580	16.52
High	5700	16.52
Straddle	5720	13.26
Worst		16.53

9.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5500	17.67
Mid	5580	17.69
High	5700	17.67
Straddle	5720	13.84
Worst		17.69

9.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	5510	36.16
Mid	5590	36.06
High	5670	36.09
Straddle	5710	33.07
Worst		36.16

9.4.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency [MHz]	26 dB Bandwidth
		[MHz]
Low	5530	75.29
High	5610	75.28
Straddle	5690	72.62
Worst		75.29

9.4.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5720	3.26
Low	5745	16.50
Mid	5785	16.48
High	5825	16.50
Worst		16.50

9.4.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5720	3.84
Low	5745	17.70
Mid	5785	17.69
High	5825	17.68
Worst		17.70

9.4.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5710	3.07
Low	5755	36.10
High	5795	36.12
Worst		36.12


9.4.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Straddle	5690	2.62
Middle	5775	75.33
Worst		75.33


9.4.17. 99% BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode


11a Mode Low Channel

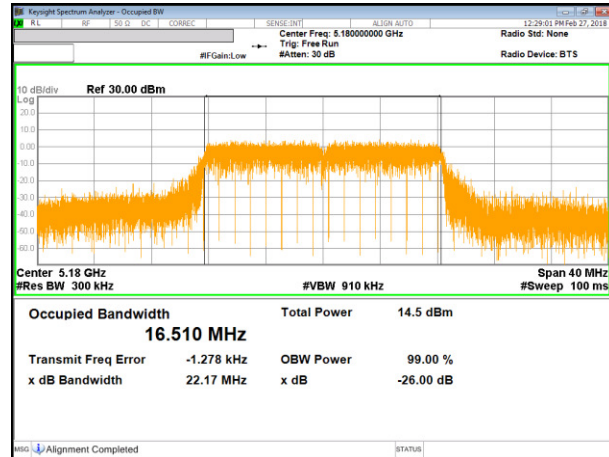

11a Mode Middle Channel

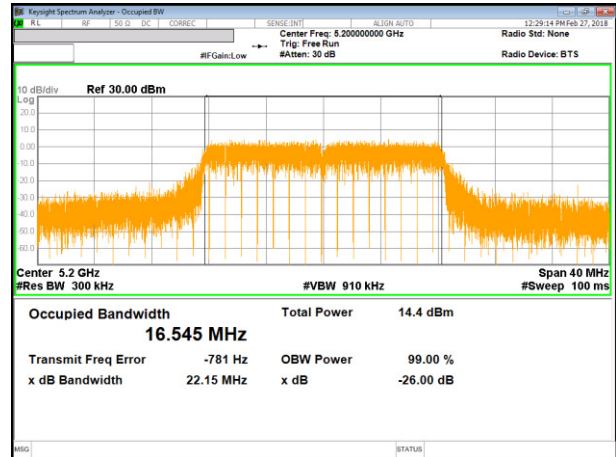


11a Mode High Channel

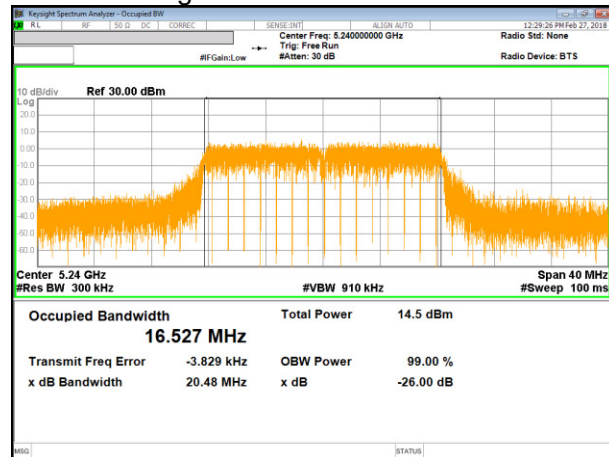


UNII 5.2 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

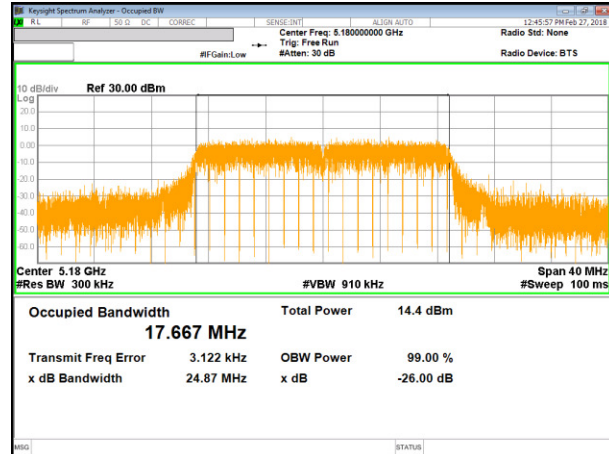


11n HT20 Mode Middle Channel

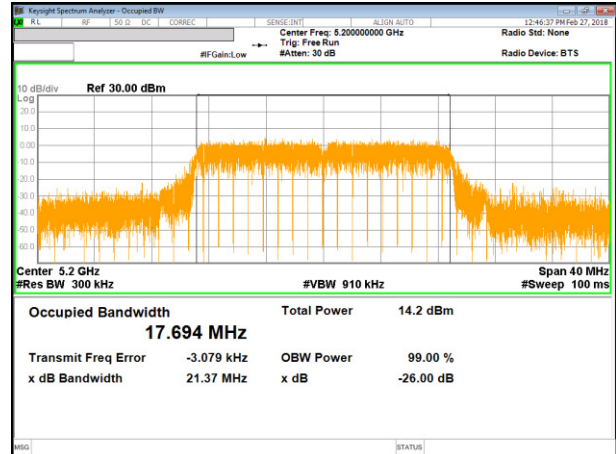


11n HT20 Mode High Channel

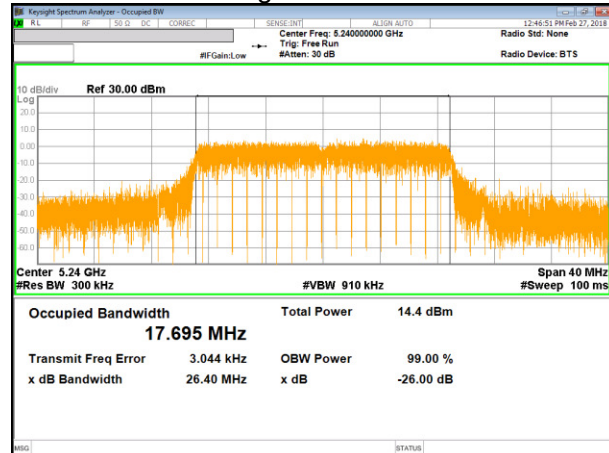

UNII 5.2 GHz IEEE 802.11n HT40 mode

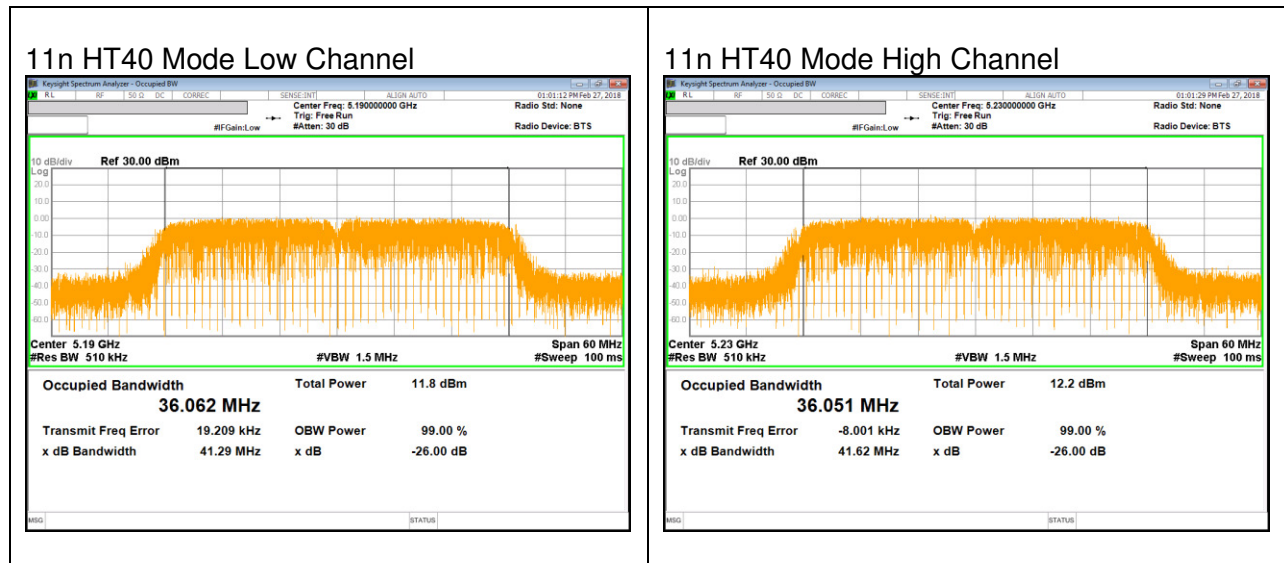


UNII 5.2 GHz IEEE 802.11ac VHT80 mode

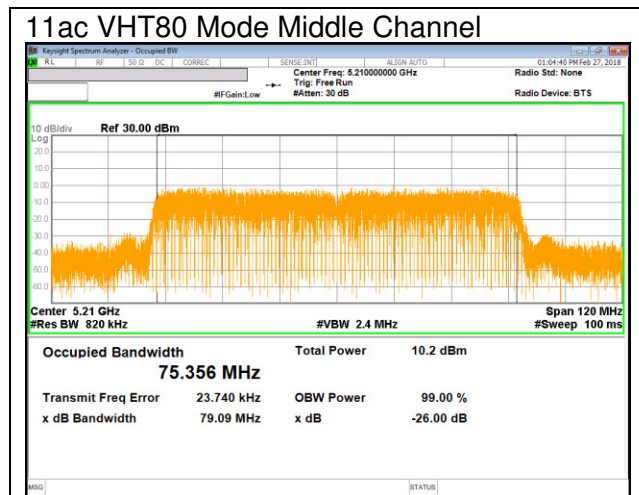


UNII 5.3 GHz IEEE 802.11a mode


11a Mode Low Channel

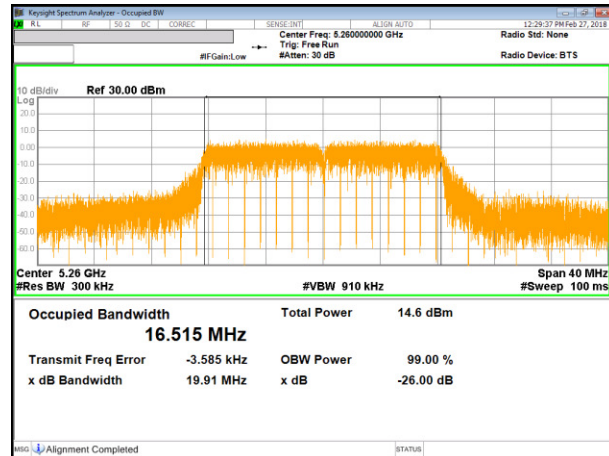

11a Mode Middle Channel

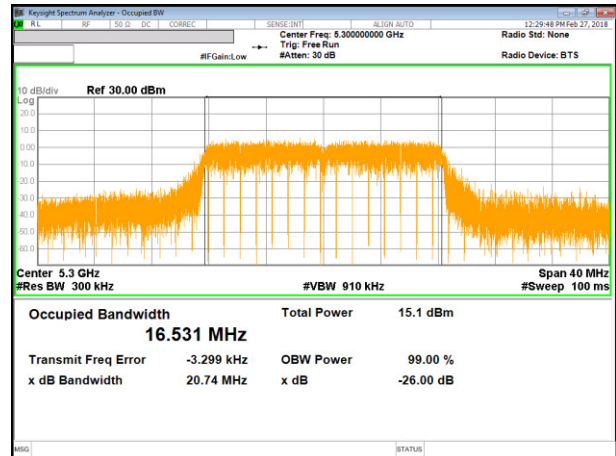


11a Mode High Channel

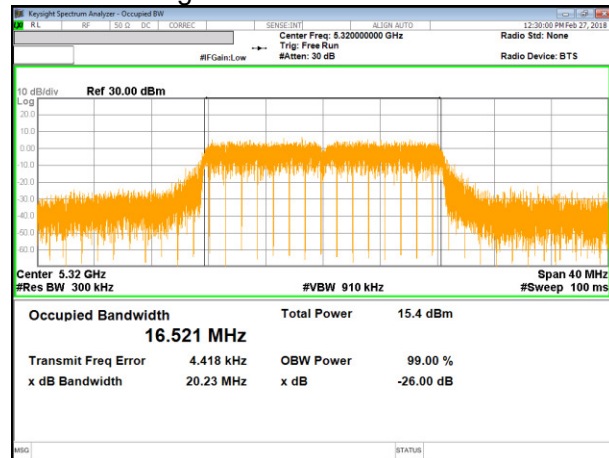


UNII 5.3 GHz IEEE 802.11n HT20 mode


11n HT20 Mode Low Channel

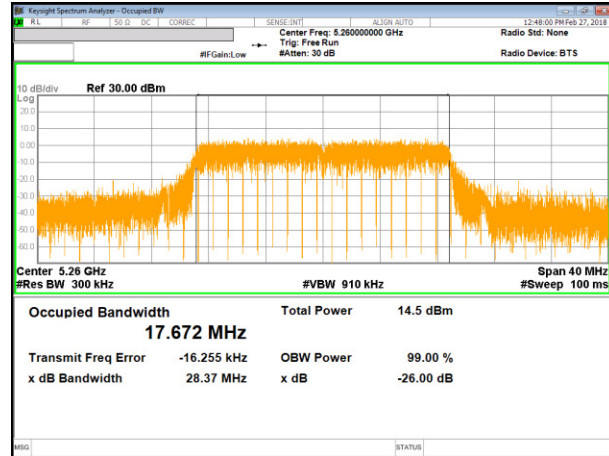


11n HT20 Mode Middle Channel

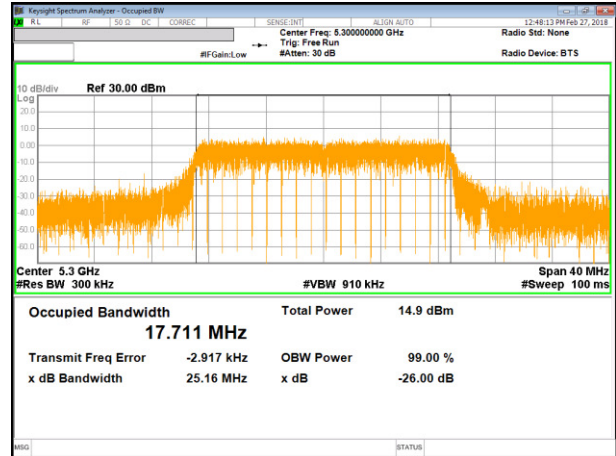


11n HT20 Mode High Channel

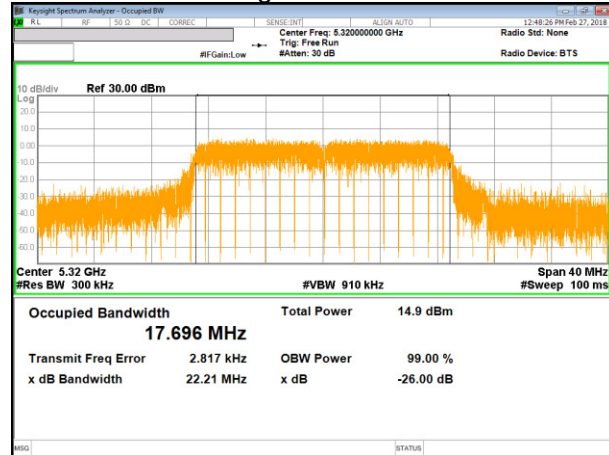

UNII 5.3 GHz IEEE 802.11n HT40 mode

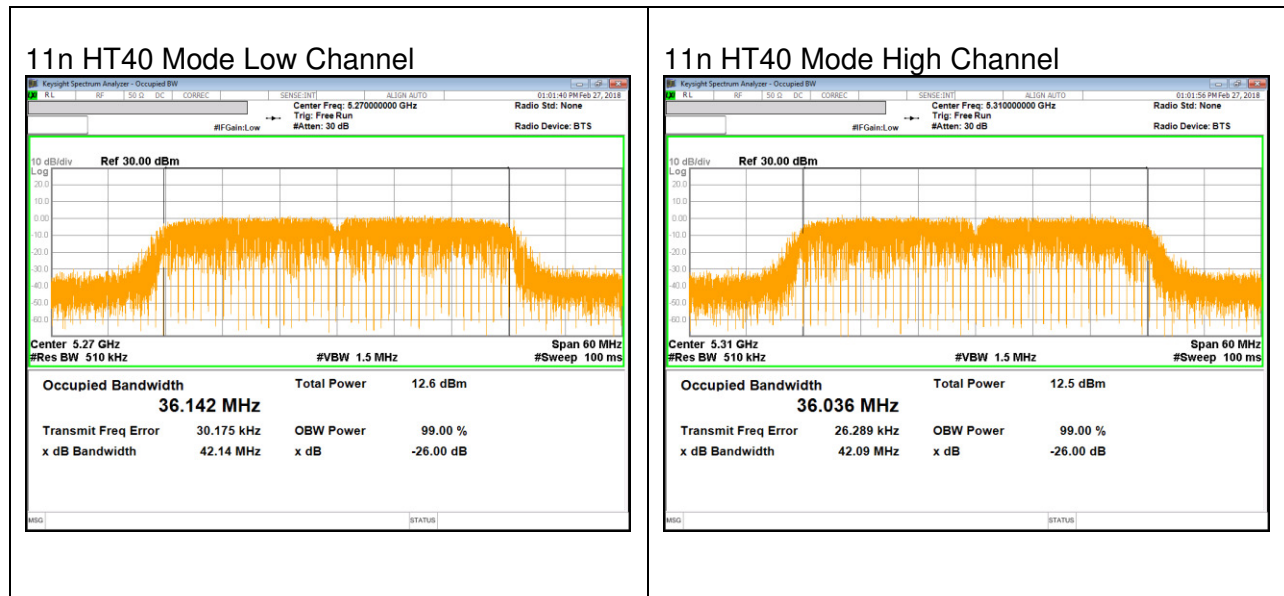


UNII 5.3 GHz IEEE 802.11ac VHT80 mode

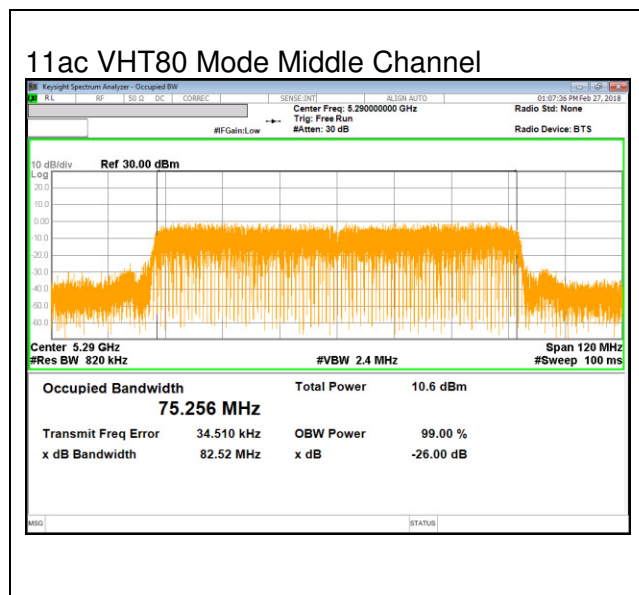


UNII 5.5 GHz IEEE 802.11a mode


11a Mode Low Channel

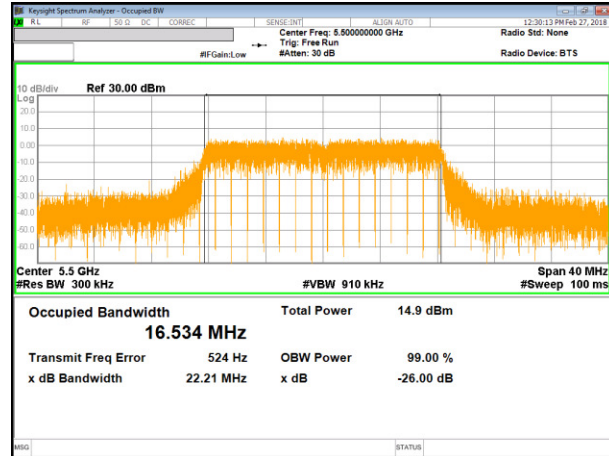

11a Mode Middle Channel

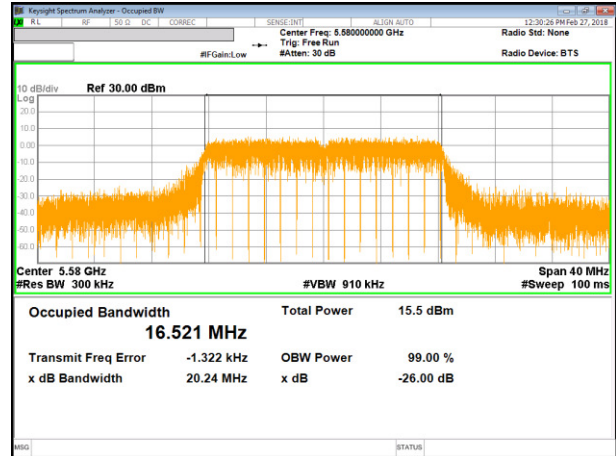

11a Mode High Channel

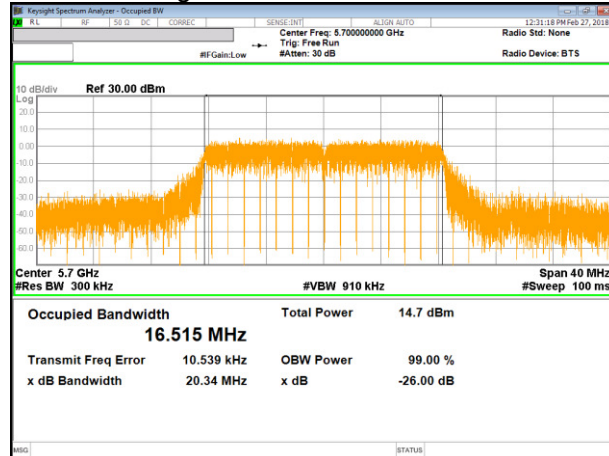

11a Mode Straddle Channel

