

FCC UNII REPORT

FCC Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

June 16, 2017

Test Site/Location:

HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Address:

129, Samsung-ro, Yeongtong-gu, Suwon-si,
 Gyeonggi-do, 16677, Rep. of Korea

Report No.: HCT-R-1706-F006-1

HCT FRN: 0005866421

FCC ID : A3LSMJ730K

APPLICANT : SAMSUNG Electronics Co., Ltd.

Model: SM-J730K

EUT Type: Mobile Phone

Modulation type OFDM

FCC Classification: Unlicensed National Information Infrastructure(UNII)

FCC Rule Part(s): Part 15.407

Band	Mode	Frequency Range (MHz)	Power (dBm)	Power (W)
UNII1	802.11a	5180 – 5240	17.97	0.06266
	802.11n_HT20	5180 – 5240	17.60	0.05754
	802.11n_HT40	5190 – 5230	14.49	0.02812
	802.11ac_VHT20	5180 – 5240	17.57	0.05715
	802.11ac_VHT40	5190 – 5230	13.90	0.02455
	802.11ac_VHT80	5210	14.16	0.02603
UNII2A	802.11a	5260 – 5320	17.40	0.05495
	802.11n_HT20	5260 – 5320	17.32	0.05395
	802.11n_HT40	5270 – 5310	14.24	0.02655
	802.11ac_VHT20	5260 – 5320	17.25	0.05309
	802.11ac_VHT40	5270 – 5310	14.17	0.02612
	802.11ac_VHT80	5290	13.58	0.02279
UNII2C	802.11a	5500 – 5720	17.63	0.05798
	802.11n_HT20	5500 – 5720	17.36	0.05440
	802.11n_HT40	5510 – 5710	15.47	0.03521
	802.11ac_VHT20	5500 – 5720	17.35	0.05438
	802.11ac_VHT40	5510 – 5710	15.49	0.03543
	802.11ac_VHT80	5530 – 5690	14.23	0.02646
UNII3	802.11a	5745 – 5825	17.81	0.06039
	802.11n_HT20	5745 – 5825	17.59	0.05741
	802.11n_HT40	5755 – 5795	15.49	0.03538
	802.11ac_VHT20	5745 – 5825	17.51	0.05636
	802.11ac_VHT40	5755 – 5795	15.48	0.03530
	802.11ac_VHT80	5775	14.49	0.02811

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by : Jung Lae Cho
Engineer of Telecommunication testing center



Approved by : Jong Seok Lee
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1706-F006	June 08, 2017	- First Approval Report
HCT-R-1706-F006-1	June 16, 2017	- Revised the PSD for 802.11a, channel 144 on Page 84

Table of Contents

1. GENERAL INFORMATION	5 #
2. EUT DESCRIPTION	5 #
3. TEST METHODOLOGY	6 #
3.1 EUT CONFIGURATION	6 #
3.2 EUT EXERCISE	6 #
3.3 GENERAL TEST PROCEDURES	6 #
3.4 DESCRIPTION OF TEST MODES	6 #
4. INSTRUMENT CALIBRATION.....	7 #
5. FACILITIES AND ACCREDITATIONS	7 #
5.1 FACILITIES	7 #
5.2 EQUIPMENT	7 #
6. ANTENNA REQUIREMENTS	7 #
7. MEASUREMENT UNCERTAINTY	8 #
8. SUMMARY OF TEST RESULTS	9 #
9. TEST RESULT	10 #
9.1 DUTY CYCLE.....	10 #
9.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT	13 #
9.3 OUTPUT POWER MEASUREMENT	35 #
9.4 POWER SPECTRAL DENSITY	70 #
9.5 FREQUENCY STABILITY	90 #
9.6 RADIATED MEASUREMENT.....	102 #
9.6.1 RADIATED SPURIOUS EMISSIONS.....	102 #
9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	171 #
9.7 POWERLINE CONDUCTED EMISSIONS	191 #
10. LIST OF TEST EQUIPMENT	196 #
10.1 LIST OF TEST EQUIPMENT(Conducted Test)	196 #
10.2 LIST OF TEST EQUIPMENT(Radiated Test).....	197 #

1. GENERAL INFORMATION

Applicant: SAMSUNG Electronics Co.,Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID: A3LSMJ730K
EUT Type: Mobile Phone
Model: SM-J730K
Date(s) of Tests: May 02, 2017 ~ June 08, 2017
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

2. EUT DESCRIPTION

Model	SM-J730K	
EUT Type	Mobile Phone	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BA720ABA Type: Li-ion Battery	
Frequency Range	TX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2A)/ 5500 MHz - 5720 MHz (UNII 2C)/ 5745 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2A)/ 5510 MHz - 5710 MHz (UNII 2C) / 5755 MHz - 5795 MHz (UNII 3)
	80 MHz BW:	5210 MHz(UNII 1)/ 5290 MHz(UNII 2A)/ 5530 - 5690 MHz (UNII 2C)/ 5775 MHz (UNII 3)
	RX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2A)/ 5500 MHz - 5720 MHz (UNII 2C)/ 5745 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2A)/ 5510 MHz - 5710 MHz (UNII 2C) / 5755 MHz - 5795 MHz (UNII 3)
	80 MHz BW:	5210 MHz(UNII 1)/ 5290 MHz(UNII 2A)/ 5530 - 5690 MHz (UNII 2C)/ 5775 MHz (UNII 3)
Modulation Type	OFDM(802.11a, 802.11n, 802.11ac)	
Antenna Specification	Manufacturer: Samsung Electronics Antenna type: Metal frame Peak Gain : -1.68 dBi (UNII 1) / -0.46 dBi(UNII 2A) / -0.97 dBi(UNII 2C) / -3.30 dBi(UNII 3)	

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 dated May 2, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement. For 802.11ac, KDB644545 D03 v01 dated August 14, 2014.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 789033 D02 v01r04)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70

8. SUMMARY OF TEST RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	CONDUCTED	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW (5150-5250 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5470-5725 MHz) <1 W (5725-5850 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g)	NA		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) <-27 dBm/MHz EIRP(Worst) (UNII 3)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

9. TEST RESULT

9.1 DUTY CYCLE

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section B)1)a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

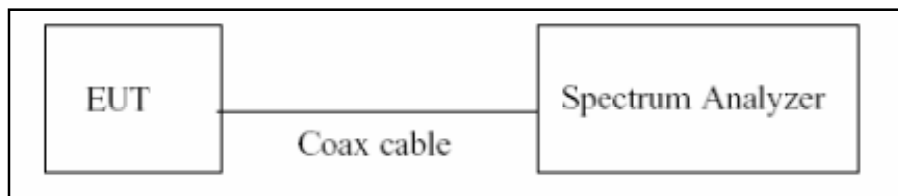

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, (B.2 in KDB 789033 D02 v01r04)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

Duty Cycle Factor

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6	1.428	1.530	0.93333333	0.300
	9	0.960	1.061	0.90462175	0.435
	12	0.725	0.826	0.87755107	0.567
	18	0.492	0.593	0.82945736	0.812
	24	0.373	0.474	0.78610618	1.045
	36	0.256	0.357	0.71601968	1.451
	48	0.197	0.298	0.66034200	1.802
	54	0.180	0.281	0.64055947	1.934
Mode	MCS INDEX	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11n_HT20	0	1.336	1.437	0.92971468	0.317
	1	0.688	0.790	0.87153245	0.597
	2	0.472	0.574	0.82308879	0.846
	3	0.364	0.466	0.78240025	1.066
	4	0.256	0.357	0.71644339	1.448
	5	0.200	0.303	0.65966449	1.807
	6	0.184	0.287	0.64079878	1.933
	7	0.168	0.271	0.62060859	2.072
802.11n_HT40	0	0.664	0.765	0.86820084	0.614
	1	0.352	0.453	0.77738516	1.094
	2	0.248	0.350	0.70938215	1.491
	3	0.196	0.297	0.66037736	1.802
	4	0.144	0.246	0.58781362	2.308
	5	0.116	0.217	0.53441296	2.721
	6	0.108	0.209	0.51680672	2.867
	7	0.100	0.202	0.49781659	3.029


Mode	MCS INDEX	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ac_VHT20	0	1.344	1.445	0.93055786	0.313
	1	0.692	0.793	0.87316994	0.589
	2	0.476	0.578	0.82352941	0.843
	3	0.368	0.469	0.78464819	1.053
	4	0.260	0.361	0.72022161	1.425
	5	0.204	0.306	0.66844888	1.749
	6	0.188	0.289	0.64971705	1.873
	7	0.176	0.277	0.63457682	1.975
	8	0.152	0.254	0.59871425	2.228
802.11ac_VHT40	0	0.669	0.770	0.86902287	0.610
	1	0.356	0.458	0.77797203	1.090
	2	0.252	0.353	0.71428571	1.461
	3	0.200	0.302	0.66312997	1.784
	4	0.148	0.250	0.59330986	2.267
	5	0.120	0.221	0.54274354	2.654
	6	0.112	0.213	0.52577320	2.792
	7	0.108	0.209	0.51680672	2.867
	8	0.100	0.202	0.49673203	3.039
	9	0.092	0.193	0.47608252	3.223
802.11ac_VHT80	0	0.600	0.701	0.85564860	0.677
	1	0.320	0.421	0.75925926	1.196
	2	0.228	0.329	0.69210495	1.598
	3	0.180	0.282	0.64023122	1.937
	4	0.136	0.238	0.57339716	2.415
	5	0.112	0.214	0.52550961	2.794
	6	0.104	0.206	0.50706617	2.949
	7	0.096	0.198	0.48713297	3.124
	8	0.088	0.190	0.46551797	3.321
	9	0.084	0.185	0.45294165	3.440

9.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033 D02 v01r04, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

■ TEST CONFIGURATION

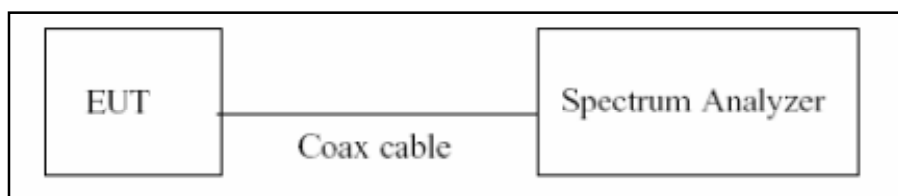

■ TEST PROCEDURE (26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (C.1 in KDB 789033 D02 v01r04)

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note : We tested 26 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 26 dB.

1. In order to simplify the report, attached plots were only the most wide channel.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.

■ TEST PROCEDURE (for the band 5.725-5.85 GHz, 6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to(C.2 in KDB 789033 D02 v01r04)

1. RBW = 100 kHz
2. VBW $\geq$ 3*RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

TEST RESULTS for 802.11a

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.05	N/A	Pass
5200	40	20.93	N/A	Pass
5240	48	21.13	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.40	N/A	Pass
5300	60	21.17	N/A	Pass
5320	64	21.35	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	20.93	N/A	Pass
5580	116	21.40	N/A	Pass
5720	144	20.95	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	21.37	N/A	Pass
5785	157	20.90	N/A	Pass
5825	165	21.34	N/A	Pass

■ TEST Plot for 802.11a

802.11a UNII 1 BAND 26dB Bandwidth (CH 48)




802.11a UNII 2A BAND 26dB Bandwidth (CH 52)



802.11a UNII 2C BAND 26dB Bandwidth (CH116)



802.11a UNII 3 BAND 26dB Bandwidth (CH 149)

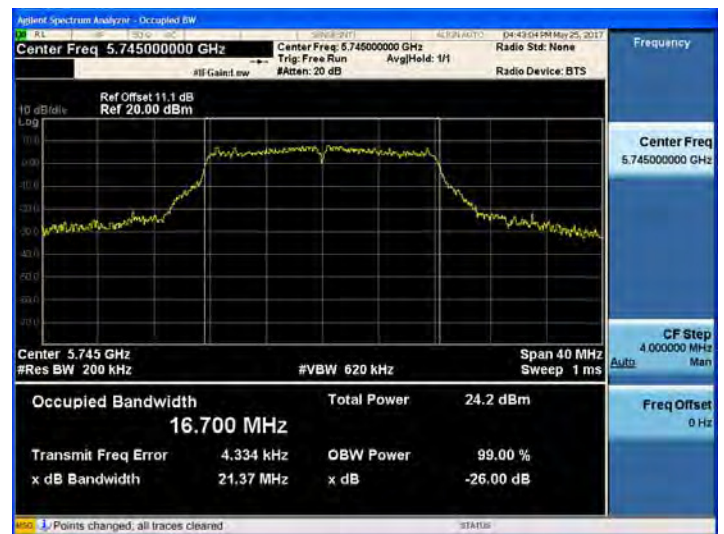

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT20

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20

802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.45	N/A	Pass
5200	40	21.61	N/A	Pass
5240	48	21.48	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20

802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.28	N/A	Pass
5300	60	21.32	N/A	Pass
5320	64	22.07	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	21.26	N/A	Pass
5580	116	21.27	N/A	Pass
5720	144	21.28	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20

802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	21.20	N/A	Pass
5785	157	21.57	N/A	Pass
5825	165	21.97	N/A	Pass

■ TEST Plot for 802.11n_HT20

802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 40)

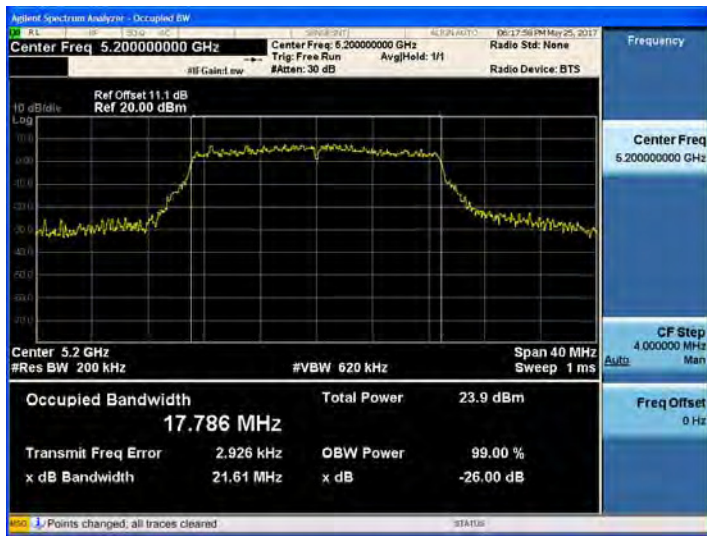

802.11n_HT20 UNII 2A BAND 26dB Bandwidth(CH 64)



802.11n_HT20 UNII 2C BAND 26dB Bandwidth(CH 144)



802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)



Note : In order to simplify the report, attached plots were only the most wide channel.

■ TEST RESULTS for 802.11ac_VHT20

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT20

802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.27	N/A	Pass
5200	40	21.40	N/A	Pass
5240	48	21.49	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT20

802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.46	N/A	Pass
5300	60	21.96	N/A	Pass
5320	64	21.15	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT20

802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	21.46	N/A	Pass
5580	116	21.15	N/A	Pass
5720	144	21.27	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT20

802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	21.63	N/A	Pass
5785	157	21.61	N/A	Pass
5825	165	22.70	N/A	Pass

■ TEST Plot for 802.11ac_VHT20


802.11ac_VHT20 UNII 1 BAND 26dB Bandwidth(CH 48)



802.11ac_VHT20 UNII 2A BAND 26dB Bandwidth(CH 60)



802.11ac_VHT20 UNII 2C BAND 26dB Bandwidth(CH 100)

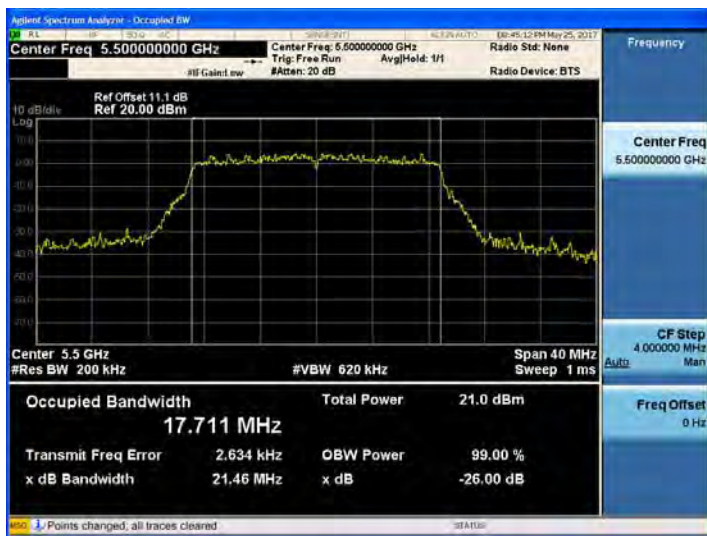

802.11ac_VHT20 UNII 3 BAND 26dB Bandwidth(CH 165)



Note : In order to simplify the report, attached plots were only the most wide channel.

■ TEST RESULTS for 802.11n_HT40

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40

802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.56	N/A	Pass
5230	46	39.45	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40

802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	39.82	N/A	Pass
5310	62	39.65	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	39.81	N/A	Pass
5550	110	39.80	N/A	Pass
5710	142	39.77	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40

802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	39.69	N/A	Pass
5795	159	39.70	N/A	Pass

■ TEST Plot for 802.11n_HT40


802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 38)

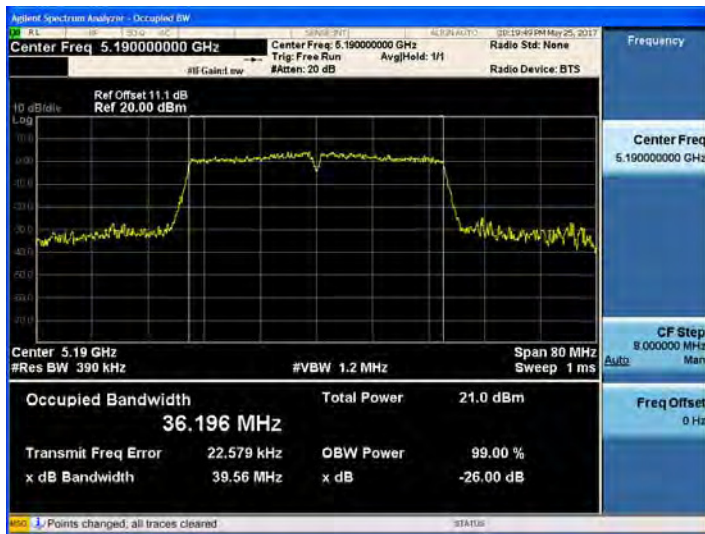

802.11n_HT40 UNII 2A BAND 26dB Bandwidth (CH 54)



802.11n_HT40 UNII 2C BAND 26dB Bandwidth(CH 102)

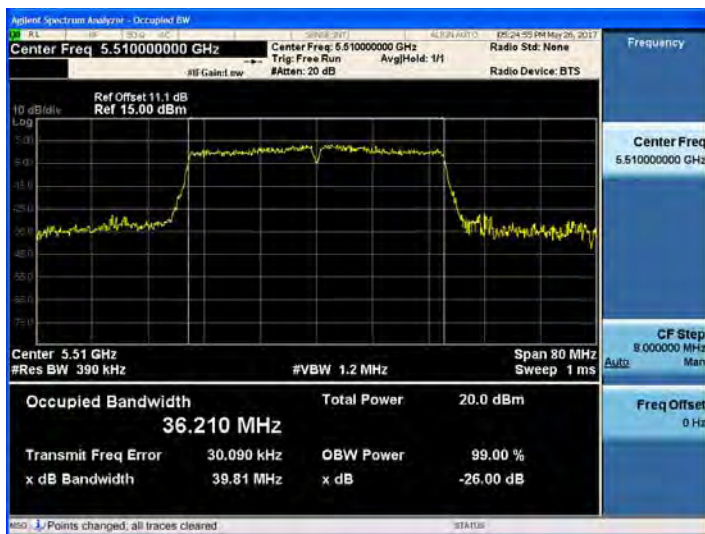

802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)



Note : In order to simplify the report, attached plots were only the most wide channel.

■ TEST RESULTS for 802.11ac_VHT40

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT40

802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.86	N/A	Pass
5230	46	39.54	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT40

802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	39.70	N/A	Pass
5310	62	39.73	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT40

802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	39.75	N/A	Pass
5550	110	39.50	N/A	Pass
5710	142	39.43	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT40


802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	39.44	N/A	Pass
5795	159	39.58	N/A	Pass

■ TEST Plot for 802.11ac_VHT40

802.11ac_VHT40 UNII 1 BAND 26dB Bandwidth(CH 38)




802.11ac_VHT40 UNII 2A BAND 26dB Bandwidth (CH 62)

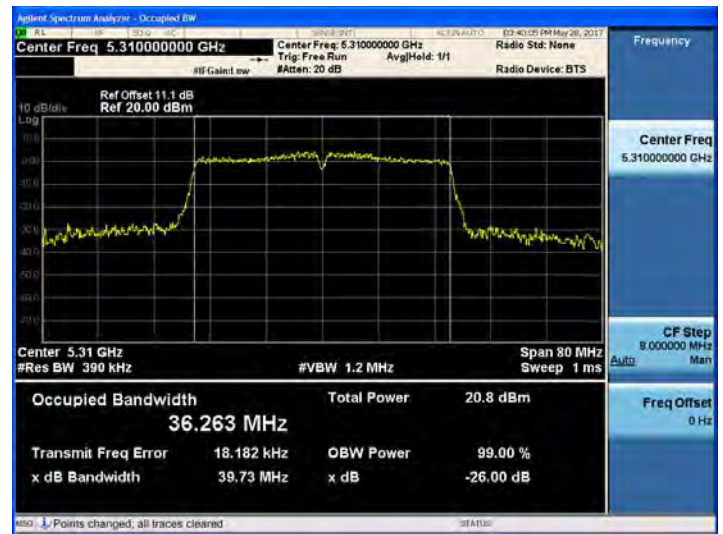

802.11ac_VHT40 UNII 2C BAND 26dB Bandwidth(CH 102)



802.11ac_VHT40 UNII 3 BAND 26dB Bandwidth (CH 159)

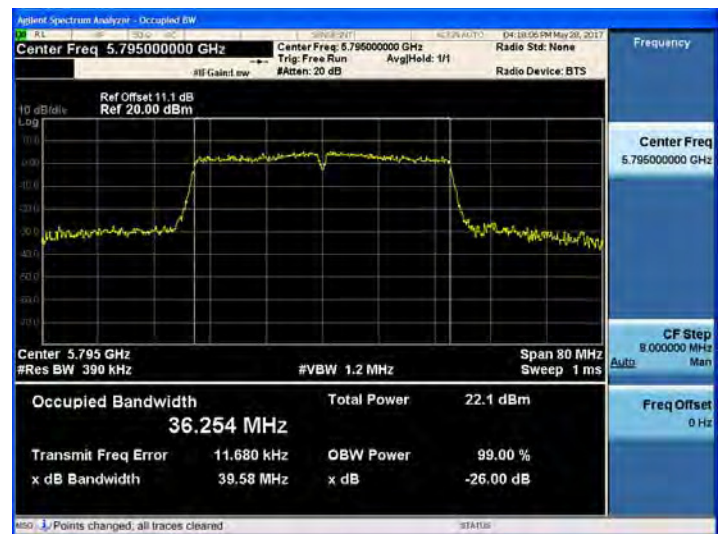

Note : In order to simplify the report, attached plots were only the most wide channel.

■ TEST RESULTS for 802.11ac_VHT80

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT80

802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5210	42	81.20	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT80

802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5290	58	81.15	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT80

802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5530	106	81.13	N/A	Pass
5610	122	81.28	N/A	Pass
5690	138	81.13	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac_VHT80

802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	80.72	N/A	Pass

Note :


1. In order to simplify the report, attached plots were only the most wide channel.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.

■ TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)




802.11ac_VHT80 UNII 2A BAND 26dB Bandwidth(CH 58)

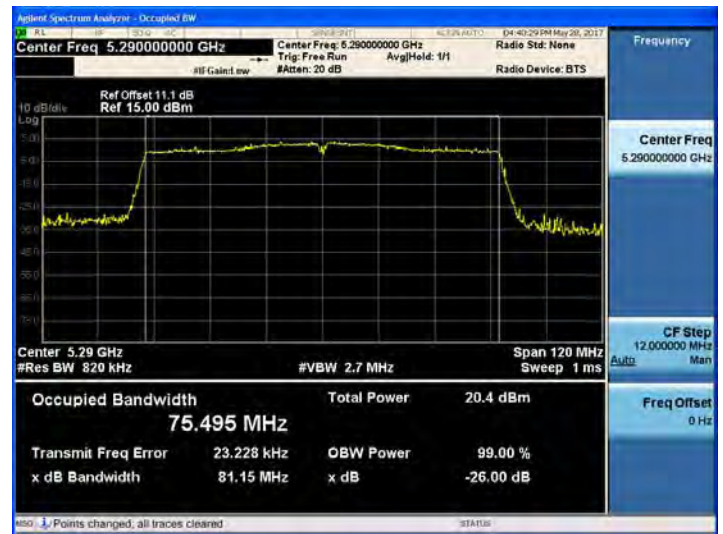

802.11ac_VHT80 UNII 2C BAND 26dB Bandwidth(CH 122)



802.11ac_VHT80 UNII 3 BAND 26dB Bandwidth(CH 155)

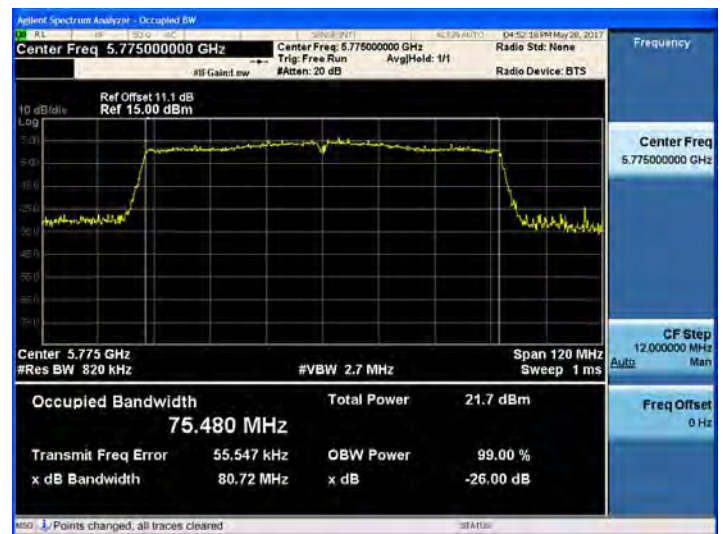

Note : In order to simplify the report, attached plots were only the most wide channel.

■ TEST RESULTS for 802.11a/n_HT20/ac_VHT20

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.35	0.5	Pass
5785	157	16.34	0.5	Pass
5825	165	16.29	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_HT20

802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.27	0.5	Pass
5785	157	16.91	0.5	Pass
5825	165	17.29	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_VHT20

802.11ac_VHT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.03	0.5	Pass
5785	157	17.29	0.5	Pass
5825	165	17.53	0.5	Pass

■ TEST Plot for 802.11a/n_HT20/ac_VHT20


802.11a UNII 3 BAND 6dB Bandwidth (CH.149)



802.11n_HT20 UNII 3 BAND 6dB Bandwidth(CH.165)



802.11ac_VHT20 UNII 3 BAND 6dB Bandwidth(CH.165)

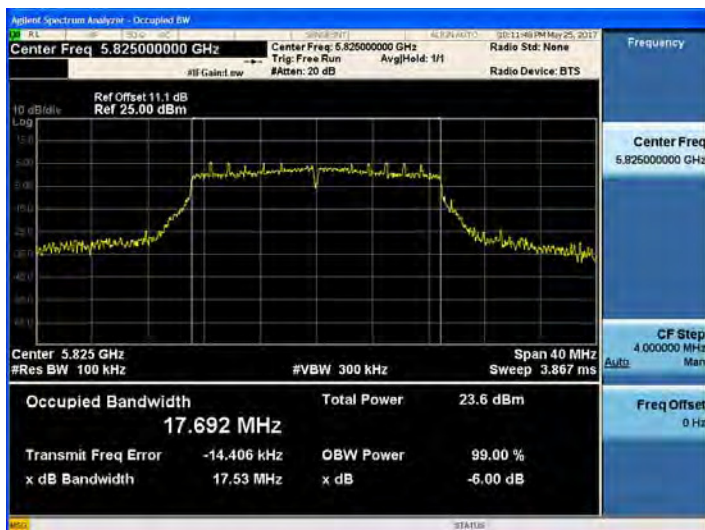

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT40/ac_VHT40


Conducted 6 dB Bandwidth Measurements for 802.11n_HT40

802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.76	0.5	Pass
5795	159	35.75	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_VHT40

802.11ac_VHT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.49	0.5	Pass
5795	159	35.97	0.5	Pass

TEST Plot for 802.11n_HT40/ac_VHT40

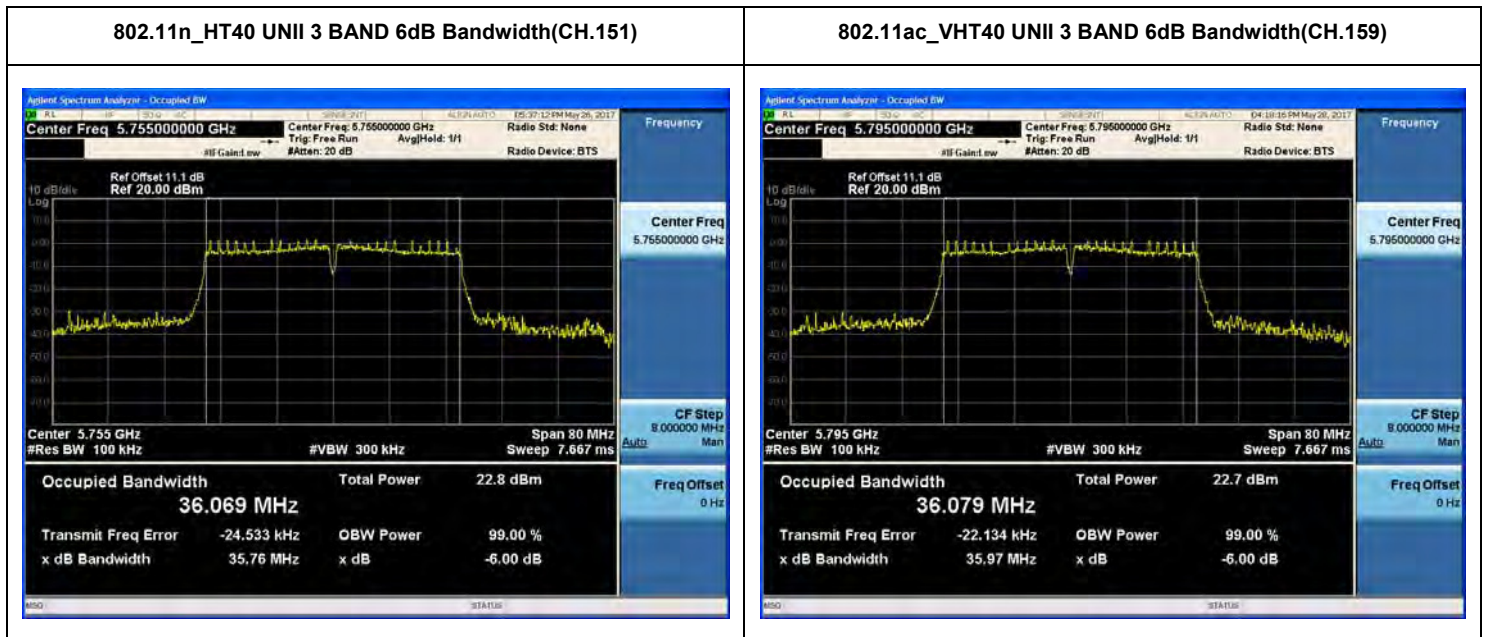


Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11ac_VHT80

Conducted 6 dB Bandwidth Measurements for 802.11ac_VHT80

802.11ac_VHT80 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.59	0.5	Pass

TEST Plot for 802.11ac_VHT80

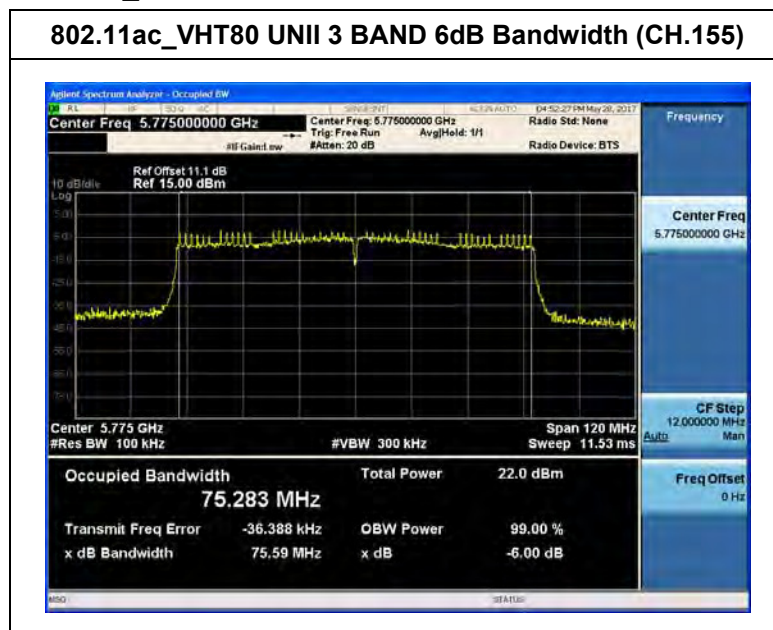

Note : In order to simplify the report, attached plots were only the most wide channel.

Straddle channels TEST RESULTS

Conducted Bandwidth Measurements for 802.11a/n_HT20/ac_VHT20 (UNII 2C Band)

Mode	Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
802.11a	5720	144	15.24	N/A	Pass
802.11n			15.44	N/A	Pass
802.11ac			15.48	N/A	Pass

Conducted Bandwidth Measurements for 802.11a/n_HT20/ac_VHT20 (UNII 3 Band)

Mode	Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
802.11a	5720	144	5.20	N/A	Pass
802.11n			5.52	N/A	Pass
802.11ac			5.40	N/A	Pass

Straddle channels TEST Plot for 802.11a/n_HT20/ac_VHT20

802.11a CH.144 Bandwidth



802.11n_HT20 CH.144 Bandwidth



802.11ac_VHT20 CH.144 Bandwidth



Straddle channels TEST RESULTS

Conducted Bandwidth Measurements for 802.11n_HT40/ac_VHT40 (UNII 2C Band)

Mode	Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
802.11n	5710	142	34.44	N/A	Pass
802.11ac			34.84	N/A	Pass

Conducted Bandwidth Measurements for 802.11n_HT40/ac_VHT40 (UNII 3 Band)

Mode	Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
802.11n	5710	142	4.52	N/A	Pass
802.11ac			4.84	N/A	Pass

Straddle channels TEST Plot for 802.11n_HT40/ac_VHT40

802.11n_HT40 CH.142 Bandwidth



802.11ac_VHT40 CH.142 Bandwidth



Straddle channels TEST RESULTS


Conducted Bandwidth Measurements for 802.11ac_VHT80 (UNII 2C Band)

Mode	Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
802.11ac	5690	138	75.68	N/A	Pass

Conducted Bandwidth Measurements for 802.11ac_VHT80 (UNII 3 Band)

Mode	Frequency [MHz]	Channel No.	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
802.11ac	5690	138	5.68	N/A	Pass

Straddle channels TEST Plot for 802.11ac_VHT80

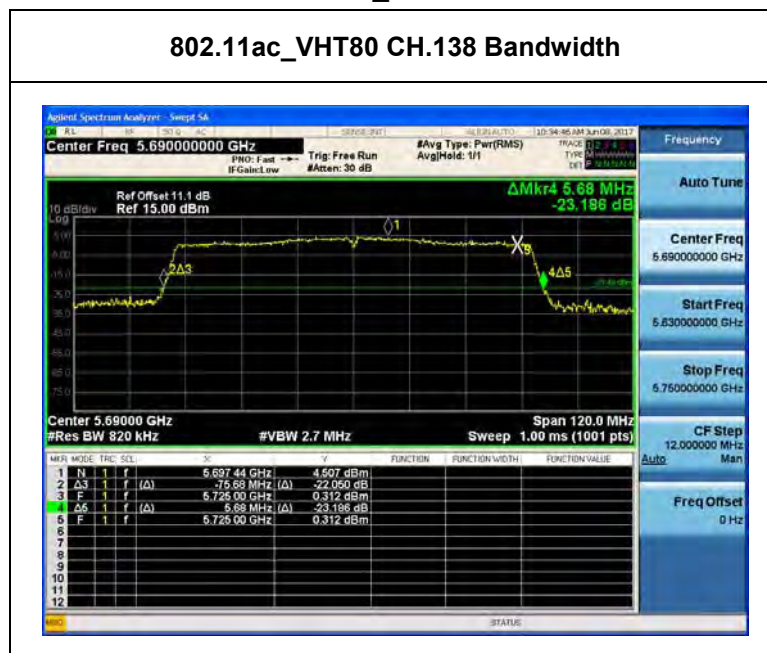

9.3 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.407(a)(1)


A transmitter antenna terminal of EUT is connected to the input of a Power meter or Spectrum Analyzer .Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

■ Limit

Band	Mode	Limit (dBm)
UNII 1, 2A, 2C	802.11a,n,ac	23.98
UNII 3	802.11a,n,ac	30.00

Note : According to KDB644545 D03 v01, the limit on maximum conducted output power in each U-NII band for straddle channel is computed based on the portion of the emission bandwidth contained within that band.

■ TEST CONFIGURATION(20 MHz BW)

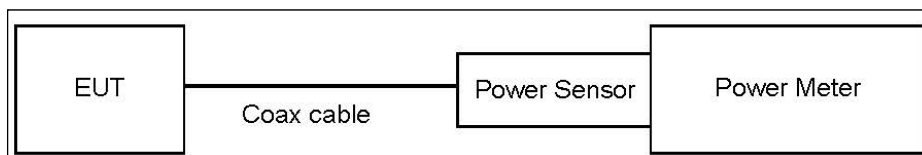

■ TEST PROCEDURE(20 MHz BW)

- Average Power (Procedure E.3.a in KDB 789033 D02 v01r04).
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 2A, 2C, 3	12.1

(Actual value of loss for the attenuator and cable combination)

■ TEST CONFIGURATION(40 MHz BW & 80 MHz BW)

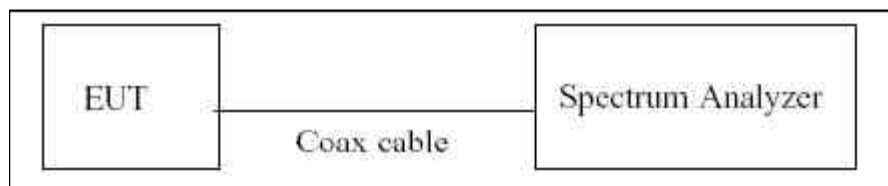

■ TEST PROCEDURE(40 MHz BW & 80 MHz BW)

▪ Average Power

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-2 in KDB 789033 D02 v01r04.

The Spectrum Analyzer is set to

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW ≥ 3 MHz.
5. Number of points in sweep ≥ 2*span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to “free run”.
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation (Conducted)

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Note: 1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 2A, 2C, 3	12.1

(Actual value of loss for the attenuator and cable combination)

802.11a (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	17.36	0.30	17.66	23.98
		9	17.29	0.44	17.73	23.98
		12	17.19	0.57	17.75	23.98
		18	16.99	0.81	17.80	23.98
		24	16.72	1.05	17.76	23.98
		36	16.16	1.45	17.61	23.98
		48	16.17	1.80	17.97	23.98
		54	15.79	1.93	17.72	23.98
5200	40	6	17.20	0.30	17.50	23.98
		9	17.21	0.44	17.65	23.98
		12	16.92	0.57	17.49	23.98
		18	16.71	0.81	17.52	23.98
		24	16.55	1.05	17.59	23.98
		36	16.16	1.45	17.61	23.98
		48	15.94	1.80	17.74	23.98
		54	15.77	1.93	17.71	23.98
5240	48	6	16.89	0.30	17.19	23.98
		9	16.86	0.44	17.30	23.98
		12	16.72	0.57	17.29	23.98
		18	16.66	0.81	17.47	23.98
		24	16.33	1.05	17.37	23.98
		36	16.00	1.45	17.46	23.98
		48	15.79	1.80	17.59	23.98
		54	15.62	1.93	17.55	23.98

802.11a (UNII 2A)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5260~5320)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6	16.98	0.30	17.28	23.98
		9	16.80	0.44	17.23	23.98
		12	16.79	0.57	17.35	23.98
		18	16.58	0.81	17.40	23.98
		24	16.34	1.05	17.38	23.98
		36	15.85	1.45	17.30	23.98
		48	15.52	1.80	17.32	23.98
		54	15.37	1.93	17.30	23.98
5300	60	6	16.89	0.30	17.19	23.98
		9	16.78	0.44	17.21	23.98
		12	16.74	0.57	17.31	23.98
		18	16.38	0.81	17.19	23.98
		24	16.15	1.05	17.20	23.98
		36	15.64	1.45	17.09	23.98
		48	15.39	1.80	17.19	23.98
		54	15.24	1.93	17.17	23.98
5320	64	6	16.72	0.30	17.02	23.98
		9	16.69	0.44	17.12	23.98
		12	16.55	0.57	17.11	23.98
		18	16.30	0.81	17.11	23.98
		24	15.84	1.05	16.89	23.98
		36	15.57	1.45	17.02	23.98
		48	15.35	1.80	17.15	23.98
		54	15.15	1.93	17.08	23.98

802.11a (UNII 2C)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5500~5720)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6	13.26	0.30	13.56	23.98
		9	13.23	0.44	13.67	23.98
		12	13.09	0.57	13.66	23.98
		18	12.93	0.81	13.75	23.98
		24	12.64	1.05	13.69	23.98
		36	12.20	1.45	13.65	23.98
		48	11.96	1.80	13.76	23.98
		54	11.72	1.93	13.66	23.98
5580	116	6	16.98	0.30	17.28	23.98
		9	16.70	0.44	17.14	23.98
		12	16.69	0.57	17.26	23.98
		18	16.45	0.81	17.26	23.98
		24	16.20	1.05	17.24	23.98
		36	15.66	1.45	17.11	23.98
		48	15.50	1.80	17.30	23.98
		54	15.30	1.93	17.23	23.98
5720	144	6	17.18	0.30	17.48	23.98
		9	17.04	0.44	17.48	23.98
		12	16.99	0.57	17.56	23.98
		18	16.73	0.81	17.54	23.98
		24	16.33	1.05	17.38	23.98
		36	15.97	1.45	17.42	23.98
		48	15.83	1.80	17.63	23.98
		54	15.64	1.93	17.58	23.98

802.11a (UNII 3)

■ TEST RESULTS
Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6	17.46	0.30	17.76	30
		9	17.32	0.44	17.76	30
		12	17.21	0.57	17.77	30
		18	16.87	0.81	17.68	30
		24	16.57	1.05	17.61	30
		36	16.28	1.45	17.73	30
		48	15.98	1.80	17.79	30
		54	15.87	1.93	17.81	30
5785	157	6	17.09	0.30	17.39	30
		9	17.02	0.44	17.45	30
		12	16.85	0.57	17.41	30
		18	16.63	0.81	17.44	30
		24	16.25	1.05	17.30	30
		36	15.90	1.45	17.35	30
		48	15.71	1.80	17.52	30
		54	15.52	1.93	17.46	30
5825	165	6	16.68	0.30	16.98	30
		9	16.58	0.44	17.02	30
		12	16.45	0.57	17.01	30
		18	16.10	0.81	16.91	30
		24	15.85	1.05	16.89	30
		36	15.45	1.45	16.90	30
		48	15.27	1.80	17.07	30
		54	15.04	1.93	16.97	30

802.11n_HT20 (UNII 1)

■ TEST RESULTS
Conducted Output Power Measurements (802.11n_HT20 Mode: 5180~5240)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	17.10	0.32	17.42	23.98
		1	16.86	0.60	17.45	23.98
		2	16.53	0.85	17.37	23.98
		3	16.35	1.07	17.41	23.98
		4	15.99	1.45	17.44	23.98
		5	15.74	1.81	17.55	23.98
		6	15.65	1.93	17.58	23.98
		7	15.53	2.07	17.60	23.98
5200	40	0	16.91	0.32	17.22	23.98
		1	16.72	0.60	17.31	23.98
		2	16.50	0.85	17.34	23.98
		3	16.16	1.07	17.22	23.98
		4	15.79	1.45	17.24	23.98
		5	15.55	1.81	17.36	23.98
		6	15.43	1.93	17.36	23.98
		7	15.30	2.07	17.37	23.98
5240	48	0	16.88	0.32	17.20	23.98
		1	16.77	0.60	17.37	23.98
		2	16.41	0.85	17.25	23.98
		3	16.16	1.07	17.23	23.98
		4	15.87	1.45	17.32	23.98
		5	15.63	1.81	17.44	23.98
		6	15.60	1.93	17.53	23.98
		7	15.28	2.07	17.35	23.98

802.11n_HT20 (UNII 2A)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT20 Mode: 5260~5320)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	0	16.81	0.32	17.12	23.98
		1	16.62	0.60	17.22	23.98
		2	16.26	0.85	17.10	23.98
		3	16.07	1.07	17.13	23.98
		4	15.79	1.45	17.24	23.98
		5	15.51	1.81	17.32	23.98
		6	15.32	1.93	17.25	23.98
		7	15.11	2.07	17.19	23.98
5300	60	0	16.72	0.32	17.03	23.98
		1	16.32	0.60	16.92	23.98
		2	16.16	0.85	17.01	23.98
		3	15.93	1.07	17.00	23.98
		4	15.62	1.45	17.07	23.98
		5	15.13	1.81	16.94	23.98
		6	15.10	1.93	17.03	23.98
		7	14.98	2.07	17.06	23.98
5320	64	0	16.58	0.32	16.90	23.98
		1	16.11	0.60	16.71	23.98
		2	15.97	0.85	16.81	23.98
		3	15.79	1.07	16.85	23.98
		4	15.51	1.45	16.96	23.98
		5	15.10	1.81	16.91	23.98
		6	15.15	1.93	17.08	23.98
		7	14.80	2.07	16.87	23.98

802.11n_HT20 (UNII 2C)

■ TEST RESULTS
Conducted Output Power Measurements (802.11n_HT20 Mode: 5500~5720)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	0	13.25	0.32	13.56	23.98
		1	12.85	0.60	13.45	23.98
		2	12.58	0.85	13.43	23.98
		3	12.42	1.07	13.48	23.98
		4	11.94	1.45	13.39	23.98
		5	11.69	1.81	13.50	23.98
		6	11.56	1.93	13.49	23.98
		7	11.48	2.07	13.56	23.98
5580	116	0	16.58	0.32	16.90	23.98
		1	16.43	0.60	17.02	23.98
		2	16.17	0.85	17.02	23.98
		3	15.84	1.07	16.90	23.98
		4	15.49	1.45	16.94	23.98
		5	15.12	1.81	16.92	23.98
		6	15.07	1.93	17.00	23.98
		7	14.95	2.07	17.02	23.98
5720	144	0	16.95	0.32	17.26	23.98
		1	16.70	0.60	17.29	23.98
		2	16.35	0.85	17.19	23.98
		3	16.20	1.07	17.26	23.98
		4	15.90	1.45	17.35	23.98
		5	15.55	1.81	17.36	23.98
		6	15.34	1.93	17.28	23.98
		7	15.18	2.07	17.25	23.98

802.11n_HT20 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT20 Mode: 5745~5825)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	0	17.13	0.32	17.45	30
		1	16.78	0.60	17.38	30
		2	16.57	0.85	17.42	30
		3	16.30	1.07	17.37	30
		4	16.06	1.45	17.51	30
		5	15.75	1.81	17.56	30
		6	15.66	1.93	17.59	30
		7	15.43	2.07	17.50	30
5785	157	0	16.77	0.32	17.09	30
		1	16.40	0.60	16.99	30
		2	16.15	0.85	16.99	30
		3	16.02	1.07	17.09	30
		4	15.65	1.45	17.10	30
		5	15.33	1.81	17.13	30
		6	15.13	1.93	17.07	30
		7	15.03	2.07	17.10	30
5825	165	0	16.51	0.32	16.83	30
		1	16.04	0.60	16.63	30
		2	15.91	0.85	16.76	30
		3	15.71	1.07	16.78	30
		4	15.45	1.45	16.89	30
		5	15.03	1.81	16.83	30
		6	14.86	1.93	16.79	30
		7	14.77	2.07	16.84	30

802.11ac_VHT20 (UNII 1)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT20 Mode: 5180~5240)

802.11ac_VHT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	17.11	0.31	17.42	23.98
		1	16.69	0.59	17.28	23.98
		2	16.52	0.84	17.36	23.98
		3	16.34	1.05	17.39	23.98
		4	16.01	1.43	17.44	23.98
		5	15.74	1.75	17.49	23.98
		6	15.69	1.87	17.57	23.98
		7	15.43	1.98	17.40	23.98
		8	15.20	2.23	17.43	23.98
5200	40	0	16.91	0.31	17.22	23.98
		1	16.71	0.59	17.30	23.98
		2	16.55	0.84	17.40	23.98
		3	16.32	1.05	17.37	23.98
		4	15.82	1.43	17.25	23.98
		5	15.59	1.75	17.33	23.98
		6	15.46	1.87	17.33	23.98
		7	15.35	1.98	17.33	23.98
		8	15.12	2.23	17.34	23.98
5240	48	0	16.81	0.31	17.13	23.98
		1	16.58	0.59	17.17	23.98
		2	16.36	0.84	17.20	23.98
		3	16.18	1.05	17.23	23.98
		4	15.90	1.43	17.32	23.98
		5	15.65	1.75	17.40	23.98
		6	15.34	1.87	17.22	23.98
		7	15.27	1.98	17.25	23.98
		8	15.05	2.23	17.28	23.98

802.11ac_VHT20 (UNII 2A)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT20 Mode: 5260~5320)

802.11ac_VHT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	0	16.70	0.31	17.01	23.98
		1	16.49	0.59	17.08	23.98
		2	16.16	0.84	17.00	23.98
		3	15.95	1.05	17.00	23.98
		4	15.63	1.43	17.05	23.98
		5	15.28	1.75	17.03	23.98
		6	15.21	1.87	17.08	23.98
		7	15.28	1.98	17.25	23.98
		8	14.91	2.23	17.14	23.98
5300	60	0	16.62	0.31	16.93	23.98
		1	16.27	0.59	16.86	23.98
		2	16.06	0.84	16.90	23.98
		3	15.69	1.05	16.75	23.98
		4	15.39	1.43	16.81	23.98
		5	15.13	1.75	16.88	23.98
		6	15.04	1.87	16.92	23.98
		7	14.93	1.98	16.91	23.98
		8	14.70	2.23	16.93	23.98
5320	64	0	16.20	0.31	16.51	23.98
		1	16.02	0.59	16.61	23.98
		2	15.79	0.84	16.63	23.98
		3	15.63	1.05	16.68	23.98
		4	15.34	1.43	16.76	23.98
		5	14.88	1.75	16.63	23.98
		6	14.96	1.87	16.83	23.98
		7	14.67	1.98	16.64	23.98
		8	14.47	2.23	16.70	23.98

802.11ac_VHT20 (UNII 2C)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT20 Mode: 5500~5720)

802.11ac_VHT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	0	13.92	0.31	14.23	23.98
		1	13.67	0.59	14.26	23.98
		2	13.45	0.84	14.29	23.98
		3	13.27	1.05	14.33	23.98
		4	13.03	1.43	14.46	23.98
		5	12.61	1.75	14.36	23.98
		6	12.56	1.87	14.43	23.98
		7	12.49	1.98	14.46	23.98
		8	12.22	2.23	14.45	23.98
5580	116	0	16.58	0.31	16.89	23.98
		1	16.33	0.59	16.92	23.98
		2	16.15	0.84	17.00	23.98
		3	15.86	1.05	16.91	23.98
		4	15.46	1.43	16.89	23.98
		5	15.25	1.75	16.99	23.98
		6	15.11	1.87	16.98	23.98
		7	15.06	1.98	17.03	23.98
		8	14.80	2.23	17.03	23.98
5720	144	0	16.77	0.31	17.08	23.98
		1	16.57	0.59	17.16	23.98
		2	16.42	0.84	17.26	23.98
		3	16.21	1.05	17.26	23.98
		4	15.91	1.43	17.34	23.98
		5	15.58	1.75	17.33	23.98
		6	15.48	1.87	17.35	23.98
		7	15.23	1.98	17.21	23.98
		8	15.03	2.23	17.26	23.98

802.11ac_VHT20 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT20 Mode: 5745~5825)

802.11ac_VHT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	0	17.19	0.31	17.51	30
		1	16.75	0.59	17.34	30
		2	16.59	0.84	17.44	30
		3	16.38	1.05	17.44	30
		4	15.90	1.43	17.32	30
		5	15.60	1.75	17.35	30
		6	15.53	1.87	17.40	30
		7	15.45	1.98	17.43	30
		8	15.24	2.23	17.47	30
5785	157	0	16.78	0.31	17.09	30
		1	16.47	0.59	17.05	30
		2	16.17	0.84	17.02	30
		3	16.03	1.05	17.08	30
		4	15.73	1.43	17.16	30
		5	15.19	1.75	16.94	30
		6	15.15	1.87	17.02	30
		7	15.07	1.98	17.05	30
		8	14.82	2.23	17.05	30
5825	165	0	16.40	0.31	16.71	30
		1	16.05	0.59	16.64	30
		2	15.90	0.84	16.74	30
		3	15.72	1.05	16.77	30
		4	15.21	1.43	16.64	30
		5	14.93	1.75	16.68	30
		6	14.92	1.87	16.79	30
		7	14.75	1.98	16.73	30
		8	14.54	2.23	16.76	30

802.11n_HT40 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5190~5230)

802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	13.78	0.61	14.40	23.98
		1	13.15	1.09	14.24	23.98
		2	12.90	1.49	14.39	23.98
		3	12.57	1.80	14.37	23.98
		4	12.10	2.31	14.41	23.98
		5	11.70	2.72	14.42	23.98
		6	11.62	2.87	14.49	23.98
		7	11.39	3.03	14.41	23.98
5230	46	0	13.75	0.61	14.36	23.98
		1	13.12	1.09	14.21	23.98
		2	12.80	1.49	14.29	23.98
		3	12.46	1.80	14.27	23.98
		4	12.04	2.31	14.35	23.98
		5	11.69	2.72	14.41	23.98
		6	11.56	2.87	14.43	23.98
		7	11.23	3.03	14.25	23.98

802.11n_HT40 (UNII 2A)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5270~5310)

802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	0	13.36	0.61	13.97	23.98
		1	12.84	1.09	13.94	23.98
		2	12.75	1.49	14.24	23.98
		3	12.05	1.80	13.85	23.98
		4	11.58	2.31	13.89	23.98
		5	11.25	2.72	13.97	23.98
		6	11.01	2.87	13.87	23.98
		7	10.95	3.03	13.98	23.98
5310	62	0	13.30	0.61	13.91	23.98
		1	12.94	1.09	14.04	23.98
		2	12.46	1.49	13.95	23.98
		3	12.21	1.80	14.01	23.98
		4	11.63	2.31	13.93	23.98
		5	11.20	2.72	13.92	23.98
		6	11.10	2.87	13.97	23.98
		7	11.00	3.03	14.03	23.98

802.11n_HT40 (UNII 2C)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5510~5710)

802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	0	12.76	0.61	13.37	23.98
		1	12.51	1.09	13.61	23.98
		2	12.24	1.49	13.73	23.98
		3	11.71	1.80	13.52	23.98
		4	11.27	2.31	13.58	23.98
		5	10.85	2.72	13.58	23.98
		6	10.77	2.87	13.63	23.98
		7	10.61	3.03	13.64	23.98
5550	110	0	14.36	0.61	14.98	23.98
		1	13.80	1.09	14.90	23.98
		2	13.50	1.49	14.99	23.98
		3	13.20	1.80	15.00	23.98
		4	12.77	2.31	15.08	23.98
		5	12.19	2.72	14.91	23.98
		6	12.29	2.87	15.16	23.98
		7	11.96	3.03	14.99	23.98
5710	142	0	14.79	0.61	15.41	23.98
		1	14.34	1.09	15.44	23.98
		2	13.89	1.49	15.38	23.98
		3	13.58	1.80	15.39	23.98
		4	13.14	2.31	15.45	23.98
		5	12.62	2.72	15.34	23.98
		6	12.60	2.87	15.47	23.98
		7	12.35	3.03	15.38	23.98

802.11n_HT40 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5755~5795)

802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	0	14.84	0.61	15.45	30
		1	14.34	1.09	15.44	30
		2	13.92	1.49	15.41	30
		3	13.68	1.80	15.48	30
		4	13.18	2.31	15.49	30
		5	12.70	2.72	15.42	30
		6	12.59	2.87	15.46	30
		7	12.45	3.03	15.48	30
5795	159	0	14.70	0.61	15.32	30
		1	14.21	1.09	15.30	30
		2	13.81	1.49	15.30	30
		3	13.37	1.80	15.17	30
		4	13.10	2.31	15.41	30
		5	12.57	2.72	15.29	30
		6	12.56	2.87	15.43	30
		7	12.44	3.03	15.47	30

TEST Plot _802.11n_HT40

**802.11n_HT40 UNII 1 BAND Average Power
(5190 MHz ~5230 MHz) CH 38 MCS6**



**802.11n_HT40 UNII 2A BAND Average Power
(5270 MHz ~5310 MHz) CH 54 MCS2**



**802.11n_HT40 UNII 2C BAND Average Power
(5510 MHz ~5710 MHz) CH 142 MCS6**



**802.11n_HT40 UNII 3 BAND Average Power
(5755 MHz ~5795 MHz) CH 151 MCS4**



802.11ac_VHT40 (UNII 1)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT40 Mode: 5190~5230)

802.11ac_VHT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	12.95	0.61	13.56	23.98
		1	12.53	1.09	13.62	23.98
		2	12.25	1.46	13.71	23.98
		3	11.91	1.78	13.69	23.98
		4	11.48	2.27	13.75	23.98
		5	10.91	2.65	13.57	23.98
		6	10.79	2.79	13.59	23.98
		7	10.88	2.87	13.75	23.98
		8	10.64	3.04	13.68	23.98
		9	10.46	3.22	13.68	23.98
5230	46	0	13.09	0.61	13.70	23.98
		1	12.68	1.09	13.77	23.98
		2	12.33	1.46	13.79	23.98
		3	12.06	1.78	13.85	23.98
		4	11.63	2.27	13.90	23.98
		5	10.99	2.65	13.65	23.98
		6	10.89	2.79	13.68	23.98
		7	10.79	2.87	13.66	23.98
		8	10.66	3.04	13.70	23.98
		9	10.59	3.22	13.82	23.98

802.11ac_VHT40 (UNII 2A)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT40 Mode: 5270~5310)

802.11ac_VHT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	0	13.16	0.61	13.77	23.98
		1	12.74	1.09	13.84	23.98
		2	12.24	1.46	13.70	23.98
		3	11.96	1.78	13.74	23.98
		4	11.50	2.27	13.77	23.98
		5	11.10	2.65	13.76	23.98
		6	10.99	2.79	13.79	23.98
		7	10.93	2.87	13.80	23.98
		8	10.78	3.04	13.82	23.98
		9	10.65	3.22	13.87	23.98
5310	62	0	13.49	0.61	14.10	23.98
		1	12.95	1.09	14.04	23.98
		2	12.58	1.46	14.04	23.98
		3	12.24	1.78	14.03	23.98
		4	11.82	2.27	14.09	23.98
		5	11.36	2.65	14.02	23.98
		6	11.22	2.79	14.01	23.98
		7	11.18	2.87	14.05	23.98
		8	11.12	3.04	14.15	23.98
		9	10.95	3.22	14.17	23.98

802.11ac_VHT40 (UNII 2C)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT40 Mode: 5510~5710)

802.11ac_VHT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	0	13.19	0.61	13.80	23.98
		1	12.52	1.09	13.61	23.98
		2	12.21	1.46	13.68	23.98
		3	11.97	1.78	13.75	23.98
		4	11.32	2.27	13.59	23.98
		5	11.00	2.65	13.66	23.98
		6	10.83	2.79	13.62	23.98
		7	10.74	2.87	13.61	23.98
		8	10.61	3.04	13.65	23.98
		9	10.50	3.22	13.73	23.98
5550	110	0	14.45	0.61	15.05	23.98
		1	14.04	1.09	15.13	23.98
		2	13.72	1.46	15.18	23.98
		3	13.26	1.78	15.04	23.98
		4	12.86	2.27	15.13	23.98
		5	12.48	2.65	15.13	23.98
		6	12.35	2.79	15.14	23.98
		7	12.29	2.87	15.16	23.98
		8	12.12	3.04	15.15	23.98
		9	11.97	3.22	15.19	23.98
5710	142	0	14.85	0.61	15.46	23.98
		1	14.35	1.09	15.44	23.98
		2	13.93	1.46	15.39	23.98
		3	13.68	1.78	15.46	23.98
		4	13.20	2.27	15.47	23.98
		5	12.84	2.65	15.49	23.98
		6	12.60	2.79	15.39	23.98
		7	12.53	2.87	15.40	23.98
		8	12.40	3.04	15.44	23.98
		9	12.23	3.22	15.45	23.98

802.11ac_VHT40 (UNII 3)

■ TEST RESULTS
Conducted Output Power Measurements (802.11ac_VHT40 Mode: 5755~5795)

802.11ac_VHT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	0	14.71	0.61	15.32	30
		1	14.21	1.09	15.30	30
		2	14.00	1.46	15.46	30
		3	13.67	1.78	15.45	30
		4	13.21	2.27	15.48	30
		5	12.69	2.65	15.34	30
		6	12.56	2.79	15.35	30
		7	12.50	2.87	15.37	30
		8	12.42	3.04	15.46	30
		9	12.21	3.22	15.43	30
5795	159	0	14.15	1.09	15.24	30
		1	13.83	1.46	15.29	30
		2	13.59	1.78	15.37	30
		3	13.06	2.27	15.32	30
		4	12.82	2.65	15.47	30
		5	12.51	2.79	15.30	30
		6	12.59	2.87	15.46	30
		7	12.20	3.04	15.24	30
		8	12.07	3.22	15.29	30
		9	14.15	1.09	15.24	30

TEST Plot _802.11ac_VHT40

802.11ac_VHT40 UNII 1 BAND Average Power (5190 MHz ~5230 MHz) CH 46 MCS4



802.11ac_VHT40 UNII 2A BAND Average Power (5270 MHz ~5310 MHz) CH 62 MCS9



802.11ac_VHT40 UNII 2C BAND Average Power (5510 MHz ~5710 MHz) CH 142 MCS5



802.11ac_VHT40 UNII 3 BAND Average Power (5755 MHz ~5795 MHz) CH 151 MCS4



802.11ac_VHT80 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: 5210)

802.11ac_VHT80 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	0	13.47	0.68	14.15	23.98
		1	12.77	1.20	13.96	23.98
		2	12.38	1.60	13.98	23.98
		3	12.10	1.94	14.03	23.98
		4	11.63	2.42	14.04	23.98
		5	11.08	2.79	13.87	23.98
		6	10.97	2.95	13.92	23.98
		7	11.03	3.12	14.16	23.98
		8	10.57	3.32	13.89	23.98
		9	10.58	3.44	14.02	23.98

802.11ac_VHT80 (UNII 2A)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: 5290)

802.11ac_VHT80 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5290	58	0	12.40	0.68	13.08	23.98
		1	12.29	1.20	13.48	23.98
		2	11.90	1.60	13.50	23.98
		3	11.61	1.94	13.55	23.98
		4	11.12	2.42	13.53	23.98
		5	10.78	2.79	13.58	23.98
		6	10.48	2.95	13.43	23.98
		7	10.35	3.12	13.48	23.98
		8	10.15	3.32	13.47	23.98
		9	10.02	3.44	13.46	23.98

802.11ac_VHT80 (UNII 2C)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: 5530 – 5690 MHz)

802.11ac_VHT80 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5530	106	0	10.94	0.68	11.62	23.98
		1	10.30	1.20	11.49	23.98
		2	9.97	1.60	11.56	23.98
		3	9.66	1.94	11.60	23.98
		4	9.19	2.42	11.61	23.98
		5	8.87	2.79	11.67	23.98
		6	8.68	2.95	11.63	23.98
		7	8.51	3.12	11.64	23.98
		8	8.22	3.32	11.54	23.98
		9	8.14	3.44	11.58	23.98
5610	122	0	13.40	0.68	14.07	23.98
		1	12.77	1.20	13.97	23.98
		2	12.44	1.60	14.03	23.98
		3	12.15	1.94	14.08	23.98
		4	11.67	2.42	14.08	23.98
		5	11.23	2.79	14.03	23.98
		6	11.01	2.95	13.96	23.98
		7	10.92	3.12	14.04	23.98
		8	10.74	3.32	14.06	23.98
		9	10.49	3.44	13.93	23.98
5690	138	0	13.35	0.68	14.03	23.98
		1	12.86	1.20	14.05	23.98
		2	12.49	1.60	14.09	23.98
		3	12.18	1.94	14.11	23.98
		4	11.67	2.42	14.08	23.98
		5	11.43	2.79	14.23	23.98
		6	11.20	2.95	14.15	23.98
		7	11.10	3.12	14.22	23.98
		8	10.67	3.32	13.99	23.98
		9	10.57	3.44	14.01	23.98

802.11ac_VHT80 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: 5775 MHz)

802.11ac_VHT80 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5775	155	0	13.79	0.68	14.47	30
		1	13.06	1.20	14.26	30
		2	12.88	1.60	14.48	30
		3	12.32	1.94	14.26	30
		4	11.91	2.42	14.32	30
		5	11.65	2.79	14.45	30
		6	11.42	2.95	14.36	30
		7	11.37	3.12	14.49	30
		8	11.08	3.32	14.40	30
		9	11.01	3.44	14.45	30

TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 1 BAND Average Power (5210 MHz) CH 42 MCS7



802.11ac_VHT80 UNII 2A BAND Average Power (5290 MHz) CH 58 MCS5



802.11ac_VHT80 UNII 2C BAND Average Power (5530 – 5690 MHz) CH 138 MCS5



802.11ac_VHT80 UNII 3 BAND Average Power (5775 MHz) CH 155 MCS7



■Straddle channels TEST RESULTS

Conducted Output Power Measurements (802.11a/n_HT20/ac_VHT20 Mode: UNII 2C Band 5720MHz)

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11a	5720	144	15.09	1.802	16.89	22.71
802.11n			14.59	1.807	16.40	22.65
802.11ac			14.71	1.873	16.58	22.68

Conducted Output Power Measurements (802.11a/n_HT20/ac_VHT20 Mode: UNII 3 Band 5720MHz)


Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11a	5720	144	7.72	1.802	9.52	24.06
802.11n			7.78	1.807	9.59	24.21
802.11ac			7.93	1.873	9.80	24.13

■ Straddle channels TEST Plot for 802.11a/n_HT20


802.11a UNII 2C Band Average Power CH.144



802.11a UNII 3 Band Average Power CH.144

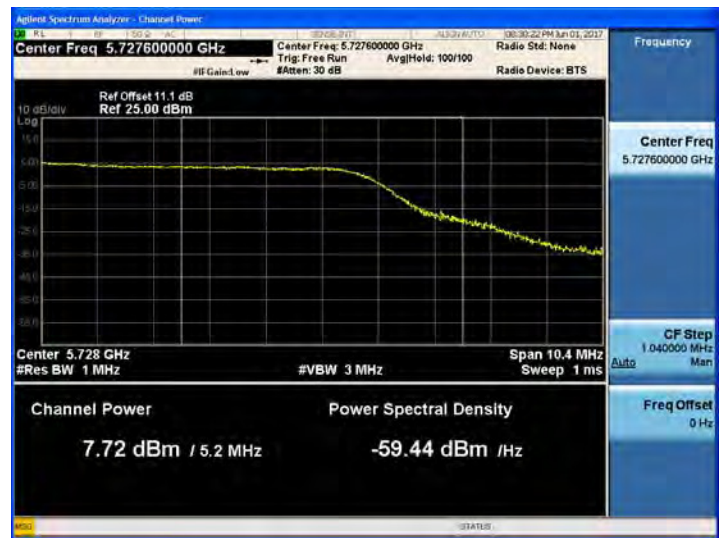

802.11n_HT20 UNII 2C Band Average Power CH.144

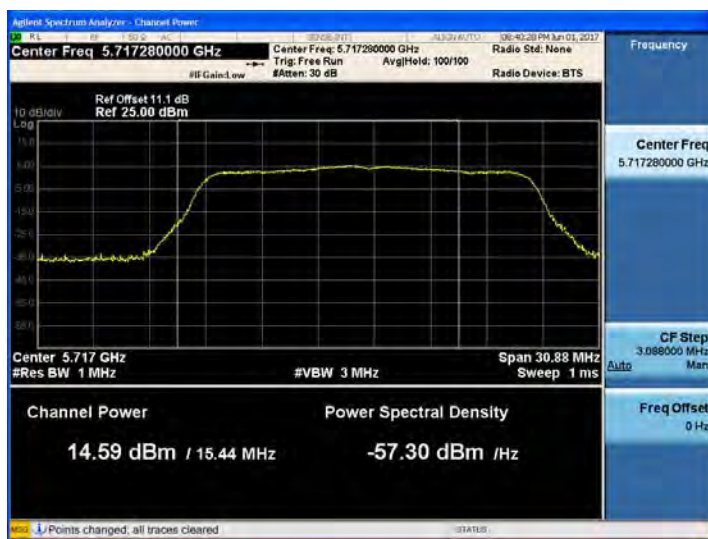


802.11n_HT20 UNII 3 Band Average Power CH.144



■ Straddle channels TEST Plot for 802.11ac_VHT20

802.11ac_VHT20 UNII 2C Band Average Power CH.144

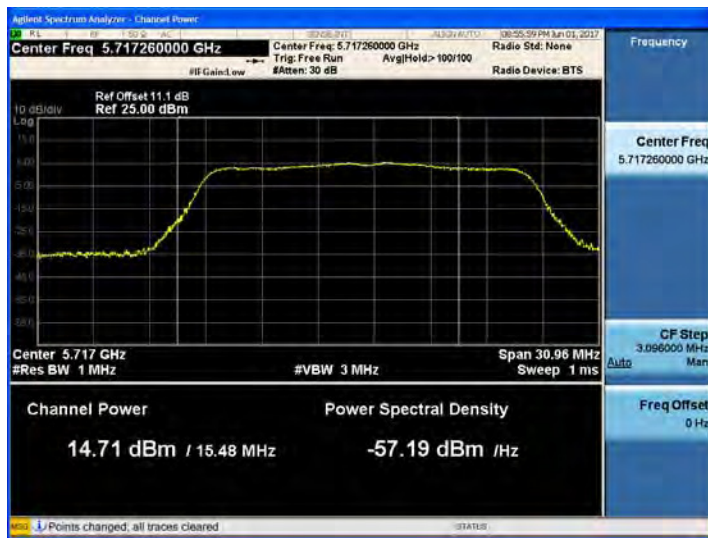

802.11ac_VHT20 UNII 3 Band Average Power CH.144



Straddle channels TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40/ac_VHT40 Mode: UNII 2C Band 5710MHz)

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11n	5710	142	12.23	2.867	15.10	23.44
802.11ac			12.55	2.654	15.20	23.42

Conducted Output Power Measurements (802.11n_HT40/ac_VHT40 Mode: UNII 3 Band 5710MHz)


Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11n	5710	142	1.34	2.867	4.21	20.65
802.11ac			1.62	2.654	4.27	20.86

■ Straddle channels TEST Plot for 802.11n_HT40/ac_VHT40

802.11n_HT40 UNII 2C Band Average Power CH.142



802.11n_HT40 UNII 3 Band Average Power CH.142

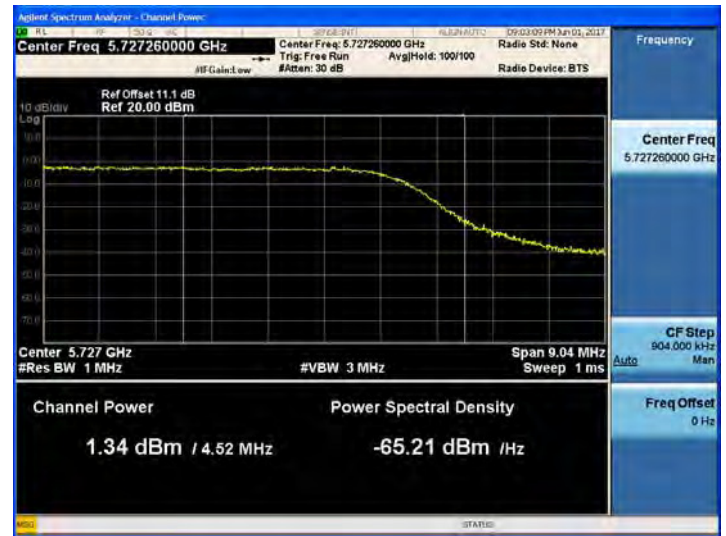

802.11ac_VHT40 UNII 2C Band Average Power CH.142



802.11ac_VHT40 UNII 3 Band Average Power CH.142



Straddle channels TEST RESULTS

Conducted Output Power Measurements (802.11ac_VHT80 Mode: UNII 2C Band 5690MHz)

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11ac	5690	138	11.09	2.794	13.88	23.67

Conducted Output Power Measurements (802.11ac_VHT80 Mode: UNII 3 Band 5690MHz)

Mode	Frequency [MHz]	Channel No.	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11ac	5690	138	-3.42	2.794	-0.63	18.40

Straddle channels TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 2C Band Average Power CH.138



802.11ac_VHT80 UNII 3 Band Average Power CH.138



9.4 POWER SPECTRAL DENSITY


The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 11 dBm/ MHz for UNII 1,2A, 2C and 30 dBm/500 kHz for UNII 3.

■ Limit

Power Spectral Density

Band	Mode	Limit
UNII 1	802.11a,n,ac	11 dBm/MHz
UNII 2A	802.11a,n,ac	11 dBm/MHz
UNII 2C	802.11a,n,ac	11 dBm/MHz
UNII 3	802.11a,n,ac	30 dBm/500 kHz

Note : Note : According to KDB644545 D03 v01, emission for straddle channels in each band shall comply with the PSD limits applicable to that band under the appropriate rule section.

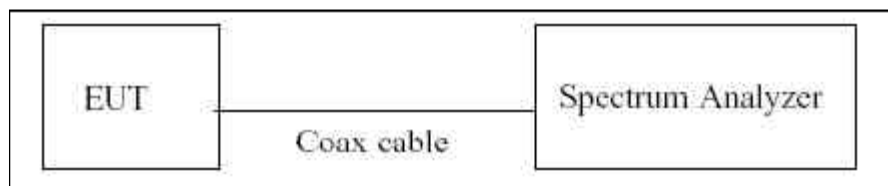■ TEST CONFIGURATION**■ TEST PROCEDURE**

We tested according to Method in KDB 789033 D02 v01r04.

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 2A , 2C, 3	12.1

(Actual value of loss for the attenuator and cable combination)

■ 802.11a

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	6.355	1.802	8.157	11	Pass
5200	40		6.158	1.802	7.960		Pass
5240	48		5.490	1.802	7.292		Pass
5260	52		6.593	0.812	7.405	11	Pass
5300	60		6.268	0.567	6.835		Pass
5320	64		5.665	1.802	7.467		Pass
5500	100		2.385	1.802	4.187	11	Pass
5580	116		5.890	1.802	7.692		Pass
5720	144		5.894	1.802	7.696		Pass
5745	149		3.700	1.934	5.634	30	Pass
5785	157		3.283	1.802	5.085		Pass
5825	165		2.862	1.802	4.664		Pass

Note : Please refer to the straddle channels test results for the measurements of ch.144

■ TEST Plot for 802.11a


802.11a UNII 1 BAND PSD CH 36



802.11a UNII 2A BAND PSD CH 64



802.11a UNII 2C BAND PSD CH 144

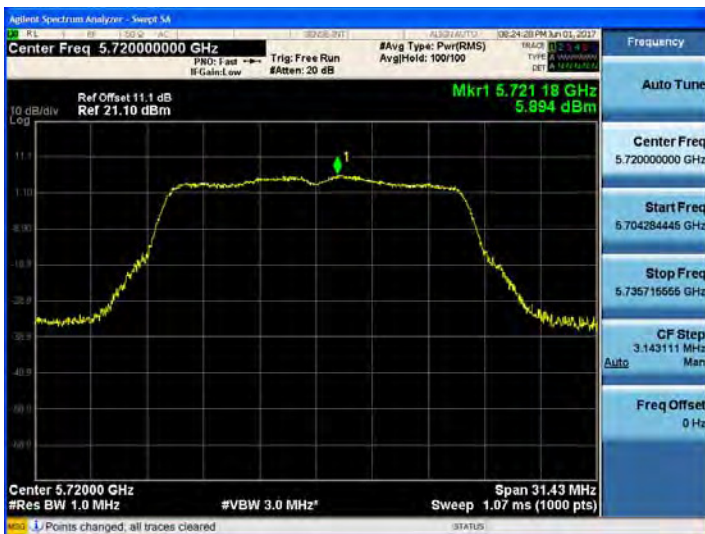

802.11a UNII 3 BAND PSD CH 149



802.11n_HT20

TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11n _HT20	6.434	2.072	8.506	11	Pass
5200	40		6.235	2.072	8.307		Pass
5240	48		6.333	1.933	8.266		Pass
5260	52		5.700	1.807	7.507	11	Pass
5300	60		5.299	1.448	6.747		Pass
5320	64		5.256	1.933	7.189		Pass
5500	100		2.848	0.317	3.165	11	Pass
5580	116		6.203	0.597	6.800		Pass
5720	144		5.633	1.807	7.440		Pass
5745	149		3.183	1.933	5.116	30	Pass
5785	157		2.942	1.807	4.749		Pass
5825	165		2.487	1.448	3.935		Pass

■ TEST Plot for 802.11n_HT20


802.11n_HT20 UNII 1 BAND PSD CH 36



802.11n_HT20 UNII 2A BAND PSD CH 52



802.11n_HT20 UNII 2C BAND PSD CH 144

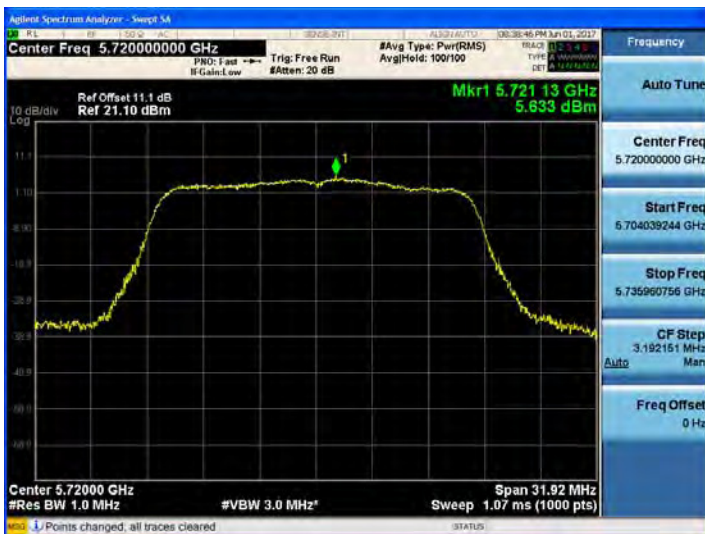

802.11n_HT20 UNII 3 BAND PSD CH 149



802.11ac_VHT20

TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11ac _VHT20	5.413	1.873	7.286	11	Pass
5200	40		6.500	0.843	7.343		Pass
5240	48		5.839	1.749	7.588		Pass
5260	52		5.247	1.975	7.222	11	Pass
5300	60		6.236	0.313	6.549		Pass
5320	64		4.573	1.873	6.446		Pass
5500	100		2.856	1.975	4.831	11	Pass
5580	116		5.340	1.975	7.315		Pass
5720	144		5.272	1.873	7.145		Pass
5745	149		3.927	0.313	4.240	30	Pass
5785	157		2.561	1.425	3.986		Pass
5825	165		2.149	1.873	4.022		Pass

■ TEST Plot for 802.11ac_VHT20


802.11ac_VHT20 UNII 1 BAND PSD CH 48



802.11ac_VHT20 UNII 2A BAND PSD CH 52



802.11ac_VHT20 UNII 2C BAND PSD CH 116

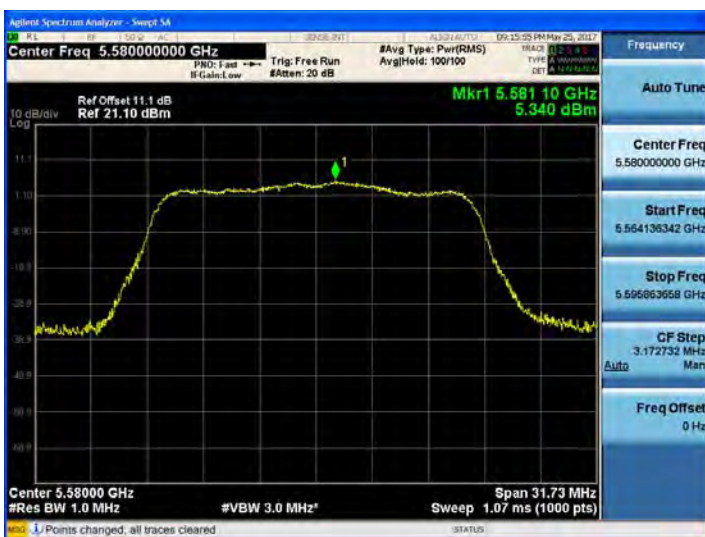

802.11ac_VHT20 UNII 3 BAND PSD CH 149



802.11n_HT40

TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11n _HT40	-0.649	2.867	2.218	11	Pass
5230	46		-1.096	2.867	1.771		Pass
5270	54		-0.742	1.491	0.749	11	Pass
5310	62		-0.685	1.094	0.409		Pass
5510	102		-1.119	1.491	0.372	11	Pass
5550	110		-0.432	2.867	2.435		Pass
5710	142		-0.231	2.867	2.636		Pass
5755	151		-2.431	2.308	-0.123	30	Pass
5795	159		-2.956	3.029	0.073		Pass

■ TEST Plot for 802.11n_HT40

802.11n_HT40 UNII 1 BAND PSD CH 38



802.11n_HT40 UNII 2A BAND PSD CH 54



802.11n_HT40 UNII 2C BAND PSD CH 142



802.11n_HT40 UNII 3 BAND PSD CH 159



802.11ac_VHT40

TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11ac _VHT40	-1.737	2.267	0.530	11	Pass
5230	46		-1.402	2.267	0.865		Pass
5270	54		-2.104	3.223	1.119	11	Pass
5310	62		-1.864	3.223	1.359		Pass
5510	102		-0.136	0.610	0.474	11	Pass
5550	110		-1.041	3.223	2.182		Pass
5710	142		-0.342	2.654	2.312		Pass
5755	151		-2.470	2.267	-0.203	30	Pass
5795	159		-3.433	2.654	-0.779		Pass

■ TEST Plot for 802.11ac_VHT40

802.11ac_VHT40 UNII 1 BAND PSD CH 46




802.11ac_VHT40 UNII 2A BAND PSD CH 62



802.11ac_VHT40 UNII 2C BAND PSD CH 142



802.11ac_VHT40 UNII 3 BAND PSD CH 151

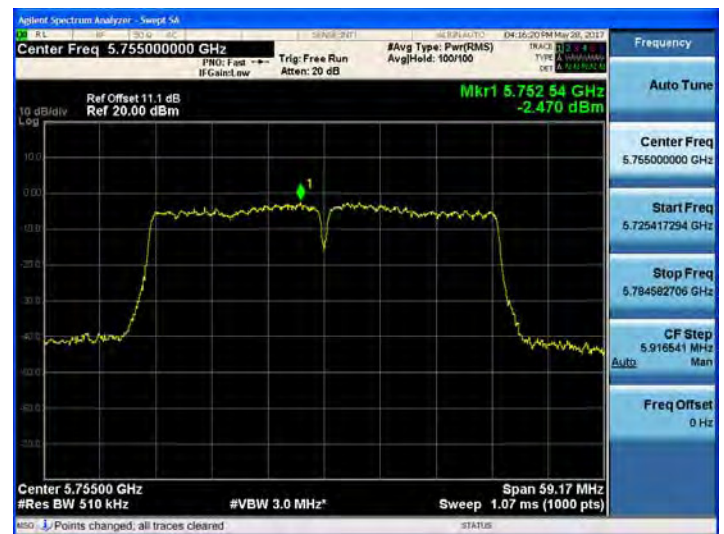

■ 802.11ac_VHT80

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5210	42	802.11ac _VHT80	-4.510	3.124	-1.386	11	Pass
5290	58		-4.917	2.794	-2.123		Pass
5530	106		-6.862	2.794	-4.068		Pass
5610	122		-3.840	1.937	-1.903		Pass
5690	138		-4.566	2.794	-1.772		Pass
5775	155		-6.610	3.124	-3.486	30	Pass

■ TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 1 BAND PSD CH 42



802.11ac_VHT80 UNII 2A BAND PSD CH 58



802.11ac_VHT80 UNII 2C BAND PSD CH 138



802.11ac_VHT80 UNII 3 BAND PSD CH 155



■ Straddle channels TEST RESULTS for 802.11a/n_HT20/ac_VHT20
Conducted Power Density Measurements (UNII 2C Band 5720MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5720	144	802.11a	6.140	1.802	7.942	11	Pass
		802.11n	5.302	1.807	7.109	11	Pass
		802.11ac	5.537	1.873	7.410	11	Pass

Conducted Power Density Measurements (UNII 3 Band 5720MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5720	144	802.11a	0.902	1.802	2.704	30	Pass
		802.11n	0.330	1.807	2.137	30	Pass
		802.11ac	0.504	1.873	2.377	30	Pass

Straddle channels TEST Plot for 802.11a/n_HT20/ac_VHT20


802.11a UNII 2C Band PSD CH.144



802.11a UNII 3 Band PSD CH.144



802.11n_HT20 UNII 2C Band PSD CH.144

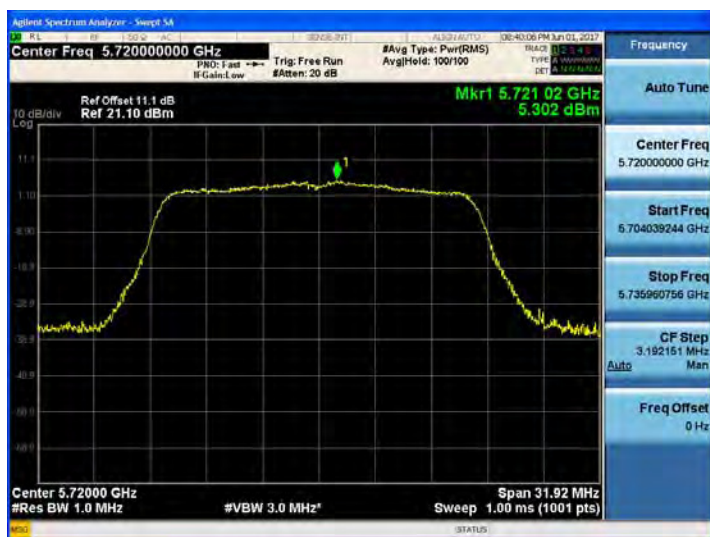

802.11n_HT20 UNII 3 Band PSD CH.144



802.11ac_VHT20 UNII 2C Band PSD CH.144



802.11ac_VHT20 UNII 3 Band PSD CH.144



■ Straddle channels TEST RESULTS for 802.11n_HT40/ac_VHT40
Conducted Power Density Measurements (UNII 2C Band 5710MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5710	142	802.11n	-0.659	2.867	2.208	11	Pass
		802.11ac	-0.601	2.654	2.053	11	Pass

Conducted Power Density Measurements (UNII 3 Band 5710MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5710	142	802.11n	-4.928	2.867	-2.061	30	Pass
		802.11ac	-4.558	2.654	-1.904	30	Pass

Straddle channels TEST Plot for 802.11n_HT40/ac_VHT40

802.11n_HT40 UNII 2C Band PSD CH.142



802.11n_HT40 UNII 3 Band PSD CH.142



802.11ac_VHT40 UNII 2C Band PSD CH.142



802.11ac_VHT40 UNII 3 Band PSD CH.142



Straddle channels TEST RESULTS

Conducted Power Density Measurements (UNII 2C Band 5690MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5690	138	802.11ac	-4.596	2.794	-1.802	11	Pass

Conducted Power Density Measurements (UNII 3 Band 5690MHz)

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5690	138	802.11ac	-10.478	2.794	-7.684	30	Pass

Straddle channels TEST Plot for 802.11ac_VHT80

802.11ac_VHT80 UNII 2C Band PSD CH.138



802.11ac_VHT80 UNII 3 Band PSD CH.138



9.5 FREQUENCY STABILITY

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

20 MHz BW

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,180,000,000 Hz
CHANNEL:	36
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5180034.50	34.50
100%		-30	5180002.50	2.50
100%		-20	5180008.60	8.60
100%		-10	5180016.30	16.30
100%		0	5180021.60	21.60
100%		+10	5180029.20	29.20
100%		+30	5180038.90	38.90
100%		+40	5180044.70	44.70
100%		+50	5180052.20	52.20
115%	4.40	+20	5180029.20	29.20
Batt. Endpoint	3.60	+20	5180020.70	20.70

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5260033.10	33.10
100%		-30	5260001.60	1.60
100%		-20	5260008.40	8.40
100%		-10	5260013.50	13.50
100%		0	5260019.70	19.70
100%		+10	5260026.20	26.20
100%		+30	5260040.10	40.10
100%		+40	5260044.20	44.20
100%		+50	5260048.80	48.80
115%	4.40	+20	5260026.90	26.90
Batt. Endpoint	3.60	+20	5260020.50	20.50

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5500028.40	28.40
100%		-30	5499999.80	-0.20
100%		-20	5500004.60	4.6
100%		-10	5500011.80	11.8
100%		0	5500018.60	18.6
100%		+10	5500023.80	23.8
100%		+30	5500036.20	36.2
100%		+40	5500041.70	41.7
100%		+50	5500047.50	47.50
115%	4.40	+20	5500021.60	21.60
Batt. Endpoint	3.60	+20	5500019.60	19.6

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5745022.80	22.80
100%		-30	5744992.80	-7.20
100%		-20	5744998.60	-1.4
100%		-10	5745003.50	3.5
100%		0	5745010.00	10
100%		+10	5745015.40	15.4
100%		+30	5745028.90	28.9
100%		+40	5745035.80	35.8
100%		+50	5745043.70	43.70
115%	4.40	+20	5745016.30	16.30
Batt. Endpoint	3.60	+20	5745009.60	9.6

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

40 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5190042.10	42.10
100%		-30	5190008.50	8.50
100%		-20	5190013.00	13.00
100%		-10	5190020.30	20.30
100%		0	5190028.00	28.00
100%		+10	5190035.00	35.00
100%		+30	5190046.50	46.50
100%		+40	5190052.40	52.40
100%		+50	5190056.70	56.70
115%	4.40	+20	5190034.40	34.40
Batt. Endpoint	3.60	+20	5190024.70	24.70

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5270039.70	39.70
100%		-30	5270007.10	7.10
100%		-20	5270015.10	15.1
100%		-10	5270021.70	21.7
100%		0	5270027.10	27.1
100%		+10	5270033.00	33
100%		+30	5270046.10	46.1
100%		+40	5270051.50	51.5
100%		+50	5270058.70	58.70
115%	4.40	+20	5270034.30	34.30
Batt. Endpoint	3.60	+20	5270028.10	28.1

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,510,000,000 Hz
CHANNEL:	102
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5510045.30	45.30
100%		-30	5510009.80	9.80
100%		-20	5510017.80	17.8
100%		-10	5510025.30	25.3
100%		0	5510032.00	32
100%		+10	5510038.20	38.2
100%		+30	5510051.90	51.9
100%		+40	5510057.20	57.2
100%		+50	5510063.10	63.10
115%	4.40	+20	5510038.60	38.60
Batt. Endpoint	3.60	+20	5510031.90	31.9

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5755034.90	34.90
100%		-30	5755004.20	4.20
100%		-20	5755009.80	9.8
100%		-10	5755015.10	15.1
100%		0	5755021.00	21
100%		+10	5755029.00	29
100%		+30	5755041.90	41.9
100%		+40	5755049.00	49
100%		+50	5755056.50	56.50
115%	4.40	+20	5755029.00	29.00
Batt. Endpoint	3.60	+20	5755022.10	22.1

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

80 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210019.70	19.70
100%		-30	5209990.60	-9.40
100%		-20	5209995.10	-4.90
100%		-10	5210000.60	0.60
100%		0	5210007.30	7.30
100%		+10	5210015.10	15.10
100%		+30	5210024.60	24.60
100%		+40	5210028.90	28.90
100%		+50	5210034.10	34.10
115%	4.40	+20	5210013.00	13.00
Batt. Endpoint	3.60	+20	5210005.50	5.50

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5290029.30	29.30
100%		-30	5290001.60	1.60
100%		-20	5290005.80	5.8
100%		-10	5290011.30	11.3
100%		0	5290018.80	18.8
100%		+10	5290024.30	24.3
100%		+30	5290033.90	33.9
100%		+40	5290040.30	40.3
100%		+50	5290047.40	47.40
115%	4.40	+20	5290021.80	21.80
Batt. Endpoint	3.60	+20	5290015.90	15.9

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5530023.70	23.70
100%		-30	5529995.00	-5.00
100%		-20	5529999.70	-0.3
100%		-10	5530006.60	6.6
100%		0	5530011.30	11.3
100%		+10	5530017.80	17.8
100%		+30	5530030.10	30.1
100%		+40	5530034.50	34.5
100%		+50	5530039.30	39.30
115%	4.40	+20	5530019.00	19.00
Batt. Endpoint	3.60	+20	5530013.00	13

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5775028.60	28.60
100%		-30	5774996.80	-3.20
100%		-20	5775002.70	2.7
100%		-10	5775010.70	10.7
100%		0	5775017.40	17.4
100%		+10	5775021.80	21.8
100%		+30	5775035.40	35.4
100%		+40	5775041.40	41.4
100%		+50	5775049.40	49.40
115%	4.40	+20	5775021.90	21.90
Batt. Endpoint	3.60	+20	5775017.50	17.5

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

9.6 RADIATED MEASUREMENT**9.6.1 RADIATED SPURIOUS EMISSIONS.****Test Requirements and limit, §15.205, §15.209, §15.407**

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


■ §15.407, KDB 789033 D02

All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBμV/m.


Especially, for transmitter operating in the 5725 Mhz – 5850 MHz : all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequency 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


Test Configuration

Below 30 MHz

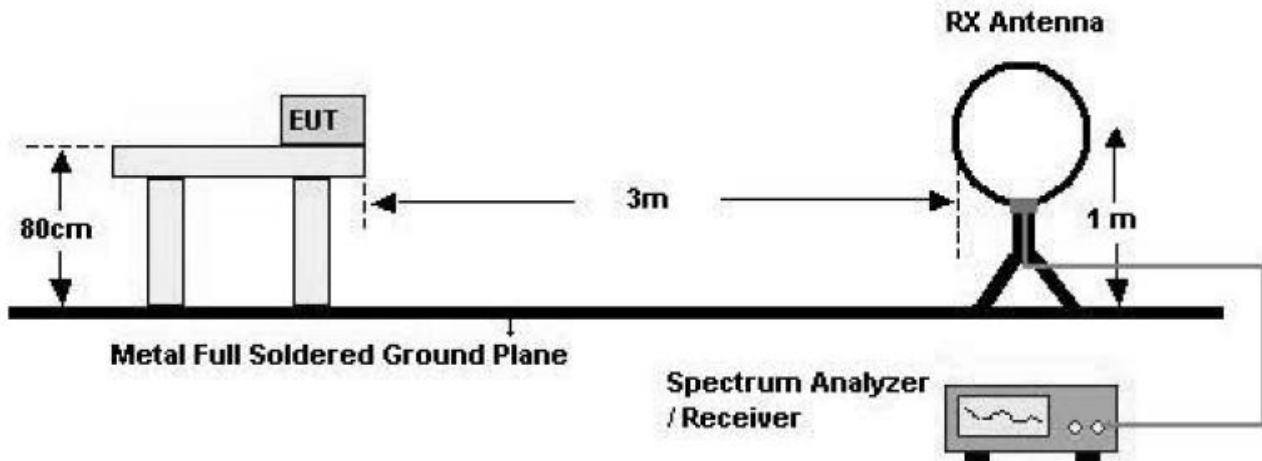

30 MHz - 1 GHz

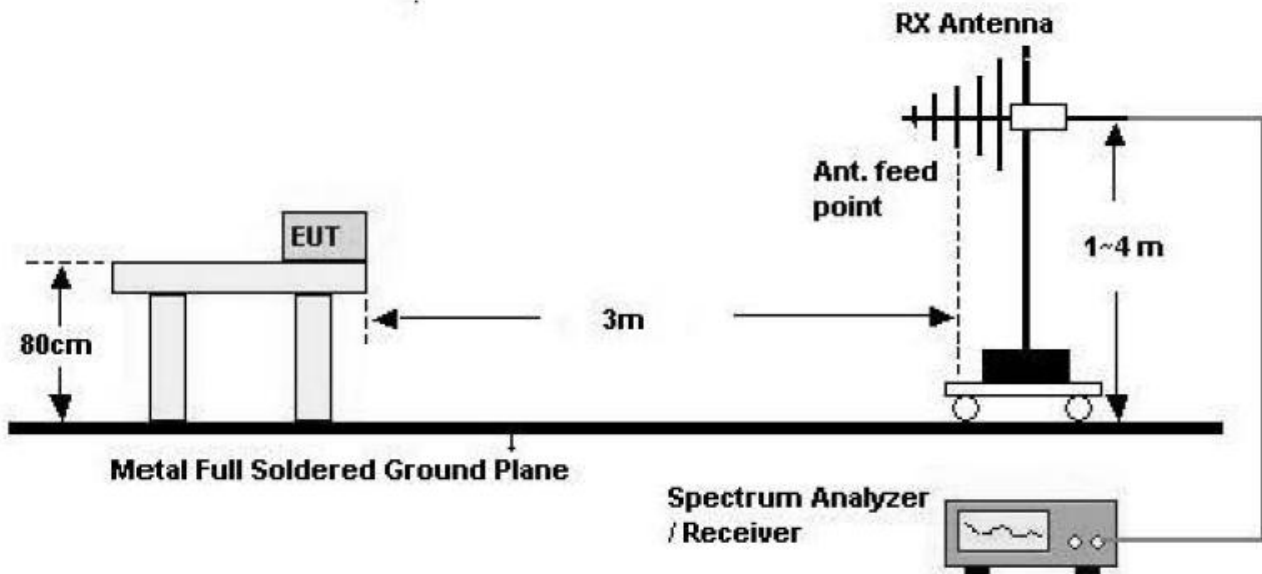

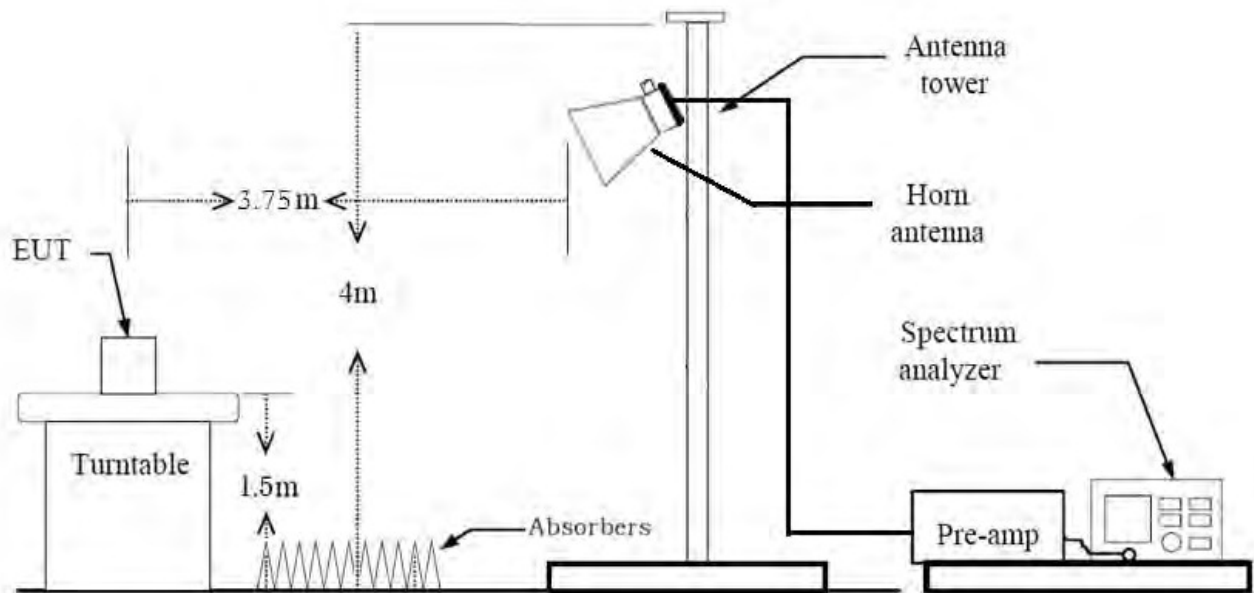Above 1 GHz**TEST PROCEDURE USED**

ANSI C63.10:2013

Method G)5) in KDB 789033 D02 v01r04 (Peak)

Method G)6)d) in KDB 789033 D02 v01r04 (Average)

. Spectrum setting:**- Peak.**

1. RBW = 1 MHz

2. VBW $\geq$ 3 MHz

3. Detector = Peak

4. Sweep Time = auto

5. Trace mode = max hold

6. Allow sweeps to continue until the trace stabilizes.

7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.**- Average (Method VB :Averaging using reduced video bandwidth)**

1. RBW = 1 MHz

2. VBW

2.1. If the EUT is configured to transmit with duty cycle $\geq$ 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.2.2. If the EUT duty cycle is $<$ 98 percent, set $VBW \geq 1/T$, where T is the minimum transmission

duration.

3. The analyzer is set to linear detector mode.
4. Detector = Peak.
5. Sweep time = auto.
6. Trace mode = max hold.
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

Note :

1. We used the Method VB for 802.11a/n_HT20, n_HT40, ac_VHT20, 40, 80 mode to perform the average filed strength measurements.
2. The actual setting value of VBW for 802.11a/n_HT20, n_HT40, ac_VHT20, 40, 80
3. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
4. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	1.428	1.530	93.33	700	1000
n_HT20	MCS 0	1.336	1.437	92.97	749	1000
ac_VHT20	MCS 0	1.344	1.445	93.06	744	1000
n_HT40	MCS 0	0.664	0.765	86.82	1506	3000
ac_VHT40	MCS 0	0.669	0.770	86.90	1495	3000
ac_VHT80	MCS 0	0.600	0.701	85.56	1667	10000

TEST RESULTS**9 kHz – 30MHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
6. The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 2 dB higher than semi-anechoic chamber (10 m chamber)

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}_{\mu\text{V}}$	dB /m	dB	(H/V)	$\text{dB}_{\mu\text{V/m}}$	$\text{dB}_{\mu\text{V/m}}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	58.05	5.53	V	63.58	68.20	4.62	PK
15540	44.45	9.69	V	54.14	73.98	19.84	PK
15540	30.69	9.69	V	40.38	53.98	13.60	AV
10360	55.38	5.53	H	60.91	68.20	7.29	PK
15540	44.80	9.69	H	54.49	73.98	19.49	PK
15540	30.89	9.69	H	40.58	53.98	13.40	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	56.08	5.44	V	61.52	68.20	6.68	PK
15600	44.09	9.72	V	53.81	73.98	20.17	PK
15600	30.93	9.72	V	40.65	53.98	13.33	AV
10400	55.49	5.44	H	60.93	68.20	7.27	PK
15600	44.00	9.72	H	53.72	73.98	20.26	PK
15600	30.84	9.72	H	40.56	53.98	13.42	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	55.22	5.46	V	60.68	68.20	7.52	PK
15720	45.36	9.29	V	54.65	73.98	19.33	PK
15720	31.62	9.29	V	40.91	53.98	13.07	AV
10480	54.87	5.46	H	60.33	68.20	7.87	PK
15720	45.21	9.29	H	54.50	73.98	19.48	PK
15720	31.59	9.29	H	40.88	53.98	13.10	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	57.09	5.53	V	62.62	68.20	5.58	PK
15540	44.39	9.69	V	54.08	73.98	19.90	PK
15540	30.66	9.69	V	40.35	53.98	13.63	AV
10360	55.49	5.53	H	61.02	68.20	7.18	PK
15540	44.48	9.69	H	54.17	73.98	19.81	PK
15540	30.61	9.69	H	40.30	53.98	13.68	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT20. Worst case is MCS0 in 802.11n_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	55.88	5.44	V	61.32	68.20	6.88	PK
15600	44.24	9.72	V	53.96	73.98	20.02	PK
15600	31.05	9.72	V	40.77	53.98	13.21	AV
10400	54.14	5.44	H	59.58	68.20	8.62	PK
15600	44.15	9.72	H	53.87	73.98	20.11	PK
15600	31.08	9.72	H	40.80	53.98	13.18	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	54.59	5.46	V	60.05	68.20	8.15	PK
15720	45.74	9.29	V	55.03	73.98	18.95	PK
15720	31.49	9.29	V	40.78	53.98	13.20	AV
10480	53.15	5.46	H	58.61	68.20	9.59	PK
15720	45.69	9.29	H	54.98	73.98	19.00	PK
15720	31.41	9.29	H	40.70	53.98	13.28	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	57.17	5.53	V	62.70	68.20	5.50	PK
15540	44.23	9.69	V	53.92	73.98	20.06	PK
15540	30.60	9.69	V	40.29	53.98	13.69	AV
10360	56.11	5.53	H	61.64	68.20	6.56	PK
15540	44.31	9.69	H	54.00	73.98	19.98	PK
15540	30.58	9.69	H	40.27	53.98	13.71	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	55.93	5.44	V	61.37	68.20	6.83	PK
15600	44.19	9.72	V	53.91	73.98	20.07	PK
15600	31.10	9.72	V	40.82	53.98	13.16	AV
10400	54.10	5.44	H	59.54	68.20	8.66	PK
15600	44.18	9.72	H	53.90	73.98	20.08	PK
15600	31.05	9.72	H	40.77	53.98	13.21	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	54.82	5.46	V	60.28	68.20	7.92	PK
15720	45.86	9.29	V	55.15	73.98	18.83	PK
15720	31.54	9.29	V	40.83	53.98	13.15	AV
10480	53.78	5.46	H	59.24	68.20	8.96	PK
15720	45.79	9.29	H	55.08	73.98	18.90	PK
15720	31.58	9.29	H	40.87	53.98	13.11	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	50.20	5.27	V	55.47	68.20	12.73	PK
15570	44.31	9.47	V	53.78	73.98	20.20	PK
15570	31.61	9.47	V	41.08	53.98	12.90	AV
10380	49.25	5.27	H	54.52	68.20	13.68	PK
15570	44.84	9.47	H	54.31	73.98	19.67	PK
15570	31.59	9.47	H	41.06	53.98	12.92	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT40. Worst case is MCS0 in 802.11n_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	48.51	6.15	V	54.66	68.20	13.54	PK
15690	44.90	9.17	V	54.07	73.98	19.91	PK
15690	32.27	9.17	V	41.44	53.98	12.54	AV
10460	47.74	6.15	H	53.89	68.20	14.31	PK
15690	45.01	9.17	H	54.18	73.98	19.80	PK
15690	32.30	9.17	H	41.47	53.98	12.51	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	50.56	5.27	V	55.83	68.20	12.37	PK
15570	44.94	9.47	V	54.41	73.98	19.57	PK
15570	31.58	9.47	V	41.05	53.98	12.93	AV
10380	48.98	5.27	H	54.25	68.20	13.95	PK
15570	45.21	9.47	H	54.68	73.98	19.30	PK
15570	31.55	9.47	H	41.02	53.98	12.96	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT40. Worst case is MCS0 in 802.11ac_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11ac_ VHT40
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	48.85	6.15	V	55.00	68.20	13.20	PK
15690	45.21	9.17	V	54.38	73.98	19.60	PK
15690	32.18	9.17	V	41.35	53.98	12.63	AV
10460	47.65	6.15	H	53.80	68.20	14.40	PK
15690	45.64	9.17	H	54.81	73.98	19.17	PK
15690	32.15	9.17	H	41.32	53.98	12.66	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT40. Worst case is MCS0 in 802.11ac_ VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	47.56	5.86	V	53.42	68.20	14.78	PK
15630	44.63	9.88	V	54.51	73.98	19.47	PK
15630	33.16	9.88	V	43.04	53.98	10.94	AV
10420	46.84	5.86	H	52.70	68.20	15.50	PK
15630	44.74	9.88	H	54.62	73.98	19.36	PK
15630	33.12	9.88	H	43.00	53.98	10.98	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer MCS Index:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	53.74	6.42	V	60.16	68.20	8.04	PK
15780	45.07	9.30	V	54.37	73.98	19.61	PK
15780	31.77	9.30	V	41.07	53.98	12.91	AV
10520	51.57	6.42	H	57.99	68.20	10.21	PK
15780	44.89	9.30	H	54.19	73.98	19.79	PK
15780	31.59	9.30	H	40.89	53.98	13.09	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	50.32	5.97	V	56.29	73.98	17.69	PK
10600	36.07	5.97	V	42.04	53.98	11.94	AV
15900	44.91	9.21	V	54.12	73.98	19.86	PK
15900	30.62	9.21	V	39.83	53.98	14.15	AV
10600	49.10	5.97	H	55.07	73.98	18.91	PK
10600	34.59	5.97	H	40.56	53.98	13.42	AV
15900	44.84	9.21	H	54.05	73.98	19.93	PK
15900	30.45	9.21	H	39.66	53.98	14.32	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	50.33	7.08	V	57.41	73.98	16.57	PK
10640	36.03	7.08	V	43.11	53.98	10.87	AV
15960	44.35	8.93	V	53.28	73.98	20.70	PK
15960	30.79	8.93	V	39.72	53.98	14.26	AV
10640	48.32	7.08	H	55.40	73.98	18.58	PK
10640	34.29	7.08	H	41.37	53.98	12.61	AV
15960	44.58	8.93	H	53.51	73.98	20.47	PK
15960	30.70	8.93	H	39.63	53.98	14.35	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	53.15	6.42	V	59.57	68.20	8.63	PK
15780	44.63	9.30	V	53.93	73.98	20.05	PK
15780	31.53	9.30	V	40.83	53.98	13.15	AV
10520	52.19	6.42	H	58.61	68.20	9.59	PK
15780	44.94	9.30	H	54.24	73.98	19.74	PK
15780	31.49	9.30	H	40.79	53.98	13.19	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT20. Worst case is MCS0 in 802.11n_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	50.56	5.97	V	56.53	73.98	17.45	PK
10600	35.01	5.97	V	40.98	53.98	13.00	AV
15900	44.01	9.21	V	53.22	73.98	20.76	PK
15900	30.75	9.21	V	39.96	53.98	14.02	AV
10600	49.10	5.97	H	55.07	73.98	18.91	PK
10600	34.08	5.97	H	40.05	53.98	13.93	AV
15900	43.77	9.21	H	52.98	73.98	21.00	PK
15900	30.52	9.21	H	39.73	53.98	14.25	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	49.58	7.08	V	56.66	73.98	17.32	PK
10640	34.67	7.08	V	41.75	53.98	12.23	AV
15960	44.78	8.93	V	53.71	73.98	20.27	PK
15960	30.76	8.93	V	39.69	53.98	14.29	AV
10640	48.14	7.08	H	55.22	73.98	18.76	PK
10640	32.98	7.08	H	40.06	53.98	13.92	AV
15960	44.49	8.93	H	53.42	73.98	20.56	PK
15960	30.65	8.93	H	39.58	53.98	14.40	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5260MHz
Channel No.	52 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	53.28	6.42	V	59.70	68.20	8.50	PK
15780	44.87	9.30	V	54.17	73.98	19.81	PK
15780	31.55	9.30	V	40.85	53.98	13.13	AV
10520	52.45	6.42	H	58.87	68.20	9.33	PK
15780	44.74	9.30	H	54.04	73.98	19.94	PK
15780	31.50	9.30	H	40.80	53.98	13.18	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	51.24	5.97	V	57.21	73.98	16.77	PK
10600	35.21	5.97	V	41.18	53.98	12.80	AV
15900	44.25	9.21	V	53.46	73.98	20.52	PK
15900	30.78	9.21	V	39.99	53.98	13.99	AV
10600	50.41	5.97	H	56.38	73.98	17.60	PK
10600	34.59	5.97	H	40.56	53.98	13.42	AV
15900	44.14	9.21	H	53.35	73.98	20.63	PK
15900	30.72	9.21	H	39.93	53.98	14.05	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	49.62	7.08	V	56.70	73.98	17.28	PK
10640	34.75	7.08	V	41.83	53.98	12.15	AV
15960	45.24	8.93	V	54.17	73.98	19.81	PK
15960	30.82	8.93	V	39.75	53.98	14.23	AV
10640	48.89	7.08	H	55.97	73.98	18.01	PK
10640	34.00	7.08	H	41.08	53.98	12.90	AV
15960	45.19	8.93	H	54.12	73.98	19.86	PK
15960	30.84	8.93	H	39.77	53.98	14.21	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	47.85	6.73	V	54.58	68.20	13.62	PK
15810	45.53	9.43	V	54.96	73.98	19.02	PK
15810	32.17	9.43	V	41.60	53.98	12.38	AV
10540	46.98	6.73	H	53.71	68.20	14.49	PK
15810	45.21	9.43	H	54.64	73.98	19.34	PK
15810	32.11	9.43	H	41.54	53.98	12.44	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT40. Worst case is MCS0 in 802.11n_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	46.83	6.00	V	52.83	73.98	21.15	PK
10620	33.97	6.00	V	39.97	53.98	14.01	AV
15930	44.55	8.83	V	53.38	73.98	20.60	PK
15930	31.51	8.83	V	40.34	53.98	13.64	AV
10620	46.14	6.00	H	52.14	73.98	21.84	PK
10620	33.15	6.00	H	39.15	53.98	14.83	AV
15930	44.18	8.83	H	53.01	73.98	20.97	PK
15930	31.26	8.83	H	40.09	53.98	13.89	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	47.59	6.73	V	54.32	68.20	13.88	PK
15810	45.26	9.43	V	54.69	73.98	19.29	PK
15810	32.13	9.43	V	41.56	53.98	12.42	AV
10540	47.15	6.73	H	53.88	68.20	14.32	PK
15810	45.74	9.43	H	55.17	73.98	18.81	PK
15810	32.10	9.43	H	41.53	53.98	12.45	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT40. Worst case is MCS0 in 802.11ac_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11ac_ VHT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	46.94	6.00	V	52.94	73.98	21.04	PK
10620	34.01	6.00	V	40.01	53.98	13.97	AV
15930	44.68	8.83	V	53.51	73.98	20.47	PK
15930	31.48	8.83	V	40.31	53.98	13.67	AV
10620	46.51	6.00	H	52.51	73.98	21.47	PK
10620	33.78	6.00	H	39.78	53.98	14.20	AV
15930	44.97	8.83	H	53.80	73.98	20.18	PK
15930	31.50	8.83	H	40.33	53.98	13.65	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT40. Worst case is MCS0 in 802.11ac_ VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2A
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10580	45.92	7.38	V	53.30	68.20	14.90	PK
15870	44.40	8.38	V	52.78	73.98	21.20	PK
15870	33.15	8.38	V	41.53	53.98	12.45	AV
10580	45.34	7.38	H	52.72	68.20	15.48	PK
15870	44.10	8.38	H	52.48	73.98	21.50	PK
15870	33.13	8.38	H	41.51	53.98	12.47	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	46.18	8.28	V	54.46	73.98	19.52	PK
11000	32.59	8.28	V	40.87	53.98	13.11	AV
16500	46.67	8.81	V	55.48	68.20	12.72	PK
11000	47.00	8.28	H	55.28	73.98	18.70	PK
11000	33.20	8.28	H	41.48	53.98	12.50	AV
16500	46.70	8.81	H	55.51	68.20	12.69	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	45.66	7.73	V	53.39	73.98	20.59	PK
11160	31.47	7.73	V	39.20	53.98	14.78	AV
16740	46.15	9.48	V	55.63	68.20	12.57	PK
11160	45.74	7.73	H	53.47	73.98	20.51	PK
11160	32.11	7.73	H	39.84	53.98	14.14	AV
16740	46.34	9.48	H	55.82	68.20	12.38	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	45.29	8.40	V	53.69	73.98	20.29	PK
11440	31.81	8.40	V	40.21	53.98	13.77	AV
17160	46.14	11.90	V	58.04	68.20	10.16	PK
11440	46.59	8.40	H	54.99	73.98	18.99	PK
11440	31.96	8.40	H	40.36	53.98	13.62	AV
17160	46.61	11.90	H	58.51	68.20	9.69	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	46.10	8.28	V	54.38	73.98	19.60	PK
11000	31.24	8.28	V	39.52	53.98	14.46	AV
16500	45.94	8.81	V	54.75	68.20	13.45	PK
11000	46.55	8.28	H	54.83	73.98	19.15	PK
11000	31.84	8.28	H	40.12	53.98	13.86	AV
16500	45.82	8.81	H	54.63	68.20	13.57	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT20. Worst case is MCS0 in 802.11n_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	45.51	7.73	V	53.24	73.98	20.74	PK
11160	31.44	7.73	V	39.17	53.98	14.81	AV
16740	45.74	9.48	V	55.22	68.20	12.98	PK
11160	45.68	7.73	H	53.41	73.98	20.57	PK
11160	32.02	7.73	H	39.75	53.98	14.23	AV
16740	45.89	9.48	H	55.37	68.20	12.83	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	44.81	8.40	V	53.21	73.98	20.77	PK
11440	31.51	8.40	V	39.91	53.98	14.07	AV
17160	45.48	11.90	V	57.38	68.20	10.82	PK
11440	44.93	8.40	H	53.33	73.98	20.65	PK
11440	31.80	8.40	H	40.20	53.98	13.78	AV
17160	45.90	11.90	H	57.80	68.20	10.40	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5500MHz
Channel No.	100 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	45.19	8.28	V	53.47	73.98	20.51	PK
11000	31.74	8.28	V	40.02	53.98	13.96	AV
16500	45.47	8.81	V	54.28	68.20	13.92	PK
11000	45.62	8.28	H	53.90	73.98	20.08	PK
11000	32.06	8.28	H	40.34	53.98	13.64	AV
16500	45.94	8.81	H	54.75	68.20	13.45	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	45.94	7.73	V	53.67	73.98	20.31	PK
11160	31.55	7.73	V	39.28	53.98	14.70	AV
16740	45.95	9.48	V	55.43	68.20	12.77	PK
11160	45.84	7.73	H	53.57	73.98	20.41	PK
11160	31.89	7.73	H	39.62	53.98	14.36	AV
16740	46.21	9.48	H	55.69	68.20	12.51	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	44.97	8.40	V	53.37	73.98	20.61	PK
11440	31.70	8.40	V	40.10	53.98	13.88	AV
17160	45.61	11.90	V	57.51	68.20	10.69	PK
11440	45.24	8.40	H	53.64	73.98	20.34	PK
11440	32.14	8.40	H	40.54	53.98	13.44	AV
17160	45.82	11.90	H	57.72	68.20	10.48	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	44.89	7.92	V	52.81	73.98	21.17	PK
11020	32.00	7.92	V	39.92	53.98	14.06	AV
16530	45.18	9.02	V	54.20	68.20	14.00	PK
11020	45.35	7.92	H	53.27	73.98	20.71	PK
11020	32.31	7.92	H	40.23	53.98	13.75	AV
16530	45.53	9.02	H	54.55	68.20	13.65	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT40. Worst case is MCS0 in 802.11n_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11n_HT40
Transfer MCS Index:	0
Operating Frequency	5550 MHz
Channel No.	110 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11100	44.64	7.12	V	51.76	73.98	22.22	PK
11100	31.89	7.12	V	39.01	53.98	14.97	AV
16650	46.24	10.48	V	56.72	68.20	11.48	PK
11100	45.26	7.12	H	52.38	73.98	21.60	PK
11100	32.11	7.12	H	39.23	53.98	14.75	AV
16650	46.93	10.48	H	57.41	68.20	10.79	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT40. Worst case is MCS0 in 802.11n_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	45.86	6.97	V	52.83	73.98	21.15	PK
11420	32.51	6.97	V	39.48	53.98	14.50	AV
17130	45.31	12.65	V	57.96	68.20	10.24	PK
11420	45.44	6.97	H	52.41	73.98	21.57	PK
11420	32.60	6.97	H	39.57	53.98	14.41	AV
17130	45.90	12.65	H	58.55	68.20	9.65	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	45.21	7.92	V	53.13	73.98	20.85	PK
11020	32.24	7.92	V	40.16	53.98	13.82	AV
16530	45.73	9.02	V	54.75	68.20	13.45	PK
11020	45.51	7.92	H	53.43	73.98	20.55	PK
11020	32.51	7.92	H	40.43	53.98	13.55	AV
16530	45.84	9.02	H	54.86	68.20	13.34	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT40. Worst case is MCS0 in 802.11ac_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_HT40
Transfer MCS Index:	0
Operating Frequency	5550 MHz
Channel No.	110 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11100	45.11	7.12	V	52.23	73.98	21.75	PK
11100	32.10	7.12	V	39.22	53.98	14.76	AV
16650	46.51	10.48	V	56.99	68.20	11.21	PK
11100	45.84	7.12	H	52.96	73.98	21.02	PK
11100	32.25	7.12	H	39.37	53.98	14.61	AV
16650	46.85	10.48	H	57.33	68.20	10.87	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT40. Worst case is MCS0 in 802.11n_HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_ VHT40
Transfer MCS Index:	0
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	45.20	6.97	V	52.17	73.98	21.81	PK
11420	32.05	6.97	V	39.02	53.98	14.96	AV
17130	45.03	12.65	V	57.68	68.20	10.52	PK
11420	45.60	6.97	H	52.57	73.98	21.41	PK
11420	32.14	6.97	H	39.11	53.98	14.87	AV
17130	45.44	12.65	H	58.09	68.20	10.11	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT40. Worst case is MCS0 in 802.11ac_ VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11060	45.02	7.39	V	52.41	73.98	21.57	PK
11060	33.15	7.39	V	40.54	53.98	13.44	AV
16590	46.21	8.84	V	55.05	68.20	13.15	PK
11060	45.37	7.39	H	52.76	73.98	21.22	PK
11060	33.41	7.39	H	40.80	53.98	13.18	AV
16590	47.29	8.84	H	56.13	68.20	12.07	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5610 MHz
Channel No.	122 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11220	45.14	9.70	V	54.84	73.98	19.14	PK
11220	33.19	9.70	V	42.89	53.98	11.09	AV
16830	46.13	9.10	V	55.23	68.20	12.97	PK
11220	45.21	9.70	H	54.91	73.98	19.07	PK
11220	33.25	9.70	H	42.95	53.98	11.03	AV
16830	47.20	9.10	H	56.30	68.20	11.90	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 2C
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5690 MHz
Channel No.	138 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11380	44.89	9.70	V	54.59	73.98	19.39	PK
11380	33.03	9.70	V	42.73	53.98	11.25	AV
17070	46.11	9.10	V	55.21	68.20	12.99	PK
11380	45.27	9.70	H	54.97	73.98	19.01	PK
11380	33.14	9.70	H	42.84	53.98	11.14	AV
17070	47.18	9.10	H	56.28	68.20	11.92	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5745MHz
Channel No.	149 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	46.22	4.11	V	50.33	73.98	23.65	PK
11490	32.50	4.11	V	36.61	53.98	17.37	AV
17235	45.79	11.23	V	57.02	68.20	11.18	PK
11490	46.45	4.11	H	50.56	73.98	23.42	PK
11490	32.59	4.11	H	36.70	53.98	17.28	AV
17235	46.55	11.23	H	57.78	68.20	10.42	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	46.57	8.06	V	54.63	73.98	19.35	PK
11570	32.33	8.06	V	40.39	53.98	13.59	AV
17355	44.58	12.20	V	56.78	68.20	11.42	PK
11570	46.64	8.06	H	54.70	73.98	19.28	PK
11570	32.45	8.06	H	40.51	53.98	13.47	AV
17355	44.75	12.20	H	56.95	68.20	11.25	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	46.99	7.44	V	54.43	73.98	19.55	PK
11650	32.81	7.44	V	40.25	53.98	13.73	AV
17475	44.89	14.60	V	59.49	68.20	8.71	PK
11650	46.74	7.44	H	54.18	73.98	19.80	PK
11650	32.77	7.44	H	40.21	53.98	13.77	AV
17475	44.68	14.60	H	59.28	68.20	8.92	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	45.43	4.11	V	49.54	73.98	24.44	PK
11490	31.94	4.11	V	36.05	53.98	17.93	AV
17235	45.82	11.23	V	57.05	68.20	11.15	PK
11490	45.39	4.11	H	49.50	73.98	24.48	PK
11490	32.15	4.11	H	36.26	53.98	17.72	AV
17235	46.18	11.23	H	57.41	68.20	10.79	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_HT20. Worst case is MCS0 in 802.11n_HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	45.97	8.06	V	54.03	73.98	19.95	PK
11570	31.94	8.06	V	40.00	53.98	13.98	AV
17355	44.63	12.20	V	56.83	68.20	11.37	PK
11570	46.25	8.06	H	54.31	73.98	19.67	PK
11570	32.15	8.06	H	40.21	53.98	13.77	AV
17355	44.85	12.20	H	57.05	68.20	11.15	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_ HT20
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	45.66	7.44	V	53.10	73.98	20.88	PK
11650	32.51	7.44	V	39.95	53.98	14.03	AV
17475	45.84	14.60	V	60.44	68.20	7.76	PK
11650	45.90	7.44	H	53.34	73.98	20.64	PK
11650	32.69	7.44	H	40.13	53.98	13.85	AV
17475	45.94	14.60	H	60.54	68.20	7.66	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT20. Worst case is MCS0 in 802.11n_ HT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	45.84	4.11	V	49.95	73.98	24.03	PK
11490	32.13	4.11	V	36.24	53.98	17.74	AV
17235	45.81	11.23	V	57.04	68.20	11.16	PK
11490	45.66	4.11	H	49.77	73.98	24.21	PK
11490	32.28	4.11	H	36.39	53.98	17.59	AV
17235	45.99	11.23	H	57.22	68.20	10.98	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT20. Worst case is MCS0 in 802.11ac_VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	45.85	8.06	V	53.91	73.98	20.07	PK
11570	32.11	8.06	V	40.17	53.98	13.81	AV
17355	45.02	12.20	V	57.22	68.20	10.98	PK
11570	46.18	8.06	H	54.24	73.98	19.74	PK
11570	32.18	8.06	H	40.24	53.98	13.74	AV
17355	44.59	12.20	H	56.79	68.20	11.41	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 ac_ VHT20
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	45.25	7.44	V	52.69	73.98	21.29	PK
11650	32.61	7.44	V	40.05	53.98	13.93	AV
17475	45.77	14.60	V	60.37	68.20	7.83	PK
11650	45.58	7.44	H	53.02	73.98	20.96	PK
11650	32.74	7.44	H	40.18	53.98	13.80	AV
17475	45.91	14.60	H	60.51	68.20	7.69	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT20. Worst case is MCS0 in 802.11ac_ VHT20.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII3
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	44.78	7.17	V	51.95	73.98	22.03	PK
11510	32.32	7.17	V	39.49	53.98	14.49	AV
17265	46.14	12.92	V	59.06	68.20	9.14	PK
11510	45.31	7.17	H	52.48	73.98	21.50	PK
11510	32.57	7.17	H	39.74	53.98	14.24	AV
17265	46.31	12.92	H	59.23	68.20	8.97	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11n_ HT40
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	45.14	8.59	V	53.73	73.98	20.25	PK
11590	32.15	8.59	V	40.74	53.98	13.24	AV
17385	44.84	13.05	V	57.89	68.20	10.31	PK
11590	45.60	8.59	H	54.19	73.98	19.79	PK
11590	32.20	8.59	H	40.79	53.98	13.19	AV
17385	45.04	13.05	H	58.09	68.20	10.11	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_ HT40. Worst case is MCS0 in 802.11n_ HT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	45.62	7.17	V	52.79	73.98	21.19	PK
11510	32.59	7.17	V	39.76	53.98	14.22	AV
17265	46.14	12.92	V	59.06	68.20	9.14	PK
11510	45.74	7.17	H	52.91	73.98	21.07	PK
11510	32.66	7.17	H	39.83	53.98	14.15	AV
17265	46.36	12.92	H	59.28	68.20	8.92	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT40. Worst case is MCS0 in 802.11ac_VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11ac_ VHT40
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	45.25	8.59	V	53.84	73.98	20.14	PK
11590	32.31	8.59	V	40.90	53.98	13.08	AV
17385	44.96	13.05	V	58.01	68.20	10.19	PK
11590	45.58	8.59	H	54.17	73.98	19.81	PK
11590	32.25	8.59	H	40.84	53.98	13.14	AV
17385	45.17	13.05	H	58.22	68.20	9.98	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_ VHT40. Worst case is MCS0 in 802.11ac_ VHT40.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5775 MHz
Channel No.	155 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11550	45.39	7.71	V	53.10	73.98	20.88	PK
11550	33.30	7.71	V	41.01	53.98	12.97	AV
17325	44.77	13.58	V	58.35	68.20	9.85	PK
11550	45.37	7.71	H	53.08	73.98	20.90	PK
11550	33.65	7.71	H	41.36	53.98	12.62	AV
17325	45.32	13.58	H	58.90	68.20	9.30	PK


*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_VHT80. Worst case is MCS0 in 802.11ac_VHT80.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)


■ **RESULT PLOTS**

Radiated Spurious Emissions plot –Peak Reading (802.11a, Ch.36 2nd Harmonic, X-V)

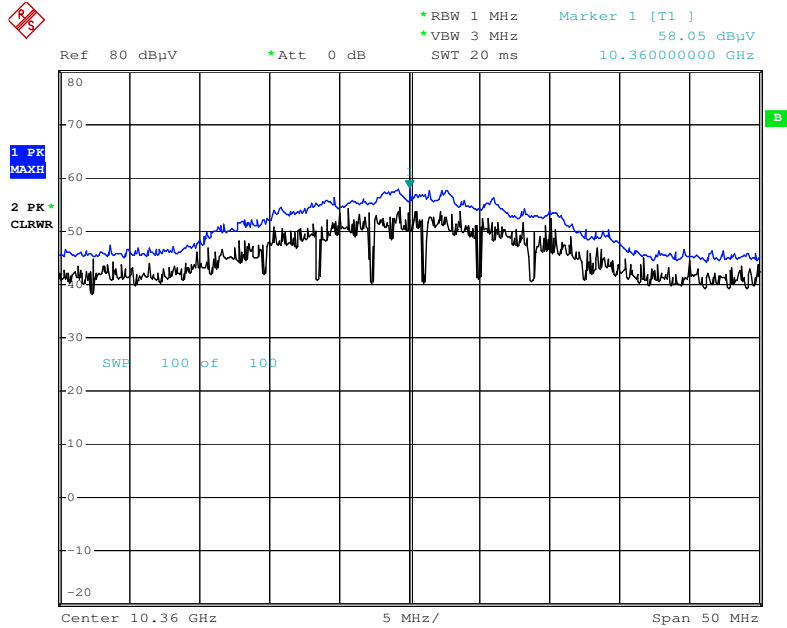


Date: 25.MAY.2017 12:23:38

Radiated Spurious Emissions plot – Peak Reading(802.11n_HT20, Ch.36 2nd Harmonic, X-V)

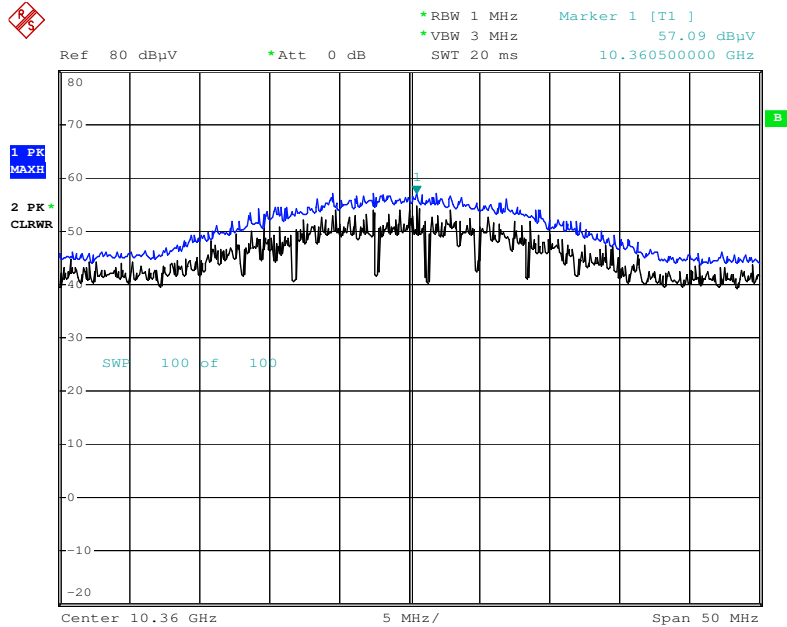


Date: 25.MAY.2017 12:25:34

Radiated Spurious Emissions plot –Peak Reading (802.11ac_VHT20, Ch.36 2nd Harmonic, X-V)

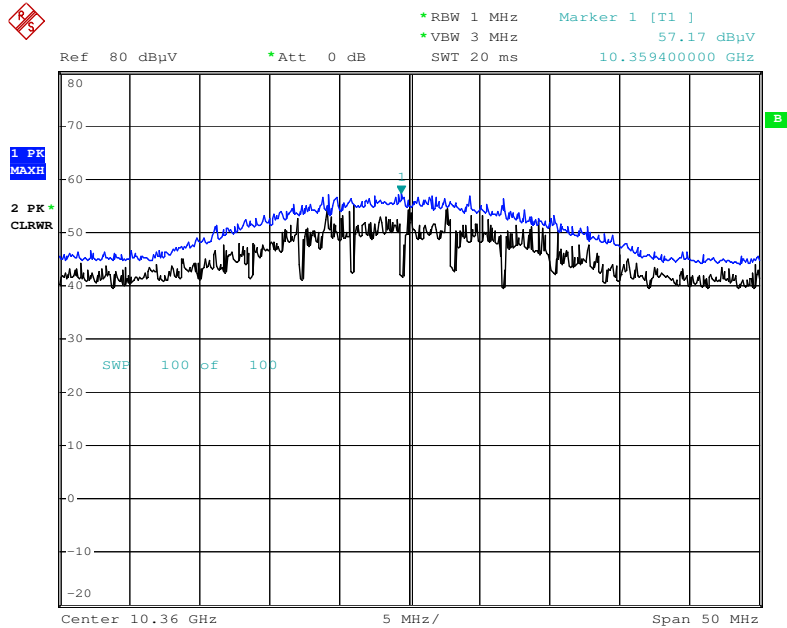


Date: 25.MAY.2017 12:27:03

Radiated Spurious Emissions plot – Peak Reading (802.11n_HT40, Ch.151 3rd Harmonic, Y-H)

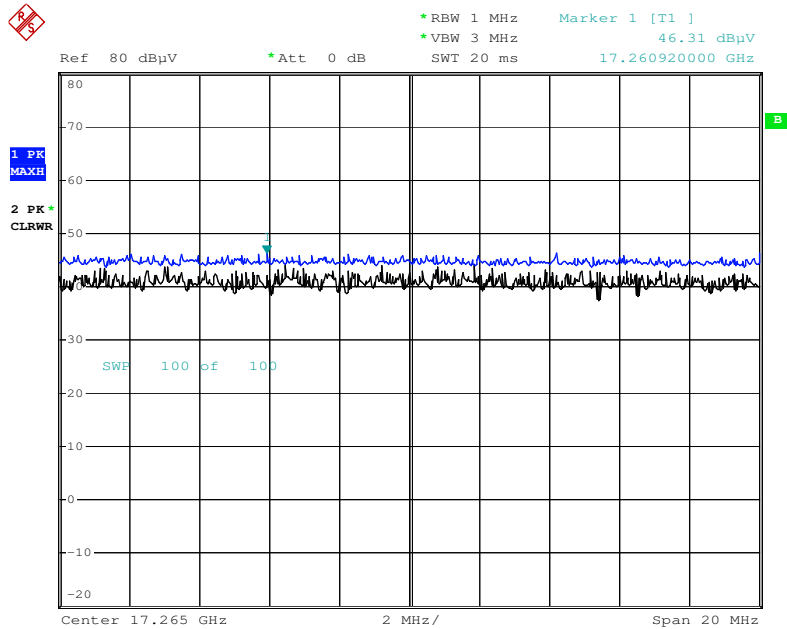


Date: 25.MAY.2017 12:19:19

Radiated Spurious Emissions plot –Peak Reading (802.11ac_VHT40, Ch.151 3rd Harmonic, Y-H)

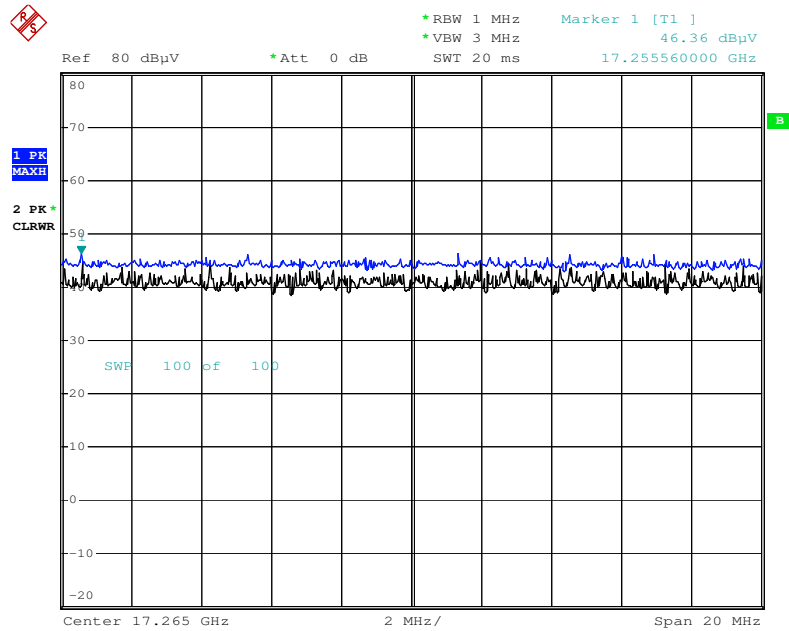

Date: 25.MAY.2017 12:19:58

Radiated Spurious Emissions plot –Peak Reading (802.11ac_VHT80, Ch.155 3rd Harmonic, Y-H)

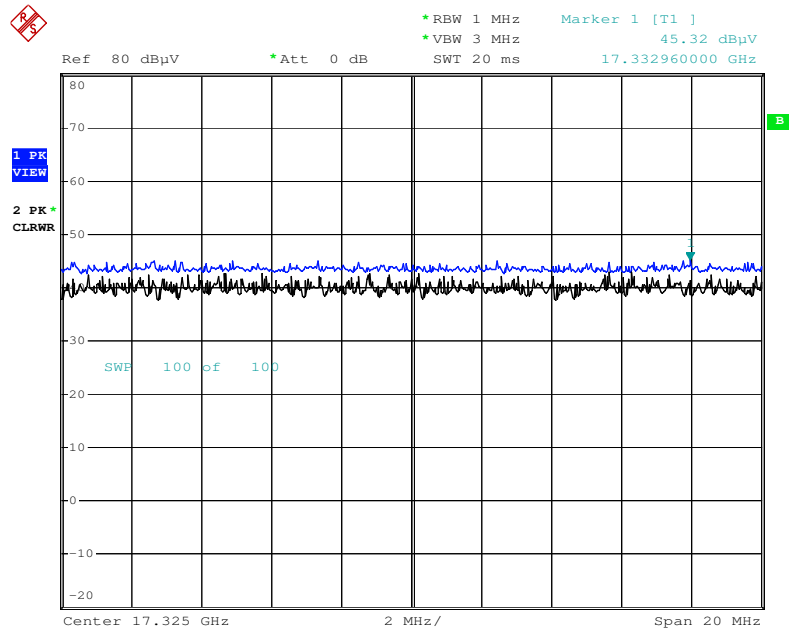

Date: 25.MAY.2017 12:05:01

Note : Only the worst case plots for Radiated Spurious Emissions.

9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	63.37	6.13	H	69.50	73.98	4.48	PK
5150	45.24	6.13	H	51.37	53.98	2.61	AV
5150	62.16	6.13	V	68.29	73.98	5.69	PK
5150	44.28	6.13	V	50.41	53.98	3.57	AV

Band : UNII 1

Operation Mode: 802.11 n_HT20

Transfer MCS Index: 0

Operating Frequency 5180 MHz

Channel No. 36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	64.84	6.13	H	70.97	73.98	3.01	PK
5150	44.45	6.13	H	50.58	53.98	3.40	AV
5150	63.02	6.13	V	69.15	73.98	4.83	PK
5150	43.74	6.13	V	49.87	53.98	4.11	AV

Band : UNII 1

Operation Mode: 802.11 ac_VHT20

Transfer MCS Index: 0

Operating Frequency 5180 MHz

Channel No. 36 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	64.48	6.13	H	70.61	73.98	3.37	PK
5150	43.94	6.13	H	50.07	53.98	3.91	AV
5150	64.24	6.13	V	70.37	73.98	3.61	PK
5150	43.67	6.13	V	49.8	53.98	4.18	AV

Band : UNII 1

Operation Mode: 802.11 n_HT40

Transfer MCS Index: 0

Operating Frequency 5190 MHz

Channel No. 38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	60.94	6.13	H	67.07	73.98	6.91	PK
5150	43.12	6.13	H	49.25	53.98	4.73	AV
5150	63.83	6.13	V	69.96	73.98	4.02	PK
5150	42.06	6.13	V	48.19	53.98	5.79	AV

Band : UNII 1

Operation Mode: 802.11 ac_VHT40

Transfer MCS Index: 0

Operating Frequency 5190 MHz

Channel No. 38 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	59.75	6.13	H	65.88	73.98	8.10	PK
5150	43.10	6.13	H	49.23	53.98	4.75	AV
5150	59.11	6.13	V	65.24	73.98	8.74	PK
5150	42.35	6.13	V	48.48	53.98	5.50	AV

Band : UNII 1
Operation Mode: 802.11 ac_VHT80
Transfer MCS Index: 0
Operating Frequency 5210 MHz
Channel No. 42 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.19	6.13	H	62.32	73.98	11.66	PK
5150	43.88	6.13	H	50.01	53.98	3.97	AV
5150	55.78	6.13	V	61.91	73.98	12.07	PK
5150	43.75	6.13	V	49.88	53.98	4.10	AV

Band : UNII 2A
Operation Mode: 802.11 a
Transfer Rate: 6 Mbps
Operating Frequency 5320 MHz
Channel No. 64 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	59.67	6.35	H	66.02	73.98	7.96	PK
5350	42.00	6.35	H	48.35	53.98	5.63	AV
5350	59.29	6.35	V	65.64	73.98	8.34	PK
5350	41.87	6.35	V	48.22	53.98	5.76	AV

Band : UNII 2A

Operation Mode: 802.11 n_ HT20

Transfer MCS Index: 0

Operating Frequency 5320 MHz

Channel No. 64 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	60.53	6.35	H	66.88	73.98	7.10	PK
5350	43.27	6.35	H	49.62	53.98	4.36	AV
5350	59.61	6.35	V	65.96	73.98	8.02	PK
5350	42.67	6.35	V	49.02	53.98	4.96	AV

Band : UNII 2A

Operation Mode: 802.11 ac_VHT20

Transfer MCS Index: 0

Operating Frequency 5320 MHz

Channel No. 64 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	59.71	6.35	H	66.06	73.98	7.92	PK
5350	42.69	6.35	H	49.04	53.98	4.94	AV
5350	58.83	6.35	V	65.18	73.98	8.80	PK
5350	42.16	6.35	V	48.51	53.98	5.47	AV

Band : UNII 2A
Operation Mode: 802.11 n_HT40
Transfer MCS Index: 0
Operating Frequency 5310 MHz
Channel No. 62 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	62.95	6.35	H	69.30	73.98	4.68	PK
5350	42.05	6.35	H	48.4	53.98	5.58	AV
5350	62.67	6.35	V	69.02	73.98	4.96	PK
5350	40.35	6.35	V	46.7	53.98	7.28	AV

Band : UNII 2A
Operation Mode: 802.11 ac_VHT40
Transfer MCS Index: 0
Operating Frequency 5310 MHz
Channel No. 62 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	63.41	6.35	H	69.76	73.98	4.22	PK
5350	41.84	6.35	H	48.19	53.98	5.79	AV
5350	61.64	6.35	V	67.99	73.98	5.99	PK
5350	40.59	6.35	V	46.94	53.98	7.04	AV

Band : UNII 2A

Operation Mode: 802.11 ac_VHT80

Transfer MCS Index: 0

Operating Frequency 5290 MHz

Channel No. 58 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	60.43	6.35	H	66.78	73.98	7.20	PK
5350	42.78	6.35	H	49.13	53.98	4.85	AV
5350	60.36	6.35	V	66.71	73.98	7.27	PK
5350	42.51	6.35	V	48.86	53.98	5.12	AV

Band : UNII 2C

Operation Mode: 802.11 a

Transfer Rate: 6 Mbps

Operating Frequency 5500 MHz

Channel No. 100 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	55.68	6.83	H	62.51	73.98	11.47	PK
5460	39.87	6.83	H	46.7	53.98	7.28	AV
*5470	63.51	6.84	H	70.35	73.98	3.63	PK
*5470	43.18	6.84	H	50.02	53.98	3.96	AV
5460	55.65	6.83	V	62.48	73.98	11.50	PK
5460	40.11	6.83	V	46.94	53.98	7.04	AV
*5470	63.70	6.84	V	70.54	73.98	3.44	PK
*5470	43.36	6.84	V	50.2	53.98	3.78	AV

Band : UNII 2C
 Operation Mode: 802.11 n_ HT20
 Transfer MCS Index: 0
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.16	6.83	H	60.99	73.98	12.99	PK
5460	37.64	6.83	H	44.47	53.98	9.51	AV
*5470	62.23	6.84	H	69.07	73.98	4.91	PK
*5470	38.43	6.84	H	45.27	53.98	8.71	AV
5460	54.58	6.83	V	61.41	73.98	12.57	PK
5460	37.43	6.83	V	44.26	53.98	9.72	AV
*5470	62.18	6.84	V	69.02	73.98	4.96	PK
*5470	38.41	6.84	V	45.25	53.98	8.73	AV

Band : UNII 2C

Operation Mode: 802.11 ac_VHT20

Transfer MCS Index: 0

Operating Frequency 5500 MHz

Channel No. 100 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.78	6.83	H	61.61	73.98	12.37	PK
5460	38.20	6.83	H	45.03	53.98	8.95	AV
*5470	63.01	6.84	H	69.85	73.98	4.13	PK
*5470	38.60	6.84	H	45.44	53.98	8.54	AV
5460	55.76	6.83	V	62.59	73.98	11.39	PK
5460	38.03	6.83	V	44.86	53.98	9.12	AV
*5470	64.36	6.84	V	71.2	73.98	2.78	PK
*5470	38.68	6.84	V	45.52	53.98	8.46	AV

Band : UNII 2C

Operation Mode: 802.11 n_HT40

Transfer MCS Index: 0

Operating Frequency 5510 MHz

Channel No. 102 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	60.71	6.83	H	67.54	73.98	6.44	PK
5460	39.19	6.83	H	46.02	53.98	7.96	AV
*5470	62.79	6.84	H	69.63	73.98	4.35	PK
*5470	43.85	6.84	H	50.69	53.98	3.29	AV
5460	61.27	6.83	V	68.1	73.98	5.88	PK
5460	39.32	6.83	V	46.15	53.98	7.83	AV
*5470	62.85	6.84	V	69.69	73.98	4.29	PK
*5470	44.07	6.84	V	50.91	53.98	3.07	AV

Band : UNII 2C

Operation Mode: 802.11 ac_VHT40

Transfer MCS Index: 0

Operating Frequency 5510 MHz

Channel No. 102 Ch

Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	57.26	6.83	H	64.09	73.98	9.89	PK
5460	38.31	6.83	H	45.14	53.98	8.84	AV
*5470	61.09	6.84	H	67.93	73.98	6.05	PK
*5470	42.89	6.84	H	49.73	53.98	4.25	AV
5460	58.16	6.83	V	64.99	73.98	8.99	PK
5460	38.57	6.83	V	45.4	53.98	8.58	AV
*5470	62.85	6.84	V	69.69	73.98	4.29	PK
*5470	43.12	6.84	V	49.96	53.98	4.02	AV

Band : UNII 2C

Operation Mode: 802.11 ac_VHT80

Transfer MCS Index: 0

Operating Frequency 5530 MHz

Channel No. 106 Ch


Frequency [MHz]	Reading [dBuV]	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	55.63	6.83	H	62.46	73.98	11.52	PK
5460	42.08	6.83	H	48.91	53.98	5.07	AV
*5470	57.50	6.84	H	64.34	73.98	9.64	PK
*5470	43.47	6.84	H	50.31	53.98	3.67	AV
5460	55.80	6.83	V	62.63	73.98	11.35	PK
5460	42.11	6.83	V	48.94	53.98	5.04	AV
*5470	57.77	6.84	V	64.61	73.98	9.37	PK
*5470	43.50	6.84	V	50.34	53.98	3.64	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT + D.F.
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. “*” is radiated band edge test frequency.(not restricted band emissions)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
6. The worst limit for UNII 3 according to 15.407(4)(i) is -27 dBm(68.2 dBuV/m).
The band edge results at 5850 MHz comply to the worst limit.


RESULT PLOTS

Radiated Restricted Band Edges plot –Average Reading (802.11a, Ch.36), X-H

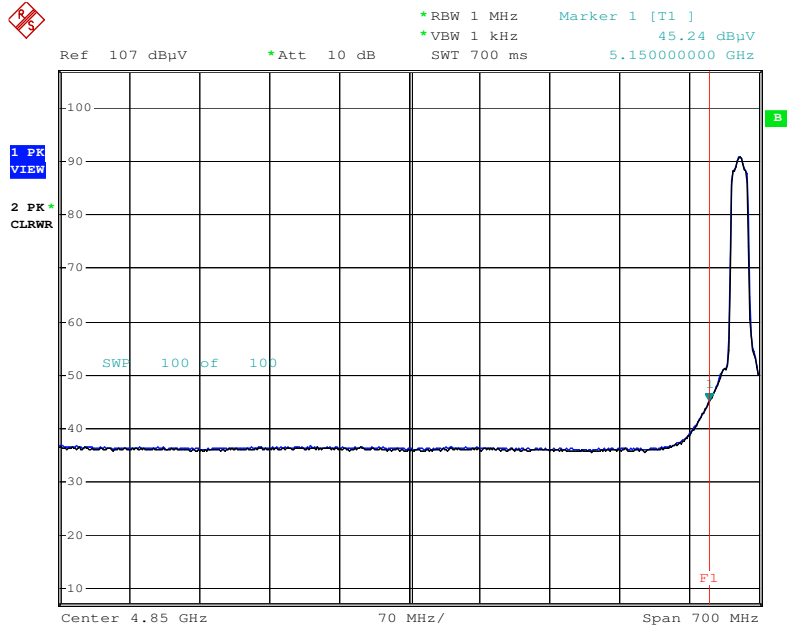

Date: 23.MAY.2017 19:22:44


Radiated Restricted Band Edges plot – Peak Reading (802.11a, Ch.36), X-H

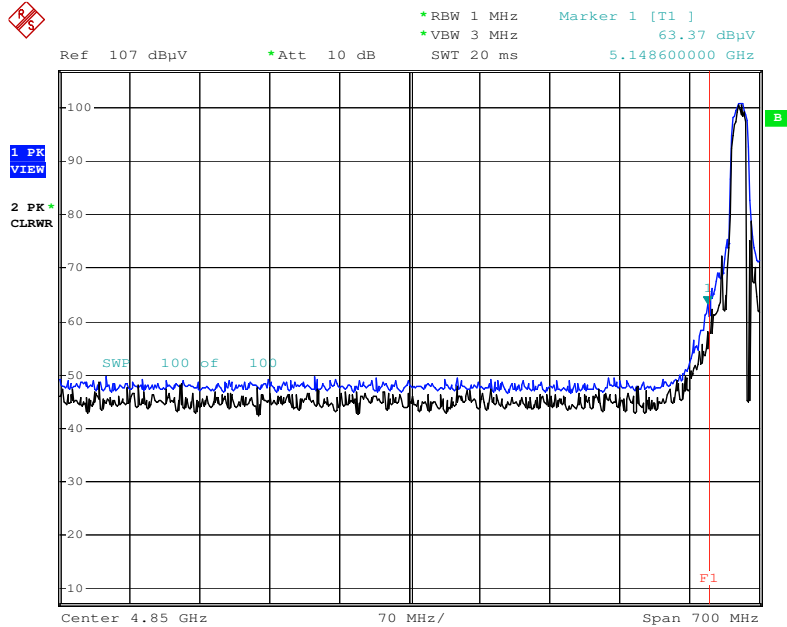

Date: 23.MAY.2017 19:23:33


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11n_HT20, Ch.36), X-H

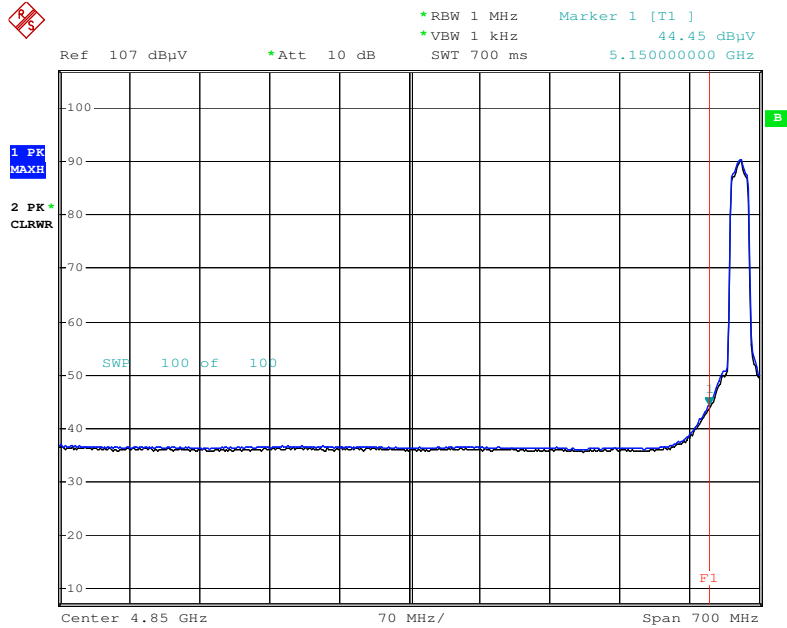

Date: 23.MAY.2017 19:26:08


Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.36), X-H

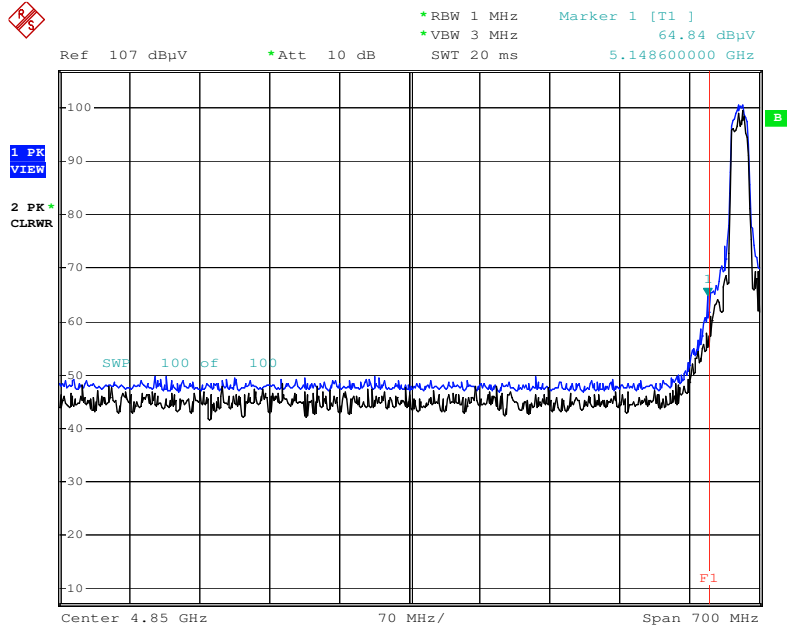

Date: 23.MAY.2017 19:26:41


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11ac_VHT20, Ch.100), Y-V

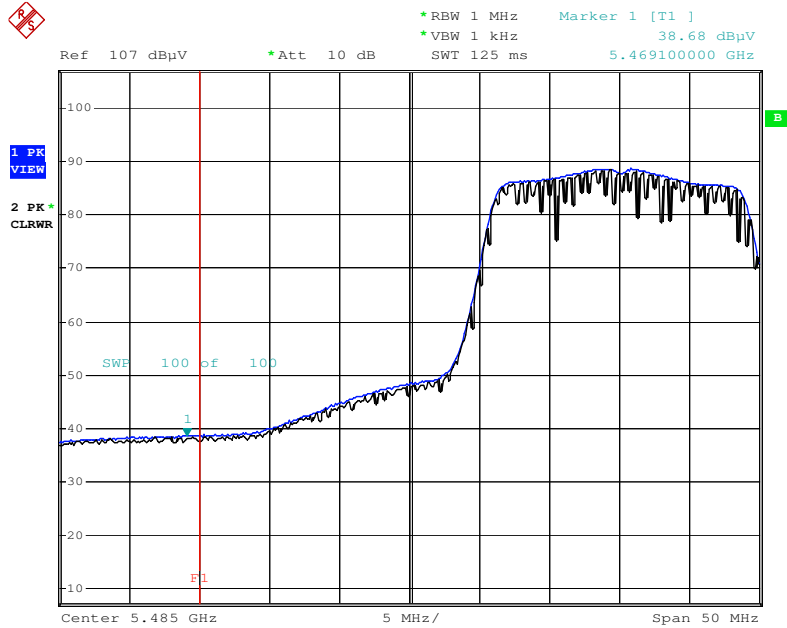

Date: 23.MAY.2017 19:52:47


Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT20, Ch.100), Y-V

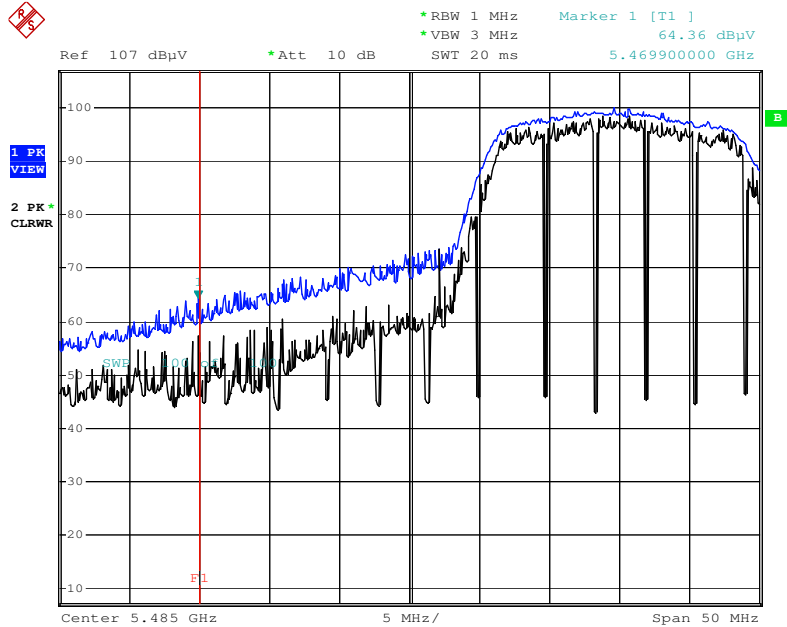

Date: 23.MAY.2017 19:51:01


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11n_HT40, Ch.102), Y-V

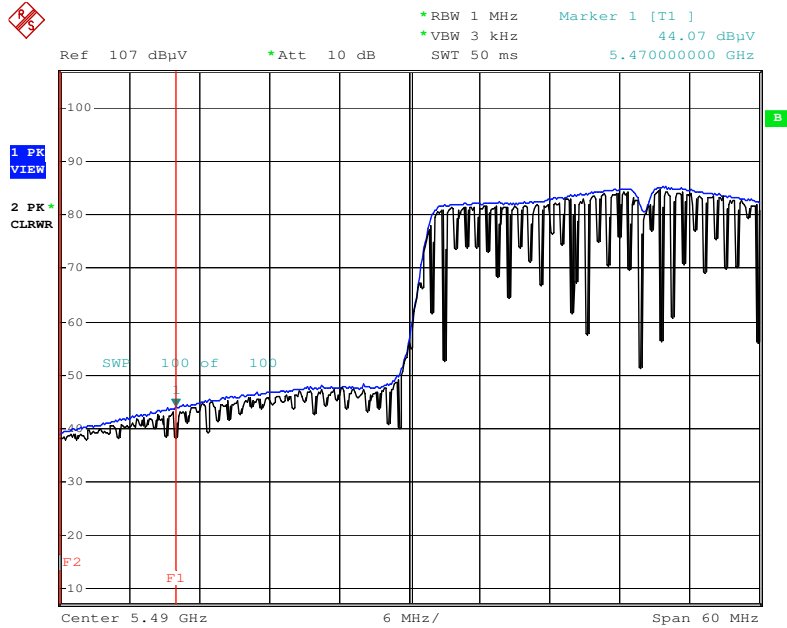

Date: 23.MAY.2017 20:01:40


Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT40, Ch.102), Y-V

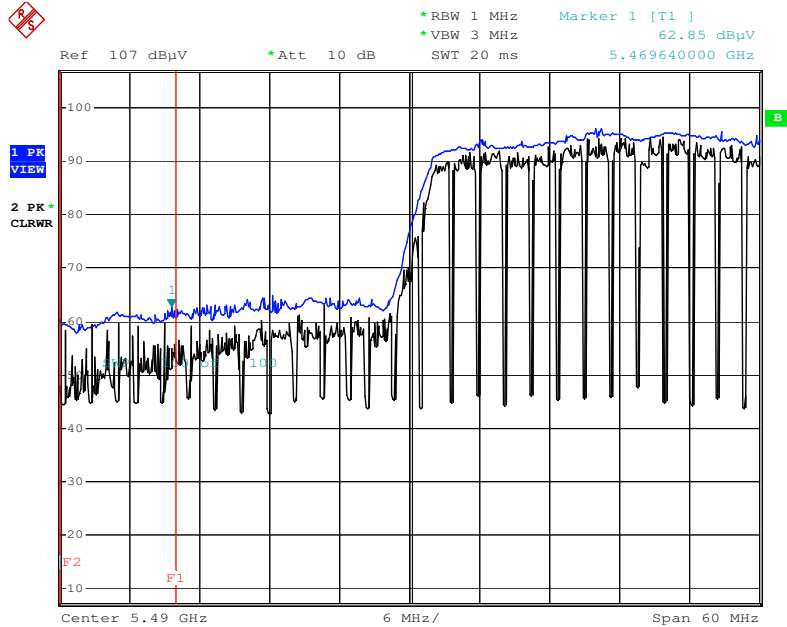

Date: 23.MAY.2017 20:00:22


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11ac_VHT40, Ch.102), Y-V

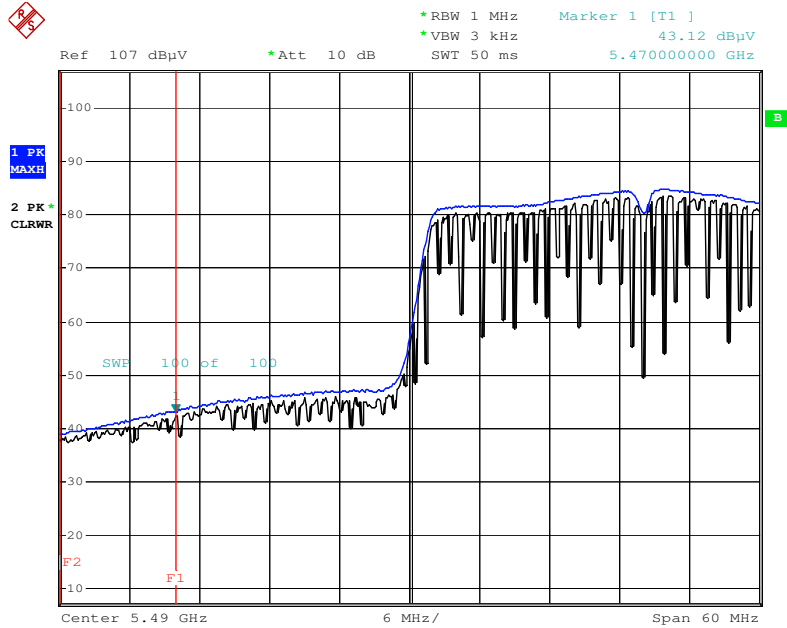

Date: 23.MAY.2017 20:14:25


Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT40, Ch.102), Y-V

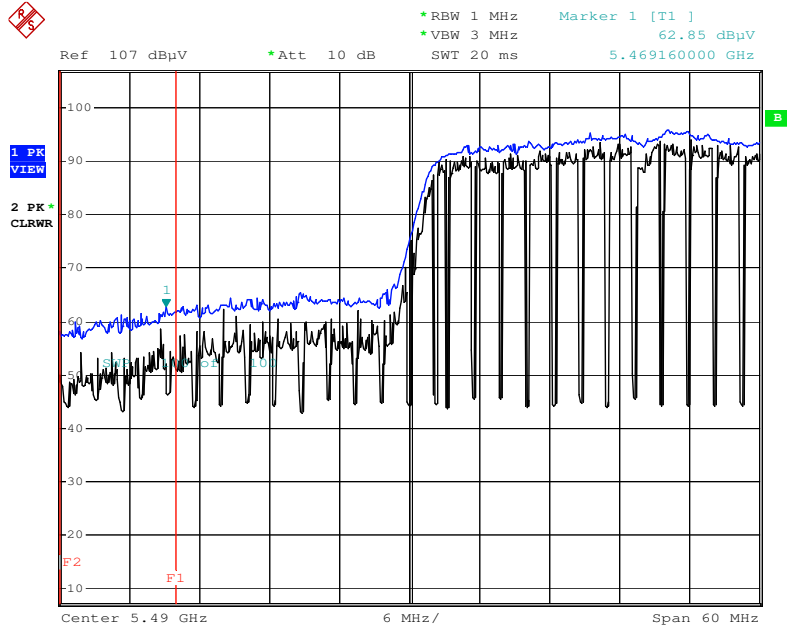

Date: 23.MAY.2017 20:16:34


Note : Only the worst case plots for Radiated Restricted Band Edges.

Radiated Restricted Band Edges plot –Average Reading (802.11ac_VHT80, Ch.106), Y-V

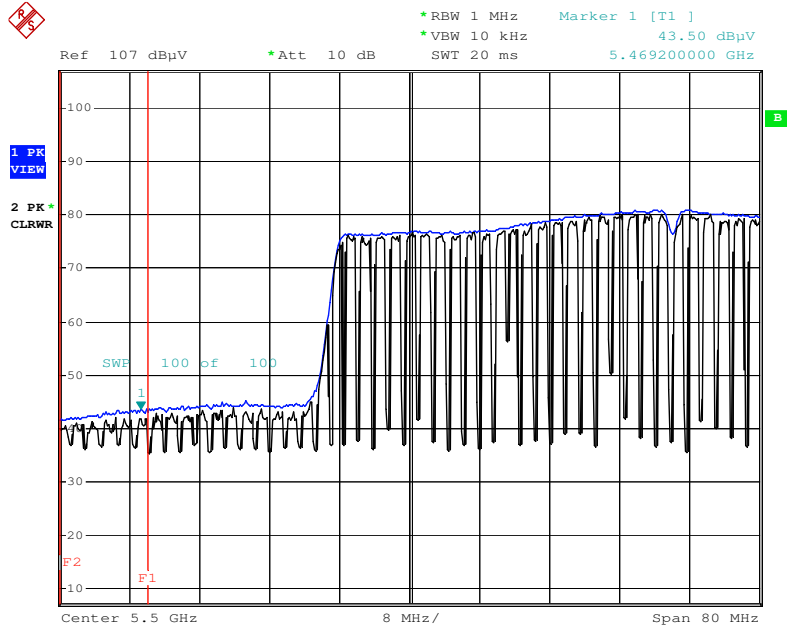

Date: 23.MAY.2017 20:37:37

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80, Ch.106), Y-V

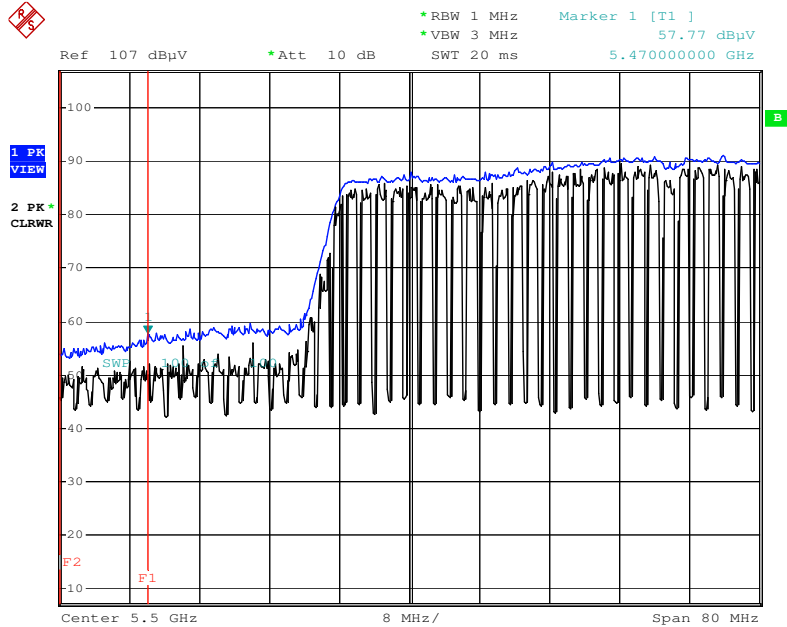


Date: 23.MAY.2017 20:39:29

Note : Only the worst case plots for Radiated Restricted Band Edges.


■ RESULT PLOTS (UNII 3)

Radiated Restricted Band Edges plot – Peak Reading (802.11a)

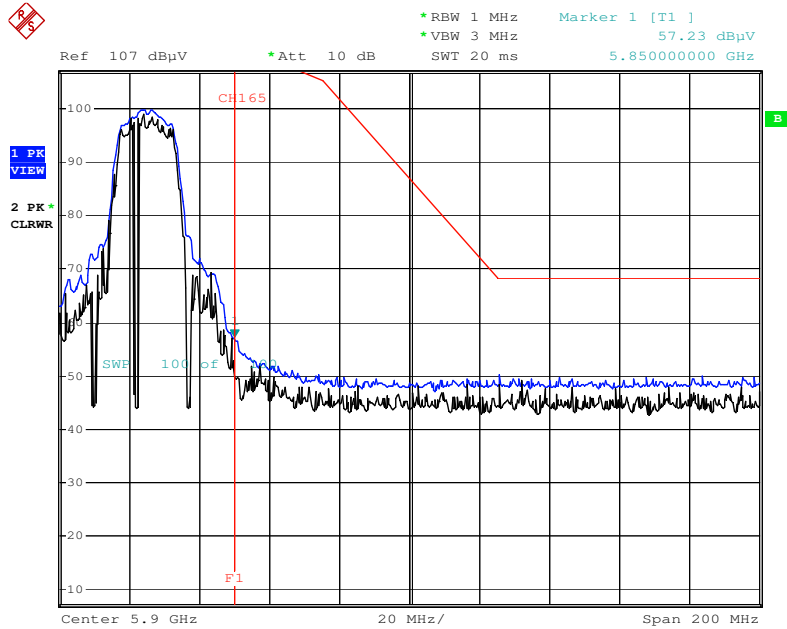


Date: 23.MAY.2017 20:54:27

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20)

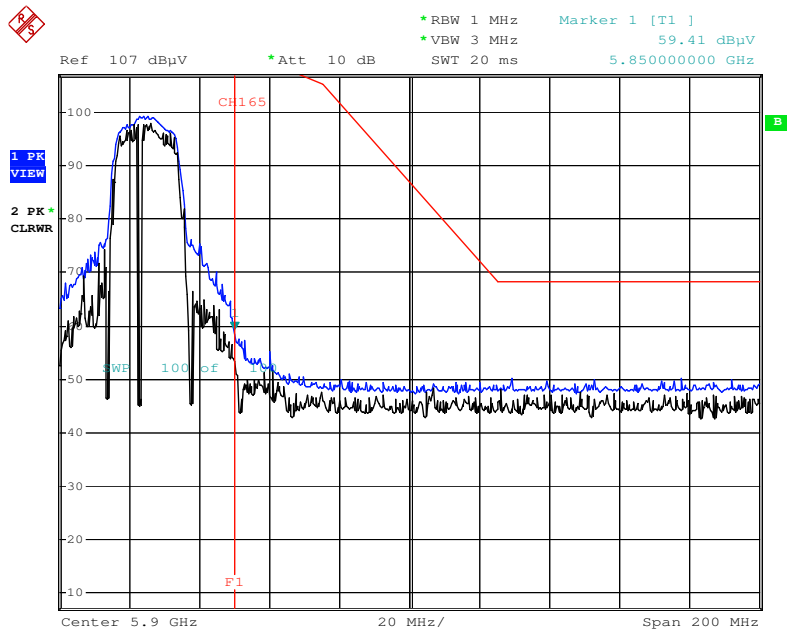


Date: 23.MAY.2017 20:55:33

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT20)

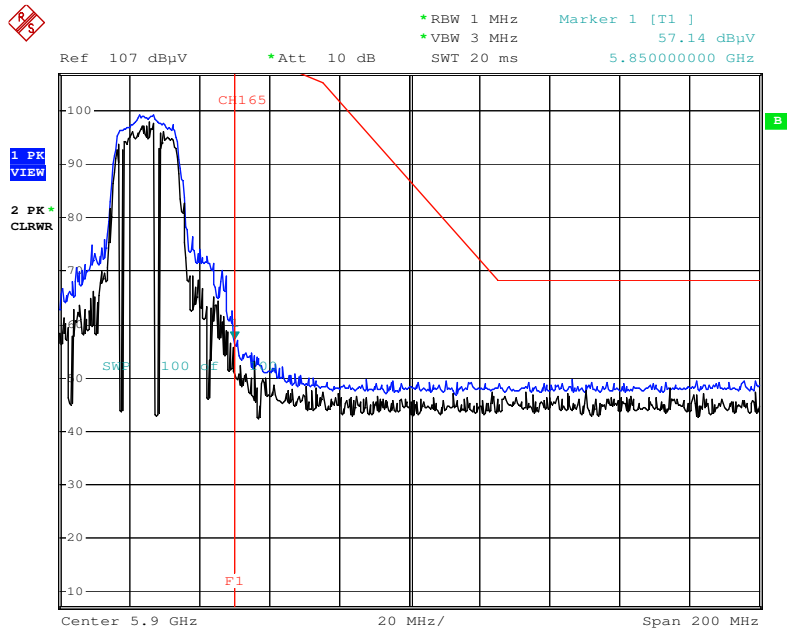


Date: 23.MAY.2017 20:56:21

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT40)

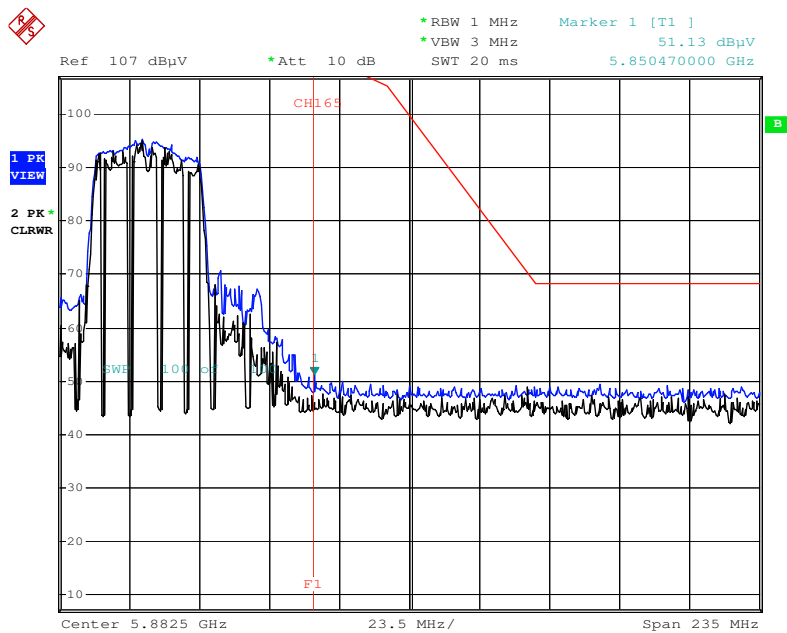


Date: 23.MAY.2017 20:59:35

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT40)

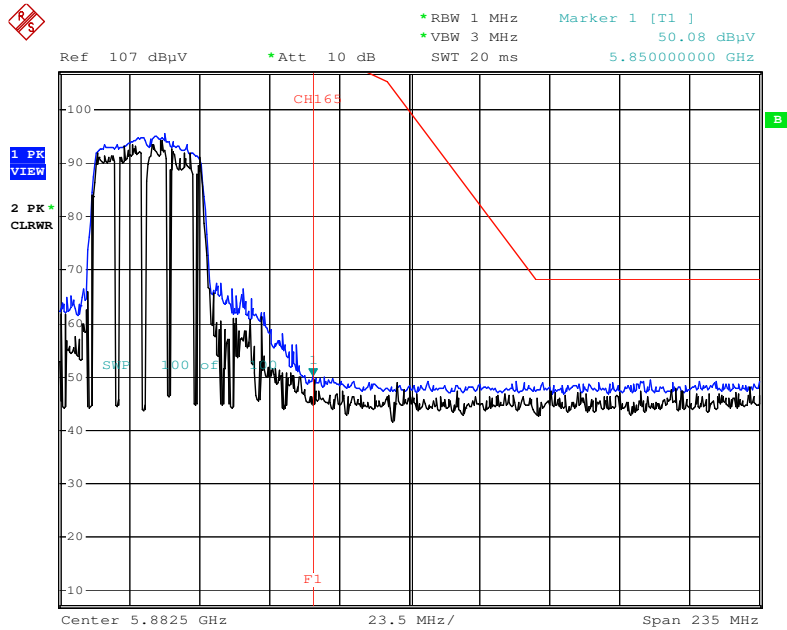

Date: 23.MAY.2017 20:58:26

Radiated Restricted Band Edges plot – Peak Reading (802.11ac_VHT80)

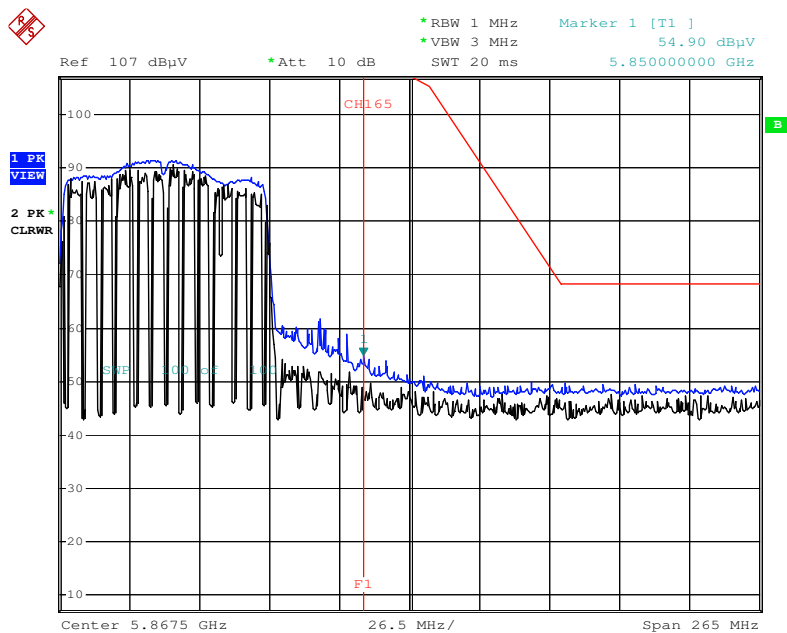

Date: 23.MAY.2017 20:52:54

9.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

■ **RESULT PLOTS**

Conducted Emissions (Line 1)

EMI Auto Test(12)


1 / 2

HCT TEST Report

Common Information

EUT: SM-J730K
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: WLAN 5GHz MODE

FCC CLASS B

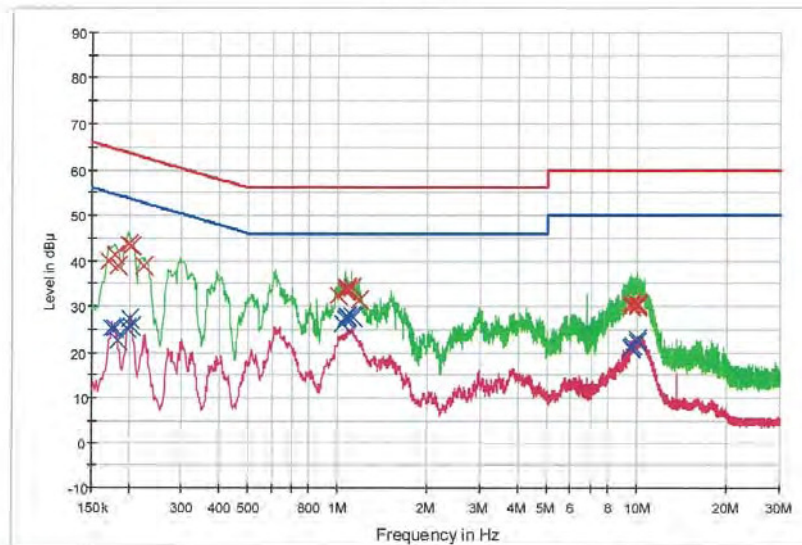

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.170000	39.7	9.000	Off	L1	9.6	25.2	65.0
0.178000	41.3	9.000	Off	L1	9.6	23.2	64.6
0.184000	38.9	9.000	Off	L1	9.6	25.4	64.3
0.198000	43.5	9.000	Off	L1	9.6	20.2	63.7
0.204000	43.1	9.000	Off	L1	9.6	20.4	63.4
0.222000	38.7	9.000	Off	L1	9.6	24.0	62.7
0.998000	32.2	9.000	Off	L1	9.7	23.8	56.0
1.052000	33.5	9.000	Off	L1	9.7	22.5	56.0
1.068000	33.9	9.000	Off	L1	9.7	22.1	56.0
1.072000	33.9	9.000	Off	L1	9.7	22.1	56.0
1.106000	34.1	9.000	Off	L1	9.7	21.9	56.0
1.172000	31.2	9.000	Off	L1	9.7	24.8	56.0
9.562000	30.8	9.000	Off	L1	10.1	29.2	60.0
9.568000	30.6	9.000	Off	L1	10.1	29.4	60.0
9.578000	30.0	9.000	Off	L1	10.1	30.0	60.0
9.964000	30.1	9.000	Off	L1	10.1	30.0	60.0
9.990000	30.3	9.000	Off	L1	10.1	29.7	60.0
10.016000	30.8	9.000	Off	L1	10.1	29.2	60.0

Final Result 2

2017-06-02

오전 10:31:27

EMI Auto Test(12)

2 / 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Gorr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	25.2	9.000	Off	L1	9.6	29.5	54.8
0.178000	25.3	9.000	Off	L1	9.6	29.2	54.6
0.182000	22.5	9.000	Off	L1	9.6	31.9	54.4
0.196000	25.1	9.000	Off	L1	9.6	28.7	53.8
0.200000	27.3	9.000	Off	L1	9.6	26.3	53.6
0.204000	25.8	9.000	Off	L1	9.6	27.7	53.4
1.030000	26.3	9.000	Off	L1	9.7	19.7	46.0
1.052000	27.2	9.000	Off	L1	9.7	18.8	46.0
1.066000	27.6	9.000	Off	L1	9.7	18.4	46.0
1.070000	27.8	9.000	Off	L1	9.7	18.2	46.0
1.106000	28.1	9.000	Off	L1	9.7	17.9	46.0
1.128000	27.7	9.000	Off	L1	9.7	18.3	46.0
9.574000	21.3	9.000	Off	L1	10.1	28.7	50.0
9.578000	20.9	9.000	Off	L1	10.1	29.1	50.0
9.644000	21.4	9.000	Off	L1	10.1	28.6	50.0
9.984000	22.7	9.000	Off	L1	10.1	27.3	50.0
9.992000	22.2	9.000	Off	L1	10.1	27.8	50.0
10.016000	22.8	9.000	Off	L1	10.1	27.2	50.0

2017-06-02

오전 10:31:27

Conducted Emissions (Line 2)

EMI Auto Test(12)


1 / 2

HCT TEST Report

Common Information

EUT: SM-J730K
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 5GHz MODE

FCC CLASS B

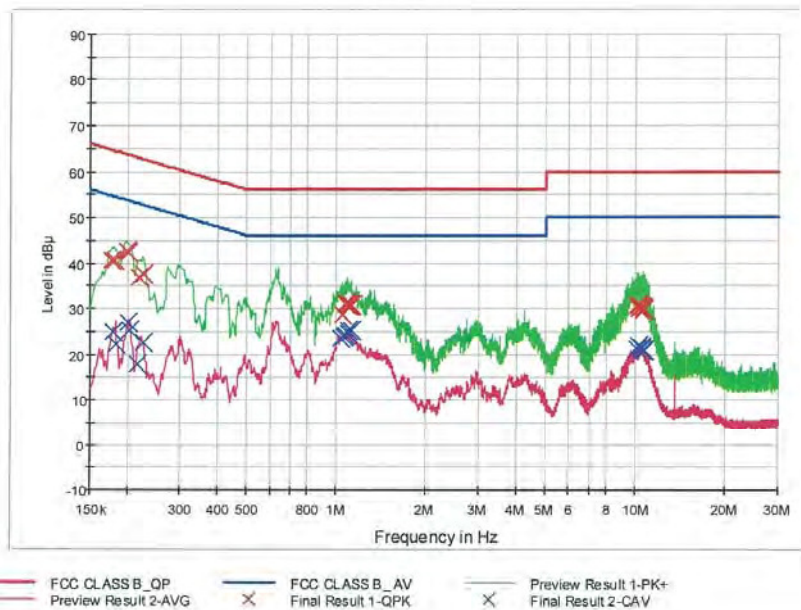

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.176000	40.5	9.000	Off	N	9.6	24.2	64.7
0.180000	40.5	9.000	Off	N	9.6	24.0	64.5
0.198000	42.5	9.000	Off	N	9.6	21.2	63.7
0.202000	42.2	9.000	Off	N	9.6	21.3	63.5
0.218000	36.9	9.000	Off	N	9.6	26.0	62.9
0.226000	37.4	9.000	Off	N	9.6	25.2	62.6
1.044000	28.8	9.000	Off	N	9.7	27.2	56.0
1.066000	30.9	9.000	Off	N	9.7	25.1	56.0
1.088000	31.0	9.000	Off	N	9.7	25.0	56.0
1.096000	30.6	9.000	Off	N	9.7	25.4	56.0
1.106000	30.7	9.000	Off	N	9.7	25.3	56.0
1.116000	30.6	9.000	Off	N	9.7	25.4	56.0
10.168000	30.6	9.000	Off	N	10.1	29.4	60.0
10.222000	30.5	9.000	Off	N	10.1	29.5	60.0
10.234000	30.0	9.000	Off	N	10.1	30.0	60.0
10.490000	30.2	9.000	Off	N	10.1	29.8	60.0
10.564000	29.7	9.000	Off	N	10.1	30.3	60.0
10.616000	30.1	9.000	Off	N	10.1	29.9	60.0

Final Result 2

2017-06-02

오전 10:22:11

EMI Auto Test(12)

2 / 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Gorr. (dB)	Margin (dB)	Limit (dBμV)
0.178000	24.9	9.000	Off	N	9.6	29.6	54.6
0.182000	22.2	9.000	Off	N	9.6	32.2	54.4
0.200000	27.1	9.000	Off	N	9.6	26.5	53.6
0.204000	25.3	9.000	Off	N	9.6	28.1	53.4
0.216000	17.7	9.000	Off	N	9.6	35.3	53.0
0.226000	22.4	9.000	Off	N	9.6	30.2	52.6
1.028000	23.6	9.000	Off	N	9.7	22.4	46.0
1.056000	23.7	9.000	Off	N	9.7	22.3	46.0
1.064000	24.1	9.000	Off	N	9.7	21.9	46.0
1.096000	24.6	9.000	Off	N	9.7	21.4	46.0
1.100000	25.3	9.000	Off	N	9.7	20.7	46.0
1.116000	25.1	9.000	Off	N	9.7	20.9	46.0
10.168000	21.1	9.000	Off	N	10.1	28.9	50.0
10.222000	21.9	9.000	Off	N	10.1	28.1	50.0
10.470000	21.2	9.000	Off	N	10.1	28.8	50.0
10.490000	21.6	9.000	Off	N	10.1	28.4	50.0
10.616000	21.0	9.000	Off	N	10.1	29.0	50.0
10.662000	20.8	9.000	Off	N	10.1	29.2	50.0

2017-06-02

오전 10:22:11

10. LIST OF TEST EQUIPMENT

10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/23/2016	Annual	100073
Rohde & Schwarz	ESCI / Test Receiver	12/23/2016	Annual	100584
Agilent	N9020A / Signal Analyzer	06/24/2016	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/30/2016	Annual	MY49431210
Agilent	N1911A / Power Meter	04/17/2017	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/17/2017	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/23/2016	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/14/2016	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	07/07/2016	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/15/2016	Annual	07560

10.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	08/25/2016	Biennial	9120D-1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	09/04/2015	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	09/10/2016	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/23/2016	Annual	101068-SZ
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/24/2016	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/15/2017	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	07/06/2016	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/24/2017	Annual	2
Agilent	8493C-10 / Attenuator(10 dB)	08/11/2016	Annual	76649
CERNEX	CBLU1183540 / Power Amplifier	07/15/2016	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/15/2016	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/23/2017	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	07/11/2016	Annual	25956