



FCC 47 CFR § 2.1093
IEEE Std 1528-2013

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n and ANT+

MODEL NUMBER: SM-J810G/DS, SM-J810GF/DS

FCC ID: A3LSMJ810G

REPORT NUMBER: 4788490168-S1V1

ISSUE DATE: 6/5/2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History


Rev.	Date	Revisions	Revised By
V1	6/5/2018	Initial Issue	SangHwa, Lee

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	10
6.	Device Under Test (DUT) Information	10
6.1.	DUT Description	10
6.2.	Wireless Technologies.....	11
6.3.	Nominal and Maximum Output Power.....	11
6.4.	General LTE SAR Test and Reporting Considerations.....	12
6.5.	LTE Carrier Aggregation	13
6.6.	LTE (TDD) Considerations.....	13
6.7.	Power Reduction by Proximity Sensing	15
6.7.1.	Proximity Sensor Triggering Distance (KDB 616217 §6.2).....	15
6.7.2.	Proximity Sensor Coverage (KDB 616217 §6.3)	22
6.7.3.	Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4).....	22
6.7.4.	Resulting test positions for SAR measurements	22
7	RF Exposure Conditions (Test Configurations)	23
8	Dielectric Property Measurements & System Check	24
8.1	Dielectric Property Measurements	24
8.2	System Check.....	26
9	Conducted Output Power Measurements.....	28
9.1	GSM	28
9.2	W-CDMA	30
9.3	LTE.....	35
9.3.1	LTE Rel.10 Carrier Aggregation	43
9.4	Wi-Fi 2.4 GHz (DTS Band).....	43
9.5	Bluetooth	44
10.	Measured and Reported (Scaled) SAR Results.....	45
10.1	GSM 850	47

10.2	GSM1900	47
10.3	W-CDMA Band II	48
10.4	W-CDMA Band V	48
10.5	LTE Band 5 (10MHz Bandwidth)	49
10.6	LTE Band 41 (20MHz Bandwidth)	49
10.7	Wi-Fi (DTS Band)	50
10.8	Bluetooth	51
11.	SAR Measurement Variability	52
12.	DUT Holder Perturbations	53
13.	Simultaneous Transmission SAR Analysis	54
13.1	Sum of the SAR for GSM 850 & Wi-Fi & BT	55
13.2	Sum of the SAR for GSM 1900 & Wi-Fi & BT	55
13.3	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	55
13.4	Sum of the SAR for WCDMA Band V & Wi-Fi & BT	56
13.5	Sum of the SAR for LTE Band 5 & Wi-Fi & BT	56
13.6	Sum of the SAR for LTE Band 41 & Wi-Fi & BT	56
Appendixes		58
	4788490168-S1V1 FCC Report SAR_App A_Photos & Ant. Locations	58
	4788490168-S1V1 FCC Report SAR_App B_Highest SAR Test Plots	58
	4788490168-S1V1 FCC Report SAR_App C_System Check Plots	58
	4788490168-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients	58
	4788490168-S1V1 FCC Report SAR_App E_Probe Cal. Certificates	58
	4788490168-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates	58

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.		
FCC ID	A3LSMJ810G		
Model Number	SM-J810G/DS, SM-J810GF/DS		
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
SAR Limits (W/Kg)			
Exposure Category	Peak spatial-average(1g of tissue)	Phablet (10g of tissue)	
General population / Uncontrolled exposure	1.6	4.0	
The Highest Reported SAR (W/kg)			
RF Exposure Conditions	Equipment Class		
	Licensed	DTS	DSS(BT)
Head	0.90	1.03	0.34
Body-worn	1.33	0.11	N/A
Hotspot	0.99	0.24	
Phablet-10g	1.32	N/A	
Simultaneous TX	Head	1.46	1.18
	Body-worn	1.44	N/A
	Hotspot	1.23	
	Phablet-10g	N/A	
Date Tested	5/24/2018 to 6/2/2018		
Test Results	Pass		
UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.			
Approved & Released By:		Prepared By:	
			
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory		SangHwa Lee Laboratory Technician UL Korea, Ltd. Suwon Laboratory	

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

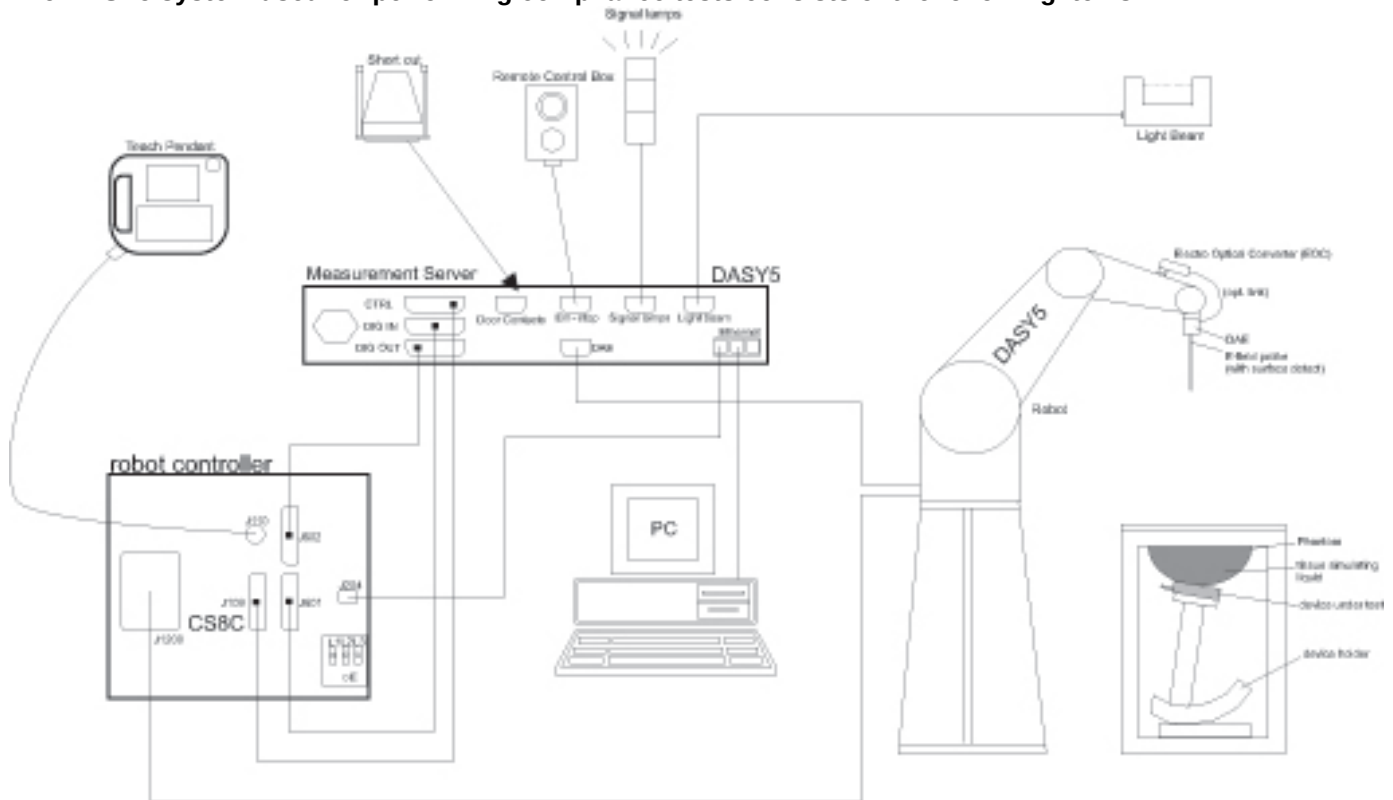

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-8-2018
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-2-2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-11-2018
Thermometer	Lutron	MHB-382SD	AH.91478	8-10-2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-7-2018
Power Sensor	Agilent	U2000A	MY54260010	8-8-2018
Power Sensor	Agilent	U2000A	MY54260007	8-8-2018
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2018
Directional Coupler	Agilent	772D	MY52180193	8-7-2018
Directional Coupler	Agilent	778D	MY52180432	8-7-2018
Low Pass Filter	MICROLAB	LA-15N	03943	8-7-2018
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2018
Attenuator	Agilent	8491B/003	MY39269292	8-7-2018
Attenuator	Agilent	8491B/010	MY39269315	8-7-2018
Attenuator	Agilent	8491B/020	MY39269298	8-7-2018
E-Field Probe (SAR1)	SPEAG	EX3DV4	7376	8-22-2018
E-Field Probe (SAR2)	SPEAG	EX3DV4	7330	1-22-2019
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	9-28-2018
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1468	8-22-2018
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1447	3-15-2019
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	7-20-2018
System Validation Dipole	SPEAG	D835V2	4d194	7-19-2018
System Validation Dipole	SPEAG	D1900V2	5d190	9-20-2018
System Validation Dipole	SPEAG	D2450V2	939	9-19-2018
System Validation Dipole	SPEAG	D2600V2	1097	1-17-2019
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-10-2018
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	2-9-2019
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-16-2018

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	12-08-2018
Base Station Simulator	R & S	CMW500	150314	12-05-2018
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	8-7-2018

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 159.4 mm x 75.6 mm
------------------	--

	Overall Diagonal: 169.0 mm Display Diagonal: 151.7 mm																		
Back Cover	☒ The Back Cover is not removable.																		
Battery Options	☒ The rechargeable battery is not user accessible																		
Accessory	Headset																		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz)																		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz)																		
Test Sample Information	<table><tr><th>No.</th><th>S/N</th><th>Notes</th></tr><tr><td>1</td><td>R38K30X237A</td><td>Wi-Fi/BT Conduction</td></tr><tr><td>2</td><td>R38K30TBXQF</td><td>Main Conduction</td></tr><tr><td>3</td><td>R38K30TBTBM</td><td>SAR</td></tr><tr><td>4</td><td>R38K30TBTFF</td><td>SAR</td></tr><tr><td>5</td><td>R38K30TBXPR</td><td>SAR</td></tr></table>	No.	S/N	Notes	1	R38K30X237A	Wi-Fi/BT Conduction	2	R38K30TBXQF	Main Conduction	3	R38K30TBTBM	SAR	4	R38K30TBTFF	SAR	5	R38K30TBXPR	SAR
	No.	S/N	Notes																
	1	R38K30X237A	Wi-Fi/BT Conduction																
	2	R38K30TBXQF	Main Conduction																
	3	R38K30TBTBM	SAR																
	4	R38K30TBTFF	SAR																
5	R38K30TBXPR	SAR																	

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Release.9) HSUPA (Release.9) DC-HSDPA (Release 8) HSPA+ (Release.8)		100%
LTE	FDD Band 5 TDD Band 41	QPSK 16QAM ☒ Rel. 12 Carrier Aggregation (1 Uplink and 2 Downlinks)		100% (FDD) 63.3% (TDD)
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		99.7% (802.11b) 98.2% (802.11g) 98.1% (802.11n 20MHz BW)
Bluetooth	2.4 GHz	Version 4.2 LE		76.9% (DH5)

Notes:

- This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
- The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.9% and was considered and used for SAR Testing.
- Duty cycle for Wi-Fi is referenced from the DTS report.

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Antenna	RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power Hotspot back-off (dBm)		Reduced. RF Output Power Proximity sensor back-off (dBm)	
				Tune-up Limit	Frame Power	Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
Main Ant.1	GSM850	Voice/GPRS	1	33.5	24.5				
		GPRS	2	31.5	25.5				
		GPRS	3	28.5	24.2				
		GPRS	4	27.5	24.5				
		EGPRS	1	27.0	18.0				
		EGPRS	2	25.0	19.0				
		EGPRS	3	24.0	19.7				
		EGPRS	4	23.0	20.0				
	GSM1900	Voice/GPRS	1	31.0	22.0	28.0	19.0	28.0	19.0
		GPRS	2	28.5	22.5	25.5	19.5	25.5	19.5
		GPRS	3	26.5	22.2	23.5	19.2	23.5	19.2
		GPRS	4	25.0	22.0	22.0	19.0	22.0	19.0
		EGPRS	1	26.0	17.0	23.0	14.0	23.0	14.0
		EGPRS	2	24.0	18.0	21.0	15.0	21.0	15.0
		EGPRS	3	23.5	19.2	20.5	16.2	20.5	16.2
		EGPRS	4	22.0	19.0	19.0	16.0	19.0	16.0

Antenna	RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
Main Ant.1	W-CDMA Band II	R99	24.0	19.5	19.5
		HSDPA	22.5	18.5	18.5
		HSUPA	22.5	18.5	18.5
		DC-HSDPA	22.5	18.5	18.5
	W-CDMA Band V	R99	25.0		
		HSDPA	23.5		
		HSUPA	23.5		
		DC-HSDPA	23.5		

Antenna	RF Air interface	Mode	Max. RF Output Power (dBm)
Main Ant.1	LTE Band 5	QPSK	25.5
Main Ant.2	LTE Band 41	QPSK	24.5

RF Air interface	Mode	Max. RF Output Power (dBm)
WiFi 2.4 GHz	802.11b	17.0
	802.11g	14.0
	802.11n HT20	14.0
Bluetooth		12.0
Bluetooth LE		2.0

Notes:

- The device utilizes power reduction under some portable hotspot conditions for SAR compliance. There is power reduction for WWAN (GSM1900, WCDMA Band II). The reduced powers were confirmed via conducted power measurements the RF port. Detailed description of the hotspot power reduction mechanism is included in the operational description.
- WWAN (GSM1900, WCDMA Band II) has support to proximity sensor back-off function. it is operating during extremity (hand-held) use conditions. And This function is apply to phablet 10-g SAR exposure condition. Other Head and Body exposure conditions are performed SAR test at full power. The proximity sensor details explain in SAR report according to Section 6 in KDB 616217.
- Both back-off functions are not operating at the same time.
- LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

6.4. General LTE SAR Test and Reporting Considerations

Item	Description	
Frequency range, Channel Bandwidth,	Band 5	Frequency range: 824 - 849 MHz
		Channel Bandwidth

Numbers and Frequencies		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																																														
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																																														
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																																														
	Band 41	Frequency range: 2496 - 2690 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low	39750 / 2506.0																																																																			
	Low-Mid	40185 / 2549.5																																																																			
	Mid	40620 / 2593.0																																																																			
	Mid-High	41055 / 2636.5																																																																			
High	41490 / 2680.0																																																																				
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																				
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
Power reduction	Yes																																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

Notes:

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.5. LTE Carrier Aggregation

Combination	CA configuration	BCS Configuration	Reverse Y/N	Bandwidth (MHz)												Max Aggregated BW (MHz)
				Carrier 1						Carrier 2						
				20	15	10	5	3	1.4	20	15	10	5	3	1.4	
Intra-Band contiguous	5B	(0)	Yes			√	√					√				20
						√						√				
		(1)						√				√				8
							√							√		
Intra-Band non-contiguous	5A-5A	(0)	Yes			√	√					√	√			20
								√				√				
		(1)											√			8

Note(s):

For supported channels, please refer to §6.4

6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7.


6.7. Power Reduction by Proximity Sensing

6.7.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Front, Rear and Edge 3 of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

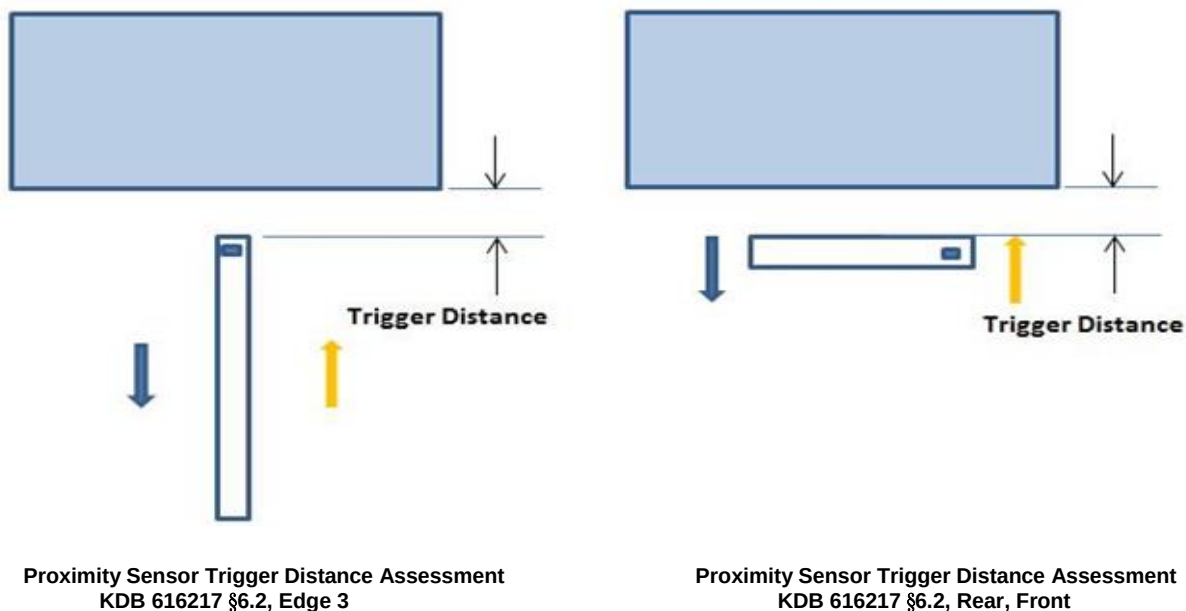

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point


Summary of Trigger Distances

Tissue simulating liquid	Trigger distance - Rear		Trigger distance - Front		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
1900 Body	14 mm	14 mm	8 mm	8 mm	12 mm	12 mm

Proximity Sensor Triggering Distance Measurement Results**GSM 1900**


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
GSM1900 GPRS 1 Slot	26.9	26.8	27.1	27.1	26.9	29.8	30.1	30.0	30.1	29.9
GSM1900 GPRS 2 Slots	24.5	24.4	24.4	24.6	24.6	27.6	27.3	27.4	27.6	27.6
GSM1900 GPRS 3 Slots	22.5	22.5	22.3	22.4	22.6	25.7	25.5	25.3	25.5	25.4
GSM1900 GPRS 4 Slots	21.1	20.8	20.9	21.1	21.2	24.2	24.0	23.9	23.8	24.1
GSM1900 EGPRS 1 Slot	21.9	21.8	22.0	22.2	22.1	25.0	25.1	24.8	24.9	24.9
GSM1900 EGPRS 2 Slots	20.2	19.8	19.9	20.2	20.1	22.8	22.8	22.9	23.2	23.1
GSM1900 EGPRS 3 Slots	19.7	19.6	19.5	19.4	19.6	22.5	22.3	22.4	22.4	22.6
GSM1900 EGPRS 4 Slots	17.8	17.9	17.8	18.2	18.1	21.2	20.9	20.8	20.9	21.1

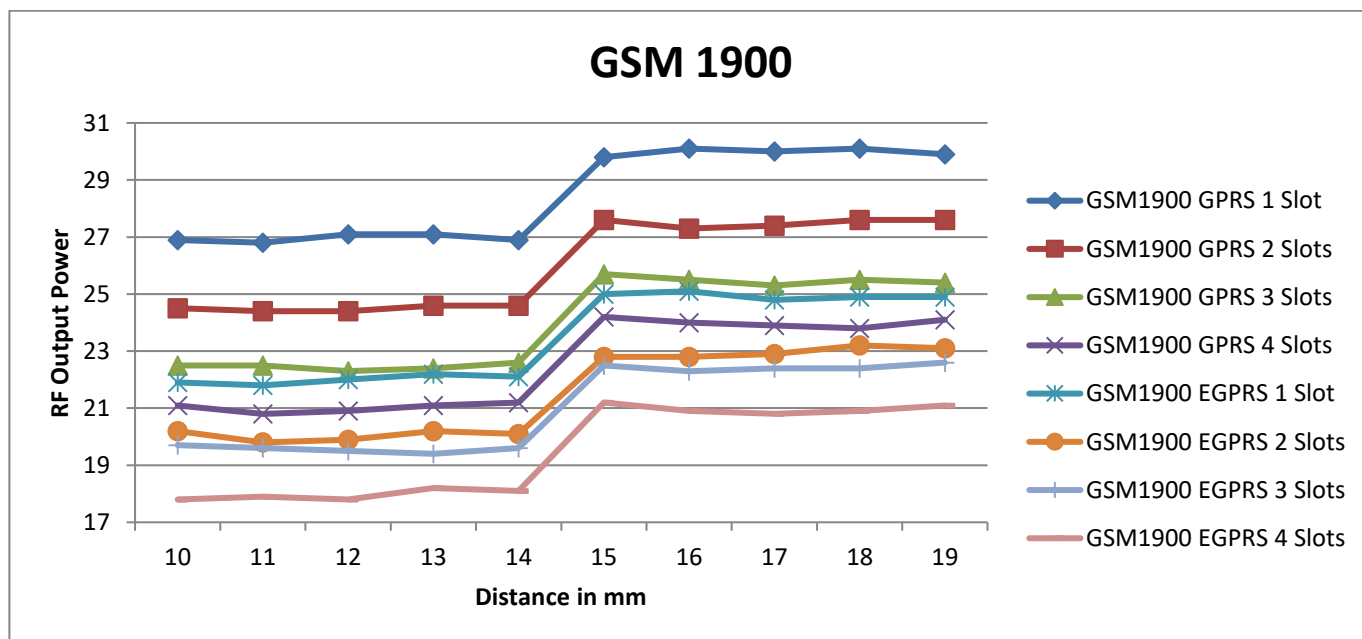


Front, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
GSM1900 GPRS 1 Slot	26.8	26.9	27.1	27.1	26.9	29.8	30.1	30.0	30.2	29.9
GSM1900 GPRS 2 Slots	24.5	24.4	24.4	24.6	24.7	27.7	27.3	27.3	27.7	27.7
GSM1900 GPRS 3 Slots	22.4	22.4	22.3	22.4	22.7	25.7	25.6	25.2	25.5	25.4
GSM1900 GPRS 4 Slots	21.2	20.9	20.9	21.1	21.2	24.2	24.0	23.7	23.9	24.2
GSM1900 EGPRS 1 Slot	21.9	21.8	22.0	22.2	22.1	25.1	25.2	24.8	24.9	24.9
GSM1900 EGPRS 2 Slots	20.3	19.8	19.9	20.2	20.3	22.8	22.8	22.9	23.1	23.3
GSM1900 EGPRS 3 Slots	19.6	19.5	19.5	19.4	19.6	22.4	22.4	22.4	22.5	22.6
GSM1900 EGPRS 4 Slots	17.9	17.9	17.8	18.2	18.2	21.2	20.9	20.8	20.9	21.2

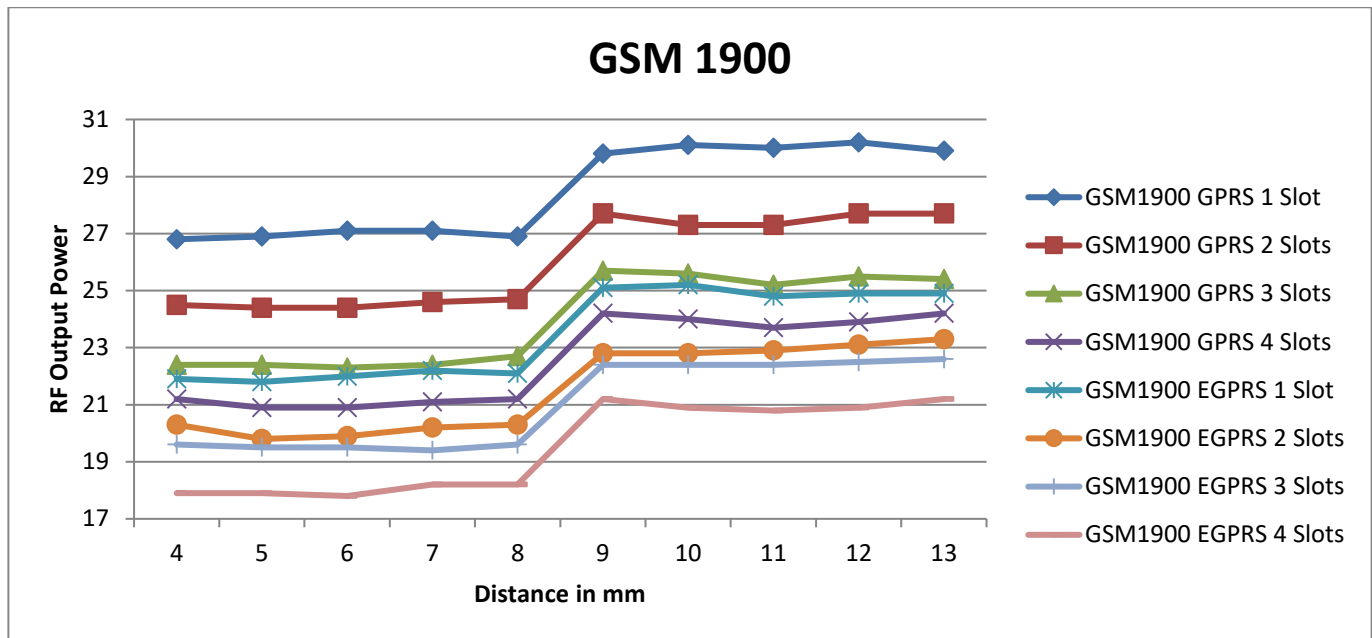

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	8	9	10	11	12	13	14	15	16	17
GSM1900 GPRS 1 Slot	26.9	26.8	27.3	27.1	26.9	29.8	30.1	30.0	30.1	29.8
GSM1900 GPRS 2 Slots	24.5	24.4	24.2	24.6	24.6	27.6	27.4	27.4	27.6	27.7
GSM1900 GPRS 3 Slots	22.2	22.4	22.1	22.4	22.6	25.7	25.5	25.4	25.4	25.3
GSM1900 GPRS 4 Slots	21.1	20.8	20.8	21.1	21.2	24.1	24.1	23.9	23.9	24.1
GSM1900 EGPRS 1 Slot	21.9	21.8	22.0	22.2	22.1	25.1	25.1	24.7	24.9	24.9
GSM1900 EGPRS 2 Slots	20.3	19.8	19.9	20.2	20.1	22.9	22.9	22.8	23.2	23.1
GSM1900 EGPRS 3 Slots	19.8	19.6	19.4	19.4	19.6	22.5	22.3	22.4	22.5	22.7
GSM1900 EGPRS 4 Slots	17.8	17.9	17.8	18.2	18.1	21.2	20.7	20.8	20.7	21.2

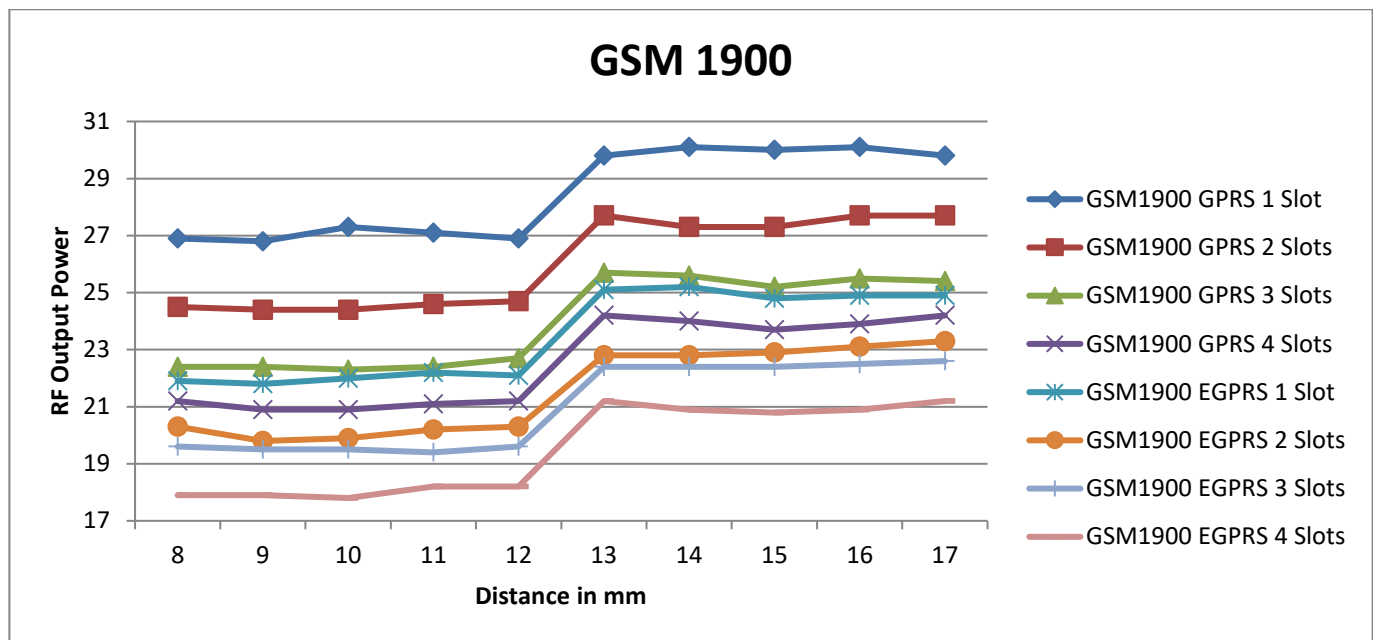

WCDMA Band II


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	10	11	12	13	14	15	16	17	18	19
WCDMA Band II	18.9	19.1	18.8	19.2	19.1	23.0	23.2	22.9	23.1	23.2

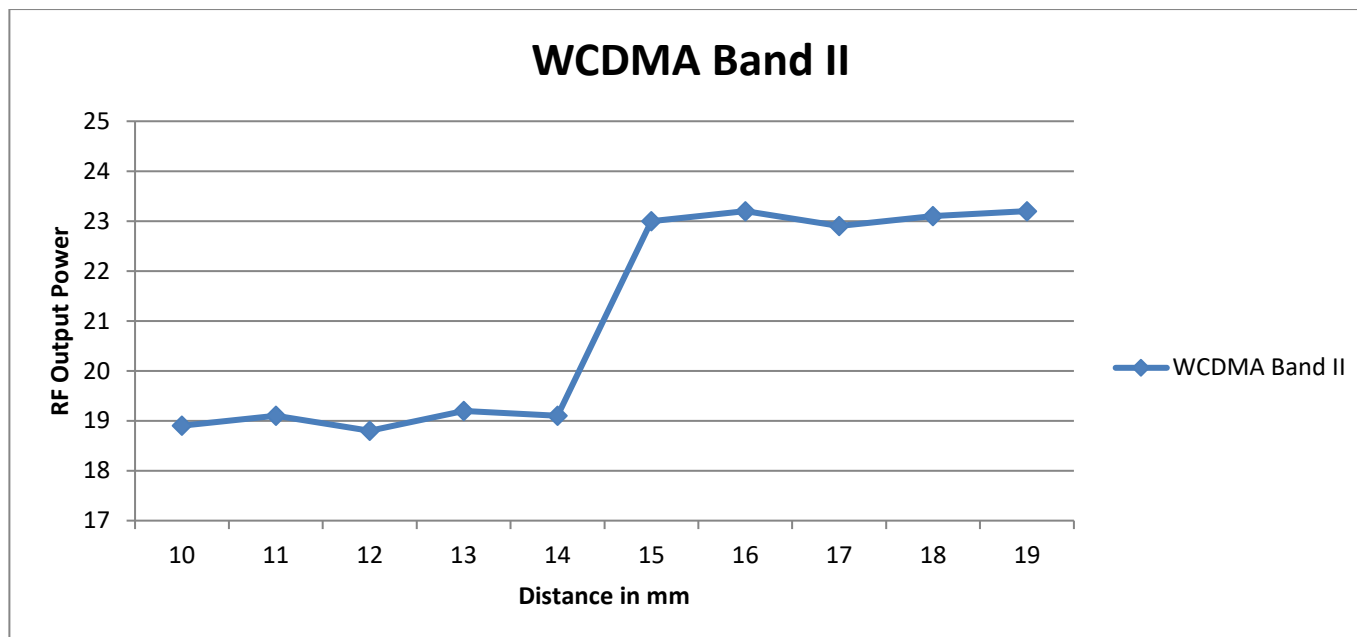


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
WCDMA Band II	18.5	18.4	18.5	18.4	18.7	23.1	23.2	22.7	22.9	23.0

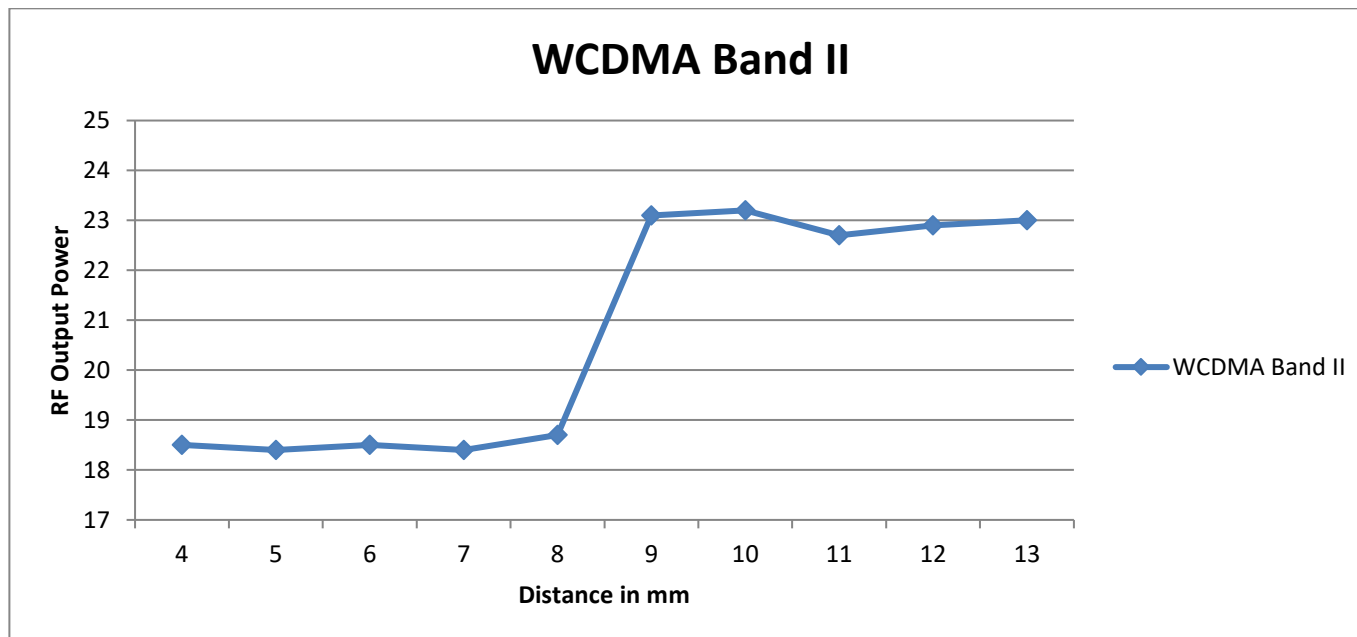

Edge 3, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	8	9	10	11	12	13	14	15	16	17
WCDMA Band II	18.7	18.4	18.5	18.4	18.6	23.1	23.2	22.9	22.9	23.1

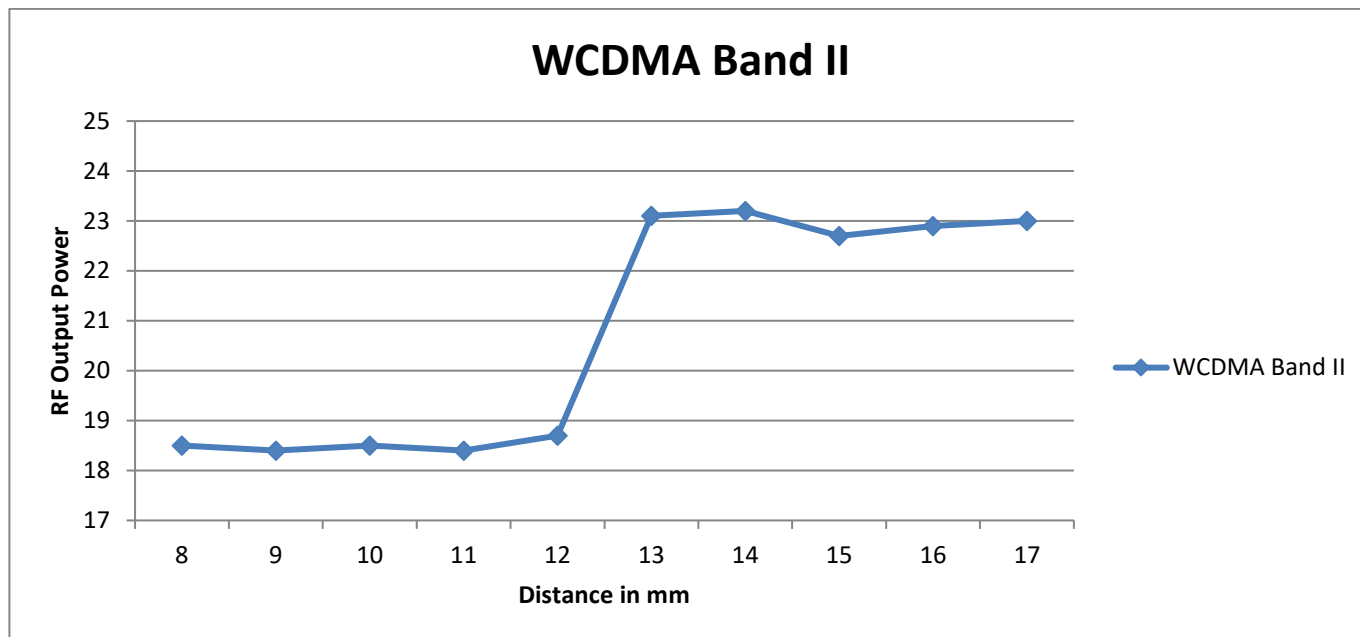


6.7.2. Proximity Sensor Coverage (KDB 616217 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

6.7.3. Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 3 parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 3 for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

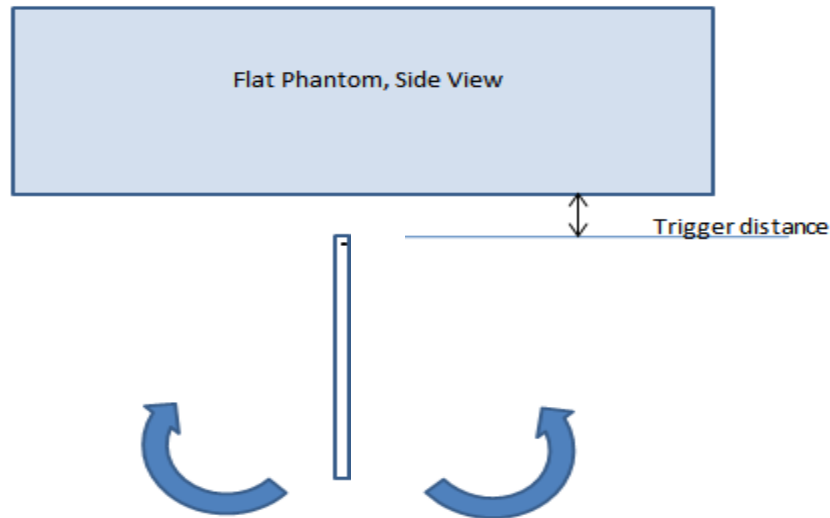

Proximity sensor tilt angle assessment (Edge 3) KDB 616217 §6.4

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Edge 3)

Band (MHz)	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over $\pm 45^\circ$	Power reduction status										
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
1900	12 mm	12 mm	On	On	On	On	On	On	On	On	On	On	On

6.7.4. Resulting test positions for SAR measurements

Wireless technologies	DUT Position	§6.7.1 Triggering Distance	§6.7.2 Coverage	§6.7.3 Tilt Angle	Worst case distance for SAR
WWAN	Rear	14 mm	N/A	N/A	13 mm
	Fornt	8 mm	N/A	N/A	7 mm
	Edge 3	12 mm	N/A	12 mm	11 mm

7 RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN Main Ant.1 & Main Ant.2	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	4
	Phablet-10g	0 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	4
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1
	Phablet-10g	0 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	> 25 mm	No	1

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Phablet SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g Phablet SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Phablet SAR is required for all surfaces and Edges within 25mm of the antenna.
- SAR test of Edge 4 (Left) is not required in Main Ant.2 due to antenna to the edge is > 25mm.

8 Dielectric Property Measurements & System Check

8.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5-29-2018	Body 2600	e'	52.6600	Relative Permittivity (ϵ_r):	52.66	52.51	0.28	5
		e''	14.8300	Conductivity (σ):	2.14	2.16	-0.78	5
	Body 2500	e'	52.9100	Relative Permittivity (ϵ_r):	52.91	52.64	0.52	5
		e''	14.5600	Conductivity (σ):	2.02	2.02	0.18	5
	Body 2700	e'	52.4000	Relative Permittivity (ϵ_r):	52.40	52.38	0.03	5
		e''	15.0600	Conductivity (σ):	2.26	2.30	-1.76	5
5-29-2018	Body 2450	e'	53.0100	Relative Permittivity (ϵ_r):	53.01	52.70	0.59	5
		e''	14.4600	Conductivity (σ):	1.97	1.95	1.02	5
	Body 2400	e'	53.1000	Relative Permittivity (ϵ_r):	53.10	52.77	0.62	5
		e''	14.3500	Conductivity (σ):	1.91	1.90	0.89	5
	Body 2480	e'	52.9600	Relative Permittivity (ϵ_r):	52.96	52.66	0.57	5
		e''	14.5200	Conductivity (σ):	2.00	1.99	0.51	5
5-31-2018	Head 2450	e'	40.2900	Relative Permittivity (ϵ_r):	40.29	39.20	2.78	5
		e''	13.2800	Conductivity (σ):	1.81	1.80	0.51	5
	Head 2400	e'	40.5000	Relative Permittivity (ϵ_r):	40.50	39.30	3.06	5
		e''	13.1100	Conductivity (σ):	1.75	1.75	-0.12	5
	Head 2480	e'	40.1700	Relative Permittivity (ϵ_r):	40.17	39.16	2.57	5
		e''	13.3800	Conductivity (σ):	1.85	1.83	0.69	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5-30-2018	Body 1900	e'	52.9100	Relative Permittivity (ϵ_r):	52.91	53.30	-0.73	5
		e''	14.9200	Conductivity (σ):	1.58	1.52	3.70	5
	Body 1850	e'	53.0300	Relative Permittivity (ϵ_r):	53.03	53.30	-0.51	5
		e''	14.9400	Conductivity (σ):	1.54	1.52	1.11	5
	Body 1910	e'	52.8900	Relative Permittivity (ϵ_r):	52.89	53.30	-0.77	5
		e''	14.9300	Conductivity (σ):	1.59	1.52	4.32	5
6-1-2018	Head 2600	e'	38.1000	Relative Permittivity (ϵ_r):	38.10	39.01	-2.33	5
		e''	14.0100	Conductivity (σ):	2.03	1.96	3.22	5
	Head 2500	e'	38.4800	Relative Permittivity (ϵ_r):	38.48	39.14	-1.68	5
		e''	13.7600	Conductivity (σ):	1.91	1.85	3.17	5
	Head 2700	e'	37.7100	Relative Permittivity (ϵ_r):	37.71	38.88	-3.02	5
		e''	14.2300	Conductivity (σ):	2.14	2.07	3.19	5
6-1-2018	Head 835	e'	41.5800	Relative Permittivity (ϵ_r):	41.58	41.50	0.19	5
		e''	19.5800	Conductivity (σ):	0.91	0.90	1.01	5
	Head 820	e'	41.7500	Relative Permittivity (ϵ_r):	41.75	41.60	0.35	5
		e''	19.6400	Conductivity (σ):	0.90	0.90	-0.33	5
	Head 850	e'	41.4100	Relative Permittivity (ϵ_r):	41.41	41.50	-0.22	5
		e''	19.5400	Conductivity (σ):	0.92	0.92	0.93	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5-28-2018	Body 835	e'	53.3000	Relative Permittivity (ϵ_r):	53.30	55.20	-3.44	5
		e''	21.4000	Conductivity (σ):	0.99	0.97	2.43	5
	Body 820	e'	53.4600	Relative Permittivity (ϵ_r):	53.46	55.28	-3.29	5
		e''	21.4700	Conductivity (σ):	0.98	0.97	1.08	5
	Body 850	e'	53.1500	Relative Permittivity (ϵ_r):	53.15	55.16	-3.64	5
		e''	21.3400	Conductivity (σ):	1.01	0.99	2.17	5
5-30-2018	Head 1900	e'	40.5100	Relative Permittivity (ϵ_r):	40.51	40.00	1.28	5
		e''	13.6700	Conductivity (σ):	1.44	1.40	3.16	5
	Head 1850	e'	40.8300	Relative Permittivity (ϵ_r):	40.83	40.00	2.08	5
		e''	13.6300	Conductivity (σ):	1.40	1.40	0.15	5
	Head 1910	e'	40.4300	Relative Permittivity (ϵ_r):	40.43	40.00	1.08	5
		e''	13.6800	Conductivity (σ):	1.45	1.40	3.77	5

8.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d194	7-19-2017	835	1g	9.33	9.30
				10g	6.03	6.09
D1900V2	5d190	9-20-2017	1900	1g	38.30	40.00
				10g	20.10	21.10
D2450V2	939	9-19-2017	2450	1g	52.30	50.70
				10g	24.60	23.90
D2600V2	1097	1-17-2018	2600	1g	56.40	54.40
				10g	25.30	24.20

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5-29-2018	D2600V2	1097	Body	1g	5.35	53.50	54.40	-1.65	1, 2
				10g	2.37	23.70	24.20	-2.07	
5-29-2018	D2450V2	939	Body	1g	4.77	47.70	50.70	-5.92	
				10g	2.22	22.20	23.90	-7.11	
5-31-2018	D2450V2	939	Head	1g	5.44	54.40	52.30	4.02	
				10g	2.48	24.80	24.60	0.81	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5-30-2018	D1900V2	5d190	Body	1g	4.04	40.40	40.00	1.00	3, 4
				10g	2.02	20.20	21.10	-4.27	
6-1-2018	D2600V2	1097	Head	1g	6.03	60.30	56.40	6.91	
				10g	2.63	26.30	25.30	3.95	
6-1-2018	D835V2	4d194	Head	1g	0.94	9.43	9.33	1.07	
				10g	0.62	6.20	6.03	2.82	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5-28-2018	D835V2	4d194	Body	1g	0.96	9.61	9.30	3.33	5, 6
				10g	0.63	6.31	6.09	3.61	
5-30-2018	D1900V2	5d190	Head	1g	4.13	41.30	38.30	7.83	7, 8
				10g	2.10	21.00	20.10	4.48	

9 Conducted Output Power Measurements

9.1 GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Full Power							
Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.4	32.9	23.8	24.5
			190	836.6	32.9	23.9	
			251	848.8	32.7	23.6	
GPRS (GMSK)	CS1	1	128	824.4	33.1	24.0	24.5
			190	836.6	32.8	23.7	
			251	848.8	32.4	23.4	
		2	128	824.4	30.8	24.8	25.5
			190	836.6	30.7	24.7	
			251	848.8	30.7	24.7	
		3	128	824.4	28.5	24.2	24.2
			190	836.6	28.5	24.2	
			251	848.8	28.5	24.2	
		4	128	824.4	27.2	24.2	24.5
			190	836.6	27.1	24.1	
			251	848.8	26.8	23.8	
EGPRS (8PSK)	MCS5	1	128	824.4	25.8	16.7	18.0
			190	836.6	25.7	16.7	
			251	848.8	25.5	16.5	
		2	128	824.4	23.6	17.6	19.0
			190	836.6	23.6	17.6	
			251	848.8	23.4	17.4	
		3	128	824.4	22.4	18.1	19.7
			190	836.6	22.3	18.1	
			251	848.8	22.2	17.9	
		4	128	824.4	22.7	19.7	20.0
			190	836.6	23.0	20.0	
			251	848.8	22.9	19.9	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots for Max power based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity sensor back-off		
						Frame Pwr (dBm)	Max. Frame Pwr (dBm)		Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.0	21.0	22.0		27.7	18.6	19.0	27.8	18.7	19.0
			661	1880.0	30.2	21.2			27.6	18.6		27.7	18.7	
			810	1909.8	30.4	21.4			27.8	18.7		27.9	18.8	
GPRS (GMSK)	CS1	1	512	1850.2	30.0	21.0	22.0		27.6	18.6	19.0	27.7	18.7	19.0
			661	1880.0	30.1	21.1			27.5	18.5		27.6	18.5	
			810	1909.8	30.3	21.3			27.5	18.5		27.7	18.7	
		2	512	1850.2	27.7	21.7	22.5		24.9	18.8	19.5	25.0	18.9	19.5
			661	1880.0	27.8	21.8			24.9	18.9		25.1	19.0	
			810	1909.8	27.7	21.7			24.8	18.8		24.9	18.9	
		3	512	1850.2	25.7	21.5	22.2		22.7	18.4	19.2	22.8	18.5	19.2
			661	1880.0	25.8	21.5			22.8	18.6		22.9	18.7	
			810	1909.8	25.7	21.5			22.8	18.5		22.9	18.6	
		4	512	1850.2	24.2	21.2	22.0		21.2	18.2	19.0	21.3	18.3	19.0
			661	1880.0	24.3	21.3			21.3	18.3		21.4	18.4	
			810	1909.8	24.2	21.2			21.2	18.2		21.3	18.3	
EGPRS (8PSK)	MCS5	1	512	1850.2	24.5	15.5	17.0		21.6	12.6	14.0	21.7	12.7	14.0
			661	1880.0	24.6	15.6			21.6	12.6		21.7	12.7	
			810	1909.8	24.6	15.5			21.6	12.6		21.7	12.6	
		2	512	1850.2	22.3	16.3	18.0		19.4	13.4	15.0	19.4	13.4	15.0
			661	1880.0	22.4	16.4			19.4	13.4		19.5	13.5	
			810	1909.8	22.3	16.3			19.4	13.4		19.5	13.4	
		3	512	1850.2	21.5	17.2	19.2		18.5	14.3	16.2	18.6	14.3	16.2
			661	1880.0	21.6	17.3			18.6	14.4		18.7	14.4	
			810	1909.8	21.5	17.3			18.6	14.3		18.6	14.4	
		4	512	1850.2	19.7	16.7	19.0		16.7	13.7	16.0	16.8	13.8	16.0
			661	1880.0	19.8	16.8			16.8	13.8		16.9	13.9	
			810	1909.8	19.7	16.7			16.8	13.7		16.8	13.8	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots for Max power and 2 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{dB}$ higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is $\leq 1.2\text{W/kg}$.

9.2 W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13.
A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

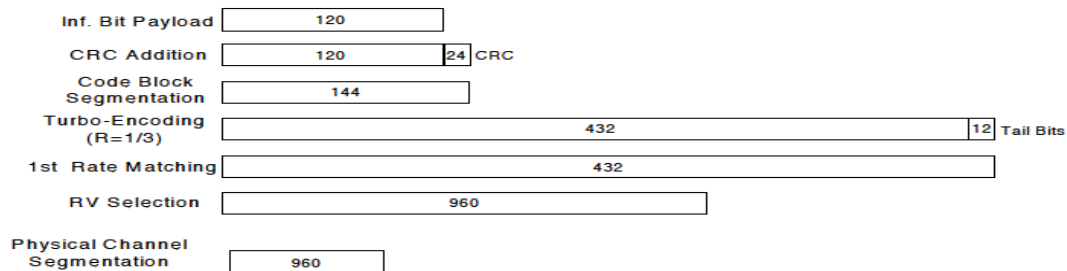**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 12			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7. Therefore, the RF conducted power is not measured.

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. RF output power (dBm)	Reduced. RF output power Hotspot back-off (dBm)	Reduced. RF output power Proximity sensor back-off (dBm)
						Meas. Avg Pwr	Meas. Avg Pwr	Meas. Avg Pwr
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.6	19.0	19.0
			9400	1880.0		22.8	19.2	19.2
			9538	1907.6		22.3	18.8	18.8
	HSDPA	Subtest 1	9262	1852.4	0	21.6	18.1	18.1
			9400	1880.0		21.7	18.2	18.2
			9538	1907.6		21.3	17.9	17.9
		Subtest 2	9262	1852.4	0	21.6	18.1	18.1
			9400	1880.0		21.8	18.3	18.3
			9538	1907.6		21.3	17.9	17.9
		Subtest 3	9262	1852.4	0.5	21.1	17.6	17.6
			9400	1880.0		21.3	17.8	17.8
			9538	1907.6		20.8	17.4	17.4
		Subtest 4	9262	1852.4	0.5	21.1	17.6	17.6
			9400	1880.0		21.3	17.8	17.8
			9538	1907.6		20.8	17.3	17.3
	HSUPA	Subtest 1	9262	1852.4	0	21.6	18.0	18.0
			9400	1880.0		21.7	18.2	18.2
			9538	1907.6		21.3	17.8	17.8
		Subtest 2	9262	1852.4	2	19.5	16.0	16.0
			9400	1880.0		19.7	16.2	16.2
			9538	1907.6		19.3	15.8	15.8
		Subtest 3	9262	1852.4	1	20.6	17.1	17.1
			9400	1880.0		20.8	17.2	17.2
			9538	1907.6		20.4	16.8	16.8
		Subtest 4	9262	1852.4	2	19.6	16.0	16.0
			9400	1880.0		19.8	16.2	16.2
			9538	1907.6		19.3	15.8	15.8
		Subtest 5	9262	1852.4	0	21.5	18.0	18.0
			9400	1880.0		21.7	18.2	18.2
			9538	1907.6		21.3	17.8	17.8
	DC-HSDPA	Subtest 1	9262	1852.4	0	21.6	18.1	18.1
			9400	1880.0		21.8	18.3	18.3
			9538	1907.6		21.3	17.8	17.8
		Subtest 2	9262	1852.4	0	21.6	18.0	18.0
			9400	1880.0		21.7	18.2	18.2
			9538	1907.6		21.3	17.8	17.8
		Subtest 3	9262	1852.4	0.5	21.1	17.5	17.5
			9400	1880.0		21.2	17.7	17.7
			9538	1907.6		20.8	17.3	17.3
		Subtest 4	9262	1852.4	0.5	21.1	17.5	17.5
			9400	1880.0		21.2	17.7	17.7
			9538	1907.6		20.8	17.3	17.3

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. RF output power (dBm)
						Meas. Avg Pwr
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.9
			4183	836.6		24.0
			4233	846.6		24.0
	HSDPA	Subtest 1	4132	826.4	0	22.8
			4183	836.6		22.9
			4233	846.6		23.0
		Subtest 2	4132	826.4	0	22.9
			4183	836.6		22.9
			4233	846.6		23.0
		Subtest 3	4132	826.4	0.5	22.4
			4183	836.6		22.4
			4233	846.6		22.5
		Subtest 4	4132	826.4	0.5	22.4
			4183	836.6		22.5
			4233	846.6		22.5
	HSUPA	Subtest 1	4132	826.4	0	22.9
			4183	836.6		23.0
			4233	846.6		23.1
		Subtest 2	4132	826.4	2	20.9
			4183	836.6		21.0
			4233	846.6		21.1
		Subtest 3	4132	826.4	1	21.9
			4183	836.6		22.0
			4233	846.6		22.1
		Subtest 4	4132	826.4	2	20.8
			4183	836.6		20.9
			4233	846.6		21.0
		Subtest 5	4132	826.4	0	22.8
			4183	836.6		22.9
			4233	846.6		23.0
	DC-HSDPA	Subtest 1	4132	826.4	0	22.8
			4183	836.6		23.0
			4233	846.6		23.0
		Subtest 2	4132	826.4	0	22.8
			4183	836.6		22.9
			4233	846.6		23.0
		Subtest 3	4132	826.4	0.5	22.3
			4183	836.6		22.4
			4233	846.6		22.5
		Subtest 4	4132	826.4	0.5	22.3
			4183	836.6		22.4
			4233	846.6		22.5

9.3 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3, 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.3.3.15				
NS_21	6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	24.0	24.0	24.1
			1	25	0	23.7	23.8	23.9
			1	49	0	24.1	24.2	24.1
			25	0	1	22.9	22.9	23.0
			25	12	1	22.9	23.0	23.0
			25	25	1	23.0	23.1	23.0
		16QAM	50	0	1	22.9	23.0	23.1
			1	0	1	23.1	23.4	23.0
			1	25	1	22.8	23.2	22.9
			1	49	1	23.2	23.6	23.0
			25	0	2	22.0	21.9	22.0
			25	12	2	22.0	22.0	22.1
			25	25	2	22.1	22.1	22.0
			50	0	2	21.9	22.0	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	24.0	23.9	24.0
			1	12	0	23.8	23.8	24.0
			1	24	0	23.8	23.8	23.9
			12	0	1	23.0	22.9	23.0
			12	7	1	22.9	22.9	23.0
			12	13	1	23.0	22.9	22.8
		16QAM	25	0	1	22.9	22.9	22.9
			1	0	1	23.0	23.3	23.1
			1	12	1	22.9	23.3	23.0
			1	24	1	22.9	23.4	22.9
			12	0	2	22.0	22.0	22.1
			12	7	2	22.0	22.0	22.0
			12	13	2	22.0	22.1	21.9
			25	0	2	21.9	22.0	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.9	23.8	24.0
			1	8	0	23.9	23.9	23.7
			1	14	0	23.8	23.8	23.8
			8	0	1	22.9	22.9	22.9
			8	4	1	22.9	22.9	22.9
			8	7	1	22.9	22.8	22.9
		16QAM	15	0	1	23.0	22.9	22.9
			1	0	1	23.0	23.2	22.9
			1	8	1	22.9	23.3	22.9
			1	14	1	22.8	23.3	22.5
			8	0	2	22.0	22.0	22.0
			8	4	2	22.0	21.9	22.1
			8	7	2	21.9	21.9	22.0
			15	0	2	21.9	21.9	22.0

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Meas. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.8	23.8	23.9
			1	3	0	23.8	23.8	23.9
			1	5	0	23.9	23.8	23.7
			3	0	0	23.8	23.8	23.7
			3	1	0	23.8	23.8	23.7
			3	3	0	23.8	23.8	23.7
		16QAM	6	0	1	22.9	22.9	22.8
			1	0	1	22.9	23.3	22.9
			1	3	1	23.0	23.2	23.0
			1	5	1	22.9	23.1	22.9
			3	0	1	23.1	23.0	22.7
			3	1	1	23.1	23.0	22.8
			3	3	1	23.1	23.0	22.8
			6	0	2	22.1	21.8	21.9

Note(s):


10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band TDD Measured Results


Procedure used to establish SAR test signal for LTE TDD Band

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using "ON | OFF" key
- Operating Band: Select Band 41 and TDD
- Go to "Config...."

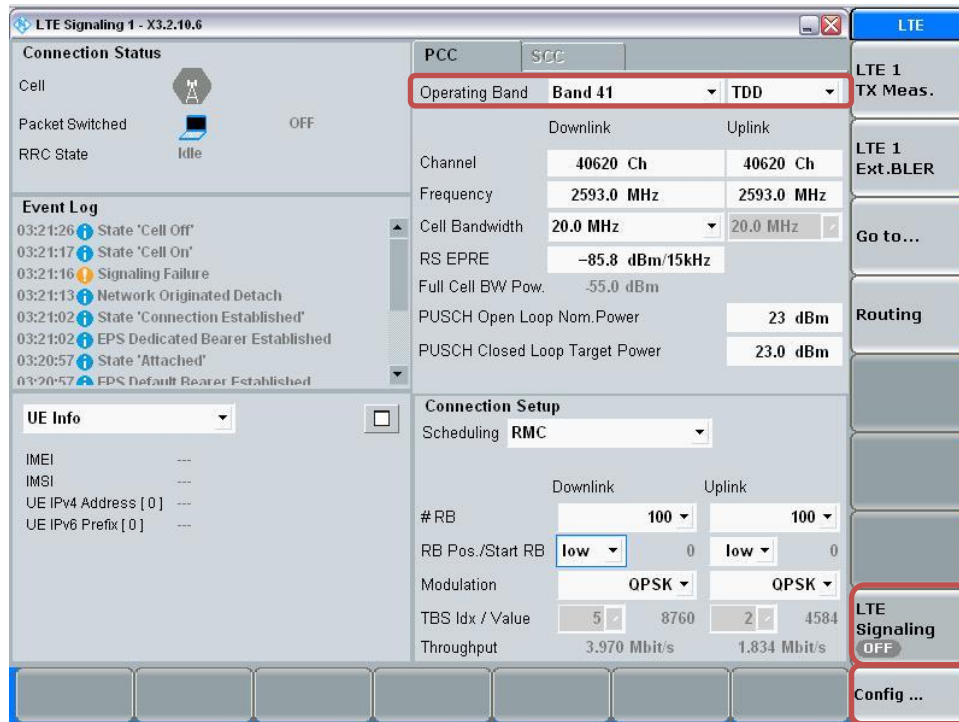


- Go to "Physical Cell Setup"
- Select "TDD" and Set "Uplink Downlink Configuration" to "0"
- Turn the cell on using "ON | OFF" key

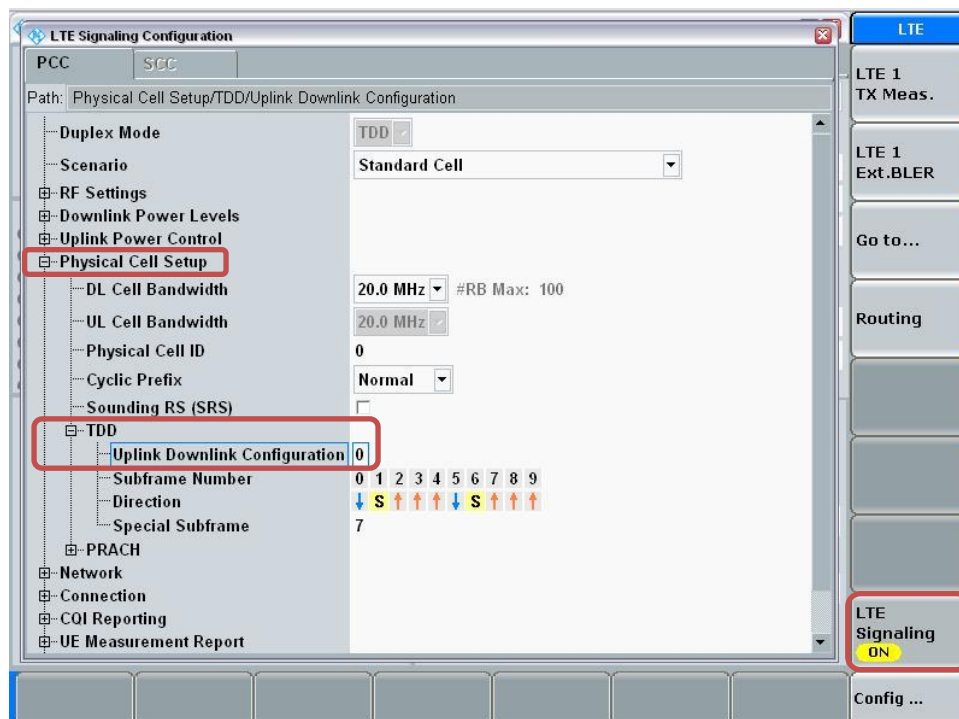


Connect to EUT


- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

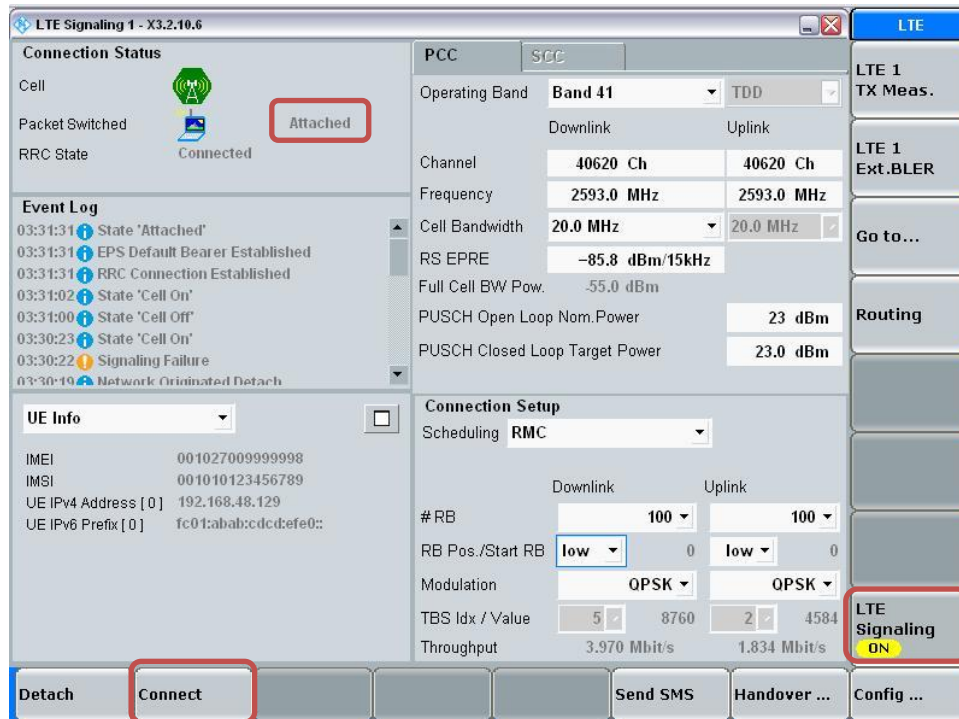**Max Power Setting**

- Select “LTE 1 TX Meas.”
- Press “RESTART | STOP” Soft key

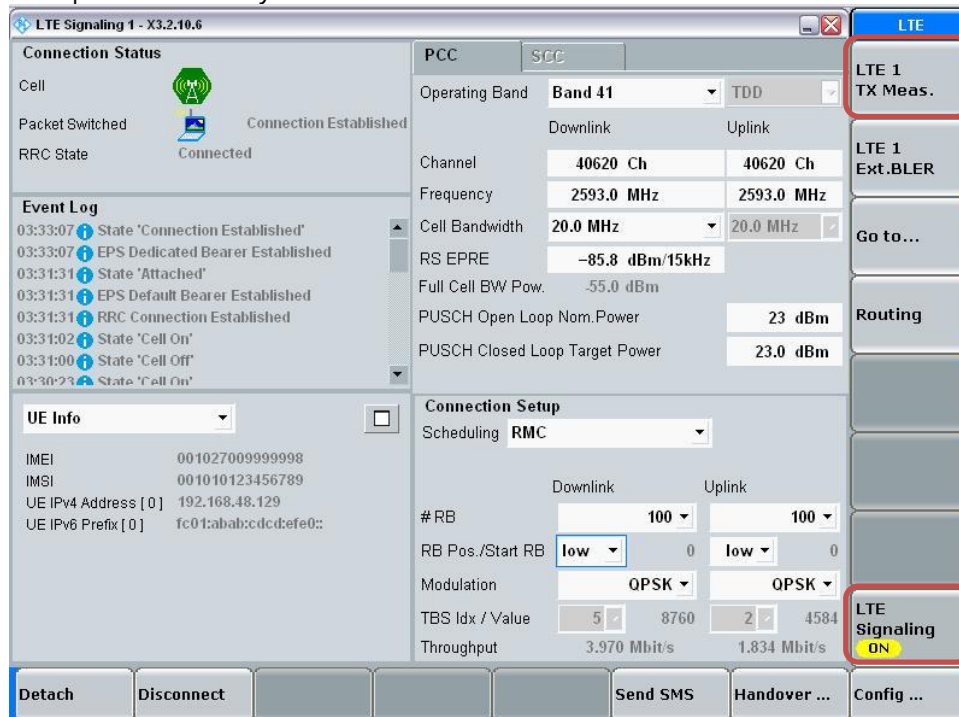


- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

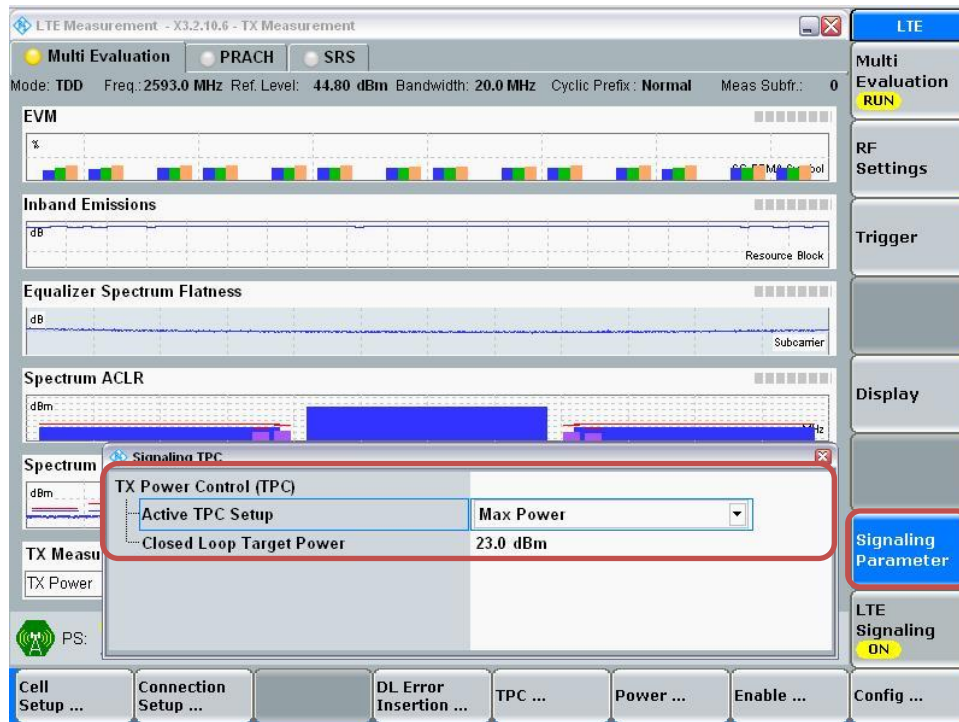

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”

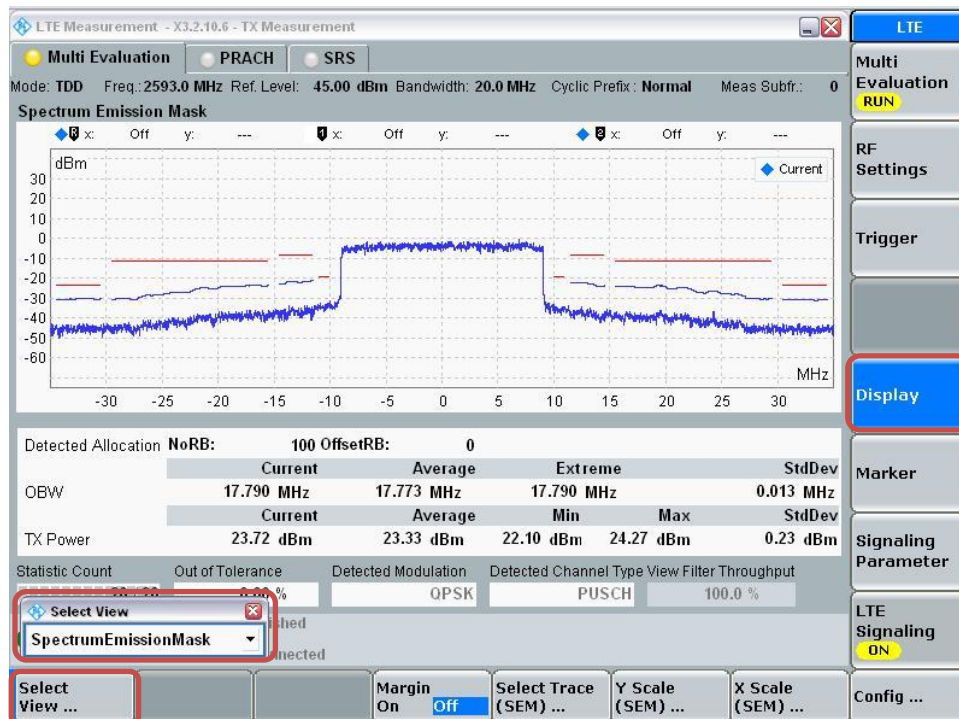

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)					
					MPR	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	23.5	23.6	23.7	23.5	23.5
			1	49	0	23.5	23.4	23.7	23.6	23.1
			1	99	0	23.6	23.7	23.9	23.7	22.5
			50	0	1	22.6	22.8	22.7	22.6	22.7
			50	24	1	22.6	22.6	22.7	22.6	22.5
			50	50	1	22.7	22.7	22.8	22.7	22.5
			100	0	1	22.7	22.7	22.8	22.7	22.7
		16QAM	1	0	1	22.1	22.6	22.5	22.4	22.6
			1	49	1	22.3	22.6	22.4	22.5	22.3
			1	99	1	22.4	22.9	22.6	22.6	21.5
			50	0	2	21.7	21.8	21.7	21.7	21.7
			50	24	2	21.6	21.7	21.6	21.6	21.6
			50	50	2	21.7	21.7	21.7	21.7	21.6
			100	0	2	21.7	21.7	21.6	21.6	21.6
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)					
					MPR	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	15	QPSK	1	0	0	23.7	23.8	23.9	24.0	23.6
			1	37	0	23.4	23.2	23.5	23.5	23.0
			1	74	0	23.9	23.8	23.8	23.9	22.7
			36	0	1	22.6	22.7	22.7	22.7	22.6
			36	20	1	22.6	22.6	22.6	22.6	22.6
			36	39	1	22.6	22.6	22.7	22.6	22.6
			75	0	1	22.7	22.7	22.7	22.5	22.7
		16QAM	1	0	1	22.7	22.9	22.8	22.7	22.7
			1	37	1	22.4	22.6	22.6	22.5	22.1
			1	74	1	22.7	22.8	22.7	22.8	21.8
			36	0	2	21.6	21.7	21.7	21.7	21.6
			36	20	2	21.6	21.6	21.6	21.5	21.6
			36	39	2	21.7	21.6	21.6	21.6	21.6
			75	0	2	21.6	21.7	21.7	21.7	21.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)					
					MPR	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	10	QPSK	1	0	0	23.9	24.0	23.8	23.8	23.2
			1	25	0	23.5	23.6	23.6	23.6	23.0
			1	49	0	23.9	23.9	23.9	23.9	23.1
			25	0	1	22.7	22.6	22.7	22.6	22.5
			25	12	1	22.6	22.6	22.7	22.4	22.6
			25	25	1	22.6	22.6	22.7	22.6	22.5
			50	0	1	22.6	22.5	22.7	22.6	22.5
		16QAM	1	0	1	22.6	23.0	22.8	22.8	22.4
			1	25	1	22.5	22.6	22.8	22.5	22.4
			1	49	1	22.8	23.1	22.9	23.0	21.5
			25	0	2	21.6	21.7	21.7	21.5	21.6
			25	12	2	21.6	21.5	21.7	21.5	21.6
			25	25	2	21.8	21.7	21.7	21.6	21.5
			50	0	2	21.7	21.7	21.6	21.7	21.6

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)					
					MPR	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	5	QPSK	1	0	0	23.6	23.7	23.8	23.5	23.4
			1	12	0	23.5	23.6	23.7	23.6	23.2
			1	24	0	23.6	23.6	23.6	23.4	22.8
			12	0	1	22.7	22.7	22.6	22.6	22.5
			12	7	1	22.6	22.6	22.6	22.5	22.6
			12	13	1	22.6	22.7	22.6	22.5	22.5
			25	0	1	22.6	22.6	22.6	22.6	22.5
		16QAM	1	0	1	22.6	22.6	22.8	22.5	22.3
			1	12	1	22.4	22.5	22.7	22.6	22.3
			1	24	1	22.4	22.5	22.7	22.4	21.8
			12	0	2	21.6	21.6	21.7	21.6	21.4
			12	7	2	21.6	21.6	21.6	21.5	21.4
			12	13	2	21.6	21.6	21.6	21.5	21.4
			25	0	2	21.6	21.6	21.6	21.6	21.5

9.3.1 LTE Rel.10 Carrier Aggregation

LTE Release 10 Carrier Aggregation

The following power measurements were performed with a single carrier uplink; CA for this particular project only supports one (1) uplink and two (2) downlinks.

1) power results

E-UTRA CA configuration (BCS)	Bands		UL					DL						LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta
	PCC	SCC	PCC					PCC			SCC					
	1st	2nd	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)	BW (MHz)	Channel	Freq. (MHz)			
CA_5A-5A (0)(1)	5A	5A	QPSK	10	20450	829.0	1/49	10	2540	874.0	10	2600	889.0	24.13	24.15	0.02
CA_5B (0)(1)	5B	5B	QPSK	10	20450	829.0	1/49	10	2540	874.0	10	2549	883.9	24.13	24.12	-0.01

Note(s):

- Per KDB 941225 D05A LTE Rel. 10 KDB inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power doesn't exceed LTE Release 8 by more than a 1/4 dBm.
- When the same frequency band is used for both contiguous and non-contiguous in DL CA Intra band, power was measured using the configuration with the largest aggregated bandwidth and maximum output power among the contiguous and non-contiguous in DL CA Intra band configurations.

9.4 Wi-Fi 2.4 GHz (DTS Band)

Measured Results

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412	15.3	17.0	Yes
		6	2437	15.3		
		11	2462	15.2		
802.11g	6 Mbps	1	2412	Not Require	14.0	No
		6	2437			
		11	2462			
802.11n (HT20)	6.5 Mbps	1	2412	Not Require	14.0	No
		6	2437			
		11	2462			

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

9.5 Bluetooth

Average Power Measured Results


Band (GHz)	Mode	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)
2.4	GFSK	0	2402	10.5
		39	2441	12.0
		78	2480	9.5
	EDR, $\pi/4$ DQPSK	0	2402	9.2
		39	2441	10.8
		78	2480	8.2
	EDR, 8-DPSK	0	2402	9.2
		39	2441	10.8
		78	2480	8.2
	LE, GFSK	0	2402	0.8
		19	2440	1.8
		39	2480	0.3

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.884	3.750	76.9%	1.30

Duty Cycle plots

GFSK

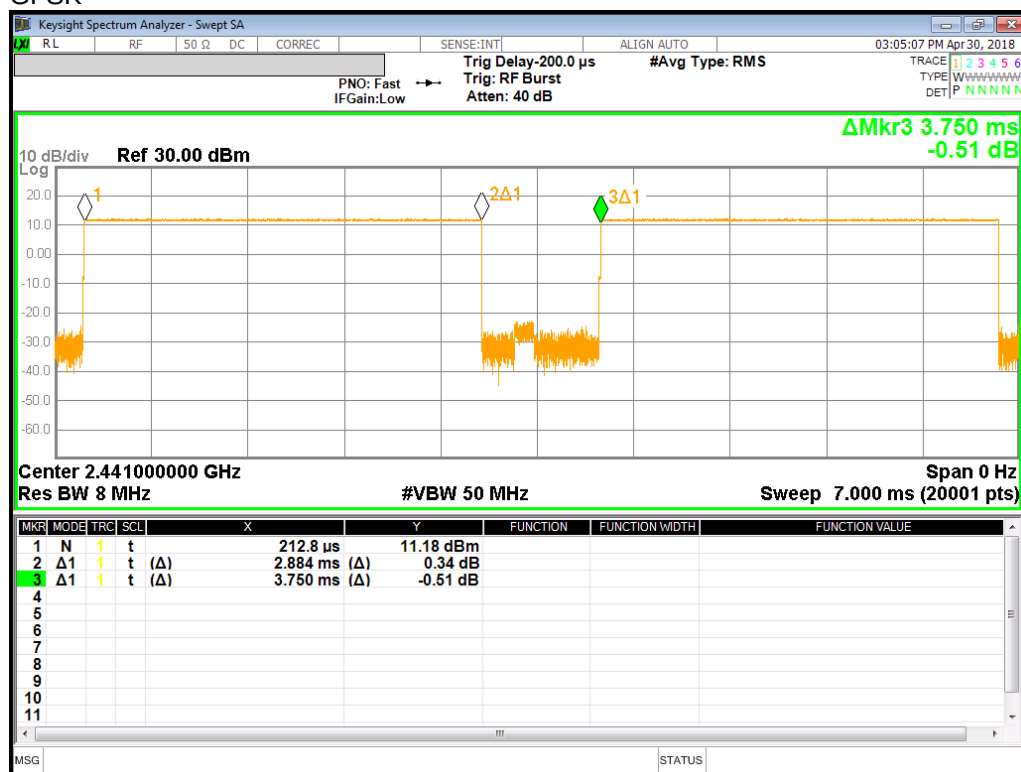

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg .

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1 GSM 850

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main Ant.1	Head (VoIP)	GPRS 2 Slot	N/A	0	Left Touch	190	836.6	31.5	30.7	0.204	0.245	
					Left Tilt	190	836.6	31.5	30.7	0.129	0.155	
					Right Touch	190	836.6	31.5	30.7	0.257	0.308	1
					Right Tilt	190	836.6	31.5	30.7	0.146	0.175	
	Body-worn	GPRS 2 Slot		15	Rear	190	836.6	31.5	30.7	0.301	0.361	2
					Front	190	836.6	31.5	30.7	0.251	0.301	
	Hotspot	GPRS 2 Slot		10	Rear	190	836.6	31.5	30.7	0.478	0.574	3
					Front	190	836.6	31.5	30.7	0.327	0.392	
					Edge 2	190	836.6	31.5	30.7	0.227	0.272	
					Edge 3	190	836.6	31.5	30.7	0.156	0.187	
					Edge 4	190	836.6	31.5	30.7	0.146	0.175	

10.2 GSM1900

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main Ant.1	Head (VoIP)	GPRS 2 slot	Off	0	Left Touch	661	1880.0	28.5	27.8	0.437	0.508	4
					Left Tilt	661	1880.0	28.5	27.8	0.163	0.190	
					Right Touch	661	1880.0	28.5	27.8	0.221	0.257	
					Right Tilt	661	1880.0	28.5	27.8	0.163	0.190	
	Body-worn	GPRS 2 slot	Off	15	Rear	512	1850.2	28.5	27.7	0.747	0.889	5
						661	1880.0	28.5	27.8	0.704	0.819	
						810	1909.8	28.5	27.7	0.521	0.629	
					Front	661	1880.0	28.5	27.8	0.462	0.537	
	Hotspot	GPRS 2 slot	On	10	Rear	512	1850.2	25.5	24.9	0.807	0.934	6
						661	1880.0	25.5	24.9	0.757	0.874	
						810	1909.8	25.5	24.8	0.578	0.675	
					Front	661	1880.0	25.5	24.9	0.455	0.525	
					Edge 2	661	1880.0	25.5	24.9	0.020	0.023	
					Edge 3	661	1880.0	25.5	24.9	0.553	0.638	
					Edge 4	661	1880.0	25.5	24.9	0.235	0.271	
Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main Ant.1	Phablet-10g	GPRS 2 slot	Off	13	Rear	661	1880.0	28.5	27.8	0.435	0.506	
				7	Front	661	1880.0	28.5	27.8	0.575	0.669	7
				0	Edge 2	661	1880.0	28.5	27.8	0.045	0.053	
				11	Edge 3	661	1880.0	28.5	27.8	0.440	0.512	
				0	Edge 4	661	1880.0	28.5	27.8	0.461	0.536	
		GPRS 2 slot	On	0	Rear	661	1880.0	25.5	25.1	0.567	0.627	
					Front	661	1880.0	25.5	25.1	0.456	0.504	
					Edge 3	661	1880.0	25.5	25.1	0.360	0.398	

10.3 W-CDMA Band II

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled		
Main Ant.1	Head	Rel 99 RMC	Off	0	Left Touch	9262	1852.4	24.0	22.6	0.651	0.899		8
						9400	1880.0	24.0	22.8	0.651	0.858		
						9538	1907.6	24.0	22.3	0.539	0.797		
					Left Tilt	9400	1880.0	24.0	22.8	0.245	0.323		
						9400	1880.0	24.0	22.8	0.335	0.442		
						9400	1880.0	24.0	22.8	0.252	0.332		
	Bod-worn	Rel 99 RMC	Off	15	Rear	9262	1852.4	24.0	22.6	0.963	1.329		9
						9400	1880.0	24.0	22.8	1.000	1.318		
						9538	1907.6	24.0	22.3	0.724	1.071		
	Front					9400	1880.0	24.0	22.8	0.579	0.763		
	Body-worn With Headset	Rel 99 RMC	Off	15	Rear	9262	1852.4	24.0	22.6	0.948	1.309	1	
	Hotspot	Rel 99 RMC	On	10	Rear	9262	1852.4	19.5	19.0	0.880	0.987		10
						9400	1880.0	19.5	19.2	0.885	0.948		
						9538	1907.6	19.5	18.8	0.690	0.811		
					Front	9400	1880.0	19.5	19.2	0.450	0.482		
					Edge 2	9400	1880.0	19.5	19.2	0.061	0.065		
					Edge 3	9400	1880.0	19.5	19.2	0.740	0.793		
					Edge 4	9400	1880.0	19.5	19.2	0.269	0.288		
Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Note	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled		
Main Ant.1	Phablet-10g	Rel 99 RMC	Off	13	Rear	9400	1880.0	24.0	22.8	0.666	0.878		
				7	Front	9400	1880.0	24.0	22.8	1.000	1.318		11
				0	Edge 2	9400	1880.0	24.0	22.8	0.076	0.101		
				11	Edge 3	9400	1880.0	24.0	22.8	0.697	0.919		
				0	Edge 4	9400	1880.0	24.0	22.8	0.831	1.095		
			On	0	Rear	9400	1880.0	19.5	19.2	0.759	0.813		
					Front	9400	1880.0	19.5	19.2	0.660	0.707		
					Edge 3	9400	1880.0	19.5	19.2	0.518	0.555		

Note(s):

- When highest reported SAR level is over 1.2 W/kg in body-worn exposure condition, additional test was evaluated with set headset at worst case condition.
- Adjusted SAR is not over 1.2 or 3 W/kg (1-g or 10-g respectively), for HSDPA, HSUPA and DC-HSDPA. So additional tests are not required.

10.4 W-CDMA Band V

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main Ant.1	Head	Rel 99 RMC	N/A	0	Left Touch	4183	836.6	25.0	24.0	0.127	0.160	
					Left Tilt	4183	836.6	25.0	24.0	0.081	0.102	
					Right Touch	4183	836.6	25.0	24.0	0.156	0.196	12
					Rightt Tilt	4183	836.6	25.0	24.0	0.093	0.117	
	Body-worn	Rel 99 RMC		15	Rear	4183	836.6	25.0	24.0	0.182	0.229	13
					Front	4183	836.6	25.0	24.0	0.140	0.176	
	Hotspot	Rel 99 RMC		10	Rear	4183	836.6	25.0	24.0	0.300	0.378	14
					Front	4183	836.6	25.0	24.0	0.203	0.256	
					Edge 2	4183	836.6	25.0	24.0	0.139	0.175	
					Edge 3	4183	836.6	25.0	24.0	0.108	0.136	
					Edge 4	4183	836.6	25.0	24.0	0.100	0.126	

10.5 LTE Band 5 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main Ant.1	Head	QPSK	N/A	0	Left Touch	20525	836.5	1	49	25.5	24.2	0.138	0.186	
								25	25	24.5	23.1	0.102	0.142	
					Left Tilt	20525	836.5	1	49	25.5	24.2	0.085	0.115	
								25	25	24.5	23.1	0.067	0.093	
					Right Touch	20525	836.5	1	49	25.5	24.2	0.162	0.218	15
								25	25	24.5	23.1	0.126	0.176	
					Right Tilt	20525	836.5	1	49	25.5	24.2	0.089	0.121	
								25	25	24.5	23.1	0.073	0.102	
	Body-worn	QPSK		15	Rear	20525	836.5	1	49	25.5	24.2	0.160	0.216	16
								25	25	24.5	23.1	0.127	0.177	
					Front	20525	836.5	1	49	25.5	24.2	0.128	0.173	
								25	25	24.5	23.1	0.105	0.146	
	Hotspot	QPSK		10	Rear	20525	836.5	1	49	25.5	24.2	0.312	0.421	17
								25	25	24.5	23.1	0.243	0.339	
					Front	20525	836.5	1	49	25.5	24.2	0.216	0.291	
								25	25	24.5	23.1	0.169	0.236	
					Edge 2	20525	836.5	1	49	25.5	24.2	0.174	0.235	
								25	25	24.5	23.1	0.141	0.197	
					Edge 3	20525	836.5	1	49	25.5	24.2	0.115	0.155	
								25	25	24.5	23.1	0.090	0.126	
					Edge 4	20525	836.5	1	49	25.5	24.2	0.077	0.103	
								25	25	24.5	23.1	0.063	0.087	

10.6 LTE Band 41 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main Ant.2	Head	QPSK	N/A	0	Left Touch	40620	2593.0	1	99	24.5	23.9	0.177	0.202	
								50	50	23.5	22.8	0.145	0.171	
					Left Tilt	40620	2593.0	1	99	24.5	23.9	0.190	0.217	
								50	50	23.5	22.8	0.149	0.176	
					Right Touch	40620	2593.0	1	99	24.5	23.9	0.260	0.297	18
								50	50	23.5	22.8	0.211	0.249	
					Right Tilt	40620	2593.0	1	99	24.5	23.9	0.108	0.124	
								50	50	23.5	22.8	0.081	0.095	
	Body-worn	QPSK		15	Rear	40620	2593.0	1	99	24.5	23.9	0.157	0.180	
								50	50	23.5	22.8	0.126	0.149	
					Front	40620	2593.0	1	99	24.5	23.9	0.168	0.192	19
								50	50	23.5	22.8	0.129	0.152	
	Hotspot	QPSK		10	Rear	40620	2593.0	1	99	24.5	23.9	0.340	0.389	20
								50	50	23.5	22.8	0.270	0.319	
					Front	40620	2593.0	1	99	24.5	23.9	0.323	0.369	
								50	50	23.5	22.8	0.257	0.304	
					Edge 2	40620	2593.0	1	99	24.5	23.9	0.215	0.246	
								50	50	23.5	22.8	0.170	0.201	
					Edge 3	40620	2593.0	1	99	24.5	23.9	0.277	0.317	
								50	50	23.5	22.8	0.220	0.260	

10.7 Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	1	2412.0	0.702	99.7	17.0	15.3	0.528	0.783	
					6	2437.0	0.788	99.7	17.0	15.3	0.582	0.859	
				Left Tilt	6	2437.0	0.605	99.7	17.0	15.3	0.481	0.710	
					1	2412.0	0.779	99.7	17.0	15.3	0.605	0.898	
				Right Touch	6	2437.0	0.886	99.7	17.0	15.3	0.688	1.016	
					1	2412.0	0.662	99.7	17.0	15.3	0.464	0.688	
				Right Tilt	6	2437.0	0.962	99.7	17.0	15.3	0.694	1.025	21
		Body-worn	15	Rear	6	2437.0	0.096	99.7	17.0	15.3	0.074	0.110	22
				Front	6	2437.0	0.088	99.7	17.0	15.3			
		Hotspot	10	Rear	6	2437.0	0.217	99.7	17.0	15.3	0.162	0.239	23
				Front	6	2437.0	0.183	99.7	17.0	15.3			
				Edge 1	6	2437.0	0.103	99.7	17.0	15.3			

Note(s):

1. When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.
2. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.8 Bluetooth

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	GFSK	Head	0	Left Touch	39	2441.0	76.9	12.0	12.0	0.216	0.283	
				Left Tilt	39	2441.0	76.9	12.0	12.0	0.181	0.237	
				Right Touch	39	2441.0	76.9	12.0	12.0	0.261	0.342	24
				Rightt Tilt	39	2441.0	76.9	12.0	12.0	0.248	0.325	

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-worn	2.480	12.0	16	15	1.7	0.224
	Hotspot	2.480	12.0	16	10	2.5	0.336

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
835	GSM 850	Hotspot	Rear	No	0.478	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.300	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.312	N/A	N/A
1900	GSM 1900	Hotspot	Rear	Yes	0.807	N/A	N/A
	WCDMA Band II	Body	Rear	Yes	1.000	0.981	1.02
2400	Wi-Fi 802.11b/g/n	Head	Right Tilt	No	0.694	N/A	N/A
	Bluetooth	Head	Right Touch	No	0.261	N/A	N/A
2600	LTE Band 41	Hotspot	Rear	No	0.340	N/A	N/A

Peak spatial-average (10g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
1900	GSM 1900	Phablet-10g	Front	No	0.575	N/A	N/A
	WCDMA Band II	Phablet-10g	Front	No	1.000	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. DUT Holder Perturbations

In accordance with published DUT Holder Perturbations in Oct.2016 TCB workshop,

When Highest reported SAR is over 1.2 or 3.0 W/kg (1-g or 10-g respectively), Holder perturbation verification is required for each antenna, using the highest configuration among all applicable frequency bands.

Both Head test and Body test (Edge 1-4 sides) are evaluated with DUT holder. Both Front and Rear sides are evaluated without DUT holder. (Details of test setup are refer to Appendix A.)

So we are only consider about Head test and Body test (Edge 1-4 sides).

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Antenna	Air Interface	RF Exposure Conditions	Test Position	DUTHolder Perturbation(Yes/No)	Highest Reported SAR (W/kg)	SAR test without holder	Deviation (%)
							Measured SAR (W/kg)	
850	Main Ant.1	GSM 850	Hotspot	Rear	No	0.574	N/A	N/A
		WCDMA Band V	Hotspot	Rear	No	0.378	N/A	N/A
		LTE Band 5	Hotspot	Rear	No	0.421	N/A	N/A
1900		GSM 1900	Hotspot	Rear	No	0.934	N/A	N/A
		WCDMA Band II	Body	Rear	No	1.329	N/A	N/A
2400	Wi-Fi & BT	Wi-Fi 802.11b/g/n	Head	Right Tilt	No	1.025	N/A	N/A
		Bluetooth	Head	Right Touch	No	0.342	N/A	N/A
2600	Main Ant.2	LTE Band 41	Hotspot	Rear	No	0.389	N/A	N/A

Peak spatial-average (10g of tissue)

Frequency Band (MHz)	Antenna	Air Interface	RF Exposure Conditions	Test Position	DUTHolder Perturbation(Yes/No)	Highest Reported SAR (W/kg)	SAR test without holder	Deviation (%)
							Measured SAR (W/kg)	
1900	Main Ant.1	GSM 1900	Phablet-10g	Front	No	0.669	N/A	N/A
		WCDMA Band II	Phablet-10g	Front	No	1.318	N/A	N/A

Note(s):

Both deviation should be within measurement uncertainty (22%).

13. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	GSM(Voice/GPRS)	+	DTS
	2	GSM(Voice/GPRS)	+	BT
	3	W-CDMA	+	DTS
	4	W-CDMA	+	BT
	5	LTE	+	DTS
	6	LTE	+	BT
Body-worn	7	GSM(Voice/GPRS)	+	DTS
	8	GSM(Voice/GPRS)	+	BT
	9	W-CDMA	+	DTS
	10	W-CDMA	+	BT
	11	LTE	+	DTS
	12	LTE	+	BT
Hotspot	13	GSM(GPRS)	+	DTS
	14	GSM(GPRS)	+	BT
	15	WCDMA	+	DTS
	16	WCDMA	+	BT
	17	LTE	+	DTS
	18	LTE	+	BT
Notes:				
1. DTS supports Wi-Fi Direct, Hotspot and VoIP.				
2. GPRS, W-CDMA, LTE supports Hotspot and VoIP.				
3. DTS cannot transmit simultaneously with Bluetooth Radio.				
4. BT tethering is consider about each RF exposure conditions				

13.1 Sum of the SAR for GSM 850 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.245	0.859	0.283	1.104	No	0.528	No
	Left Tilt	0.155	0.710	0.237	0.865	No	0.392	No
	Right Touch	0.308	1.016	0.342	1.324	No	0.650	No
	Right Tilt	0.175	1.025	0.325	1.200	No	0.500	No
Body-worn	All position	0.361	0.110	0.224	0.471	No	0.585	No
Hotspot	All position	0.574	0.239	0.336	0.813	No	0.910	No

13.2 Sum of the SAR for GSM 1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.508	0.859	0.283	1.367	No	0.791	No
	Left Tilt	0.190	0.710	0.237	0.900	No	0.427	No
	Right Touch	0.257	1.016	0.342	1.273	No	0.599	No
	Right Tilt	0.190	1.025	0.325	1.215	No	0.515	No
Body-worn	All position	0.889	0.110	0.224	0.999	No	1.113	No
Hotspot	All position	0.934	0.239	0.336	1.173	No	1.270	No

13.3 Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.899	0.859	0.283	1.758	Yes	1.182	No
	Left Tilt	0.323	0.710	0.237	1.033	No	0.560	No
	Right Touch	0.442	1.016	0.342	1.458	No	0.784	No
	Right Tilt	0.332	1.025	0.325	1.357	No	0.657	No
Body-worn	All position	1.329	0.110	0.224	1.439	No	1.553	No
Hotspot	All position	0.987	0.239	0.336	1.226	No	1.323	No

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Standalone SAR (W/kg)			Σ 1-g SAR (W/kg)		Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS	③ BT						
Left Touch	0.899	0.859		① + ②	1.758	75.8	0.03	No	1

13.4 Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.160	0.859	0.283	1.019	No	0.443	No
	Left Tilt	0.102	0.710	0.237	0.812	No	0.339	No
	Right Touch	0.196	1.016	0.342	1.212	No	0.538	No
	Right Tilt	0.117	1.025	0.325	1.142	No	0.442	No
Body-worn	All position	0.229	0.110	0.224	0.339	No	0.453	No
Hotspot	All position	0.378	0.239	0.336	0.617	No	0.714	No

13.5 Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.186	0.859	0.283	1.045	No	0.469	No
	Left Tilt	0.115	0.710	0.237	0.825	No	0.352	No
	Right Touch	0.218	1.016	0.342	1.234	No	0.560	No
	Right Tilt	0.121	1.025	0.325	1.146	No	0.446	No
Body-worn	All position	0.216	0.110	0.224	0.326	No	0.440	No
Hotspot	All position	0.421	0.239	0.336	0.660	No	0.757	No


13.6 Sum of the SAR for LTE Band 41 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.202	0.859	0.283	1.061	No	0.485	No
	Left Tilt	0.217	0.710	0.237	0.927	No	0.454	No
	Right Touch	0.297	1.016	0.342	1.313	No	0.639	No
	Right Tilt	0.124	1.025	0.325	1.149	No	0.449	No
Body-worn	All position	0.192	0.110	0.224	0.302	No	0.416	No
Hotspot	All position	0.389	0.239	0.336	0.628	No	0.725	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg (10-g SAR is < 4.0 W/kg) or the SPLSR is < 1-g 0.04 (10-g 0.10) for all circumstances that require SPLSR calculation.

Figure (1)

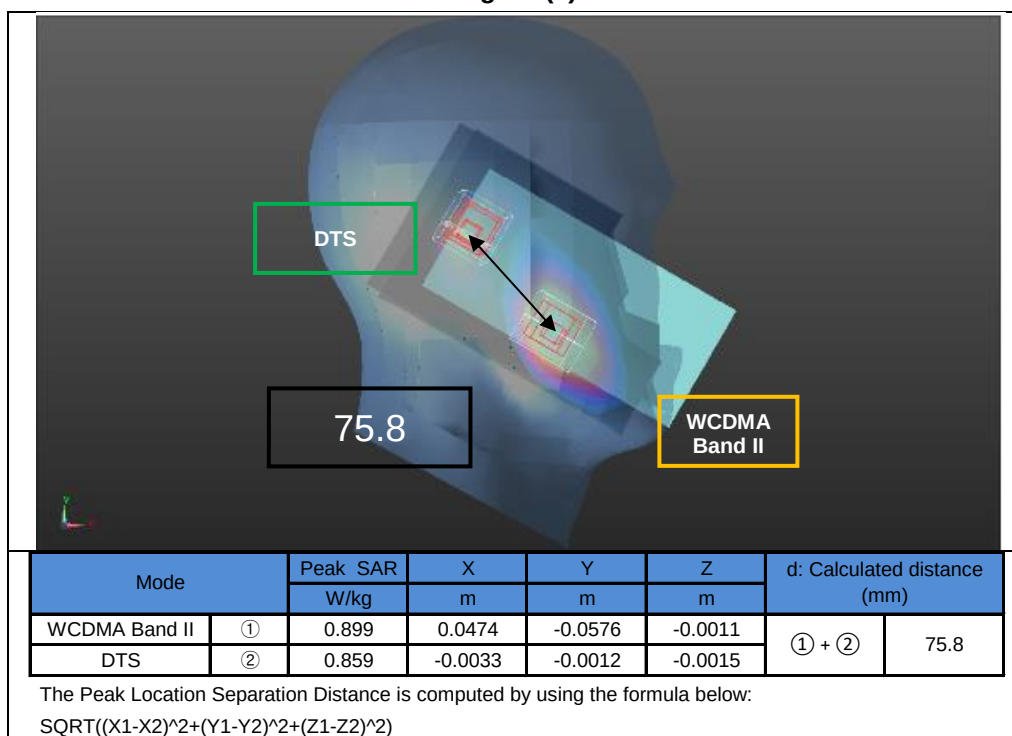

Appendixes

Refer to separated files for the following appendixes.

4788490168-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

4788490168-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

4788490168-S1V1 FCC Report SAR_App C_System Check Plots

4788490168-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

4788490168-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

4788490168-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT