

6.5 Peak Excursion Ratio – 802.11 a/n/ac §15.407(a.6)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r04, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 v01r04, was used to capture the average trace used to make the peak excursion measurement.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum power spectral density is 13 dBm/MHz.

Test Procedure Used

KDB 789033 v01r04 – Section G

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum. This level was compared to the peak power density level found from the previous section to determine the peak excursion.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-4. Test Instrument & Measurement Setup

Test Notes


The peak excursion was investigated for all signal types, modulation types, channel bandwidths, and variations in signal parameters and the worst case data is shown below. Only the worst case modulation mode on a single channel among all bands is reported since that is sufficient to demonstrate compliance to the peak excursion requirement per KDB 789033 v01r04.

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 91 of 186

Antenna-1 Peak Excursion Ratio – 802.11a/n/ac


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]	Pass / Fail
5180	36	a	6	8.05	13.0	-4.95	Pass
5180	36	n (20MHz)	6.5/7.2 (MCS0)	8.74	13.0	-4.26	Pass
5270	54	n (40MHz)	13.5/15 (MCS0)	8.94	13.0	-4.06	Pass
5290	58	ac (80MHz)	29.3/32.5 (MCS0)	9.15	13.0	-3.85	Pass

Table 6-21. Conducted Peak Excursion Ratio Measurements

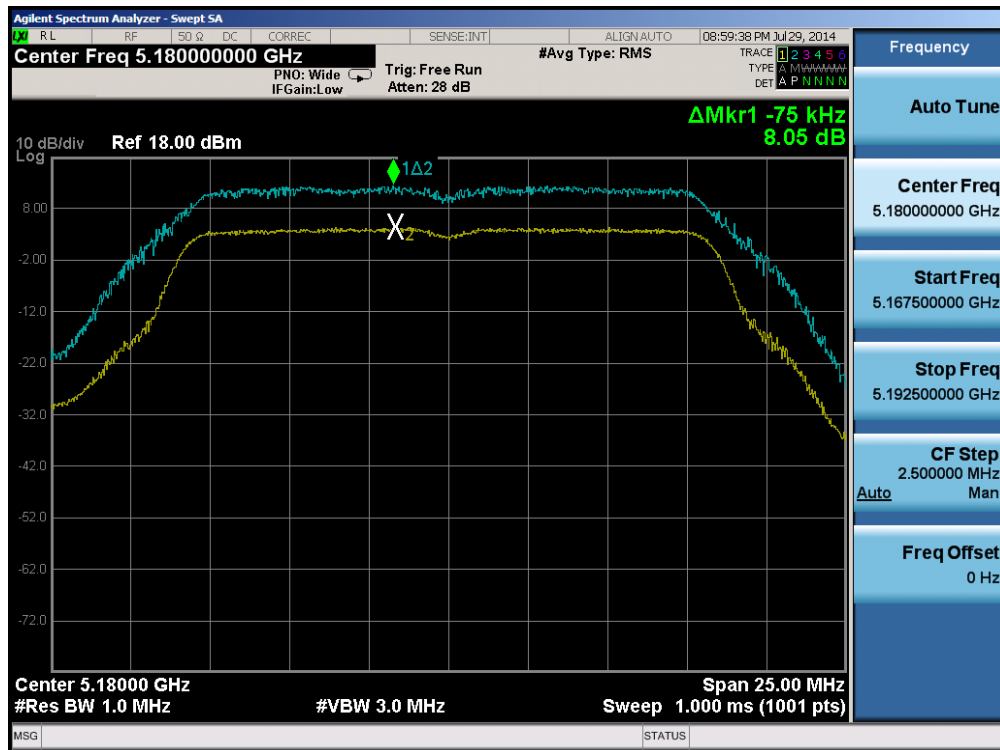


Plot 6-130. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 36)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 92 of 186

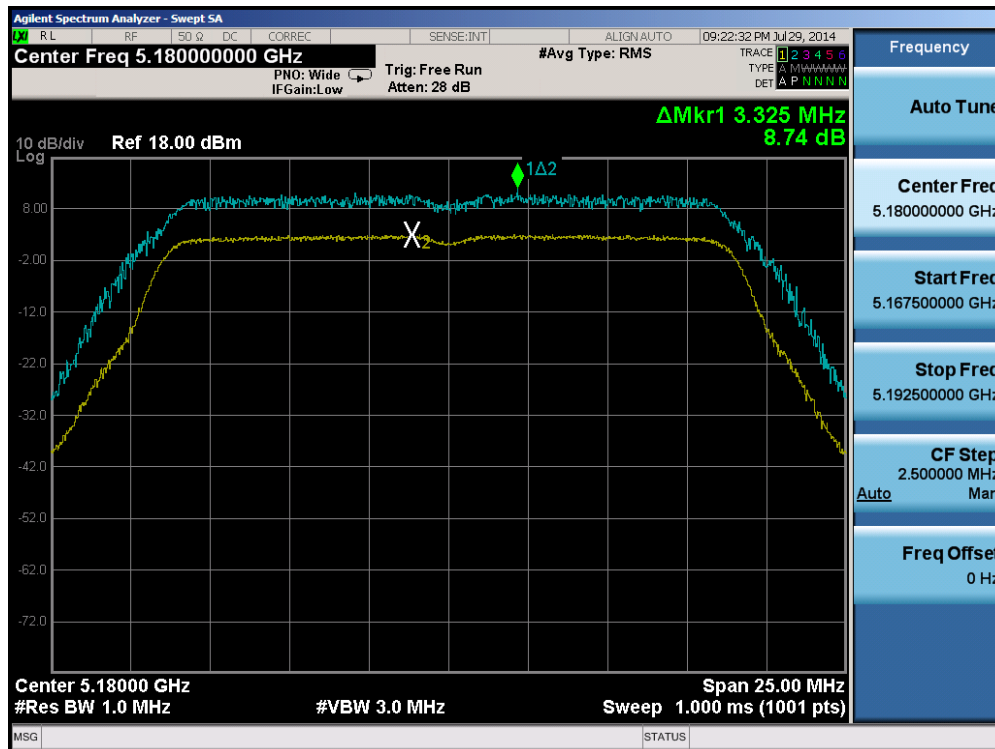


Plot 6-131. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

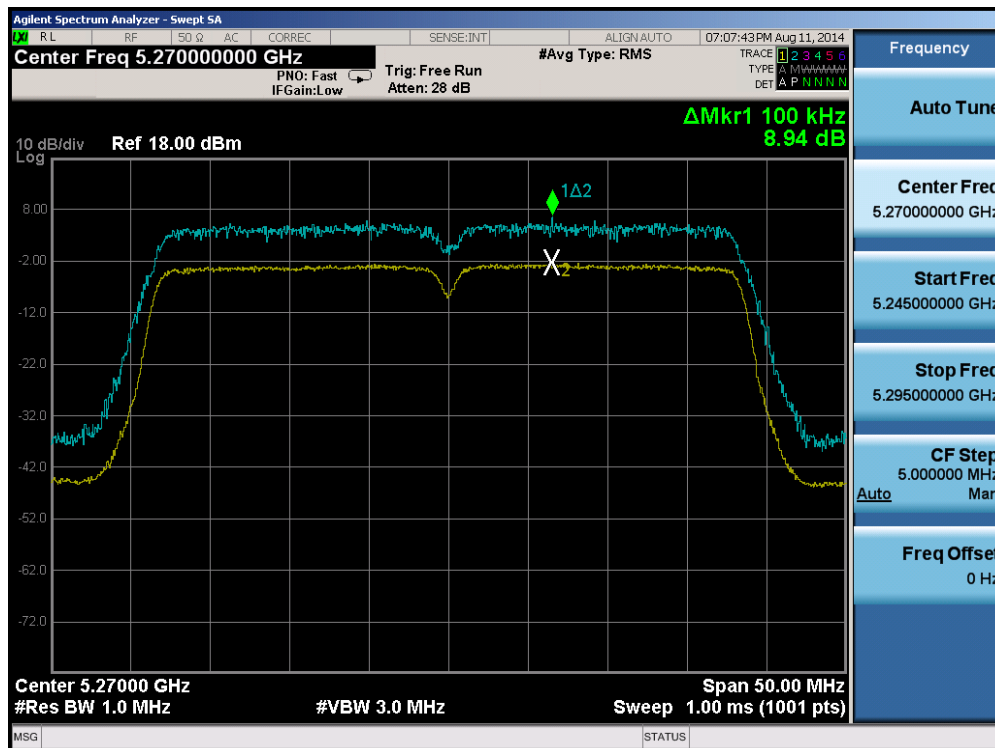

Plot 6-132. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 93 of 186

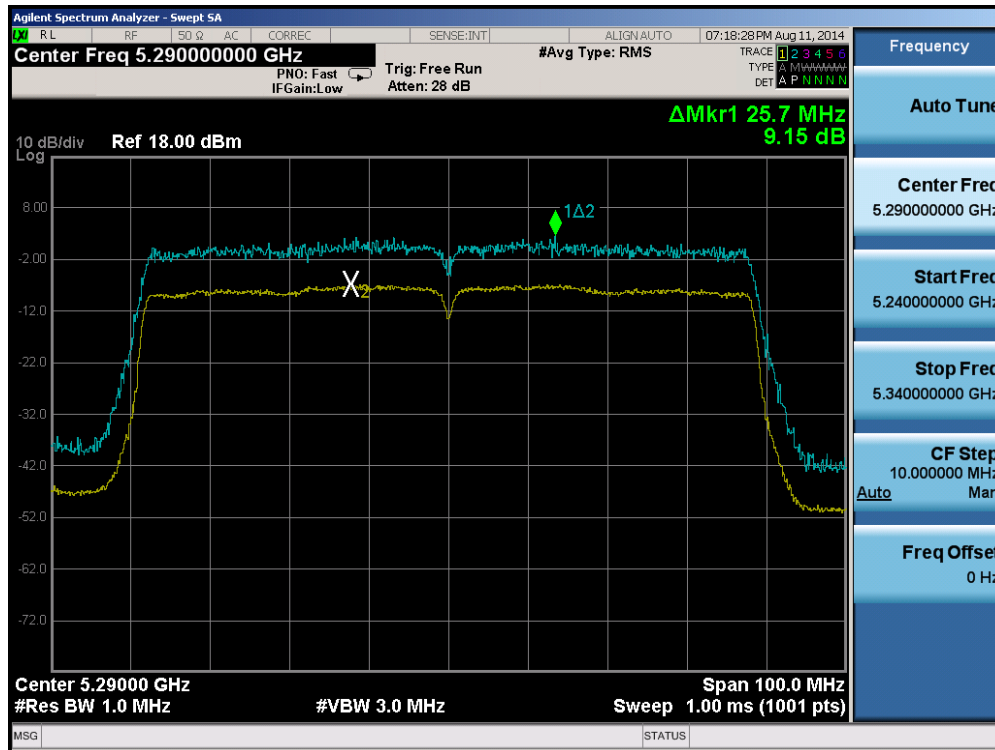


Plot 6-133. Peak Excursion Ratio Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 94 of 186

Antenna-2 Peak Excursion Ratio – 802.11a/n/ac


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]	Pass / Fail
5580	116	a	6	8.11	13.0	-4.89	Pass
5260	52	n (20MHz)	6.5/7.2 (MCS0)	9.22	13.0	-3.78	Pass
5670	134	n (40MHz)	13.5/15 (MCS0)	9.54	13.0	-3.46	Pass
5210	42	ac (80MHz)	29.3/32.5 (MCS0)	8.88	13.0	-4.12	Pass

Table 6-22. Conducted Peak Excursion Ratio Measurements

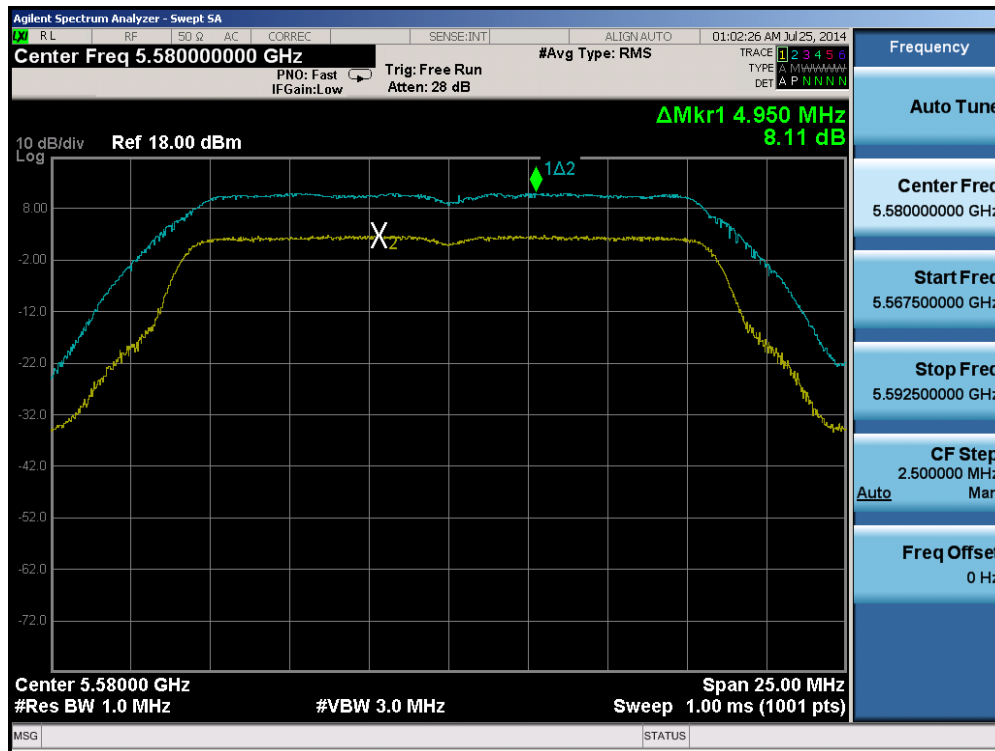


Plot 6-134. Peak Excursion Ratio Plot (802.11a (UNII Band 2C) – Ch. 116)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 95 of 186

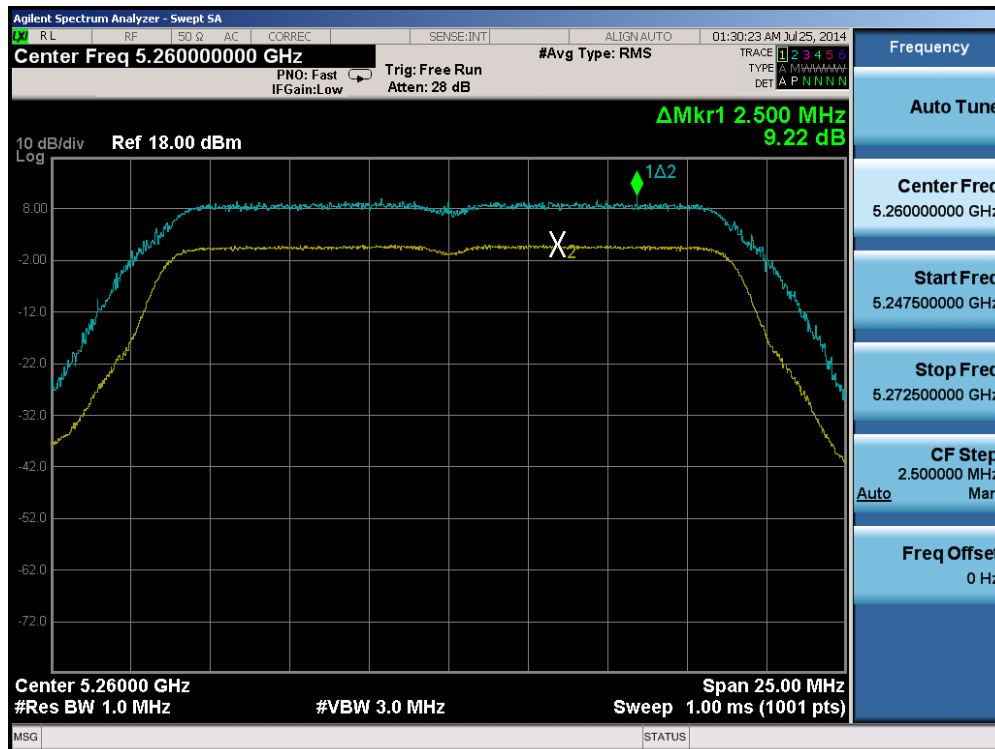


Plot 6-135. Peak Excursion Ratio Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

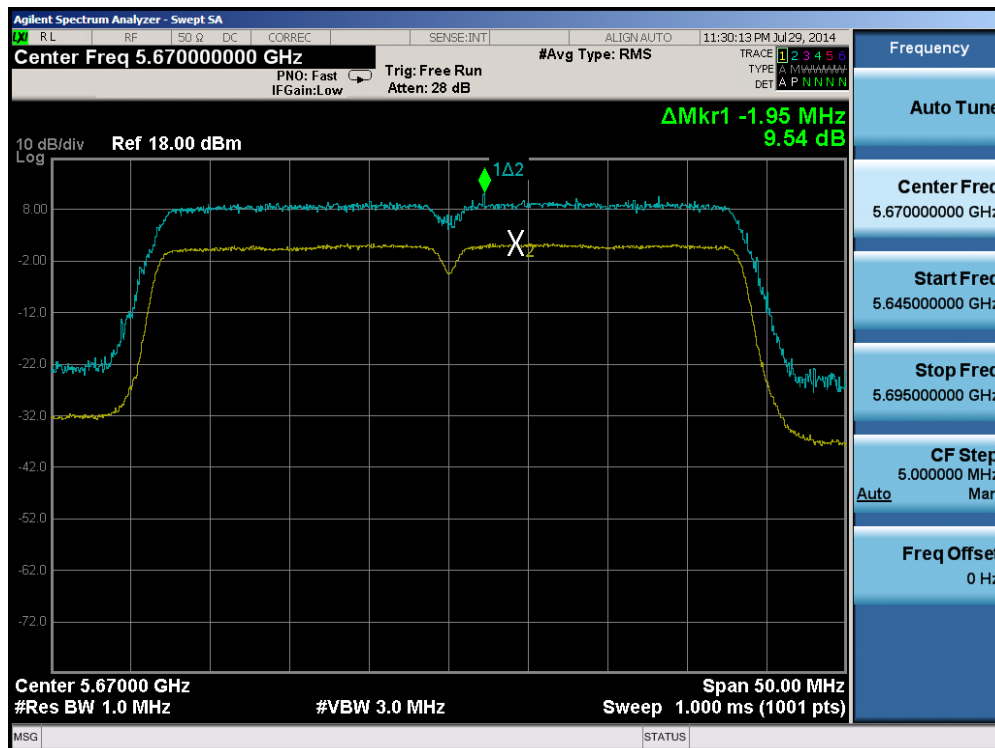

Plot 6-136. Peak Excursion Ratio Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 96 of 186

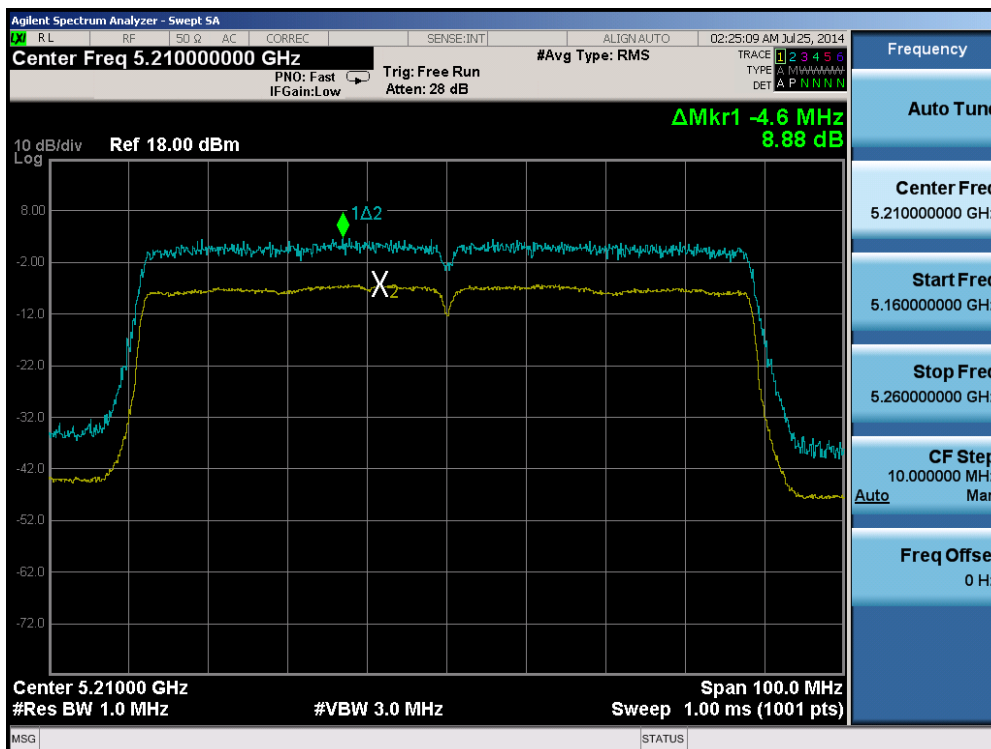

Plot 6-137. Peak Excursion Ratio Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 97 of 186

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,180,000,008	8	0.00000015
100 %		- 30	5,180,000,002	2	0.00000004
100 %		- 20	5,180,000,009	9	0.00000017
100 %		- 10	5,179,999,987	-13	-0.00000025
100 %		0	5,179,999,988	-12	-0.00000023
100 %		+ 10	5,179,999,992	-8	-0.00000015
100 %		+ 20	5,180,000,002	2	0.00000004
100 %		+ 30	5,180,000,020	20	0.00000039
100 %		+ 40	5,180,000,020	20	0.00000039
100 %		+ 50	5,180,000,007	7	0.00000014
BATT. ENDPOINT	3.45	+ 20	5,179,999,992	-8	-0.00000015

Table 6-23. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 98 of 186

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,259,999,990	-10	-0.00000019
100 %		- 30	5,259,999,980	-20	-0.00000038
100 %		- 20	5,260,000,008	8	0.00000015
100 %		- 10	5,259,999,982	-18	-0.00000034
100 %		0	5,259,999,999	-1	-0.00000002
100 %		+ 10	5,259,999,983	-17	-0.00000032
100 %		+ 20	5,259,999,989	-11	-0.00000021
100 %		+ 30	5,260,000,020	20	0.00000038
100 %		+ 40	5,259,999,985	-15	-0.00000029
100 %		+ 50	5,259,999,984	-16	-0.00000030
BATT. ENDPOINT	3.45	+ 20	5,260,000,011	11	0.00000021

Table 6-24. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset	Page 99 of 186	

Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,500,000,016	16	0.00000029
100 %		- 30	5,499,999,983	-17	-0.00000031
100 %		- 20	5,499,999,996	-4	-0.00000007
100 %		- 10	5,499,999,995	-5	-0.00000009
100 %		0	5,500,000,001	1	0.00000002
100 %		+ 10	5,499,999,995	-5	-0.00000009
100 %		+ 20	5,500,000,013	13	0.00000024
100 %		+ 30	5,500,000,017	17	0.00000031
100 %		+ 40	5,500,000,008	8	0.00000015
100 %		+ 50	5,500,000,019	19	0.00000035
BATT. ENDPOINT	3.45	+ 20	5,500,000,014	14	0.00000025

Table 6-25. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset	Page 100 of 186	

6.7 Radiated Spurious Emission Measurements

§15.407(b.1)(b.6) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r04, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW) and 802.11n (40MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-26 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-26. Radiated Limits

Test Procedures Used

KDB 789033 v01r04 – Section H

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 101 of 186

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

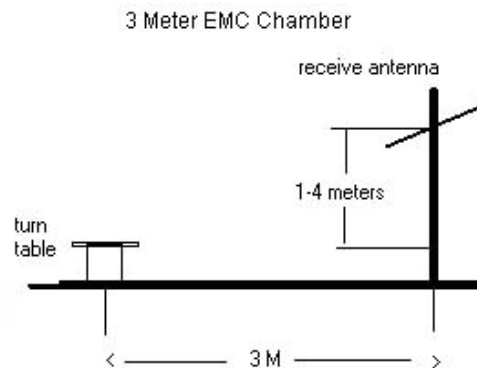


Figure 6-5. Test Instrument & Measurement Setup

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 102 of 186

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 v01r04 Section H.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-26.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. The battery used with this device for testing (Model: EB-BN910BBE) contains an embedded NFC antenna.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- o $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- o $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- o The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 103 of 186

Antenna-1 Radiated Spurious Emission Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-104.38	Peak	H	H2	46.49	0.00	49.11	68.20	-19.09
* 15540.00	-117.45	Average	H	H2	48.07	0.00	37.62	53.98	-16.35
* 15540.00	-105.63	Peak	H	H2	48.07	0.00	49.44	73.98	-24.53
* 20720.00	-107.51	Average	V	V	44.05	-9.54	34.00	53.98	-19.98
* 20720.00	-95.98	Peak	V	V	44.05	-9.54	45.52	73.98	-28.46
25900.00	-96.96	Peak	V	V	44.95	-9.54	45.45	68.20	-22.75

Table 6-27. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 104 of 186

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-104.19	Peak	H	H2	46.56	0.00	49.37	68.20	-18.83
* 15600.00	-117.94	Average	H	H2	47.90	0.00	36.97	53.98	-17.01
* 15600.00	-106.33	Peak	H	H2	47.90	0.00	48.58	73.98	-25.40
* 20800.00	-107.61	Average	V	V	44.04	-9.54	33.89	53.98	-20.09
* 20800.00	-96.56	Peak	V	V	44.04	-9.54	44.93	73.98	-29.05
26000.00	-97.61	Peak	V	V	45.00	-9.54	44.85	68.20	-23.35

Table 6-28. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-103.19	Peak	H	H2	46.67	0.00	50.48	68.20	-17.72
* 15720.00	-117.56	Average	H	H2	47.65	0.00	37.09	53.98	-16.89
* 15720.00	-106.42	Peak	H	H2	47.65	0.00	48.23	73.98	-25.75
* 20960.00	-100.20	Average	V	V	43.96	-9.54	41.22	53.98	-12.76
* 20960.00	-94.70	Peak	V	V	43.96	-9.54	46.72	73.98	-27.26
26200.00	-95.92	Peak	V	V	44.84	-9.54	46.37	68.20	-21.83

Table 6-29. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 105 of 186

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-104.21	Peak	H	H2	46.74	0.00	49.52	68.20	-18.68
* 15780.00	-117.72	Average	H	H2	47.70	0.00	36.98	53.98	-17.00
* 15780.00	-106.40	Peak	H	H2	47.70	0.00	48.30	73.98	-25.68
* 21040.00	-98.64	Average	V	V	43.89	-9.54	42.71	53.98	-11.27
* 21040.00	-92.66	Peak	V	V	43.89	-9.54	48.69	73.98	-25.29
26300.00	-93.62	Peak	V	V	44.80	-9.54	48.64	68.20	-19.56

Table 6-30. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-104.57	Peak	H	H2	46.87	0.00	49.29	68.20	-18.91
* 15840.00	-117.30	Average	H	H2	48.00	0.00	37.70	53.98	-16.28
* 15840.00	-105.33	Peak	H	H2	48.00	0.00	49.67	73.98	-24.31
* 21120.00	-98.09	Average	V	V	43.79	-9.54	43.16	53.98	-10.82
* 21120.00	-92.83	Peak	V	V	43.79	-9.54	48.42	73.98	-25.56
26400.00	-92.63	Peak	V	V	44.80	-9.54	49.62	68.20	-18.58

Table 6-31. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 106 of 186

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-116.09	Average	H	H2	47.15	0.00	38.06	53.98	-15.92
* 10640.00	-104.51	Peak	H	H2	47.15	0.00	49.64	73.98	-24.34
* 15960.00	-117.59	Average	H	H2	48.56	0.00	37.97	53.98	-16.01
* 15960.00	-106.14	Peak	H	H2	48.56	0.00	49.42	73.98	-24.56
* 21280.00	-98.98	Average	V	V	43.66	-9.54	42.14	53.98	-11.84
* 21280.00	-92.55	Peak	V	V	43.66	-9.54	48.57	73.98	-25.41
26600.00	-102.86	Peak	V	V	47.32	-9.54	41.92	68.20	-26.28

Table 6-32. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-115.92	Average	H	H2	47.12	0.00	38.20	53.98	-15.78
* 11000.00	-103.11	Peak	H	H2	47.12	0.00	51.01	73.98	-22.97
16500.00	-104.64	Peak	H	H2	49.46	0.00	51.81	68.20	-16.39
22000.00	-90.33	Peak	V	V	43.97	-9.54	51.09	68.20	-17.11
27500.00	-104.85	Peak	V	V	48.36	-9.54	40.97	68.20	-27.23

Table 6-33. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 107 of 186

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5580MHz
Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-115.95	Average	H	H2	46.96	0.00	38.02	53.98	-15.96
* 11160.00	-103.13	Peak	H	H2	46.96	0.00	50.84	73.98	-23.14
16740.00	-105.71	Peak	H	H2	49.79	0.00	51.08	68.20	-17.12
* 22320.00	-101.05	Average	V	V	44.45	-9.54	40.86	53.98	-13.12
* 22320.00	-89.84	Peak	V	V	44.45	-9.54	52.07	73.98	-21.91
27900.00	-104.06	Peak	V	V	48.05	-9.54	41.45	68.20	-26.75

Table 6-34. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5700MHz
Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-115.85	Average	H	H2	47.21	0.00	38.36	53.98	-15.62
* 11400.00	-104.85	Peak	H	H2	47.21	0.00	49.36	73.98	-24.62
17100.00	-104.02	Peak	H	H2	53.13	0.00	56.11	68.20	-12.09
* 22800.00	-96.83	Average	V	V	44.45	-9.54	45.08	53.98	-8.90
* 22800.00	-86.95	Peak	V	V	44.45	-9.54	54.96	73.98	-19.02
28500.00	-103.79	Peak	V	V	48.01	-9.54	41.68	68.20	-26.52

Table 6-35. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 108 of 186

Antenna-2 Radiated Spurious Emission Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-103.07	Peak	H	H	46.49	0.00	50.42	68.20	-17.78
* 15540.00	-116.82	Average	H	H	48.07	0.00	38.25	53.98	-15.72
* 15540.00	-105.20	Peak	H	H	48.07	0.00	49.87	73.98	-24.10
* 20720.00	-103.66	Average	H	V	44.05	-9.54	37.84	53.98	-16.14
* 20720.00	-94.63	Peak	H	V	44.05	-9.54	46.87	73.98	-27.11
25900.00	-96.41	Peak	H	V	44.95	-9.54	46.00	68.20	-22.20

Table 6-36. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 109 of 186

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-101.46	Peak	H	H	46.56	0.00	52.10	68.20	-16.10
* 15600.00	-116.98	Average	H	H	47.90	0.00	37.93	53.98	-16.05
* 15600.00	-104.63	Peak	H	H	47.90	0.00	50.28	73.98	-23.70
* 20800.00	-104.77	Average	H	V	44.04	-9.54	36.72	53.98	-17.26
* 20800.00	-94.82	Peak	H	V	44.04	-9.54	46.67	73.98	-27.31
26000.00	-96.52	Peak	H	V	45.00	-9.54	45.94	68.20	-22.26

Table 6-37. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-102.49	Peak	H	H	46.67	0.00	51.18	68.20	-17.02
* 15720.00	-117.13	Average	H	H	47.65	0.00	37.52	53.98	-16.46
* 15720.00	-104.83	Peak	H	H	47.65	0.00	49.82	73.98	-24.16
* 20960.00	-108.35	Average	H	V	43.96	-9.54	33.07	53.98	-20.91
* 20960.00	-95.62	Peak	H	V	43.96	-9.54	45.80	73.98	-28.18
26200.00	-95.60	Peak	H	V	44.84	-9.54	46.69	68.20	-21.51

Table 6-38. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 110 of 186

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-101.72	Peak	H	H	46.74	0.00	52.01	68.20	-16.19
* 15780.00	-116.68	Average	H	H	47.70	0.00	38.02	53.98	-15.96
* 15780.00	-105.35	Peak	H	H	47.70	0.00	49.35	73.98	-24.63
* 21040.00	-107.88	Average	H	V	43.89	-9.54	33.47	53.98	-20.51
* 21040.00	-96.00	Peak	H	V	43.89	-9.54	45.35	73.98	-28.63
26300.00	-93.22	Peak	H	V	44.80	-9.54	49.04	68.20	-19.16

Table 6-39. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-103.32	Peak	H	H	46.87	0.00	50.54	68.20	-17.66
* 15840.00	-115.44	Average	H	H	48.00	0.00	39.56	53.98	-14.42
* 15840.00	-103.96	Peak	H	H	48.00	0.00	51.04	73.98	-22.94
* 21120.00	-108.05	Average	H	V	43.79	-9.54	33.20	53.98	-20.78
* 21120.00	-96.06	Peak	H	V	43.79	-9.54	45.19	73.98	-28.79
26400.00	-92.88	Peak	H	V	44.80	-9.54	49.37	68.20	-18.83

Table 6-40. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 111 of 186

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-116.29	Average	H	H	47.15	0.00	37.86	53.98	-16.12
* 10640.00	-104.32	Peak	H	H	47.15	0.00	49.83	73.98	-24.15
* 15960.00	-116.67	Average	H	H	48.56	0.00	38.89	53.98	-15.09
* 15960.00	-104.39	Peak	H	H	48.56	0.00	51.17	73.98	-22.81
* 21280.00	-106.71	Average	H	V	43.66	-9.54	34.40	53.98	-19.58
* 21280.00	-96.52	Peak	H	V	43.66	-9.54	44.60	73.98	-29.38
26600.00	-103.46	Peak	H	V	47.32	-9.54	41.32	68.20	-26.88

Table 6-41. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-116.12	Average	H	H	47.12	0.00	38.00	53.98	-15.98
* 11000.00	-103.54	Peak	H	H	47.12	0.00	50.58	73.98	-23.40
16500.00	-106.53	Peak	H	H	49.46	0.00	49.92	68.20	-18.28
22000.00	-96.15	Peak	H	V	43.97	-9.54	45.27	68.20	-22.93
27500.00	-104.90	Peak	H	V	48.36	-9.54	40.92	68.20	-27.28

Table 6-42. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 112 of 186

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-113.04	Average	H	H	46.96	0.00	40.93	53.98	-13.05
* 11160.00	-99.98	Peak	H	H	46.96	0.00	53.99	73.98	-19.99
16740.00	-105.86	Peak	H	H	49.79	0.00	50.93	68.20	-17.27
* 22320.00	-109.10	Average	H	V	44.45	-9.54	32.81	53.98	-21.17
* 22320.00	-97.76	Peak	H	V	44.45	-9.54	44.15	73.98	-29.83
27900.00	-104.50	Peak	H	V	48.05	-9.54	41.01	68.20	-27.19

Table 6-43. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-110.51	Average	H	H	47.21	0.00	43.70	53.98	-10.28
* 11400.00	-98.39	Peak	H	H	47.21	0.00	55.82	73.98	-18.16
17100.00	-104.58	Peak	H	H	53.13	0.00	55.55	68.20	-12.65
* 22800.00	-108.93	Average	H	V	44.45	-9.54	32.98	53.98	-21.00
* 22800.00	-97.49	Peak	H	V	44.45	-9.54	44.42	73.98	-29.56
28500.00	-104.50	Peak	H	V	48.01	-9.54	40.97	68.20	-27.23

Table 6-44. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 113 of 186

MIMO Radiated Spurious Emission Measurements

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-101.05	Peak	H	H2	46.49	0.00	52.44	68.20	-15.76
* 15540.00	-116.86	Average	H	H2	48.07	0.00	38.21	53.98	-15.76
* 15540.00	-104.68	Peak	H	H2	48.07	0.00	50.39	73.98	-23.58
* 20720.00	-102.30	Average	V	V	44.05	-9.54	39.21	53.98	-14.77
* 20720.00	-93.86	Peak	V	V	44.05	-9.54	47.64	73.98	-26.34
25900.00	-95.81	Peak	V	V	44.95	-9.54	46.60	68.20	-21.60

Table 6-45. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 114 of 186

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-102.33	Peak	H	H2	46.56	0.00	51.23	68.20	-16.97
* 15600.00	-117.87	Average	H	H2	47.90	0.00	37.04	53.98	-16.94
* 15600.00	-106.33	Peak	H	H2	47.90	0.00	48.58	73.98	-25.40
* 20800.00	-106.20	Average	V	V	44.04	-9.54	35.29	53.98	-18.69
* 20800.00	-94.67	Peak	V	V	44.04	-9.54	46.82	73.98	-27.16
26000.00	-98.04	Peak	V	V	45.00	-9.54	44.42	68.20	-23.78

Table 6-46. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-102.24	Peak	H	H2	46.67	0.00	51.43	68.20	-16.77
* 15720.00	-117.52	Average	H	H2	47.65	0.00	37.13	53.98	-16.85
* 15720.00	-105.82	Peak	H	H2	47.65	0.00	48.83	73.98	-25.15
* 20960.00	-107.73	Average	V	V	43.96	-9.54	33.69	53.98	-20.29
* 20960.00	-96.14	Peak	V	V	43.96	-9.54	45.28	73.98	-28.70
26200.00	-94.48	Peak	V	V	44.84	-9.54	47.81	68.20	-20.39

Table 6-47. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 115 of 186

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-101.77	Peak	H	H2	46.74	0.00	51.96	68.20	-16.24
* 15780.00	-113.44	Average	H	H2	47.70	0.00	41.26	53.98	-12.72
* 15780.00	-102.12	Peak	H	H2	47.70	0.00	52.58	73.98	-21.40
* 21040.00	-107.69	Average	V	V	43.89	-9.54	33.66	53.98	-20.32
* 21040.00	-95.58	Peak	V	V	43.89	-9.54	45.77	73.98	-28.21
26300.00	-93.44	Peak	V	V	44.80	-9.54	48.82	68.20	-19.38

Table 6-48. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-102.49	Peak	H	H2	46.87	0.00	51.37	68.20	-16.83
* 15840.00	-113.77	Average	H	H2	48.00	0.00	41.23	53.98	-12.75
* 15840.00	-102.03	Peak	H	H2	48.00	0.00	52.97	73.98	-21.01
* 21120.00	-108.43	Average	V	V	43.79	-9.54	32.82	53.98	-21.16
* 21120.00	-98.10	Peak	V	V	43.79	-9.54	43.15	73.98	-30.83
26400.00	-93.26	Peak	V	V	44.80	-9.54	48.99	68.20	-19.21

Table 6-49. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 116 of 186

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-114.52	Average	H	H2	47.15	0.00	39.63	53.98	-14.35
* 10640.00	-102.97	Peak	H	H2	47.15	0.00	51.18	73.98	-22.80
* 15960.00	-113.45	Average	H	H2	48.56	0.00	42.11	53.98	-11.87
* 15960.00	-100.47	Peak	H	H2	48.56	0.00	55.09	73.98	-18.89
* 21280.00	-106.82	Average	V	V	43.66	-9.54	34.30	53.98	-19.68
* 21280.00	-95.08	Peak	V	V	43.66	-9.54	46.04	73.98	-27.94
26600.00	-103.02	Peak	V	V	47.32	-9.54	41.76	68.20	-26.44

Table 6-50. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-111.52	Average	H	H2	47.12	0.00	42.60	53.98	-11.38
* 11000.00	-99.81	Peak	H	H2	47.12	0.00	54.31	73.98	-19.67
16500.00	-101.84	Peak	H	H2	49.46	0.00	54.61	68.20	-13.59
22000.00	-95.14	Peak	H	H2	43.97	-9.54	46.28	68.20	-21.92
27500.00	-105.34	Peak	H	H2	48.36	-9.54	40.48	68.20	-27.72

Table 6-51. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 117 of 186

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5580MHz
Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	-111.03	Average	H	H2	46.96	0.00	42.94	53.98	-11.04
* 11160.00	-98.89	Peak	H	H2	46.96	0.00	55.08	73.98	-18.90
16740.00	-101.76	Peak	H	H2	49.79	0.00	55.03	68.20	-13.17
* 22320.00	-107.41	Average	H	H2	44.45	-9.54	34.50	53.98	-19.48
* 22320.00	-97.23	Peak	H	H2	44.45	-9.54	44.68	73.98	-29.30
27900.00	-103.83	Peak	H	H2	48.05	-9.54	41.68	68.20	-26.52

Table 6-52. Radiated Measurements

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5700MHz
Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-109.64	Average	H	H2	47.21	0.00	44.57	53.98	-9.41
* 11400.00	-97.84	Peak	H	H2	47.21	0.00	56.37	73.98	-17.61
17100.00	-102.08	Peak	H	H2	53.13	0.00	58.05	68.20	-10.15
* 22800.00	-108.96	Average	H	H2	44.45	-9.54	32.95	53.98	-21.03
* 22800.00	-97.34	Peak	H	H2	44.45	-9.54	44.57	73.98	-29.41
28500.00	-106.18	Peak	H	H2	48.01	-9.54	39.29	68.20	-28.91

Table 6-53. Radiated Measurements

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 118 of 186

6.8 Antenna-1 Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz


Channel: 36

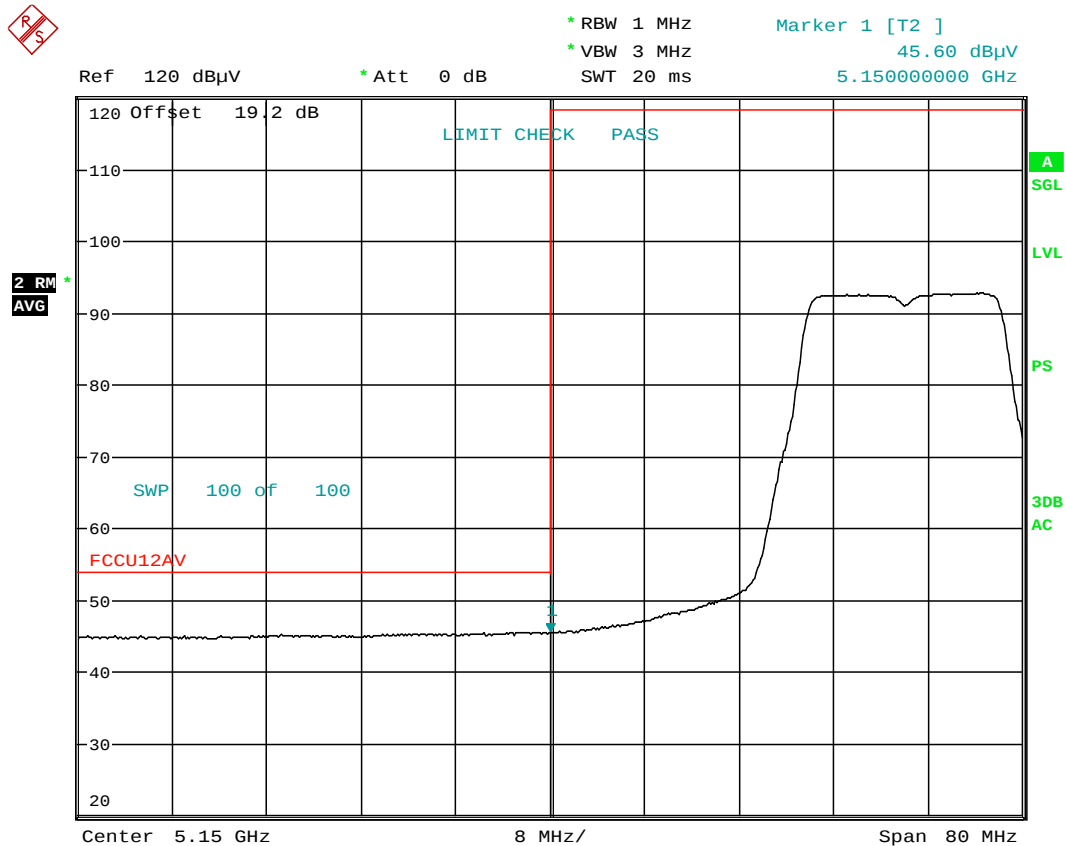

Plot 6-138. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 119 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

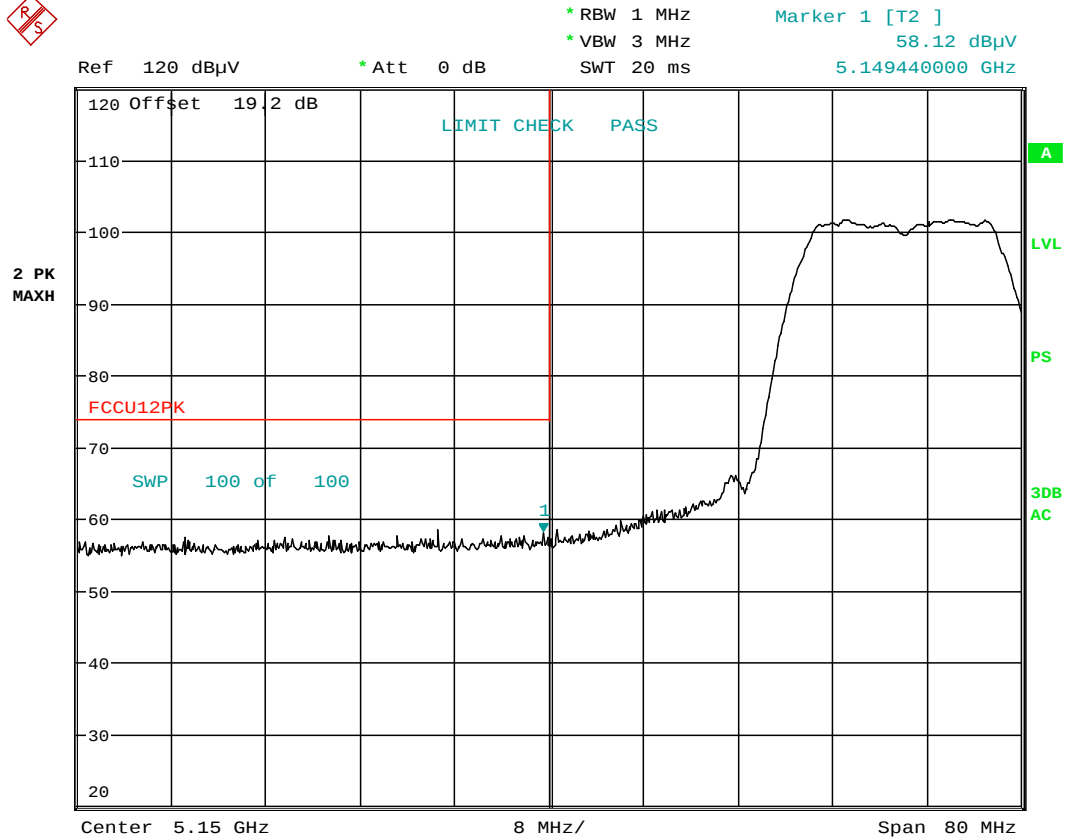

Plot 6-139. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 120 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

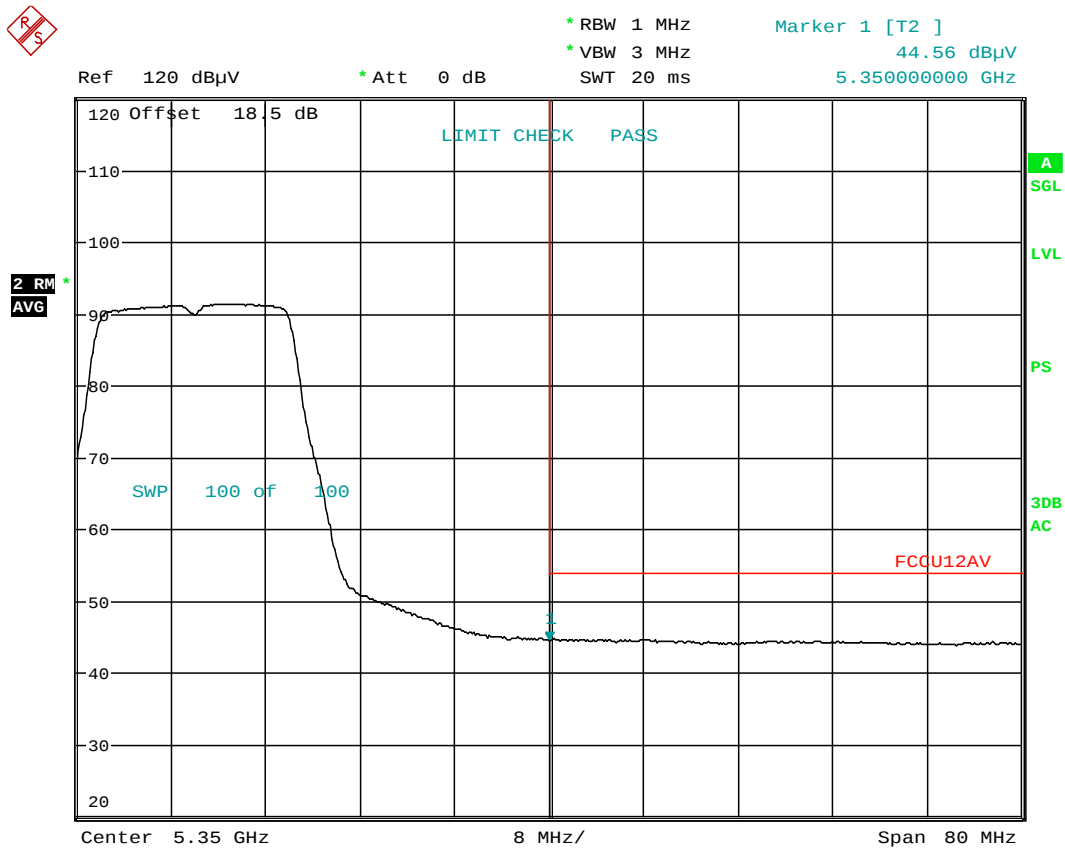

Plot 6-140. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 121 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

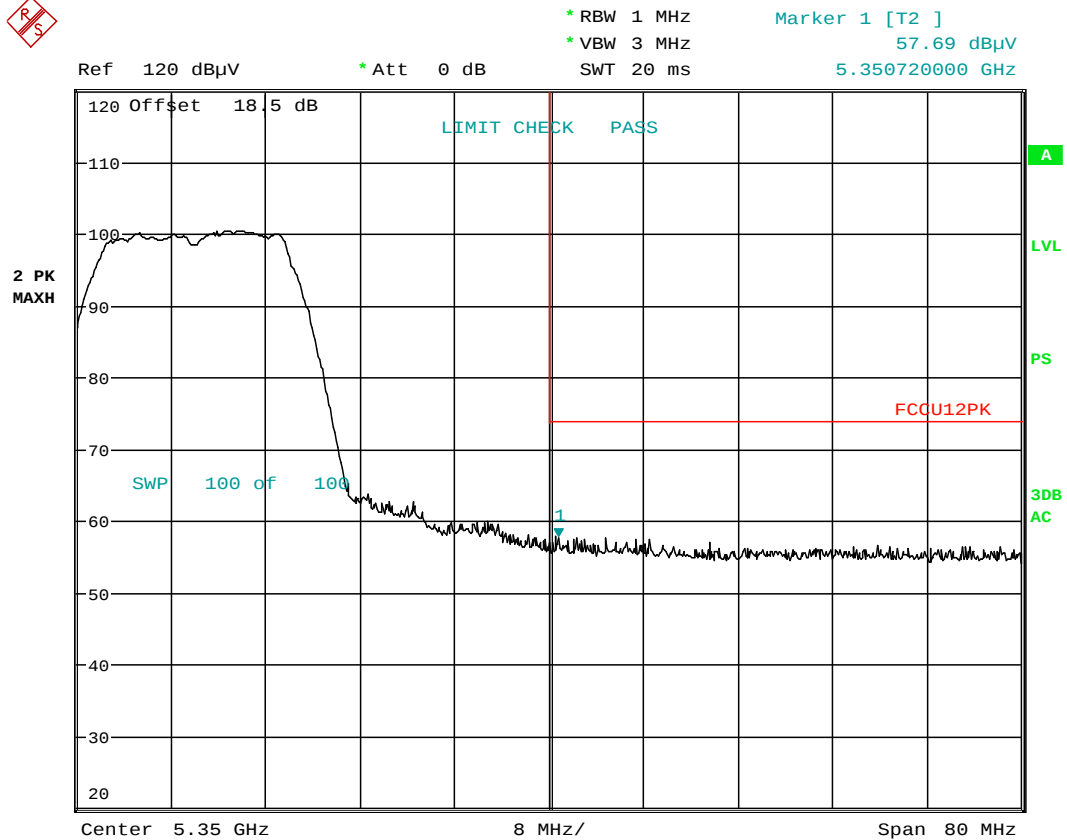


Plot 6-141. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 122 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

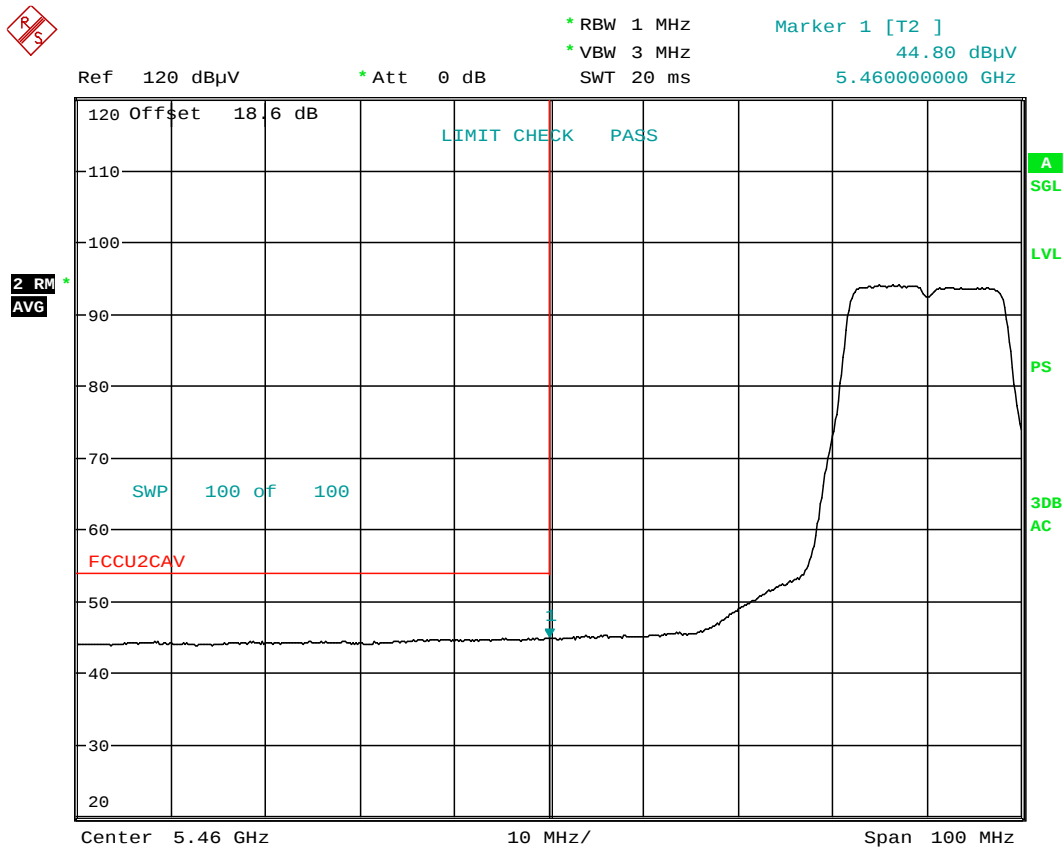

Plot 6-142. Radiated Restricted Lower Band Edge Plot (Average - UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 - 8/20/2014	EUT Type: Portable Handset		Page 123 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

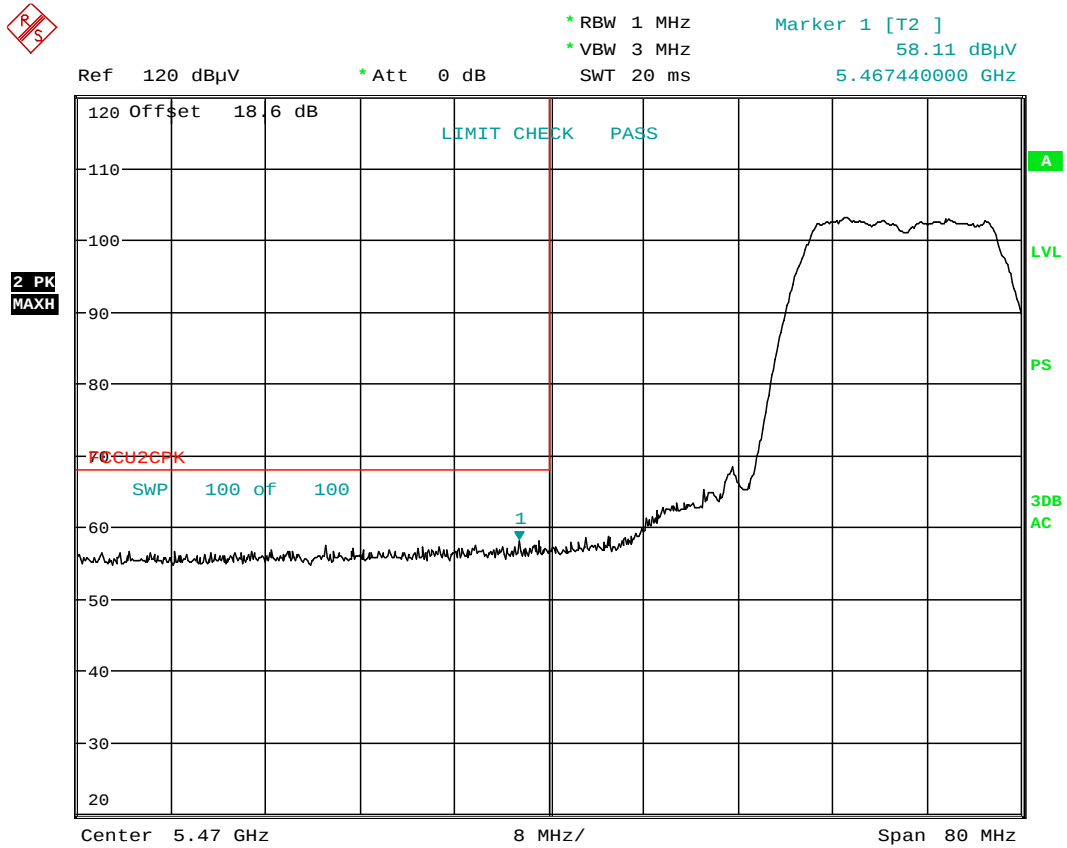

Plot 6-143. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 124 of 186

6.9 Antenna-1 Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz


Channel: 38

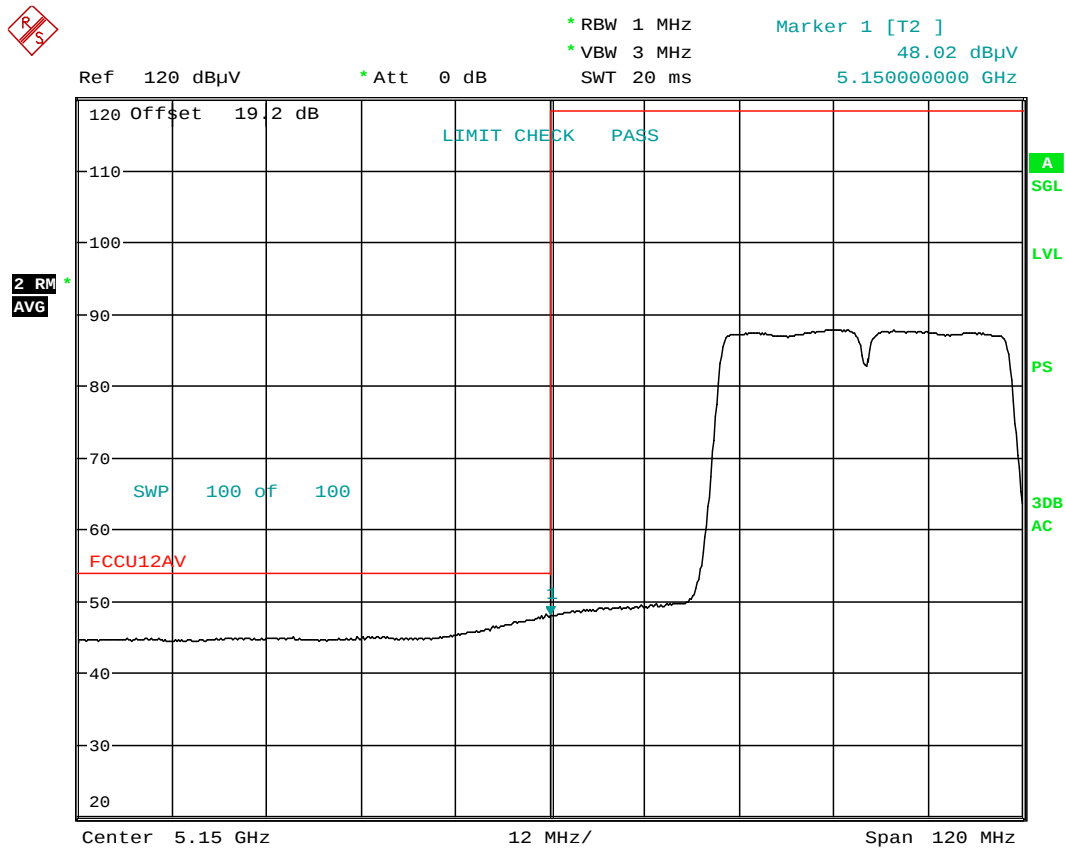

Plot 6-145. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 126 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

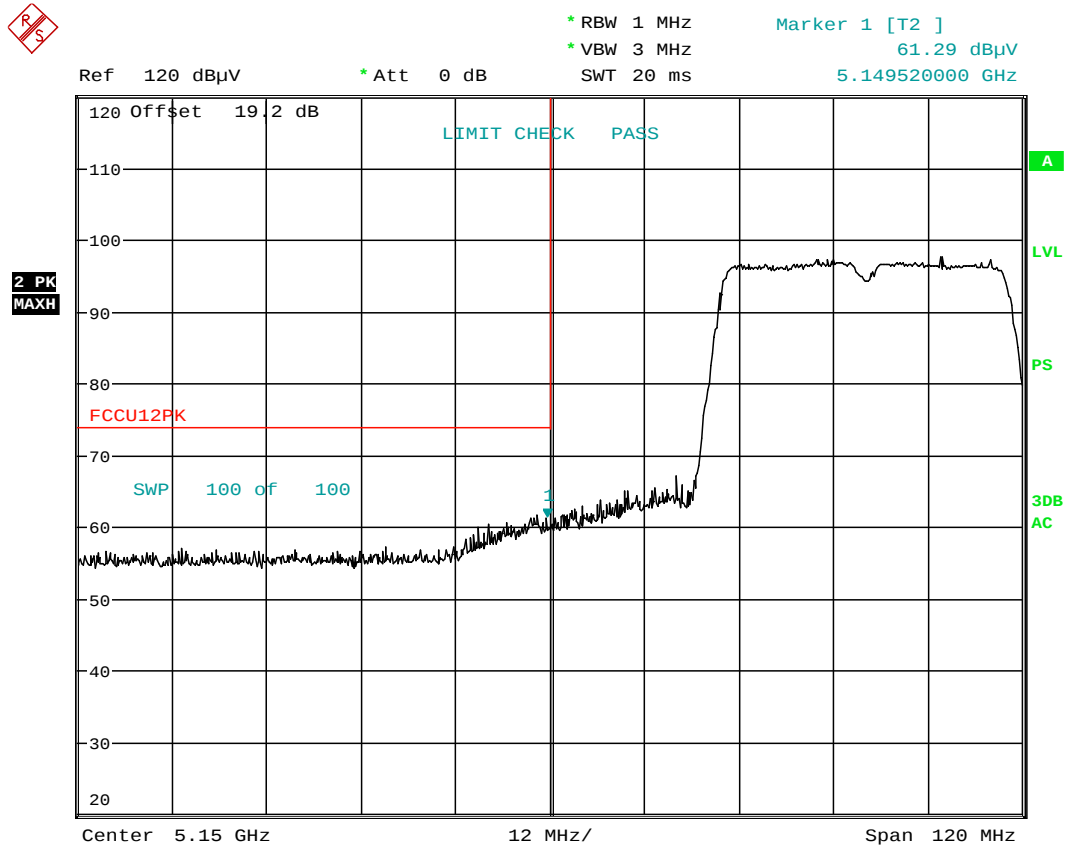

Plot 6-146. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 127 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz


Channel: 62

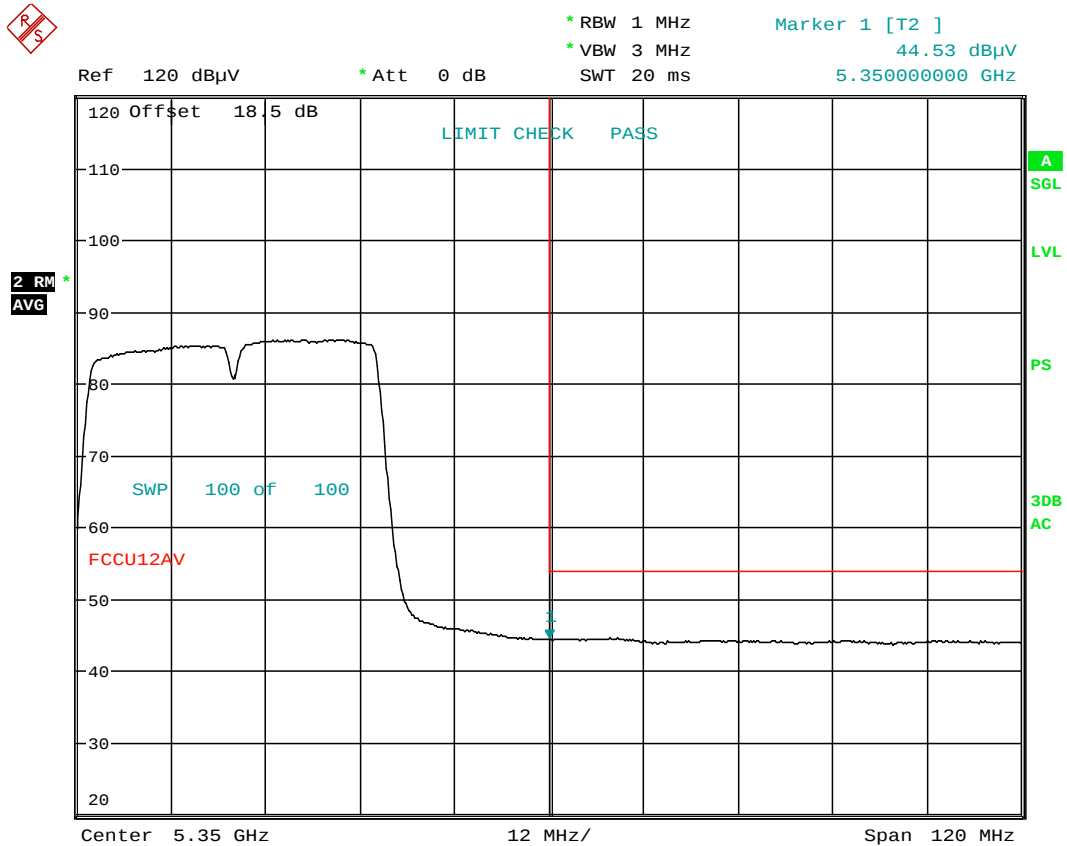

Plot 6-147. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 128 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

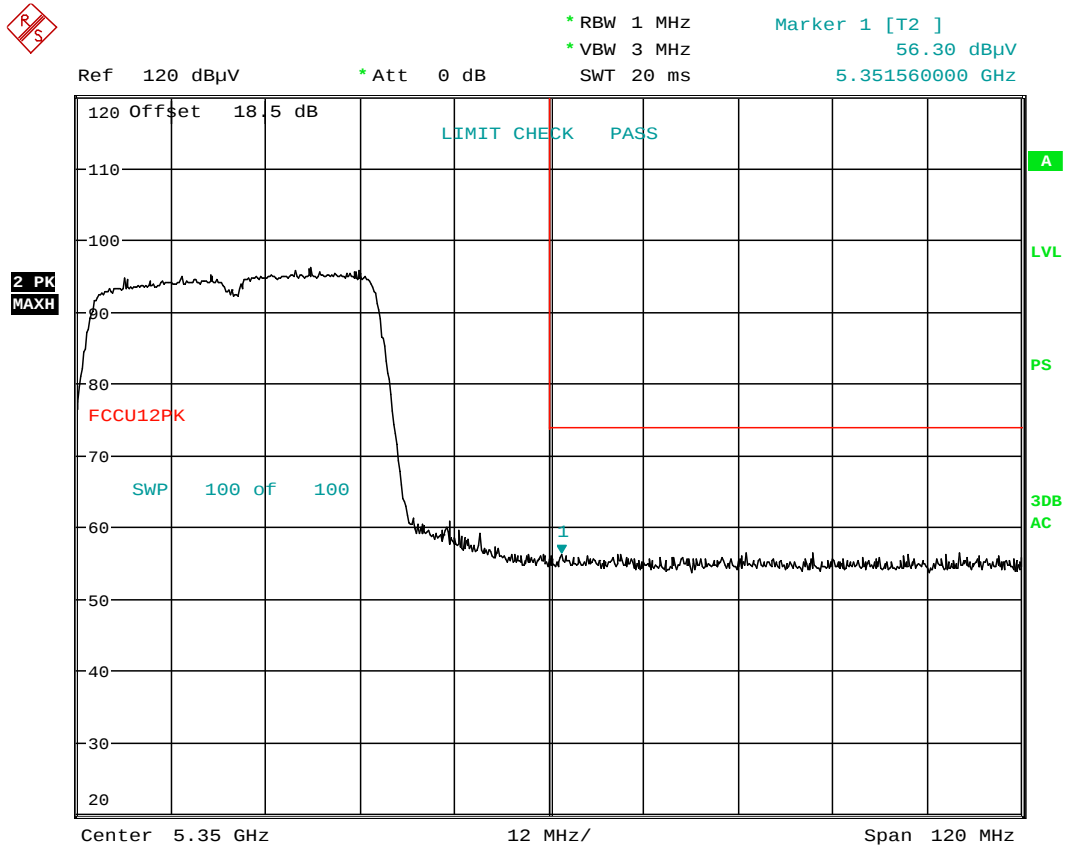

Plot 6-148. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 129 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz


Channel: 102

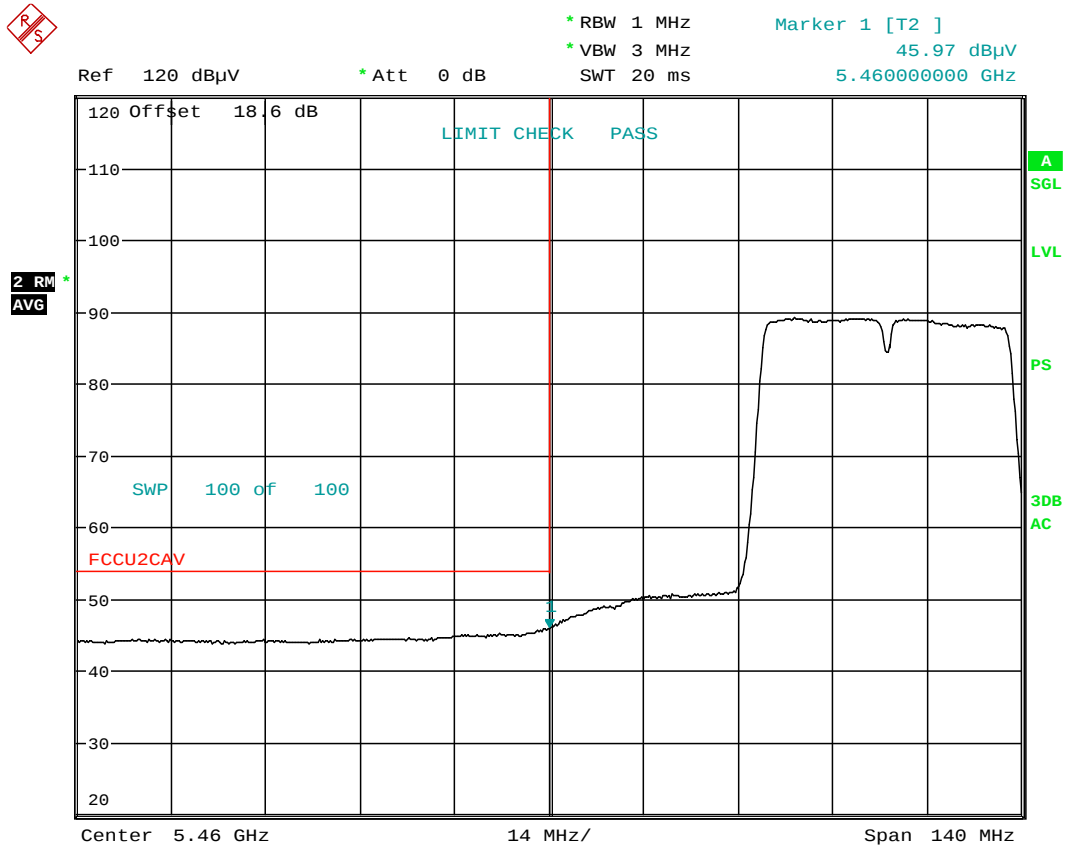

Plot 6-149. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 130 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

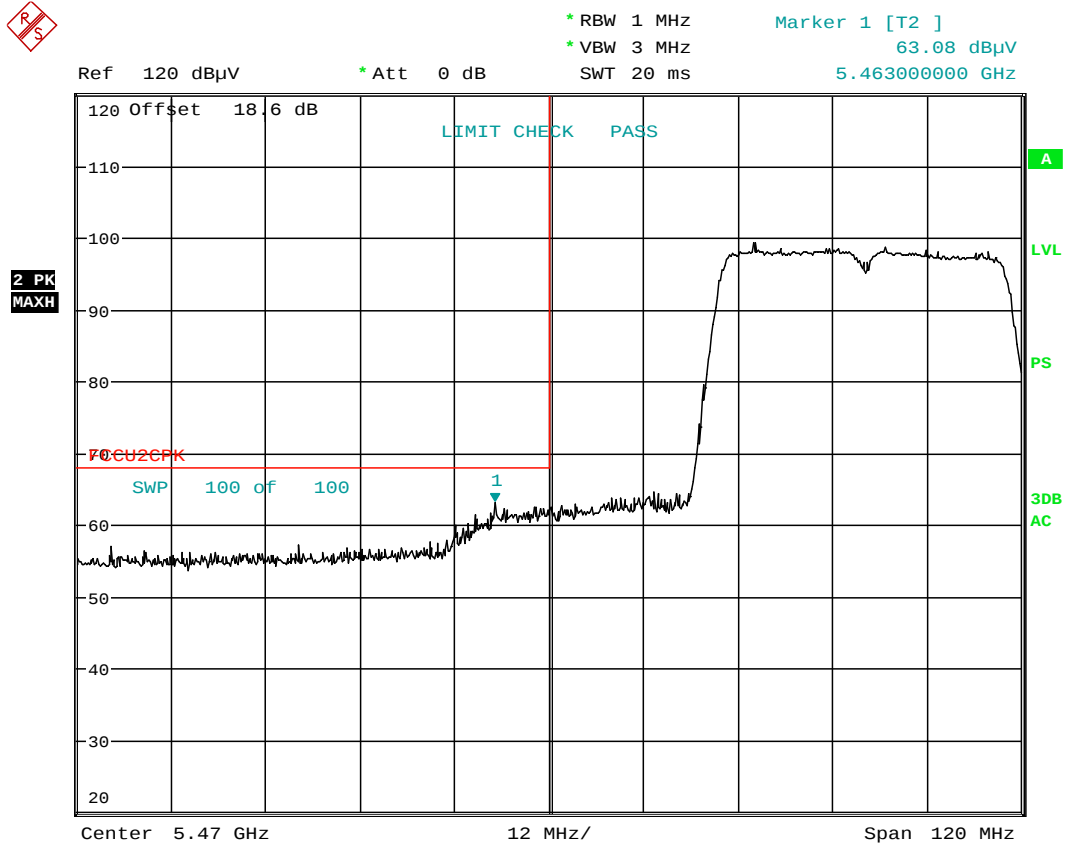


Plot 6-150. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 131 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11n (40MHz)
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5670MHz
Channel: 134

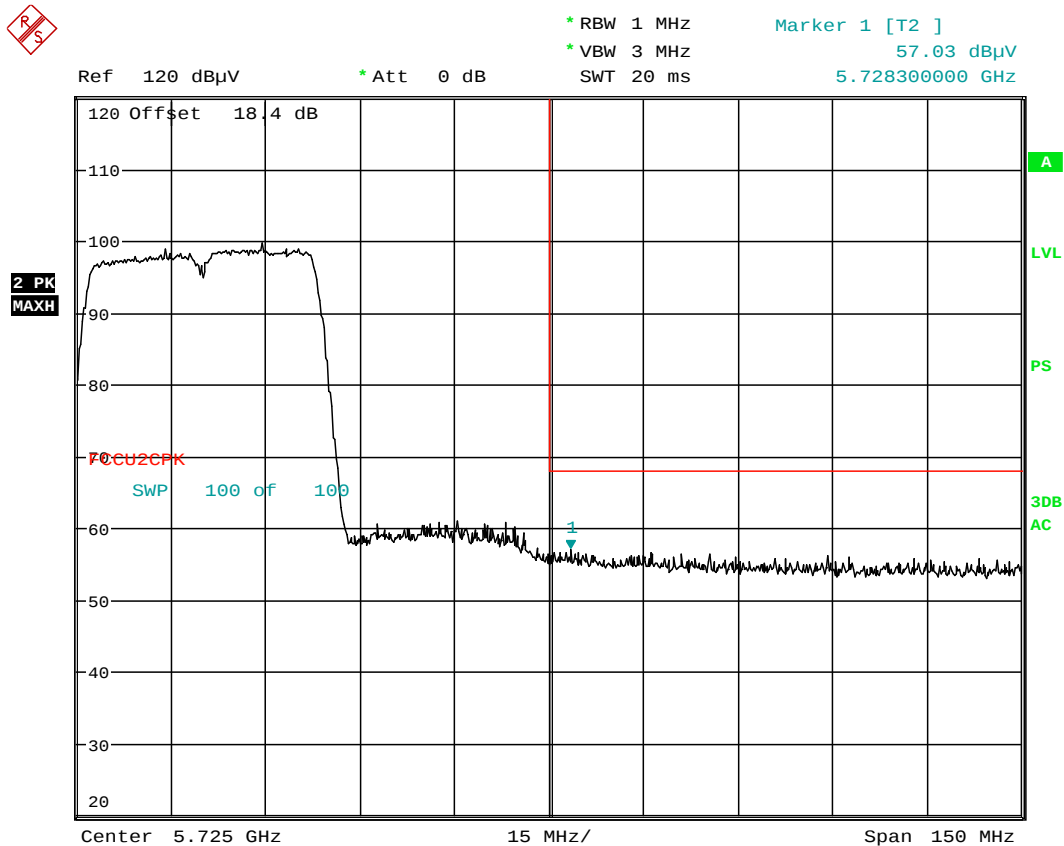

Plot 6-151. Radiated Upper Band Edge Plot (Peak - UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 - 8/20/2014	EUT Type: Portable Handset		Page 132 of 186

6.10 Antenna-1 Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz


Channel: 42

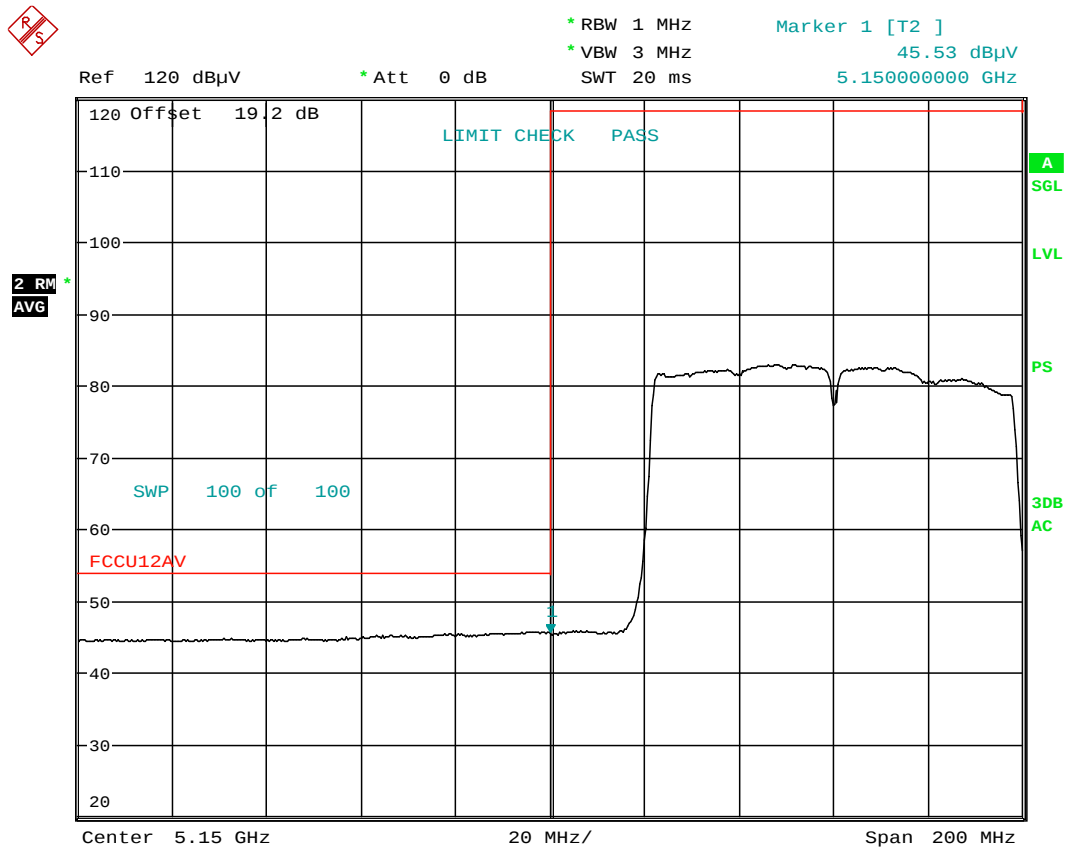

Plot 6-152. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 133 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

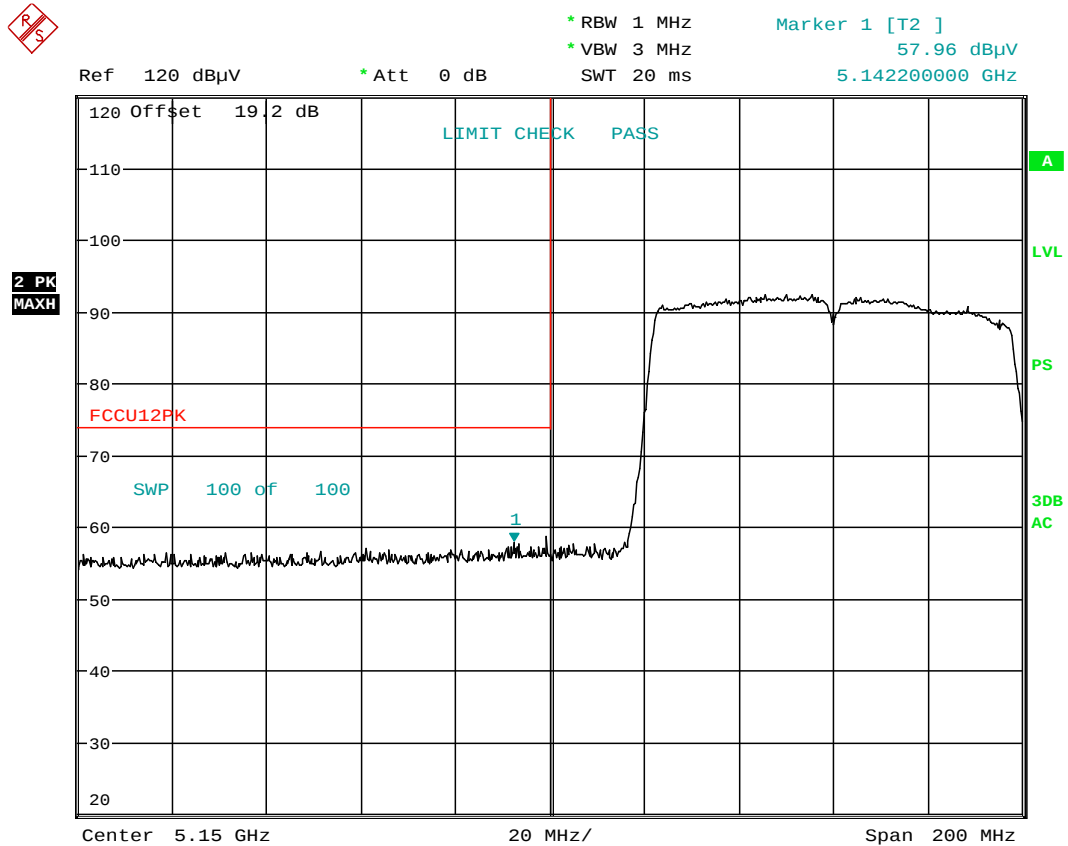

Plot 6-153. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 134 of 186

Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz


Channel: 58

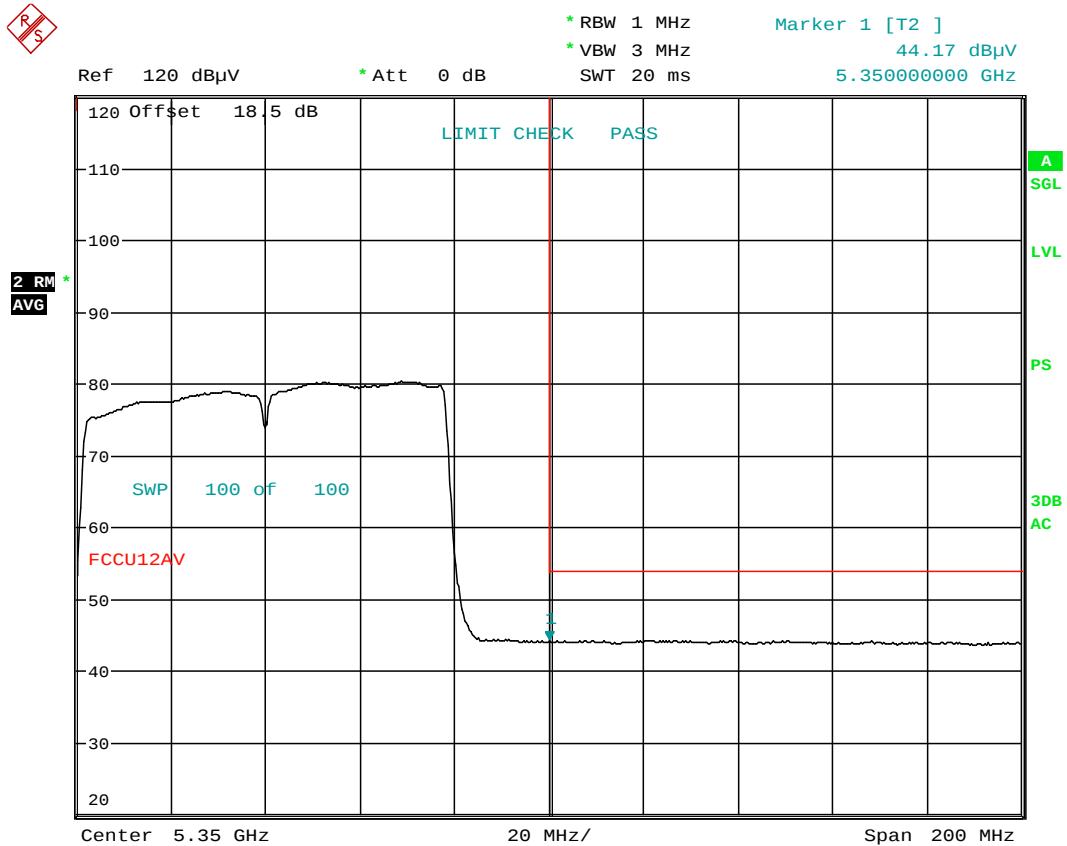

Plot 6-154. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 135 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

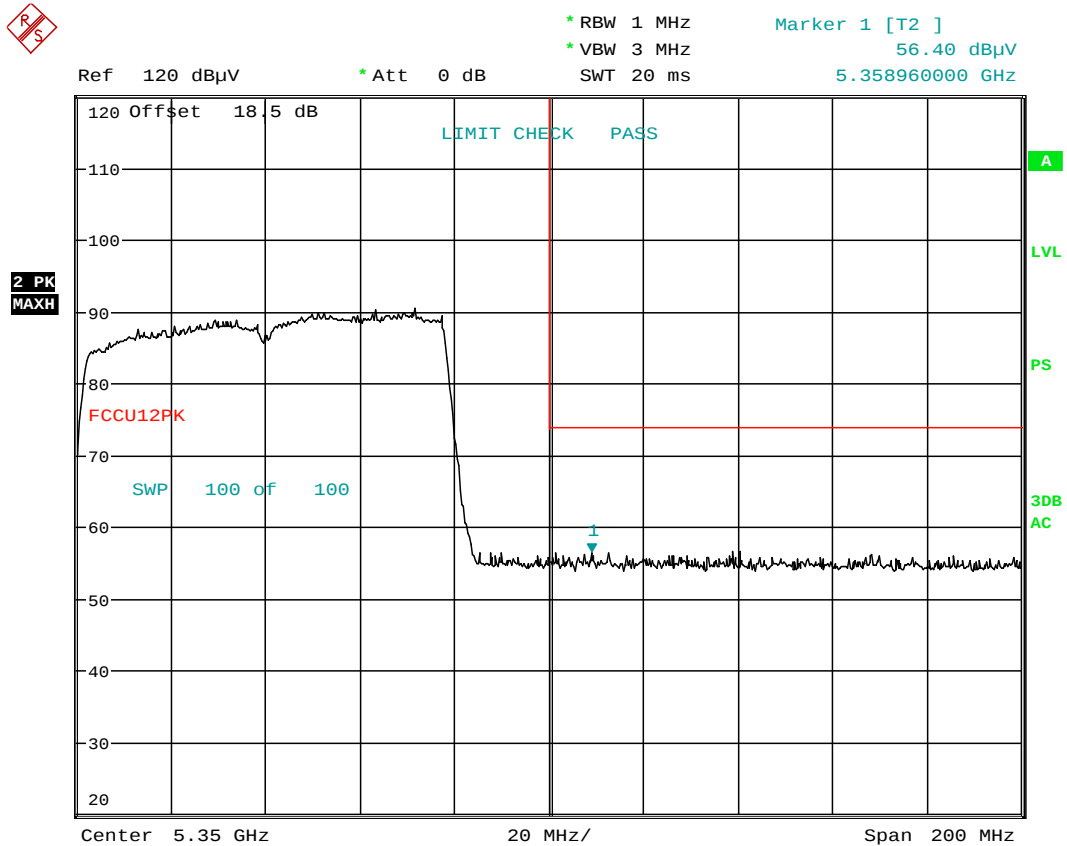

Plot 6-155. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 136 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz


Channel: 106

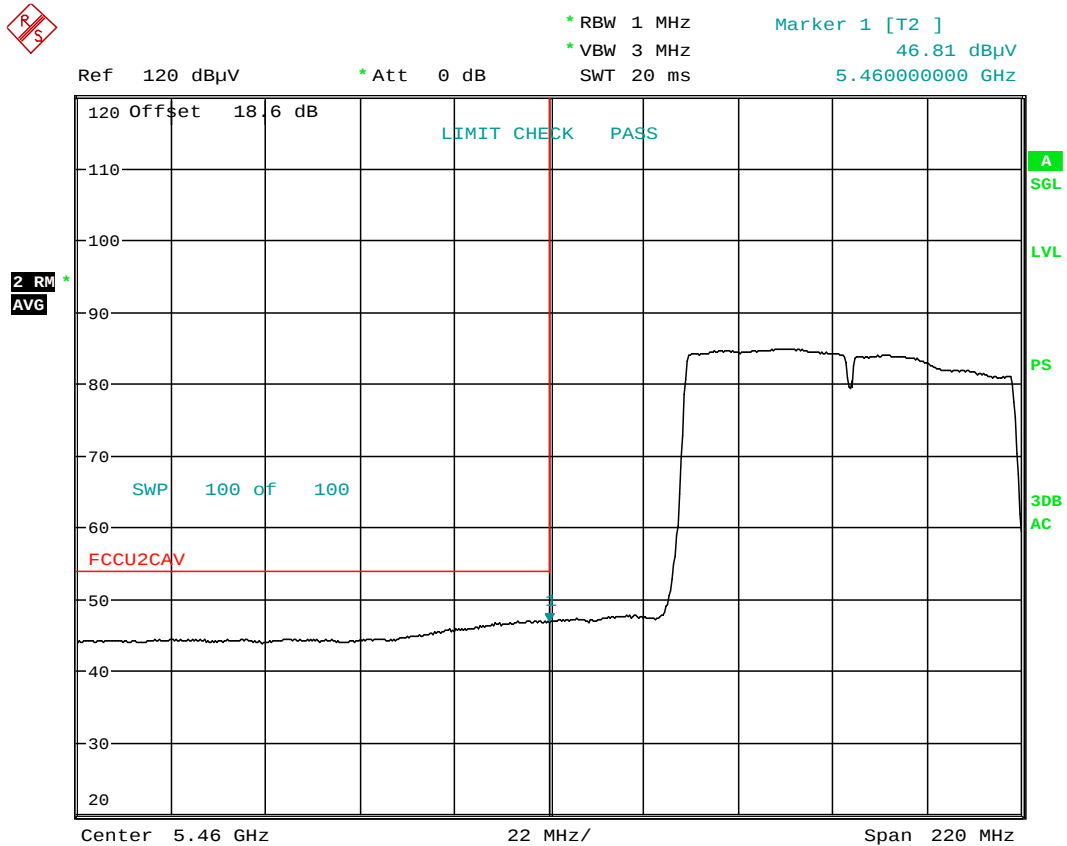

Plot 6-156. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 137 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

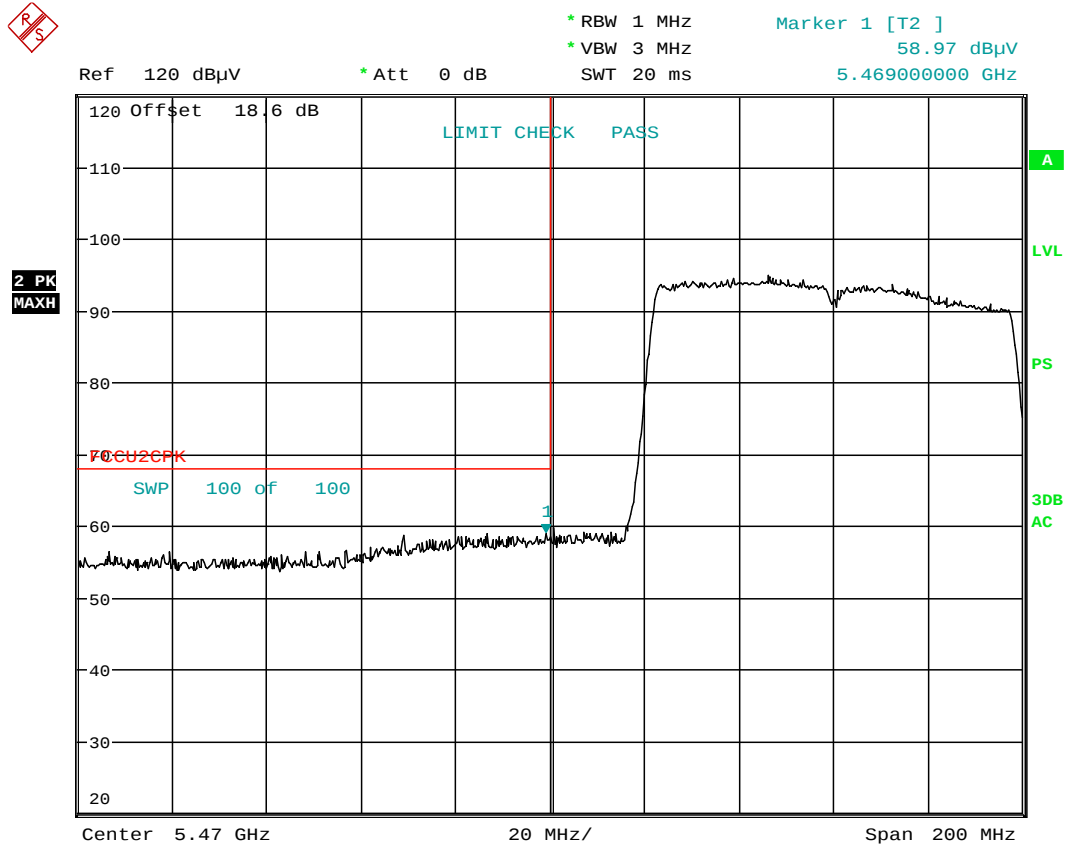

Plot 6-157. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 138 of 186

6.11 Antenna-2 Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz


Channel: 36

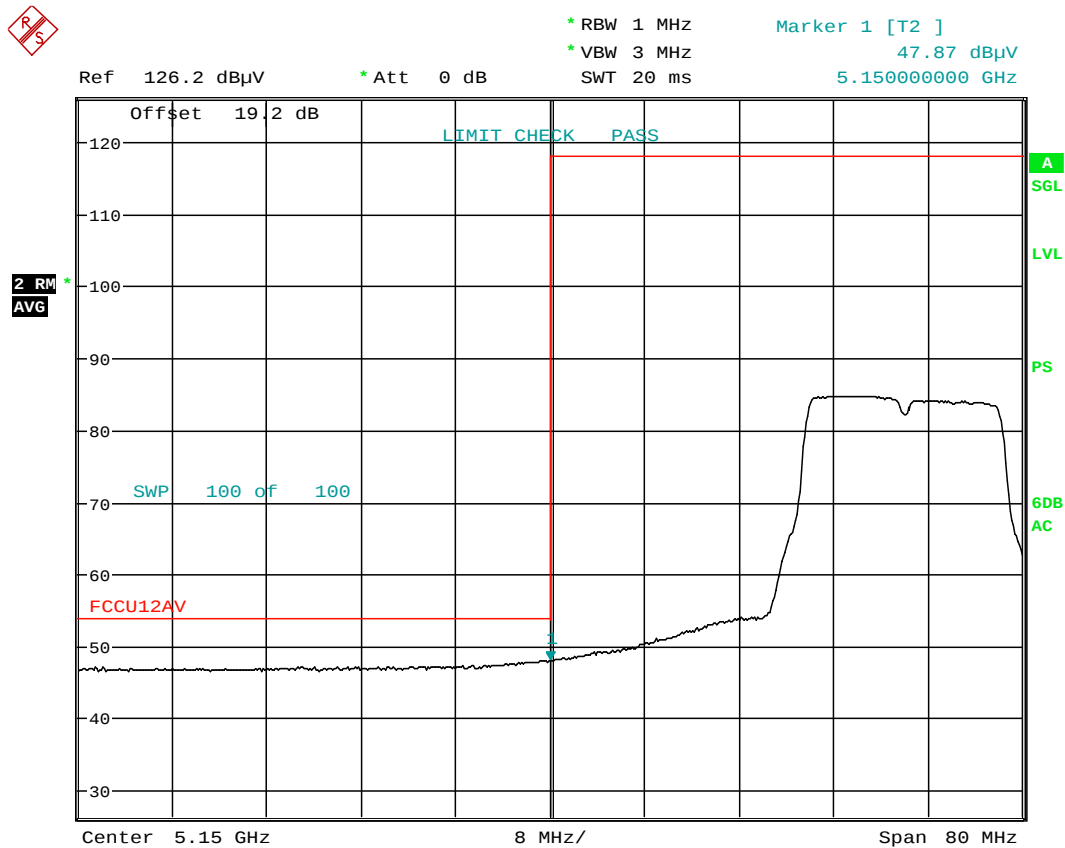

Plot 6-158. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 139 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

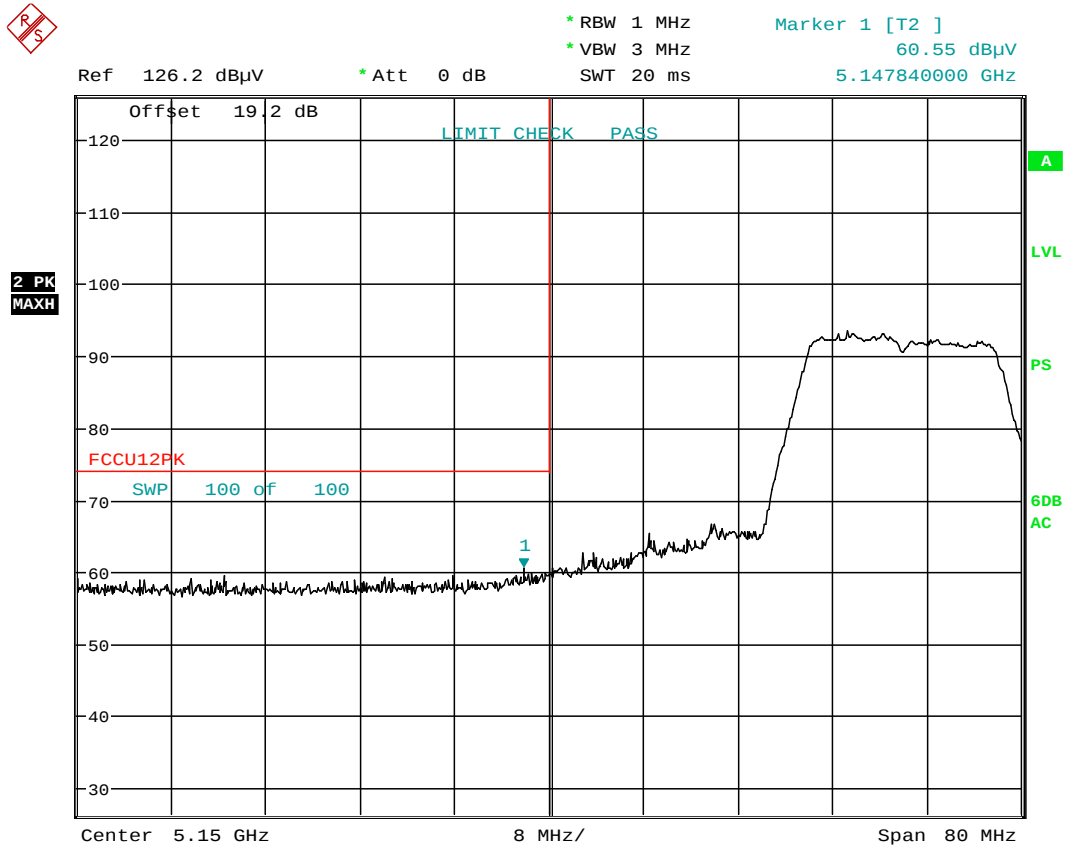

Plot 6-159. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 140 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

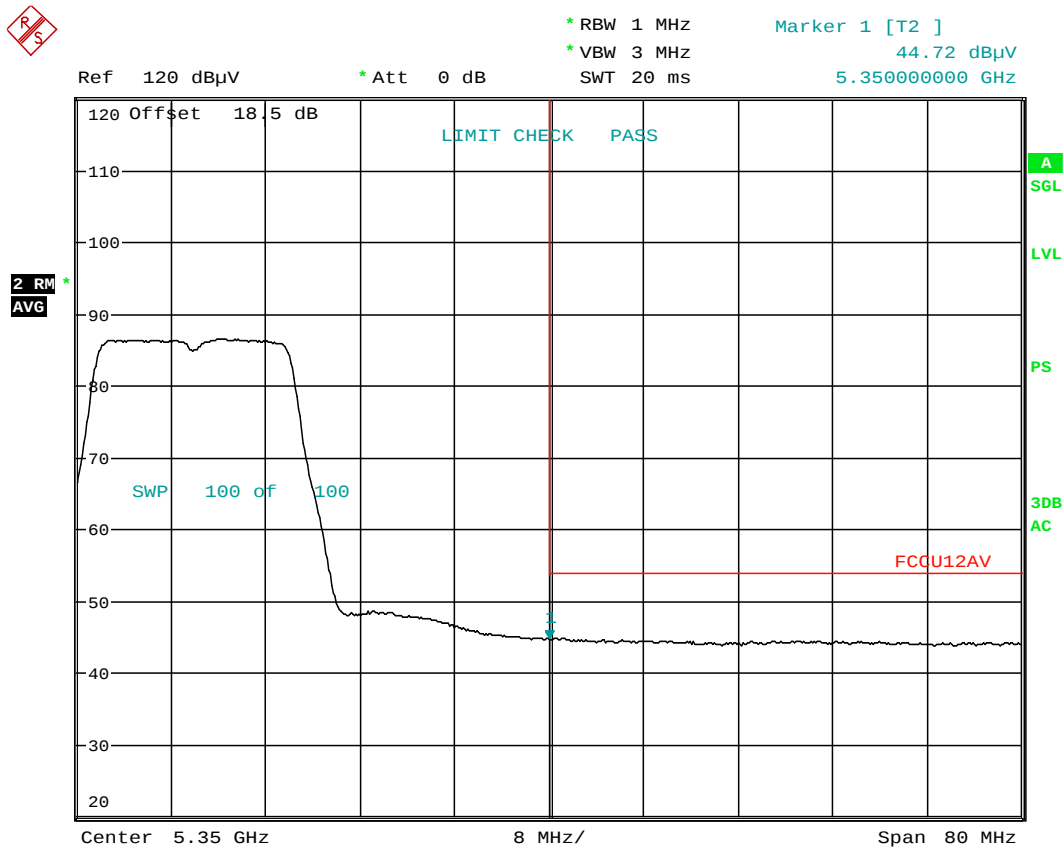

Plot 6-160. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 141 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

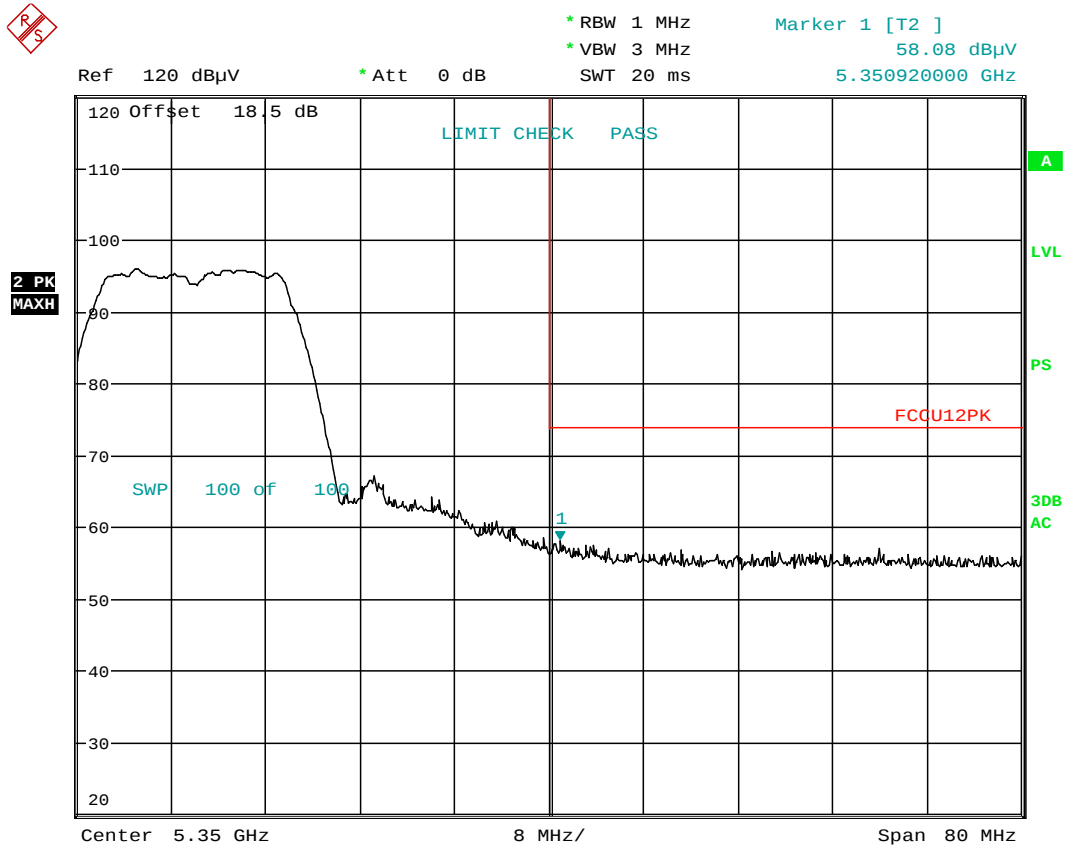

Plot 6-161. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 142 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz


Channel: 100

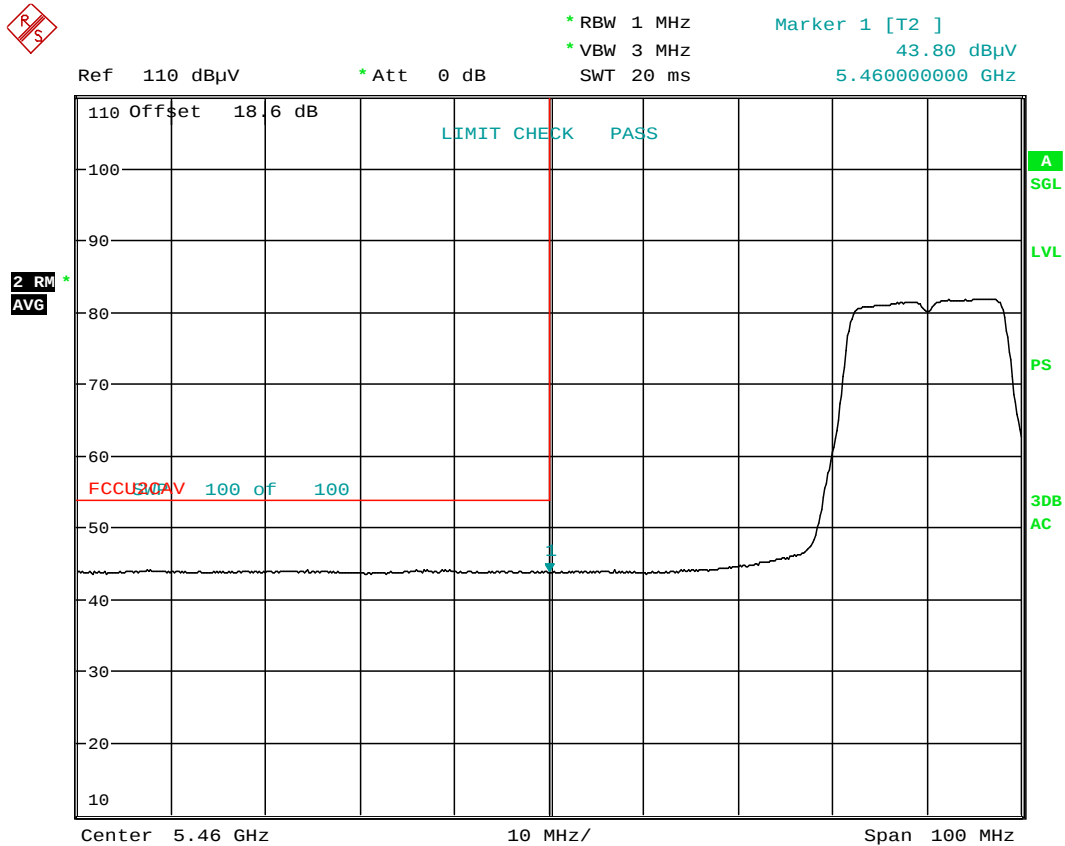

Plot 6-162. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 143 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

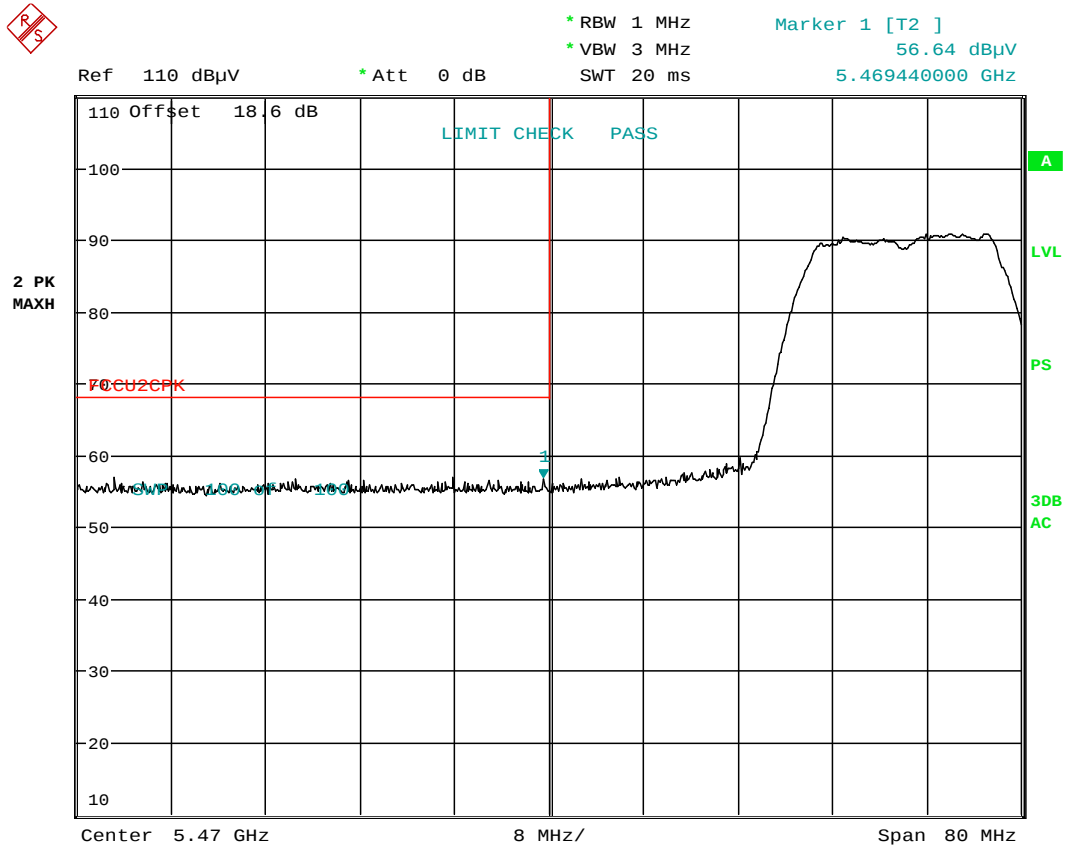

Plot 6-163. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 144 of 186

6.12 Antenna-2 Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz


Channel: 38

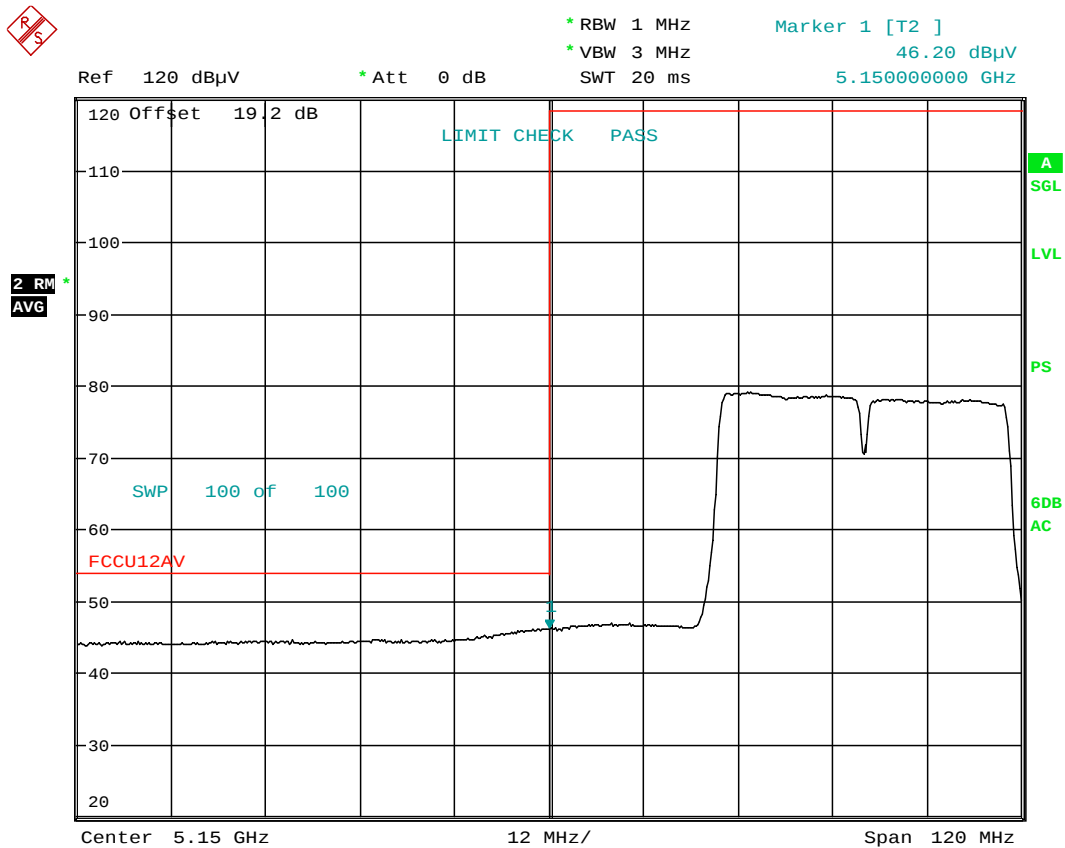

Plot 6-165. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 146 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

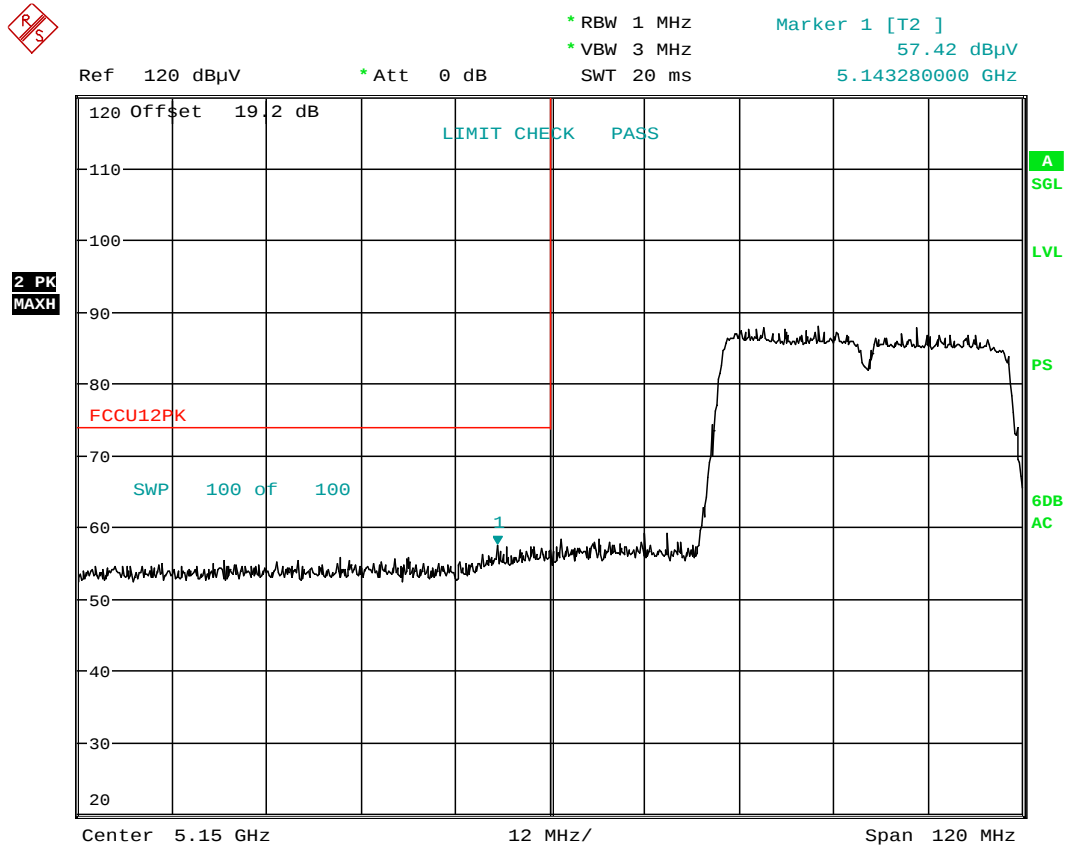


Plot 6-166. Radiated Restricted Lower Band Edge Plot (Peak - UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 - 8/20/2014	EUT Type: Portable Handset		Page 147 of 186

Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	<u>802.11n (40MHz)</u>
Worst Case Transfer Rate:	<u>MCS0</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>5310MHz</u>
Channel:	<u>62</u>

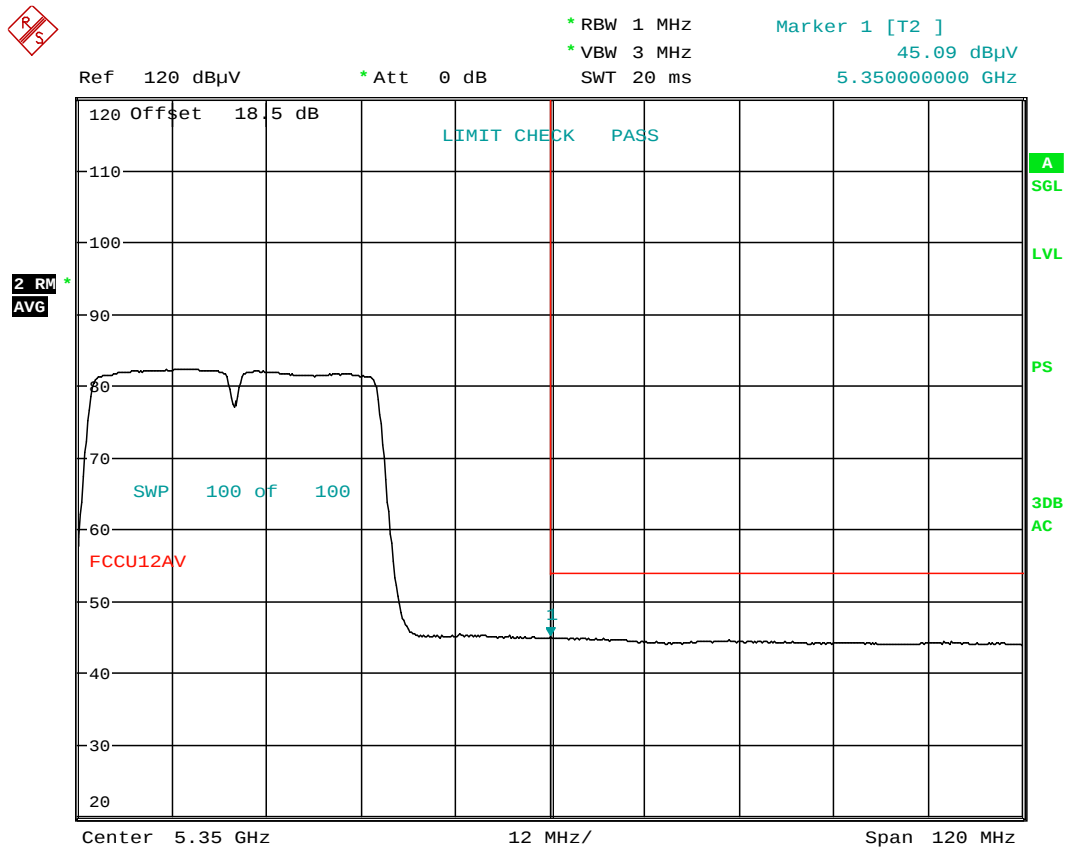


Plot 6-167. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	 FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset	Page 148 of 186

Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

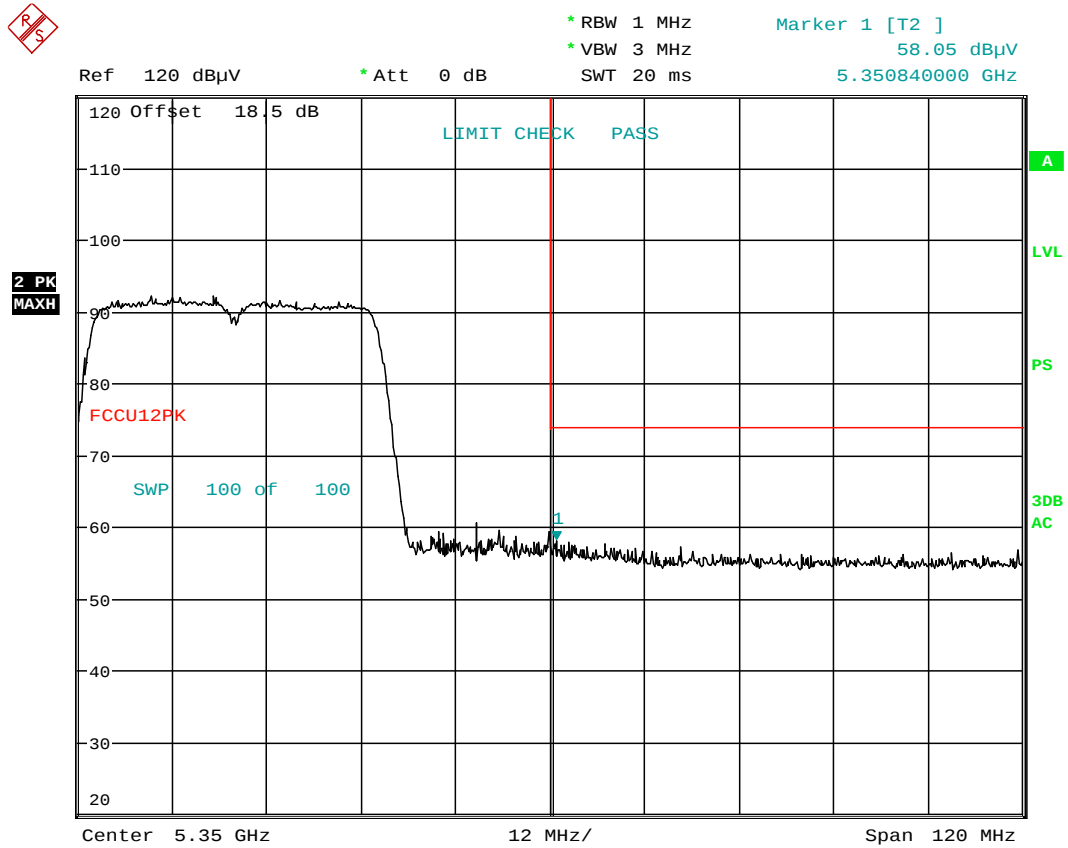

Plot 6-168. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 149 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz


Channel: 102

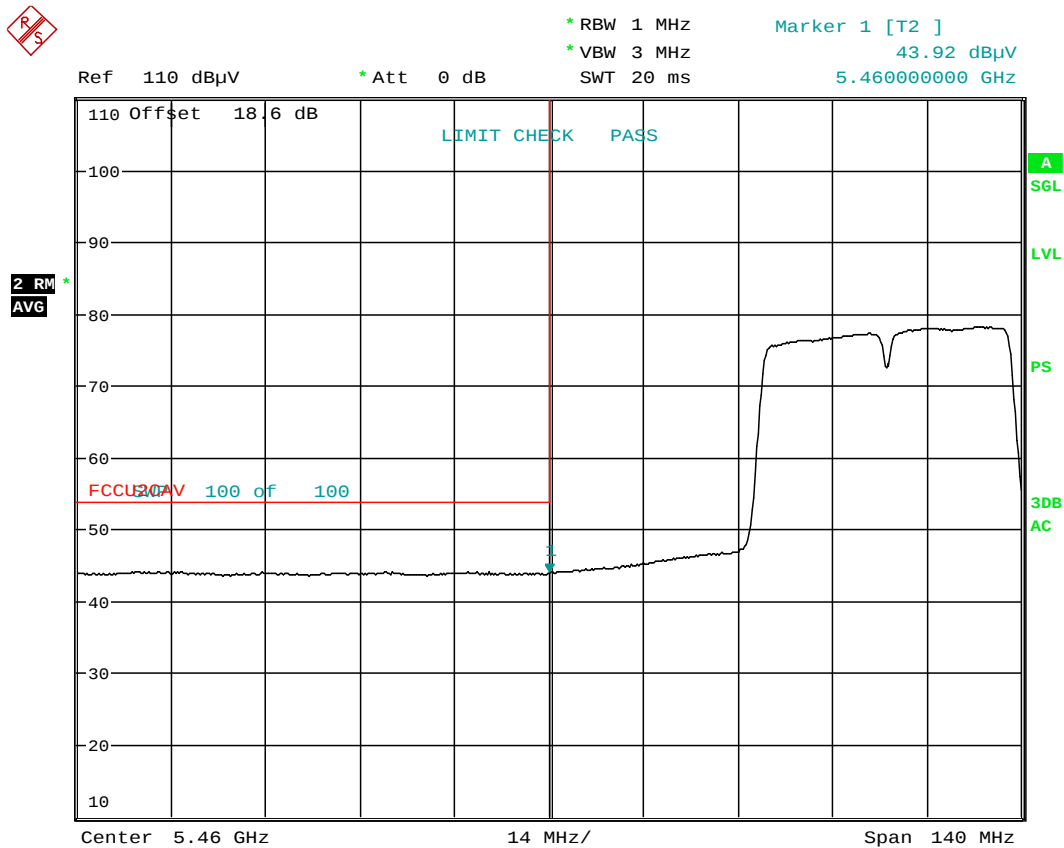

Plot 6-169. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 150 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

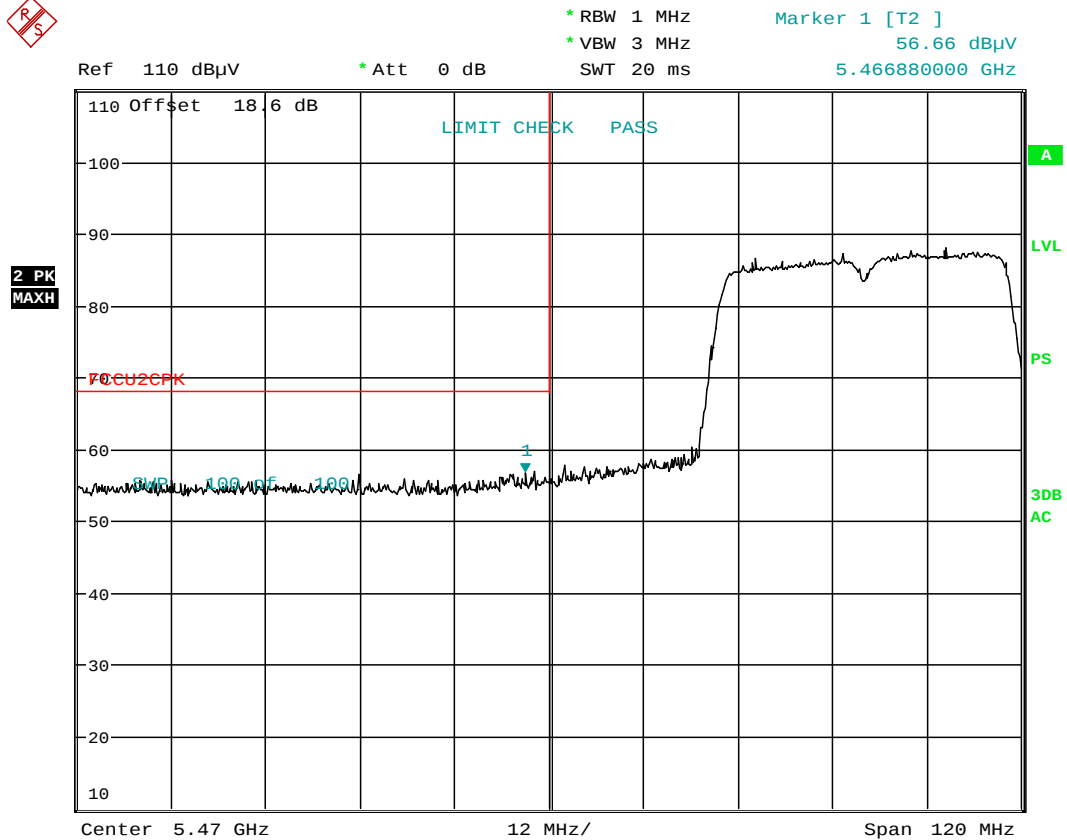

Plot 6-170. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 151 of 186

6.13 Antenna-2 Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz


Channel: 42

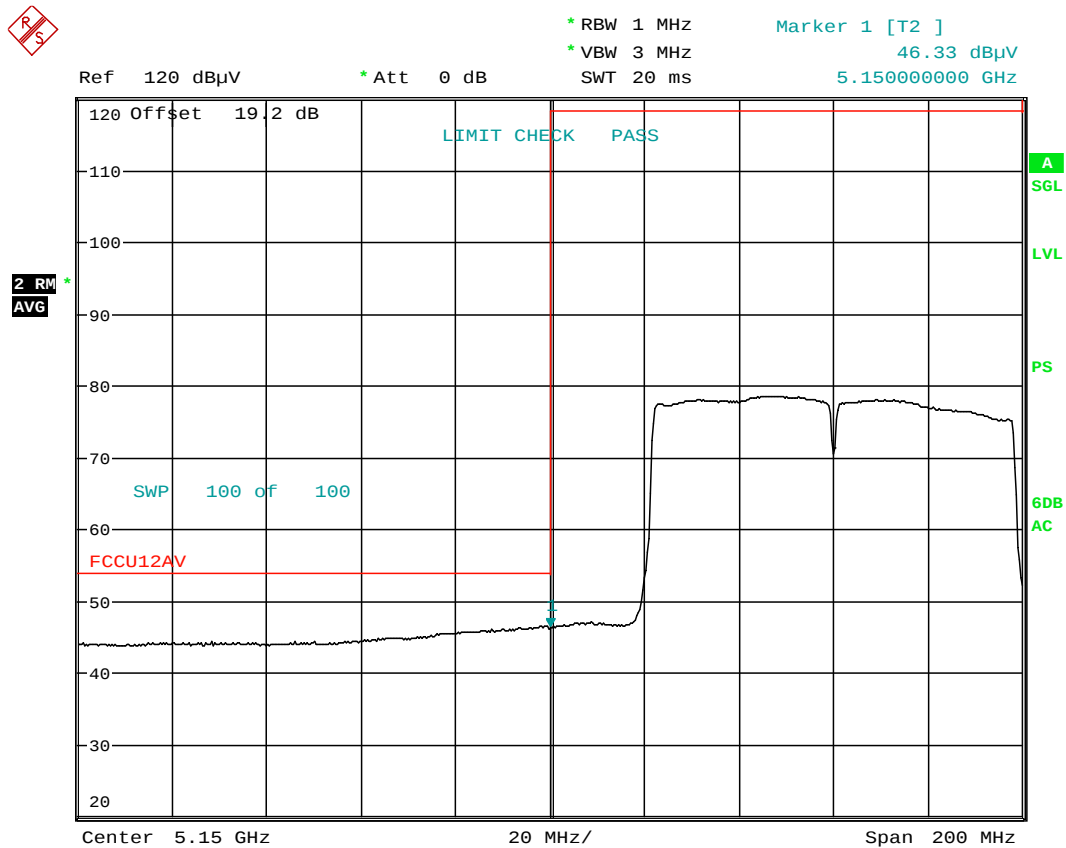

Plot 6-172. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 153 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

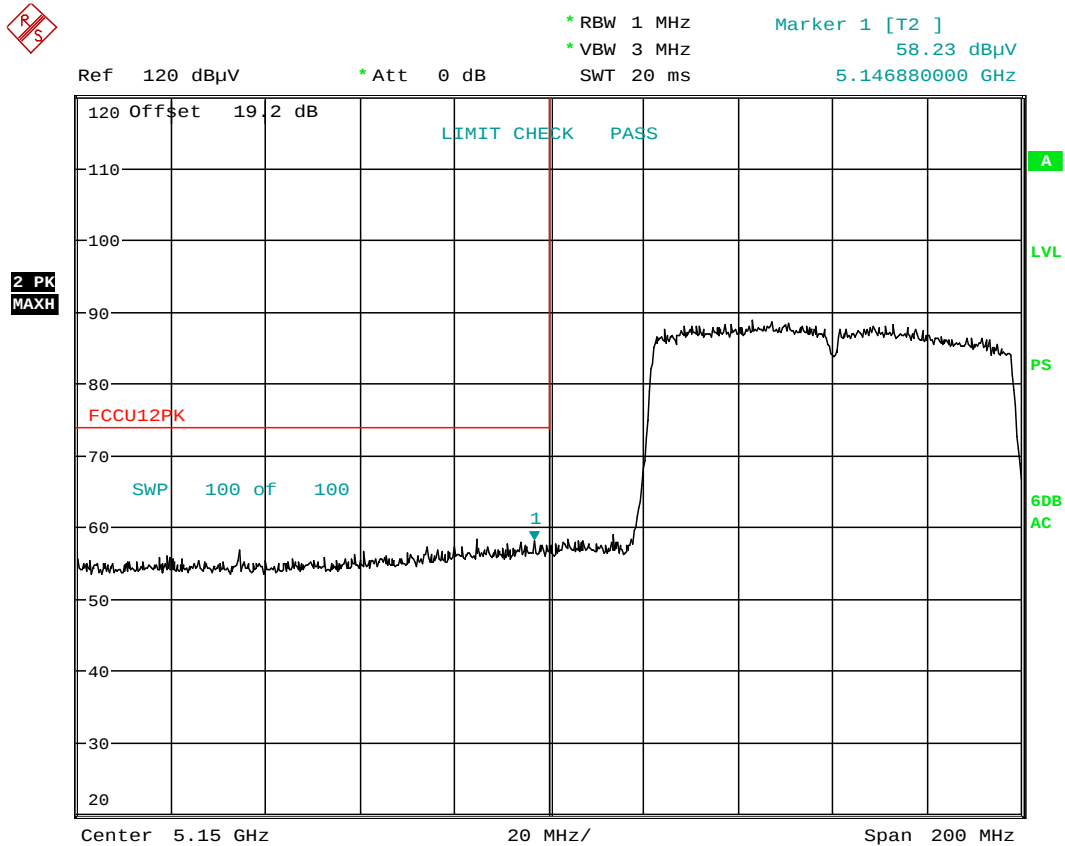

Plot 6-173. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 154 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz


Channel: 58

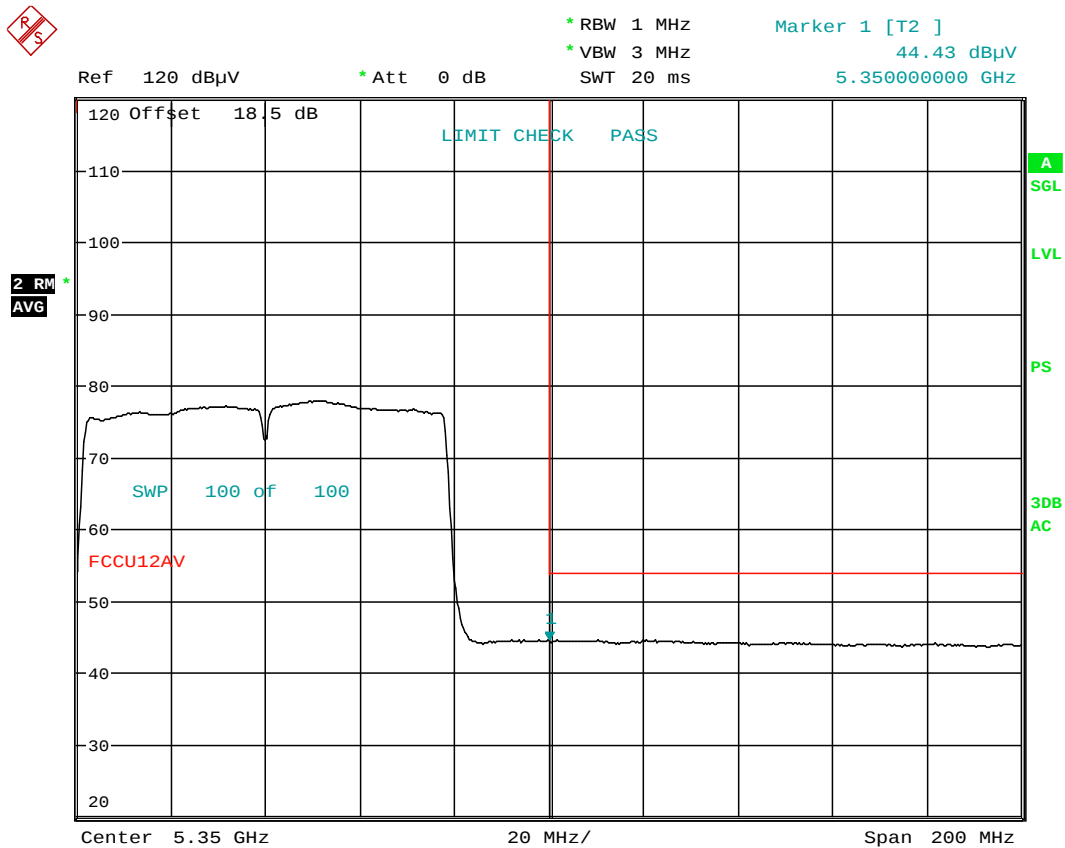

Plot 6-174. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 155 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

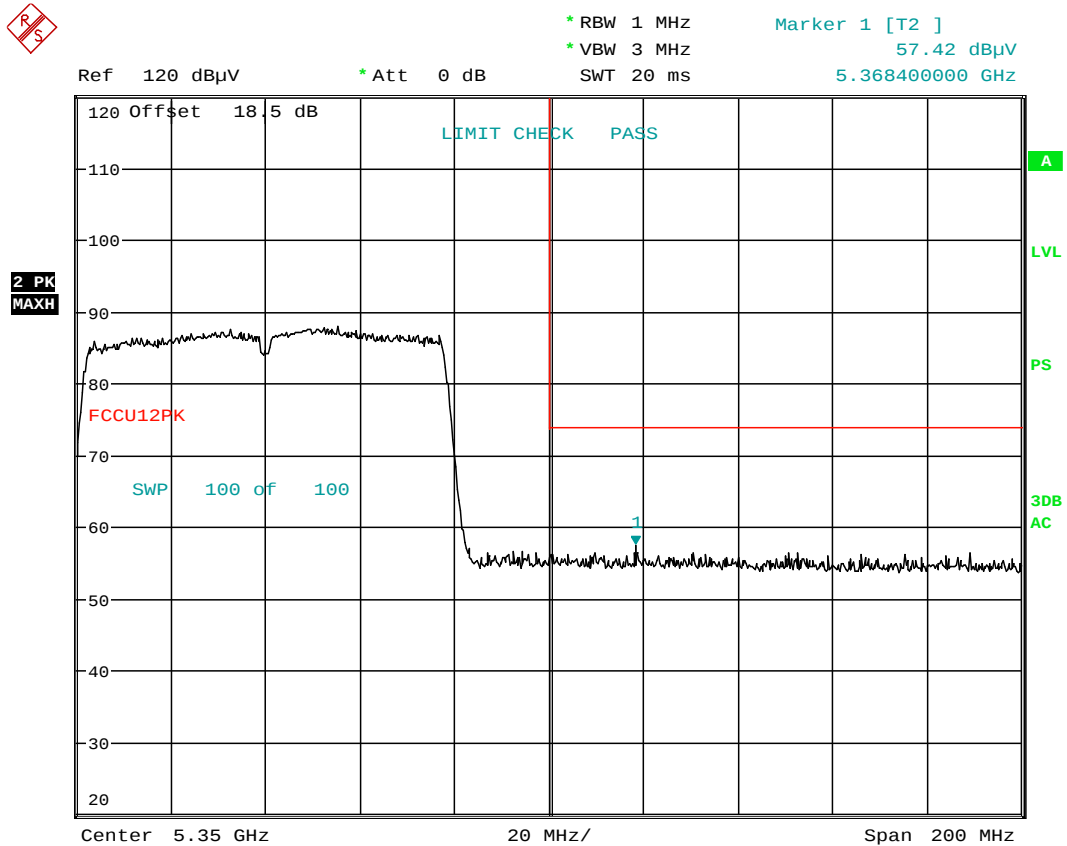

Plot 6-175. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 156 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz


Channel: 106

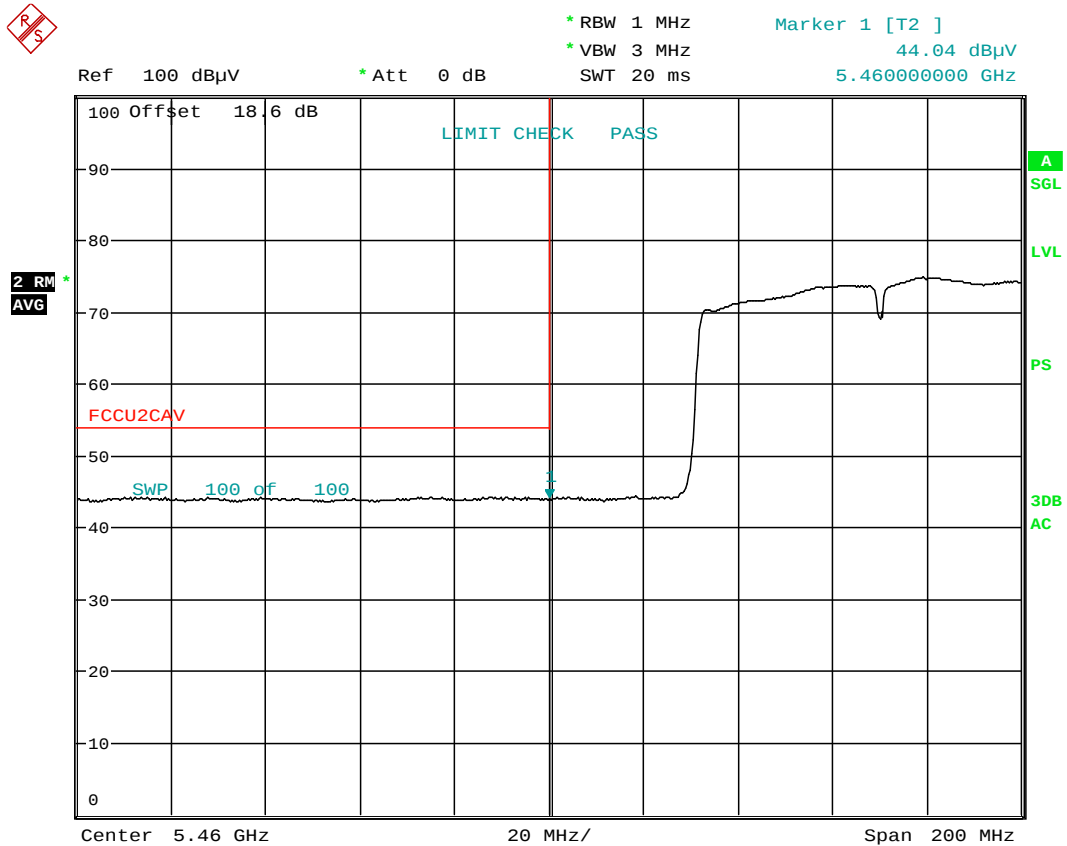

Plot 6-176. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 157 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

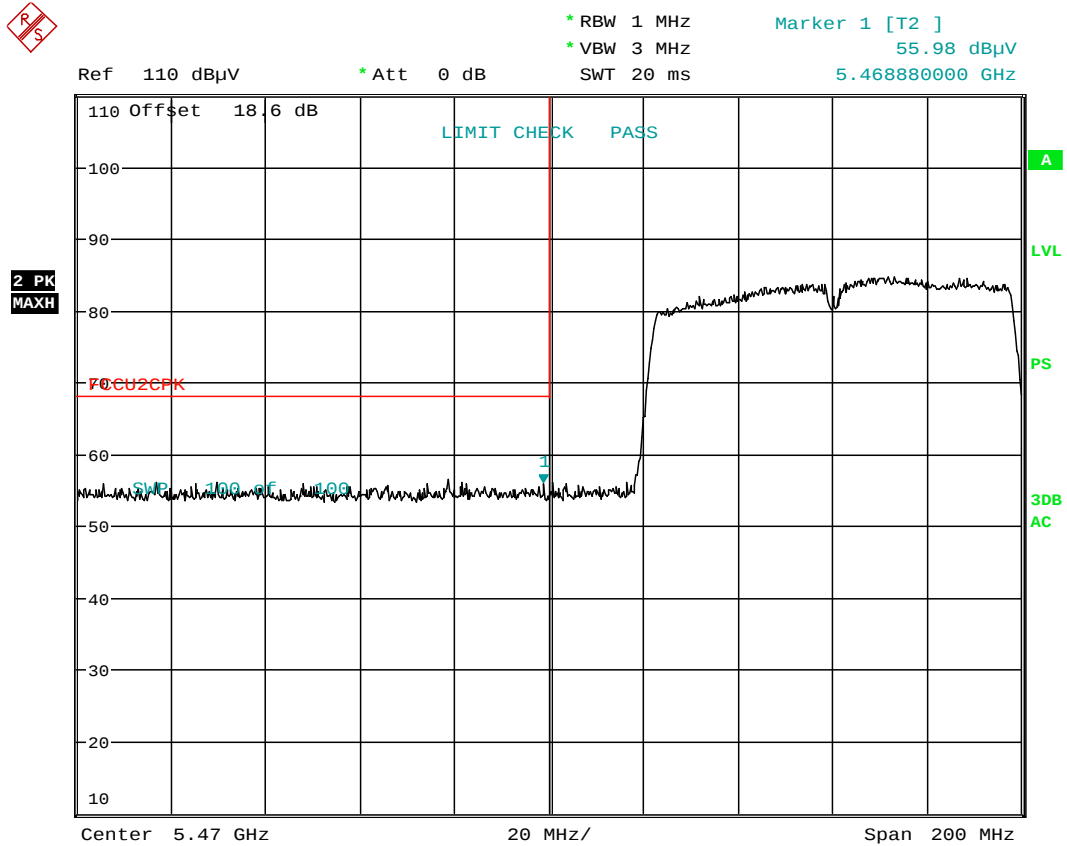

Plot 6-177. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 158 of 186

6.14 MIMO Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz


Channel: 36

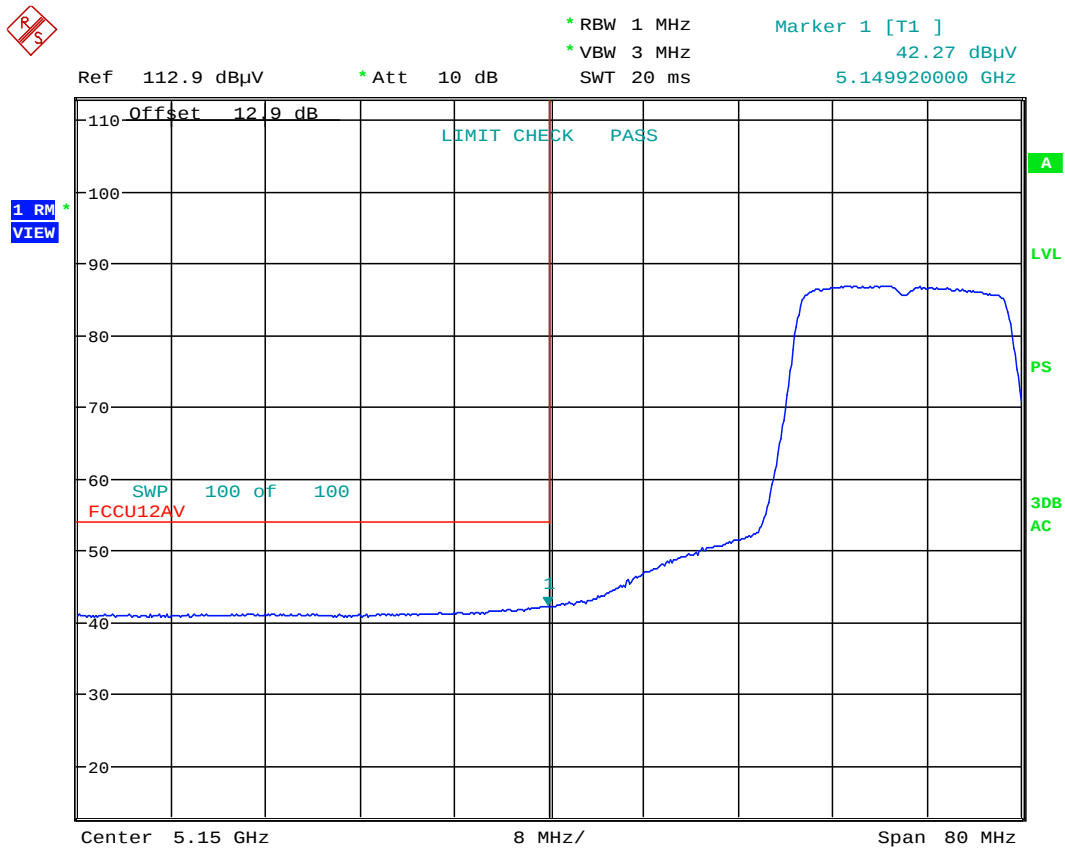

Plot 6-178. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 159 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

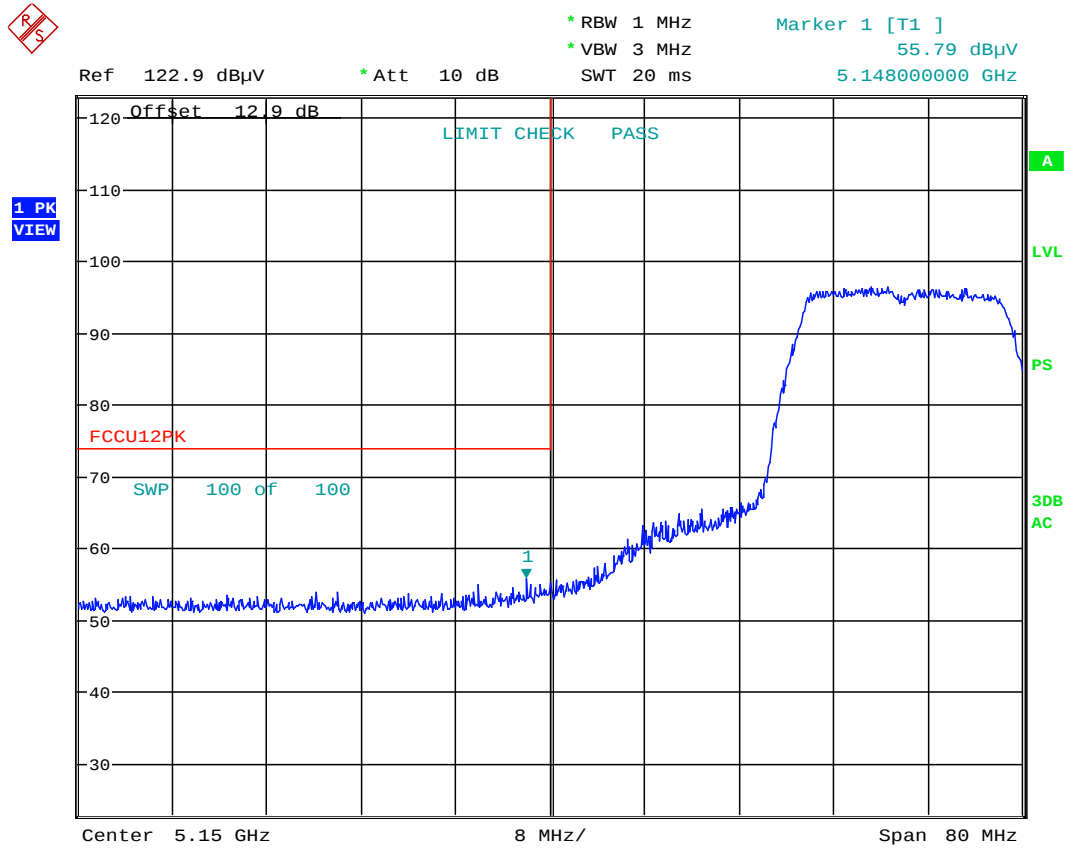

Plot 6-179. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 160 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64

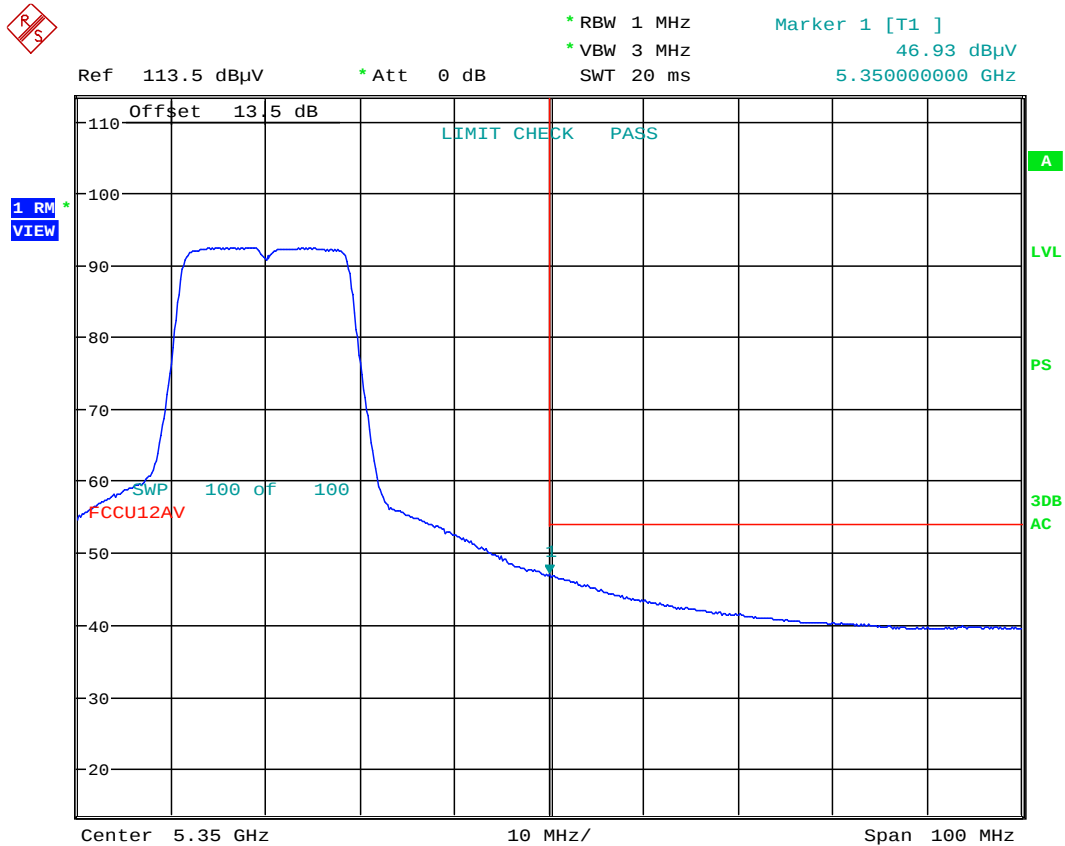

Plot 6-180. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 161 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

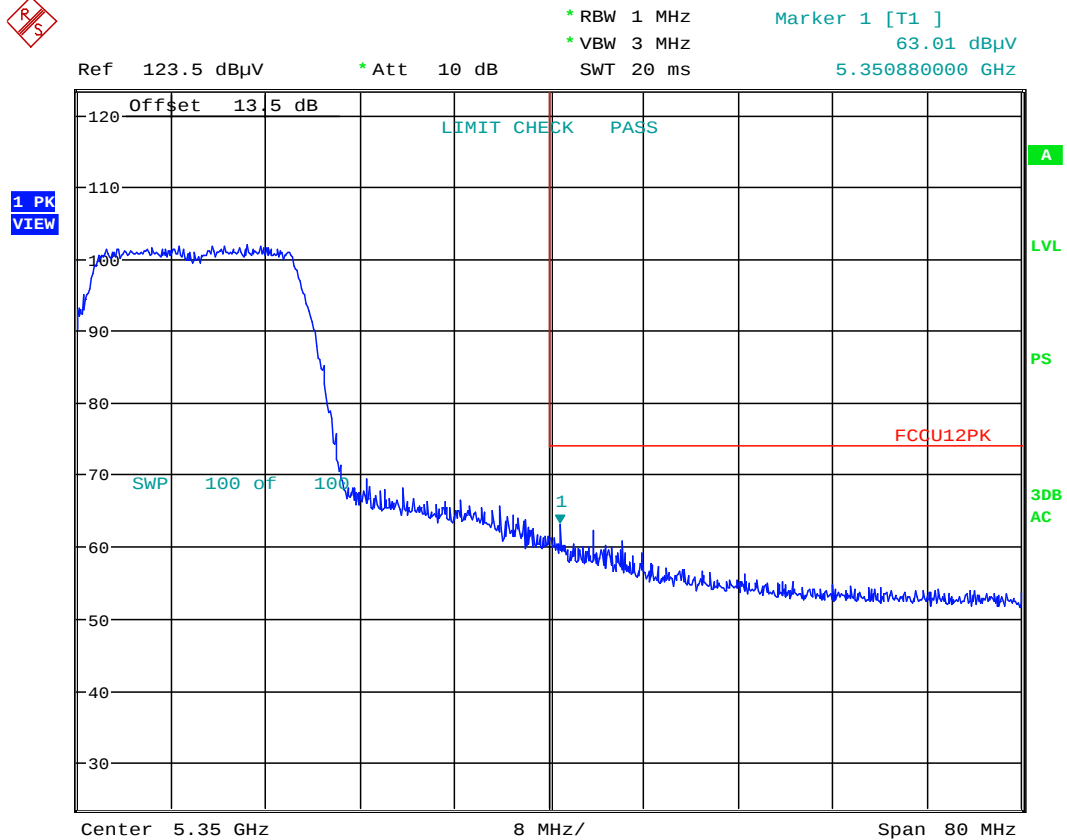

Plot 6-181. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 162 of 186

Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

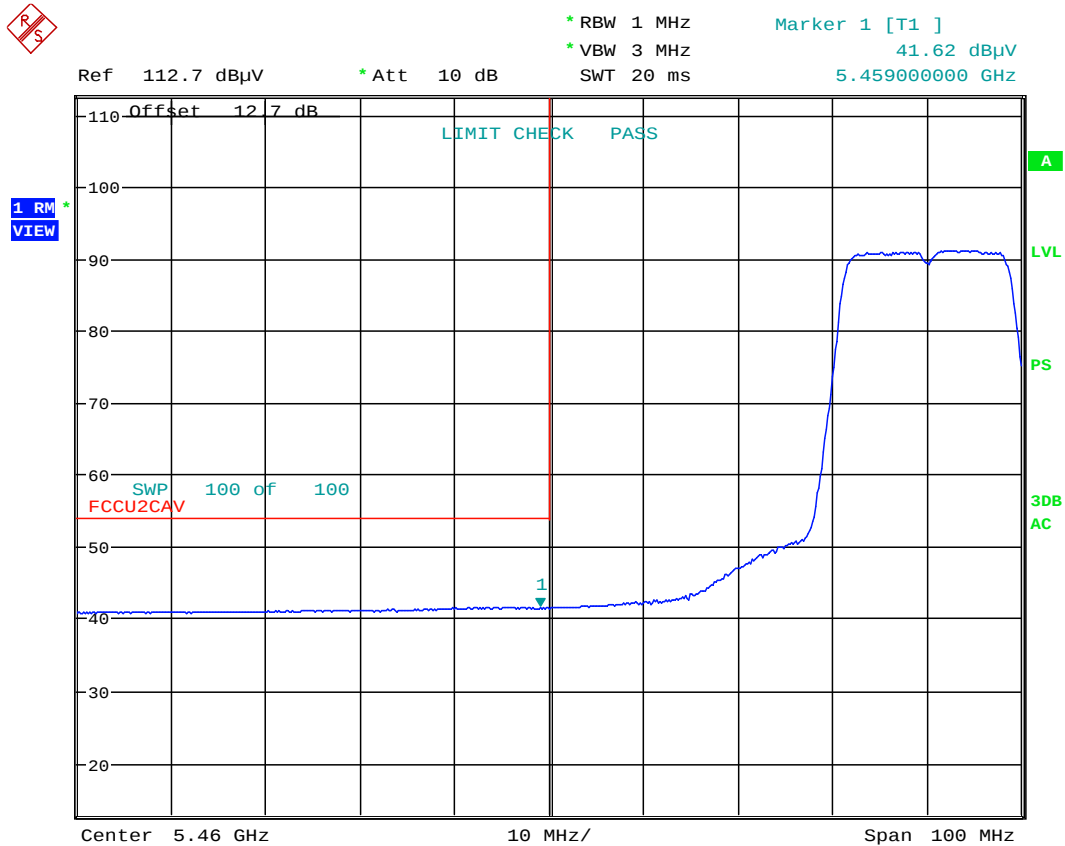


Plot 6-182. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 163 of 186

Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

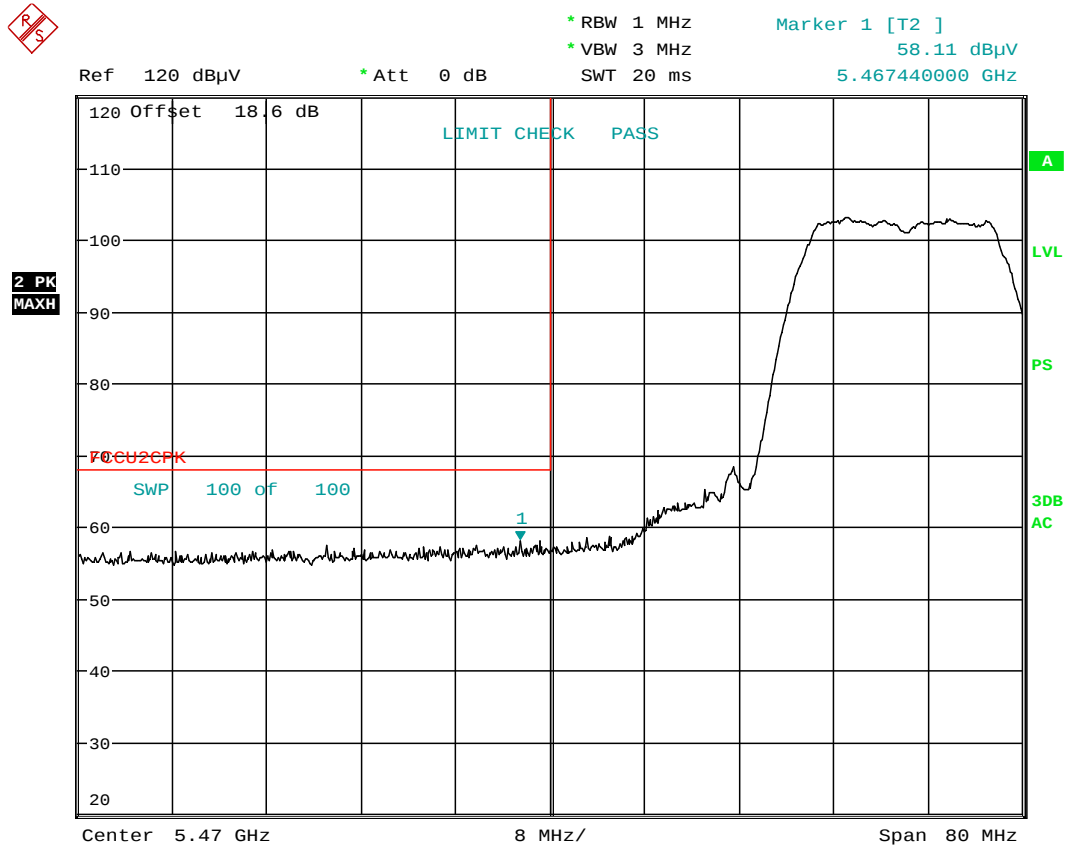

Plot 6-183. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 164 of 186

Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5700MHz

Channel: 140

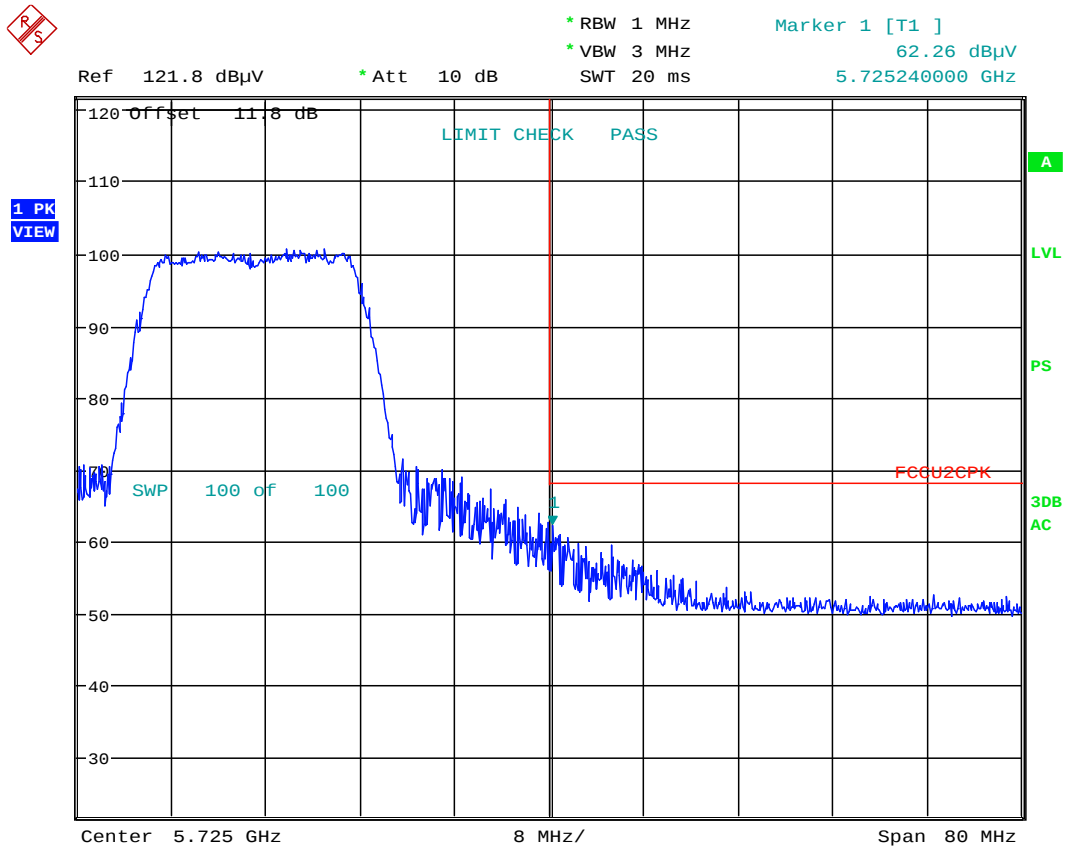

Plot 6-184. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 165 of 186

6.15 MIMO Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz


Channel: 38

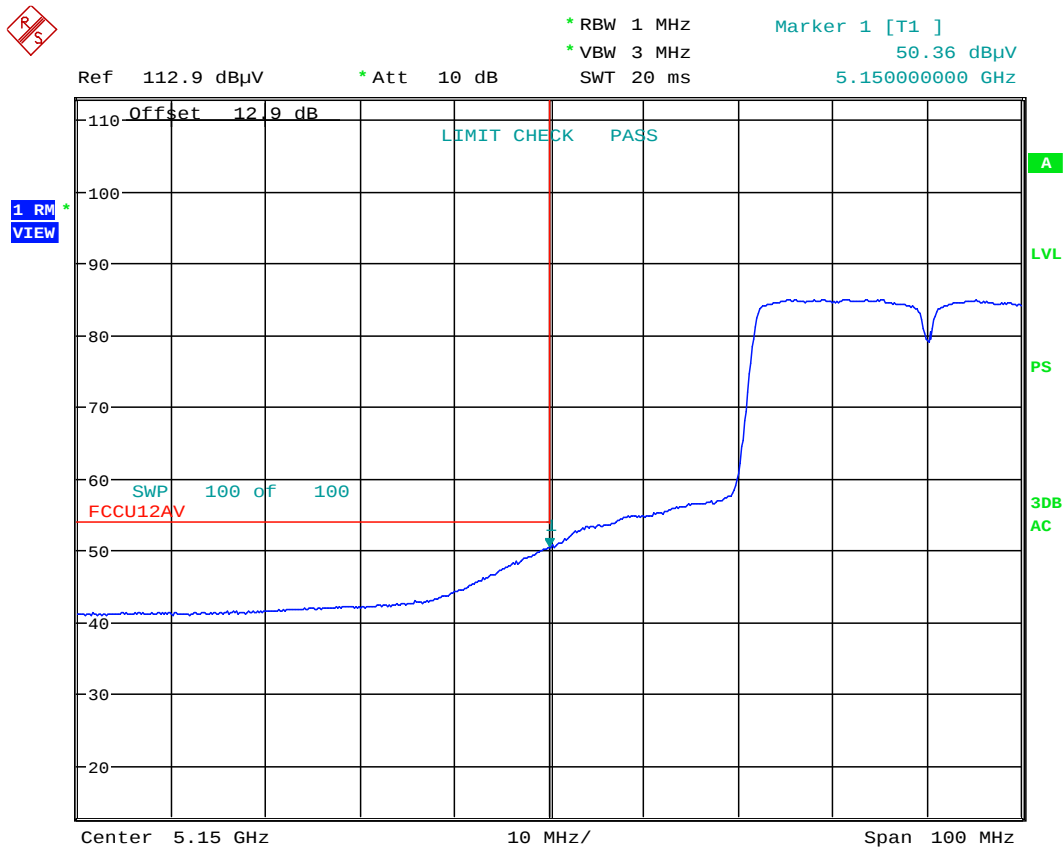

Plot 6-185. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 166 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

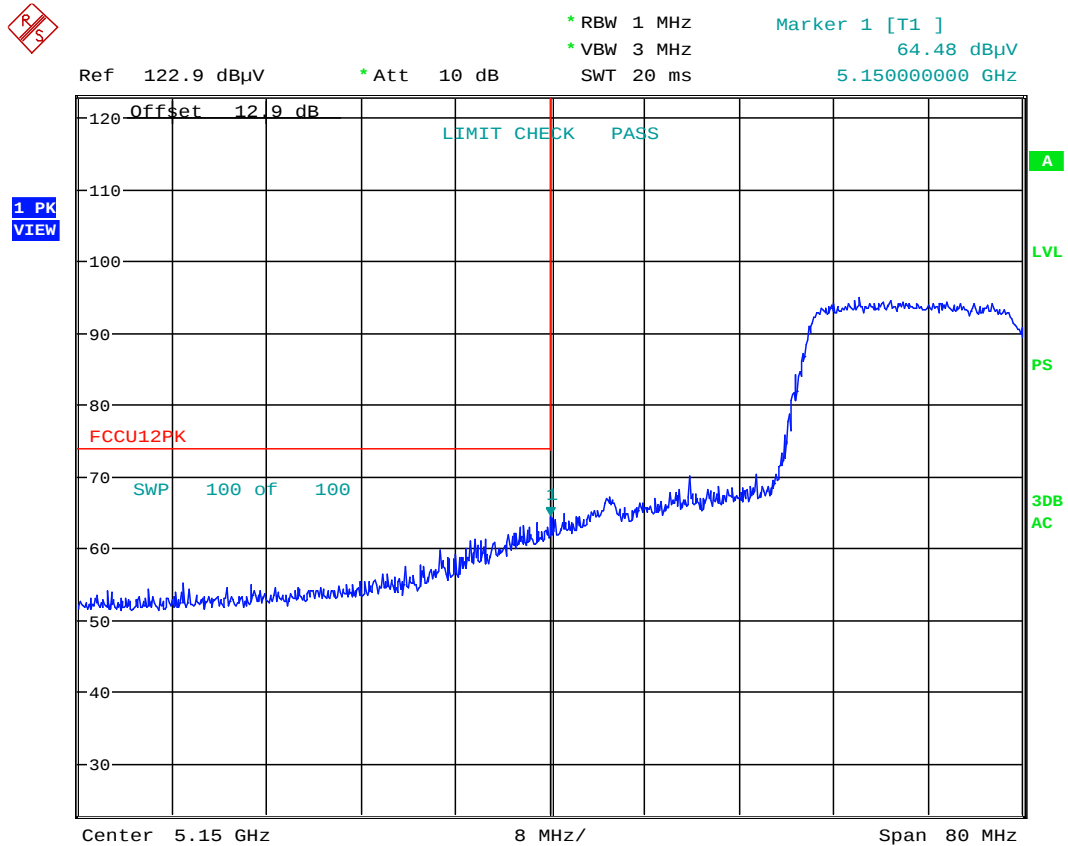

Plot 6-186. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 167 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz


Channel: 62

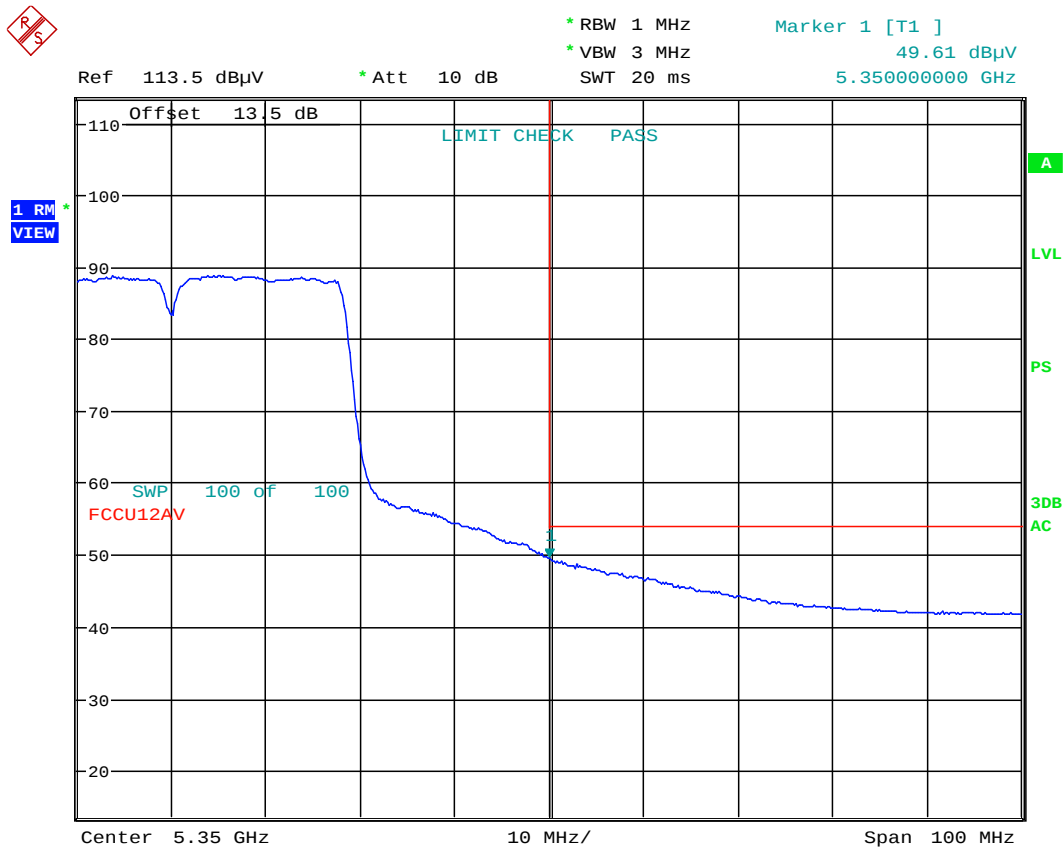

Plot 6-187. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 168 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

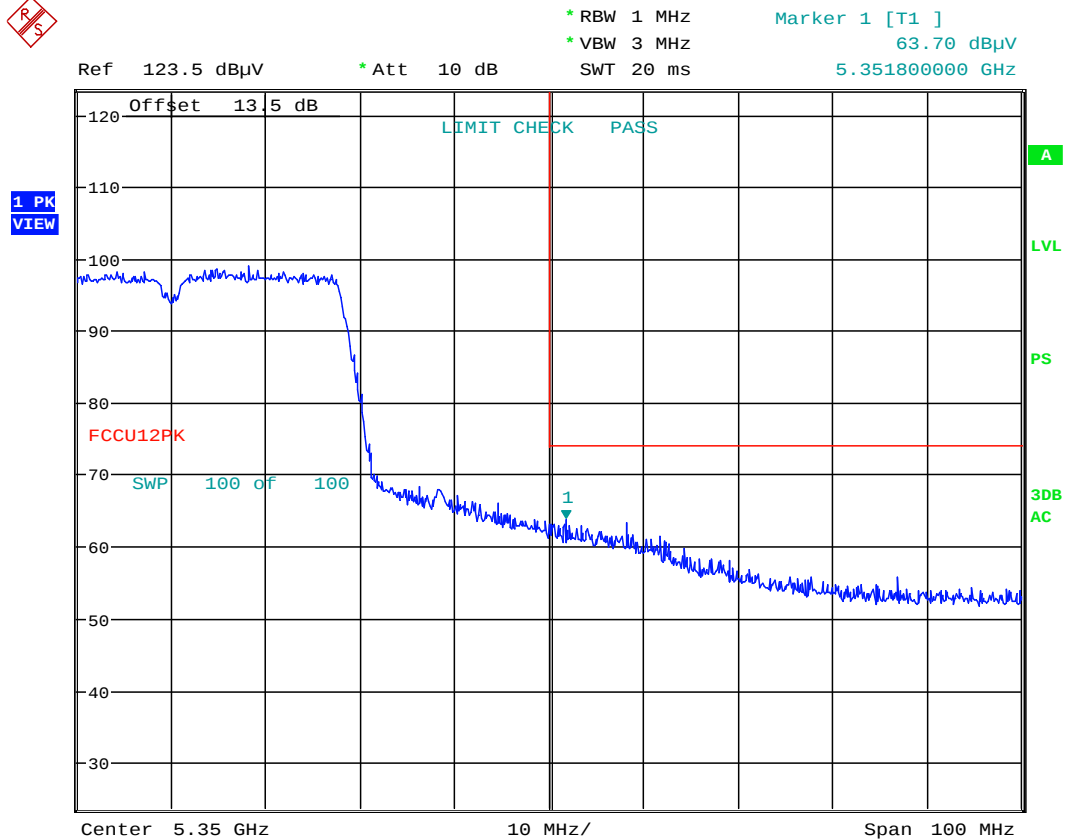

Plot 6-188. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 169 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

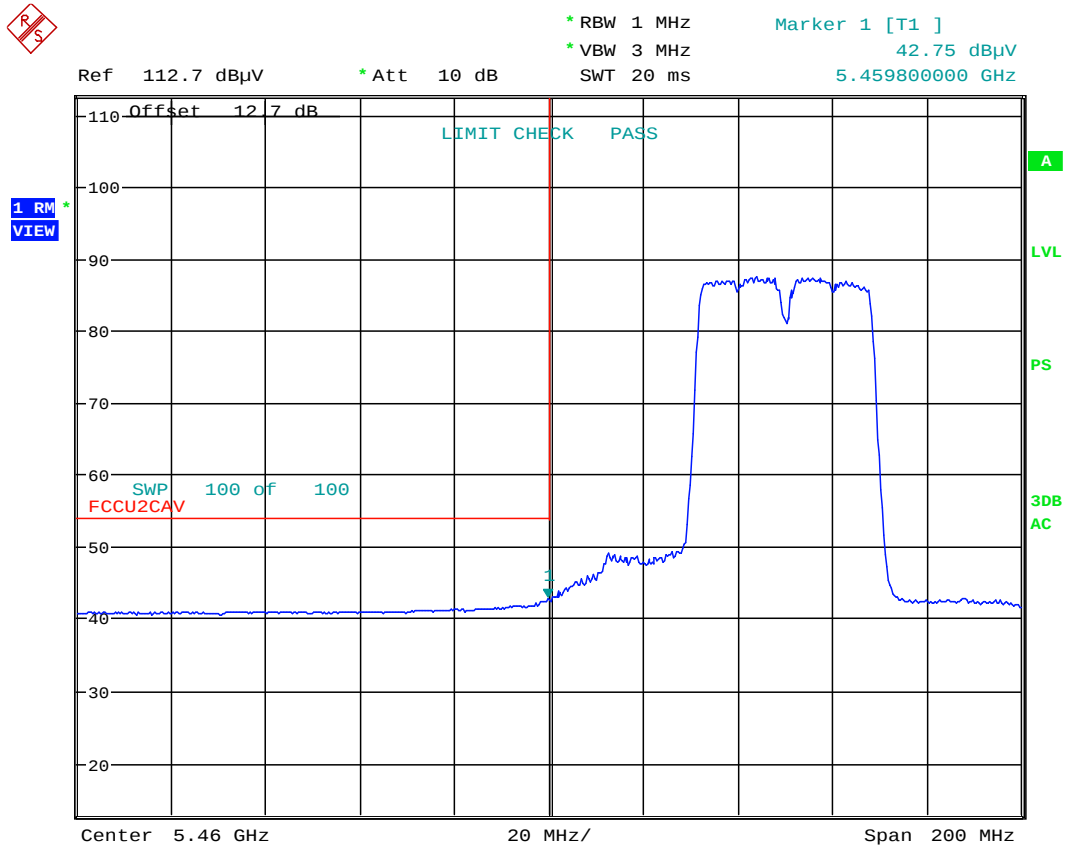


Plot 6-189. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 170 of 186

Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

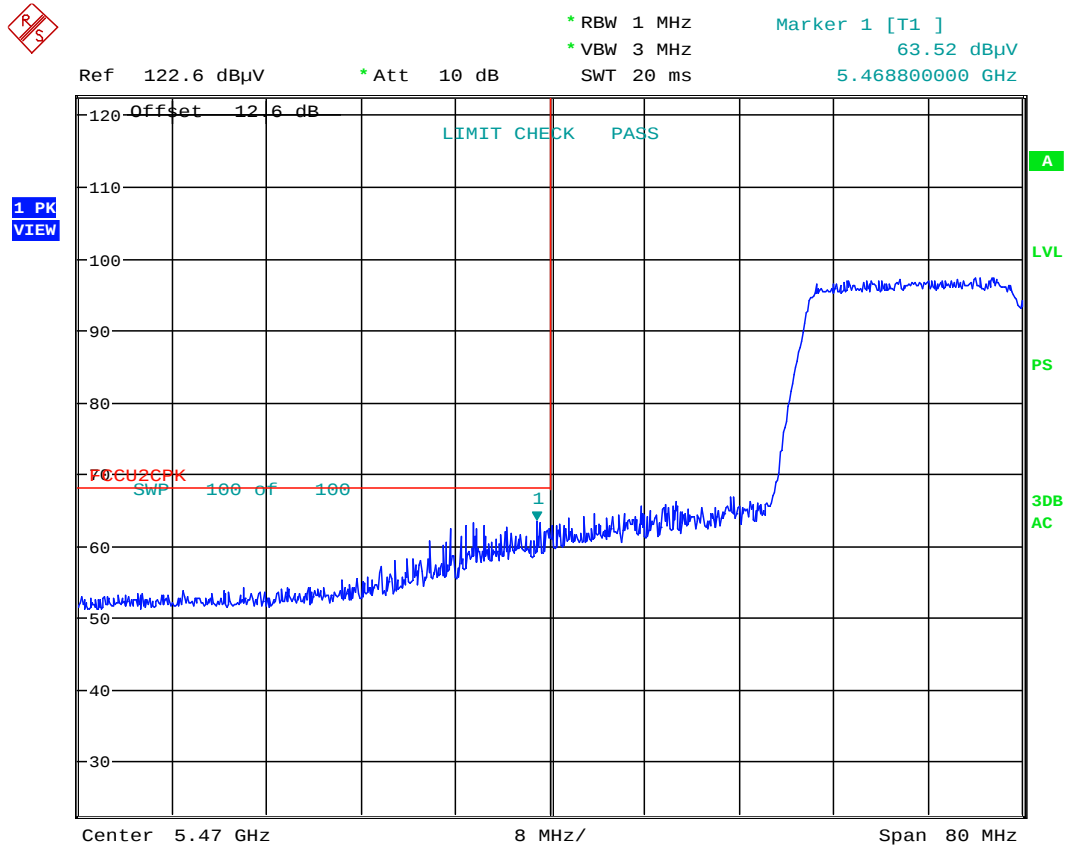

Plot 6-190. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 171 of 186

Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134

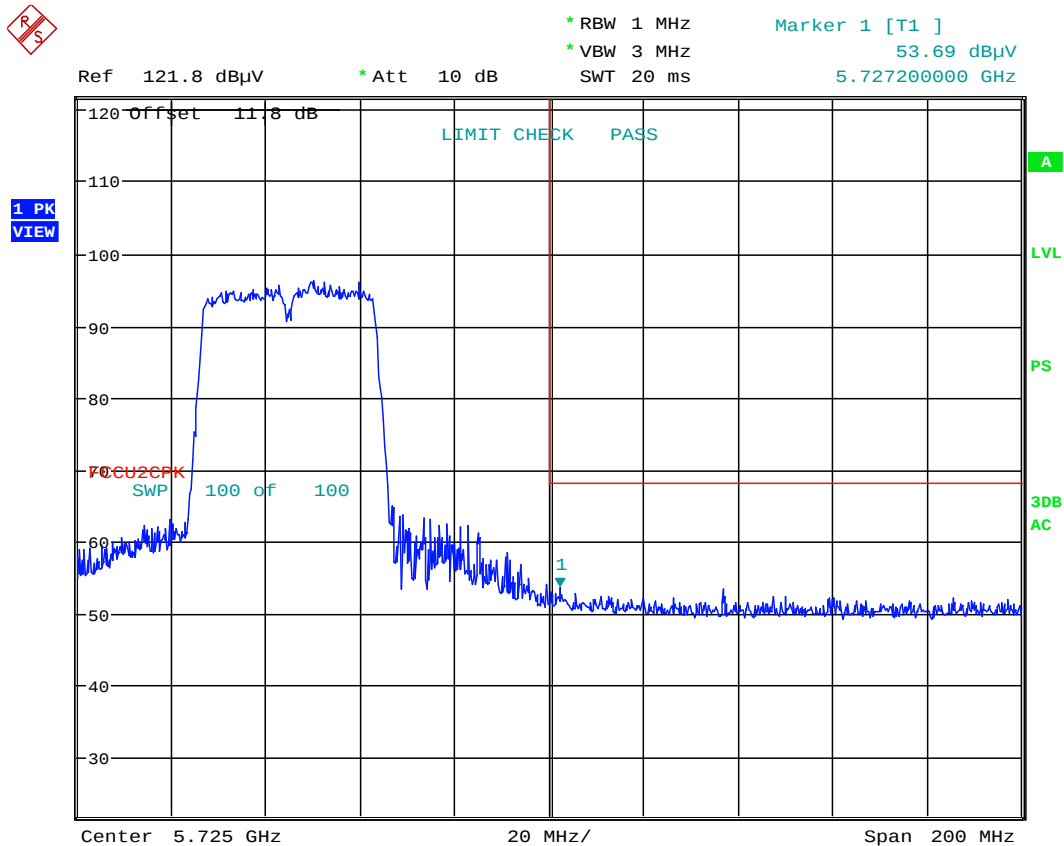

Plot 6-191. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 172 of 186

6.16 MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

The table below shows additional correction factors that need to be applied to the average measurement plots in this section based on the duty cycle of the emissions.

Mode	Frequency [MHz]	Channel	Radiated Level [dBμV/m]	Duty Cycle Correction [dBm]	Limit [dBμV/m]	Corrected Radiated Level [dBμV/m]	Average Margin [dB]
802.11ac 80MHz MIMO	5150	42	42.11	0.75167	53.979	42.86	-11.12
	5350	58	42.61			43.36	-10.62
	5470	106	45.25			46.00	-7.98

Table 6-54. Radiated Band Edge Duty Cycle Corrections

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 173 of 186


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz


Channel: 42

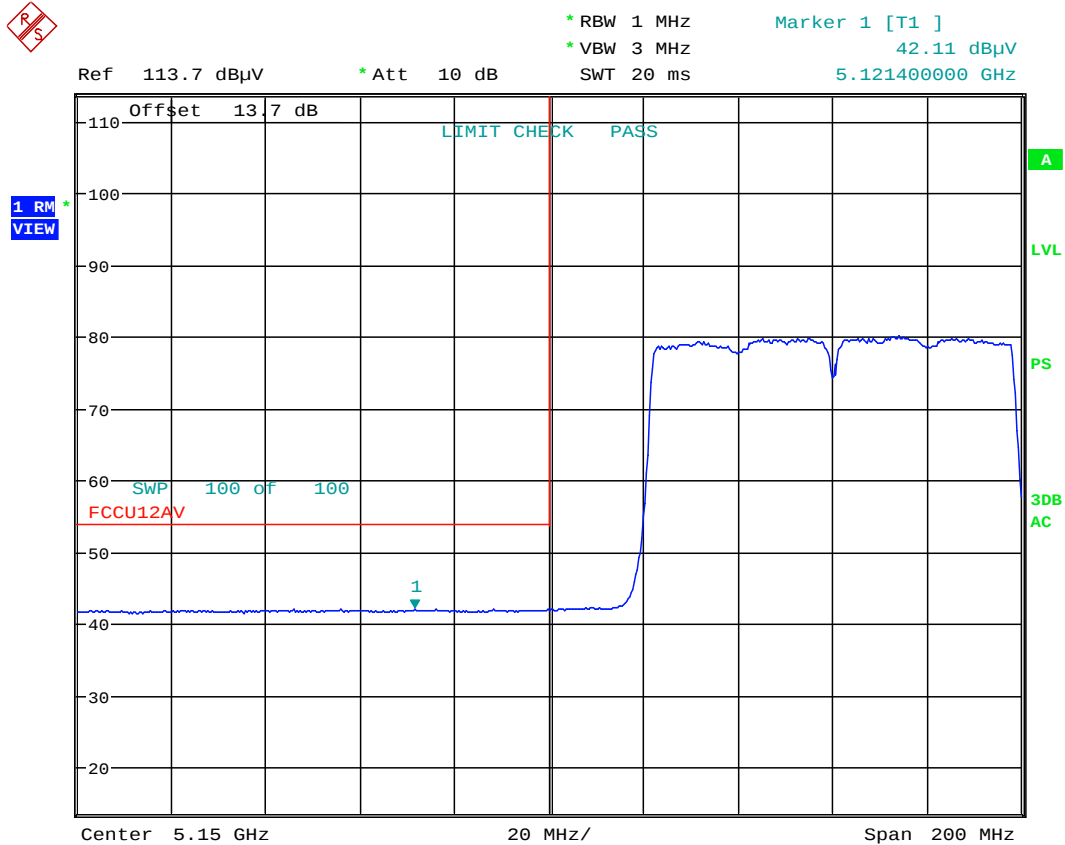

Plot 6-192. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 174 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

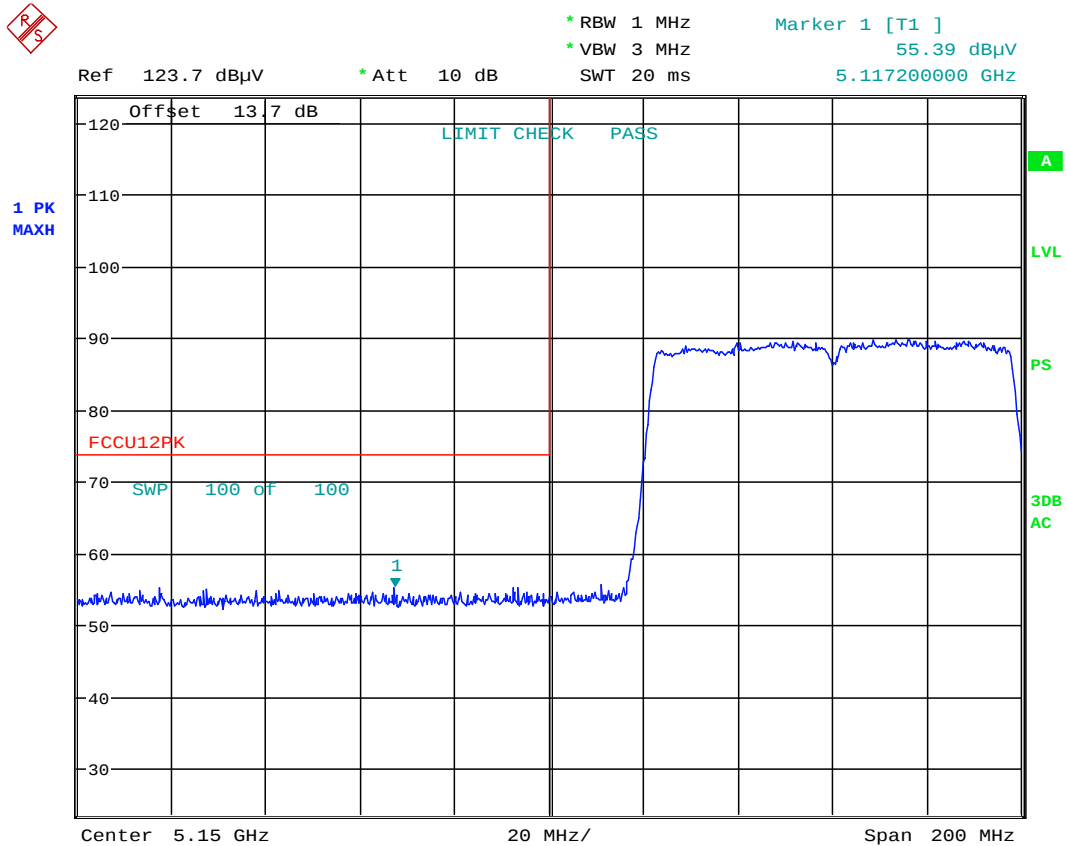

Plot 6-193. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 175 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz


Channel: 58

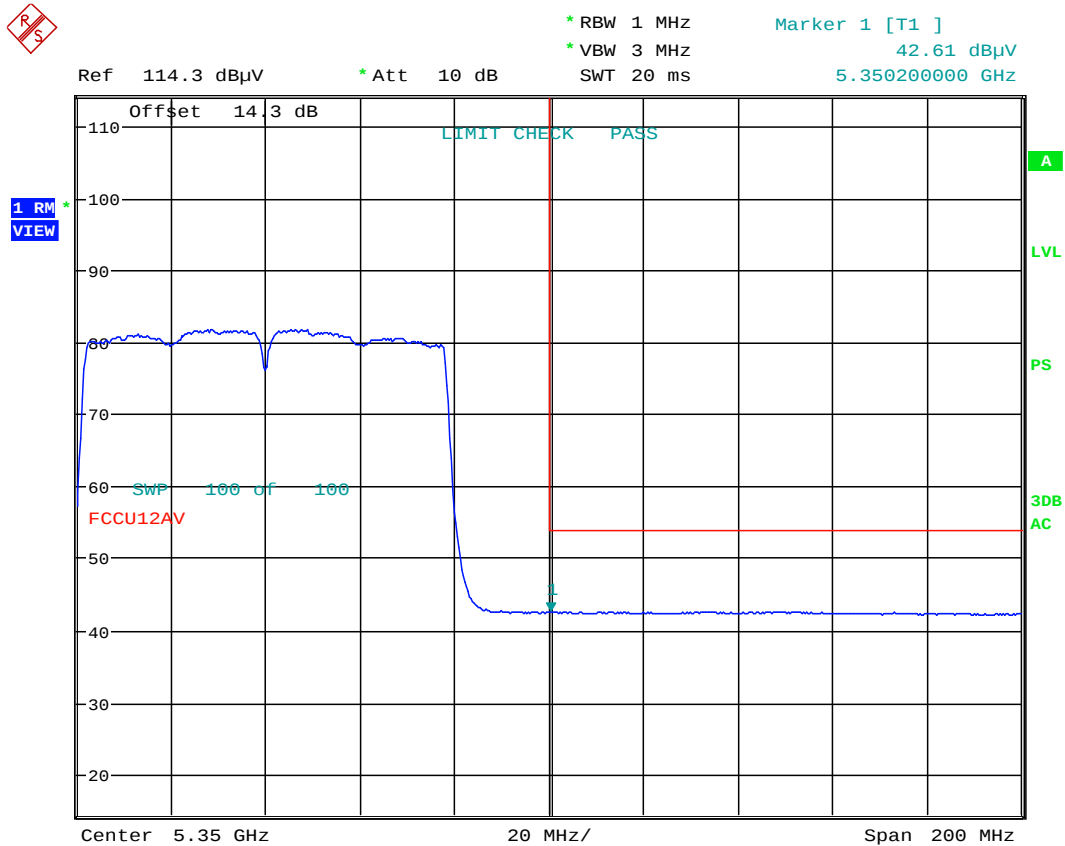

Plot 6-194. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 176 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

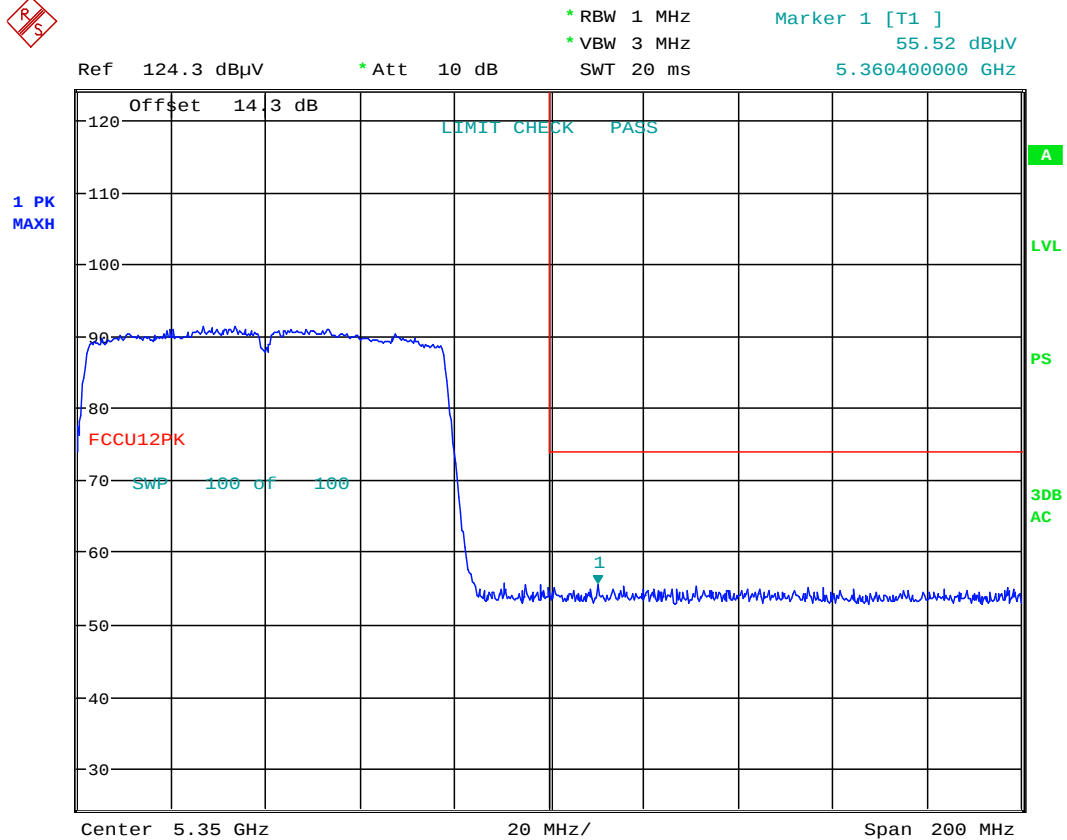

Plot 6-195. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 177 of 186

Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

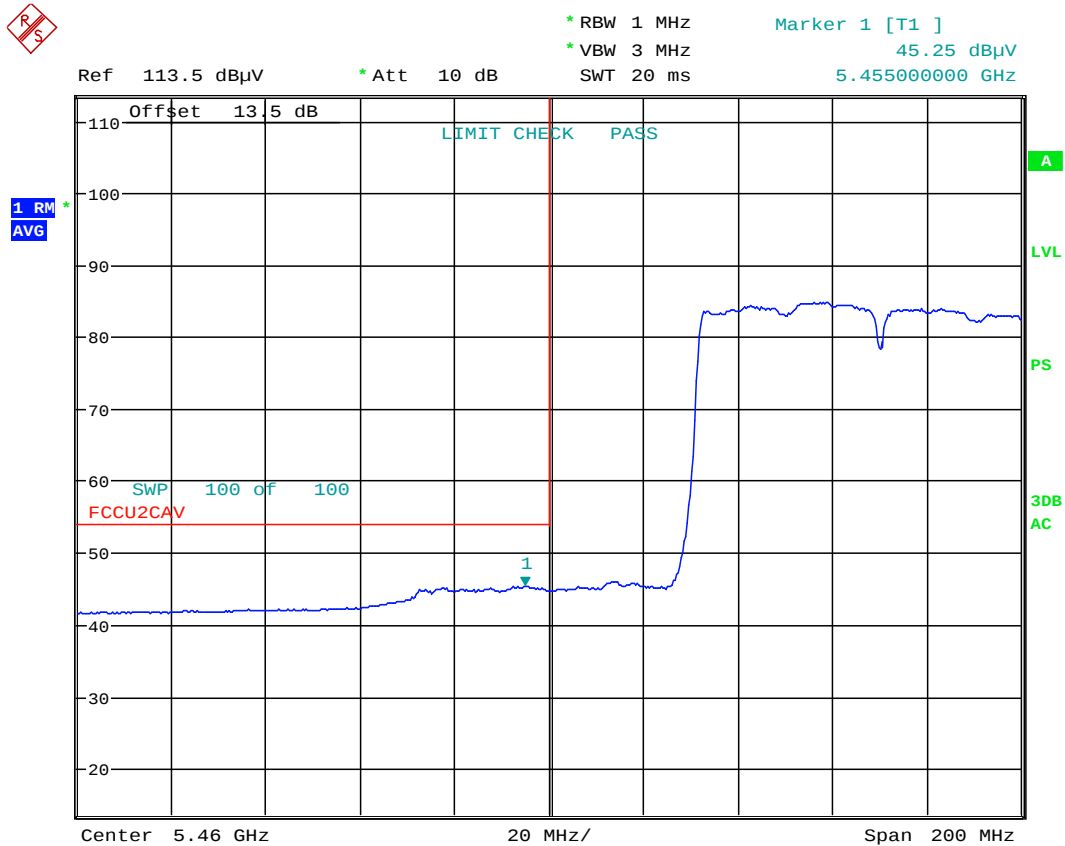


Plot 6-196. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 178 of 186

Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

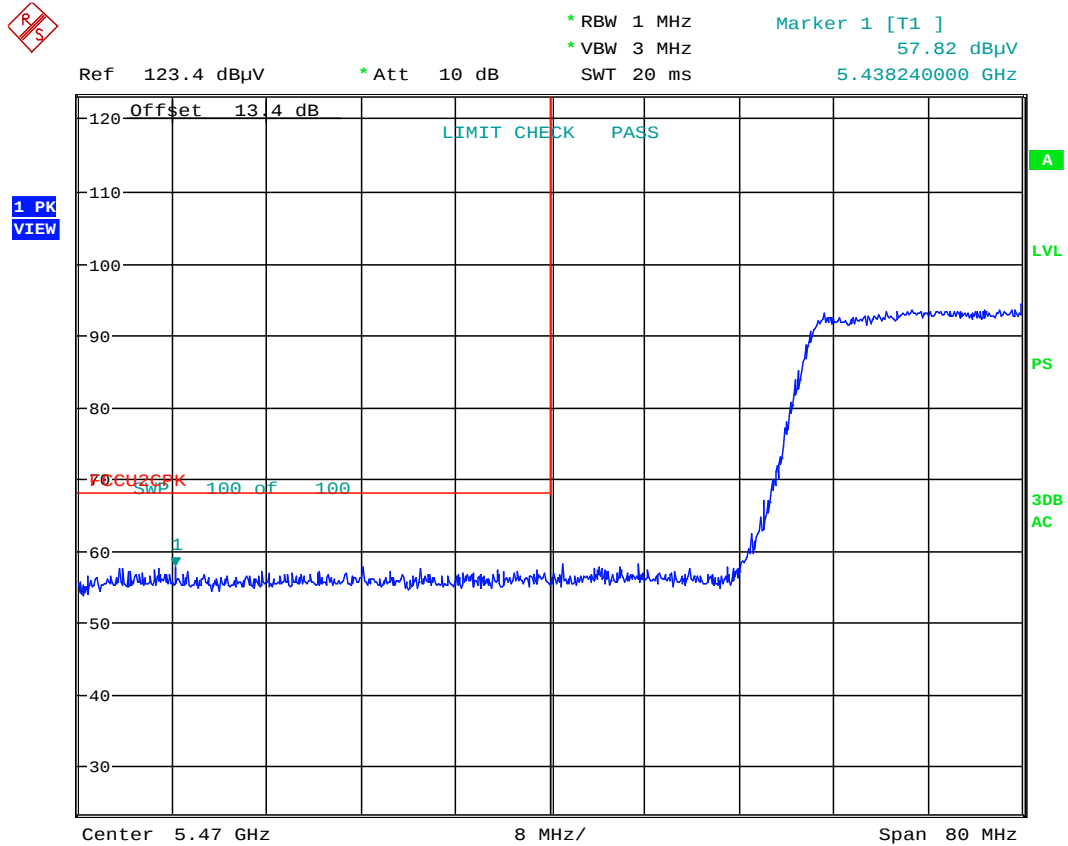


Plot 6-197. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 179 of 186

6.17 Line-Conducted Test Data

\$15.407

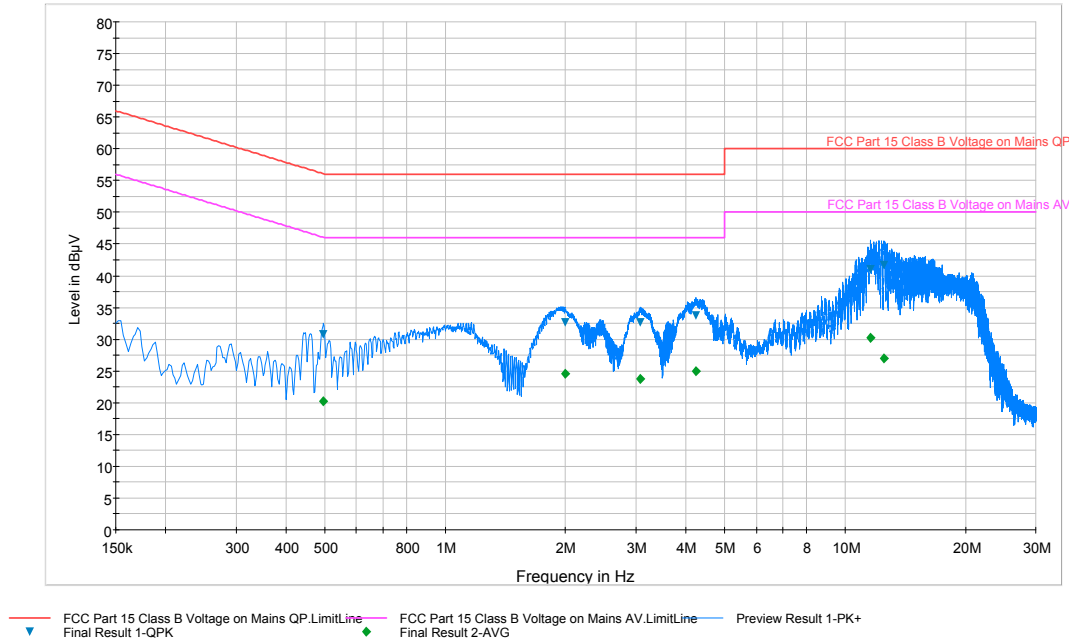

Plot 6-198. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.497	L1	0.1	30.80	56.10	25.30	20.20	46.10	25.90
1.993	L1	0.1	32.70	56.00	23.30	24.50	46.00	21.50
3.082	L1	0.2	32.60	56.00	23.40	23.80	46.00	22.20
4.243	L1	0.2	33.80	56.00	22.20	25.00	46.00	21.00
11.596	L1	0.4	41.00	60.00	19.00	30.30	50.00	19.70
12.527	L1	0.4	41.70	60.00	18.30	26.90	50.00	23.10

Table 6-55. Line Conducted Data with 802.11a UNII Band 1 (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 180 of 186

Line-Conducted Test Data

\$15.407

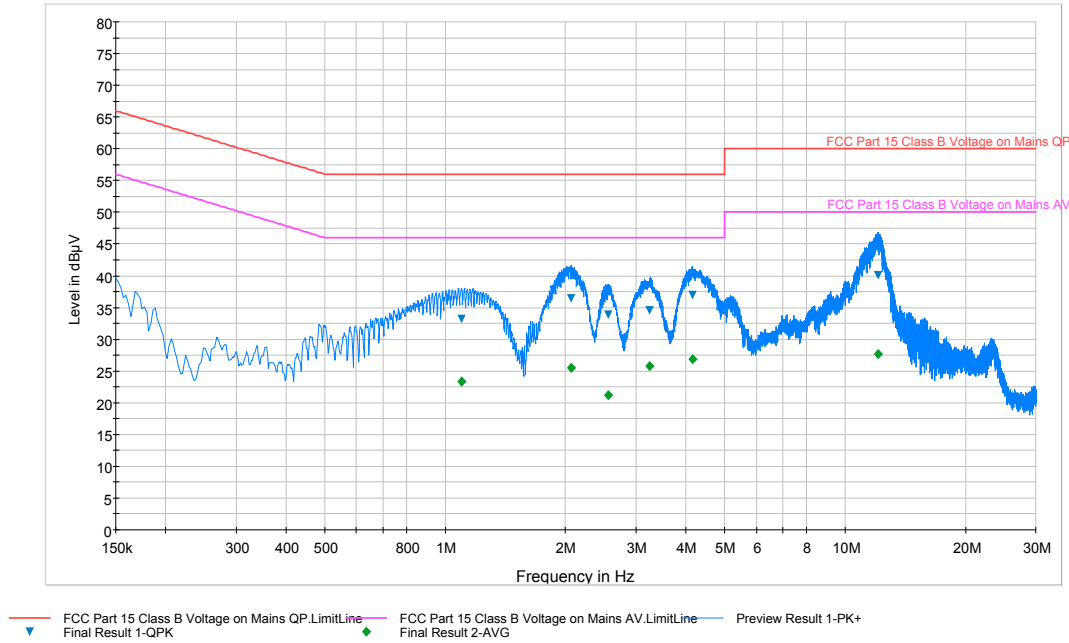

Plot 6-199. Line Conducted Plot with 802.11a UNII Band 1 (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
1.097	N	0.1	33.20	56.00	22.80	23.40	46.00	22.60
2.069	N	0.2	36.40	56.00	19.60	25.60	46.00	20.40
2.562	N	0.2	33.80	56.00	22.20	21.10	46.00	24.90
3.239	N	0.2	34.50	56.00	21.50	25.70	46.00	20.30
4.160	N	0.2	37.00	56.00	19.00	26.90	46.00	19.10
12.086	N	0.4	40.10	60.00	19.90	27.60	50.00	22.40

Table 6-56. Line Conducted Data with 802.11a UNII Band 1 (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 181 of 186

Line-Conducted Test Data

\$15.407

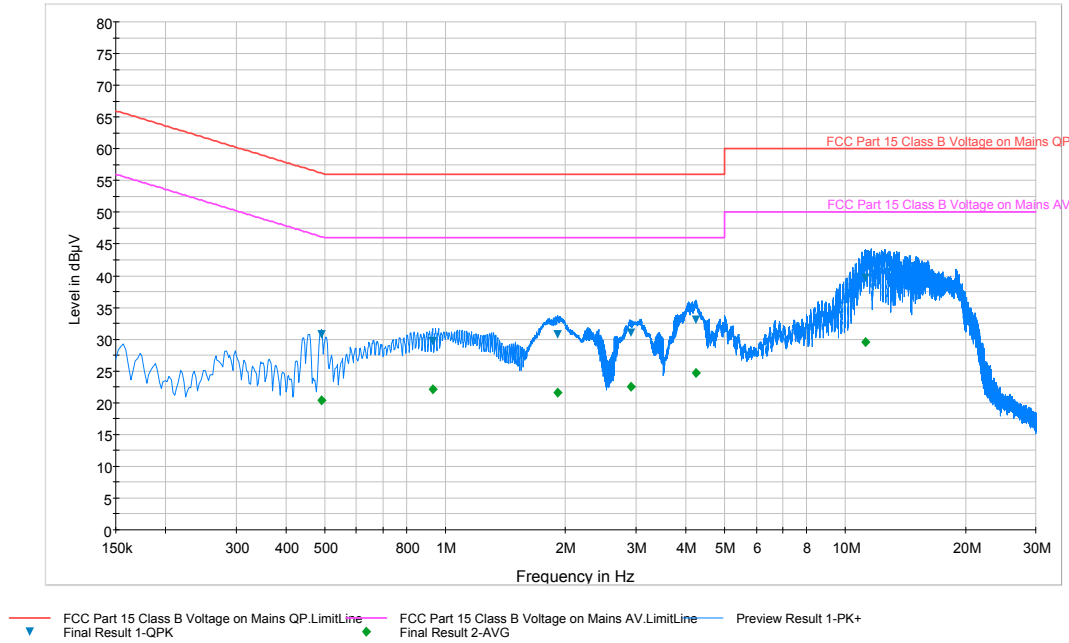

Plot 6-200. Line Conducted Plot with 802.11a UNII Band 2A (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.490	L1	0.1	30.80	56.20	25.40	20.30	46.20	25.80
0.931	L1	0.1	29.70	56.00	26.30	22.10	46.00	23.90
1.912	L1	0.1	30.70	56.00	25.30	21.60	46.00	24.40
2.911	L1	0.2	31.10	56.00	24.90	22.60	46.00	23.40
4.236	L1	0.2	33.00	56.00	23.00	24.70	46.00	21.30
11.231	L1	0.4	39.70	60.00	20.30	29.50	50.00	20.50

Table 6-57. Line Conducted Data with 802.11a UNII Band 2A (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 182 of 186

Line-Conducted Test Data

\$15.407

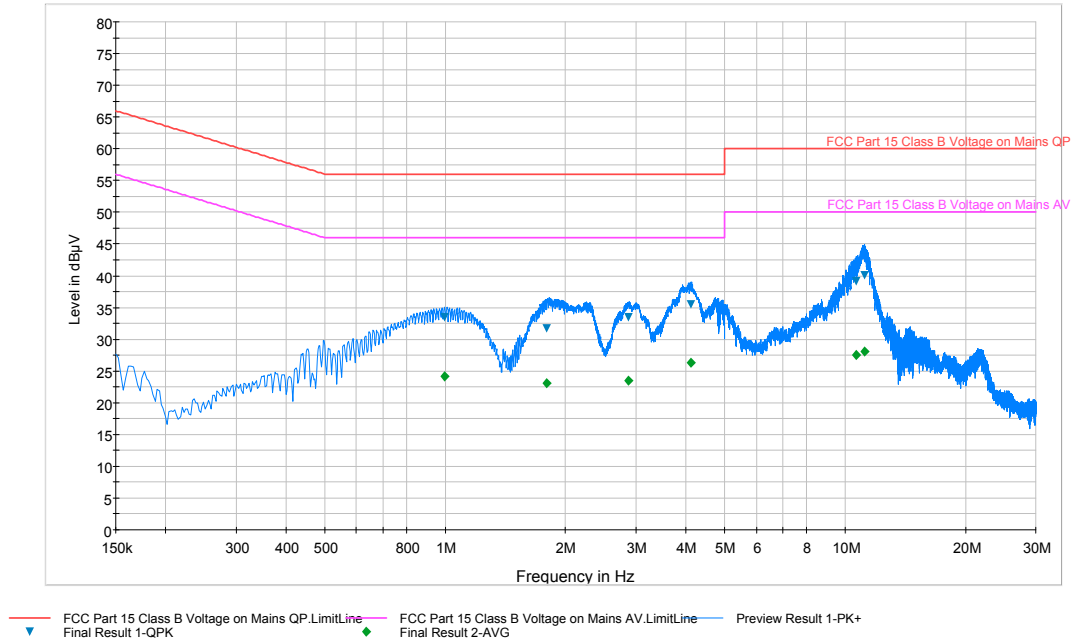

Plot 6-201. Line Conducted Plot with 802.11a UNII Band 2A (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.996	N	0.1	33.50	56.00	22.50	24.10	46.00	21.90
1.793	N	0.2	31.80	56.00	24.20	23.10	46.00	22.90
2.870	N	0.2	33.40	56.00	22.60	23.40	46.00	22.60
4.121	N	0.2	35.50	56.00	20.50	26.40	46.00	19.60
10.649	N	0.4	39.10	60.00	20.90	27.60	50.00	22.40
11.202	N	0.4	40.10	60.00	20.00	28.00	50.00	22.00

Table 6-58. Line Conducted Data with 802.11a UNII Band 2A (N)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 183 of 186

Line-Conducted Test Data

\$15.407

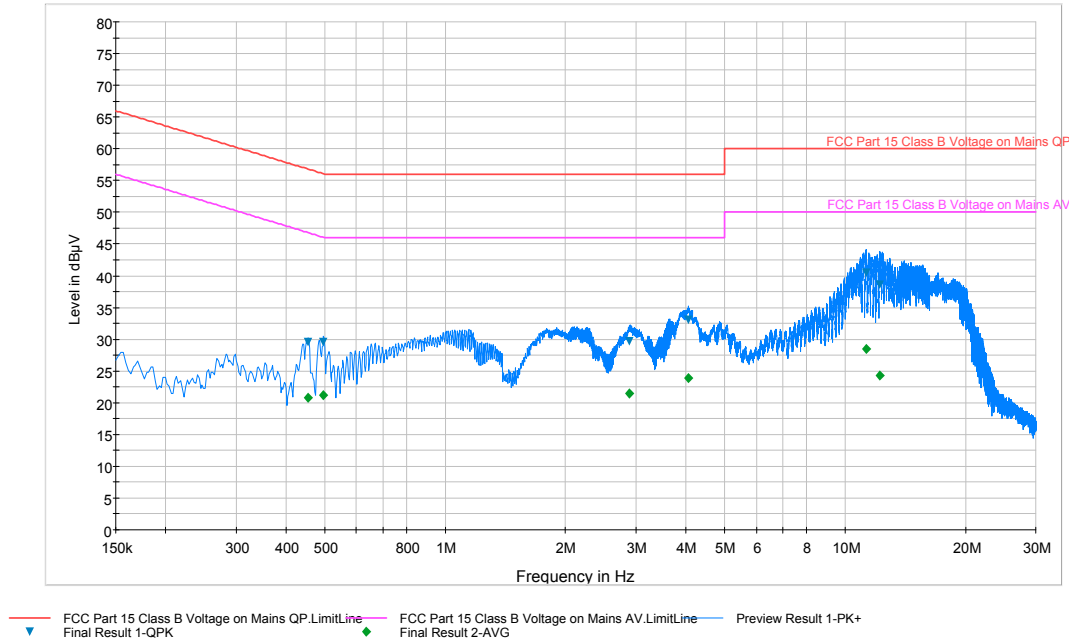

Plot 6-202. Line Conducted Plot with 802.11a UNII Band 2C (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.454	L1	0.1	29.50	56.80	27.30	20.80	46.80	26.00
0.497	L1	0.1	29.60	56.10	26.50	21.20	46.10	24.90
2.893	L1	0.2	29.60	56.00	26.40	21.50	46.00	24.50
4.056	L1	0.2	33.00	56.00	23.00	23.90	46.00	22.10
11.310	L1	0.4	40.40	60.00	19.60	28.50	50.00	21.50
12.224	L1	0.4	38.50	60.00	21.50	24.20	50.00	25.80

Table 6-59. Line Conducted Plot with 802.11a UNII Band 2C (L1)


Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 184 of 186

Line-Conducted Test Data

\$15.407

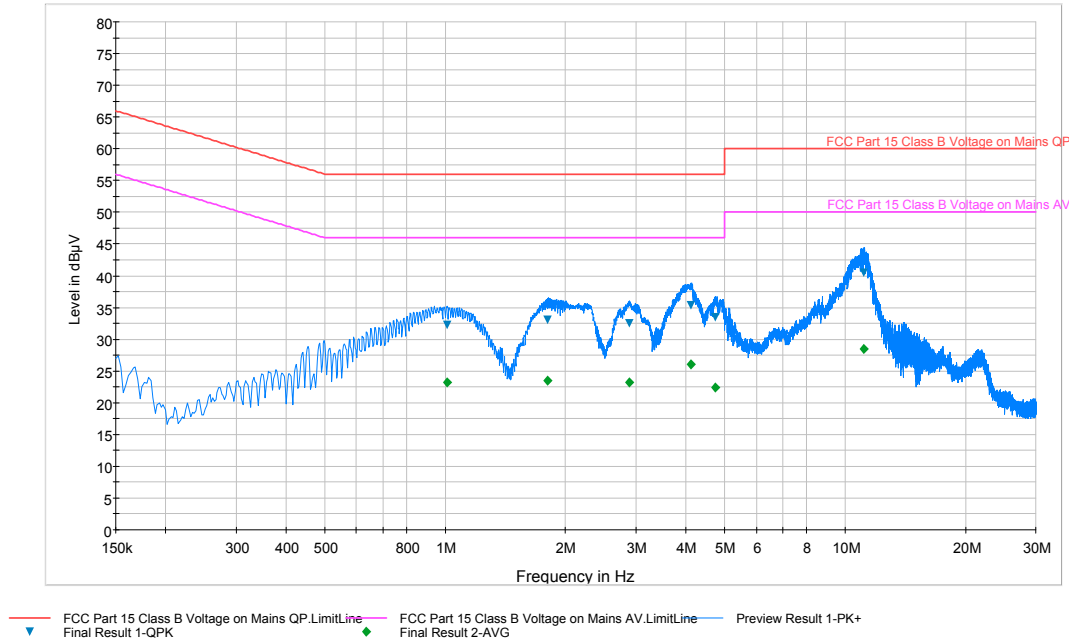

Plot 6-203. Line Conducted Plot with 802.11a UNII Band 2C (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
1.010	N	0.1	32.20	56.00	23.80	23.20	46.00	22.80
1.802	N	0.2	33.10	56.00	22.90	23.50	46.00	22.60
2.886	N	0.2	32.50	56.00	23.50	23.20	46.00	22.80
4.108	N	0.2	35.40	56.00	20.60	26.10	46.00	19.90
4.733	N	0.2	33.40	56.00	22.60	22.40	46.00	23.60
11.126	N	0.4	40.40	60.00	19.60	28.40	50.00	21.60

Table 6-60. Line Conducted Data with 802.11a UNII Band 2C (N)

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMN910C	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 185 of 186

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN910C** is in compliance with Part 15E of the FCC Rules.

FCC ID: A3LSMN910C		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241463.A3L	Test Dates: 7/24 – 8/20/2014	EUT Type: Portable Handset		Page 186 of 186