

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


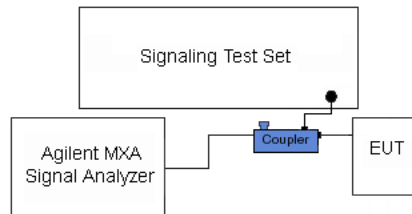


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 67 of 94

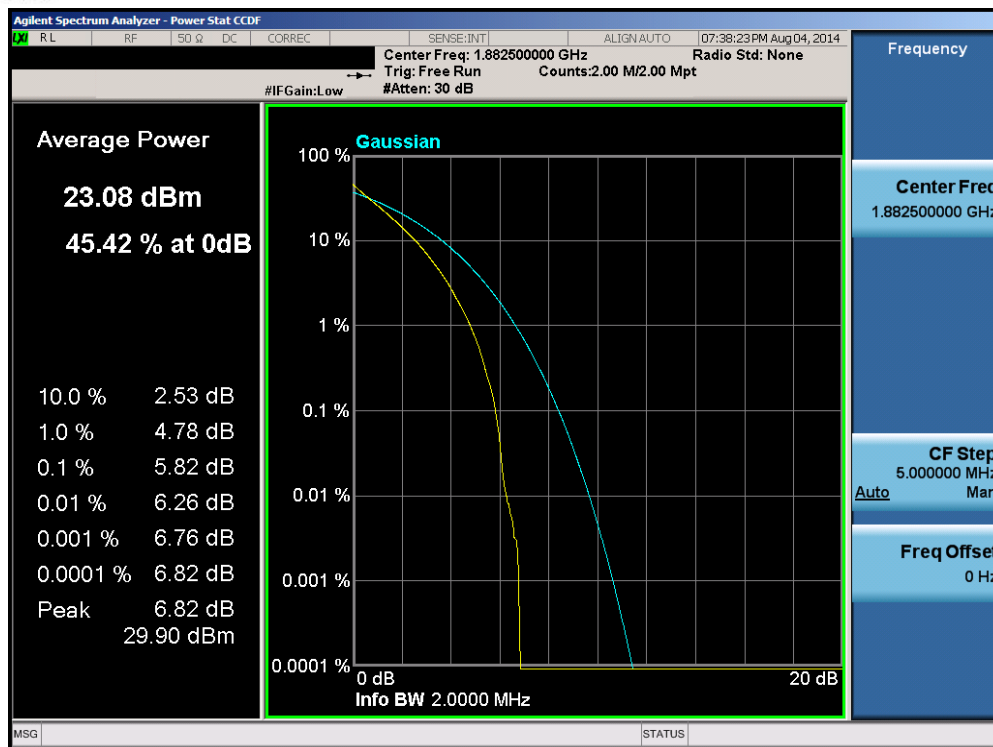


Plot 6-105. PAR Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

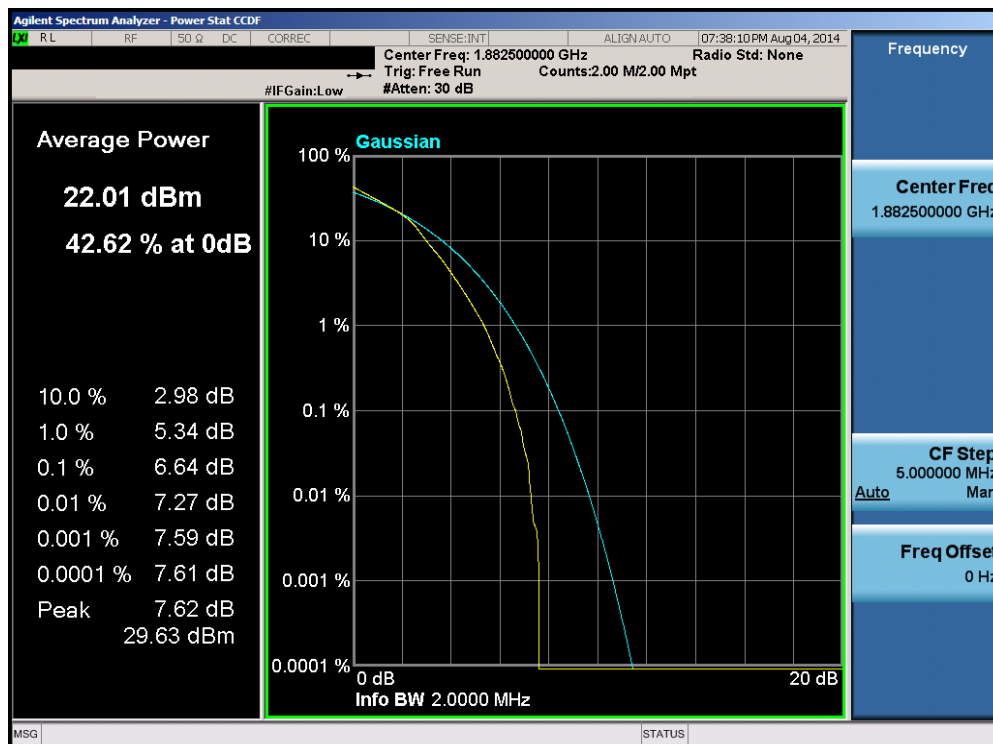


Plot 6-106. PAR Plot (Band 25 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 68 of 94

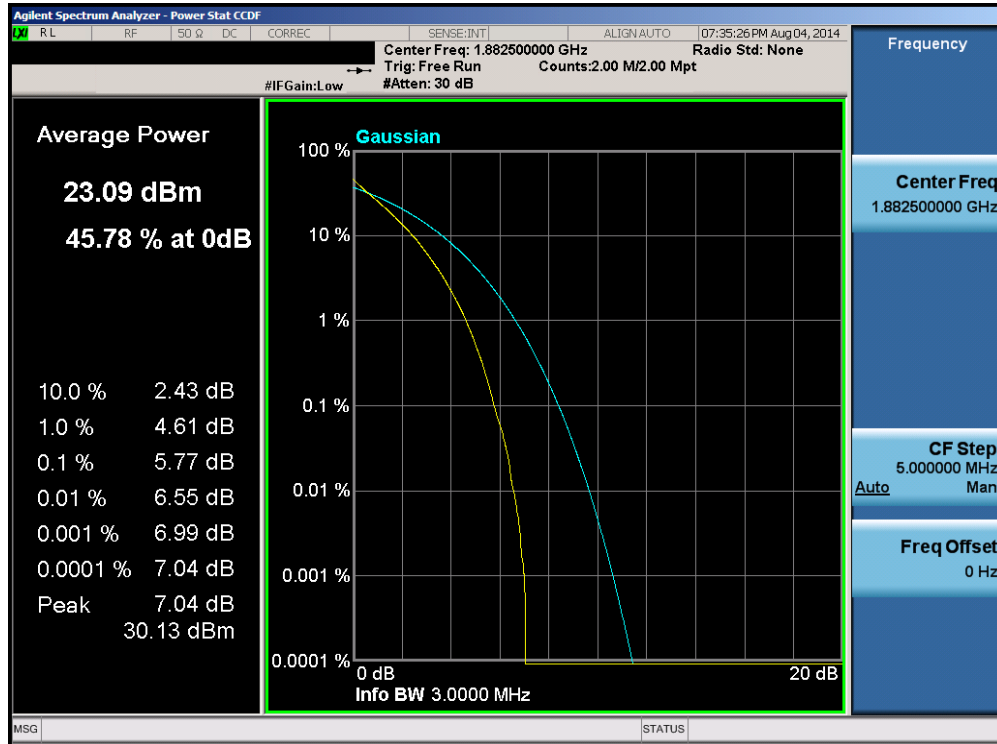


Plot 6-107. PAR Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

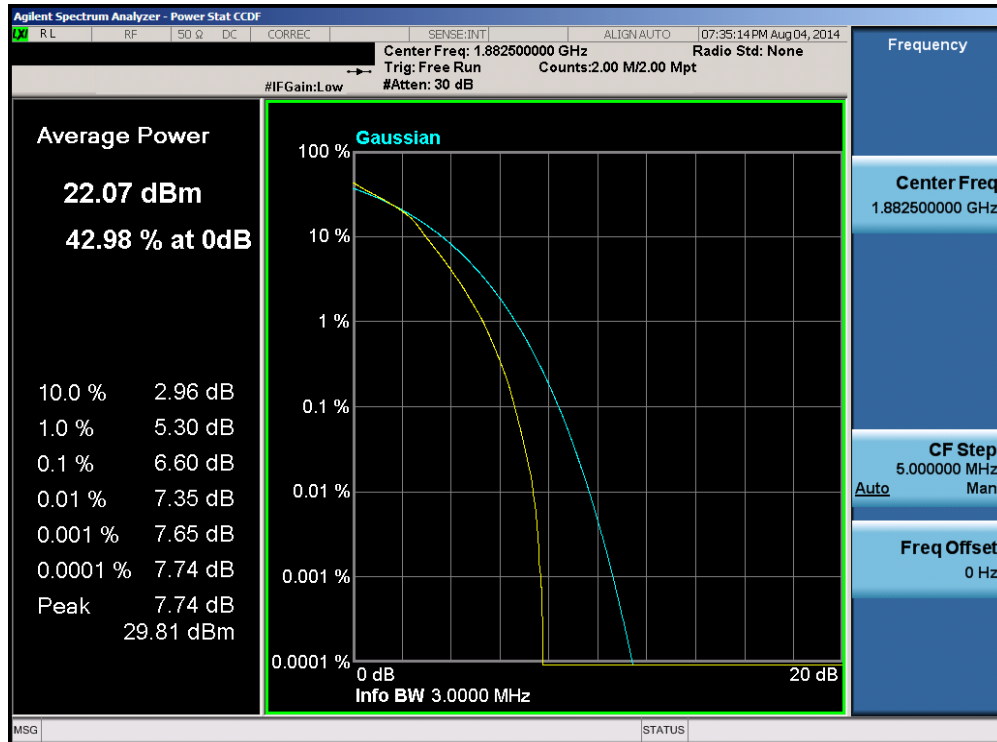


Plot 6-108. PAR Plot (Band 25 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 69 of 94

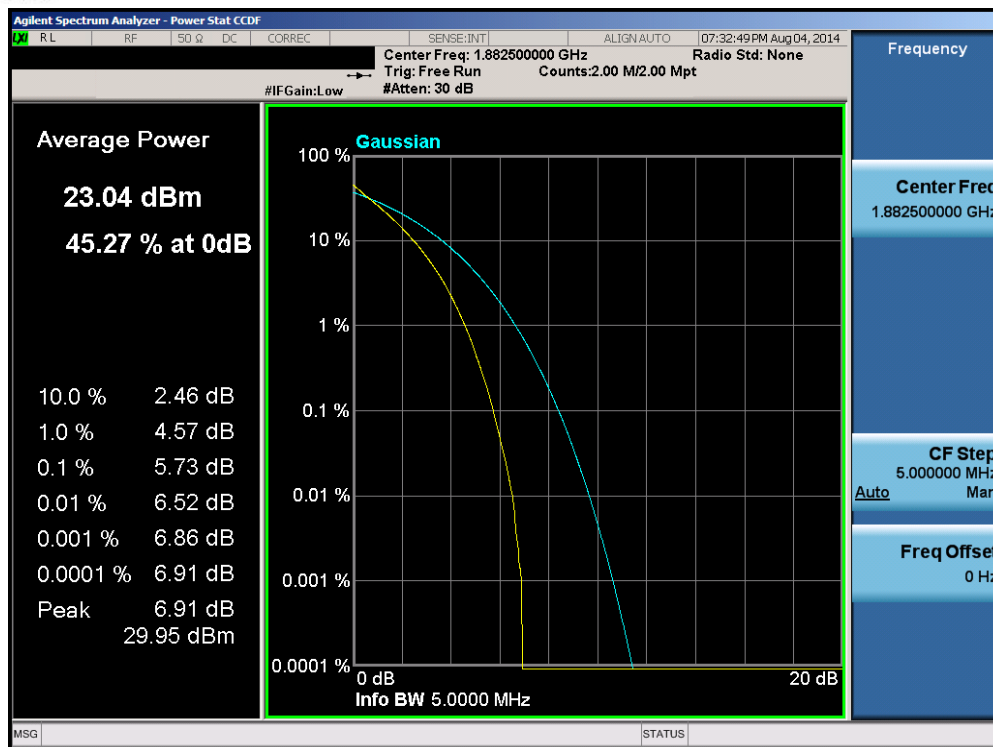


Plot 6-109. PAR Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

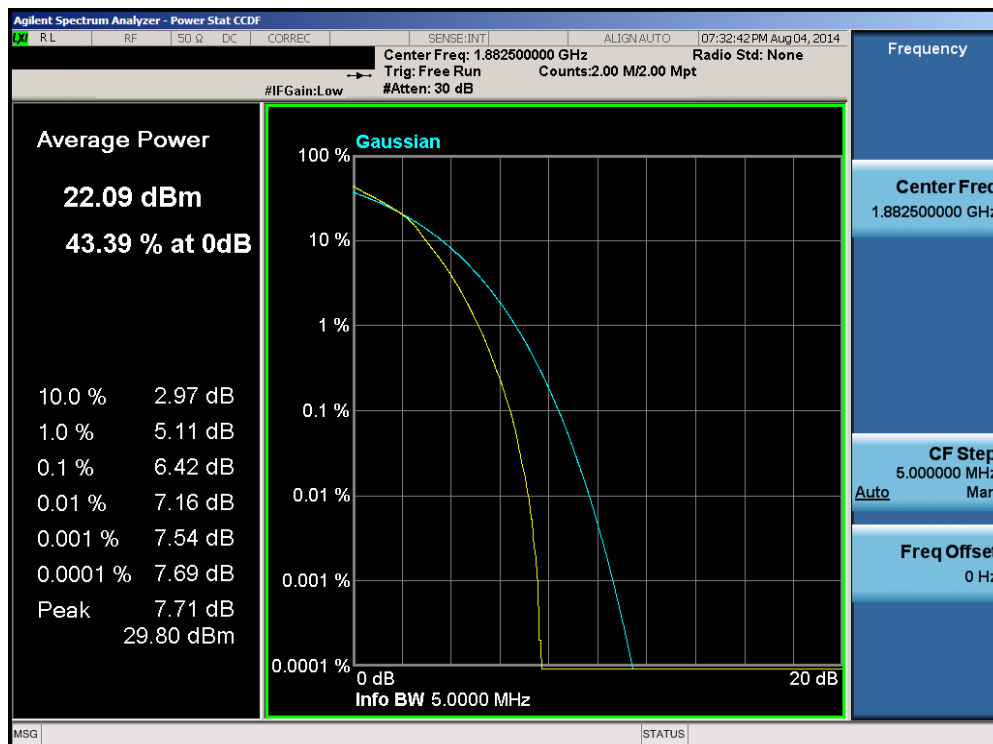


Plot 6-110. PAR Plot (Band 25 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 70 of 94

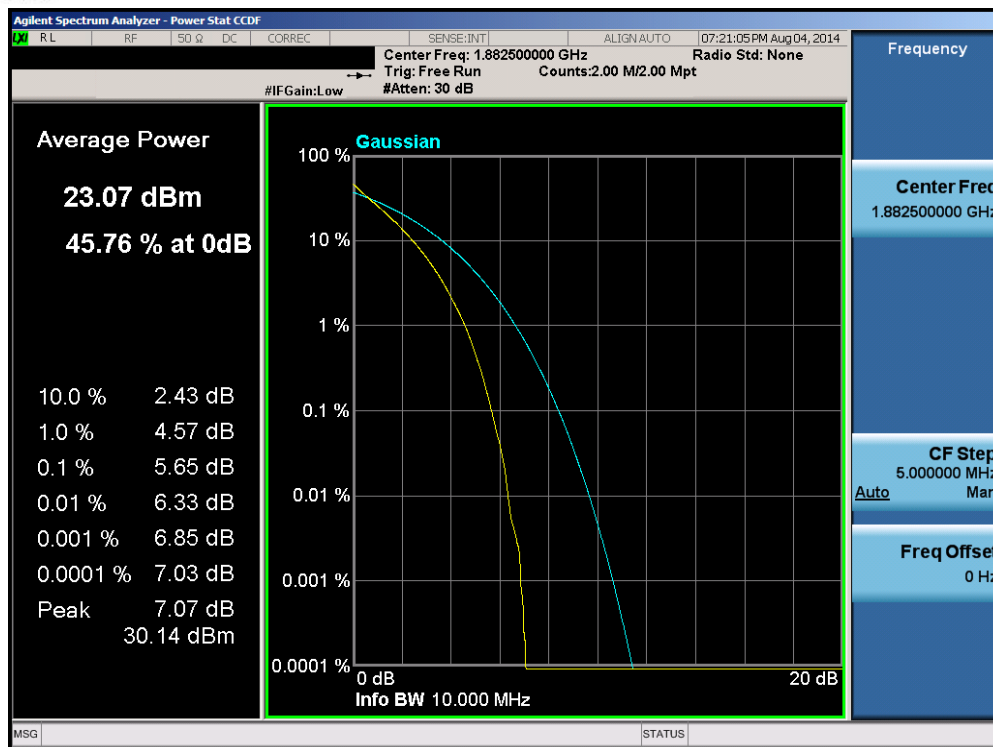


Plot 6-111. PAR Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

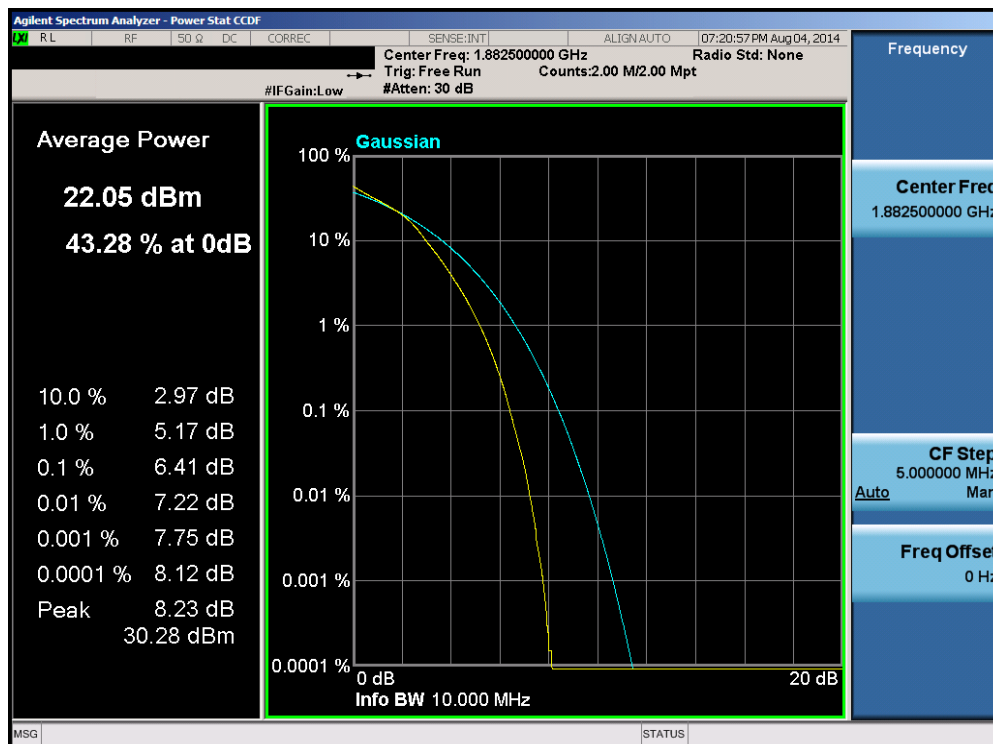


Plot 6-112. PAR Plot (Band 25 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 71 of 94

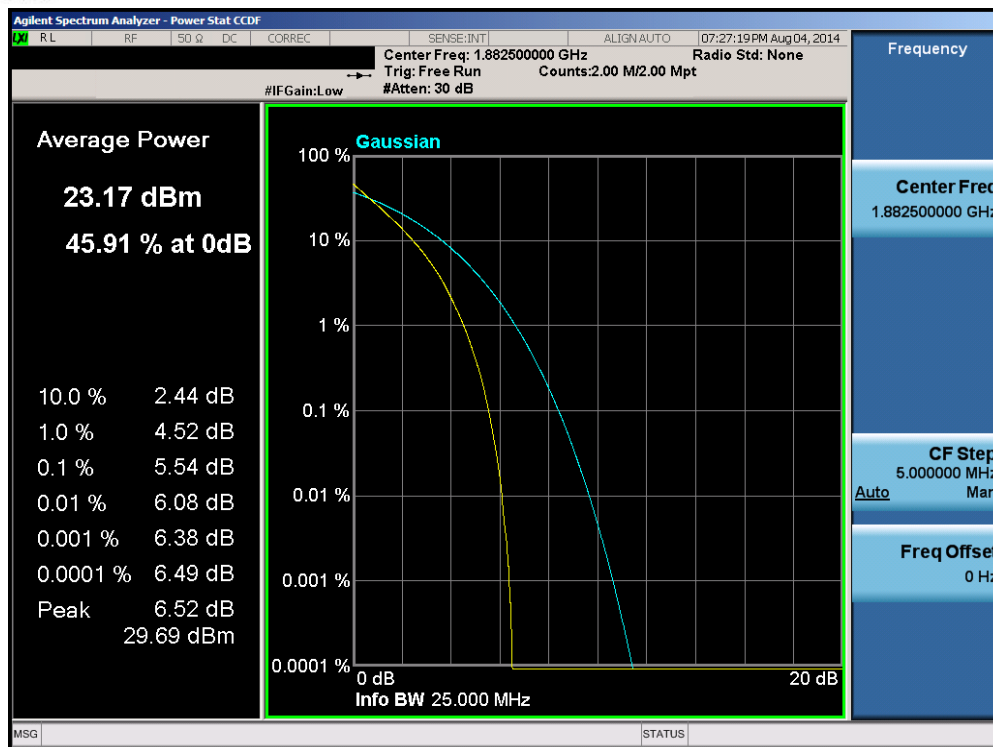


Plot 6-113. PAR Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

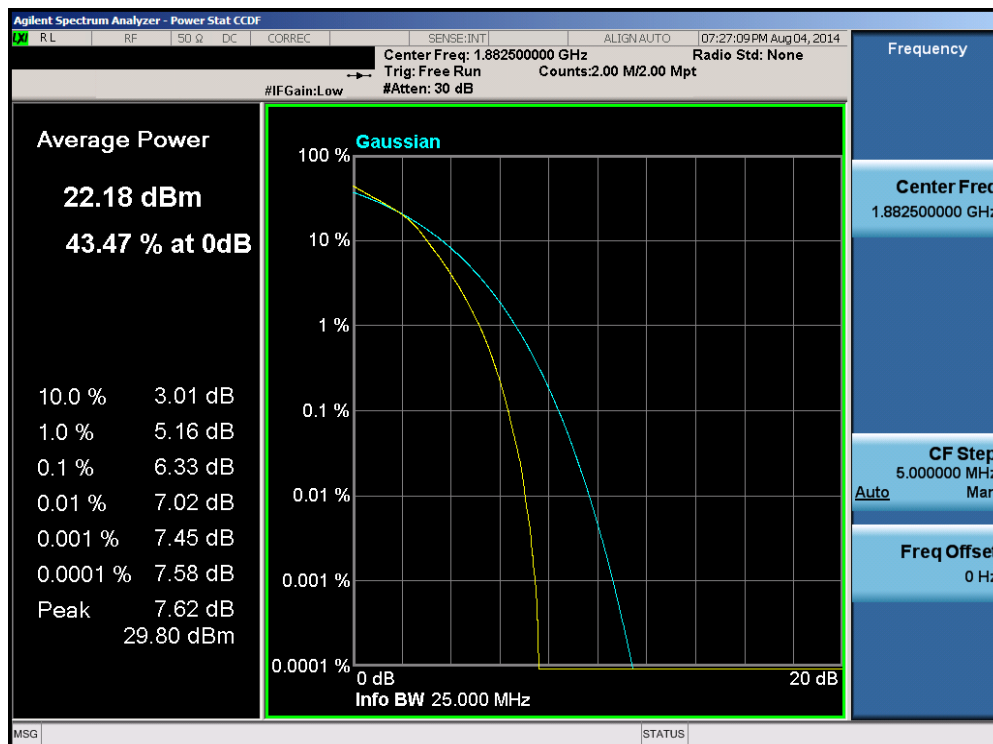


Plot 6-114. PAR Plot (Band 25 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 72 of 94

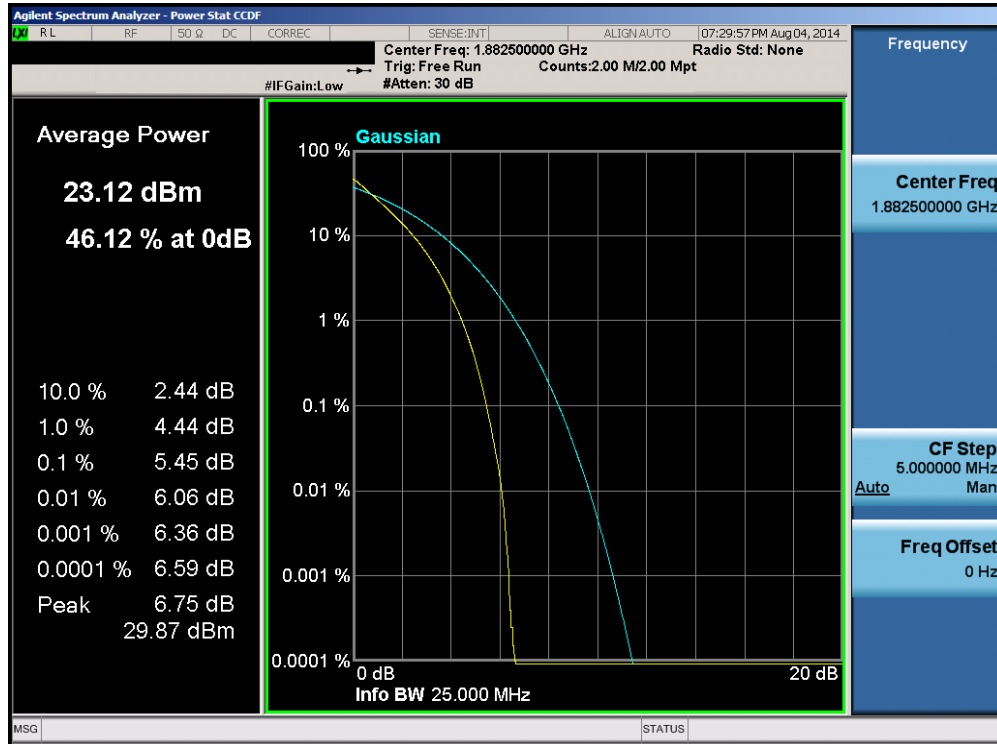

Plot 6-115. PAR Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

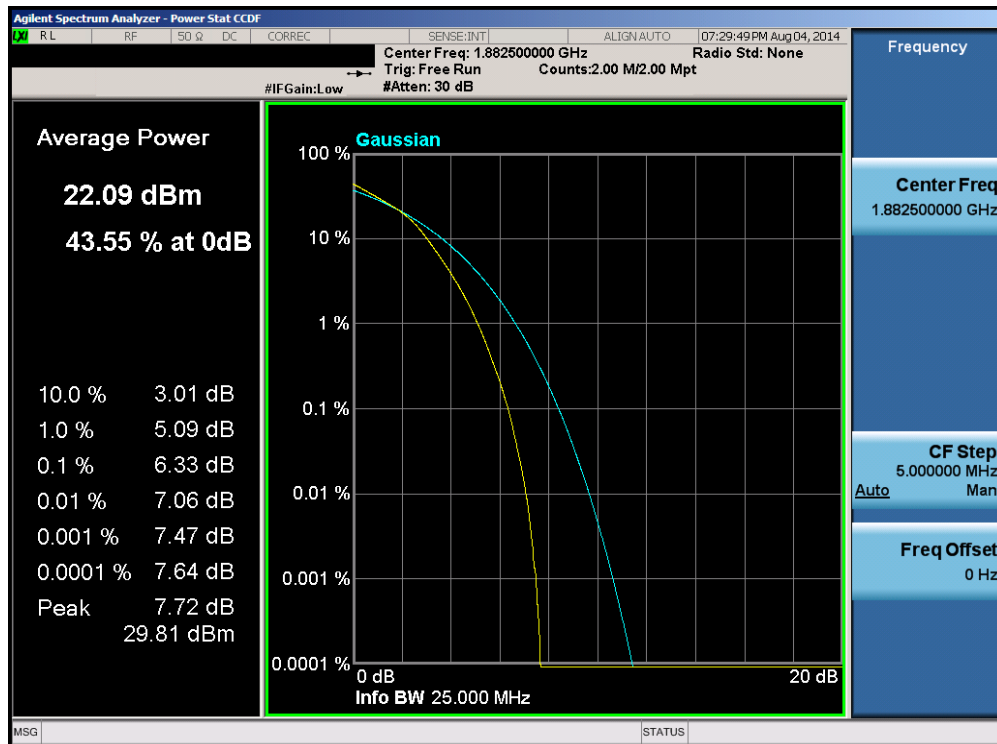

Plot 6-116. PAR Plot (Band 25 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 73 of 94

6.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c) §27.50(h.2)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 74 of 94

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

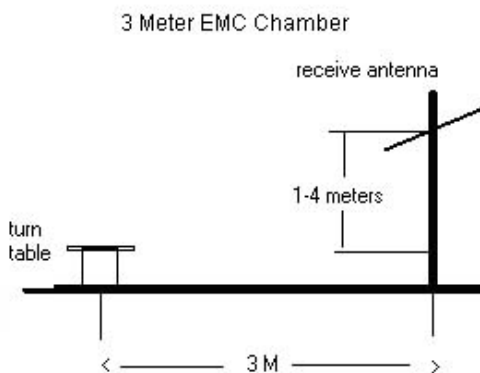


Figure 6-5. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The battery used with this device for testing (Model:EB-BN910BBU) contains an embedded NFC antenna.

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 75 of 94

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 3	13.88	4.42	V	V	18.30	0.068	-20.15
836.50	1.4	QPSK	Standard	1 / 3	14.04	4.50	V	V	18.54	0.072	-19.91
848.30	1.4	QPSK	Standard	1 / 3	13.83	4.59	V	V	18.42	0.069	-20.03
824.70	1.4	16-QAM	Standard	1 / 3	12.66	4.42	V	V	17.08	0.051	-21.37
836.50	1.4	16-QAM	Standard	1 / 3	12.97	4.50	V	V	17.47	0.056	-20.98
848.30	1.4	16-QAM	Standard	1 / 3	12.63	4.59	V	V	17.22	0.053	-21.23
825.50	3	QPSK	Standard	1 / 0	14.20	4.42	V	V	18.62	0.073	-19.83
836.50	3	QPSK	Standard	1 / 7	14.28	4.50	V	V	18.78	0.076	-19.67
847.50	3	QPSK	Standard	1 / 0	14.38	4.58	V	V	18.96	0.079	-19.49
825.50	3	16-QAM	Standard	1 / 0	13.05	4.42	V	V	17.47	0.056	-20.98
836.50	3	16-QAM	Standard	1 / 7	13.04	4.50	V	V	17.54	0.057	-20.91
847.50	3	16-QAM	Standard	1 / 0	13.17	4.58	V	V	17.75	0.060	-20.70
826.50	5	QPSK	Standard	1 / 12	14.45	4.43	V	V	18.88	0.077	-19.57
836.50	5	QPSK	Standard	1 / 12	14.33	4.50	V	V	18.83	0.076	-19.62
846.50	5	QPSK	Standard	1 / 24	14.31	4.58	V	V	18.89	0.077	-19.57
826.50	5	16-QAM	Standard	1 / 12	13.31	4.43	V	V	17.74	0.059	-20.71
836.50	5	16-QAM	Standard	1 / 12	13.11	4.50	V	V	17.61	0.058	-20.84
846.50	5	16-QAM	Standard	1 / 24	13.05	4.58	V	V	17.63	0.058	-20.83
829.00	10	QPSK	Standard	1 / 0	14.42	4.45	V	V	18.87	0.077	-19.58
836.50	10	QPSK	Standard	1 / 25	14.05	4.50	V	V	18.55	0.072	-19.90
844.00	10	QPSK	Standard	1 / 25	14.36	4.56	V	V	18.92	0.078	-19.53
829.00	10	16-QAM	Standard	1 / 0	13.34	4.45	V	V	17.79	0.060	-20.66
836.50	10	16-QAM	Standard	1 / 25	12.97	4.50	V	V	17.47	0.056	-20.98
844.00	10	16-QAM	Standard	1 / 25	13.09	4.56	V	V	17.65	0.058	-20.80
847.50	3	QPSK	WCC	1 / 0	14.24	4.58	V	V	18.82	0.076	-19.63

Table 6-2. ERP Data (Band 26)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset				Page 76 of 94

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	11.78	9.49	V	H2	21.27	0.134	-11.74
1882.50	1.4	QPSK	Standard	1 / 0	11.55	9.44	V	H2	20.99	0.126	-12.02
1914.30	1.4	QPSK	Standard	1 / 5	11.87	9.40	V	H2	21.27	0.134	-11.74
1850.70	1.4	16-QAM	Standard	1 / 0	10.67	9.49	V	H2	20.16	0.104	-12.85
1882.50	1.4	16-QAM	Standard	1 / 0	10.41	9.44	V	H2	19.85	0.097	-13.16
1914.30	1.4	16-QAM	Standard	1 / 5	10.76	9.40	V	H2	20.16	0.104	-12.85
1851.50	3	QPSK	Standard	1 / 14	12.60	9.49	V	H2	22.09	0.162	-10.92
1882.50	3	QPSK	Standard	1 / 14	12.34	9.44	V	H2	21.78	0.151	-11.23
1913.50	3	QPSK	Standard	1 / 0	12.64	9.40	V	H2	22.04	0.160	-10.97
1851.50	3	16-QAM	Standard	1 / 14	11.26	9.49	V	H2	20.75	0.119	-12.26
1882.50	3	16-QAM	Standard	1 / 14	11.18	9.44	V	H2	20.62	0.115	-12.39
1913.50	3	16-QAM	Standard	1 / 0	11.48	9.40	V	H2	20.88	0.123	-12.13
1852.50	5	QPSK	Standard	1 / 24	12.67	9.49	V	H2	22.16	0.164	-10.85
1882.50	5	QPSK	Standard	1 / 24	13.01	9.44	V	H2	22.45	0.176	-10.56
1912.50	5	QPSK	Standard	1 / 0	12.59	9.41	V	H2	22.00	0.158	-11.02
1852.50	5	16-QAM	Standard	1 / 24	11.32	9.49	V	H2	20.81	0.121	-12.20
1882.50	5	16-QAM	Standard	1 / 24	11.86	9.44	V	H2	21.30	0.135	-11.71
1912.50	5	16-QAM	Standard	1 / 0	11.41	9.41	V	H2	20.82	0.121	-12.20
1855.00	10	QPSK	Standard	1 / 49	12.62	9.49	V	H2	22.11	0.162	-10.90
1882.50	10	QPSK	Standard	1 / 49	13.14	9.44	V	H2	22.58	0.181	-10.43
1910.00	10	QPSK	Standard	1 / 49	12.69	9.41	V	H2	22.10	0.162	-10.91
1855.00	10	16-QAM	Standard	1 / 49	11.39	9.49	V	H2	20.88	0.122	-12.13
1882.50	10	16-QAM	Standard	1 / 49	11.91	9.44	V	H2	21.35	0.136	-11.66
1910.00	10	16-QAM	Standard	1 / 49	11.49	9.41	V	H2	20.90	0.123	-12.11
1857.50	15	QPSK	Standard	1 / 37	12.48	9.48	V	H2	21.96	0.157	-11.05
1882.50	15	QPSK	Standard	1 / 74	13.34	9.44	V	H2	22.78	0.190	-10.23
1907.50	15	QPSK	Standard	1 / 74	13.05	9.41	V	H2	22.46	0.176	-10.55
1857.50	15	16-QAM	Standard	1 / 37	11.32	9.48	V	H2	20.80	0.120	-12.21
1882.50	15	16-QAM	Standard	1 / 74	12.31	9.44	V	H2	21.75	0.150	-11.26
1907.50	15	16-QAM	Standard	1 / 74	11.77	9.41	V	H2	21.18	0.131	-11.83
1860.00	20	QPSK	Standard	50 / 25	12.64	9.48	V	H2	22.12	0.163	-10.89
1882.50	20	QPSK	Standard	1 / 99	13.31	9.44	V	H2	22.75	0.188	-10.26
1905.00	20	QPSK	Standard	1 / 99	13.09	9.41	V	H2	22.50	0.178	-10.51
1860.00	20	16-QAM	Standard	50 / 25	11.46	9.48	V	H2	20.94	0.124	-12.07
1882.50	20	16-QAM	Standard	1 / 99	12.01	9.44	V	H2	21.45	0.140	-11.56
1905.00	20	16-QAM	Standard	1 / 99	11.75	9.41	V	H2	21.16	0.131	-11.85
1882.50	15	WCC	Standard	1 / 99	12.66	9.44	V	H2	22.10	0.162	-10.91

Table 6-3. EIRP Data (Band 25)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 77 of 94	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
2499.00	5	QPSK	Standard	1 / 0	13.00	8.36	V	V	21.36	0.137	-11.65
2593.00	5	QPSK	Standard	1 / 12	13.79	8.90	V	V	22.69	0.186	-10.32
2687.30	5	QPSK	Standard	1 / 0	13.45	8.94	V	V	22.39	0.173	-10.62
2499.00	5	16-QAM	Standard	1 / 0	11.92	8.36	V	V	20.28	0.107	-12.73
2593.00	5	16-QAM	Standard	1 / 12	12.36	8.90	V	V	21.26	0.134	-11.75
2687.30	5	16-QAM	Standard	1 / 0	12.19	8.94	V	V	21.13	0.130	-11.88
2502.00	10	QPSK	Standard	1 / 0	13.47	8.36	V	V	21.83	0.152	-11.18
2590.00	10	QPSK	Standard	1 / 25	13.64	8.88	V	V	22.52	0.179	-10.49
2684.50	10	QPSK	Standard	1 / 25	13.35	8.94	V	V	22.29	0.170	-10.72
2502.00	10	16-QAM	Standard	1 / 0	12.27	8.36	V	V	20.63	0.116	-12.38
2590.00	10	16-QAM	Standard	1 / 25	12.38	8.88	V	V	21.26	0.134	-11.75
2684.50	10	16-QAM	Standard	1 / 25	12.22	8.94	V	V	21.16	0.131	-11.85
2504.50	15	QPSK	Standard	36 / 18	13.67	8.38	V	V	22.05	0.160	-10.96
2593.00	15	QPSK	Standard	1 / 37	13.94	8.90	V	V	22.84	0.192	-10.17
2681.80	15	QPSK	Standard	1 / 0	13.38	8.94	V	V	22.32	0.171	-10.69
2504.50	15	16-QAM	Standard	36 / 18	12.58	8.38	V	V	20.96	0.125	-12.05
2593.00	15	16-QAM	Standard	1 / 37	13.12	8.90	V	V	22.02	0.159	-10.99
2681.80	15	16-QAM	Standard	1 / 0	12.19	8.94	V	V	21.13	0.130	-11.88
2507.50	20	QPSK	Standard	50 / 25	13.67	8.39	V	V	22.06	0.161	-10.95
2590.00	20	QPSK	Standard	50 / 25	13.56	8.88	V	V	22.44	0.175	-10.57
2679.00	20	QPSK	Standard	1 / 0	13.17	8.94	V	V	22.11	0.163	-10.90
2507.50	20	16-QAM	Standard	50 / 25	12.41	8.39	V	V	20.80	0.120	-12.21
2590.00	20	16-QAM	Standard	50 / 25	12.59	8.88	V	V	21.47	0.140	-11.54
2679.00	20	16-QAM	Standard	1 / 0	12.01	8.94	V	V	20.95	0.125	-12.06
2593.00	15	QPSK	WCC	1 / 99	13.80	8.88	V	V	22.68	0.185	-10.33

Table 6-4. EIRP Data (Band 41)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 78 of 94

6.7 Radiated Spurious Emissions Measurements

\$2.1053 \$22.917(a) \$24.238(a) \$27.53(m)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r01 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

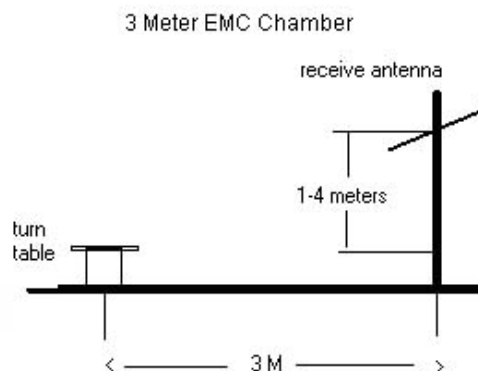


Figure 6-6. Test Instrument & Measurement Setup

FCC ID: A3LSMN910P	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 79 of 94

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 3) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 4) The battery used with this device for testing (Model:EB-BN910BBU) contains an embedded NFC antenna.

OPERATING FREQUENCY: 825.50 MHz
 CHANNEL: 26805
 MEASURED OUTPUT POWER: 18.62 dBm = 0.073 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.62 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1651.00	-45.40	3.58	-41.82	V	H2	60.4
2476.50	-50.58	3.53	-47.05	V	H2	65.7
3302.00	-62.05	5.65	-56.40	V	H2	75.0
4127.50	-60.28	6.89	-53.39	V	H2	72.0
4953.00	-59.87	7.89	-51.98	V	H2	70.6

Table 6-5. Radiated Spurious Data (Band 26 – Low Channel)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 80 of 94

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 26915
 MEASURED OUTPUT POWER: 18.78 dBm = 0.076 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.78 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1673.00	-47.64	3.50	-44.15	V	H2	62.9
2509.50	-51.71	3.53	-48.18	V	H2	67.0
3346.00	-61.70	5.77	-55.94	V	H2	74.7
4182.50	-60.20	7.04	-53.16	V	H2	71.9
5019.00	-60.88	8.01	-52.87	V	H2	71.7

Table 6-6. Radiated Spurious Data (Band 26 – Mid Channel)

OPERATING FREQUENCY: 847.50 MHz
 CHANNEL: 27025
 MEASURED OUTPUT POWER: 18.96 dBm = 0.079 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.96 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1695.00	-47.37	3.41	-43.97	V	H2	62.9
2542.50	-51.89	3.60	-48.29	V	H2	67.3
3390.00	-62.52	5.88	-56.63	V	H2	75.6
4237.50	-61.21	7.13	-54.08	V	H2	73.0
5085.00	-61.00	8.06	-52.94	V	H2	71.9

Table 6-7. Radiated Spurious Data (Band 26 – High Channel)

OPERATING FREQUENCY: 825.50 MHz
 CHANNEL: 26805
 MEASURED OUTPUT POWER: 18.82 dBm = 0.076 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.82 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1651.00	-43.34	3.41	-39.94	H	H	58.8
2476.50	-49.72	3.60	-46.12	H	H	64.9
3302.00	-61.88	5.88	-55.99	H	H	74.8
4127.50	-60.19	7.13	-53.06	H	H	71.9
4953.00	-60.06	8.06	-52.00	H	H	70.8

Table 6-8. Radiated Spurious Data with WCC (Band 26 – Low Channel)

OPERATING FREQUENCY: 1857.50 MHz
 CHANNEL: 26115
 MEASURED OUTPUT POWER: 21.96 dBm = 0.157 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.96 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3715.00	-52.28	8.40	-43.88	V	H2	65.8
5572.50	-61.99	10.60	-51.39	V	H2	73.3
7430.00	-59.66	12.06	-47.60	V	H2	69.6
9287.50	-64.16	13.22	-50.94	V	H2	72.9
11145.00	-62.44	13.27	-49.17	V	H2	71.1
13002.50	-60.79	13.47	-47.32	V	H2	69.3

Table 6-9. Radiated Spurious Data (Band 25 – Low Channel)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 82 of 94

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 22.78 dBm = 0.190 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.78 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3765.00	-51.43	8.38	-43.05	V	H2	65.8
5647.50	-63.04	10.70	-52.34	V	H2	75.1
7530.00	-59.63	12.11	-47.52	V	H2	70.3
9412.50	-64.30	13.19	-51.11	V	H2	73.9
11295.00	-62.46	13.32	-49.14	V	H2	71.9
13177.50	-61.01	13.59	-47.43	V	H2	70.2

Table 6-10. Radiated Spurious Data (Band 25 – Mid Channel)

OPERATING FREQUENCY: 1907.50 MHz
 CHANNEL: 26615
 MEASURED OUTPUT POWER: 22.46 dBm = 0.176 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 35.46 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3815.00	-52.05	8.40	-43.65	V	H2	66.1
5722.50	-63.54	10.76	-52.78	V	H2	75.2
7630.00	-60.36	12.21	-48.15	V	H2	70.6
9537.50	-59.99	13.19	-46.80	V	H2	69.3
11445.00	-62.68	13.33	-49.35	V	H2	71.8
13352.50	-62.01	13.58	-48.43	V	H2	70.9

Table 6-11. Radiated Spurious Data (Band 25 – High Channel)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 83 of 94

OPERATING FREQUENCY: 1882.50 MHz
 CHANNEL: 26365
 MEASURED OUTPUT POWER: 22.78 dBm = 0.190 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.78 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3765.00	-53.20	8.38	-44.82	H	H	67.6
5647.50	-60.88	10.70	-50.18	H	H	73.0
7530.00	-63.27	12.11	-51.16	H	H	73.9
9412.50	-65.39	13.19	-52.20	H	H	75.0
11295.00	-62.58	13.32	-49.26	H	H	72.0
13177.50	-62.34	13.59	-48.76	H	H	71.5

Table 6-12. Radiated Spurious Data with WCC (Band 25 – Mid Channel)

OPERATING FREQUENCY: 2504.50 MHz
 CHANNEL: 39735
 MEASURED OUTPUT POWER: 22.05 dBm = 0.160 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10} (W) =$ 47.05 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5009.00	-42.87	10.15	-32.72	V	H2	54.8
7513.50	-60.37	12.08	-48.28	V	H2	70.3
10018.00	-60.13	13.26	-46.86	V	H2	68.9
12522.50	-51.06	13.18	-37.88	V	H2	59.9
15027.00	-55.85	14.10	-41.75	V	H2	63.8

Table 6-13. Radiated Spurious Data (Band 41 – Low Channel)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 84 of 94

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 22.84 dBm = 0.192 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 47.84 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5186.00	-44.05	10.31	-33.74	V	H2	56.6
7779.00	-57.20	12.30	-44.90	V	H2	67.7
10372.00	-58.85	13.19	-45.66	V	H2	68.5
12965.00	-54.19	13.41	-40.78	V	H2	63.6
15558.00	-55.00	13.77	-41.23	V	H2	64.1

Table 6-14. Radiated Spurious Data (Band 41 – Mid Channel)

OPERATING FREQUENCY: 2681.80 MHz
 CHANNEL: 41508
 MEASURED OUTPUT POWER: 22.32 dBm = 0.171 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 47.32 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5363.60	-42.47	10.35	-32.12	V	H2	54.4
8045.40	-57.51	12.58	-44.93	V	H2	67.3
10727.20	-57.34	12.92	-44.43	V	H2	66.7
13409.00	-51.05	13.64	-37.41	V	H2	59.7
16090.80	-54.17	13.57	-40.60	V	H2	62.9

Table 6-15. Radiated Spurious Data (Band 41 – High Channel)

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MEASURED OUTPUT POWER: 22.68 dBm = 0.185 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 15.0 MHz
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 47.68 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5186.00	-43.11	10.31	-32.80	V	H	55.5
7779.00	-58.62	12.30	-46.32	V	H	69.0
10372.00	-59.91	13.19	-46.72	V	H	69.4
12965.00	-53.82	13.41	-40.41	V	H	63.1
15558.00	-56.18	13.77	-42.41	V	H	65.1

Table 6-16. Radiated Spurious Data with WCC (Band 41 – Mid Channel)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 86 of 94

6.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235 \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 87 of 94	

Band 26 Frequency Stability Measurements

\$2.1055 \$22.355

OPERATING FREQUENCY: 831,500,000 Hz
 CHANNEL: 26865
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	831,499,989	-11	-0.0000013
100 %		- 30	831,500,017	17	0.0000020
100 %		- 20	831,499,996	-4	-0.0000005
100 %		- 10	831,499,984	-16	-0.0000019
100 %		0	831,500,012	12	0.0000014
100 %		+ 10	831,499,999	-1	-0.0000001
100 %		+ 20	831,499,997	-3	-0.0000004
100 %		+ 30	831,500,002	2	0.0000002
100 %		+ 40	831,500,009	9	0.0000011
100 %		+ 50	831,500,015	15	0.0000018
BATT. ENDPOINT	3.40	+ 20	831,499,973	-27	-0.0000032

Table 6-17. Frequency Stability Data (Band 26)

Band 26 Frequency Stability Measurements

\$2.1055 \$22.355

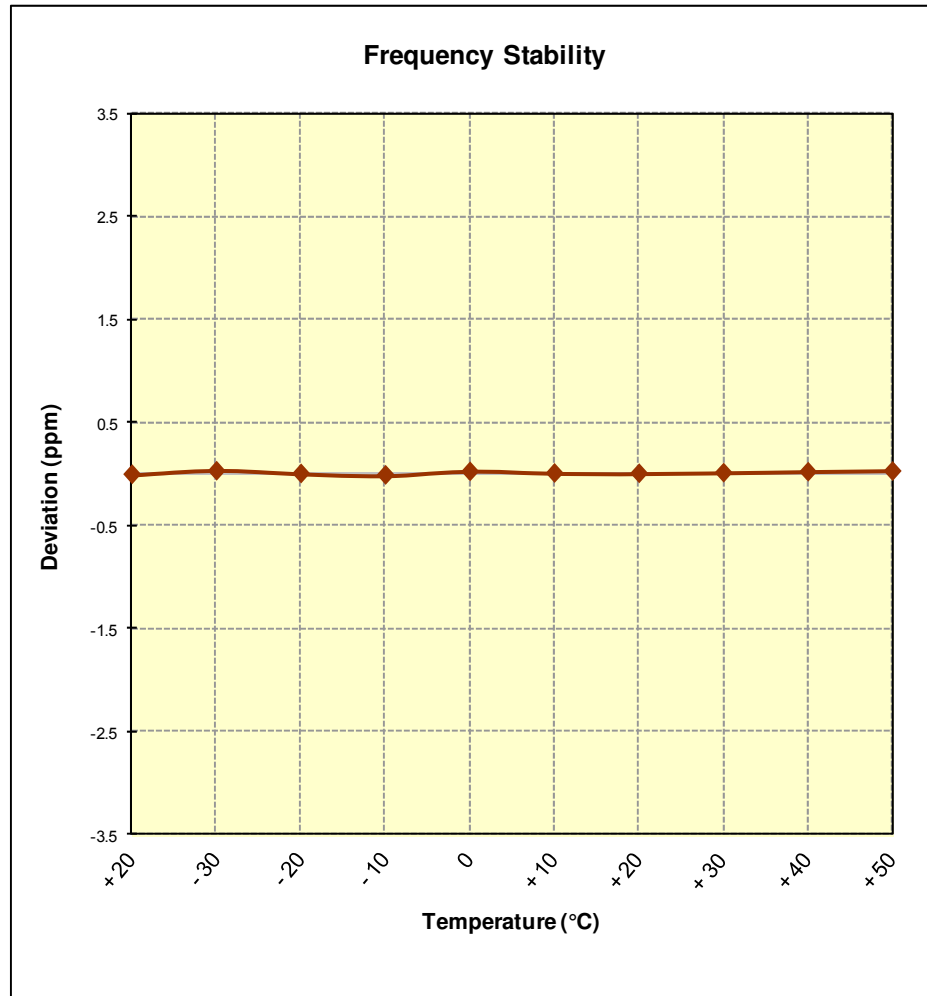


Figure 6-7. Frequency Stability Graph (Band 26)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 89 of 94	

Band 25 Frequency Stability Measurements

\$2.1055 \$24.235

OPERATING FREQUENCY: 1,882,500,000 Hz
 CHANNEL: 26365
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,882,499,979	-21	-0.0000011
100 %		- 30	1,882,499,979	-21	-0.0000011
100 %		- 20	1,882,500,016	16	0.0000008
100 %		- 10	1,882,499,983	-17	-0.0000009
100 %		0	1,882,500,002	2	0.0000001
100 %		+ 10	1,882,500,020	20	0.0000011
100 %		+ 20	1,882,500,026	26	0.0000014
100 %		+ 30	1,882,500,014	14	0.0000007
100 %		+ 40	1,882,500,015	15	0.0000008
100 %		+ 50	1,882,500,026	26	0.0000014
BATT. ENDPOINT	3.40	+ 20	1,882,500,010	10	0.0000005

Table 6-18. Frequency Stability Data (Band 25)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 90 of 94	

Band 25 Frequency Stability Measurements

\$2.1055 \$24.235

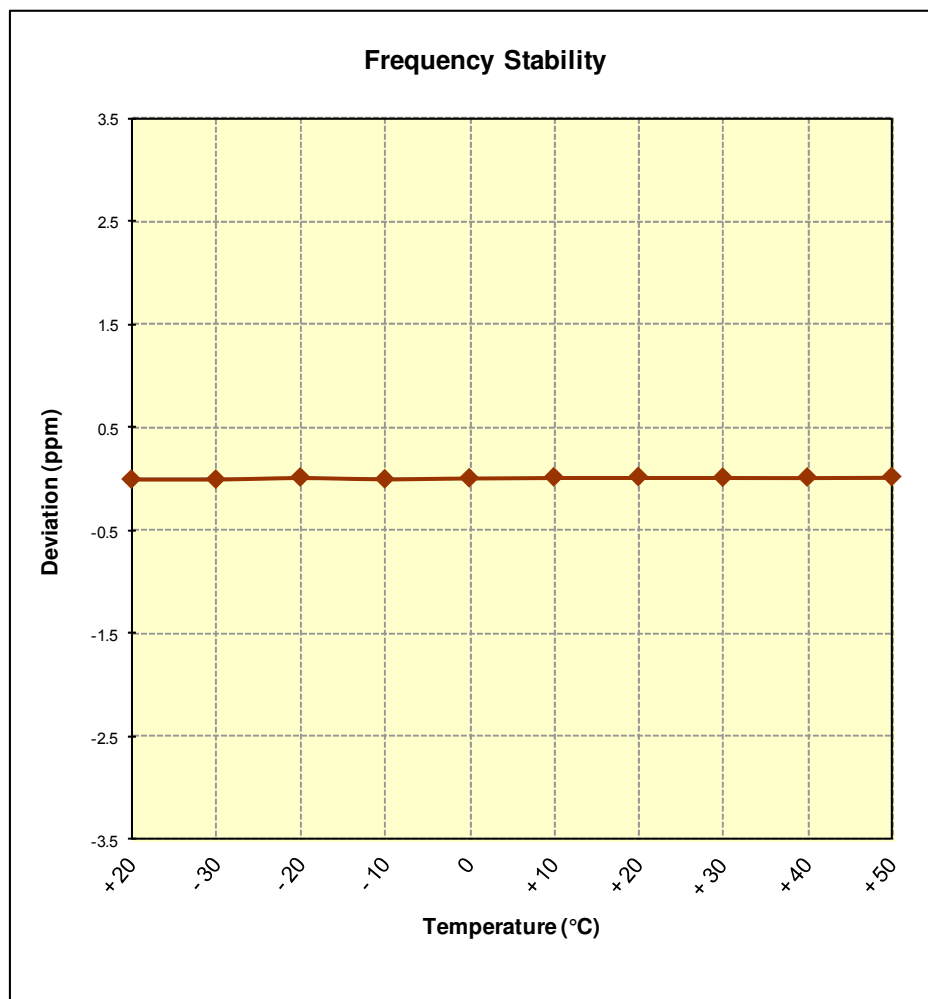


Figure 6-8. Frequency Stability Graph (Band 25)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 91 of 94	

Band 41 Frequency Stability Measurements

\$2.1055 \$27.54

OPERATING FREQUENCY: 2,590,000,000 Hz
 CHANNEL: 40590
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,589,999,985	-15	-0.0000006
100 %		- 30	2,590,000,025	25	0.0000010
100 %		- 20	2,589,999,986	-14	-0.0000005
100 %		- 10	2,590,000,017	17	0.0000007
100 %		0	2,590,000,016	16	0.0000006
100 %		+ 10	2,590,000,003	3	0.0000001
100 %		+ 20	2,590,000,001	1	0.0000000
100 %		+ 30	2,590,000,014	14	0.0000005
100 %		+ 40	2,589,999,995	-5	-0.0000002
100 %		+ 50	2,589,999,986	-14	-0.0000005
BATT. ENDPOINT	3.40	+ 20	2,589,999,989	-11	-0.0000004

Table 6-19. Frequency Stability Data (Band 41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 92 of 94	

Band 41 Frequency Stability Measurements

\$2.1055 \$27.54

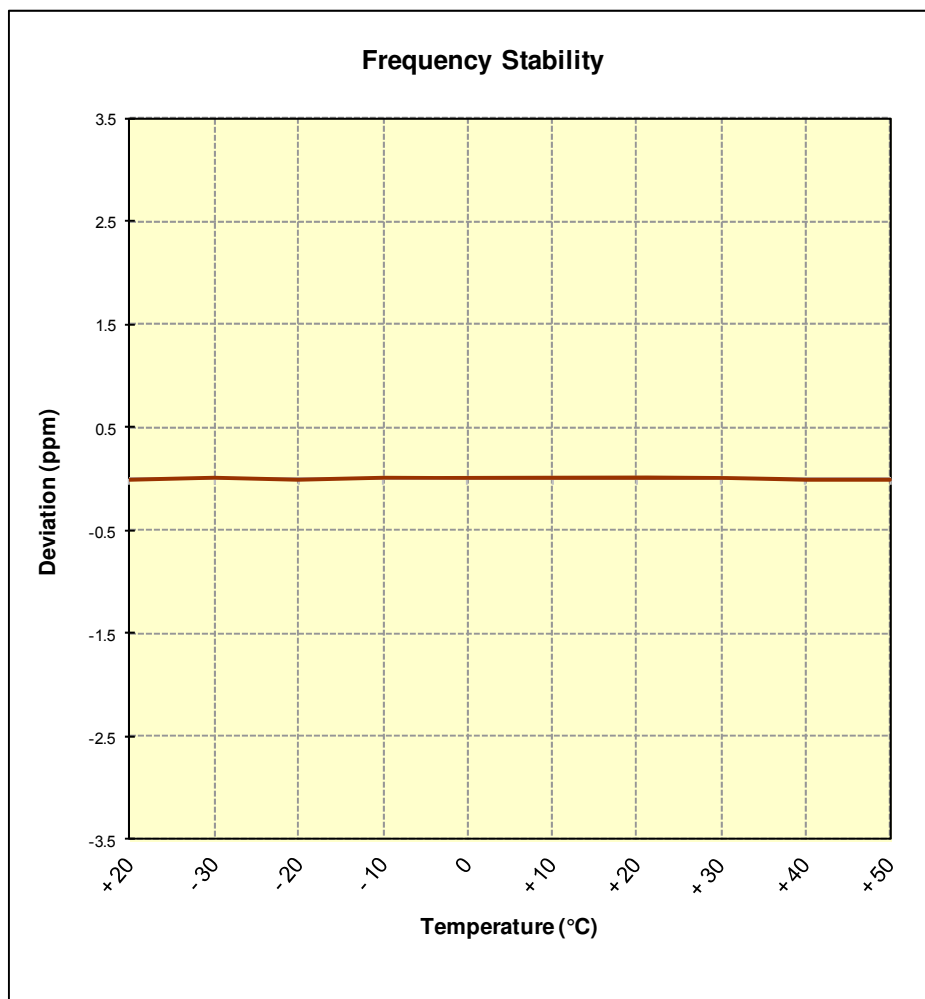


Figure 6-9. Frequency Stability Graph (Band 41)

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset		Page 93 of 94

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN910P** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: A3LSMN910P		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1408011593-R1.A3L	Test Dates: 07/29 - 09/04/14	EUT Type: Portable Handset	Page 94 of 94	