



MID CHANNEL HORIZONTAL

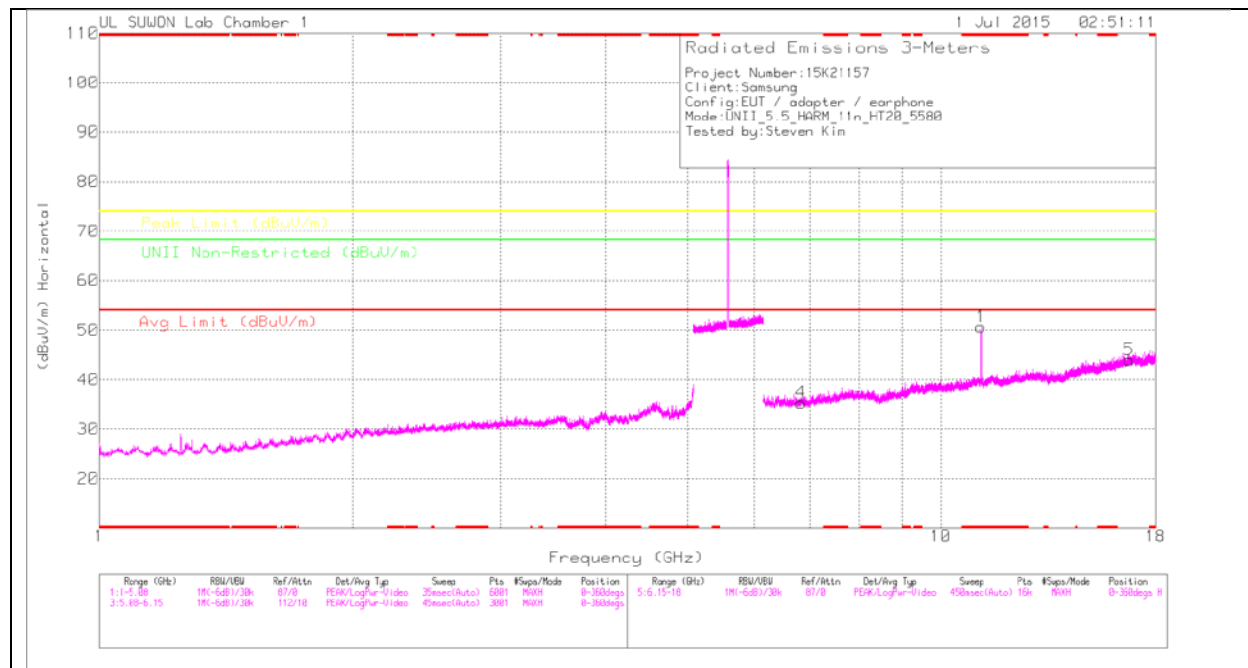

MID CHANNEL VERTICAL

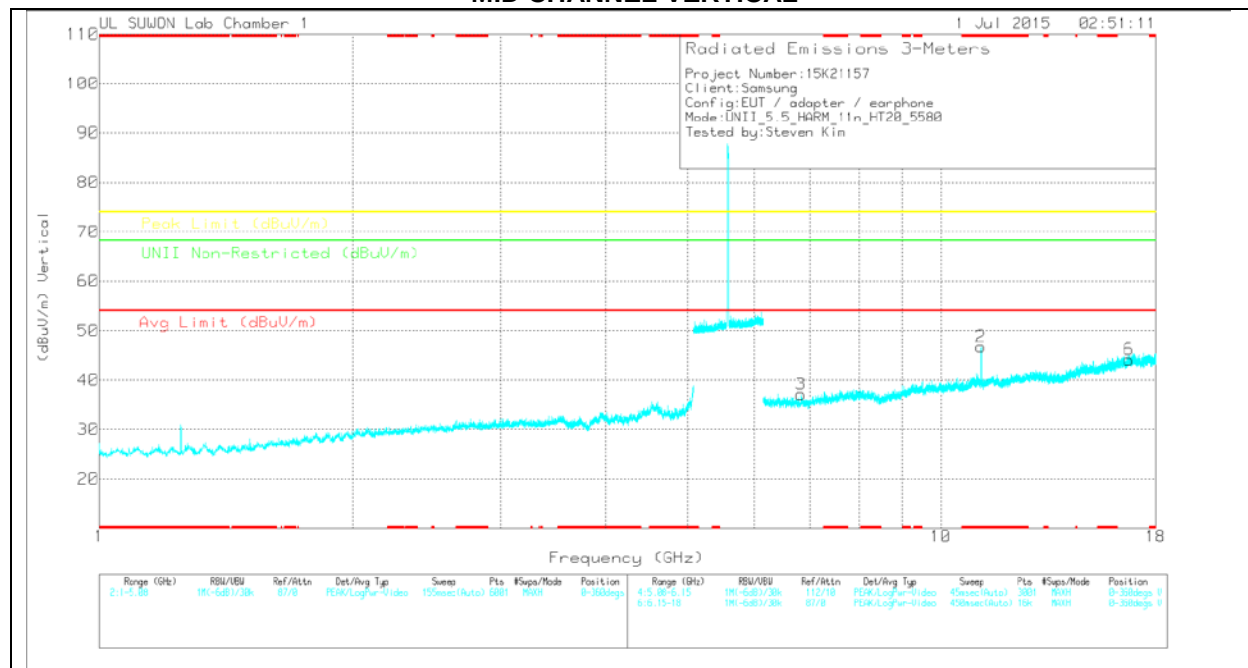

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717_150 619	Path_5_6G HP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.163	33.39	PK	38.3	-21	0	50.69	-	-	74	-23.31	-	-	0-360	200	H
4	6.814	25.54	PK	35.6	-25.8	0	35.34	-	-	-	-	68.2	-32.86	0-360	100	H
5	16.742	19.6	PK	41.3	-16.9	0	44	-	-	-	-	68.2	-24.2	0-360	200	H
2	* 11.162	29.44	PK	38.3	-21	0	46.74	-	-	74	-27.26	-	-	0-360	200	V
3	6.813	27.32	PK	35.6	-25.8	0	37.12	-	-	-	-	68.2	-31.08	0-360	100	V
6	16.74	19.72	PK	41.3	-16.9	0	44.12	-	-	-	-	68.2	-24.08	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.158	47.26	PK1	38.3	-21	0	64.56	-	-	74	-9.44	-	-	151	240	H
* 11.158	34.3	AD1	38.3	-21	.32	51.92	54	-2.08	-	-	-	-	151	240	H
* 11.158	43.73	PK1	38.3	-21	0	61.03	-	-	74	-12.97	-	-	185	268	V
* 11.163	29.58	AD1	38.3	-21	.32	47.2	54	-6.8	-	-	-	-	185	268	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

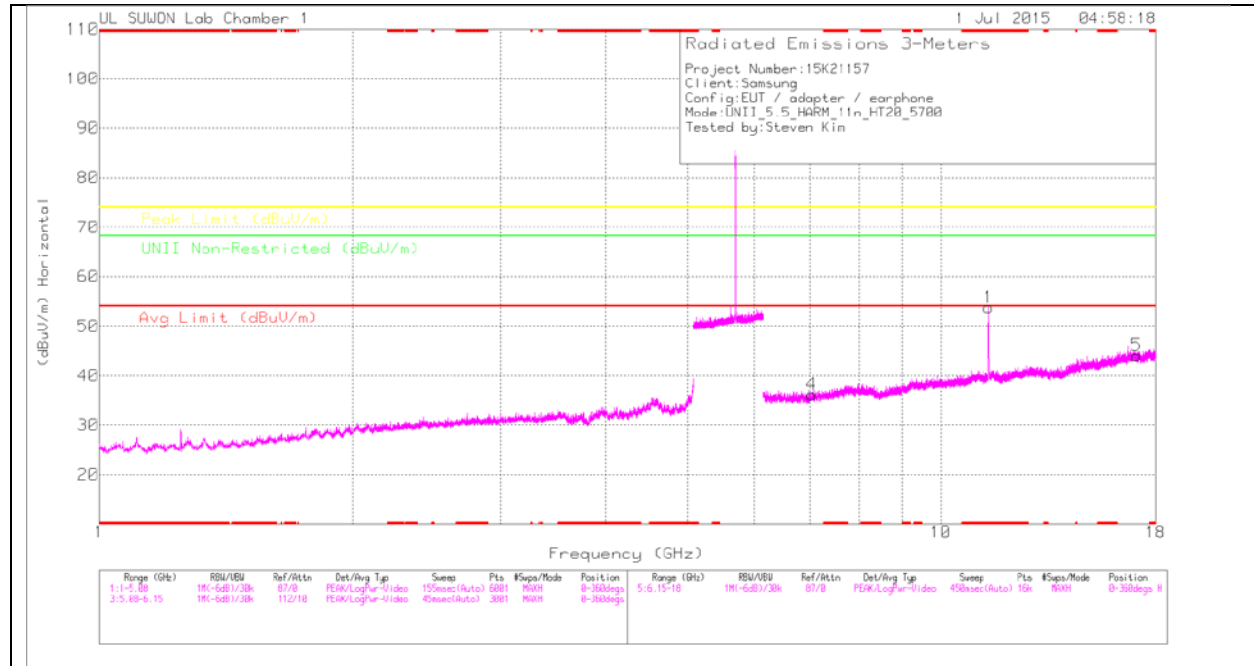

HIGH CHANNEL VERTICAL

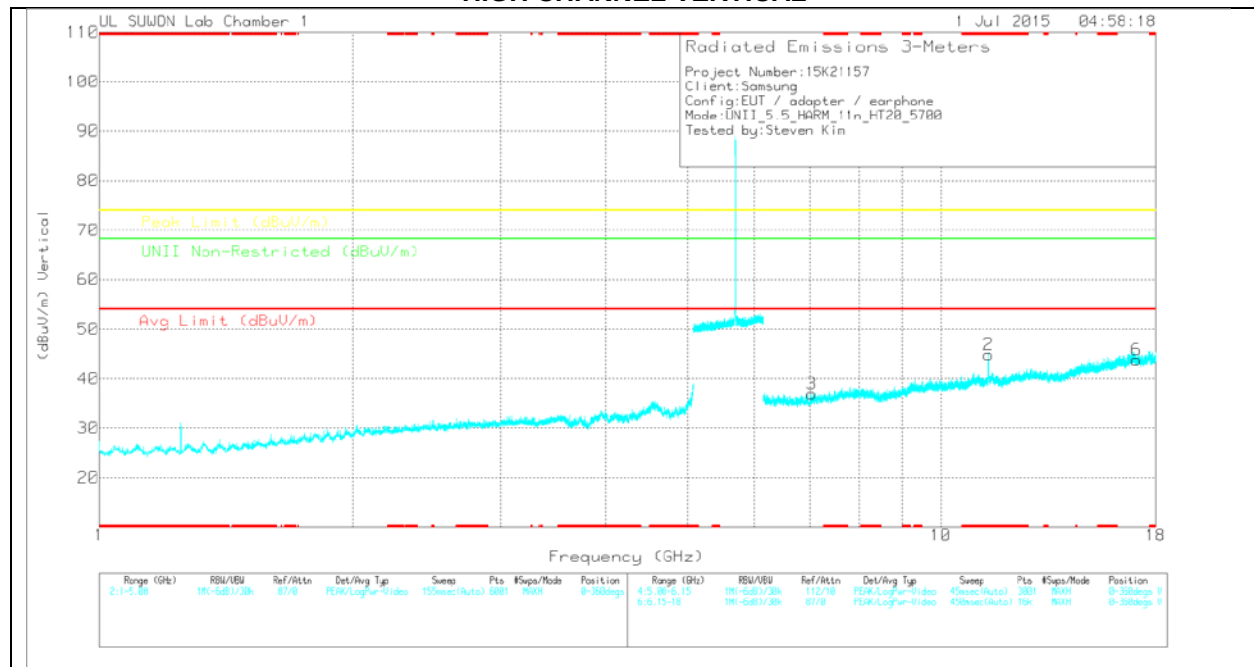

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717_150 619	Path_5_6G HP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.404	36.17	PK	38.5	-20.9	0	53.77	-	-	74	-20.23	-	-	0-360	200	H
4	7.032	26.1	PK	35.7	-25.6	0	36.2	-	-	-	-	68.2	-32	0-360	200	H
5	17.101	19.39	PK	41.3	-16.6	0	44.09	-	-	-	-	68.2	-24.11	0-360	200	H
2	* 11.398	27.25	PK	38.5	-20.9	0	44.85	-	-	74	-29.15	-	-	0-360	100	V
3	7.031	26.84	PK	35.7	-25.6	0	36.94	-	-	-	-	68.2	-31.26	0-360	200	V
6	17.102	19.07	PK	41.3	-16.6	0	43.77	-	-	-	-	68.2	-24.43	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.398	46.53	PK1	38.5	-20.9	0	64.13	-	-	74	-9.87	-	-	133	288	H
* 11.398	32.7	AD1	38.5	-20.9	.32	50.62	54	-3.38	-	-	-	-	133	288	H
* 11.399	35	PK1	38.5	-20.9	0	52.6	-	-	74	-21.4	-	-	155	322	V
* 11.4	22.99	AD1	38.5	-20.9	.32	40.91	54	-13.09	-	-	-	-	155	322	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.3.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.5 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

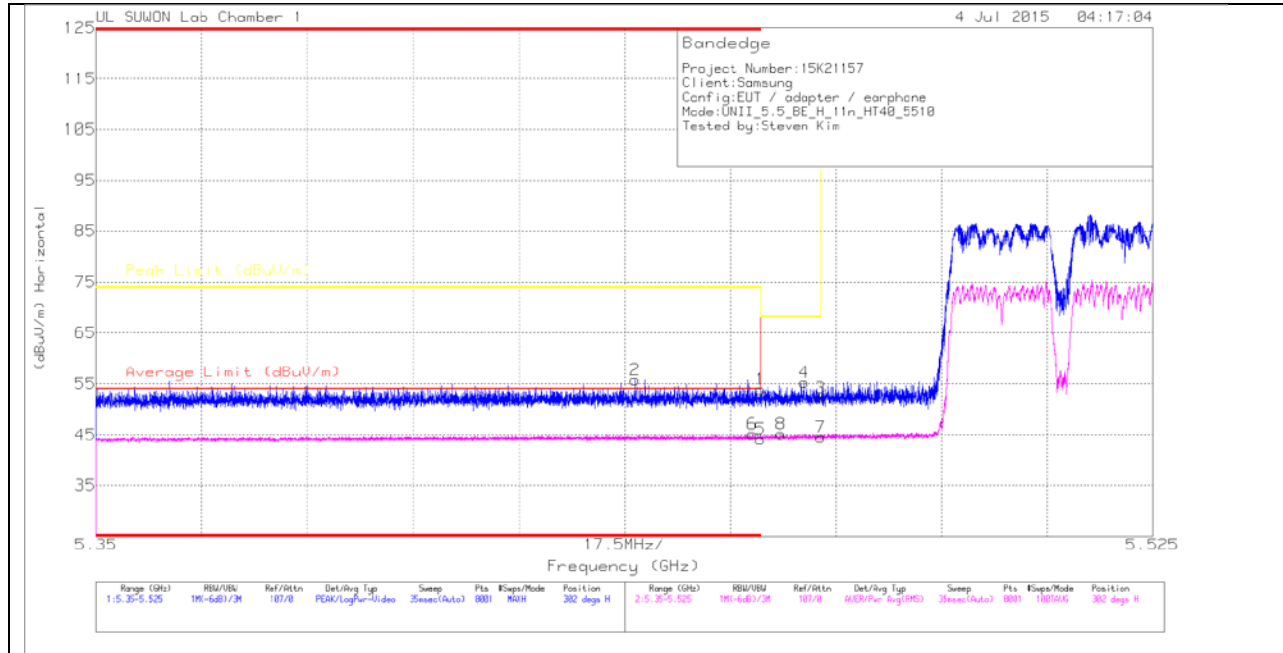

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.46	Pk	34.6	-19.2	0	53.86	-	-	74	-20.14	302	190	H
2	* 5.439	40.37	Pk	34.6	-19.2	0	55.77	-	-	74	-18.23	302	190	H
3	5.47	36.82	Pk	34.6	-19.2	0	52.22	-	-	68.2	-15.98	302	190	H
4	5.467	39.9	Pk	34.6	-19.2	0	55.3	-	-	68.2	-12.9	302	190	H
5	* 5.46	28.12	RMS	34.6	-19.2	.62	44.14	54	-9.86	-	-	302	190	H
6	* 5.459	29.06	RMS	34.6	-19.2	.62	45.08	54	-8.92	-	-	302	190	H
7	5.47	28.55	RMS	34.6	-19.2	.62	44.57	-	-	-	-	302	190	H
8	5.463	29.16	RMS	34.6	-19.2	.62	45.18	-	-	-	-	302	190	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

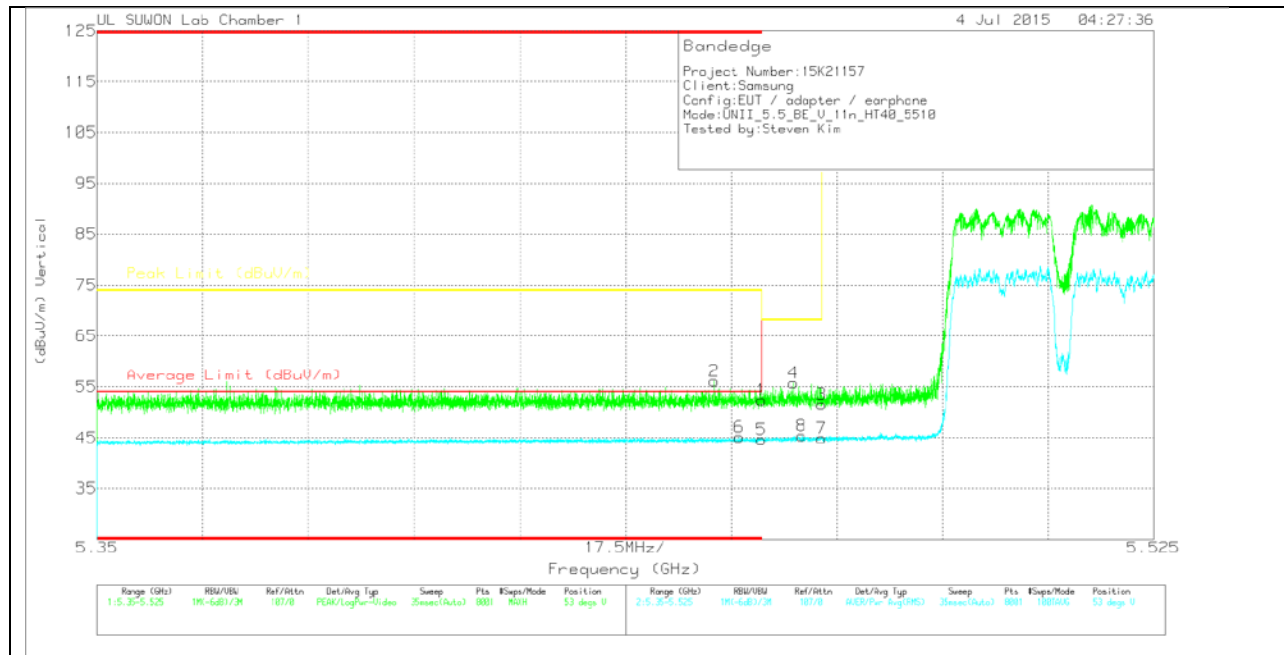

VERTICAL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.04	Pk	34.6	-19.2	0	52.44	-	-	74	-21.56	53	107	V
2	* 5.452	40.69	Pk	34.6	-19.2	0	56.09	-	-	74	-17.91	53	107	V
3	5.47	36.16	Pk	34.6	-19.2	0	51.56	-	-	68.2	-16.64	53	107	V
4	5.465	40.38	Pk	34.6	-19.2	0	55.78	-	-	68.2	-12.42	53	107	V
5	* 5.46	28.59	RMS	34.6	-19.2	.62	44.61	54	-9.39	-	-	53	107	V
6	* 5.456	29.11	RMS	34.6	-19.2	.62	45.13	54	-8.87	-	-	53	107	V
7	5.47	28.88	RMS	34.6	-19.2	.62	44.9	-	-	-	-	53	107	V
8	5.467	29.32	RMS	34.6	-19.2	.62	45.34	-	-	-	-	53	107	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

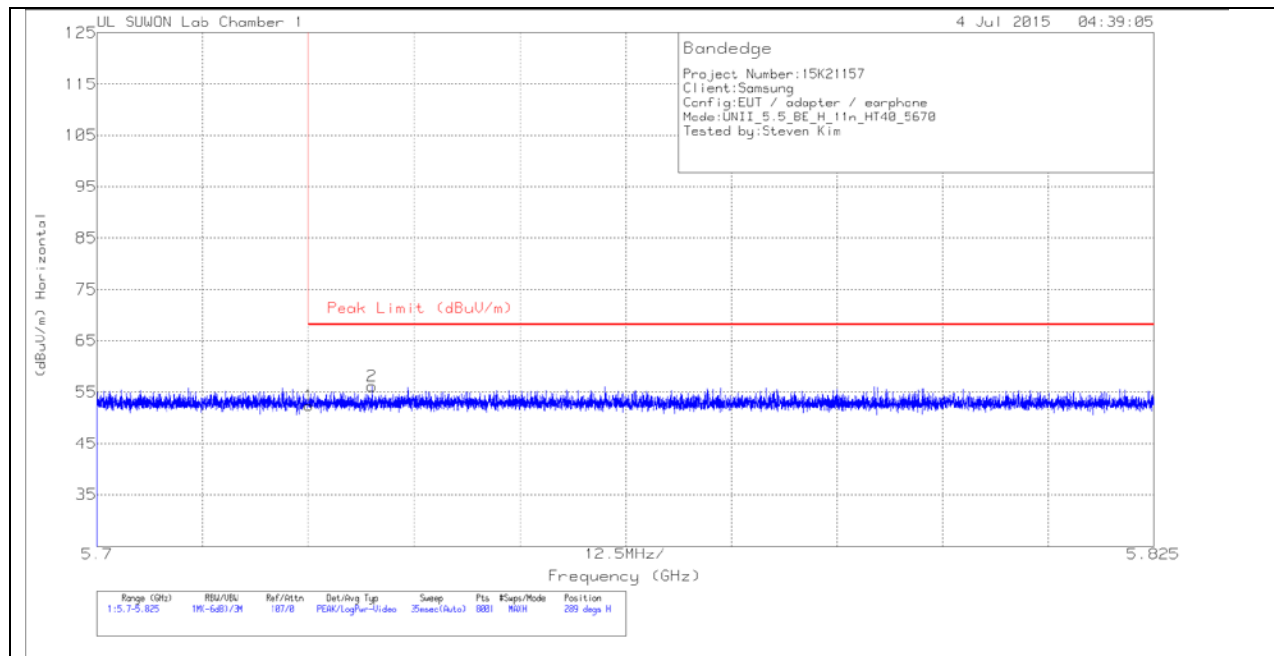

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2_10 dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.4	Pk	34.8	-18.8	0	52.4	68.2	-15.8	289	174	H
2	5.732	40.15	Pk	34.8	-18.8	0	56.15	68.2	-12.05	289	174	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

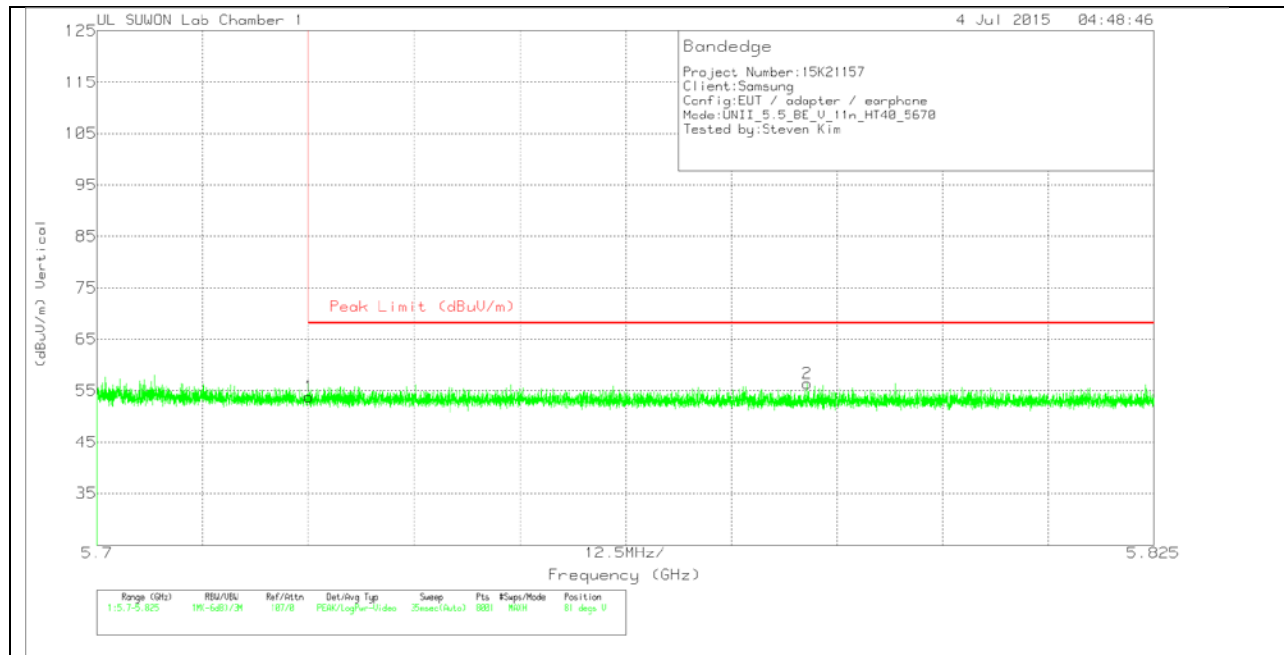

VERTICAL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_2_10 dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.84	Pk	34.8	-18.8	0	53.84	68.2	-14.36	81	103	V
2	5.784	40.35	Pk	34.8	-18.8	0	56.35	68.2	-11.85	81	103	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

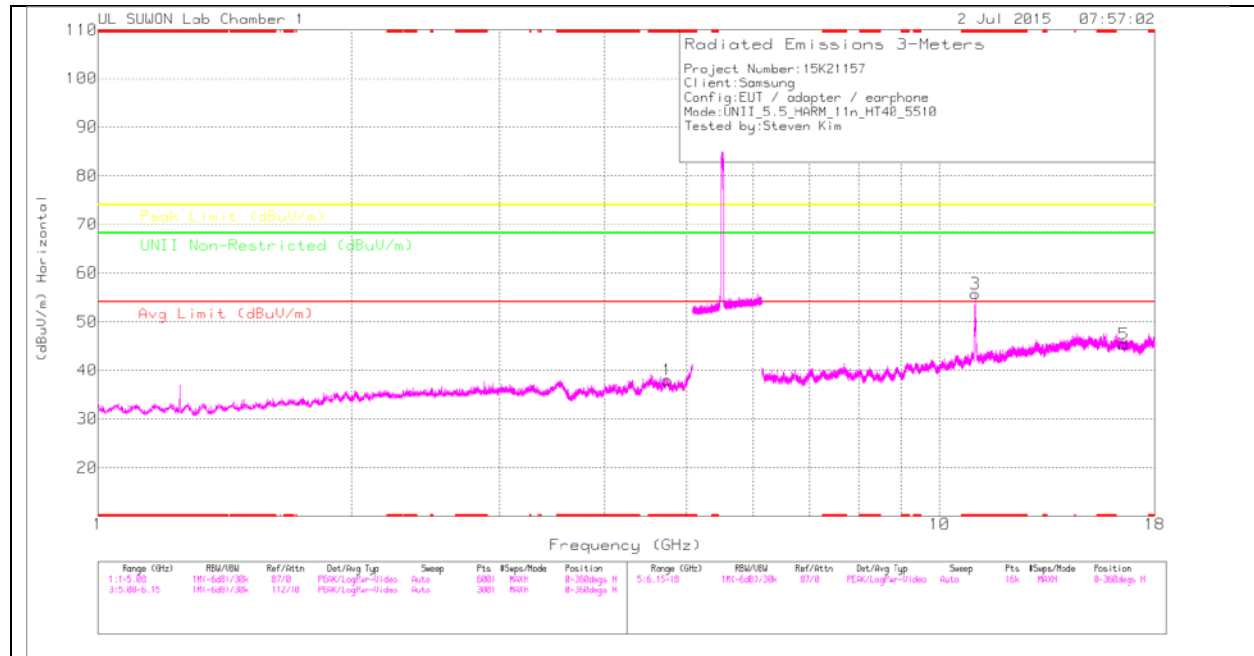

LOW CHANNEL VERTICAL

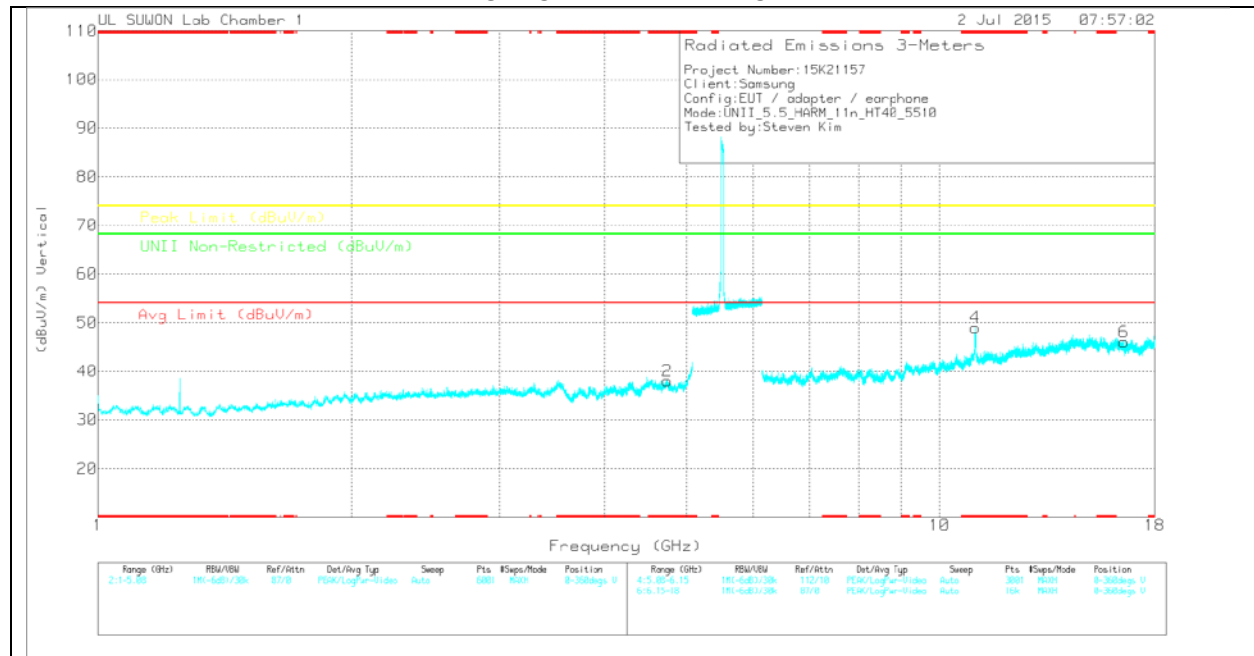

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.749	28.95	PK	33.8	-24.7	0	38.05	-	-	74	-35.95	-	-	0-360	100	H
2	* 4.749	28.89	PK	33.8	-24.7	0	37.99	-	-	74	-36.01	-	-	0-360	200	V
3	* 11.019	35.33	PK	38	-17.6	0	55.73	-	-	74	-18.27	-	-	0-360	200	H
5	16.531	20.51	PK	41	-16.1	0	45.41	-	-	-	-	68.2	-22.79	0-360	100	H
4	* 11.022	28.57	PK	38	-17.6	0	48.97	-	-	74	-25.03	-	-	0-360	200	V
6	16.531	21.16	PK	41	-16.1	0	46.06	-	-	-	-	68.2	-22.14	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.028	47.65	PK1	38	-17.7	0	67.95	-	-	74	-6.05	-	-	144	254	H
* 11.019	31.73	AD1	38	-17.6	.62	52.75	54	-1.25	-	-	-	-	144	254	H
* 11.028	42.89	PK1	38	-17.7	0	63.19	-	-	74	-10.81	-	-	187	204	V
* 11.021	27.07	AD1	38	-17.6	.62	48.09	54	-5.91	-	-	-	-	187	204	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL

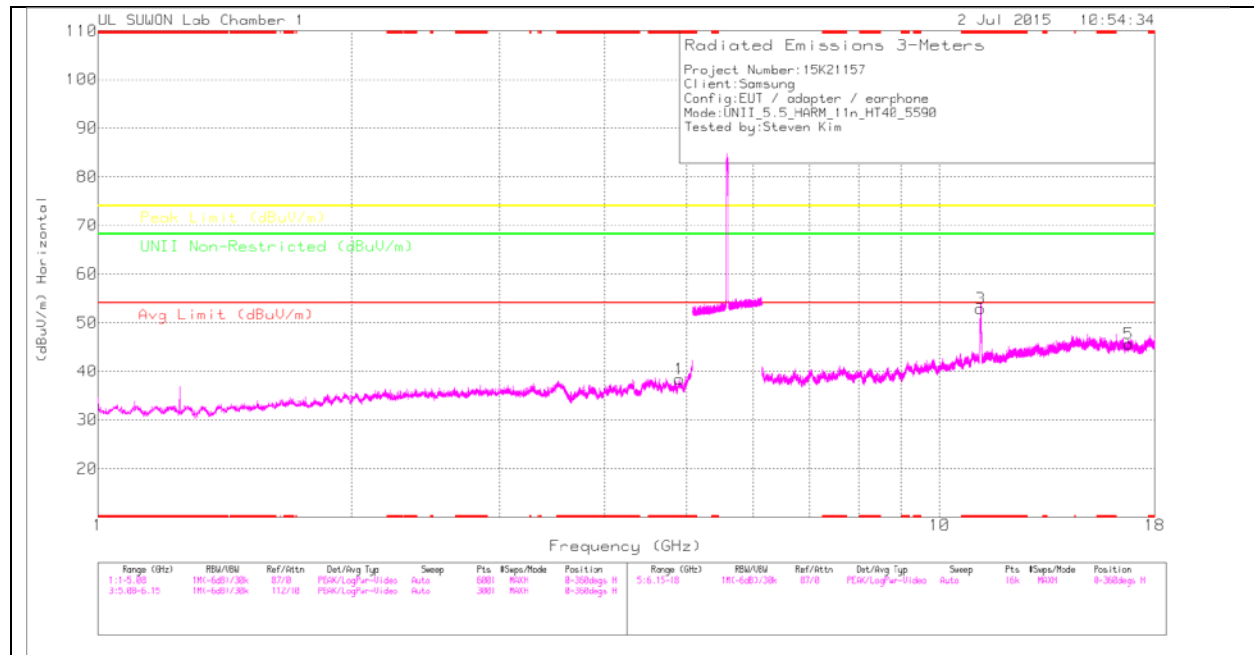

MID CHANNEL VERTICAL

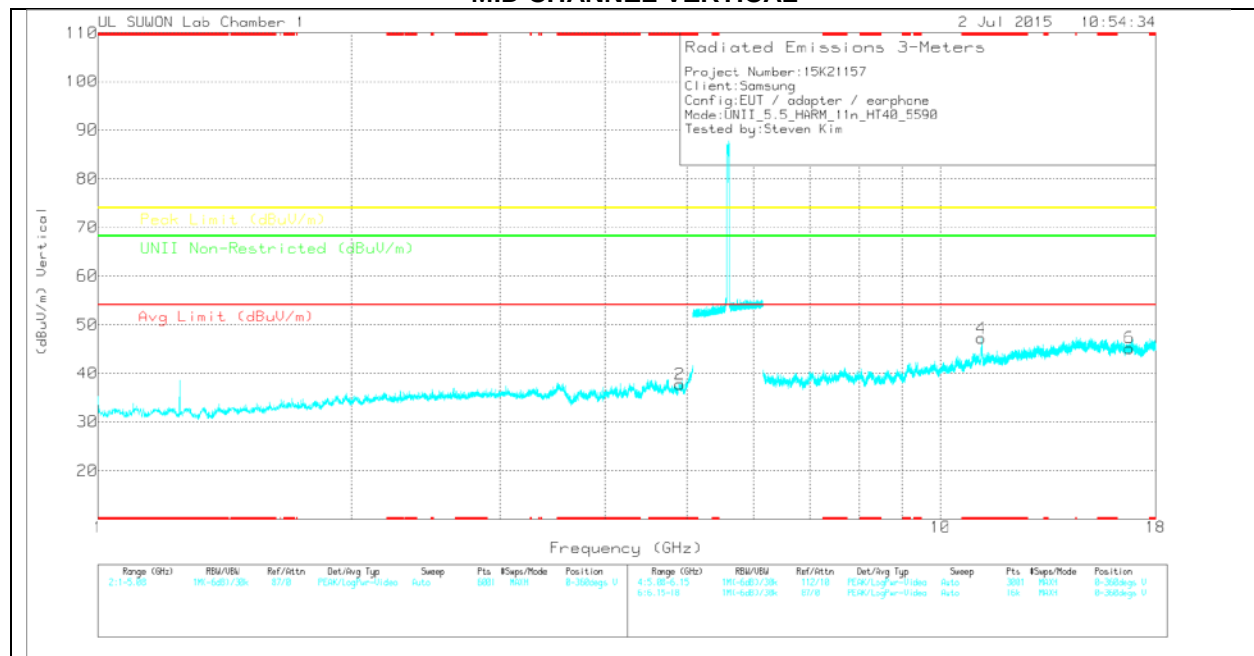

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00167 24)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.902	28.58	PK	33.9	-24.1	0	38.38	-	-	74	-35.62	-	-	0-360	200	H
2	* 4.902	27.93	PK	33.9	-24.1	0	37.73	-	-	74	-36.27	-	-	0-360	100	V
3	* 11.182	32.46	PK	38.1	-17.7	0	52.86	-	-	74	-21.14	-	-	0-360	200	H
5	16.77	20.12	PK	41	-15.5	0	45.62	-	-	-	-	68.2	-22.58	0-360	200	H
4	* 11.179	26.74	PK	38.1	-17.7	0	47.14	-	-	74	-26.86	-	-	0-360	200	V
6	16.769	19.68	PK	41	-15.5	0	45.18	-	-	-	-	68.2	-23.02	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.188	38.79	PK1	38.1	-17.7	0	59.19	-	-	74	-14.81	-	-	151	247	H
* 11.179	32.49	AD1	38.1	-17.7	.62	53.51	54	-49	-	-	-	-	151	247	H
* 11.188	39.54	PK1	38.1	-17.7	0	59.94	-	-	74	-14.06	-	-	189	200	V
* 11.181	25.18	AD1	38.1	-17.7	.62	46.2	54	-7.8	-	-	-	-	189	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

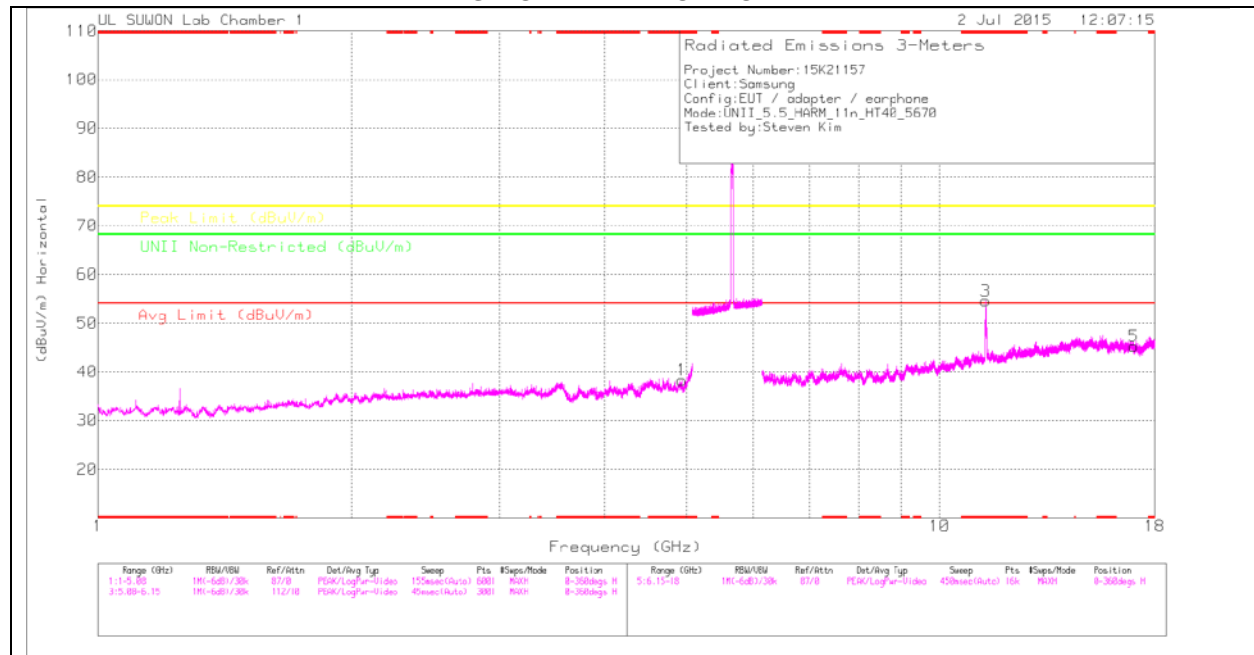

HIGH CHANNEL VERTICAL

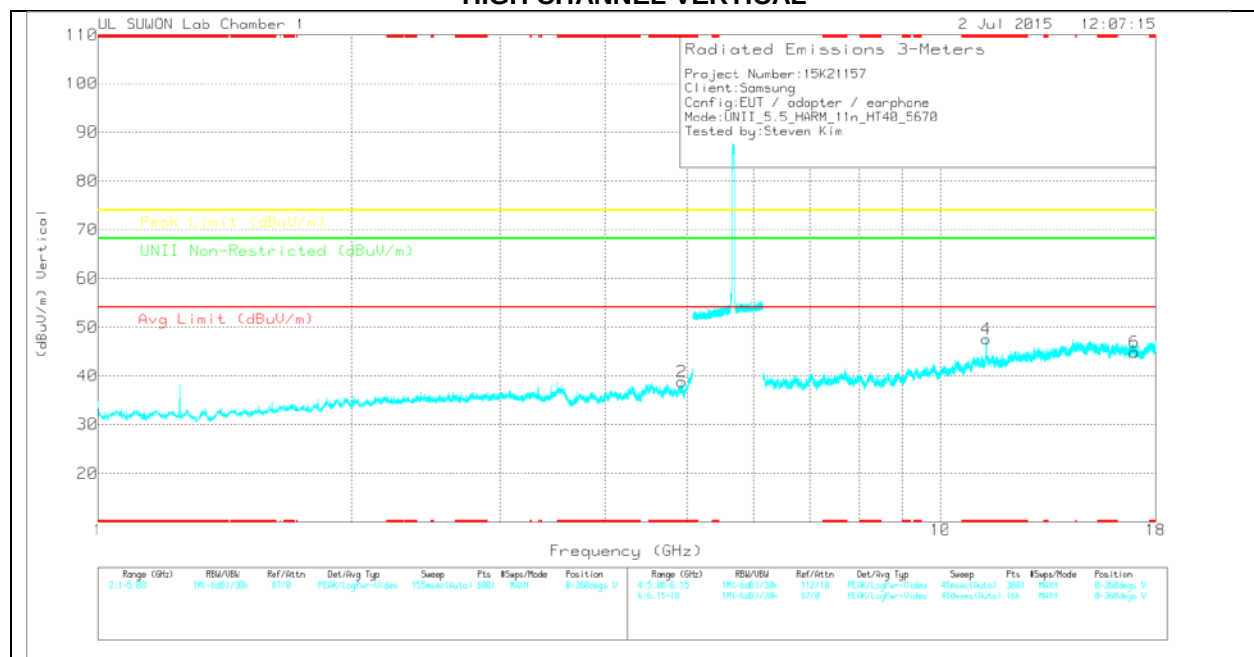

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.936	29.02	Avg	33.9	-24.6	0	38.32	-	-	74	-35.68	-	-	0-360	200	H
2	* 4.932	29.38	Avg	33.9	-24.5	0	38.78	-	-	74	-35.22	-	-	0-360	200	V
3	* 11.339	33.45	Avg	38.2	-17.1	0	54.55	-	-	74	-19.45	-	-	0-360	200	H
5	17.01	19.32	Avg	41.1	-15.2	0	45.22	-	-	-	-	68.2	-22.98	0-360	200	H
4	* 11.341	26.49	Avg	38.2	-17.1	0	47.59	-	-	74	-26.41	-	-	0-360	200	V
6	17.009	18.98	Avg	41.1	-15.2	0	44.88	-	-	-	-	68.2	-23.32	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.348	44.93	PK1	38.2	-17	0	66.13	-	-	74	-7.87	-	-	155	306	H
* 11.339	28.8	AD1	38.2	-17.1	.62	50.52	54	-3.48	-	-	-	-	155	306	H
* 11.336	36.49	PK1	38.2	-17.1	0	57.59	-	-	74	-16.41	-	-	125	263	V
* 11.339	25.24	AD1	38.2	-17.1	.62	46.96	54	-7.04	-	-	-	-	125	263	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.3.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.5 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

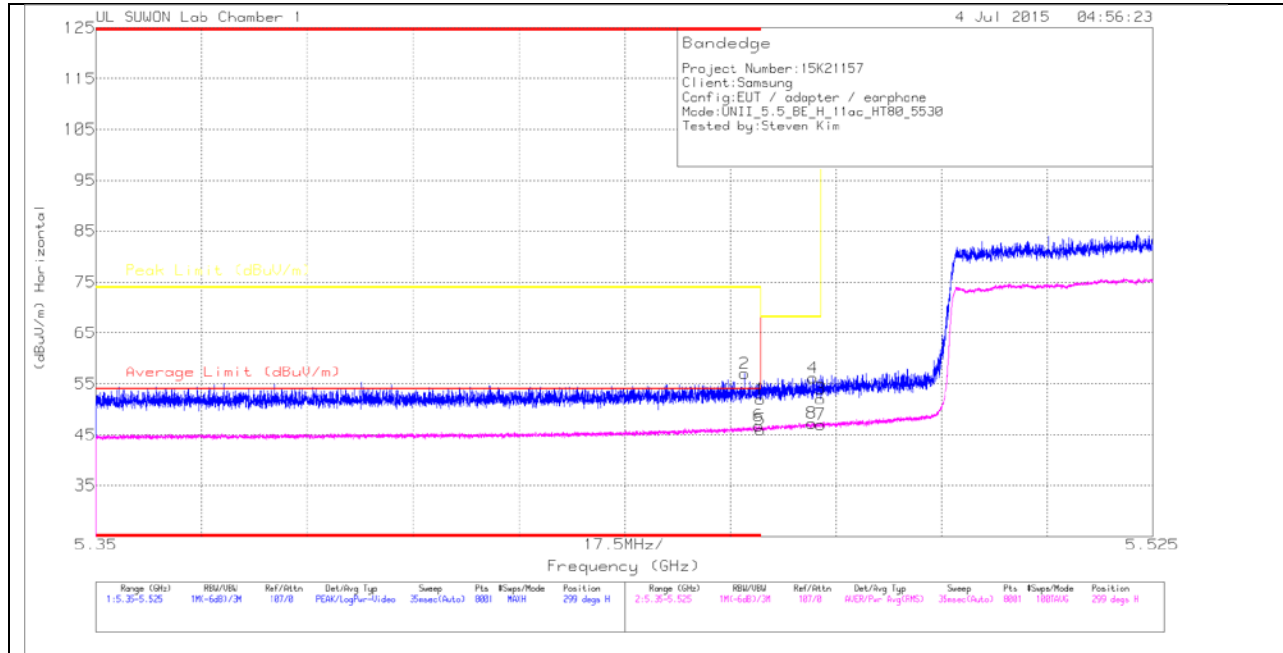

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.56	Pk		-19.2	0	51.96	-	-	74	-22.04	299	186	H
2	* 5.457	41.57	Pk		-19.2	0	56.97	-	-	74	-17.03	299	186	H
3	5.47	36.71	Pk		-19.2	0	52.11	-	-	68.2	-16.09	299	186	H
4	5.469	40.73	Pk		-19.2	0	56.13	-	-	68.2	-12.07	299	186	H
5	* 5.46	29.41	RMS		-19.2	1.16	45.97	54	-8.03	-	-	299	186	H
6	* 5.46	30.17	RMS		-19.2	1.16	46.73	54	-7.27	-	-	299	186	H
7	5.47	30.4	RMS		-19.2	1.16	46.96	-	-	-	-	299	186	H
8	5.469	30.73	RMS		-19.2	1.16	47.29	-	-	-	-	299	186	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

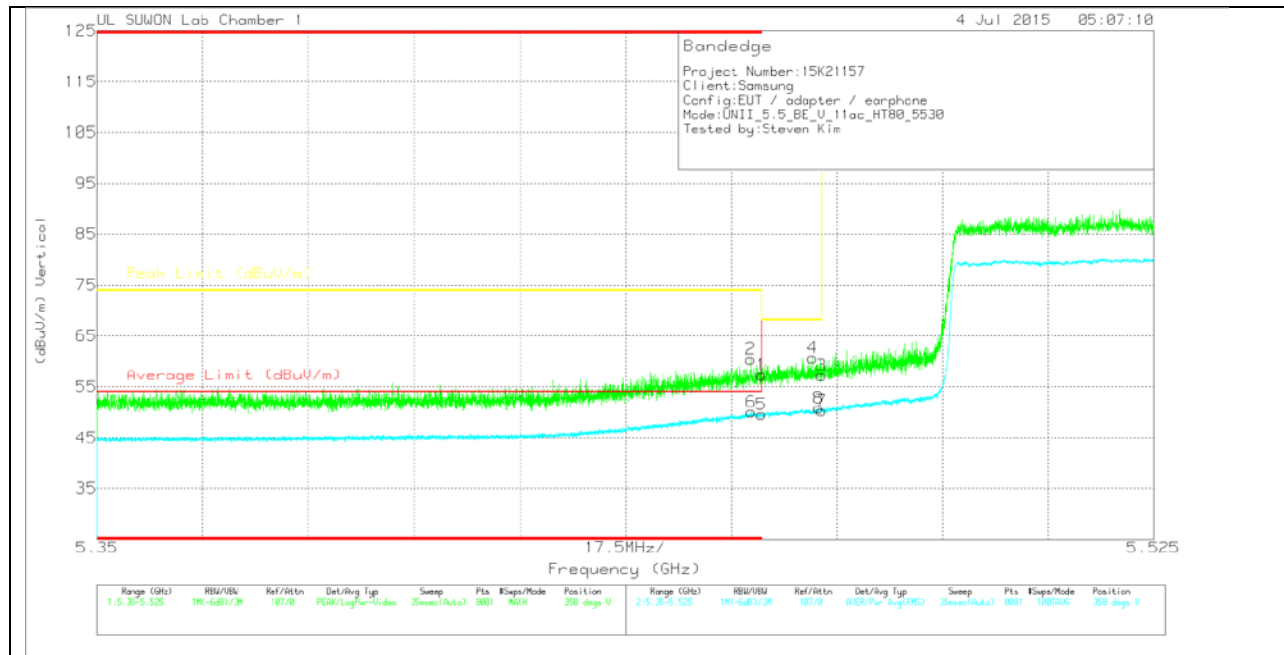

VERTICAL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.94	Pk		-19.2	0	57.34	-	-	74	-16.66	358	114	V
2	* 5.458	45.03	Pk		-19.2	0	60.43	-	-	74	-13.57	358	114	V
3	5.47	41.85	Pk		-19.2	0	57.25	-	-	68.2	-10.95	358	114	V
4	5.469	45.26	Pk		-19.2	0	60.66	-	-	68.2	-7.54	358	114	V
5	* 5.46	33.02	RMS		-19.2	1.16	49.58	54	-4.42	-	-	358	114	V
6	* 5.458	33.47	RMS		-19.2	1.16	50.03	54	-3.97	-	-	358	114	V
7	5.47	33.76	RMS		-19.2	1.16	50.32	-	-	-	-	358	114	V
8	5.469	34.31	RMS		-19.2	1.16	50.87	-	-	-	-	358	114	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

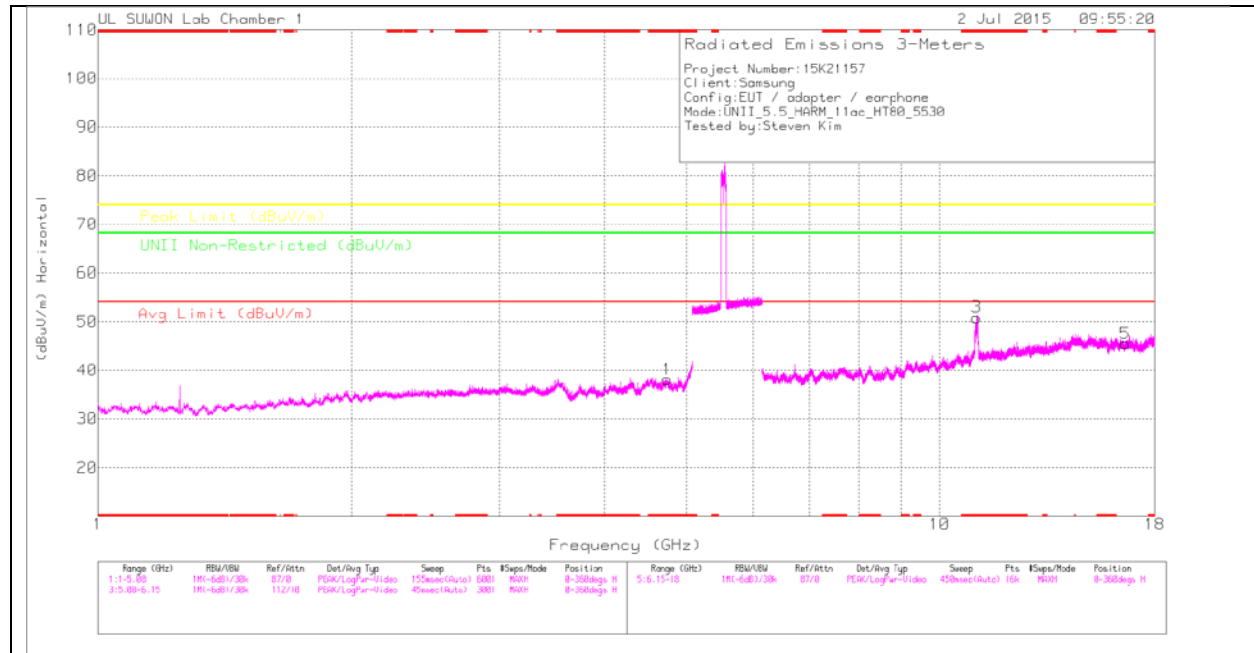

LOW CHANNEL VERTICAL

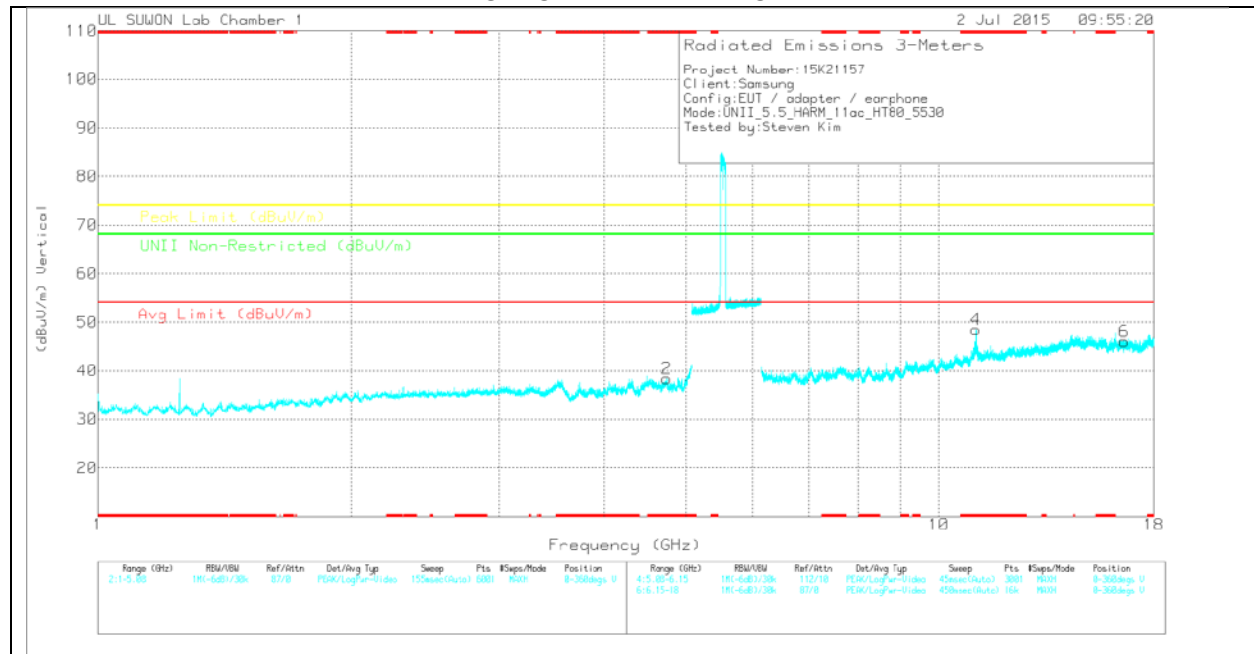

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.747	29.08	PK	33.8	-24.8	0	38.08	-	-	74	-35.92	-	-	0-360	100	H
2	* 4.751	29.17	PK	33.9	-24.7	0	38.37	-	-	74	-35.63	-	-	0-360	100	V
3	* 11.065	30.47	PK	38.1	-17.7	0	50.87	-	-	74	-23.13	-	-	0-360	200	H
5	16.589	20.38	PK	41	-15.9	0	45.48	-	-	-	-	68.2	-22.72	0-360	200	H
4	* 11.069	28.1	PK	38.1	-17.7	0	48.5	-	-	74	-25.5	-	-	0-360	200	V
6	16.589	20.94	PK	41	-15.9	0	46.04	-	-	-	-	68.2	-22.16	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.06	42.07	PK1	38.1	-17.7	0	62.47	-	-	74	-11.53	-	-	144	252	H
* 11.06	28.84	AD1	38.1	-17.7	1.16	50.4	54	-3.6	-	-	-	-	144	252	H
* 11.077	32.75	PK1	38.1	-17.6	0	53.25	-	-	74	-20.75	-	-	190	204	V
* 11.06	25.29	AD1	38.1	-17.7	1.16	46.85	54	-7.15	-	-	-	-	190	204	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

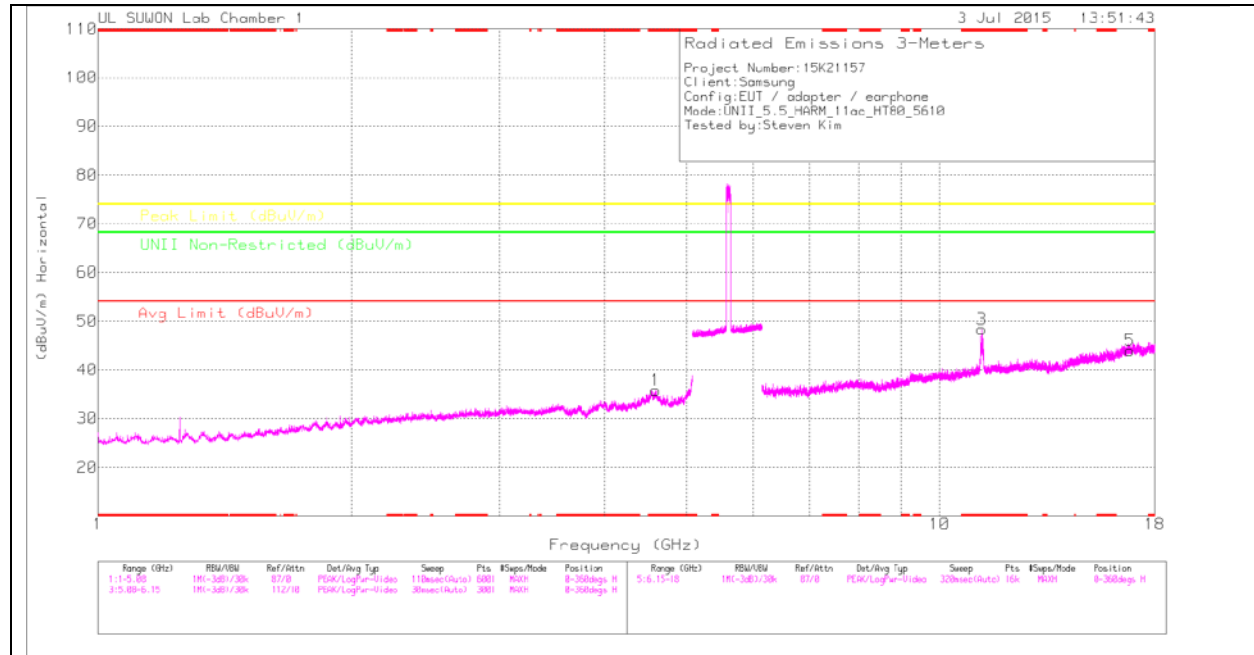

HIGH CHANNEL VERTICAL

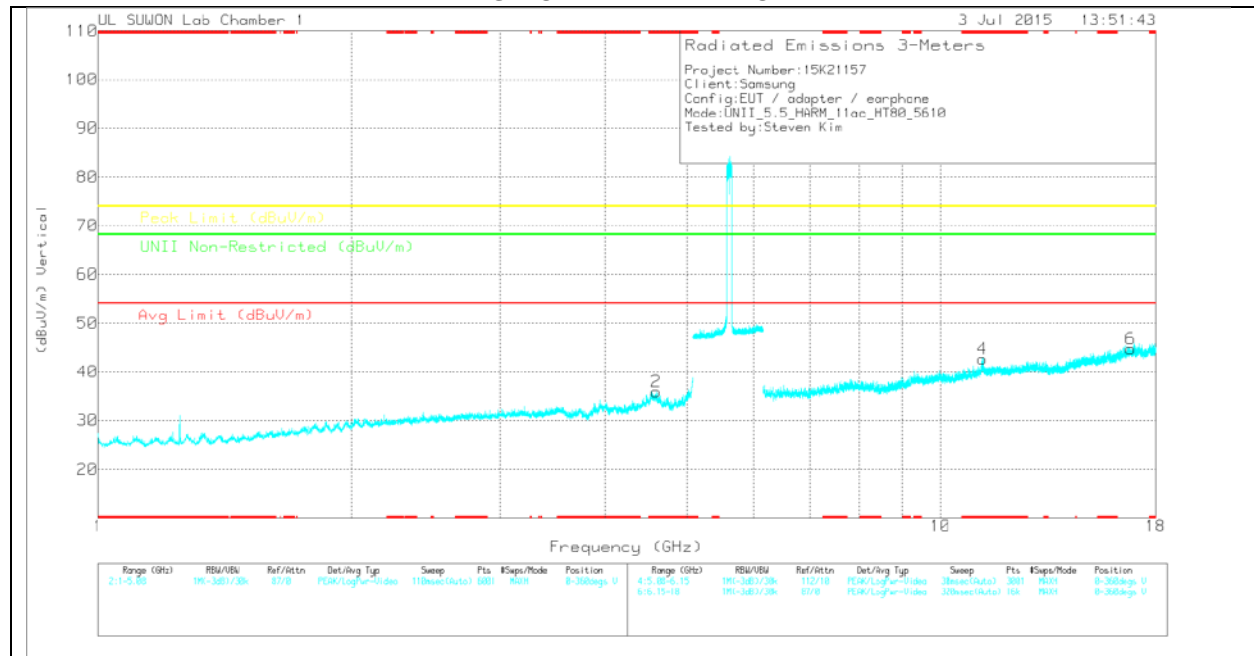

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_4_5G LP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.592	29.75	PK	33.9	-27.9	0	35.75	-	-	74	-38.25	-	-	0-360	100	H
2	* 4.596	29.95	PK	33.9	-27.9	0	35.95	-	-	74	-38.05	-	-	0-360	200	V
3	* 11.22	30.8	PK	38.4	-20.8	0	48.4	-	-	74	-25.6	-	-	0-360	200	H
5	16.829	19.49	PK	41.3	-16.9	0	43.89	-	-	-	-	68.2	-24.31	0-360	100	H
4	* 11.223	25.01	PK	38.4	-20.8	0	42.61	-	-	74	-31.39	-	-	0-360	200	V
6	16.831	20.3	PK	41.3	-16.9	0	44.7	-	-	-	-	68.2	-23.5	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	Path_5_6GH P	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.22	35.88	PK1	38.4	-20.8	0	53.48	-	-	74	-20.52	-	-	162	327	H
* 11.22	26.2	AD1	38.4	-20.8	1.16	44.96	54	-9.04	-	-	-	-	162	327	H
* 11.226	36.19	PK1	38.4	-20.8	0	53.79	-	-	74	-20.21	-	-	151	274	V
* 11.22	24.63	AD1	38.4	-20.8	1.16	43.39	54	-10.61	-	-	-	-	151	274	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.4. 5.8 GHz

11.4.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

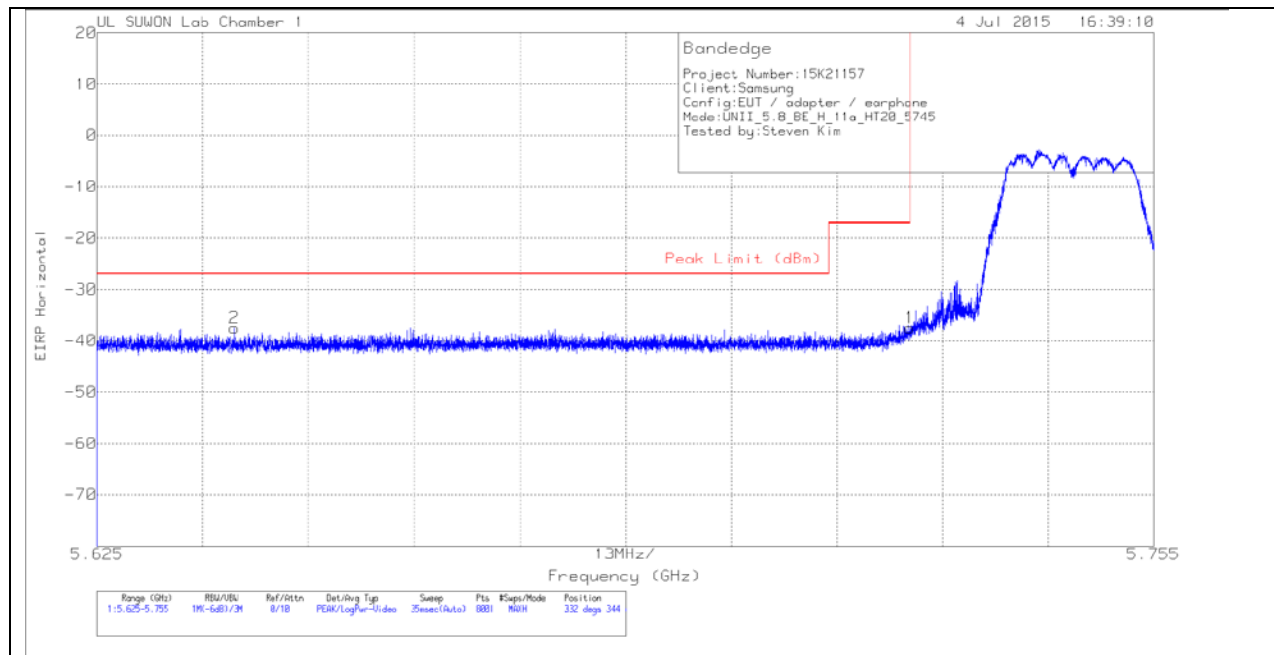

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-65.23	Pk	34.8	-18.8	11.8	0	-37.43	-17	-20.43	332	344	H
2	5.642	-65.12	Pk	34.8	-18.9	11.8	0	-37.42	-27	-10.42	332	344	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

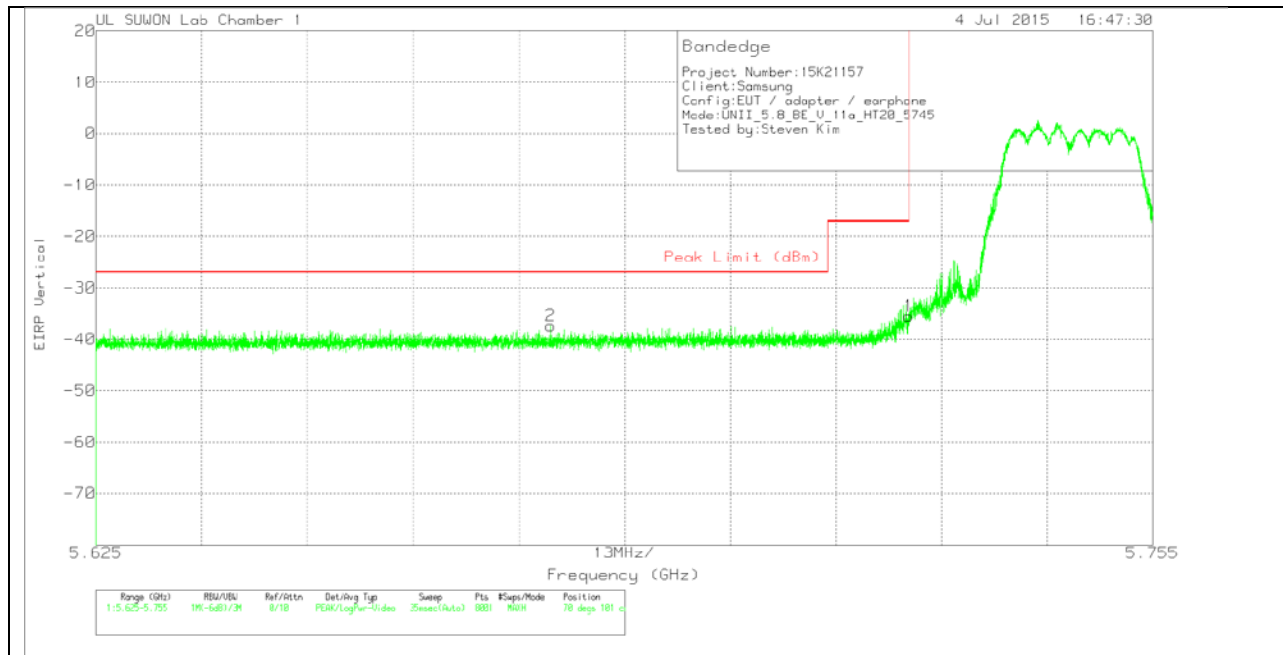

VERTICAL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-63.26	PK	34.8	-18.8	11.8	0	-35.46	-17	-18.46	70	101	V
2	5.681	-65.1	PK	34.8	-18.9	11.8	0	-37.4	-27	-10.4	70	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

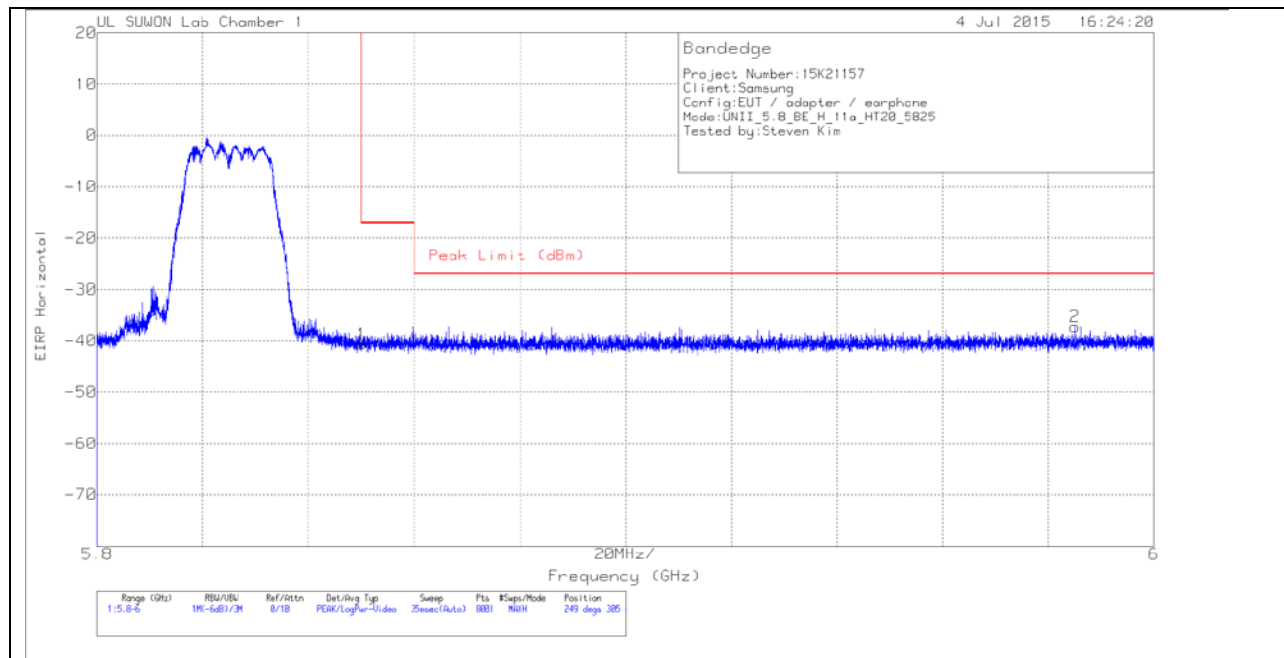

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.5	Pk	34.9	-18.9	11.8	0	-40.7	-17	-23.7	249	305	H
2	5.985	-65.36	Pk	34.9	-18.6	11.8	0	-37.26	-27	-10.26	249	305	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

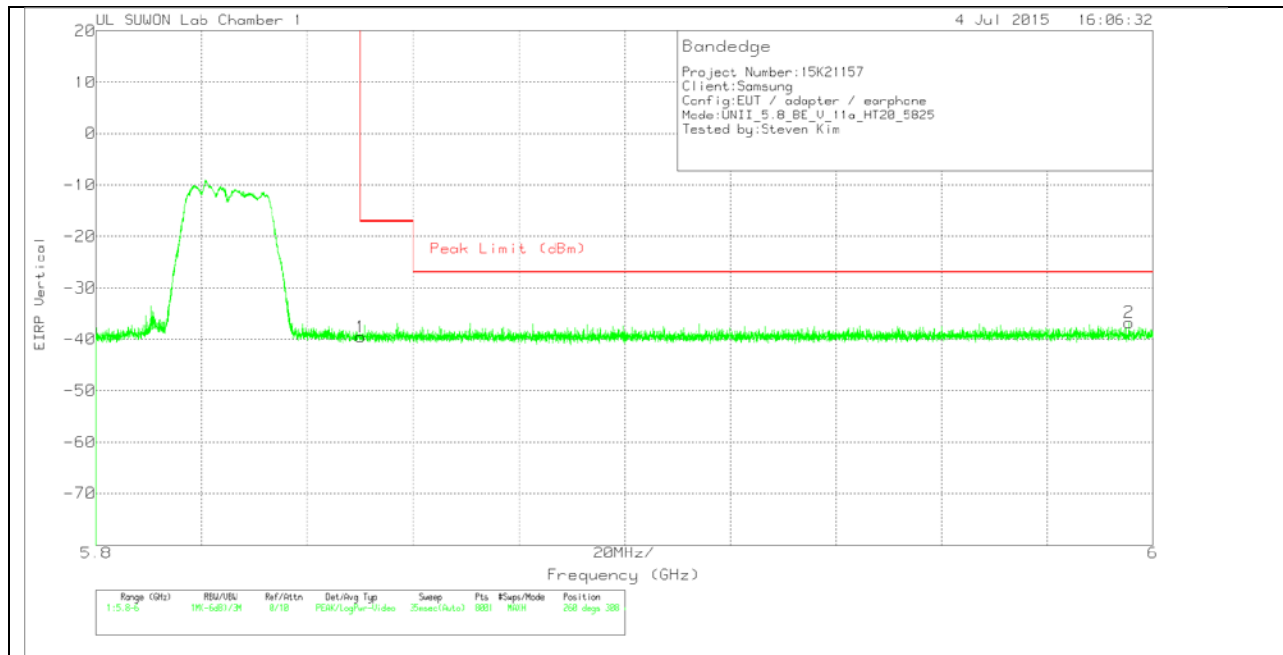

VERTICAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.4	Pk	34.9	-18.9	11.8	0	-39.6	-17	-22.6	260	308	V
2	5.996	-64.9	Pk	34.9	-18.5	11.8	0	-36.7	-27	-9.7	260	308	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

RMS - RMS detection

Straddle CHANNEL(144) HORIZONTAL

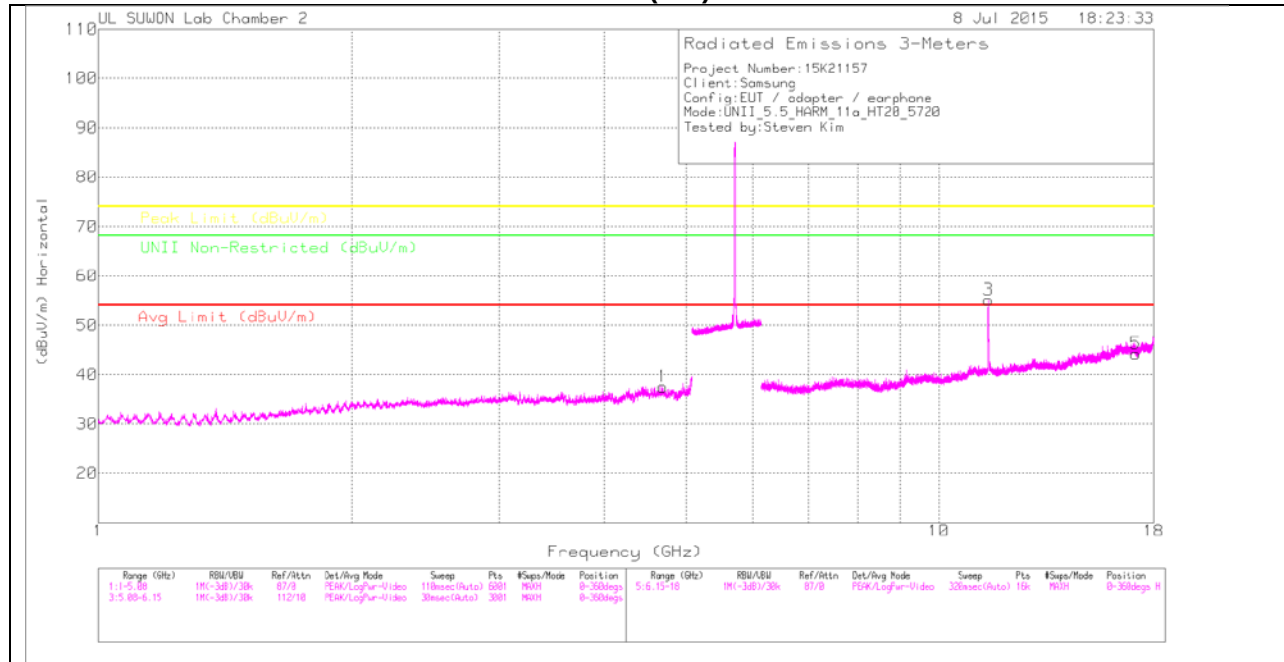

Straddle CHANNEL(144) VERTICAL

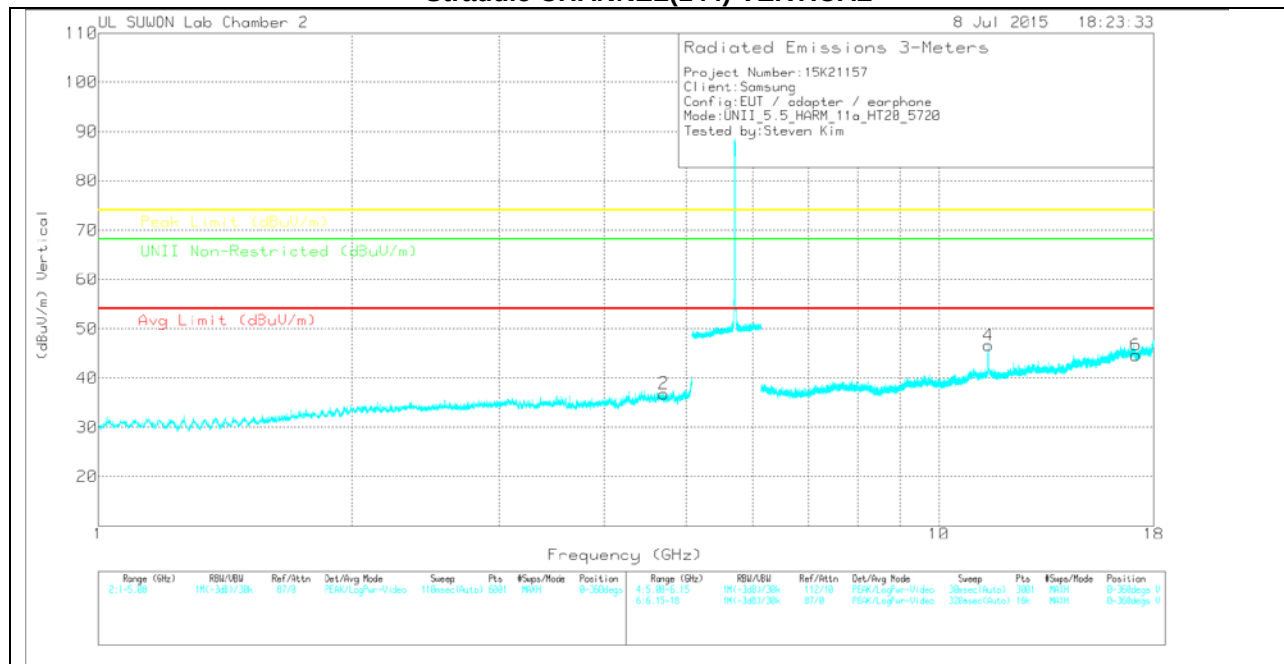

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Straddle CHANNEL(144) DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.69	28.91	PK	33.8	-25.2	0	37.51	-	-	74	-36.49	-	-	0-360	100	H
2	4.705	28.13	PK	33.8	-25.1	0	36.83	-	-	74	-37.17	-	-	0-360	200	V
3	11.439	34.26	PK	38.3	-17.4	0	55.16	-	-	74	-18.84	-	-	0-360	200	H
5	17.161	18.43	PK	41.1	-15.3	0	44.23	-	-	-	-	68.2	-23.97	0-360	200	H
4	11.438	25.71	PK	38.3	-17.4	0	46.61	-	-	74	-27.39	-	-	0-360	200	V
6	17.162	18.85	PK	41.1	-15.3	0	44.65	-	-	-	-	68.2	-23.55	0-360	200	V

PK – Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016872 4)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11.438	46.22	PK-U	38.3	-17.4	0	67.12	-	-	74	-6.88	-	-	158	164	H
11.439	31.16	ADR	38.3	-17.4	.3	52.36	54	-1.64	-	-	-	-	158	164	H
11.439	38.67	PK-U	38.3	-17.4	0	59.57	-	-	74	-14.43	-	-	142	141	V
11.438	24.85	ADR	38.3	-17.4	.3	46.05	54	-7.95	-	-	-	-	142	141	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

LOW CHANNEL HORIZONTAL

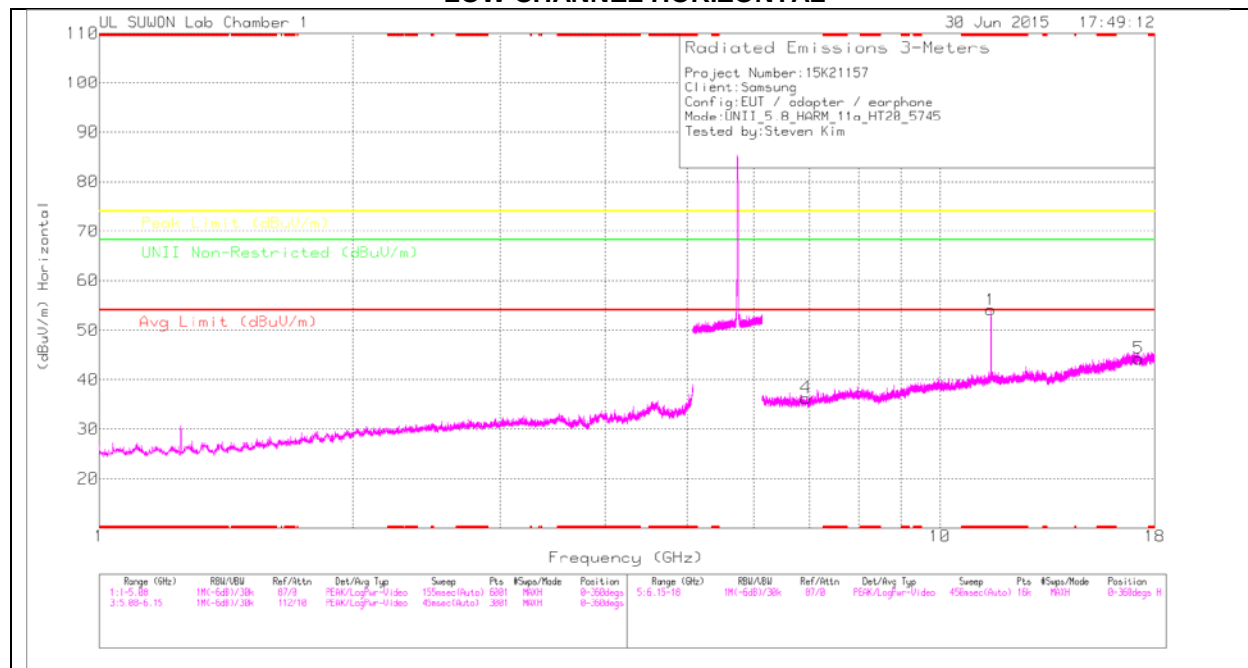

LOW CHANNEL VERTICAL

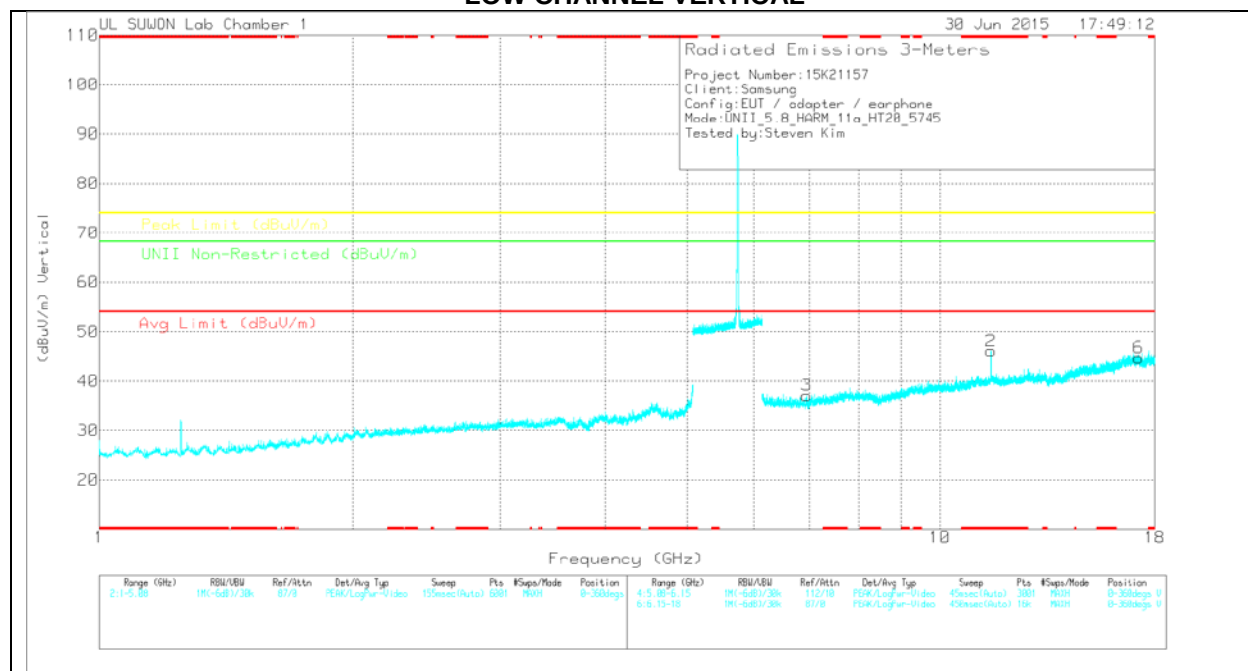

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_5_6G HP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.489	36.21	PK	38.6	-20.7	0	54.11	-	-	74	-19.89	-	-	0-360	200	H
4	6.93	26.21	PK	35.7	-25.6	0	36.31	-	-	-	-	68.2	-31.89	0-360	100	H
5	17.235	18.66	PK	41.2	-15.6	0	44.26	-	-	-	-	68.2	-23.94	0-360	100	H
2	* 11.493	28.16	PK	38.6	-20.7	0	46.06	-	-	74	-27.94	-	-	0-360	100	V
3	6.942	27.01	PK	35.7	-25.6	0	37.11	-	-	-	-	68.2	-31.09	0-360	200	V
6	17.234	19.11	PK	41.2	-15.6	0	44.71	-	-	-	-	68.2	-23.49	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	Path_5_6GH P	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.489	48.26	PK1	38.6	-20.7	0	66.16	-	-	74	-7.84	-	-	152	342	H
* 11.488	34.67	AD1	38.6	-20.7	.3	52.87	54	-1.13	-	-	-	-	152	342	H
* 11.488	39.42	PK1	38.6	-20.7	0	57.32	-	-	74	-16.68	-	-	153	298	V
* 11.488	25.65	AD1	38.6	-20.7	.3	43.85	54	-10.15	-	-	-	-	153	298	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL

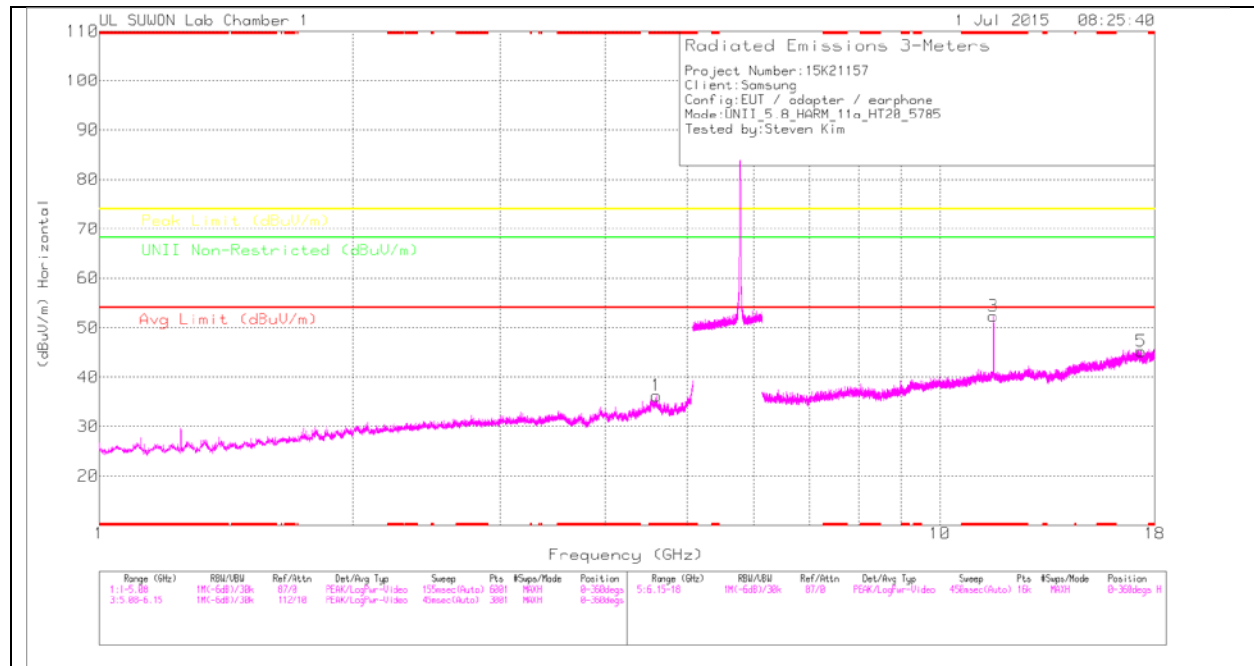

MID CHANNEL VERTICAL

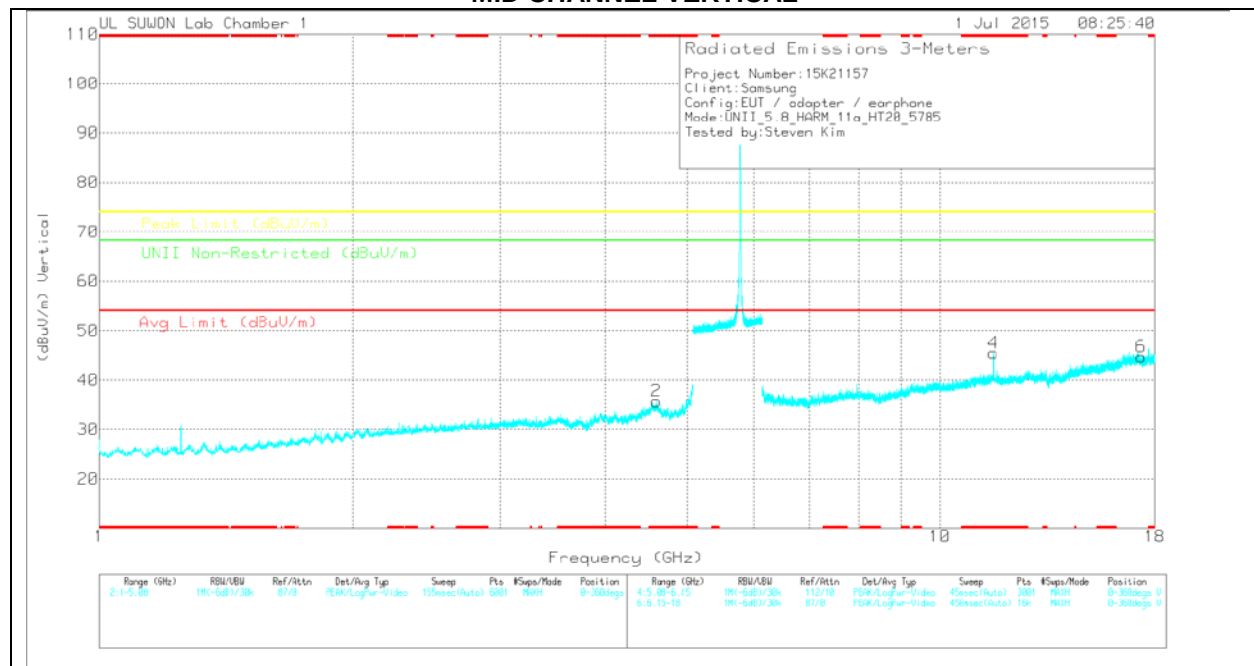

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_4_5G LP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.594	30.24	PK	33.9	-27.9	0	36.24	-	-	74	-37.76	-	-	0-360	200	H
2	* 4.597	29.74	PK	33.9	-27.9	0	35.74	-	-	74	-38.26	-	-	0-360	100	V
3	* 11.569	34.25	PK	38.7	-20.6	0	52.35	-	-	74	-21.65	-	-	0-360	200	H
5	17.357	19.71	PK	41.2	-15.7	0	45.21	-	-	-	-	68.2	-22.99	0-360	200	H
4	* 11.573	27.27	PK	38.7	-20.5	0	45.47	-	-	74	-28.53	-	-	0-360	200	V
6	17.353	19.23	PK	41.2	-15.7	0	44.73	-	-	-	-	68.2	-23.47	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.568	44.06	PK1	38.7	-20.6	0	62.16	-	-	74	-11.84	-	-	152	292	H
* 11.569	34.71	AD1	38.7	-20.6	.3	53.11	54	-8.9	-	-	-	-	152	292	H
* 11.569	38.9	PK1	38.7	-20.6	0	57	-	-	74	-17	-	-	126	267	V
* 11.568	26.7	AD1	38.7	-20.6	.3	45.1	54	-8.9	-	-	-	-	126	267	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

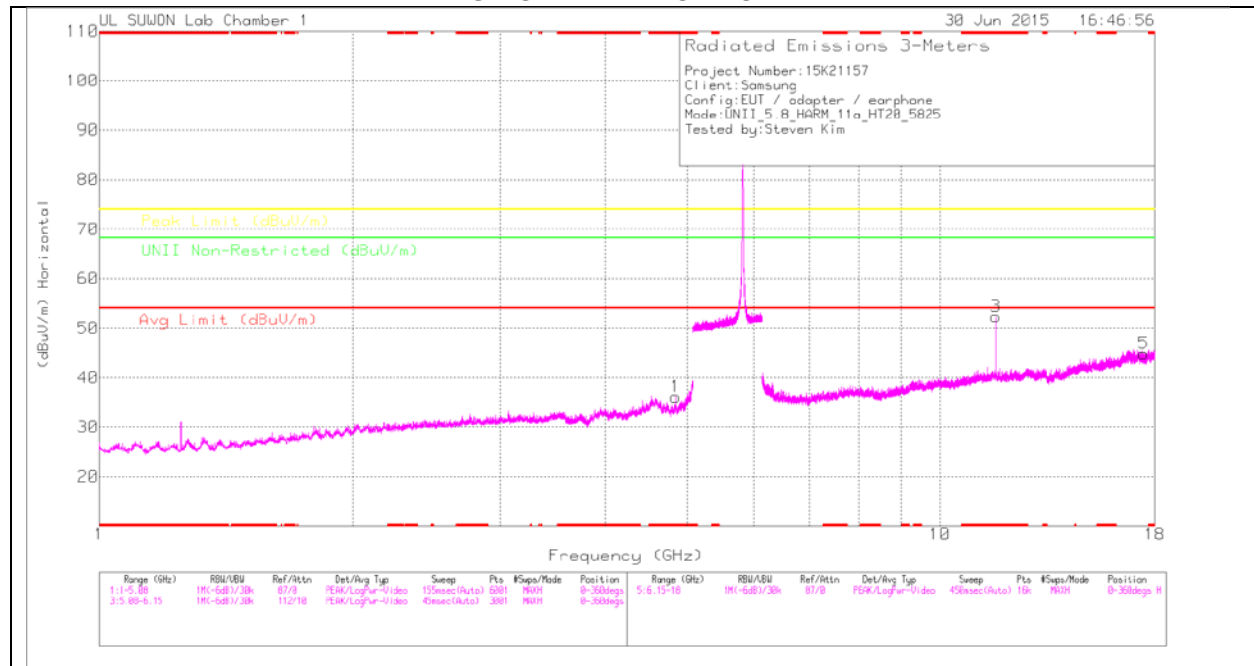

HIGH CHANNEL VERTICAL

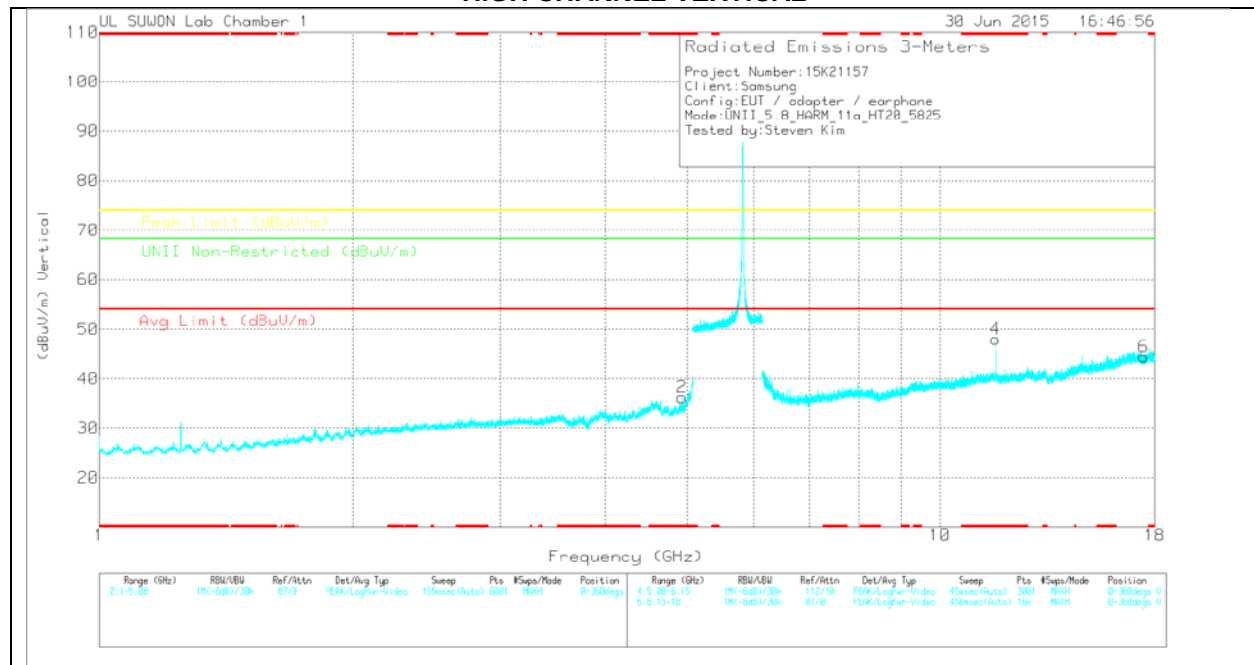

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_4_5G LP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.847	30.01	PK	34	-27.9	0	36.11	-	-	74	-37.89	-	-	0-360	100	H
2	* 4.931	30.24	PK	34	-28	0	36.24	-	-	74	-37.76	-	-	0-360	100	V
3	* 11.653	34.27	PK	38.7	-20.6	0	52.37	-	-	74	-21.63	-	-	0-360	200	H
5	17.476	19.28	PK	41.1	-15.5	0	44.88	-	-	-	-	68.2	-23.32	0-360	200	H
4	* 11.649	29.93	PK	38.7	-20.6	0	48.03	-	-	74	-25.97	-	-	0-360	100	V
6	17.476	18.84	PK	41.1	-15.5	0	44.44	-	-	-	-	68.2	-23.76	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.648	43.83	PK1	38.7	-20.6	0	61.93	-	-	74	-12.07	-	-	156	277	H
* 11.649	33.1	AD1	38.7	-20.6	.3	51.5	54	-2.5	-	-	-	-	156	277	H
* 11.649	36.92	PK1	38.7	-20.6	0	55.02	-	-	74	-18.98	-	-	81	294	V
* 11.648	24.4	AD1	38.7	-20.6	.3	42.8	54	-11.2	-	-	-	-	81	294	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.4.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

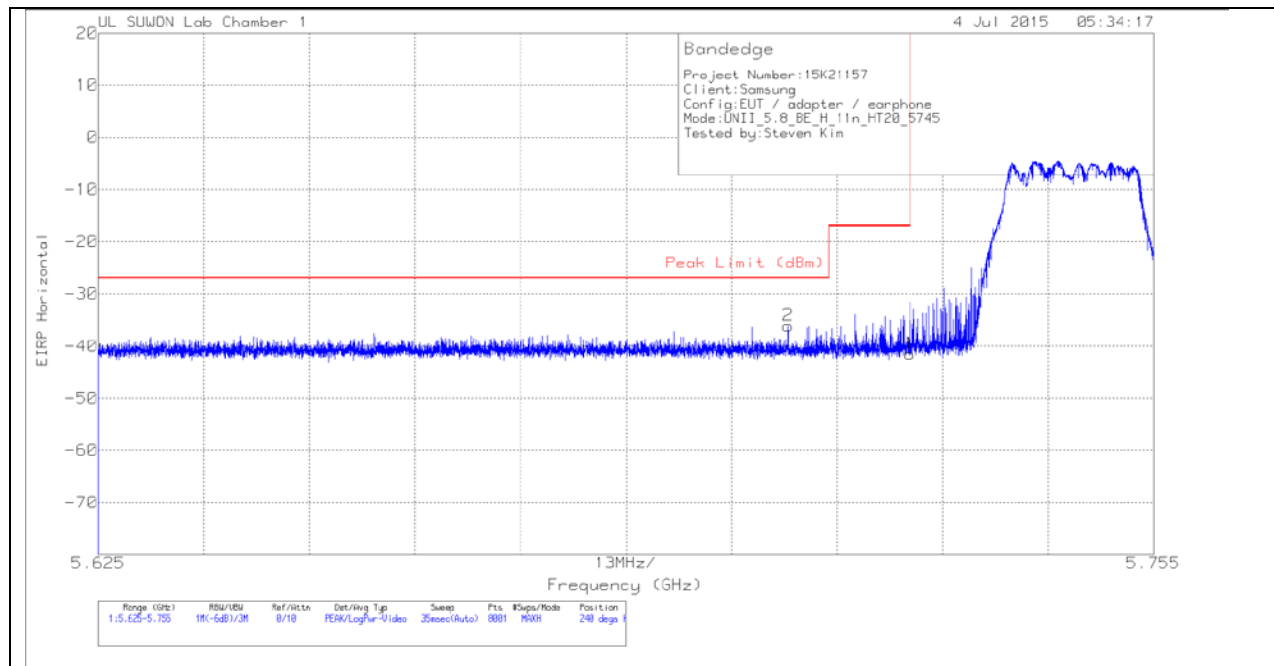

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-69.33	Pk	34.8	-18.8	11.8	0	-41.53	-17	-24.53	240	293	H
2	5.71	-63.88	Pk	34.8	-18.8	11.8	0	-36.08	-27	-9.08	240	293	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

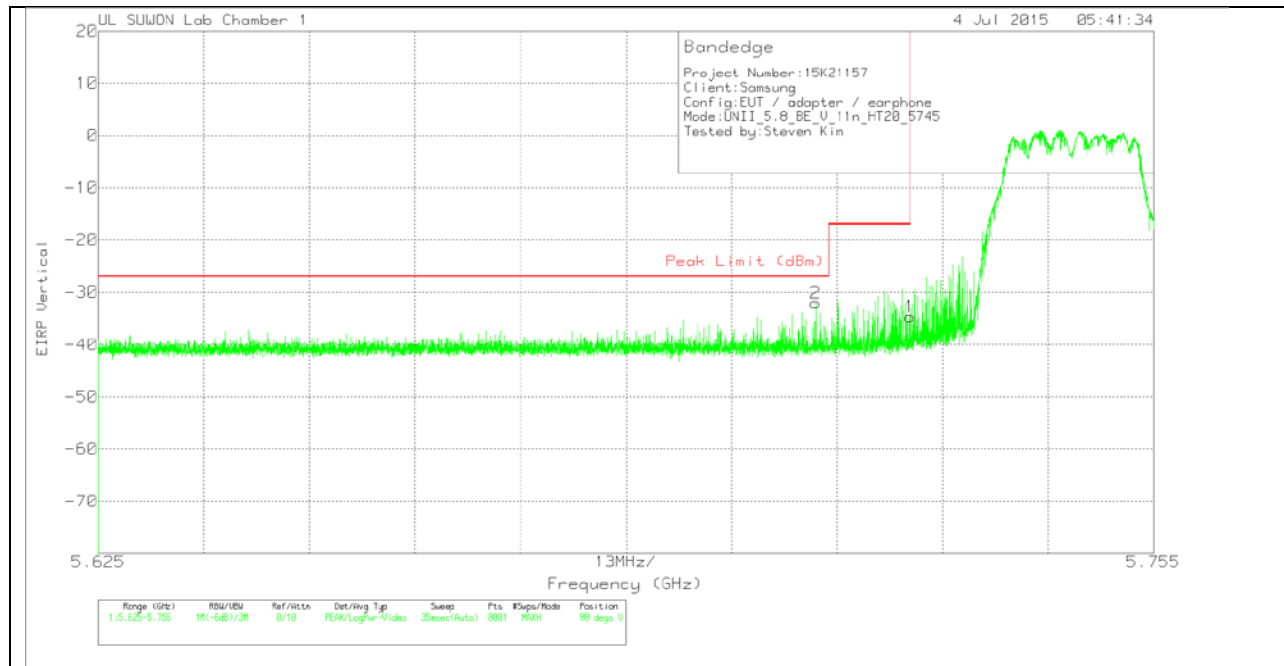

VERTICAL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-62.44	PK	34.8	-18.8	11.8	0	-34.64	-17	-17.64	88	195	V
2	5.713	-59.86	PK	34.8	-18.8	11.8	0	-32.06	-27	-5.06	88	195	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

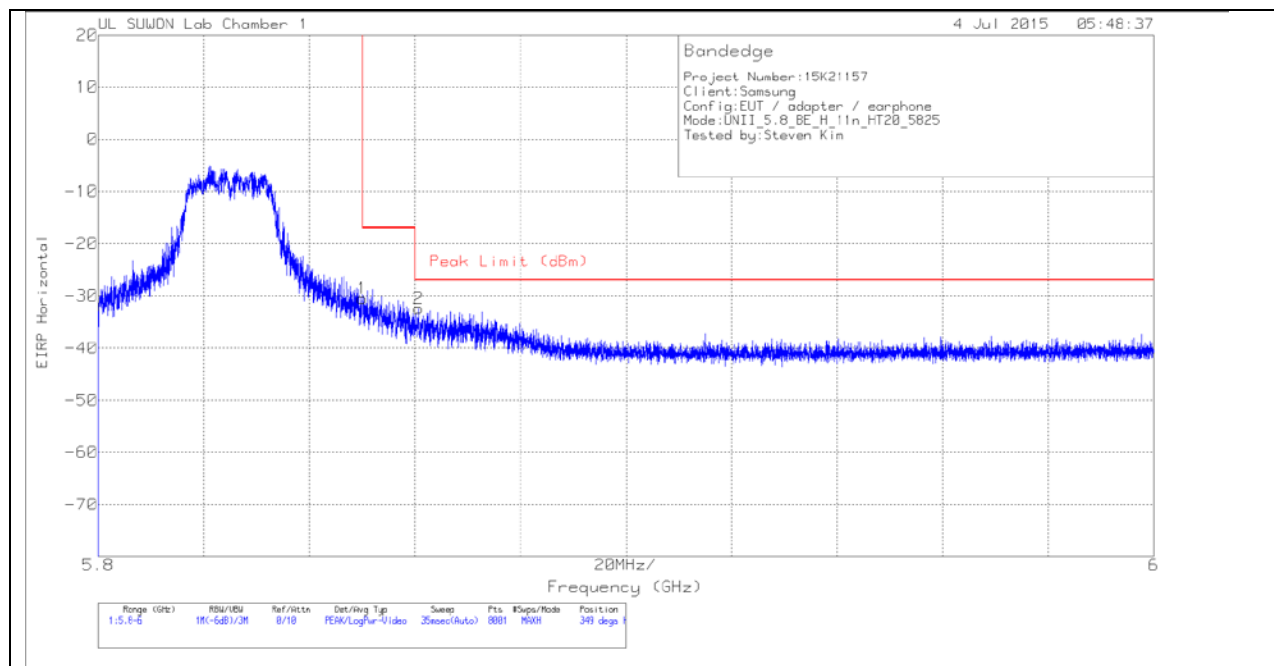

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-58.27	Pk	34.9	-18.9	11.8	0	-30.47	-17	-13.47	349	327	H
2	5.861	-60.23	Pk	34.9	-18.9	11.8	0	-32.43	-27	-5.43	349	327	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

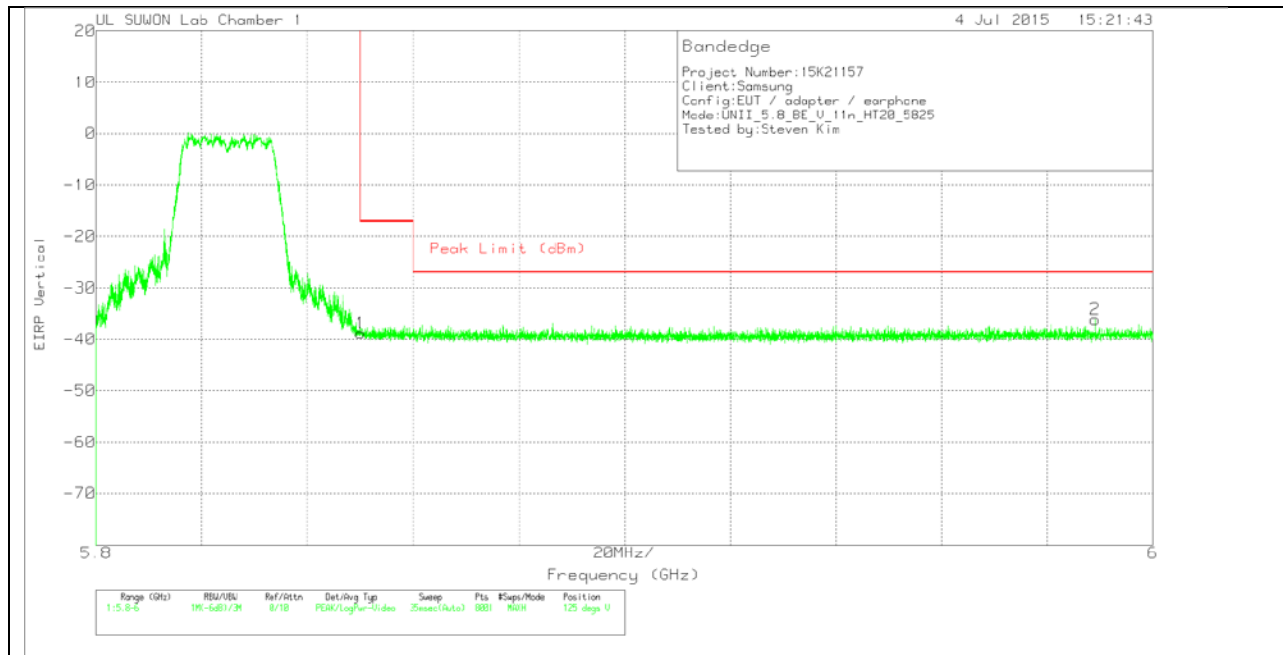

VERTICAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.58	Pk	34.9	-18.9	11.8	0	-38.78	-17	-21.78	125	100	V
2	5.989	-64.27	Pk	34.9	-18.6	11.8	0	-36.17	-27	-9.17	125	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

RMS - RMS detection

Straddle CHANNEL(144) HORIZONTAL

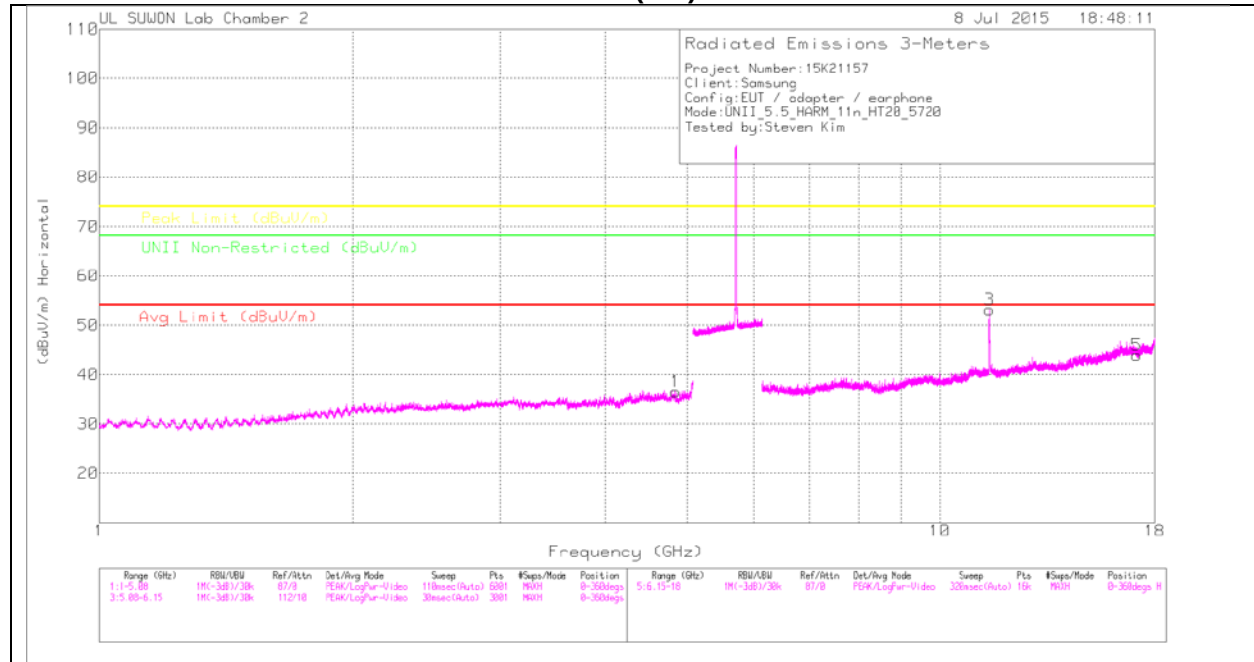

Straddle CHANNEL(144) VERTICAL

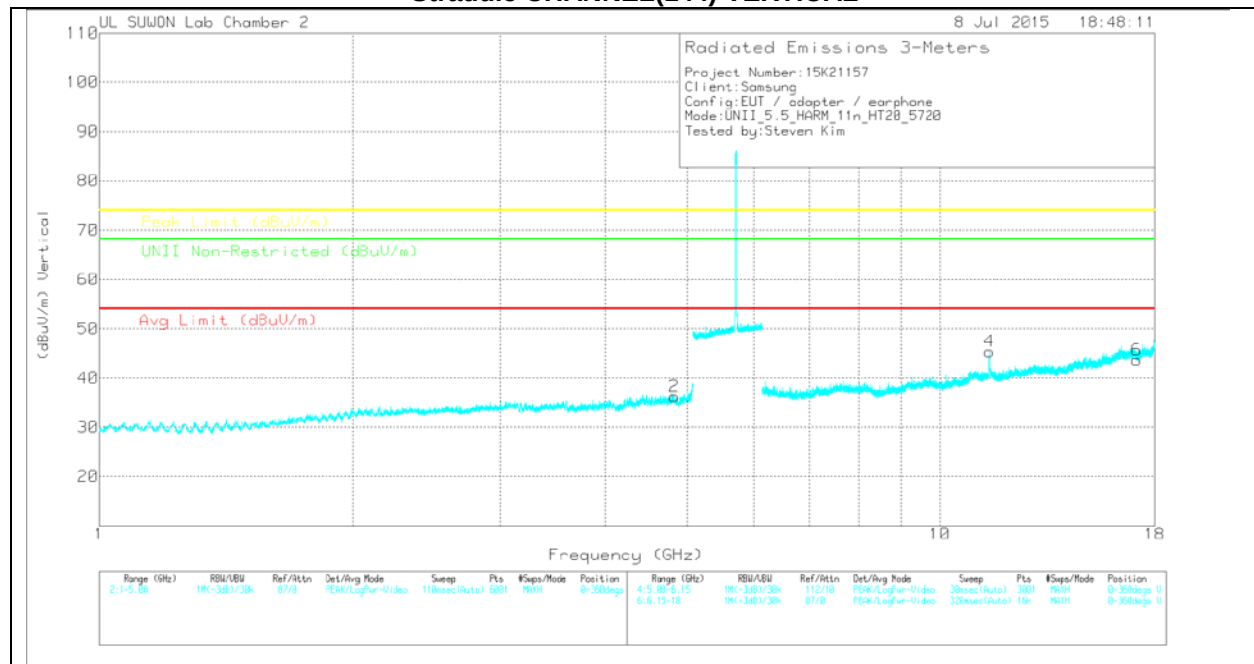

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Straddle CHANNEL(144) DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8724_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.846	27.12	PK	33.9	-24.5	0	36.52	-	-	74	-37.48	-	-	0-360	100	H
2	4.834	27.07	PK	33.9	-24.7	0	36.27	-	-	74	-37.73	-	-	0-360	100	V
3	11.438	32.23	PK	38.3	-17.4	0	53.13	-	-	74	-20.87	-	-	0-360	200	H
5	17.16	18.09	PK	41.1	-15.3	0	43.89	-	-	-	-	68.2	-24.31	0-360	100	H
4	11.439	24.48	PK	38.3	-17.4	0	45.38	-	-	74	-28.62	-	-	0-360	200	V
6	17.16	17.86	PK	41.1	-15.3	0	43.66	-	-	-	-	68.2	-24.54	0-360	200	V

PK – Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016872 4)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11.442	44.3	PK-U	38.3	-17.4	0	65.2	-	-	74	-8.8	-	-	162	172	H
11.439	29.98	ADR	38.3	-17.4	.32	51.2	54	-2.8	-	-	-	-	162	172	H
11.439	37.22	PK-U	38.3	-17.4	0	58.12	-	-	74	-15.88	-	-	133	252	V
11.441	23.92	ADR	38.3	-17.4	.32	45.14	54	-8.86	-	-	-	-	133	252	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

LOW CHANNEL HORIZONTAL

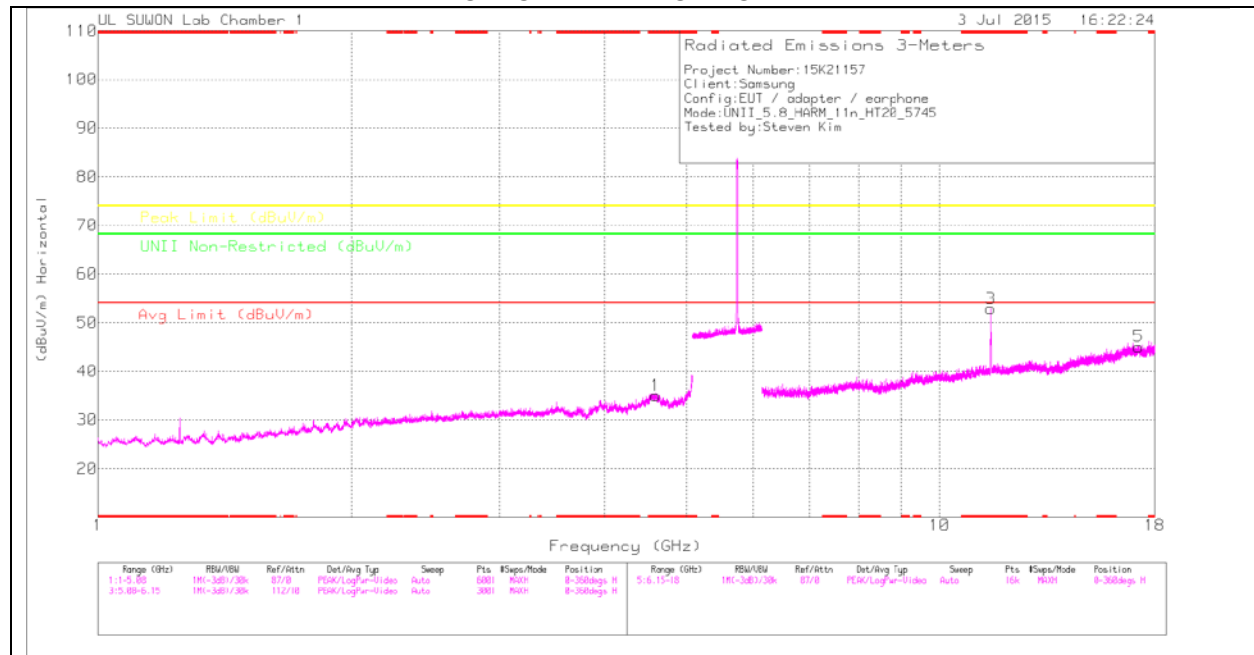

LOW CHANNEL VERTICAL

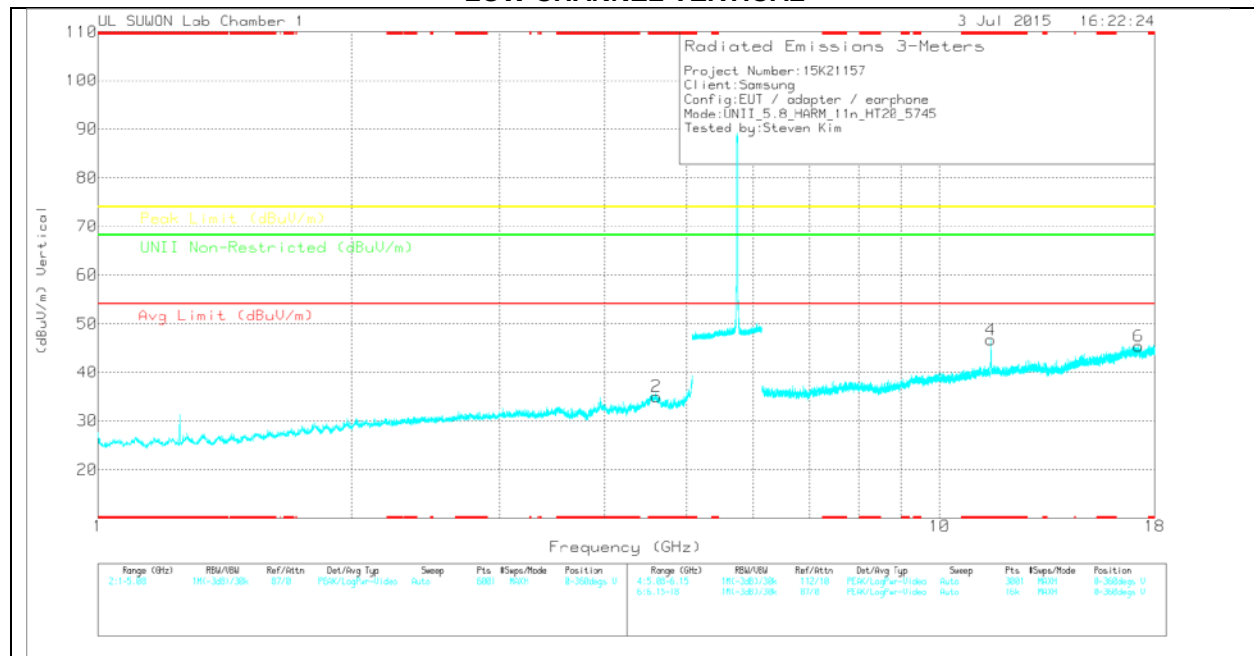

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_4_5G LP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.592	29.06	PK	33.9	-27.9	0	35.06	-	-	74	-38.94	-	-	0-360	200	H
2	* 4.603	29.17	PK	33.9	-28	0	35.07	-	-	74	-38.93	-	-	0-360	100	V
3	* 11.494	35.02	PK	38.6	-20.7	0	52.92	-	-	74	-21.08	-	-	0-360	200	H
5	17.238	19.45	PK	41.2	-15.6	0	45.05	-	-	-	-	68.2	-23.15	0-360	100	H
4	* 11.489	28.71	PK	38.6	-20.7	0	46.61	-	-	74	-27.39	-	-	0-360	200	V
6	17.236	19.75	PK	41.2	-15.6	0	45.35	-	-	-	-	68.2	-22.85	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.492	43.94	PK1	38.6	-20.7	0	61.84	-	-	74	-12.16	-	-	167	299	H
* 11.489	32.2	AD1	38.6	-20.7	.32	50.42	54	-3.58	-	-	-	-	167	299	H
* 11.492	40.33	PK1	38.6	-20.7	0	58.23	-	-	74	-15.77	-	-	70	233	V
* 11.489	25.95	AD1	38.6	-20.7	.32	44.17	54	-9.83	-	-	-	-	70	233	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL

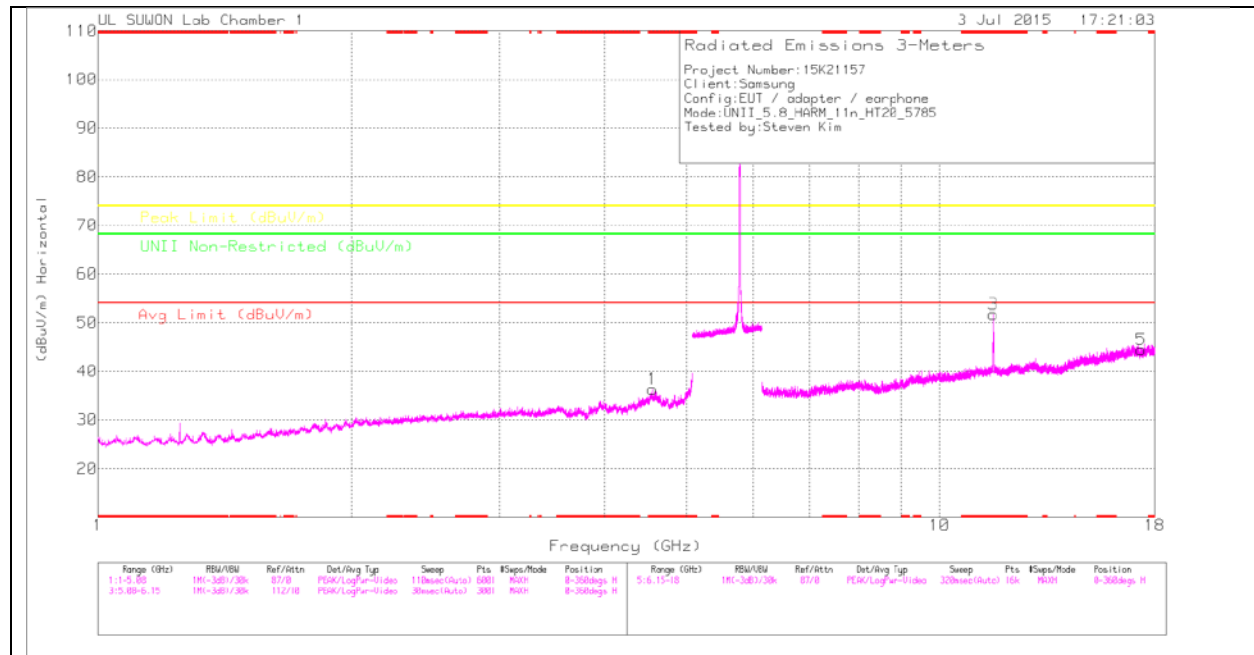

MID CHANNEL VERTICAL

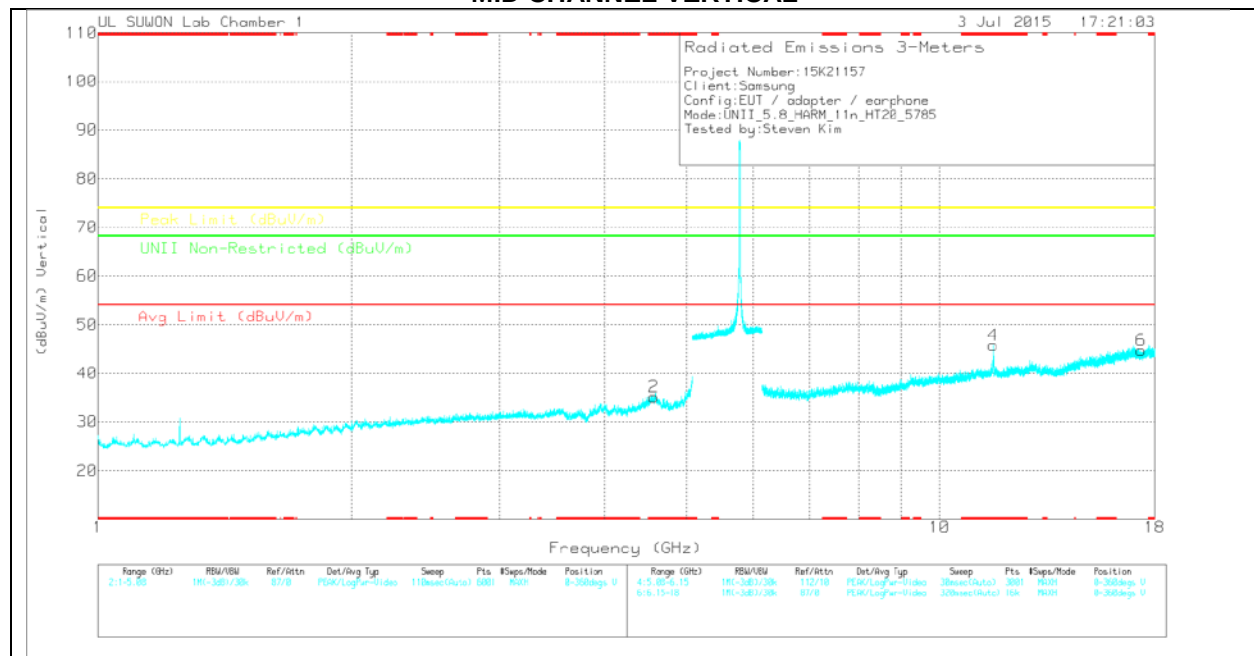

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_4_5G LP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.555	30.18	PK	33.9	-27.8	0	36.28	-	-	74	-37.72	-	-	0-360	100	H
2	* 4.569	29.07	PK	33.9	-27.8	0	35.17	-	-	74	-38.83	-	-	0-360	100	V
3	* 11.57	33.46	PK	38.7	-20.5	0	51.66	-	-	74	-22.34	-	-	0-360	200	H
5	17.356	18.95	PK	41.2	-15.7	0	44.45	-	-	-	-	68.2	-23.75	0-360	100	H
4	* 11.57	27.59	PK	38.7	-20.5	0	45.79	-	-	74	-28.21	-	-	0-360	100	V
6	17.355	19.26	PK	41.2	-15.7	0	44.76	-	-	-	-	68.2	-23.44	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_5GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.572	42.22	PK1	38.7	-20.5	0	60.42	-	-	74	-13.58	-	-	133	295	H
* 11.569	32.29	AD1	38.7	-20.6	.32	50.71	54	-3.29	-	-	-	-	133	295	H
* 11.572	37.85	PK1	38.7	-20.5	0	56.05	-	-	74	-17.95	-	-	75	282	V
* 11.57	26.42	AD1	38.7	-20.5	.32	44.94	54	-9.06	-	-	-	-	75	282	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

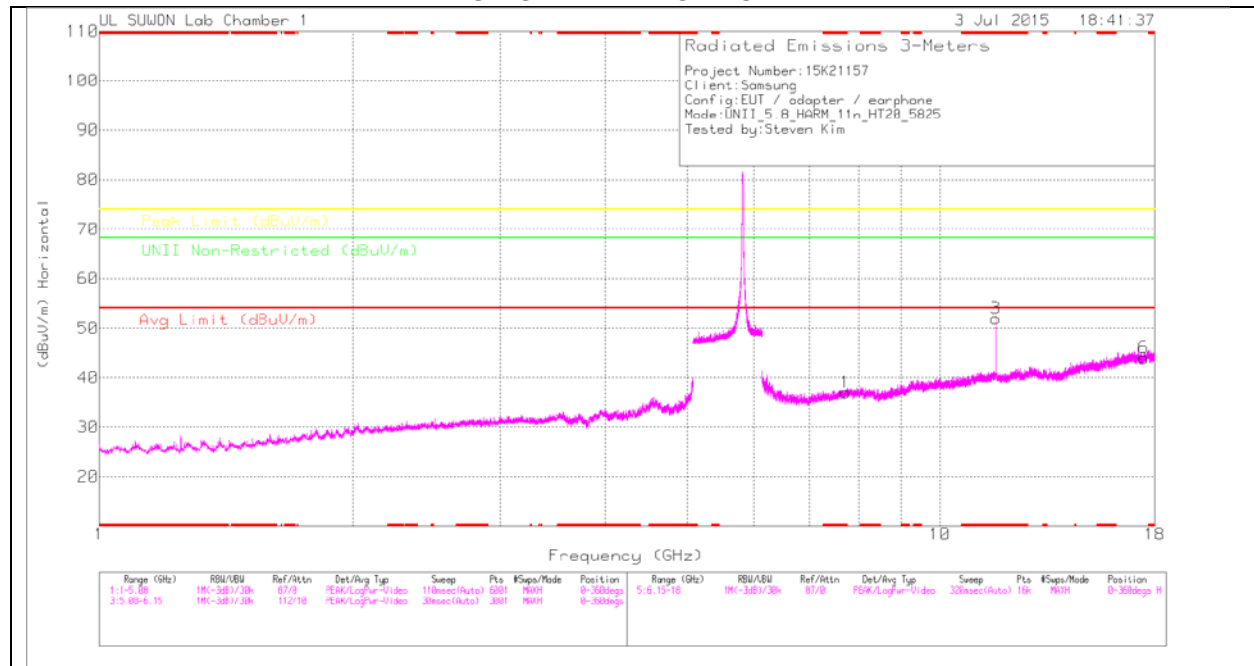

HIGH CHANNEL VERTICAL

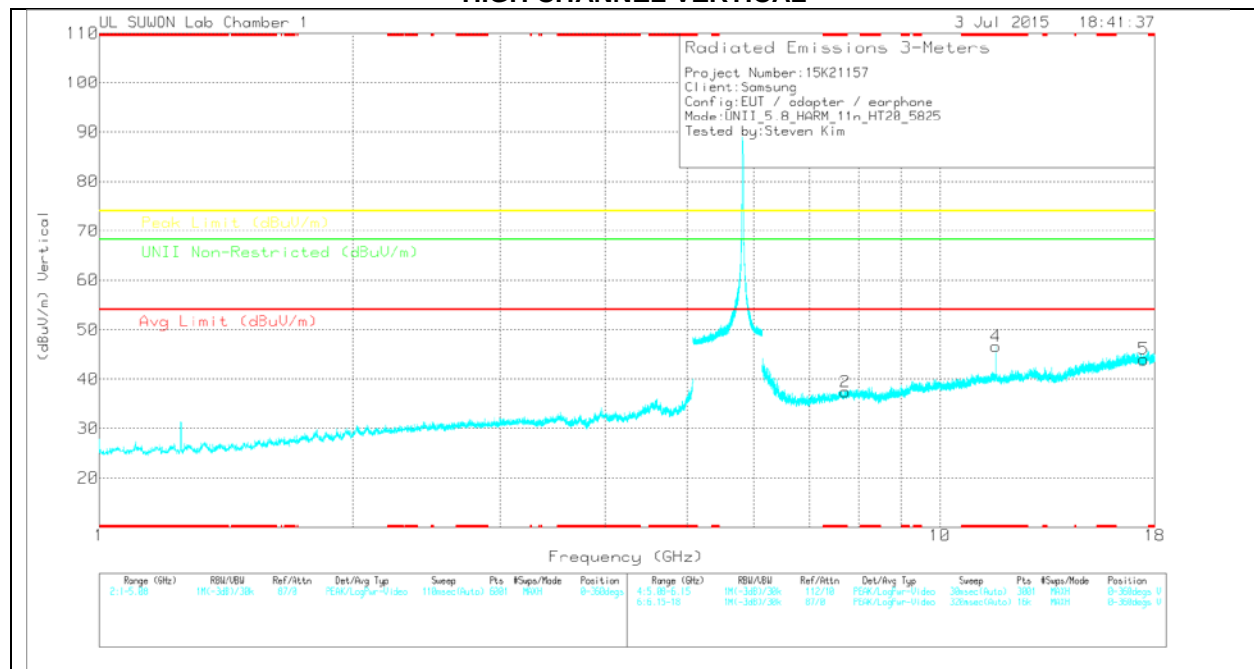

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_5_6G HP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 7.718	25.21	PK	36.1	-24.3	0	37.01	-	-	74	-36.99	-	-	0-360	100	H
3	* 11.651	33.88	PK	38.7	-20.6	0	51.98	-	-	74	-22.02	-	-	0-360	200	H
6	17.476	18.4	PK	41.1	-15.5	0	44	-	-	-	-	68.2	-24.2	0-360	100	H
2	* 7.717	25.62	PK	36.1	-24.3	0	37.42	-	-	74	-36.58	-	-	0-360	100	V
4	* 11.652	28.52	PK	38.7	-20.6	0	46.62	-	-	74	-27.38	-	-	0-360	100	V
5	17.475	18.4	PK	41.1	-15.5	0	44	-	-	-	-	68.2	-24.2	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_6G P	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.652	45.06	PK1	38.7	-20.6	0	63.16	-	-	74	-10.84	-	-	143	292	H
* 11.65	30.79	AD1	38.7	-20.6	.32	49.21	54	-4.79	-	-	-	-	143	292	H
* 11.652	36.01	PK1	38.7	-20.6	0	54.11	-	-	74	-19.89	-	-	84	278	V
* 11.65	23.46	AD1	38.7	-20.6	.32	41.88	54	-12.12	-	-	-	-	84	278	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.4.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

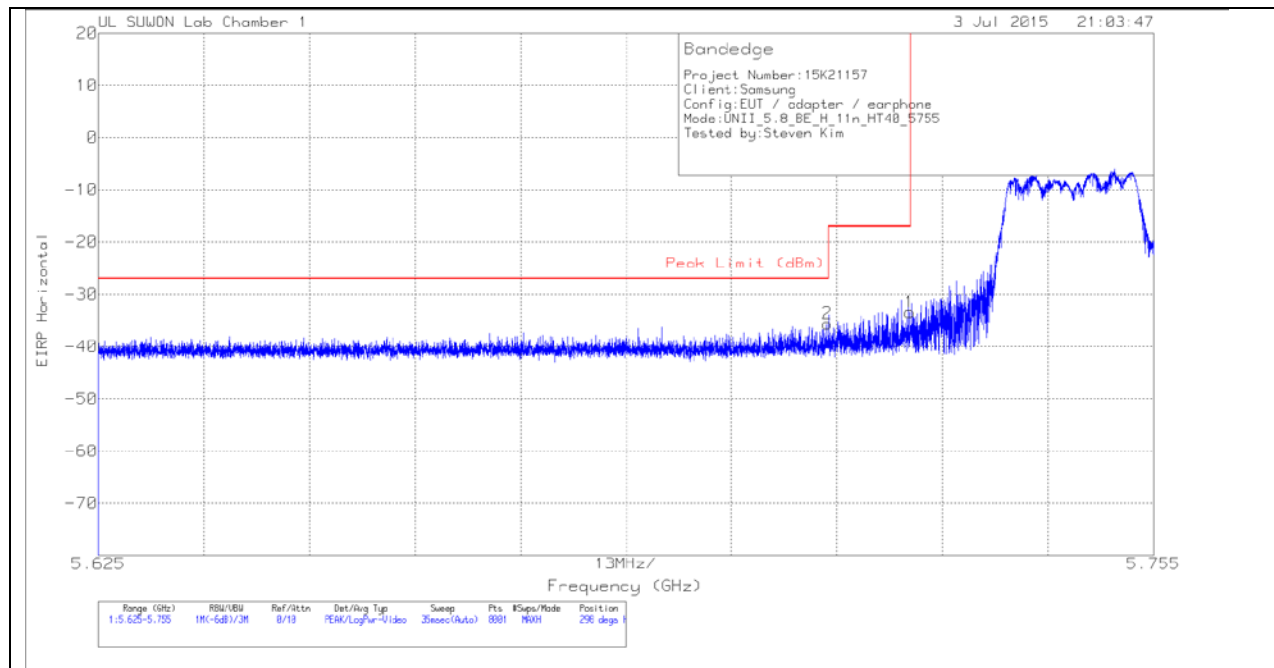

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.22	Pk	34.8	-18.8	11.8	0	-33.42	-17	-16.42	298	178	H
2	5.715	-63.42	Pk	34.8	-18.8	11.8	0	-35.62	-27	-8.62	298	178	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

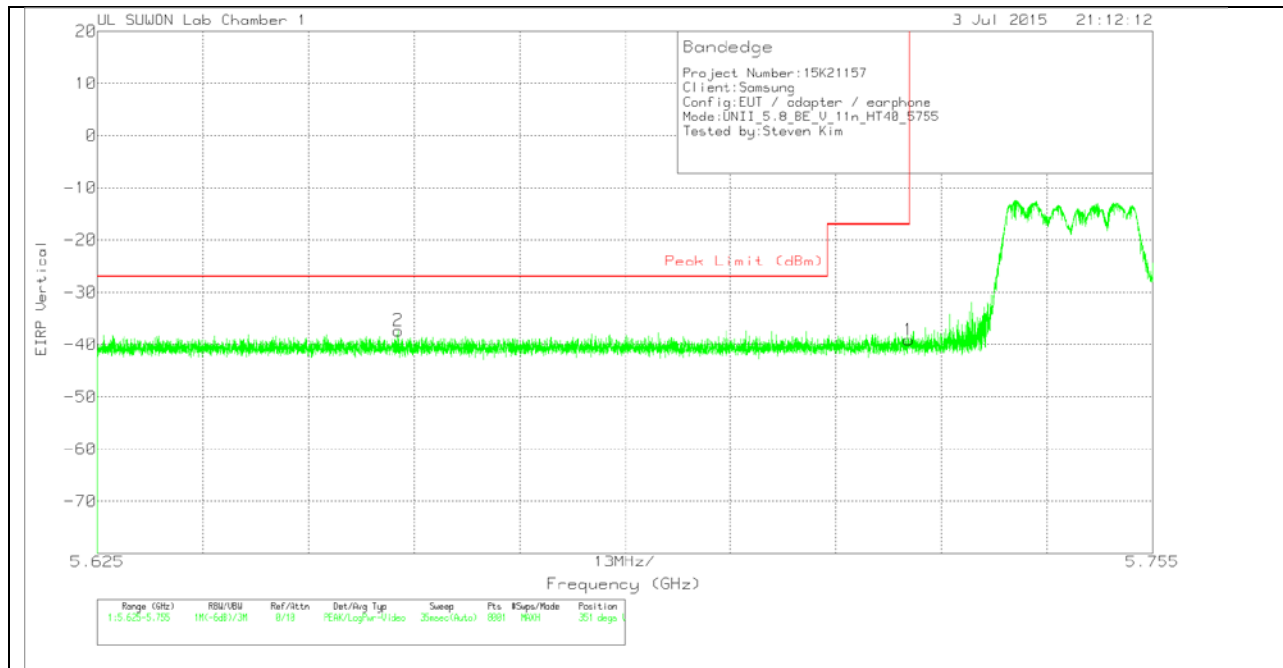

VERTICAL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-66.88	PK	34.8	-18.8	11.8	0	-39.08	-17	-22.08	351	336	V
2	5.662	-65	PK	34.8	-18.9	11.8	0	-37.3	-27	-10.3	351	336	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

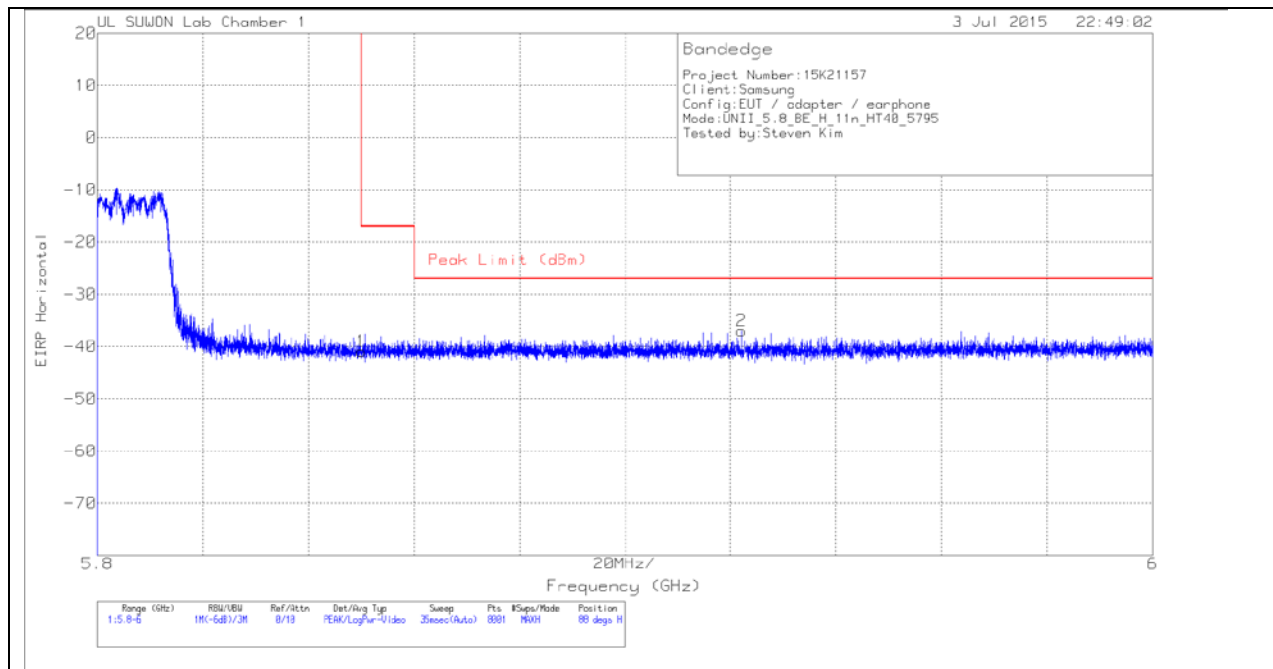

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.73	Pk	34.9	-18.9	11.8	0	-40.93	-17	-23.93	88	302	H
2	5.922	-64.88	Pk	34.9	-18.8	11.8	0	-36.98	-27	-9.98	88	302	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

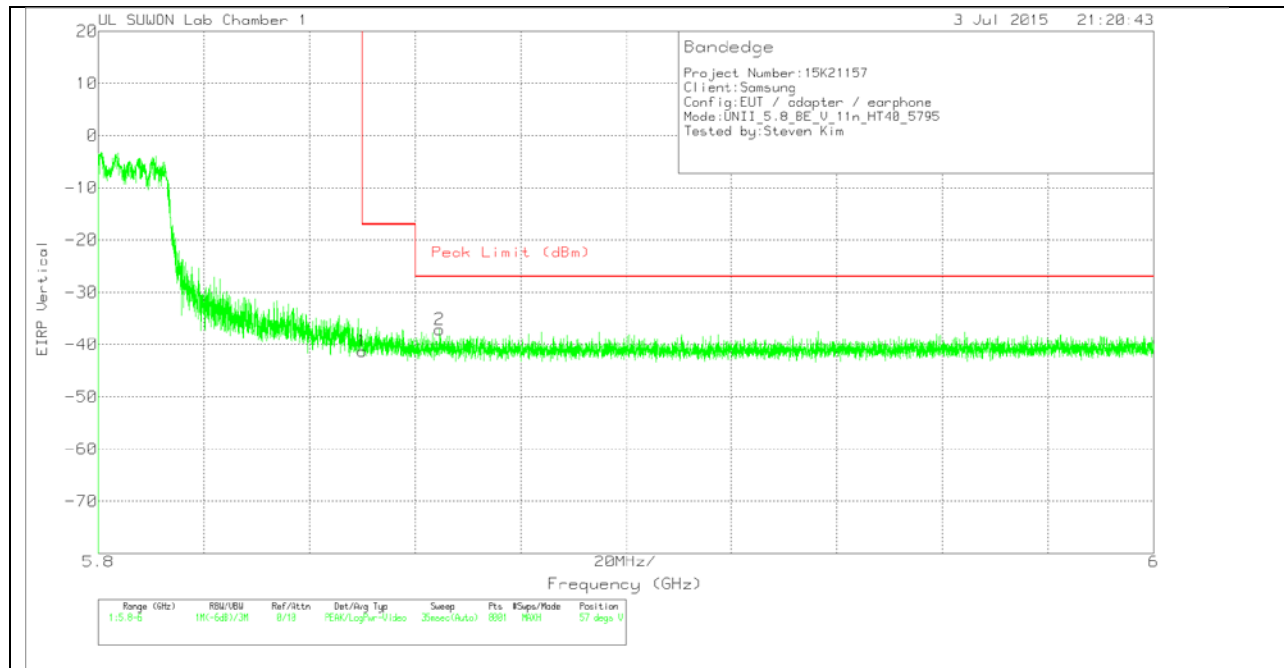

VERTICAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-69.06	PK	34.9	-18.9	11.8	0	-41.26	-17	-24.26	57	287	V
2	5.865	-64.92	PK	34.9	-18.9	11.8	0	-37.12	-27	-10.12	57	287	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

RMS - RMS detection

Straddle CHANNEL(142) HORIZONTAL

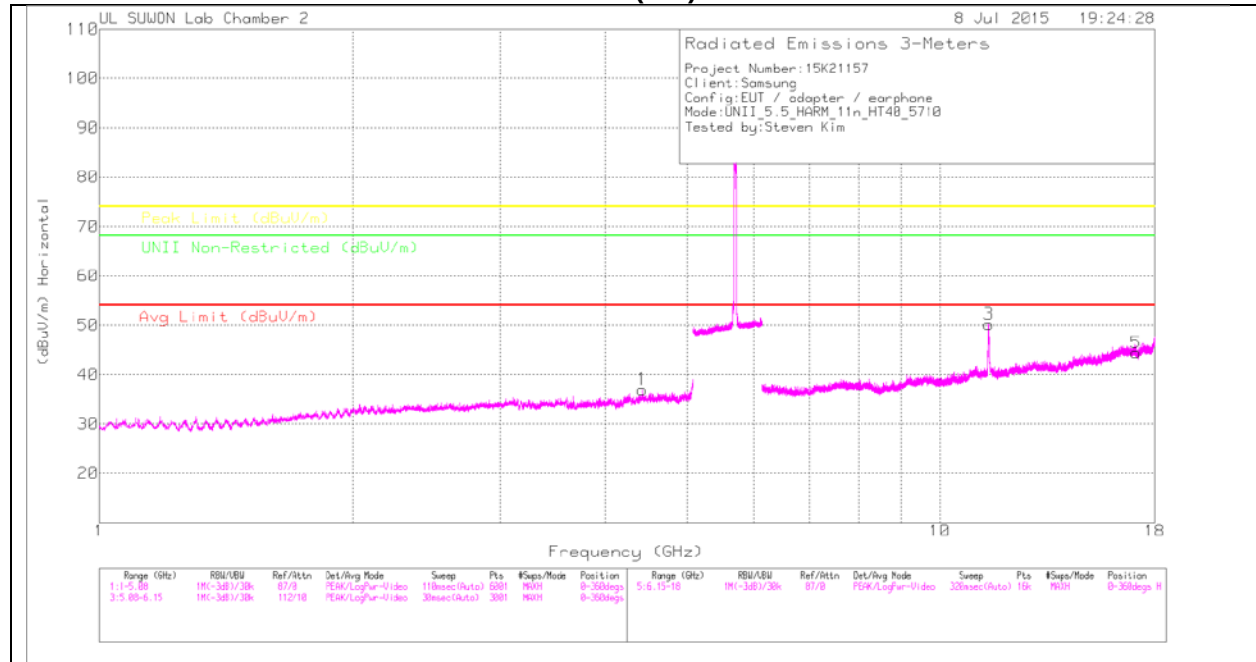

Straddle CHANNEL(142) VERTICAL

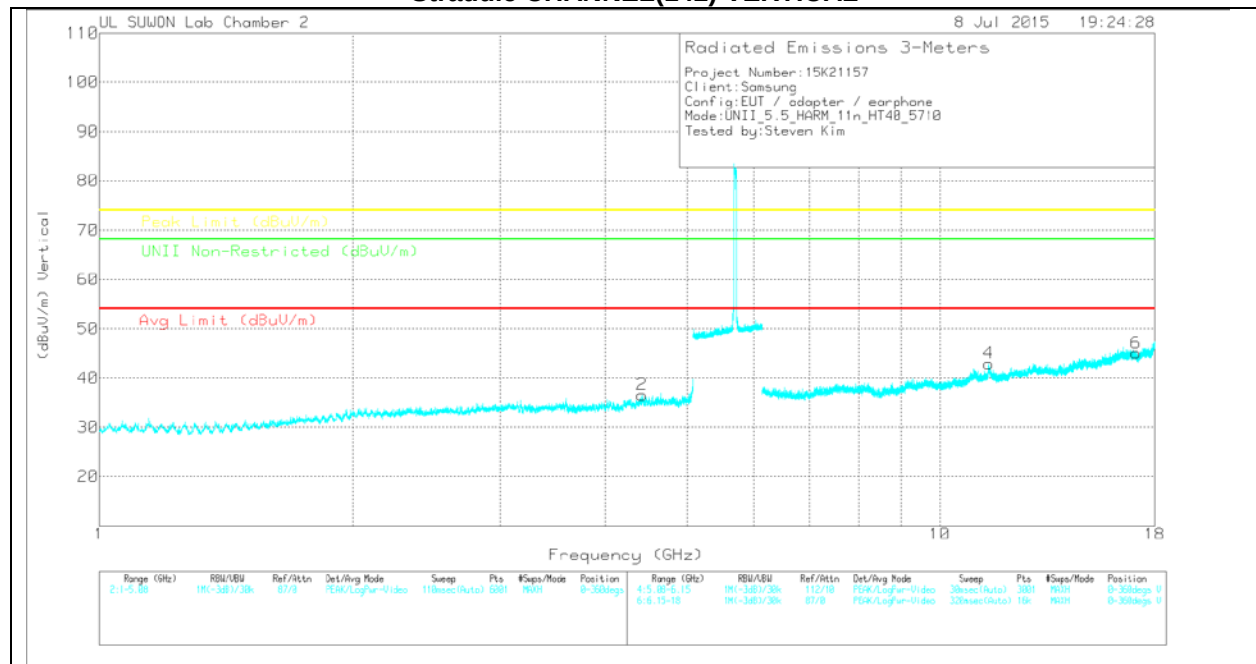

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Straddle CHANNEL(142) DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.427	28.77	PK	33.7	-25.5	0	36.97	-	-	-	-	68.2	-31.23	0-360	200	H
2	4.422	28.4	PK	33.7	-25.5	0	36.6	-	-	-	-	68.2	-31.6	0-360	200	V
3	11.419	29.2	PK	38.3	-17.3	0	50.2	-	-	74	-23.8	-	-	0-360	200	H
5	17.131	18.64	PK	41.1	-15.3	0	44.44	-	-	-	-	68.2	-23.76	0-360	200	H
4	11.421	21.97	PK	38.3	-17.3	0	42.97	-	-	74	-31.03	-	-	0-360	200	V
6	17.13	19.27	PK	41.1	-15.3	0	45.07	-	-	-	-	68.2	-23.13	0-360	200	V

PK – Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11.428	43.25	PK-U	38.3	-17.4	0	64.15	-	-	74	-9.85	-	-	161	165	H
11.42	27.74	ADR	38.3	-17.3	.62	49.36	54	-4.64	-	-	-	-	161	165	H
11.428	36.19	PK-U	38.3	-17.4	0	57.09	-	-	74	-16.91	-	-	147	288	V
11.427	21.02	ADR	38.3	-17.4	.62	42.54	54	-11.46	-	-	-	-	147	288	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

LOW CHANNEL HORIZONTAL

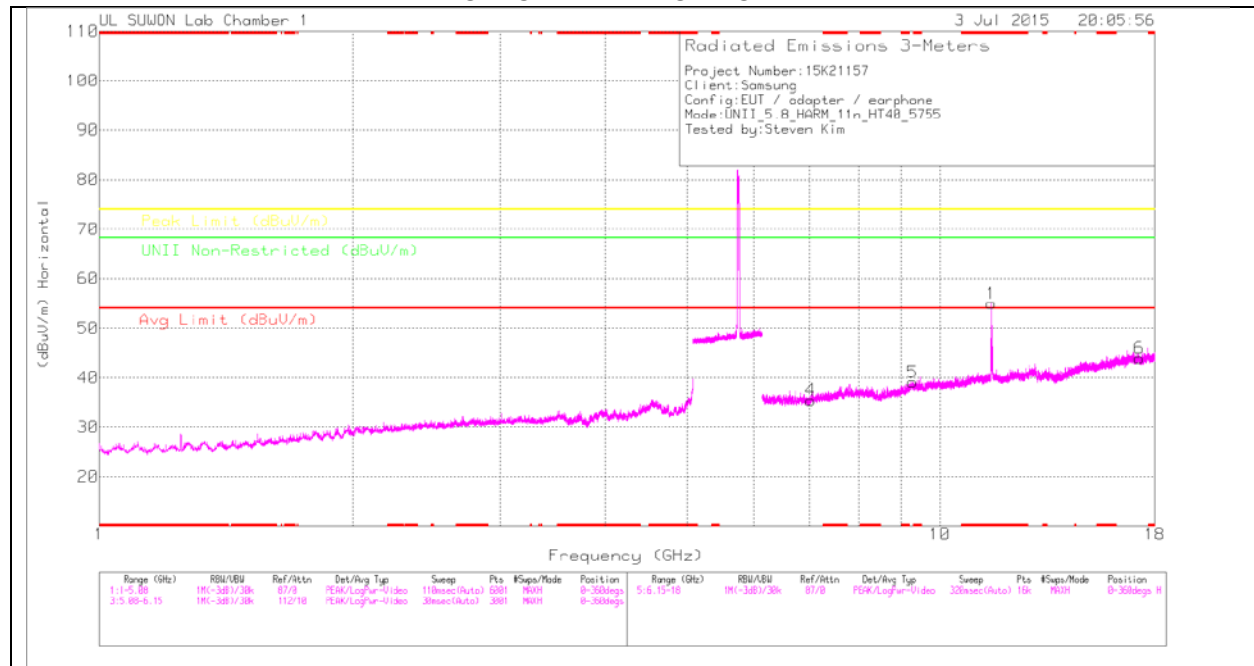

LOW CHANNEL VERTICAL

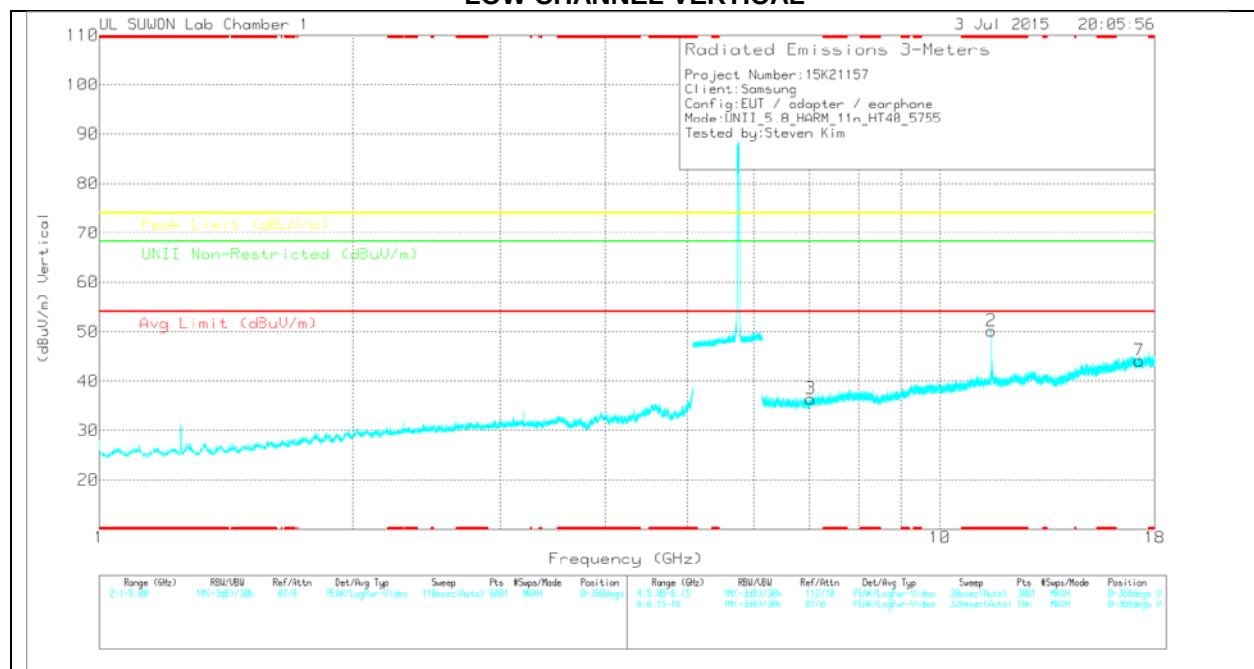

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_5_6G HP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.509	37.1	PK	38.6	-20.7	0	55	-	-	74	-19	-	-	0-360	200	H
4	7.019	25.33	PK	35.7	-25.6	0	35.43	-	-	-	-	68.2	-32.77	0-360	200	H
5	9.278	23.9	PK	36.7	-21.5	0	39.1	-	-	-	-	68.2	-29.1	0-360	100	H
6	17.265	18.31	PK	41.2	-15.6	0	43.91	-	-	-	-	68.2	-24.29	0-360	200	H
2	* 11.51	32.29	PK	38.6	-20.7	0	50.19	-	-	74	-23.81	-	-	0-360	200	V
3	7.016	26.35	PK	35.7	-25.6	0	36.45	-	-	-	-	68.2	-31.75	0-360	100	V
7	17.262	18.54	PK	41.2	-15.6	0	44.14	-	-	-	-	68.2	-24.06	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.51	44.62	PK1	38.6	-20.7	0	62.52	-	-	74	-11.48	-	-	143	284	H
* 11.51	29.09	AD1	38.6	-20.7	.62	47.61	54	-6.39	-	-	-	-	143	284	H
* 11.51	37.9	PK1	38.6	-20.7	0	55.8	-	-	74	-18.2	-	-	203	107	V
* 11.51	26.45	AD1	38.6	-20.7	.62	44.97	54	-9.03	-	-	-	-	203	107	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

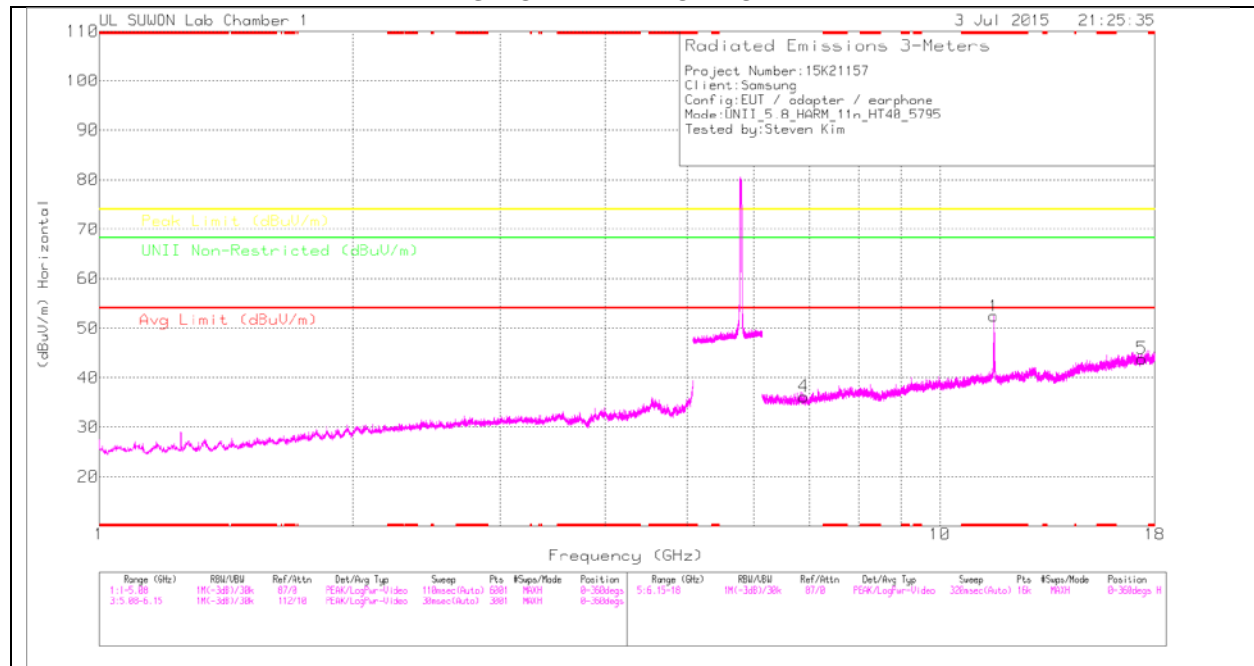

HIGH CHANNEL VERTICAL

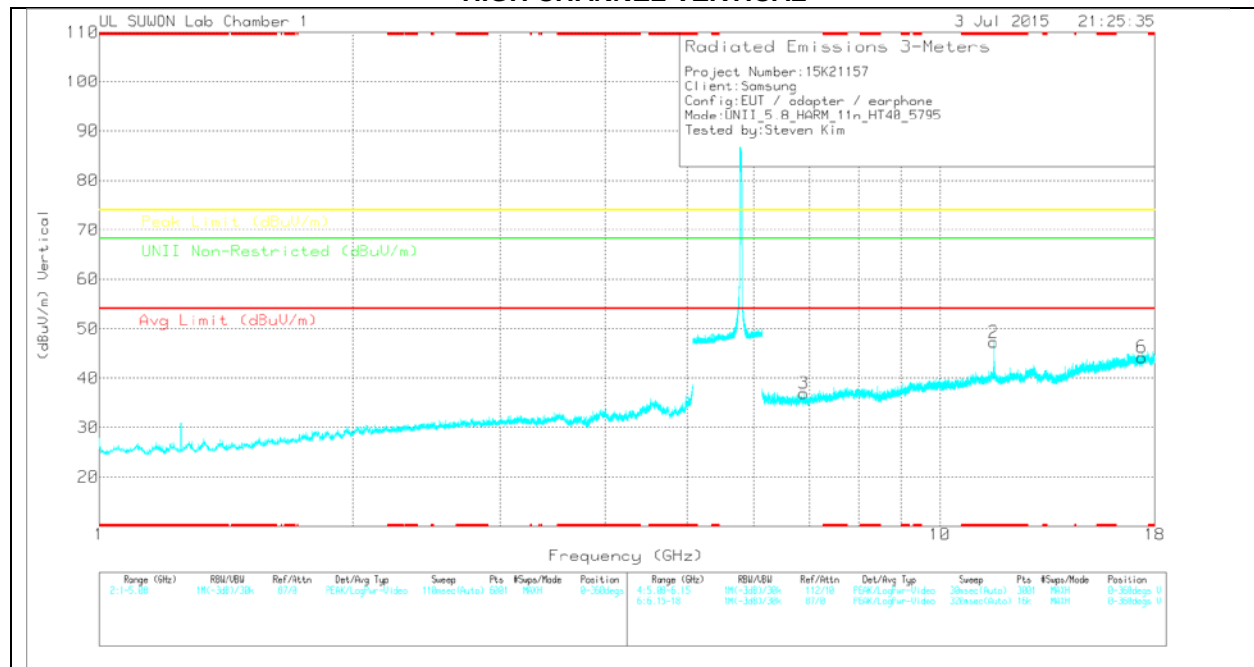

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/0016 8717_150 619	Path_5_6G HP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.591	34.26	PK	38.7	-20.5	0	52.46	-	-	74	-21.54	-	-	0-360	200	H
4	6.89	26.19	PK	35.6	-25.6	0	36.19	-	-	-	-	68.2	-32.01	0-360	100	H
5	17.386	18.24	PK	41.2	-15.6	0	43.84	-	-	-	-	68.2	-24.36	0-360	100	H
2	* 11.59	29.06	PK	38.7	-20.5	0	47.26	-	-	74	-26.74	-	-	0-360	200	V
3	6.888	26.96	PK	35.6	-25.6	0	36.96	-	-	-	-	68.2	-31.24	0-360	200	V
6	17.39	18.51	PK	41.2	-15.5	0	44.21	-	-	-	-	68.2	-23.99	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 17_150619	Path_5_6GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.59	43.06	PK1	38.7	-20.5	0	61.26	-	-	74	-12.74	-	-	155	323	H
* 11.59	28.77	AD1	38.7	-20.5	.62	47.59	54	-6.41	-	-	-	-	155	323	H
* 11.59	33.99	PK1	38.7	-20.5	0	52.19	-	-	74	-21.81	-	-	195	292	V
* 11.59	22.18	AD1	38.7	-20.5	.62	41	54	-13	-	-	-	-	195	292	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

11.4.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.8 GHz BAND HARMONICS AND SPURIOUS EMISSIONS HORIZONTAL PEAK PLOT

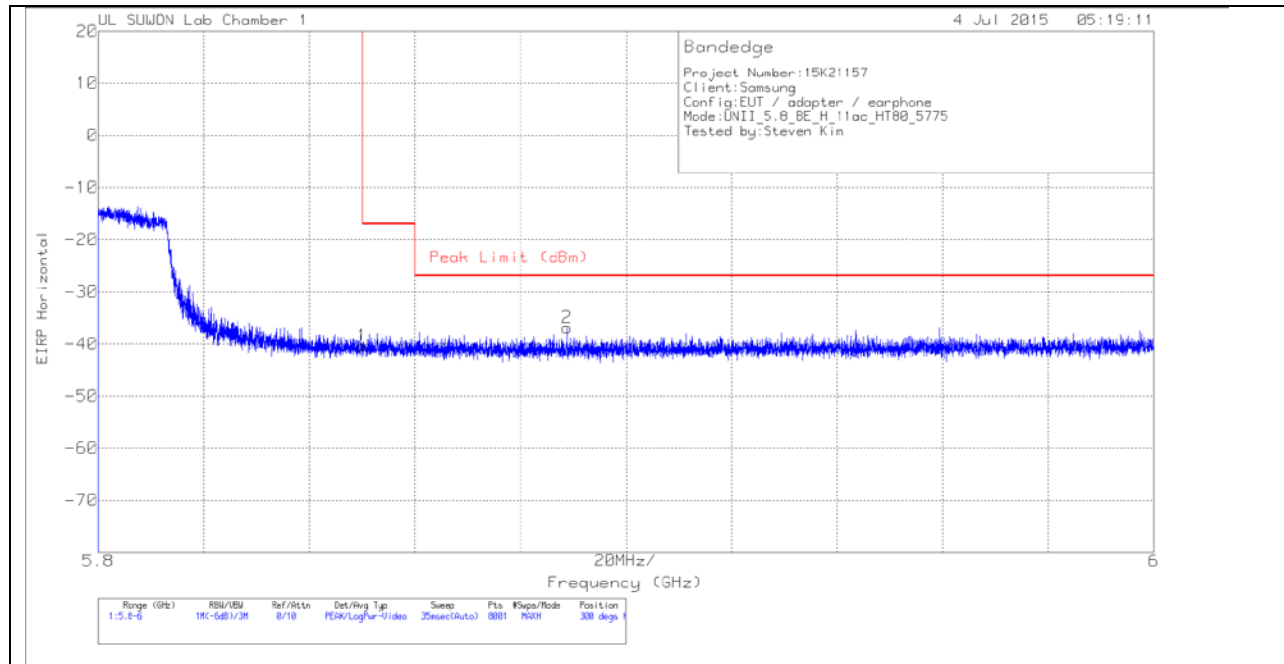

HORIZONTAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.09	Pk	34.9	-18.9	11.8	0	-40.29	-17	-23.29	300	337	H
2	5.889	-64.67	Pk	34.9	-18.9	11.8	0	-36.87	-27	-9.87	300	337	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK PLOT

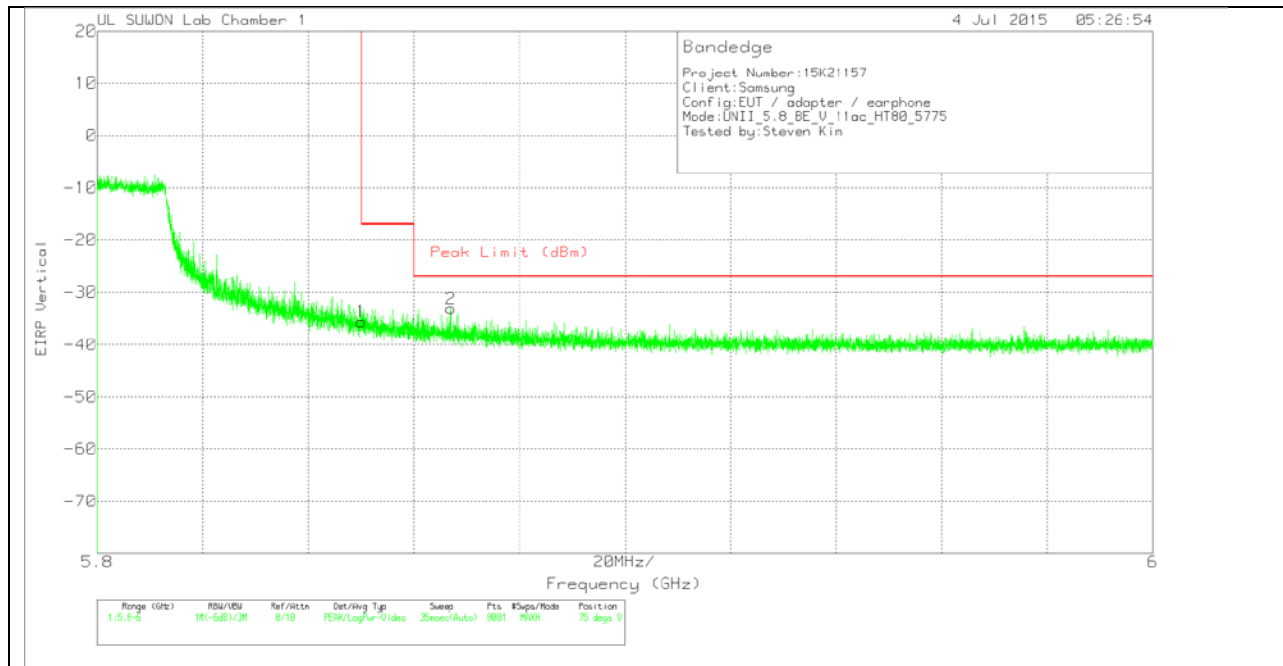

VERTICAL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117(0016 8717)_150 619	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.41	Pk	34.9	-18.9	11.8	0	-35.61	-17	-18.61	75	100	V
2	5.867	-60.94	Pk	34.9	-18.9	11.8	0	-33.14	-27	-6.14	75	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

RMS - RMS detection

Straddle (138) CHANNEL HORIZONTAL

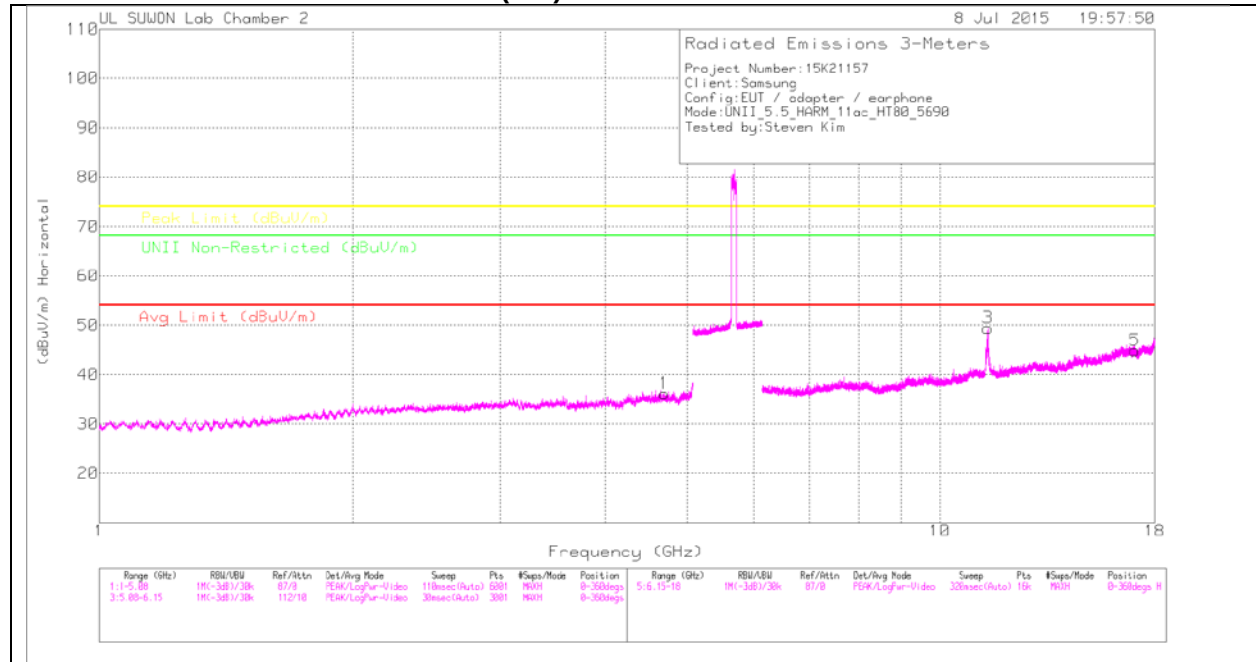

Straddle (138) CHANNEL VERTICAL

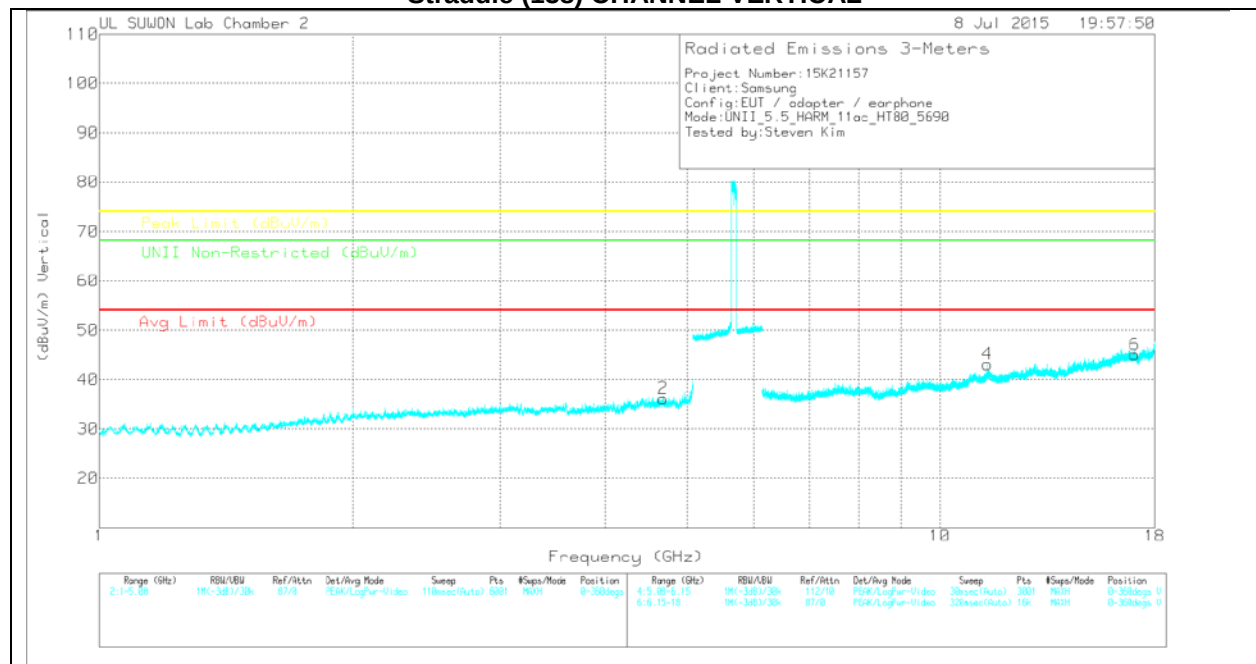

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Straddle (138) CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	Path_4	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.701	27.58	PK	33.8	-25.2	0	36.18	-	-	74	-37.82	-	-	0-360	200	H
2	4.686	27.58	PK	33.8	-25.2	0	36.18	-	-	74	-37.82	-	-	0-360	100	V
3	11.395	28.36	PK	38.3	-17.2	0	49.46	-	-	74	-24.54	-	-	0-360	200	H
5	17.071	19.1	PK	41.1	-15.3	0	44.9	-	-	-	-	68.2	-23.3	0-360	200	H
4	11.38	21.92	PK	38.3	-17.1	0	43.12	-	-	74	-30.88	-	-	0-360	200	V
6	17.071	19.24	PK	41.1	-15.3	0	45.04	-	-	-	-	68.2	-23.16	0-360	200	V

PK – Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_5	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11.397	38.12	PK-U	38.3	-17.2	0	59.22	-	-	74	-14.78	-	-	158	141	H
11.38	25.88	ADR	38.3	-17.1	1.16	48.24	54	-5.76	-	-	-	-	158	141	H
11.379	31.94	PK-U	38.3	-17.1	0	53.14	-	-	74	-20.86	-	-	148	290	V
11.38	19	ADR	38.3	-17.1	1.16	41.36	54	-12.64	-	-	-	-	148	290	V


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

LOW CHANNEL HORIZONTAL

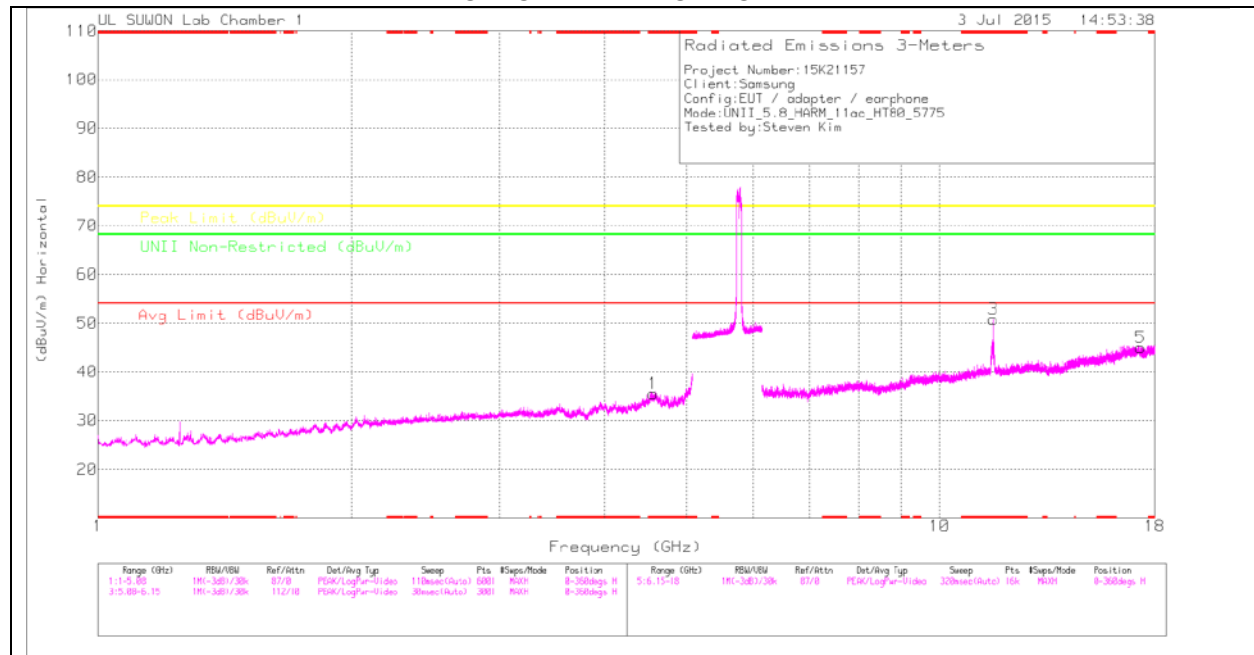

LOW CHANNEL VERTICAL

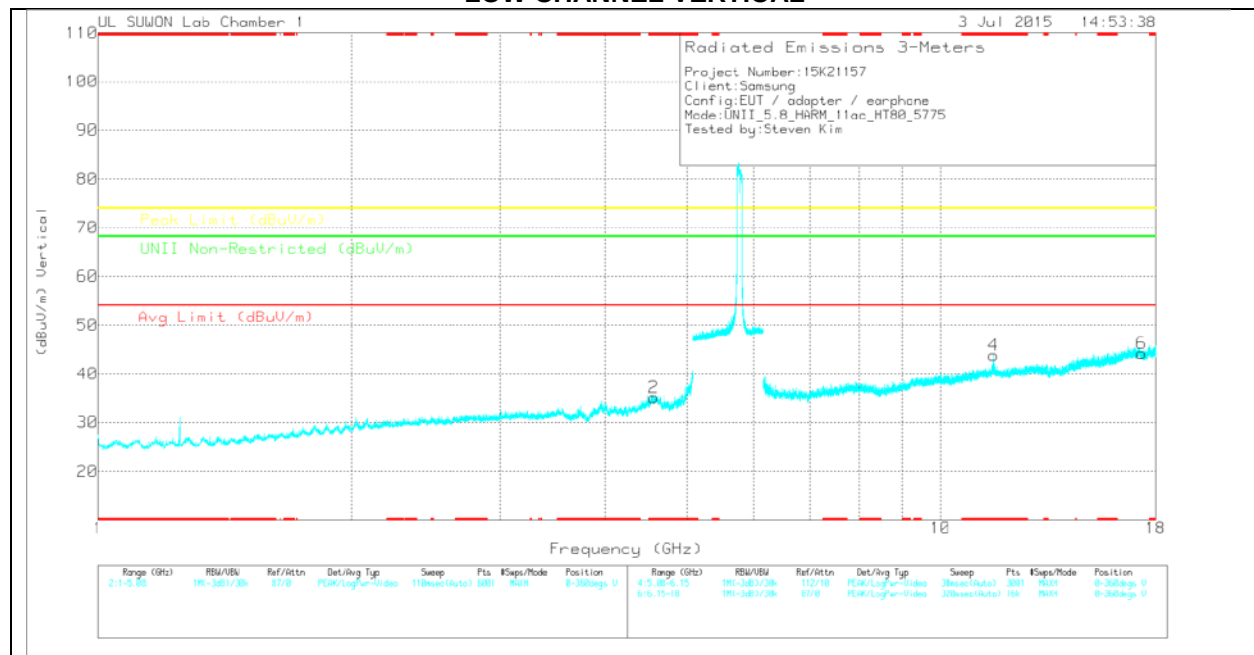

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	Path_4_5G LP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.563	29.47	PK	33.9	-27.8	0	35.57	-	-	74	-38.43	-	-	0-360	200	H
2	* 4.566	29	PK	33.9	-27.8	0	35.1	-	-	74	-38.9	-	-	0-360	200	V
3	* 11.564	32.74	PK	38.7	-20.6	0	50.84	-	-	74	-23.16	-	-	0-360	200	H
5	17.322	19.47	PK	41.2	-15.7	0	44.97	-	-	-	-	68.2	-23.23	0-360	200	H
4	* 11.564	25.72	PK	38.7	-20.6	0	43.82	-	-	74	-30.18	-	-	0-360	100	V
6	17.326	18.67	PK	41.2	-15.7	0	44.17	-	-	-	-	68.2	-24.03	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_5_6GH P	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.564	36.6	PK1	38.7	-20.6	0	54.7	-	-	74	-19.3	-	-	166	179	H
* 11.55	24.94	AD1	38.6	-20.6	1.16	44.1	54	-9.9	-	-	-	-	166	179	H
* 11.507	31.87	PK1	38.6	-20.7	0	49.77	-	-	74	-24.23	-	-	86	239	V
* 11.55	23.99	AD1	38.6	-20.6	1.16	43.15	54	-10.85	-	-	-	-	86	239	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK1 - KDB789033 Method: Peak


AD1 - KDB789033 Method: AD Primary Power Average

12. WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

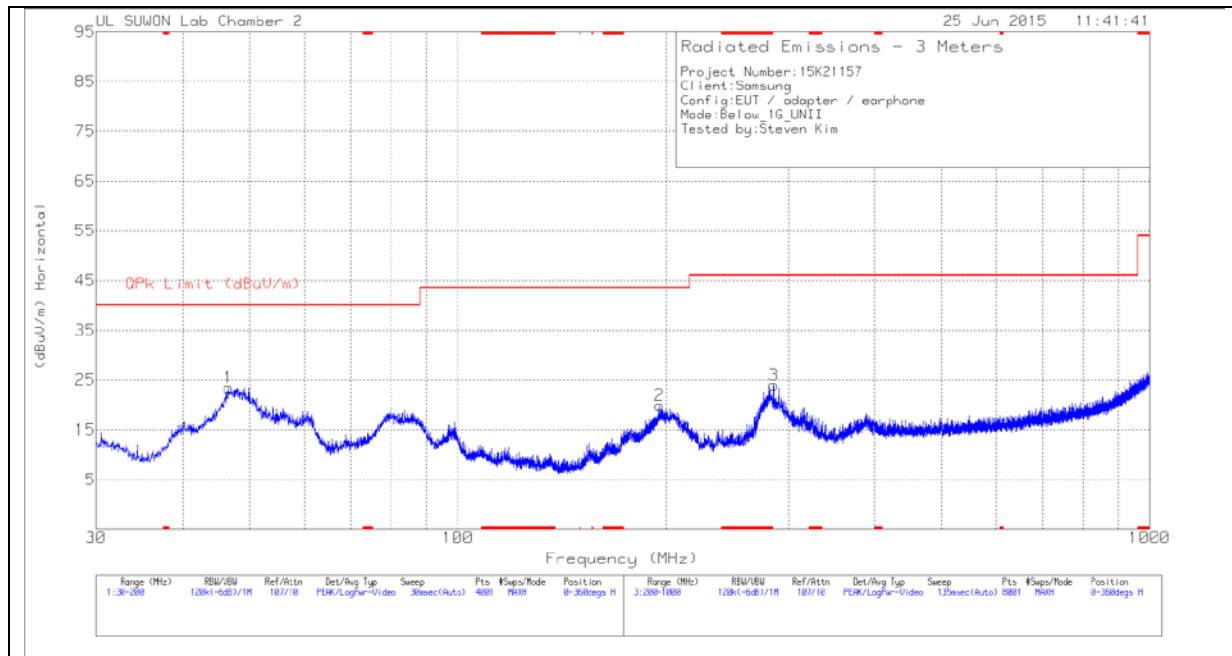

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

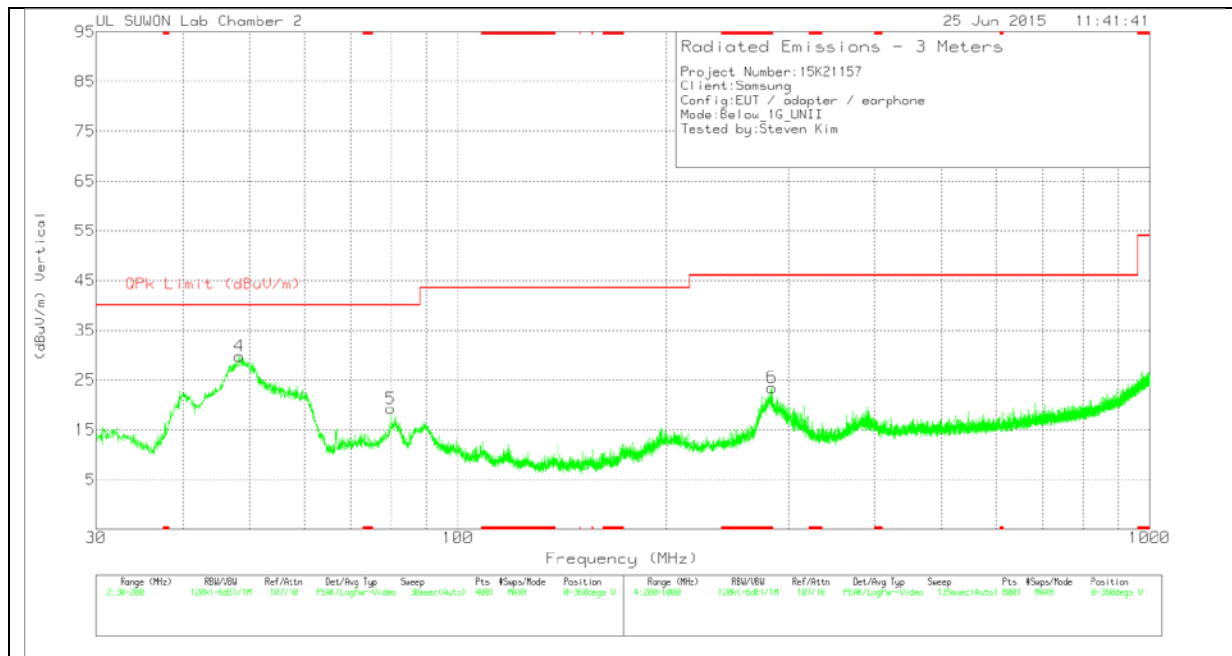

Below 1G Data

TRACE MARKERS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-749	Below_1G	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	46.6175	40.32	Pk	14	-30.8	23.52	40	-16.48	0-360	400	H
2	195.4525	39.26	Pk	11	-30.3	19.96	43.52	-23.56	0-360	200	H
4	48.275	46.54	Pk	14	-30.8	29.74	40	-10.26	0-360	200	V
5	79.98	42.79	Pk	7.1	-30.6	19.29	40	-20.71	0-360	100	V
3	286.1	40.91	Pk	13.1	-30	24.01	46.02	-22.01	0-360	100	H
6	* 284.2	40.43	Pk	13.1	-30	23.53	46.02	-22.49	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

13. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

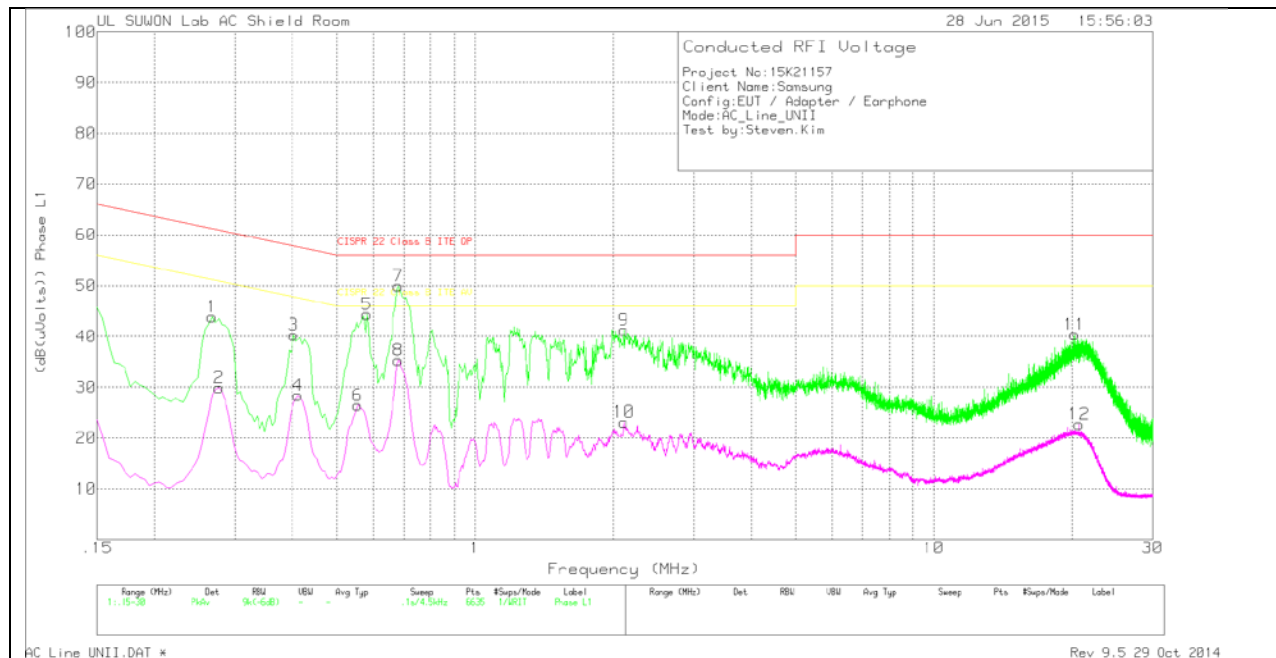

LINE 1 RESULTS

TRACE MARKERS

Phase L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_L1	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.267	34.1	Pk	9.8	0	43.9	61.21	-17.31	-	-
2	.276	20.13	Av	9.8	0	29.93	-	-	50.94	-21.01
3	.402	30.25	Pk	10.1	0	40.35	57.81	-17.46	-	-
4	.411	18.35	Av	10.1	0	28.45	-	-	47.63	-19.18
5	.582	34.25	Pk	10.1	0	44.35	56	-11.65	-	-
6	.555	16.36	Av	10.1	0	26.46	-	-	46	-19.54
7	.681	39.85	Pk	10.1	0	49.95	56	-6.05	-	-
8	.681	25.21	Av	10.1	0	35.31	-	-	46	-10.69
9	2.1075	31.37	Pk	9.8	.1	41.27	56	-14.73	-	-
10	2.1075	13.26	Av	9.8	.1	23.16	-	-	46	-22.84
11	20.265	29.85	Pk	10.4	.2	40.45	60	-19.55	-	-
12	20.7465	12.14	Av	10.4	.2	22.74	-	-	50	-27.26

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Phase L1 .15 - 30MHz									
Frequency (MHz)	Meter Reading (dBuV)	Det	101837_wit h ex-cord_L1	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
.6801	32.62	Qp	10.1	0	42.72	56	-13.28	-	-

Qp - Quasi-Peak detector

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

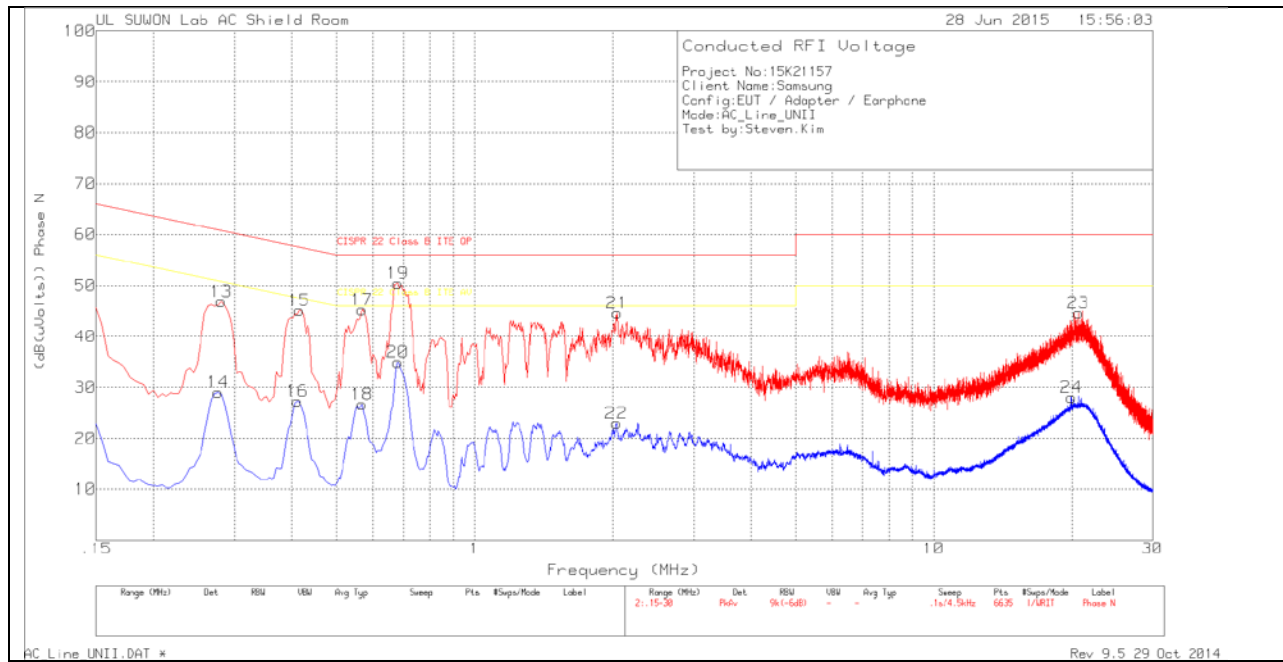

LINE 2 RESULTS

TRACE MARKERS

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_N	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.2805	37.05	Pk	9.8	0	46.85	60.8	-13.95	-	-
14	.276	19.27	Av	9.8	0	29.07	-	-	50.94	-21.87
15	.4155	35.05	Pk	10.1	0	45.15	57.54	-12.39	-	-
16	.411	17.24	Av	10.1	0	27.34	-	-	47.63	-20.29
17	.5685	35.14	Pk	10.1	0	45.24	56	-10.76	-	-
18	.5685	16.54	Av	10.1	0	26.64	-	-	46	-19.36
19	.681	40.42	Pk	10	0	50.42	56	-5.58	-	-
20	.681	24.97	Av	10	0	34.97	-	-	46	-11.03
21	2.0445	34.69	Pk	9.8	.1	44.59	56	-11.41	-	-
22	2.0355	13.06	Av	9.8	.1	22.96	-	-	46	-23.04
23	20.6655	33.81	Pk	10.6	.2	44.61	60	-15.39	-	-
24	19.9635	17.24	Av	10.6	.2	28.04	-	-	50	-21.96

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_wit h ex-cord_N	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
.6828	31.94	Qp	10	0	41.94	56	-14.06	-	-

Qp - Quasi-Peak detector

14. DYNAMIC FREQUENCY SELECTION

14.1. OVERVIEW

14.1.1. LIMITS

INDUSTRY CANADA

IC RSS-210 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-210 Issue 8 A9.3

Note: For the band 5600–5650 MHz, no operation is permitted.

Until further notice, devices subject to this annex shall not be capable of transmitting in the band 5600–5650 MHz. This restriction is for the protection of Environment Canada weather radars operating in this band.

FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar DFS	Client (without DFS)
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks.		

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see notes)
E.I.R.P. $\geq$ 200 mill watt	-64 dBm
E.I.R.P. $<$ 200 mill watt and power spectral density $<$ 10 dBm/MHz	-62 dBm
E.I.R.P. $<$ 200 mill watt that do not meet power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds (See Note 1)
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2)
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U- NII 99% transmission power bandwidth. (See Note 3)
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a	Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests.					

Table 6 – Long Pulse Radar Test Signal


Radar Waveform Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

14.1.1. TEST AND MEASUREMENT SYSTEM

CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

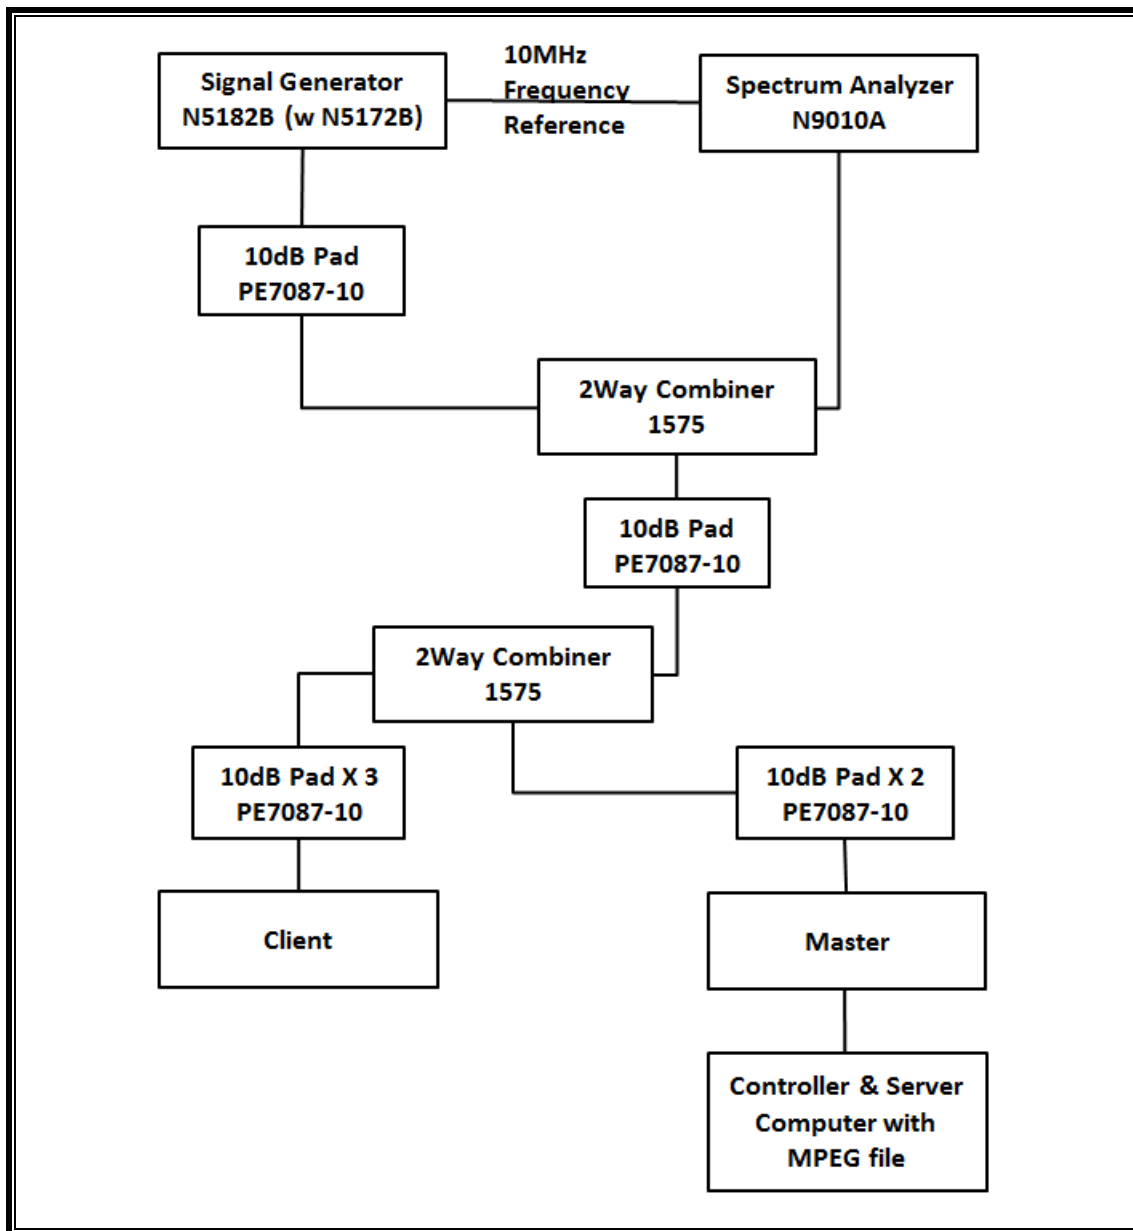

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the Keysite Signal Studio for Pulse Building as N5172B. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	Cal Due
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	09-23-15
Vector Signal Generator, 6GHz	Agilent / HP	N5182B	MY53051241	09-23-15

14.1.2. SETUP OF EUT

CONDUCTED METHOD EUT TEST SETUP

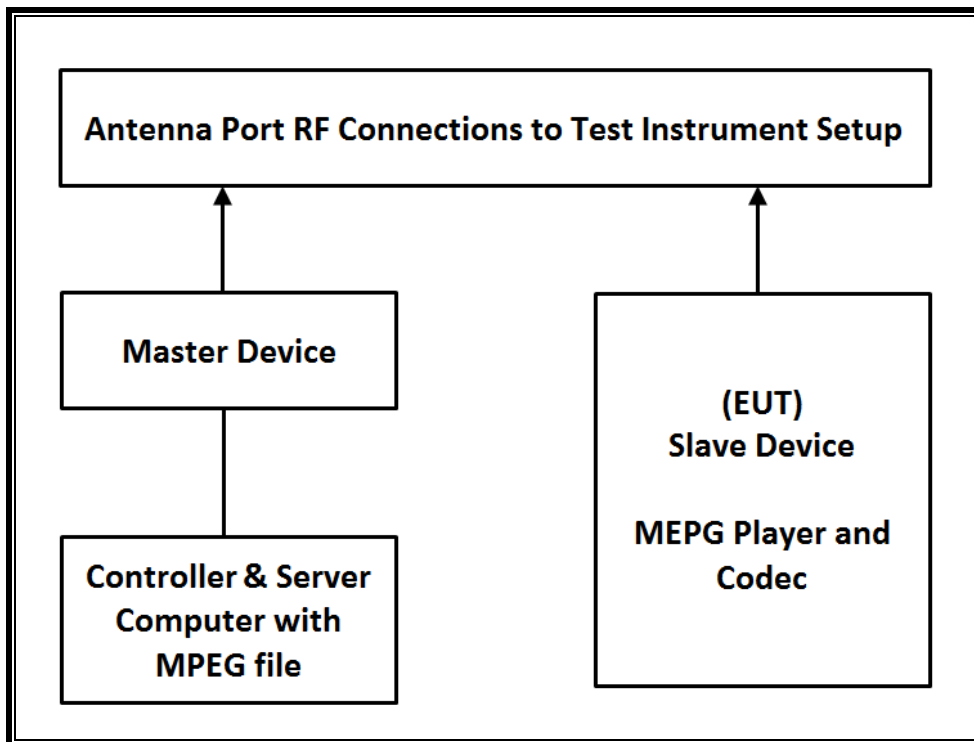

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point	Cisco	AIR-CAP3702E-A-K9	FTX182276QX	LDK102087
Notebook PC (Controller/Server)	HP	HP EliteDesk 800 G1 TWR	CZC4125J25	DoC

14.1.3. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 8.26 dBm in the 5250-5350 MHz band and 7.94 dBm in the 5470-5725 MHz band.

The antenna assembly utilized two antenna with the EUT one is -4.65 dBi, and the other is -6.60 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required conducted threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the controller/server PC to the EUT using iPerf version 2.0.5 software package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the access point is 12.4(25d)JA1.

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102087. The minimum antenna gain for the Master Device is 6 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.


14.2. RESULTS FOR 20 MHz BANDWIDTH

14.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

14.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

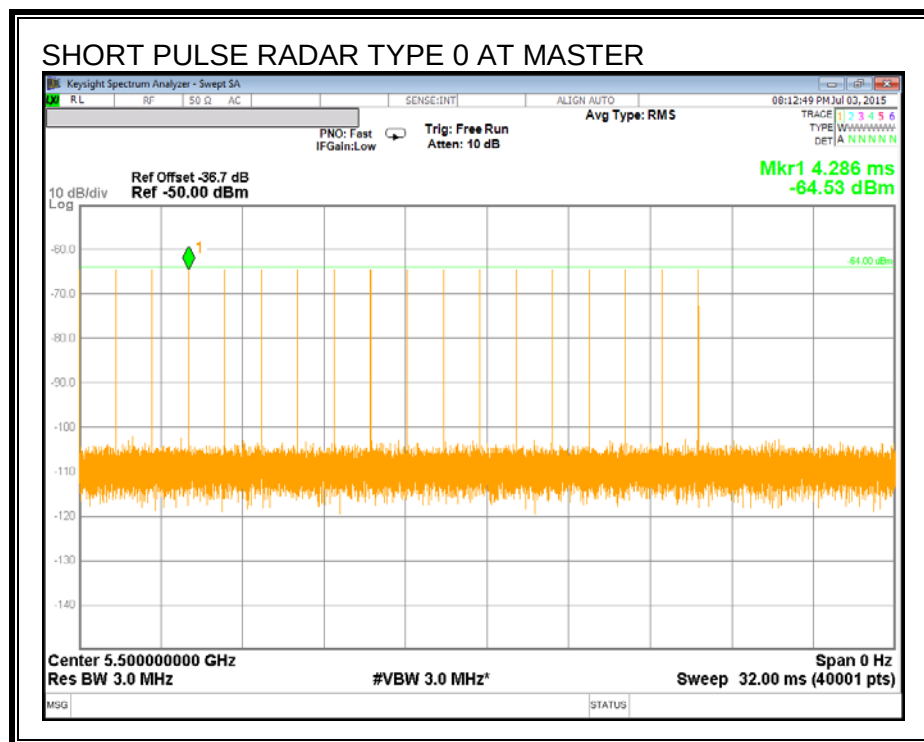

TRAFFIC

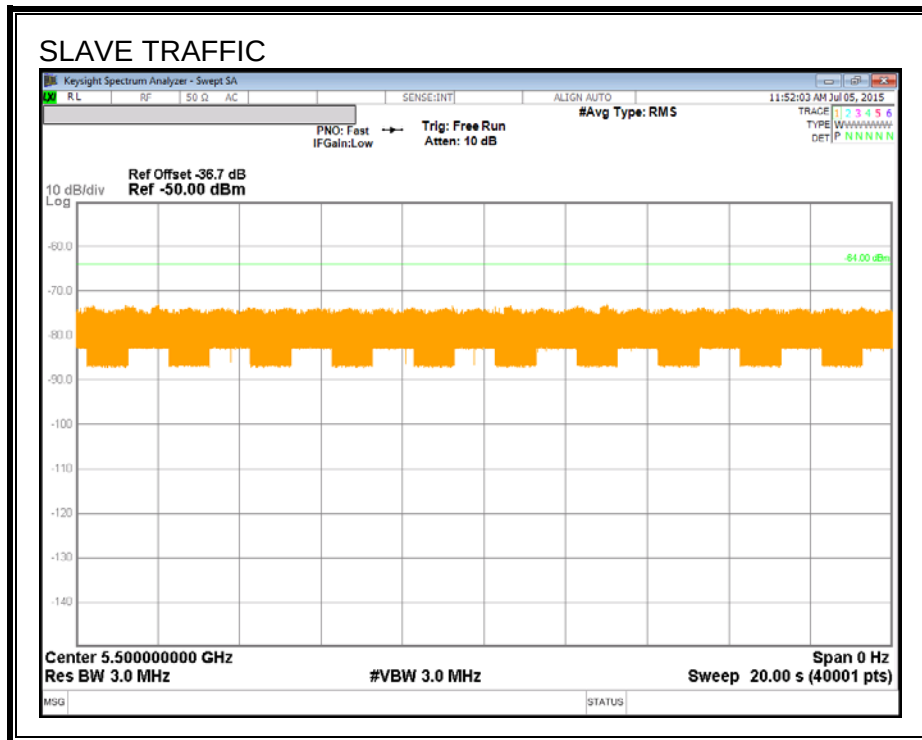

14.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.583	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
3.000	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

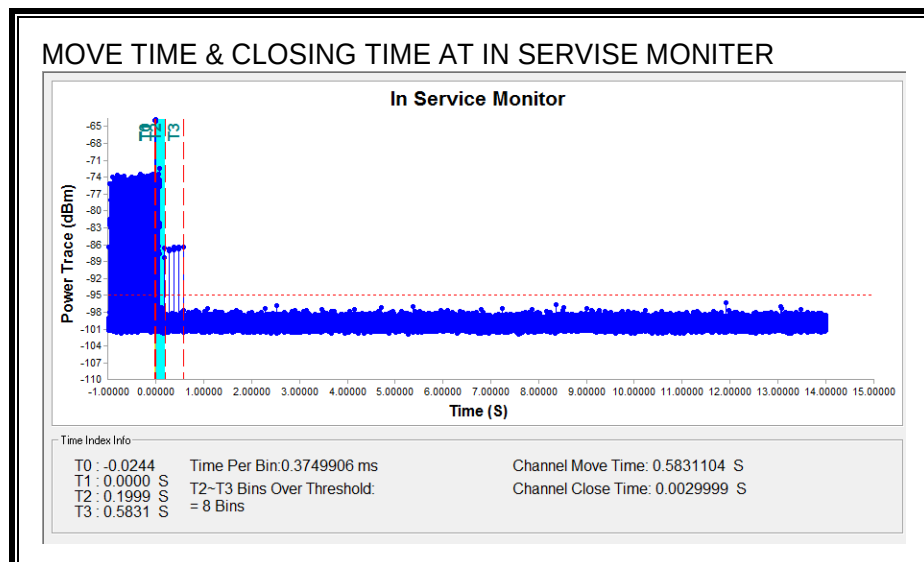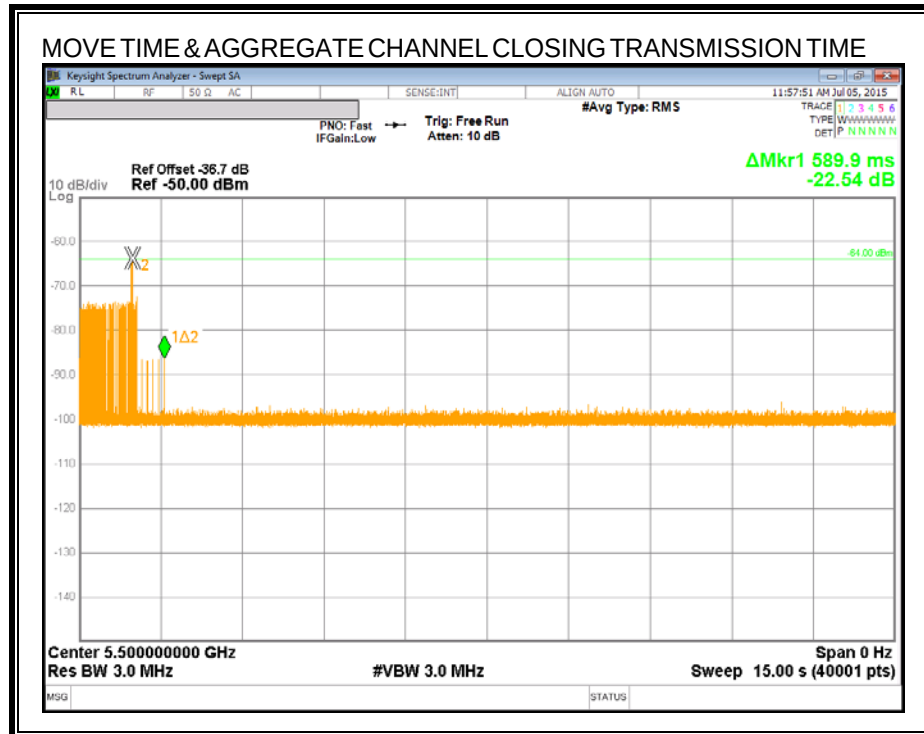

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

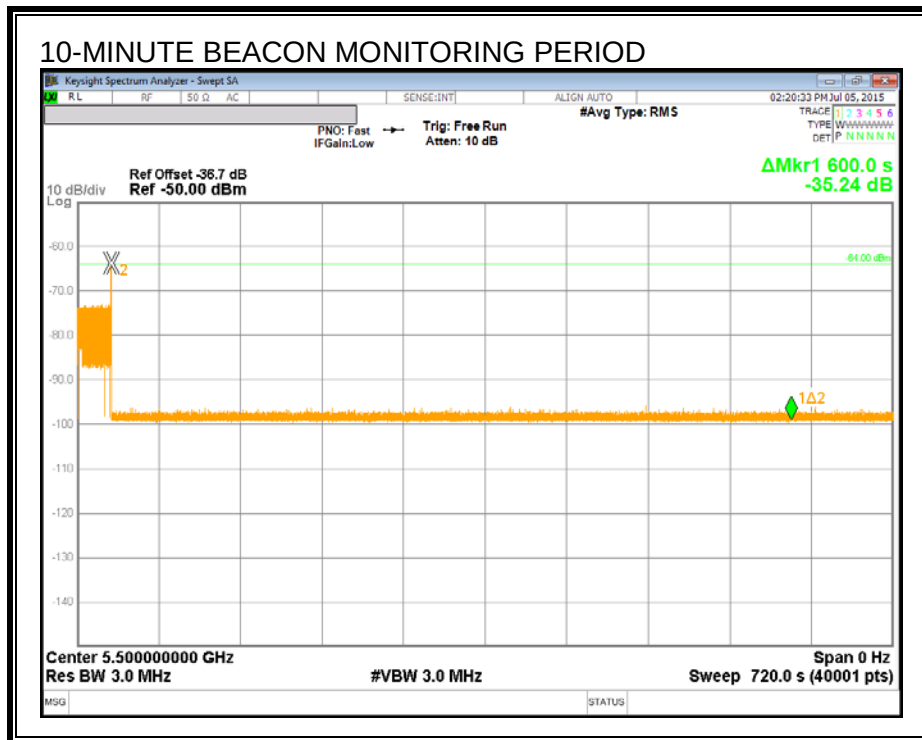


14.3. RESULTS FOR 40 MHz BANDWIDTH

14.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

14.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

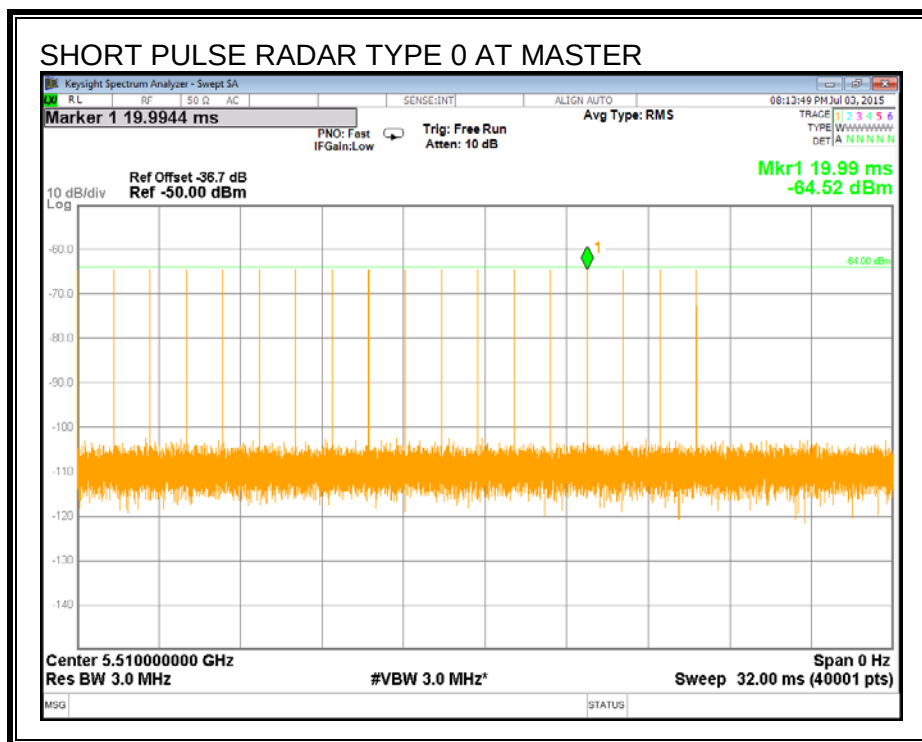

TRAFFIC

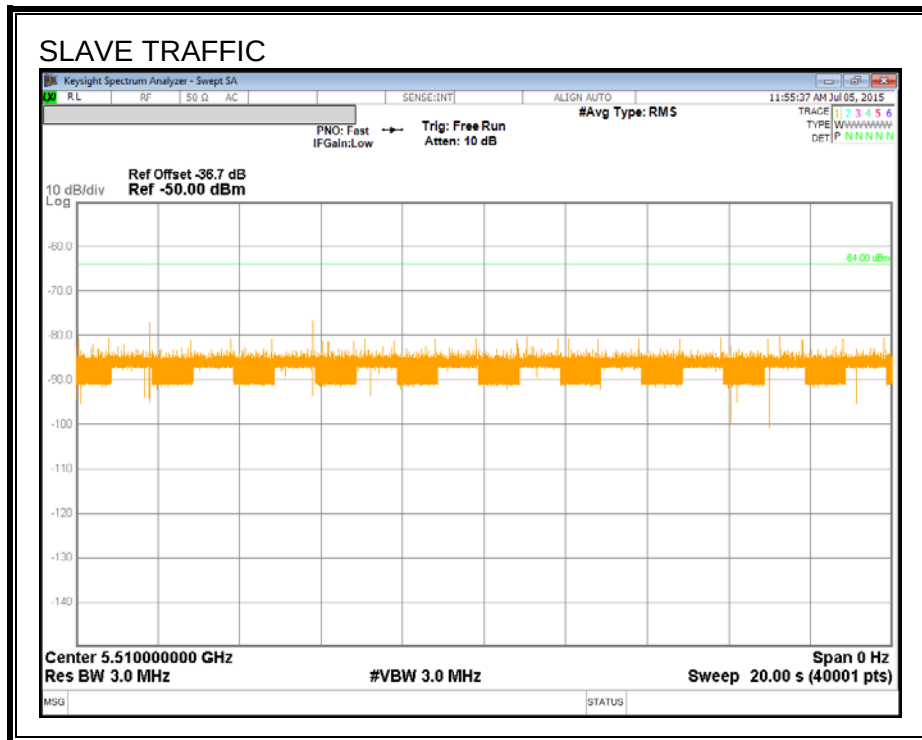

14.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.570	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.004	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

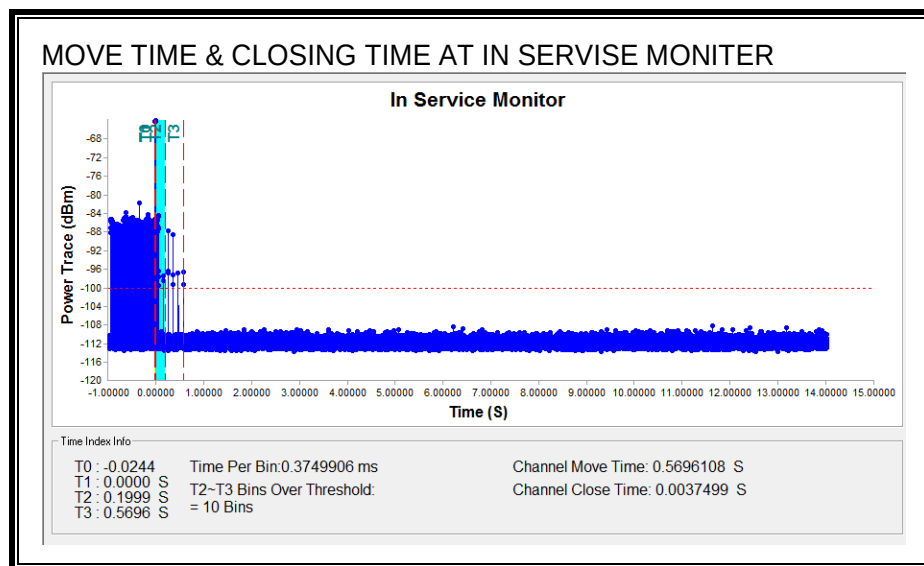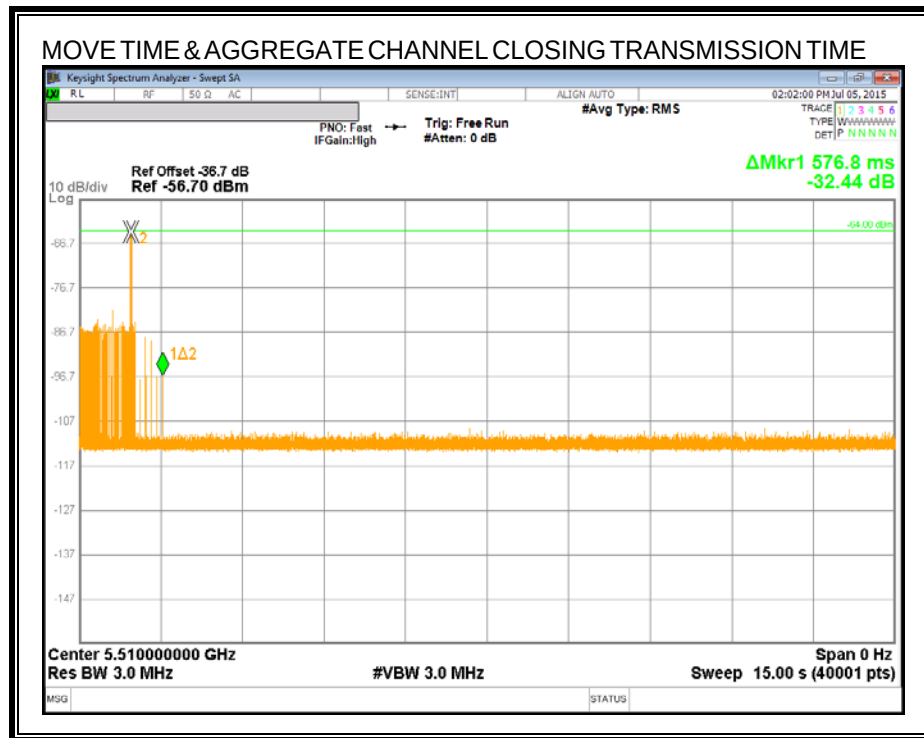


14.4. RESULTS FOR 80 MHz BANDWIDTH

14.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

14.4.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

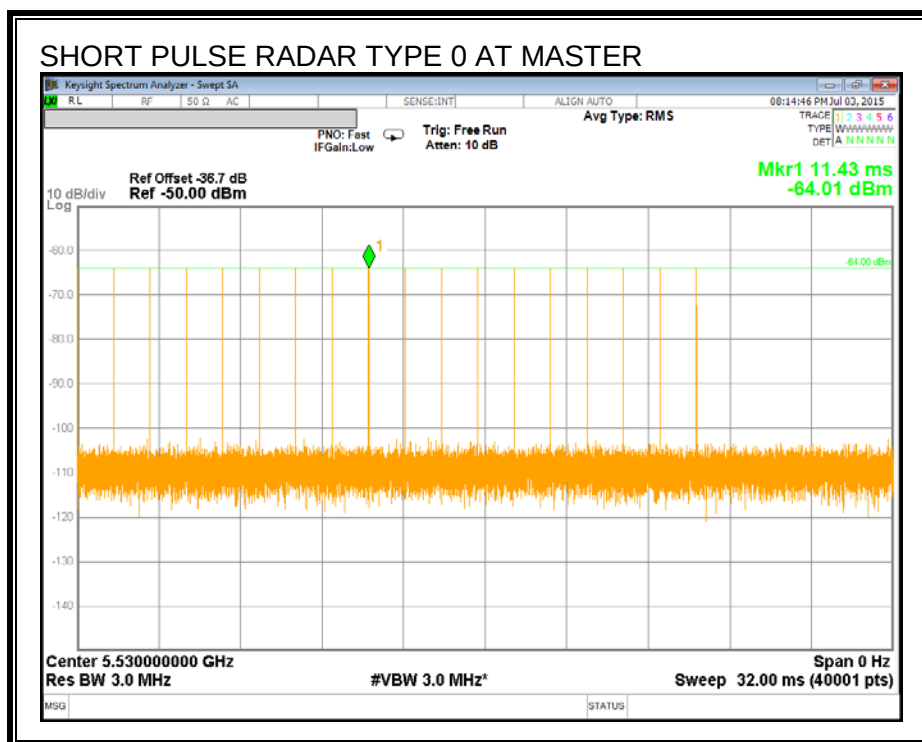

TRAFFIC

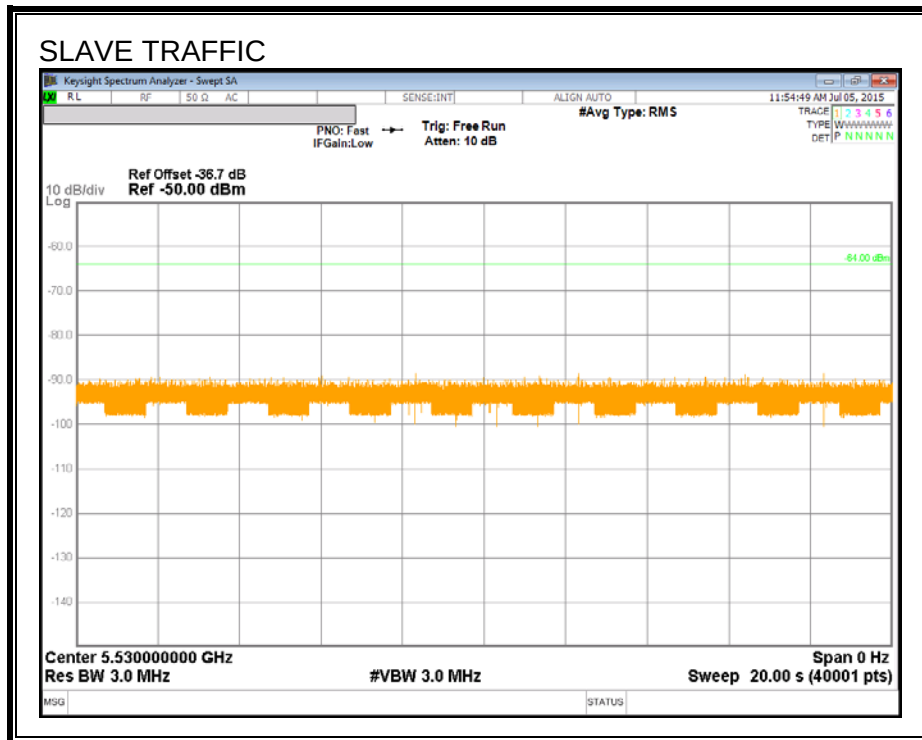

14.4.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.4.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS



Channel Move Time (sec)	Limit (sec)
0.356	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.375	60

MOVE TIME & CHANNEL CLOSING TIME

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

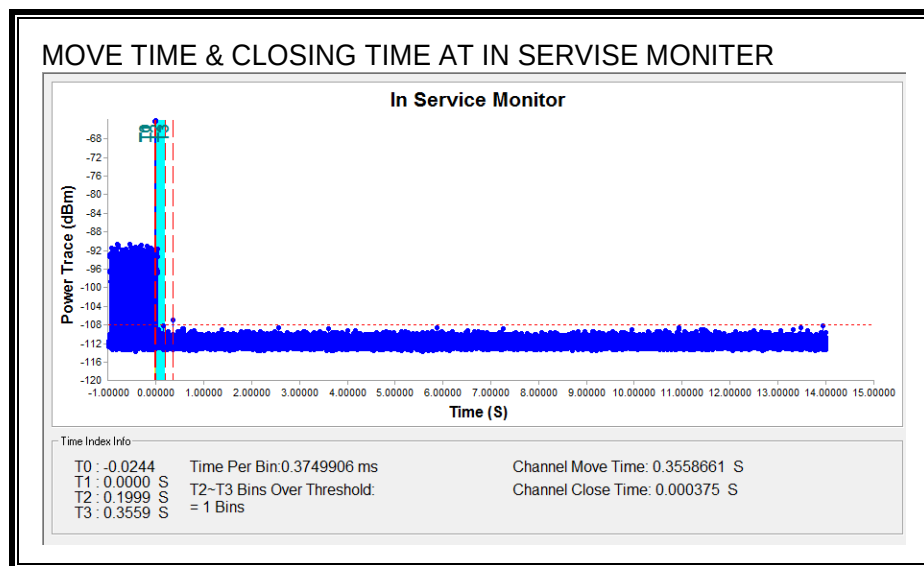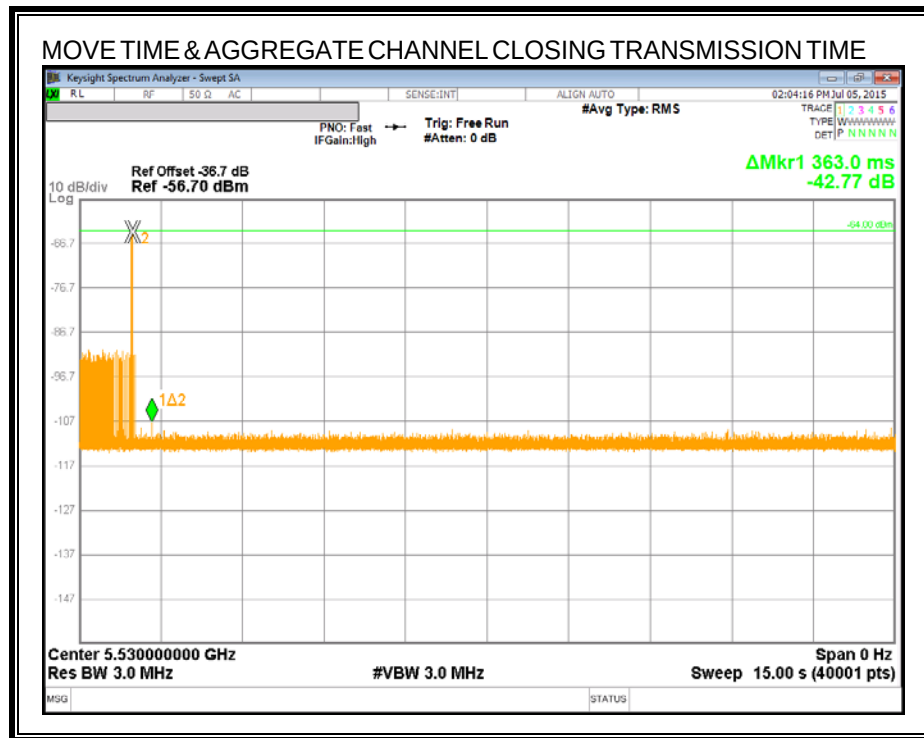

NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 10-minute observation time.

