6.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(c) §27.53(g) §27.53(h) §27.53(a.4)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level for Band 30 is > 43 + 10log10 (P[Watts] at 2300-2305MHz & 2345-2360MHz, > 55 + 10log10 (P[Watts]) at 2320-2324MHz & 2341-2345MHz, > 61 + 10log10 (P[Watts]) at 2324-2328MHz & 2337-2341MHz, > 67 + 10log10 (P[Watts]) at 2288-2292MHz & 2328-2337MHz, and > 70 + 10log10 (P[Watts]) at frequencies < 2288MHz & >2365MHz.

The minimum permissible attenuation level of any spurious emission is 43 + $\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1% of the emission bandwidth
4. VBW ≥ 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

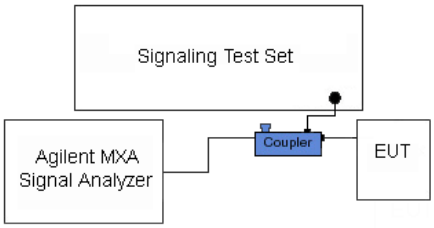

Figure 6-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b) 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

© 2015 PCTEST Engineering Laboratory, Inc.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is 65 + $10\log_{10}(P)$ = -35dBm in a 6.25kHz bandwidth.

Per 27.53(a)(5) in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

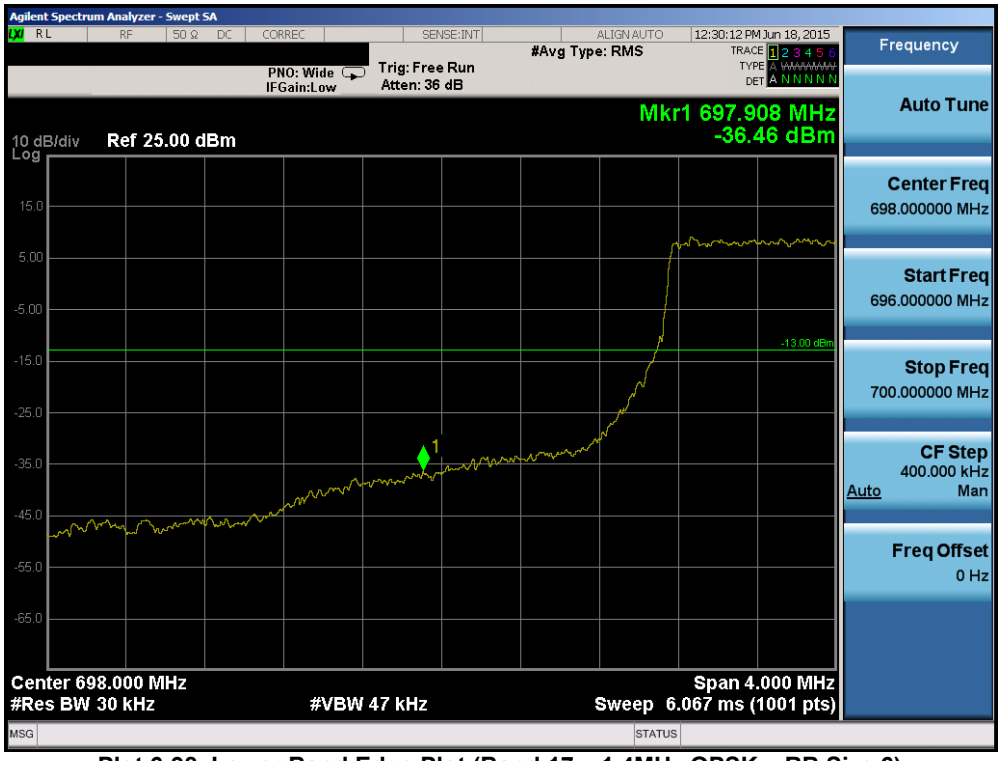

Plot 6-98. Lower Band Edge Plot (Band 17 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

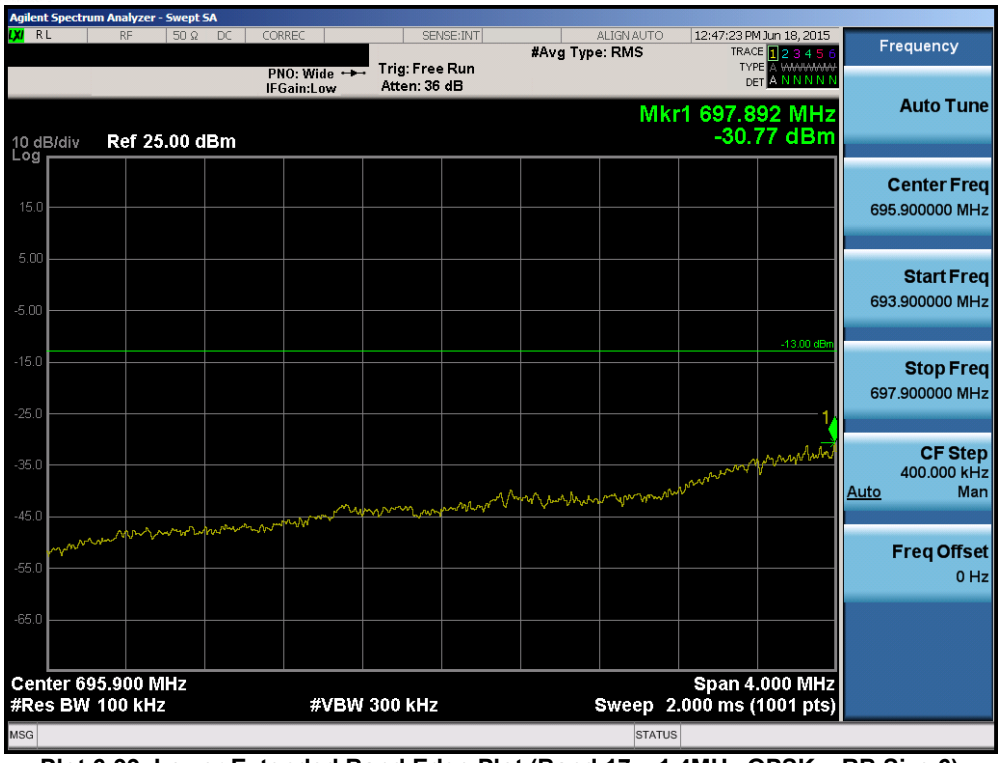

Plot 6-99. Lower Extended Band Edge Plot (Band 17 – 1.4MHz QPSK – RB Size 6)

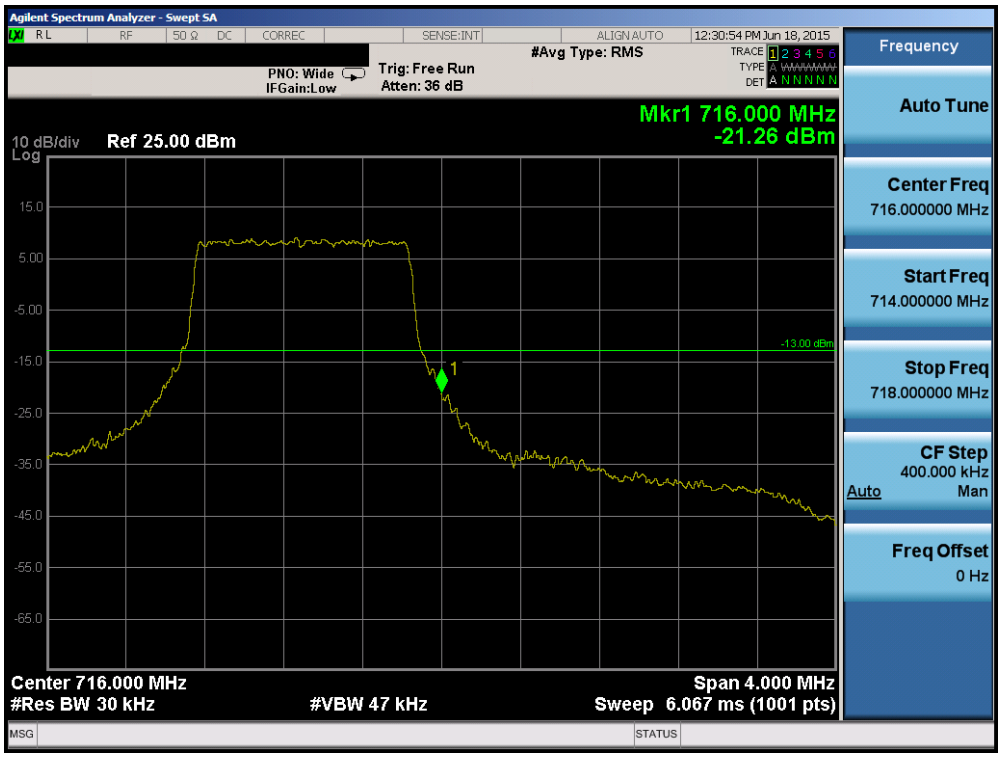

Plot 6-100. Upper Band Edge Plot (Band 17 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-101. Upper Extended Band Edge Plot (Band 17 – 1.4MHz QPSK – RB Size 6)

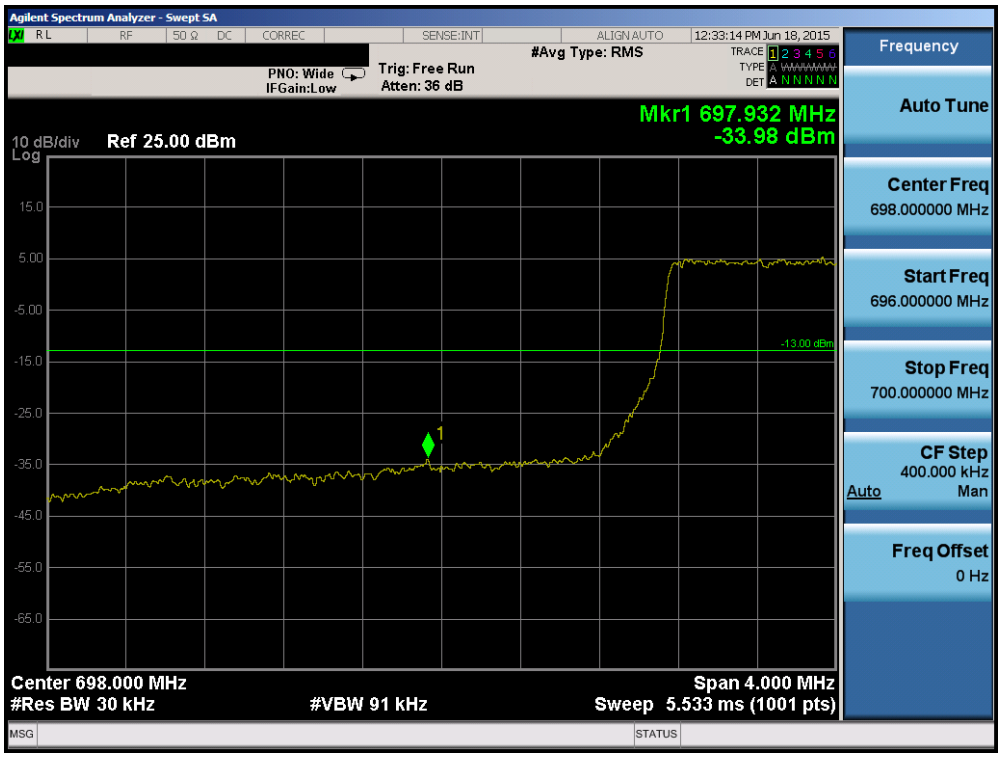

Plot 6-102. Lower Band Edge Plot (Band 17 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

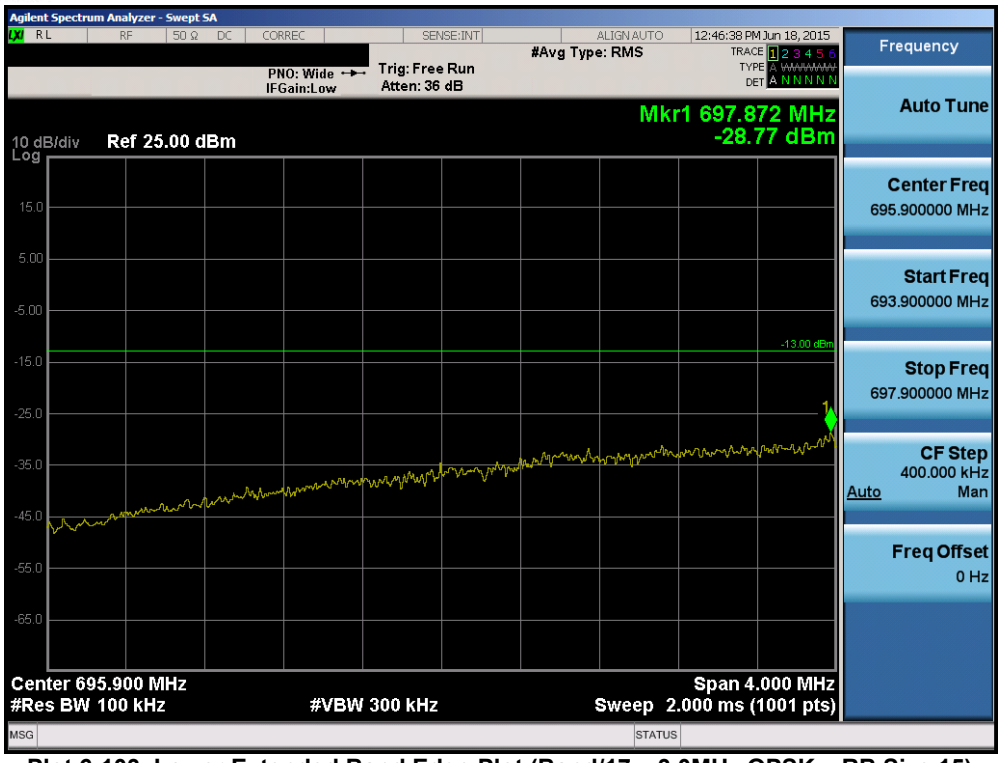

Plot 6-103. Lower Extended Band Edge Plot (Band/17 – 3.0MHz QPSK – RB Size 15)

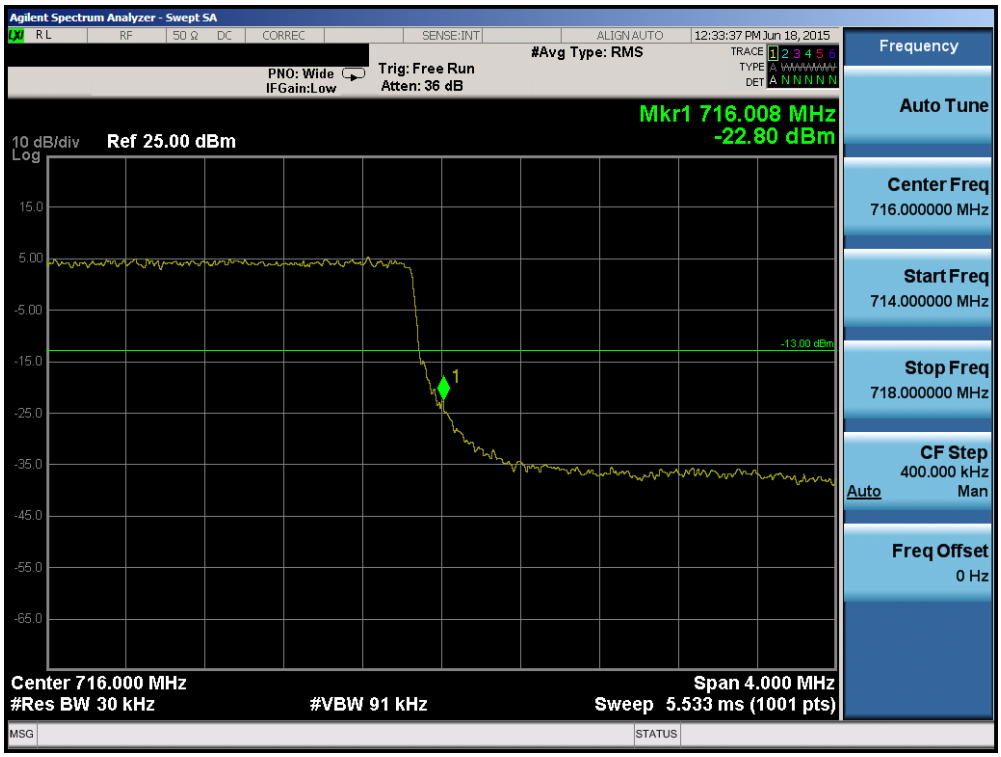

Plot 6-104. Upper Band Edge Plot (Band 17 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

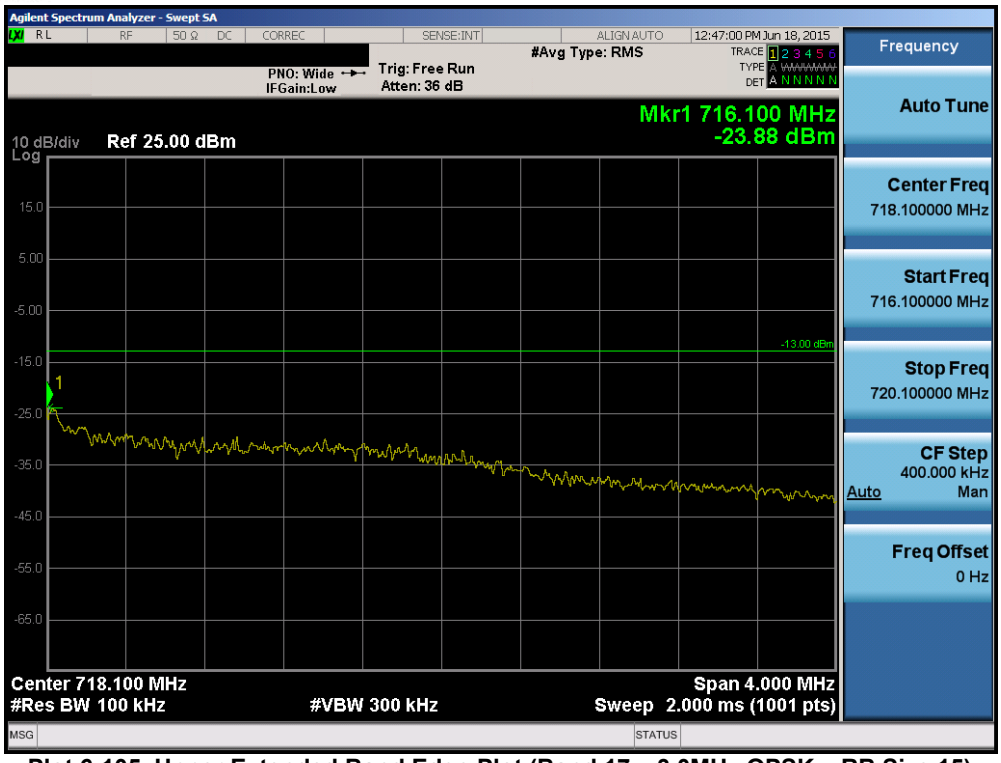

Plot 6-105. Upper Extended Band Edge Plot (Band 17 – 3.0MHz QPSK – RB Size 15)

Plot 6-106. Lower Band Edge Plot (Band 12/17 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

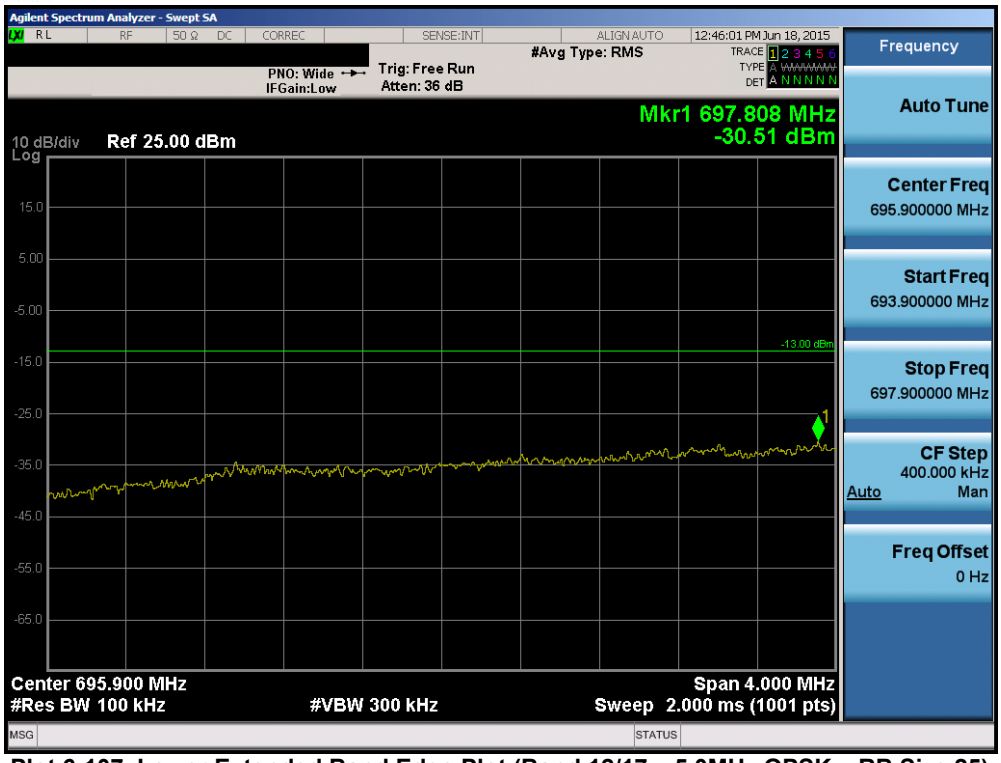

Plot 6-107. Lower Extended Band Edge Plot (Band 12/17 – 5.0MHz QPSK – RB Size 25)

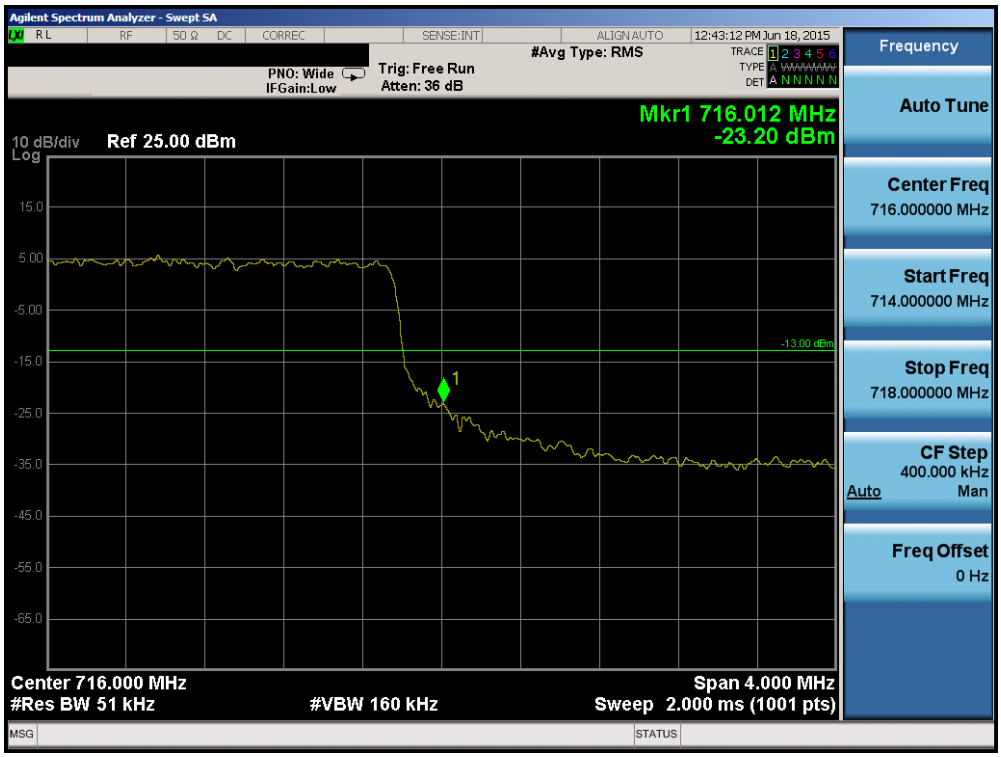

Plot 6-108. Upper Band Edge Plot (Band 12/17 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

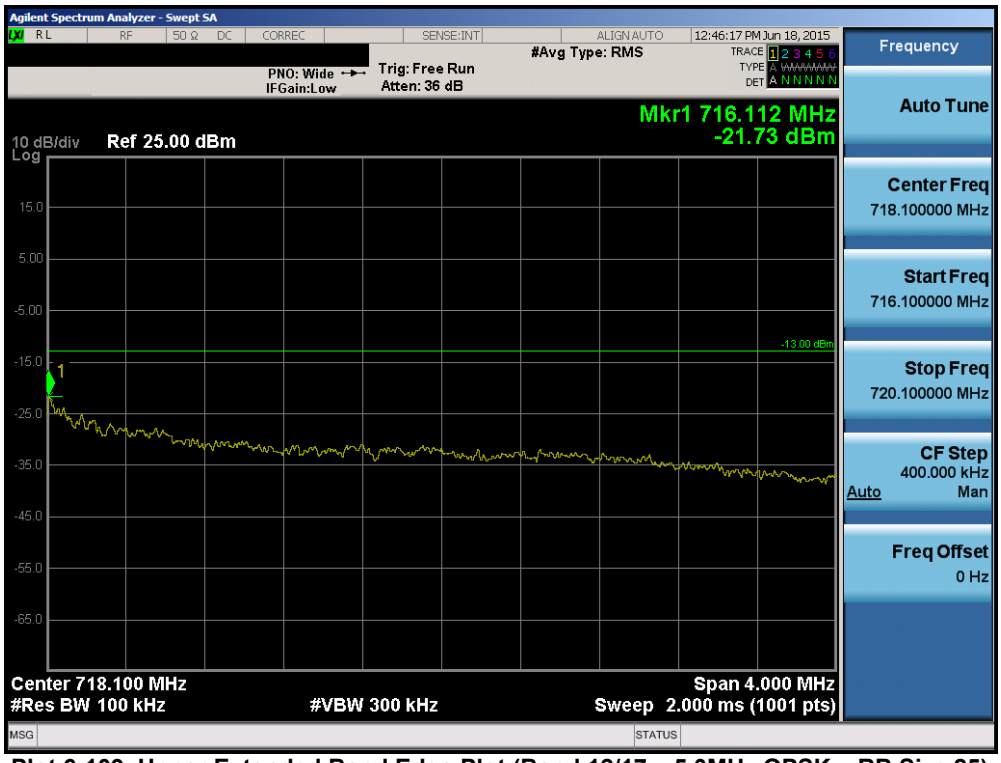

Plot 6-109. Upper Extended Band Edge Plot (Band 12/17 – 5.0MHz QPSK – RB Size 25)

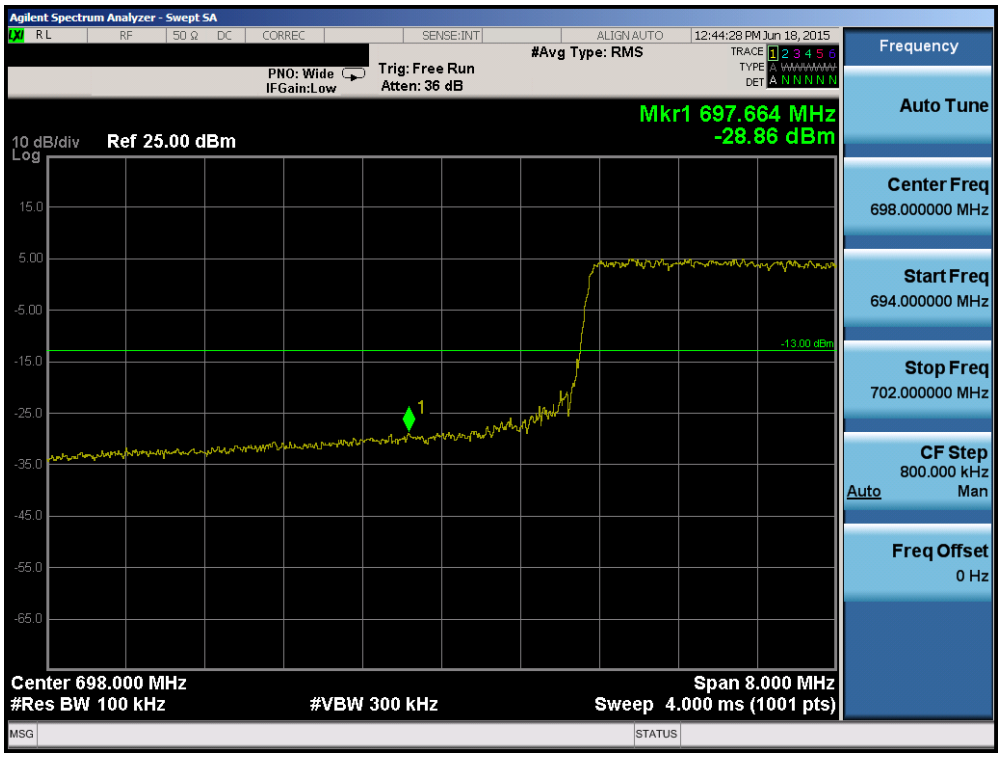

Plot 6-110. Lower Band Edge Plot (Band 12/17 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

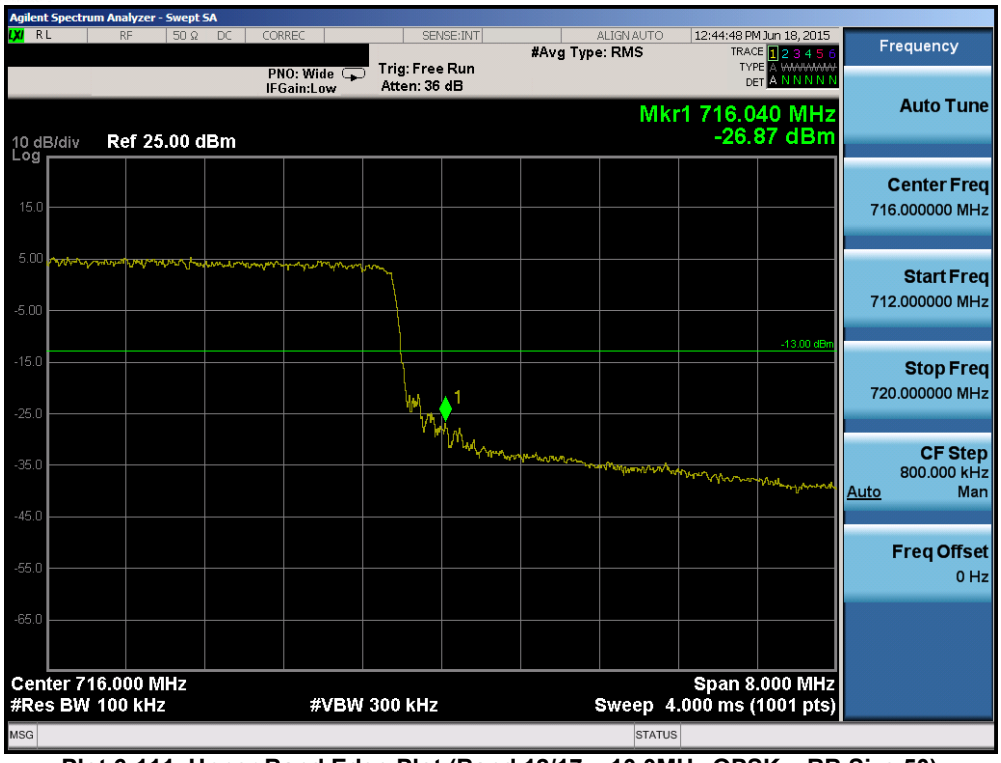

Plot 6-111. Upper Band Edge Plot (Band 12/17 – 10.0MHz QPSK – RB Size 50)

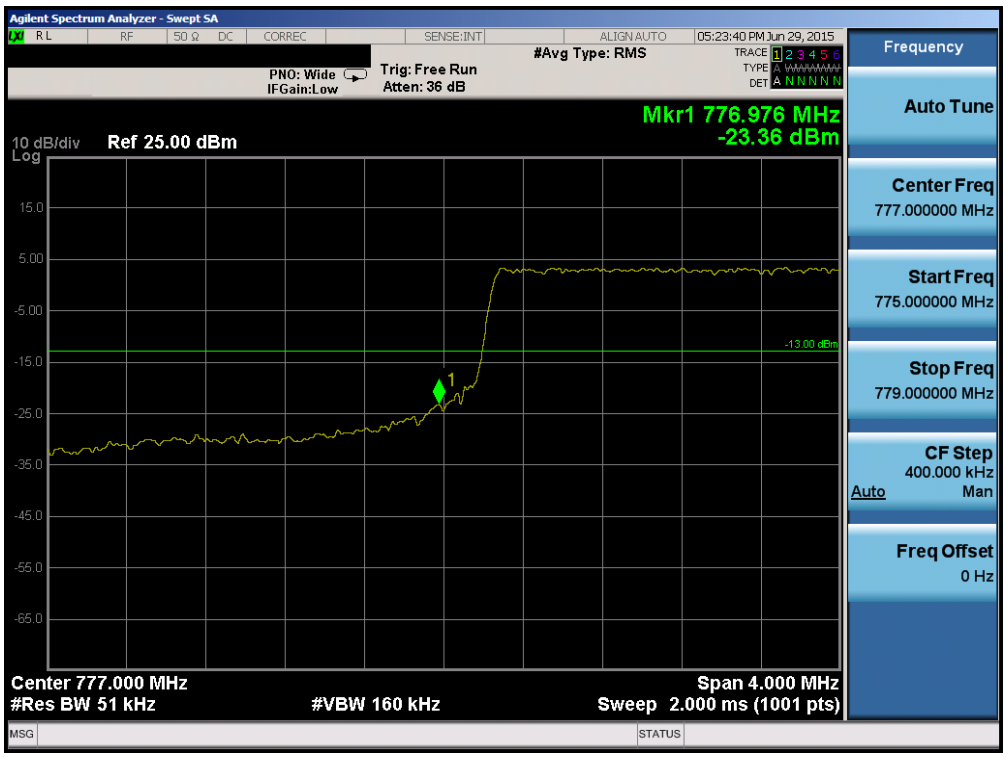

Plot 6-112. Lower Band Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

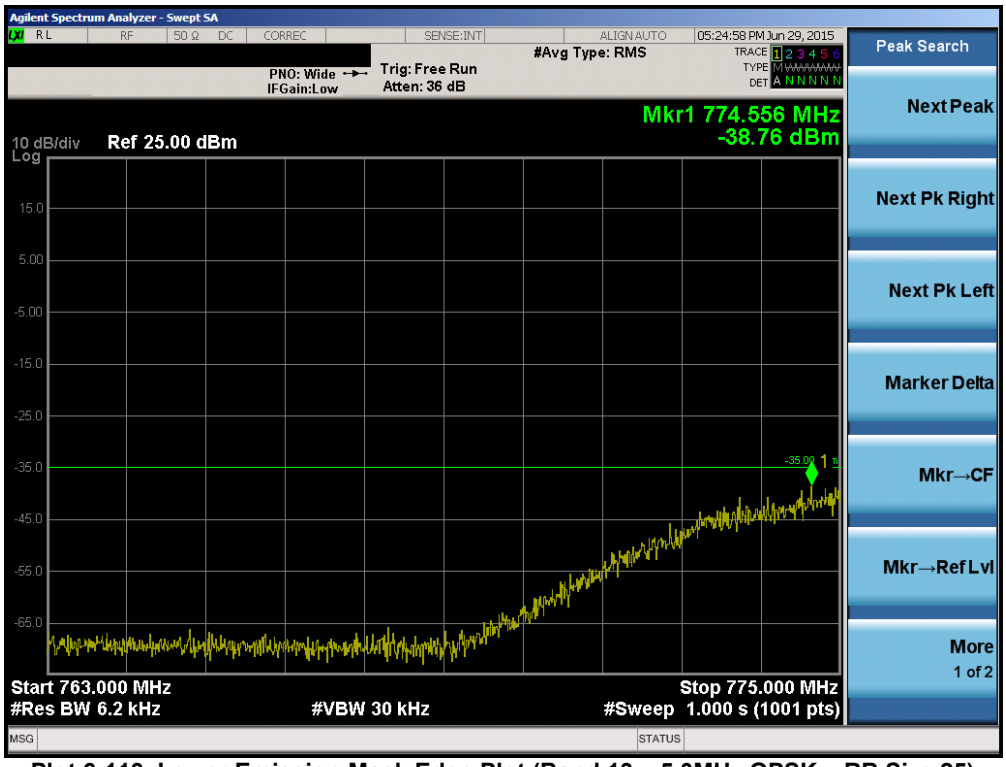

Plot 6-113. Lower Emission Mask Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)

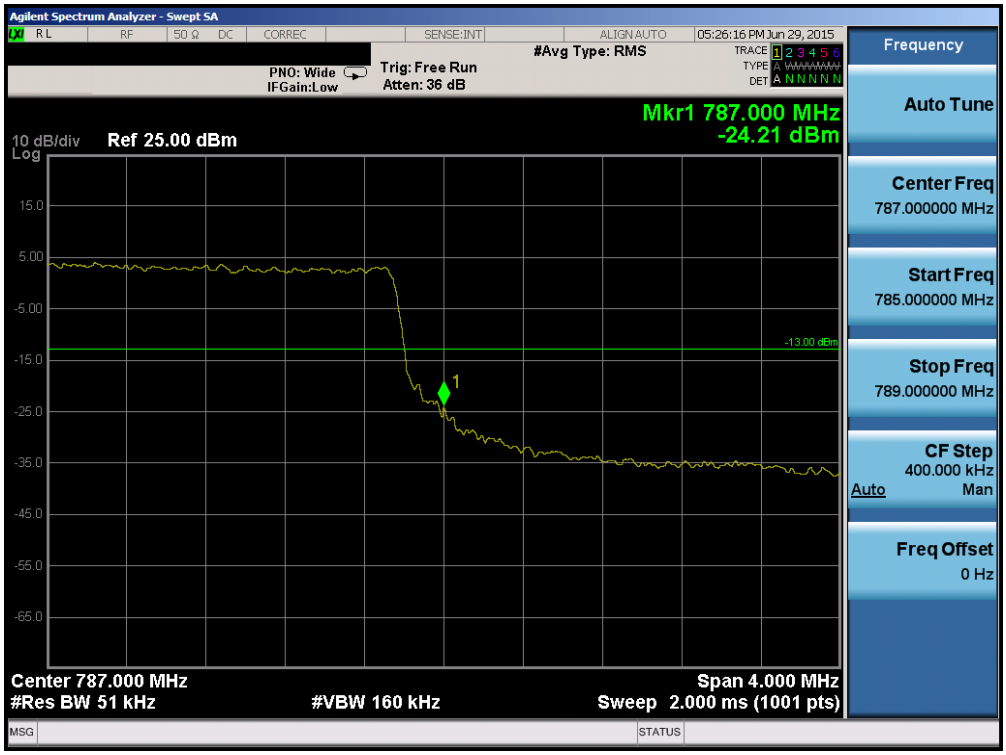

Plot 6-114. Upper Band Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

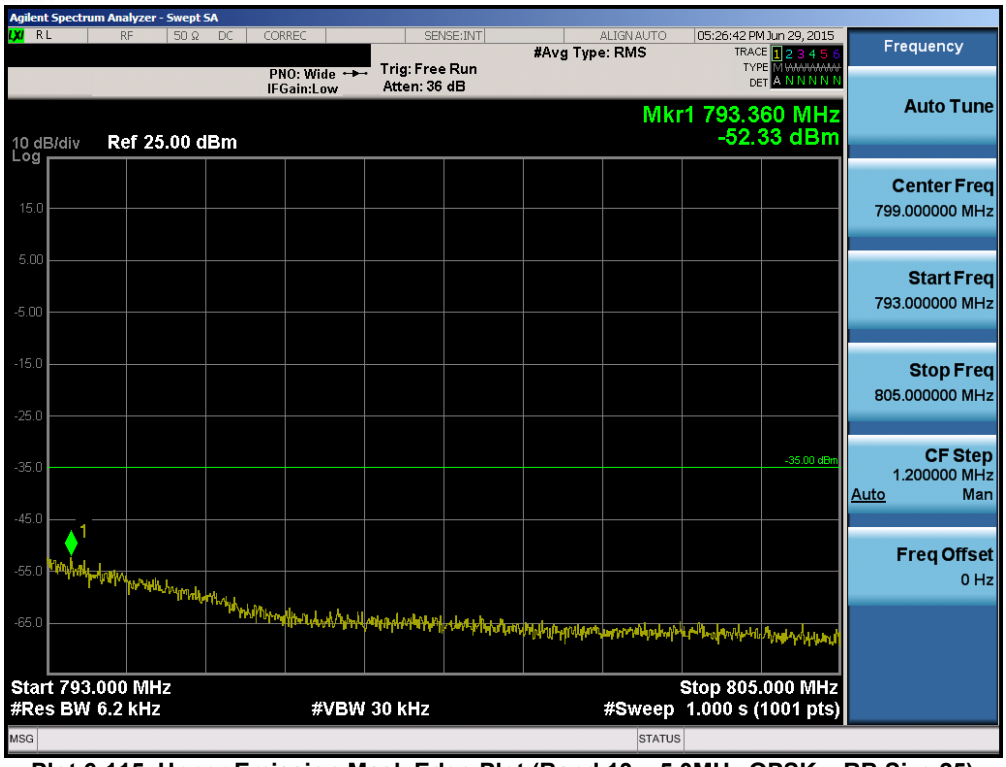

Plot 6-115. Upper Emission Mask Edge Plot (Band 13 – 5.0MHz QPSK – RB Size 25)

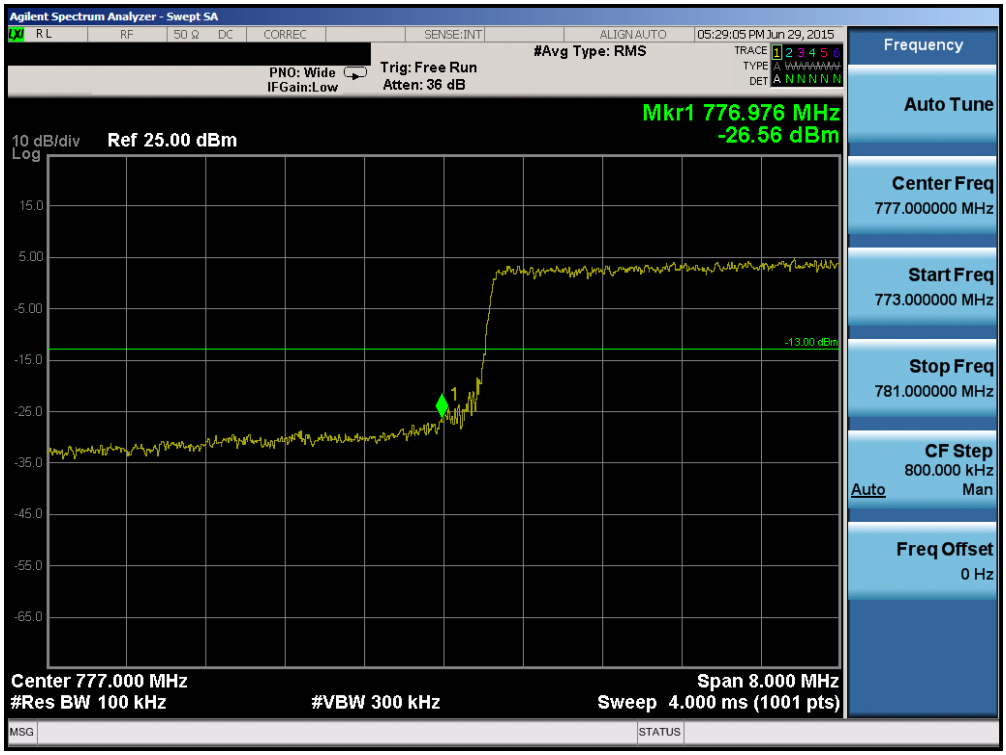

Plot 6-116. Lower Band Edge Plot (Band 13 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

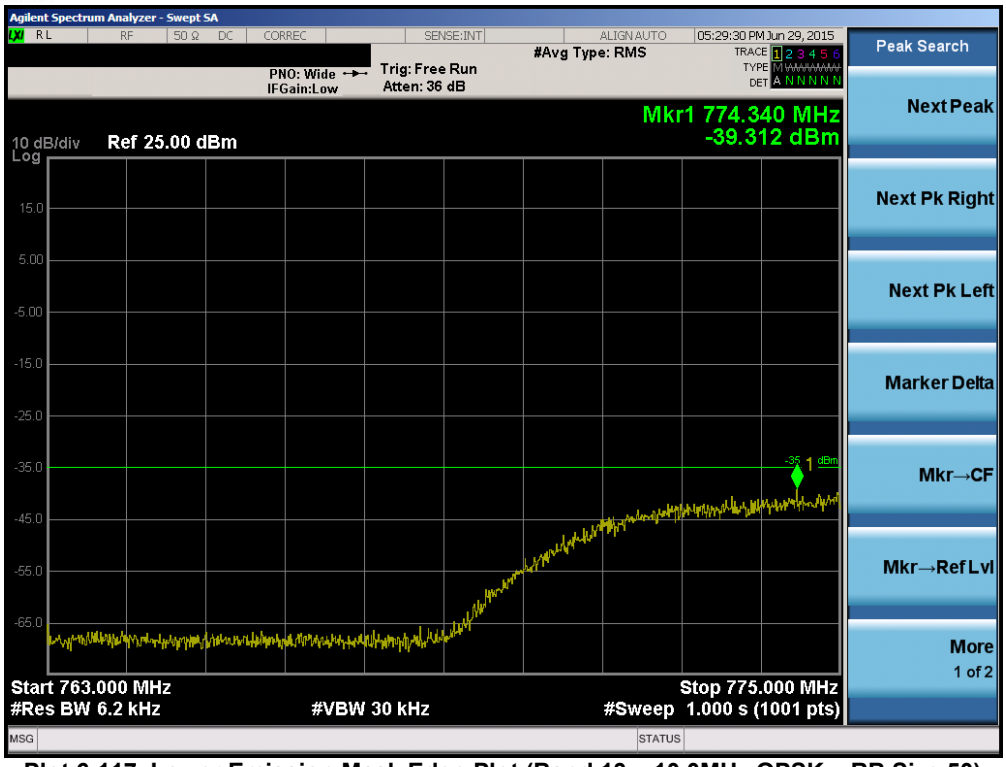

Plot 6-117. Lower Emission Mask Edge Plot (Band 13 – 10.0MHz QPSK – RB Size 50)

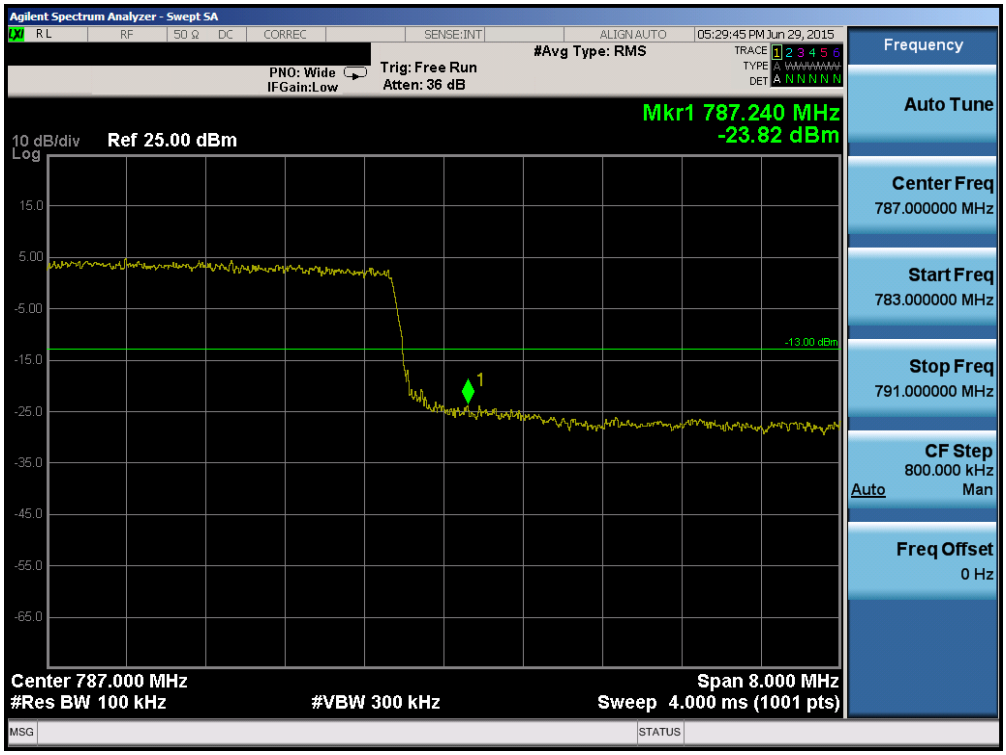

Plot 6-118. Upper Band Edge Plot (Band 13 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

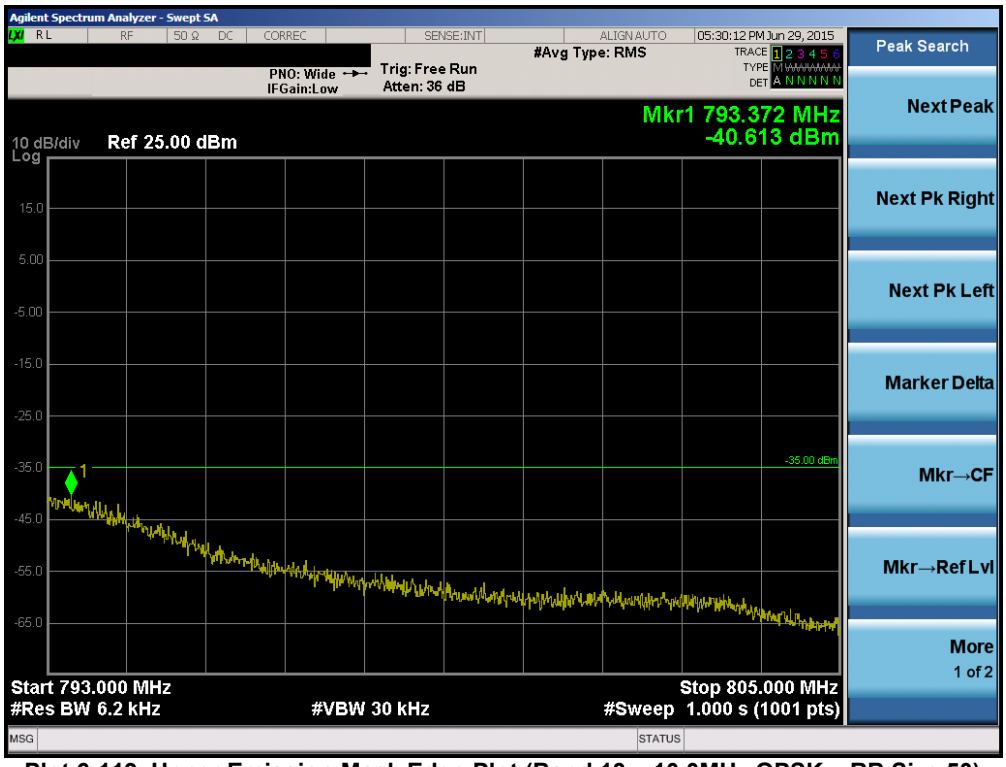

Plot 6-119. Upper Emission Mask Edge Plot (Band 13 – 10.0MHz QPSK – RB Size 50)

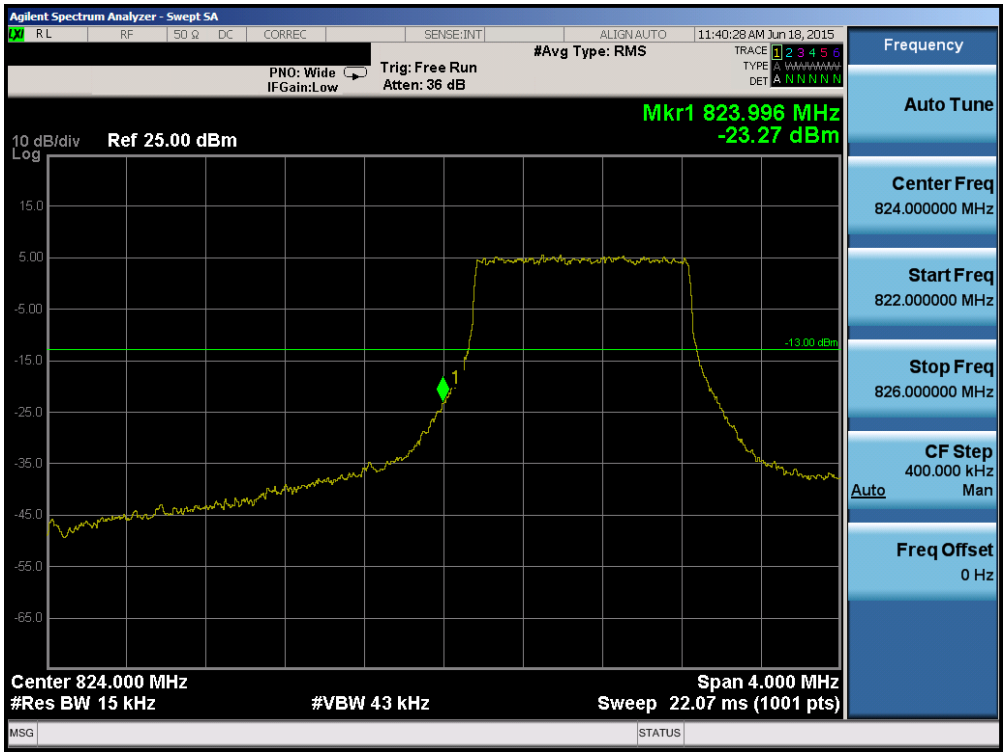

Plot 6-120. Lower Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

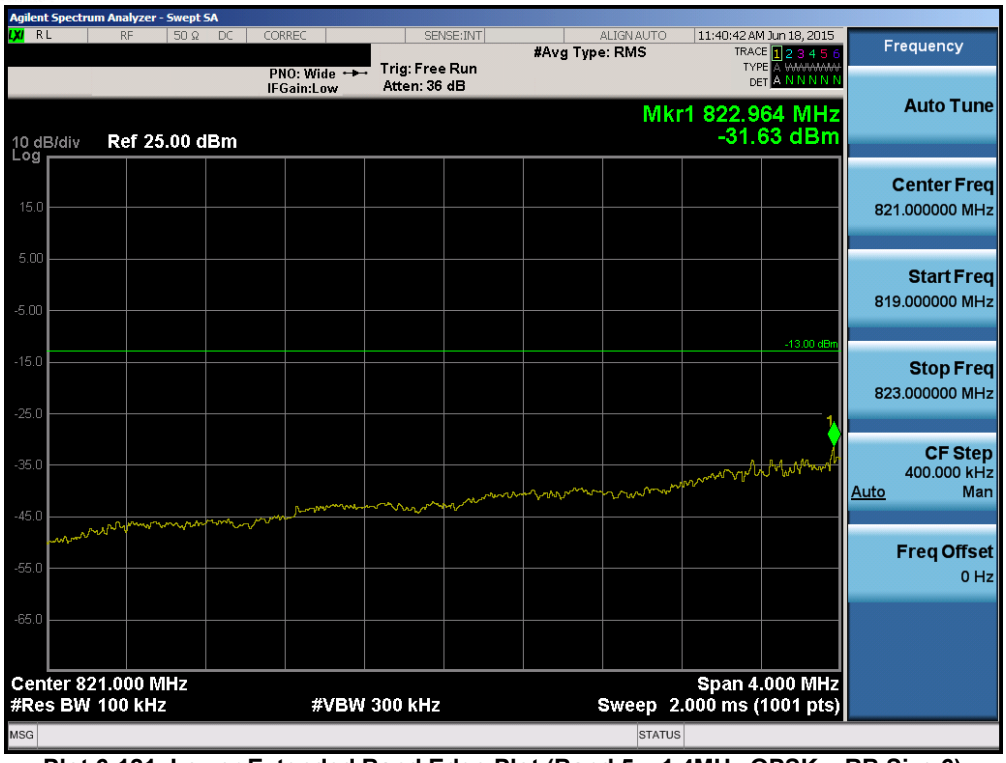

Plot 6-121. Lower Extended Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

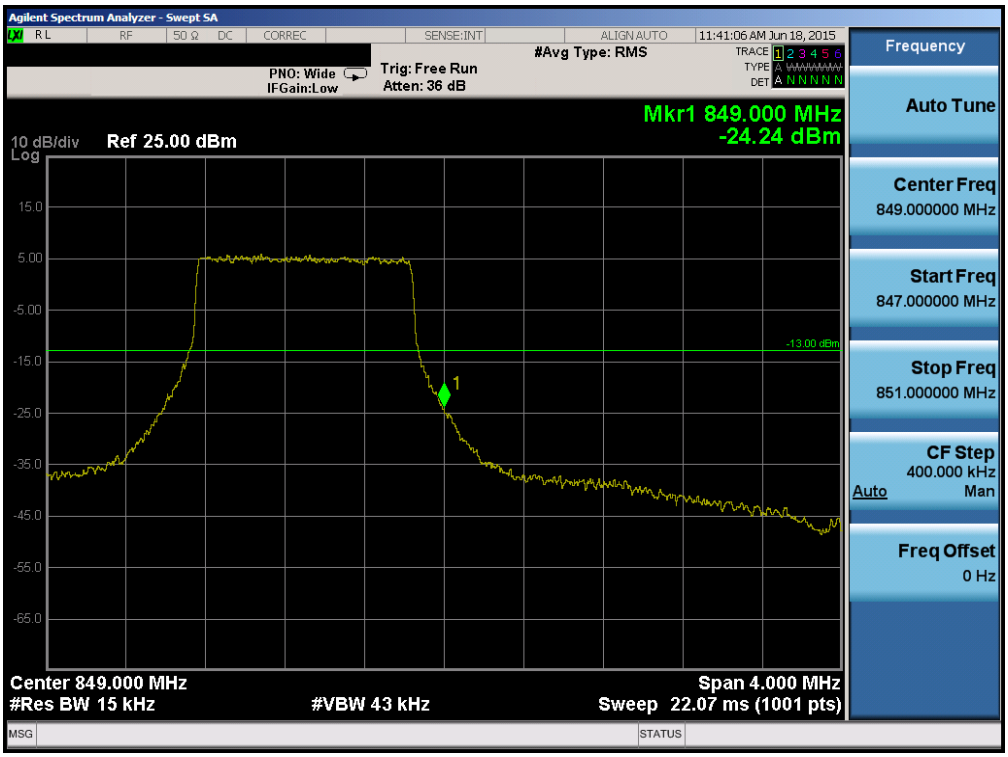

Plot 6-122. Upper Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-123. Upper Extended Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

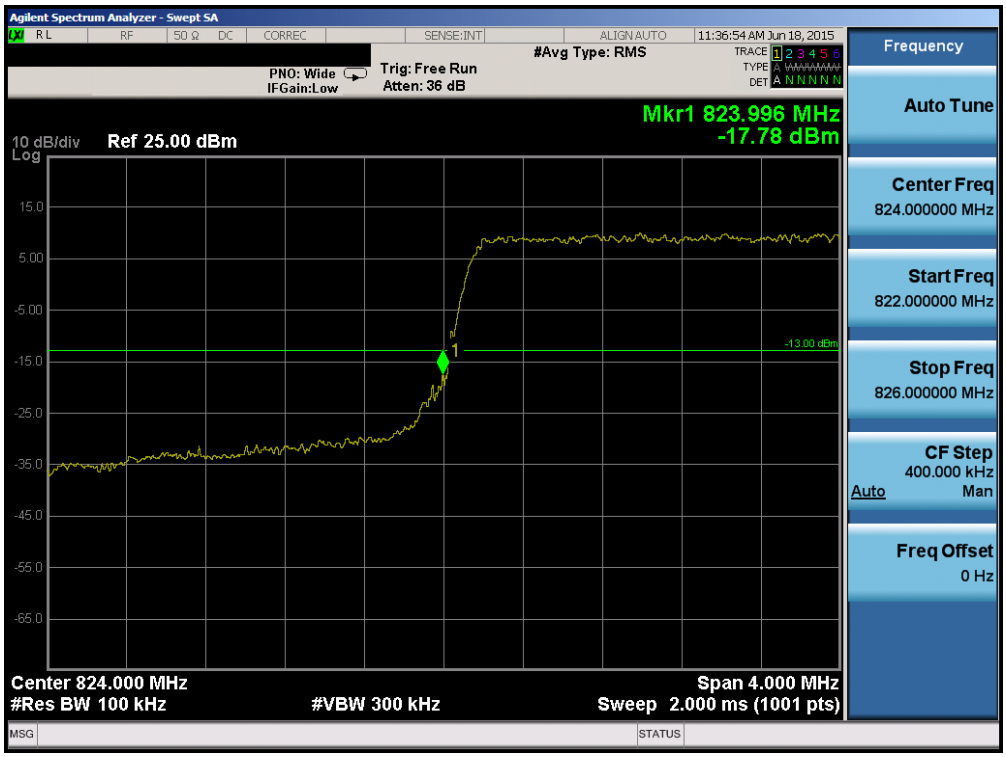

Plot 6-124. Lower Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-125. Upper Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

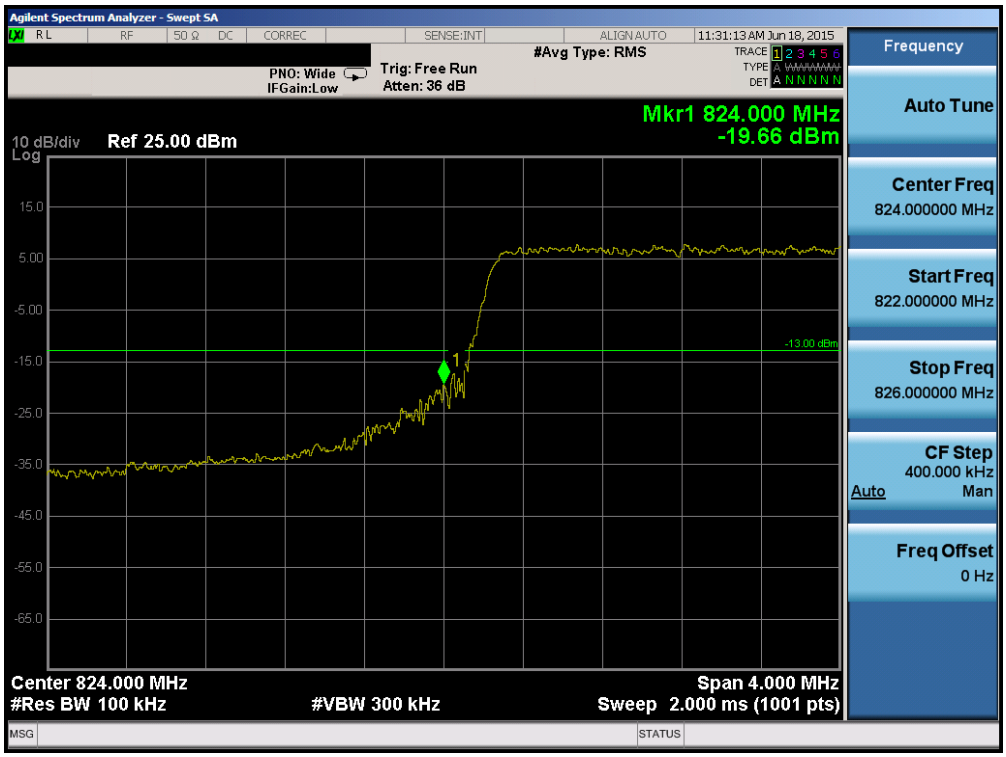

Plot 6-126. Lower Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-127. Upper Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

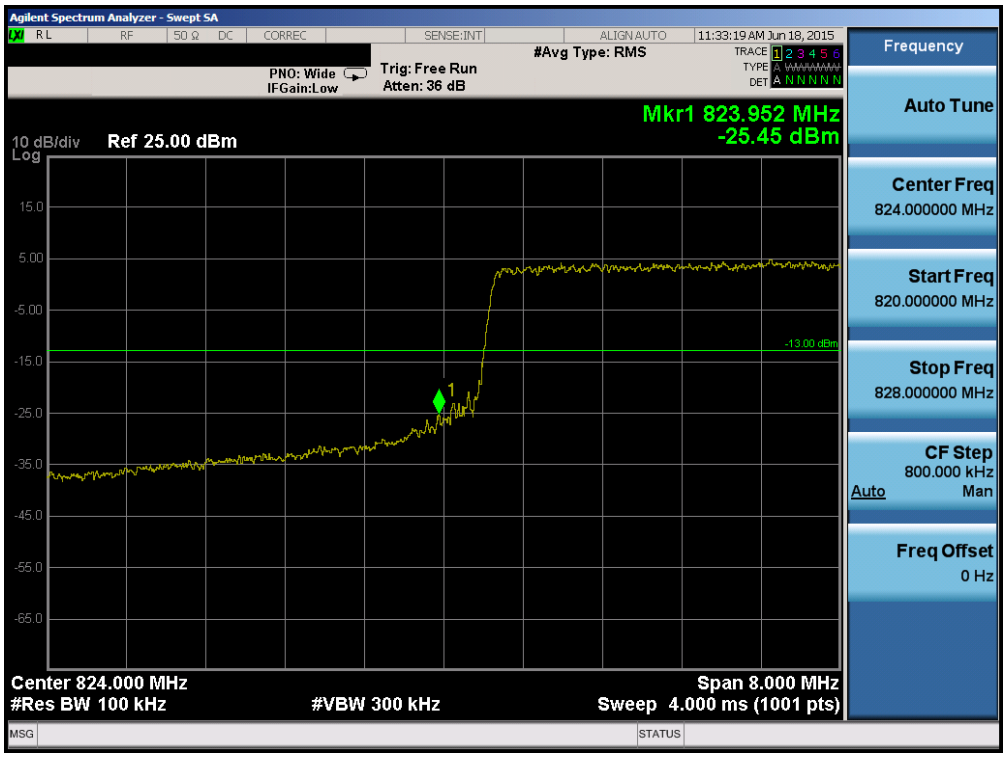

Plot 6-128. Lower Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-129. Upper Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

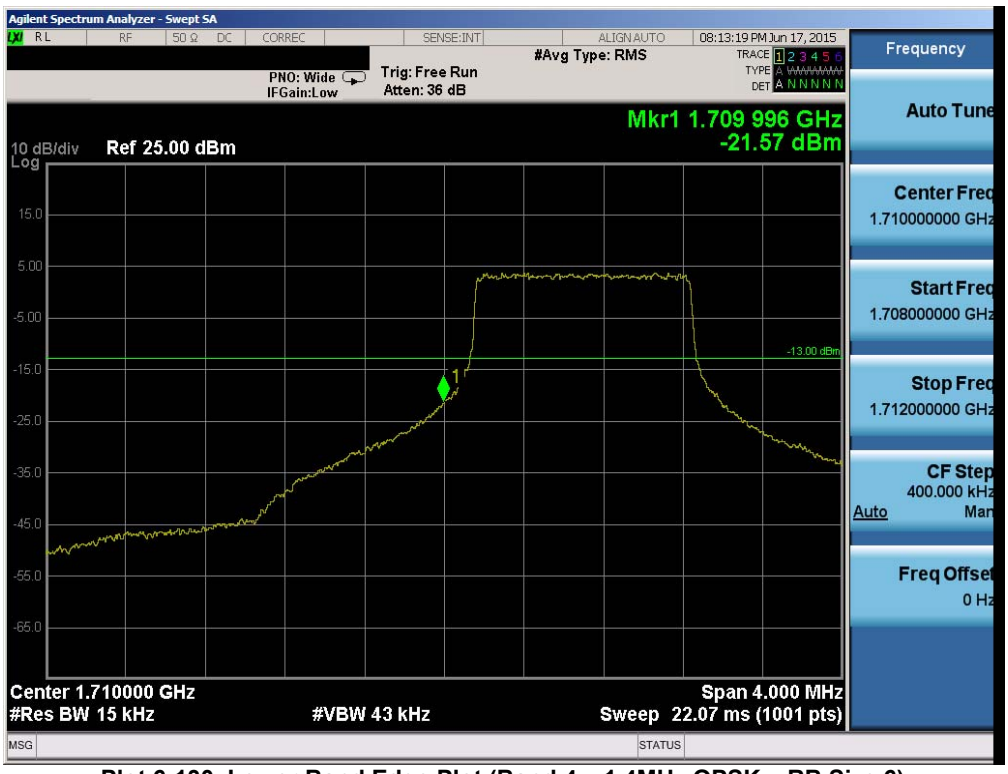

Plot 6-130. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

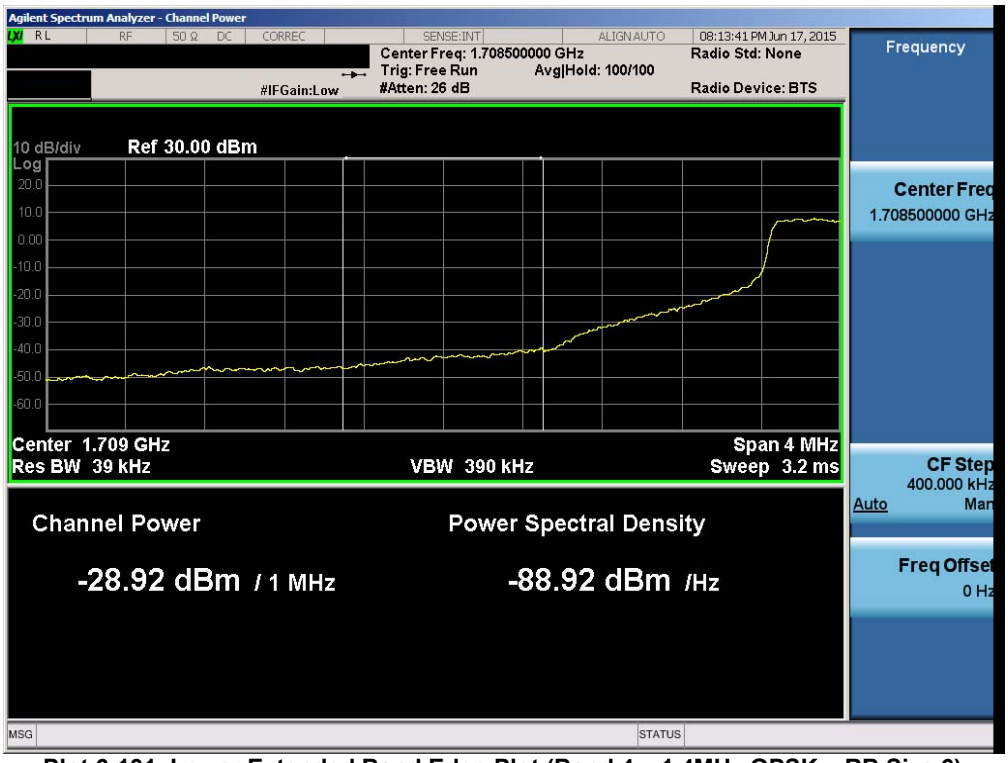

Plot 6-131. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

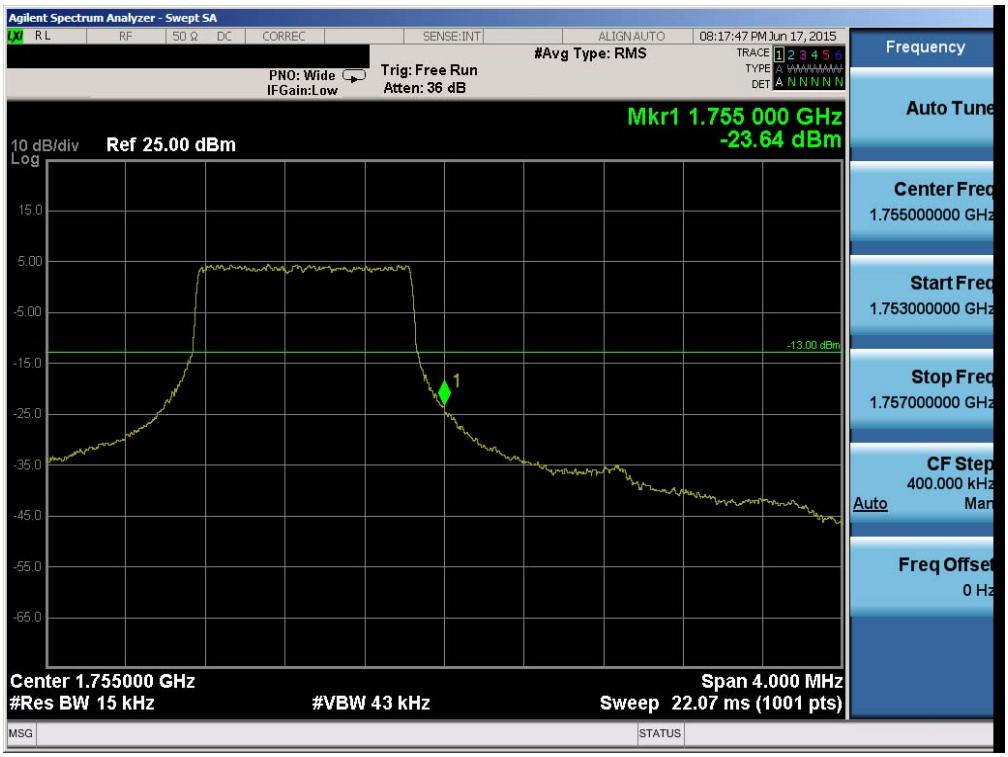

Plot 6-132. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

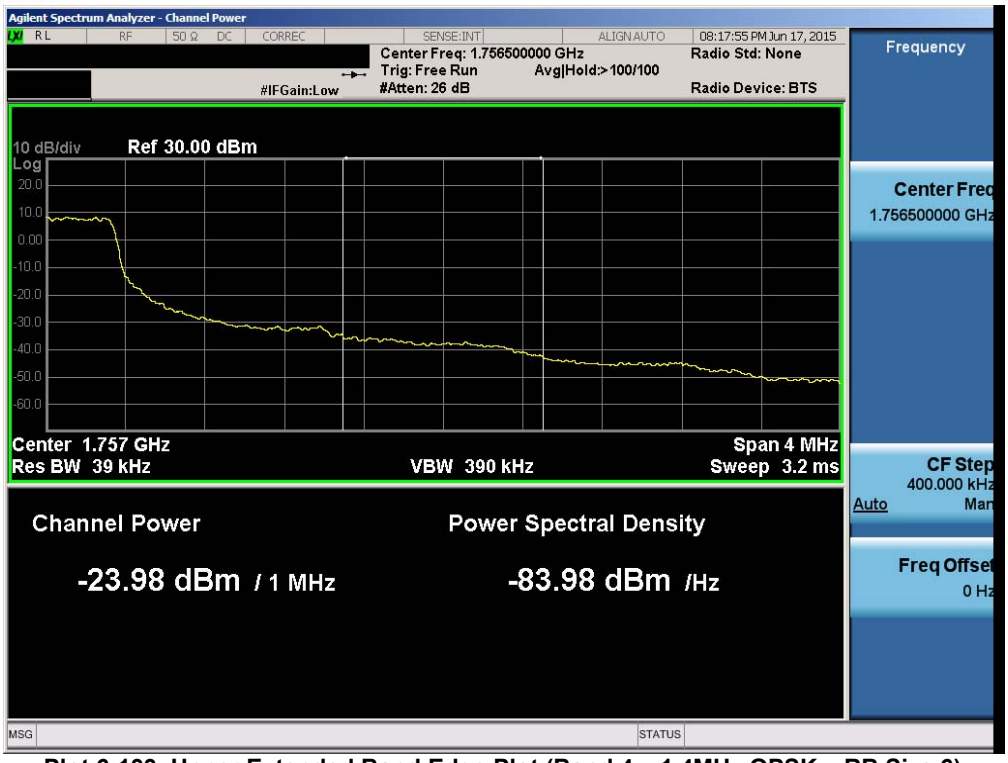

Plot 6-133. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

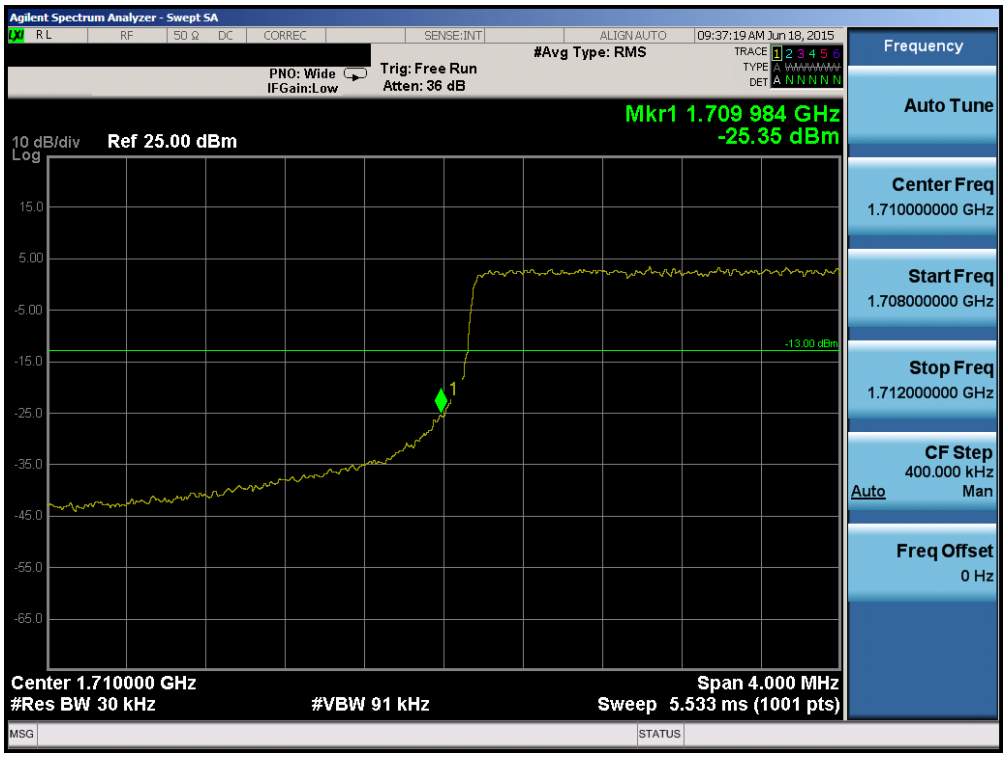

Plot 6-134. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

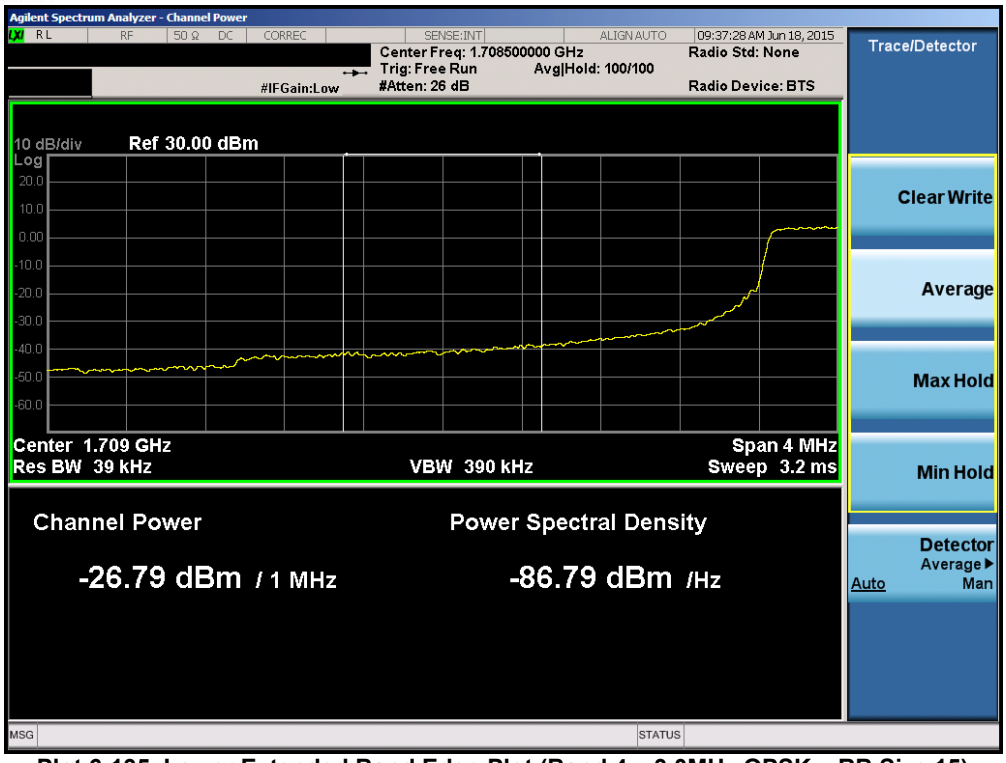

Plot 6-135. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

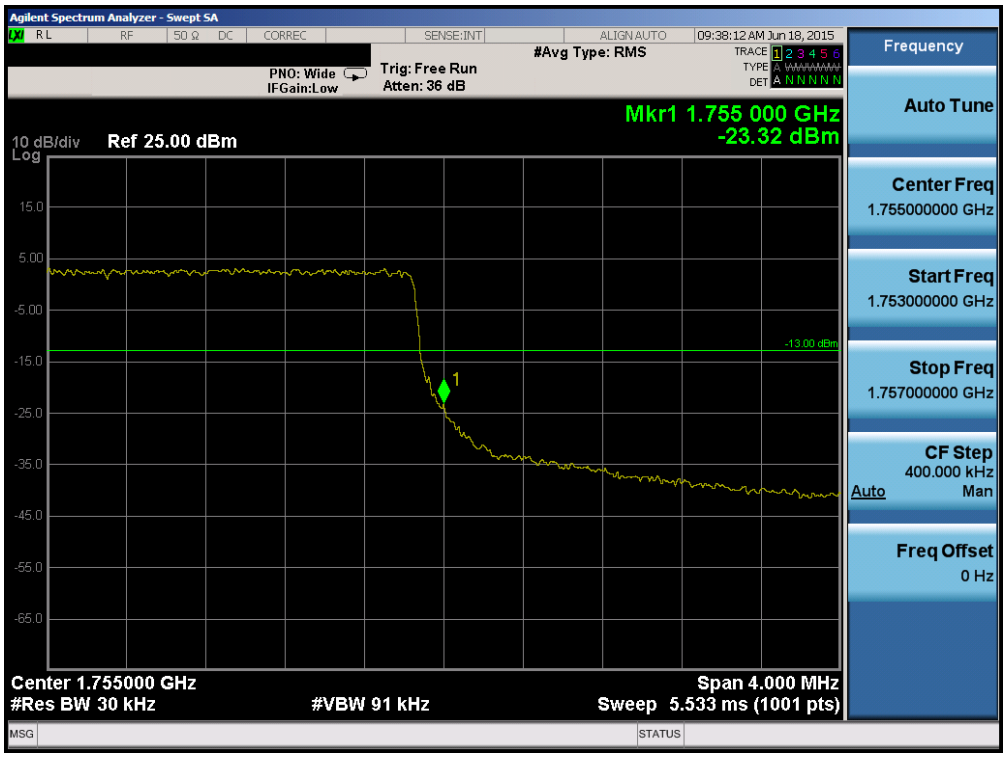

Plot 6-136. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

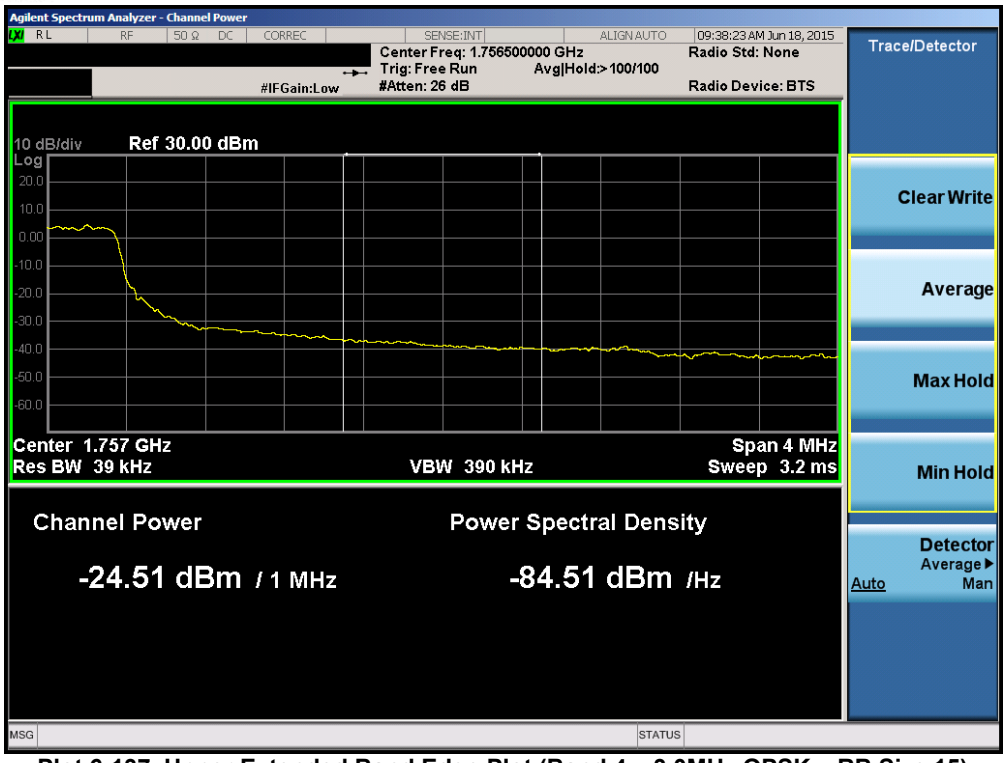

Plot 6-137. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

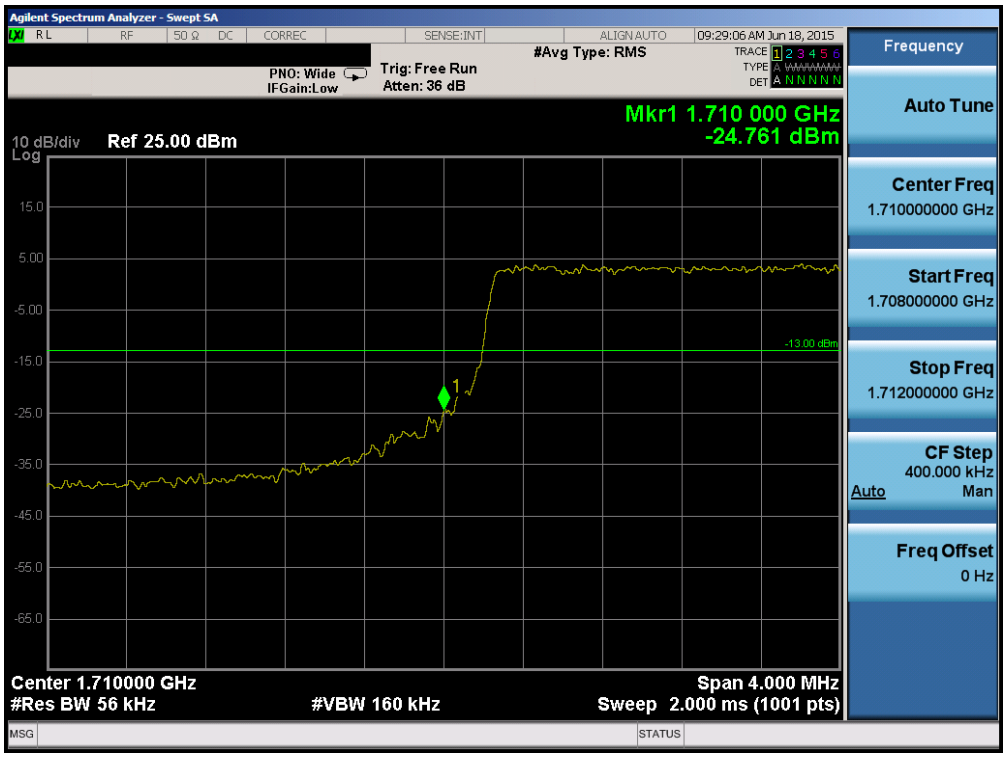

Plot 6-138. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

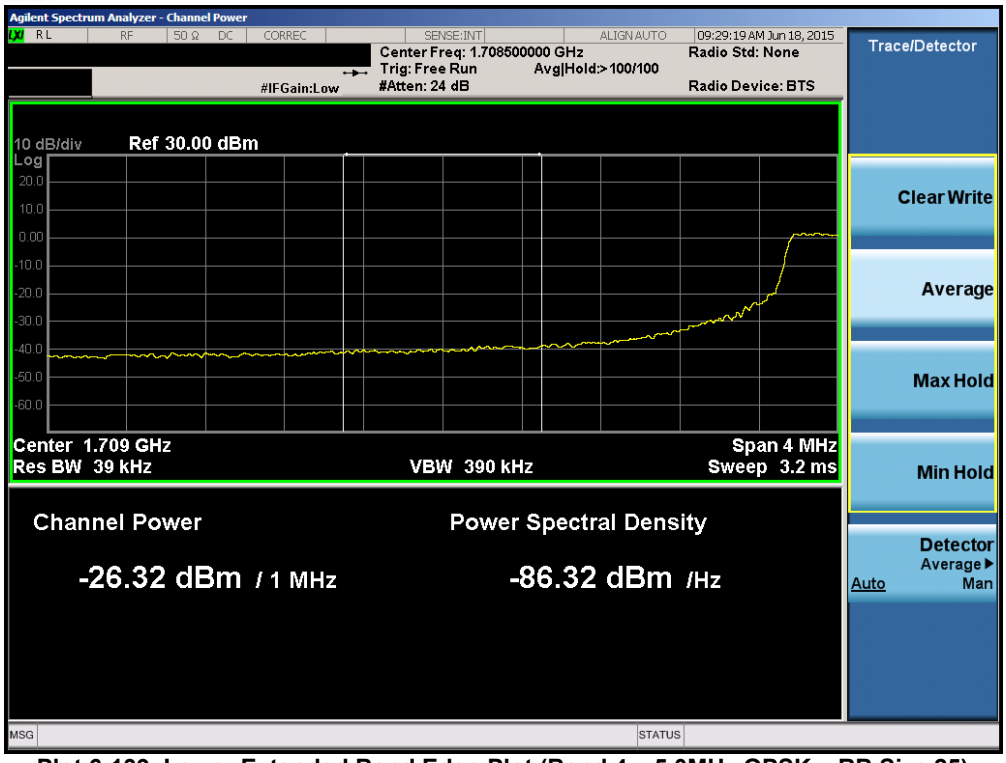

Plot 6-139. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

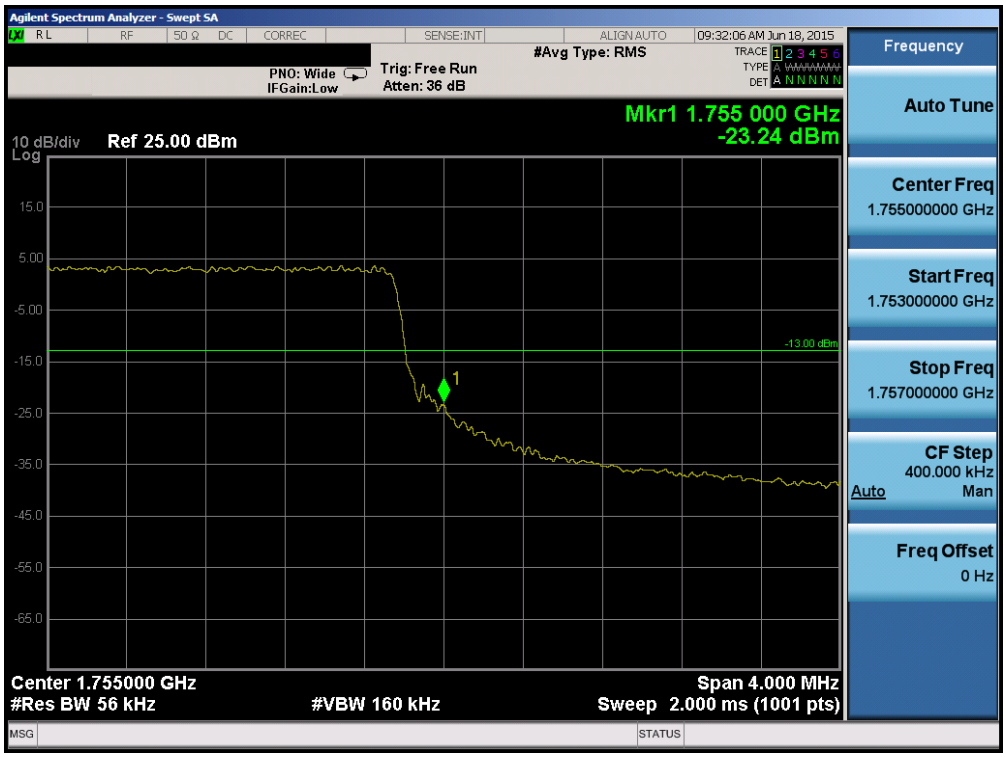

Plot 6-140. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

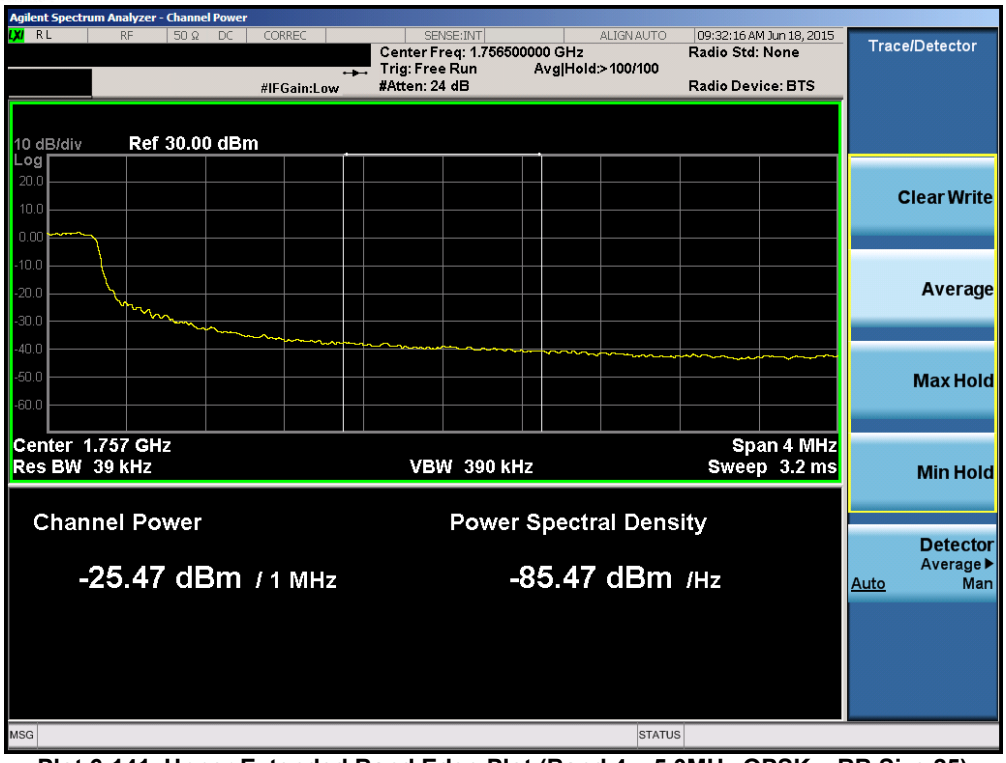

Plot 6-141. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

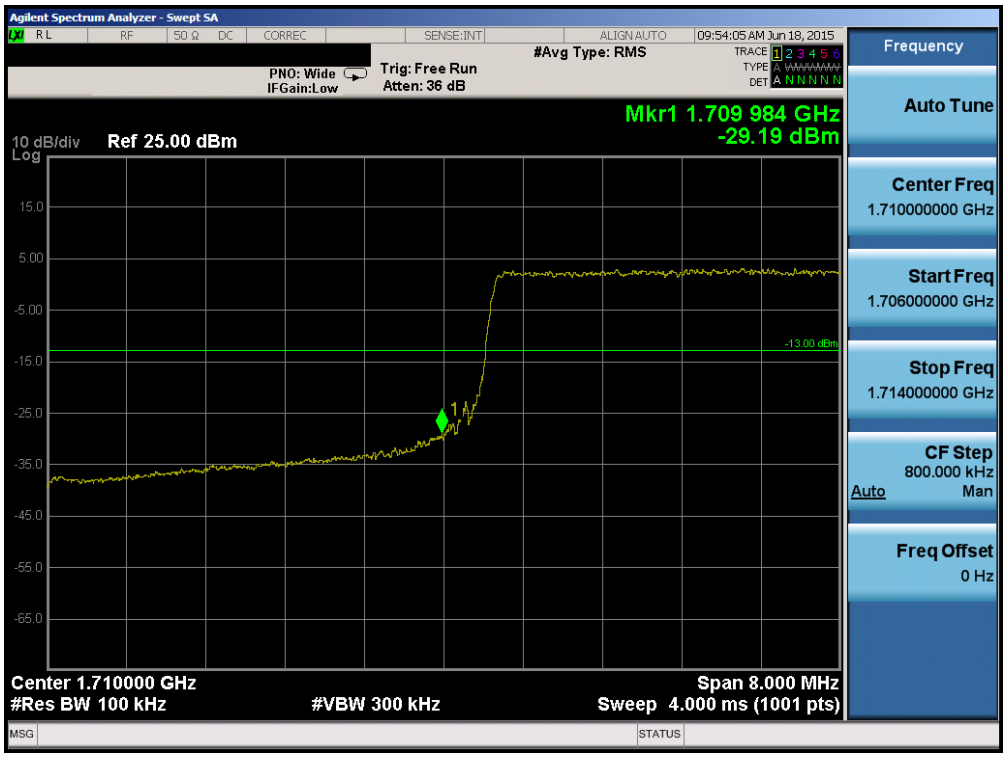

Plot 6-142. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

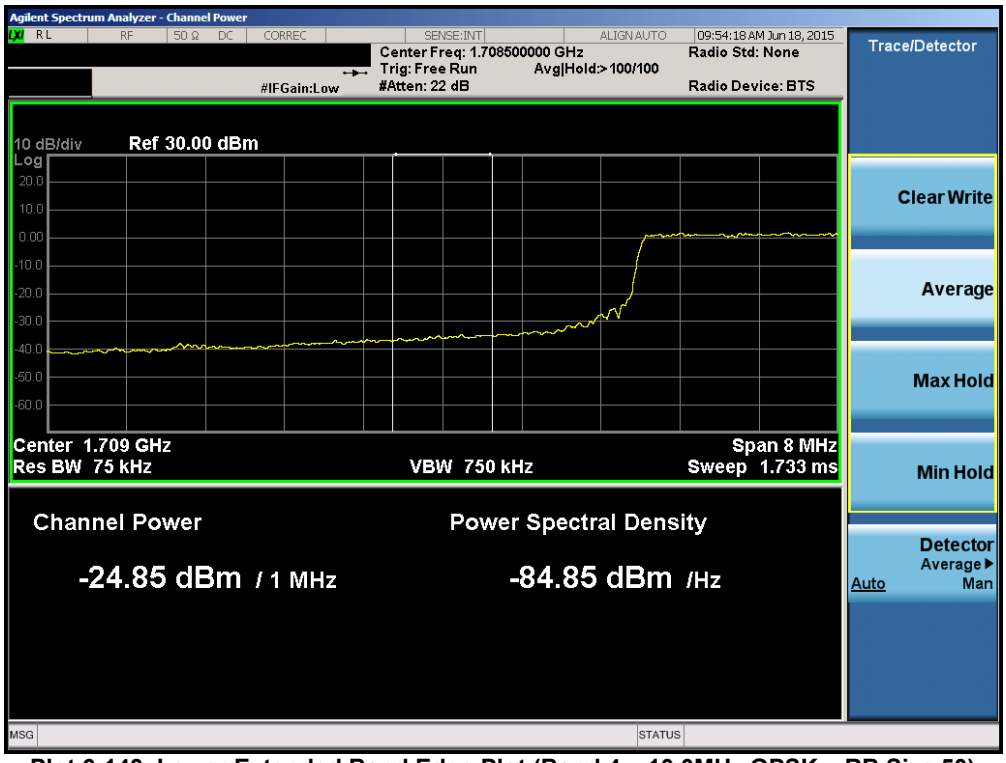

Plot 6-143. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

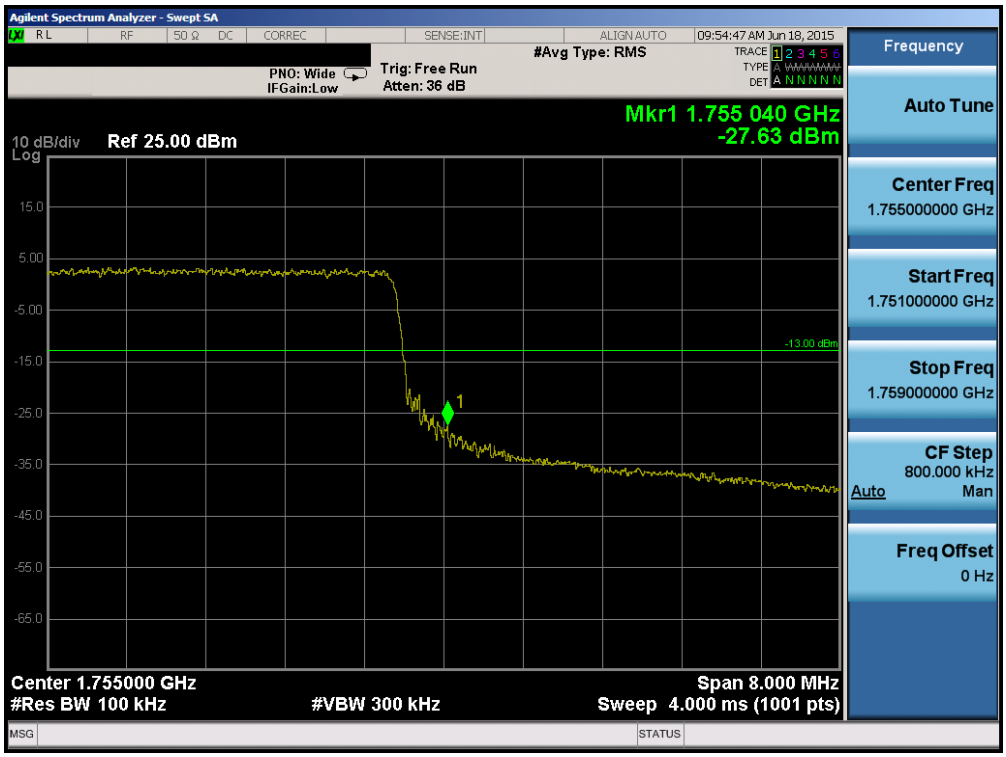

Plot 6-144. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

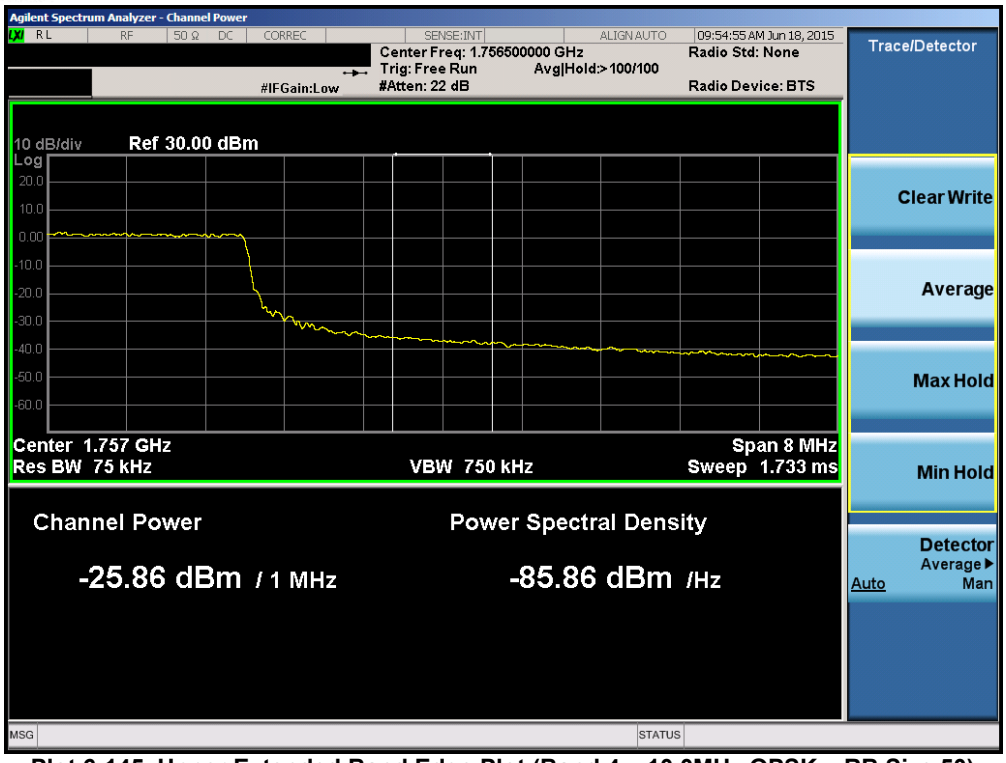

Plot 6-145. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

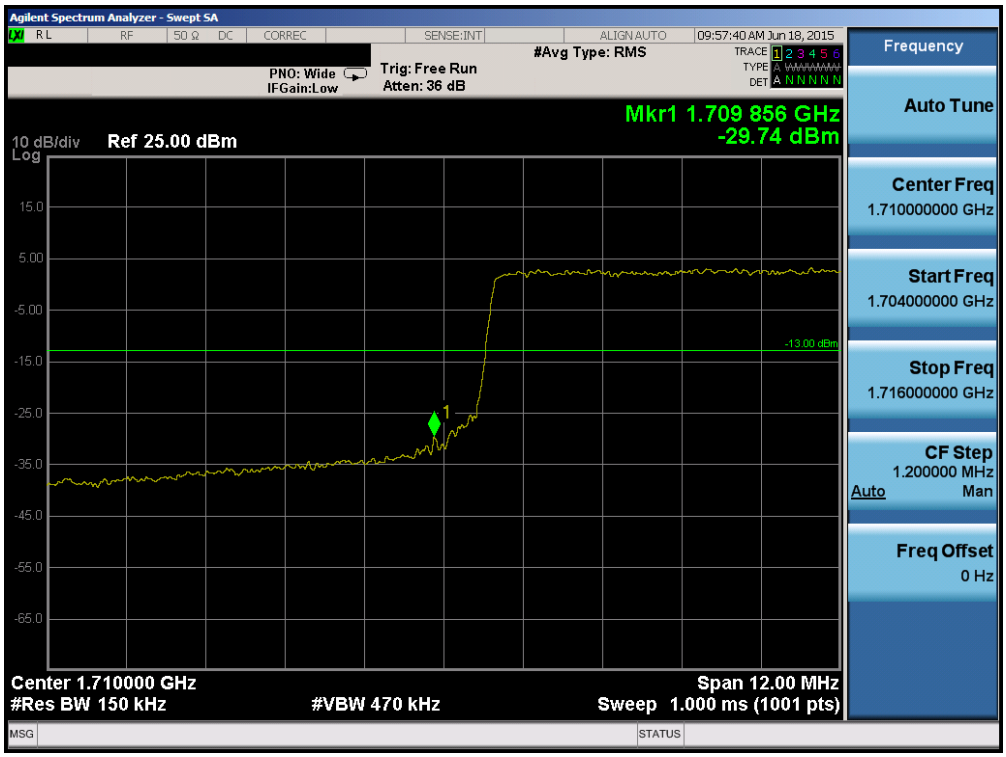

Plot 6-146. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

© 2015 PCTEST Engineering Laboratory, Inc.

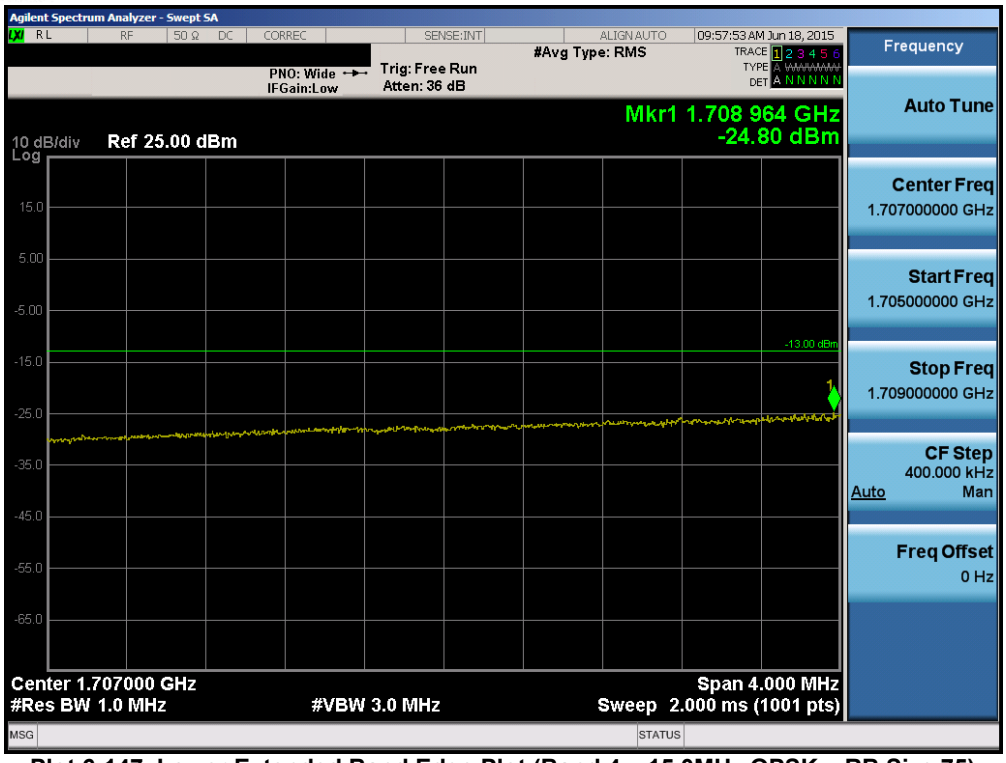

Plot 6-147. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

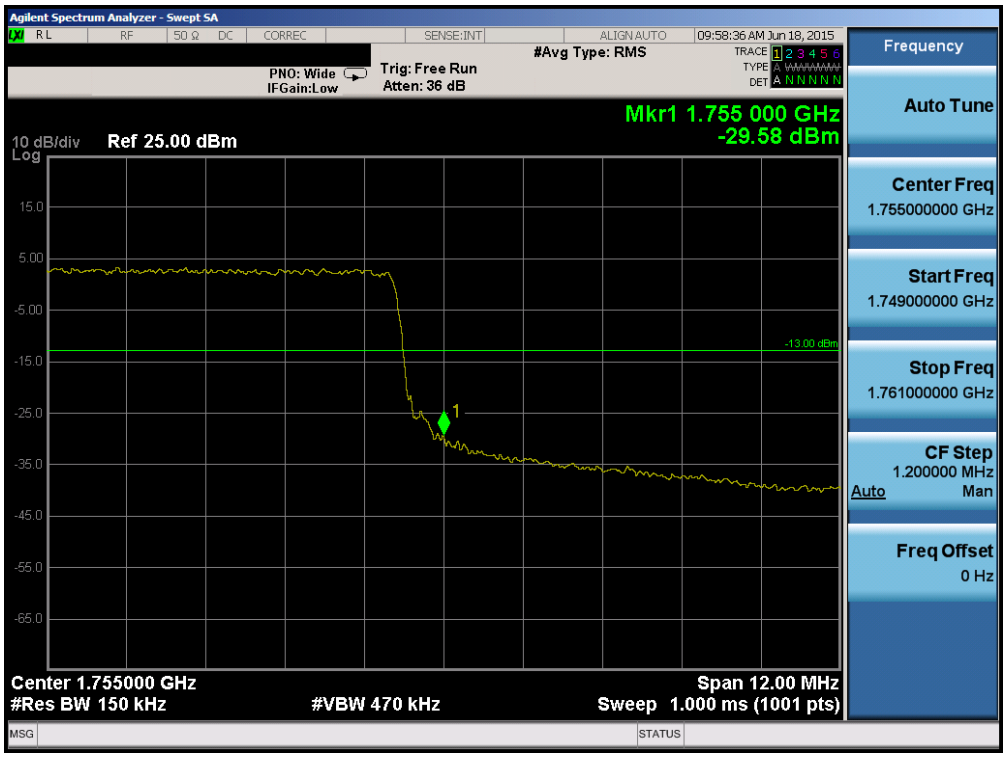

Plot 6-148. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-149. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

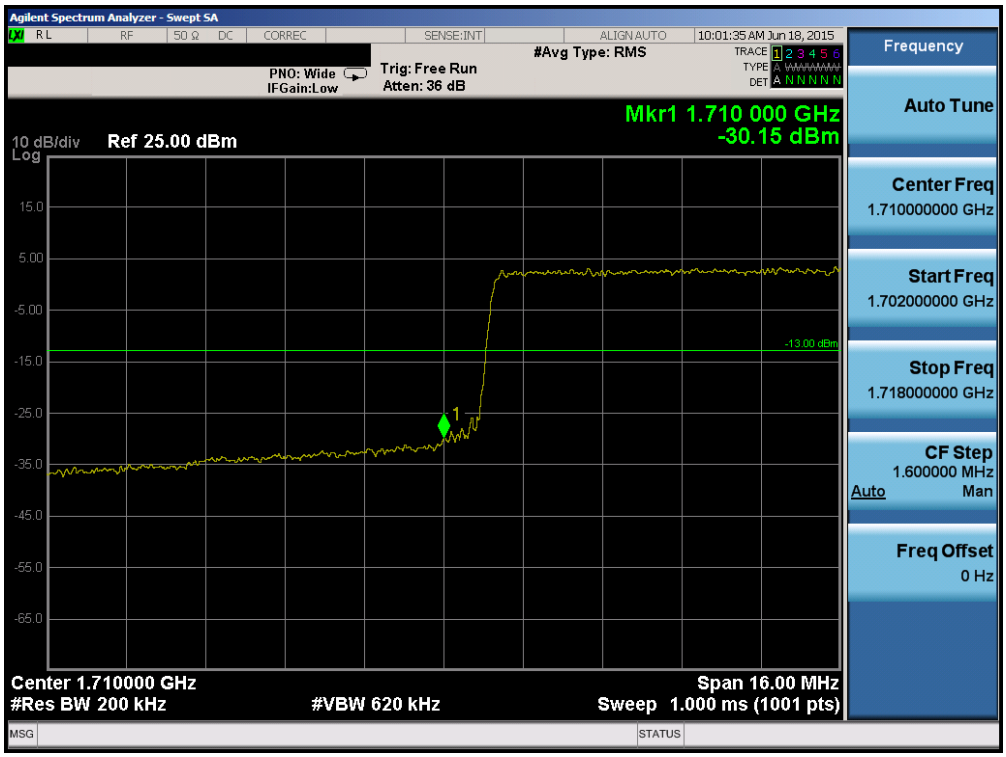

Plot 6-150. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

© 2015 PCTEST Engineering Laboratory, Inc.

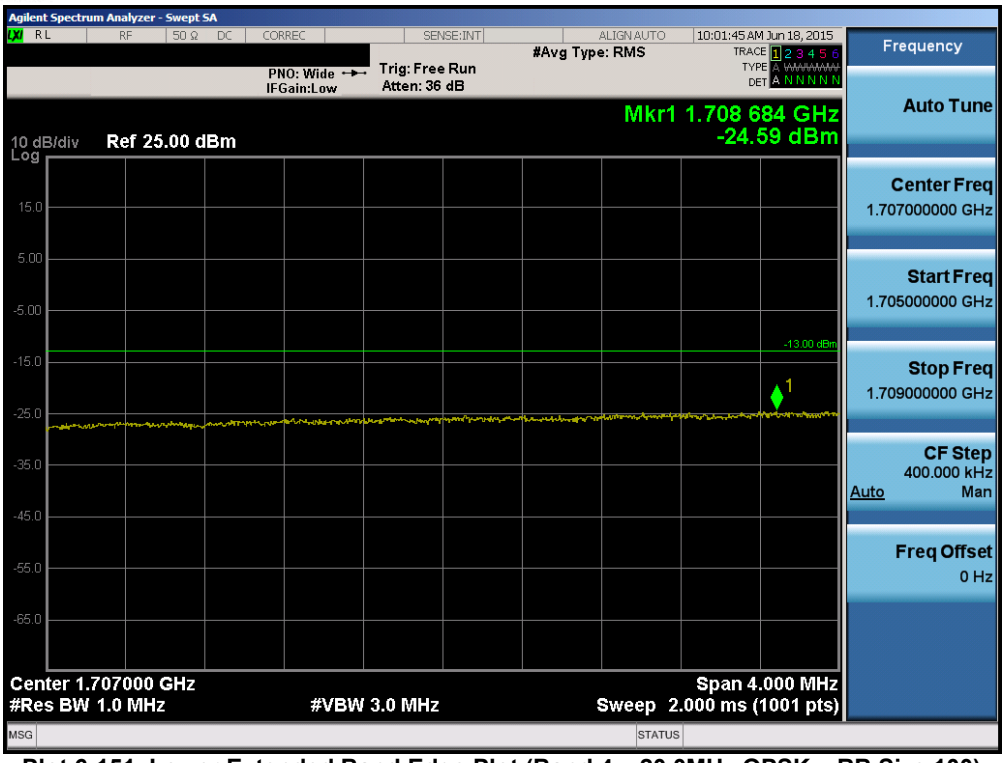

Plot 6-151. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

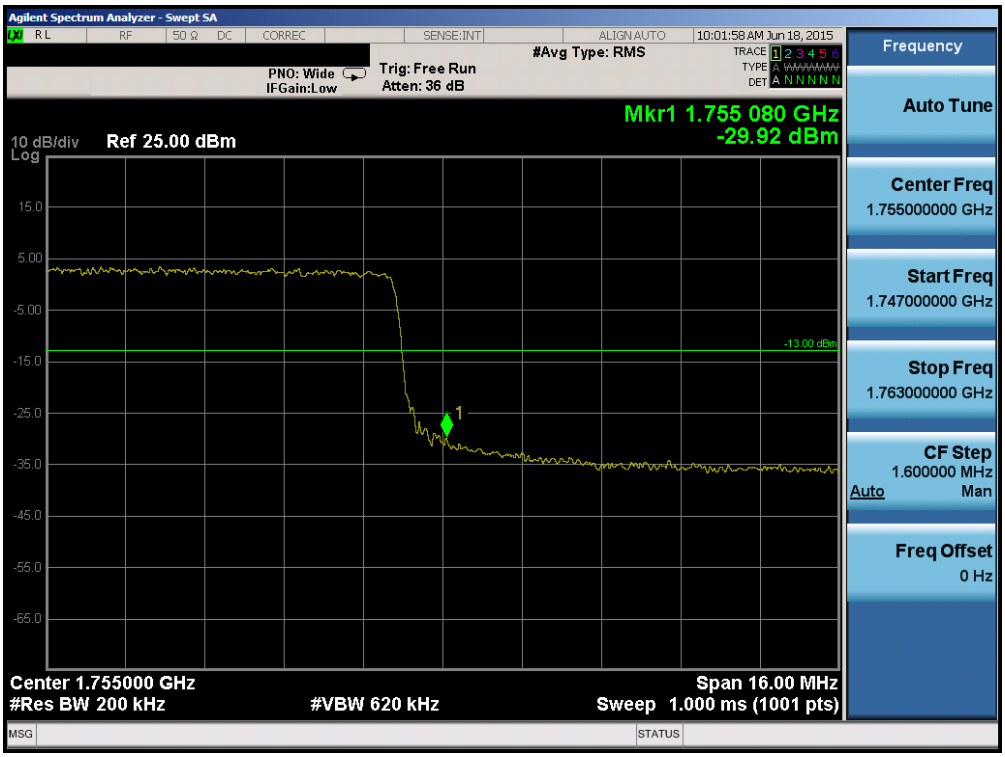

Plot 6-152. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

© 2015 PCTEST Engineering Laboratory, Inc.

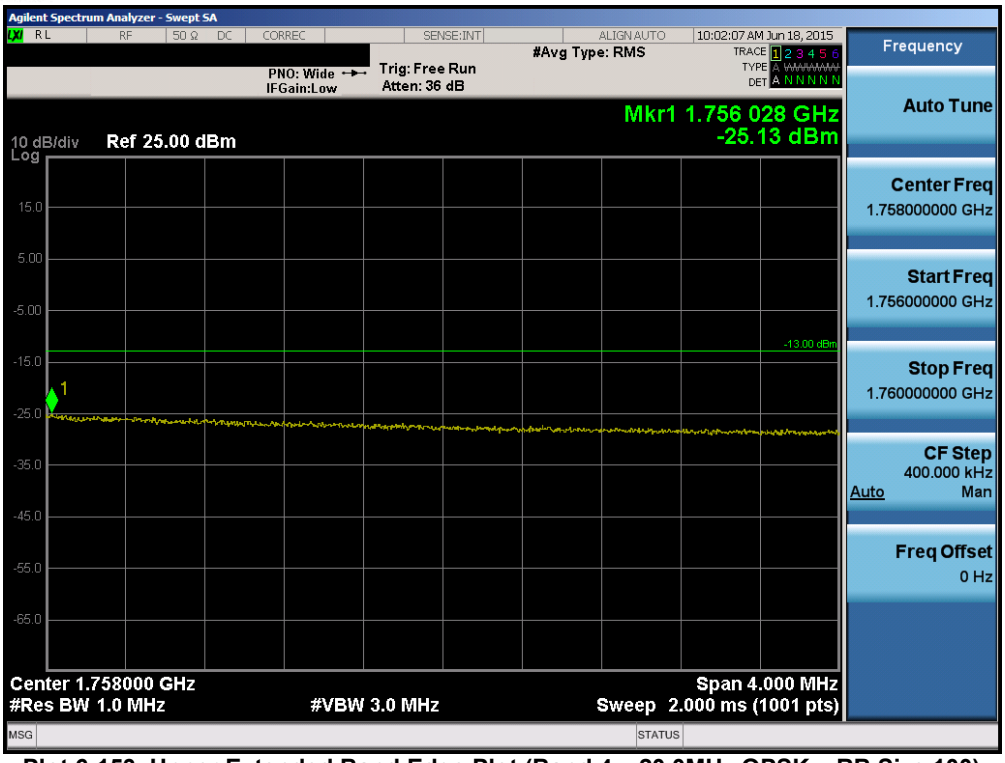

Plot 6-153. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

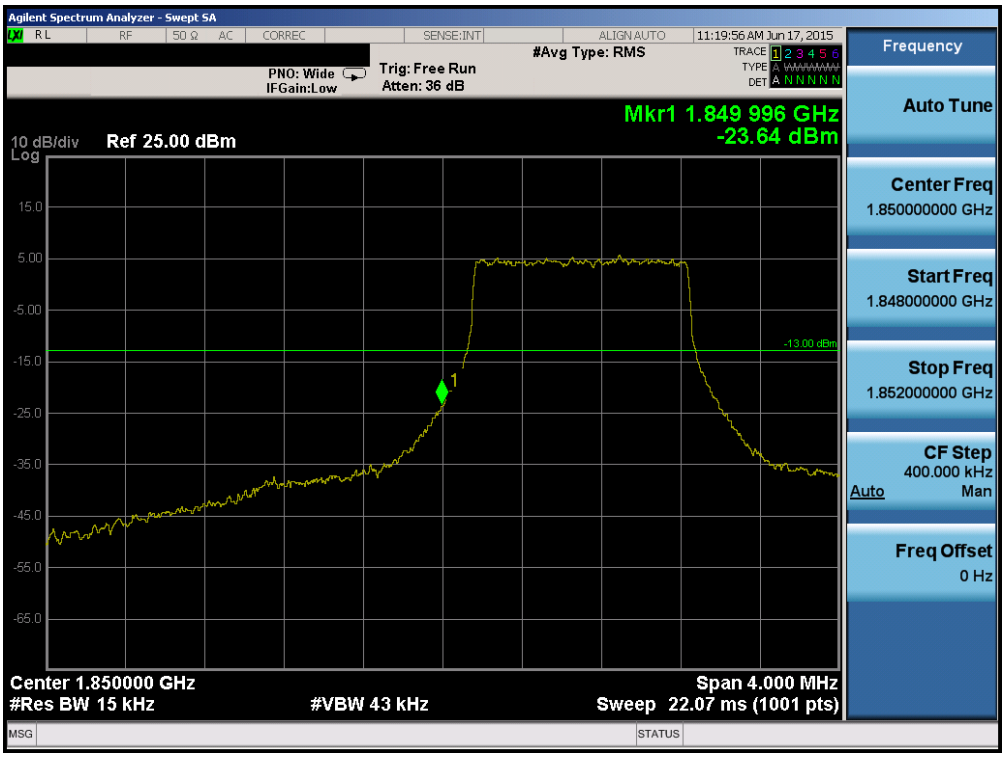

Plot 6-154. Lower Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

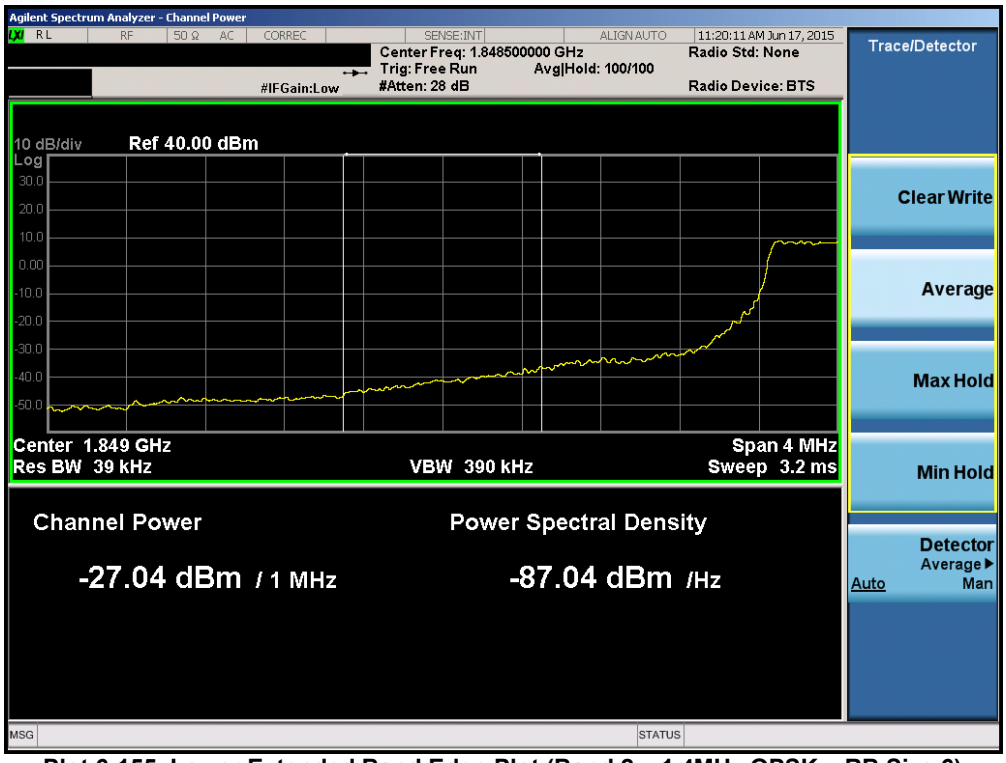

Plot 6-155. Lower Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

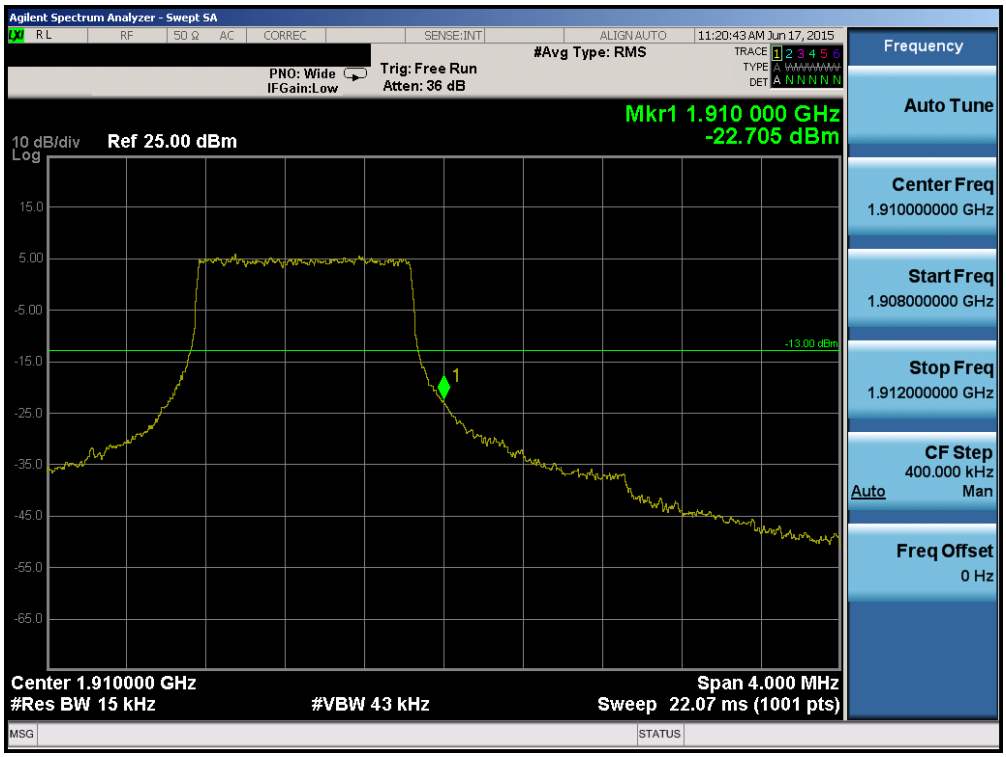

Plot 6-156. Upper Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

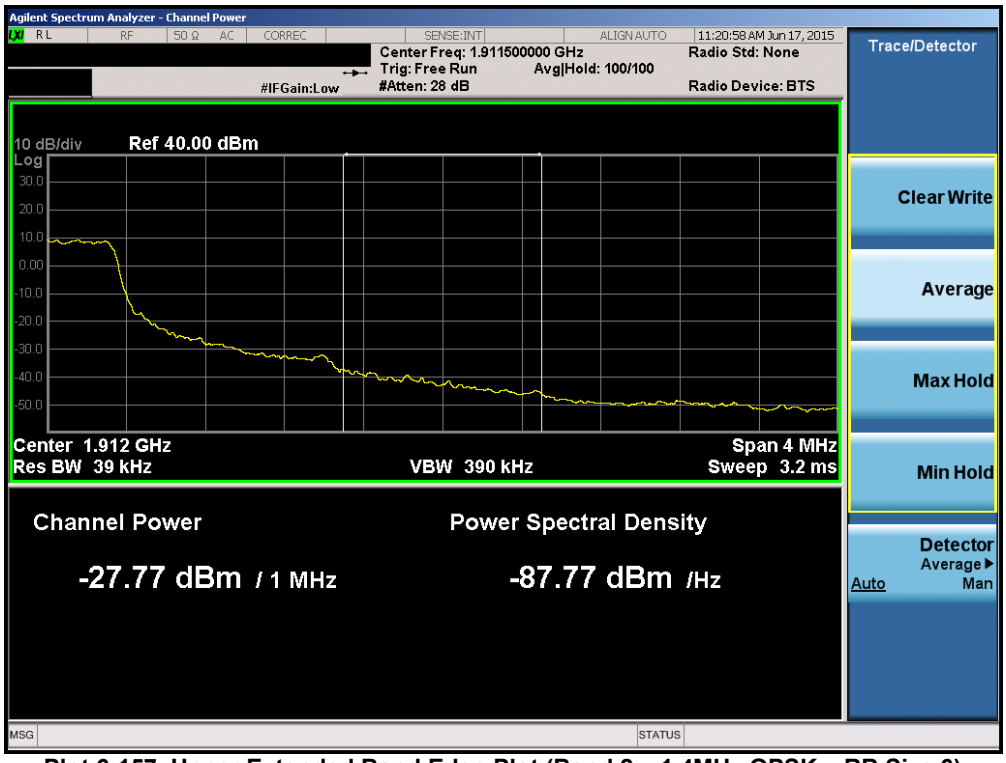

Plot 6-157. Upper Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

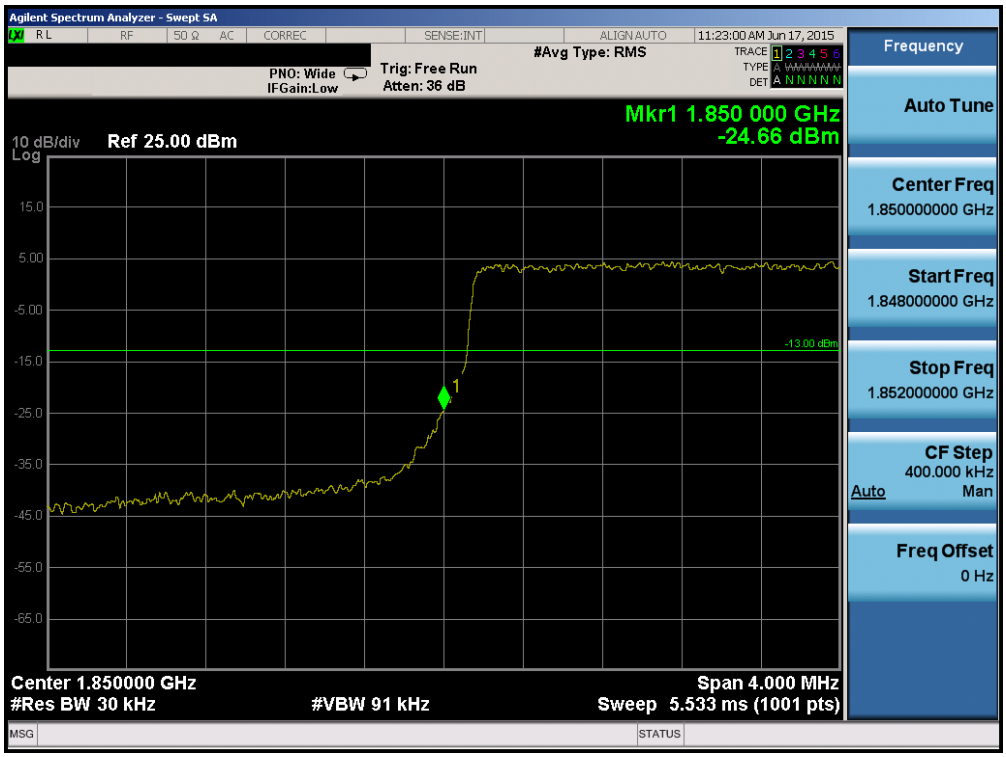

Plot 6-158. Lower Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

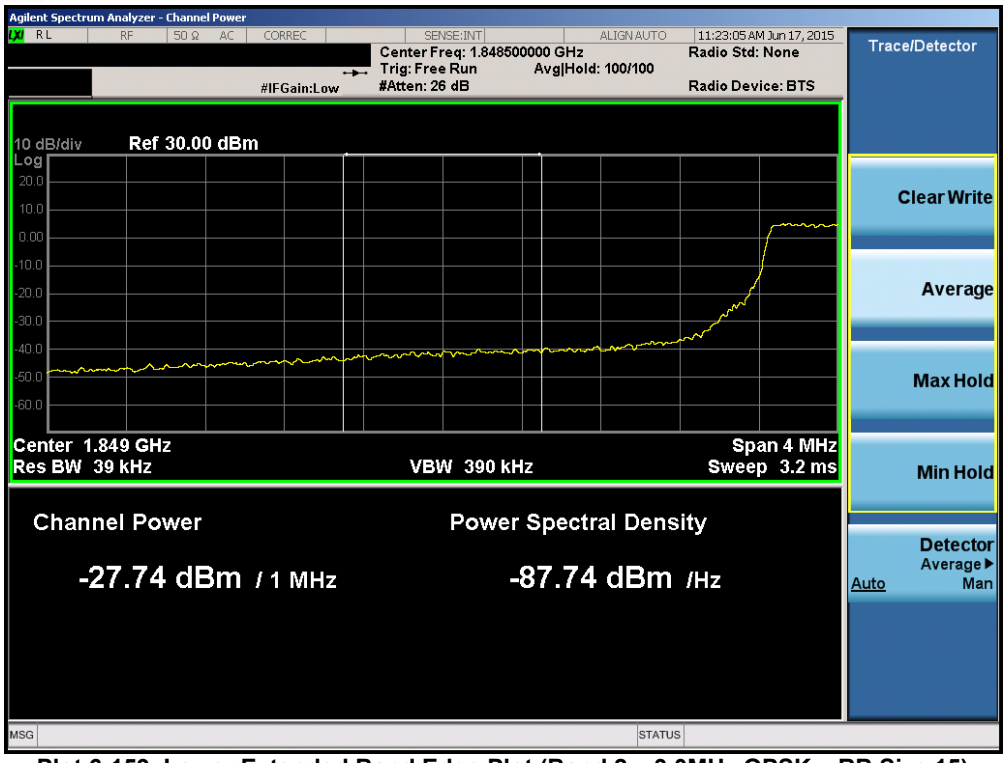

Plot 6-159. Lower Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

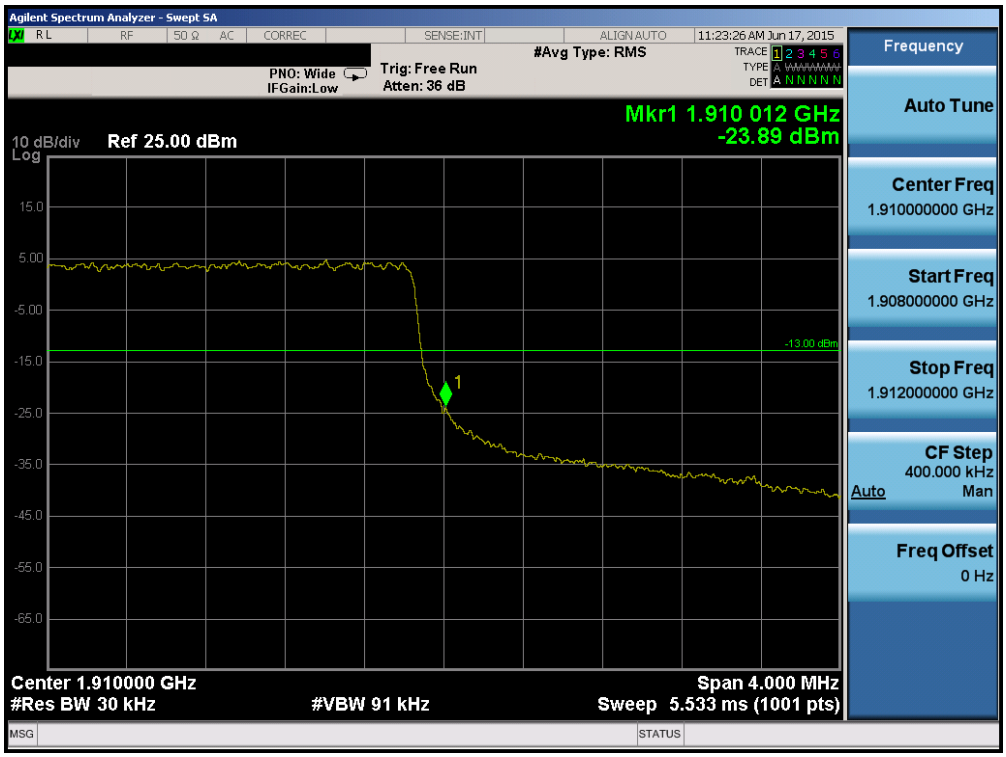

Plot 6-160. Upper Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

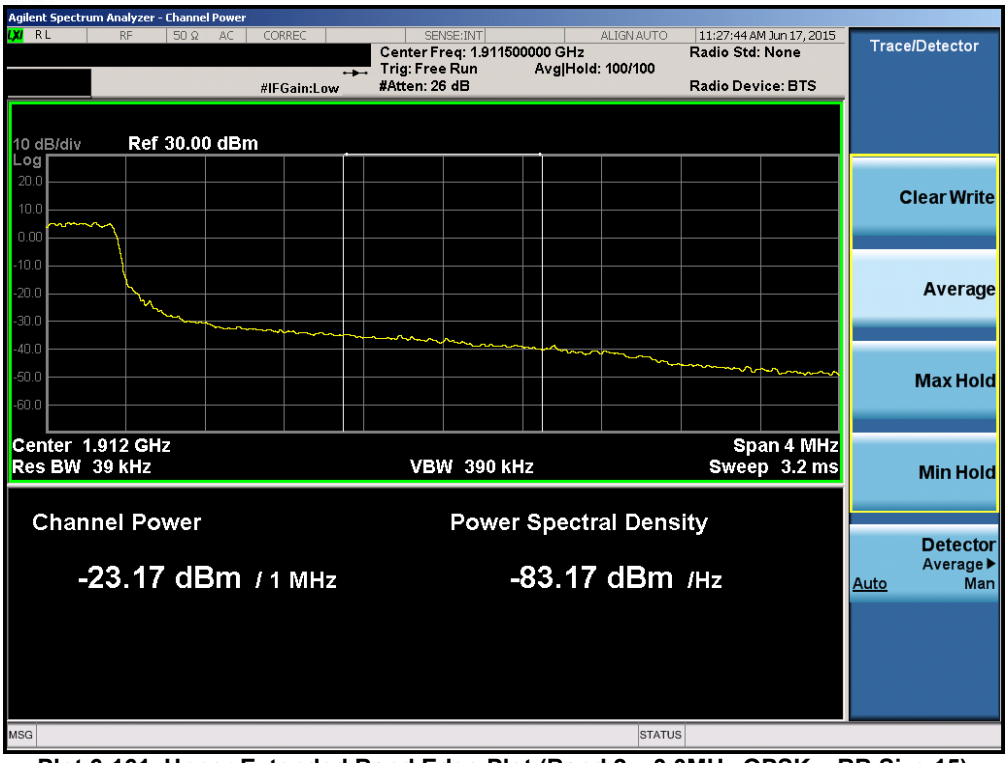

Plot 6-161. Upper Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

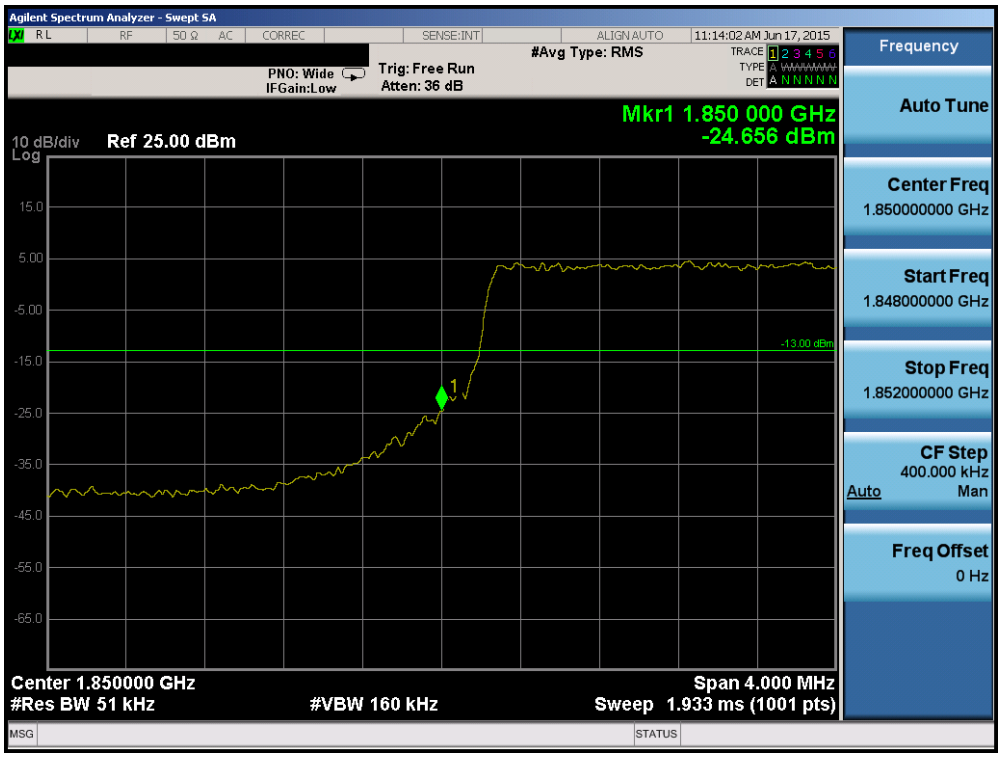

Plot 6-162. Lower Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

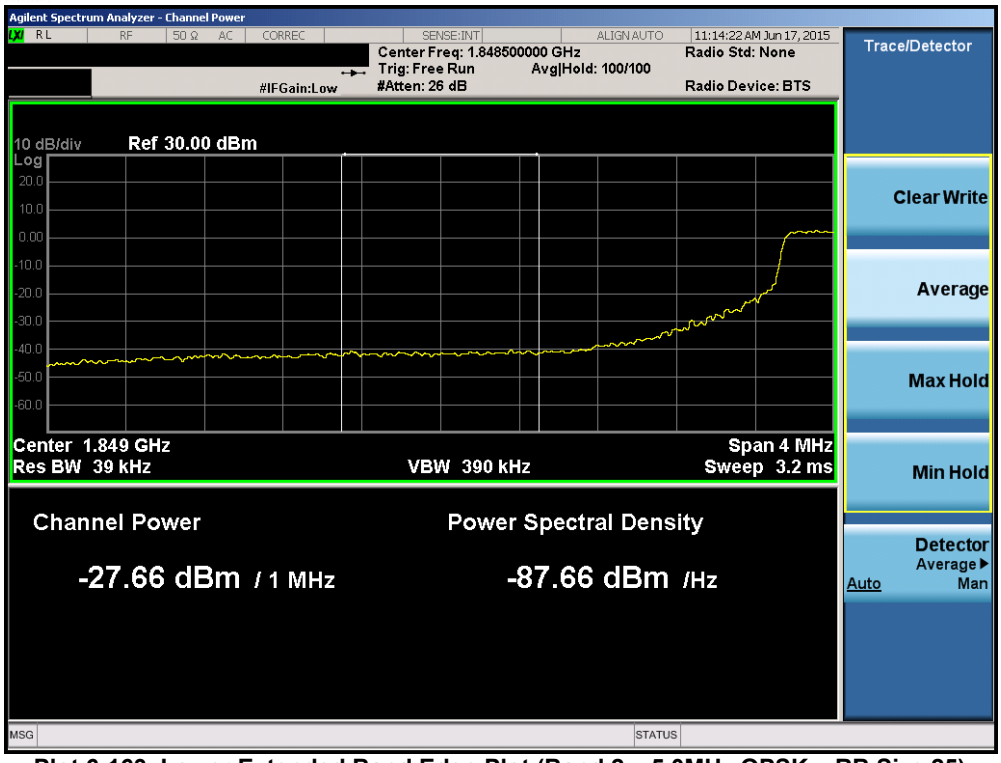

Plot 6-163. Lower Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

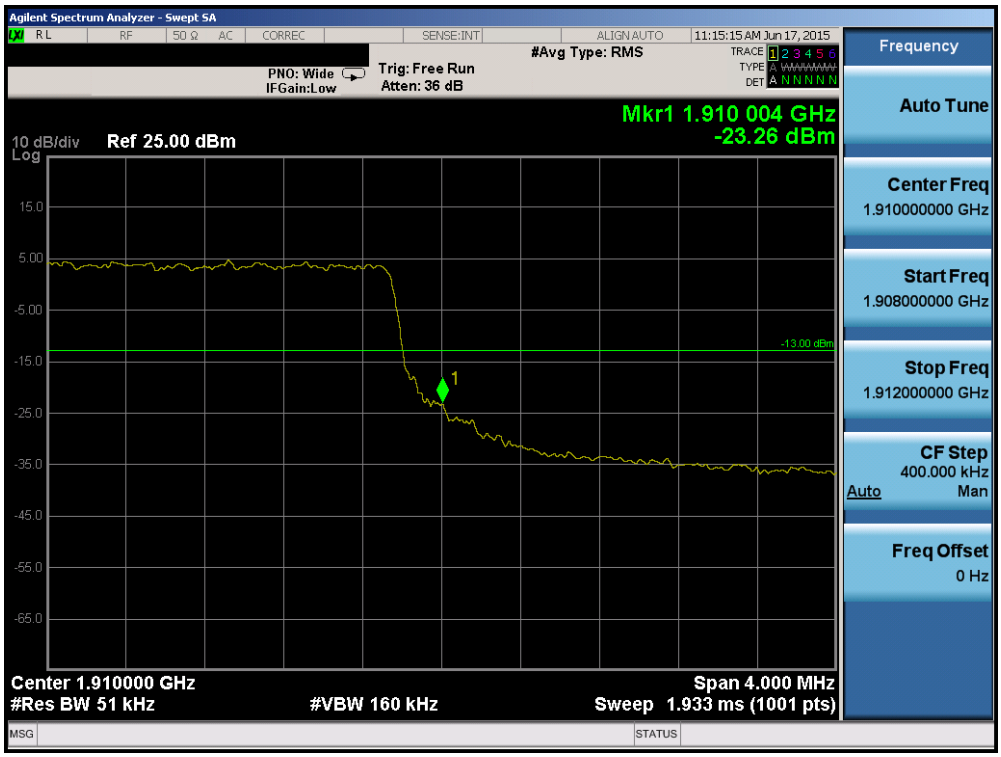

Plot 6-164. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

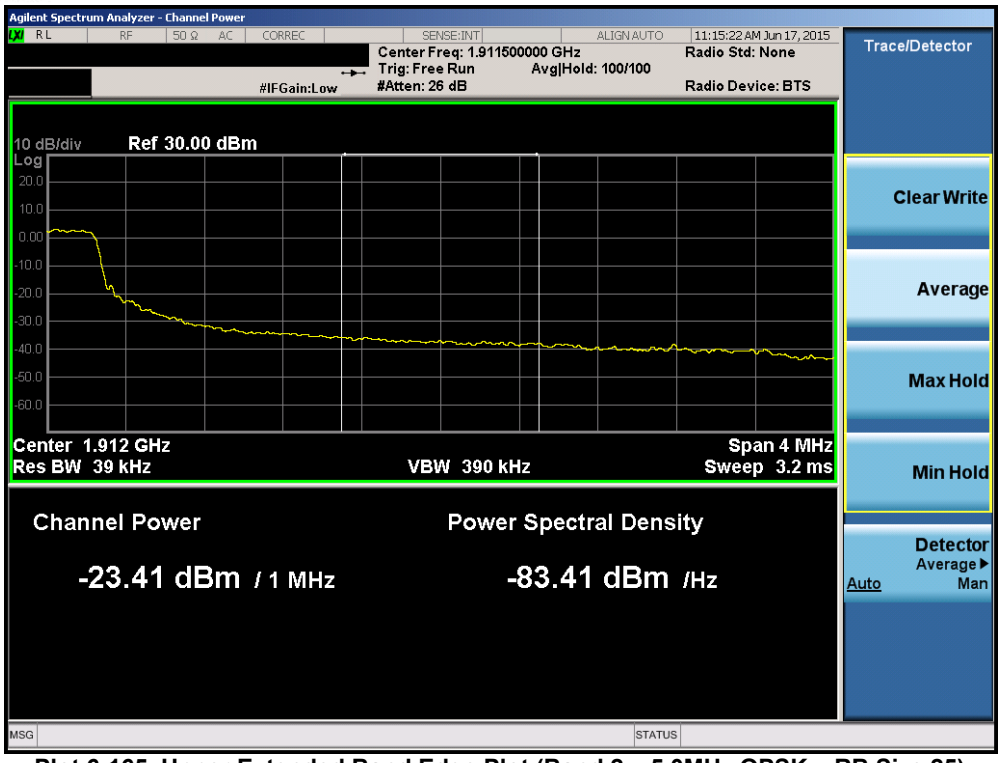

Plot 6-165. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

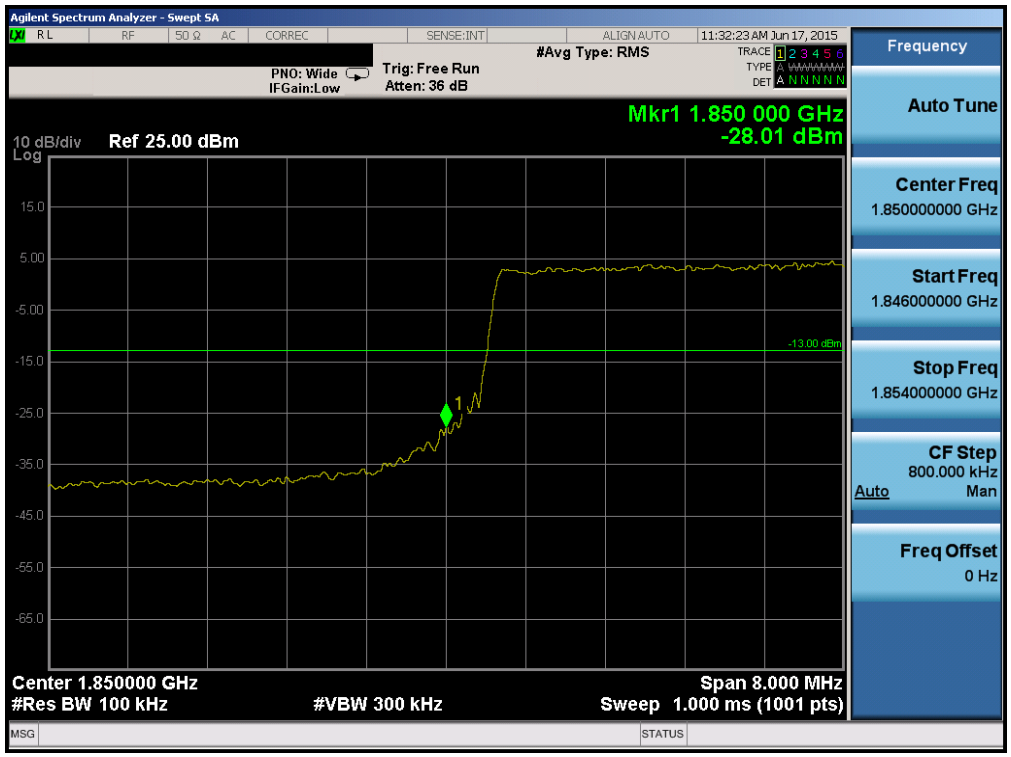

Plot 6-166. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

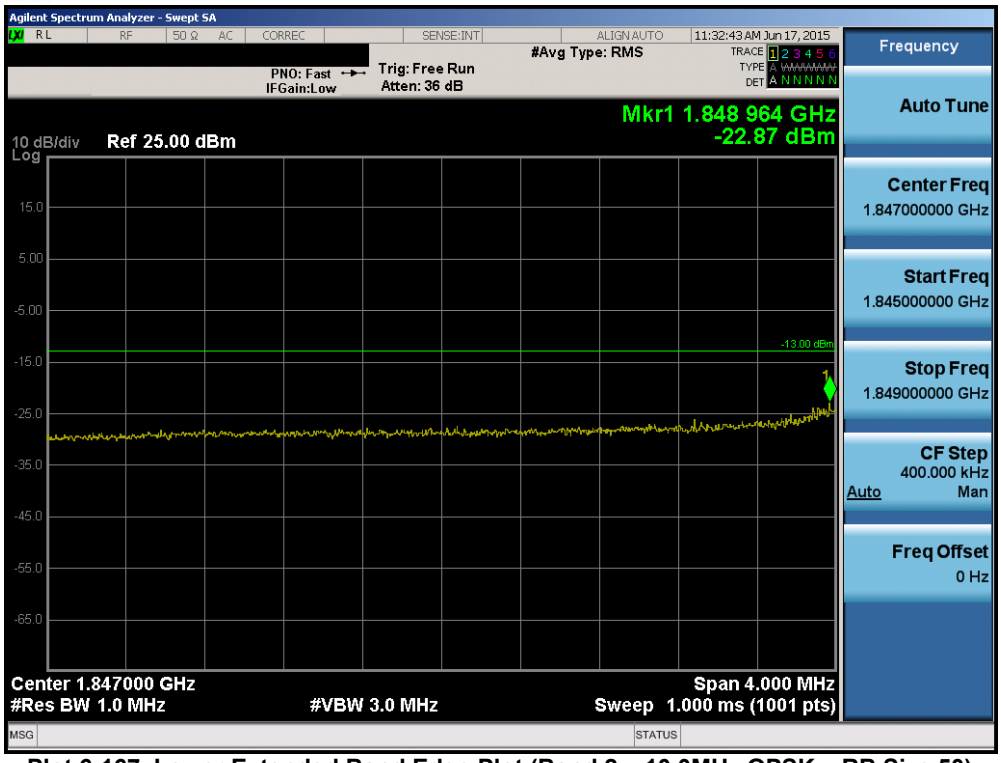

Plot 6-167. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

Plot 6-168. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-169. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

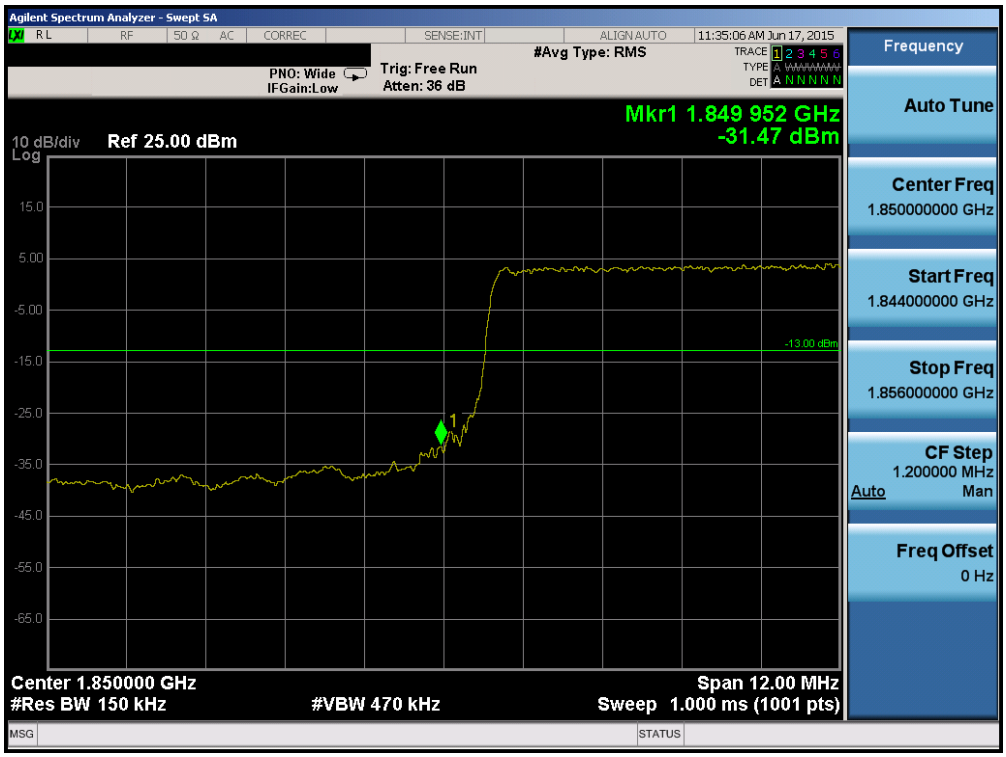

Plot 6-170. Lower Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

© 2015 PCTEST Engineering Laboratory, Inc.

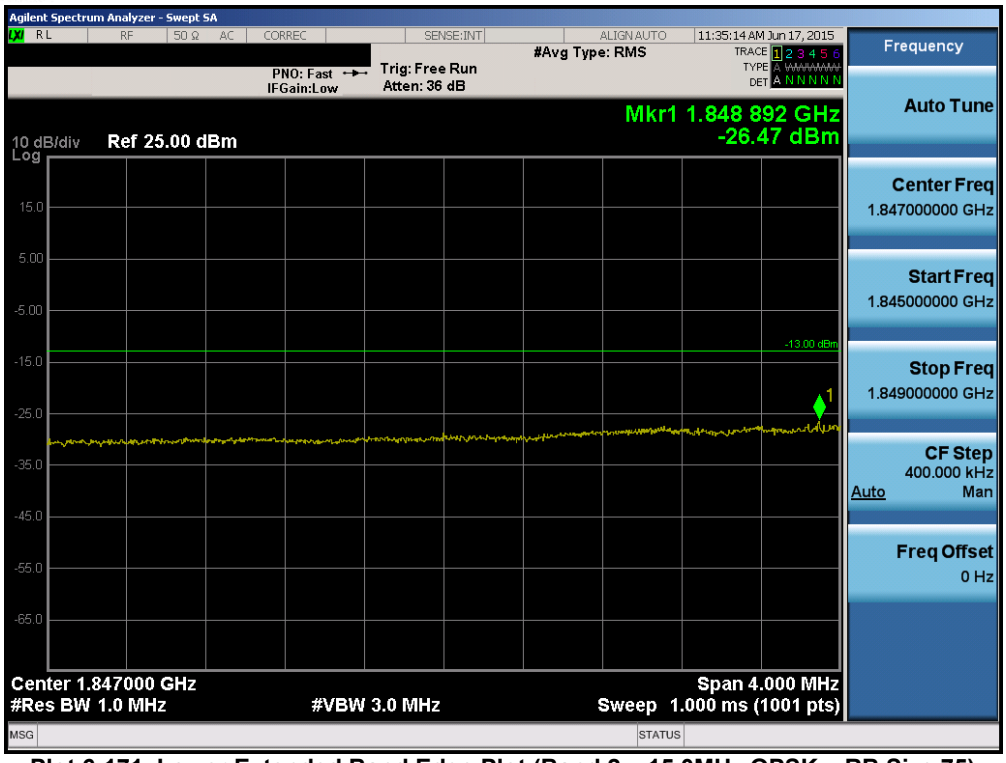

Plot 6-171. Lower Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

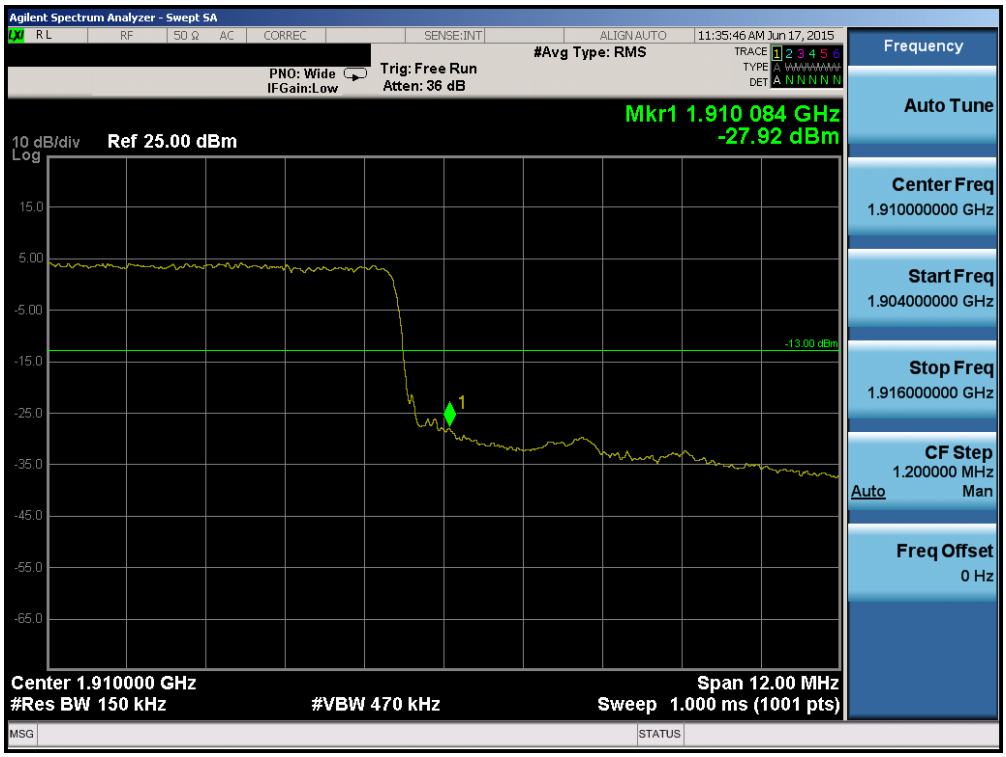

Plot 6-172. Upper Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

© 2015 PCTEST Engineering Laboratory, Inc.

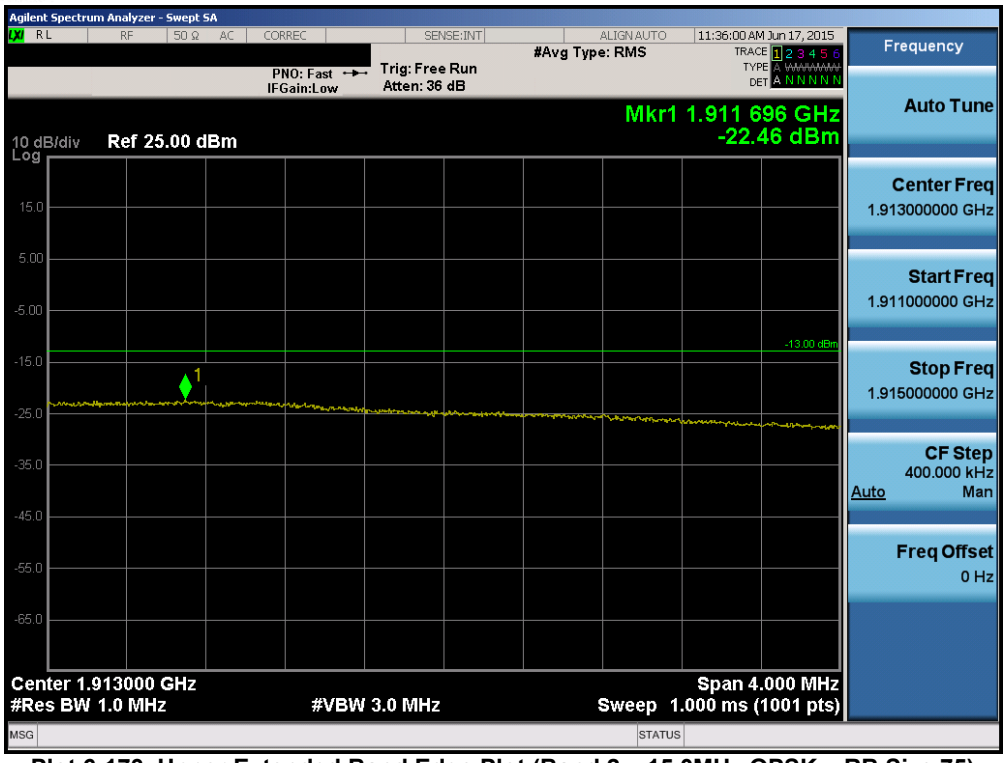

Plot 6-173. Upper Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

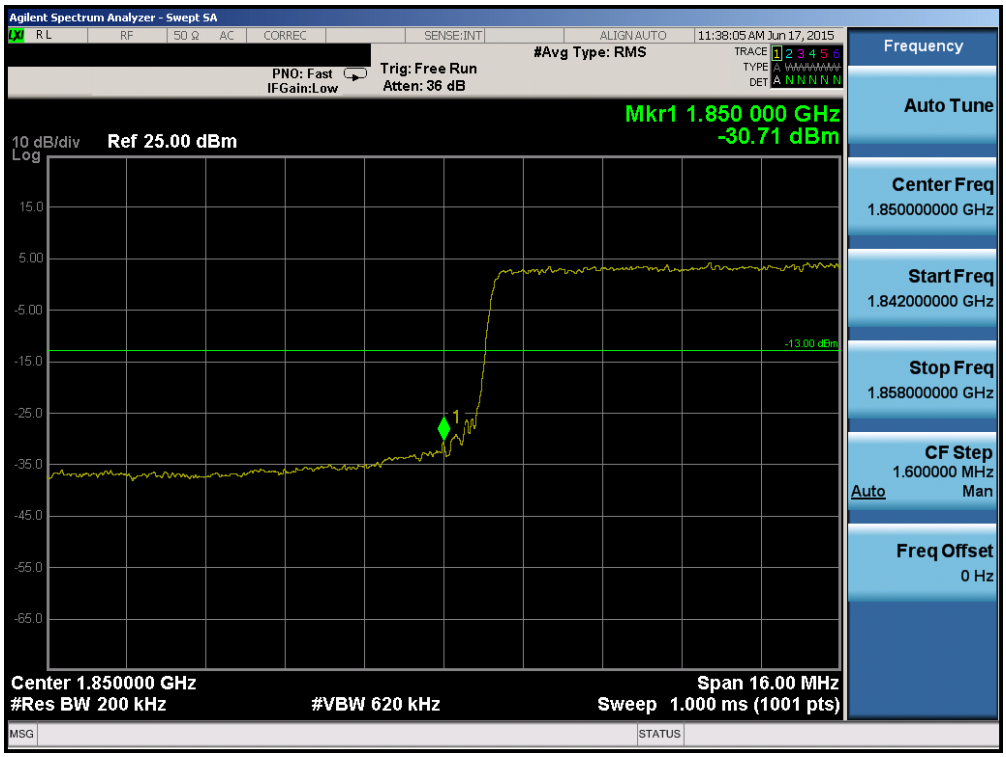

Plot 6-174. Lower Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

© 2015 PCTEST Engineering Laboratory, Inc.

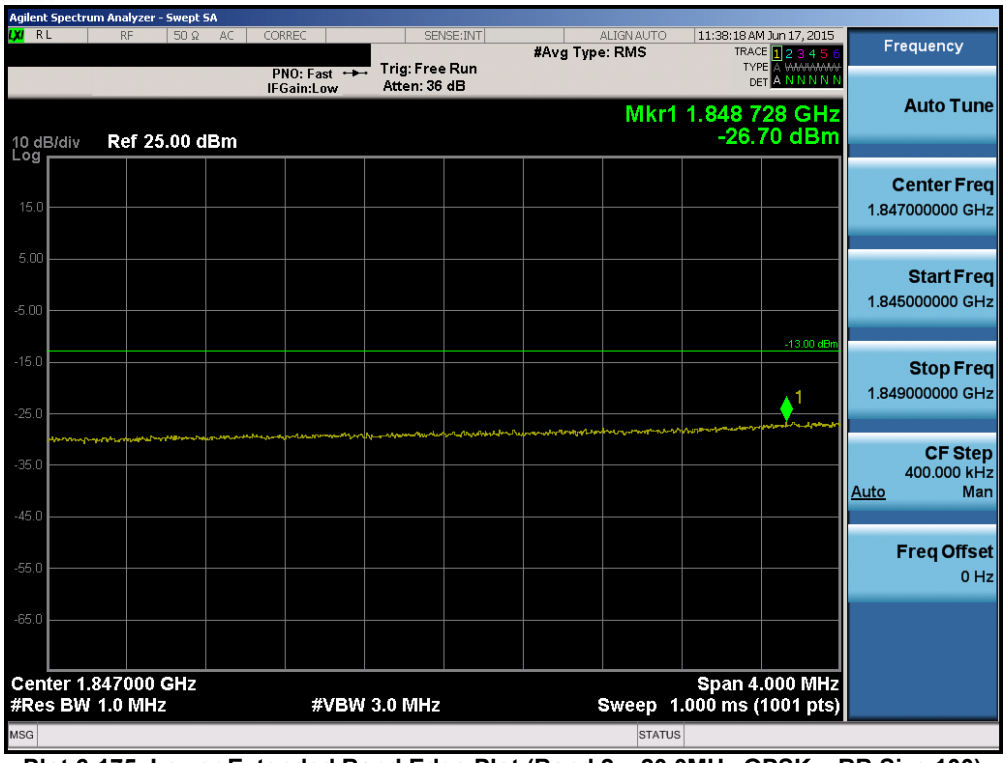

Plot 6-175. Lower Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

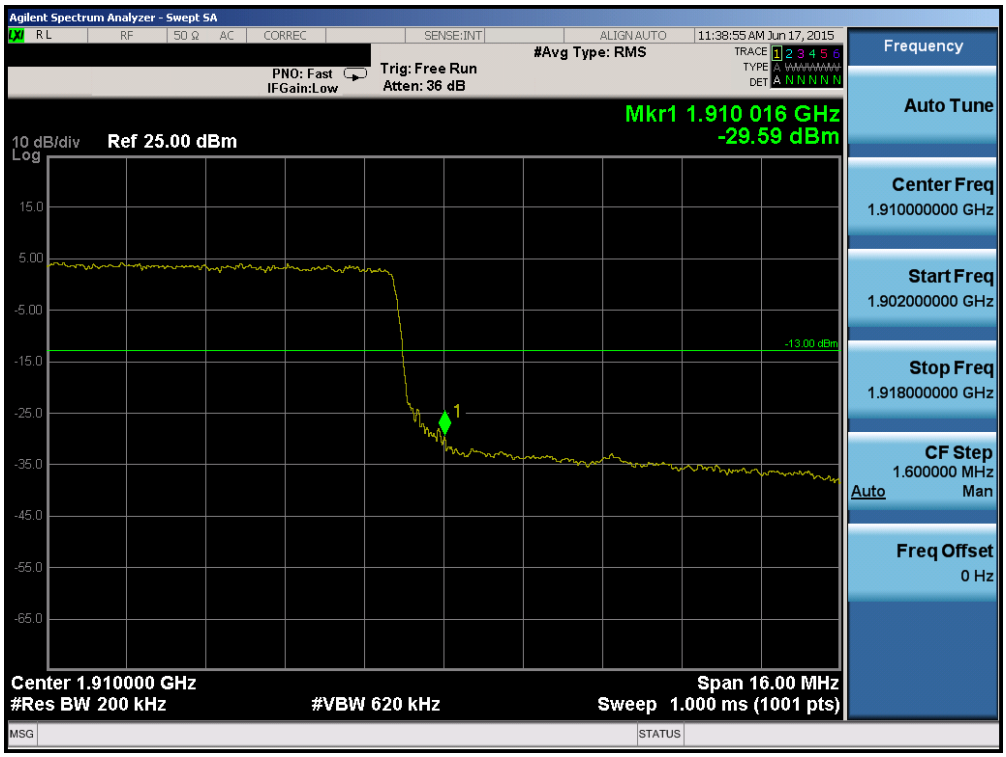

Plot 6-176. Upper Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

© 2015 PCTEST Engineering Laboratory, Inc.

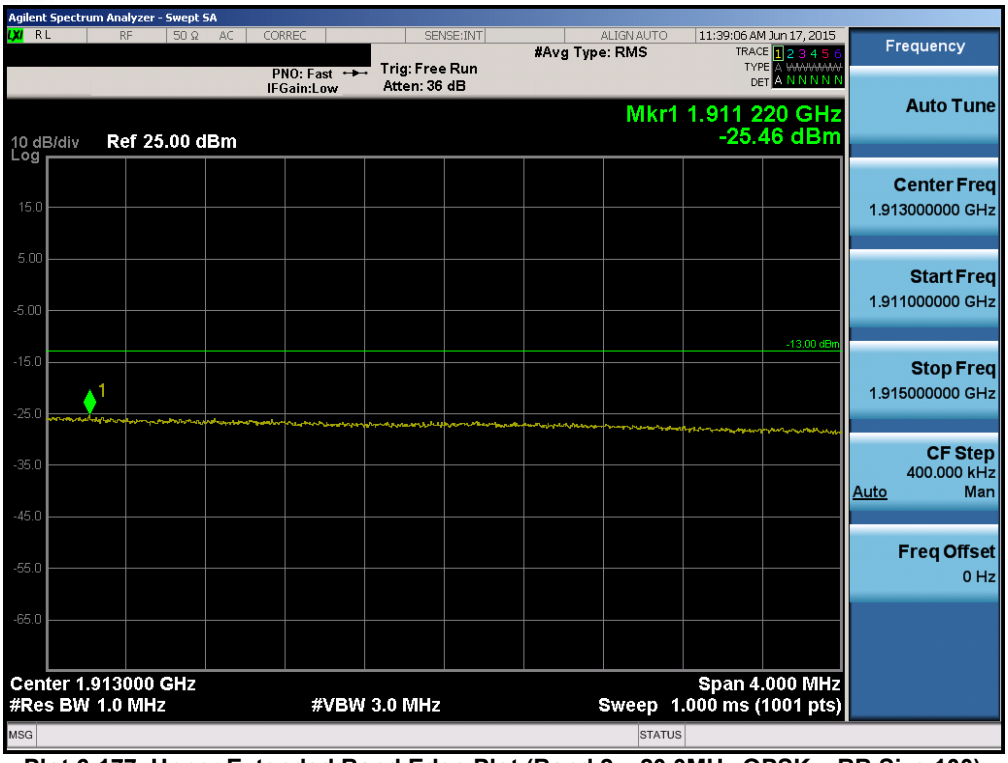

Plot 6-177. Upper Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

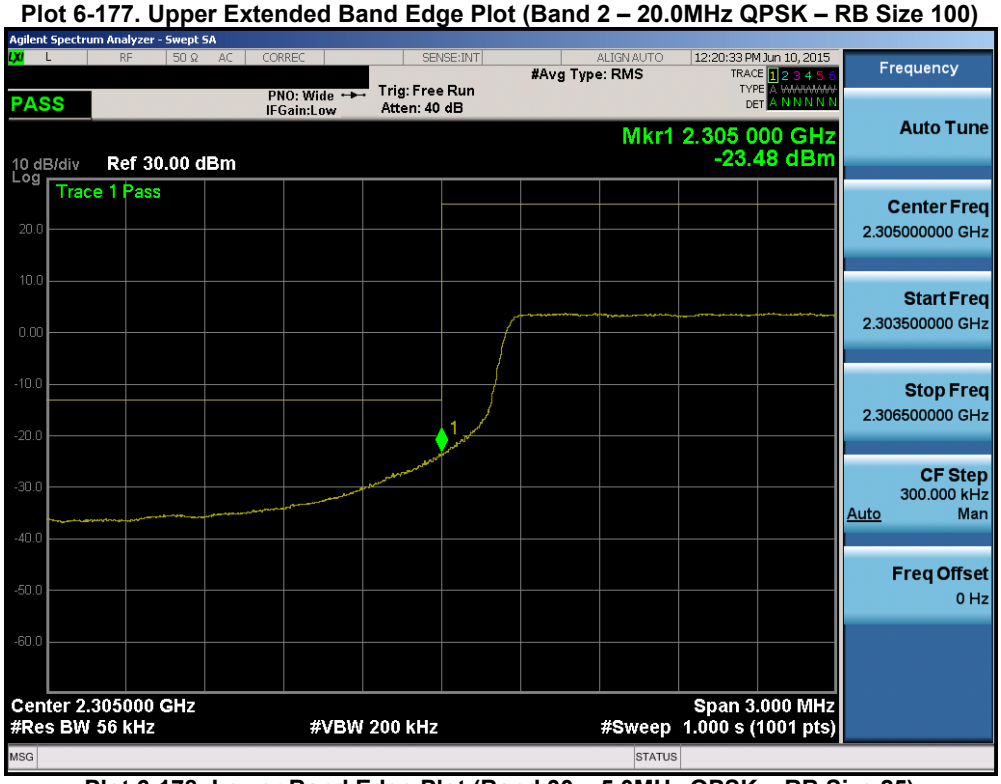

Plot 6-178. Lower Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-179. Lower Extended Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

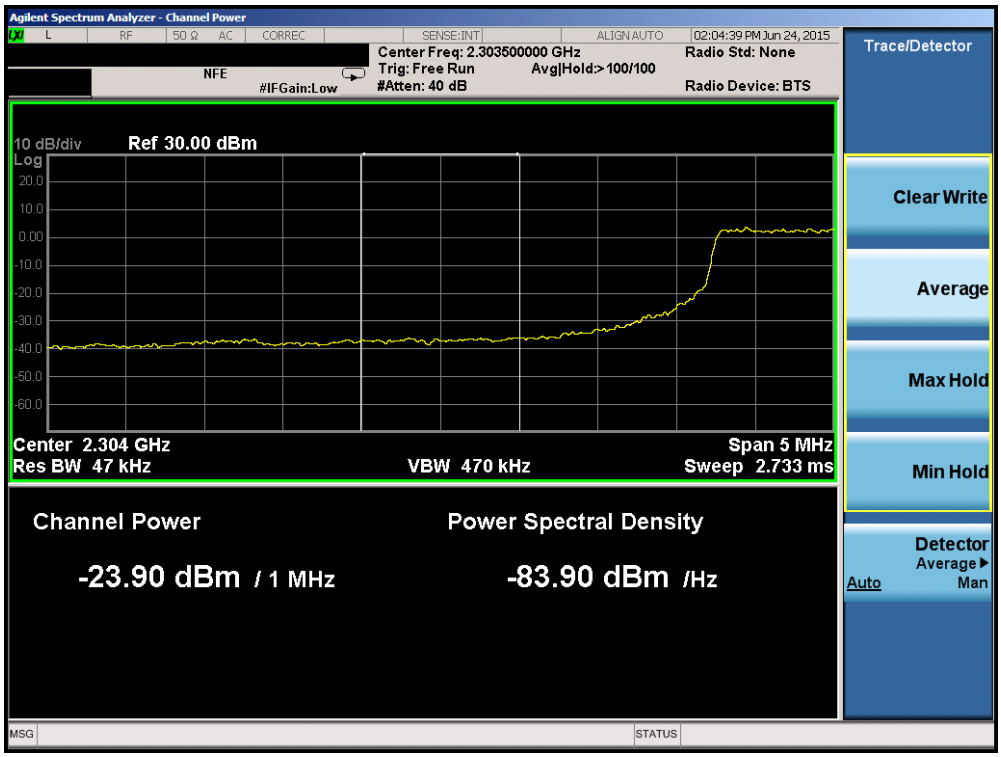

Plot 6-180. Lower Extended Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-181. Upper Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

Plot 6-182. Upper Extended Band Edge Plot (Band 30 – 5.0MHz QPSK – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-183. Lower Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

Plot 6-184. Lower Extended Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

Plot 6-185. Upper Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

Plot 6-186. Upper Extended Band Edge Plot (Band 30 – 10.0MHz QPSK – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

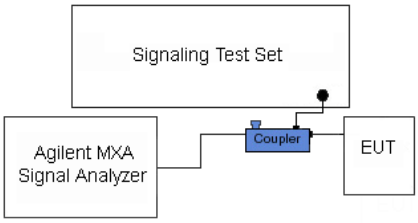

Figure 6-4. Test Instrument & Measurement Setup

Test Notes

None.

© 2015 PCTEST Engineering Laboratory, Inc.

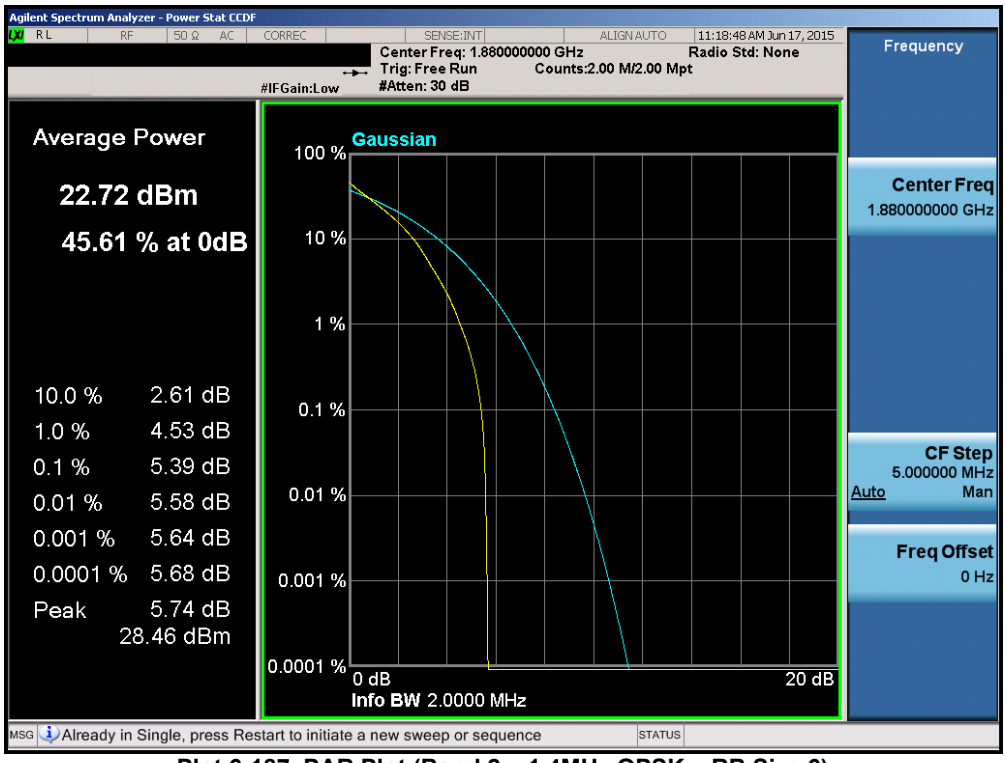

Plot 6-187. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

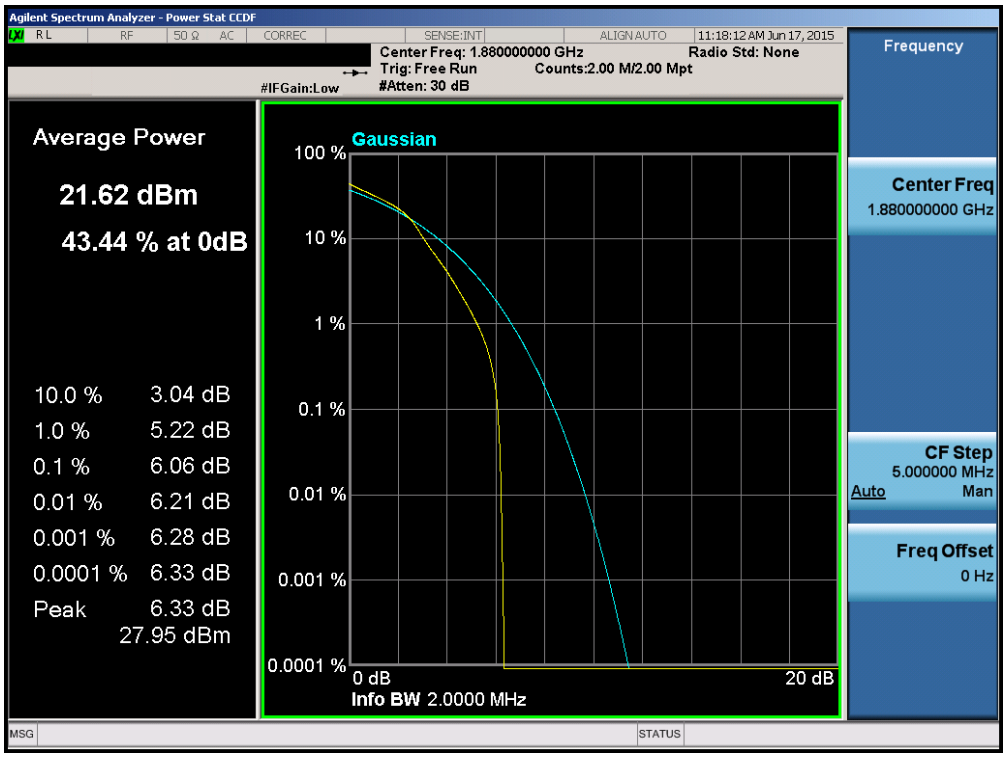

Plot 6-188. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

© 2015 PCTEST Engineering Laboratory, Inc.

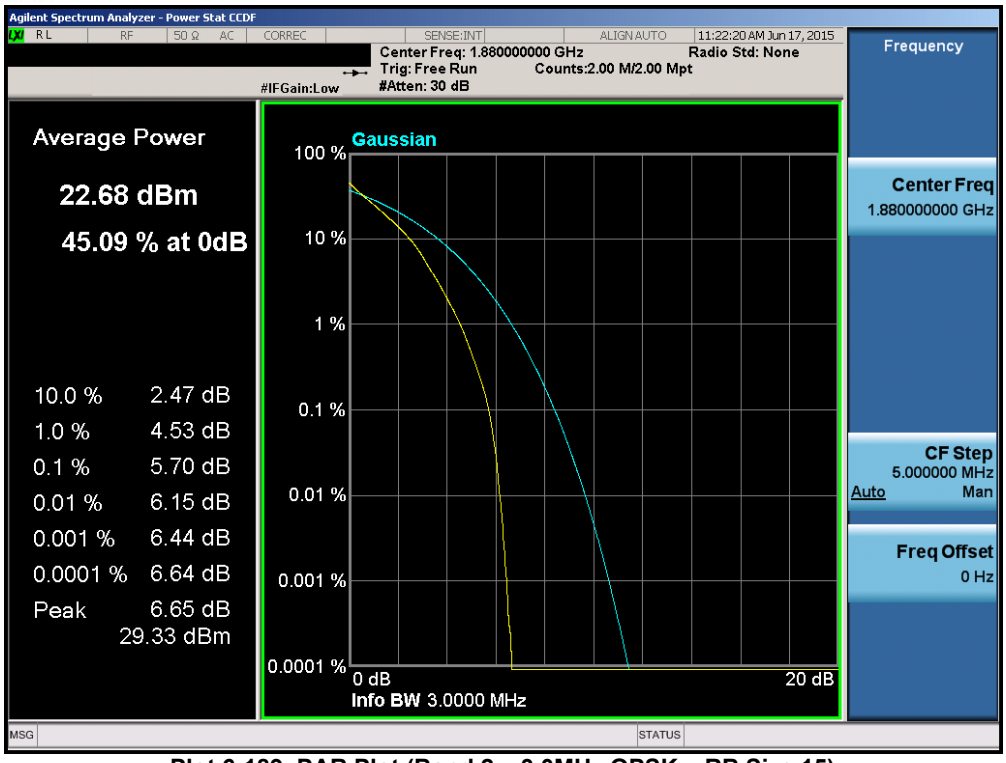

Plot 6-189. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

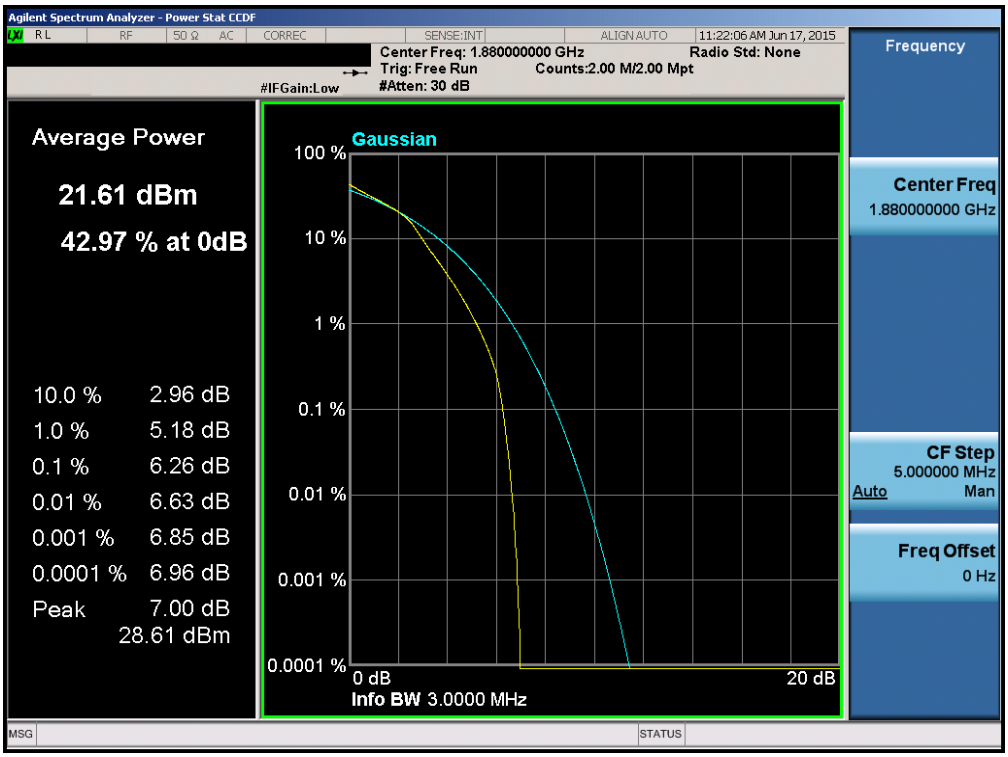

Plot 6-190. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

© 2015 PCTEST Engineering Laboratory, Inc.

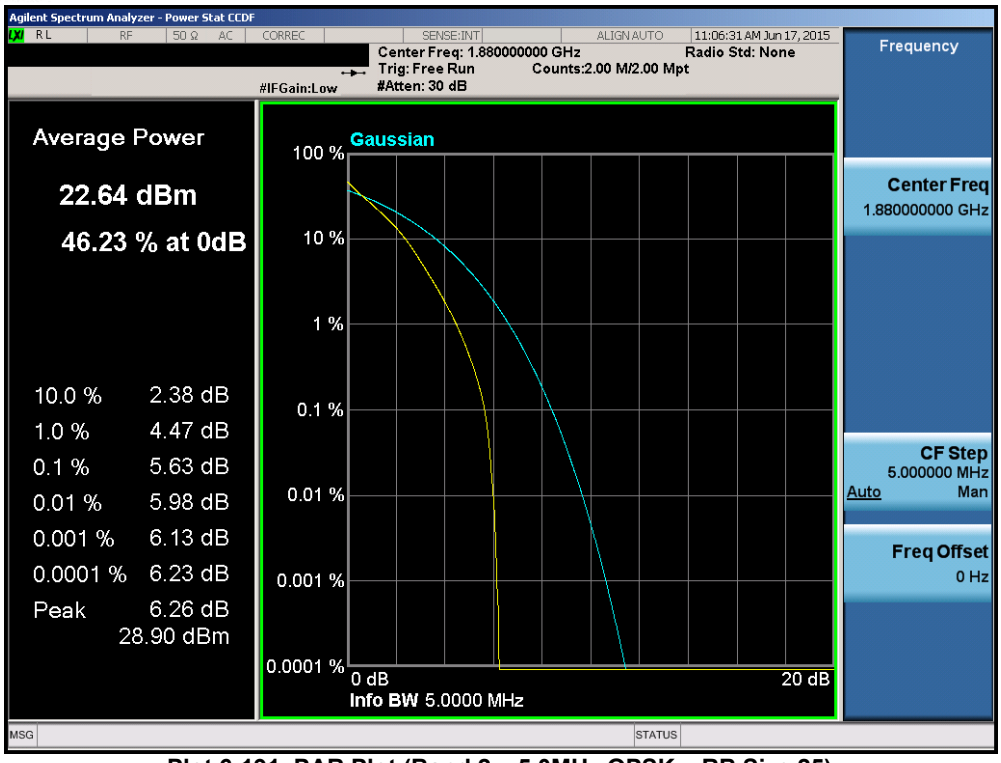

Plot 6-191. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

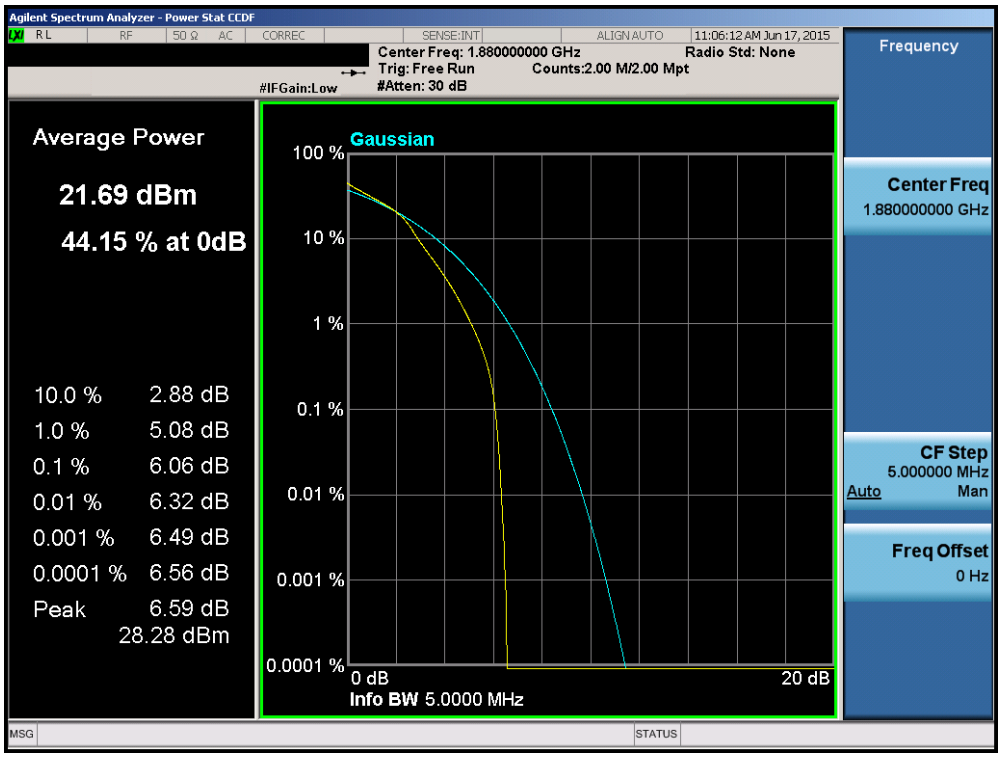

Plot 6-192. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

© 2015 PCTEST Engineering Laboratory, Inc.

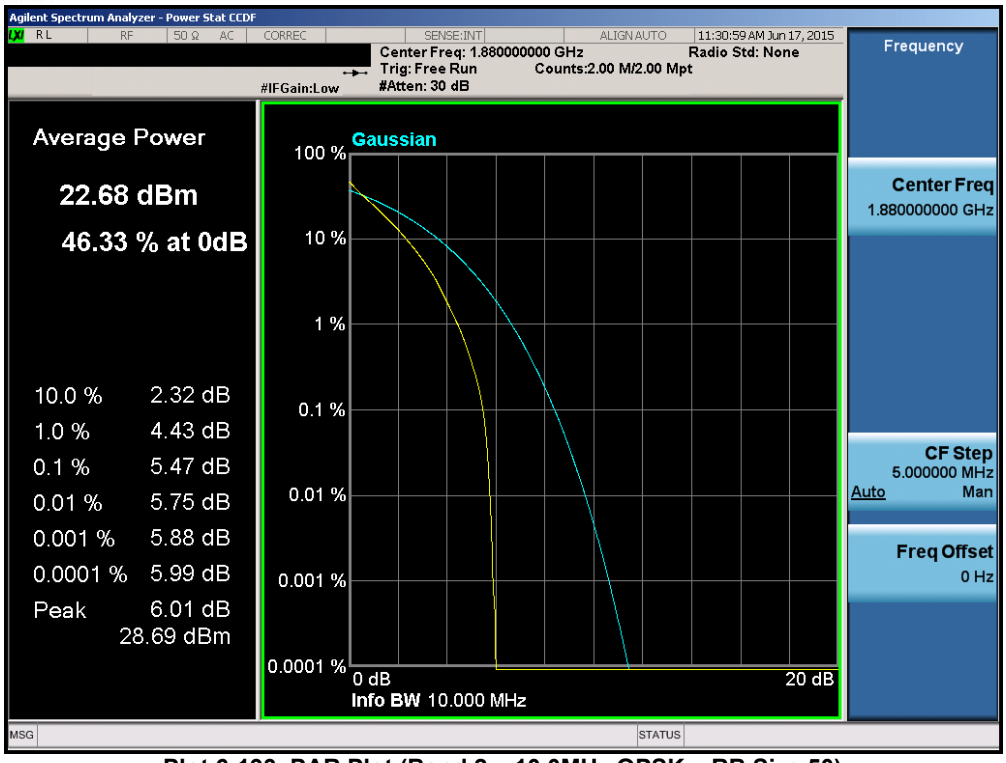

Plot 6-193. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

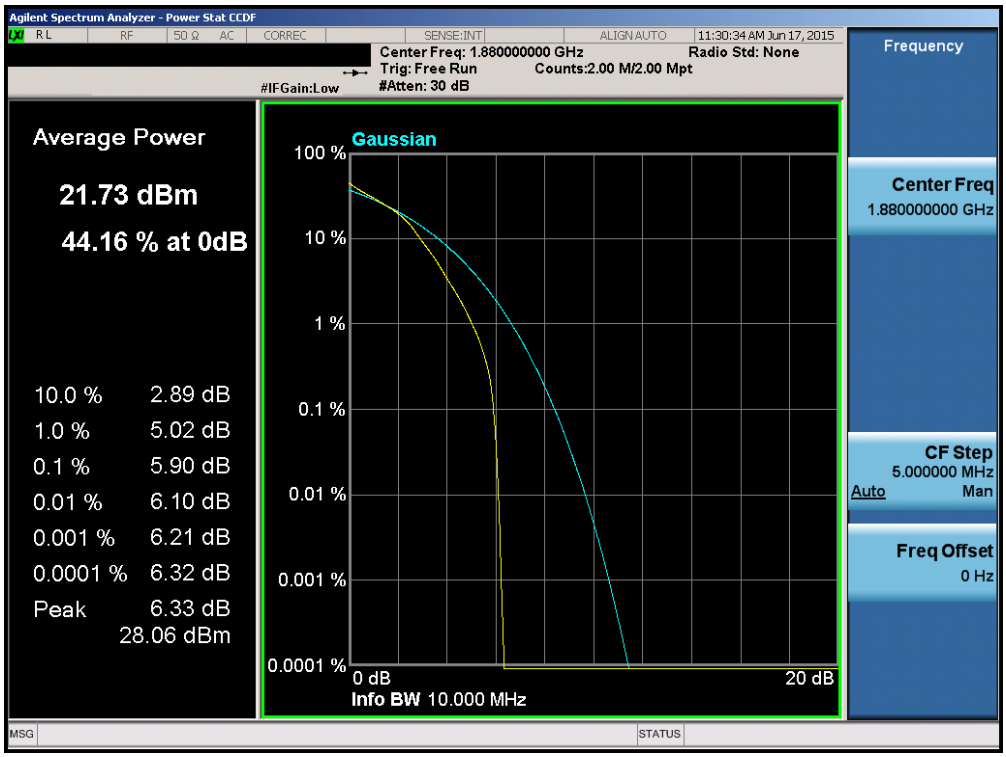

Plot 6-194. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

© 2015 PCTEST Engineering Laboratory, Inc.

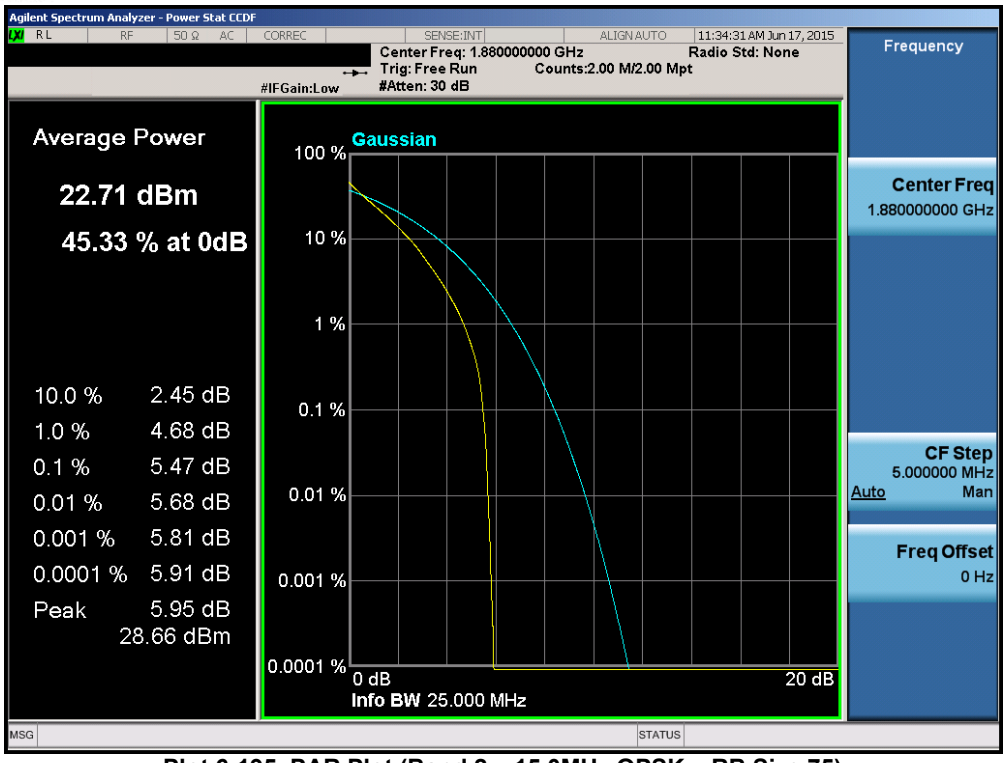

Plot 6-195. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

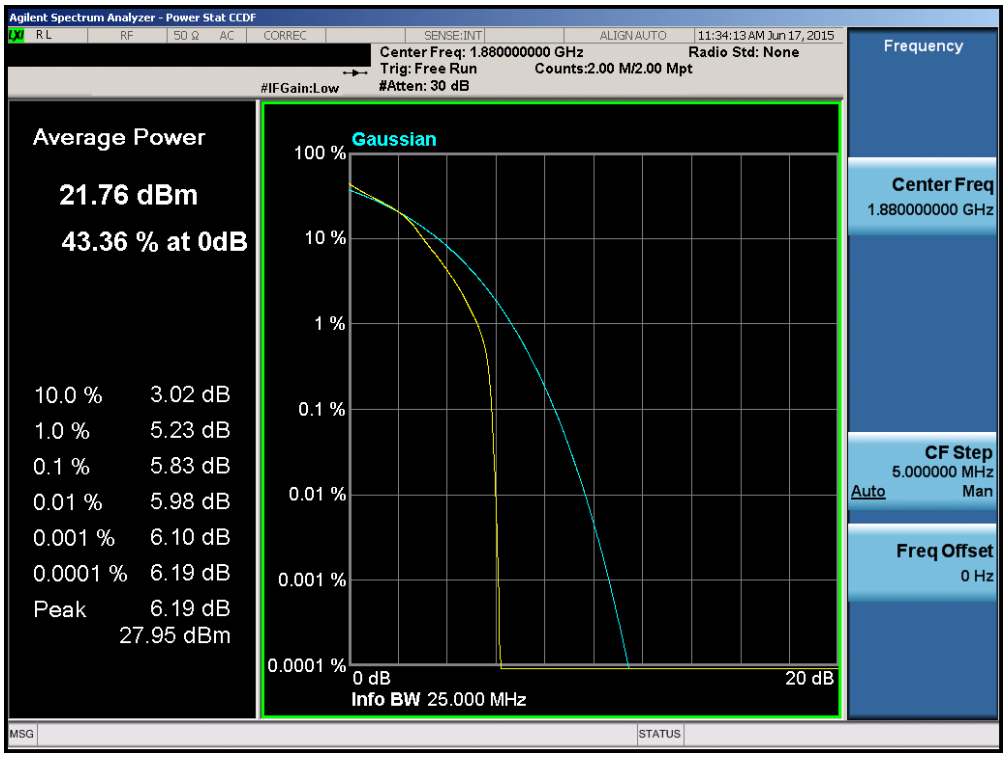

Plot 6-196. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

© 2015 PCTEST Engineering Laboratory, Inc.

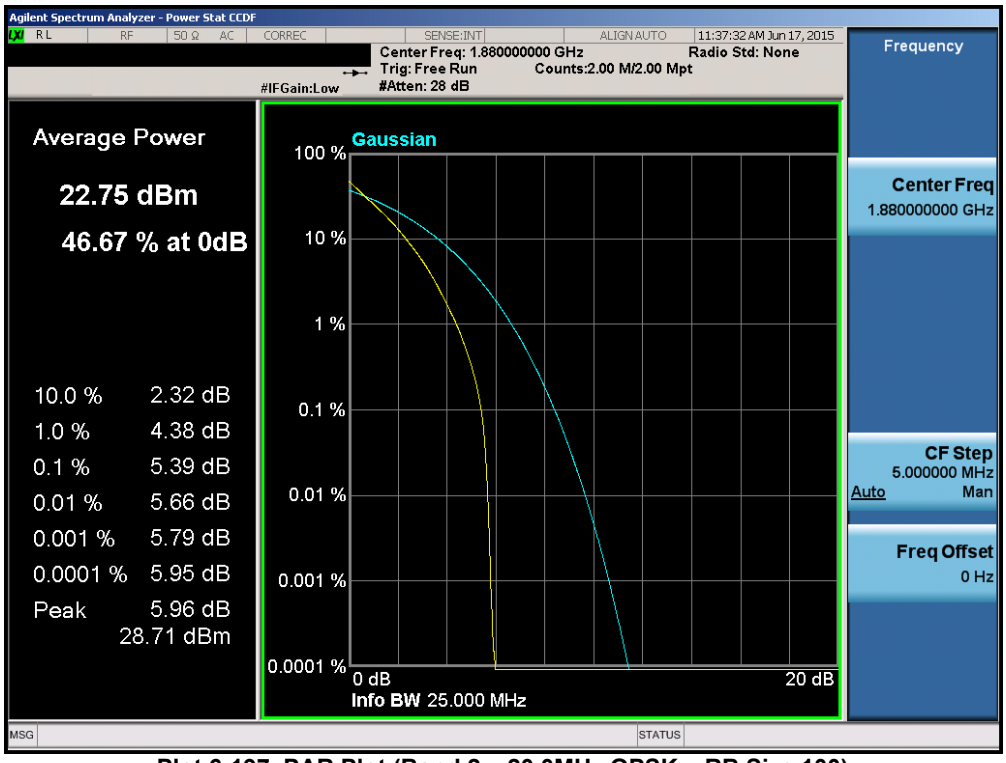

Plot 6-197. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

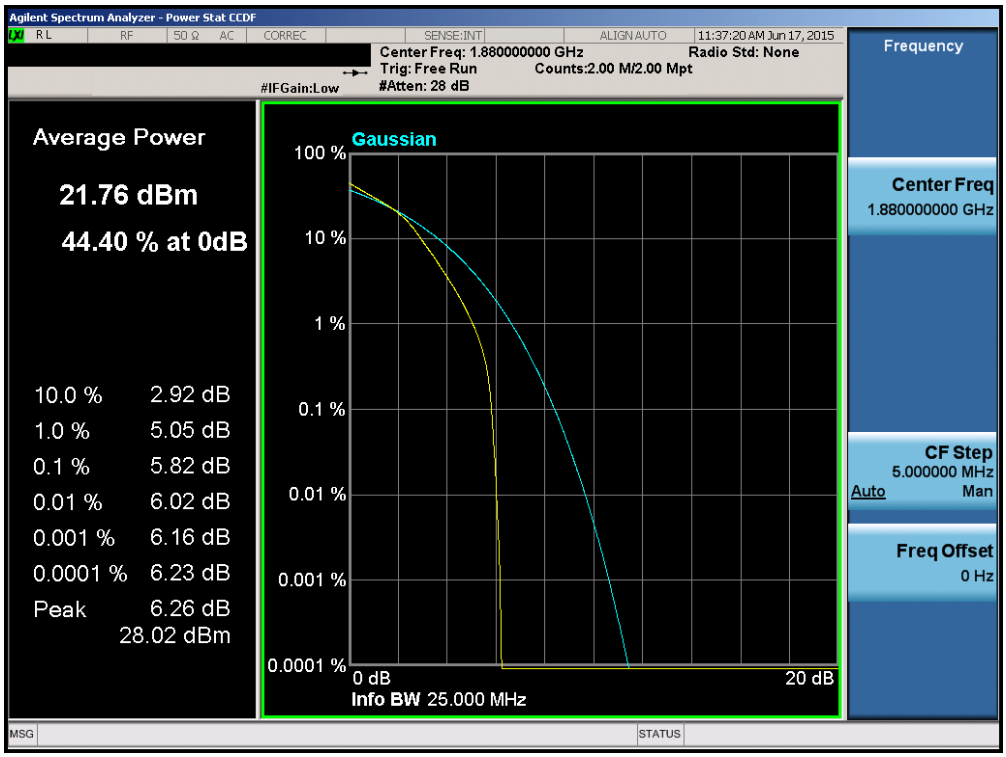

Plot 6-198. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

© 2015 PCTEST Engineering Laboratory, Inc.

6.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(h.2) §27.50(b.10) §27.50(c.10) §27.50(d.4) §27.50(a.3)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

© 2015 PCTEST Engineering Laboratory, Inc.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

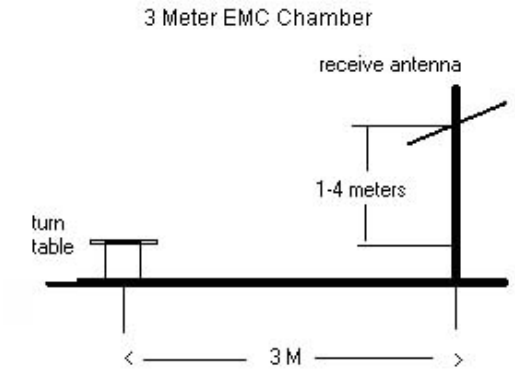

Figure 6-5. Test Instrument & Measurement Setup

Test Notes

1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

2) This unit was tested with its standard battery.

© 2015 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	Standard	1 / 0	17.44	0.91	V	18.35	34.77	-16.42
707.50	1.4	QPSK	Standard	1 / 5	18.51	1.07	V	19.58	34.77	-15.19
715.30	1.4	QPSK	Standard	1 / 5	18.03	1.23	V	19.26	34.77	-15.52
699.70	1.4	16-QAM	Standard	1 / 0	16.56	0.91	V	17.47	34.77	-17.30
707.50	1.4	16-QAM	Standard	1 / 5	17.55	1.07	V	18.62	34.77	-16.15
715.30	1.4	16-QAM	Standard	1 / 5	16.99	1.23	V	18.22	34.77	-16.56
700.50	3	QPSK	Standard	1 / 0	17.57	0.92	V	18.49	34.77	-16.28
707.50	3	QPSK	Standard	1 / 14	18.32	1.07	V	19.39	34.77	-15.38
714.50	3	QPSK	Standard	1 / 14	18.16	1.21	V	19.37	34.77	-15.40
700.50	3	16-QAM	Standard	1 / 0	16.71	0.92	V	17.63	34.77	-17.14
707.50	3	16-QAM	Standard	1 / 14	17.31	1.07	V	18.38	34.77	-16.39
714.50	3	16-QAM	Standard	1 / 14	17.05	1.21	V	18.26	34.77	-16.51
701.50	5	QPSK	Standard	1 / 0	18.04	0.94	V	18.98	34.77	-15.79
707.50	5	QPSK	Standard	1 / 24	18.62	1.07	V	19.69	34.77	-15.08
713.50	5	QPSK	Standard	1 / 24	18.50	1.19	V	19.69	34.77	-15.08
701.50	5	16-QAM	Standard	1 / 0	17.06	0.94	V	18.00	34.77	-16.77
707.50	5	16-QAM	Standard	1 / 24	17.55	1.07	V	18.62	34.77	-16.15
713.50	5	16-QAM	Standard	1 / 24	17.49	1.19	V	18.68	34.77	-16.09
704.00	10	QPSK	Standard	1 / 49	18.66	1.00	V	19.66	34.77	-15.11
707.50	10	QPSK	Standard	1 / 49	17.94	1.07	V	19.01	34.77	-15.76
711.00	10	QPSK	Standard	1 / 0	18.64	1.14	V	19.78	34.77	-14.99
704.00	10	16-QAM	Standard	1 / 49	17.43	1.00	V	18.43	34.77	-16.34
707.50	10	16-QAM	Standard	1 / 49	16.61	1.07	V	17.68	34.77	-17.09
711.00	10	16-QAM	Standard	1 / 0	17.45	1.14	V	18.59	34.77	-16.18

Table 6-2. ERP Data (Band 12/17)

© 2015 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
779.50	5	QPSK	Standard	1 / 24	16.69	2.47	V	19.16	34.77	-15.61
782.00	5	QPSK	Standard	1 / 24	16.79	2.51	V	19.30	34.77	-15.47
784.50	5	QPSK	Standard	1 / 0	16.75	2.56	V	19.31	34.77	-15.46
779.50	5	16QAM	Standard	1 / 24	15.56	2.47	V	18.03	34.77	-16.74
782.00	5	16QAM	Standard	1 / 24	15.51	2.51	V	18.02	34.77	-16.75
784.50	5	16QAM	Standard	1 / 0	15.58	2.56	V	18.14	34.77	-16.63
782.00	10	QPSK	Standard	1 / 0	16.55	2.51	V	19.06	34.77	-15.71
782.00	10	16QAM	Standard	1 / 0	15.24	2.51	V	17.75	34.77	-17.02

Table 6-3. ERP Data (Band 13)

© 2015 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 5	17.53	2.98	V	20.51	38.45	-17.94
836.50	1.4	QPSK	Standard	1 / 0	18.46	3.04	V	21.50	38.45	-16.95
848.30	1.4	QPSK	Standard	1 / 0	17.03	3.10	V	20.13	38.45	-18.32
824.70	1.4	16-QAM	Standard	1 / 5	16.56	2.98	V	19.54	38.45	-18.91
836.50	1.4	16-QAM	Standard	1 / 0	17.54	3.04	V	20.58	38.45	-17.87
848.30	1.4	16-QAM	Standard	1 / 5	16.57	3.10	V	19.67	38.45	-18.78
825.50	3	QPSK	Standard	1 / 0	18.47	2.98	V	21.45	38.45	-17.00
836.50	3	QPSK	Standard	1 / 0	18.59	3.04	V	21.63	38.45	-16.82
847.50	3	QPSK	Standard	1 / 0	17.51	3.10	V	20.61	38.45	-17.84
825.50	3	16-QAM	Standard	1 / 14	16.65	2.98	V	19.63	38.45	-18.82
836.50	3	16-QAM	Standard	1 / 0	17.43	3.04	V	20.47	38.45	-17.98
847.50	3	16-QAM	Standard	1 / 0	16.54	3.10	V	19.64	38.45	-18.81
826.50	5	QPSK	Standard	1 / 24	18.19	2.99	V	21.18	38.45	-17.27
836.50	5	QPSK	Standard	1 / 0	18.93	3.04	V	21.97	38.45	-16.48
846.50	5	QPSK	Standard	1 / 0	18.33	3.09	V	21.42	38.45	-17.03
826.50	5	16-QAM	Standard	1 / 24	16.99	2.99	V	19.98	38.45	-18.47
836.50	5	16-QAM	Standard	1 / 0	17.80	3.04	V	20.84	38.45	-17.61
846.50	5	16-QAM	Standard	1 / 0	17.23	3.09	V	20.32	38.45	-18.13
829.00	10	QPSK	Standard	1 / 49	18.33	3.00	V	21.33	38.45	-17.12
836.50	10	QPSK	Standard	1 / 0	18.38	3.04	V	21.42	38.45	-17.03
844.00	10	QPSK	Standard	1 / 0	18.49	3.08	V	21.57	38.45	-16.88
829.00	10	16-QAM	Standard	1 / 49	17.34	3.00	V	20.34	38.45	-18.11
836.50	10	16-QAM	Standard	1 / 0	17.41	3.04	V	20.45	38.45	-18.00
844.00	10	16-QAM	Standard	1 / 0	17.55	3.08	V	20.63	38.45	-17.82

Table 6-4. ERP Data (Band 5)

© 2015 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 5	10.29	9.28	V	19.57	30.00	-10.43
1732.50	1.4	QPSK	Standard	1 / 5	12.15	9.00	V	21.15	30.00	-8.85
1754.30	1.4	QPSK	Standard	1 / 0	12.48	8.72	V	21.20	30.00	-8.80
1710.70	1.4	16-QAM	Standard	1 / 5	9.65	9.28	V	18.93	30.00	-11.07
1732.50	1.4	16-QAM	Standard	1 / 5	11.20	9.00	V	20.20	30.00	-9.80
1754.30	1.4	16-QAM	Standard	1 / 0	12.00	8.72	V	20.72	30.00	-9.28
1711.50	3	QPSK	Standard	1 / 14	10.72	9.27	V	19.99	30.00	-10.01
1732.50	3	QPSK	Standard	1 / 14	12.69	9.00	V	21.69	30.00	-8.31
1753.50	3	QPSK	Standard	1 / 14	12.98	8.73	V	21.71	30.00	-8.29
1711.50	3	16-QAM	Standard	1 / 14	9.76	9.27	V	19.03	30.00	-10.97
1732.50	3	16-QAM	Standard	1 / 14	11.85	9.00	V	20.85	30.00	-9.15
1753.50	3	16-QAM	Standard	1 / 14	12.36	8.73	V	21.09	30.00	-8.91
1712.50	5	QPSK	Standard	1 / 24	10.86	9.26	V	20.12	30.00	-9.88
1732.50	5	QPSK	Standard	1 / 24	12.74	9.00	V	21.74	30.00	-8.26
1752.50	5	QPSK	Standard	1 / 0	12.82	8.74	V	21.56	30.00	-8.44
1712.50	5	16-QAM	Standard	1 / 24	9.97	9.26	V	19.23	30.00	-10.77
1732.50	5	16-QAM	Standard	1 / 24	11.77	9.00	V	20.77	30.00	-9.23
1752.50	5	16-QAM	Standard	1 / 0	12.08	8.74	V	20.82	30.00	-9.18
1715.00	10	QPSK	Standard	1 / 49	11.22	9.22	V	20.44	30.00	-9.56
1732.50	10	QPSK	Standard	1 / 49	12.66	9.00	V	21.66	30.00	-8.34
1750.00	10	QPSK	Standard	1 / 49	12.50	8.77	V	21.27	30.00	-8.73
1715.00	10	16-QAM	Standard	1 / 49	10.42	9.22	V	19.64	30.00	-10.36
1732.50	10	16-QAM	Standard	1 / 49	11.75	9.00	V	20.75	30.00	-9.25
1750.00	10	16-QAM	Standard	1 / 49	11.83	8.77	V	20.60	30.00	-9.40
1717.50	15	QPSK	Standard	1 / 74	11.09	9.19	V	20.28	30.00	-9.72
1732.50	15	QPSK	Standard	1 / 74	12.50	9.00	V	21.50	30.00	-8.50
1747.50	15	QPSK	Standard	1 / 0	12.44	8.80	V	21.24	30.00	-8.76
1717.50	15	16-QAM	Standard	1 / 74	10.10	9.19	V	19.29	30.00	-10.71
1732.50	15	16-QAM	Standard	1 / 74	11.40	9.00	V	20.40	30.00	-9.60
1747.50	15	16-QAM	Standard	1 / 0	11.38	8.80	V	20.18	30.00	-9.82
1720.00	20	QPSK	Standard	1 / 99	11.50	9.16	V	20.66	30.00	-9.34
1732.50	20	QPSK	Standard	1 / 99	12.53	9.00	V	21.53	30.00	-8.47
1745.00	20	QPSK	Standard	1 / 0	12.55	8.83	V	21.38	30.00	-8.62
1720.00	20	16-QAM	Standard	1 / 99	10.60	9.16	V	19.76	30.00	-10.24
1732.50	20	16-QAM	Standard	1 / 99	11.30	9.00	V	20.30	30.00	-9.70
1745.00	20	16-QAM	Standard	1 / 0	11.71	8.83	V	20.54	30.00	-9.46

Table 6-5. EIRP Data (Band 4)

© 2015 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 5	10.93	8.34	V	19.27	33.01	-13.74
1880.00	1.4	QPSK	Standard	1 / 0	11.21	8.46	V	19.67	33.01	-13.34
1909.30	1.4	QPSK	Standard	1 / 5	9.73	8.64	V	18.37	33.01	-14.64
1850.70	1.4	16-QAM	Standard	1 / 5	9.76	8.34	V	18.10	33.01	-14.91
1880.00	1.4	16-QAM	Standard	1 / 0	9.95	8.46	V	18.41	33.01	-14.60
1909.30	1.4	16-QAM	Standard	1 / 5	8.82	8.64	V	17.46	33.01	-15.55
1851.50	3	QPSK	Standard	1 / 0	9.66	8.35	V	18.01	33.01	-15.00
1880.00	3	QPSK	Standard	1 / 0	10.38	8.46	V	18.84	33.01	-14.17
1908.50	3	QPSK	Standard	1 / 14	9.70	8.63	V	18.33	33.01	-14.68
1851.50	3	16-QAM	Standard	1 / 0	8.96	8.35	V	17.31	33.01	-15.70
1880.00	3	16-QAM	Standard	1 / 0	9.38	8.46	V	17.84	33.01	-15.17
1908.50	3	16-QAM	Standard	1 / 14	8.57	8.63	V	17.20	33.01	-15.81
1852.50	5	QPSK	Standard	1 / 24	9.91	8.35	V	18.26	33.01	-14.75
1880.00	5	QPSK	Standard	1 / 24	10.10	8.46	V	18.56	33.01	-14.45
1907.50	5	QPSK	Standard	1 / 24	9.26	8.62	V	17.88	33.01	-15.13
1852.50	5	16-QAM	Standard	1 / 24	8.87	8.35	V	17.22	33.01	-15.79
1880.00	5	16-QAM	Standard	1 / 0	9.72	8.46	V	18.18	33.01	-14.83
1907.50	5	16-QAM	Standard	1 / 24	8.47	8.62	V	17.09	33.01	-15.92
1855.00	10	QPSK	Standard	1 / 0	12.00	8.36	V	20.36	33.01	-12.65
1880.00	10	QPSK	Standard	1 / 49	11.83	8.46	V	20.29	33.01	-12.72
1905.00	10	QPSK	Standard	1 / 0	11.30	8.59	V	19.89	33.01	-13.12
1855.00	10	16-QAM	Standard	1 / 0	11.10	8.36	V	19.46	33.01	-13.55
1880.00	10	16-QAM	Standard	1 / 49	11.84	8.46	V	20.30	33.01	-12.71
1905.00	10	16-QAM	Standard	1 / 0	10.43	8.59	V	19.02	33.01	-13.99
1857.50	15	QPSK	Standard	1 / 0	11.81	8.37	V	20.18	33.01	-12.83
1880.00	15	QPSK	Standard	1 / 74	11.60	8.46	V	20.06	33.01	-12.95
1902.50	15	QPSK	Standard	1 / 0	11.31	8.56	V	19.87	33.01	-13.14
1857.50	15	16-QAM	Standard	1 / 0	10.95	8.37	V	19.32	33.01	-13.69
1880.00	15	16-QAM	Standard	1 / 74	10.60	8.46	V	19.06	33.01	-13.95
1902.50	15	16-QAM	Standard	1 / 0	10.64	8.56	V	19.20	33.01	-13.81
1860.00	20	QPSK	Standard	1 / 0	11.97	8.38	V	20.35	33.01	-12.66
1880.00	20	QPSK	Standard	1 / 99	11.36	8.46	V	19.82	33.01	-13.19
1900.00	20	QPSK	Standard	1 / 0	11.14	8.53	V	19.67	33.01	-13.34
1860.00	20	16-QAM	Standard	1 / 0	11.20	8.38	V	19.58	33.01	-13.43
1880.00	20	16-QAM	Standard	1 / 99	10.44	8.46	V	18.90	33.01	-14.11
1900.00	20	16-QAM	Standard	1 / 0	10.50	8.53	V	19.03	33.01	-13.98

Table 6-6. EIRP Data (Band 2)

© 2015 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
2307.50	5	QPSK	Standard	1 / 24	11.80	8.00	V	19.80	23.98	-4.18
2310.00	5	QPSK	Standard	1 / 0	11.63	8.00	V	19.63	23.98	-4.35
2312.50	5	QPSK	Standard	1 / 0	11.96	8.00	V	19.96	23.98	-4.02
2307.50	5	16-QAM	Standard	1 / 24	10.62	8.00	V	18.62	23.98	-5.36
2310.00	5	16-QAM	Standard	1 / 0	10.58	8.00	V	18.58	23.98	-5.40
2312.50	5	16-QAM	Standard	1 / 0	10.87	8.00	V	18.87	23.98	-5.11
2310.00	10	QPSK	Standard	1 / 0	11.45	8.00	V	19.45	23.98	-4.53
2310.00	10	16-QAM	Standard	1 / 0	10.57	8.00	V	18.57	23.98	-5.41

Table 6-7. EIRP Data (Band 30)

© 2015 PCTEST Engineering Laboratory, Inc.

6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(c) §27.53(f) §27.53(g) §27.53(h) §27.53(a.4)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points ≥ 2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

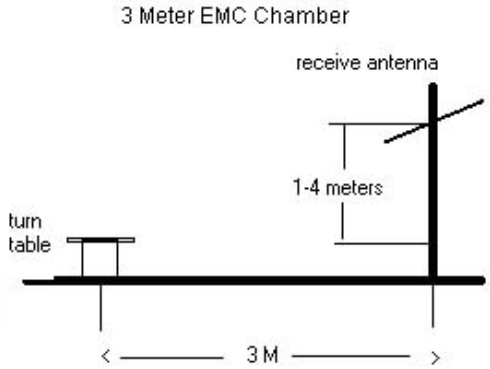

Figure 6-6. Test Instrument & Measurement Setup

© 2015 PCTEST Engineering Laboratory, Inc.

Test Notes

1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

2) This unit was tested with its standard battery.

3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.

4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	704.00	MHz		
CHANNEL:	23060			
MEASURED OUTPUT POWER:	19.66	dBm	=	0.092 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	10.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.66	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1408.00	-52.59	2.51	-50.08	H	69.7
2112.00	-55.65	2.98	-52.67	H	72.3
2816.00	-59.20	4.75	-54.45	H	74.1

Table 6-8. Radiated Spurious Data (Band 12/17 – Low Channel)

OPERATING FREQUENCY:	707.50	MHz		
CHANNEL:	23095			
MEASURED OUTPUT POWER:	19.01	dBm	=	0.080 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	10.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.01	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1415.00	-60.07	2.59	-57.48	H	76.5
2122.50	-54.03	3.02	-51.01	H	70.0
2830.00	-58.83	4.74	-54.09	H	73.1

Table 6-9. Radiated Spurious Data (Band 12/17 – Mid Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	711.00			MHz	
CHANNEL:	23130				
MEASURED OUTPUT POWER:	19.78	dBm	=	0.095	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	10.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.78		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1422.00	-55.15	2.66	-52.49	H	72.3
2133.00	-57.67	3.05	-54.62	H	74.4
2844.00	-59.29	4.73	-54.56	H	74.3

Table 6-10. Radiated Spurious Data (Band 12/17 – High Channel)

OPERATING FREQUENCY:	711.00			MHz	
CHANNEL:	23130				
MEASURED OUTPUT POWER:	19.78	dBm	=	0.095	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	10.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.78		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1422.00	-58.77	2.66	-56.11	H	75.9
2133.00	-56.18	3.05	-53.13	H	72.9
2844.00	-59.13	4.73	-54.40	H	74.2

Table 6-11. Radiated Spurious Data with WCP (Band 12/17 – High Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	779.50	MHz		
CHANNEL:	23205			
MEASURED OUTPUT POWER:	19.16	dBm	=	0.082 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.16	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
2338.50	-65.89	7.28	-58.61	V	77.8
3118.00	-63.33	7.25	-56.08	V	75.2
3897.50	-60.59	7.10	-53.49	V	72.6
4677.00	-60.50	8.67	-51.83	V	71.0

Table 6-12. Radiated Spurious Data (Band 13 – Low Channel)

OPERATING FREQUENCY:	782.00	MHz		
CHANNEL:	23230			
MEASURED OUTPUT POWER:	19.30	dBm	=	0.085 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.30	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
2346.00	-62.57	7.26	-55.31	V	74.6
3128.00	-62.89	7.26	-55.63	V	74.9
3910.00	-59.73	7.14	-52.58	V	71.9

Table 6-13. Radiated Spurious Data (Band 13 – Mid Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	784.50			MHz	
CHANNEL:	23255				
MEASURED OUTPUT POWER:	19.31	dBm	=	0.085	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.31		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
2353.50	-65.72	7.25	-58.47	V	77.8
3138.00	-63.78	7.27	-56.51	V	75.8
3922.50	-60.76	7.20	-53.57	V	72.9
4707.00	-59.87	8.65	-51.22	V	70.5

Table 6-14. Radiated Spurious Data (Band 13 – High Channel)

OPERATING FREQUENCY:	782.00			MHz	
CHANNEL:	23230				
MEASURED OUTPUT POWER:	19.30	dBm	=	0.085	W
MODULATION SIGNAL:	QPSK				
DISTANCE:	3	meters			
NARROWBAND EMISSION LIMIT:	-50	dBm			
WIDEBAND EMISSION LIMIT:	-40	dBm/MHz			

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	Margin [dB]
1564.00	-67.23	6.44	-60.79	V	-20.8

Table 6-15. Radiated Spurious Data (Band 13 – 1559-1610MHz Band)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	784.50			MHz	
CHANNEL:	23255				
MEASURED OUTPUT POWER:	19.31	dBm	=	0.085	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.31		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
2353.50	-65.35	7.25	-58.10	H	77.4
3138.00	-63.83	7.27	-56.56	H	75.9
3922.50	-61.14	7.20	-53.95	H	73.3
4707.00	-60.54	8.65	-51.89	H	71.2

Table 6-16. Radiated Spurious Data with WCP (Band 13 – Mid Channel)

OPERATING FREQUENCY:	826.50			MHz	
CHANNEL:	20425				
MEASURED OUTPUT POWER:	21.18	dBm	=	0.131	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.18		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1653.00	-59.37	3.60	-55.77	H	76.9
2479.50	-52.07	3.57	-48.50	H	69.7
3306.00	-58.78	5.68	-53.10	H	74.3

Table 6-17. Radiated Spurious Data (Band 5 – Low Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	836.50			MHz	
CHANNEL:	20525				
MEASURED OUTPUT POWER:	21.97	dBm	=	0.157	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.97		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.00	-58.00	3.53	-54.48	H	76.4
2509.50	-55.21	3.57	-51.64	H	73.6
3346.00	-58.24	5.78	-52.45	H	74.4

Table 6-18. Radiated Spurious Data (Band 5 – Mid Channel)

OPERATING FREQUENCY:	846.50			MHz	
CHANNEL:	20625				
MEASURED OUTPUT POWER:	21.42	dBm	=	0.139	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.42		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1693.00	-58.11	3.46	-54.65	H	76.1
2539.50	-55.40	3.63	-51.77	H	73.2
3386.00	-59.05	5.89	-53.17	H	74.6

Table 6-19. Radiated Spurious Data (Band 5 – High Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	836.50			MHz	
CHANNEL:	20525				
MEASURED OUTPUT POWER:	21.97	dBm	=	0.157	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.97		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.00	-55.89	3.53	-52.37	H	74.3
2509.50	-48.15	3.57	-44.58	H	66.6
3346.00	-58.81	5.78	-53.02	H	75.0

Table 6-20. Radiated Spurious Data with WCP (Band 5 – Mid Channel)

OPERATING FREQUENCY:	1712.50			MHz	
CHANNEL:	19975				
MEASURED OUTPUT POWER:	20.12	dBm	=	0.103	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	33.12		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3425.00	-58.11	8.15	-49.96	H	70.1
5137.50	-59.61	10.26	-49.34	H	69.5
6850.00	-57.64	11.39	-46.25	H	66.4

Table 6-21. Radiated Spurious Data (Band 4 – Low Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1732.50	MHz		
CHANNEL:	20175			
MEASURED OUTPUT POWER:	21.74	dBm	=	0.149 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.74	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3465.00	-59.13	8.29	-50.85	H	72.6
5197.50	-57.65	10.35	-47.30	H	69.0
6930.00	-56.62	11.49	-45.14	H	66.9

Table 6-22. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY:	1752.50	MHz		
CHANNEL:	20375			
MEASURED OUTPUT POWER:	21.56	dBm	=	0.143 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.56	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3505.00	-58.82	8.40	-50.41	H	72.0
5257.50	-58.61	10.36	-48.25	H	69.8
7010.00	-58.35	11.56	-46.78	H	68.3

Table 6-23. Radiated Spurious Data (Band 4 – High Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1732.50	MHz		
CHANNEL:	20175			
MEASURED OUTPUT POWER:	21.74	dBm	=	0.149 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.74	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3465.00	-54.57	8.29	-46.29	H	68.0
5197.50	-58.02	10.35	-47.67	H	69.4
6930.00	-56.72	11.49	-45.24	H	67.0

Table 6-24. Radiated Spurious Data with WCP (Band 4 – Mid Channel)

OPERATING FREQUENCY:	1855.00	MHz		
CHANNEL:	18650			
MEASURED OUTPUT POWER:	20.36	dBm	=	0.109 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	10.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	33.36	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3710.00	-58.68	8.40	-50.28	H	70.6
5565.00	-58.31	10.59	-47.73	H	68.1
7420.00	-56.00	12.06	-43.94	H	64.3

Table 6-25. Radiated Spurious Data (Band 2 – Low Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1880.00			MHz	
CHANNEL:	18900				
MEASURED OUTPUT POWER:	20.29	dBm	=	0.107	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	10.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	33.29		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3760.00	-58.82	8.38	-50.44	H	70.7
5640.00	-57.72	10.70	-47.03	H	67.3
7520.00	-56.91	12.10	-44.80	H	65.1

Table 6-26. Radiated Spurious Data (Band 2 – Mid Channel)

OPERATING FREQUENCY:	1905.00			MHz	
CHANNEL:	19150				
MEASURED OUTPUT POWER:	19.89	dBm	=	0.098	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	10.0	MHz			
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.89		dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3810.00	-58.81	8.39	-50.42	H	70.3
5715.00	-58.51	10.75	-47.76	H	67.6
7620.00	-59.40	12.20	-47.20	H	67.1

Table 6-27. Radiated Spurious Data (Band 2 – High Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1855.00	MHz		
CHANNEL:	18650			
MEASURED OUTPUT POWER:	20.36	dBm	=	0.109 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	10.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	33.36	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3710.00	-59.59	8.40	-51.19	H	71.6
5565.00	-58.71	10.59	-48.13	H	68.5
7420.00	-57.23	12.06	-45.17	H	65.5

Table 6-28. Radiated Spurious Data with WCP (Band 2 – Low Channel)

OPERATING FREQUENCY:	2307.50	MHz		
CHANNEL:	27685			
MEASURED OUTPUT POWER:	19.80	dBm	=	0.095 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	70 + 10 $\log_{10}$ (W) =	59.80	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
4615.00	-63.68	9.51	-54.17	H	74.0
6922.50	-64.64	11.48	-53.16	H	73.0
9230.00	-64.70	13.22	-51.48	H	71.3
11537.50	-66.16	13.34	-52.82	H	72.6
13845.00	-62.18	14.55	-47.63	H	67.4
16152.50	-62.26	13.58	-48.69	H	68.5

Table 6-29. Radiated Spurious Data (Band 30 – Low Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	2310.00	MHz		
CHANNEL:	27710			
MEASURED OUTPUT POWER:	19.63	dBm	=	0.092 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	70 + 10 $\log_{10}$ (W) =	59.63	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
4620.00	-64.89	9.52	-55.37	H	75.0
6930.00	-68.50	11.49	-57.01	H	76.6
9240.00	-64.67	13.22	-51.45	H	71.1
11550.00	-66.70	13.33	-53.37	H	73.0
13860.00	-63.11	14.56	-48.54	H	68.2
16170.00	-61.65	13.57	-48.07	H	67.7

Table 6-30. Radiated Spurious Data (Band 30 – Mid Channel)

OPERATING FREQUENCY:	2312.50	MHz		
CHANNEL:	27735			
MEASURED OUTPUT POWER:	19.96	dBm	=	0.099 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	70 + 10 $\log_{10}$ (W) =	59.96	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
4625.00	-62.80	9.53	-53.27	H	73.2
6937.50	-63.59	11.49	-52.10	H	72.1
9250.00	-63.69	13.22	-50.47	H	70.4
11562.50	-66.26	13.33	-52.93	H	72.9
13875.00	-59.41	14.57	-44.84	H	64.8
16187.50	-62.01	13.57	-48.44	H	68.4

Table 6-31. Radiated Spurious Data (Band 30 – High Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	2312.50	MHz			
CHANNEL:	27735				
MEASURED OUTPUT POWER:	19.96	dBm	=	0.099	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	5.0	MHz			
DISTANCE:	3	meters			
LIMIT:	70 + 10 $\log_{10}$ (W) =	59.96	dBc		

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
4625.00	-66.85	9.53	-57.32	H	77.3
6937.50	-68.30	11.49	-56.81	H	76.8
9250.00	-66.79	13.22	-53.57	H	73.5
11562.50	-66.09	13.33	-52.76	H	72.7
13875.00	-65.41	14.57	-50.84	H	70.8
16187.50	-61.65	13.57	-48.08	H	68.0

Table 6-32. Radiated Spurious Data with WCP (Band 30 – High Channel)

© 2015 PCTEST Engineering Laboratory, Inc.

6.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

© 2015 PCTEST Engineering Laboratory, Inc.

Band 12/17 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY:	710,000,000	Hz
CHANNEL:	23090	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	709,999,960	-40	-0.0000056
100 %		- 30	709,999,808	-192	-0.0000270
100 %		- 20	709,999,876	-124	-0.0000175
100 %		- 10	710,000,152	152	0.0000214
100 %		0	709,999,794	-206	-0.0000290
100 %		+ 10	709,999,978	-22	-0.0000031
100 %		+ 20	710,000,026	26	0.0000037
100 %		+ 30	709,999,829	-171	-0.0000241
100 %		+ 40	710,000,299	299	0.0000421
100 %		+ 50	710,000,248	248	0.0000349
BATT. ENDPOINT	3.45	+ 20	709,999,923	-77	-0.0000108

Table 6-33. Frequency Stability Data (Band 12/17)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2015 PCTEST Engineering Laboratory, Inc.

Band 12/17 Frequency Stability Measurements

§2.1055 §27.54

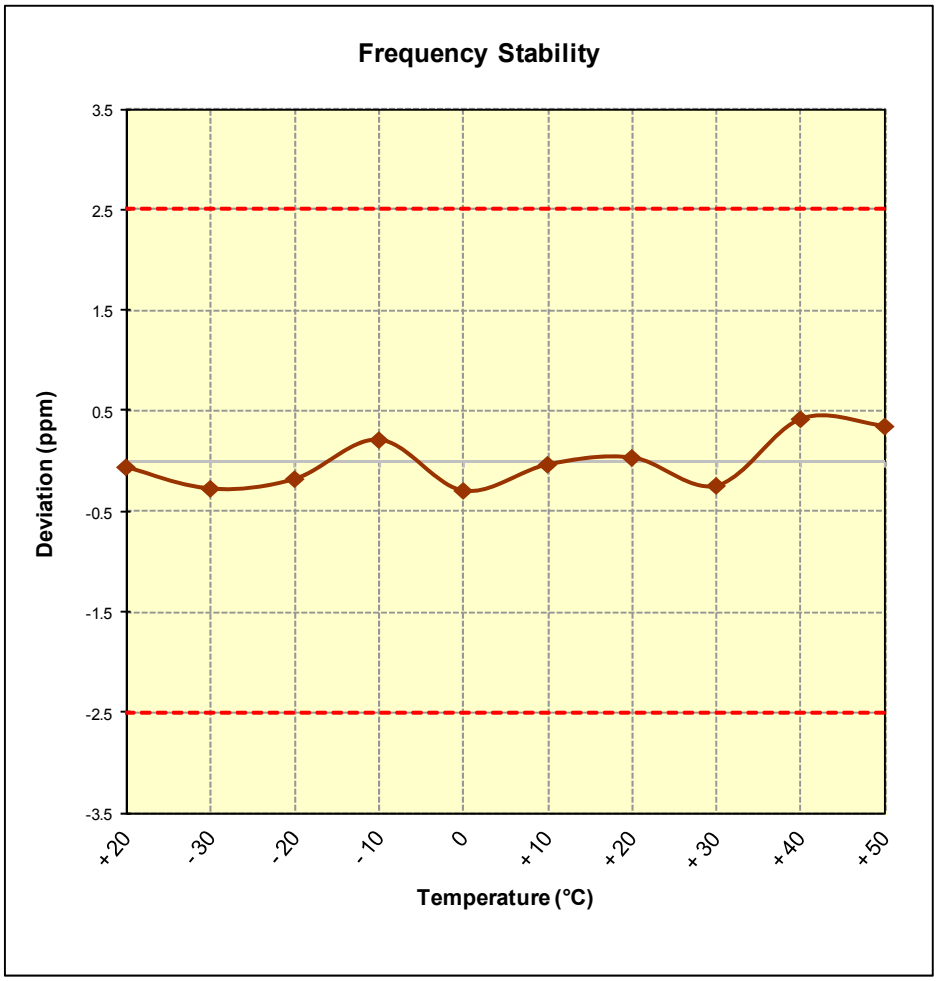

Figure 6-7. Frequency Stability Graph (Band 12/17)

© 2015 PCTEST Engineering Laboratory, Inc.

Band 13 Frequency Stability Measurements
§2.1055 §27.54

OPERATING FREQUENCY:	782,000,000	Hz
CHANNEL:	23230	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	781,999,803	-197	-0.0000252
100 %		- 30	781,999,841	-159	-0.0000203
100 %		- 20	782,000,074	74	0.0000095
100 %		- 10	782,000,051	51	0.0000065
100 %		0	781,999,998	-2	-0.0000003
100 %		+ 10	781,999,787	-213	-0.0000272
100 %		+ 20	782,000,290	290	0.0000371
100 %		+ 30	781,999,709	-291	-0.0000372
100 %		+ 40	781,999,963	-37	-0.0000047
100 %		+ 50	782,000,298	298	0.0000381
BATT. ENDPOINT	3.45	+ 20	782,000,059	59	0.0000075

Table 6-34. Frequency Stability Data (Band 13)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2015 PCTEST Engineering Laboratory, Inc.

Band 13 Frequency Stability Measurements

§2.1055 §27.54

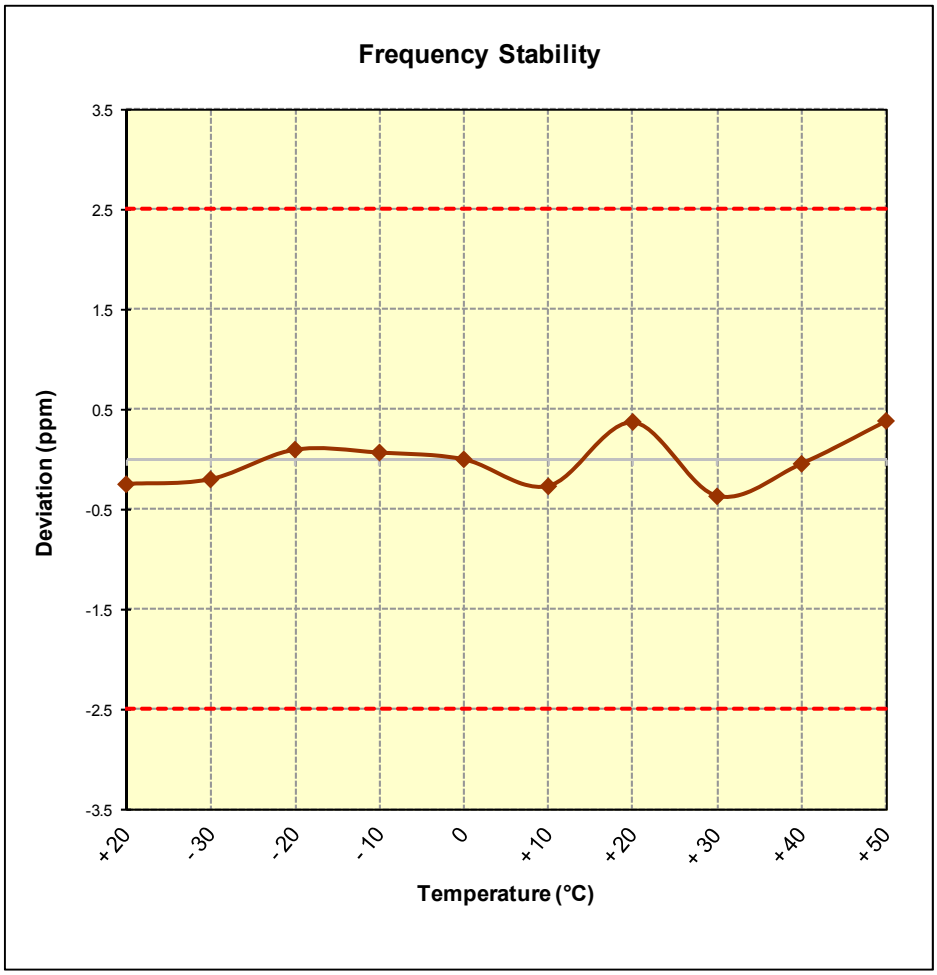

Figure 6-8. Frequency Stability Graph (Band 13)

© 2015 PCTEST Engineering Laboratory, Inc.

Band 5 Frequency Stability Measurements

§2.1055 §22.355

OPERATING FREQUENCY:	836,500,000	Hz
CHANNEL:	20525	
REFERENCE VOLTAGE:	3.85	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,873	-127	-0.0000152
100 %		- 30	836,499,881	-119	-0.0000142
100 %		- 20	836,499,980	-20	-0.0000024
100 %		- 10	836,500,161	161	0.0000192
100 %		0	836,499,988	-12	-0.0000014
100 %		+ 10	836,499,940	-60	-0.0000072
100 %		+ 20	836,500,148	148	0.0000177
100 %		+ 30	836,500,070	70	0.0000084
100 %		+ 40	836,500,249	249	0.0000298
100 %		+ 50	836,499,708	-292	-0.0000349
BATT. ENDPOINT	3.45	+ 20	836,500,339	339	0.0000405

Table 6-35. Frequency Stability Data (Band 5)

© 2015 PCTEST Engineering Laboratory, Inc.

Band 5 Frequency Stability Measurements

§2.1055 §22.355

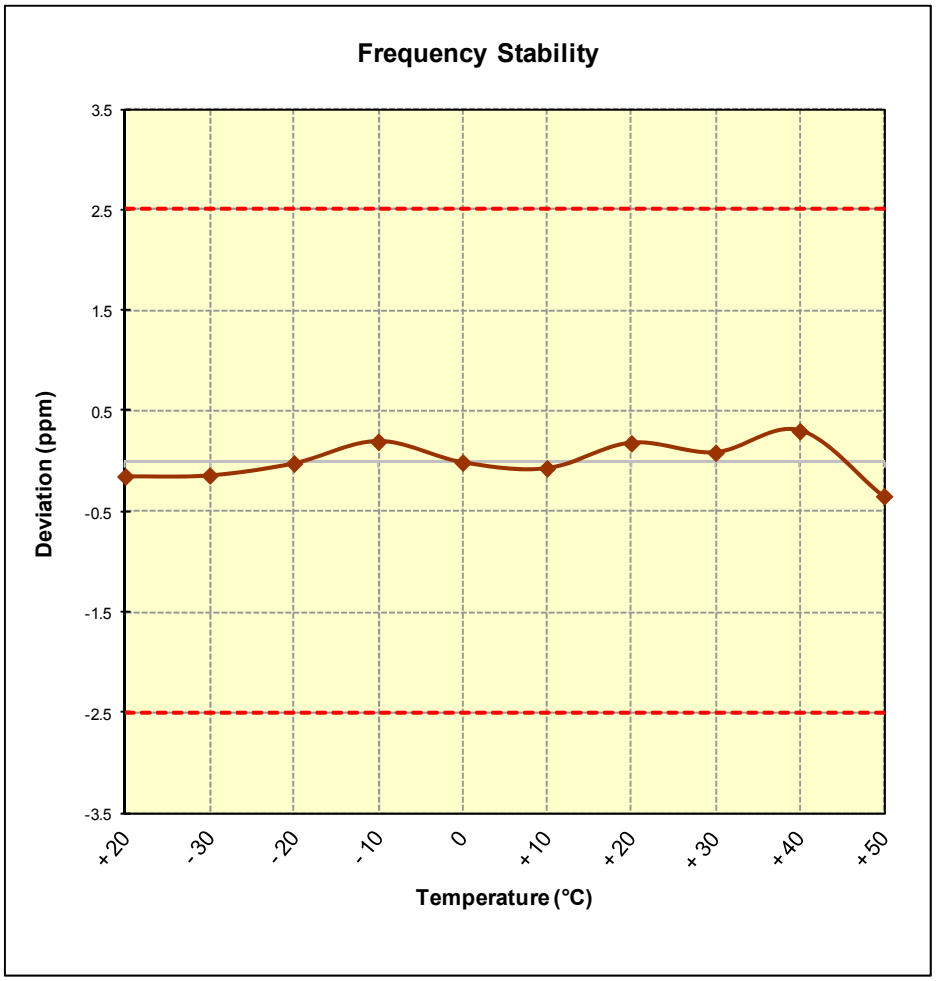

Figure 6-9. Frequency Stability Graph (Band 5)

© 2015 PCTEST Engineering Laboratory, Inc.

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY:	1,732,500,000	Hz
CHANNEL:	20175	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,499,841	-159	-0.0000092
100 %		- 30	1,732,500,040	40	0.0000023
100 %		- 20	1,732,500,131	131	0.0000076
100 %		- 10	1,732,499,991	-9	-0.0000005
100 %		0	1,732,500,185	185	0.0000107
100 %		+ 10	1,732,499,849	-151	-0.0000087
100 %		+ 20	1,732,499,845	-155	-0.0000089
100 %		+ 30	1,732,499,723	-277	-0.0000160
100 %		+ 40	1,732,500,047	47	0.0000027
100 %		+ 50	1,732,500,159	159	0.0000092
BATT. ENDPOINT	3.45	+ 20	1,732,499,985	-15	-0.0000009

Table 6-36. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2015 PCTEST Engineering Laboratory, Inc.

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

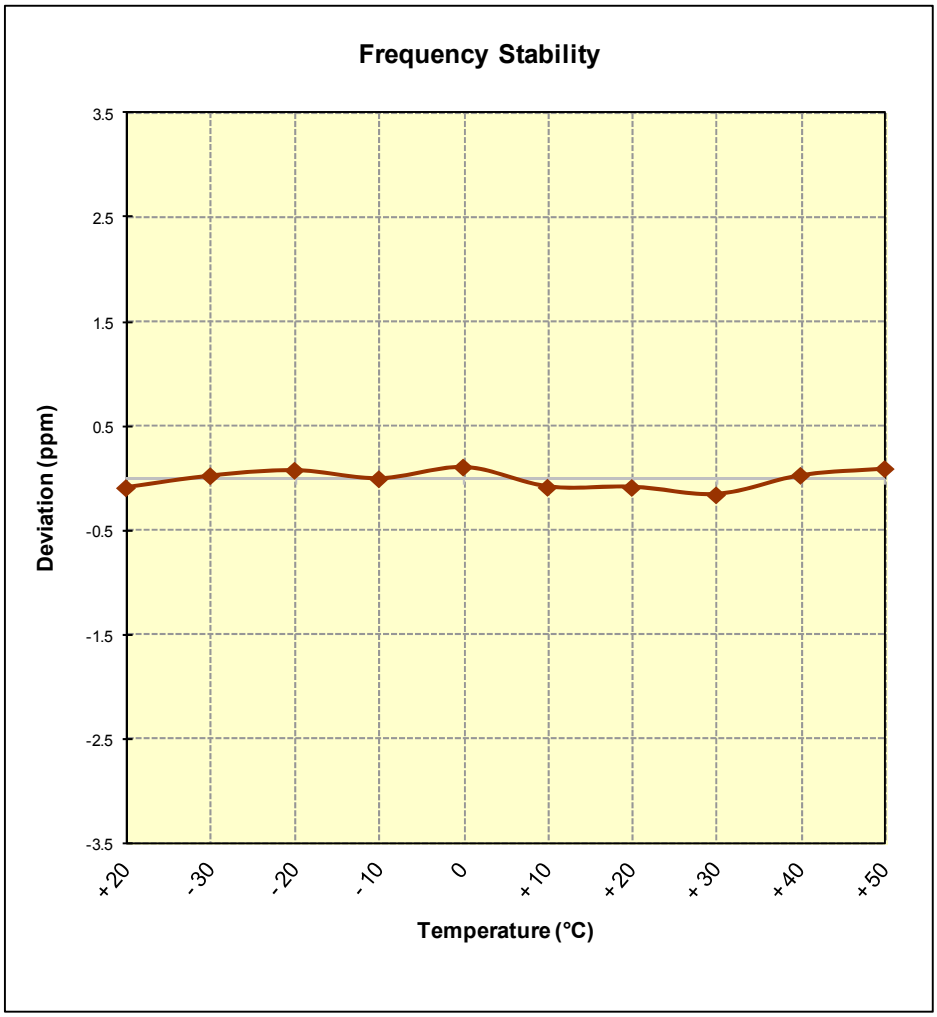

Figure 6-10. Frequency Stability Graph (Band 4)

© 2015 PCTEST Engineering Laboratory, Inc.

Band 2 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	18900	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,000	0	0.0000000
100 %		- 30	1,879,999,951	-49	-0.0000026
100 %		- 20	1,879,999,839	-161	-0.0000086
100 %		- 10	1,880,000,410	410	0.0000218
100 %		0	1,879,999,595	-405	-0.0000215
100 %		+ 10	1,879,999,928	-72	-0.0000038
100 %		+ 20	1,879,999,668	-332	-0.0000177
100 %		+ 30	1,880,000,155	155	0.0000082
100 %		+ 40	1,879,999,832	-168	-0.0000089
100 %		+ 50	1,880,000,150	150	0.0000080
BATT. ENDPOINT	3.45	+ 20	1,880,000,035	35	0.0000019

Table 6-37. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2015 PCTEST Engineering Laboratory, Inc.

Band 2 Frequency Stability Measurements

§2.1055 §24.235

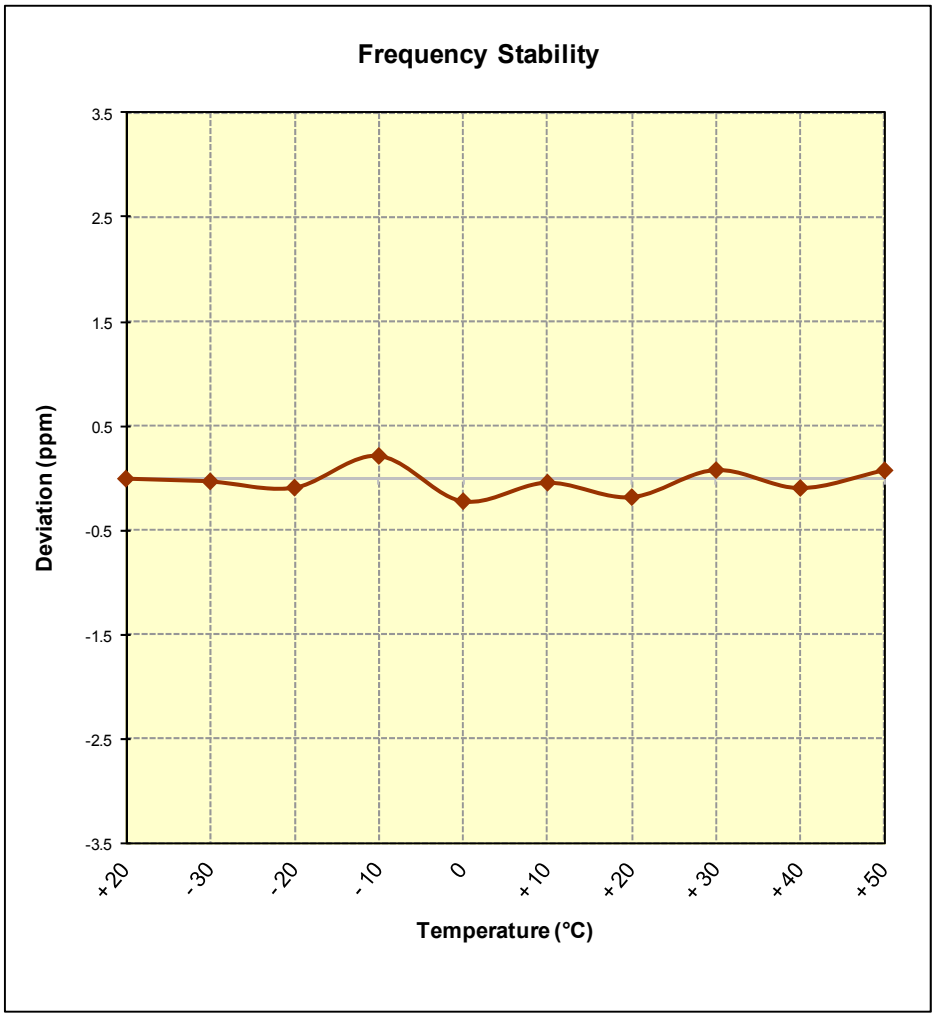

Figure 6-11. Frequency Stability Graph (Band 2)

© 2015 PCTEST Engineering Laboratory, Inc.

Band 30 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY:	2,310,000,000	Hz
CHANNEL:	27710	
REFERENCE VOLTAGE:	3.85	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	2,310,000,109	109	0.0000047
100 %		- 30	2,310,000,071	71	0.0000031
100 %		- 20	2,309,999,819	-181	-0.0000078
100 %		- 10	2,309,999,726	-274	-0.0000119
100 %		0	2,309,999,956	-44	-0.0000019
100 %		+ 10	2,309,999,888	-112	-0.0000048
100 %		+ 20	2,310,000,162	162	0.0000070
100 %		+ 30	2,309,999,735	-265	-0.0000115
100 %		+ 40	2,310,000,096	96	0.0000042
100 %		+ 50	2,309,999,738	-262	-0.0000113
BATT. ENDPOINT	3.45	+ 20	2,310,000,241	241	0.0000104

Table 6-38. Frequency Stability Data (Band 30)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2015 PCTEST Engineering Laboratory, Inc.

Band 30 Frequency Stability Measurements

§2.1055 §24.235

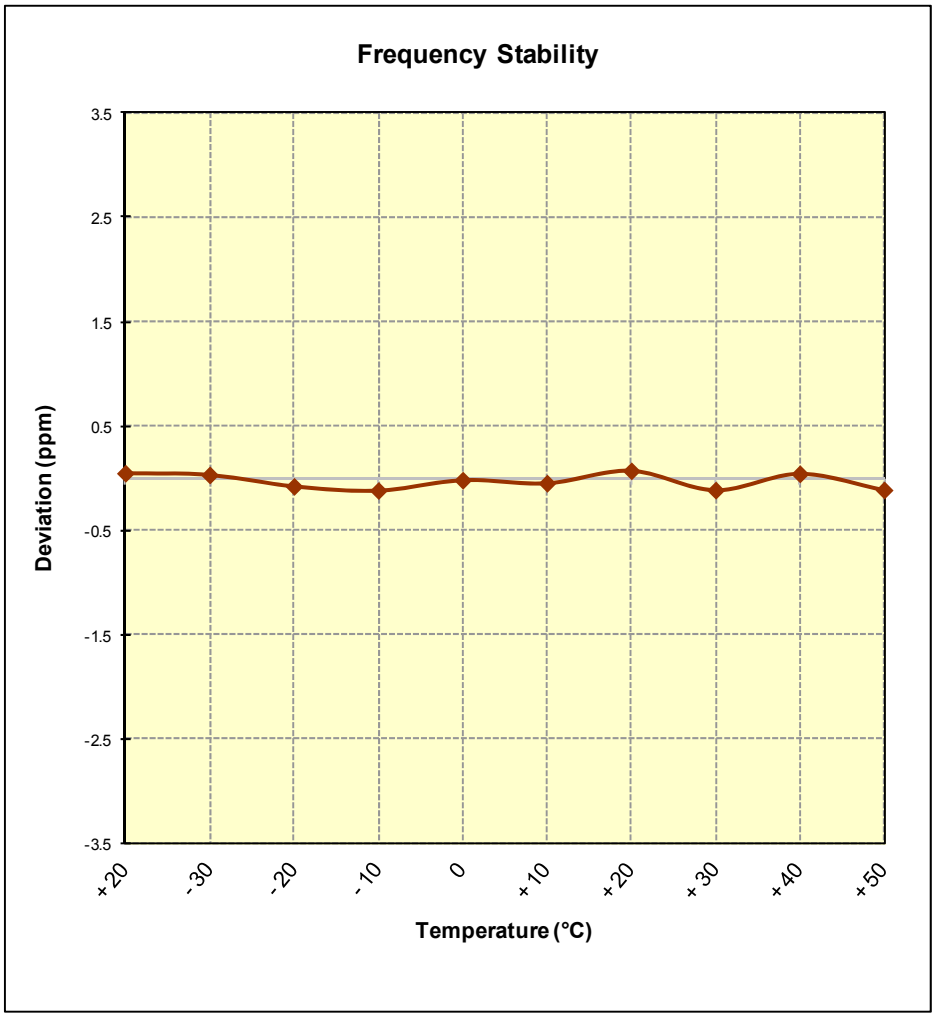

Figure 6-12. Frequency Stability Graph (Band 30)

© 2015 PCTEST Engineering Laboratory, Inc.

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN920W8** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

© 2015 PCTEST Engineering Laboratory, Inc.