



MEASUREMENT REPORT LTE

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

6/05/2018-6/18/2018

Test Site/Location:

PCTEST Lab. Columbia, MD

Test Report Serial No.:

1M1806040118-14.A3L

FCC ID:

A3LSMN960F

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Class II Permissive Change

Model:

SM-N960F

Additional Model(s):

SM-N960F/DS, SM-N960X

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22, 24, & 27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,
KDB 648474 D03 v01r04

Class II Permissive Change:


Please see FCC change document

Original Grant Date:

6/25/2018

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMN960F	 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset	Page 1 of 8

1.0 TEST DATA

1.1 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMN960F		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset		Page 2 of 8

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

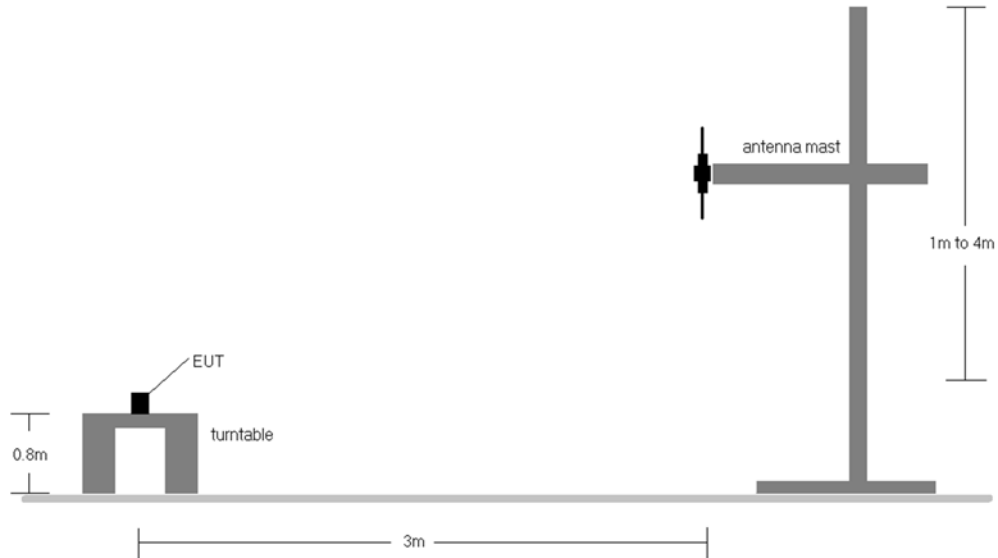


Figure 1-1. Radiated Test Setup <1GHz

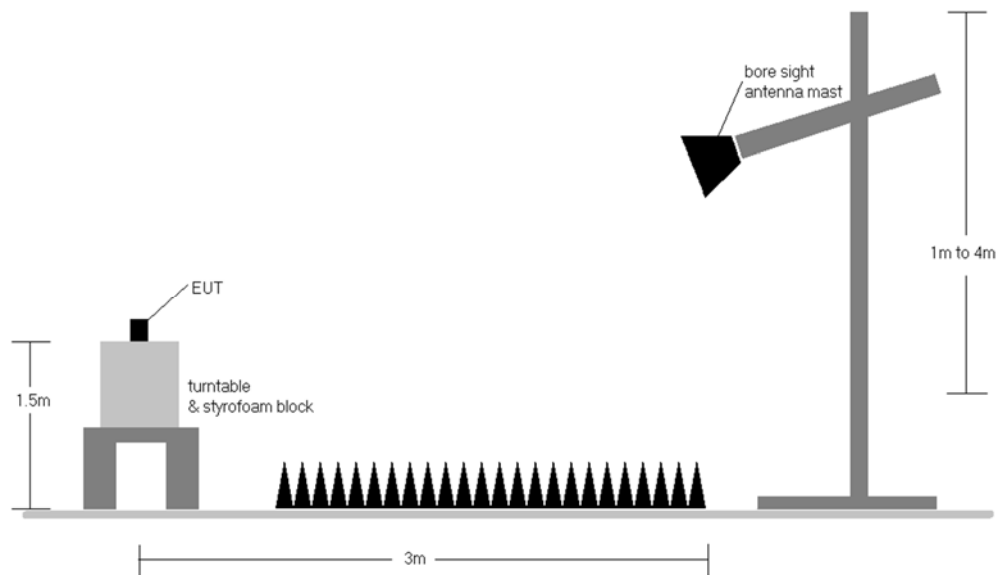


Figure 1-2. Radiated Test Setup >1GHz

FCC ID: A3LSMN960F	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset		Page 3 of 8

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The EUT was tested for the bands/modes of operation whose RF parameters were modified in compliance with FCC provisions for a permissive change.
- 3) This unit was tested with its standard battery.
- 4) The Ant. Gains (GT) are listed in dBi.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2535.00	20	QPSK	H	150	284	1 / 0	17.61	6.03	23.64	0.231	33.01	-9.37

Table 1-1. ERP Data (Band 7)

FCC ID: A3LSMN960F		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset		Page 4 of 8

1.2 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMN960F	 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) 		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset	Page 5 of 8

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

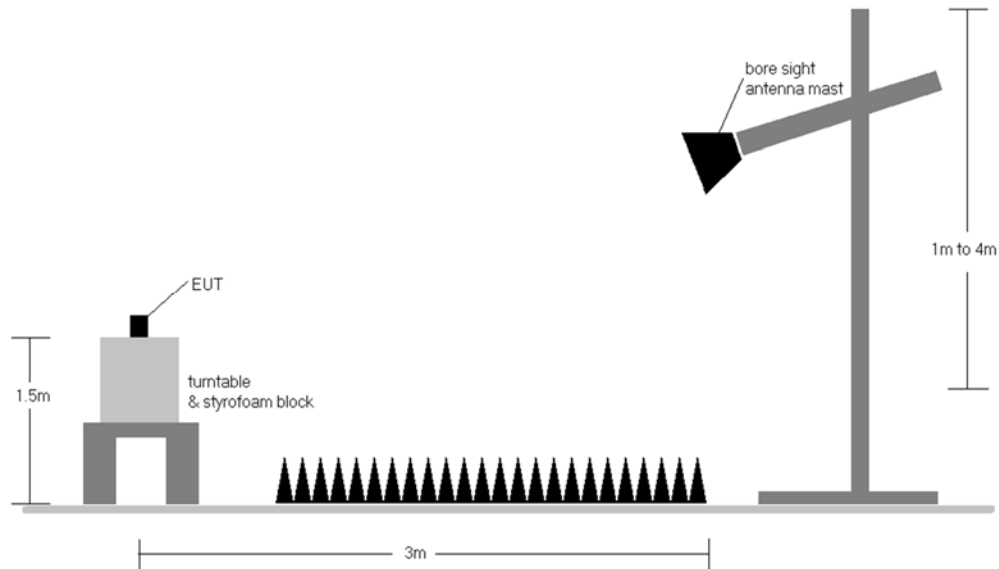


Figure 1-3. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The EUT was tested for the bands/modes of operation whose RF parameters were modified in compliance with FCC provisions for a permissive change.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMN960F	 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) 		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset	Page 6 of 8

OPERATING FREQUENCY: 2535.00 MHz
 CHANNEL: 21100
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5070.00	V	355	192	-58.67	10.09	-48.58	-23.6

Table 1-2. Radiated Spurious Data (Band 7)

FCC ID: A3LSMN960F		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset		Page 7 of 8

2.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN960F** complies with all the requirements the FCC Rules for LTE operation only.

FCC ID: A3LSMN960F		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1806040118-14.A3L	Test Dates: 6/05/2018-6/18/2018	EUT Type: Portable Handset		Page 8 of 8