



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctest.com>



MEASUREMENT REPORT FCC Part 22 & 90

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

4/30 - 6/13/2018

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1804270086-04.A3L

FCC ID:

A3LSMN960U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-N960U

Additional Model(s):

SM-N960U1, SM-N960W, SM-N960XU

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

§2.1049, §22(H), §90(R), §90(S)

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,
KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager	
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 1 of 63	

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal	24
7.4	Band Edge Emissions at Antenna Terminal	32
7.5	Conducted Power Output Data	43
7.6	Radiated Power (ERP)	45
7.7	Radiated Spurious Emissions Measurements	48
7.8	Frequency Stability / Temperature Variation	56
8.0	CONCLUSION.....	63

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 2 of 63	



MEASUREMENT REPORT

FCC Part 22(H) & 90



Mode	Tx Frequency (MHz)	Measurement	Max. Power (W)	Max. Power (dBm)	Emission Designator	Modulation
CDMA800 (BC10)	817.9 - 823.1	Conducted	0.327	25.14	1M27F9W	CDMA
LTE Band 14	790.5 - 795.5	ERP	0.106	20.25	4M55G7D	QPSK
LTE Band 14	790.5 - 795.5	ERP	0.087	19.41	4M52W7D	16-QAM
LTE Band 14	790.5 - 795.5	ERP	0.069	18.38	4M52W7D	64-QAM
LTE Band 14	793	ERP	0.102	20.08	9M00G7D	QPSK
LTE Band 14	793	ERP	0.086	19.36	9M02W7D	16-QAM
LTE Band 14	793	ERP	0.068	18.33	8M99W7D	64-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.292	24.66	1M08G7D	QPSK
LTE Band 26	814.7 - 823.3	Conducted	0.252	24.01	1M08W7D	16-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.196	22.93	1M08W7D	64-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.301	24.79	2M70G7D	QPSK
LTE Band 26	815.5 - 822.5	Conducted	0.256	24.08	2M68W7D	16-QAM
LTE Band 26	815.5 - 822.5	Conducted	0.202	23.05	2M69W7D	64-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.296	24.71	4M52G7D	QPSK
LTE Band 26	816.5 - 821.5	Conducted	0.252	24.02	4M50W7D	16-QAM
LTE Band 26	816.5 - 821.5	Conducted	0.197	22.94	4M52W7D	64-QAM
LTE Band 26	819	Conducted	0.294	24.69	8M99G7D	QPSK
LTE Band 26	819	Conducted	0.252	24.01	8M96W7D	16-QAM
LTE Band 26	819	Conducted	0.197	22.95	8M96W7D	64-QAM
LTE Band 26	821.5	Conducted	0.281	24.49	13M4G7D	QPSK
LTE Band 26	821.5	Conducted	0.244	23.87	13M5W7D	16-QAM
LTE Band 26	821.5	Conducted	0.194	22.87	13M4W7D	64-QAM
LTE Band 26	821.5	ERP	0.114	20.59	13M4G7D	QPSK
LTE Band 26	821.5	ERP	0.079	18.98	13M5W7D	16-QAM
LTE Band 26	821.5	ERP	0.065	18.15	13M4W7D	64-QAM

EUT Overview

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 3 of 63

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 4 of 63	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN960U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22(H) and 90.691.

Test Device Serial No.: 55608, 55921

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2010 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device uses a stylus pen for several functions. The EUT can operate with the stylus pen inserted or removed and the emissions measurements for the EUT were performed with and without the stylus pen inserted into the EUT. There was no degradation found without the stylus pen removed so all emission measurements were performed with the pen inserted into the EUT.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 5 of 63	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

\$2.1053, \$90.635, \$90.691

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2010.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 6 of 63	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 7 of 63

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX2	Licensed Transmitter Cable Set	8/10/2017	Annual	8/10/2018	LTX2
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	8/28/2017	Annual	8/28/2018	MY49432391
COM-Power	AL-130R	Active Loop Antenna	6/5/2017	Annual	6/5/2018	121085
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/28/2018	Biennial	3/28/2020	128337
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable Set	1/23/2018	Annual	1/23/2019	251425001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
Mini Circuits	TVA-11-422	RF Power Amp	N/A		N/A	QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A		N/A	11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2017	Annual	10/13/2018	102060
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/19/2017	Annual	6/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102135
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Anritsu	MT8820C	Radio Communication Analyzer	10/25/2017	Annual	10/25/2018	6201144419
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	10/30/2017	Annual	10/30/2018	101058
Schwarzbeck	UHA 9105	Dipole Antenna	8/26/2016	Biennial	8/26/2018	2696
Rohde & Schwarz	TS-PR8	Preamplifier-Antenna SYS; 30MHz-8GHz	10/19/2017	Annual	10/19/2018	102324
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 8 of 63

6.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission – BC10

Example: Channel 476 CDMA BC10 Mode 3rd Harmonic (2453.70MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 9 of 63

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMN960U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO / LTE
 Band: CDMA/EvDO Band Class 10 / LTE Band14 / LTE Band 26

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.543 90.691	Conducted Band Edge / Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except $> 50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046 90.635	Conducted Power	< 100 Watts (LTE B26)		PASS	Section 7.5
90.542	Effective Radiated Power (Band 14)	< 3 Watts max. ERP	RADIATED	PASS	Section 7.6
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP		PASS	Section 7.6
2.1053 90.543 90.691	Radiated Spurious Emissions (CDMA/EvDO BC10, LTE B14, LTE B26)	$> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except $> 50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.11.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 10 of 63	

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

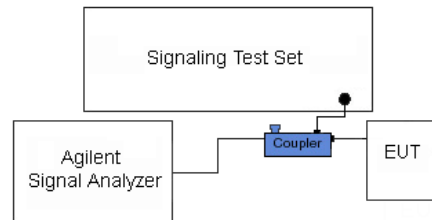



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 11 of 63	

CDMA BC10

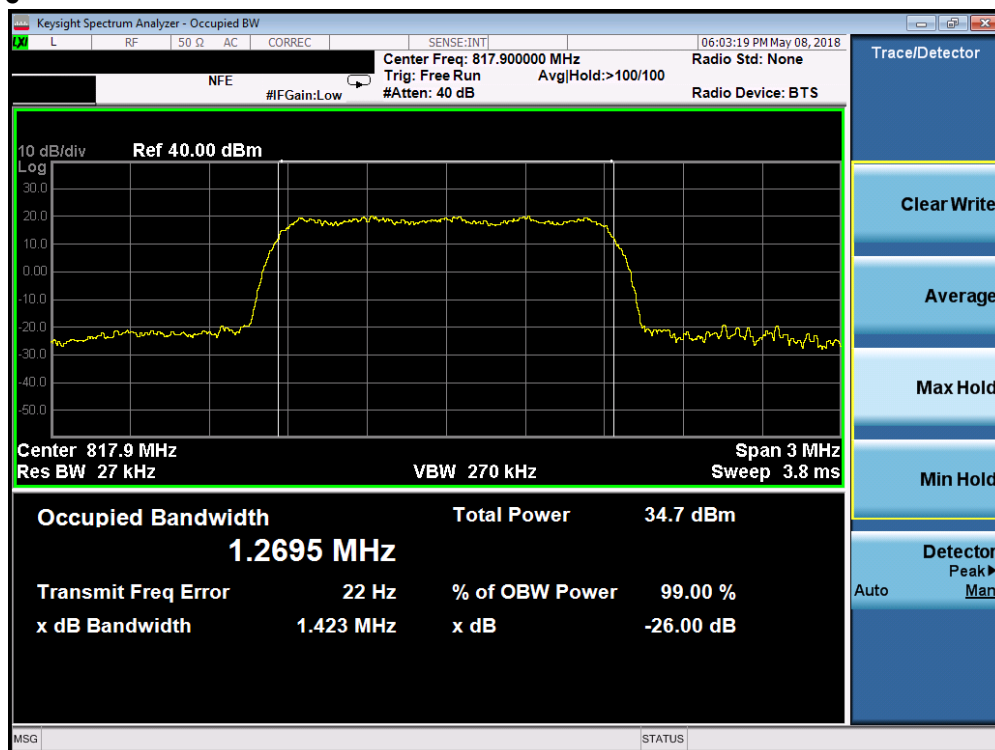


Plot 7-1. Occupied Bandwidth Plot (CDMA – Ch. 476)

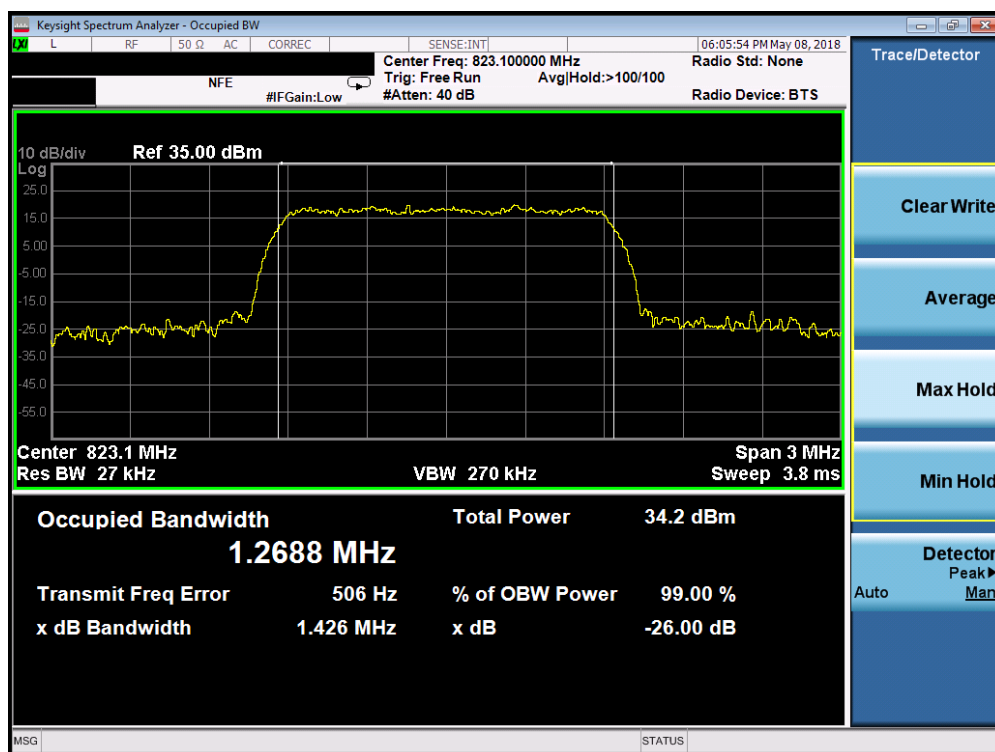


Plot 7-2. Occupied Bandwidth Plot (CDMA – Ch. 684)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset			Page 12 of 63

LTE Band 14

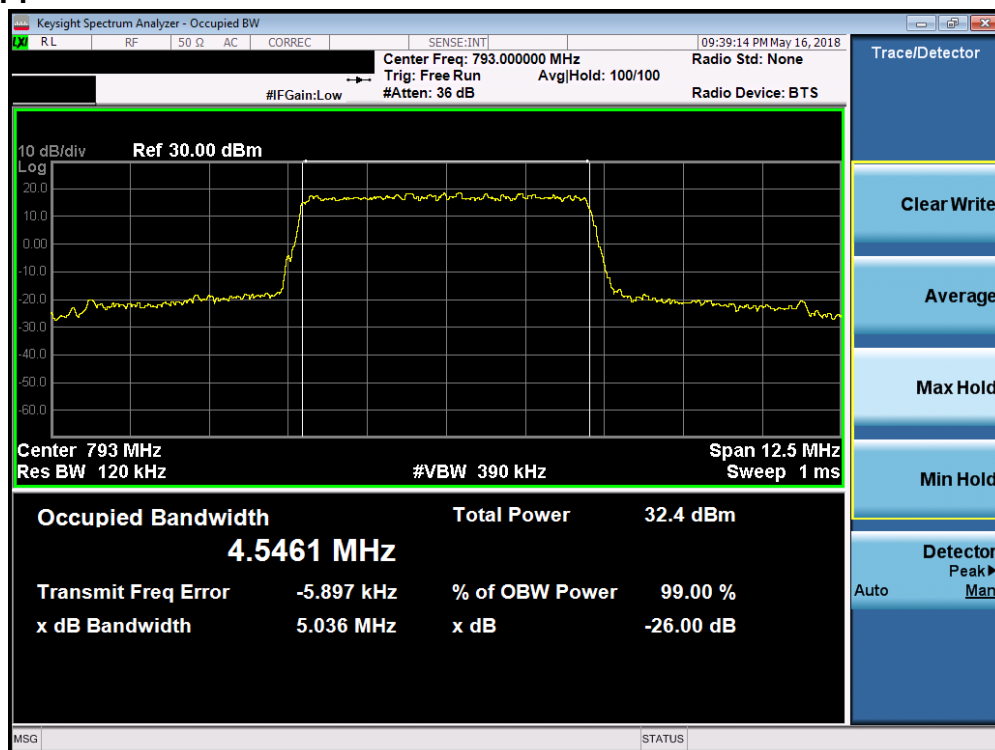


Plot 7-3. Occupied Bandwidth Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

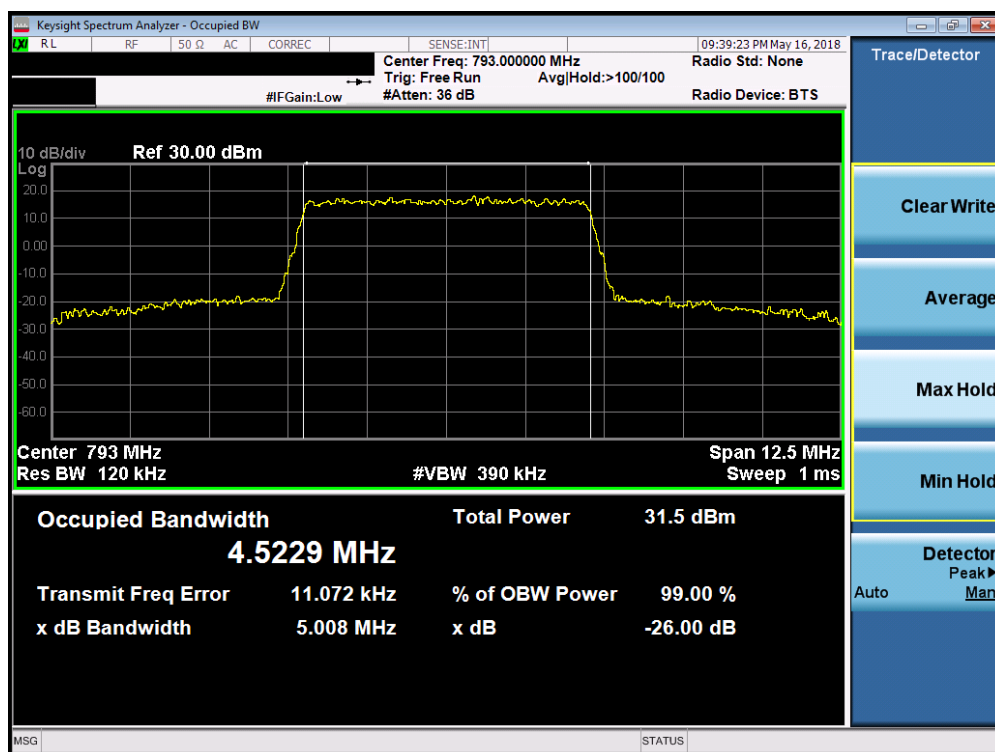

Plot 7-4. Occupied Bandwidth Plot (LTE Band 14 – 5MHz 16QAM – Full RB Configuration)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 13 of 63		

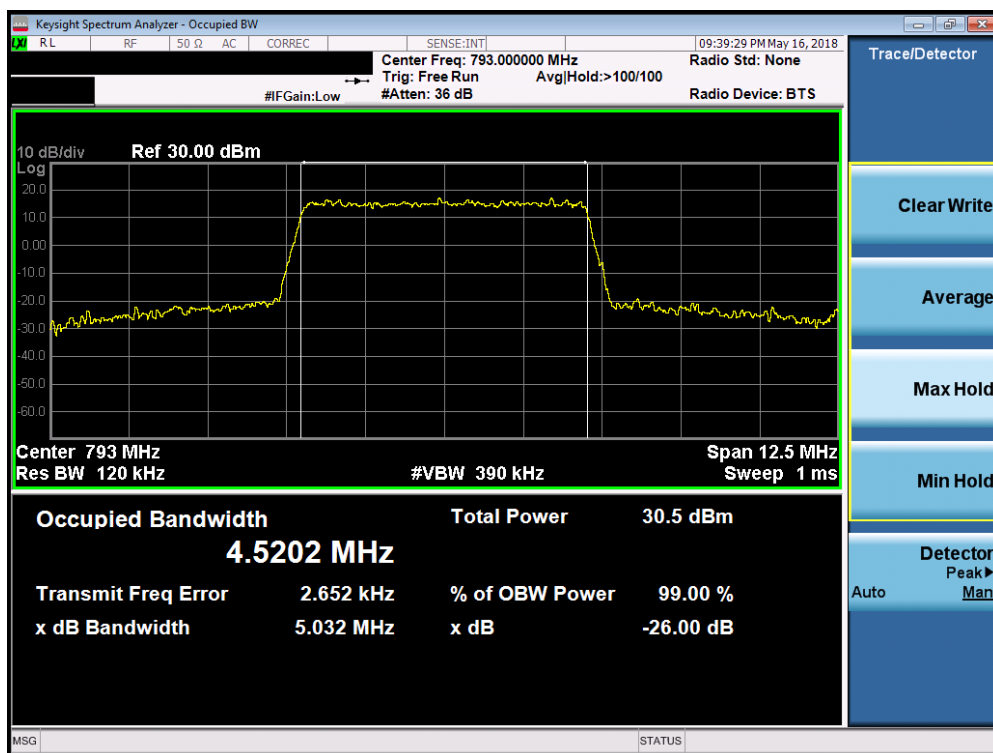

Plot 7-5. Occupied Bandwidth Plot (LTE Band 14 – 5MHz 64QAM – Full RB Configuration)



Plot 7-6. Occupied Bandwidth Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 14 of 63	




Plot 7-7. Occupied Bandwidth Plot (LTE Band 14 – 10MHz 16QAM – Full RB Configuration)




Plot 7-8. Occupied Bandwidth Plot (LTE Band 14 – 10MHz 64QAM – Full RB Configuration)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 15 of 63	

LTE Band 26

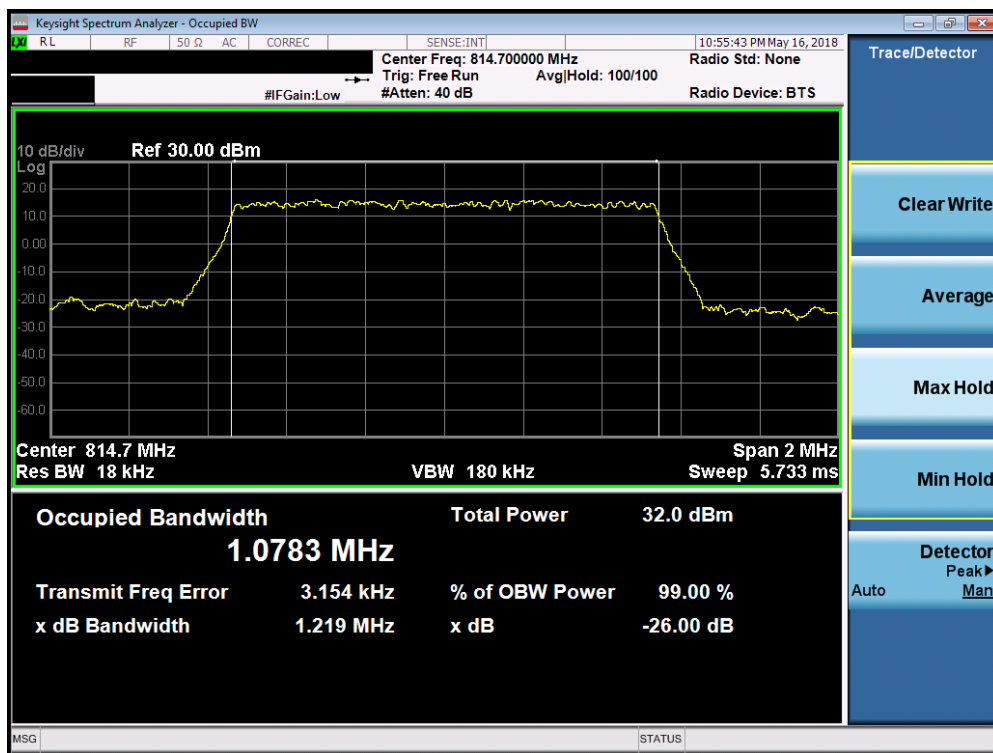


Plot 7-9. Occupied Bandwidth Plot (LTE B26 – 1.4MHz QPSK – RB Size 6– Low Channel)

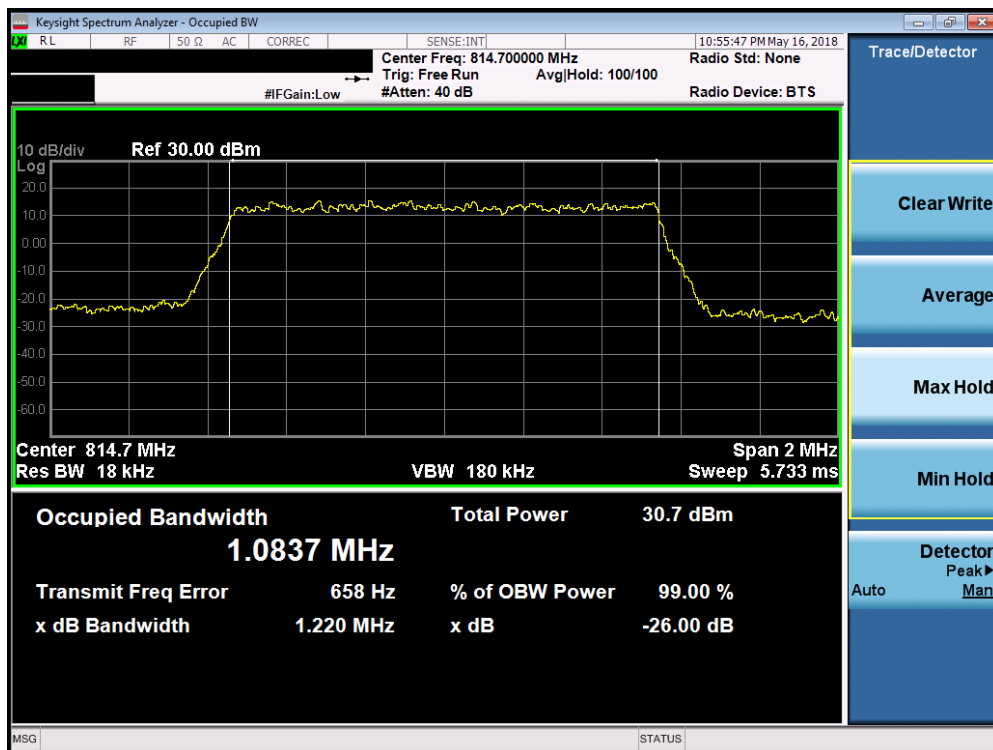


Plot 7-10. Occupied Bandwidth Plot (LTE B26 – 1.4MHz 16-QAM – RB Size 6– Low Channel)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 16 of 63		

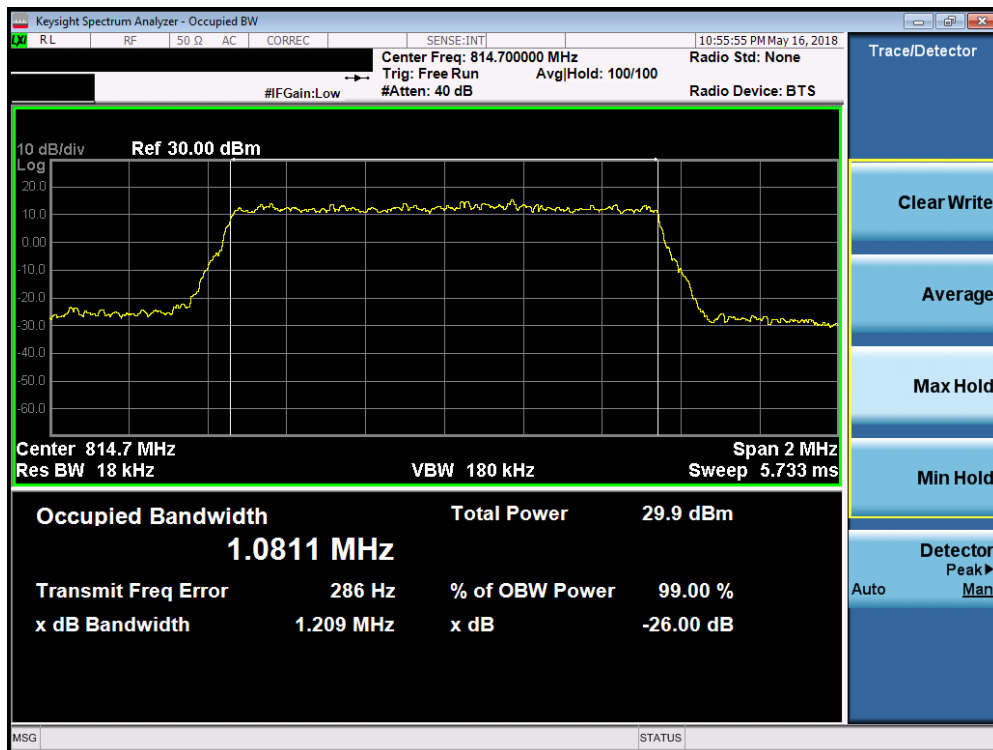


Plot 7-11. Occupied Bandwidth Plot (LTE B26 – 1.4MHz 64-QAM – RB Size 6– Low Channel)

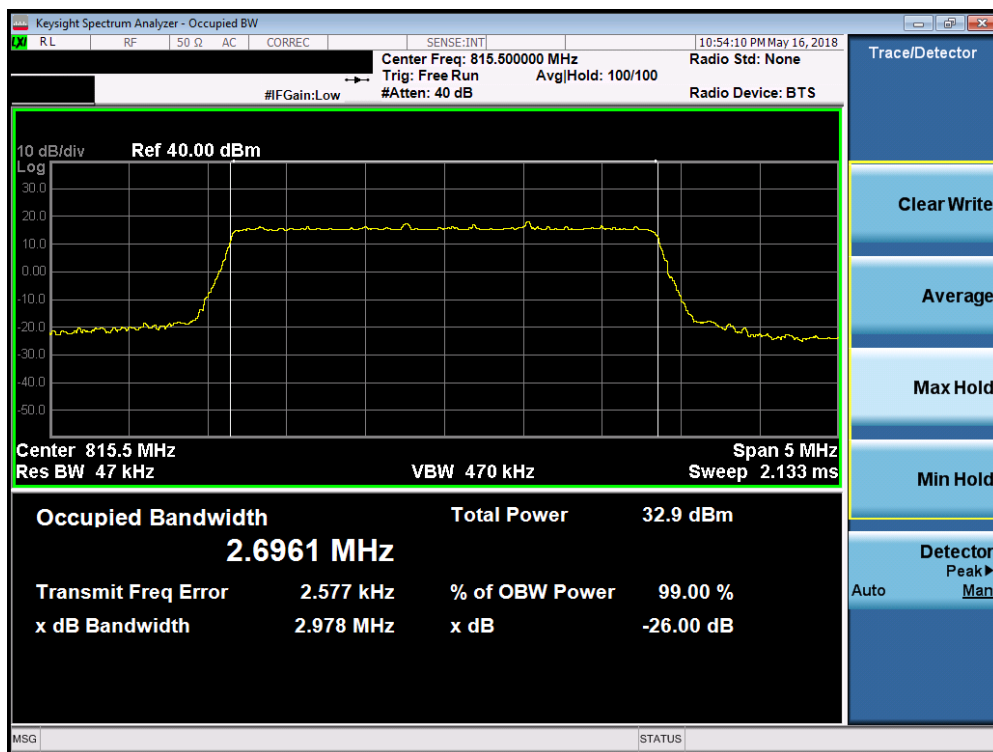


Plot 7-12. Occupied Bandwidth Plot (LTE B26 – 3MHz QPSK – RB Size 15– Low Channel)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 17 of 63		

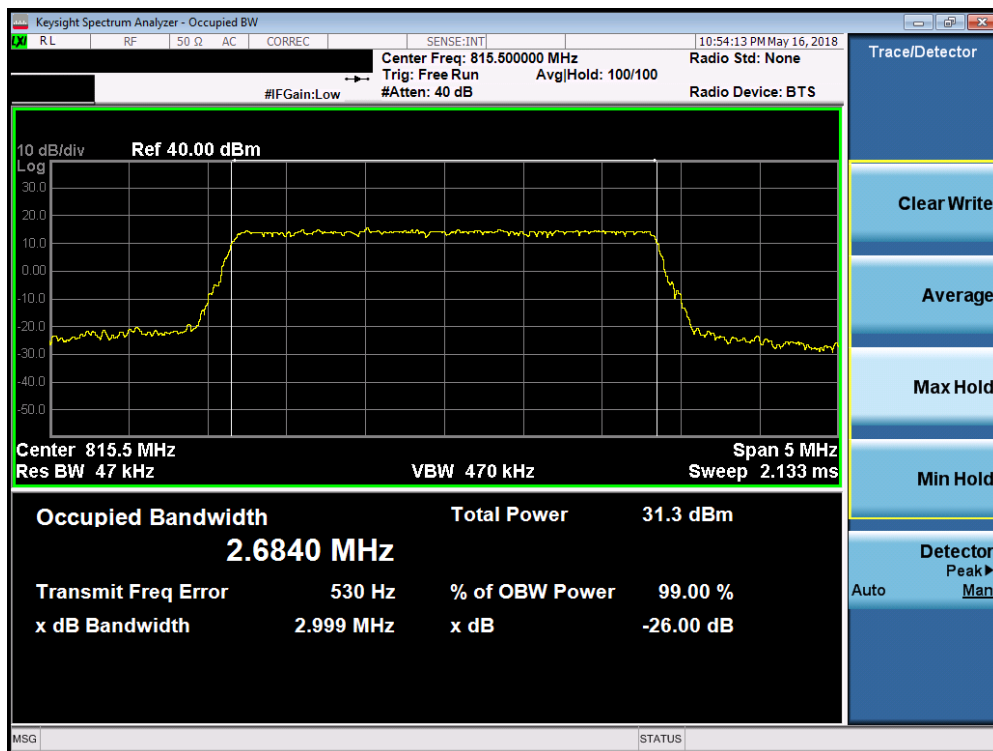


Plot 7-13. Occupied Bandwidth Plot (LTE B26 – 3MHz 16-QAM – RB Size 15– Low Channel)

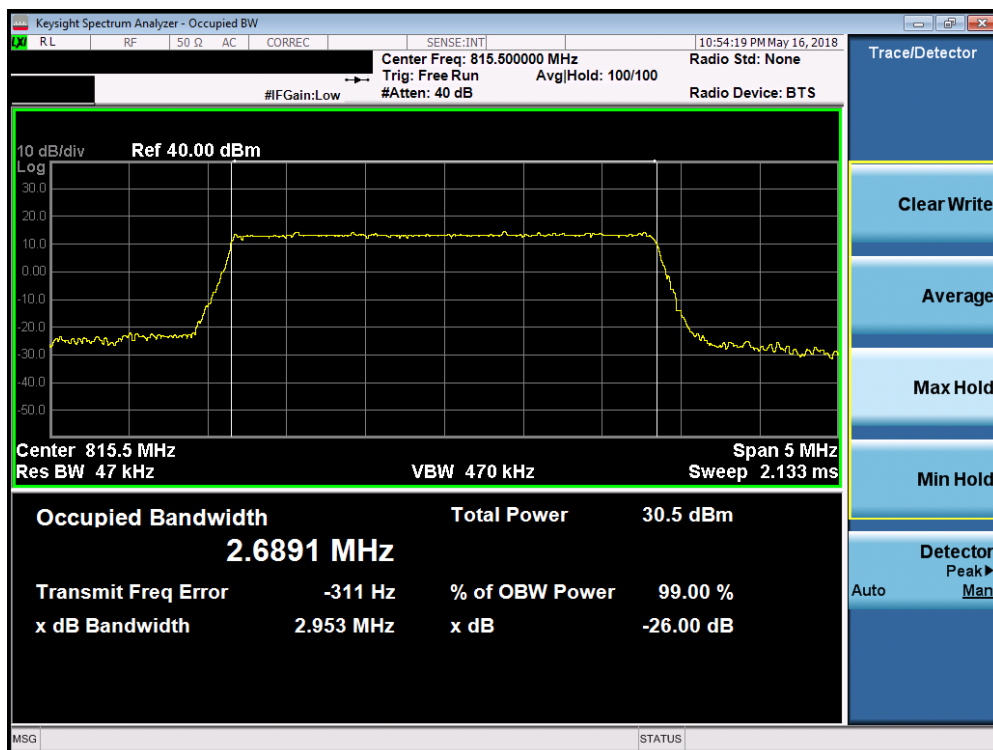

Plot 7-14. Occupied Bandwidth Plot (LTE B26 – 3MHz 64-QAM – RB Size 15– Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 18 of 63

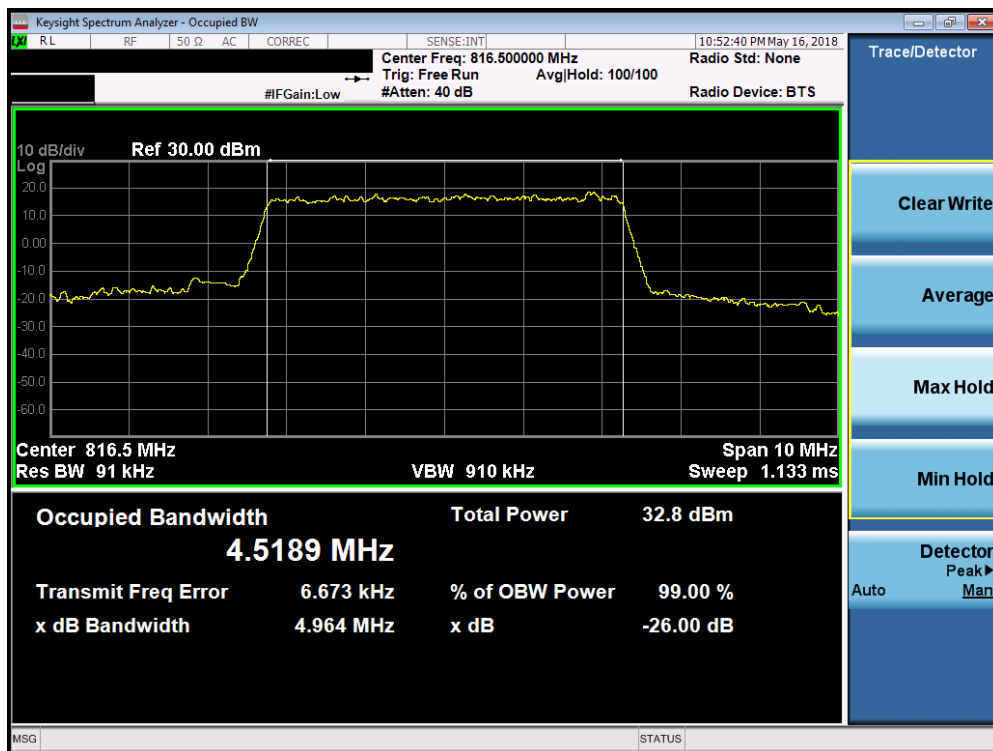


Plot 7-15. Occupied Bandwidth Plot (LTE B26 – 5MHz QPSK – RB Size 25– Low Channel)




Plot 7-16. Occupied Bandwidth Plot (LTE B26 – 5MHz 16-QAM – RB Size 25– Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 19 of 63

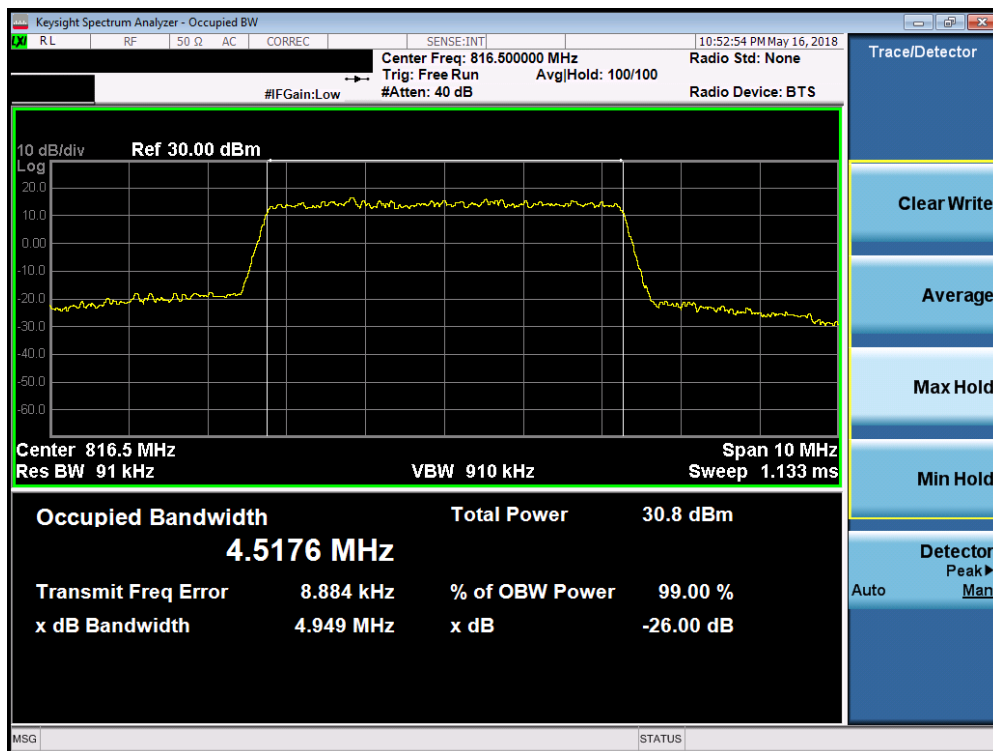


Plot 7-17. Occupied Bandwidth Plot (LTE B26 – 5MHz 64-QAM – RB Size 25– Low Channel)

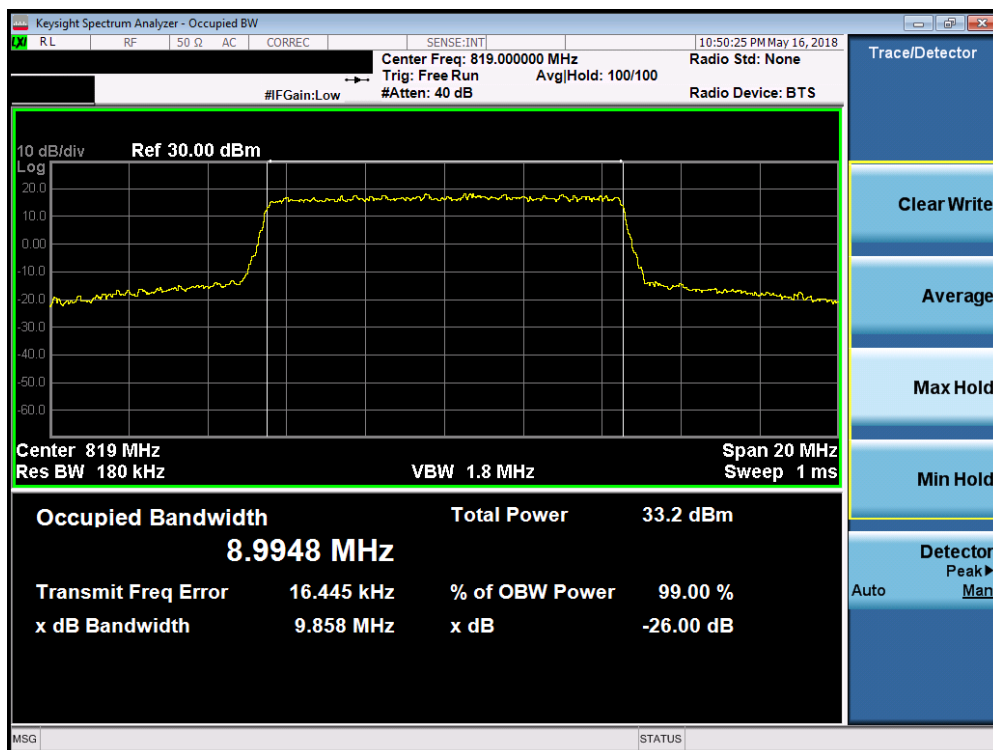


Plot 7-18. Occupied Bandwidth Plot (LTE B26 – 10MHz QPSK – RB Size 50)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 20 of 63

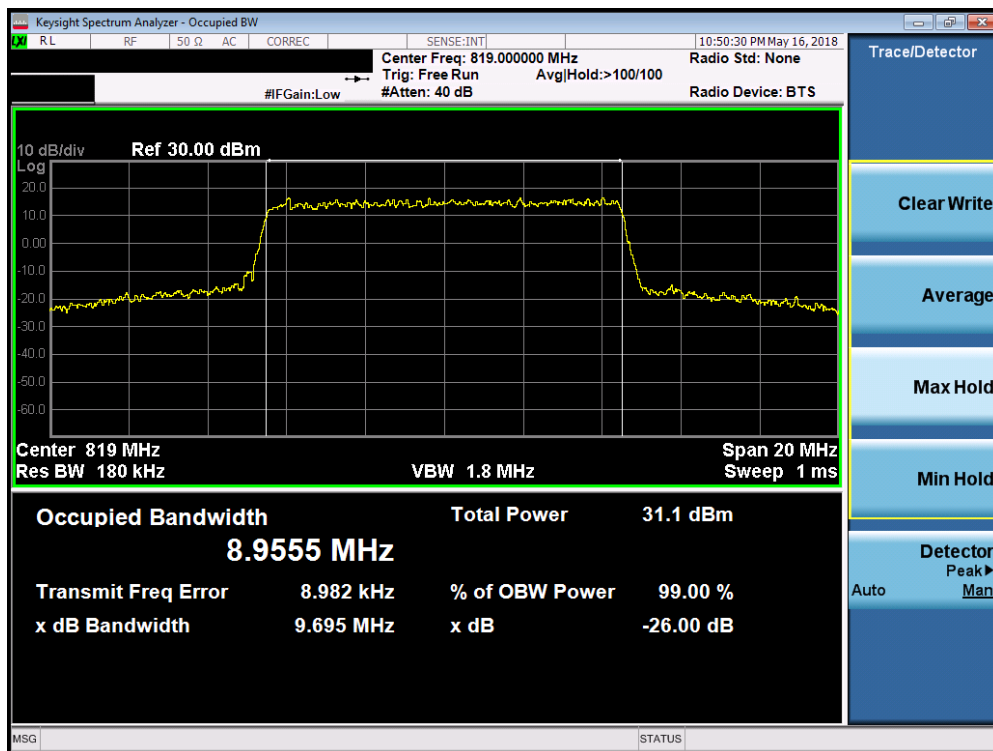


Plot 7-19. Occupied Bandwidth Plot (LTE B26 – 10MHz 16-QAM – RB Size 50)

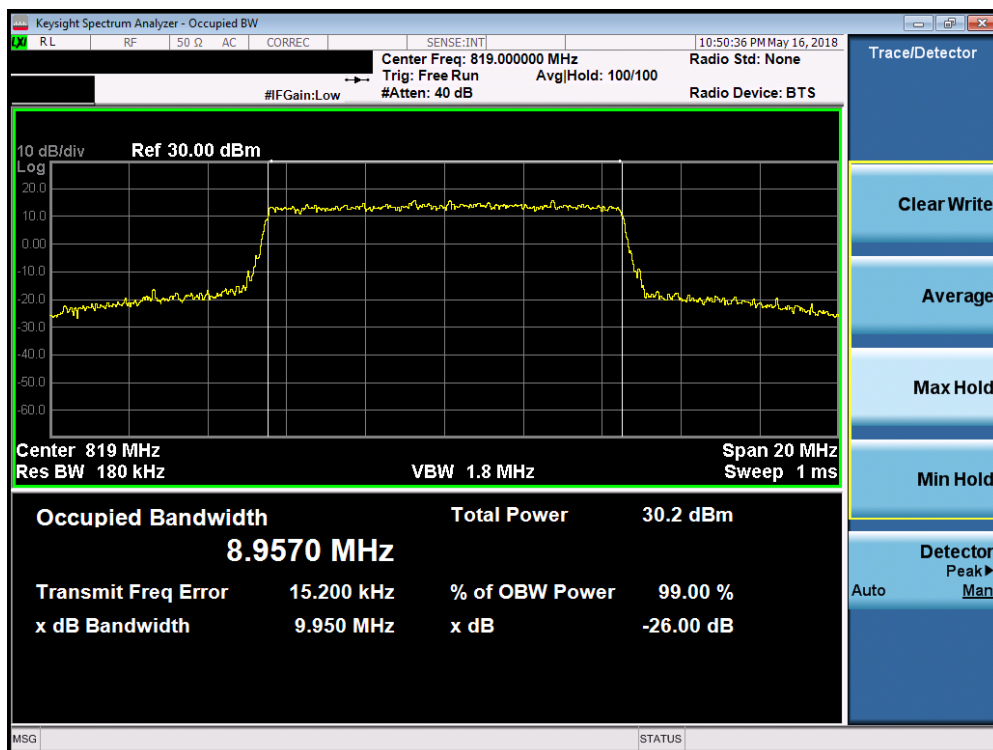


Plot 7-20. Occupied Bandwidth Plot (LTE B26 – 10MHz 64-QAM – RB Size 50)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 21 of 63

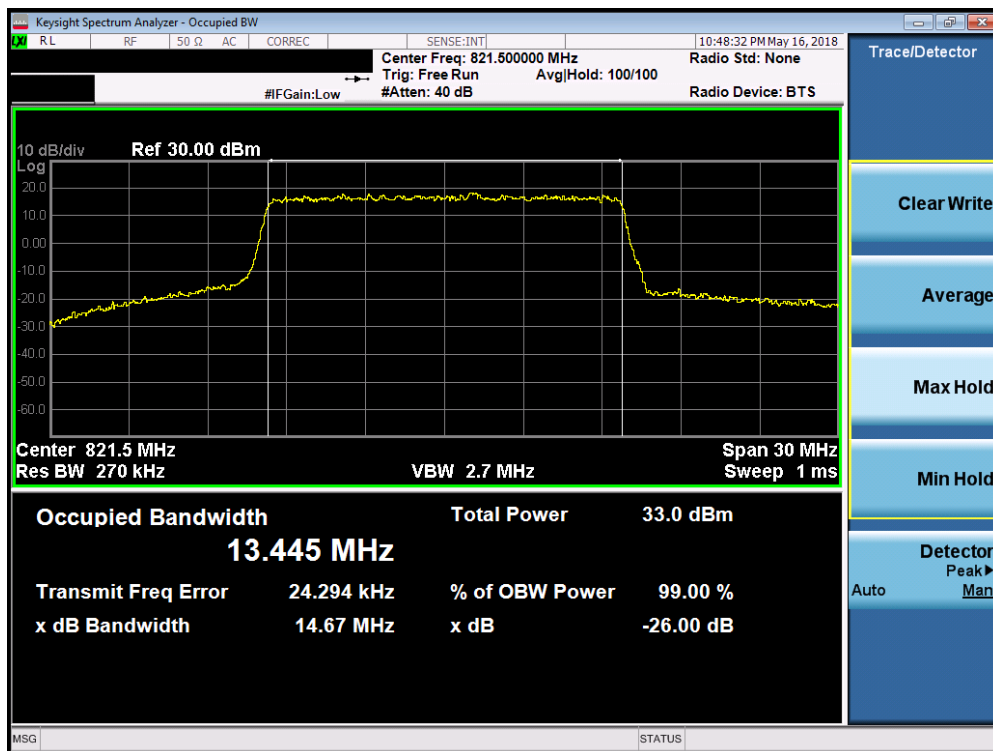


Plot 7-21. Occupied Bandwidth Plot (LTE B26 – 15MHz QPSK – RB Size 75)

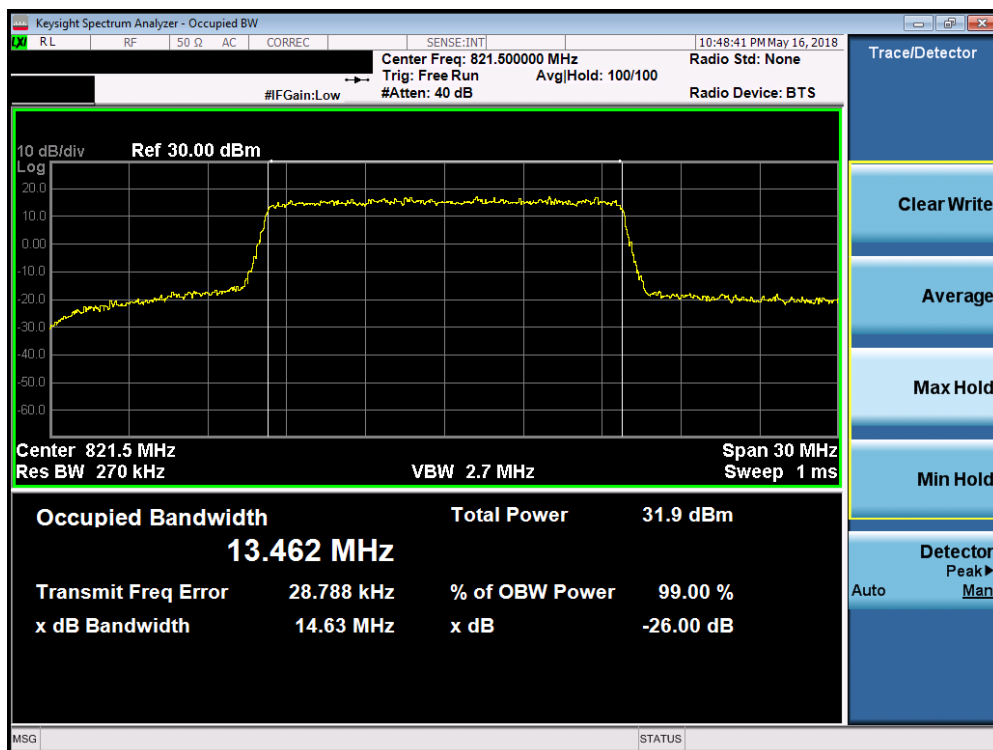

Plot 7-22. Occupied Bandwidth Plot (LTE B26 – 15MHz 16-QAM – RB Size 75)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset			Page 22 of 63

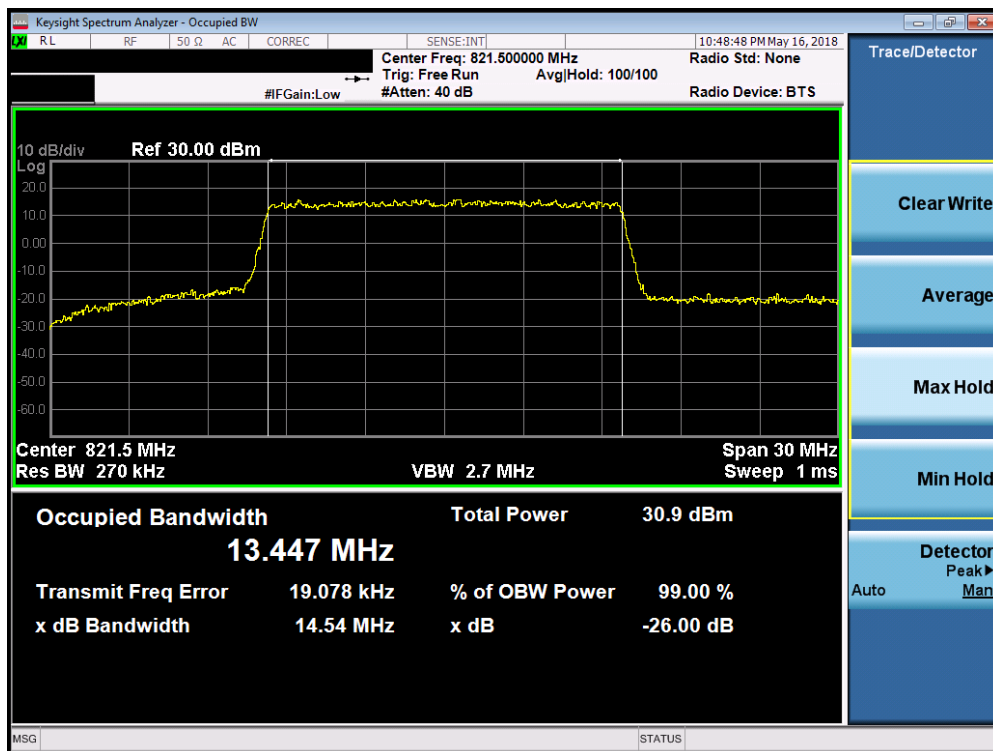

Plot 7-23. Occupied Bandwidth Plot (LTE B26 – 15MHz 64-QAM – RB Size 75)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 23 of 63

7.3 Spurious and Harmonic Emissions at Antenna Terminal

\$2.1051 \$90.543 \$90.691

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW $\geq$ 1MHz
3. VBW $\geq$ 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

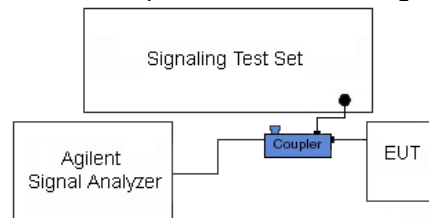



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 24 of 63

CDMA/EvDO

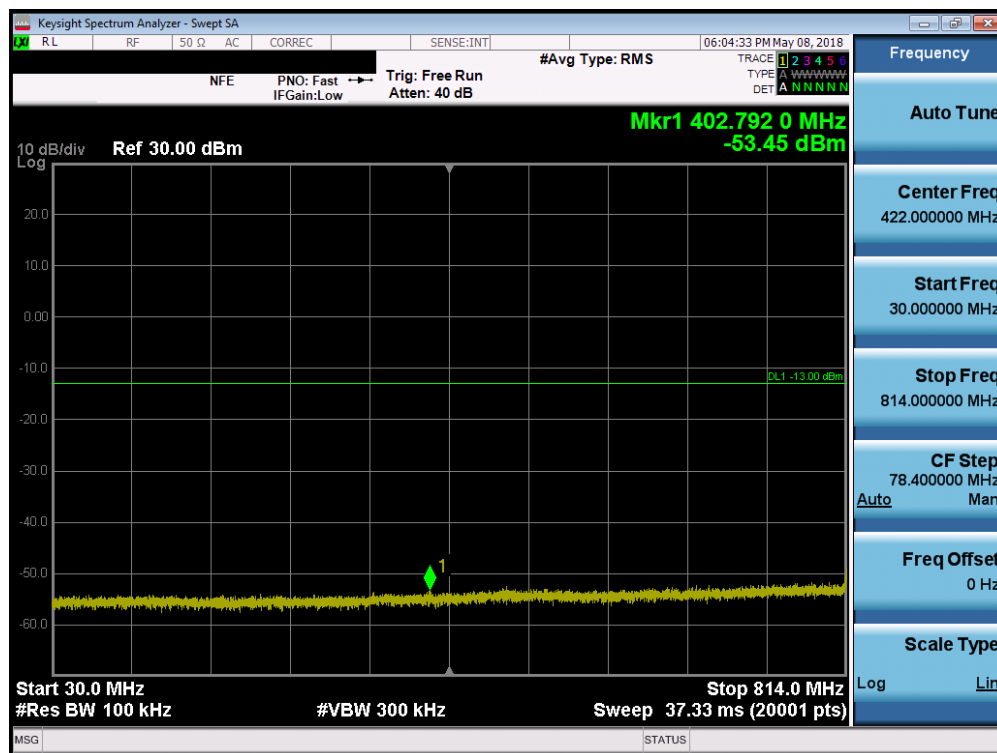


Plot 7-24. Conducted Spurious Plot (CDMA – Ch. 476)

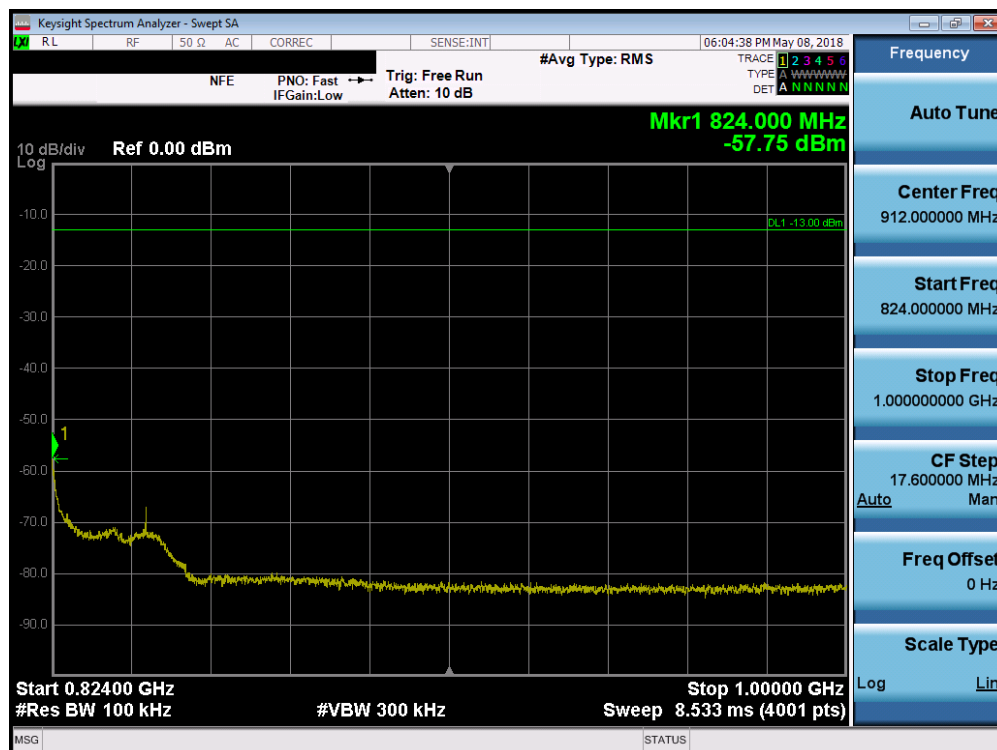


Plot 7-25. Conducted Spurious Plot (CDMA – Ch. 476)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 25 of 63	

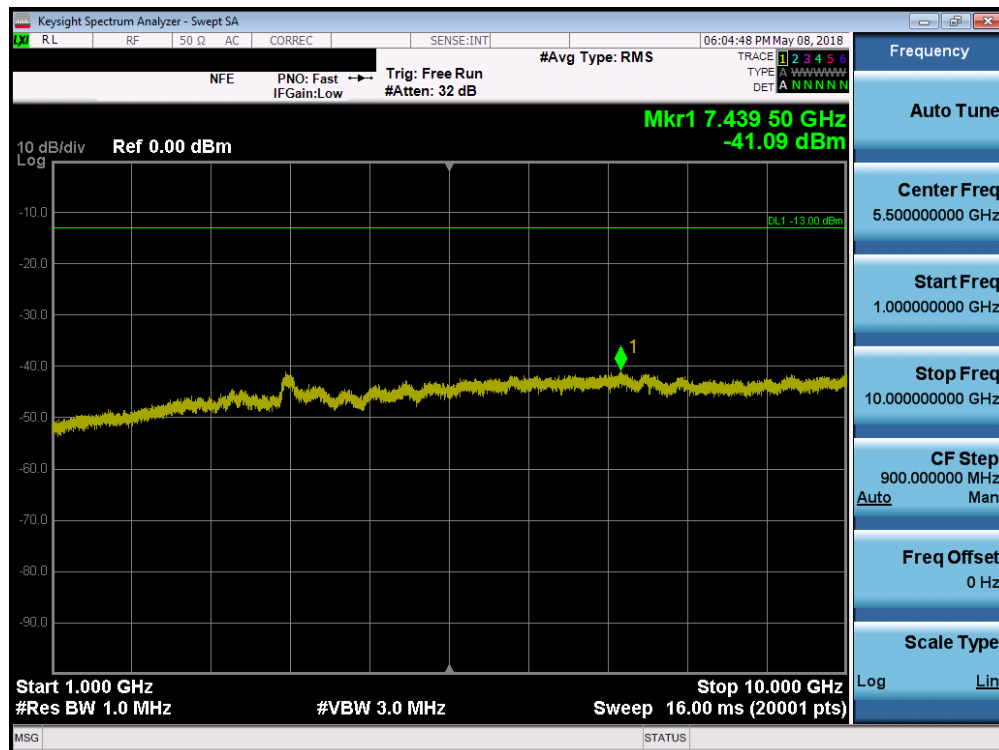


Plot 7-26. Conducted Spurious Plot (CDMA – Ch. 476)

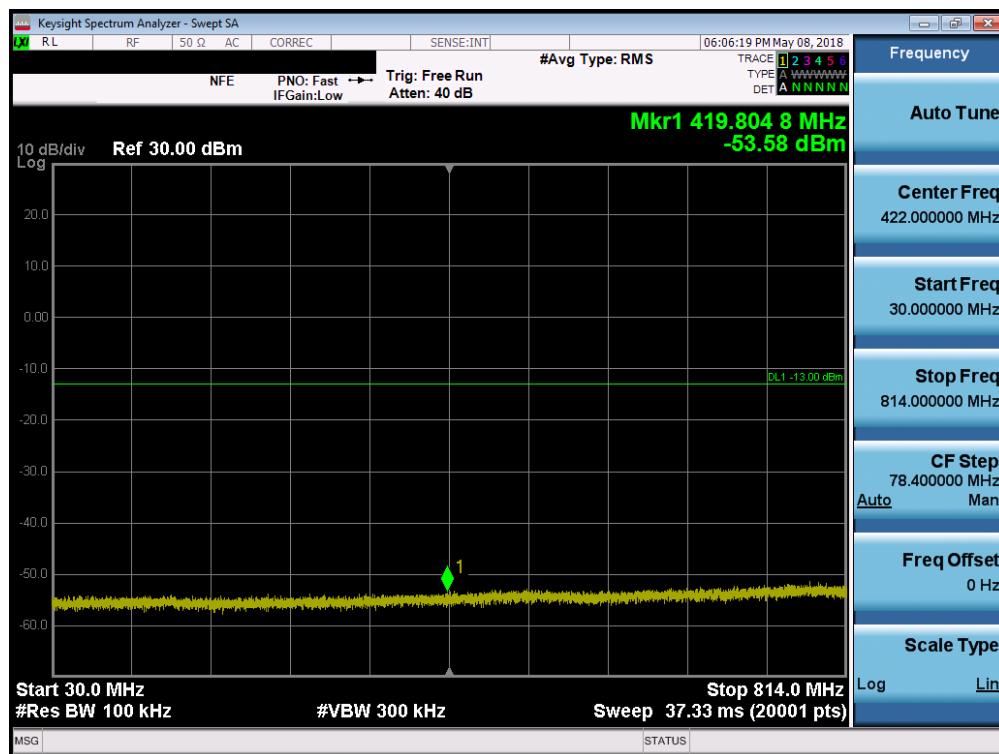


Plot 7-27. Conducted Spurious Plot (CDMA – Ch. 684)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 26 of 63

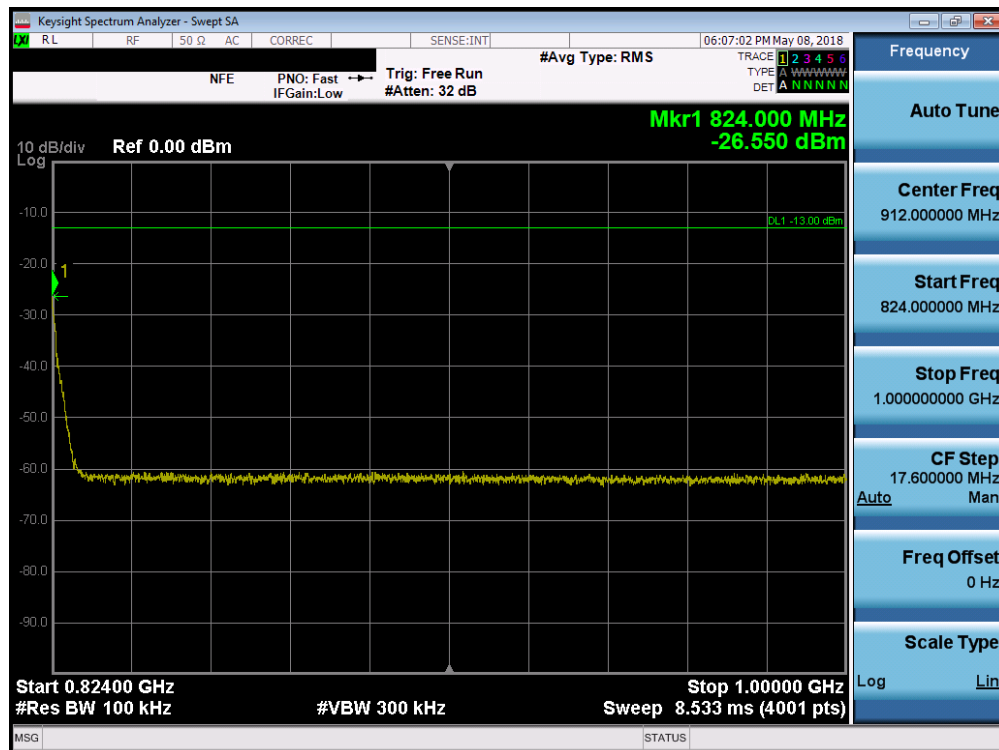


Plot 7-28. Conducted Spurious Plot (CDMA – Ch. 684)

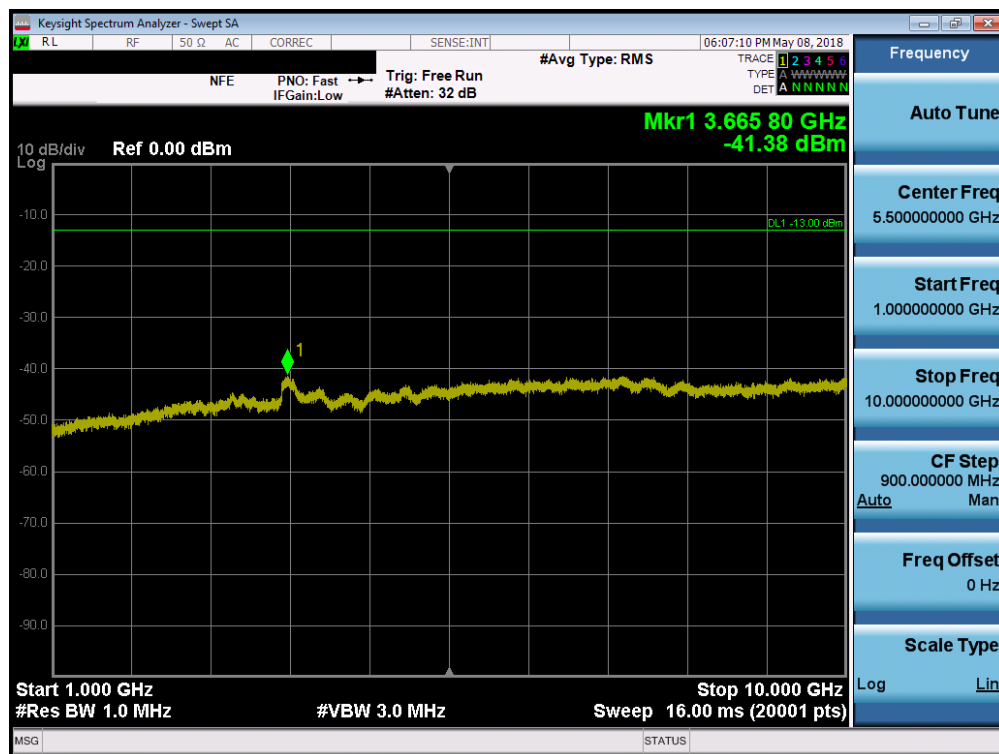


Plot 7-29. Conducted Spurious Plot (CDMA – Ch. 684)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 27 of 63

Band 14

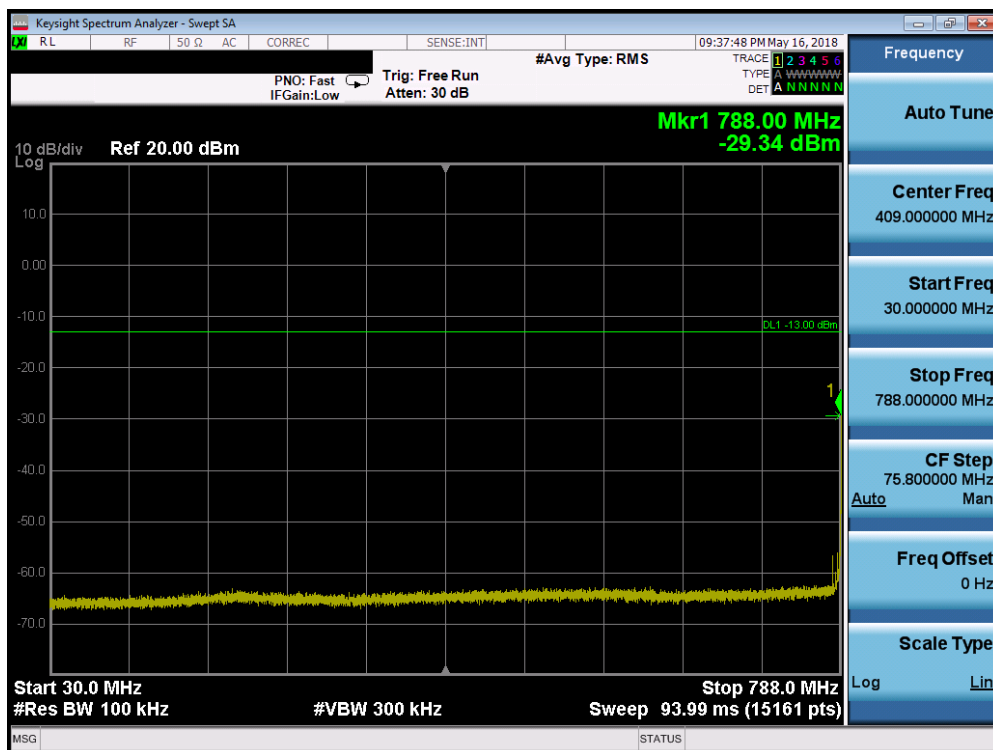


Plot 7-30. Conducted Spurious Plot (LTE B14 – 10MHz QPSK – RB Size 1, RB Offset 0)

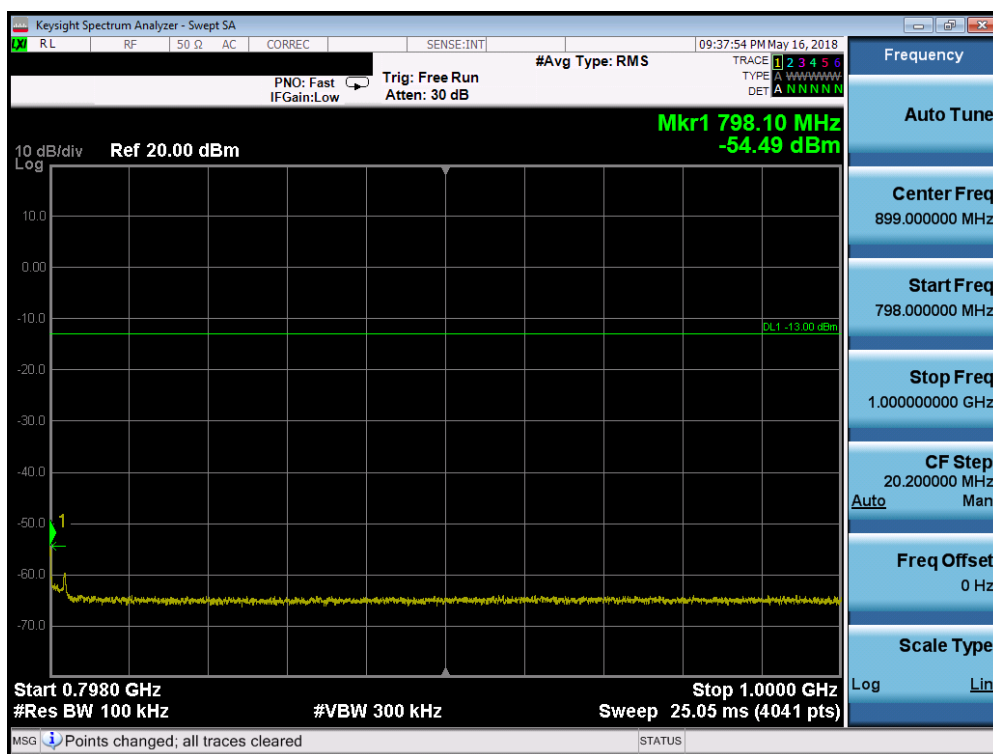

Plot 7-31. Conducted Spurious Plot (LTE B14 – 10MHz QPSK – RB Size 1, RB Offset 0)


FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 28 of 63	

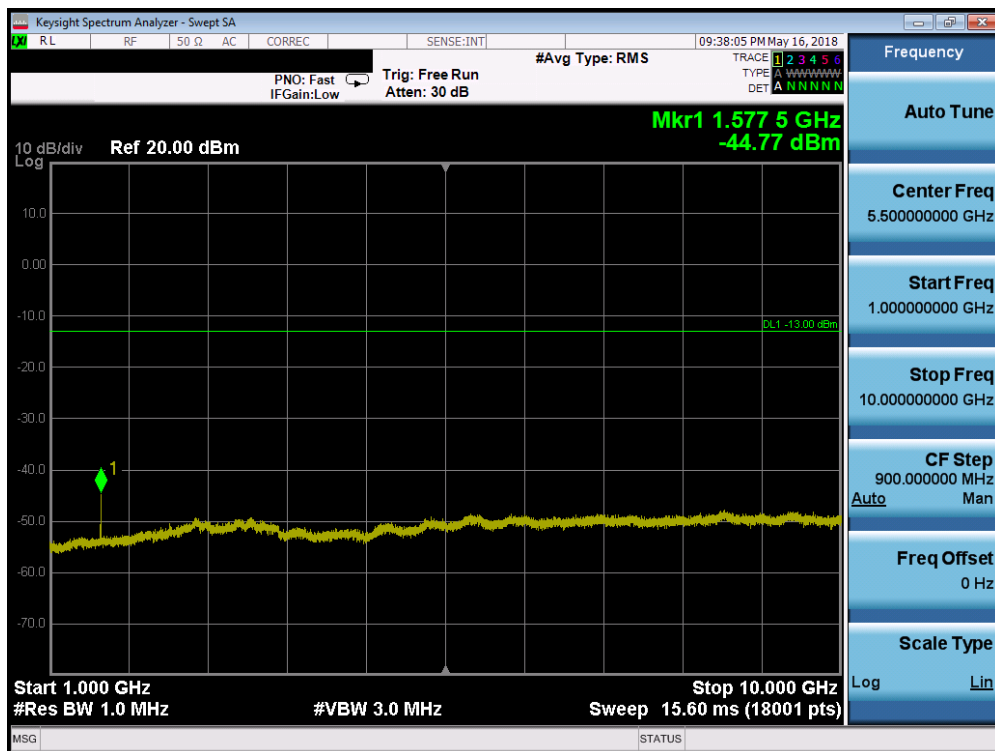


Plot 7-32. Conducted Spurious Plot (LTE B14 – 10MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 29 of 63

Band 26

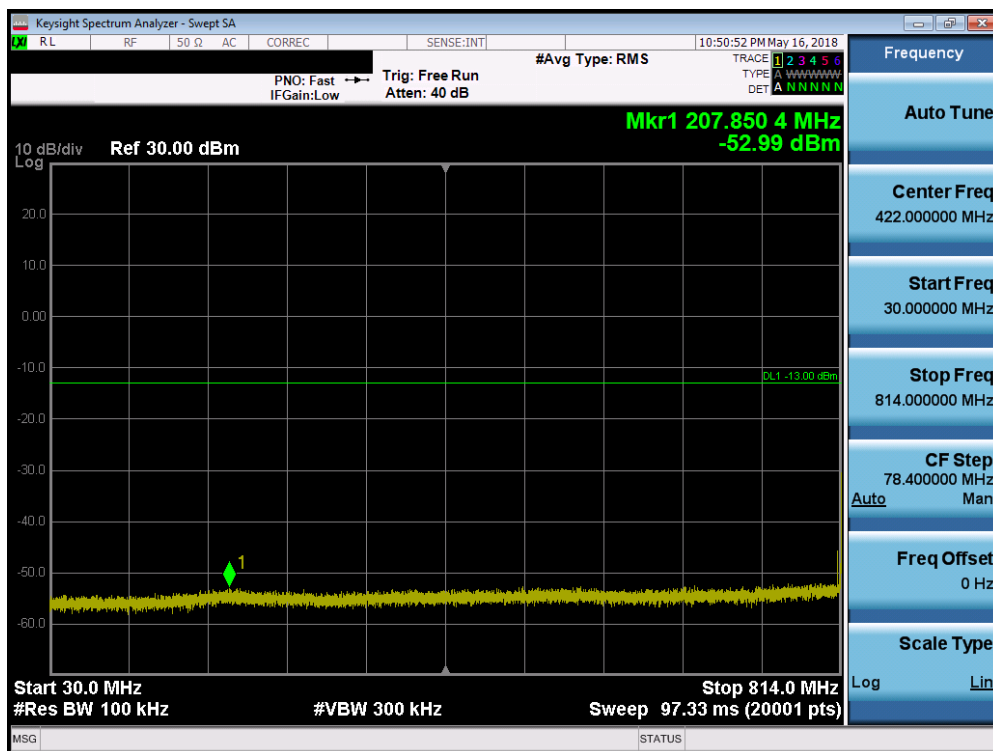


Plot 7-33. Conducted Spurious Plot (LTE B26 – 10MHz QPSK – RB Size 1, RB Offset 0)

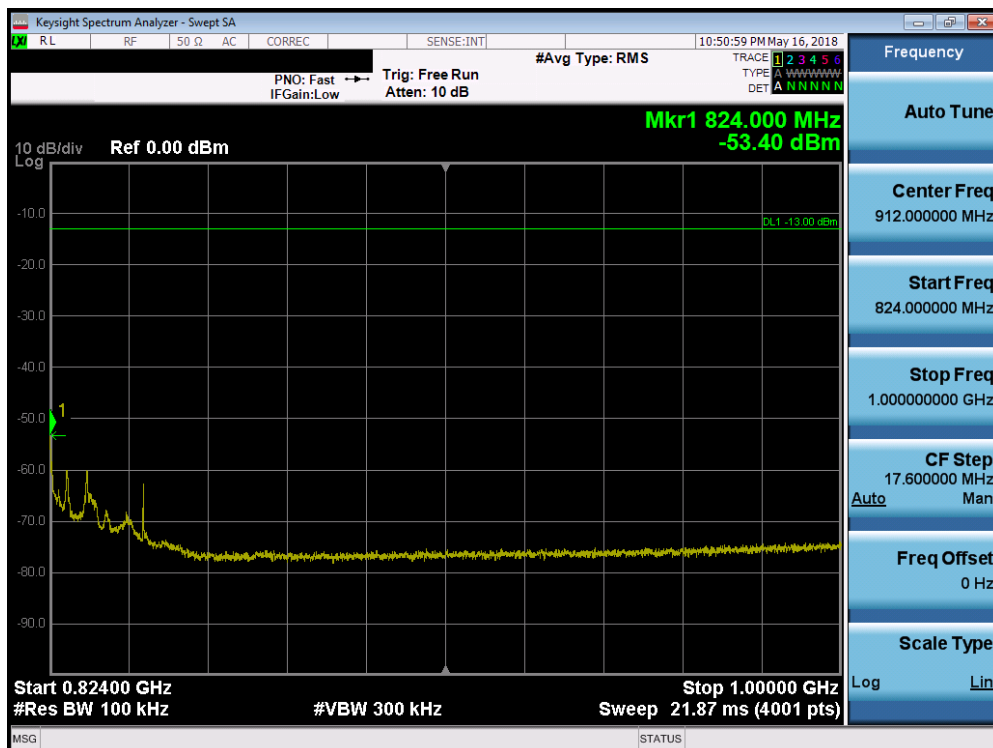

Plot 7-34. Conducted Spurious Plot (LTE B26 – 10MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 30 of 63

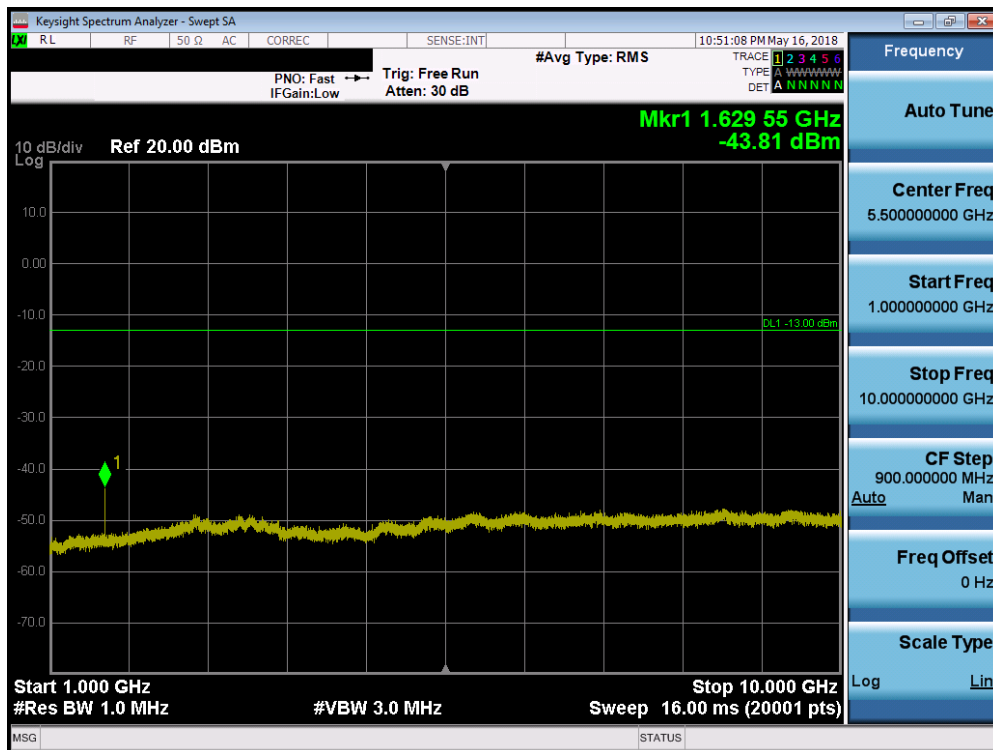

Plot 7-35. Conducted Spurious Plot (LTE B26 – 10MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 31 of 63

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.543 §90.691

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

For Band 14, the minimum permissible attenuation on any frequencies between 775-788 MHz, above 805 MHz, and below 758MHz, shall be at least $43 + \log_{10}(P_{\text{Watts}})$. On all frequencies between 769-775 MHz and 799-805 MHz, minimum permissible attenuation shall be at least than $65 + 10 \log_{10}(P_{\text{Watts}})$ in a 6.25kHz band segment.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

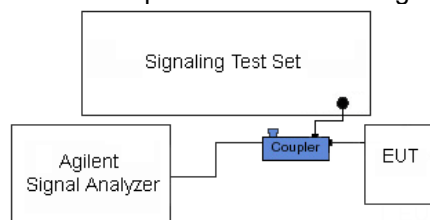


Figure 7-3. Test Instrument & Measurement Setup


FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 32 of 63

Test Notes


For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 33 of 63	

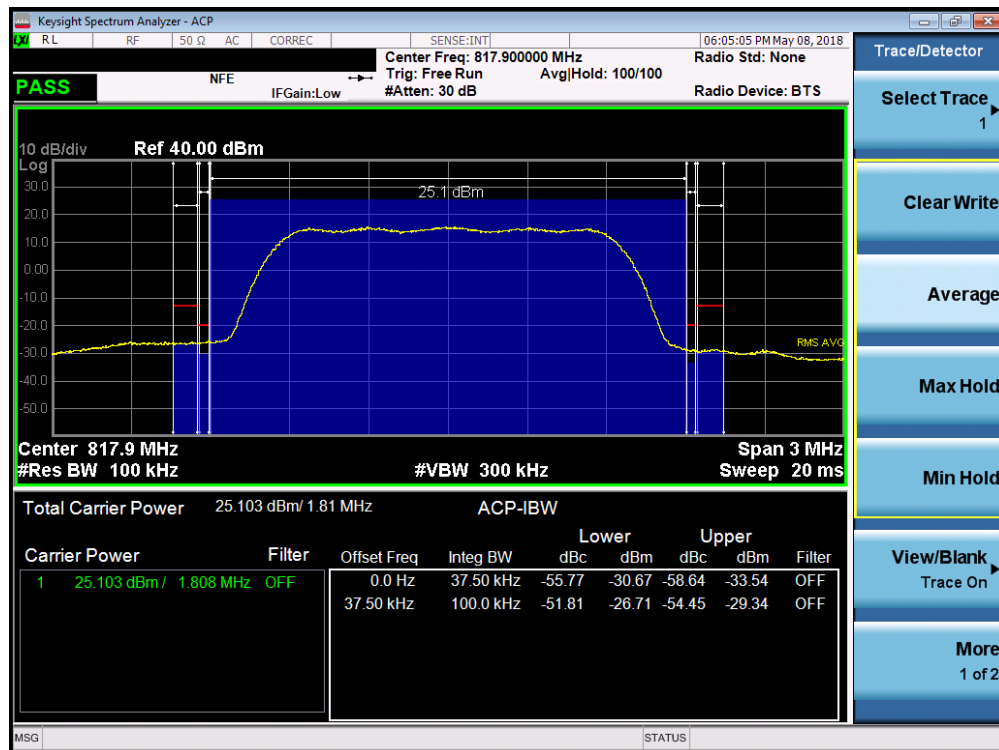


Plot 7-36. Channel Edge Plot (CDMA BC10 - Ch. 476)

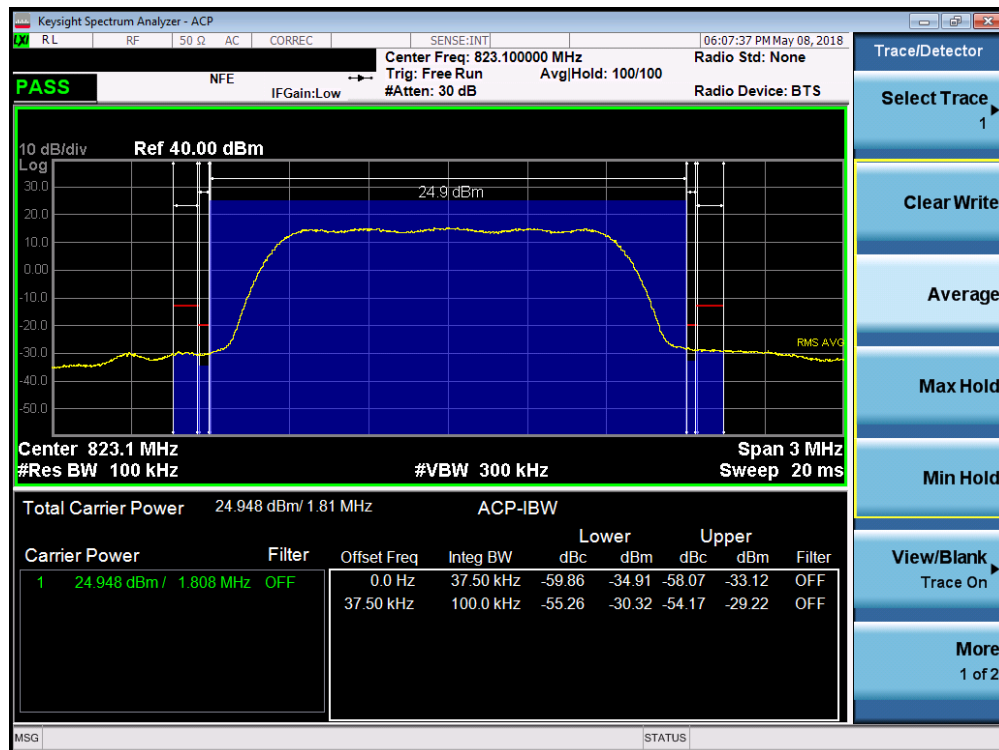


Plot 7-37. Channel Edge Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 34 of 63

Band 14

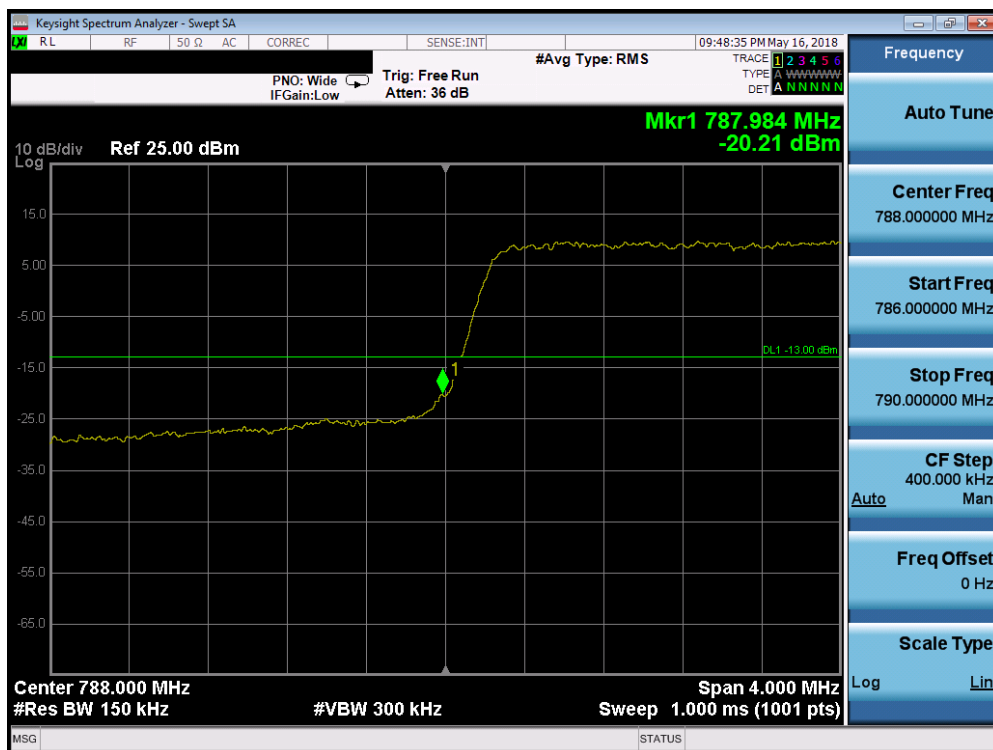

Plot 7-38. Lower Band Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

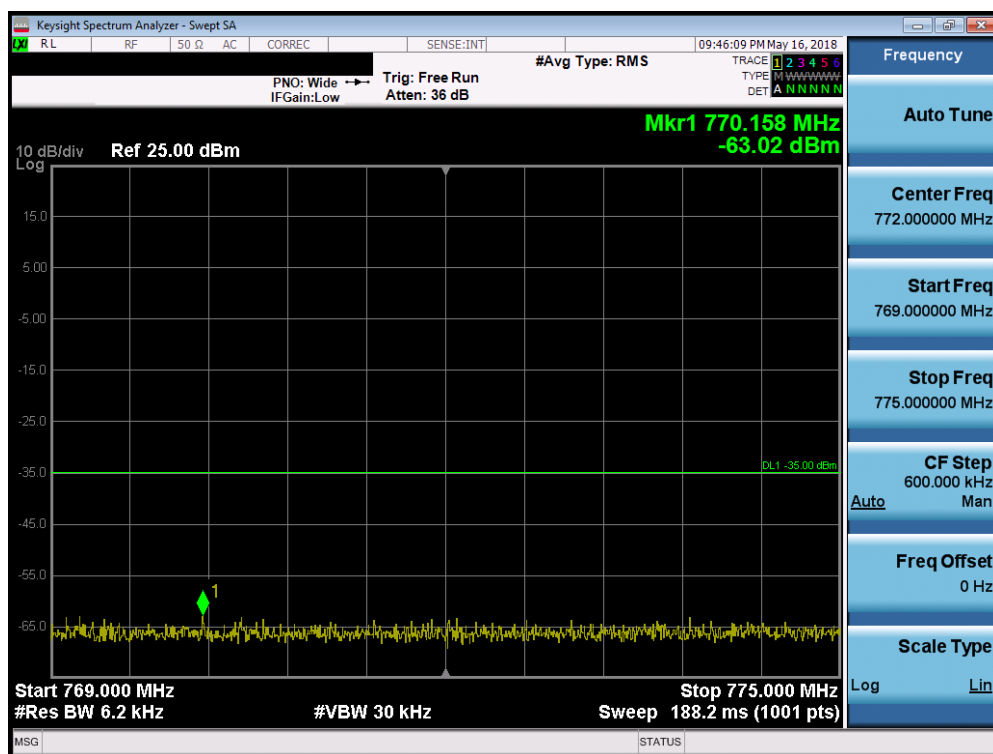


Plot 7-39. Lower Emission Mask Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 35 of 63



Plot 7-40. Upper Band Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

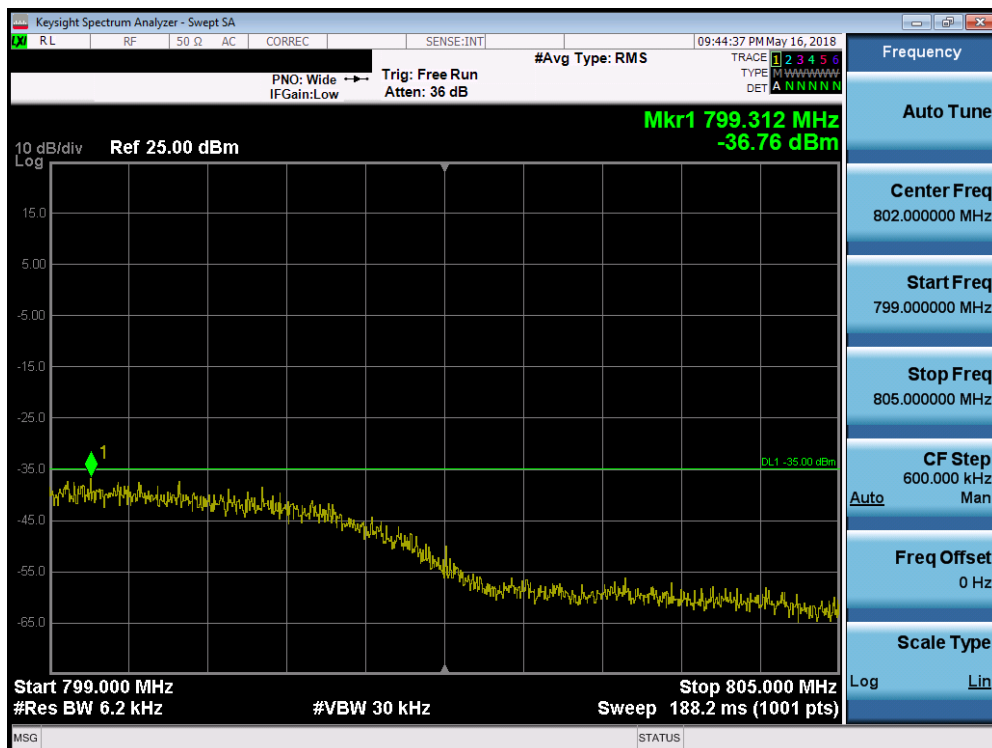


Plot 7-41. Upper Emission Mask Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 36 of 63



Plot 7-42. Lower Band Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

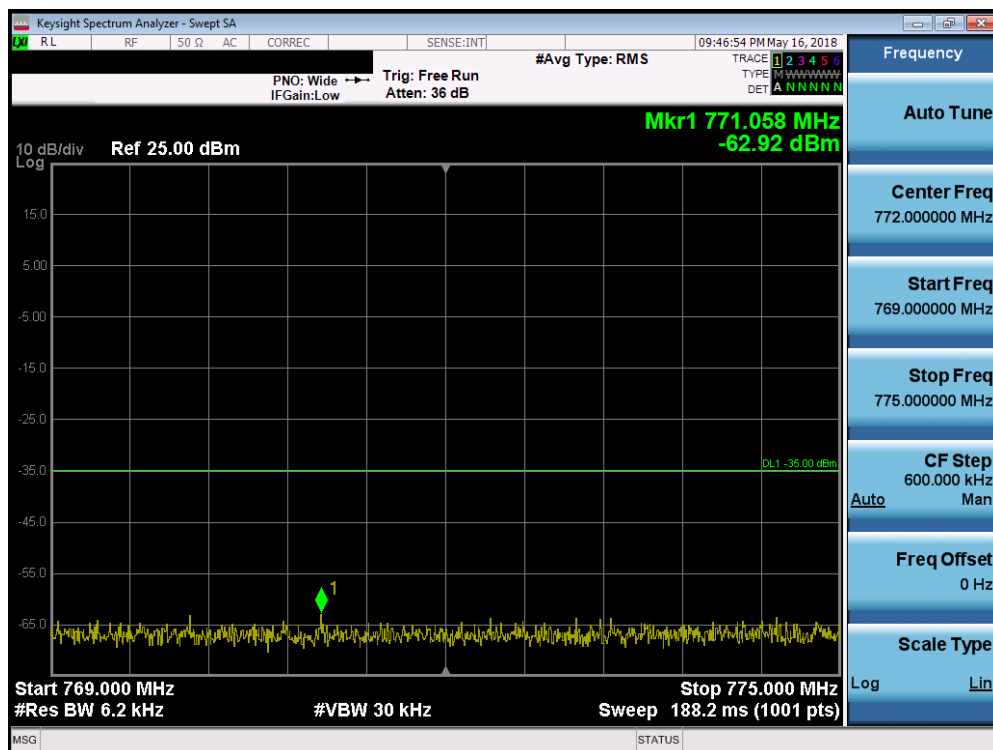


Plot 7-43. Lower Emission Mask Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 37 of 63	



Plot 7-44. Upper Band Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

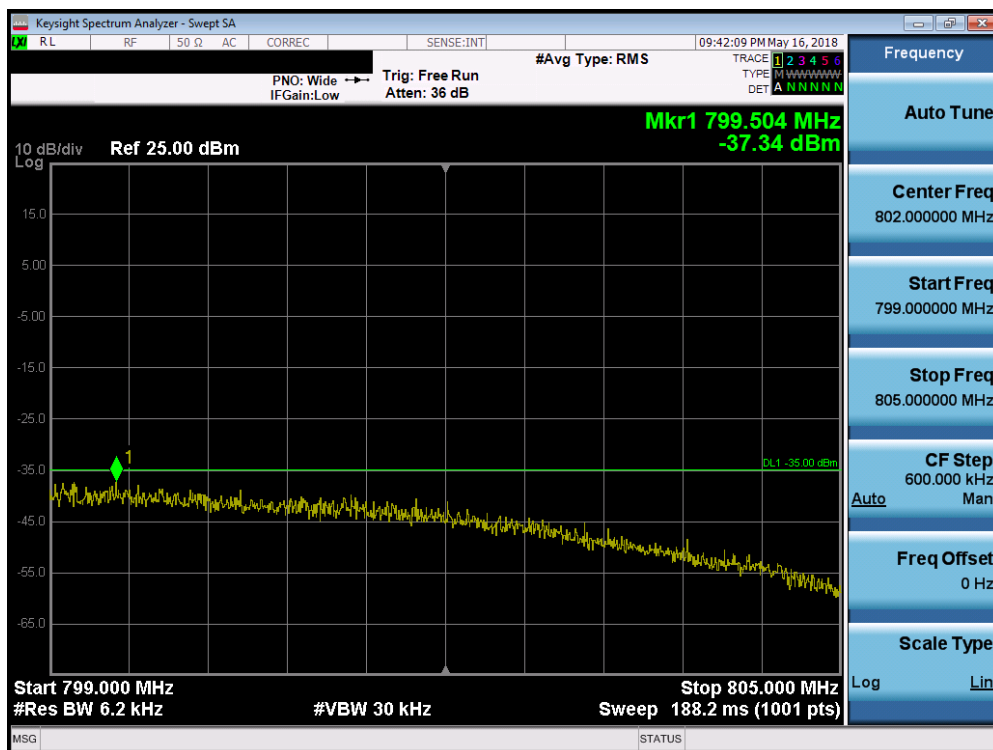


Plot 7-45. Upper Emission Mask Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 38 of 63

Band 26




Plot 7-46. Channel Edge Plot (LTE Band 26 – 1.4MHz QPSK – RB Size 6– Low Channel)

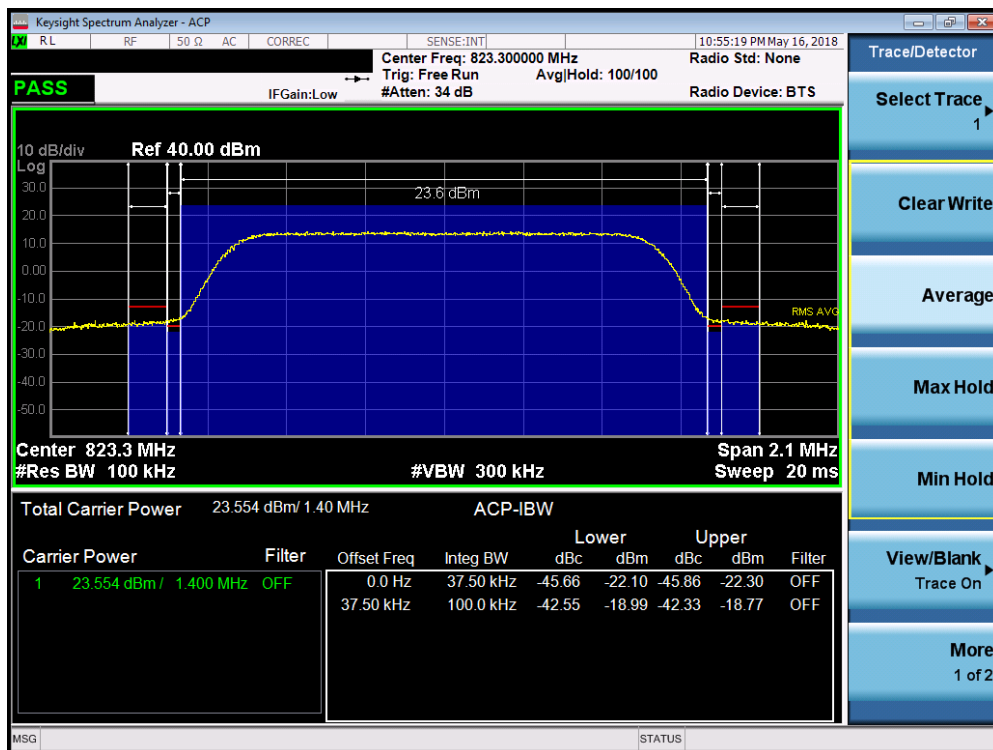


Plot 7-47. Channel Edge Plot (LTE Band 26 – 1.4MHz QPSK – RB Size 6 – High Channel)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset			Page 39 of 63

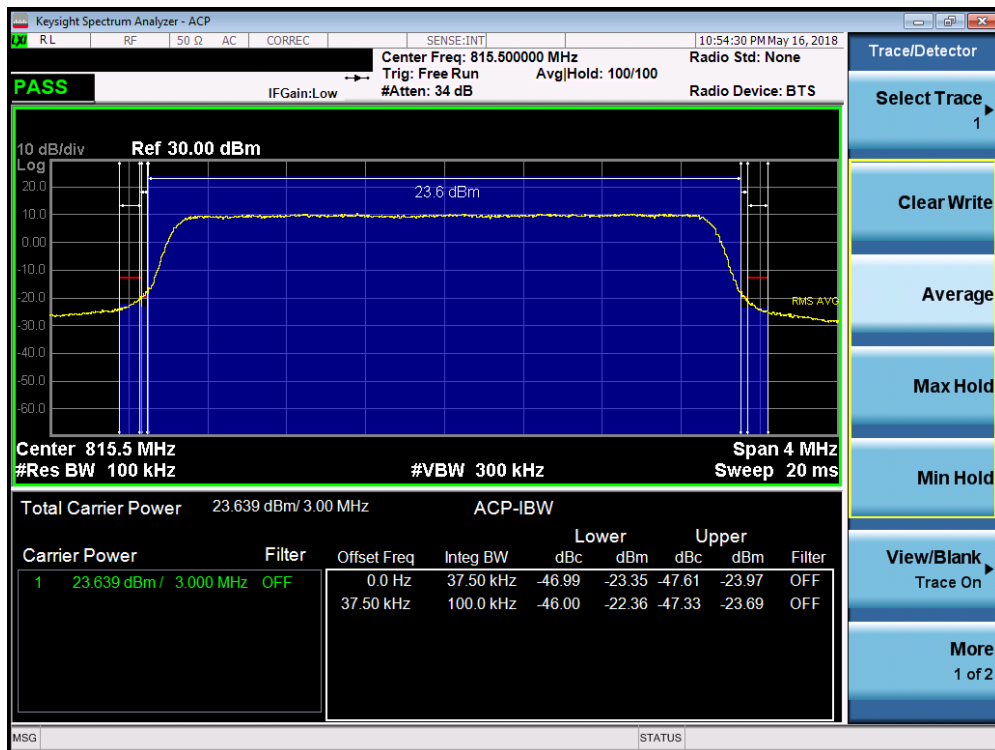


Plot 7-48. Channel Edge Plot (LTE Band 26 – 3MHz QPSK – RB Size 15– Low Channel)

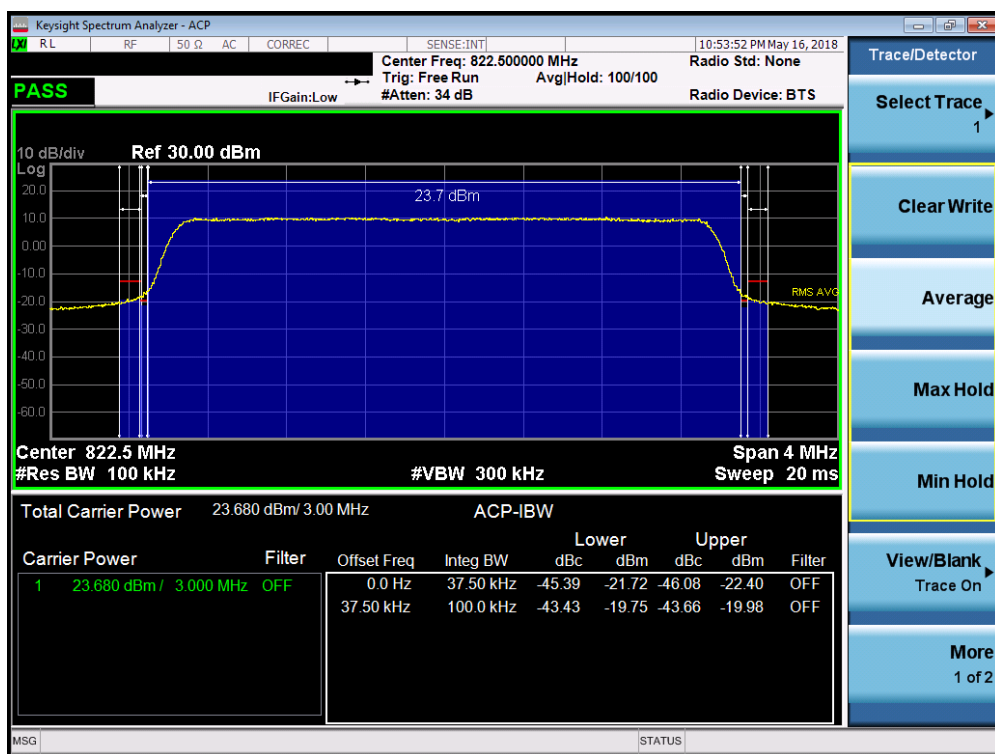


Plot 7-49. Channel Edge Plot (LTE Band 26 – 3MHz QPSK – RB Size 15 – High Channel)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 40 of 63		

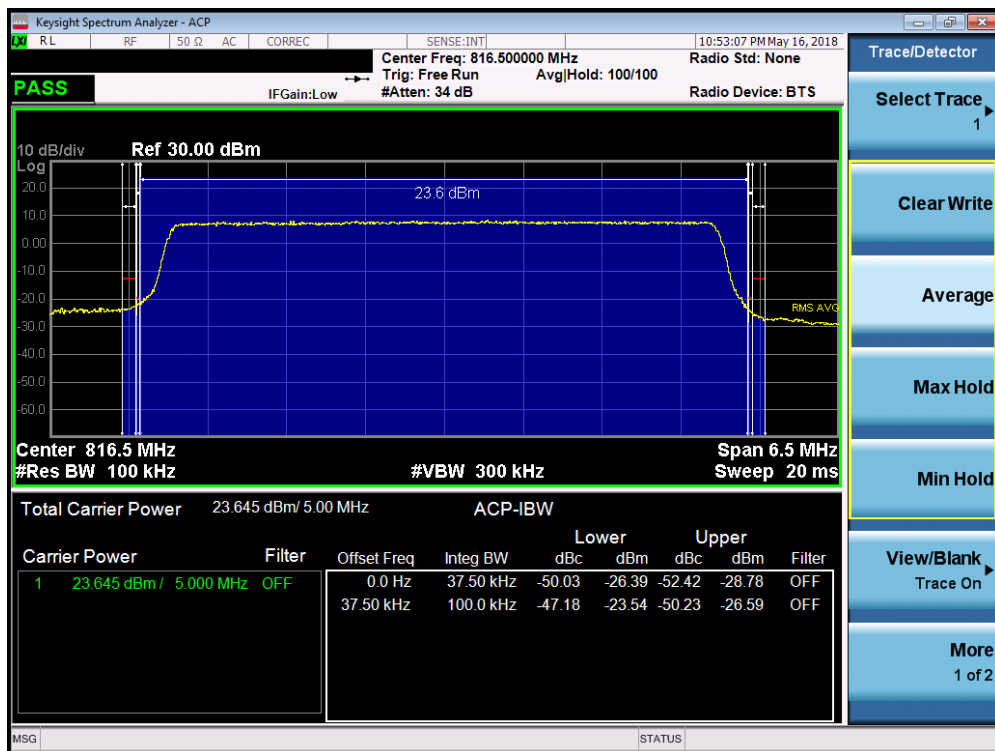


Plot 7-50. Channel Edge Plot (LTE Band 26 – 5MHz QPSK – RB Size 25– Low Channel)

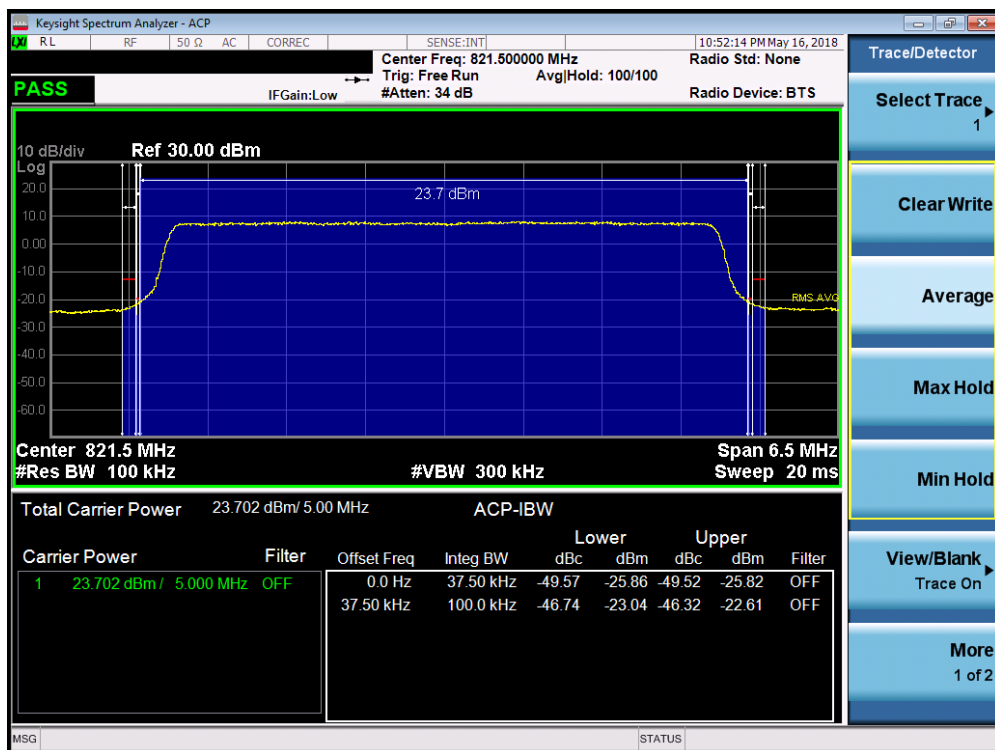


Plot 7-51. Channel Edge Plot (LTE Band 26 – 5MHz QPSK – RB Size 25 – High Channel)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 41 of 63

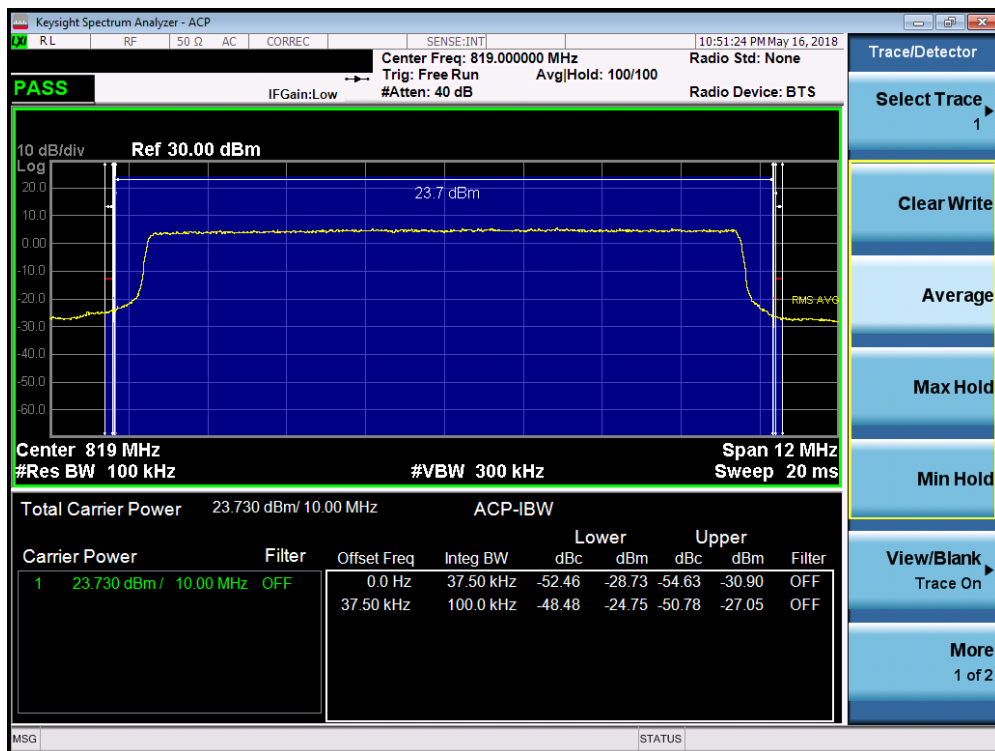

Plot 7-52. Channel Edge Plot (LTE Band 26 – 10MHz QPSK – RB Size 50)

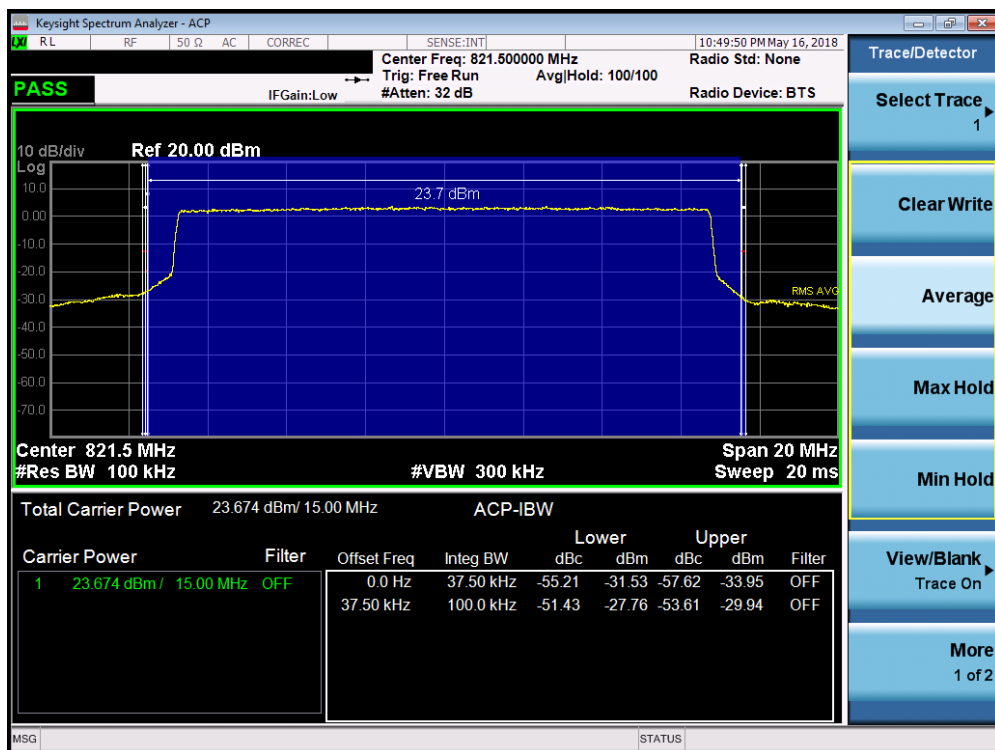

Plot 7-53. Channel Edge Plot (LTE Band 26 – 15MHz QPSK – RB Size 75)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 42 of 63

7.5 Conducted Power Output Data

§90.635

Frequency [MHz]	BC10 [Channel]	Battery Type	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
817.90	476	Standard	25.14	0.327	50.00	-24.86
823.10	684	Standard	24.99	0.316	50.00	-25.01

Table 7-2. CDMA BC10 Conducted Power Output Data

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]
793.00	5.0	QPSK	24.67	0.293
793.00	5.0	16-QAM	23.91	0.246
793.00	5.0	64-QAM	22.87	0.194
793.00	10.0	QPSK	24.58	0.287
793.00	10.0	16-QAM	23.65	0.232
793.00	10.0	64-QAM	22.71	0.187

Table 7-3. LTE Band 14 Conducted Power Output Data

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 43 of 63

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
814.70	1.4	QPSK	24.66	0.292	50.00	-25.34
823.30	1.4	QPSK	24.65	0.292	50.00	-25.35
814.70	1.4	16-QAM	24.01	0.252	50.00	-25.99
823.30	1.4	16-QAM	24.00	0.251	50.00	-26.00
814.70	1.4	64-QAM	22.93	0.196	50.00	-27.07
823.30	1.4	64-QAM	22.91	0.195	50.00	-27.09
815.50	3	QPSK	24.73	0.297	50.00	-25.27
822.50	3	QPSK	24.79	0.301	50.00	-25.21
815.50	3	16-QAM	24.07	0.255	50.00	-25.93
822.50	3	16-QAM	24.08	0.256	50.00	-25.92
815.50	3	64-QAM	23.03	0.201	50.00	-26.97
822.50	3	64-QAM	23.05	0.202	50.00	-26.95
816.50	5	QPSK	24.71	0.296	50.00	-25.29
821.50	5	QPSK	24.71	0.296	50.00	-25.29
816.50	5	16-QAM	24.00	0.251	50.00	-26.00
821.50	5	16-QAM	24.02	0.252	50.00	-25.98
816.50	5	64-QAM	22.94	0.197	50.00	-27.06
821.50	5	64-QAM	22.94	0.197	50.00	-27.06
819.00	10	QPSK	24.69	0.294	50.00	-25.31
819.00	10	16-QAM	24.01	0.252	50.00	-25.99
819.00	10	64-QAM	22.95	0.197	50.00	-27.05
821.50	15	QPSK	24.49	0.281	50.00	-25.51
821.50	15	16-QAM	23.87	0.244	50.00	-26.13
821.50	15	64-QAM	22.87	0.194	50.00	-27.13

Table 7-4. LTE Band 26 Conducted Power Output Data

NOTES:

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 44 of 63

7.6 Radiated Power (ERP)

§22.913(a.2)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 45 of 63

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

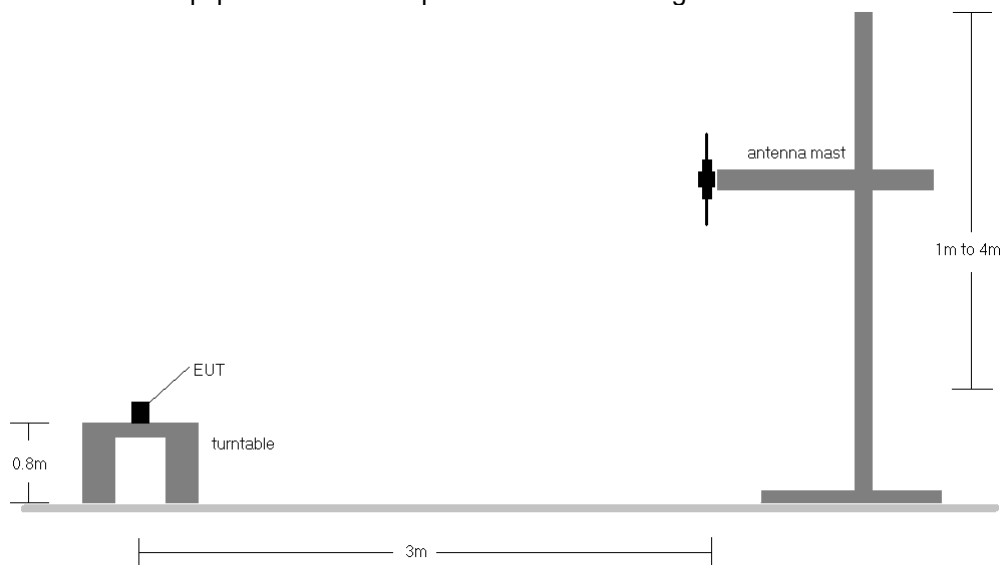


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 46 of 63

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
790.50	5	QPSK	V	150	238	1 / 0	21.04	1.36	20.25	0.106	34.77	-14.52
793.00	5	QPSK	V	150	243	1 / 0	20.96	1.37	20.18	0.104	34.77	-14.59
795.50	5	QPSK	V	150	236	1 / 0	20.69	1.38	19.92	0.098	34.77	-14.85
790.50	5	16-QAM	V	150	238	1 / 0	20.20	1.36	19.41	0.087	34.77	-15.36
790.50	5	64-QAM	V	150	238	1 / 0	19.17	1.36	18.38	0.069	34.77	-16.39
793.00	10	QPSK	V	150	234	1 / 0	20.86	1.37	20.08	0.102	34.77	-14.69
793.00	10	16-QAM	V	150	234	1 / 0	20.14	1.37	19.36	0.086	34.77	-15.41
793.00	10	64-QAM	V	150	234	1 / 0	19.11	1.37	18.33	0.068	34.77	-16.44
790.50	5	QPSK	H	150	278	1 / 0	19.11	1.36	18.32	0.068	34.77	-16.45
790.50	5 (WCP)	QPSK	V	150	28	1 / 0	20.76	1.36	19.97	0.099	34.77	-14.80

Table 7-5. ERP Data (Band 14)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
821.50	15	QPSK	H	150	33	1 / 74	21.25	1.49	20.59	0.114	38.45	-17.86
821.50	15	16-QAM	H	150	33	1 / 74	19.64	1.49	18.98	0.079	38.45	-19.47
821.50	15	64-QAM	H	150	33	1 / 74	18.81	1.49	18.15	0.065	38.45	-20.30
821.50	15	QPSK	V	150	222	1 / 74	20.54	1.49	19.88	0.097	38.45	-18.57
821.50	15 (WCP)	QPSK	H	150	25	1 / 74	20.86	1.49	20.20	0.105	38.45	-18.25

Table 7-6. ERP Data (Band 26)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 47 of 63

7.7 Radiated Spurious Emissions Measurements

\$2.1053 \$90.691

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 48 of 63	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

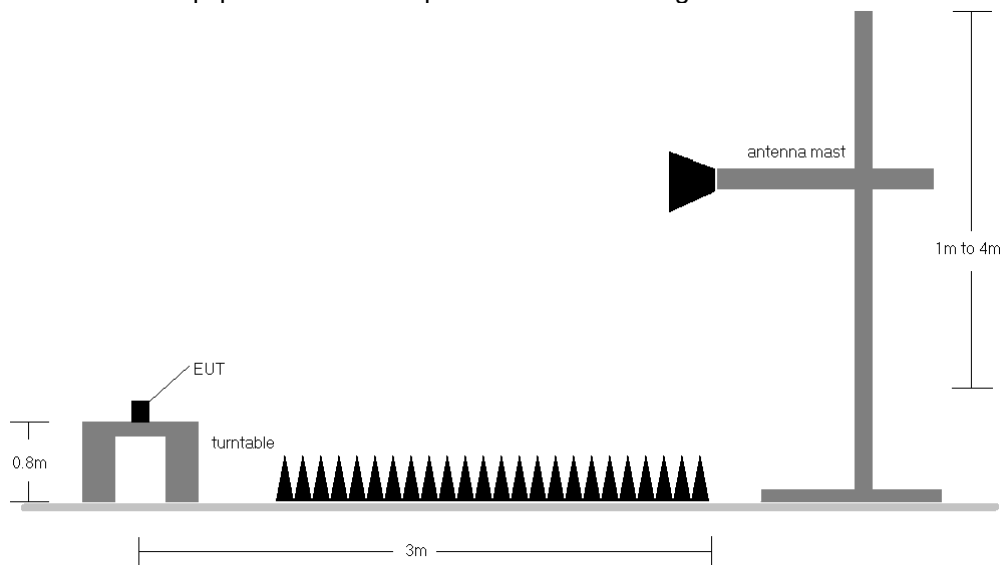


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 49 of 63

CDMA/EvDO

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	V	112	341	-78.65	8.91	-69.74	-56.7
2453.70	V	140	309	-73.95	9.12	-64.83	-51.8
3271.60	V	-	-	-74.80	9.39	-65.41	-52.4
4089.50	V	-	-	-73.26	9.61	-63.66	-50.7

Table 7-7. CDMA BC10 Radiated Spurious Data (Ch. 476)

OPERATING FREQUENCY: 823.10 MHz
 CHANNEL: 684
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	V	227	352	-79.33	8.87	-70.46	-57.5
2469.30	V	117	311	-73.90	9.17	-64.74	-51.7
3292.40	V	-	-	-74.53	9.42	-65.11	-52.1
4115.50	V	-	-	-73.11	9.79	-63.32	-50.3

Table 7-8. CDMA BC10 Radiated Spurious Data (Ch. 684)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 50 of 63

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	H	100	69	-76.08	8.91	-67.17	-54.2
2453.70	H	-	-	-77.18	9.12	-68.06	-55.1
3271.60	H	-	-	-74.57	9.39	-65.18	-52.2

Table 7-9. CDMA BC10 Radiated Spurious Data with WCP (Ch. 476)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 51 of 63

Band 14

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	V	-	-	-66.51	4.95	-61.55	-48.6
3172.00	V	-	-	-66.17	6.10	-60.07	-47.1

Table 7-10. Radiated Spurious Data (LTE Band 14 – Mid Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1586.00	V	-	-	-70.22	4.59	-65.62	-25.6

Table 7-11. Radiated Spurious Data (LTE Band 14 –1559-1610MHz Band)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 52 of 63

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	V	-	-	-56.41	4.94	-51.47	-38.5
3172.00	V	-	-	-56.10	6.09	-50.00	-37.0

Table 7-12. Radiated Spurious Data with WCP (LTE Band 14 – Mid Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1586.00	V	-	-	-59.93	4.59	-55.34	-15.3

Table 7-13. Radiated Spurious Data with WCP (LTE Band 14 –1559-1610MHz Band)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 53 of 63

Band 26

OPERATING FREQUENCY: 815.50 MHz
 CHANNEL: 26705
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1631.00	H	-	-	-60.13	4.77	-55.36	-42.4
2446.50	H	-	-	-57.09	4.94	-52.15	-39.2

Table 7-14. Radiated Spurious Data (Ch. 26705)

OPERATING FREQUENCY: 822.50 MHz
 CHANNEL: 26775
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1645.00	H	-	-	-59.99	4.80	-55.19	-42.2
2467.50	H	-	-	-56.13	4.98	-51.15	-38.2

Table 7-15. Radiated Spurious Data (Ch. 26775)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 54 of 63

OPERATING FREQUENCY: 822.50 MHz
 CHANNEL: 26775
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1645.00	H	-	-	-60.04	4.80	-55.24	-42.2
2467.50	H	-	-	-56.83	4.98	-51.85	-38.9

Table 7-16. Radiated Spurious Data with WCP (Ch. 26775)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 55 of 63

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2010

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 56 of 63

Frequency Stability / Temperature Variation

\$2.1055, \$90.213

OPERATING FREQUENCY: 817,900,000 Hz
 CHANNEL: 476
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: $\pm 0.00025\%$ or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	817,899,810	-190	-0.0000232
100 %		- 30	817,899,913	-87	-0.0000106
100 %		- 20	817,900,236	236	0.0000289
100 %		- 10	817,900,026	26	0.0000032
100 %		0	817,900,043	43	0.0000053
100 %		+ 10	817,899,788	-212	-0.0000259
100 %		+ 20	817,899,910	-90	-0.0000110
100 %		+ 30	817,900,013	13	0.0000016
100 %		+ 40	817,899,681	-319	-0.0000390
100 %		+ 50	817,900,197	197	0.0000241
BATT. ENDPOINT	3.45	+ 20	817,900,293	293	0.0000358

Table 7-17. CDMA BC10 Frequency Stability Data (Ch. 670)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 57 of 63

Frequency Stability / Temperature Variation

\$2.1055, \$90.213

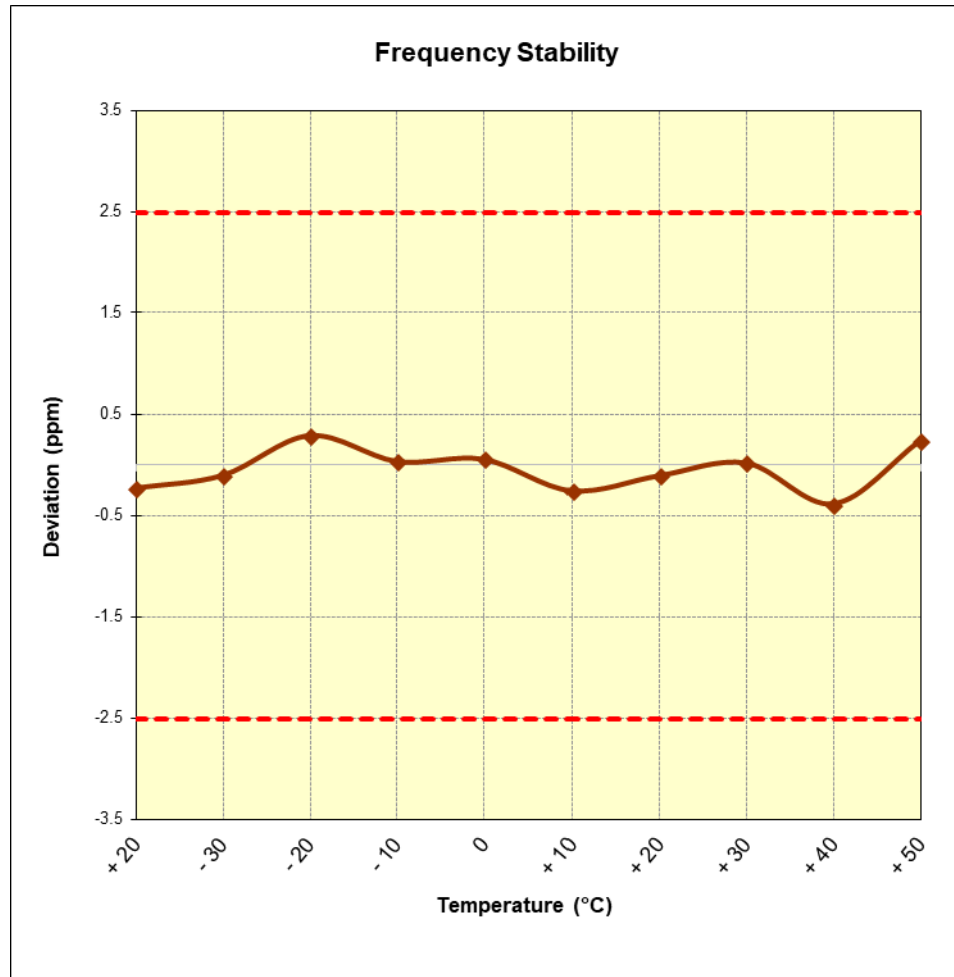


Figure 7-6. CDMA BC10 Frequency Stability Graph (Ch. 670)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 58 of 63

Band 14 Frequency Stability / Temperature Variation **\$2.1055, \$90.213**

OPERATING FREQUENCY: 793,000,000 Hz
CHANNEL: 23330
REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	793,000,186	186	0.0000235
100 %		- 30	793,000,244	244	0.0000308
100 %		- 20	792,999,982	-18	-0.0000023
100 %		- 10	792,999,747	-253	-0.0000319
100 %		0	793,000,019	19	0.0000024
100 %		+ 10	792,999,895	-105	-0.0000132
100 %		+ 20	792,999,999	-1	-0.0000001
100 %		+ 30	793,000,155	155	0.0000195
100 %		+ 40	793,000,024	24	0.0000030
100 %		+ 50	792,999,893	-107	-0.0000135
BATT. ENDPOINT	3.45	+ 20	792,999,938	-62	-0.0000078

Table 7-18. LTE Band 14 Frequency Stability Data (Ch. 23330)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 59 of 63

Band 14 Frequency Stability / Temperature Variation
\$2.1055, \$90.213

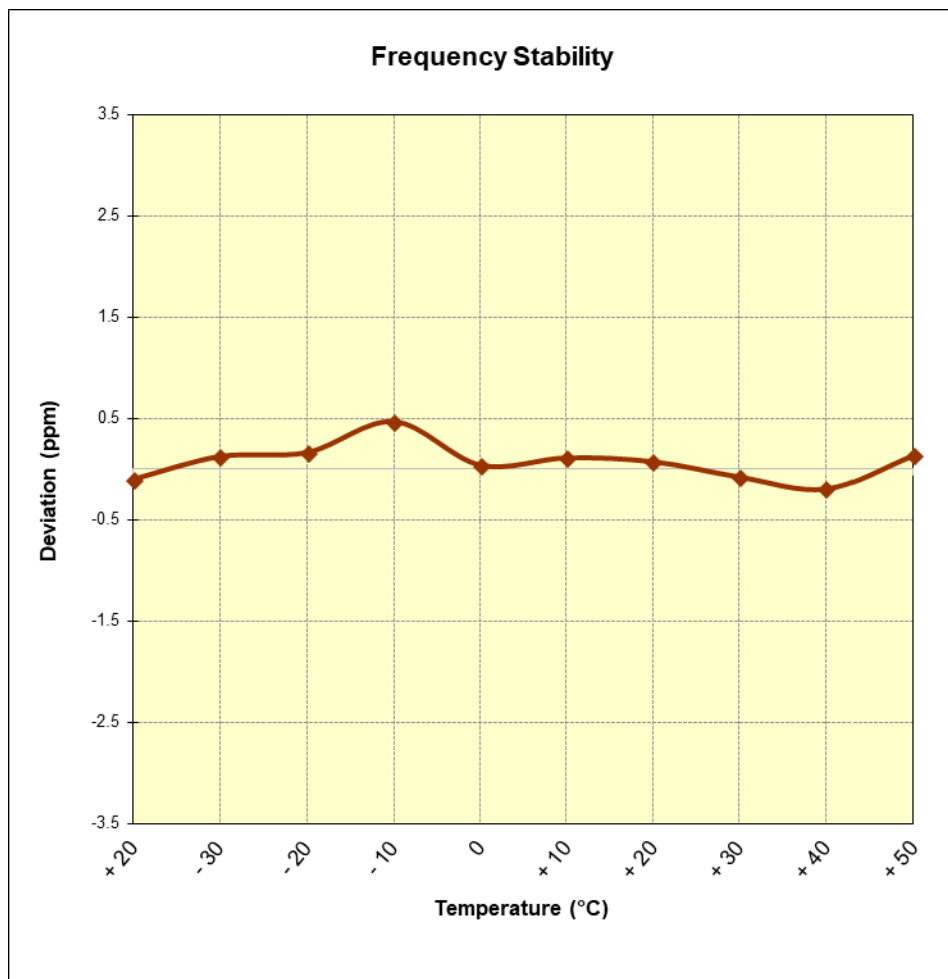


Table 7-19. LTE Band 26 Frequency Stability Data (Ch. 23330)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 60 of 63

Band 26 Frequency Stability / Temperature Variation **\$2.1055, \$90.213**

OPERATING FREQUENCY: 819,000,000 Hz
CHANNEL: 26740
REFERENCE VOLTAGE: 3.85 VDC
DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	818,999,820	-180	-0.0000220
100 %		- 30	819,000,266	266	0.0000325
100 %		- 20	818,999,672	-328	-0.0000400
100 %		- 10	819,000,186	186	0.0000227
100 %		0	818,999,966	-34	-0.0000042
100 %		+ 10	819,000,056	56	0.0000068
100 %		+ 20	819,000,250	250	0.0000305
100 %		+ 30	818,999,973	-27	-0.0000033
100 %		+ 40	819,000,400	400	0.0000488
100 %		+ 50	819,000,138	138	0.0000168
BATT. ENDPOINT	3.45	+ 20	818,999,955	-45	-0.0000055

Table 7-20. LTE Band 26 Frequency Stability Data (Ch. 26697)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 61 of 63

Band 26 Frequency Stability / Temperature Variation
\$2.1055, \$90.213

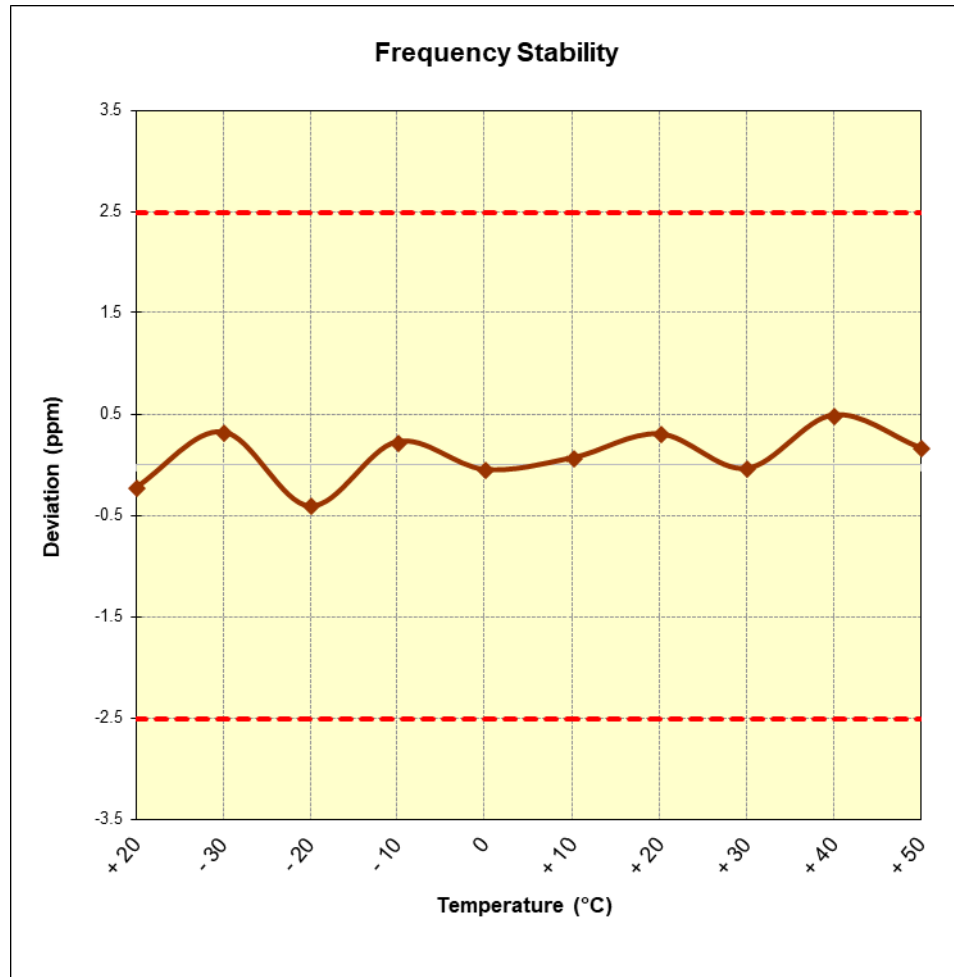


Table 7-21. LTE Band 26 Frequency Stability Data (Ch. 26697)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION)		 Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 62 of 63

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN960U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-04.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 63 of 63	