

**MEASUREMENT REPORT**
CDMA / GSM / GPRS / EDGE / WCDMA**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

4/30 - 6/13/2018

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1804270086-02.A3L

FCC ID:

A3LSMN960U

IC:

649E-SMN960U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-N960U

Additional Model(s):

SM-N960U1, SM-N960W, SM-N960XU

HVIN:

SM-N960W

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22, 24, & 27

ISED Specification:

RSS-132, RSS-133, RSS-139

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,
KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 1 of 119

T A B L E O F C O N T E N T S


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Cellular - Base Frequency Blocks	6
3.3	Cellular - Mobile Frequency Blocks	6
3.4	PCS - Base Frequency Blocks	6
3.5	PCS - Mobile Frequency Blocks	7
3.6	AWS - Base Frequency Blocks	7
3.7	AWS - Mobile Frequency Blocks	7
3.8	Radiated Measurements	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	19
7.4	Band Edge Emissions at Antenna Terminal	55
7.5	Peak-Average Ratio	70
7.6	Radiated Power (ERP/EIRP)	76
7.7	Radiated Spurious Emissions Measurements	81
7.8	Frequency Stability / Temperature Variation	104
8.0	CONCLUSION	119

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 2 of 119



MEASUREMENT REPORT

CDMA / GSM / GPRS / EDGE / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.801	29.04	1.314	31.19	243KGXW
EDGE850	22H	824.2 - 848.8	0.205	23.12	0.336	25.27	245KG7W
CDMA850	22H	824.70 - 848.31	0.110	20.42	0.181	22.57	1M28F9W
WCDMA850	22H	826.4 - 846.6	0.111	20.46	0.182	22.61	4M15F9W
WCDMA1700	27	1712.4 - 1752.6			0.288	24.59	4M15F9W
GPRS1900	24E	1850.2 - 1909.8			1.271	31.04	242KGXW
EDGE1900	24E	1850.2 - 1909.8			0.395	25.97	240KG7W
CDMA1900	24E	1851.25 - 1908.75			0.304	24.83	1M28F9W
WCDMA1900	24E	1852.4 - 1907.6			0.253	24.03	4M14F9W

EUT Overview

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 3 of 119

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 4 of 119

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN960U**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: 55921,55608, 55541

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device uses a stylus pen for several functions. The EUT can operate with the stylus pen inserted or removed and the emissions measurements for the EUT were performed with and without the stylus pen inserted into the EUT. There was no degradation found without the stylus pen removed so all emission measurements were performed with the pen inserted into the EUT.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 5 of 119


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

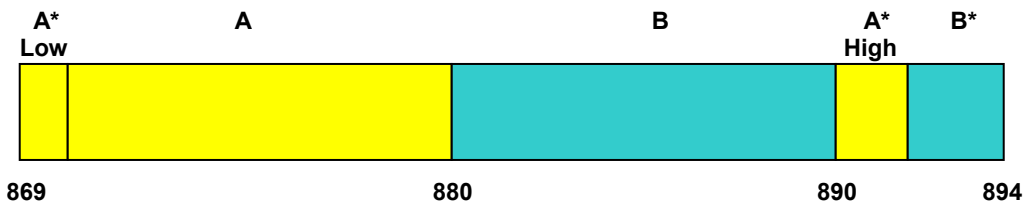


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

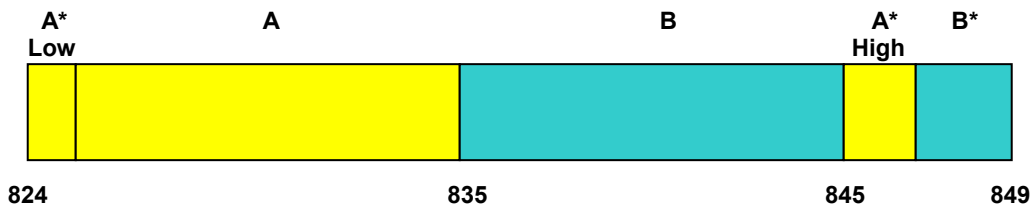


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

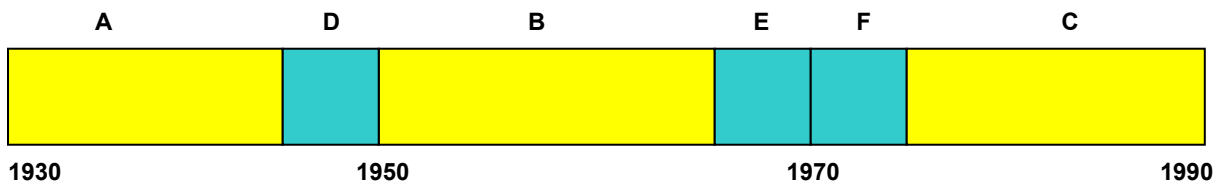

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 6 of 119

3.5 PCS - Mobile Frequency Blocks

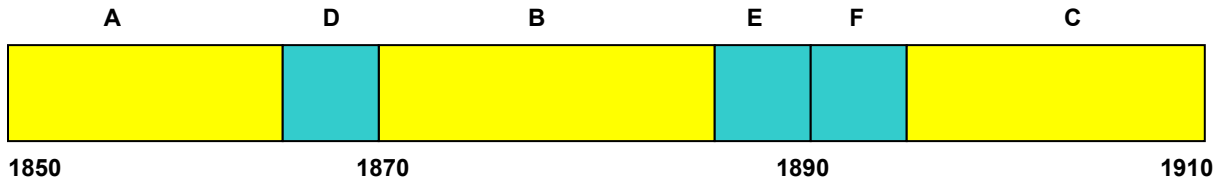

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)


BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.6 AWS - Base Frequency Blocks

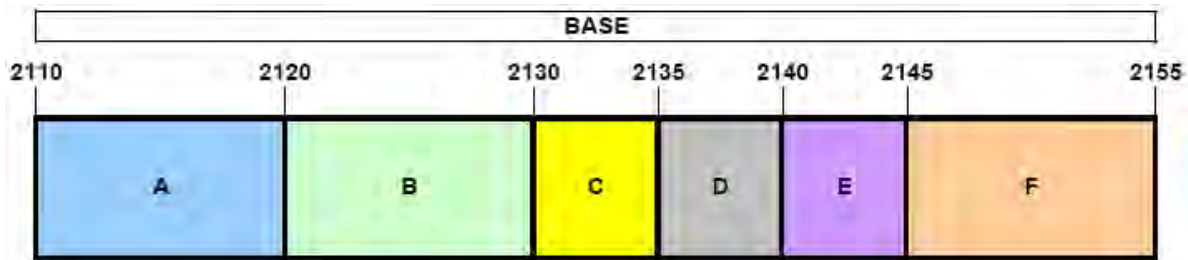

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)


BLOCK 2: 2120 – 2130 MHz (B)

BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

3.7 AWS - Mobile Frequency Blocks

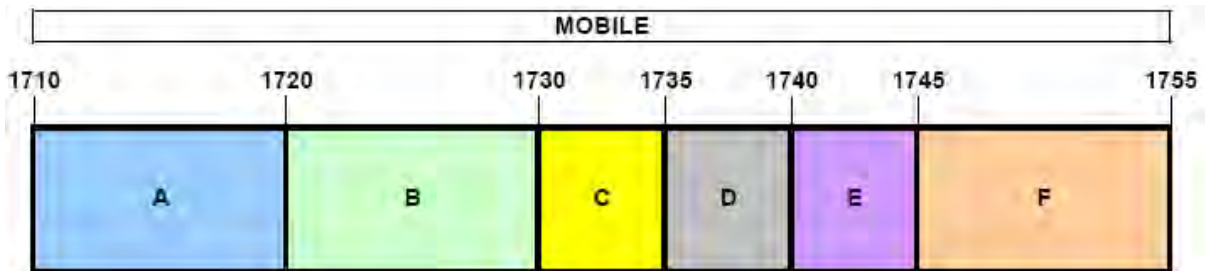

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 7 of 119

3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 8 of 119

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 9 of 119

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	8/10/2017	Annual	8/10/2018	LTx2
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	8/28/2017	Annual	8/28/2018	MY49432391
COM-Power	AL-130R	Active Loop Antenna	6/5/2017	Annual	6/5/2018	121085
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/28/2018	Biennial	3/28/2020	128337
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable Set	1/23/2018	Annual	1/23/2019	251425001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
Mini Circuits	TVA-11-422	RF Power Amp	N/A		N/A	QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A		N/A	11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2017	Annual	10/13/2018	102060
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/19/2017	Annual	6/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102135
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102133
Anritsu	MT8820C	Radio Communication Analyzer	10/25/2017	Annual	10/25/2018	6201144419
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	10/30/2017	Annual	10/30/2018	101058
Schwarzbeck	UHA 9105	Dipole Antenna	8/26/2016	Biennial	8/26/2018	2696
Rohde & Schwarz	TS-PR8	Preamplifier-Antenna SYS; 30MHz-8GHz	10/19/2017	Annual	10/19/2018	102324
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	1/24/2018	Annual	1/24/2019	100040
Seekonk	NC-100	Torque Wrench	12/28/2017	Annual	12/28/2018	N/A
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 10 of 119

6.0 SAMPLE CALCULATIONS

GPRS Emission Designator

Emission Designator = 250KGXW

GPRS BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

CDMA Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 11 of 119

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMN960U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / GSM / GPRS / EDGE / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.11.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 12 of 119

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

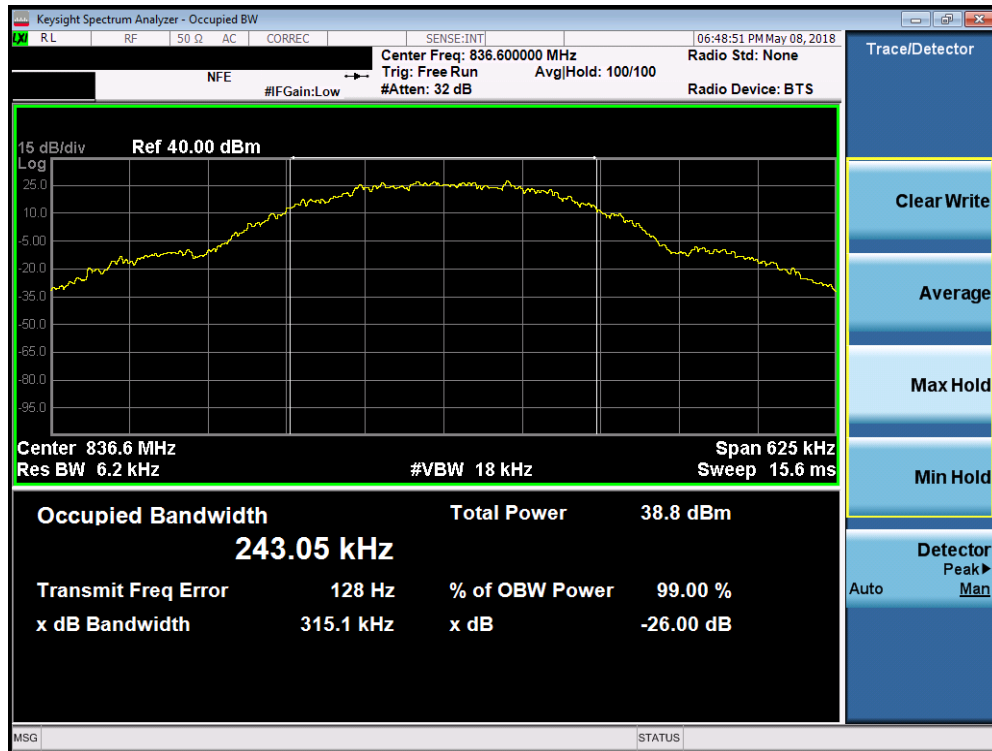


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 13 of 119




Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)

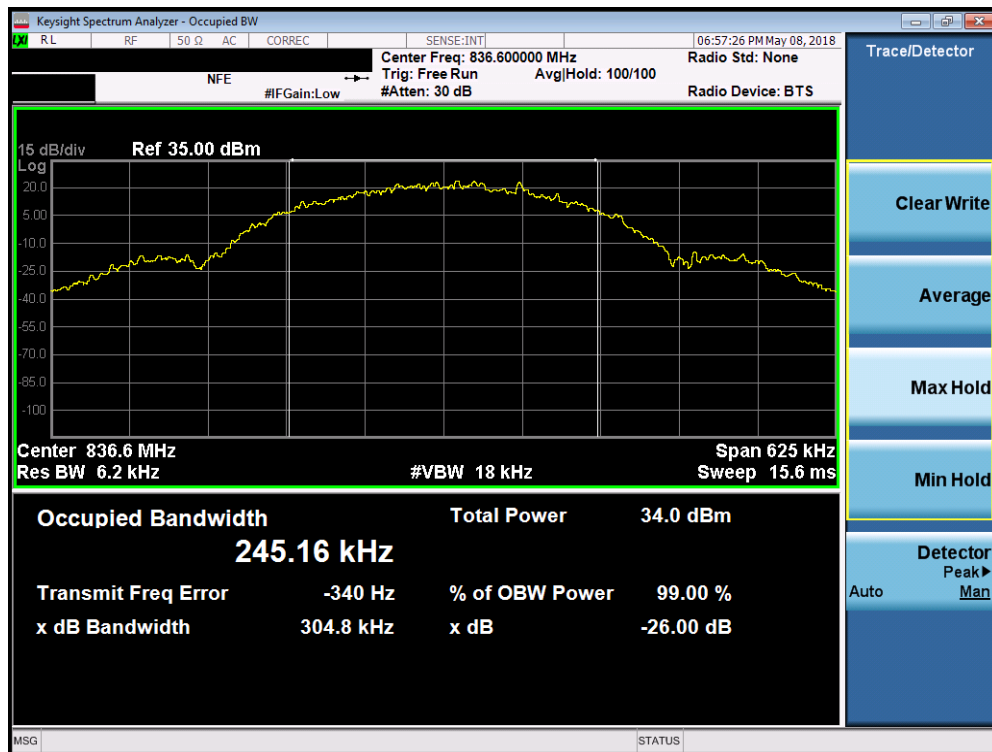


Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 14 of 119

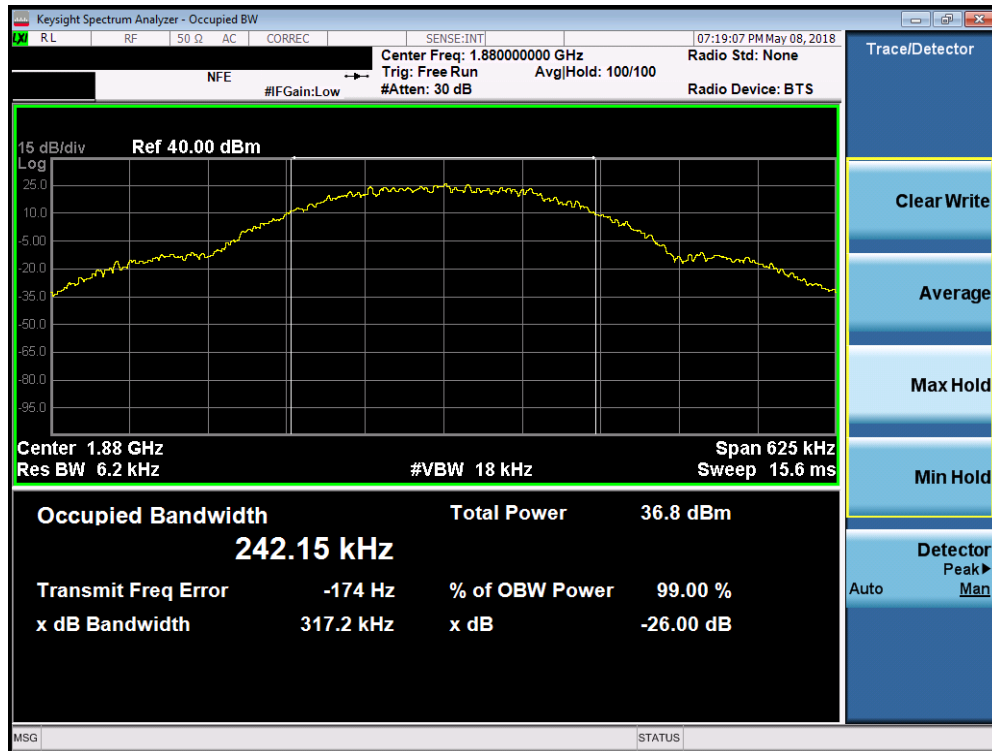


Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

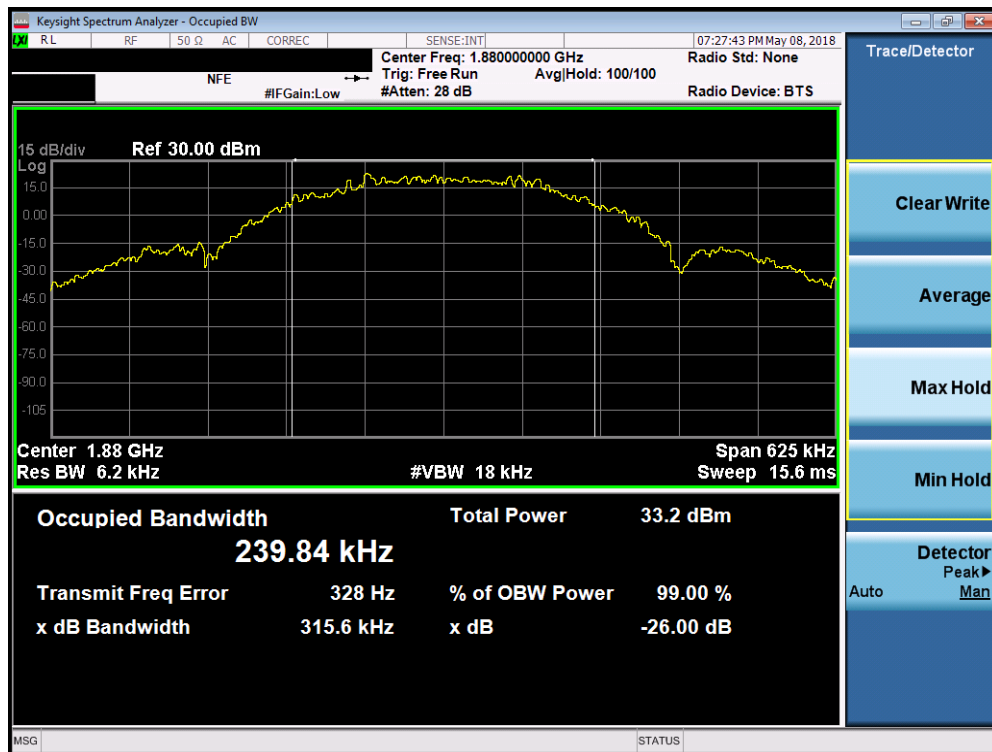


Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 15 of 119

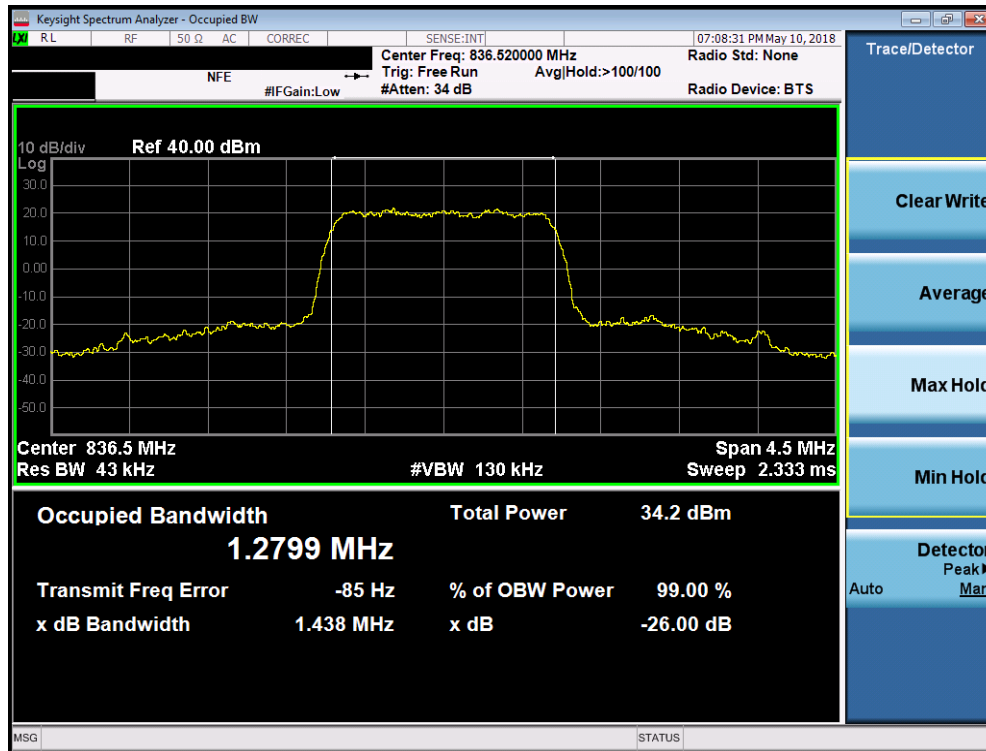


Plot 7-5. Occupied Bandwidth Plot (Cellular CDMA Mode)

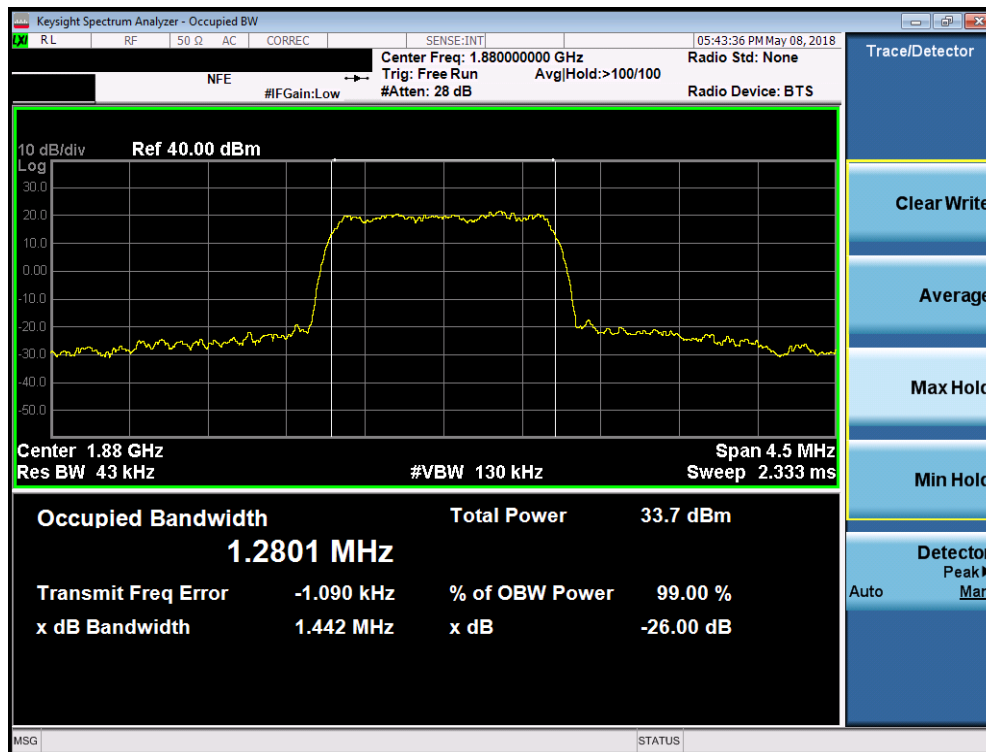


Plot 7-6. Occupied Bandwidth Plot (PCS CDMA Mode)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 16 of 119

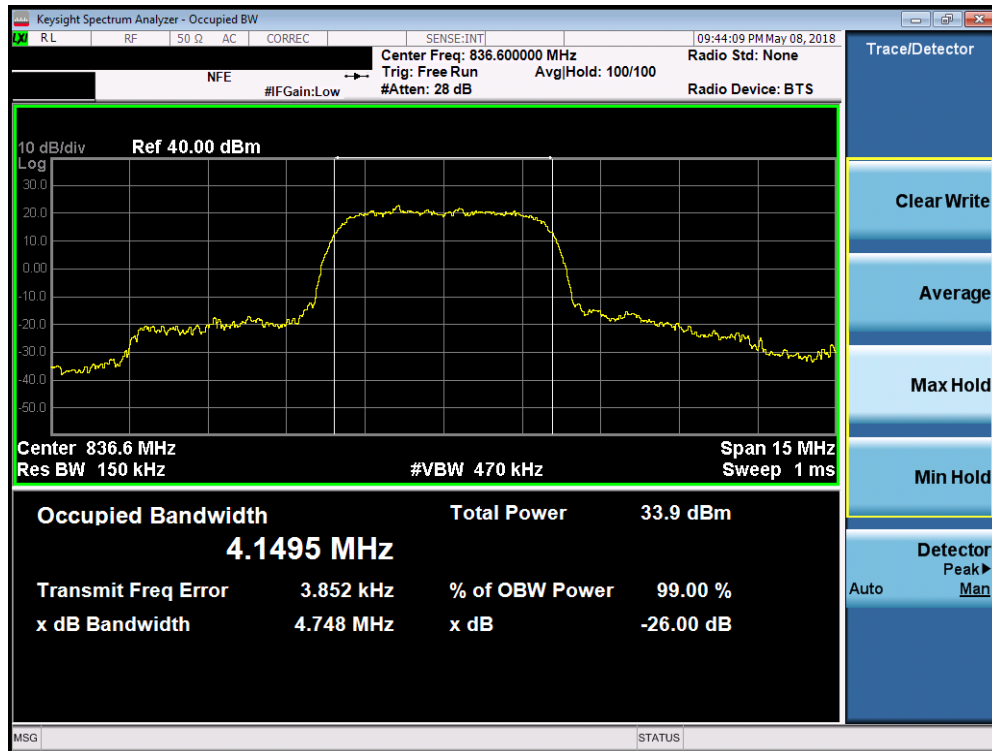


Plot 7-7. Occupied Bandwidth Plot (Cellular WCDMA Mode)

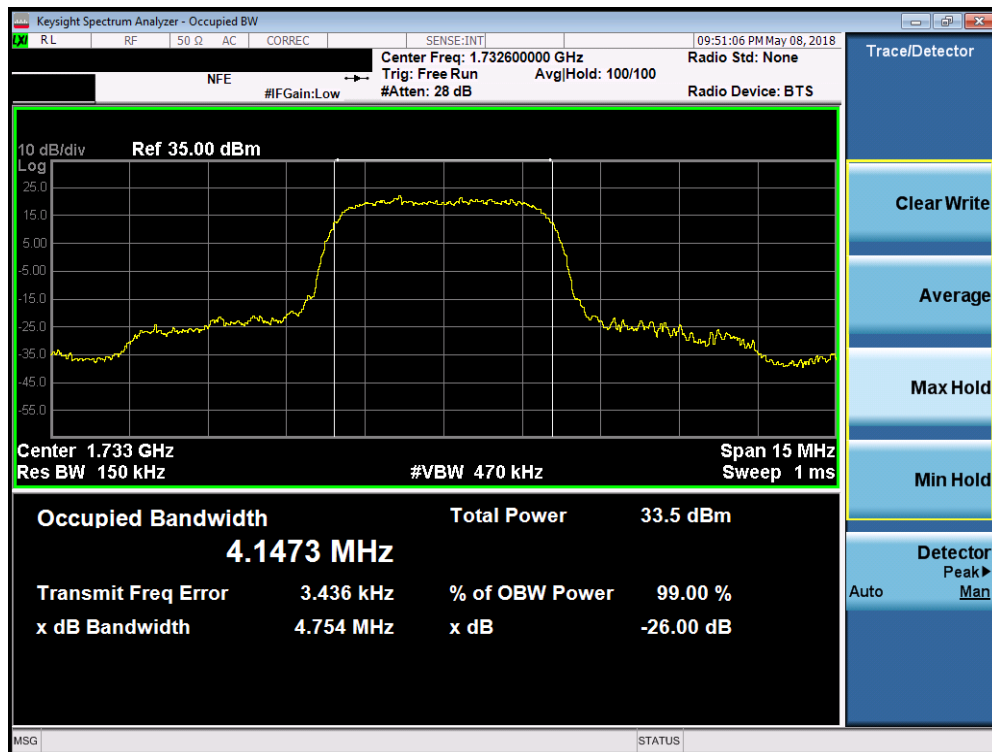

Plot 7-8. Occupied Bandwidth Plot (AWS WCDMA Mode)

FCC ID: A3LSMN960U				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 17 of 119

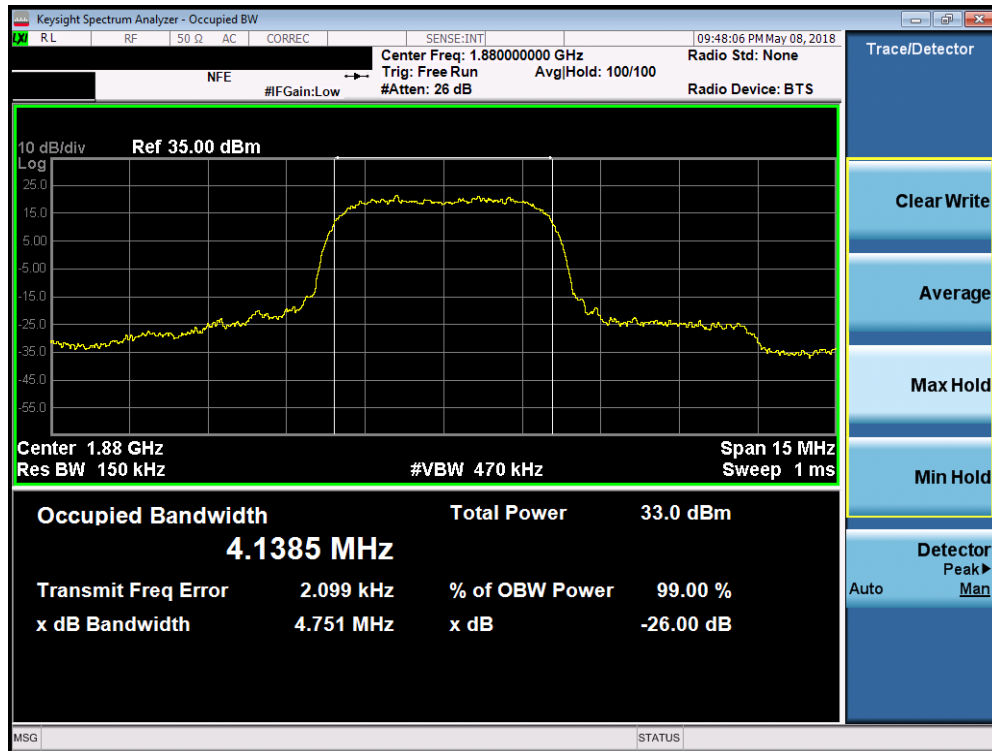

Plot 7-9. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 18 of 119

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 19 of 119

Cellular GPRS Mode

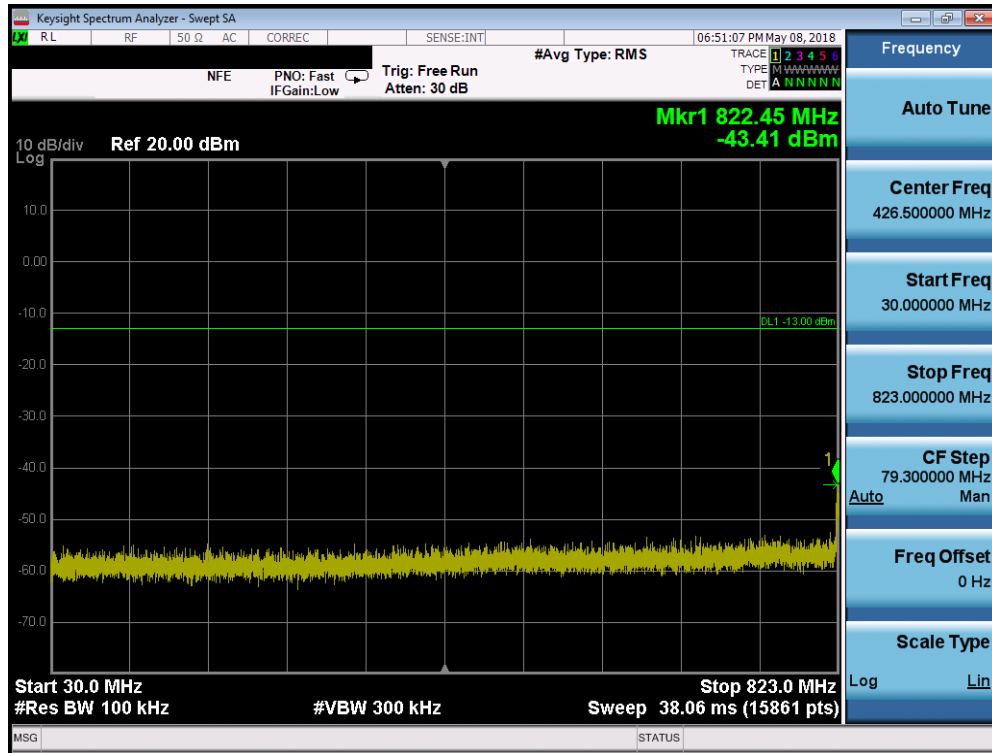


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

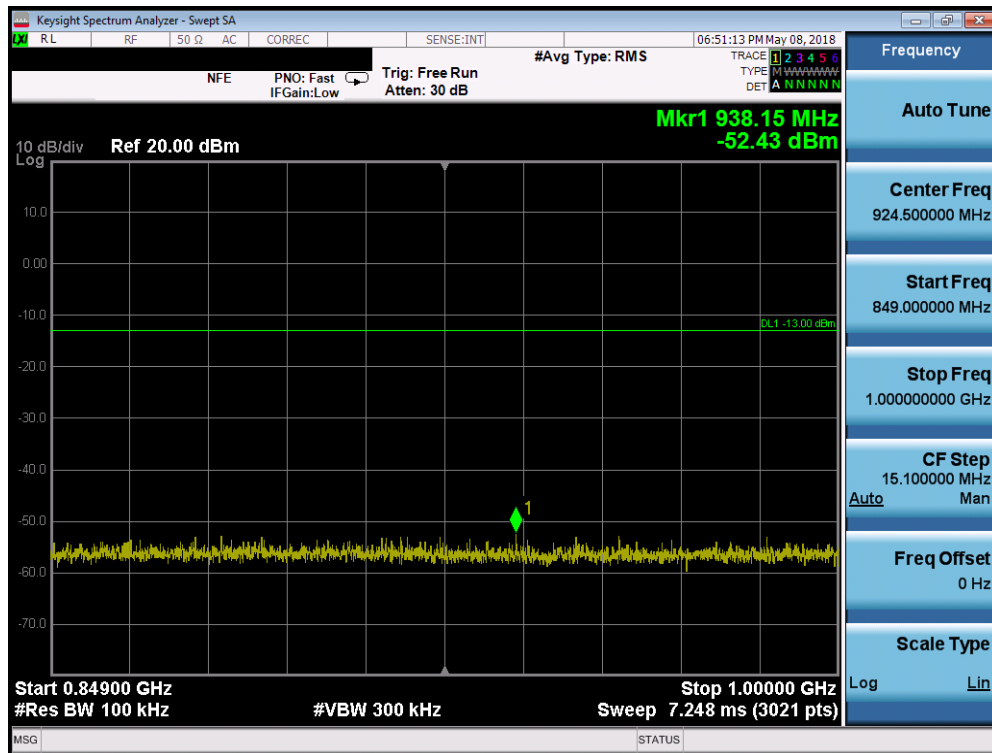


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 20 of 119

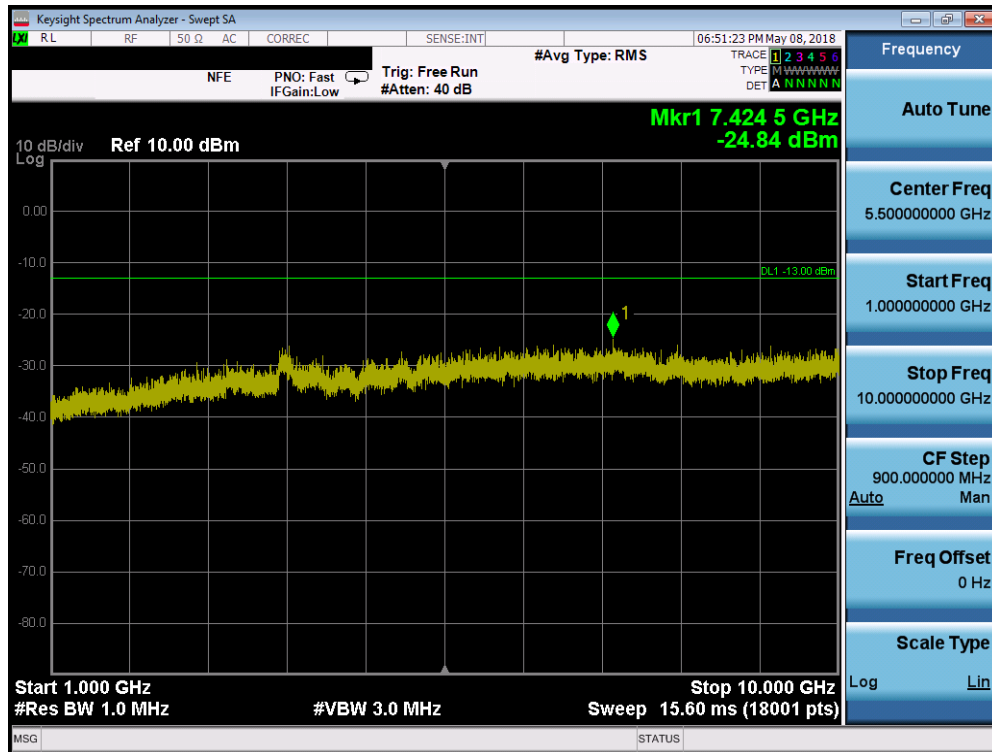


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

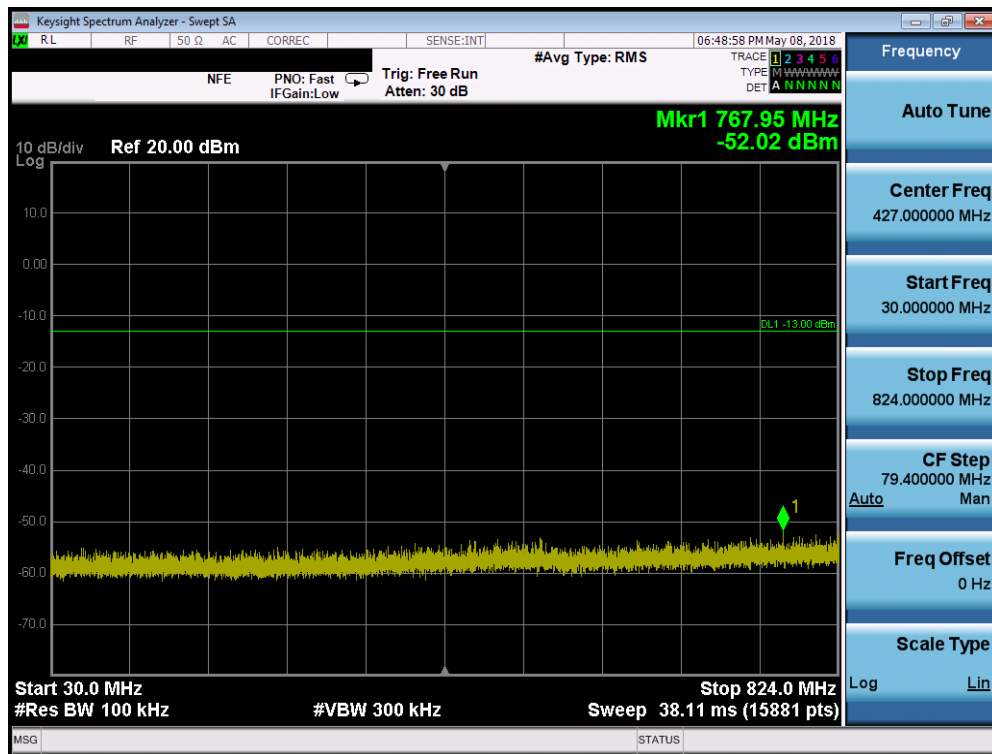


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: A3LSMN960U				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 21 of 119

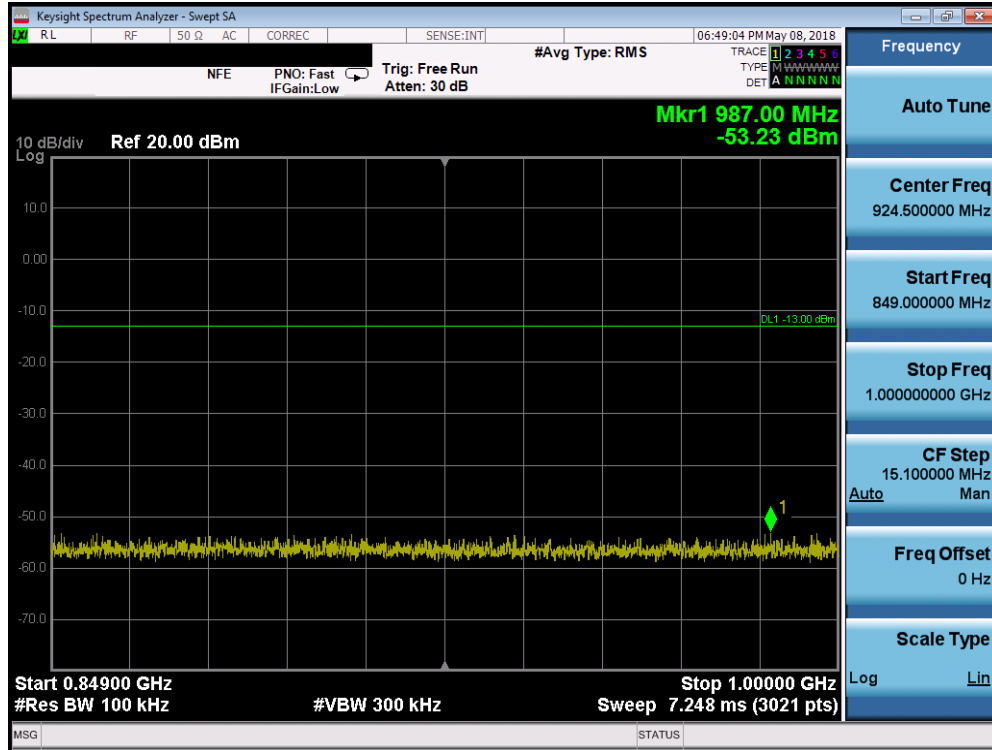


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

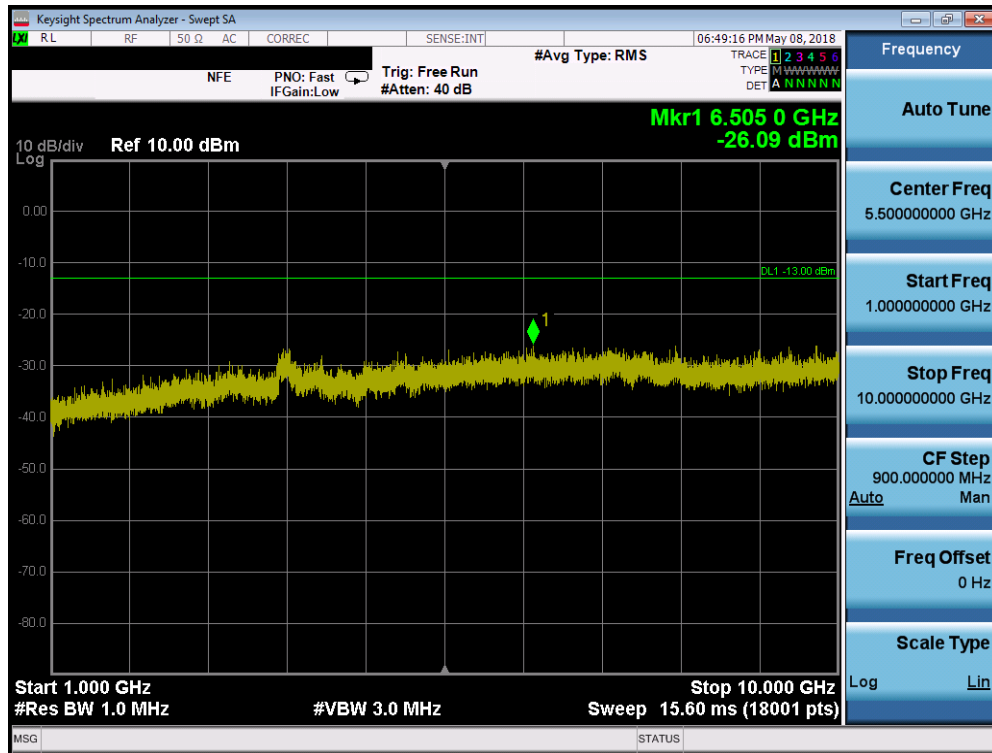


Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 22 of 119

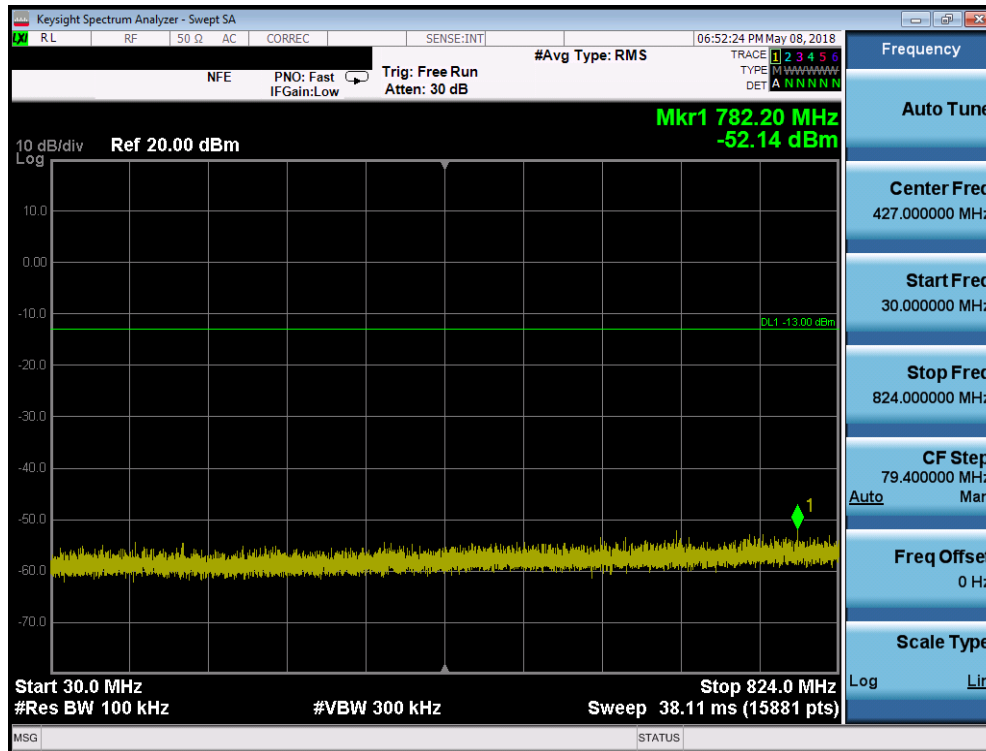


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

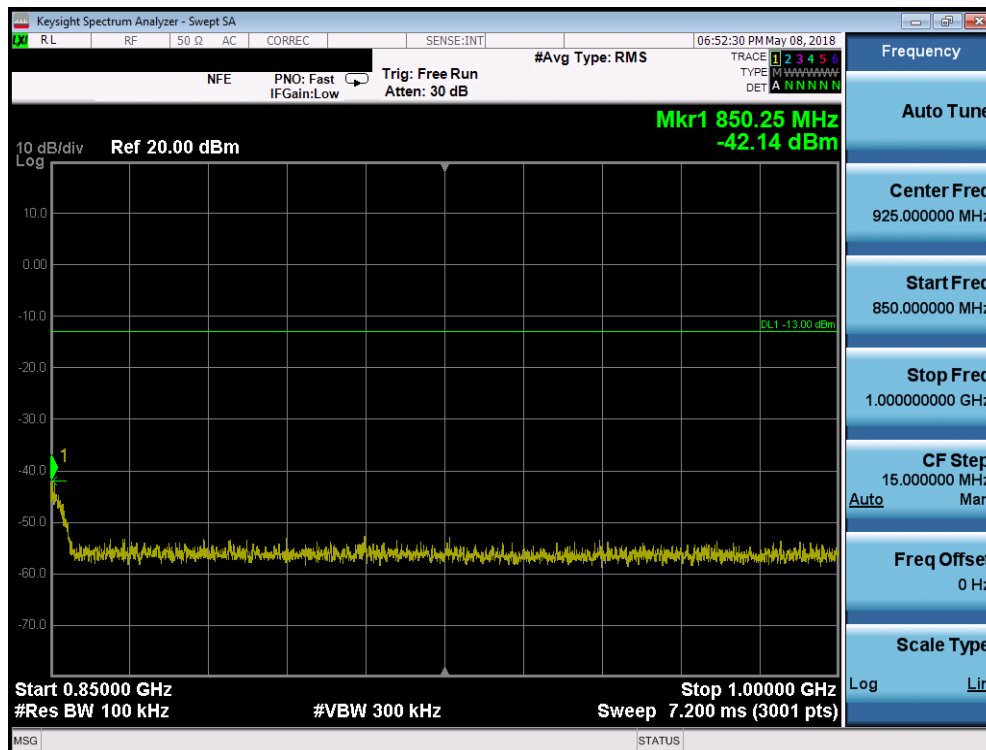

Plot 7-17. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 23 of 119

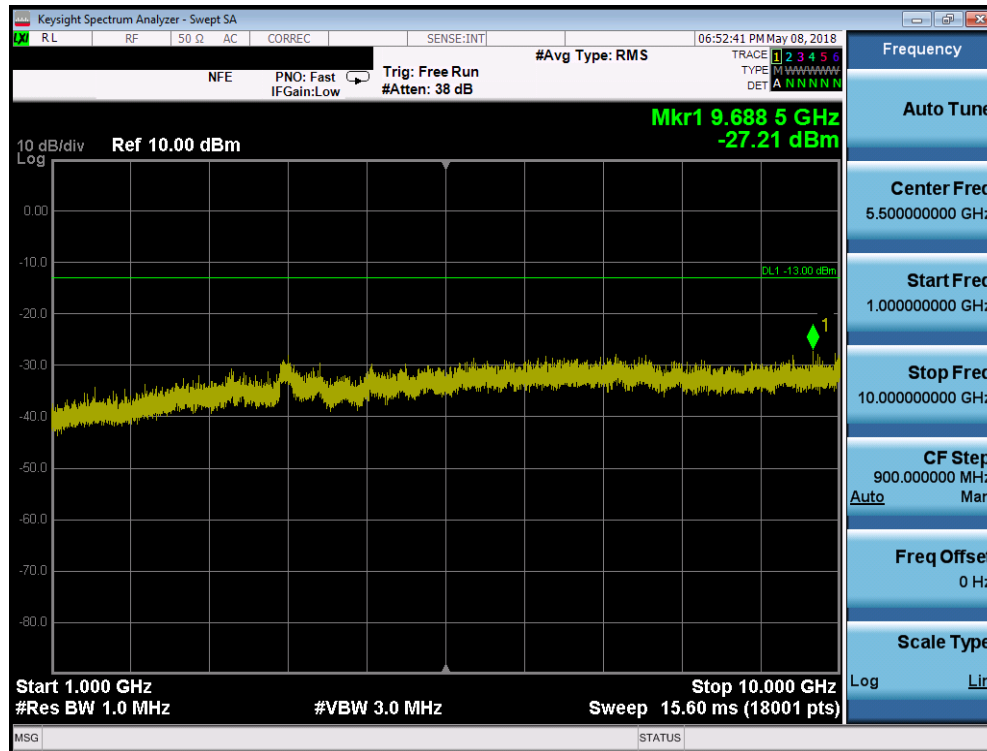


Plot 7-18. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 24 of 119

PCS GPRS Mode

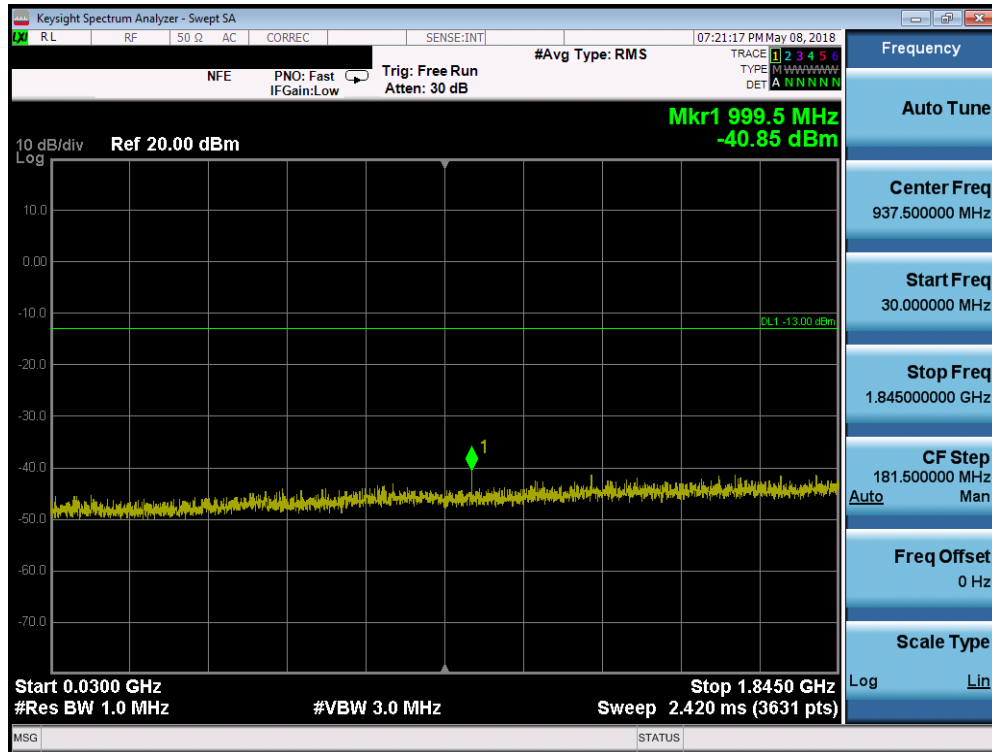


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

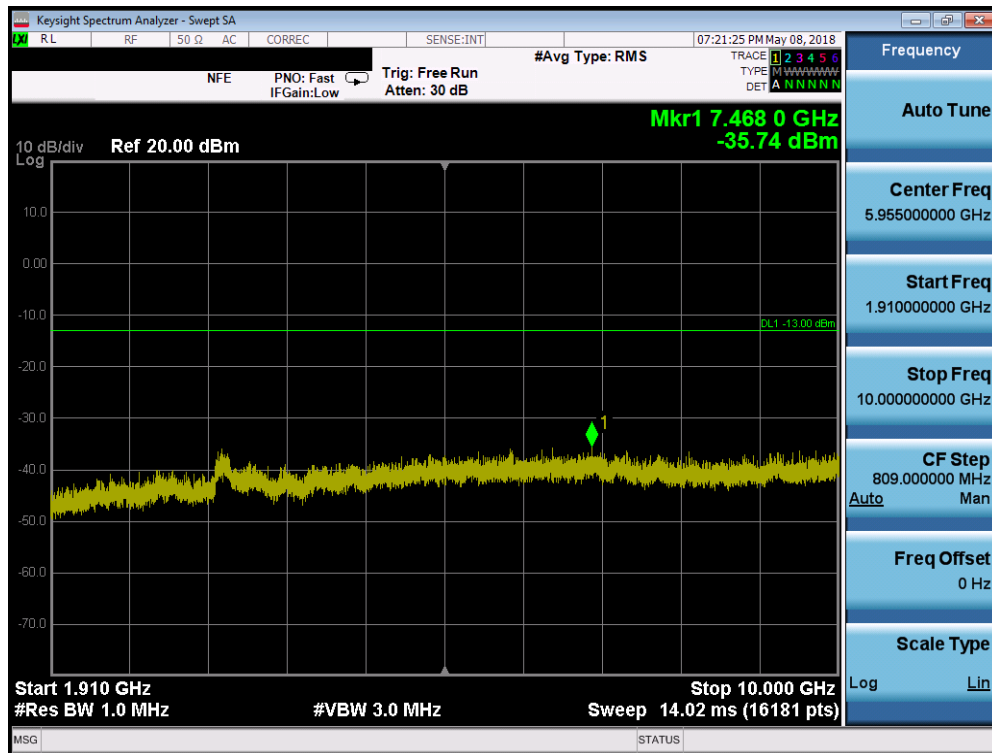


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 25 of 119

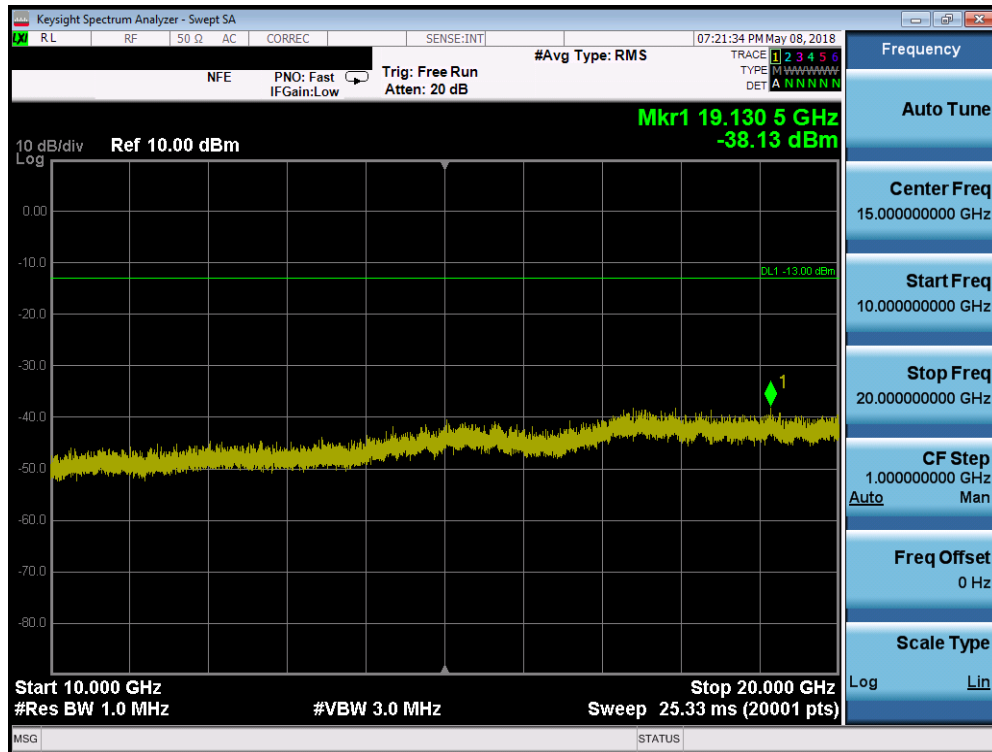


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

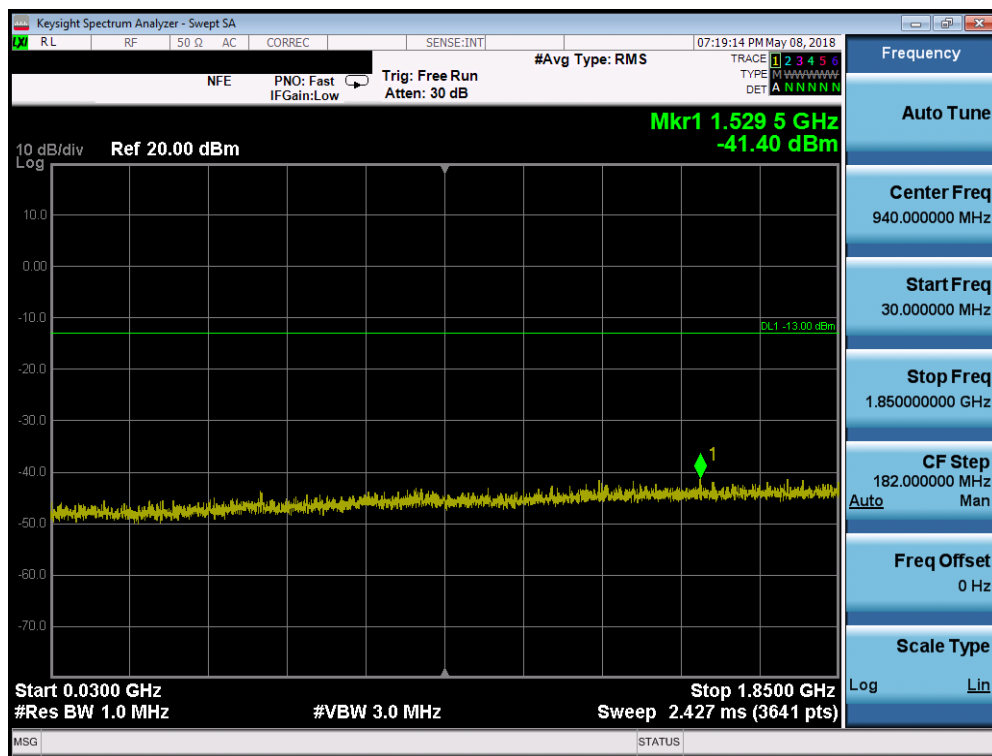


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 26 of 119

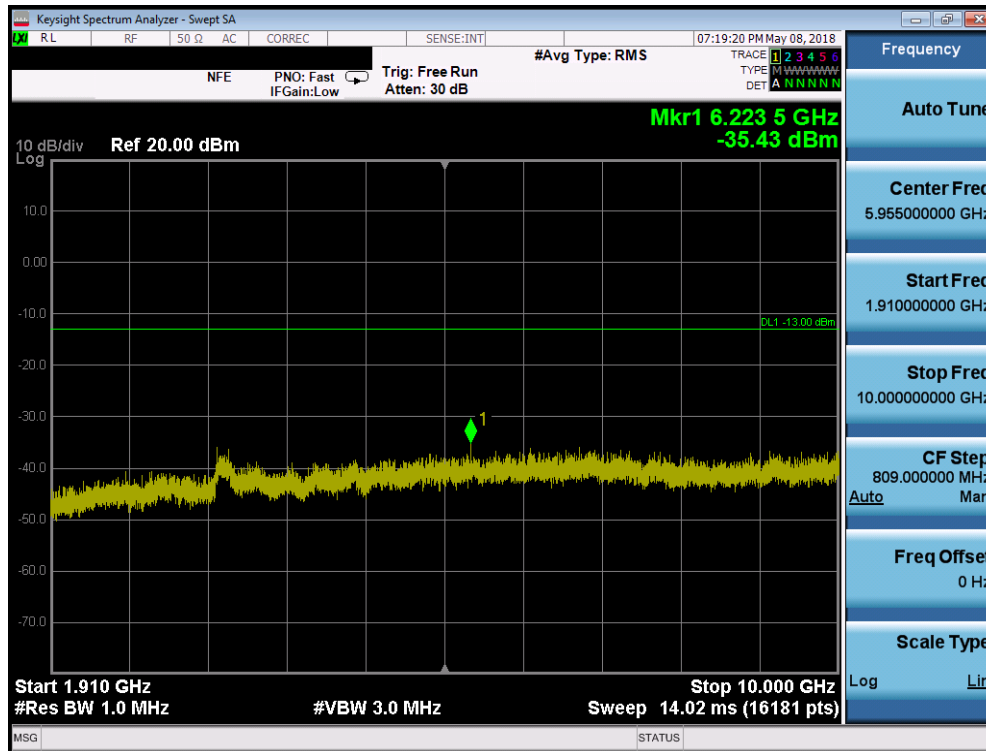


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

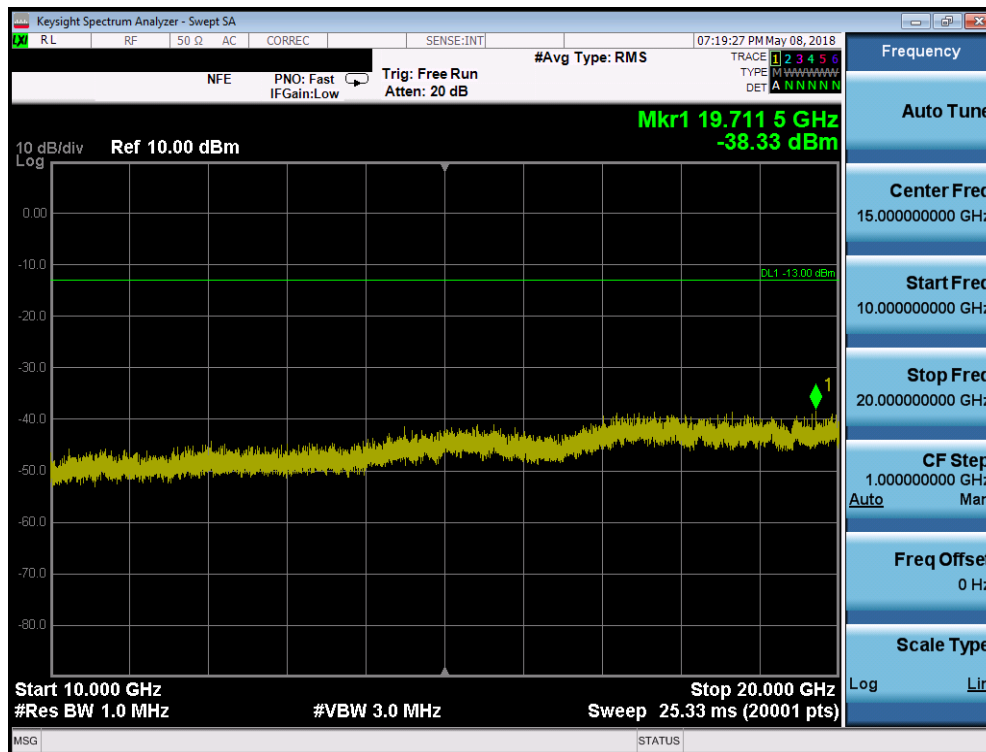


Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: A3LSMN960U				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 27 of 119

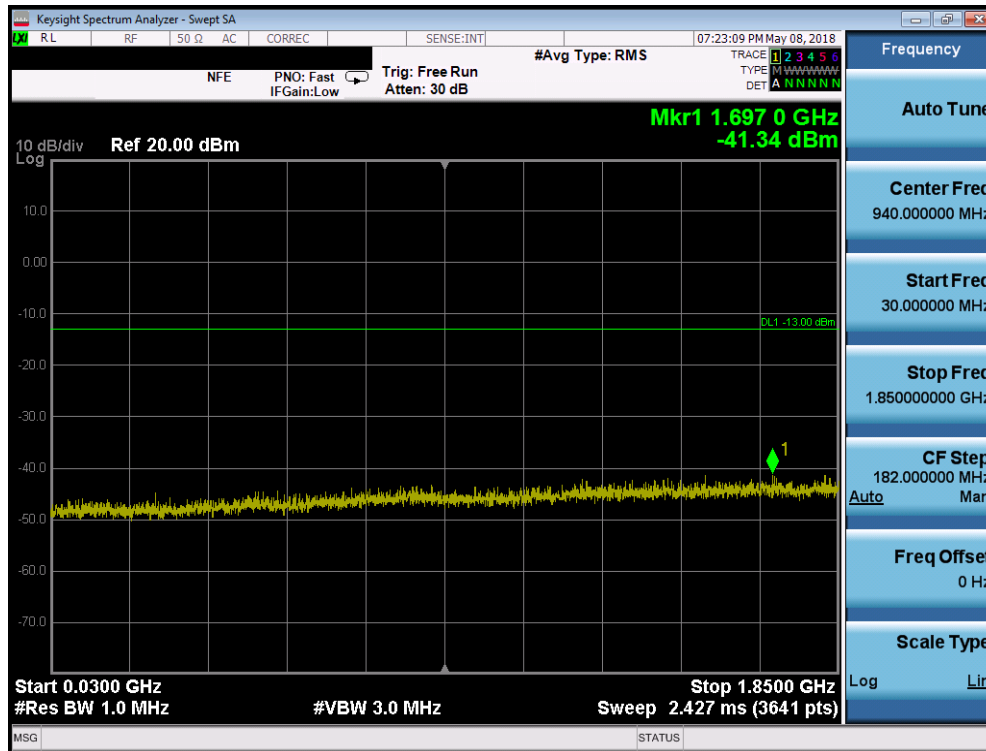


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

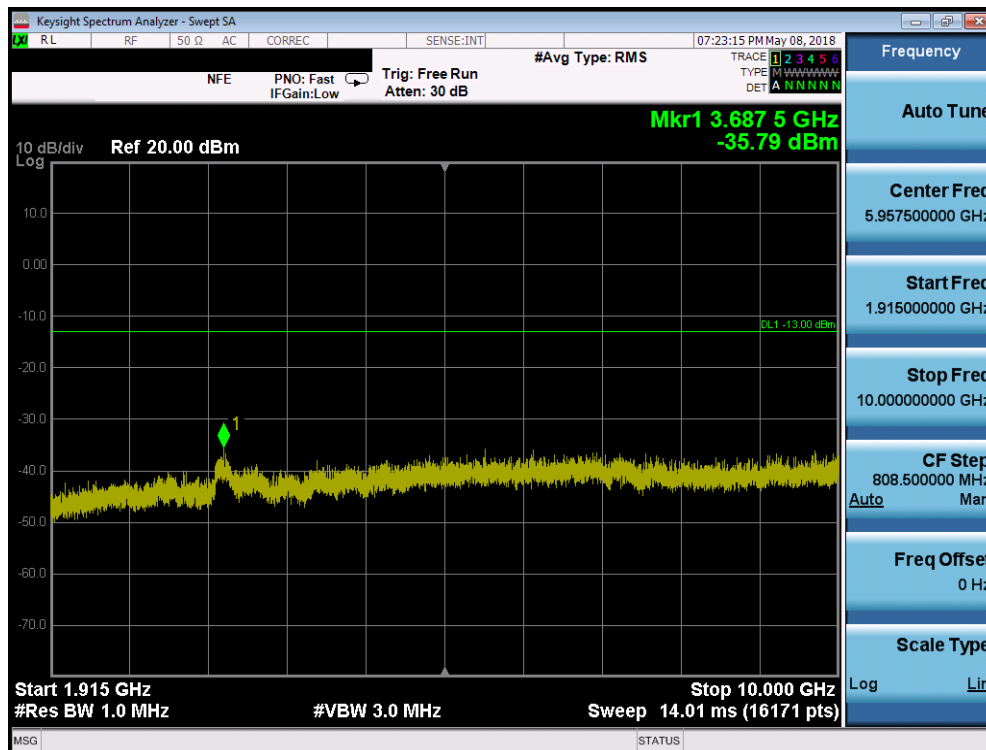

Plot 7-26. Conducted Spurious Plot (PCS GPRS Mode - High Channel)


FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 28 of 119

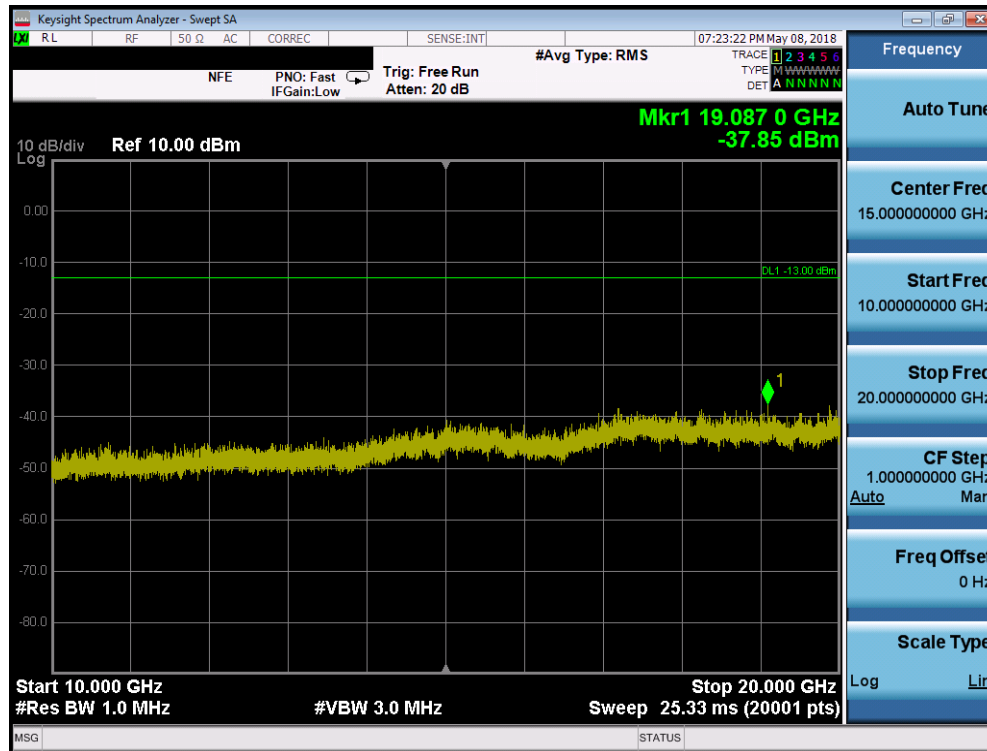


Plot 7-27. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 29 of 119

Cellular CDMA Mode

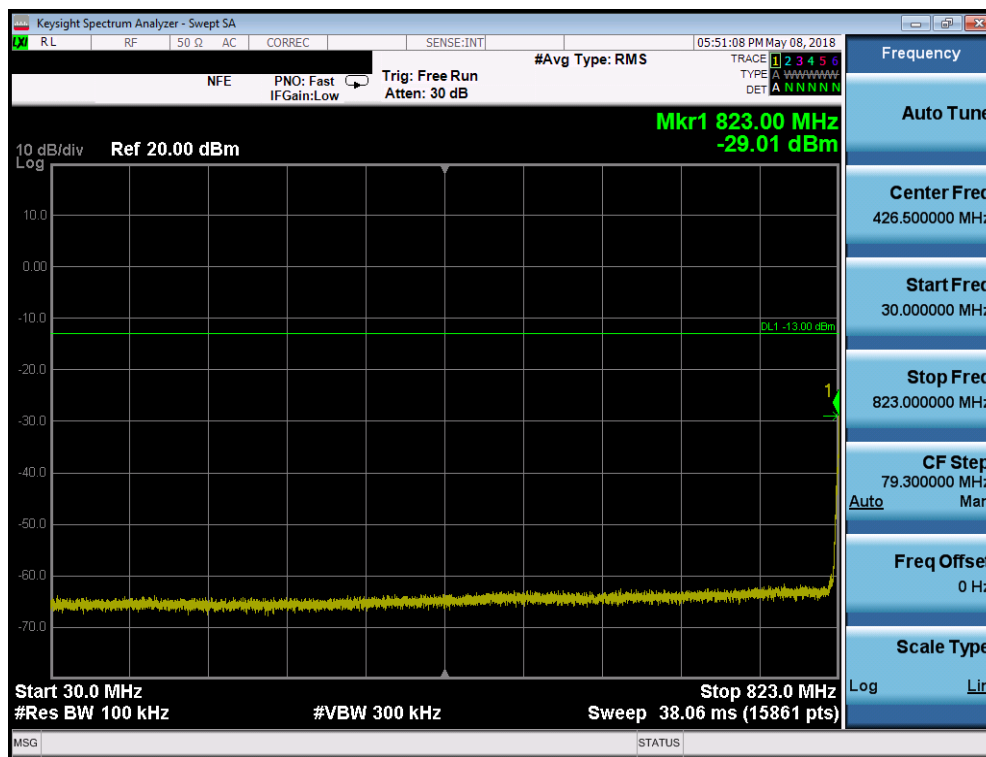


Plot 7-28. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

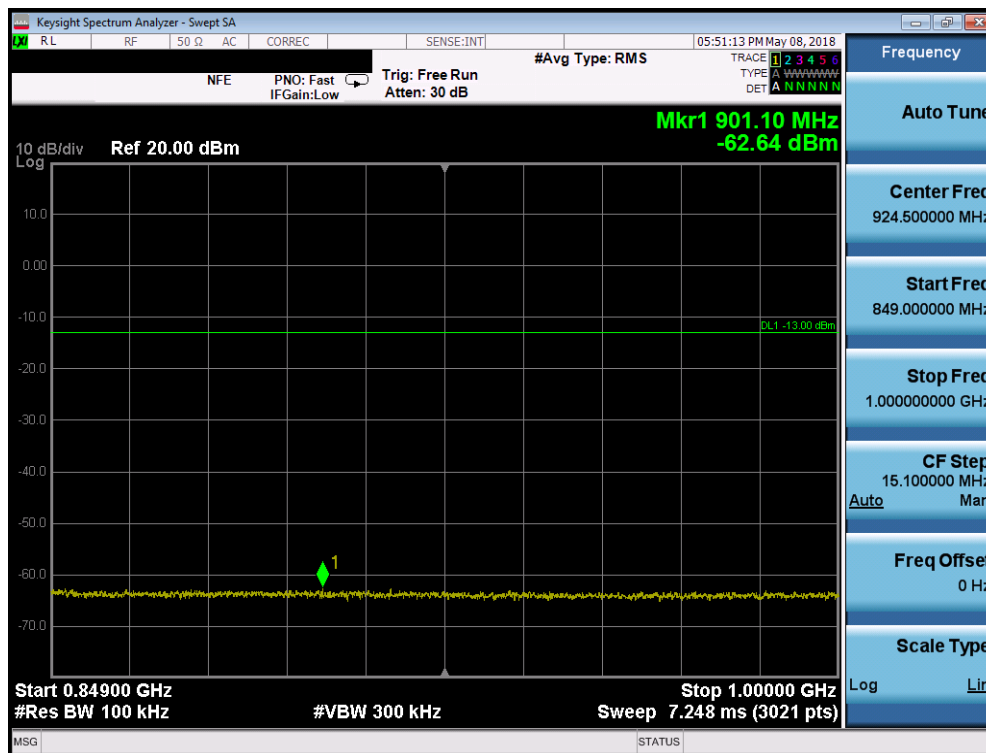


Plot 7-29. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 30 of 119

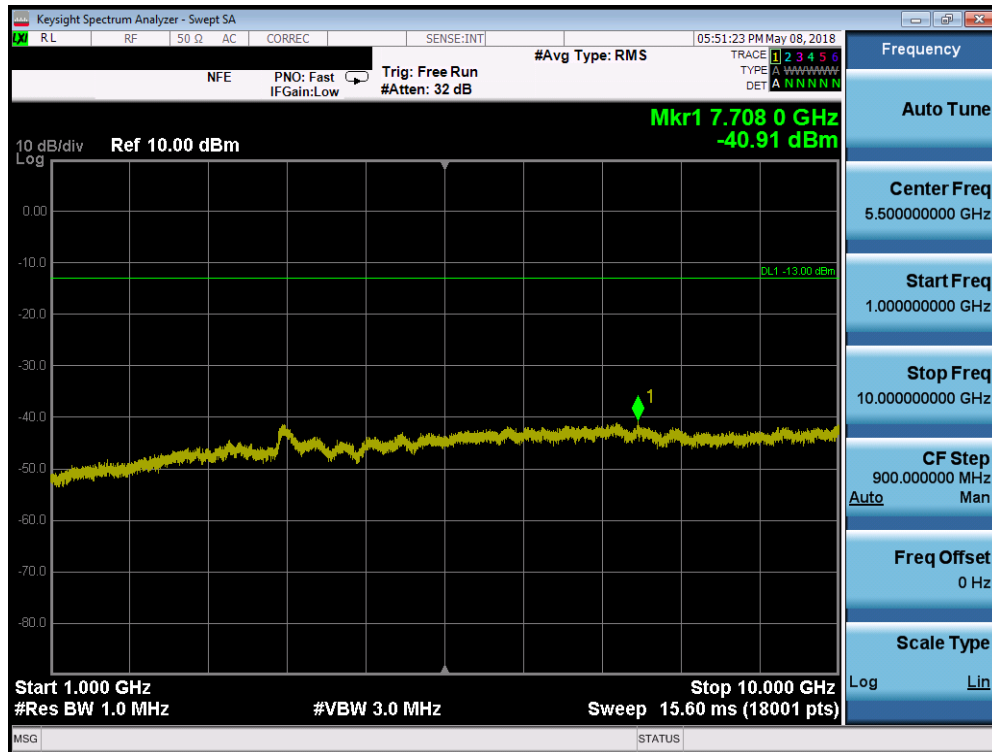


Plot 7-30. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

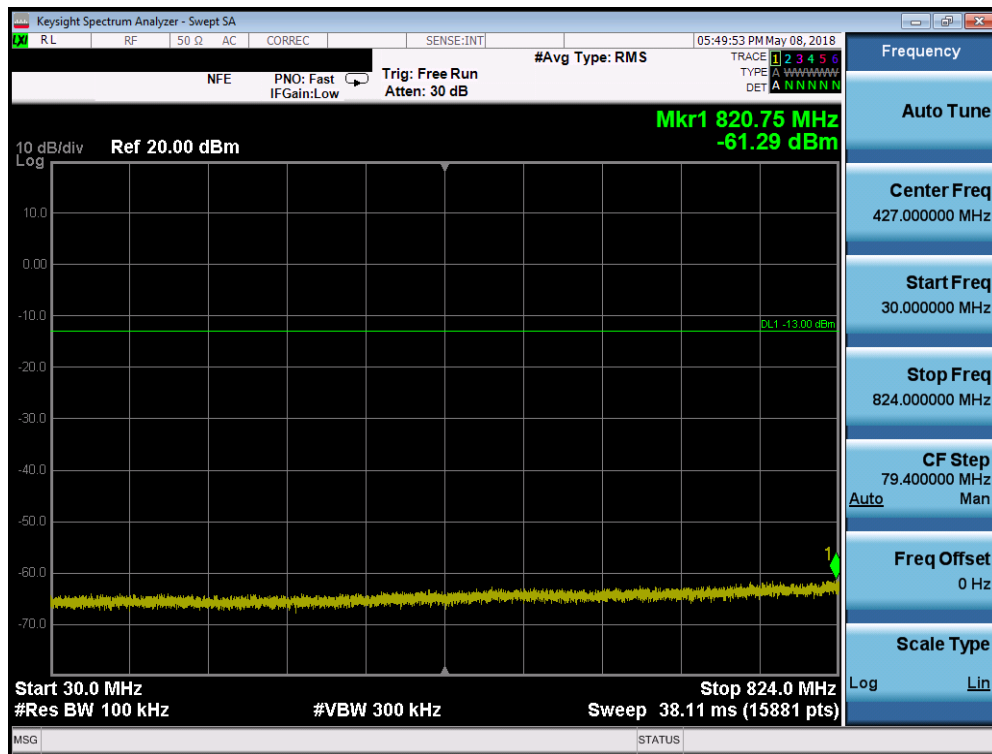


Plot 7-31. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 31 of 119

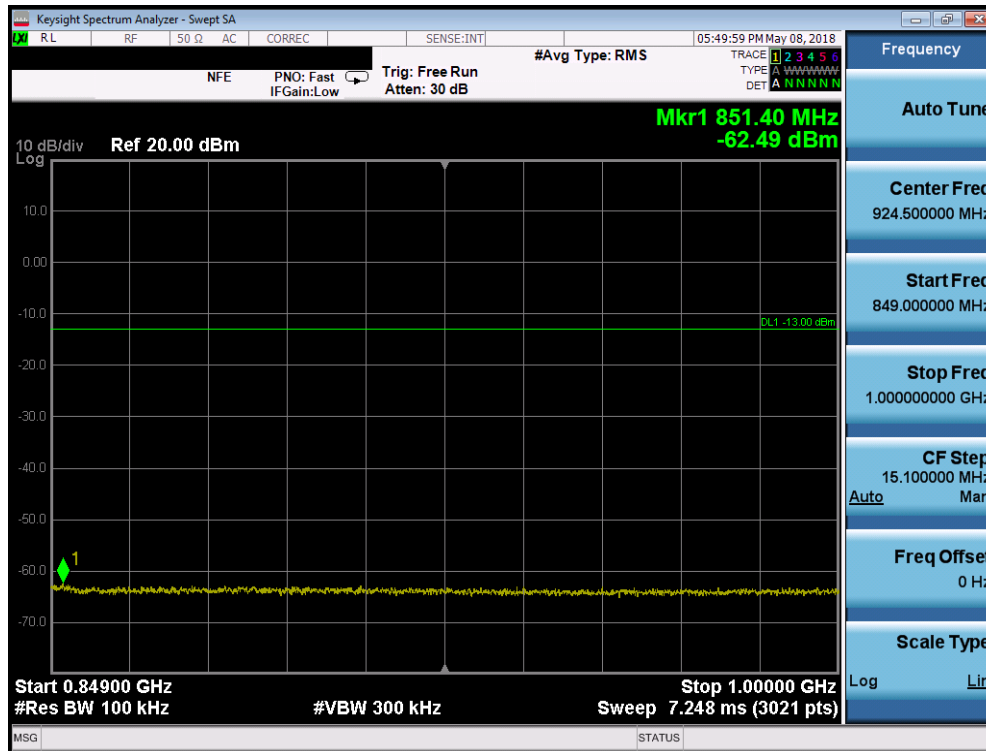


Plot 7-32. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

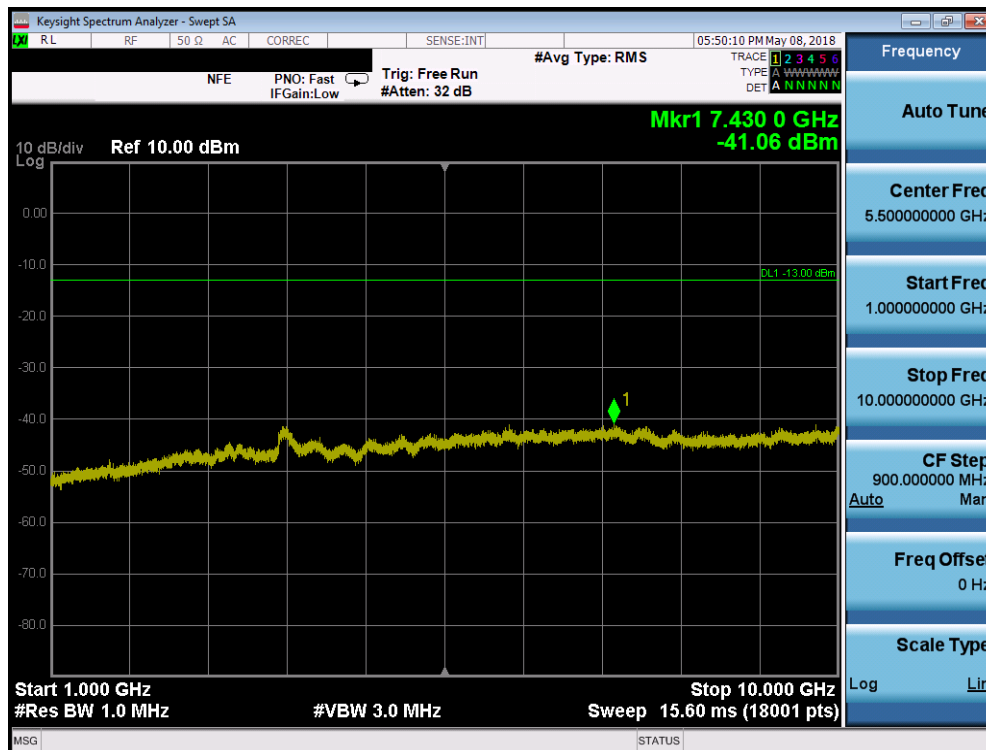


Plot 7-33. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 32 of 119

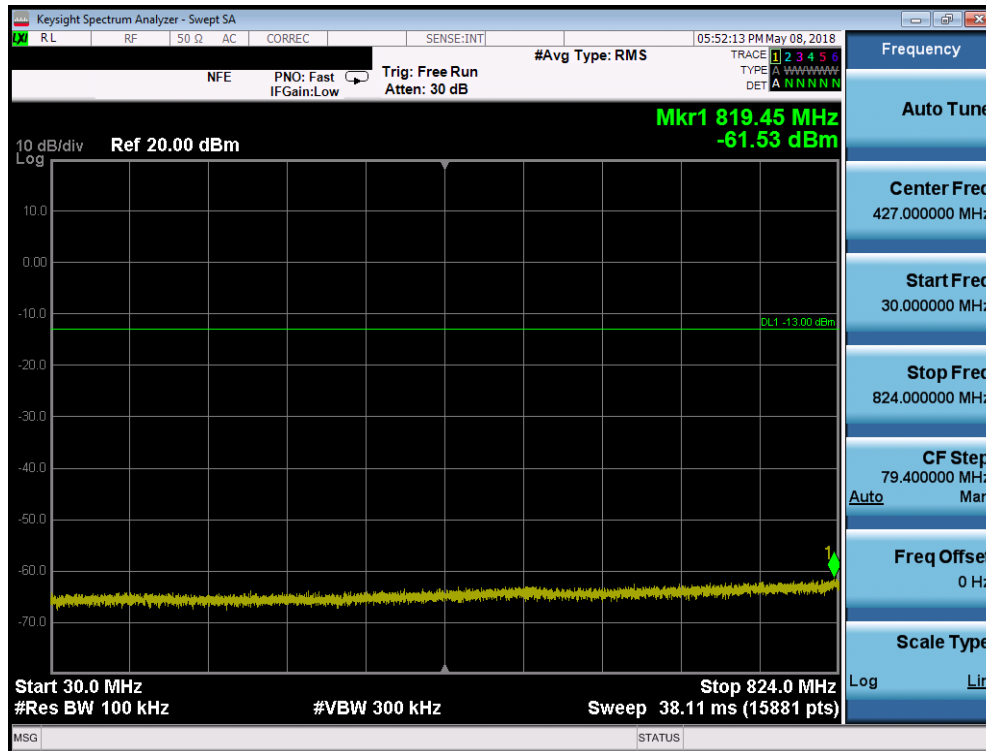


Plot 7-34. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

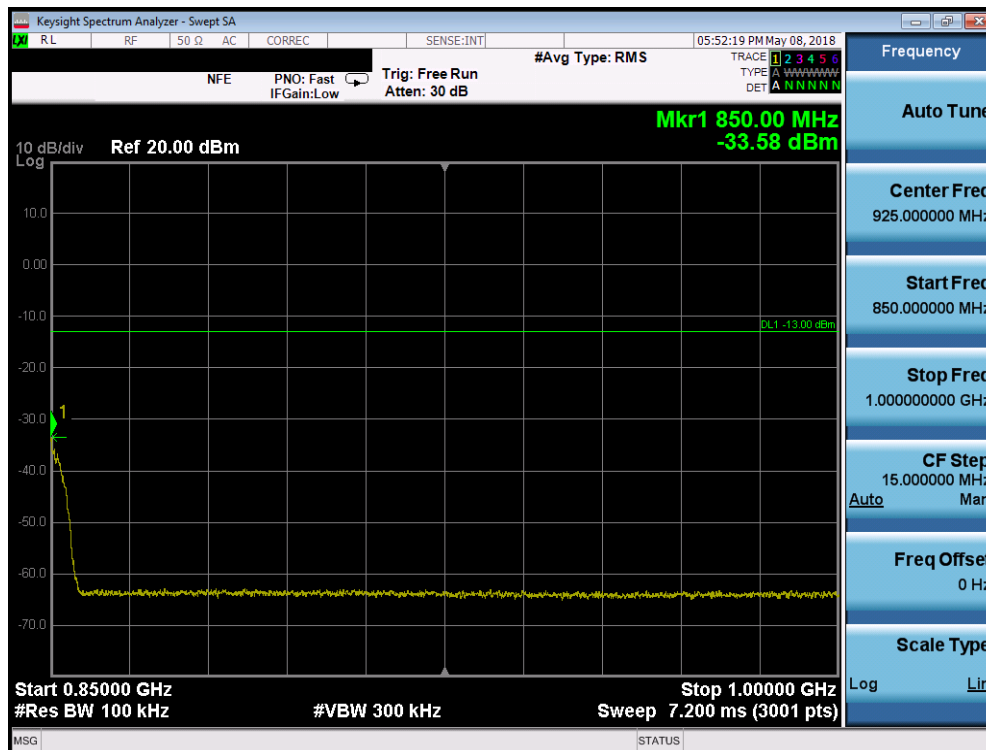

Plot 7-35. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

FCC ID: A3LSMN960U				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 33 of 119

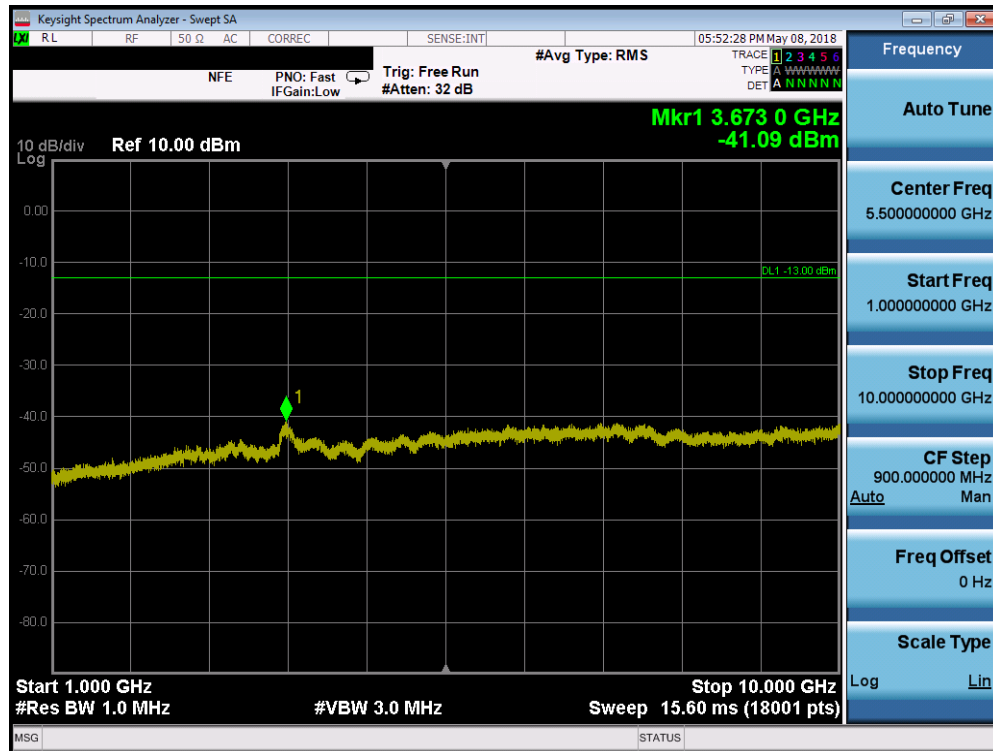


Plot 7-36. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 34 of 119

PCS CDMA Mode




Plot 7-37. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

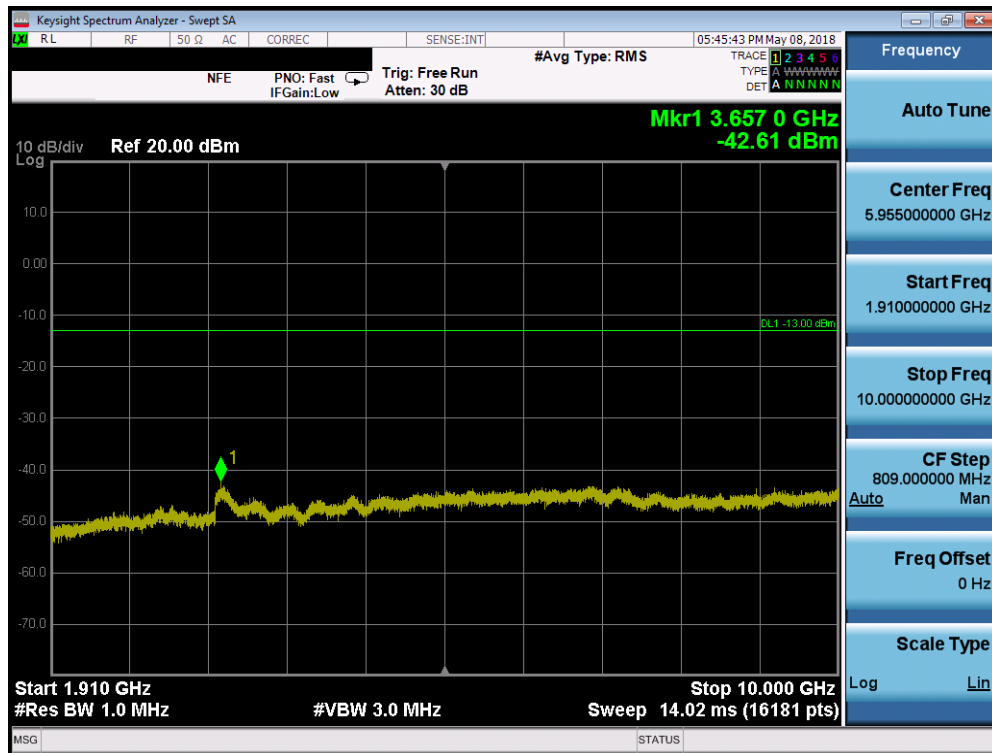

Plot 7-38. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 35 of 119

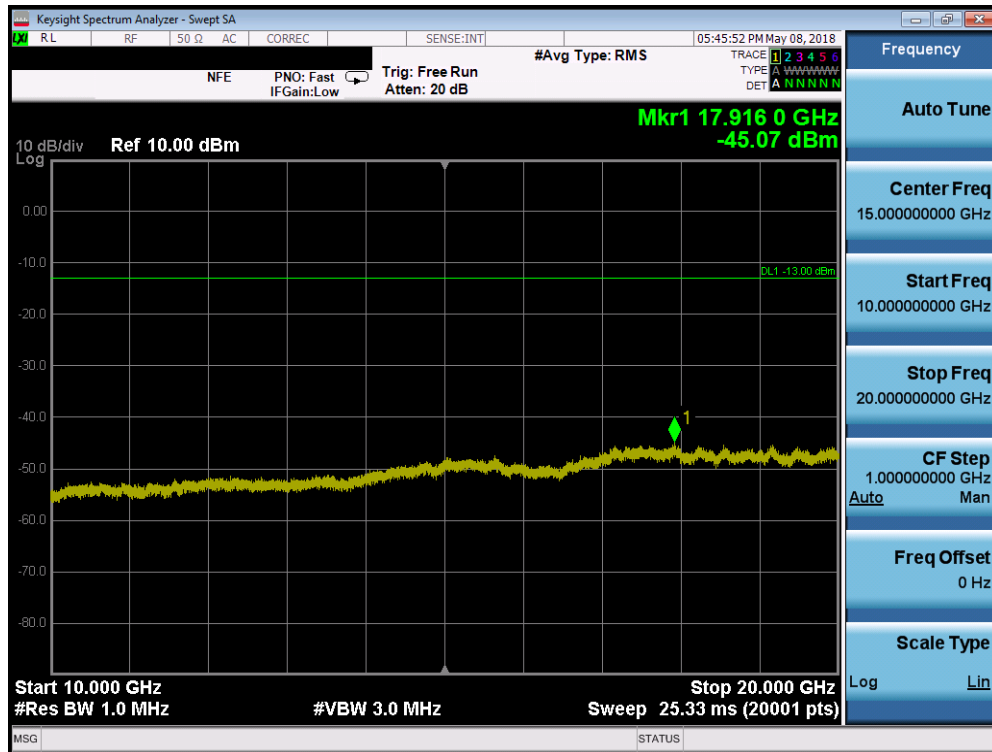


Plot 7-39. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)




Plot 7-40. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 36 of 119

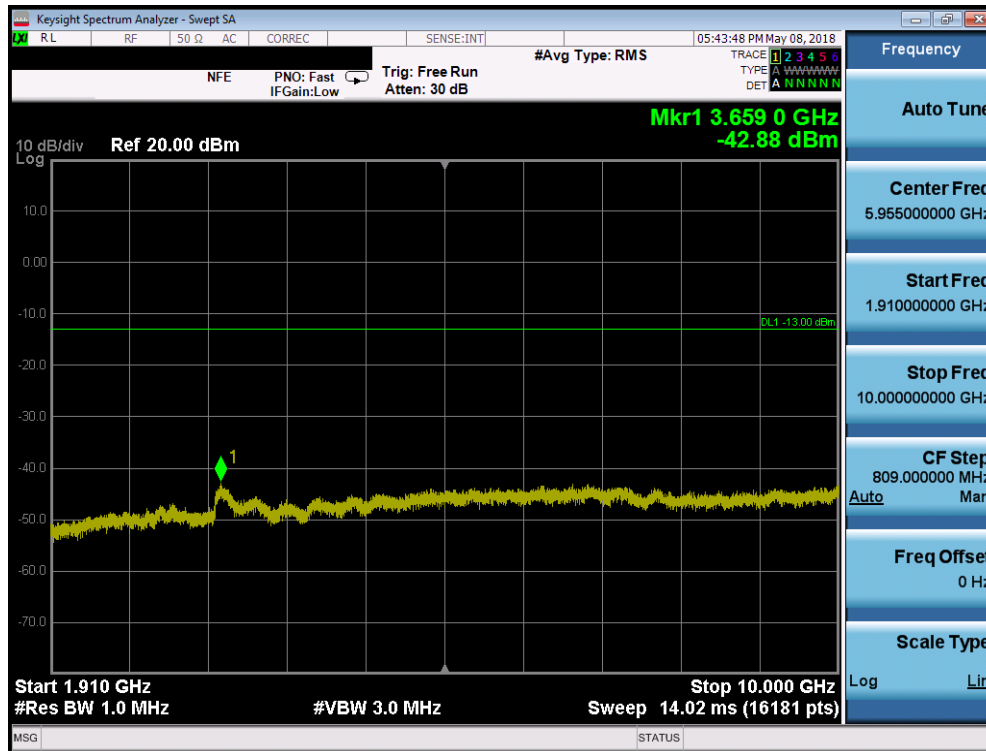


Plot 7-41. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

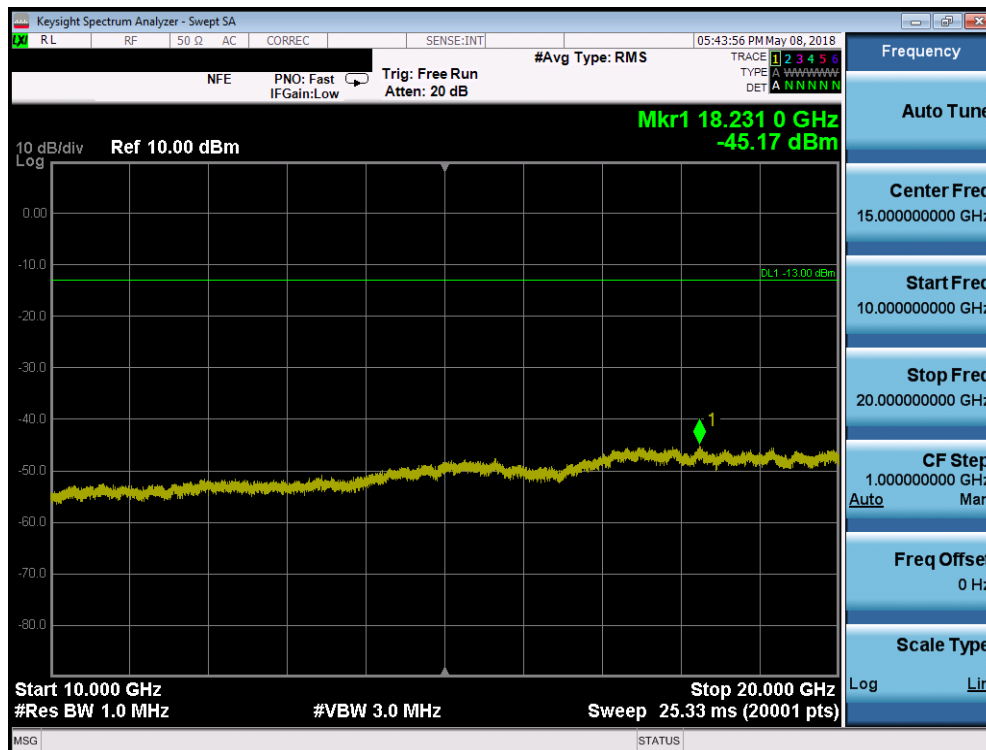


Plot 7-42. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 37 of 119

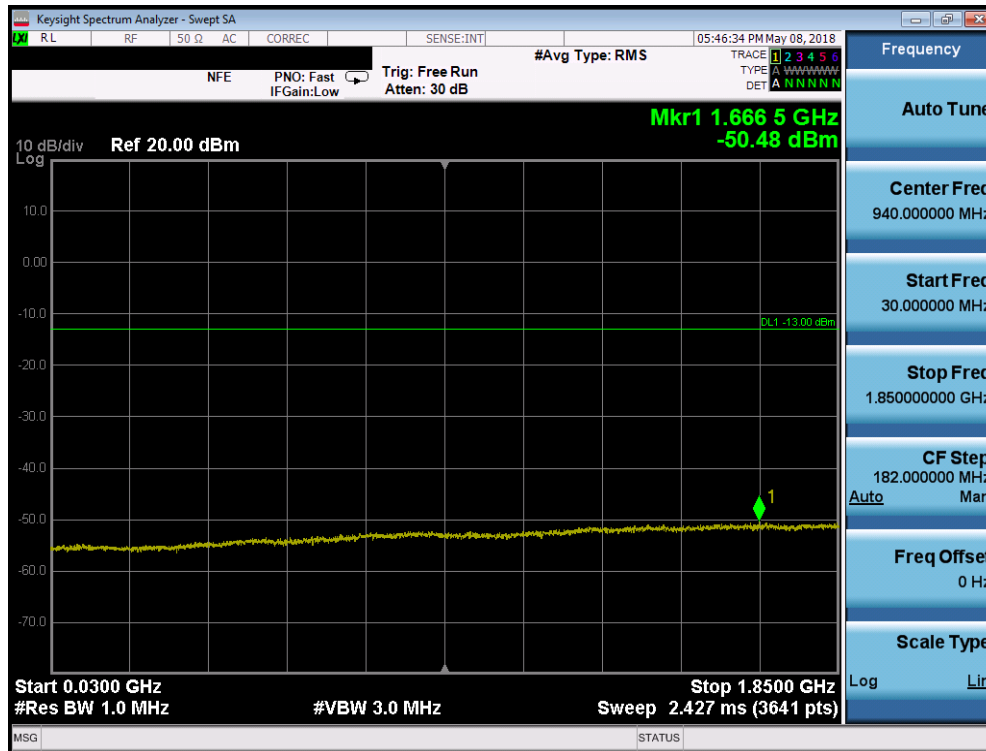


Plot 7-43. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

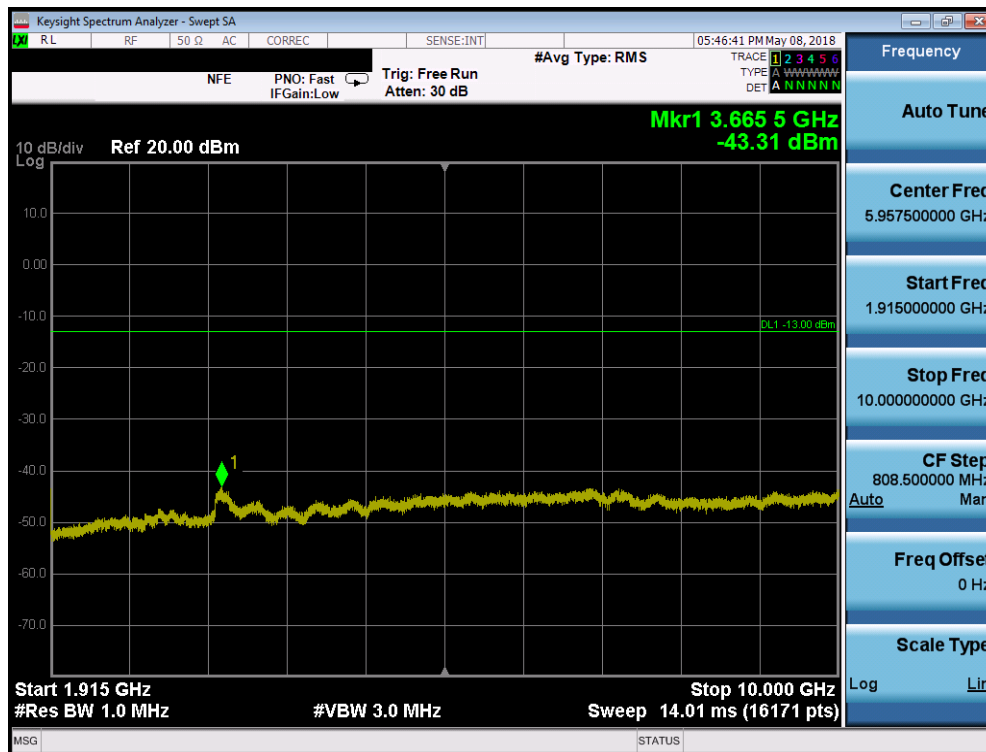

Plot 7-44. Conducted Spurious Plot (PCS CDMA Mode - High Channel)


FCC ID: A3LSMN960U				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 38 of 119

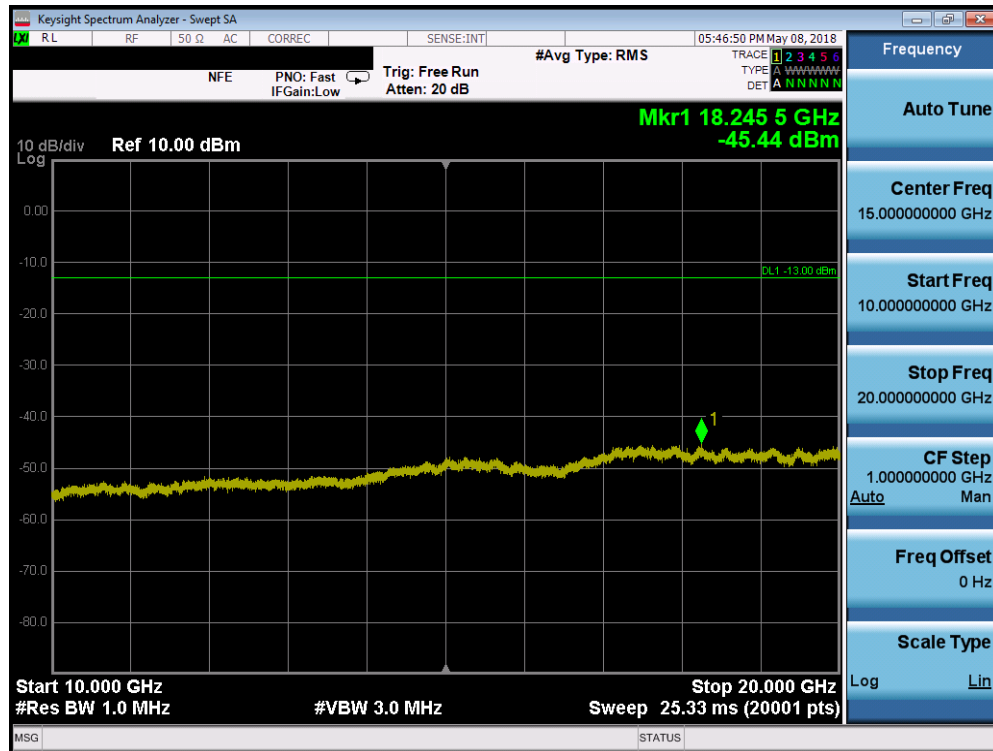


Plot 7-45. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 39 of 119

Cellular WCDMA Mode

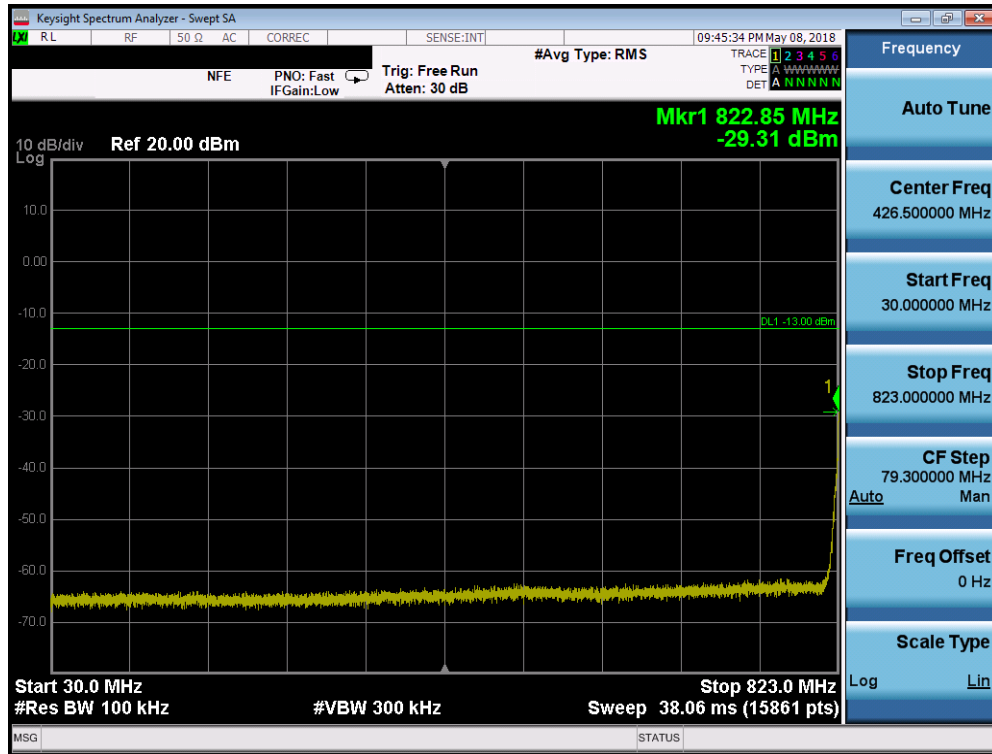


Plot 7-46. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

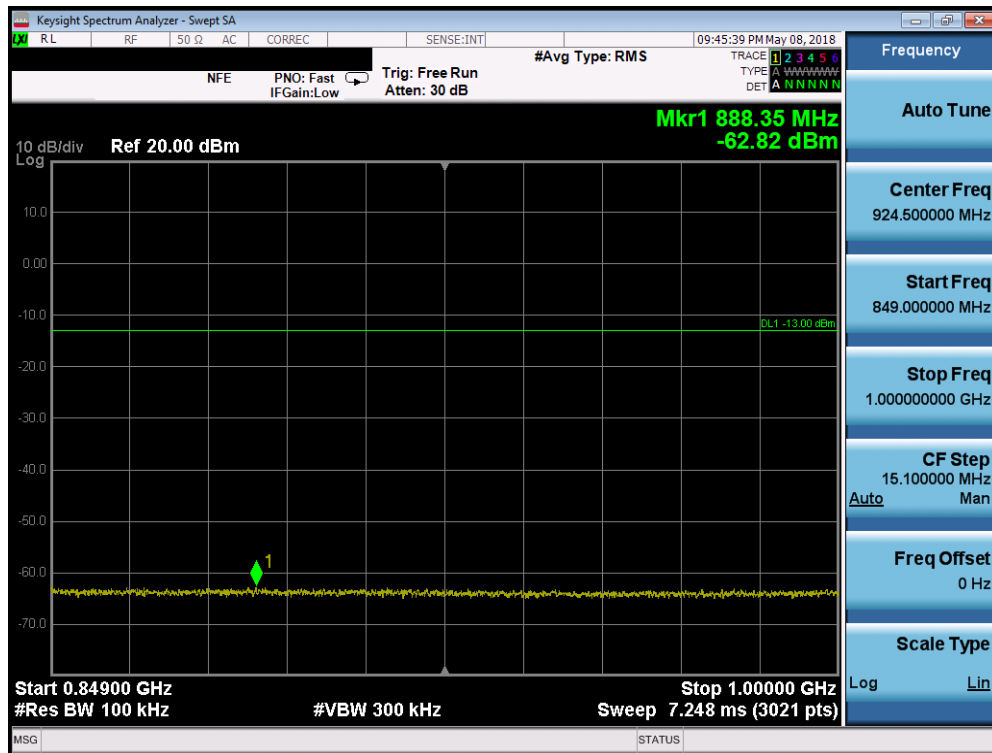


Plot 7-47. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 40 of 119

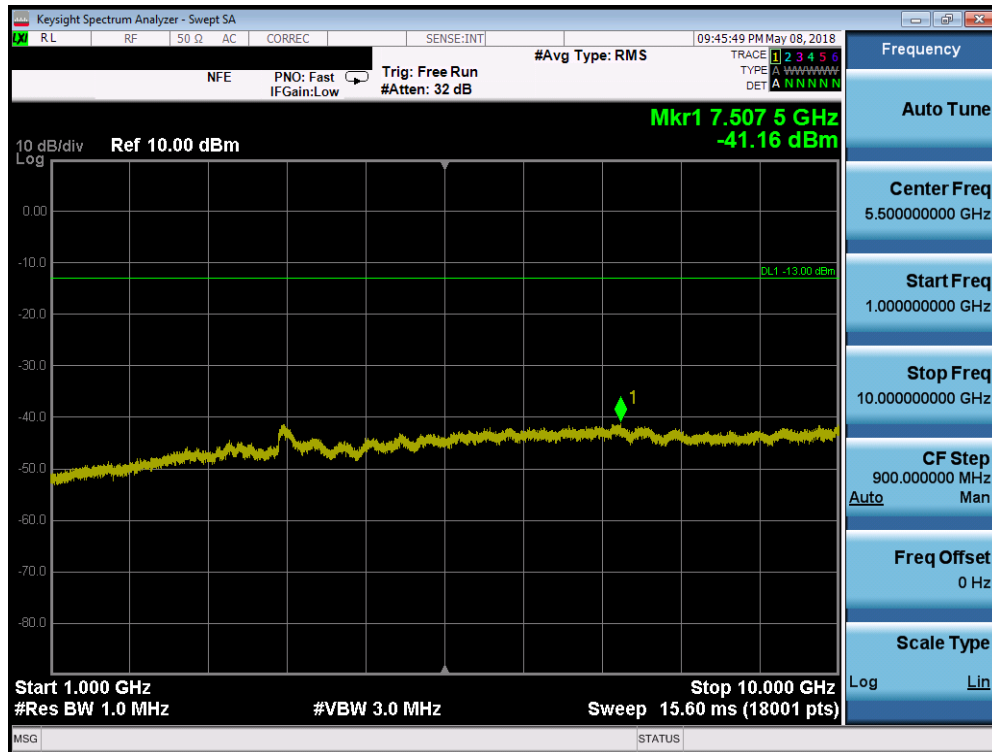


Plot 7-48. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

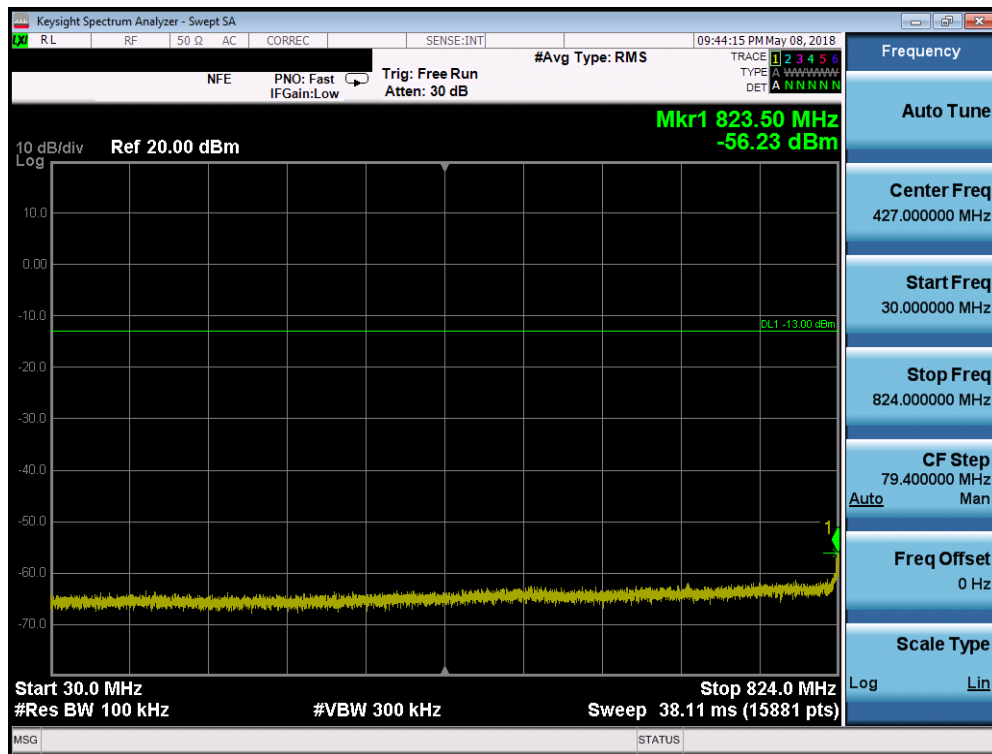


Plot 7-49. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 41 of 119

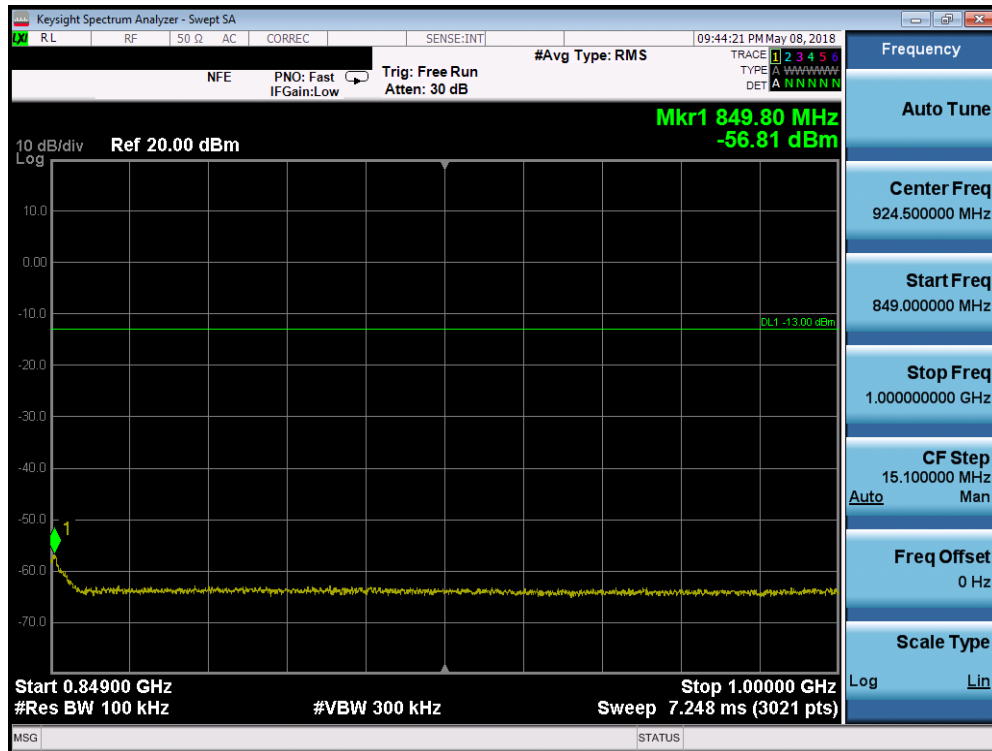


Plot 7-50. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

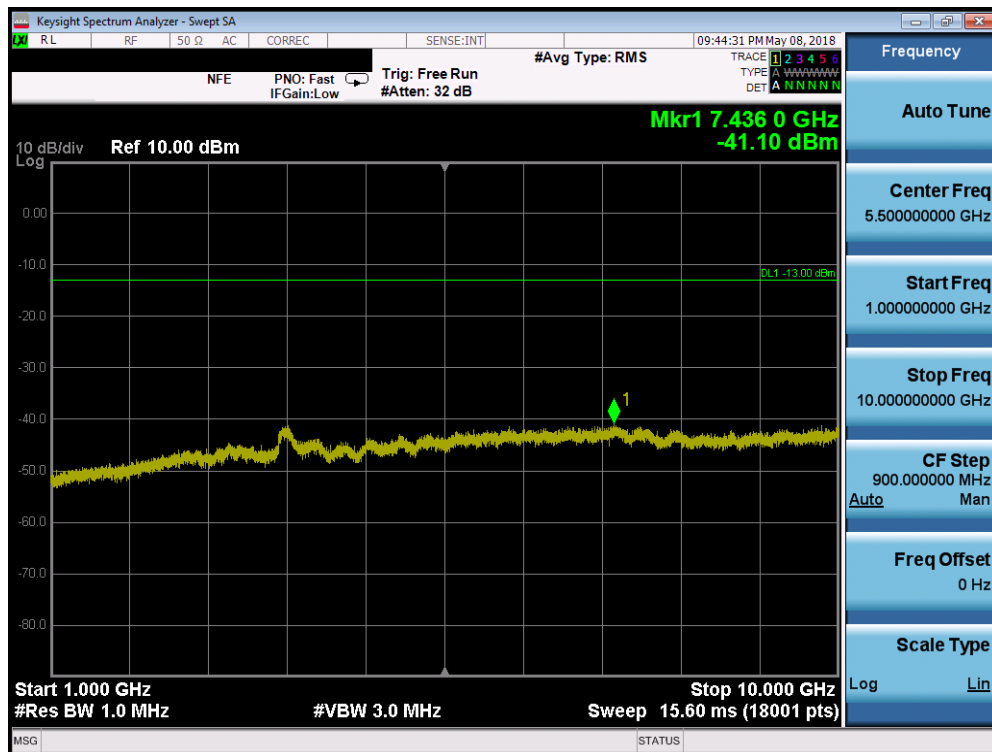


Plot 7-51. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 42 of 119

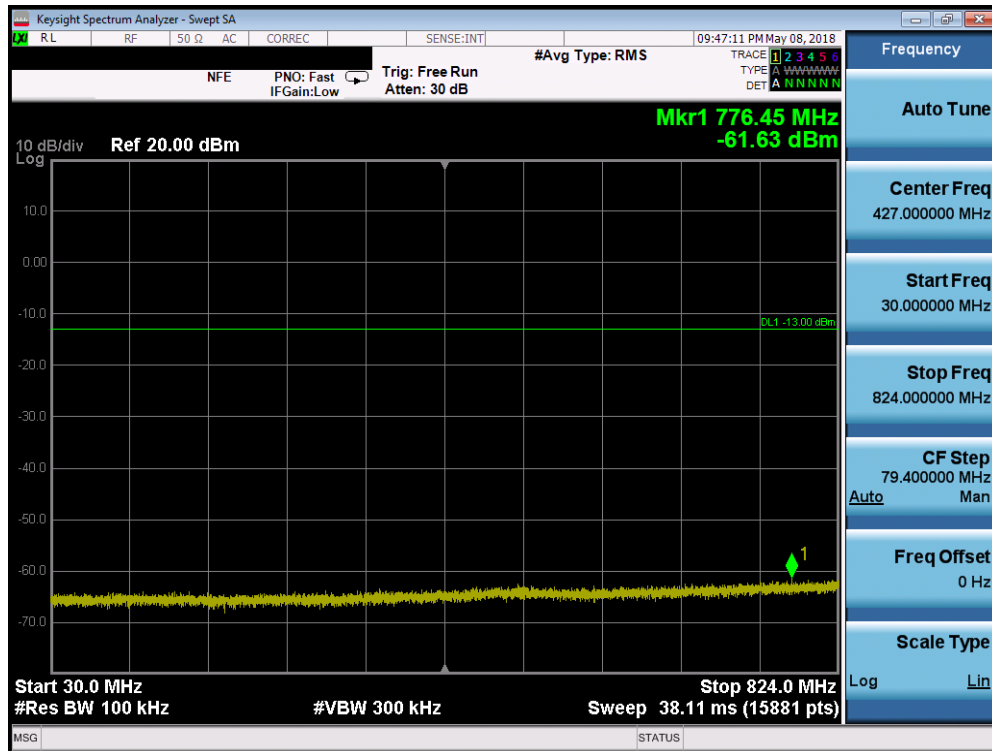


Plot 7-52. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

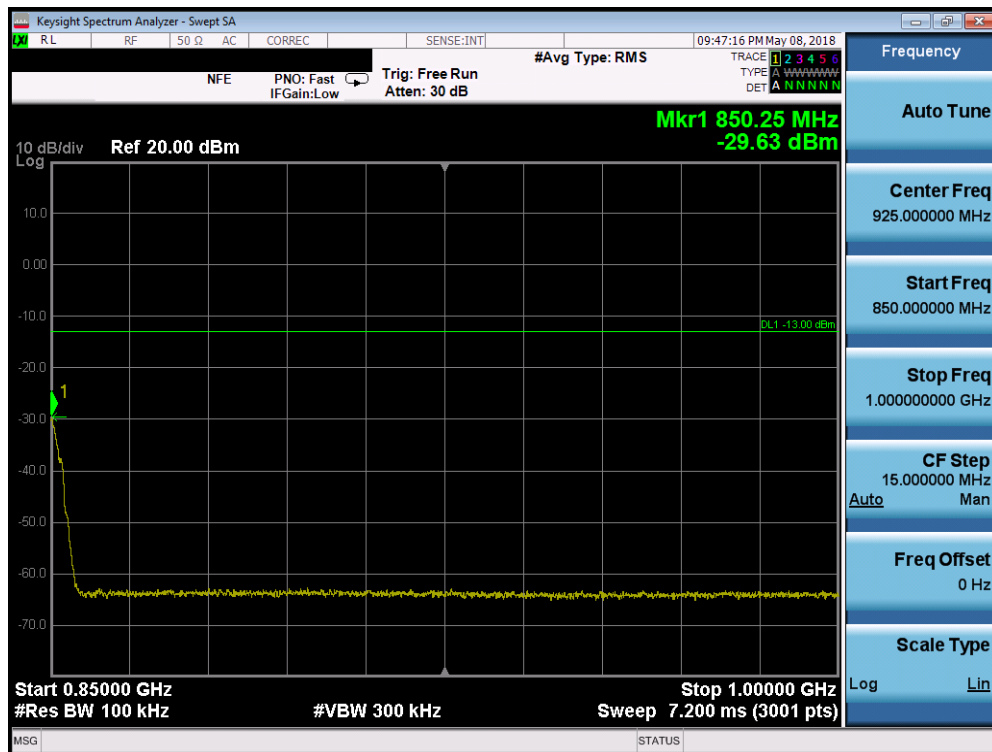

Plot 7-53. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 43 of 119

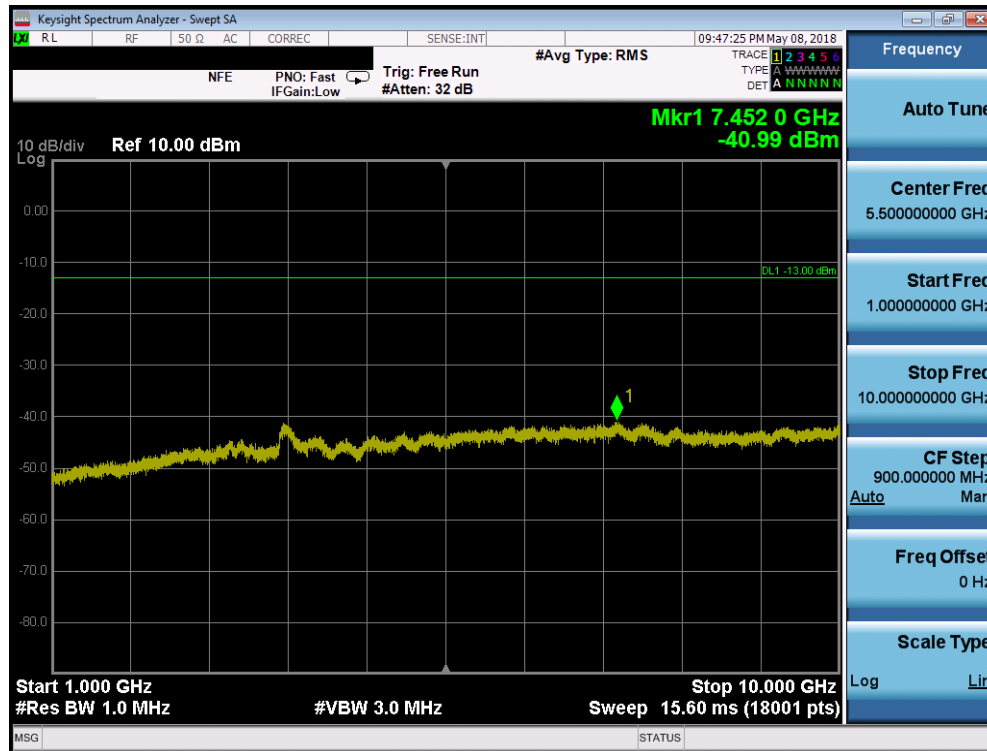


Plot 7-54. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 44 of 119

AWS WCDMA Mode

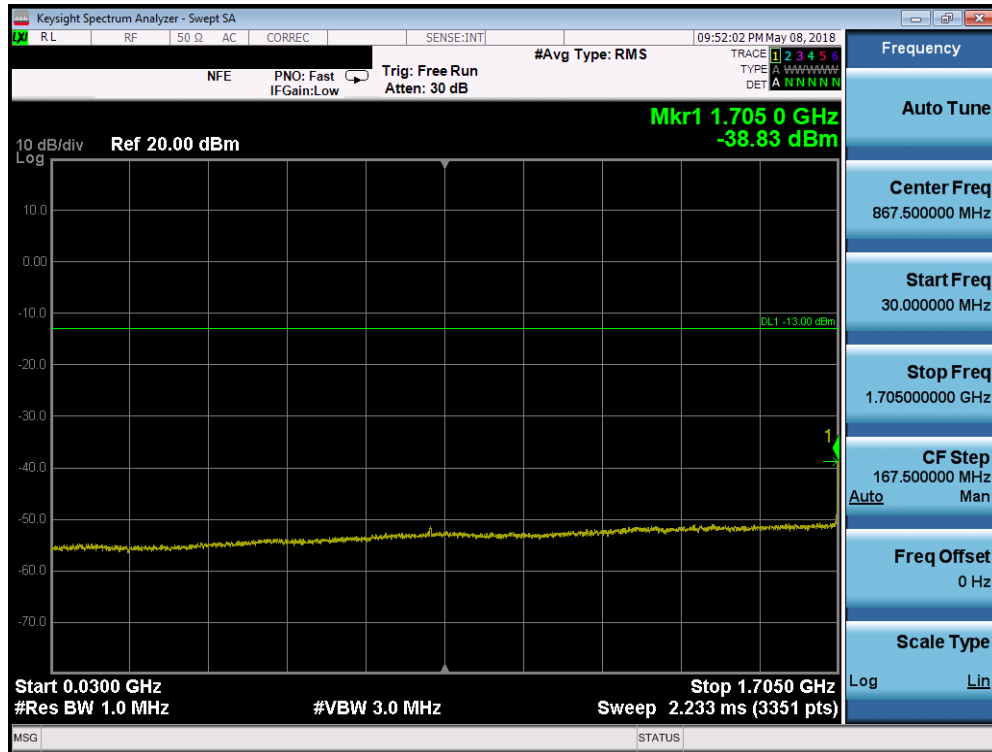


Plot 7-55. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

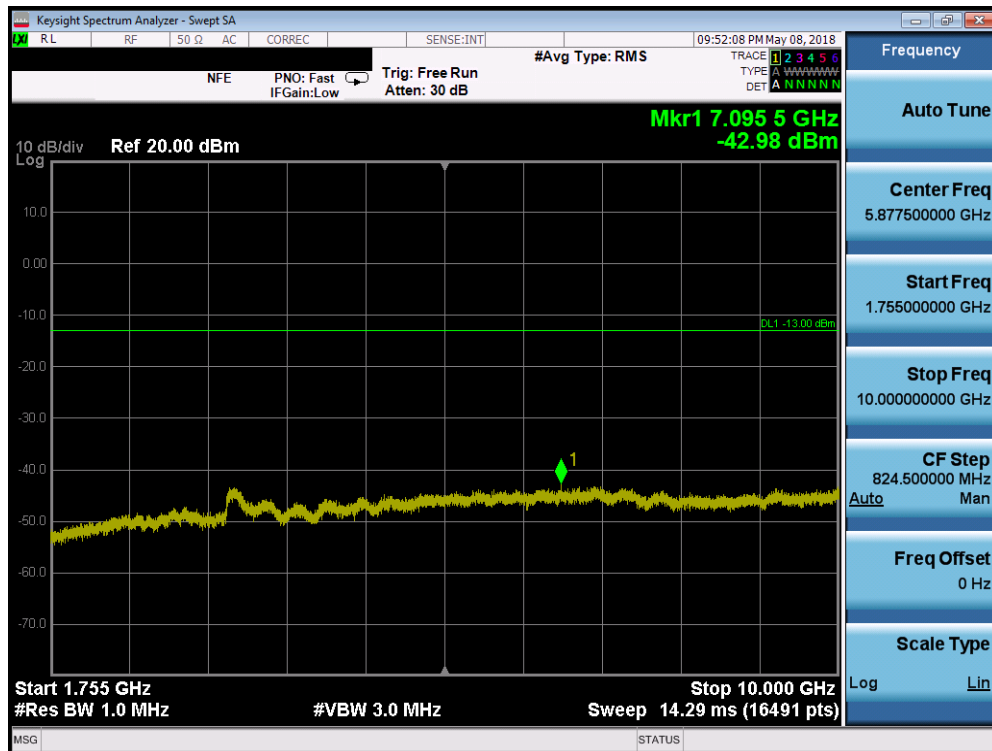


Plot 7-56. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 45 of 119

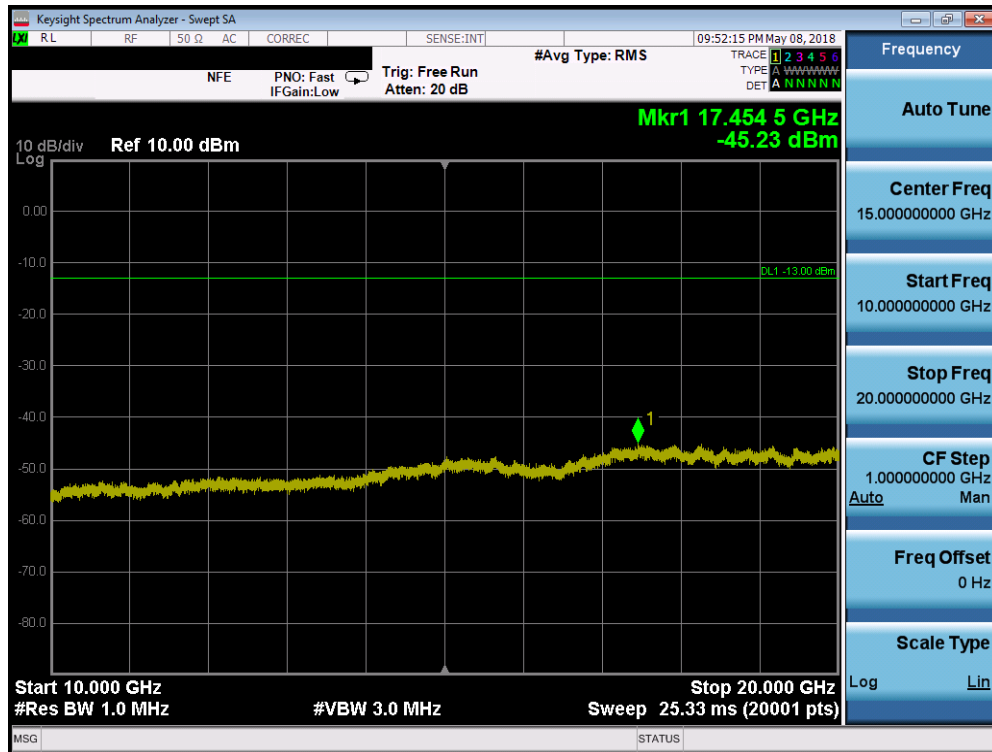


Plot 7-57. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

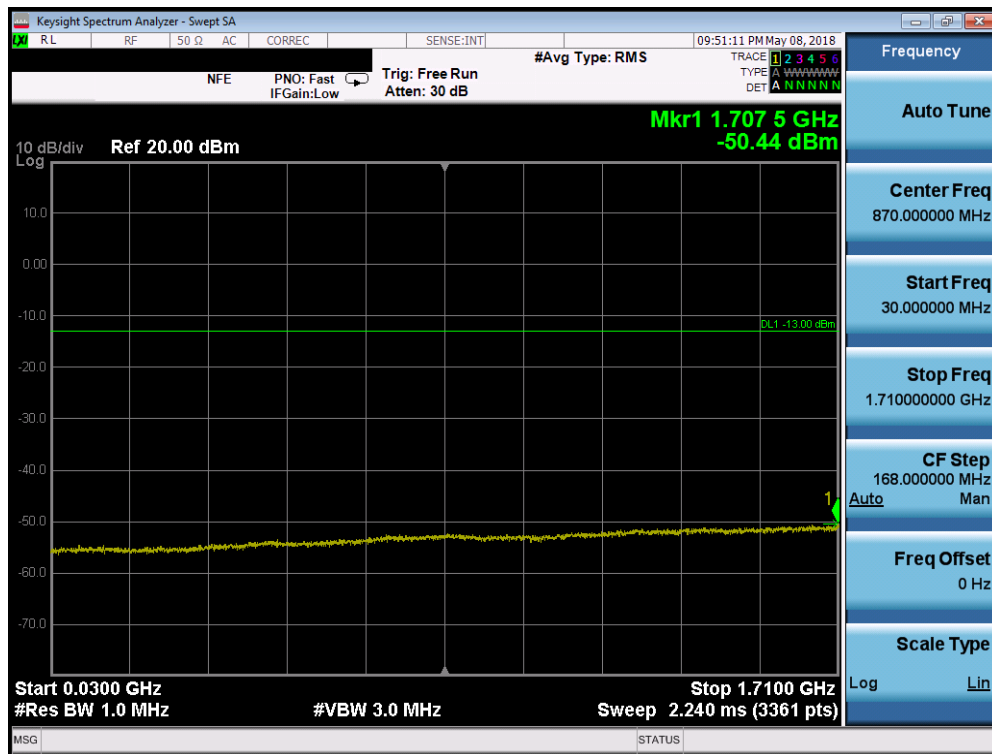


Plot 7-58. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 46 of 119

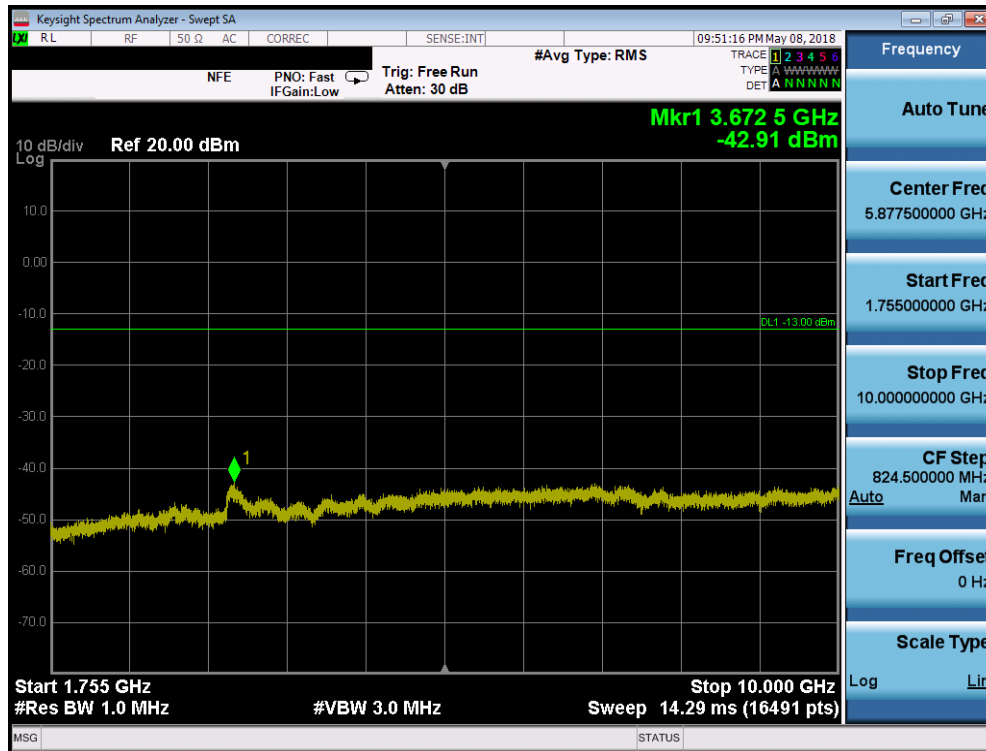


Plot 7-59. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

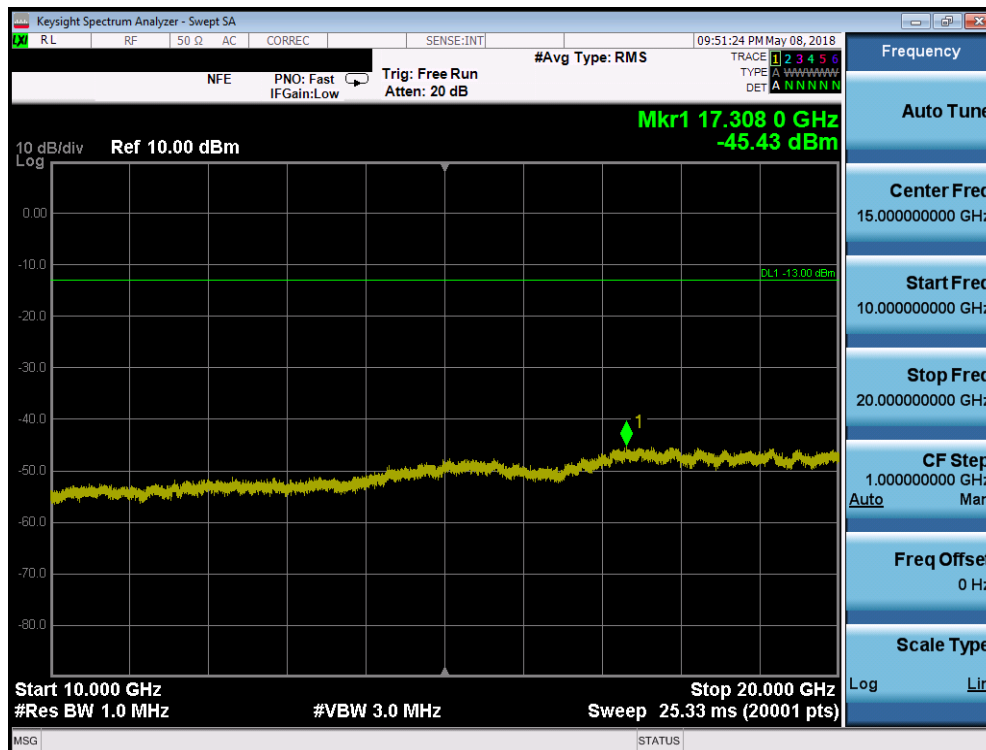


Plot 7-60. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 47 of 119

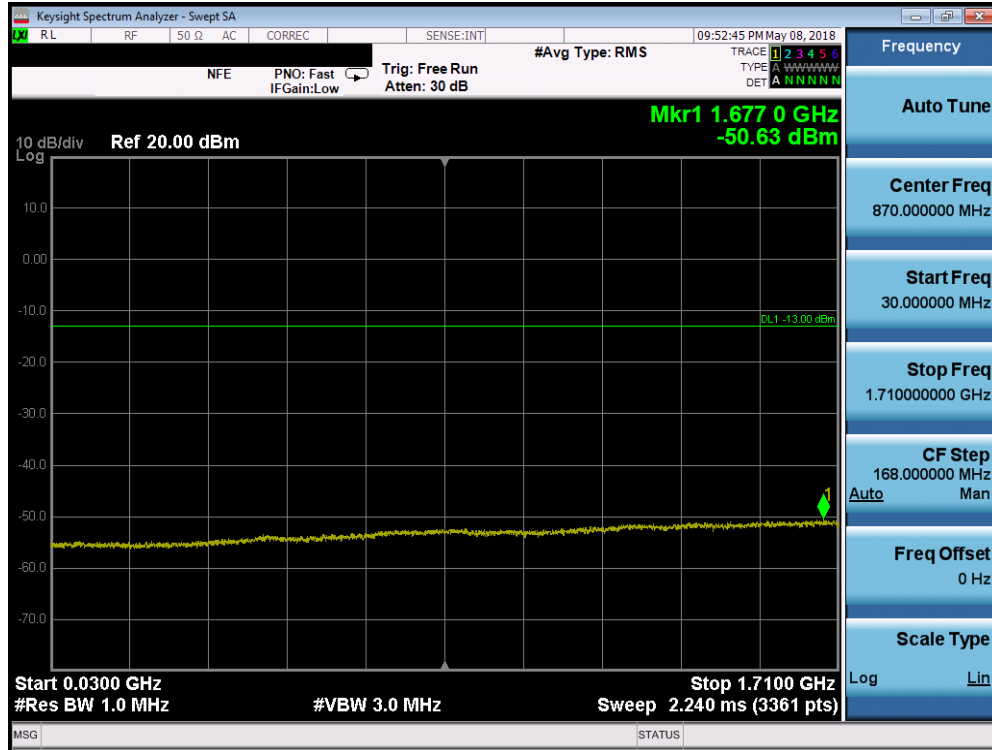


Plot 7-61. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

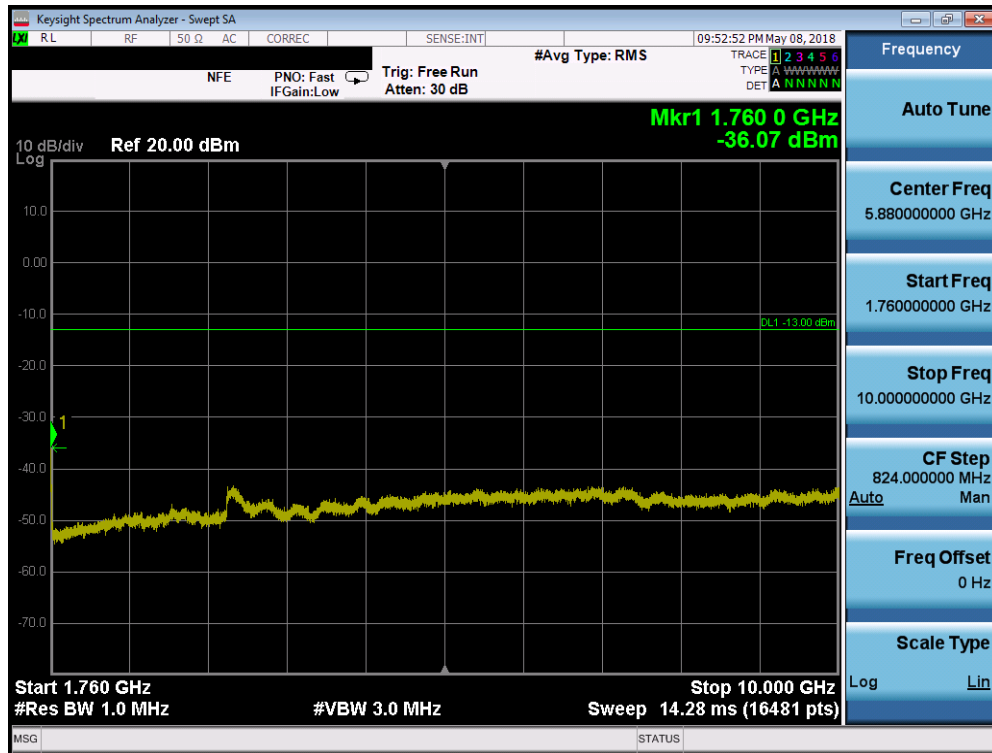


Plot 7-62. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 48 of 119

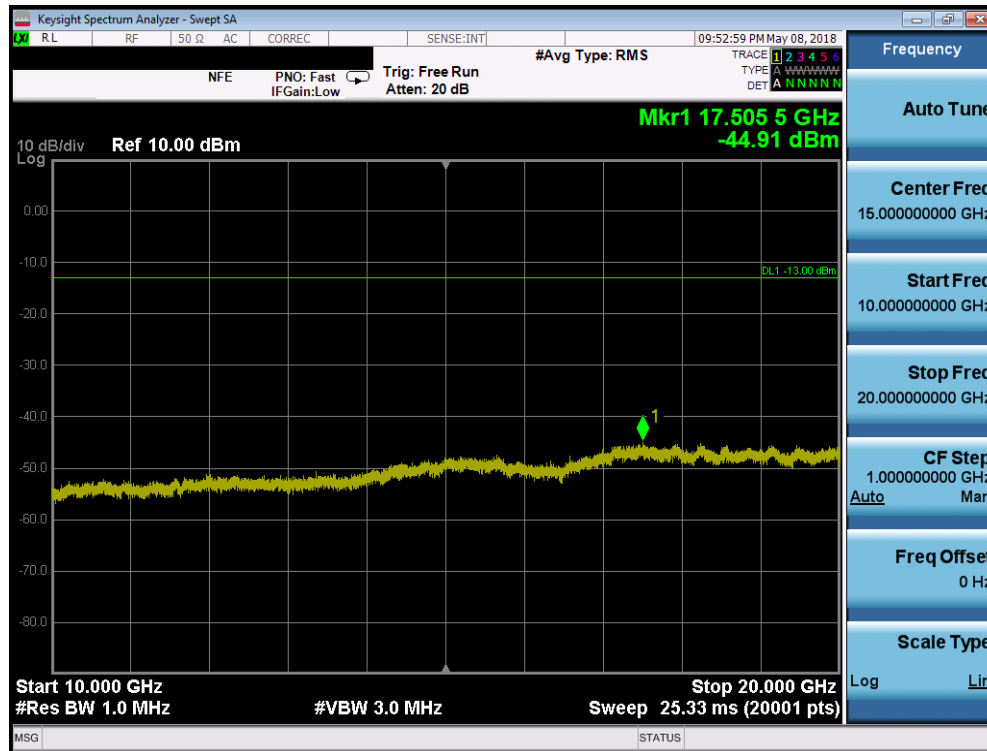


Plot 7-63. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 49 of 119

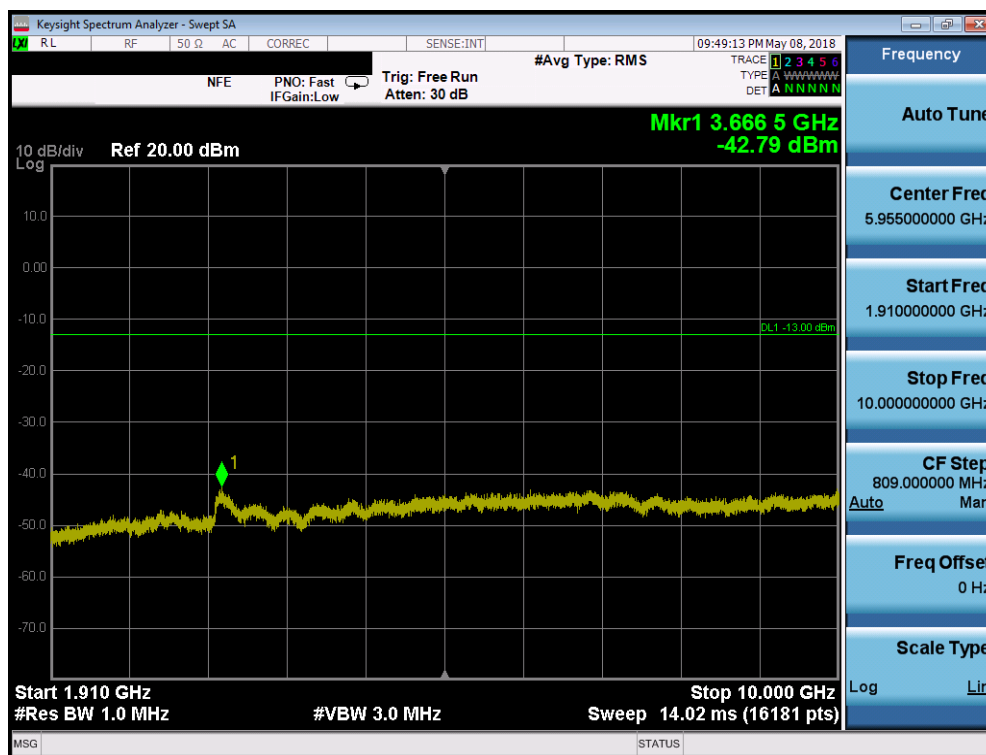

© 2018 PCTEST Engineering Laboratory, Inc. V 8.0 04/05/2018
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

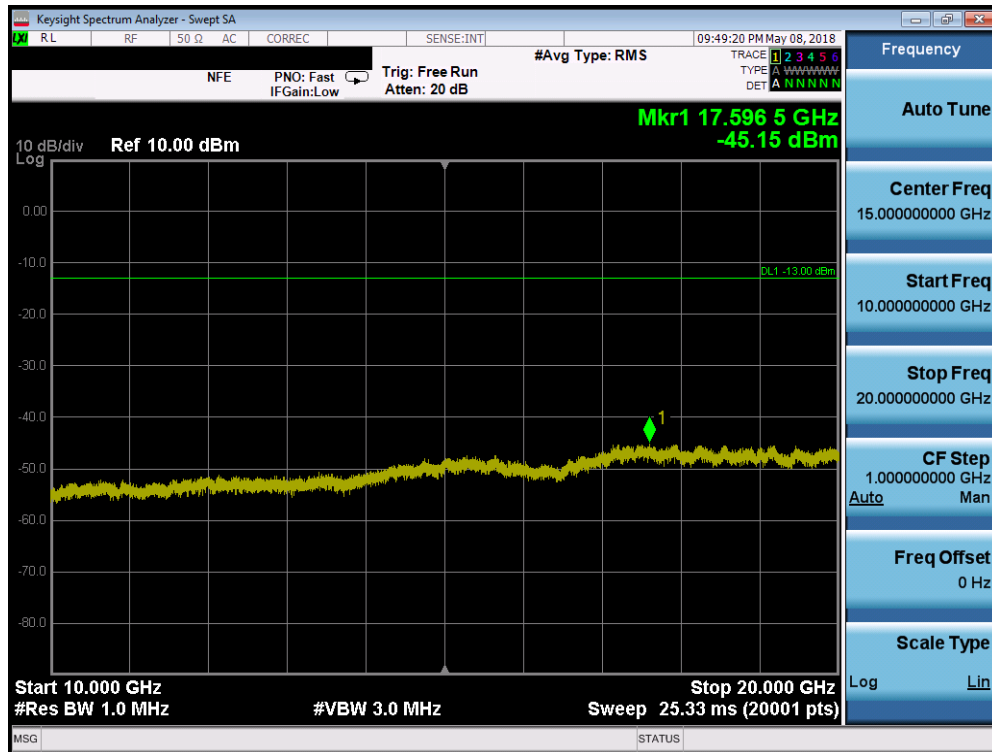


Plot 7-66. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

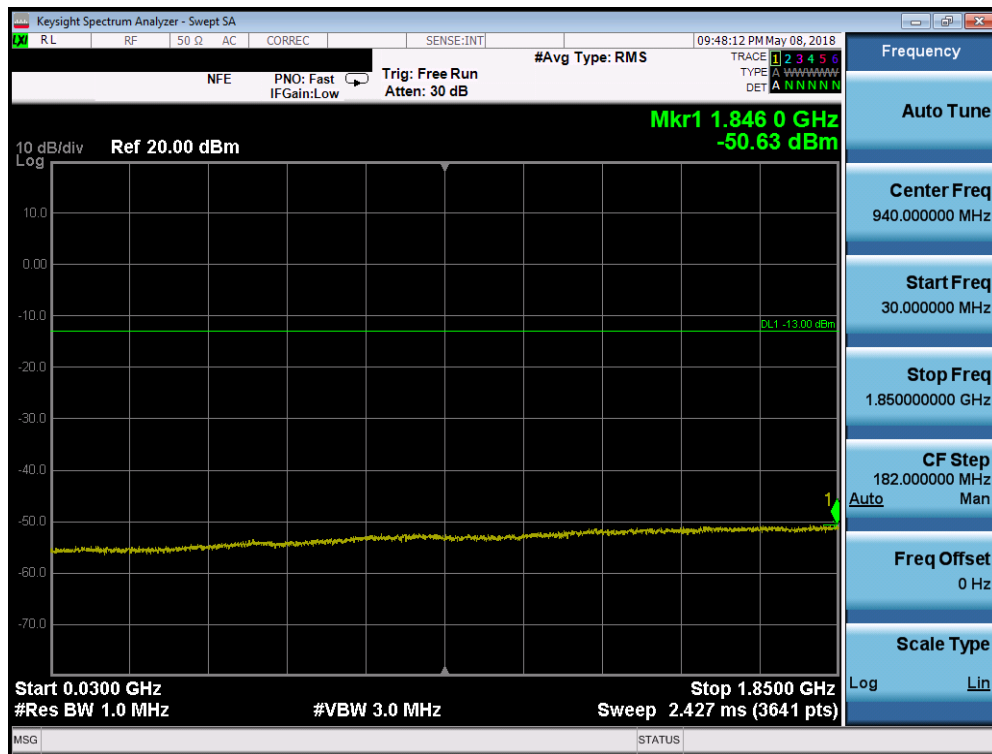


Plot 7-67. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 51 of 119

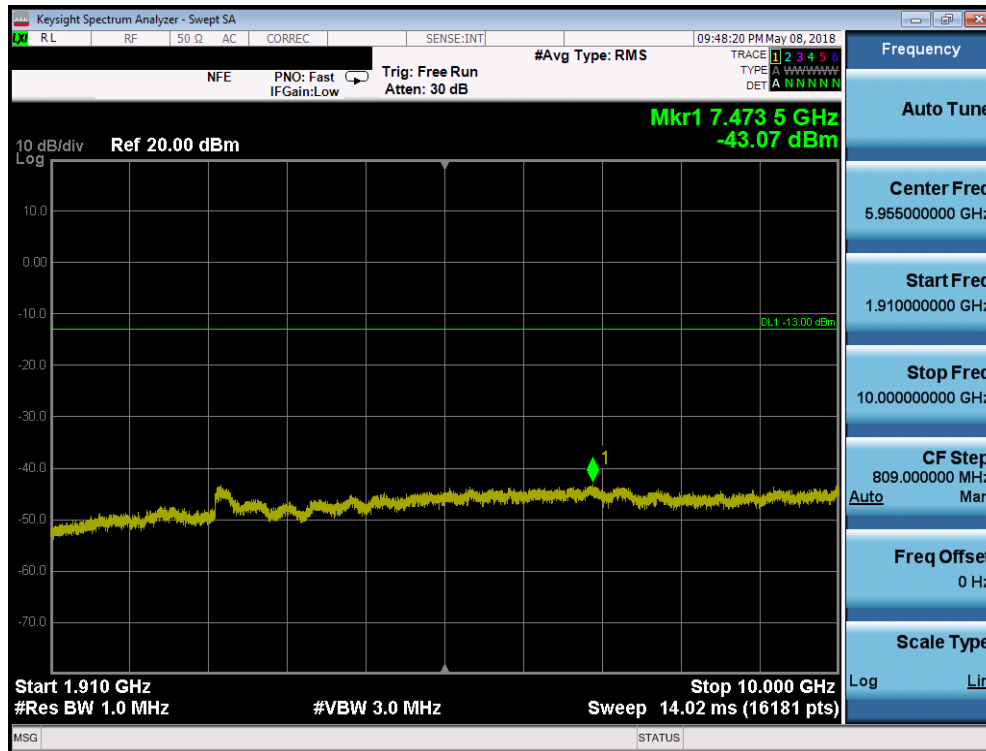


Plot 7-68. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

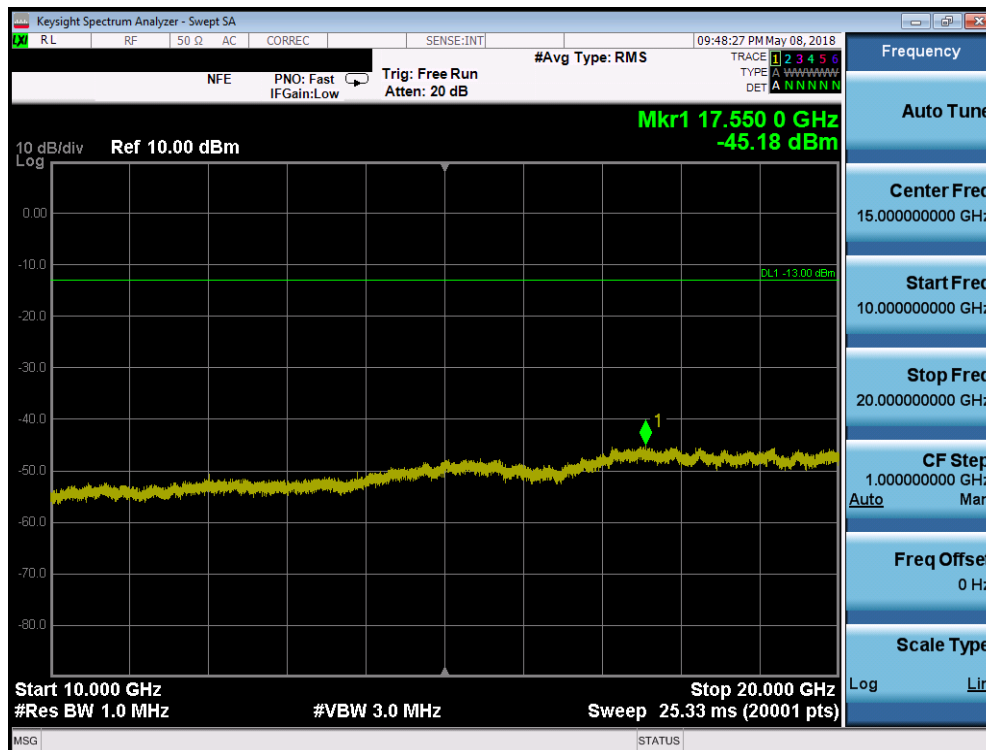


Plot 7-69. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 52 of 119

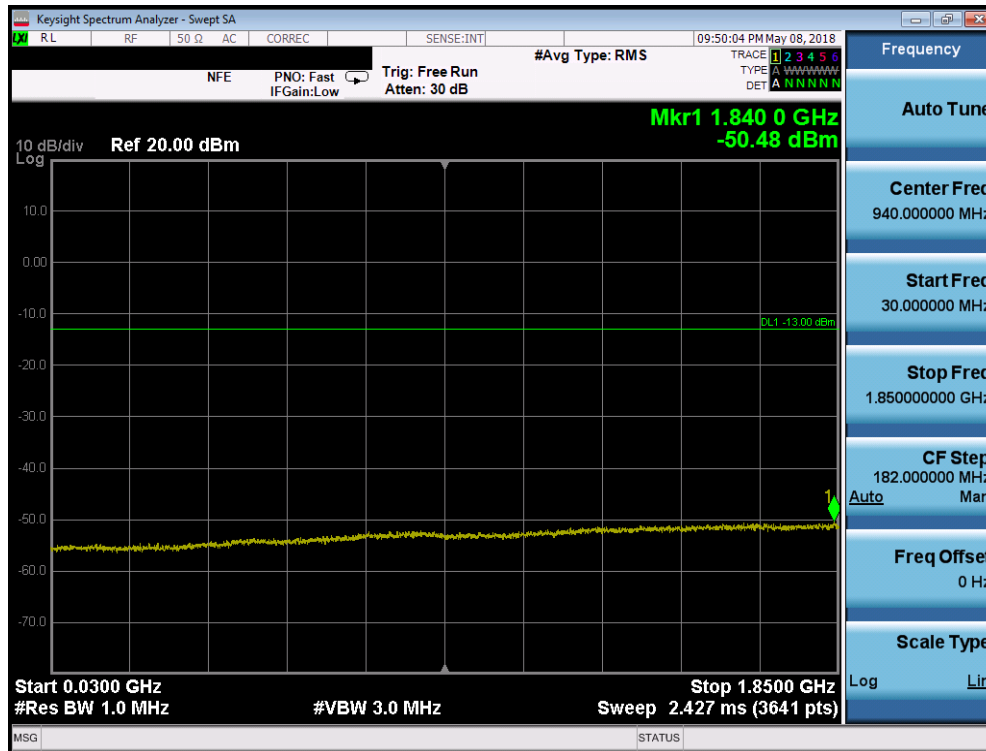


Plot 7-70. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

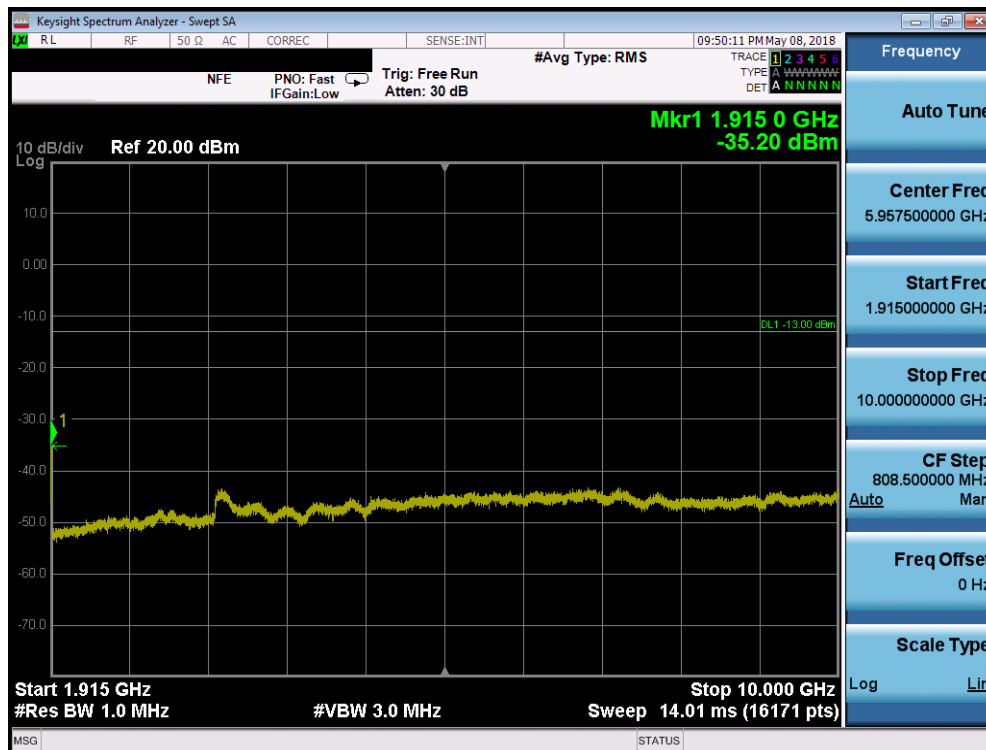

Plot 7-71. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 53 of 119

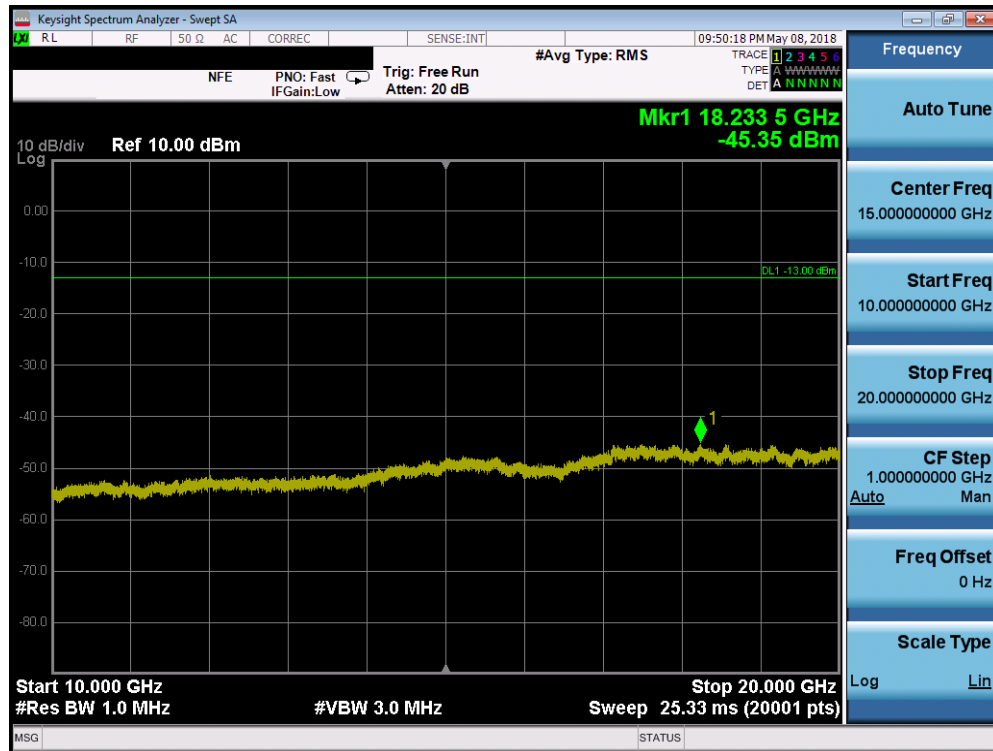

Plot 7-72. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 54 of 119

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq$ 1% of the emission bandwidth
4. VBW $\geq$ 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq$ 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 55 of 119




© 2018 PCTEST Engineering Laboratory, Inc. V 8.0 04/05/2018
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


Note:

Both GSM and GPRS mode were investigated, and GSM mode was found to be worst case for band edge emission. So, GSM mode is included in the report instead of GPRS mode.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset			Page 57 of 119

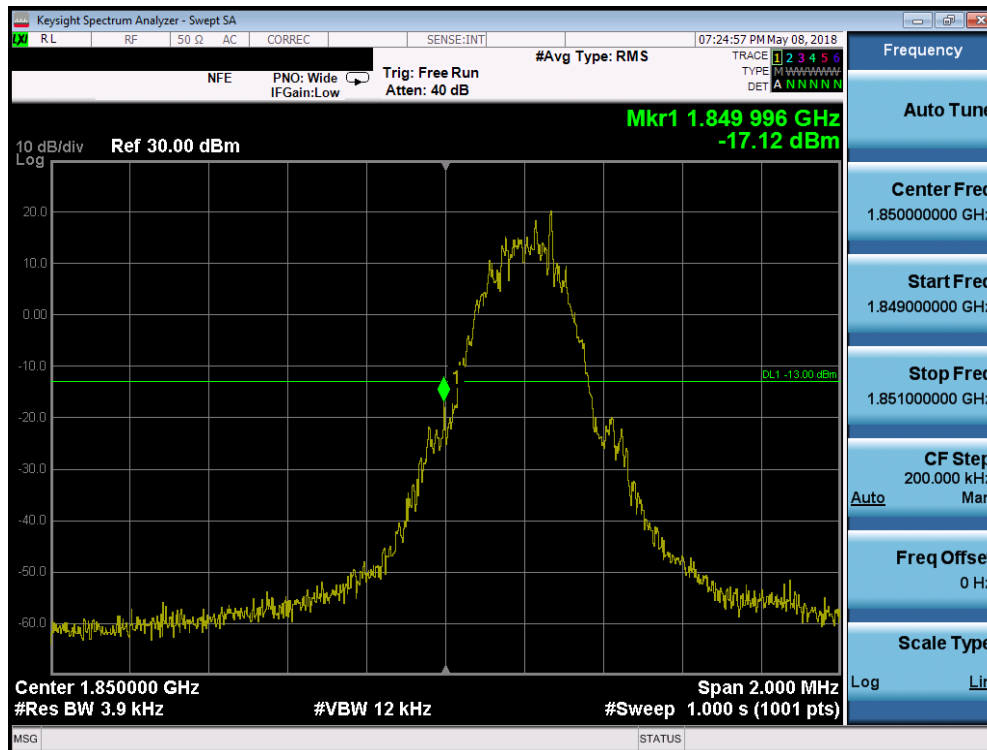


Plot 7-75. Band Edge Plot (PCS GSM Mode - Low Channel)

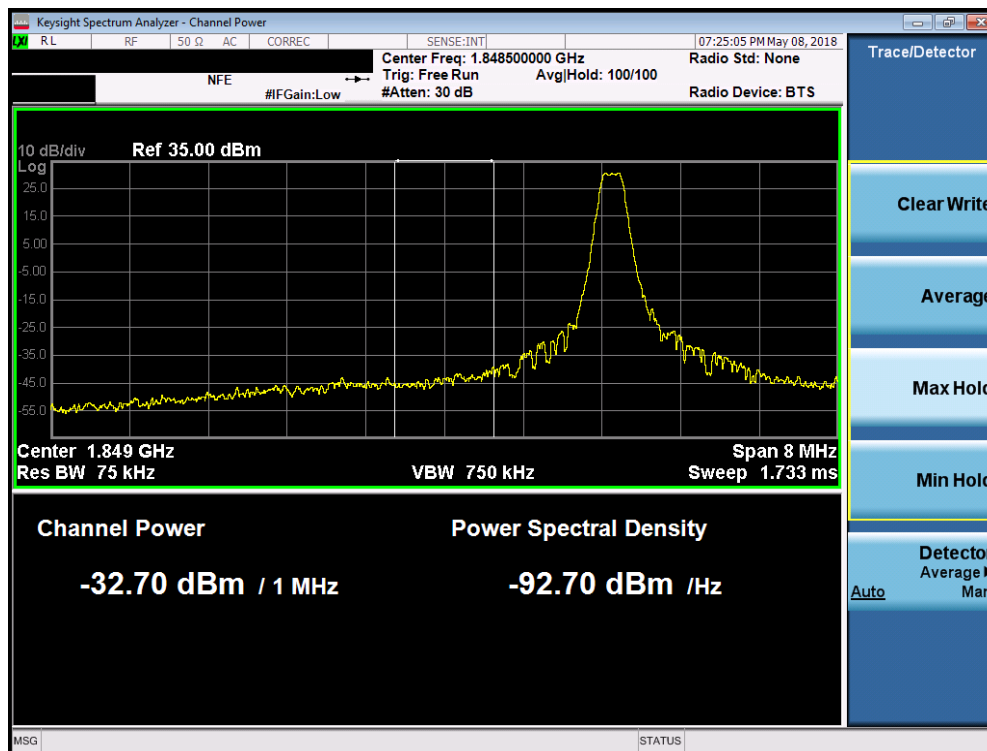


Plot 7-76. 4MHz Span Plot (PCS GSM Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 58 of 119

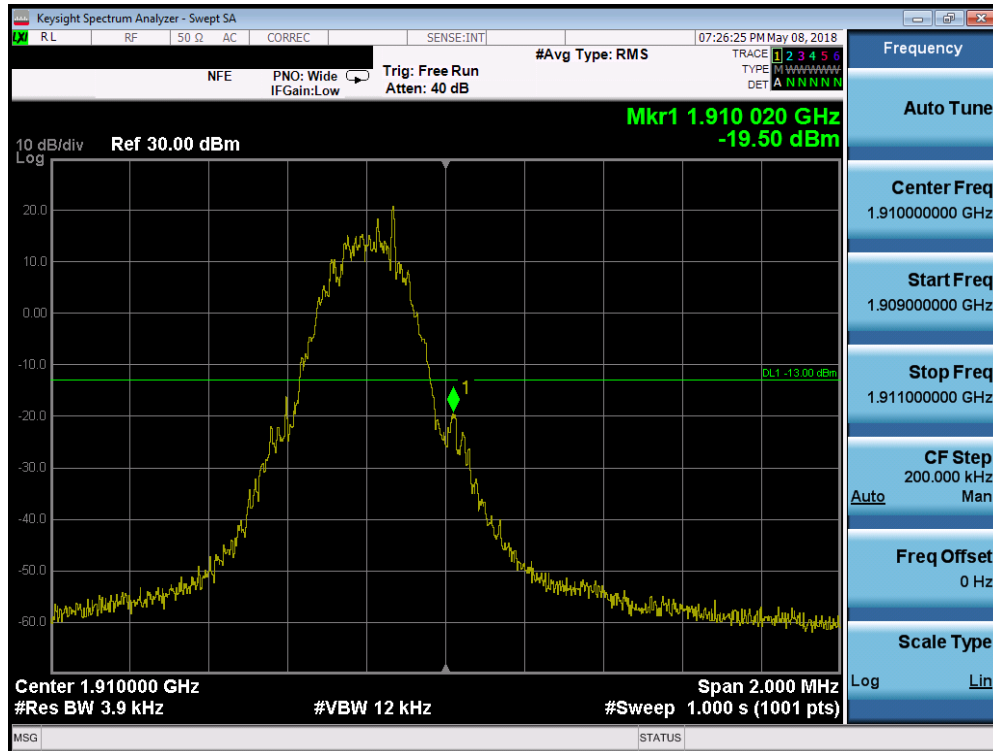

Plot 7-77. Band Edge Plot (PCS GSM Mode – High Channel)

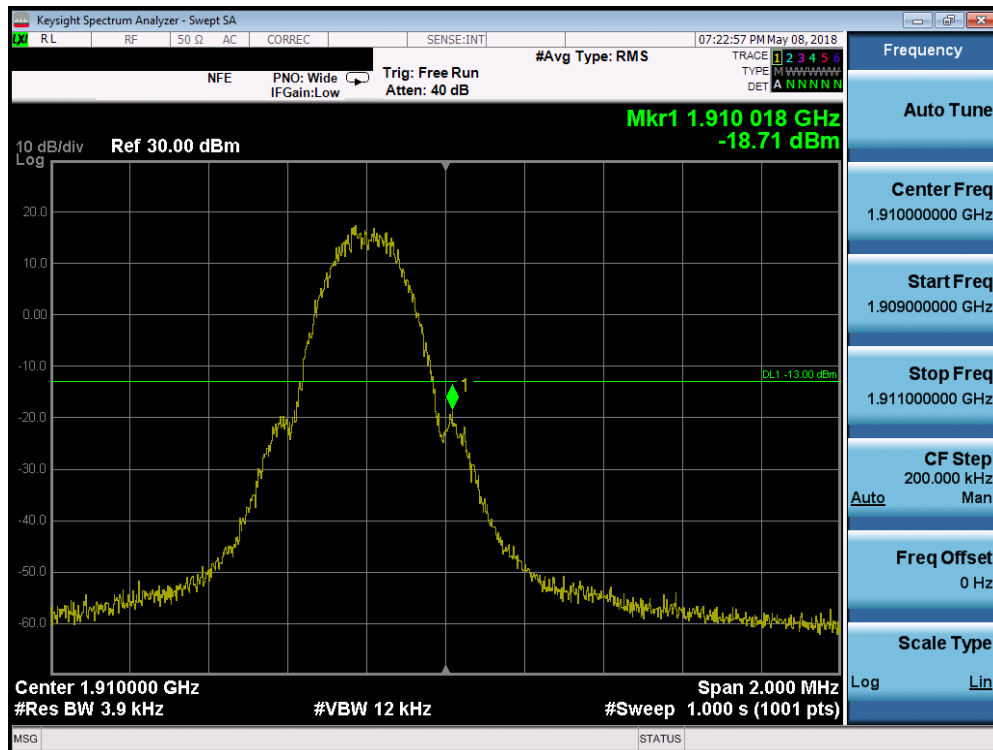

Plot 7-78. 4MHz Span Plot (PCS GSM Mode – High Channel)


FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 59 of 119

Note:

Both GSM and GPRS mode were investigated, and GSM mode was found to be worst case for band edge emission. So, GSM mode is included in the report instead of GPRS mode

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset			Page 60 of 119

Cellular CDMA Mode

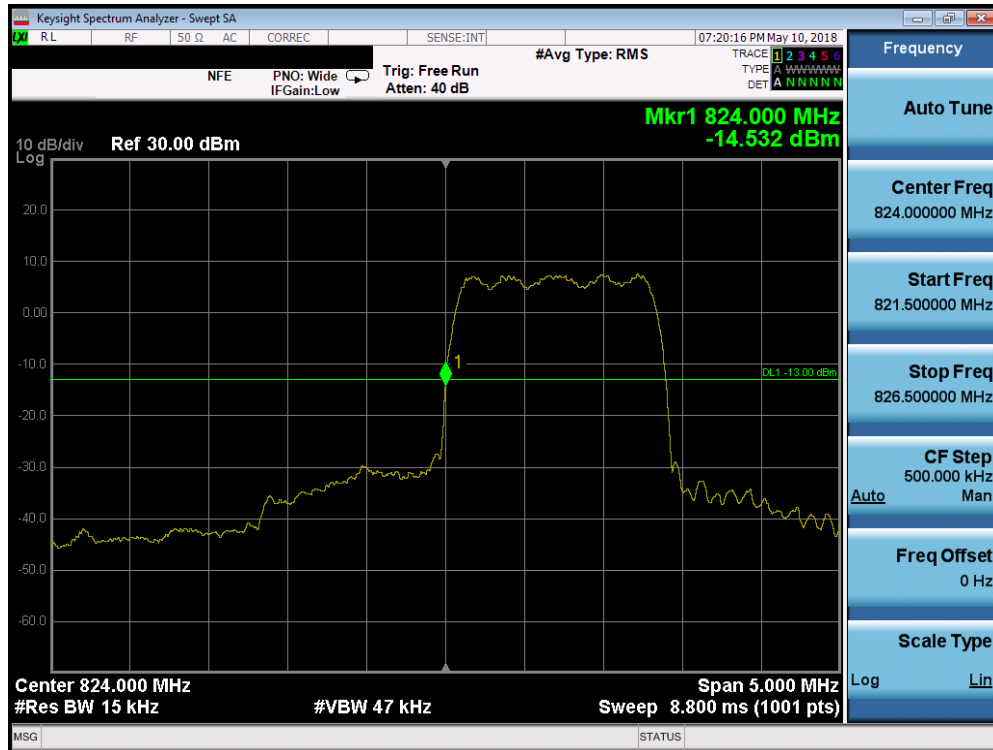


Plot 7-79. Band Edge Plot (Cellular CDMA Mode - Low Channel)




Plot 7-80. 4MHz Span Plot (Cellular CDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 61 of 119

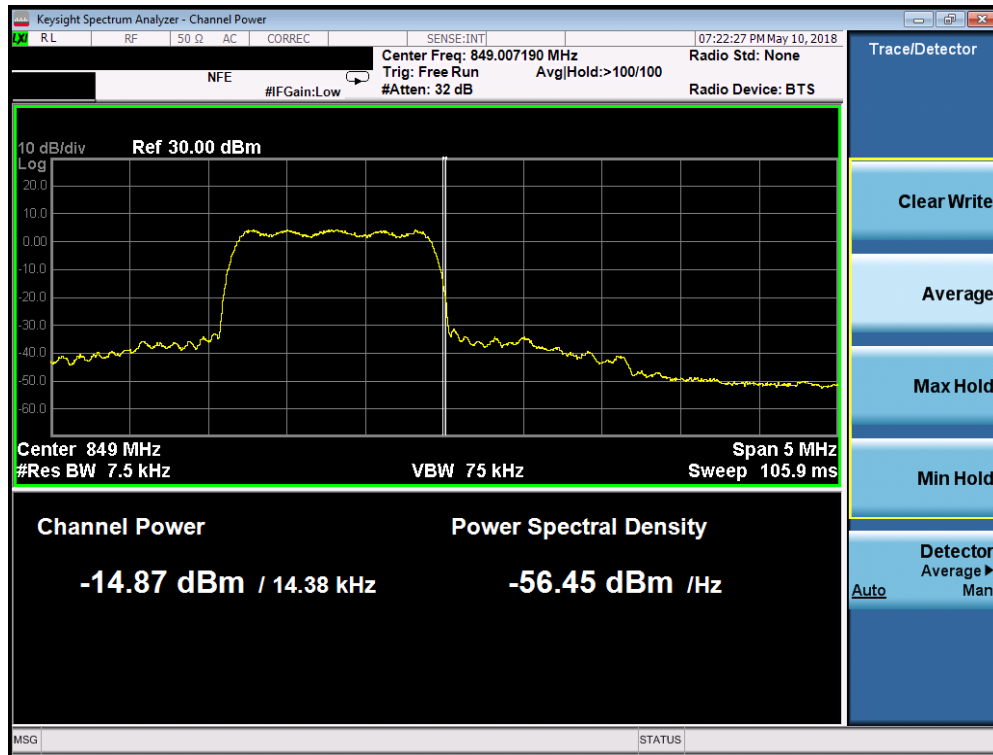


Plot 7-81. Band Edge Plot (Cellular CDMA Mode - High Channel)

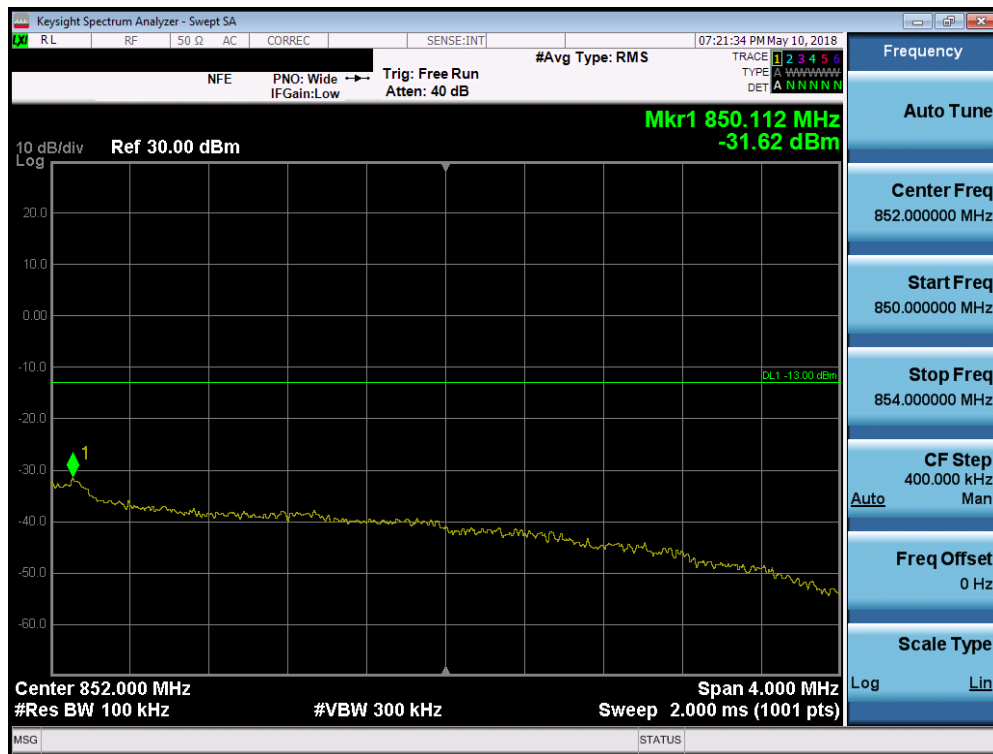


Plot 7-82. 4MHz Span Plot (Cellular CDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 62 of 119

PCS CDMA Mode

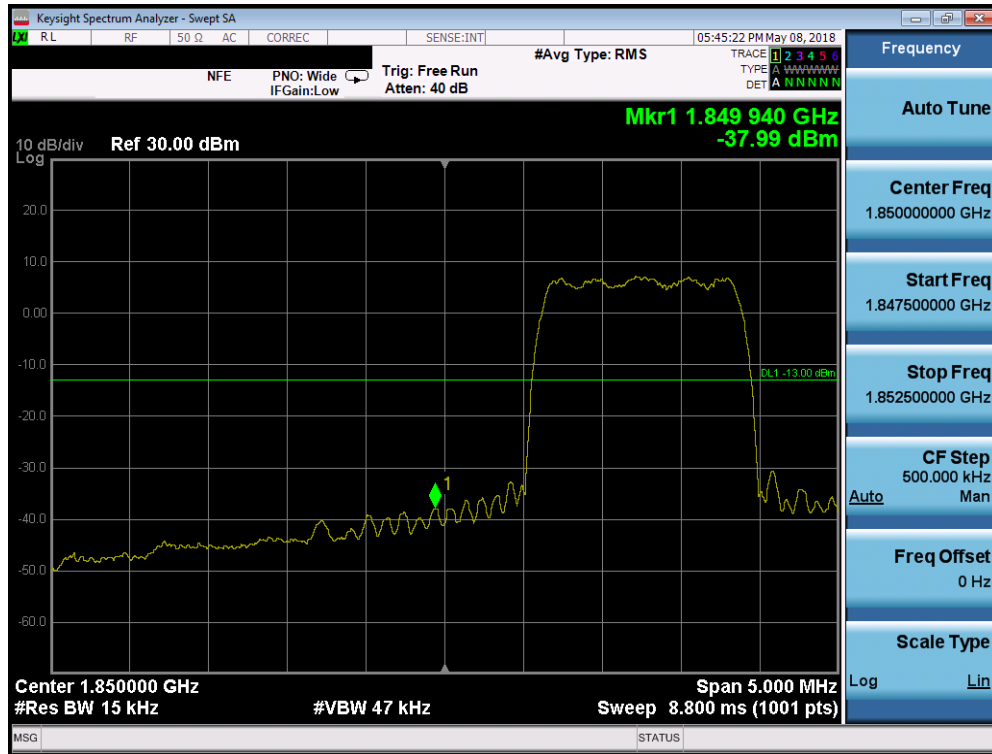


Plot 7-83. Band Edge Plot (PCS CDMA Mode - Low Channel)

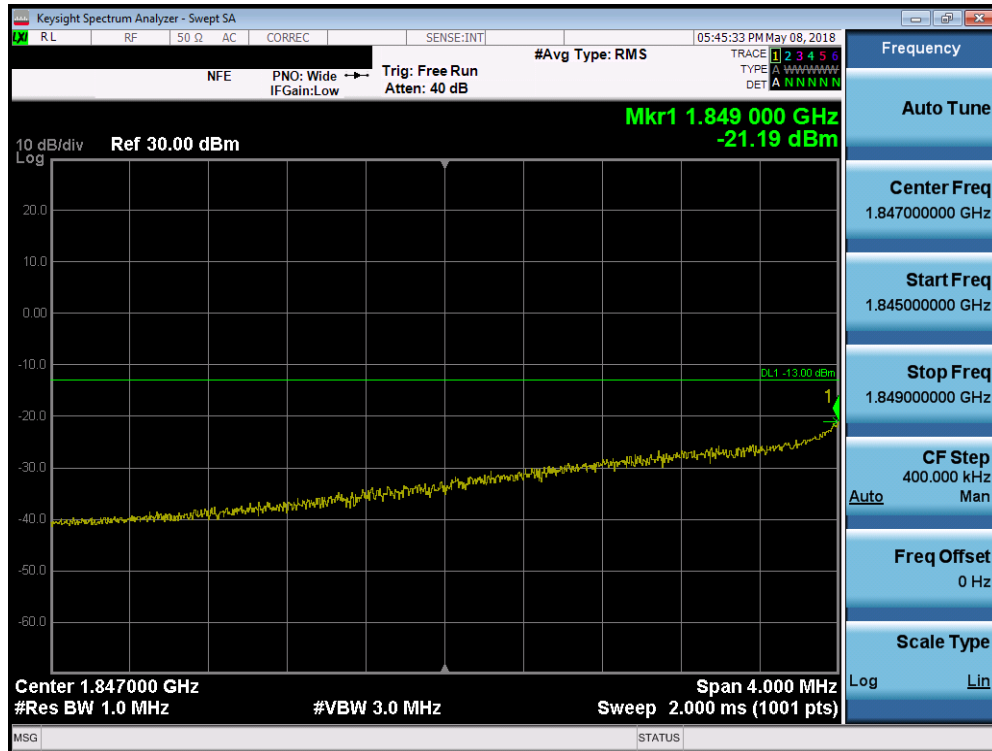


Plot 7-84. 4MHz Span Plot (PCS CDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 63 of 119

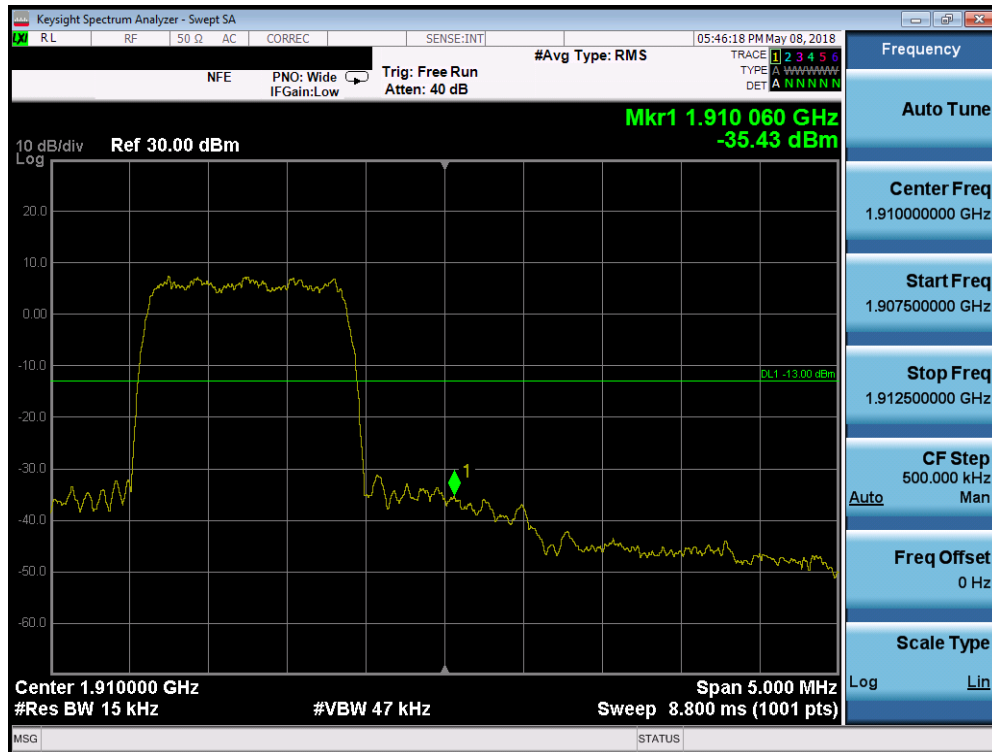


Plot 7-85. Band Edge Plot (PCS CDMA Mode - High Channel)

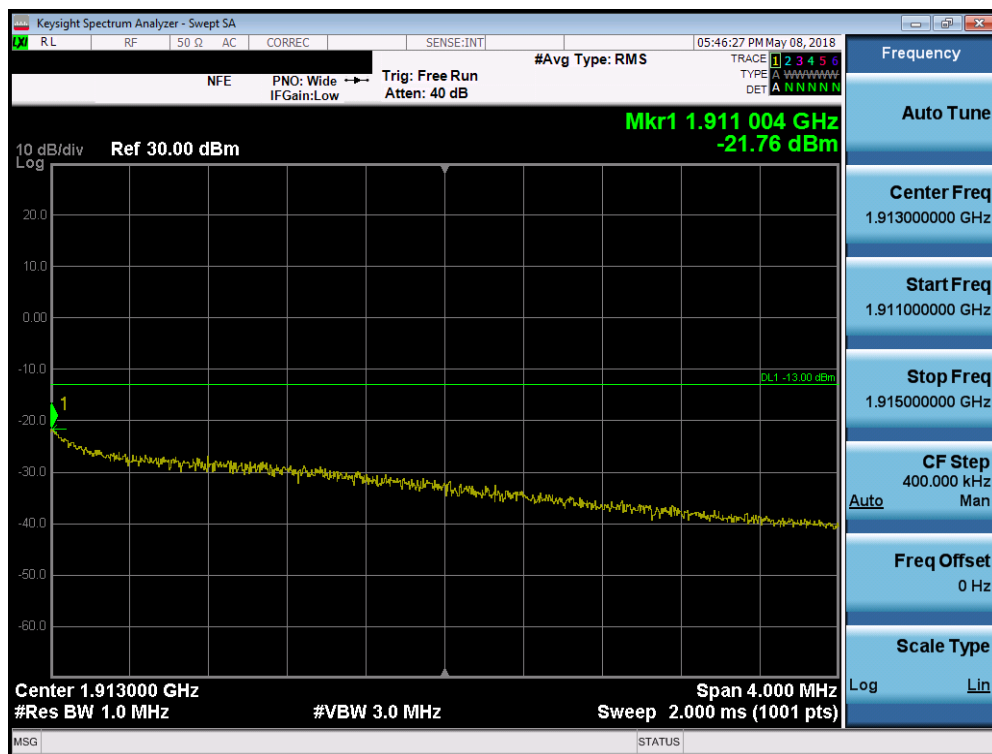

Plot 7-86. 4MHz Span Plot (PCS CDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 64 of 119

Cellular WCDMA Mode

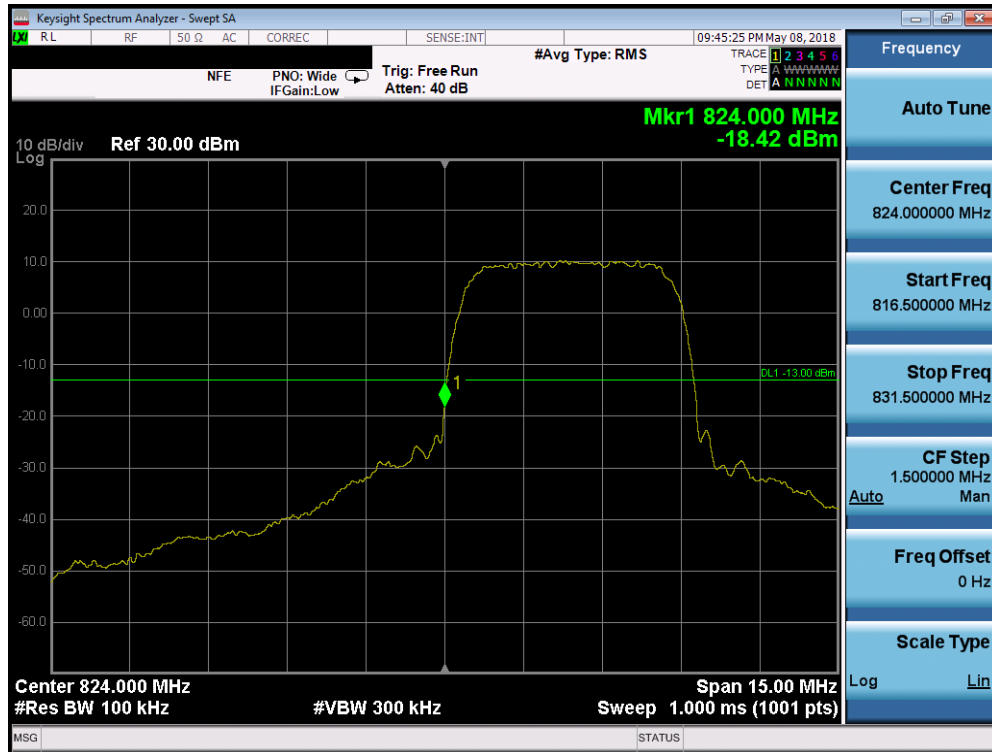

Plot 7-87. Band Edge Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-88. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 65 of 119

AWS WCDMA Mode



Plot 7-89. Band Edge Plot (AWS WCDMA Mode - Low Channel)

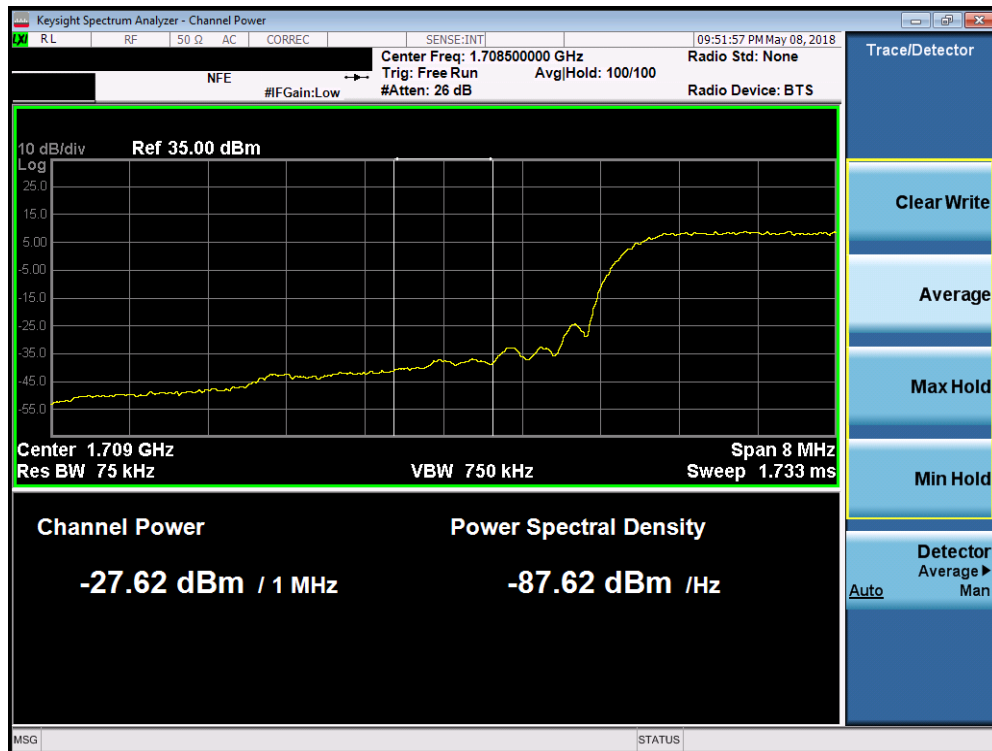

Plot 7-90. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 66 of 119




Plot 7-91. Band Edge Plot (AWS WCDMA Mode - High Channel)




Plot 7-92. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 67 of 119

PCS WCDMA Mode

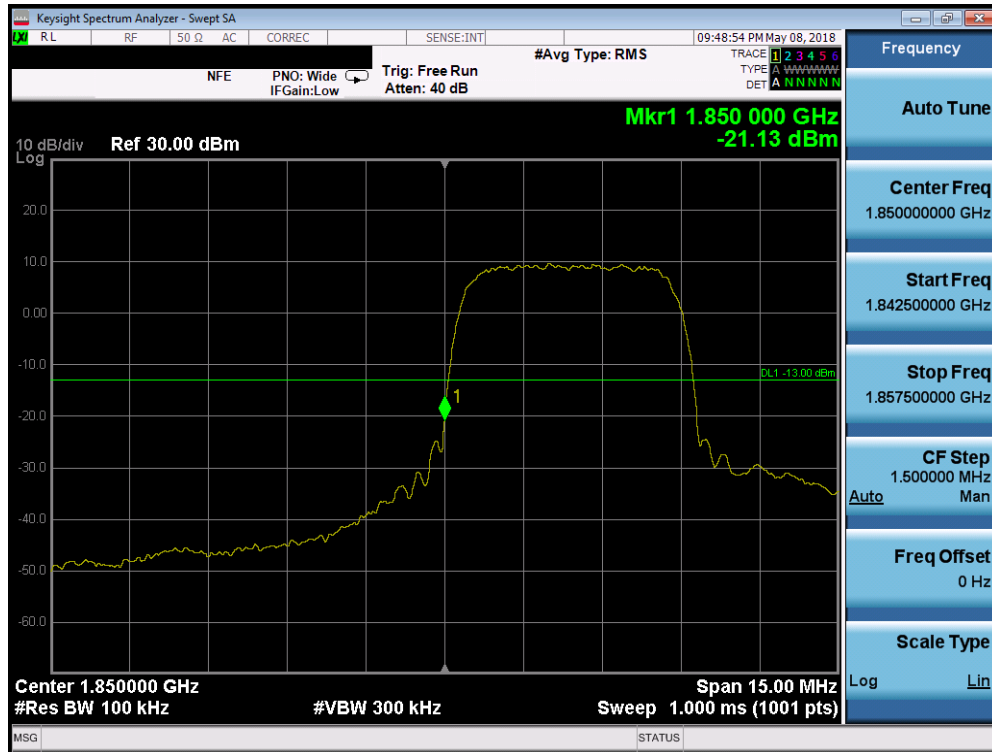

Plot 7-93. Band Edge Plot (PCS WCDMA Mode - Low Channel)

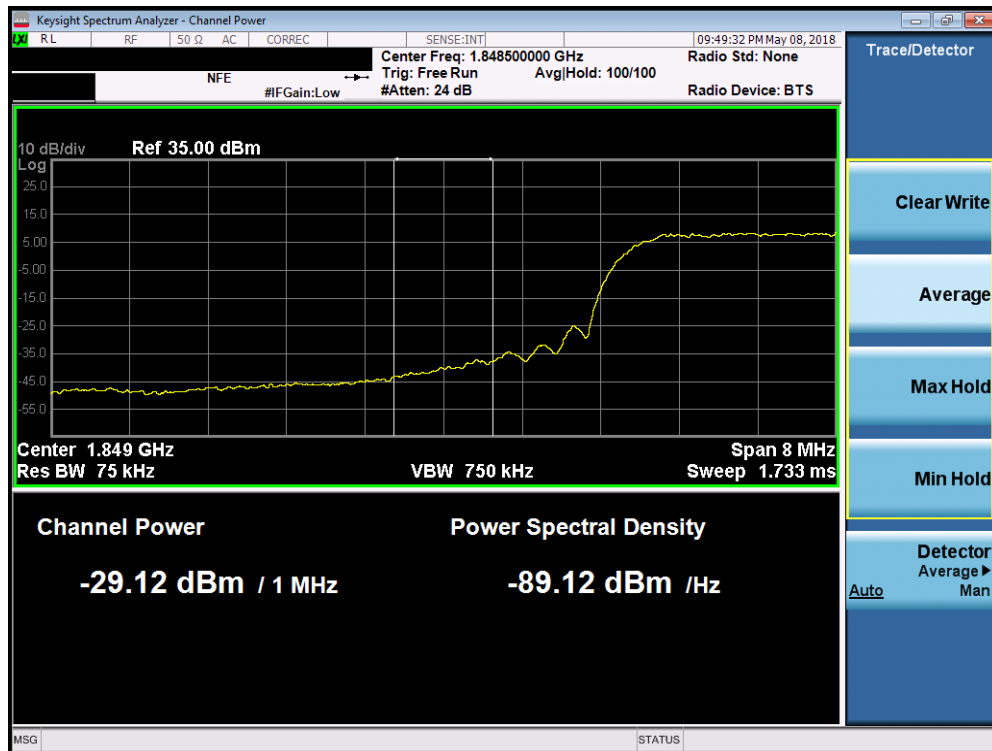


Plot 7-94. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 68 of 119



Plot 7-95. Band Edge Plot (PCS WCDMA Mode - High Channel)

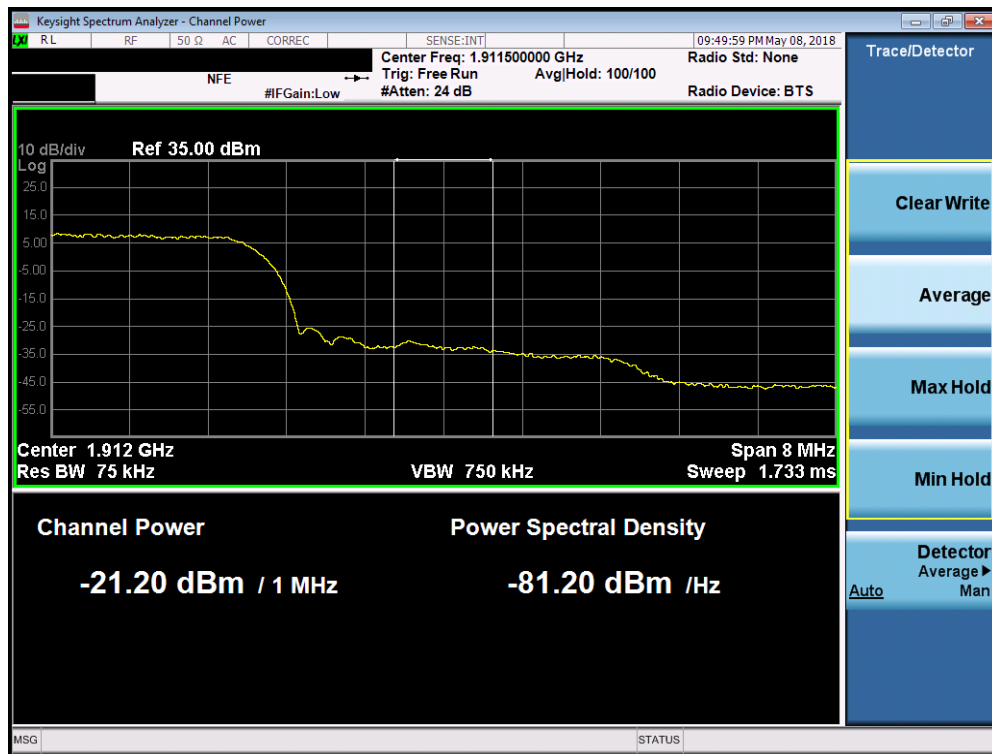

Plot 7-96. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 69 of 119

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

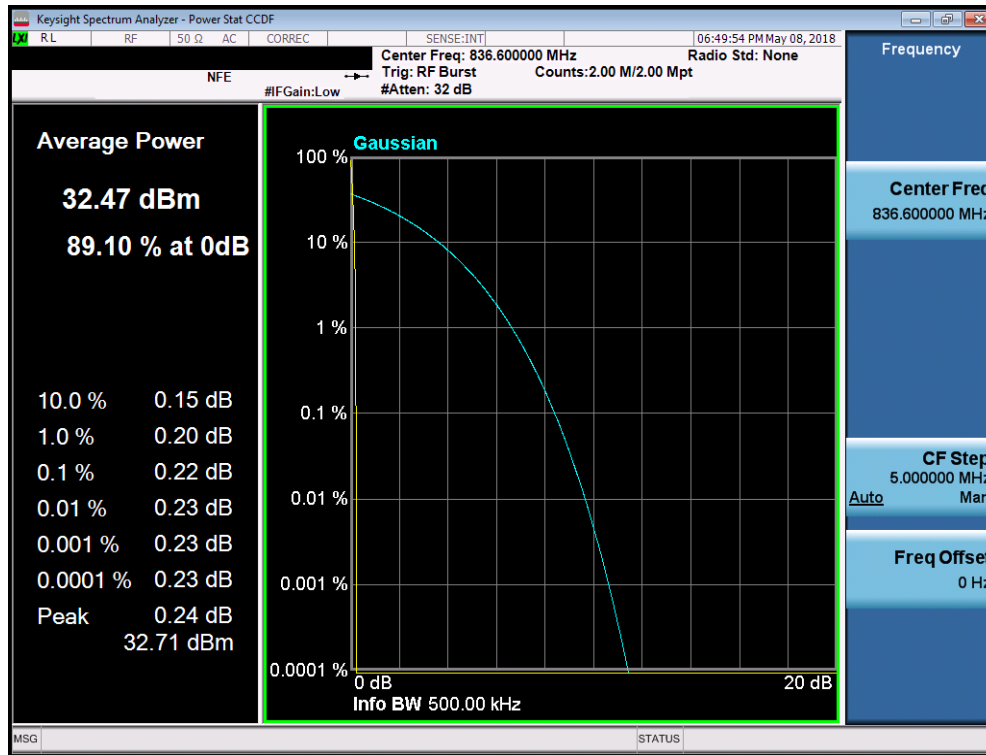


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 70 of 119




Plot 7-97. Peak-Average Ratio Plot (Cellular GPRS Mode)

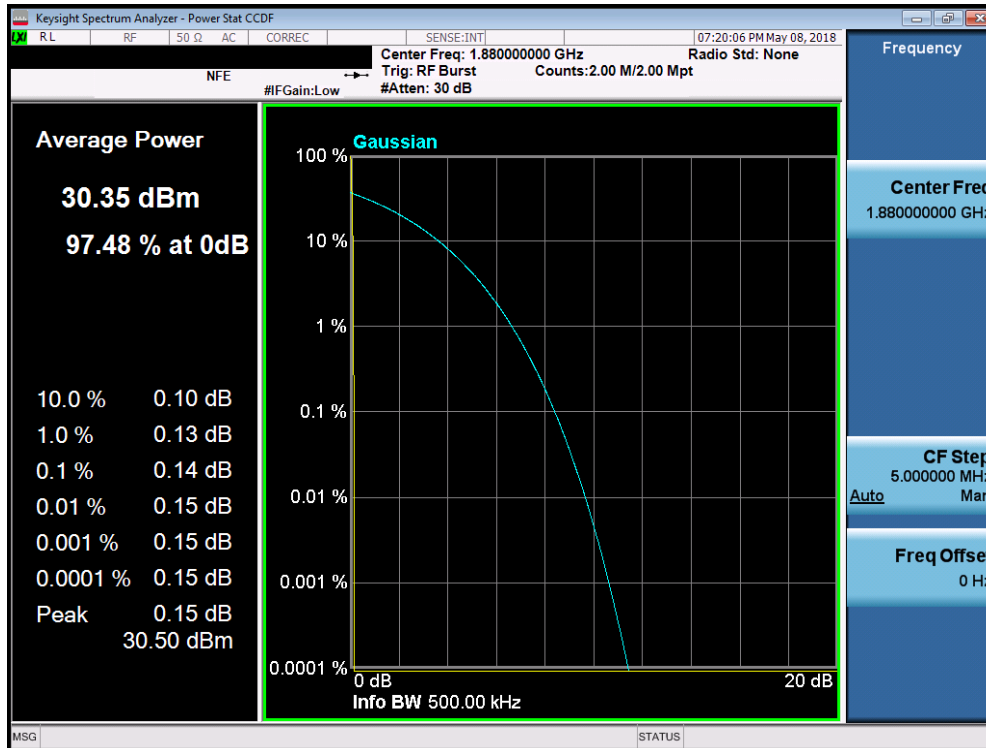


Plot 7-98. Peak-Average Ratio Plot (PCS GPRS Mode)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 71 of 119

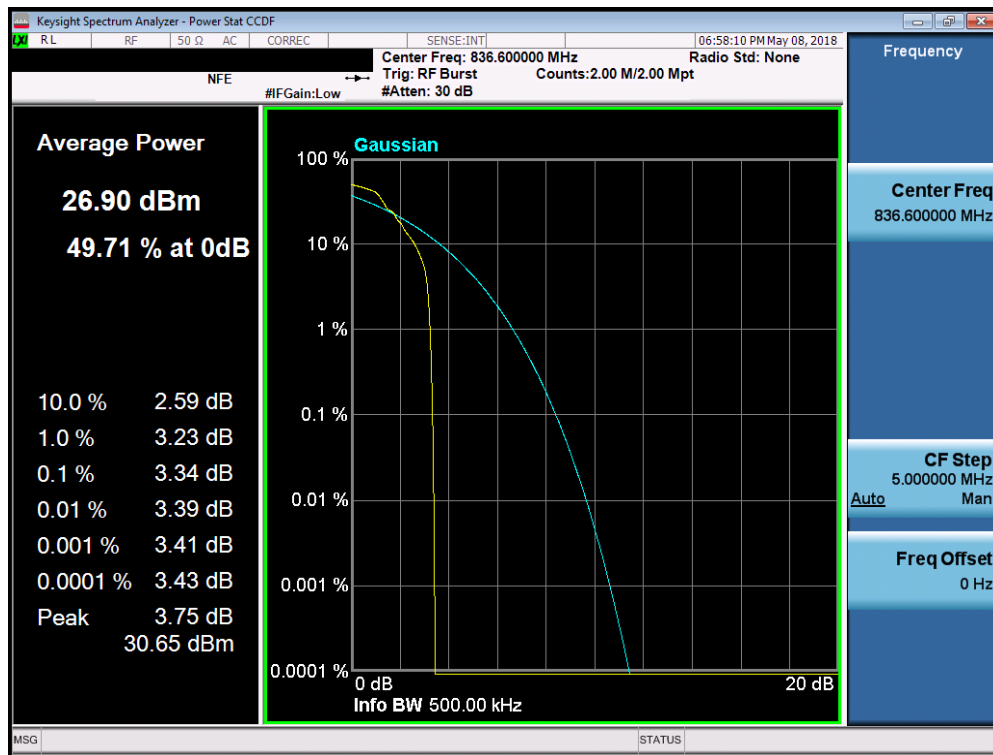


Plot 7-99. Peak-Average Ratio Plot (Cellular EDGE Mode)

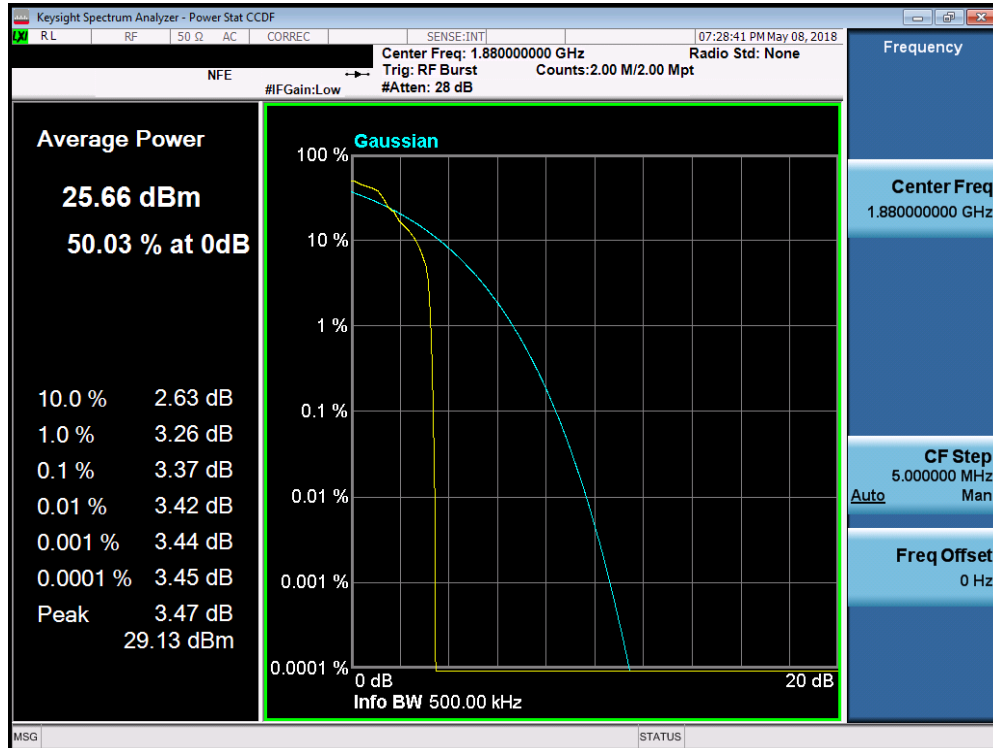


Plot 7-100. Peak-Average Ratio Plot (PCS EDGE Mode)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 72 of 119

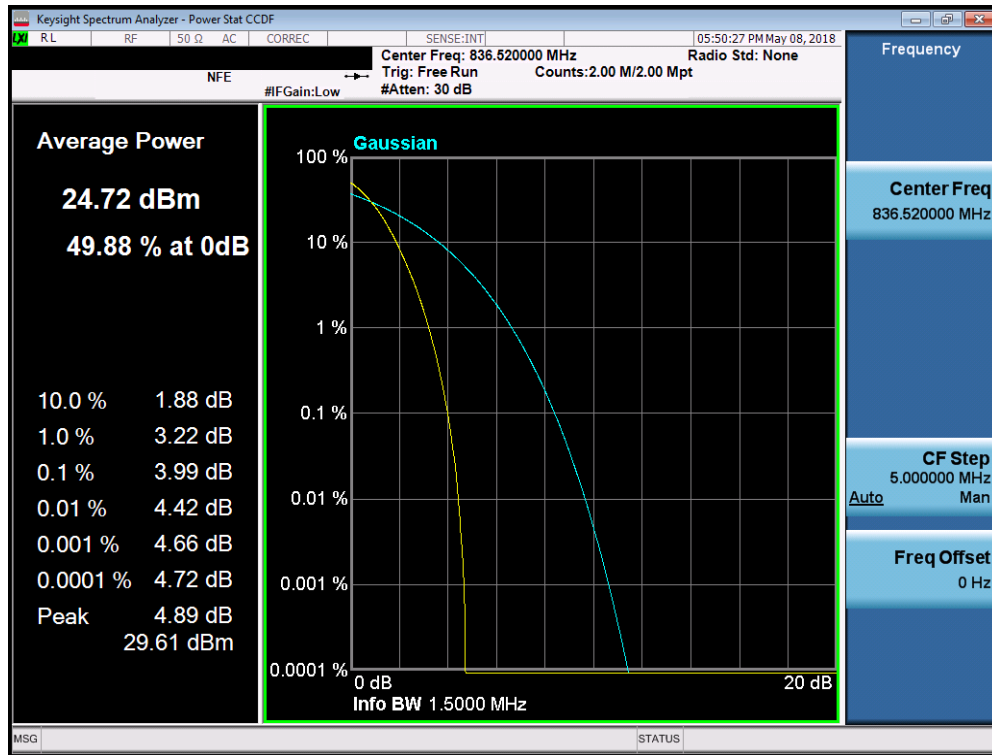


Plot 7-101. Peak-Average Ratio Plot (Cellular CDMA Mode)

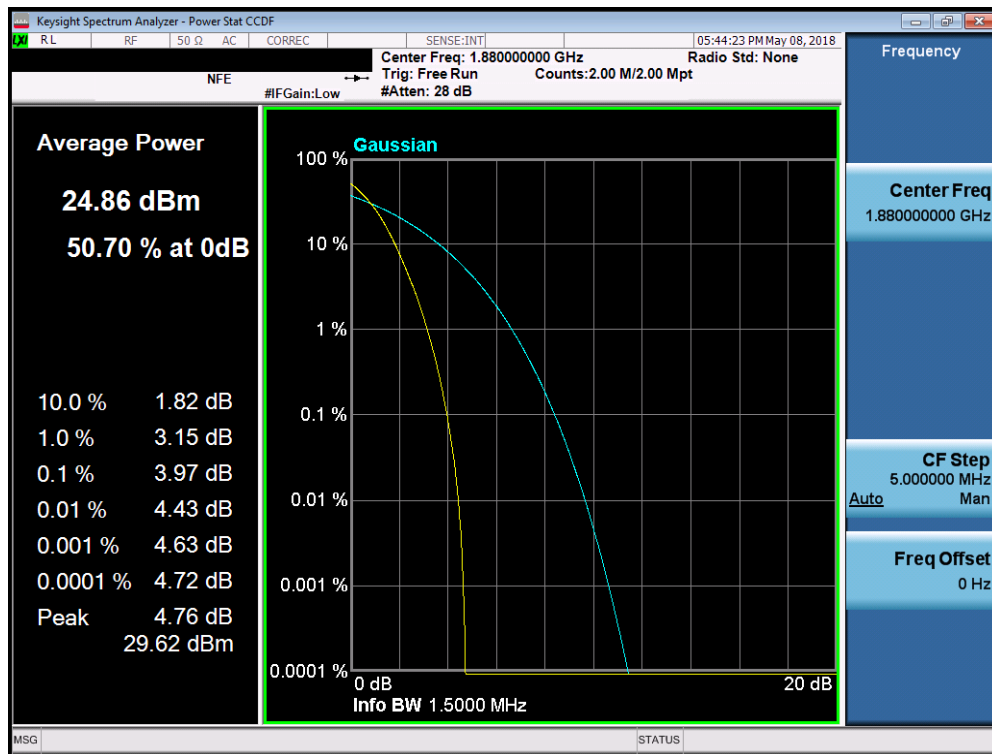


Plot 7-102. Peak-Average Ratio Plot (PCS CDMA Mode)

FCC ID: A3LSMN960U	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 73 of 119

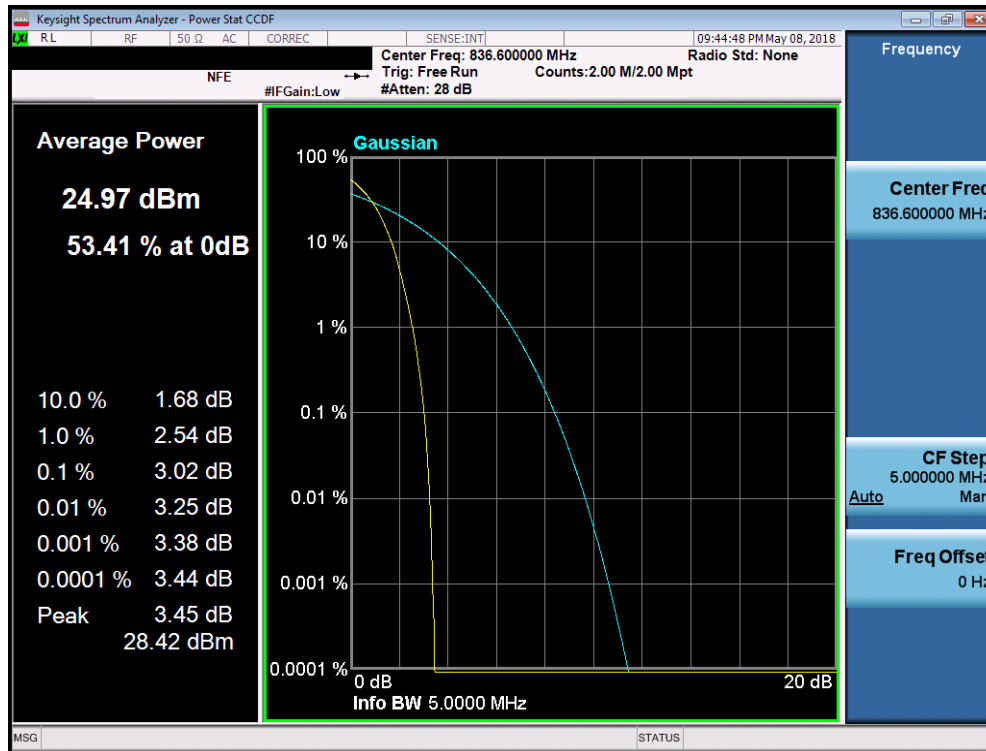


Plot 7-103. Peak-Average Ratio Plot (Cellular WCDMA Mode)

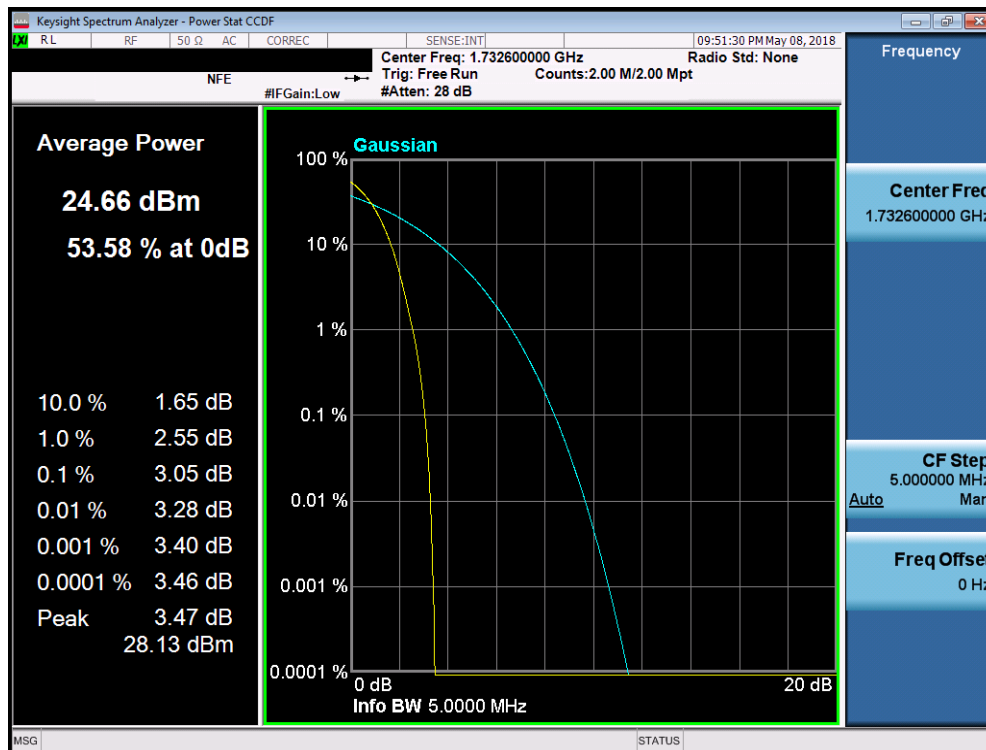

Plot 7-104. Peak-Average Ratio Plot (AWS WCDMA Mode)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 74 of 119

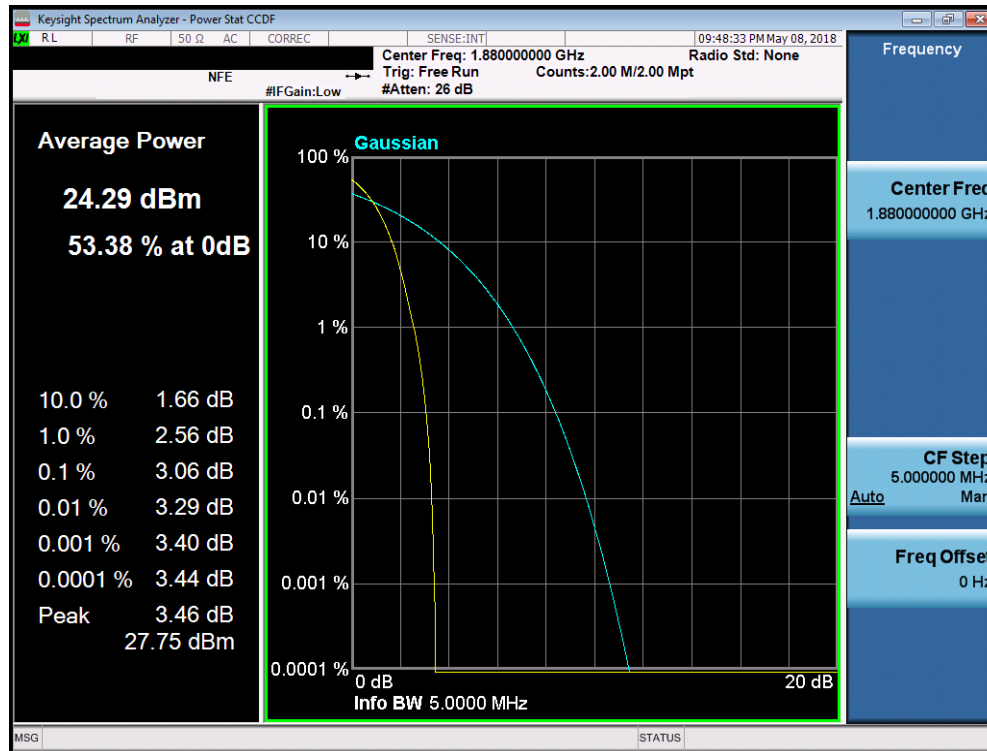

Plot 7-105. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: A3LSMN960U				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 75 of 119

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 76 of 119

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

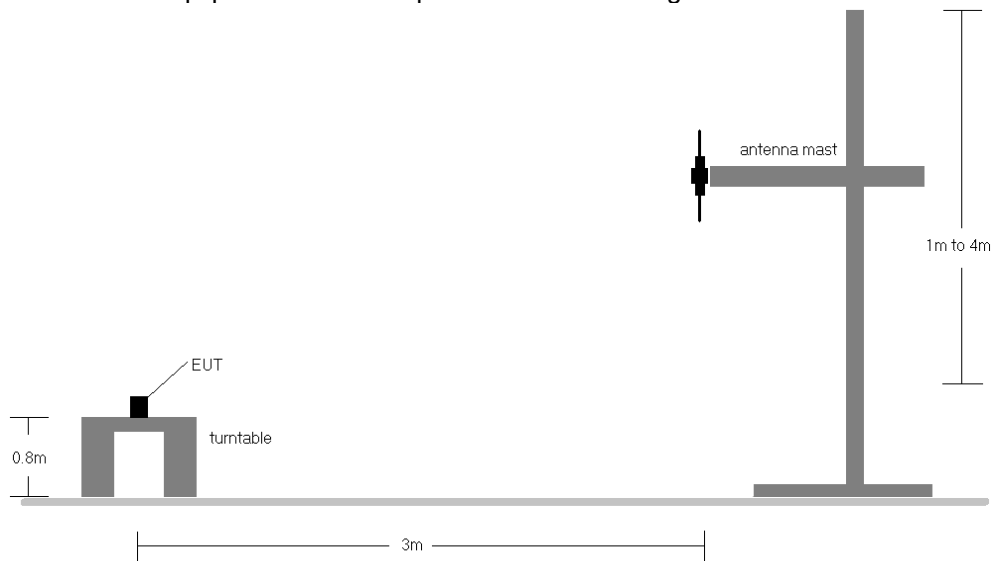


Figure 7-5. Radiated Test Setup <1GHz

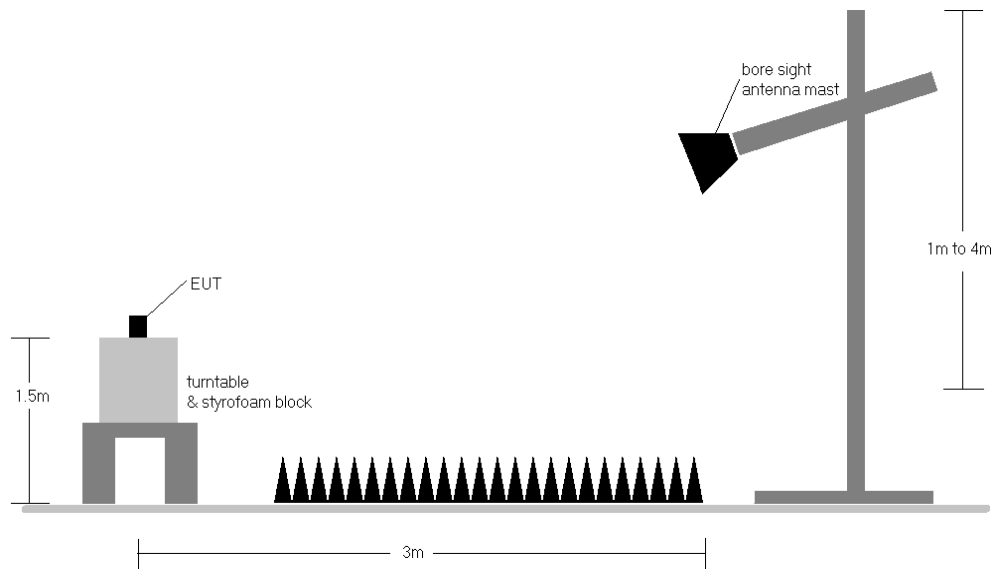


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 77 of 119

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) For CDMA, this device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 78 of 119

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	143	207	24.41	6.75	29.01	0.796	38.45	-9.44	31.16	1.306	40.61	-9.45
836.60	GPRS850	V	158	222	24.41	6.78	29.04	0.801	38.45	-9.42	31.19	1.314	40.61	-9.42
848.80	GPRS850	V	163	211	23.31	6.80	27.96	0.625	38.45	-10.49	30.11	1.026	40.61	-10.50
836.60	GPRS850	H	150	127	22.07	6.78	26.70	0.467	38.45	-11.76	28.85	0.767	40.61	-11.76
836.60	EDGE850	V	158	222	18.49	6.78	23.12	0.205	38.45	-15.34	25.27	0.336	40.61	-15.34
836.60	GPRS850 (WCP)	H	150	17	22.00	6.78	26.63	0.460	38.45	-11.83	28.78	0.754	40.61	-11.83

Table 7-2. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	CDMA850	V	147	227	15.45	6.75	20.05	0.101	38.45	-18.40	22.20	0.166	40.61	-18.41
836.52	CDMA850	V	142	237	15.79	6.78	20.42	0.110	38.45	-18.04	22.57	0.181	40.61	-18.04
848.31	CDMA850	V	141	269	15.24	6.80	19.89	0.097	38.45	-18.56	22.04	0.160	40.61	-18.57
836.52	CDMA850	H	167	186	13.78	6.78	18.41	0.069	38.45	-20.05	20.56	0.114	40.61	-20.05
836.52	CDMA850 (WCP)	V	182	276	12.68	6.78	17.31	0.054	38.45	-21.15	19.46	0.088	40.61	-21.15

Table 7-3. ERP/EIRP (Cellular CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	161	248	15.85	6.76	20.46	0.111	38.45	-18.00	22.61	0.182	40.61	-18.00
836.60	WCDMA850	H	172	138	15.73	6.78	20.36	0.109	38.45	-18.10	22.51	0.178	40.61	-18.10
846.60	WCDMA850	H	111	132	15.07	6.80	19.72	0.094	38.45	-18.73	21.87	0.154	40.61	-18.74
826.40	WCDMA850	V	201	81	12.89	6.76	17.50	0.056	38.45	-20.96	19.65	0.092	40.61	-20.96
826.40	WCDMA850 (WCP)	H	150	4	13.60	6.76	18.21	0.066	38.45	-20.25	20.36	0.109	40.61	-20.25

Table 7-4. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	H	150	254	17.74	5.55	23.29	0.213	30.00	-6.71
1732.60	WCDMA1700	H	150	235	18.73	5.41	24.14	0.259	30.00	-5.86
1752.60	WCDMA1700	H	150	46	19.32	5.27	24.59	0.288	30.00	-5.41
1752.60	WCDMA1700	V	150	296	16.32	5.27	21.59	0.144	30.00	-8.41
1752.60	WCDMA1700 (WCP)	H	150	325	15.75	5.27	21.02	0.127	30.00	-8.98

Table 7-5. EIRP (AWS WCDMA)

FCC ID: A3LSMN960U			MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 79 of 119		

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	150	350	26.22	4.82	31.04	1.271	33.01	-1.97
1880.00	GPRS1900	H	150	357	25.46	4.74	30.20	1.046	33.01	-2.82
1909.80	GPRS1900	H	150	367	24.55	4.68	29.23	0.838	33.01	-3.78
1850.20	GPRS1900	V	150	121	23.00	4.82	27.82	0.605	33.01	-5.19
1850.20	EDGE1900	H	150	350	21.15	4.82	25.97	0.395	33.01	-7.04
1850.20	GPRS1900 (WCP)	H	150	173	24.58	4.82	29.40	0.871	33.01	-3.61

Table 7-6. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	H	150	362	20.01	4.82	24.83	0.304	33.01	-8.18
1880.00	CDMA1900	H	150	359	19.57	4.74	24.31	0.270	33.01	-8.70
1908.75	CDMA1900	H	150	358	18.62	4.68	23.30	0.214	33.01	-9.71
1851.25	CDMA1900	V	150	277	16.87	4.74	21.61	0.145	33.01	-11.40
1851.25	CDMA1900 (WCP)	H	150	214	17.30	4.74	22.04	0.160	33.01	-10.97

Table 7-7. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	150	31	19.22	4.81	24.03	0.253	33.01	-8.98
1880.00	WCDMA1900	H	150	150	18.87	4.74	23.61	0.230	33.01	-9.40
1907.60	WCDMA1900	H	150	135	18.89	4.68	23.57	0.228	33.01	-9.44
1852.40	WCDMA1900	V	150	130	17.50	4.81	22.31	0.170	33.01	-10.70
1852.40	WCDMA1900 (WCP)	H	150	358	16.99	4.81	21.80	0.151	33.01	-11.21

Table 7-8. EIRP (PCS WCDMA)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 				Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset			Page 80 of 119

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 81 of 119

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

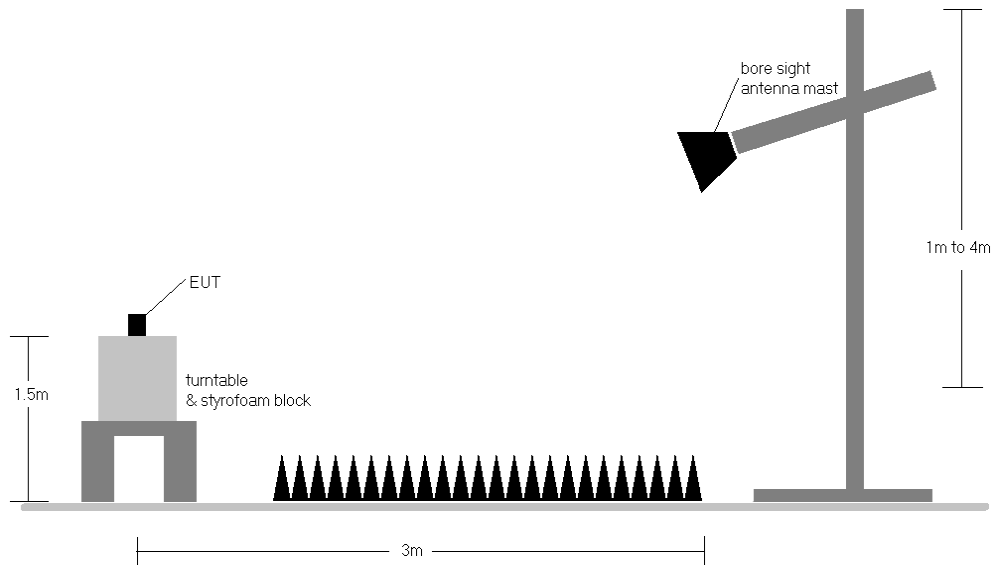



Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) For CDMA, this device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 82 of 119

Cellular GPRS Mode

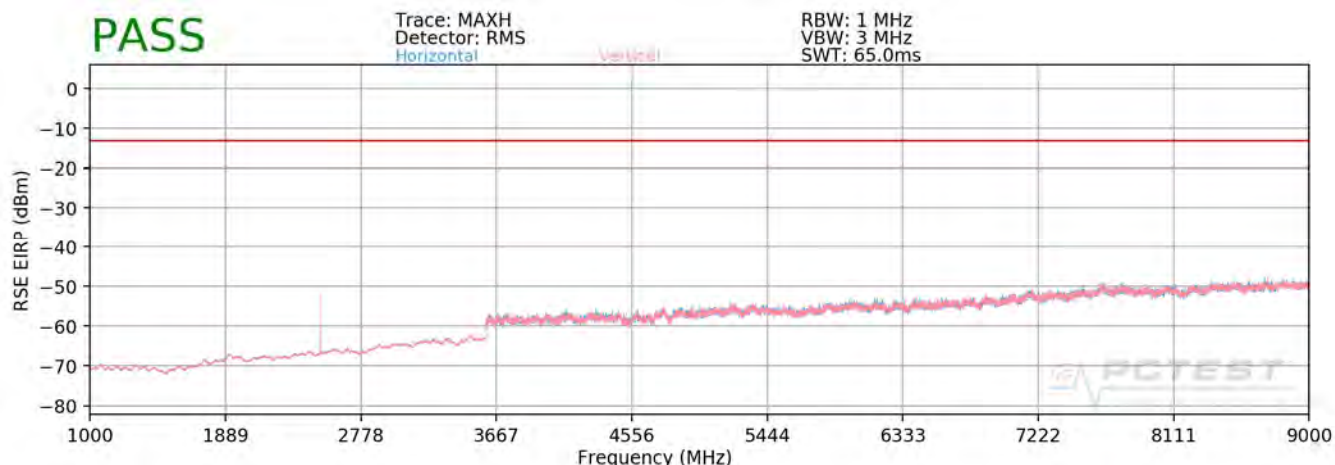

Plot 7-106. Radiated Spurious Plot Above 1GHz (Cellular GPRS Mode)

OPERATING FREQUENCY: 824.20 MHz

CHANNEL: 128

MODULATION SIGNAL: GPRS (GMSK)

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	114	11	-71.41	8.94	-62.47	-49.5
2472.60	V	298	326	-52.68	9.64	-43.03	-30.0
3296.80	V	111	332	-69.54	9.57	-59.97	-47.0
4121.00	V	-	-	-71.55	10.17	-61.38	-48.4
4945.20	V	325	349	-68.31	10.90	-57.40	-44.4
5769.40	V	-	-	-71.48	11.47	-60.02	-47.0

Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 83 of 119

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	164	328	-70.42	8.95	-61.47	-48.5
2509.80	V	181	319	-56.30	9.75	-46.55	-33.5
3346.40	V	112	330	-68.35	9.60	-58.74	-45.7
4183.00	V	-	-	-72.37	10.35	-62.02	-49.0
5019.60	V	-	-	-69.65	10.88	-58.77	-45.8

Table 7-10. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	150	337	-74.47	8.95	-65.51	-52.5
2546.40	V	154	311	-59.54	9.74	-49.80	-36.8
3395.20	V	116	332	-70.76	9.78	-60.98	-48.0
4244.00	V	-	-	-72.06	10.58	-61.48	-48.5
5092.80	V	-	-	-69.36	10.69	-58.67	-45.7

Table 7-11. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 84 of 119


OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	H	160	260	-63.94	8.94	-55.00	-42.0
2472.60	H	109	206	-59.98	9.64	-50.33	-37.3
3296.80	H	362	217	-69.99	9.57	-60.42	-47.4
4121.00	H	-	-	-71.59	10.17	-61.42	-48.4
4945.20	H	-	-	-69.92	10.90	-59.01	-46.0

Table 7-12. Radiated Spurious Data with WCP (Cellular GPRS Mode – Ch. 128)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 85 of 119

Cellular CDMA Mode

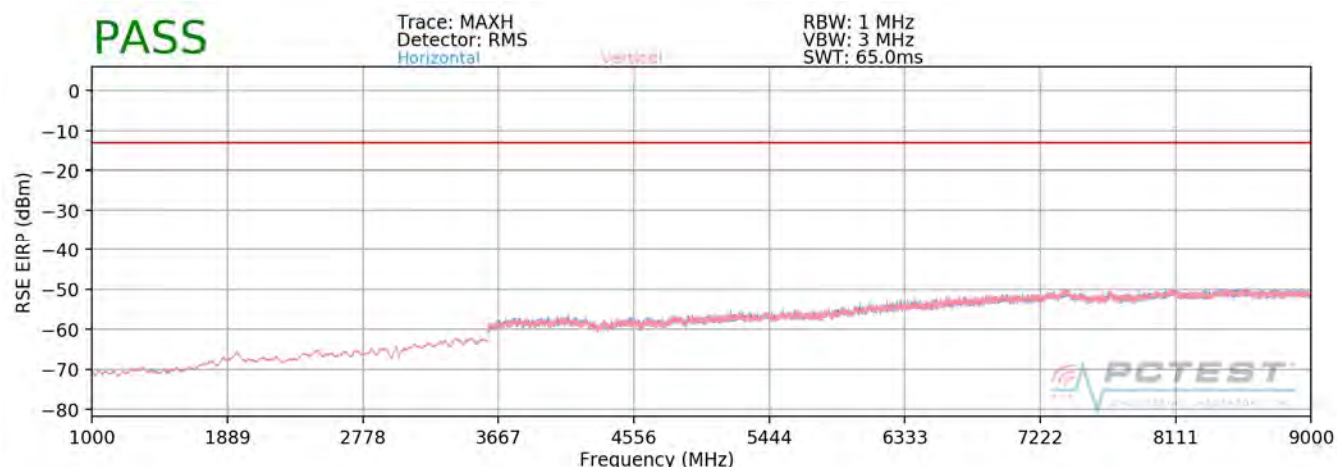

Plot 7-107. Radiated Spurious Plot Above 1GHz (Cellular CDMA Mode)

OPERATING FREQUENCY: 824.70 MHz

CHANNEL: 1013

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	V	104	353	-77.41	9.01	-68.39	-55.4
2474.10	V	279	287	-76.21	9.12	-67.09	-54.1
3298.80	V	-	-	-73.70	9.37	-64.34	-51.3
4123.50	V	-	-	-72.95	9.85	-63.10	-50.1

Table 7-13. Radiated Spurious Data with WCP (Cellular CDMA Mode – Ch. 1013)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 86 of 119

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	V	264	14	-78.47	8.85	-69.63	-56.6
2509.56	V	149	93	-76.96	9.17	-67.79	-54.8
3346.08	V	-	-	-74.53	9.36	-65.17	-52.2
4182.60	V	-	-	-73.77	10.19	-63.57	-50.6

Table 7-14. Radiated Spurious Data with WCP (Cellular CDMA Mode – Ch. 384)

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1696.62	V	250	358	-76.90	8.68	-68.22	-55.2
2544.93	V	-	-	-76.43	9.27	-67.16	-54.2
3393.24	V	-	-	-73.76	9.46	-64.31	-51.3

Table 7-15. Radiated Spurious Data with WCP (Cellular CDMA Mode – Ch. 777)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 87 of 119


OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	H	126	130	-78.87	9.01	-69.85	-56.9
2474.10	H	174	150	-77.14	9.12	-68.02	-55.0
3298.80	H	-	-	-73.69	9.37	-64.33	-51.3
4123.50	H	-	-	-72.85	9.85	-63.00	-50.0

Table 7-16. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 88 of 119

Cellular WCDMA Mode

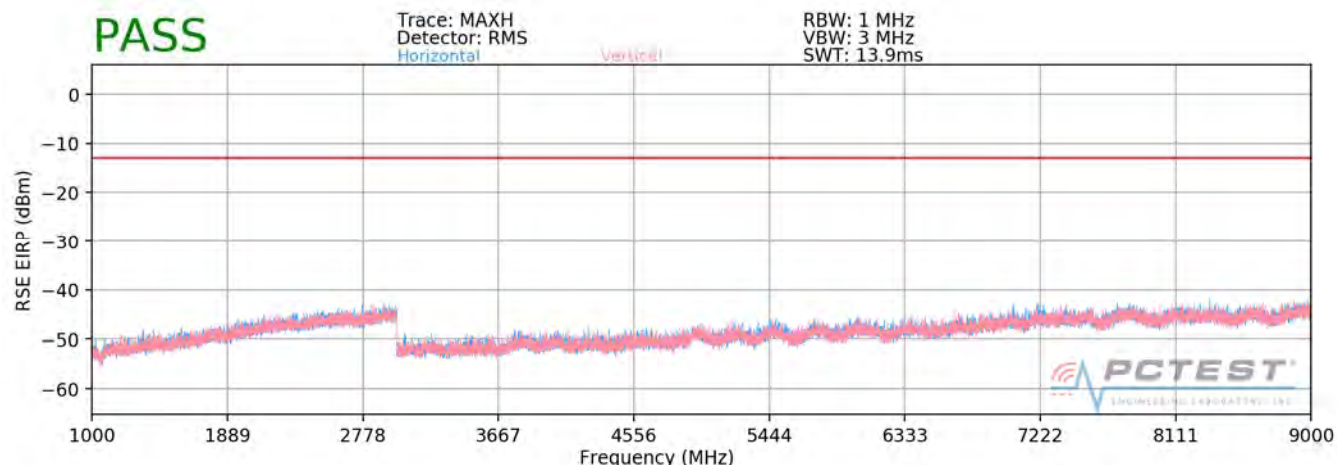

Plot 7-108. Radiated Spurious Plot Above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY: 826.40 MHz

CHANNEL: 4132

MODULATION SIGNAL: WCDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	325	22	-80.09	8.95	-71.14	-58.1
2479.20	H	202	198	-66.43	9.67	-56.76	-43.8
3305.60	H	-	-	-75.47	9.58	-65.88	-52.9

Table 7-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 89 of 119

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	345	200	-79.45	8.95	-70.50	-57.5
2509.80	H	120	198	-73.09	9.75	-63.34	-50.3
3346.40	H	-	-	-74.18	9.60	-64.57	-51.6

Table 7-18. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	359	128	-79.75	8.95	-70.80	-57.8
2539.80	H	113	214	-70.47	9.74	-60.72	-47.7
3386.40	H	-	-	-75.00	9.75	-65.25	-52.2

Table 7-19. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 90 of 119


OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	163	358	-78.03	8.95	-69.08	-56.1
2479.20	H	396	205	-77.41	9.67	-67.74	-54.7
3305.60	H	-	-	-75.55	9.58	-65.96	-53.0

Table 7-20. Radiated Spurious Data with WCP (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 91 of 119

AWS WCDMA Mode

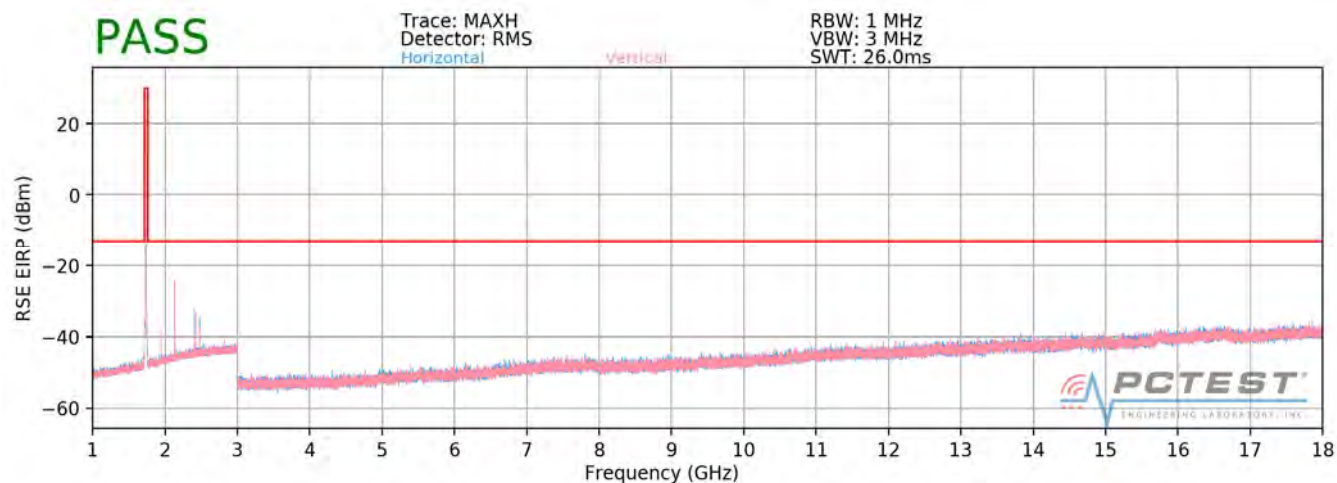

Plot 7-109. Radiated Spurious Plot Above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY: 1712.40 MHz

CHANNEL: 1312

MODULATION SIGNAL: WCDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	V	389	38	-70.20	9.83	-60.37	-47.4
5137.20	V	124	357	-70.22	10.69	-59.53	-46.5
6849.60	V	-	-	-70.25	11.64	-58.61	-45.6

Table 7-21. Radiated Spurious Data with WCP (AWS WCDMA Mode – Ch. 1312)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 92 of 119

OPERATING FREQUENCY: 1732.60 MHz
 CHANNEL: 1413
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	V	400	38	-73.45	9.88	-63.58	-50.6
5197.80	V	111	322	-69.87	10.76	-59.11	-46.1
6930.40	V	-	-	-69.48	11.74	-57.74	-44.7

Table 7-22. Radiated Spurious Data with WCP (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY: 1752.60 MHz
 CHANNEL: 1513
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	V	398	29	-70.54	9.92	-60.62	-47.6
5257.80	V	140	301	-70.94	10.72	-60.23	-47.2
7010.40	V	-	-	-70.27	11.86	-58.41	-45.4

Table 7-23. Radiated Spurious Data with WCP (AWS WCDMA Mode – Ch. 1513)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 93 of 119


OPERATING FREQUENCY: 1712.40 MHz
 CHANNEL: 1312
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	125	232	-71.88	9.83	-62.05	-49.1
5137.20	H	176	50	-70.90	10.69	-60.21	-47.2
6849.60	H	-	-	-70.11	11.64	-58.47	-45.5

Table 7-24. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 94 of 119

PCS GPRS Mode

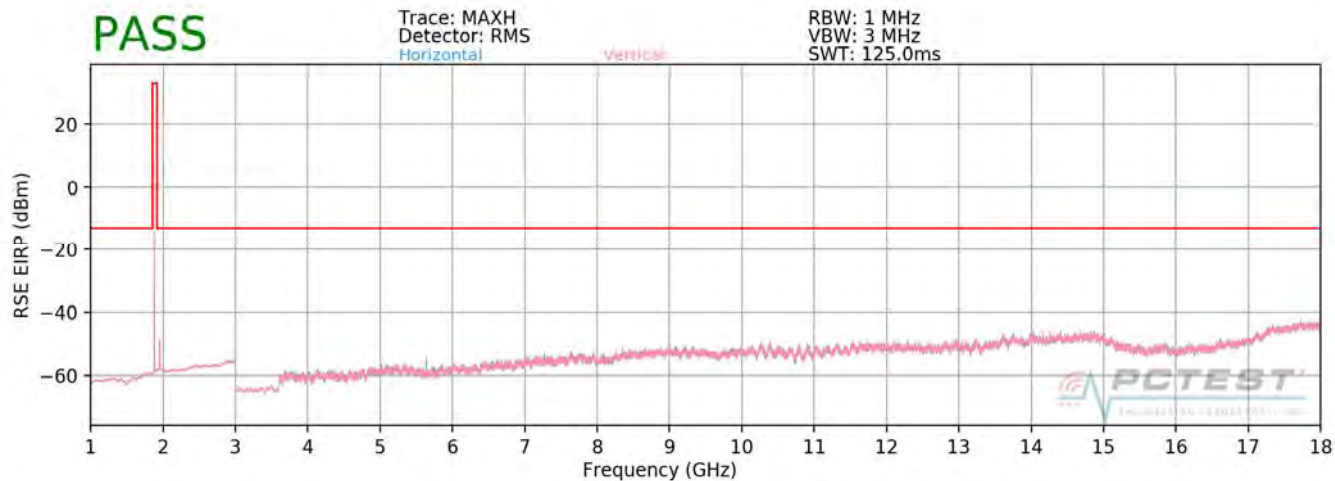

Plot 7-110. Radiated Spurious Plot Above 1GHz (PCS GPRS Mode)

OPERATING FREQUENCY: 1850.20 MHz
CHANNEL: 512
MODULATION SIGNAL: GPRS (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	387	312	-56.46	9.58	-46.88	-33.9
5550.60	H	213	17	-66.19	10.94	-55.25	-42.3
7400.80	H	-	-	-67.05	10.96	-56.10	-43.1
9251.00	H	303	4	-64.02	11.63	-52.39	-39.4
11101.20	H	110	331	-66.35	12.74	-53.61	-40.6
12951.40	H	-	-	-64.25	13.30	-50.95	-38.0

Table 7-25. Radiated Spurious Data with WCP (PCS GPRS Mode – Ch. 512)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 95 of 119

OPERATING FREQUENCY: 1880.00 MHz
CHANNEL: 661
MODULATION SIGNAL: GPRS (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	366	323	-54.40	9.37	-45.04	-32.0
5640.00	H	273	50	-65.50	11.17	-54.33	-41.3
7520.00	H	-	-	-66.61	11.11	-55.50	-42.5
9400.00	H	320	351	-61.82	11.57	-50.25	-37.3
11280.00	H	386	58	-63.93	12.72	-51.22	-38.2
13160.00	H	-	-	-65.71	13.15	-52.56	-39.6

Table 7-26. Radiated Spurious Data with WCP (PCS GPRS Mode – Ch. 661)

OPERATING FREQUENCY: 1909.80 MHz
CHANNEL: 810
MODULATION SIGNAL: GPRS (GMSK)
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	109	36	-54.64	9.30	-45.34	-32.3
5729.40	H	304	62	-65.56	11.39	-54.17	-41.2
7639.20	H	-	-	-65.95	11.33	-54.61	-41.6
9549.00	H	310	22	-63.62	11.79	-51.83	-38.8
11458.80	H	343	358	-63.07	12.82	-50.25	-37.2
13368.60	H	-	-	-63.36	12.78	-50.57	-37.6

Table 7-27. Radiated Spurious Data with WCP (PCS GPRS Mode – Ch. 810)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 96 of 119


OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	331	34	-67.13	9.37	-57.77	-44.8
5640.00	H	196	337	-63.71	11.17	-52.54	-39.5
7520.00	H	-	-	-66.63	11.11	-55.52	-42.5
9400.00	H	181	303	-60.04	11.57	-48.47	-35.5
11280.00	H	176	296	-63.46	12.72	-50.75	-37.7
13160.00	H	-	-	-65.71	13.15	-52.56	-39.6

Table 7-28. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 97 of 119

PCS CDMA Mode

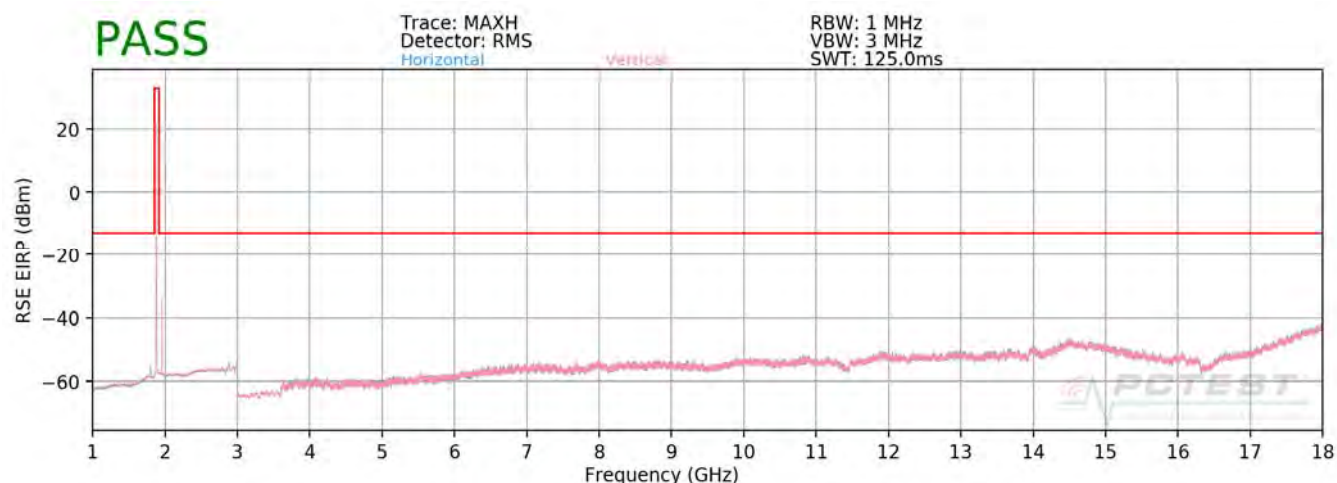

Plot 7-111. Radiated Spurious Plot Above 1GHz (PCS CDMA Mode)

OPERATING FREQUENCY: 1851.25 MHz
CHANNEL: 25
MODULATION SIGNAL: CDMA
DISTANCE: 3 meters
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3702.50	H	172	4	-71.55	9.73	-61.82	-48.8
5553.75	H	-	-	-70.74	10.98	-59.76	-46.8
7405.00	H	120	349	-68.09	10.78	-57.31	-44.3
9256.25	H	-	-	-69.23	12.28	-56.94	-43.9
11107.50	H	-	-	-67.72	12.94	-54.78	-41.8

Table 7-29. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 98 of 119

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	118	1	-71.36	9.50	-61.87	-48.9
5640.00	H	109	318	-71.80	11.16	-60.63	-47.6
7520.00	H	145	347	-67.95	11.03	-56.92	-43.9
9400.00	H	-	-	-68.14	12.19	-55.95	-43.0
11280.00	H	-	-	-66.65	13.15	-53.50	-40.5

Table 7-30. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	H	121	358	-69.52	9.30	-60.22	-47.2
5726.25	H	167	310	-70.02	11.33	-58.69	-45.7
7635.00	H	131	339	-65.95	11.27	-54.68	-41.7
9543.75	H	-	-	-67.97	12.23	-55.74	-42.7
11452.50	H	-	-	-65.62	13.26	-52.36	-39.4

Table 7-31. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 99 of 119


OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	H	104	30	-70.08	9.30	-60.78	-47.8
5726.25	H	398	56	-70.97	11.33	-59.64	-46.6
7635.00	H	135	343	-67.45	11.27	-56.18	-43.2
9543.75	H	-	-	-68.04	12.23	-55.81	-42.8
11452.50	H	-	-	-65.55	13.26	-52.29	-39.3

Table 7-32. Radiated Spurious Data with WCP (PCS CDMA Mode – Ch. 1175)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 100 of 119

PCS WCDMA Mode

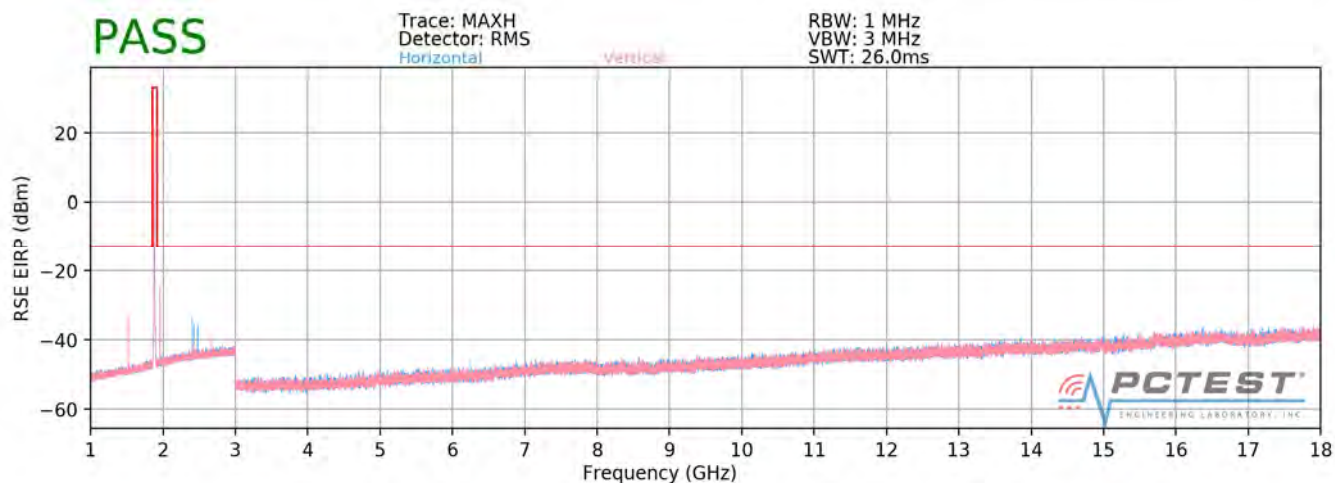

Plot 7-112. Radiated Spurious Plot Above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY: 1852.40 MHz

CHANNEL: 9262

MODULATION SIGNAL: WCDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	124	367	-71.01	9.57	-61.44	-48.4
5557.20	V	-	-	-71.20	10.95	-60.25	-47.2
7409.60	V	-	-	-69.02	10.96	-58.05	-45.1

Table 7-33. Radiated Spurious Data with WCP (PCS WCDMA Mode – Ch. 9262)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 101 of 119

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	121	356	-70.07	9.37	-60.71	-47.7
5640.00	V	-	-	-72.57	11.17	-61.40	-48.4
7520.00	V	-	-	-68.42	11.11	-57.31	-44.3

Table 7-34. Radiated Spurious Data with WCP (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	386	356	-69.91	9.30	-60.61	-47.6
5722.80	V	-	-	-71.78	11.37	-60.41	-47.4
7630.40	V	-	-	-67.77	11.31	-56.45	-43.5

Table 7-35. Radiated Spurious Data with WCP (PCS WCDMA Mode – Ch. 9538)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 102 of 119

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	178	14	-71.22	9.30	-61.92	-48.9
5722.80	H	-	-	-71.65	11.37	-60.28	-47.3
7630.40	H	-	-	-67.82	11.31	-56.50	-43.5

Table 7-36. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 103 of 119

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 104 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,600,275	275	0.0000329
100 %		- 30	836,599,997	-3	-0.0000004
100 %		- 20	836,599,853	-147	-0.0000176
100 %		- 10	836,600,103	103	0.0000123
100 %		0	836,600,359	359	0.0000429
100 %		+ 10	836,600,265	265	0.0000317
100 %		+ 20	836,599,871	-129	-0.0000154
100 %		+ 30	836,599,934	-66	-0.0000079
100 %		+ 40	836,599,976	-24	-0.0000029
100 %		+ 50	836,600,004	4	0.0000005
BATT. ENDPOINT	3.45	+ 20	836,600,242	242	0.0000289

Table 7-37. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 105 of 119

Frequency Stability / Temperature Variation

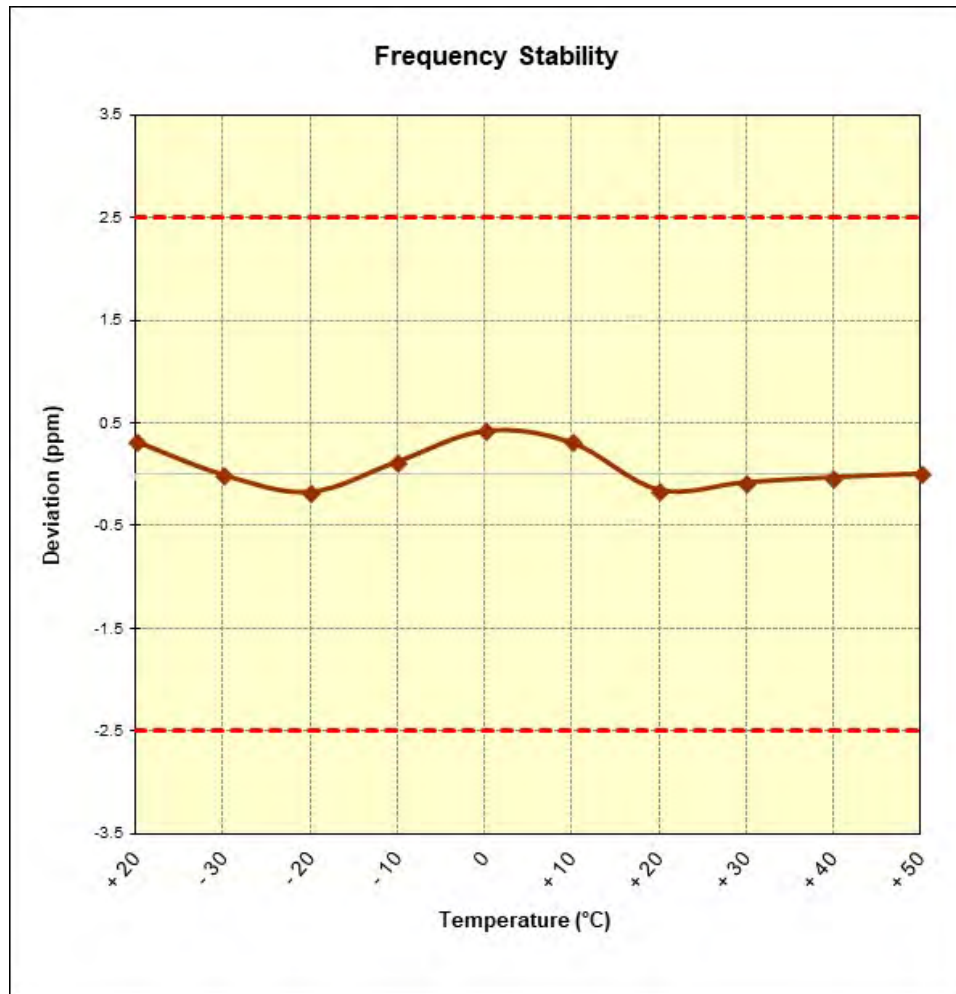


Figure 7-8. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 106 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,520,000 Hz

CHANNEL: 384

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,520,068	68	0.0000081
100 %		- 30	836,519,896	-104	-0.0000124
100 %		- 20	836,520,105	105	0.0000126
100 %		- 10	836,520,412	412	0.0000493
100 %		0	836,520,165	165	0.0000197
100 %		+ 10	836,519,802	-198	-0.0000237
100 %		+ 20	836,520,134	134	0.0000160
100 %		+ 30	836,520,044	44	0.0000053
100 %		+ 40	836,519,979	-21	-0.0000025
100 %		+ 50	836,519,884	-116	-0.0000139
BATT. ENDPOINT	3.45	+ 20	836,519,982	-18	-0.0000022

Table 7-38. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 107 of 119

Frequency Stability / Temperature Variation

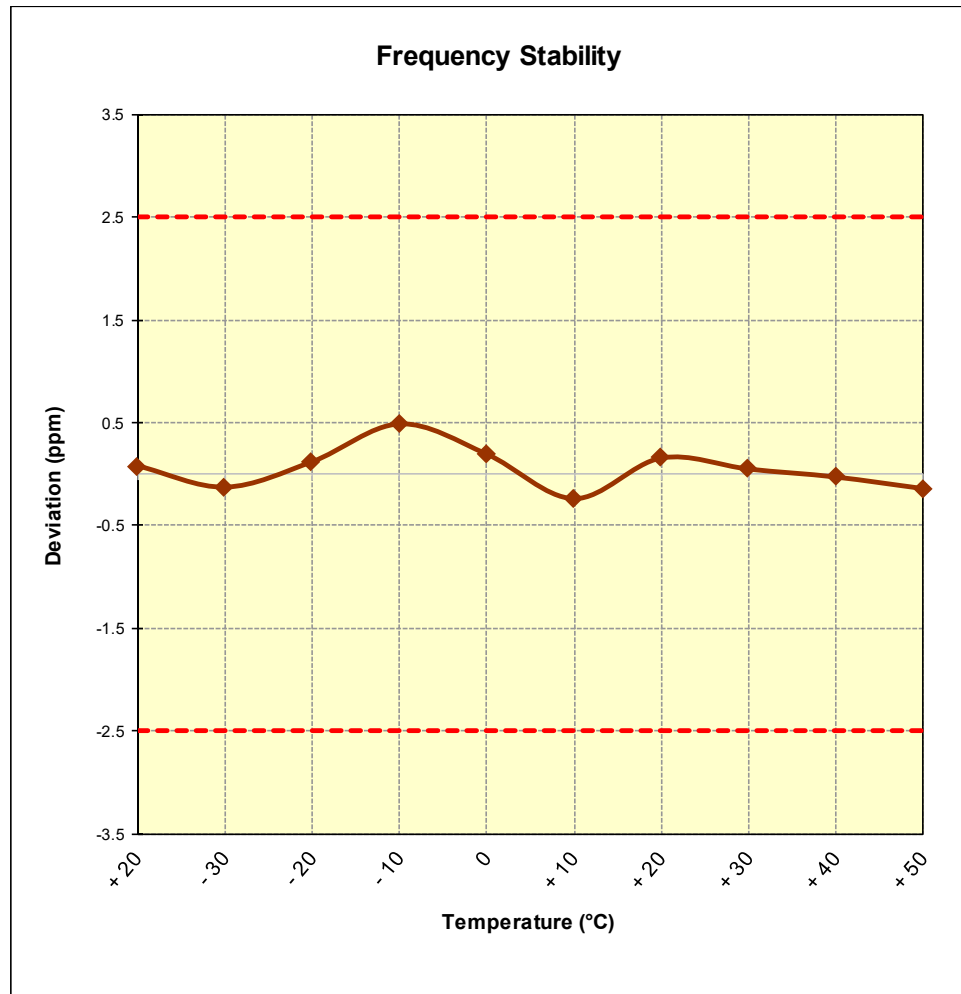


Figure 7-9. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 108 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,600,145	145	0.0000173
100 %		- 30	836,600,019	19	0.0000023
100 %		- 20	836,599,855	-145	-0.0000173
100 %		- 10	836,599,935	-65	-0.0000078
100 %		0	836,600,115	115	0.0000137
100 %		+ 10	836,600,213	213	0.0000255
100 %		+ 20	836,599,764	-236	-0.0000282
100 %		+ 30	836,599,893	-107	-0.0000128
100 %		+ 40	836,600,328	328	0.0000392
100 %		+ 50	836,599,916	-84	-0.0000100
BATT. ENDPOINT	3.45	+ 20	836,600,089	89	0.0000106

Table 7-39. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 109 of 119

Frequency Stability / Temperature Variation

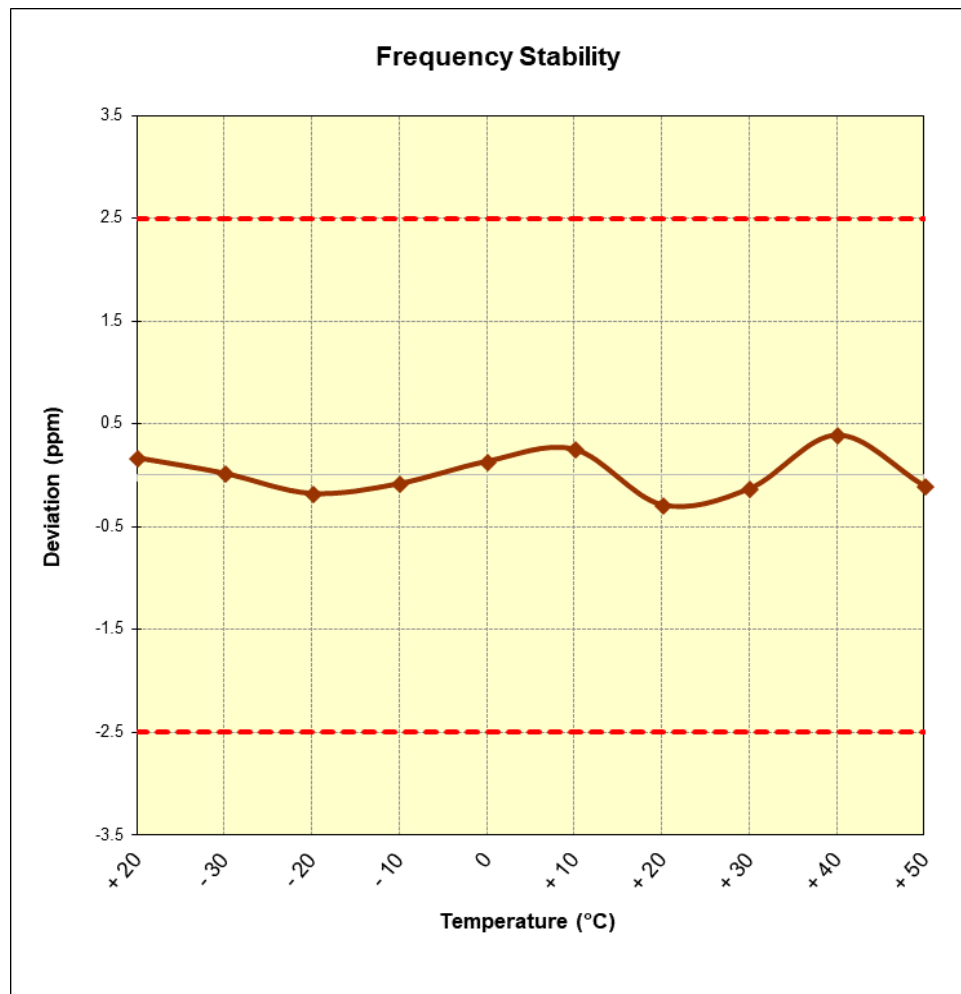


Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 110 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,732,600,000 Hz
CHANNEL: 1413
REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,599,886	-114	-0.0000066
100 %		- 30	1,732,599,799	-201	-0.0000116
100 %		- 20	1,732,599,853	-147	-0.0000085
100 %		- 10	1,732,599,678	-322	-0.0000186
100 %		0	1,732,600,045	45	0.0000026
100 %		+ 10	1,732,599,859	-141	-0.0000081
100 %		+ 20	1,732,599,978	-22	-0.0000013
100 %		+ 30	1,732,599,775	-225	-0.0000130
100 %		+ 40	1,732,600,001	1	0.0000001
100 %		+ 50	1,732,599,891	-109	-0.0000063
BATT. ENDPOINT	3.45	+ 20	1,732,599,752	-248	-0.0000143

Table 7-40. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 111 of 119

Frequency Stability / Temperature Variation

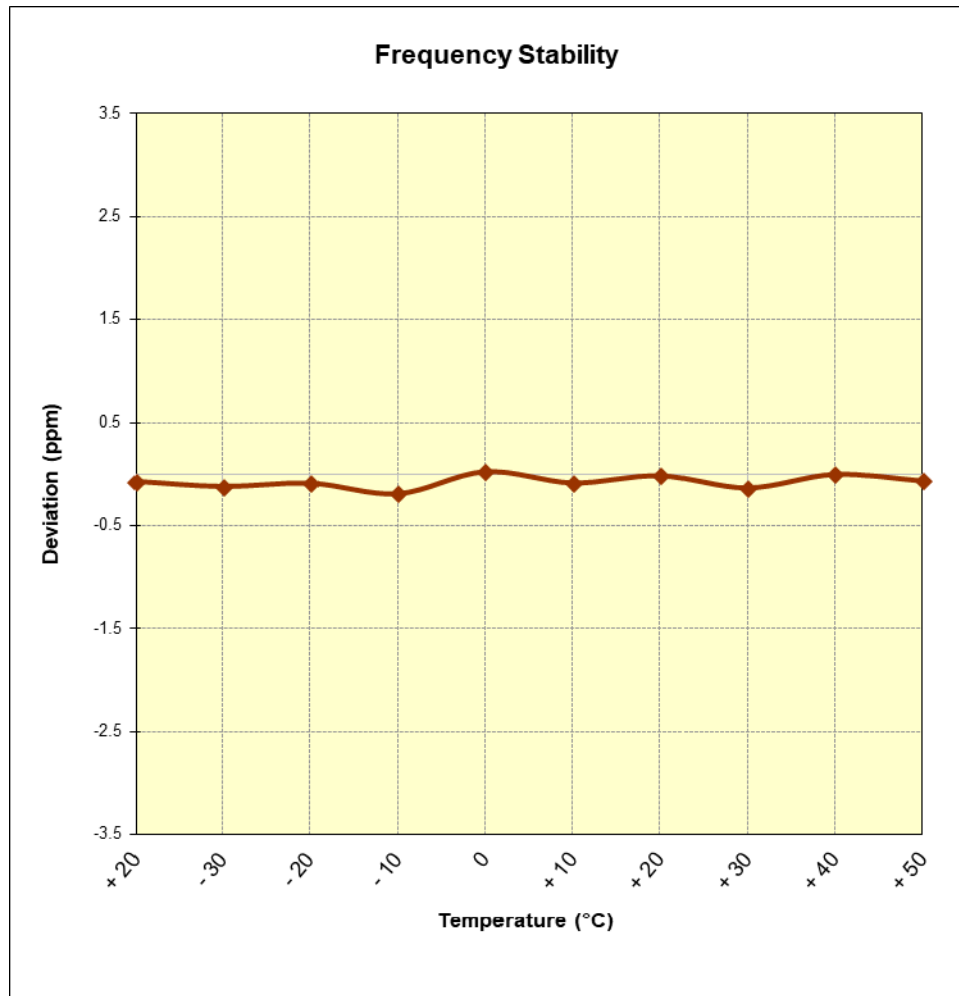


Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 112 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,886	-114	-0.0000061
100 %		- 30	1,880,000,338	338	0.0000180
100 %		- 20	1,879,999,696	-304	-0.0000162
100 %		- 10	1,880,000,128	128	0.0000068
100 %		0	1,880,000,209	209	0.0000111
100 %		+ 10	1,879,999,939	-61	-0.0000032
100 %		+ 20	1,880,000,057	57	0.0000030
100 %		+ 30	1,879,999,989	-11	-0.0000006
100 %		+ 40	1,879,999,979	-21	-0.0000011
100 %		+ 50	1,879,999,920	-80	-0.0000043
BATT. ENDPOINT	3.45	+ 20	1,879,999,978	-22	-0.0000012

Table 7-41. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 113 of 119

Frequency Stability / Temperature Variation

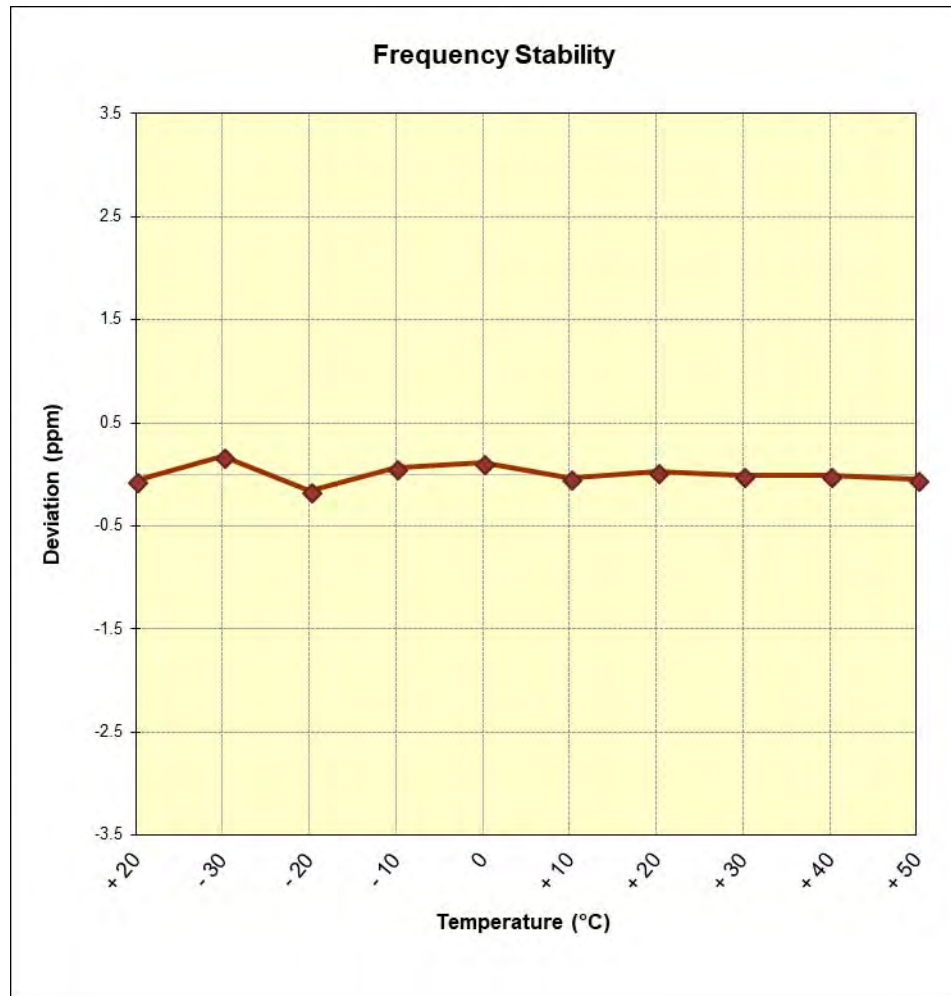


Figure 7-12. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: A3LSMN960U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 114 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 600
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,015	15	0.0000008
100 %		- 30	1,879,999,956	-44	-0.0000023
100 %		- 20	1,880,000,136	136	0.0000072
100 %		- 10	1,879,999,745	-255	-0.0000136
100 %		0	1,879,999,802	-198	-0.0000105
100 %		+ 10	1,879,999,837	-163	-0.0000087
100 %		+ 20	1,880,000,081	81	0.0000043
100 %		+ 30	1,879,999,653	-347	-0.0000185
100 %		+ 40	1,880,000,250	250	0.0000133
100 %		+ 50	1,879,999,994	-6	-0.0000003
BATT. ENDPOINT	3.45	+ 20	1,880,000,310	310	0.0000165

Table 7-42. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 115 of 119

Frequency Stability / Temperature Variation

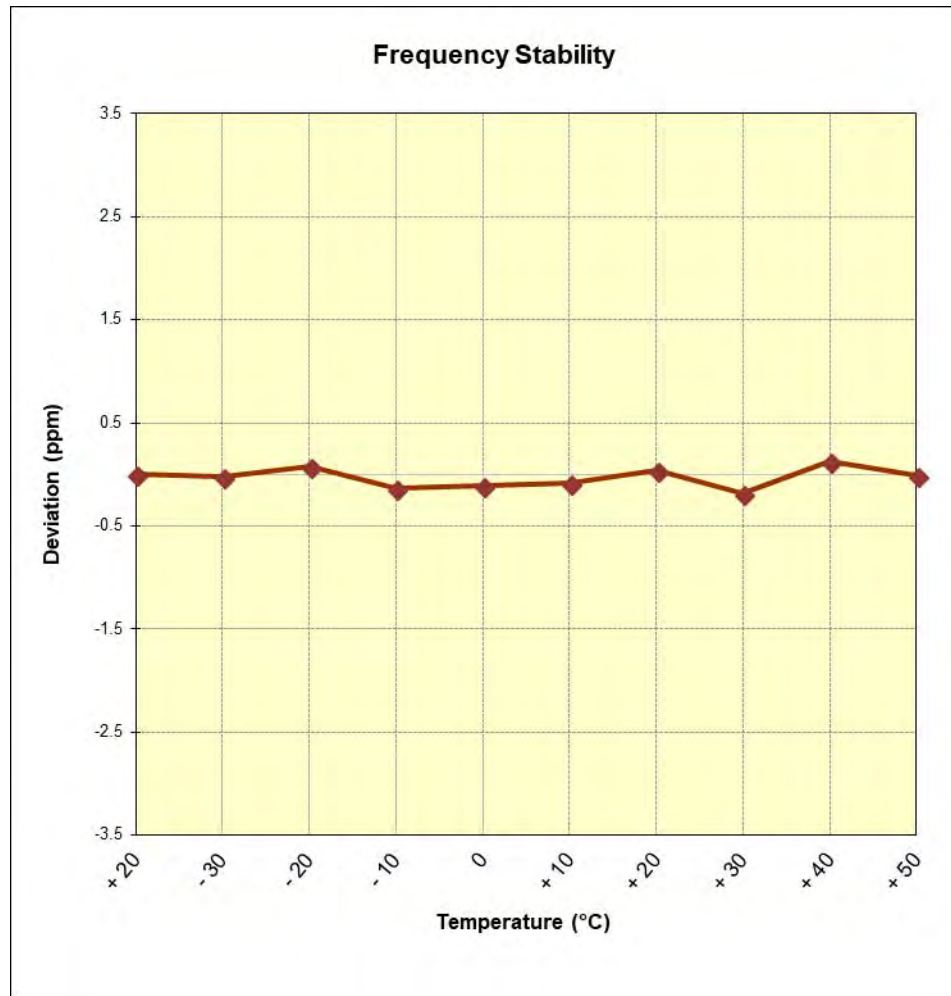


Figure 7-13. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 116 of 119

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
CHANNEL: 9400
REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,096	96	0.0000051
100 %		- 30	1,880,000,046	46	0.0000024
100 %		- 20	1,880,000,113	113	0.0000060
100 %		- 10	1,879,999,597	-403	-0.0000214
100 %		0	1,880,000,292	292	0.0000155
100 %		+ 10	1,879,999,906	-94	-0.0000050
100 %		+ 20	1,880,000,062	62	0.0000033
100 %		+ 30	1,879,999,963	-37	-0.0000020
100 %		+ 40	1,879,999,910	-90	-0.0000048
100 %		+ 50	1,879,999,566	-434	-0.0000231
BATT. ENDPOINT	3.45	+ 20	1,879,999,956	-44	-0.0000023

Table 7-43. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN960U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset	Page 117 of 119

Frequency Stability / Temperature Variation

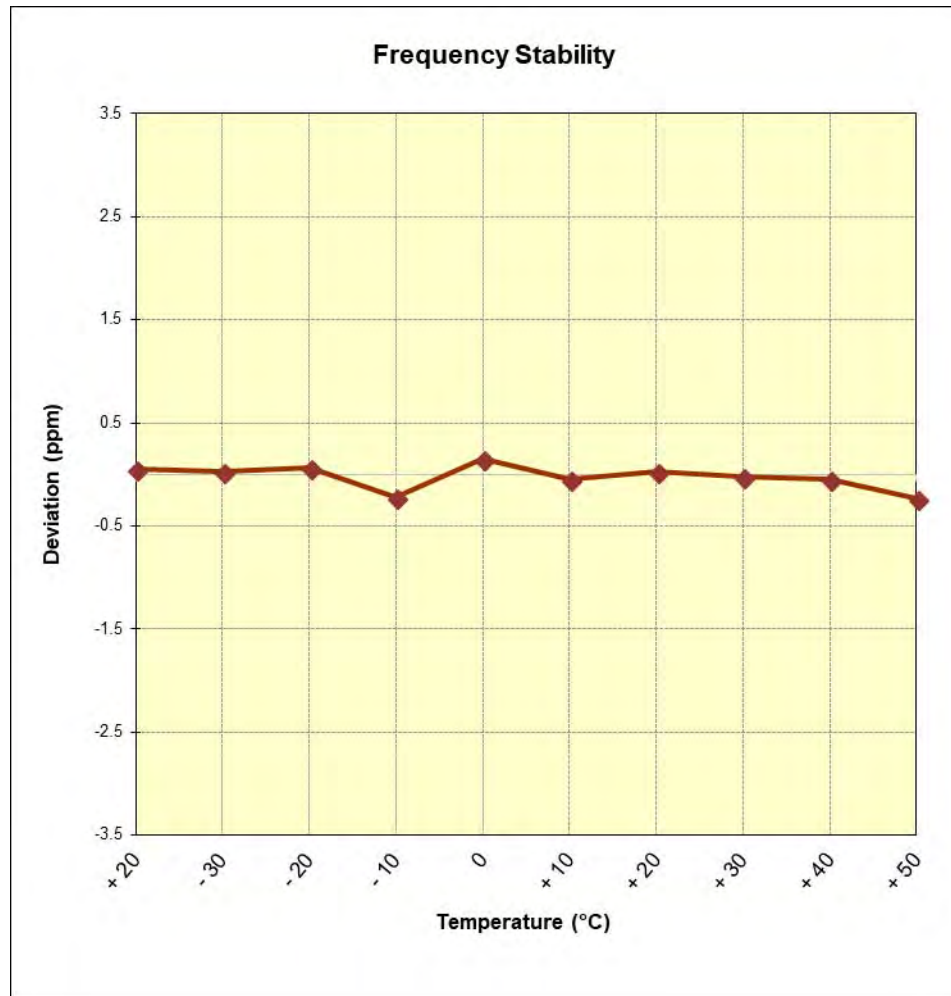


Figure 7-14. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 118 of 119

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN960U** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules and RSS-132, RSS-133, RSS-139 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: A3LSMN960U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804270086-02.A3L	Test Dates: 4/30 - 6/13/2018	EUT Type: Portable Handset		Page 119 of 119