


SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

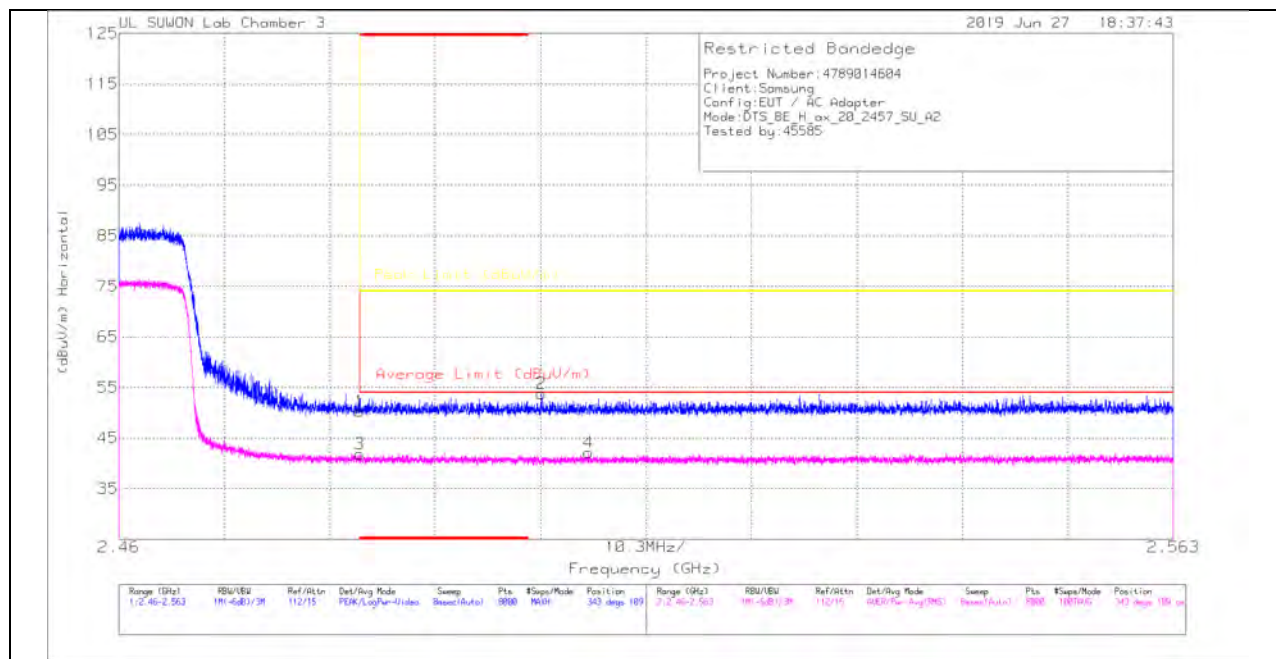

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.59	Pk	31.9	-23.2	0	50.29	-	-	74	-23.71	343	109	H
2	2.501	45.04	Pk	32	-23.3	0	53.74	-	-	74	-20.26	343	109	H
3	* 2.484	33.14	RMS	31.9	-23.2	0	41.84	54	-12.16	-	-	343	109	H
4	2.506	33.35	RMS	32	-23.2	0	42.15	54	-11.85	-	-	343	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

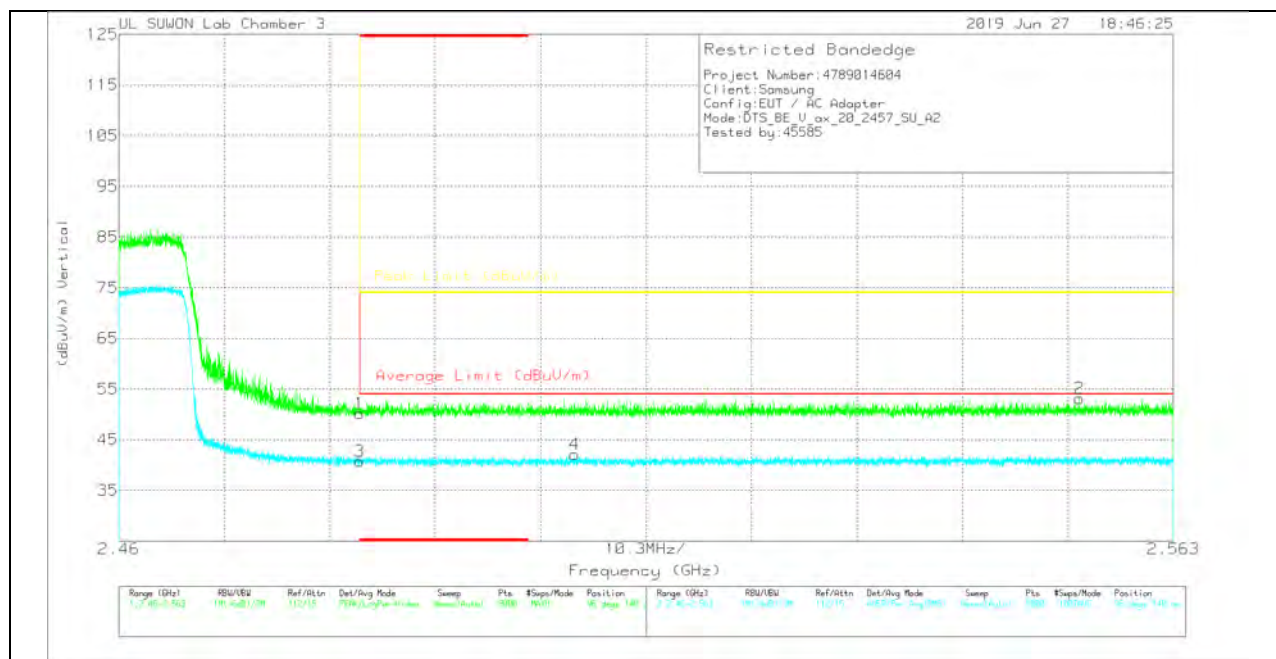

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.43	PK	31.9	-23.2	0	50.13	-	-	74	-23.87	96	140	V
2	2.554	44.11	PK	32	-23	0	53.11	-	-	74	-20.89	96	140	V
3	* 2.484	32.08	RMS	31.9	-23.2	0	40.78	54	-13.22	-	-	96	140	V
4	2.505	33.26	RMS	32	-23.2	0	42.06	54	-11.94	-	-	96	140	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (11 CHANNEL)

SU mode (ANT_1)

HORIZONTAL PEAK AND AVERAGE PLOT

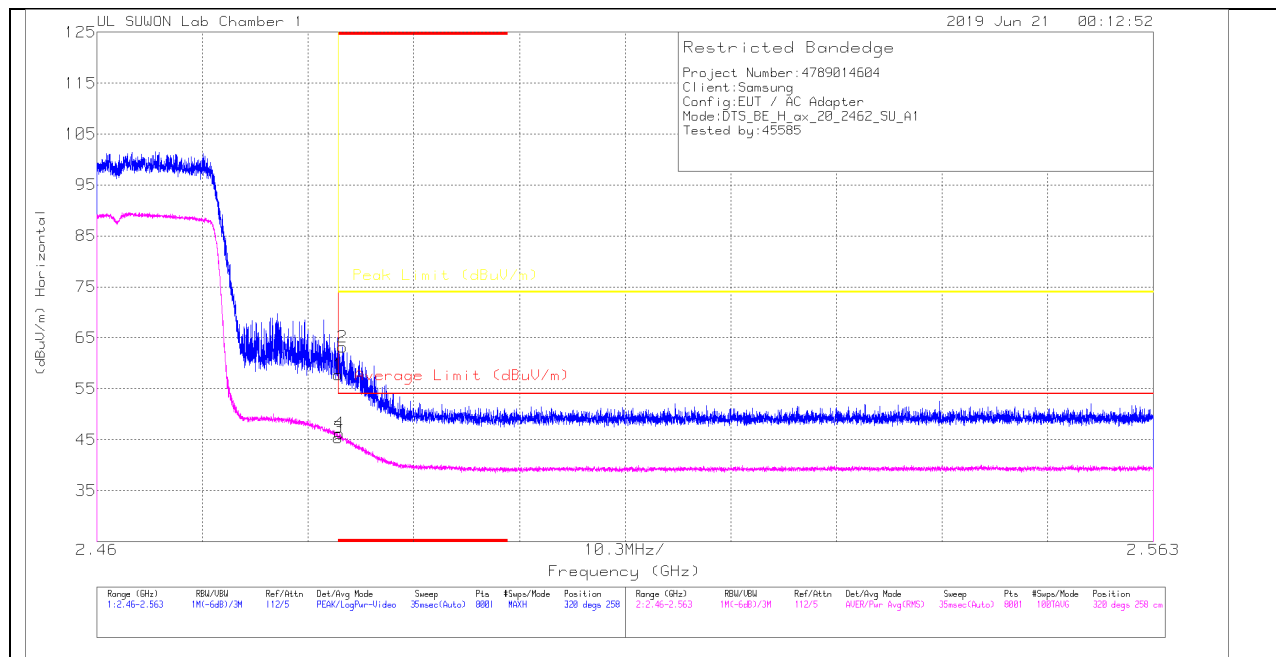

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.13	Pk	31.9	-25.3	0	57.73	-	-	74	-16.27	320	258	H
2	* 2.48394	56.54	Pk	31.9	-25.3	0	63.14	-	-	74	-10.86	320	258	H
3	* 2.48351	38.76	RMS	31.9	-25.3	0	45.36	54	-8.64	-	-	320	258	H
4	* 2.48363	39.64	RMS	31.9	-25.3	0	46.24	54	-7.76	-	-	320	258	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

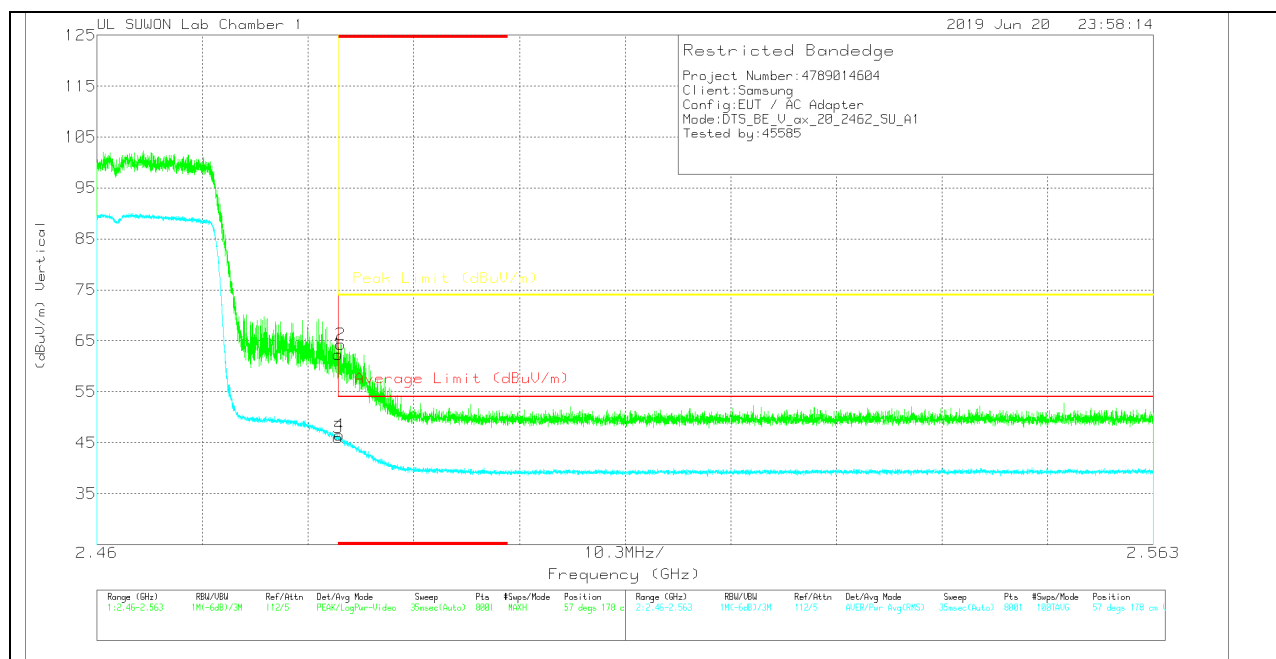

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	55.7	PK	31.9	-25.3	0	62.3	-	-	74	-11.7	57	178	V
2	* 2.48374	57.69	PK	31.9	-25.3	0	64.29	-	-	74	-9.71	57	178	V
3	* 2.48351	39.37	RMS	31.9	-25.3	0	45.97	54	-8.03	-	-	57	178	V
4	* 2.48363	39.84	RMS	31.9	-25.3	0	46.44	54	-7.56	-	-	57	178	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

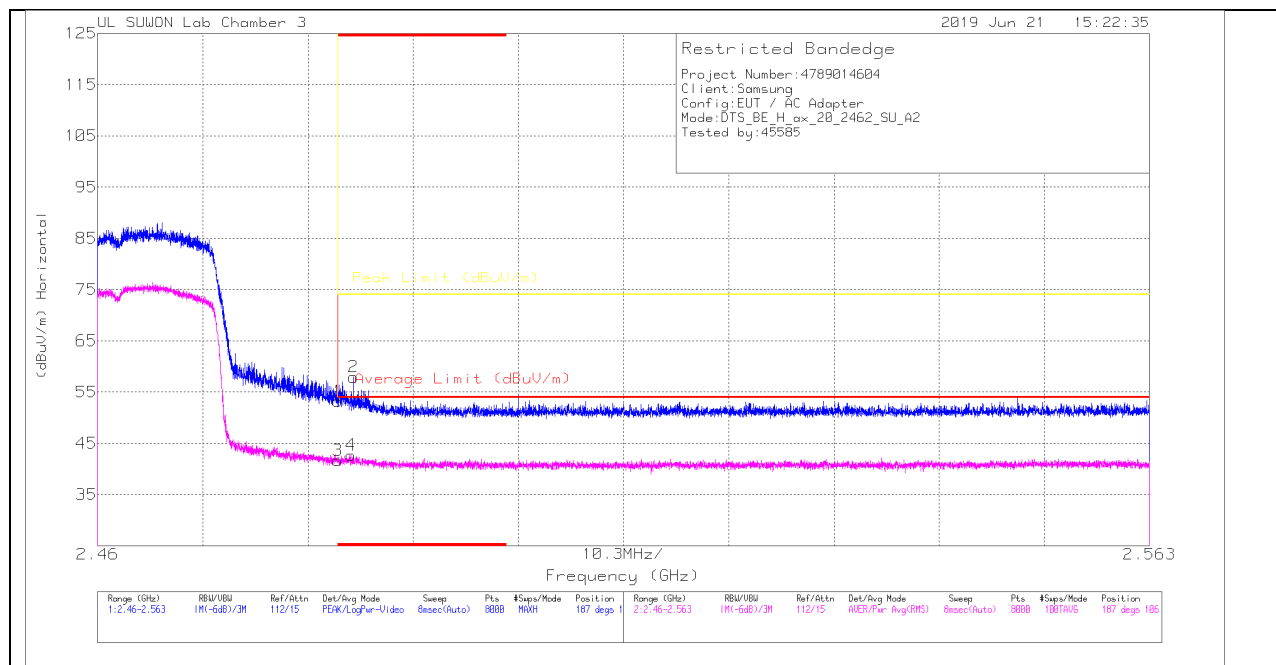

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.47	Pk	31.9	-23.2	0	53.17	-	-	74	-20.83	187	106	H
2	* 2.485	49.24	Pk	31.9	-23.2	0	57.94	-	-	74	-16.06	187	106	H
3	* 2.484	32.98	RMS	31.9	-23.2	0	41.68	54	-12.32	-	-	187	106	H
4	* 2.485	33.98	RMS	31.9	-23.2	0	42.68	54	-11.32	-	-	187	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

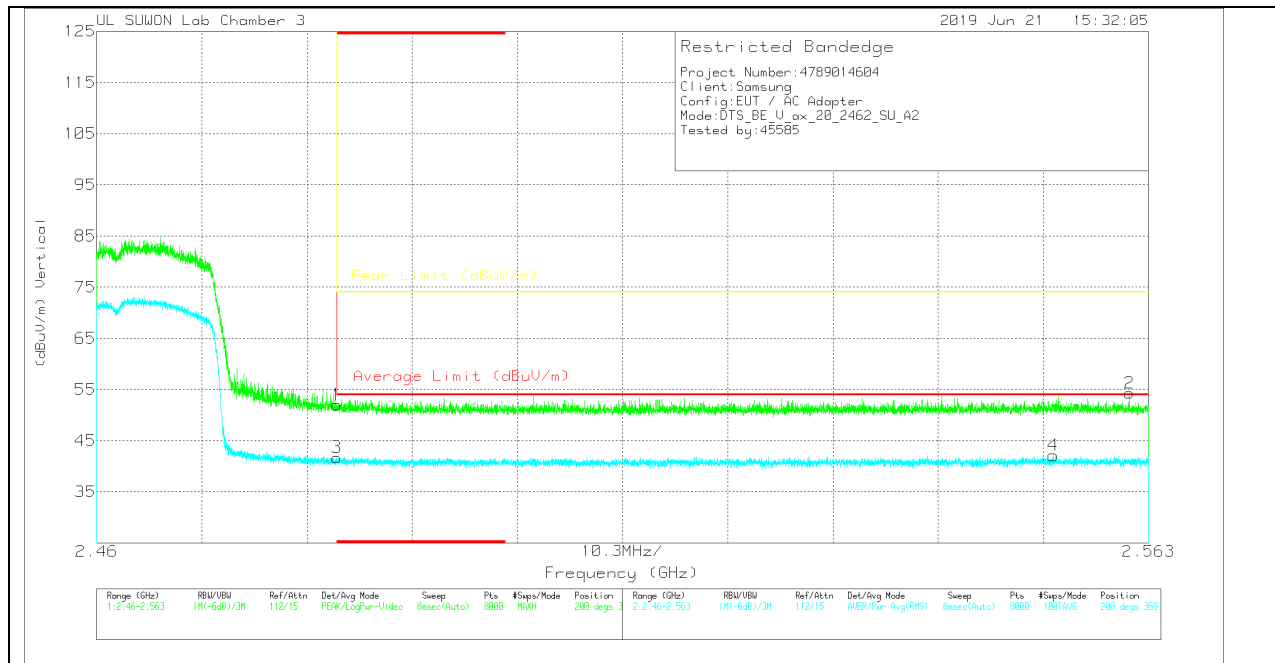

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.3	Pk	31.9	-23.2	0	52	-	-	74	-22	200	369	V
2	2.561	45.52	Pk	32	-23.2	0	54.32	-	-	74	-19.68	200	369	V
3	* 2.484	33.01	RMS	31.9	-23.2	0	41.71	54	-12.29	-	-	200	369	V
4	2.554	33.11	RMS	32	-23	0	42.11	54	-11.89	-	-	200	369	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_1 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

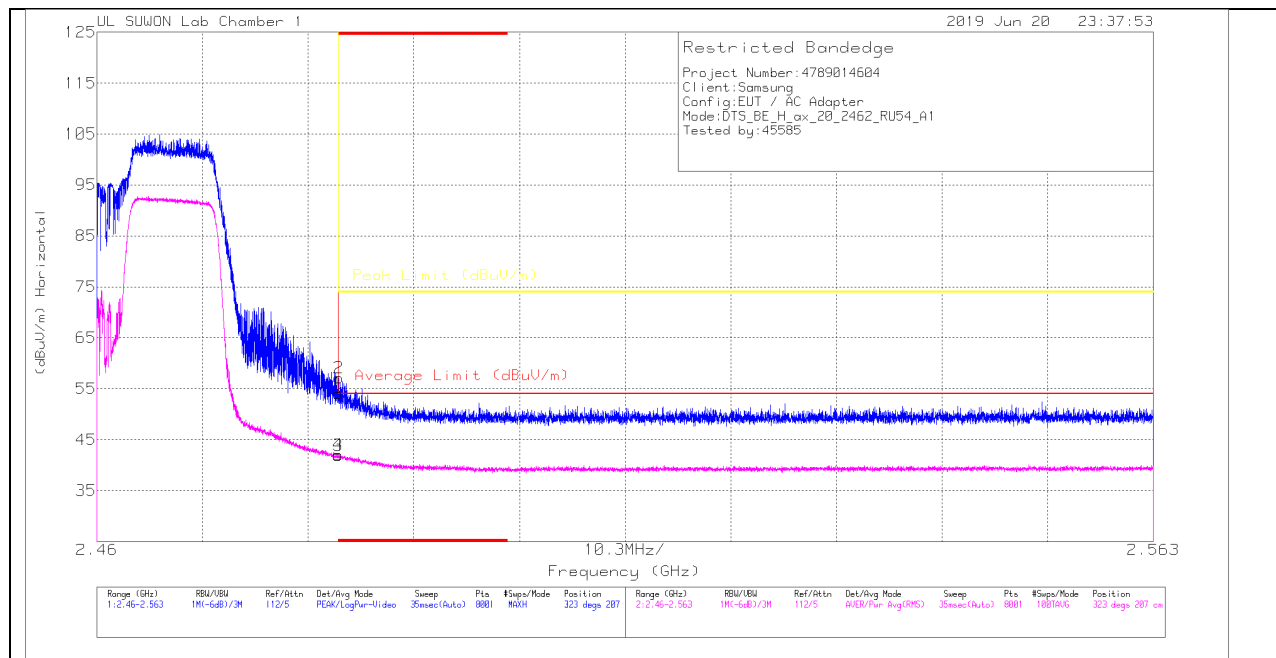

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dege)	Height (cm)	Polarity
1	* 2.48351	47.5	Pk	31.9	-25.3	0	54.1	-	-	74	-19.9	323	207	H
2	* 2.48357	50.56	Pk	31.9	-25.3	0	57.16	-	-	74	-16.84	323	207	H
3	* 2.48351	35.29	RMS	31.9	-25.3	0	41.89	54	-12.11	-	-	323	207	H
4	* 2.48355	35.39	RMS	31.9	-25.3	0	41.99	54	-12.01	-	-	323	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

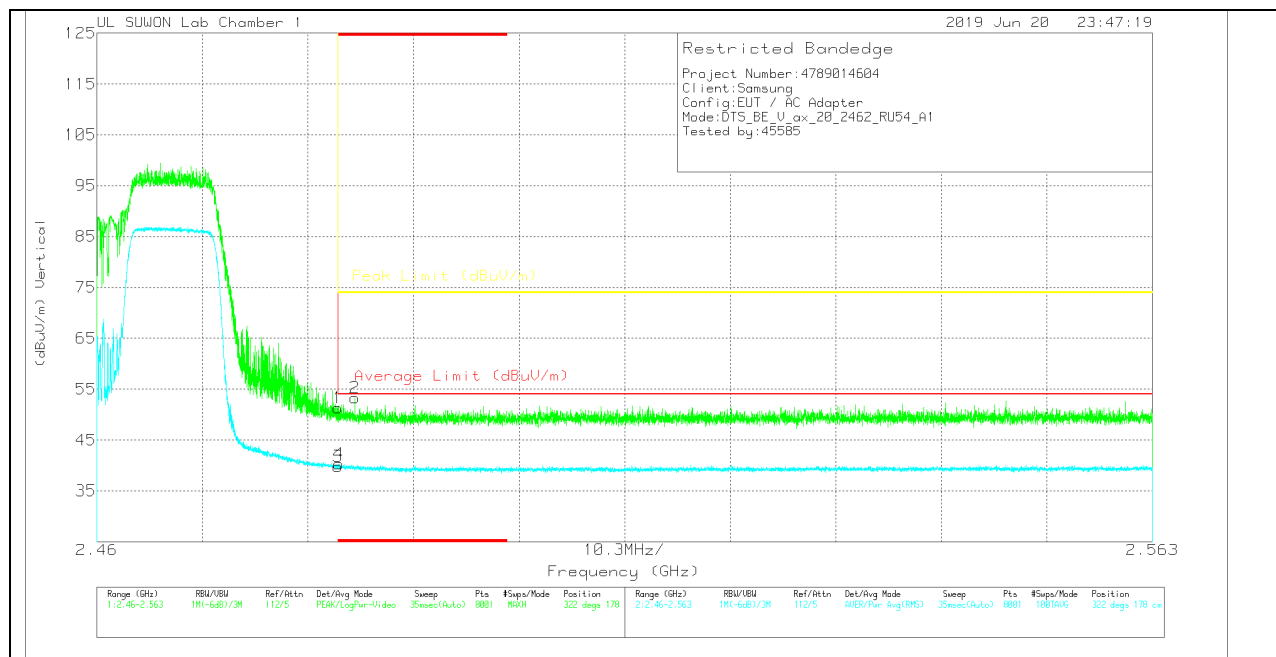

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.73	Pk	31.9	-25.3	0	51.33	-	-	74	-22.67	322	178	V
2	* 2.48518	46.73	Pk	31.9	-25.3	0	53.33	-	-	74	-20.67	322	178	V
3	* 2.48351	33.19	RMS	31.9	-25.3	0	39.79	54	-14.21	-	-	322	178	V
4	* 2.48361	33.7	RMS	31.9	-25.3	0	40.3	54	-13.7	-	-	322	178	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_2 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

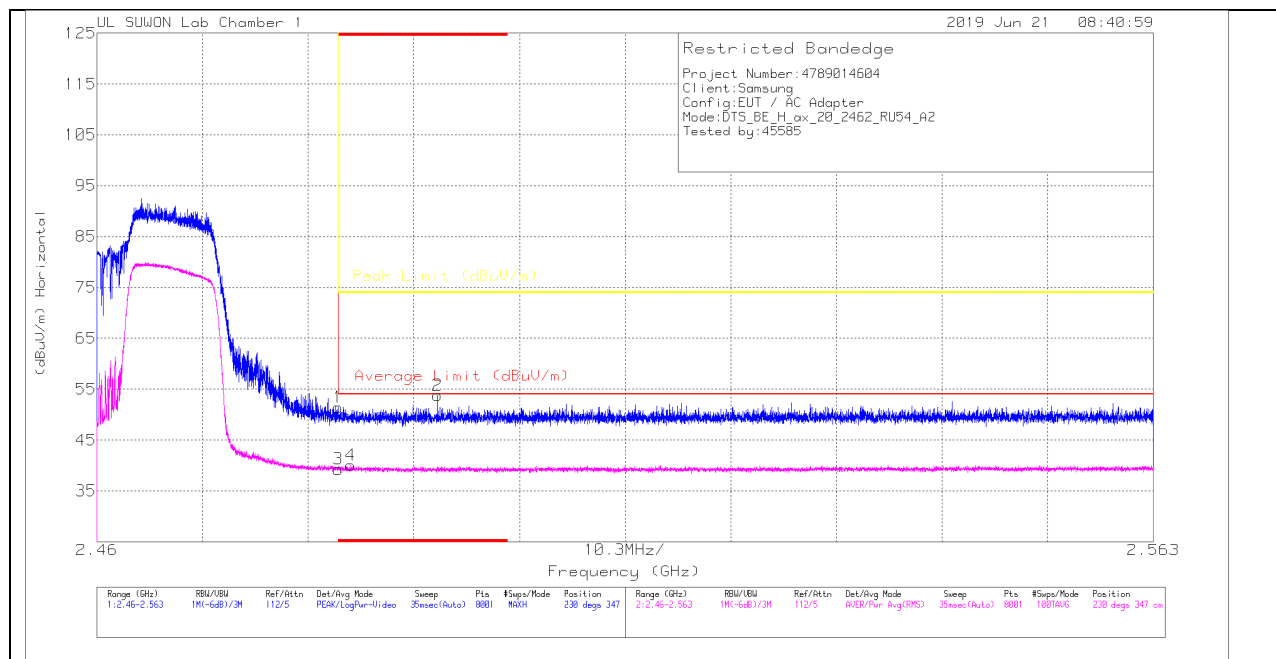

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.79	Pk	31.9	-25.3	0	51.39	-	-	74	-22.61	230	347	H
2	* 2.49321	47.15	Pk	31.9	-25.3	0	53.75	-	-	74	-20.25	230	347	H
3	* 2.48351	32.66	RMS	31.9	-25.3	0	39.26	54	-14.74	-	-	230	347	H
4	* 2.48476	33.41	RMS	31.9	-25.3	0	40.01	54	-13.99	-	-	230	347	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

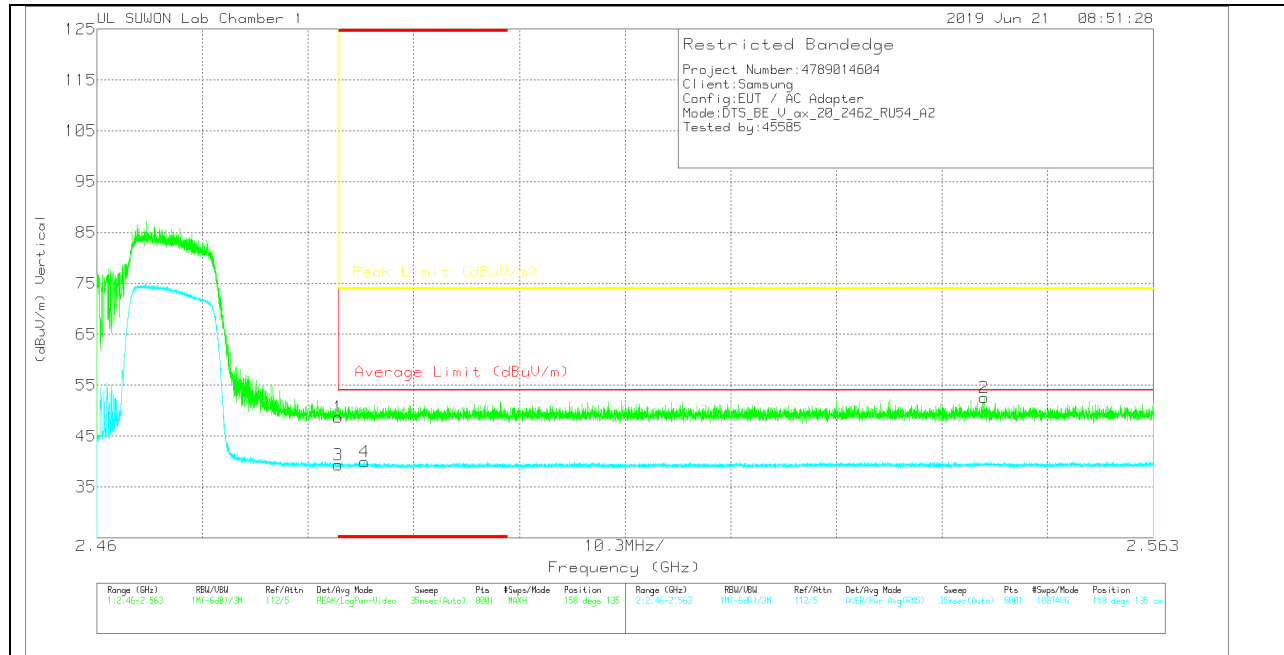

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.14	Pk	31.9	-25.3	0	48.74	-	-	74	-25.26	158	135	V
2	2.54649	45.62	Pk	32	-25.1	0	52.52	-	-	74	-21.48	158	135	V
3	* 2.48351	32.74	RMS	31.9	-25.3	0	39.34	54	-14.66	-	-	158	135	V
4	* 2.4861	33.27	RMS	31.9	-25.2	0	39.97	54	-14.03	-	-	158	135	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_1 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

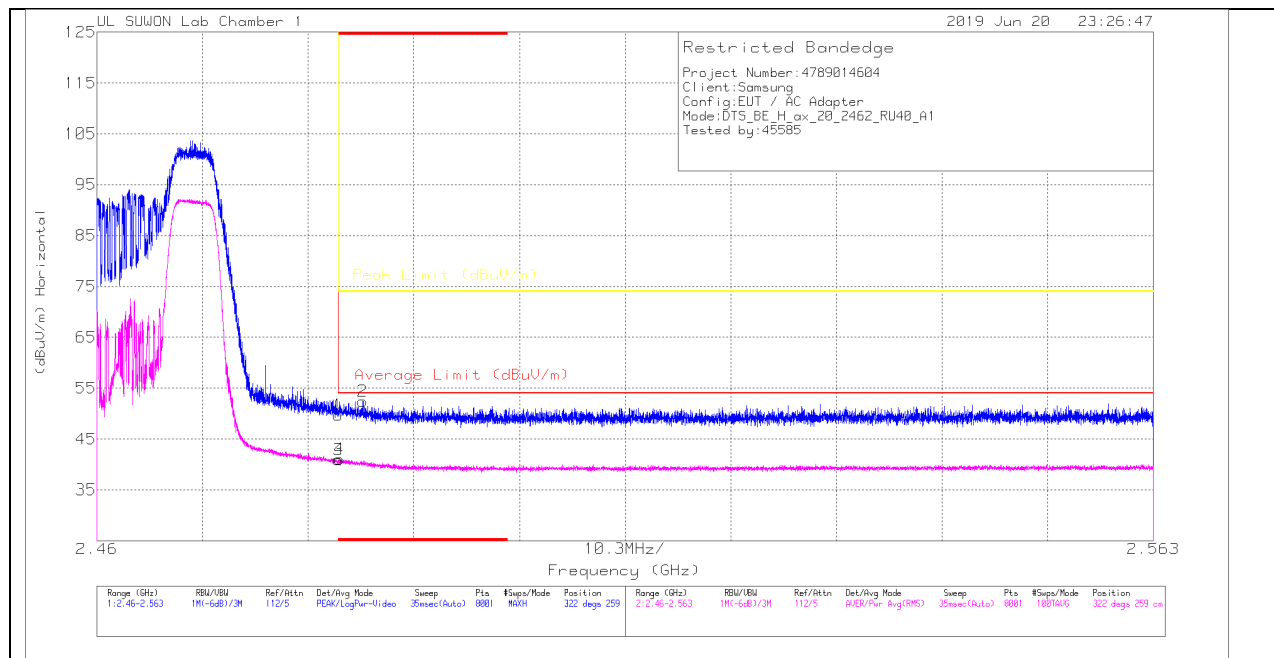

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	43.12	Pk	31.9	-25.3	0	49.72	-	-	74	-24.28	322	259	H
2	* 2.48589	45.72	Pk	31.9	-25.2	0	52.42	-	-	74	-21.58	322	259	H
3	* 2.48351	34.34	RMS	31.9	-25.3	0	40.94	54	-13.06	-	-	322	259	H
4	* 2.48366	34.4	RMS	31.9	-25.3	0	41	54	-13	-	-	322	259	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

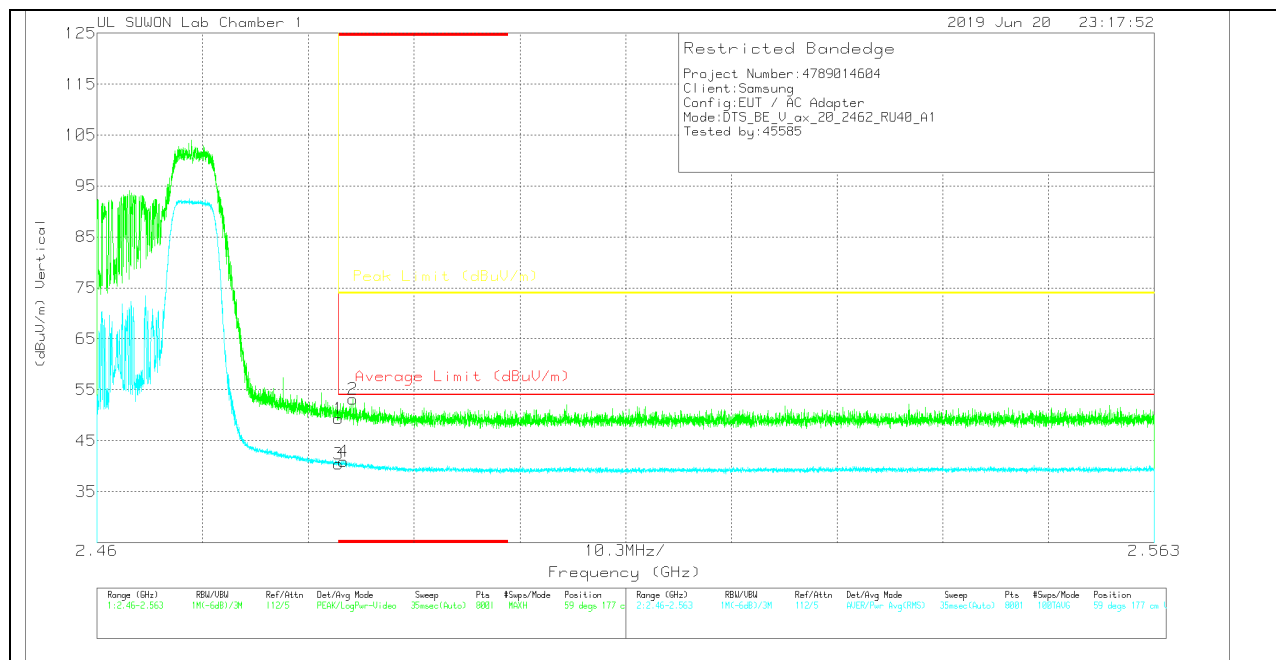

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.7	PK	31.9	-25.3	0	49.3	-	-	74	-24.7	59	177	V
2	* 2.48493	46.55	PK	31.9	-25.3	0	53.15	-	-	74	-20.85	59	177	V
3	* 2.48351	33.83	RMS	31.9	-25.3	0	40.43	54	-13.57	-	-	59	177	V
4	* 2.48403	34.35	RMS	31.9	-25.3	0	40.95	54	-13.05	-	-	59	177	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

52T RU mode (ANT_2 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

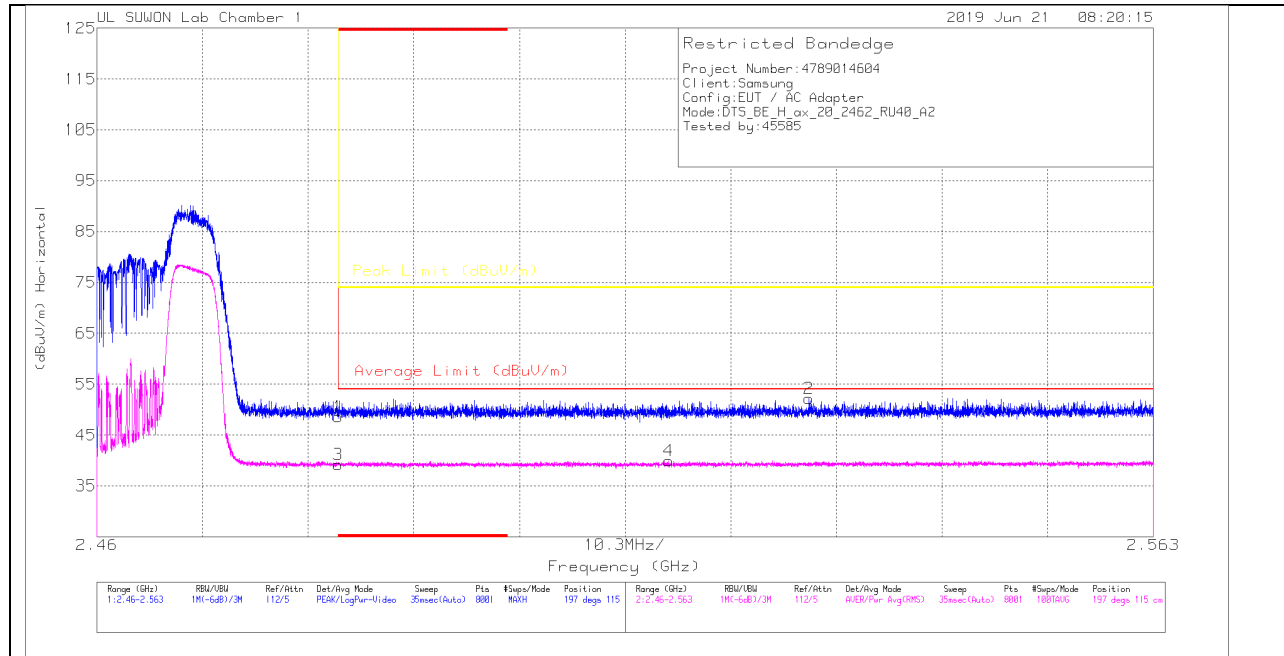

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.01	Pk	31.9	-25.3	0	48.61	-	-	74	-25.39	197	115	H
2	2.52942	45.41	Pk	32	-25.2	0	52.21	-	-	74	-21.79	197	115	H
3	* 2.48351	32.63	RMS	31.9	-25.3	0	39.23	54	-14.77	-	-	197	115	H
4	2.51574	33.14	RMS	32	-25.2	0	39.94	54	-14.06	-	-	197	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

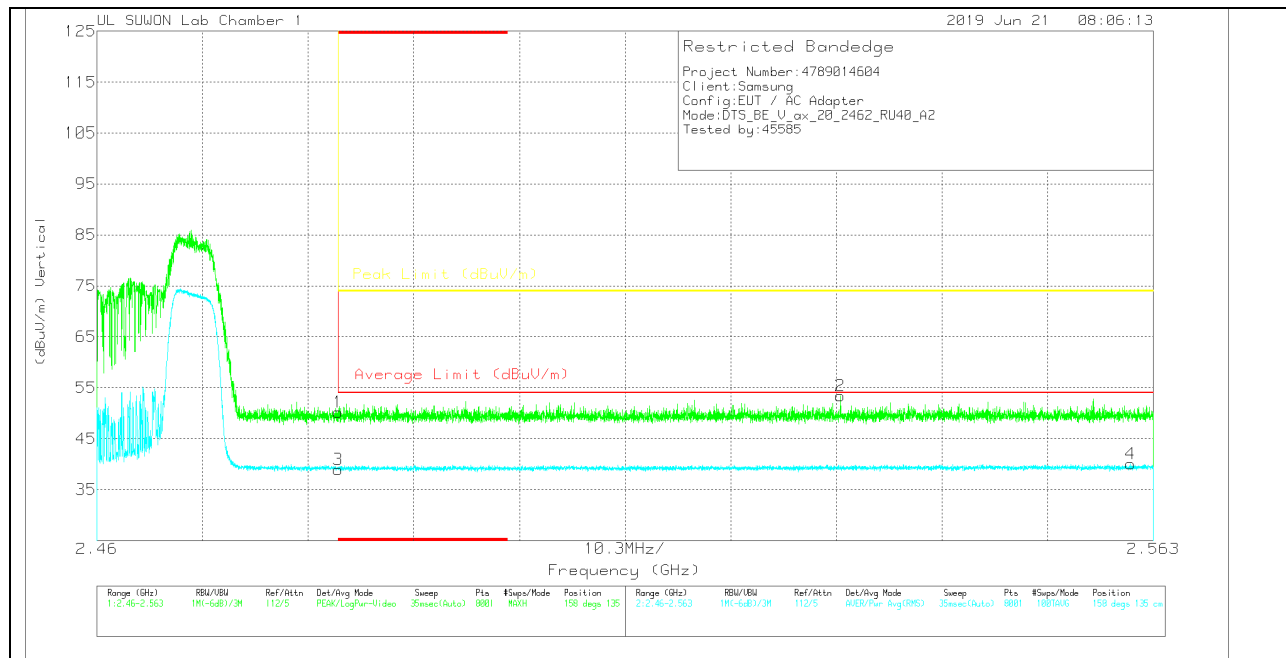

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	43.59	Pk	31.9	-25.3	0	50.19	-	-	74	-23.81	158	135	V
2	2.5325	46.67	Pk	32	-25.2	0	53.47	-	-	74	-20.53	158	135	V
3	* 2.48351	32.39	RMS	31.9	-25.3	0	38.99	54	-15.01	-	-	158	135	V
4	2.56079	33.23	RMS	32	-25.2	0	40.03	54	-13.97	-	-	158	135	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_1 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

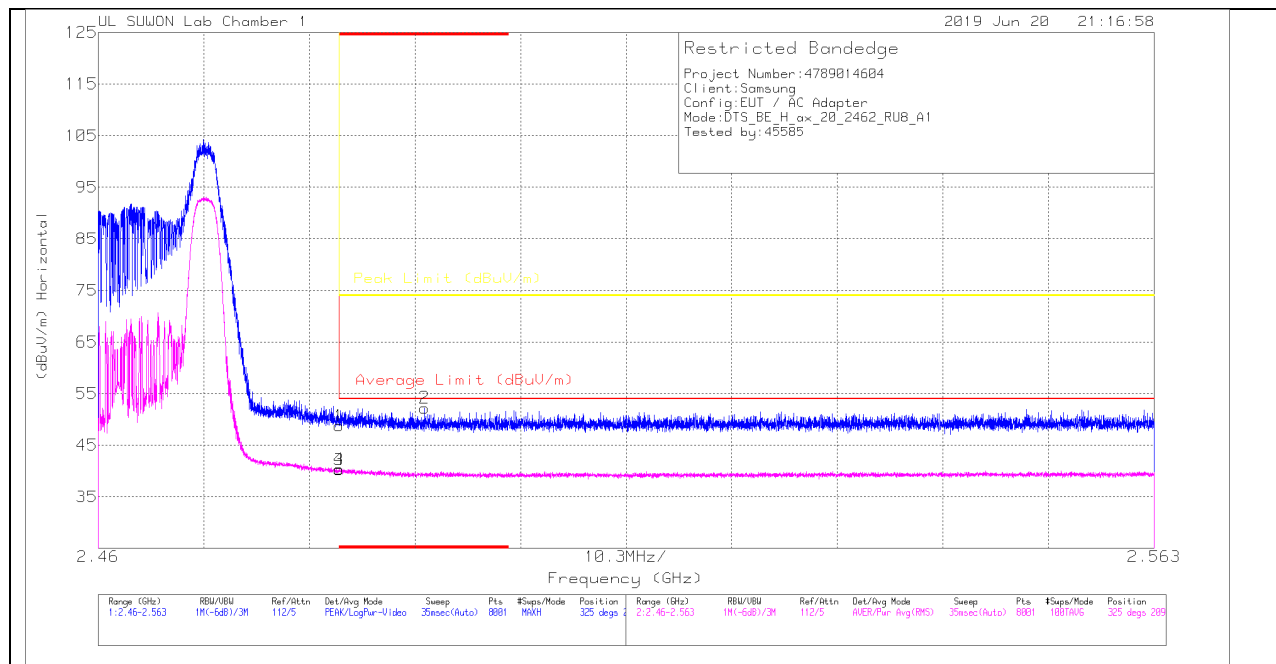

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.15	Pk	31.9	-25.3	0	48.75	-	-	74	-25.25	325	209	H
2	* 2.49185	45.52	Pk	31.9	-25.2	0	52.22	-	-	74	-21.78	325	209	H
3	* 2.48351	33.65	RMS	31.9	-25.3	0	40.25	54	-13.75	-	-	325	209	H
4	* 2.48352	33.79	RMS	31.9	-25.3	0	40.39	54	-13.61	-	-	325	209	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

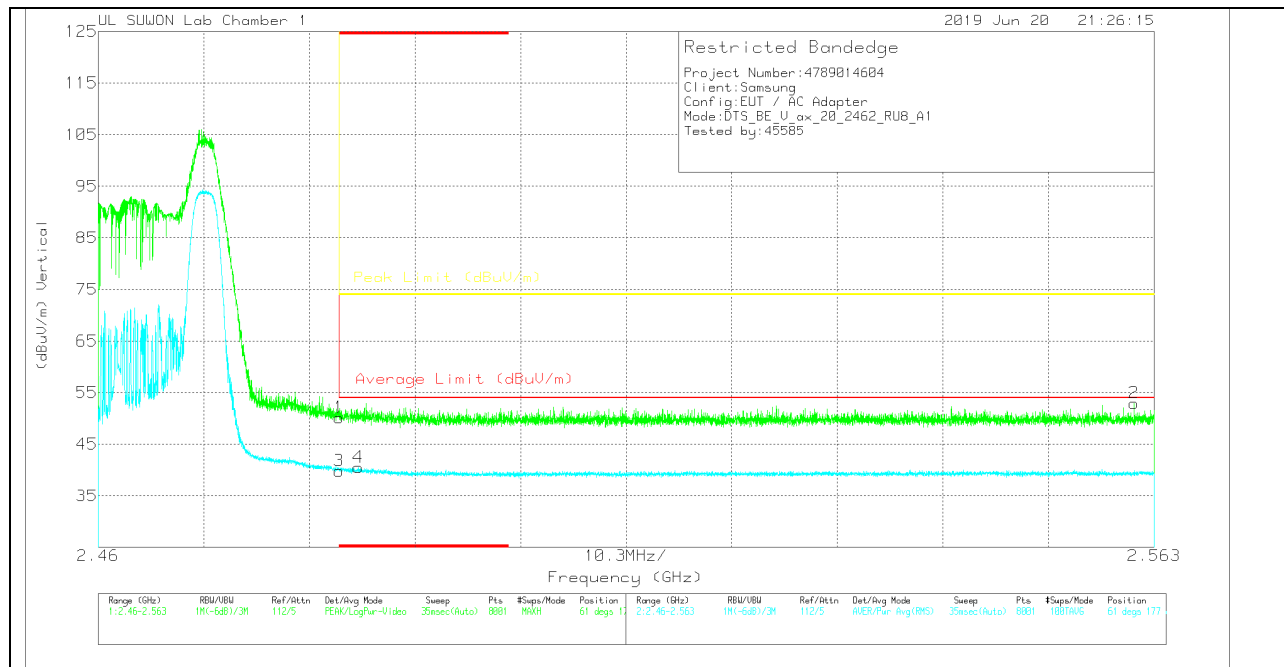

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.55	Pk	31.9	-25.3	0	50.15	-	-	74	-23.85	61	177	V
2	2.56103	46.17	Pk	32	-25.2	0	52.97	-	-	74	-21.03	61	177	V
3	* 2.48351	33.25	RMS	31.9	-25.3	0	39.85	54	-14.15	-	-	61	177	V
4	* 2.48538	33.93	RMS	31.9	-25.3	0	40.53	54	-13.47	-	-	61	177	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_2 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

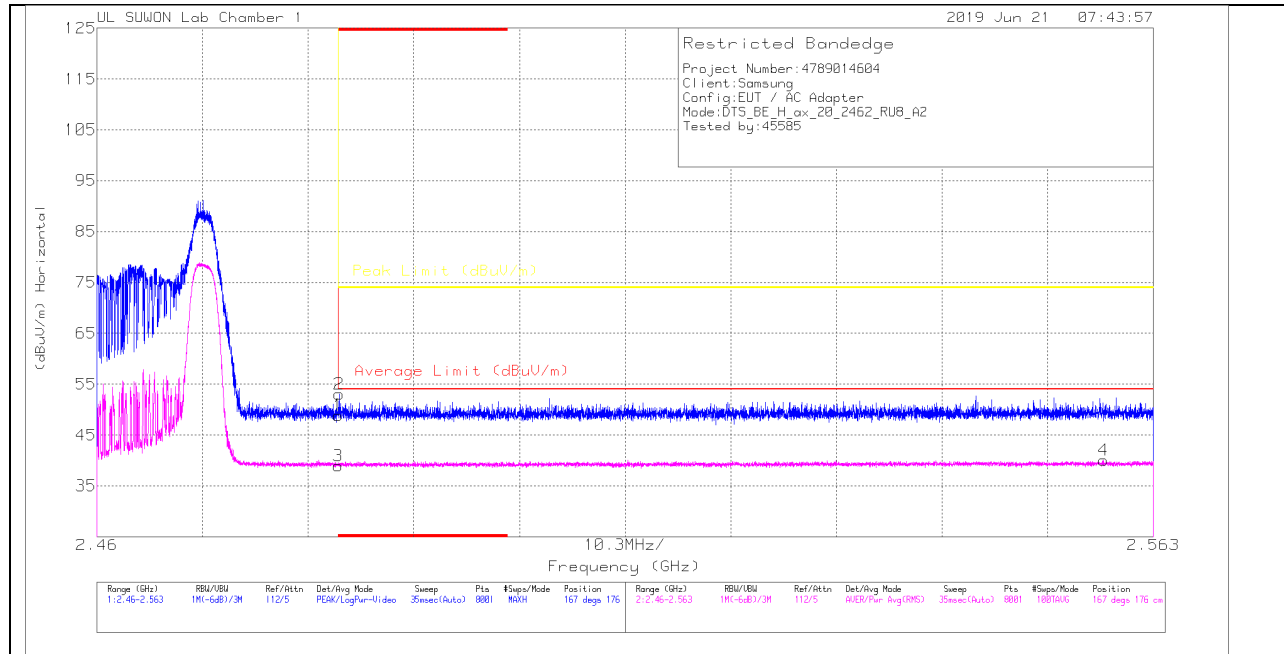

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Dege)	Height (cm)	Polarity
1	* 2.48351	42.3	Pk	31.9	-25.3	0	48.9	-	-	74	-25.1	167	176	H
2	* 2.48361	46.46	PK	31.9	-25.3	0	53.06	-	-	74	-20.94	167	176	H
3	* 2.48351	32.39	RMS	31.9	-25.3	0	38.99	54	-15.01	-	-	167	176	H
4	2.55813	33.19	RMS	32	-25.1	0	40.09	54	-13.91	-	-	167	176	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

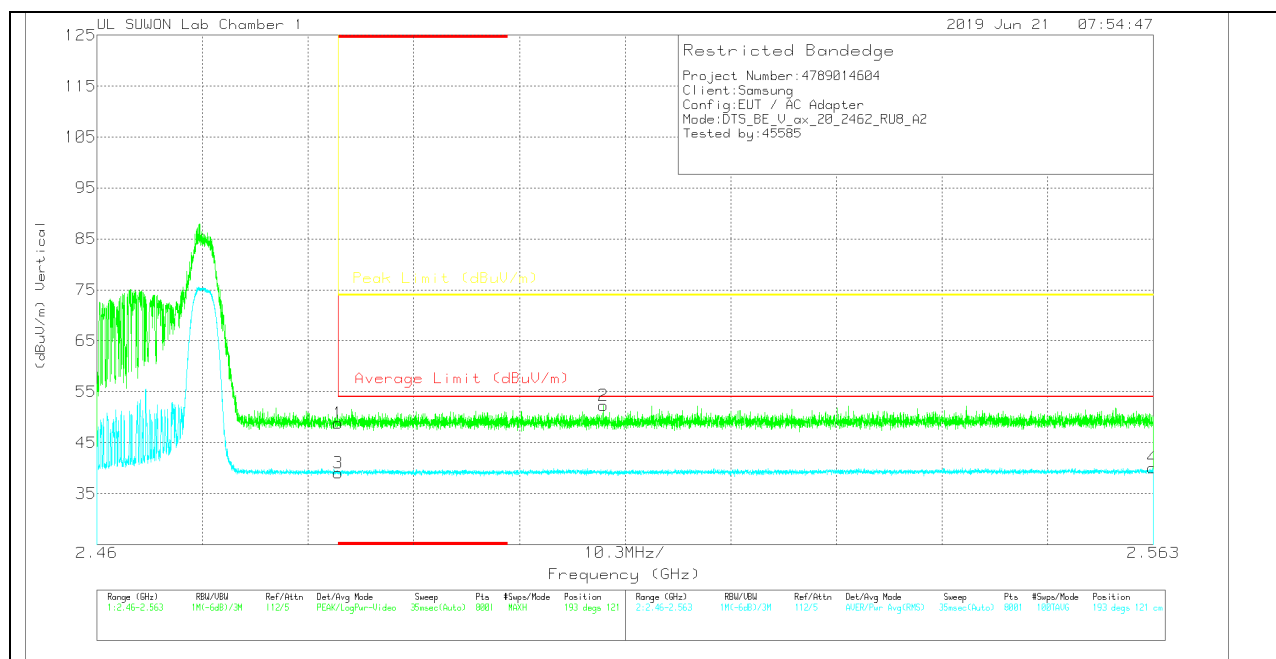

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.23	Pk	31.9	-25.3	0	48.83	-	-	74	-25.17	193	121	V
2	2.50938	45.51	Pk	32	-25.2	0	52.31	-	-	74	-21.69	193	121	V
3	* 2.48351	32.43	RMS	31.9	-25.3	0	39.03	54	-14.97	-	-	193	121	V
4	2.56291	33.17	RMS	32	-25.1	0	40.07	54	-13.93	-	-	193	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (12 CHANNEL)

SU mode (ANT_1)

HORIZONTAL PEAK AND AVERAGE PLOT

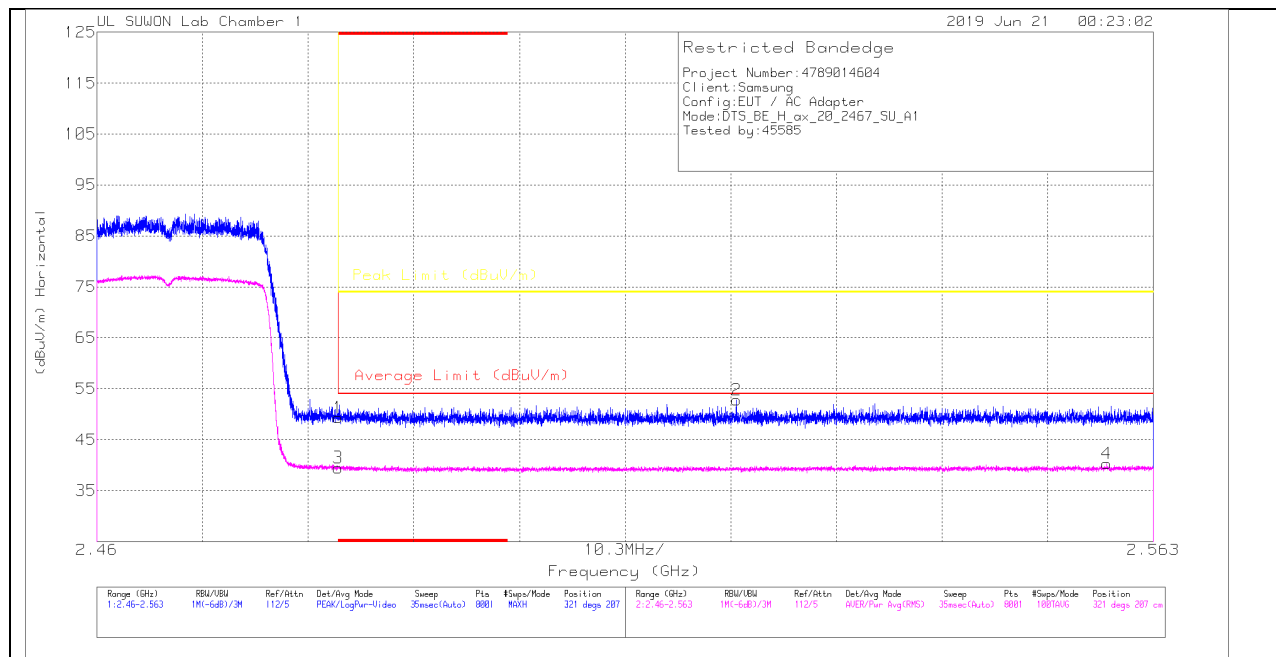

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.76	Pk	31.9	-25.3	0	49.36	-	-	74	-24.64	321	207	H
2	2.52234	45.95	Pk	32	-25.2	0	52.75	-	-	74	-21.25	321	207	H
3	* 2.48351	32.9	RMS	31.9	-25.3	0	39.5	54	-14.5	-	-	321	207	H
4	2.55848	33.43	RMS	32	-25.1	0	40.33	54	-13.67	-	-	321	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

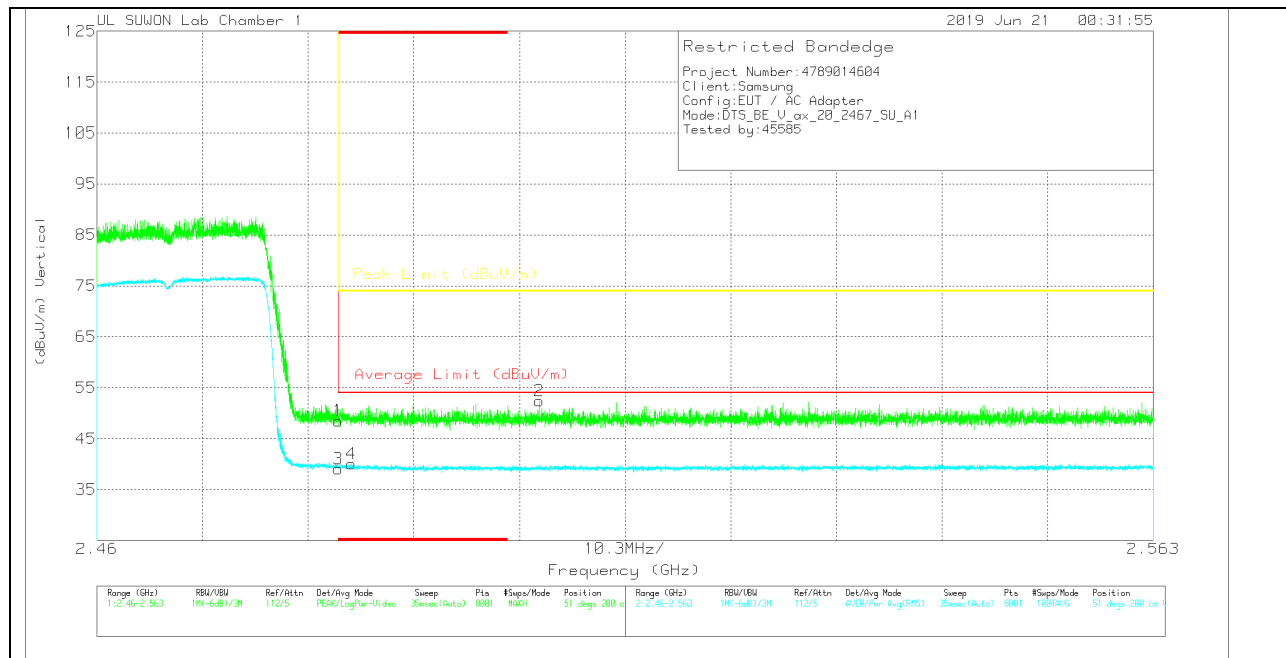

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	41.93	Pk	31.9	-25.3	0	48.53	-	-	74	-25.47	51	200	V
2	2.50313	45.61	Pk	32	-25.2	0	52.41	-	-	74	-21.59	51	200	V
3	* 2.48351	32.5	RMS	31.9	-25.3	0	39.1	54	-14.9	-	-	51	200	V
4	* 2.48484	33.51	RMS	31.9	-25.3	0	40.11	54	-13.89	-	-	51	200	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

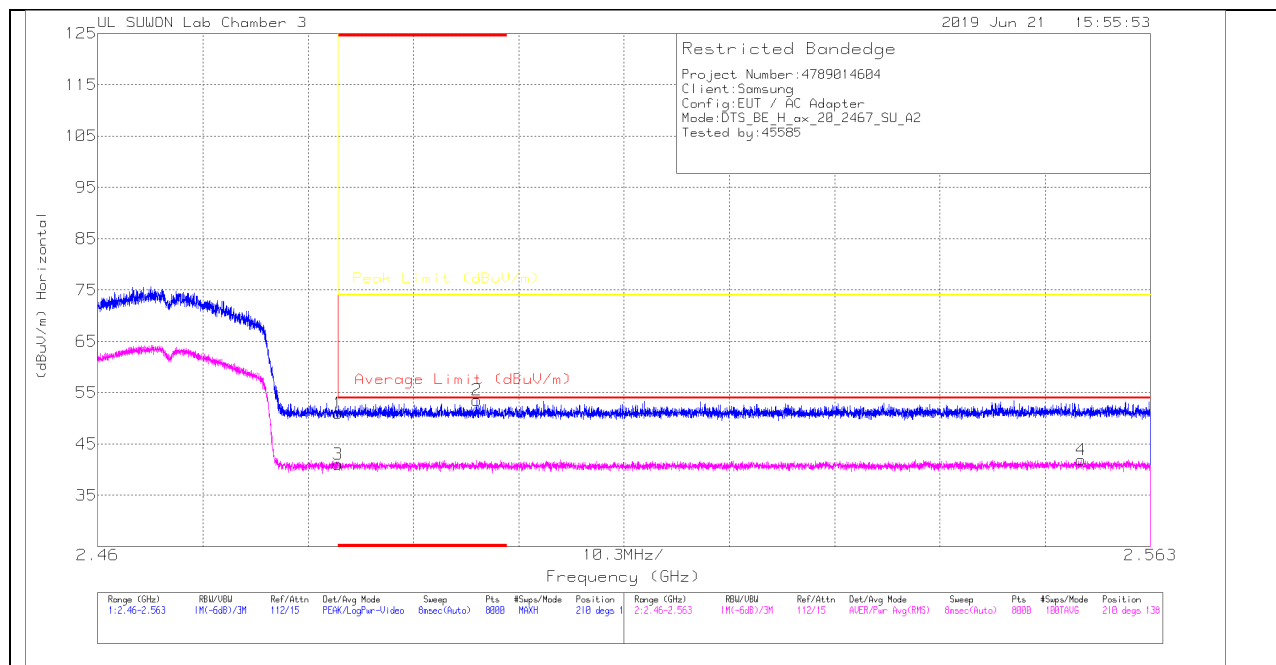

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.29	Pk	31.9	-23.2	0	50.99	-	-	74	-23.01	210	138	H
2	* 2.497	44.82	Pk	31.9	-23.2	0	53.52	-	-	74	-20.48	210	138	H
3	* 2.484	32.32	RMS	31.9	-23.2	0	41.02	54	-12.98	-	-	210	138	H
4	2.556	33.03	RMS	32	-23.1	0	41.93	54	-12.07	-	-	210	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

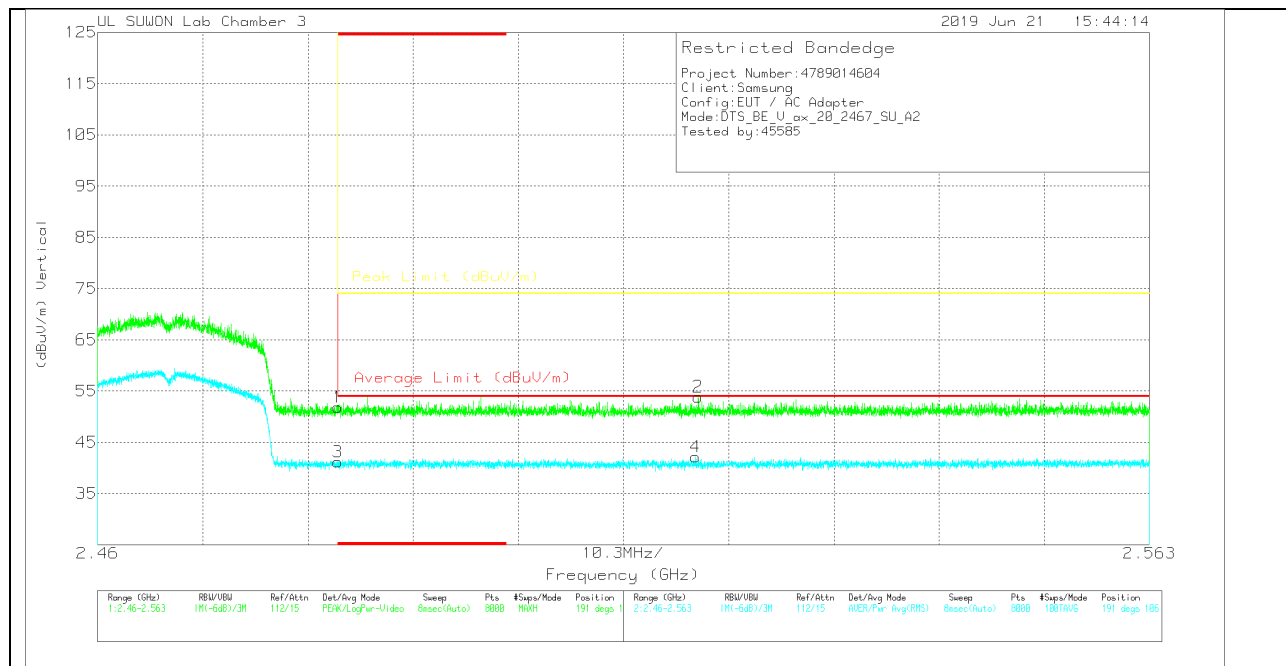

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.15	Pk	31.9	-23.2	0	51.85	-	-	74	-22.15	191	106	V
2	2.519	45.05	Pk	32	-23.2	0	53.85	-	-	74	-20.15	191	106	V
3	* 2.484	32.44	RMS	31.9	-23.2	0	41.14	54	-12.86	-	-	191	106	V
4	2.519	33.34	RMS	32	-23.2	0	42.14	54	-11.86	-	-	191	106	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_1 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

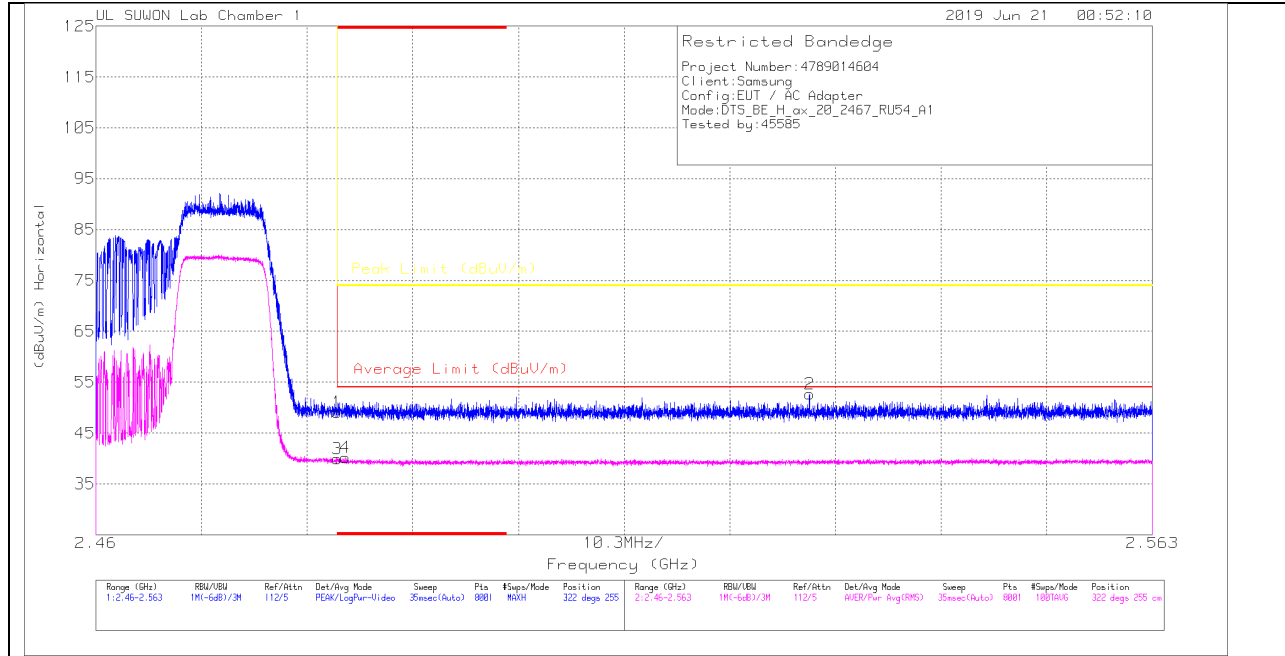

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.53	Pk	31.9	-25.3	0	49.13	-	-	74	-24.87	322	255	H
2	2.52958	45.83	PK	32	-25.2	0	52.63	-	-	74	-21.37	322	255	H
3	* 2.48351	33.35	RMS	31.9	-25.3	0	39.95	54	-14.05	-	-	322	255	H
4	* 2.48431	33.56	RMS	31.9	-25.3	0	40.16	54	-13.84	-	-	322	255	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

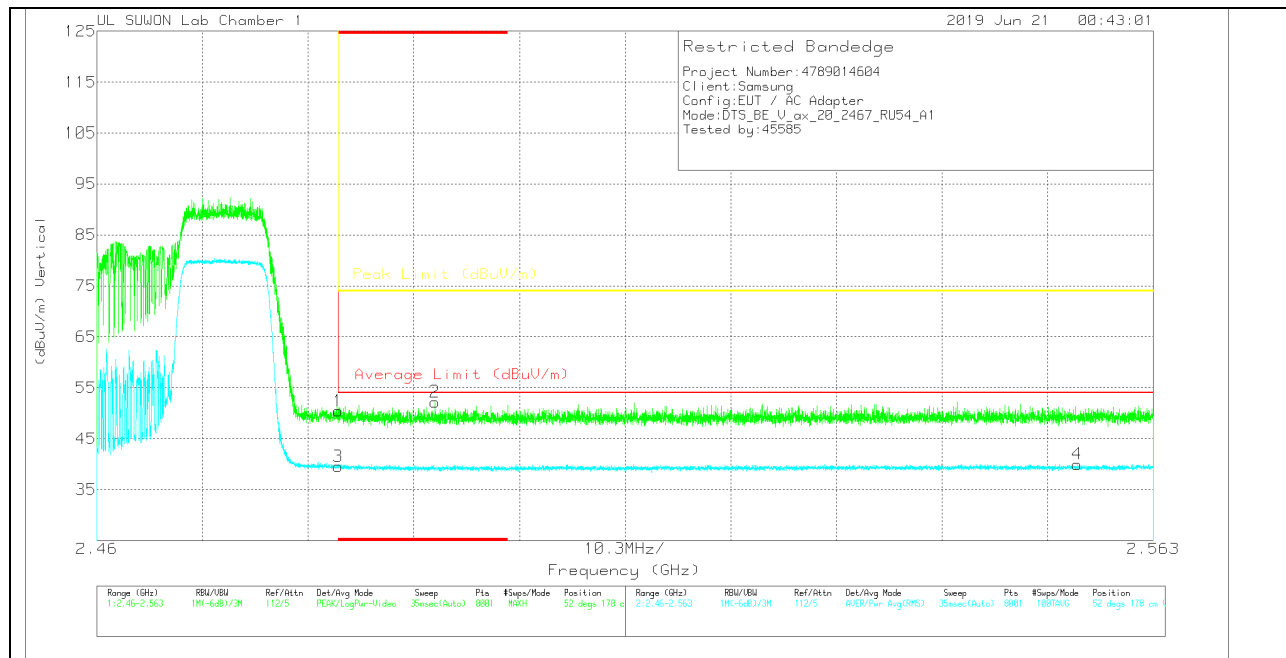

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.83	Pk	31.9	-25.3	0	50.43	-	-	74	-23.57	52	178	V
2	* 2.49296	45.64	Pk	31.9	-25.3	0	52.24	-	-	74	-21.76	52	178	V
3	* 2.48351	32.93	RMS	31.9	-25.3	0	39.53	54	-14.47	-	-	52	178	V
4	2.55556	33.1	RMS	32	-25.1	0	40	54	-14	-	-	52	178	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_2 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

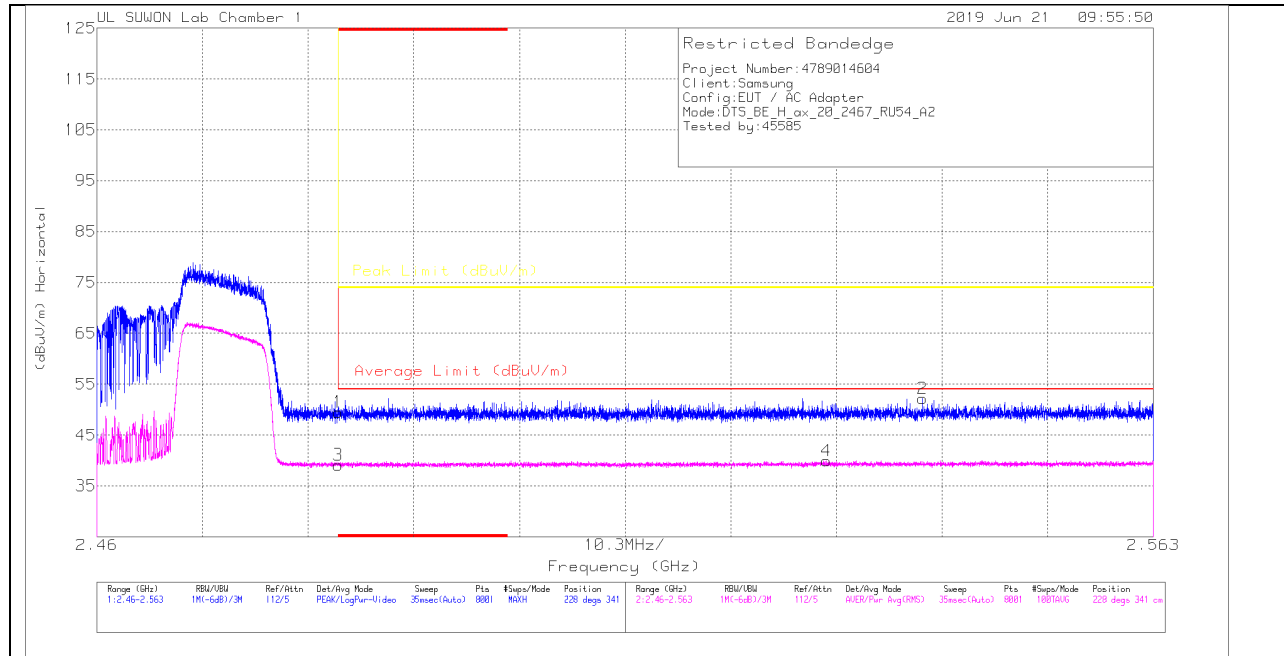

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.92	Pk	31.9	-25.3	0	49.52	-	-	74	-24.48	228	341	H
2	2.54052	45.41	Pk	32	-25.2	0	52.21	-	-	74	-21.79	228	341	H
3	* 2.48351	32.53	RMS	31.9	-25.3	0	39.13	54	-14.87	-	-	228	341	H
4	2.53112	33.07	RMS	32	-25.1	0	39.97	54	-14.03	-	-	228	341	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

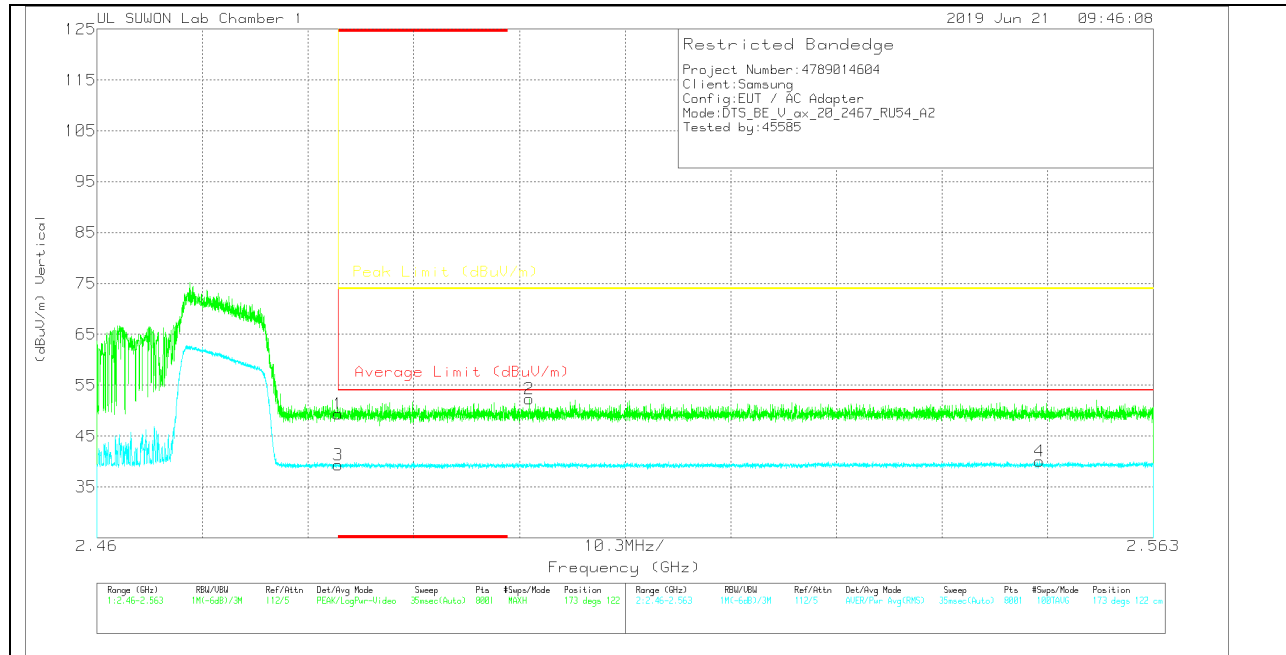

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.71	Pk	31.9	-25.3	0	49.31	-	-	74	-24.69	173	122	V
2	2.50213	45.46	Pk	32	-25.2	0	52.26	-	-	74	-21.74	173	122	V
3	* 2.48351	32.74	RMS	31.9	-25.3	0	39.34	54	-14.66	-	-	173	122	V
4	2.55192	33.16	RMS	32	-25.1	0	40.06	54	-13.94	-	-	173	122	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_1 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

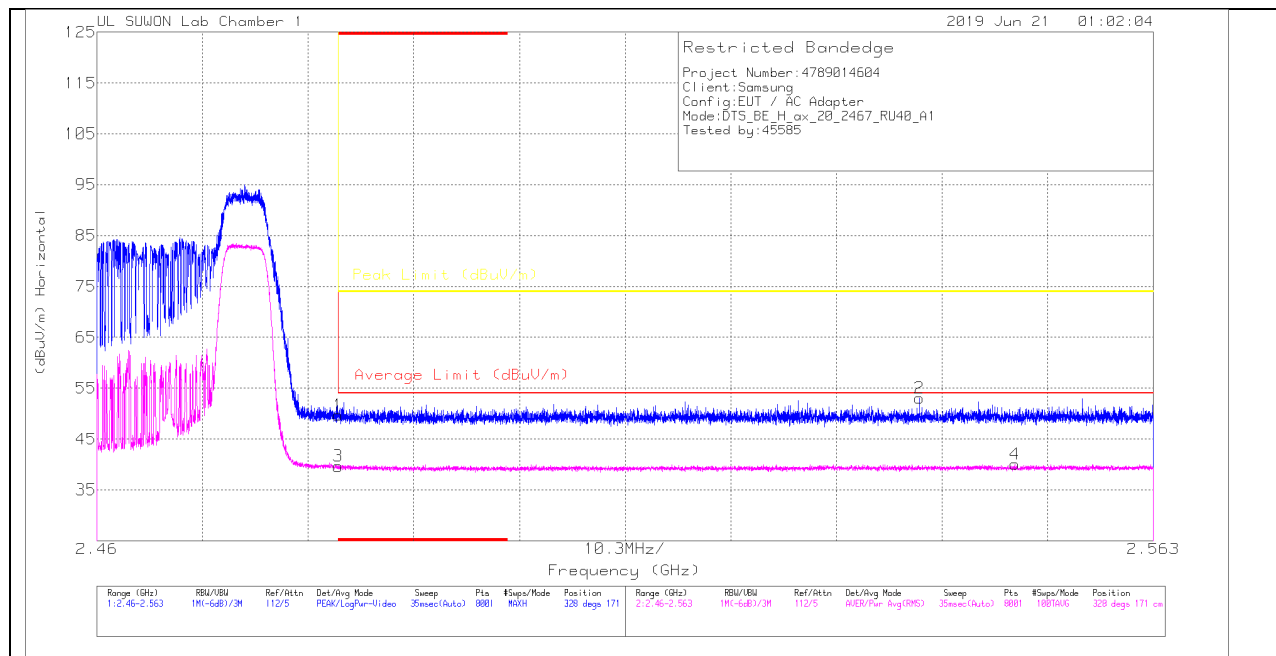

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.08	Pk	31.9	-25.3	0	49.68	-	-	74	-24.32	328	171	H
2	2.54021	46.2	Pk	32	-25.2	0	53	-	-	74	-21	328	171	H
3	* 2.48351	33.03	RMS	31.9	-25.3	0	39.63	54	-14.37	-	-	328	171	H
4	2.54948	33.21	RMS	32	-25.2	0	40.01	54	-13.99	-	-	328	171	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

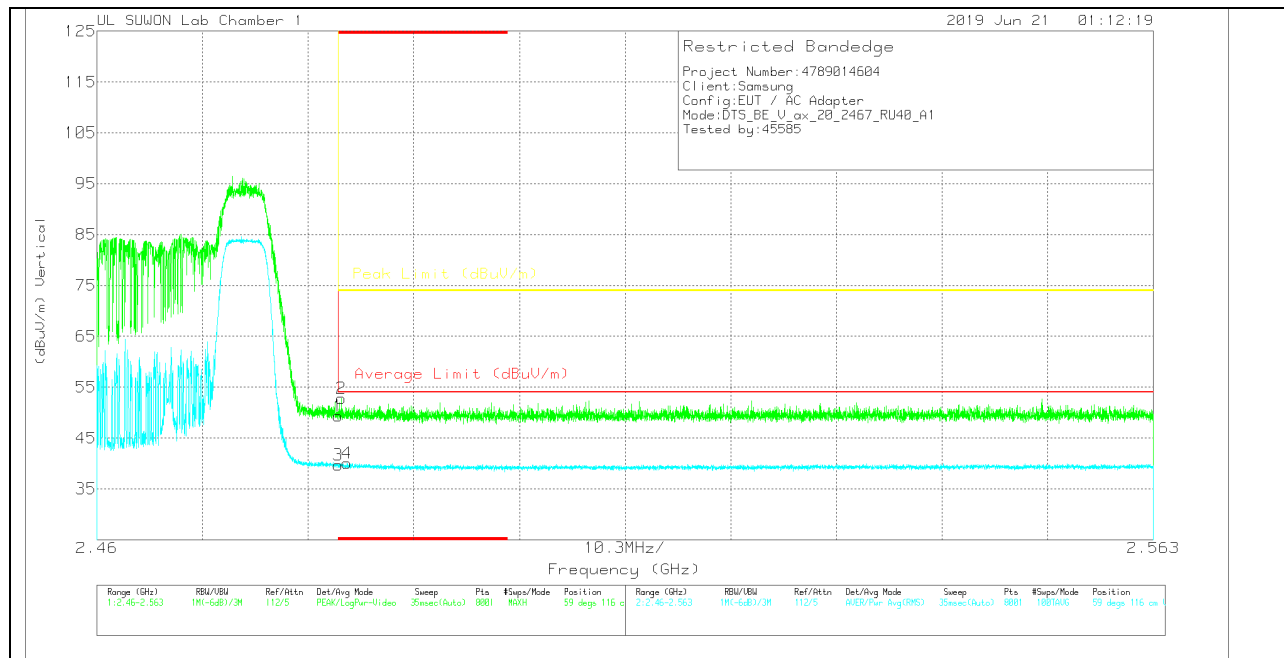

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.7	Pk	31.9	-25.3	0	49.3	-	-	74	-24.7	59	116	V
2	* 2.48386	46.15	Pk	31.9	-25.3	0	52.75	-	-	74	-21.25	59	116	V
3	* 2.48351	33.06	RMS	31.9	-25.3	0	39.66	54	-14.34	-	-	59	116	V
4	* 2.48437	33.44	RMS	31.9	-25.3	0	40.04	54	-13.96	-	-	59	116	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_2 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

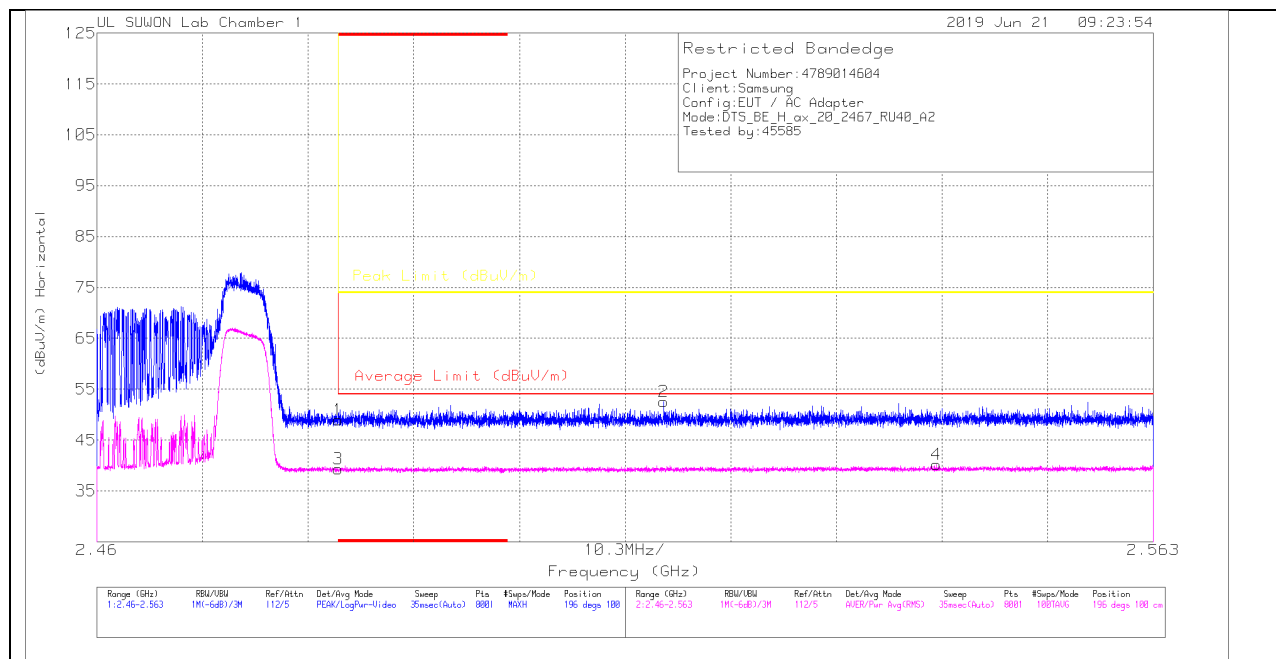

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.32	Pk	31.9	-25.3	0	48.92	-	-	74	-25.08	196	100	H
2	2.51529	45.77	Pk	32	-25.2	0	52.57	-	-	74	-21.43	196	100	H
3	* 2.48351	32.76	RMS	31.9	-25.3	0	39.36	54	-14.64	-	-	196	100	H
4	2.54185	33.31	RMS	32	-25.1	0	40.21	54	-13.79	-	-	196	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

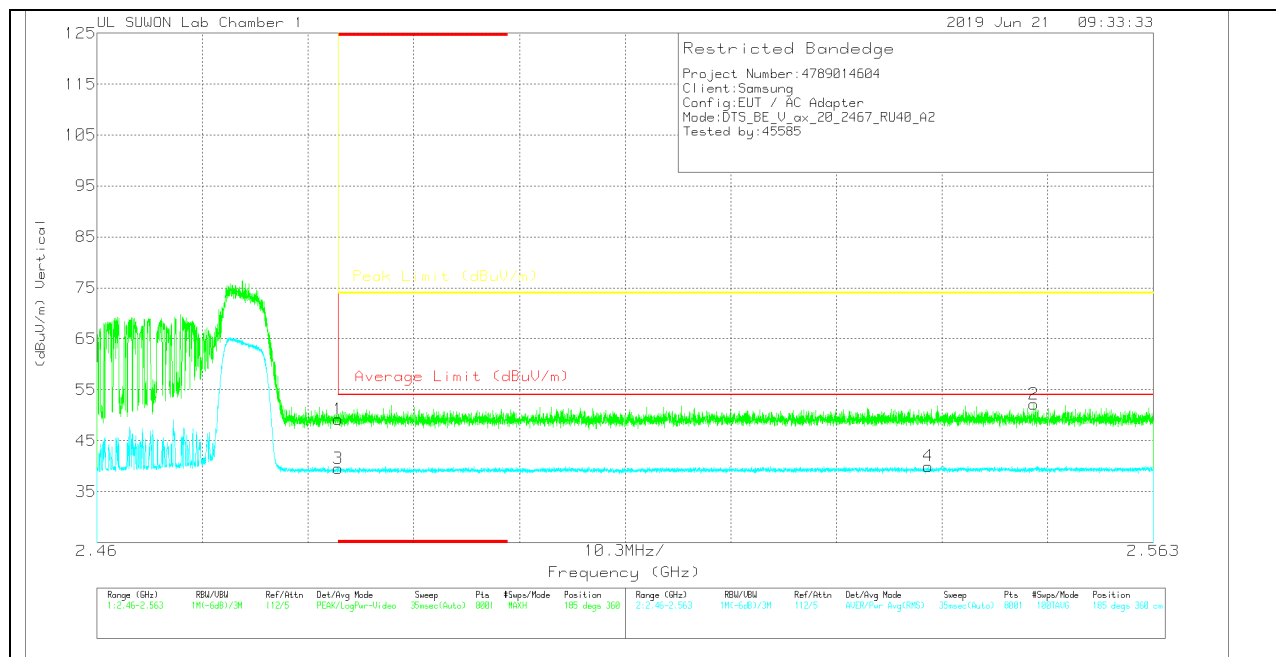

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.65	Pk	31.9	-25.3	0	49.25	-	-	74	-24.75	185	360	V
2	2.55136	45.26	Pk	32	-25.1	0	52.16	-	-	74	-21.84	185	360	V
3	* 2.48351	32.98	RMS	31.9	-25.3	0	39.58	54	-14.42	-	-	185	360	V
4	2.54106	33.2	RMS	32	-25.2	0	40	54	-14	-	-	185	360	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_1 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

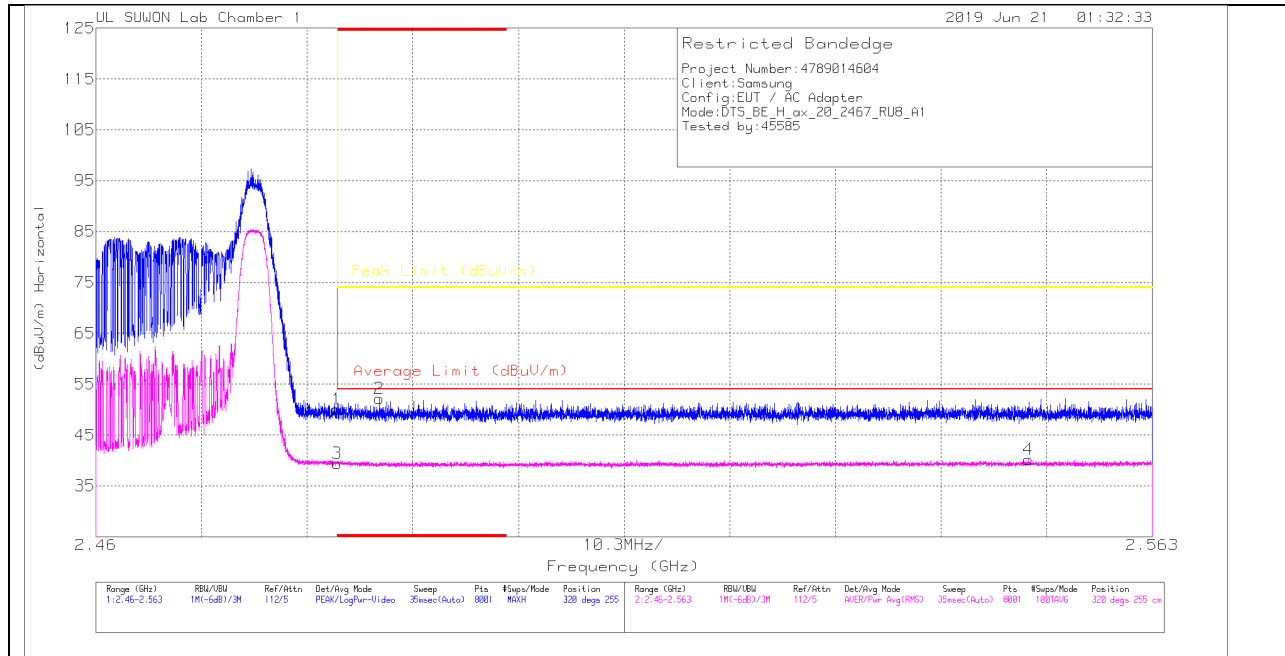

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.46	Pk	31.9	-25.3	0	50.06	-	-	74	-23.94	320	255	H
2	* 2.48762	45.47	Pk	31.9	-25.2	0	52.17	-	-	74	-21.83	320	255	H
3	* 2.48351	32.82	RMS	31.9	-25.3	0	39.42	54	-14.58	-	-	320	255	H
4	2.55091	33.23	RMS	32	-25.1	0	40.13	54	-13.87	-	-	320	255	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

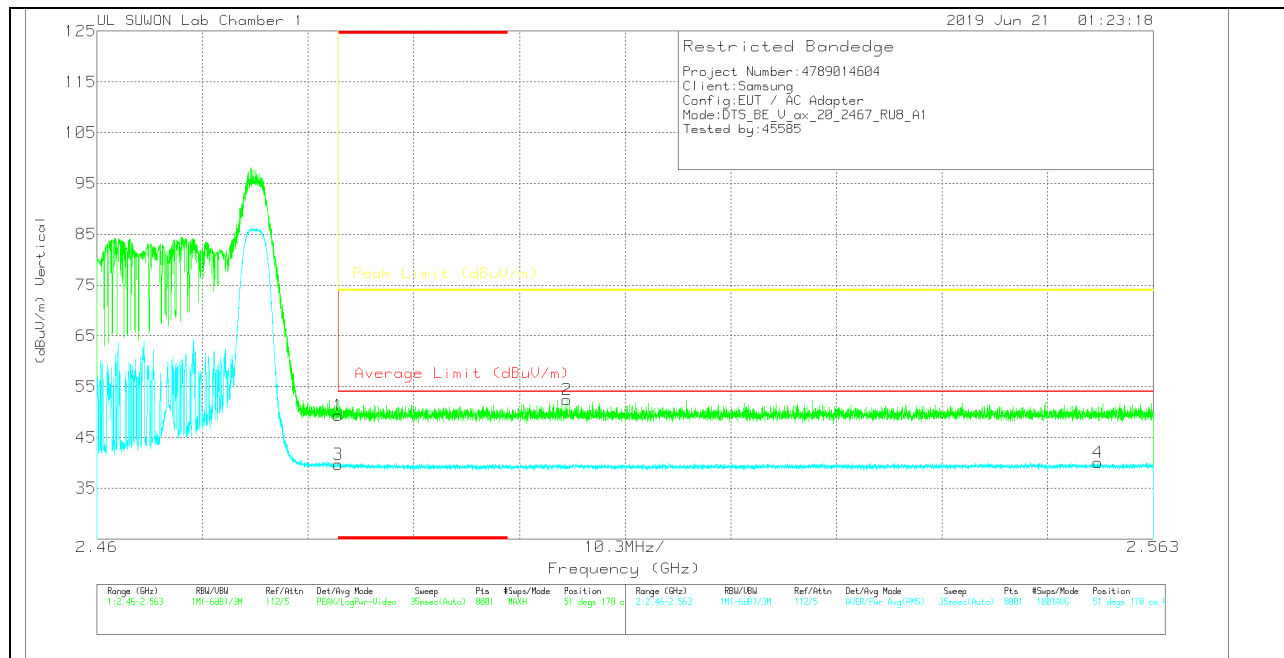

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.74	Pk	31.9	-25.3	0	49.34	-	-	74	-24.66	51	178	V
2	2.50581	45.68	Pk	32	-25.2	0	52.48	-	-	74	-21.52	51	178	V
3	* 2.48351	33.08	RMS	31.9	-25.3	0	39.68	54	-14.32	-	-	51	178	V
4	2.55758	33.14	RMS	32	-25.1	0	40.04	54	-13.96	-	-	51	178	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_2 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

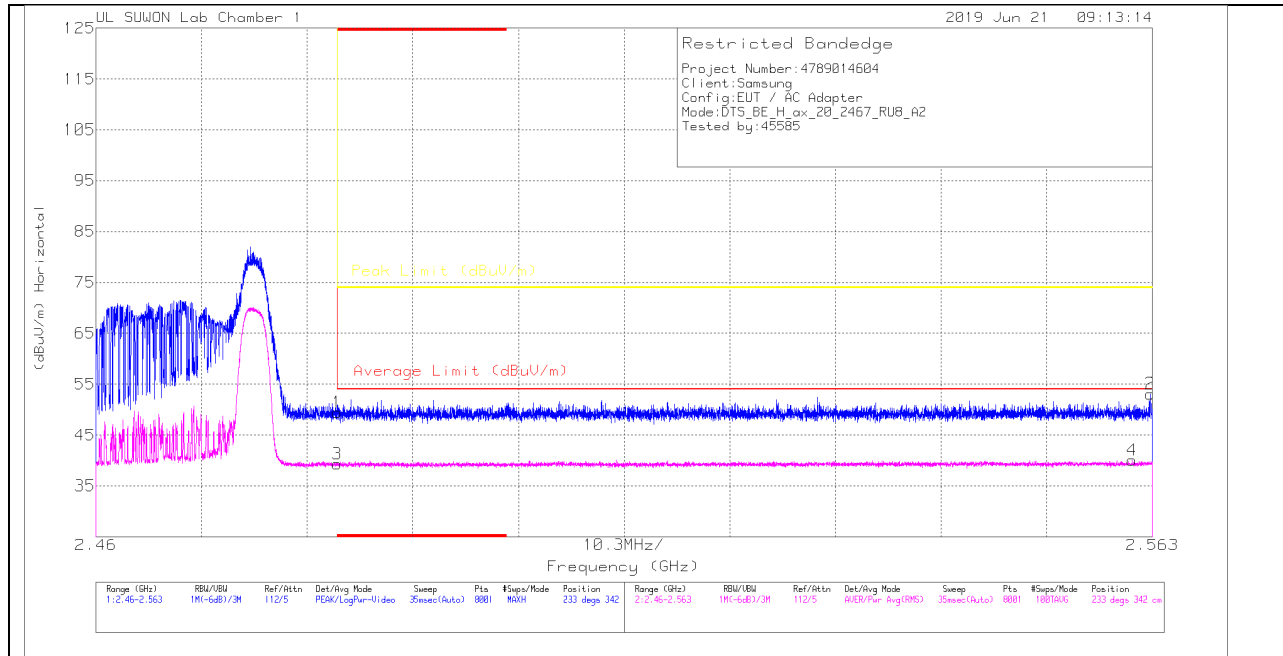

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.89	Pk	31.9	-25.3	0	49.49	-	-	74	-24.51	233	342	H
2	2.56278	46.21	PK	32	-25.1	0	53.11	-	-	74	-20.89	233	342	H
3	* 2.48351	32.7	RMS	31.9	-25.3	0	39.3	54	-14.7	-	-	233	342	H
4	2.56102	33.23	RMS	32	-25.2	0	40.03	54	-13.97	-	-	233	342	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

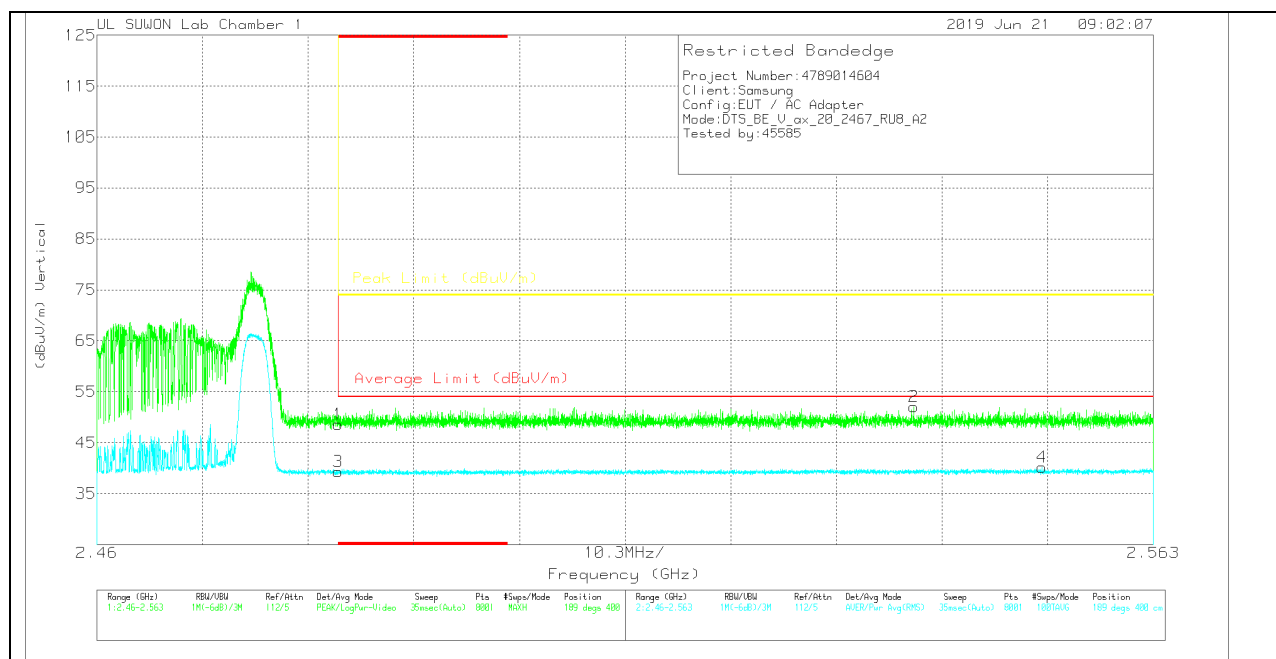

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	41.96	Pk	31.9	-25.3	0	48.56	-	-	74	-25.44	189	400	V
2	2.53963	45.29	Pk	32	-25.2	0	52.09	-	-	74	-21.91	189	400	V
3	* 2.48351	32.67	RMS	31.9	-25.3	0	39.27	54	-14.73	-	-	189	400	V
4	2.55213	33.24	RMS	32	-25.1	0	40.14	54	-13.86	-	-	189	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (13 CHANNEL)

SU mode (ANT_1)

HORIZONTAL PEAK AND AVERAGE PLOT

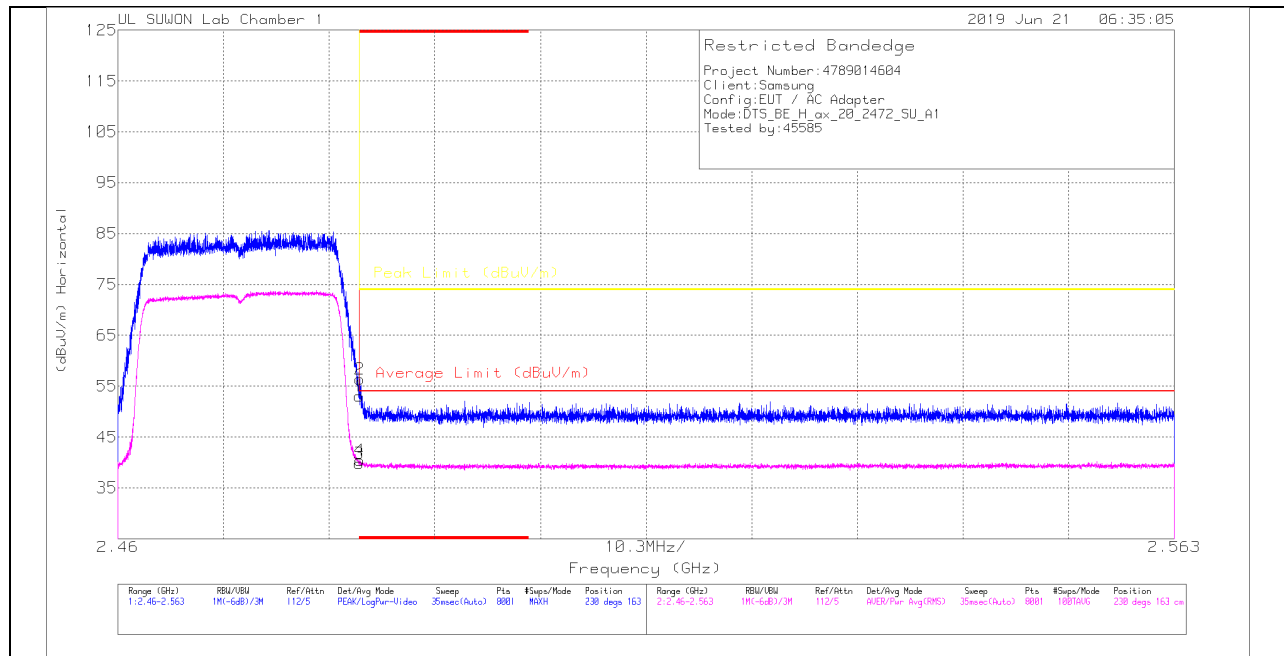

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	46.45	Pk	31.9	-25.3	0	63.05	-	-	74	-20.95	230	163	H
2	* 2.48359	49.8	Pk	31.9	-25.3	0	56.4	-	-	74	-17.6	230	163	H
3	* 2.48351	33.23	RMS	31.9	-25.3	0	39.83	54	-14.17	-	-	230	163	H
4	* 2.48357	33.88	RMS	31.9	-25.3	0	40.48	54	-13.52	-	-	230	163	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

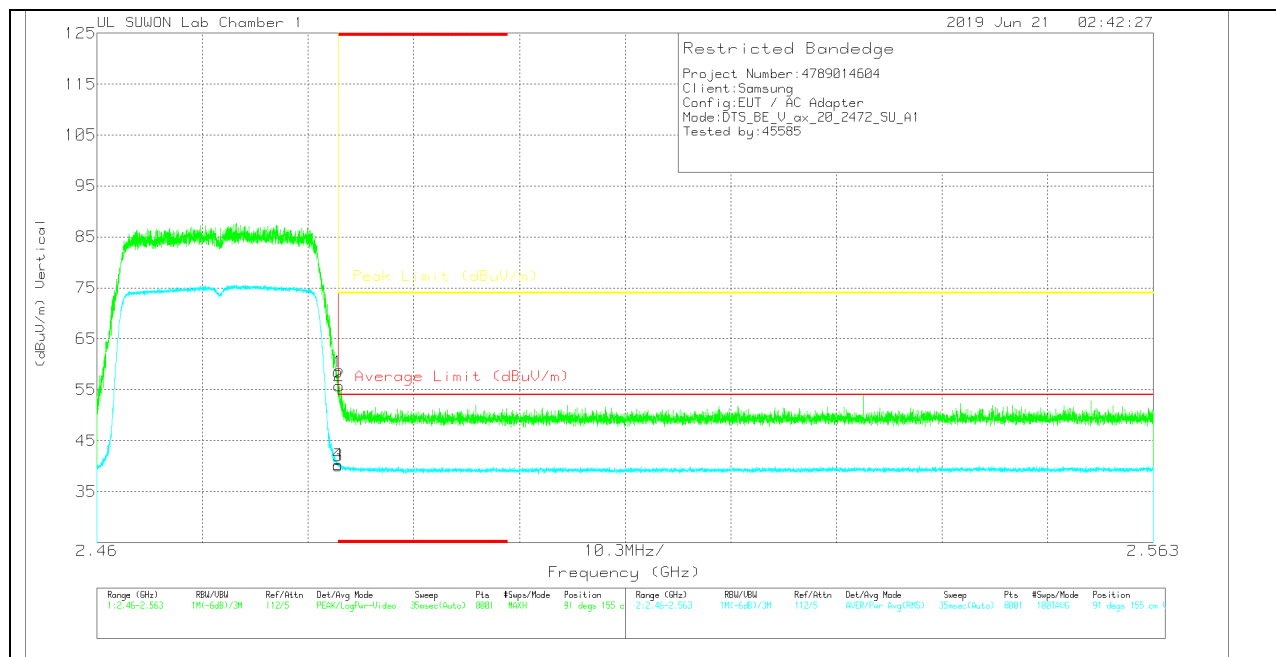

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	51.85	PK	31.9	-25.3	0	58.45	-	-	74	-15.55	91	155	V
2	* 2.48361	49.23	PK	31.9	-25.3	0	55.83	-	-	74	-18.17	91	155	V
3	* 2.48351	33.52	RMS	31.9	-25.3	0	40.12	54	-13.88	-	-	91	155	V
4	* 2.48354	33.75	RMS	31.9	-25.3	0	40.35	54	-13.65	-	-	91	155	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

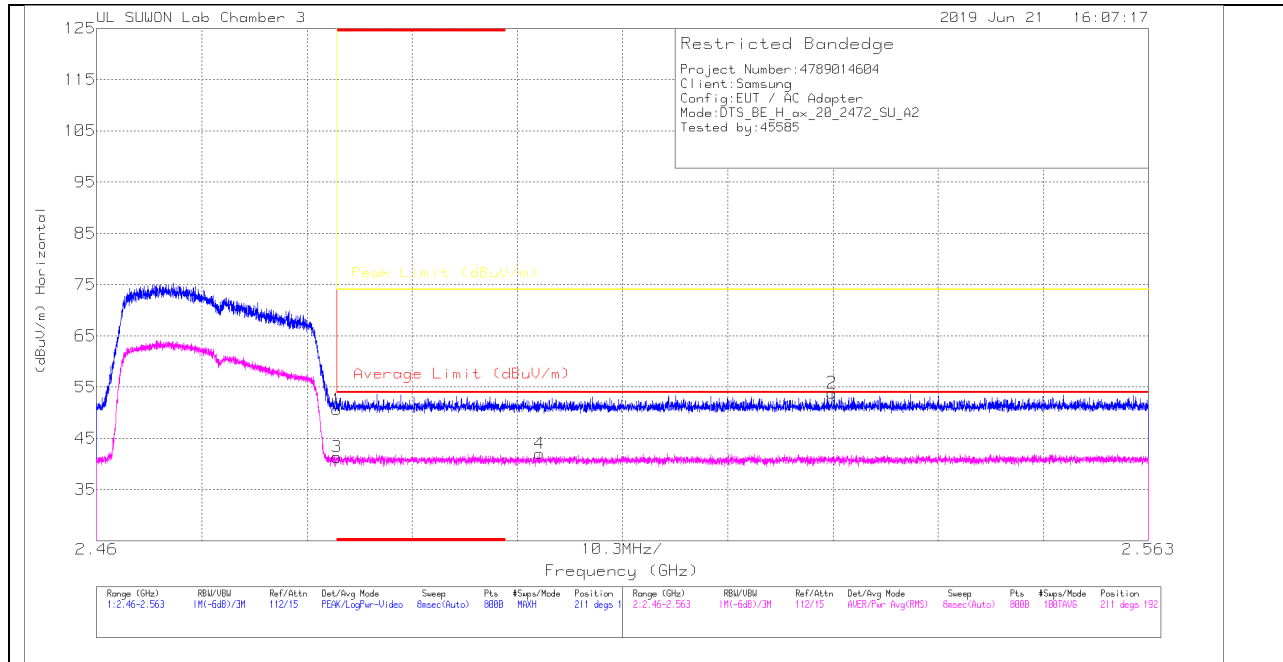

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.94	Pk	31.9	-23.2	0	50.64	-	-	74	-23.36	211	192	H
2	2.532	44.95	Pk	32	-23.1	0	53.85	-	-	74	-20.15	211	192	H
3	* 2.484	32.67	RMS	31.9	-23.2	0	41.37	54	-12.63	-	-	211	192	H
4	2.503	33.22	RMS	32	-23.2	0	42.02	54	-11.98	-	-	211	192	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

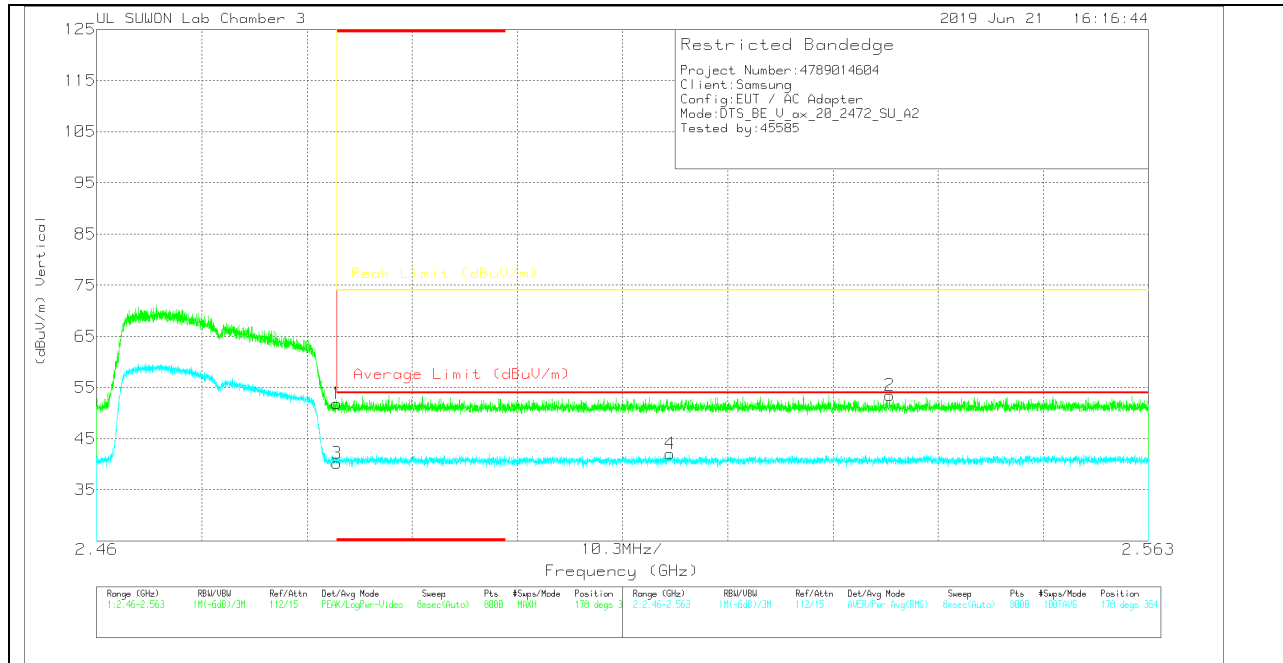

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.19	Pk	31.9	-23.2	0	51.89	-	-	74	-22.11	178	364	V
2	2.538	44.59	Pk	32	-23.1	0	53.49	-	-	74	-20.51	178	364	V
3	* 2.484	31.53	RMS	31.9	-23.2	0	40.23	54	-13.77	-	-	178	364	V
4	2.516	33.19	RMS	32	-23.1	0	42.09	54	-11.91	-	-	178	364	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_1 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

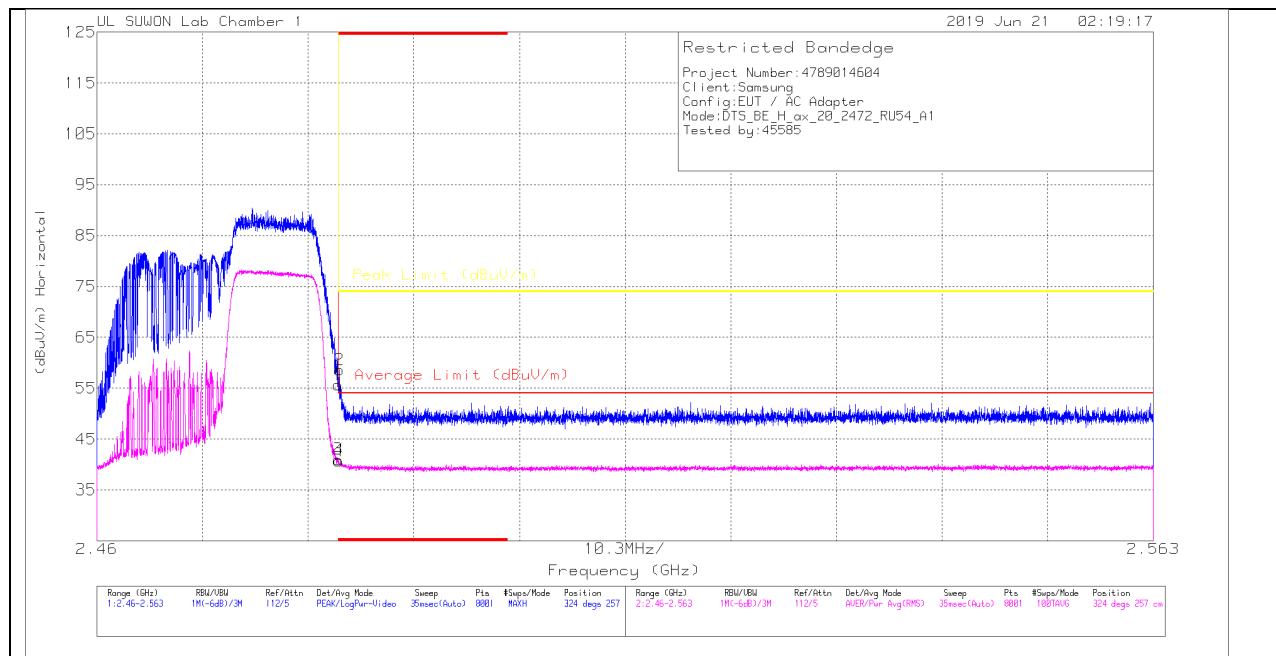

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.1	Pk	31.9	-25.3	0	55.7	-	-	74	-18.3	324	257	H
2	* 2.48364	51.98	Pk	31.9	-25.3	0	58.58	-	-	74	-15.42	324	257	H
3	* 2.48351	34.39	RMS	31.9	-25.3	0	40.99	54	-13.01	-	-	324	257	H
4	* 2.48356	34.14	RMS	31.9	-25.3	0	40.74	54	-13.26	-	-	324	257	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

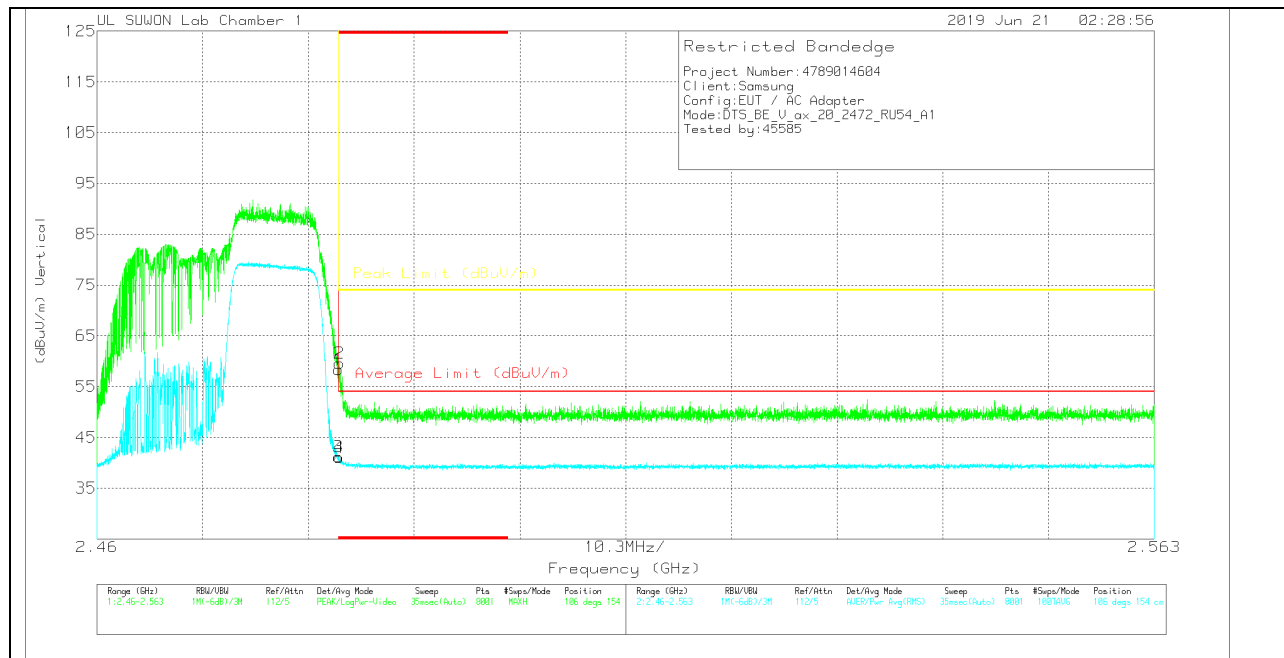

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.71	Pk	31.9	-25.3	0	58.31	-	-	74	-15.69	106	154	V
2	* 2.48361	53	Pk	31.9	-25.3	0	59.6	-	-	74	-14.4	106	154	V
3	* 2.48351	34.54	RMS	31.9	-25.3	0	41.14	54	-12.86	-	-	106	154	V
4	* 2.48357	34.43	RMS	31.9	-25.3	0	41.03	54	-12.97	-	-	106	154	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_2 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

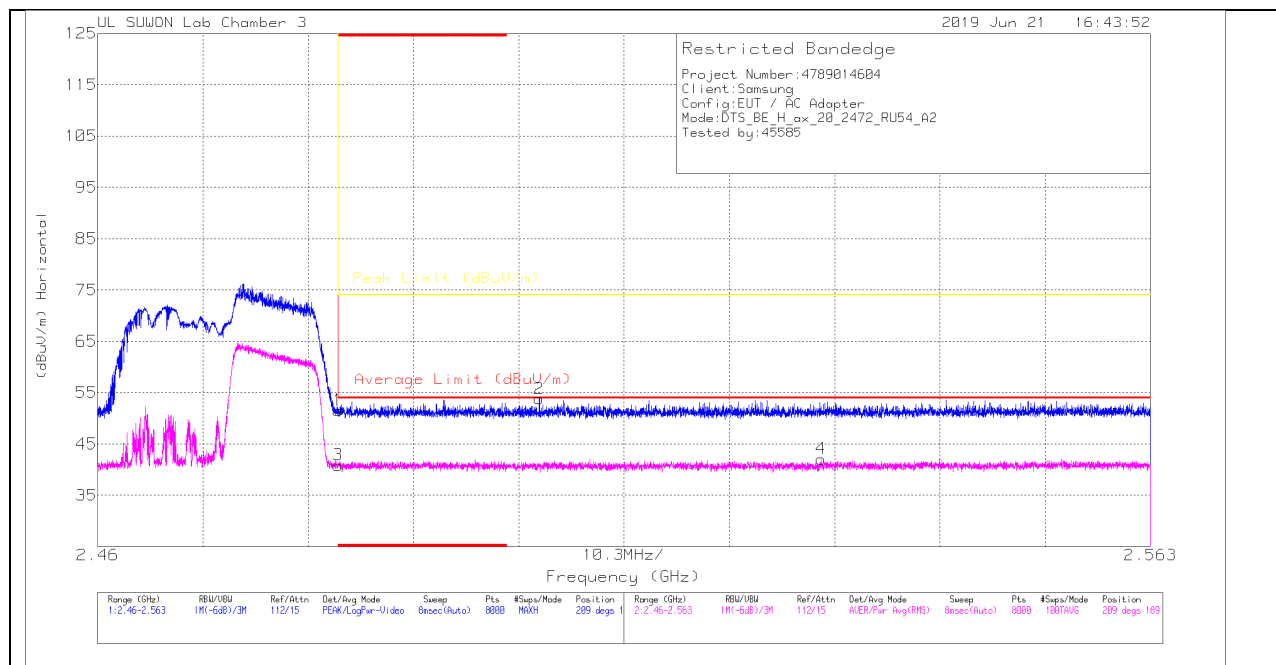

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.82	Pk	31.9	-23.2	0	51.52	-	-	74	-22.48	209	189	H
2	2.503	45	Pk	32	-23.2	0	53.8	-	-	74	-20.2	209	189	H
3	* 2.484	32.17	RMS	31.9	-23.2	0	40.87	54	-13.13	-	-	209	189	H
4	2.531	33.2	RMS	32	-23.1	0	42.1	54	-11.9	-	-	209	189	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

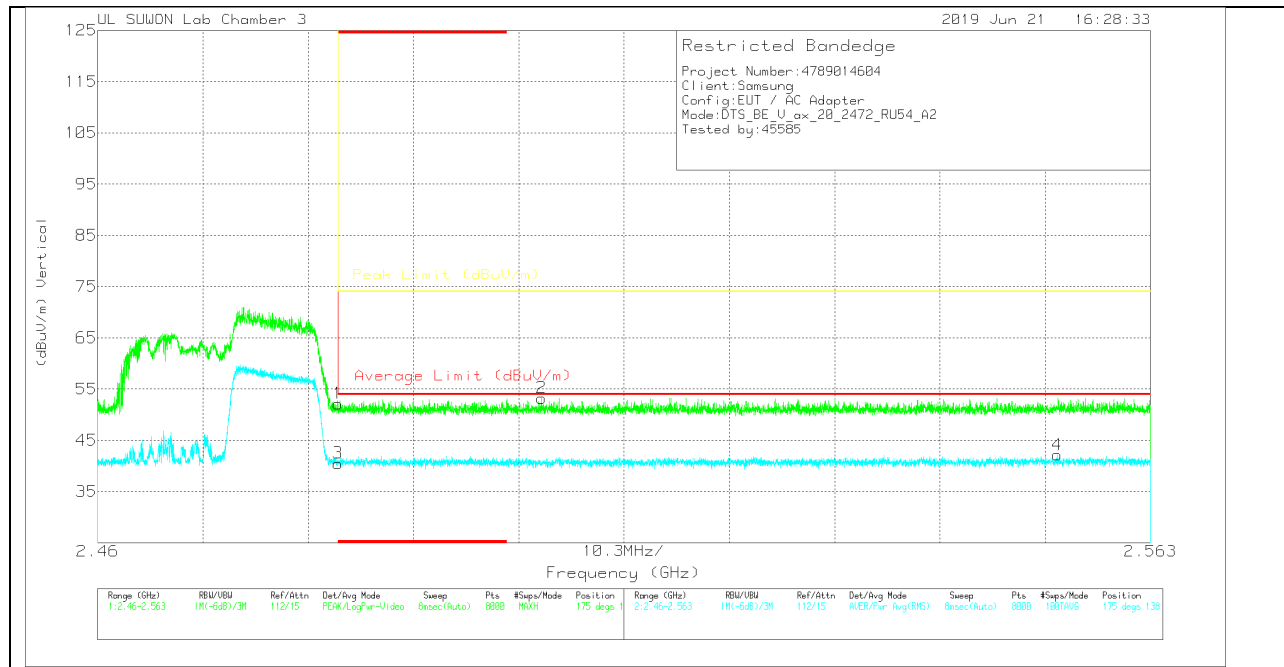

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	43.46	Pk	31.9	-23.2	0	52.16	-	-	74	-21.84	175	138	V
2	2.503	44.46	Pk	32	-23.2	0	53.26	-	-	74	-20.74	175	138	V
3	* 2.484	31.8	RMS	31.9	-23.2	0	40.5	54	-13.5	-	-	175	138	V
4	2.554	33.14	RMS	32	-23	0	42.14	54	-11.86	-	-	175	138	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_1 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

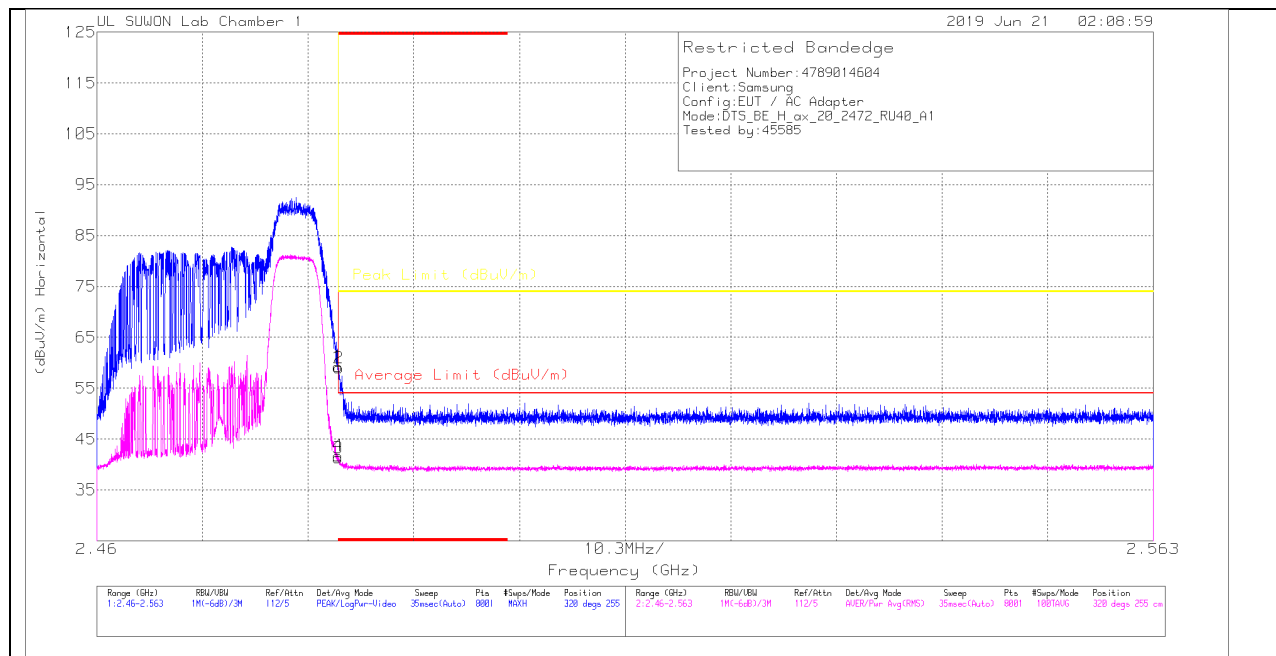

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	52.64	Pk	31.9	-25.3	0	59.24	-	-	74	-14.76	320	255	H
2	* 2.48359	52.34	Pk	31.9	-25.3	0	58.94	-	-	74	-15.06	320	255	H
3	* 2.48351	34.71	RMS	31.9	-25.3	0	41.31	54	-12.69	-	-	320	255	H
4	* 2.48352	35.13	RMS	31.9	-25.3	0	41.73	54	-12.27	-	-	320	255	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

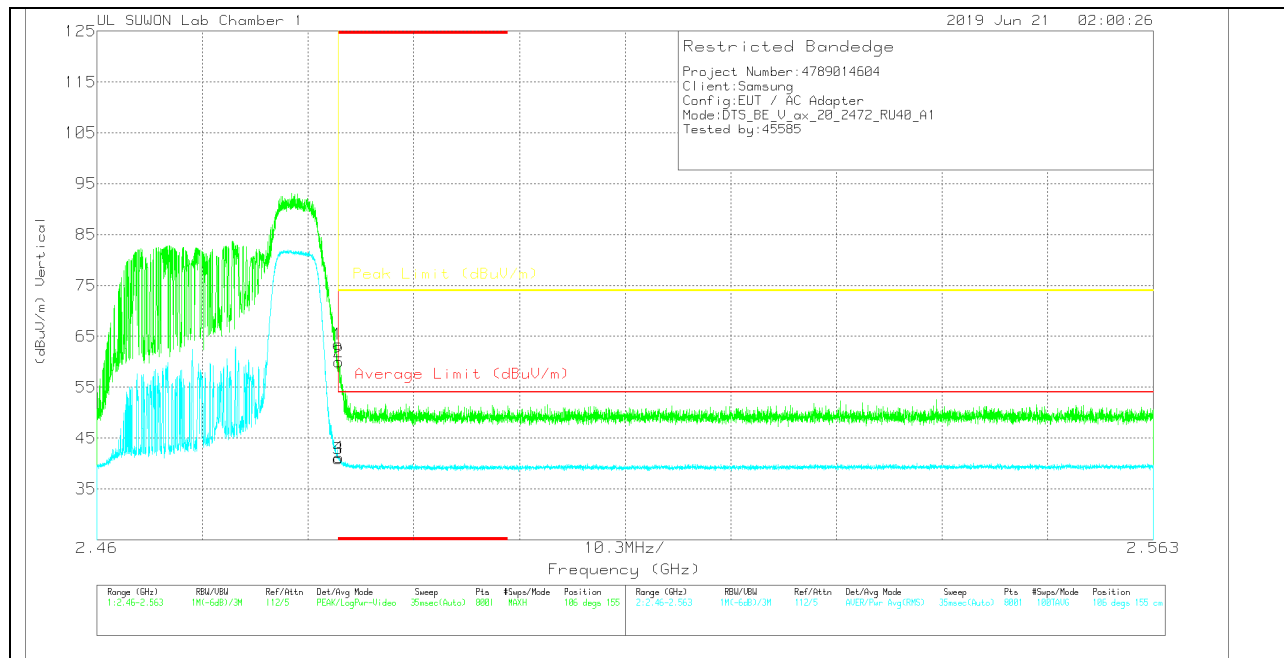

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.82	Pk	31.9	-25.3	0	63.42	-	-	74	-10.58	106	155	V
2	* 2.4836	53.32	Pk	31.9	-25.3	0	59.92	-	-	74	-14.08	106	155	V
3	* 2.48351	34.37	RMS	31.9	-25.3	0	40.97	54	-13.03	-	-	106	155	V
4	* 2.48356	34.62	RMS	31.9	-25.3	0	41.22	54	-12.78	-	-	106	155	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_2 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

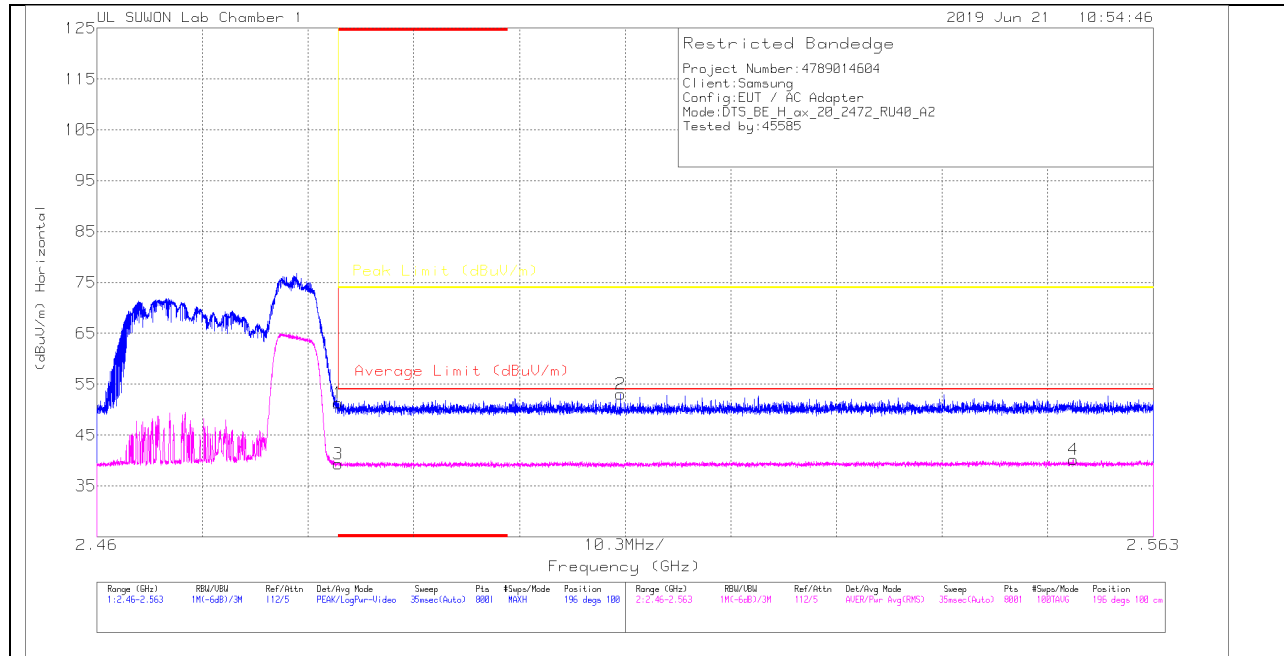

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.74	Pk	31.9	-25.3	0	51.34	-	-	74	-22.66	196	100	H
2	2.51106	46.33	Pk	32	-25.3	0	53.03	-	-	74	-20.97	196	100	H
3	* 2.48351	32.67	RMS	31.9	-25.3	0	39.27	54	-14.73	-	-	196	100	H
4	2.55519	33.23	RMS	32	-25.1	0	40.13	54	-13.87	-	-	196	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

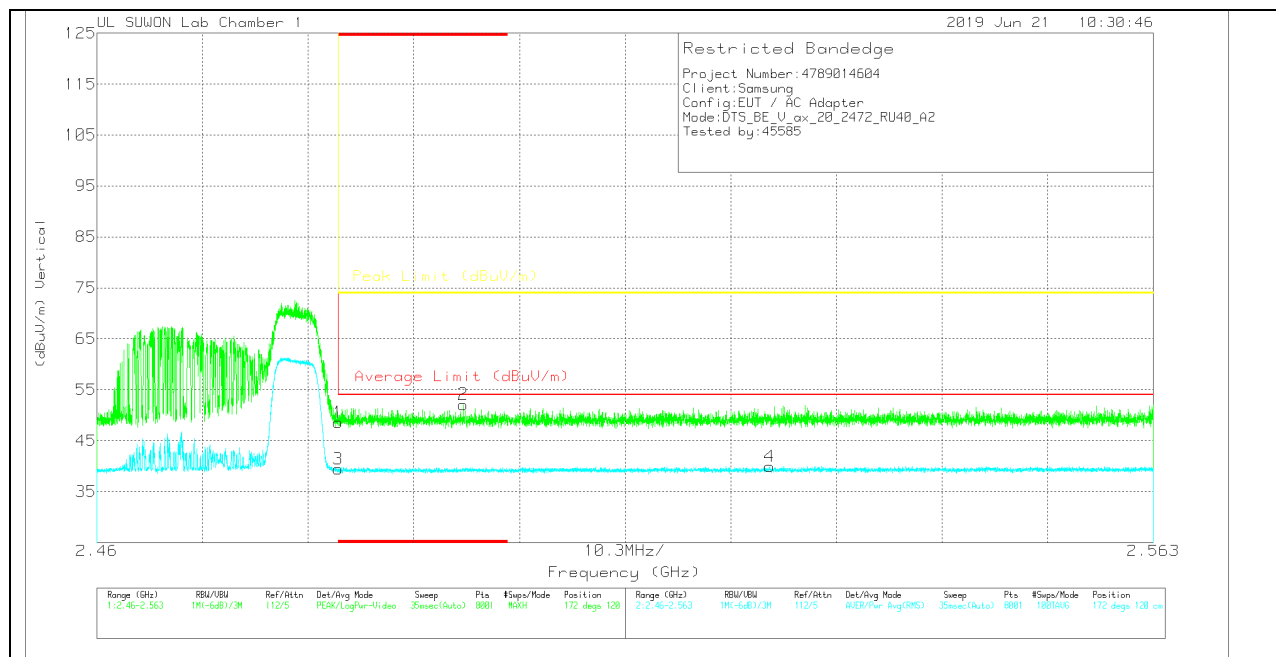

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.03	PK	31.9	-25.3	0	48.63	-	-	74	-25.37	172	120	V
2	* 2.49572	45.42	PK	31.9	-25.2	0	52.12	-	-	74	-21.88	172	120	V
3	* 2.48351	32.84	RMS	31.9	-25.3	0	39.44	54	-14.56	-	-	172	120	V
4	2.52559	33.17	RMS	32	-25.2	0	39.97	54	-14.03	-	-	172	120	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

26T RU mode (ANT_1 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

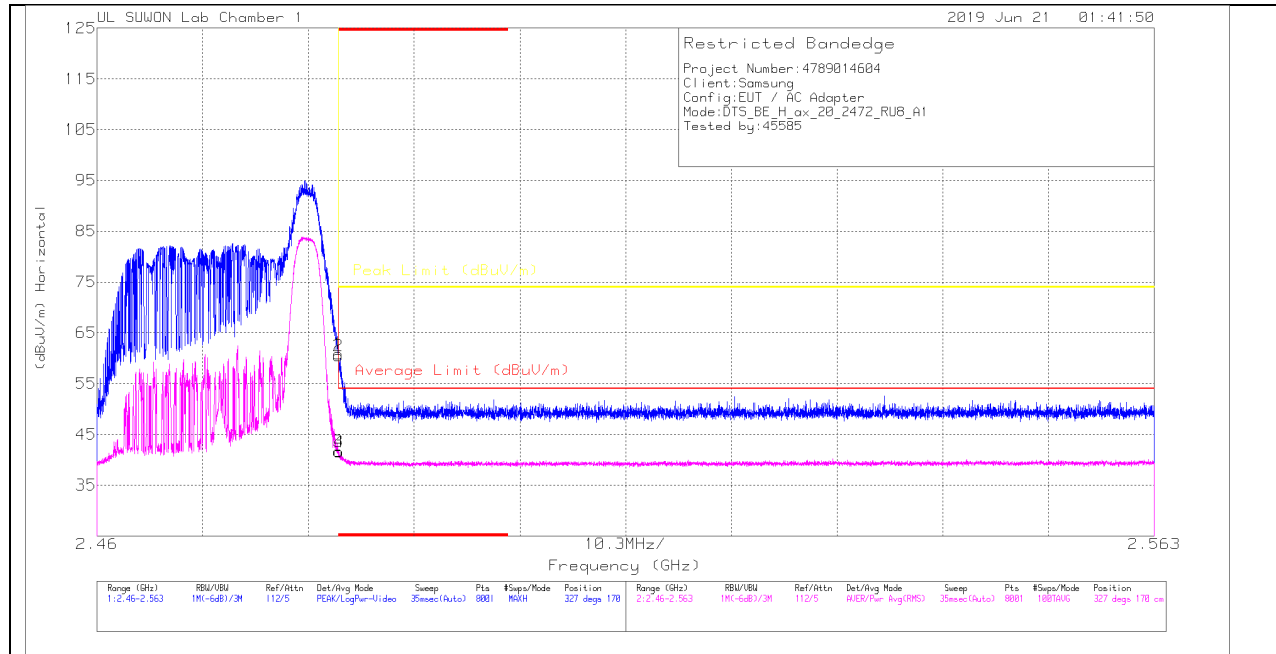

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	54.25	Pk	31.9	-25.3	0	60.85	-	-	74	-13.15	327	170	H
2	* 2.48354	53.92	Pk	31.9	-25.3	0	60.52	-	-	74	-13.48	327	170	H
3	* 2.48351	35.07	RMS	31.9	-25.3	0	41.67	54	-12.33	-	-	327	170	H
4	* 2.48356	34.96	RMS	31.9	-25.3	0	41.56	54	-12.44	-	-	327	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

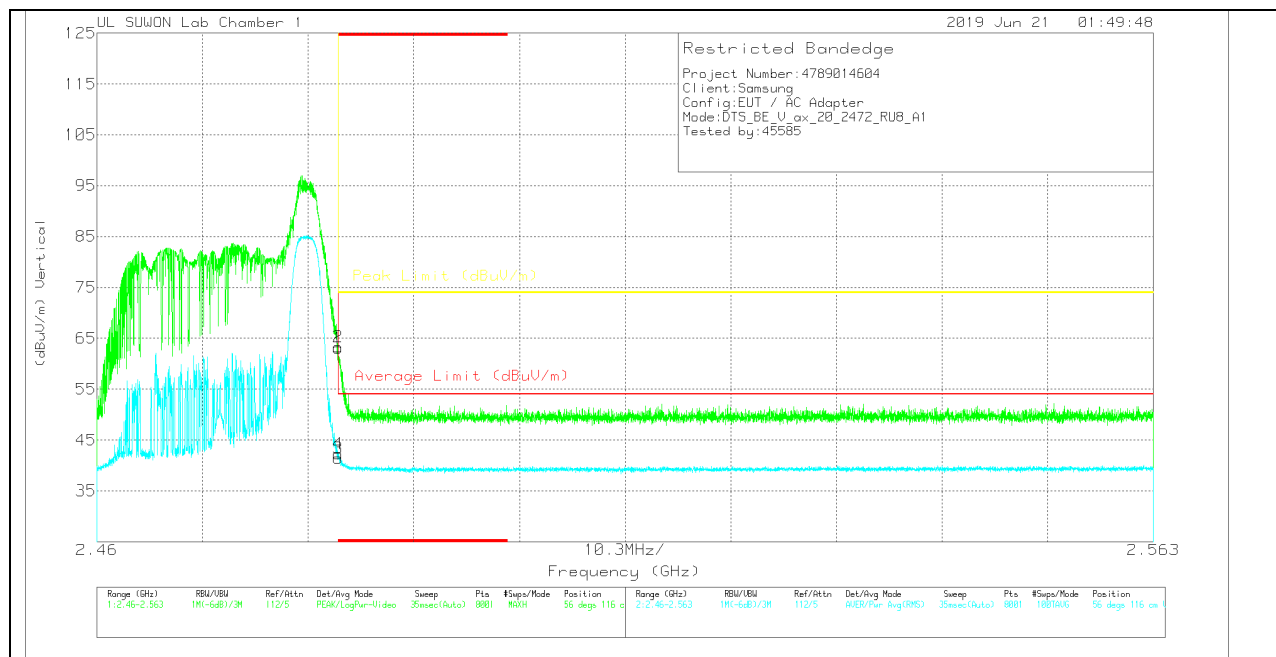

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.46	Pk	31.9	-25.3	0	63.06	-	-	74	-10.94	56	116	V
2	* 2.48352	56.7	Pk	31.9	-25.3	0	63.3	-	-	74	-10.7	56	116	V
3	* 2.48351	34.83	RMS	31.9	-25.3	0	41.43	54	-12.57	-	-	56	116	V
4	* 2.48352	35.68	RMS	31.9	-25.3	0	42.28	54	-11.72	-	-	56	116	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_2 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

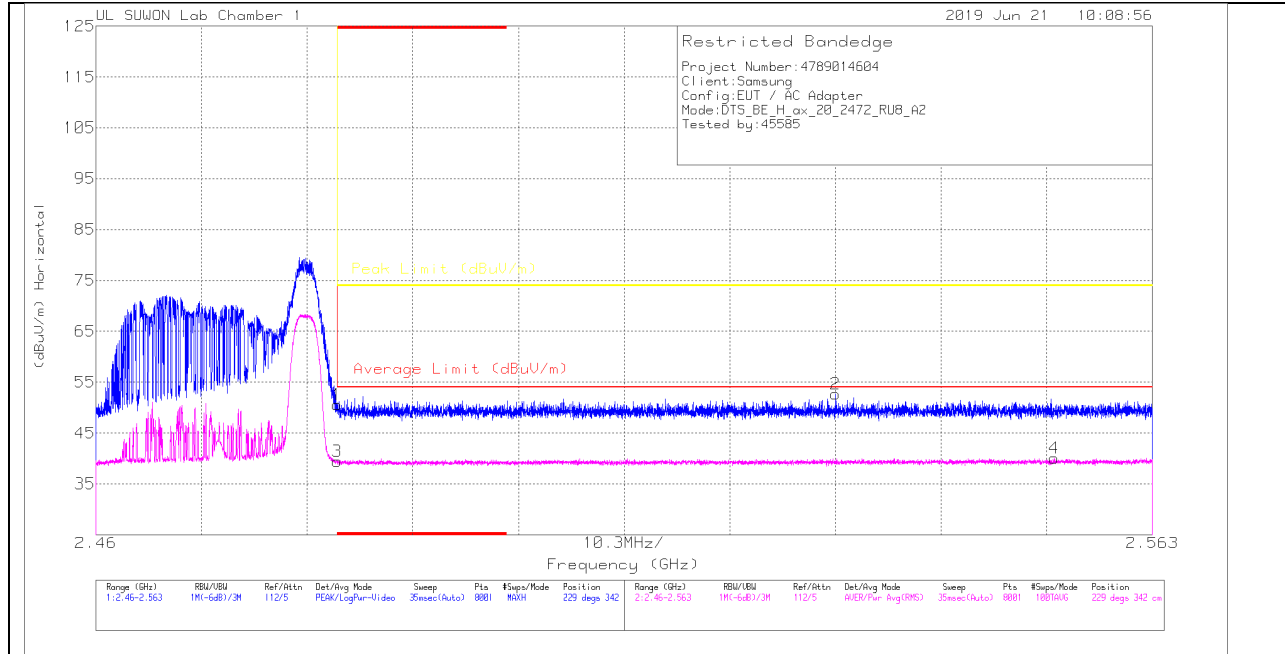

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.96	Pk	31.9	-25.3	0	50.56	-	-	74	-23.44	229	342	H
2	2.53211	45.79	PK	32	-25.1	0	52.69	-	-	74	-21.31	229	342	H
3	* 2.48351	32.82	RMS	31.9	-25.3	0	39.42	54	-14.58	-	-	229	342	H
4	2.55346	33.28	RMS	32	-25.2	0	40.08	54	-13.92	-	-	229	342	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

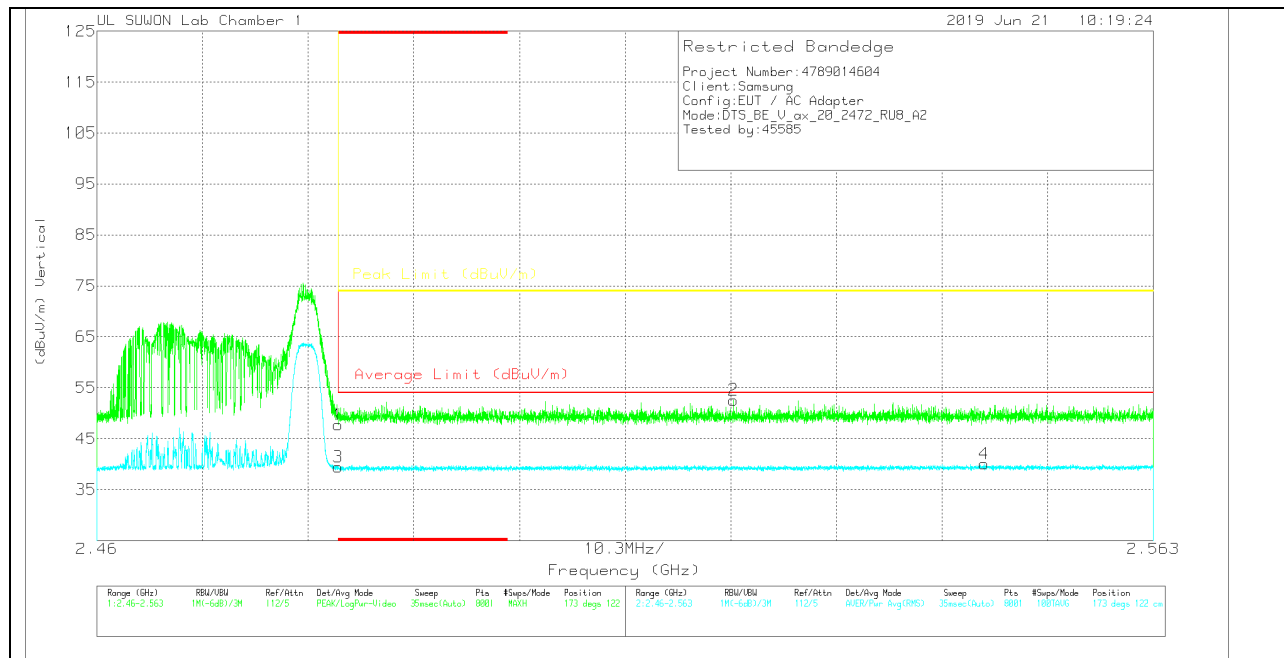

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	41.08	Pk	31.9	-25.3	0	47.68	-	-	74	-26.32	173	122	V
2	2.52207	45.71	Pk	32	-25.1	0	52.61	-	-	74	-21.39	173	122	V
3	* 2.48351	32.87	RMS	31.9	-25.3	0	39.47	54	-14.53	-	-	173	122	V
4	2.54653	33.11	RMS	32	-25.1	0	40.01	54	-13.99	-	-	173	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

SU mode (ANT_1)

2 CHANNEL HORIZONTAL

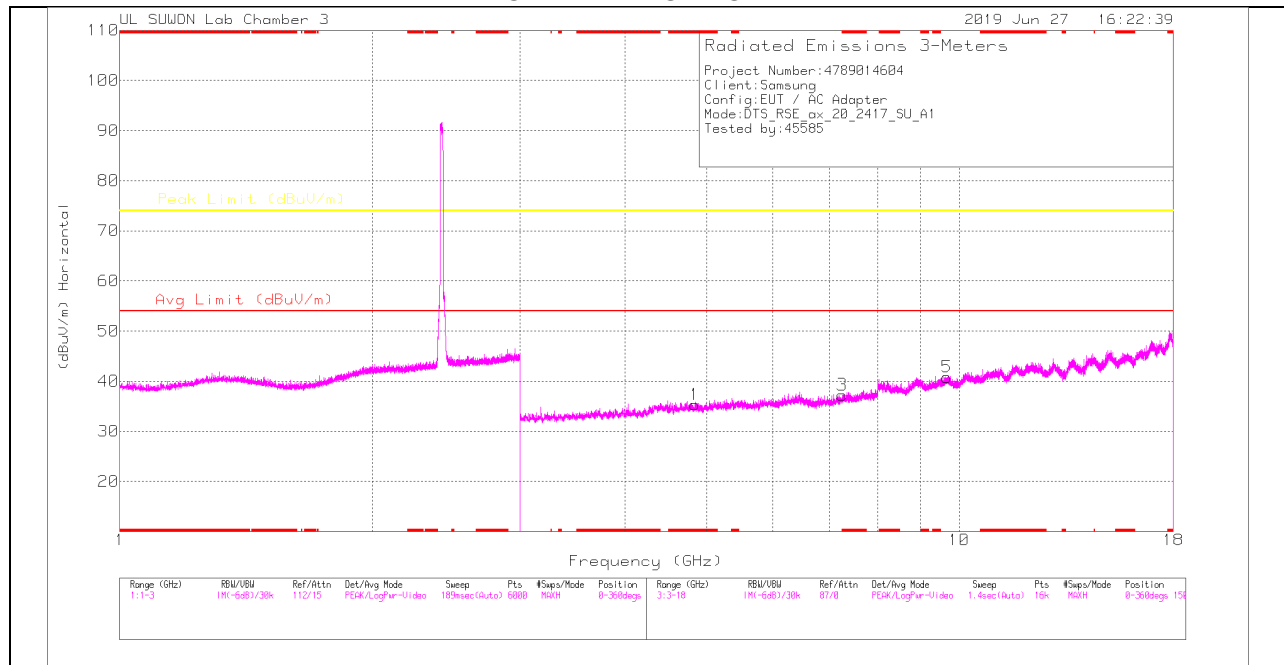

2 CHANNEL VERTICAL

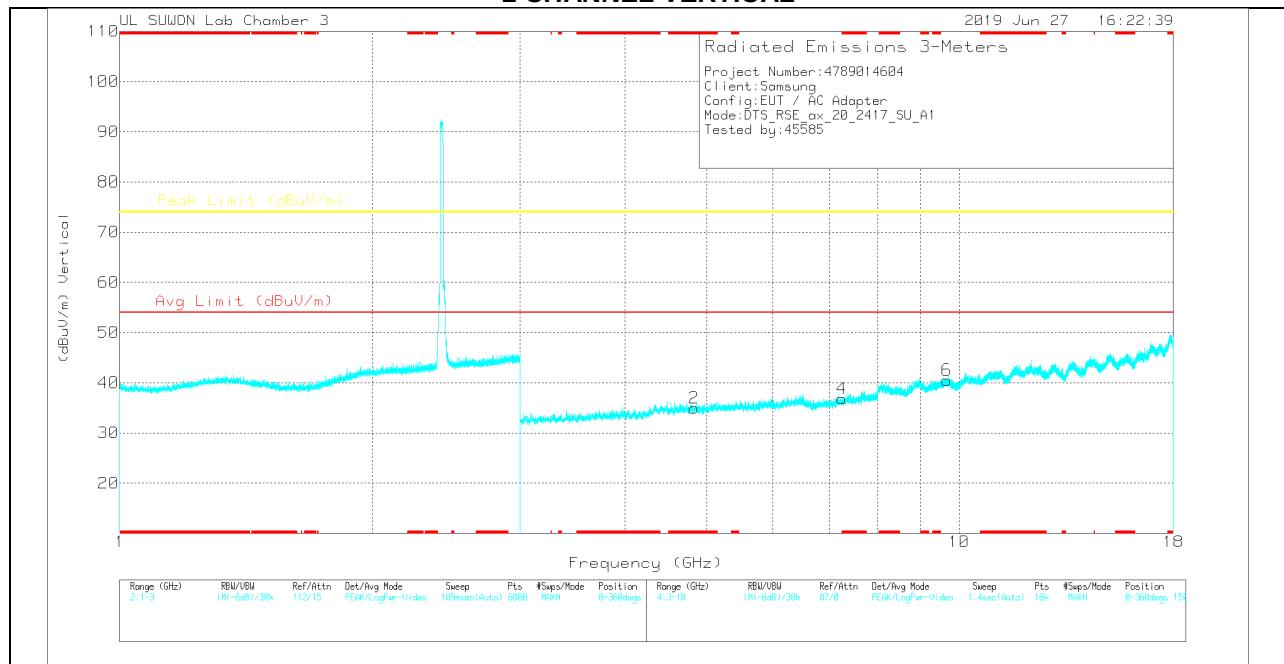

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

2 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020959	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.844	29.84	PK	34.2	-28.7	0	35.34	-	-	74	-38.66	0-360	250	H
3	* 7.256	25.45	PK	35.8	-24	0	37.25	-	-	74	-36.75	0-360	150	H
5	9.672	23.4	PK	37.1	-19.7	0	40.8	-	-	74	-33.2	0-360	150	H
2	* 4.836	29.44	PK	34.2	-28.7	0	34.94	-	-	74	-39.06	0-360	250	V
4	* 7.253	25.13	PK	35.8	-24.1	0	36.83	-	-	74	-37.17	0-360	150	V
6	9.668	23.12	PK	37.1	-19.7	0	40.52	-	-	74	-33.48	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

6 CHANNEL HORIZONTAL

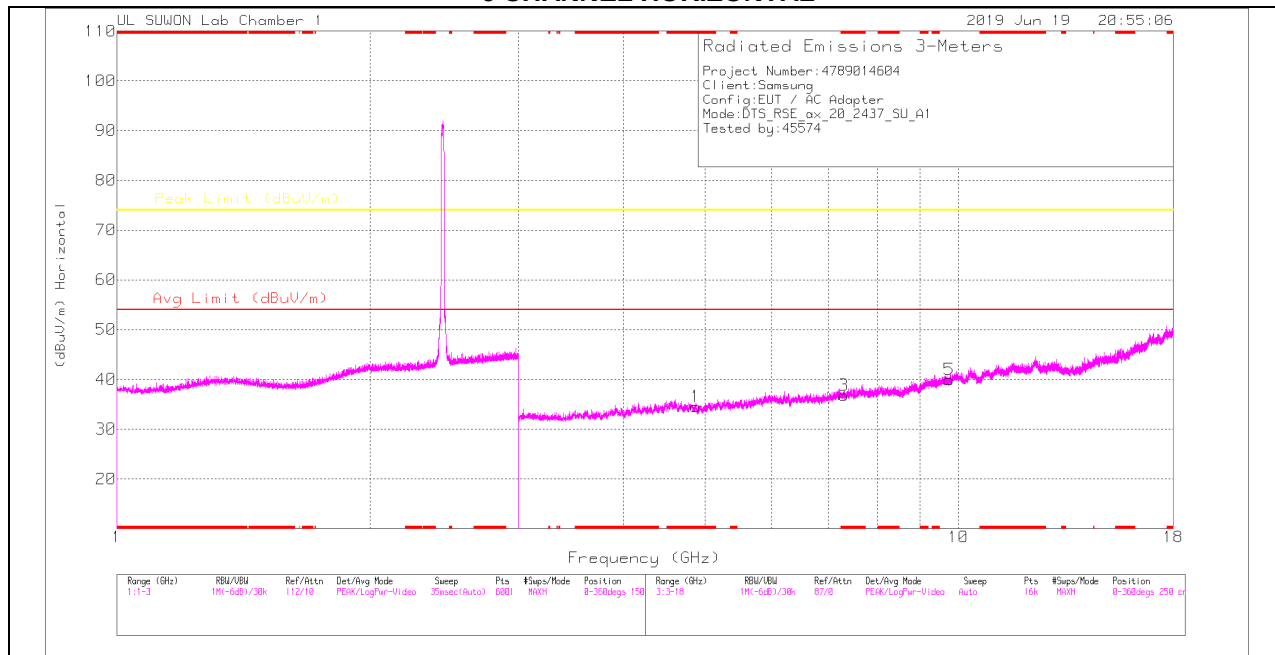

6 CHANNEL VERTICAL

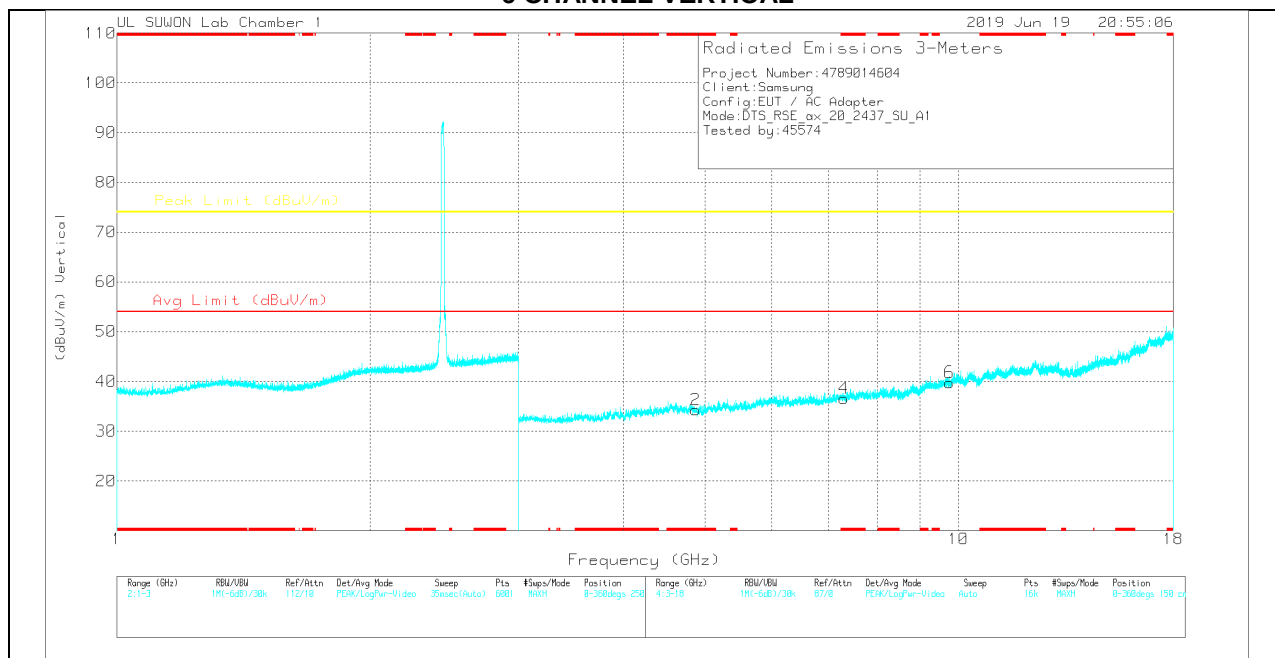

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

6 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87301	31.82	PK	34.2	-31.5	0	34.52	-	-	74	-39.48	0-360	250	H
3	* 7.31223	28.42	PK	35.8	-27.4	0	36.82	-	-	74	-37.18	0-360	150	H
5	9.74864	26.69	PK	37.2	-23.9	0	39.99	-	-	74	-34.01	0-360	150	H
2	* 4.87488	31.65	PK	34.2	-31.5	0	34.35	-	-	74	-39.65	0-360	150	V
4	* 7.31317	28.15	PK	35.8	-27.4	0	36.55	-	-	74	-37.45	0-360	250	V
6	9.74958	26.49	PK	37.2	-23.9	0	39.79	-	-	74	-34.21	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

10 CHANNEL HORIZONTAL

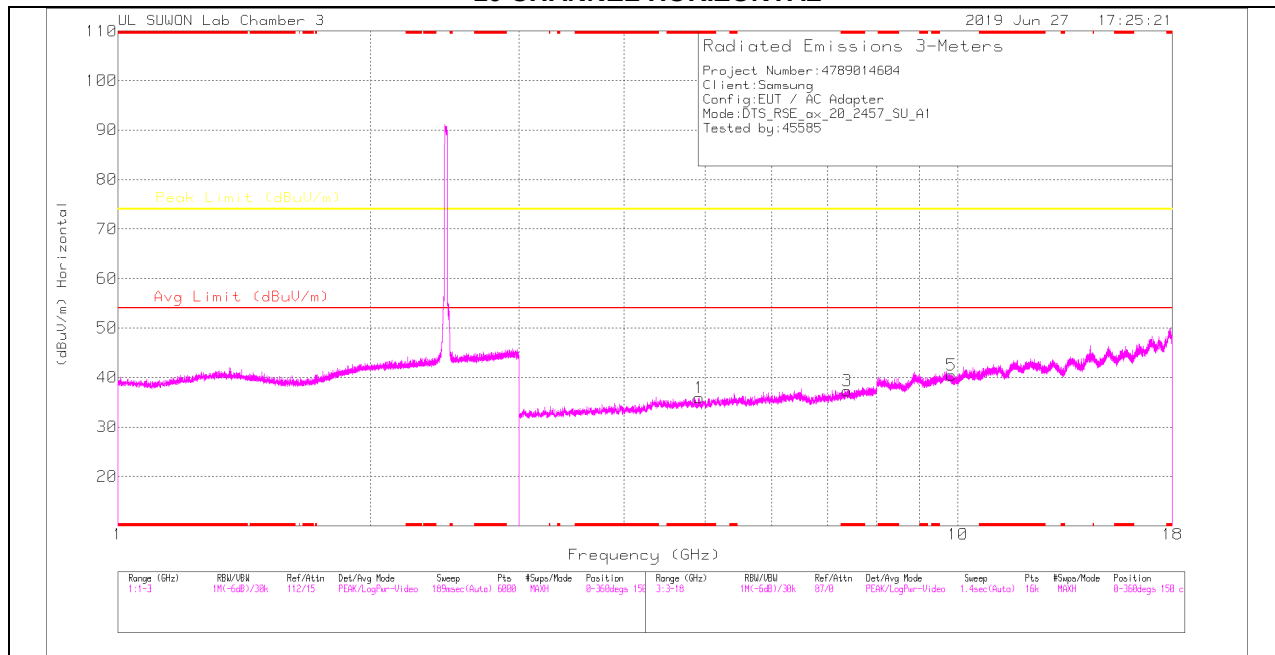

10 CHANNEL VERTICAL

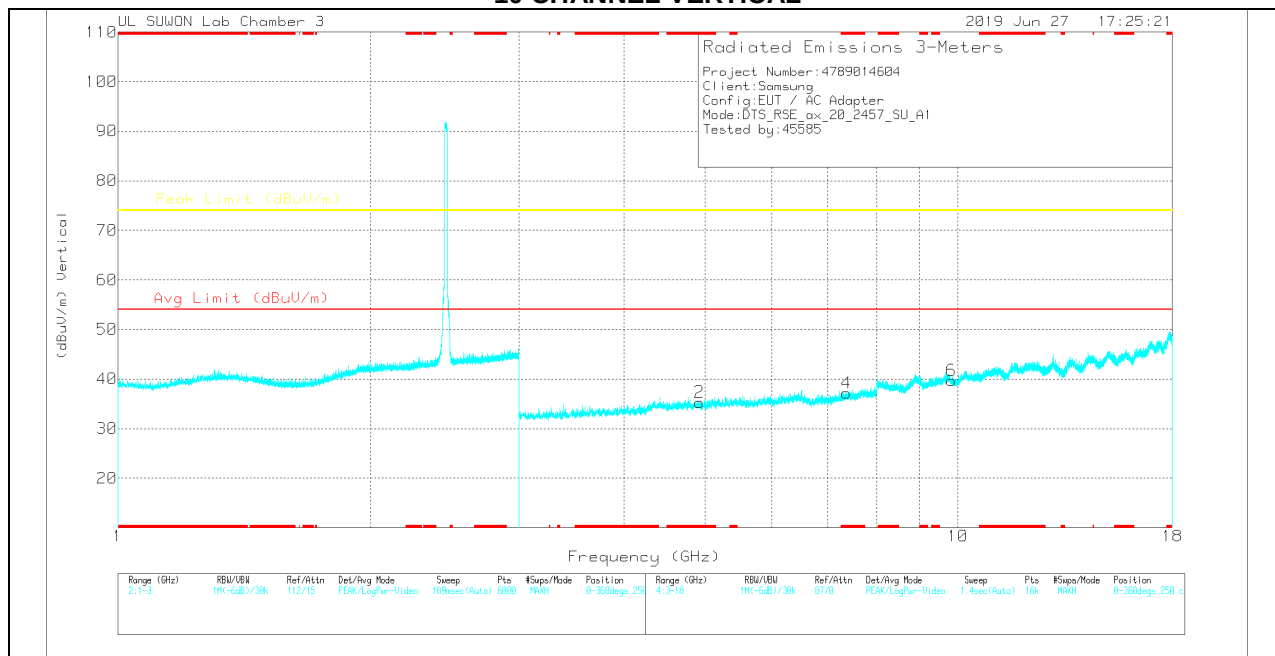

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

10 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020959	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.918	30.93	PK	34.2	-29.2	0	35.93	-	-	74	-38.07	0-360	150	H
3	* 7.377	24.81	PK	35.8	-23.3	0	37.31	-	-	74	-36.69	0-360	250	H
5	9.823	22.82	PK	37.3	-19.7	0	40.42	-	-	74	-33.58	0-360	250	H
2	* 4.919	30.33	PK	34.2	-29.2	0	35.33	-	-	74	-38.67	0-360	150	V
4	* 7.37	24.65	PK	35.8	-23.3	0	37.15	-	-	74	-36.85	0-360	150	V
6	9.824	22.2	PK	37.3	-19.8	0	39.7	-	-	74	-34.3	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

SU mode (ANT_2)

2 CHANNEL HORIZONTAL

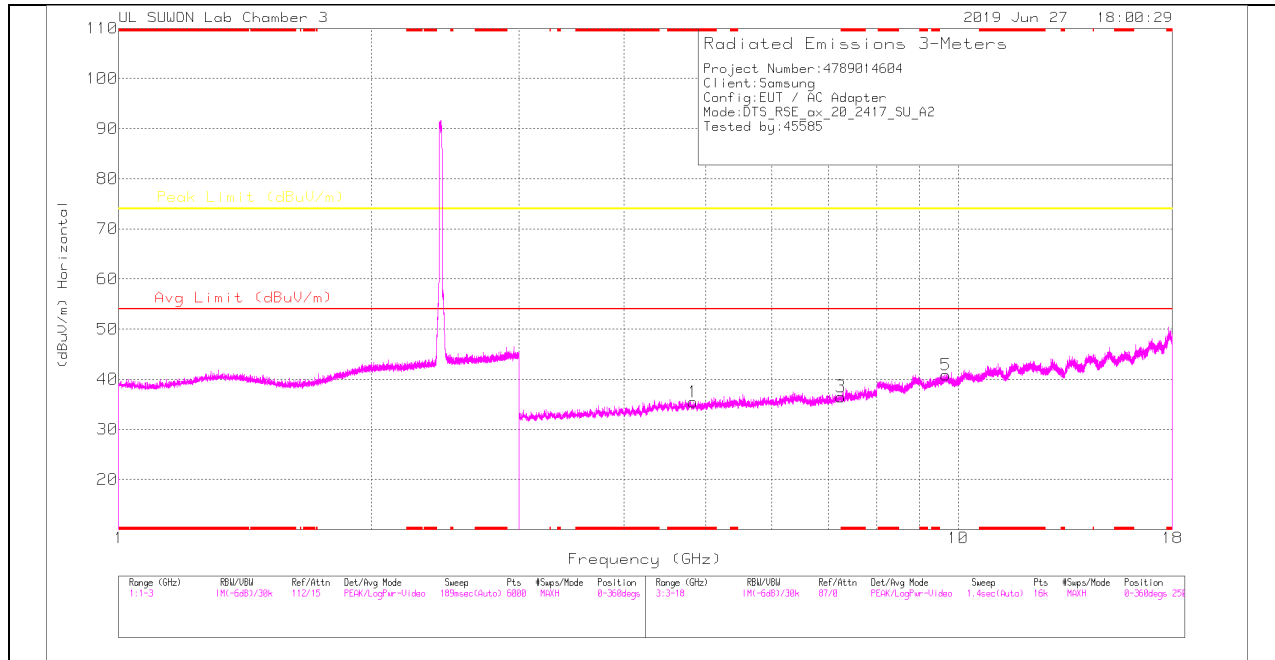

2 CHANNEL VERTICAL

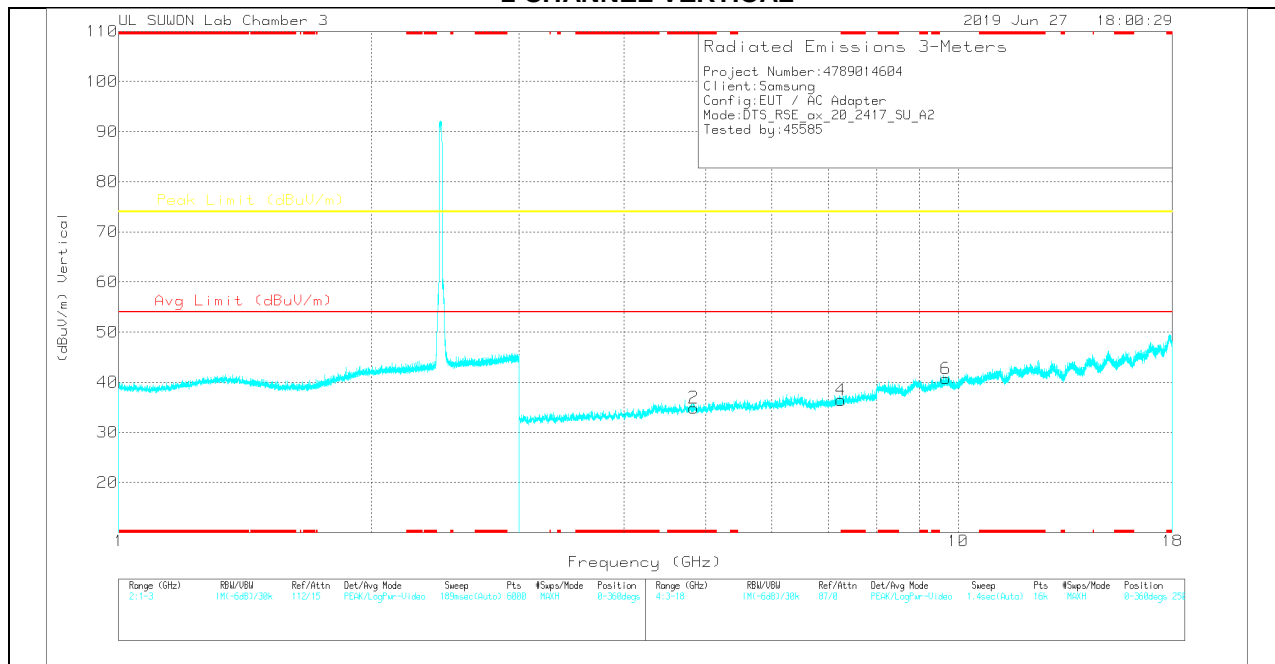

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

2 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020959	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.833	29.85	PK	34.2	-28.6	0	35.45	-	-	74	-38.55	0-360	150	H
3	7.248	24.81	PK	35.8	-24.1	0	36.51	-	-	74	-37.49	0-360	250	H
5	9.672	23.46	PK	37.1	-19.7	0	40.86	-	-	74	-33.14	0-360	250	H
2	* 4.839	29.39	PK	34.2	-28.7	0	34.89	-	-	74	-39.11	0-360	250	V
4	* 7.253	24.72	PK	35.8	-24.1	0	36.42	-	-	74	-37.58	0-360	250	V
6	9.663	23.35	PK	37.1	-19.7	0	40.75	-	-	74	-33.25	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

6 CHANNEL HORIZONTAL

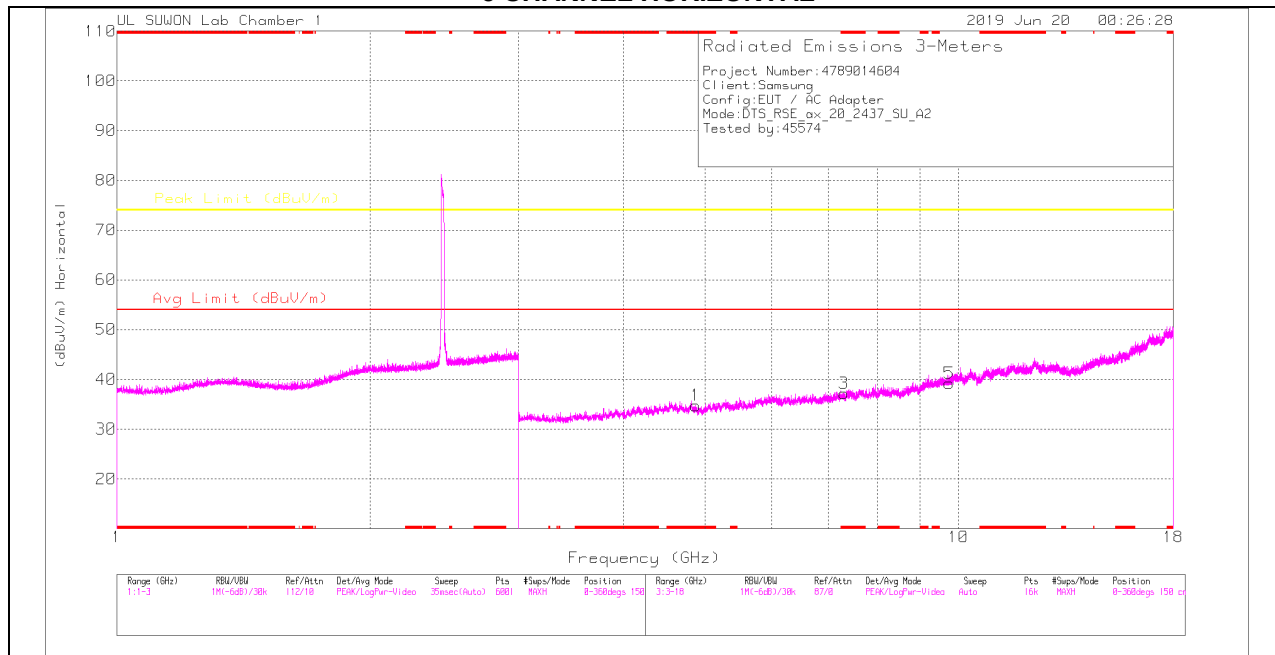

6 CHANNEL VERTICAL

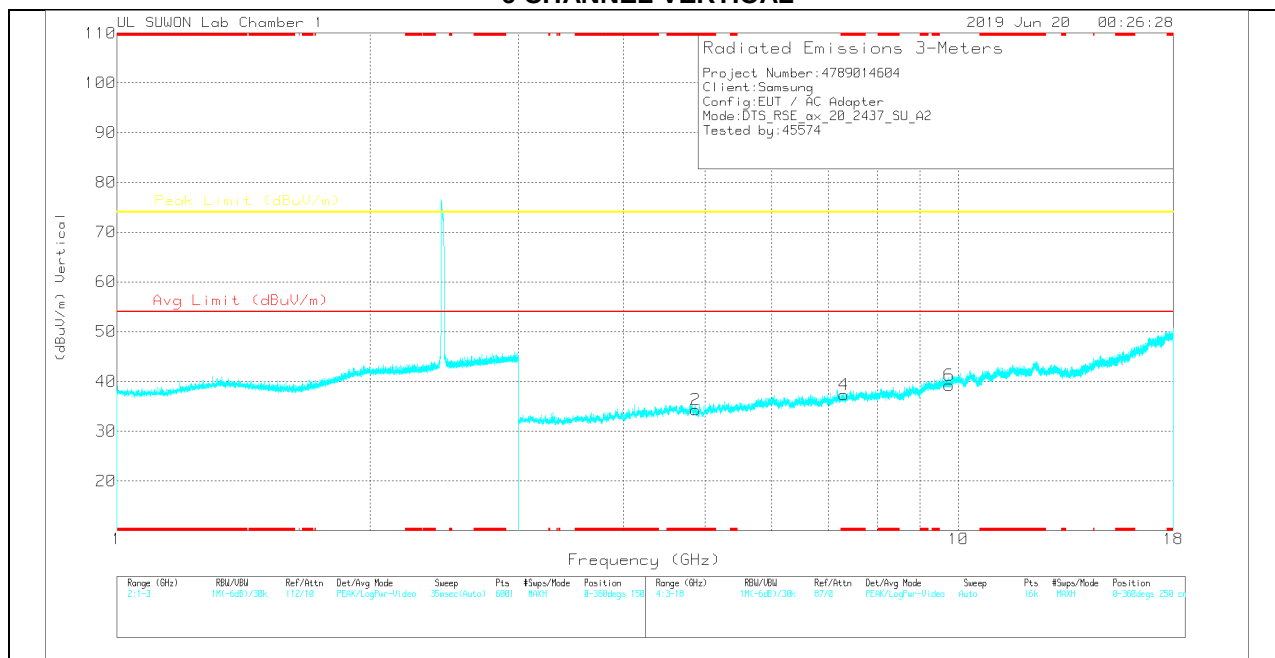

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

6 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87301	32.04	PK	34.2	-31.5	0	34.74	-	-	74	-39.26	0-360	150	H
3	* 7.30942	28.85	PK	35.8	-27.4	0	37.25	-	-	74	-36.75	0-360	150	H
5	9.74864	25.88	PK	37.2	-23.9	0	39.18	-	-	74	-34.82	0-360	250	H
2	* 4.87488	31.54	PK	34.2	-31.5	0	34.24	-	-	74	-39.76	0-360	250	V
4	* 7.31129	28.93	PK	35.8	-27.4	0	37.33	-	-	74	-36.67	0-360	150	V
6	9.74864	25.88	PK	37.2	-23.9	0	39.18	-	-	74	-34.82	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

10 CHANNEL HORIZONTAL

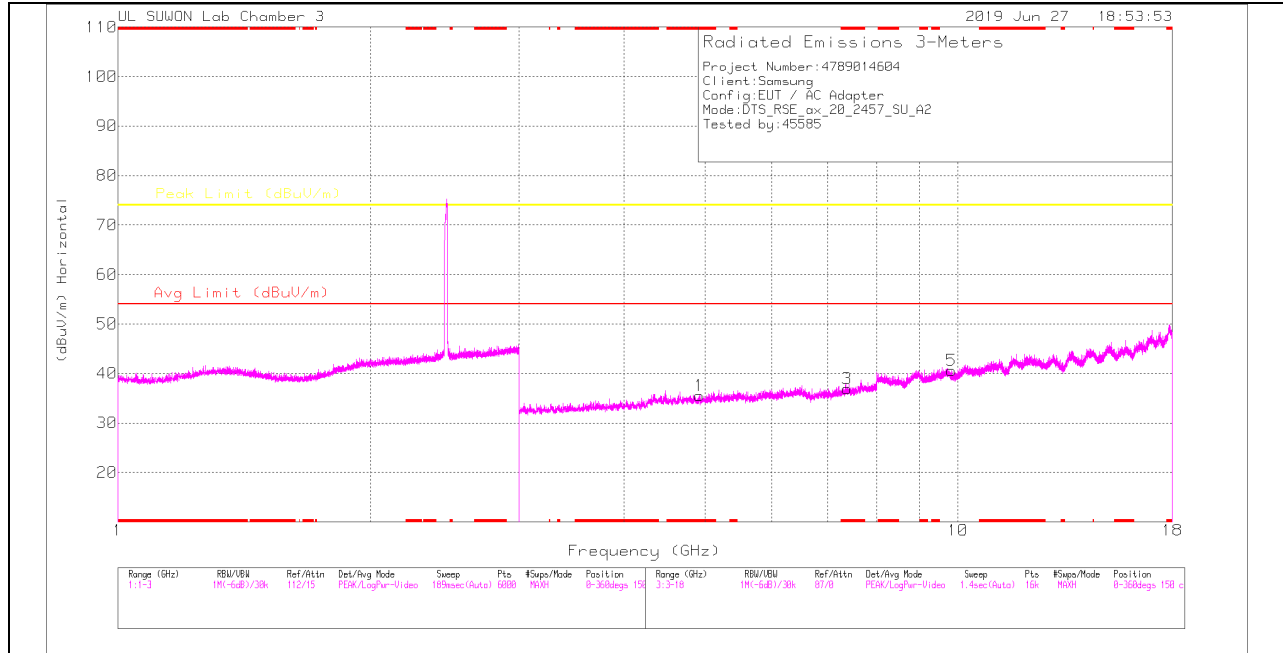

10 CHANNEL VERTICAL

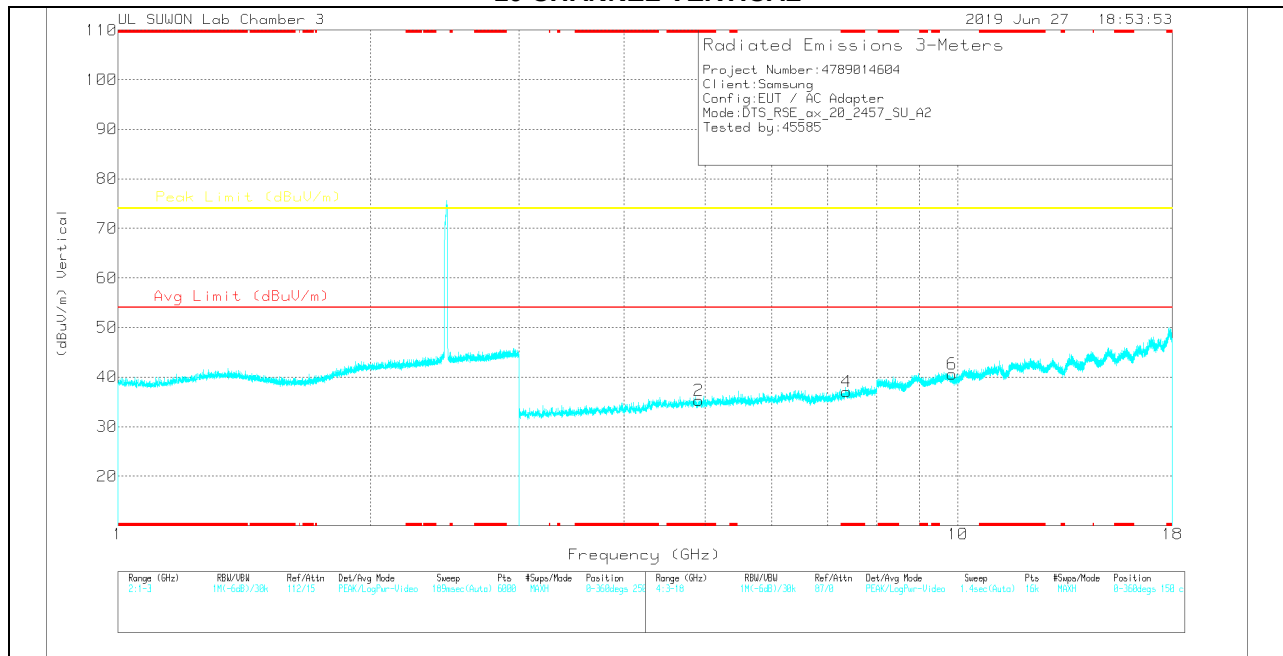

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

10 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020959	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.923	30.55	PK	34.2	-29.2	0	35.55	-	-	74	-38.45	0-360	150	H
3	* 7.377	24.44	PK	35.8	-23.3	0	36.94	-	-	74	-37.06	0-360	250	H
5	9.827	22.88	PK	37.4	-19.7	0	40.58	-	-	74	-33.42	0-360	150	H
2	* 4.914	30.32	PK	34.2	-29.3	0	35.22	-	-	74	-38.78	0-360	150	V
4	* 7.373	24.5	PK	35.8	-23.3	0	37	-	-	74	-37	0-360	250	V
6	9.833	22.95	PK	37.4	-19.7	0	40.65	-	-	74	-33.35	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

26T RU mode (ANT_1 / Low: 4, Mid: 4, High: 4)

1 CHANNEL HORIZONTAL

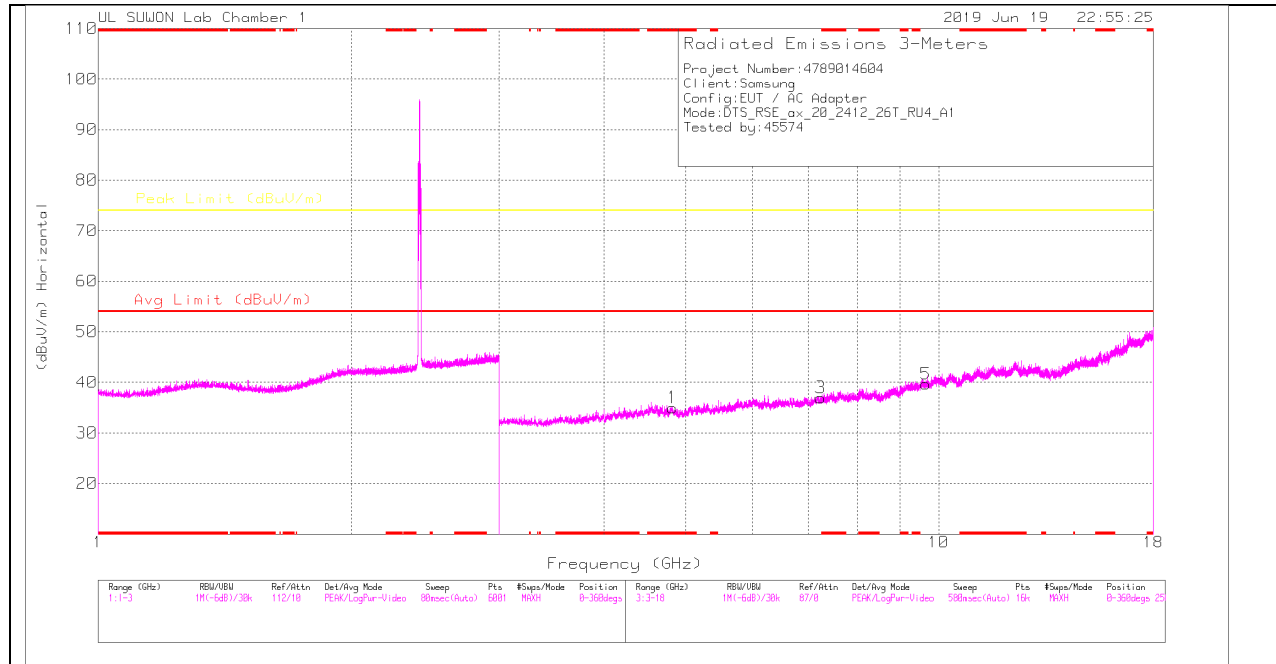

1 CHANNEL VERTICAL

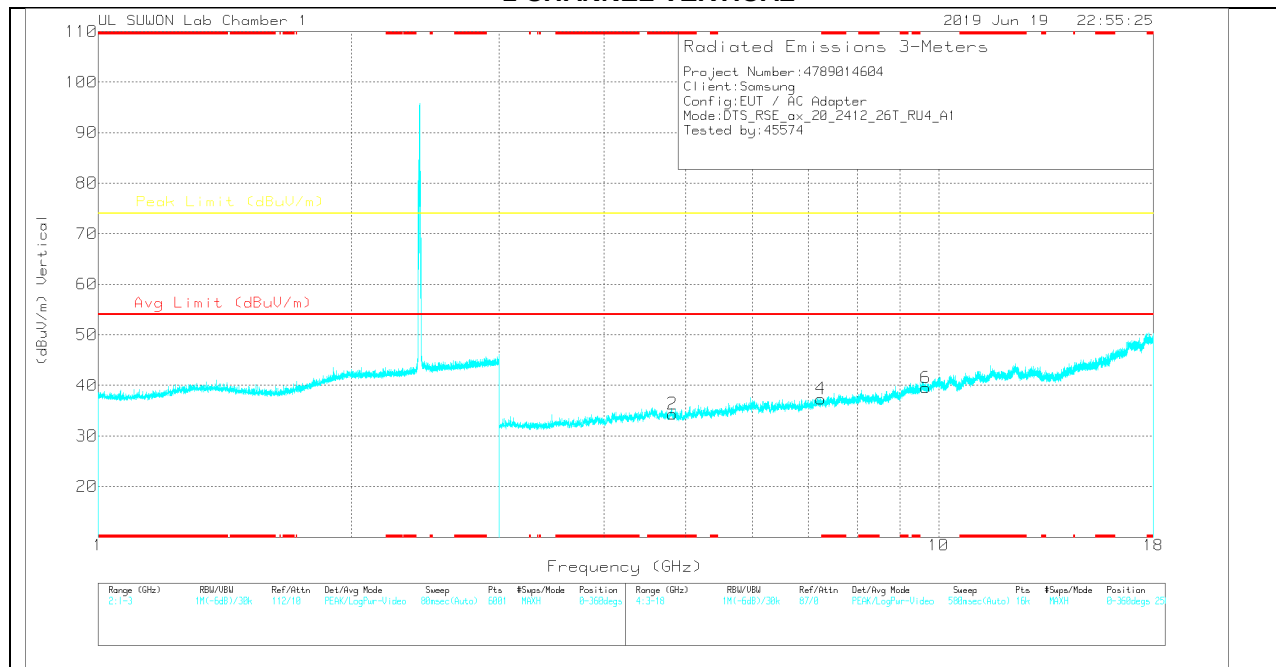

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

1 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.8252	32.08	PK	34.2	-31.3	0	34.98	-	-	74	-39.02	0-360	250	H
3	7.23536	28.95	PK	35.8	-27.8	0	36.95	-	-	74	-37.05	0-360	150	H
5	9.64739	25.85	PK	37.1	-23.3	0	39.65	-	-	74	-34.35	0-360	150	H
2	* 4.82614	31.45	PK	34.2	-31.3	0	34.35	-	-	74	-39.65	0-360	150	V
4	7.2363	29.35	PK	35.8	-27.8	0	37.35	-	-	74	-36.65	0-360	150	V
6	9.64833	25.75	PK	37.1	-23.3	0	39.55	-	-	74	-34.45	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

6 CHANNEL HORIZONTAL

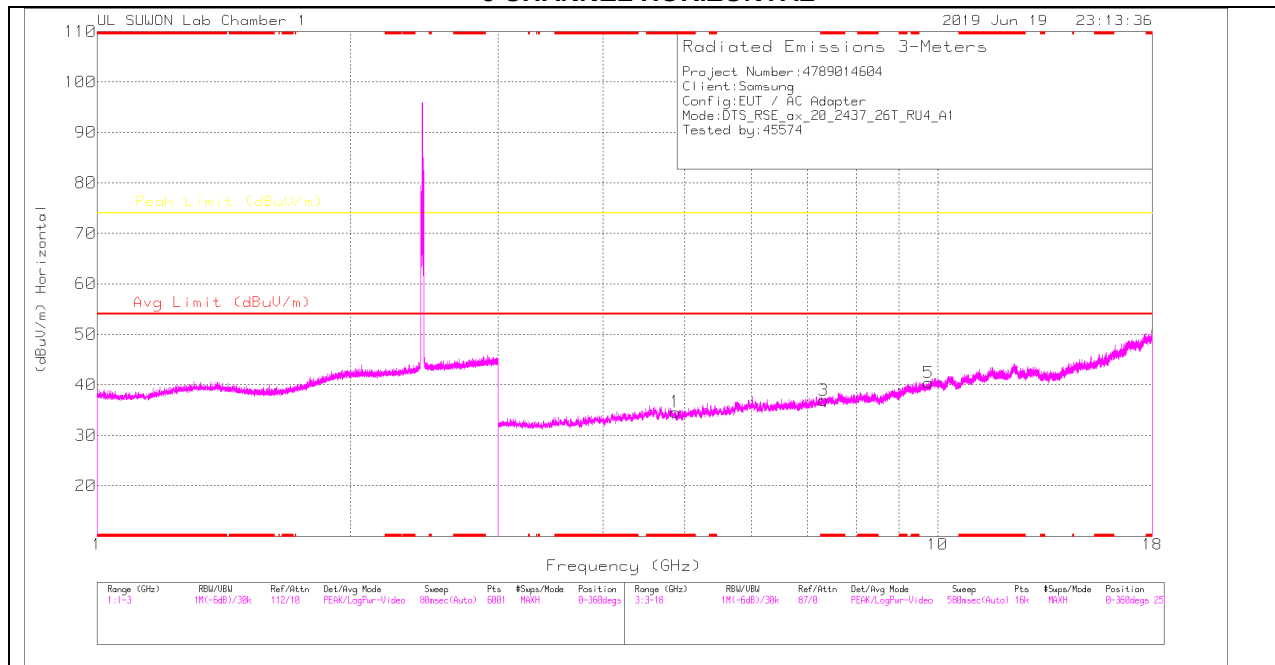

6 CHANNEL VERTICAL

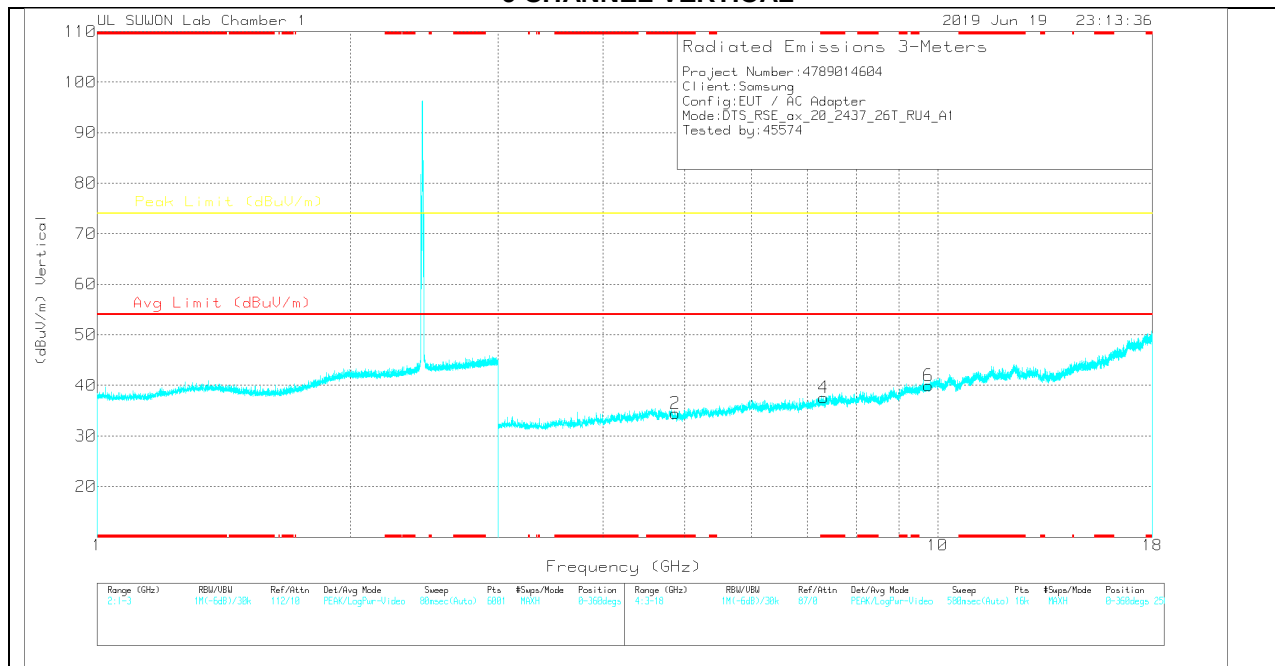

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

6 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87676	31.92	PK	34.2	-31.5	0	34.62	-	-	74	-39.38	0-360	250	H
3	* 7.31129	28.54	PK	35.8	-27.4	0	36.94	-	-	74	-37.06	0-360	250	H
5	9.74864	27.1	PK	37.2	-23.9	0	40.4	-	-	74	-33.6	0-360	250	H
2	* 4.87582	31.77	PK	34.2	-31.5	0	34.47	-	-	74	-39.53	0-360	250	V
4	* 7.31223	29.17	PK	35.8	-27.4	0	37.57	-	-	74	-36.43	0-360	250	V
6	9.7477	26.64	PK	37.2	-23.9	0	39.94	-	-	74	-34.06	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11 CHANNEL HORIZONTAL

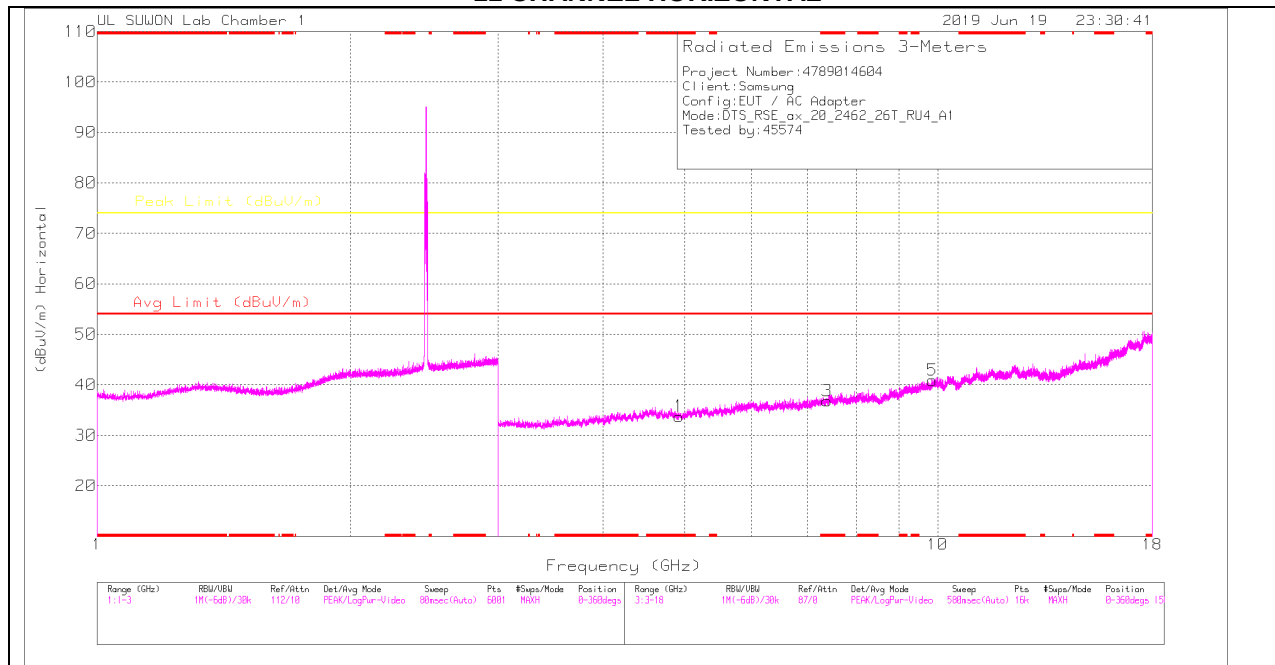

11 CHANNEL VERTICAL

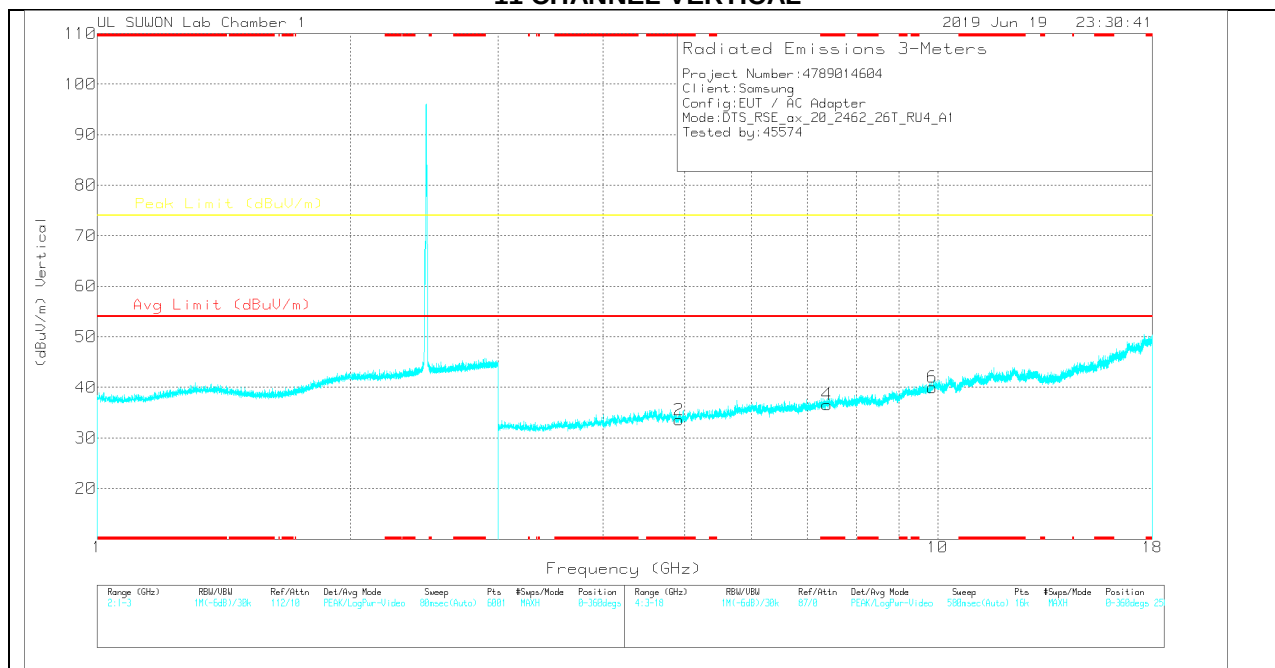

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

11 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.92457	31.14	PK	34.2	-31.6	0	33.74	-	-	74	-40.26	0-360	150	H
3	* 7.38629	28.01	PK	35.8	-27	0	36.81	-	-	74	-37.19	0-360	150	H
5	9.84894	26.67	PK	37.4	-23.2	0	40.87	-	-	74	-33.13	0-360	150	H
2	* 4.92457	30.94	PK	34.2	-31.6	0	33.54	-	-	74	-40.46	0-360	150	V
4	* 7.38629	27.79	PK	35.8	-27	0	36.59	-	-	74	-37.41	0-360	250	V
6	9.84894	25.79	PK	37.4	-23.2	0	39.99	-	-	74	-34.01	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

26T RU mode (ANT_2 / Low: 4, Mid: 4, High: 8)

1 CHANNEL HORIZONTAL

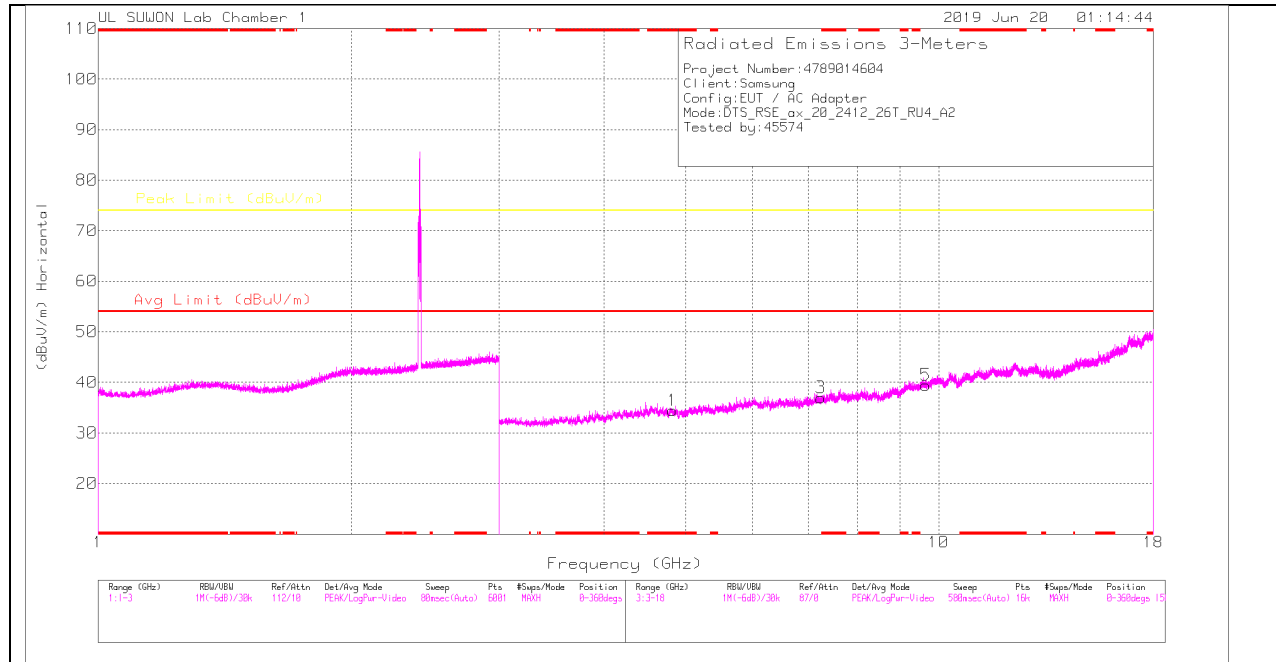

1 CHANNEL VERTICAL

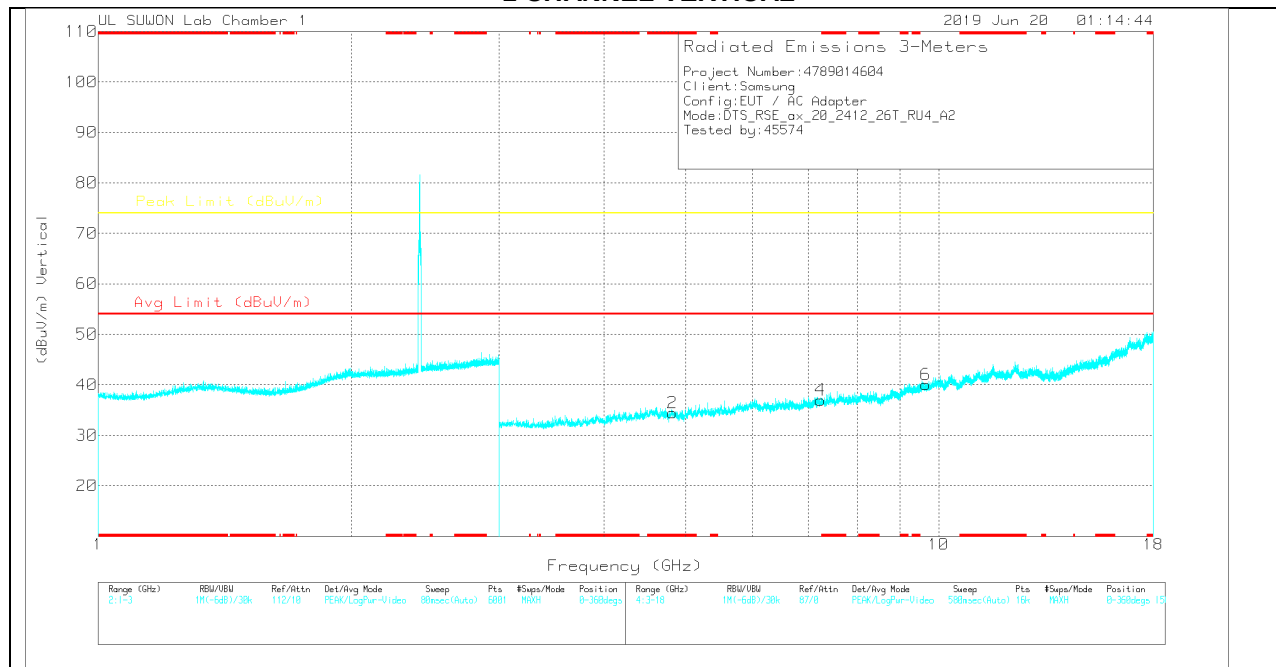

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

1 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.82332	31.61	PK	34.2	-31.4	0	34.41	-	-	74	-39.59	0-360	250	H
3	7.23723	29.07	PK	35.8	-27.9	0	36.97	-	-	74	-37.03	0-360	150	H
5	9.64833	25.65	PK	37.1	-23.3	0	39.45	-	-	74	-34.55	0-360	150	H
2	* 4.82332	31.65	PK	34.2	-31.4	0	34.45	-	-	74	-39.55	0-360	150	V
4	7.23536	28.98	PK	35.8	-27.8	0	36.98	-	-	74	-37.02	0-360	250	V
6	9.64927	26.22	PK	37.1	-23.3	0	40.02	-	-	74	-33.98	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

6 CHANNEL HORIZONTAL

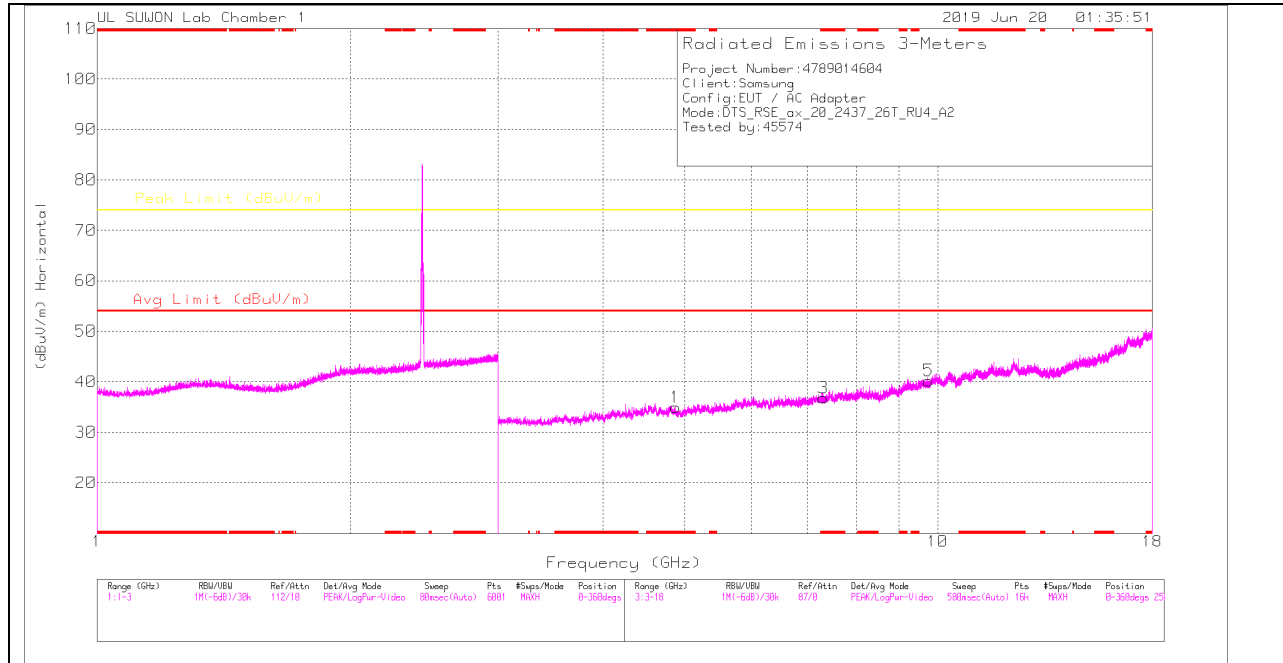

6 CHANNEL VERTICAL

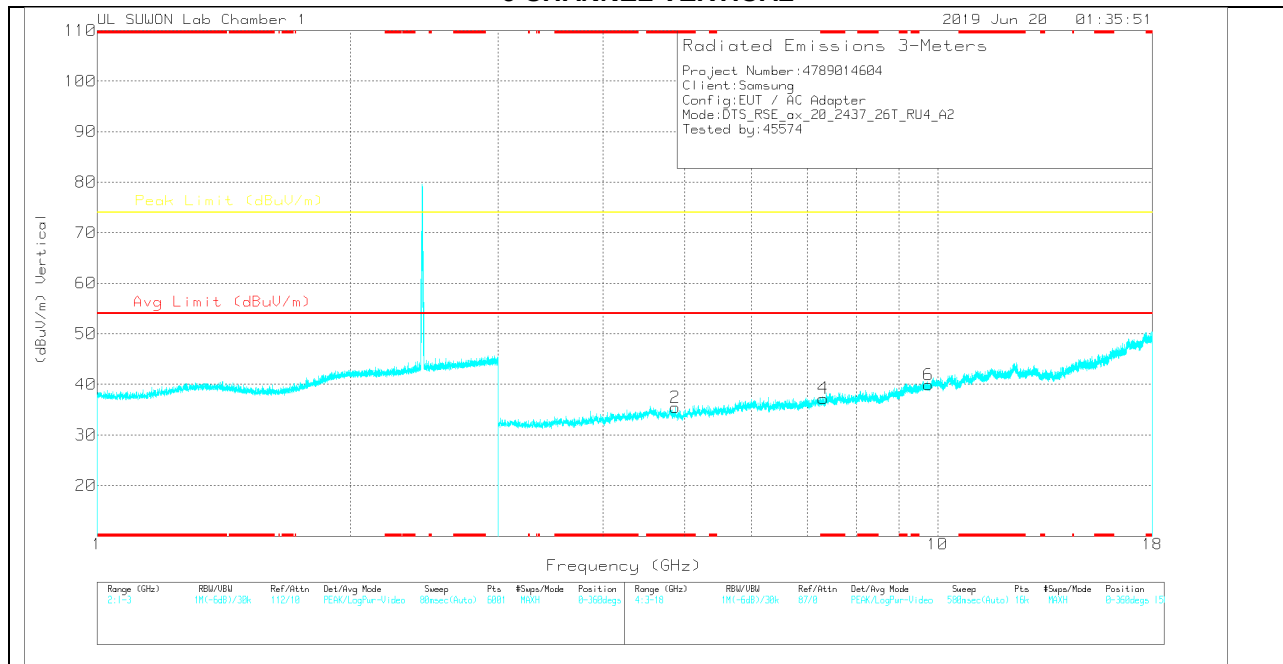

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

6 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87676	32.21	PK	34.2	-31.5	0	34.91	-	-	74	-39.09	0-360	250	H
3	* 7.31035	28.51	PK	35.8	-27.5	0	36.81	-	-	74	-37.19	0-360	150	H
5	9.74676	26.92	PK	37.2	-23.9	0	40.22	-	-	74	-33.78	0-360	250	H
2	* 4.87582	32.71	PK	34.2	-31.5	0	35.41	-	-	74	-38.59	0-360	250	V
4	* 7.31035	28.93	PK	35.8	-27.5	0	37.23	-	-	74	-36.77	0-360	150	V
6	9.74864	26.62	PK	37.2	-23.9	0	39.92	-	-	74	-34.08	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11 CHANNEL HORIZONTAL

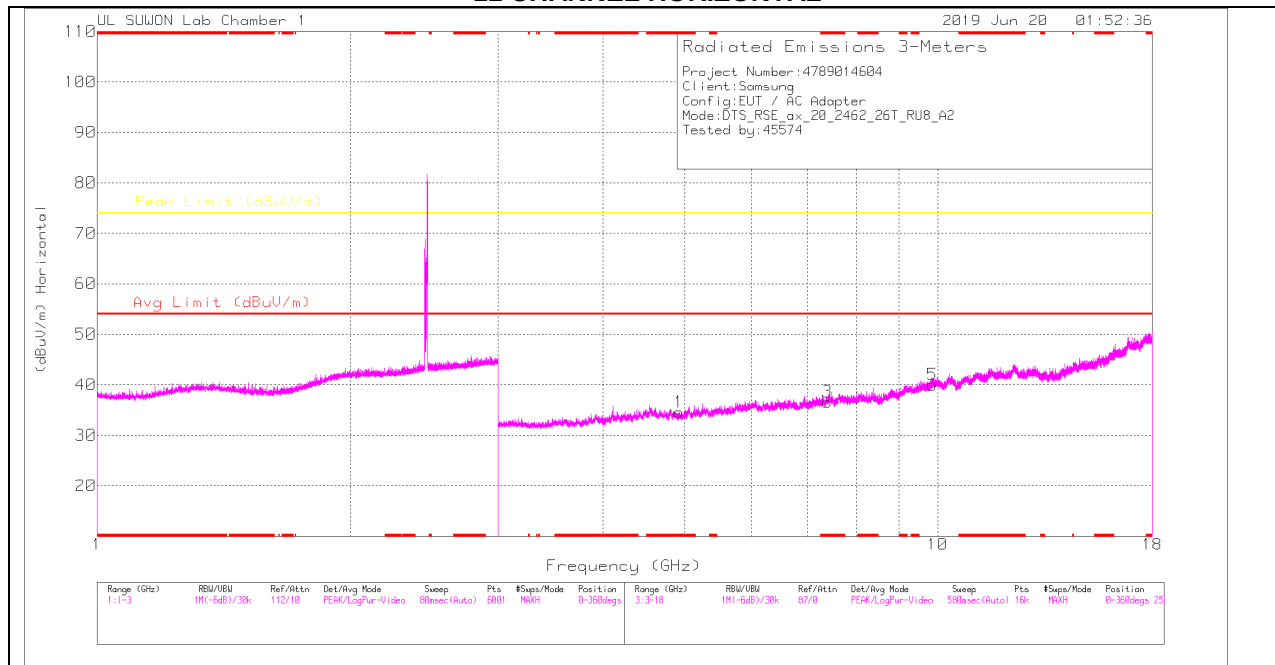

11 CHANNEL VERTICAL

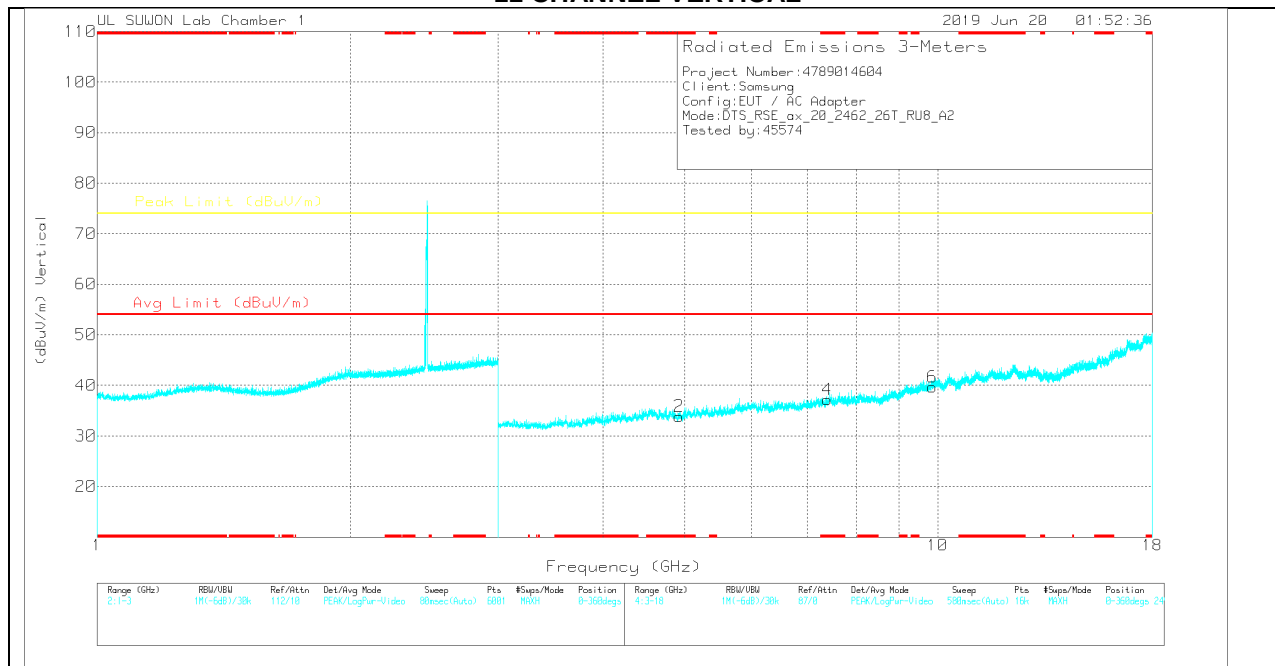

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

11 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.92644	31.87	PK	34.2	-31.5	0	34.57	-	-	74	-39.43	0-360	150	H
3	* 7.38816	27.81	PK	35.8	-27	0	36.81	-	-	74	-37.39	0-360	250	H
5	9.84801	25.8	PK	37.4	-23.2	0	40	-	-	74	-34	0-360	250	H
2	* 4.92363	31.25	PK	34.2	-31.6	0	33.85	-	-	74	-40.15	0-360	249	V
4	* 7.38816	28.38	PK	35.8	-27	0	37.18	-	-	74	-36.82	0-360	150	V
6	9.84801	25.48	PK	37.4	-23.2	0	39.68	-	-	74	-34.32	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.2. TRANSMITTER ABOVE 1 GHz_MIMO

11.2.1. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (1 CHANNEL)

SU mode (MIMO)

HORIZONTAL PEAK AND AVERAGE PLOT

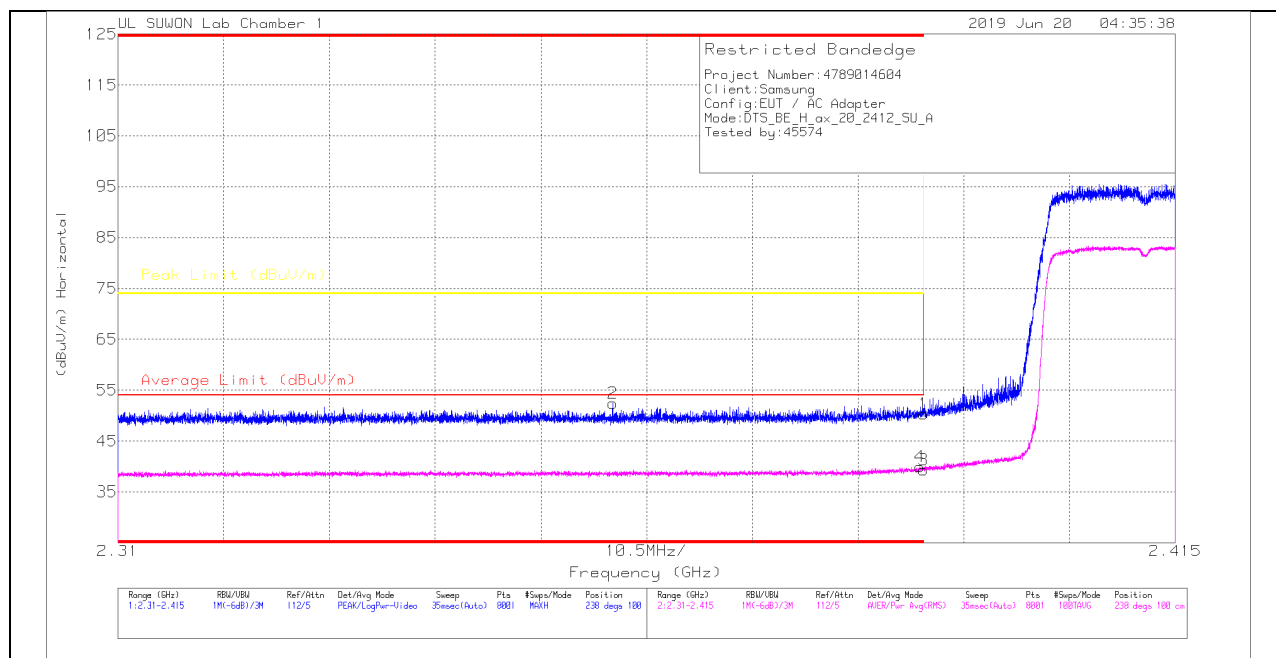

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	44.16	Pk	31.7	-25.5	0	50.36	-	-	74	-23.64	238	100	H
2	* 2.35917	46.5	Pk	31.6	-25.7	0	52.4	-	-	74	-21.6	238	100	H
3	* 2.39	33.14	RMS	31.7	-25.5	0	39.34	54	-14.66	-	-	238	100	H
4	* 2.38963	33.7	RMS	31.7	-25.5	0	39.9	54	-14.1	-	-	238	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

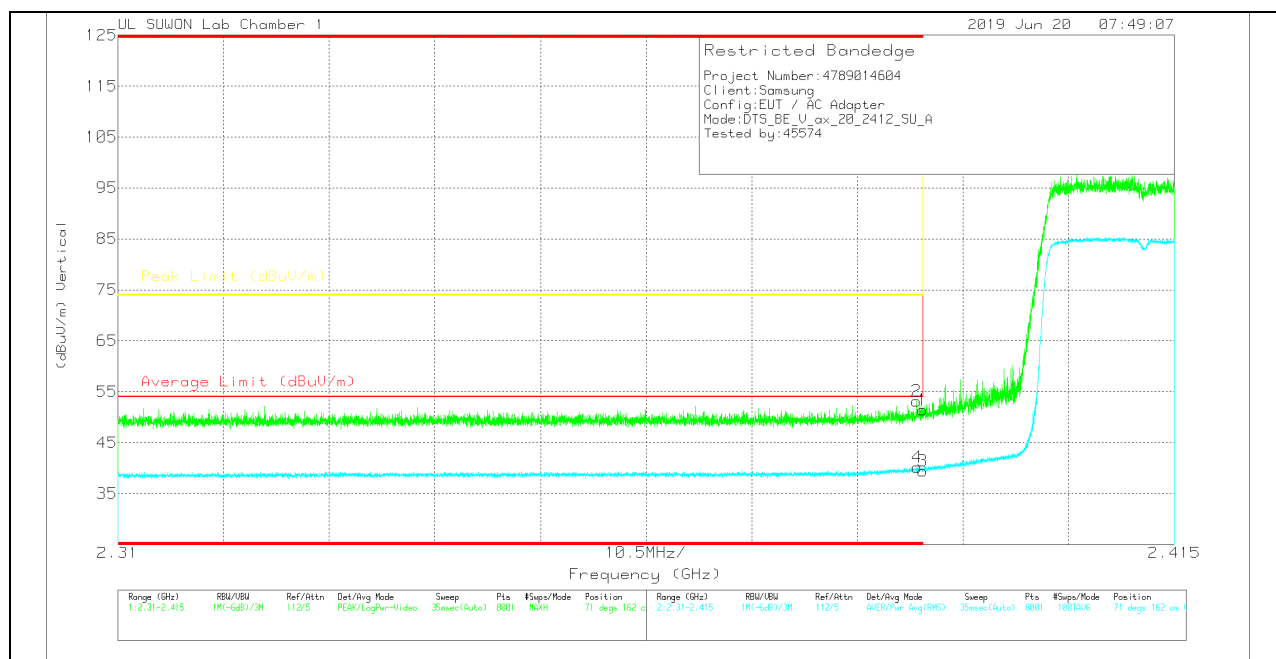

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	45.24	Pk	31.7	-25.5	0	51.44	-	-	74	-22.56	71	162	V
2	* 2.38939	47.02	Pk	31.7	-25.5	0	53.22	-	-	74	-20.78	71	162	V
3	* 2.39	33.29	RMS	31.7	-25.5	0	39.49	54	-14.51	-	-	71	162	V
4	* 2.38947	34	RMS	31.7	-25.5	0	40.2	54	-13.8	-	-	71	162	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (MIMO / RU offset 53)

HORIZONTAL PEAK AND AVERAGE PLOT

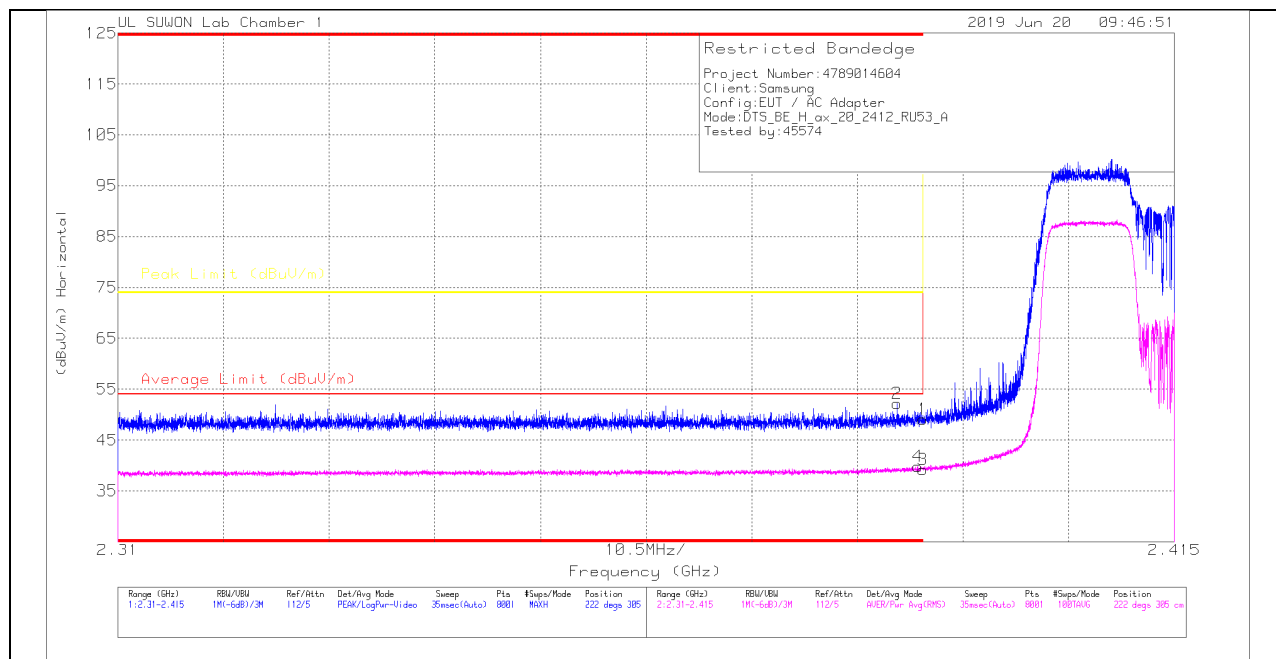

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.93	Pk	31.7	-25.5	0	49.13	-	-	74	-24.87	222	305	H
2	* 2.38746	45.96	Pk	31.7	-25.5	0	52.16	-	-	74	-21.84	222	305	H
3	* 2.39	33.01	RMS	31.7	-25.5	0	39.21	54	-14.79	-	-	222	305	H
4	* 2.38949	33.61	RMS	31.7	-25.5	0	39.81	54	-14.19	-	-	222	305	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

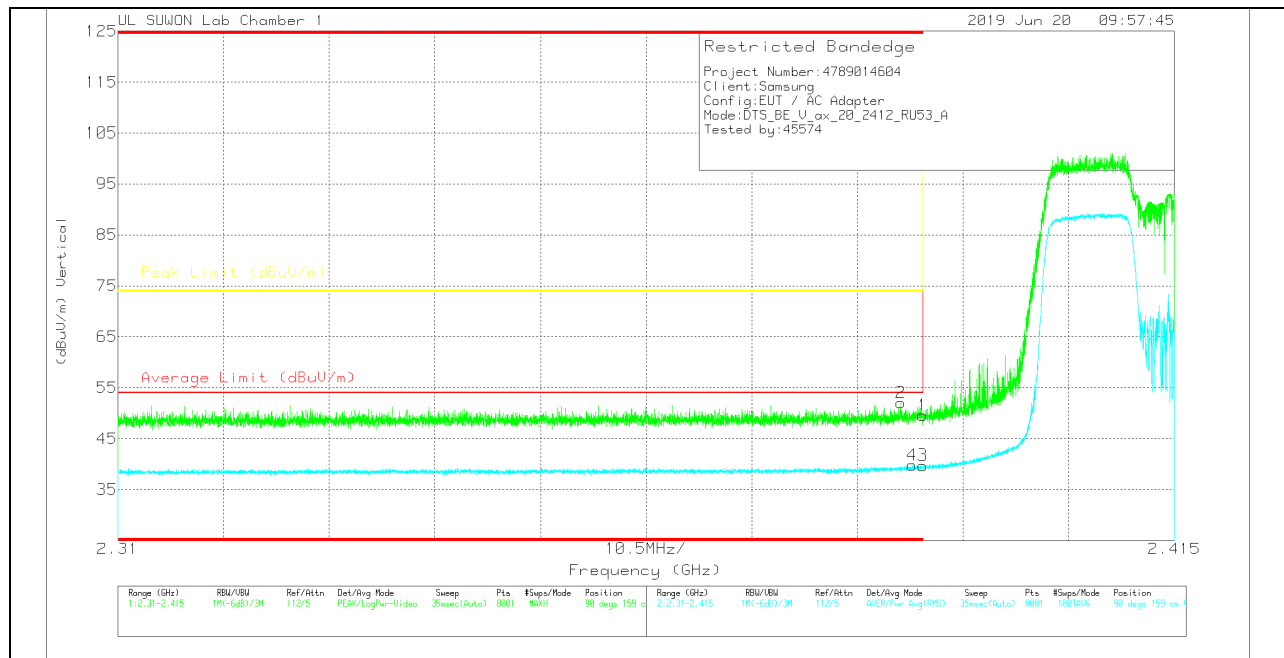

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	43.42	Pk	31.7	-25.5	0	49.62	-	-	74	-24.38	90	159	V
2	* 2.38784	45.89	Pk	31.7	-25.5	0	52.09	-	-	74	-21.91	90	159	V
3	* 2.39	33.55	RMS	31.7	-25.5	0	39.75	54	-14.25	-	-	90	159	V
4	* 2.38895	33.66	RMS	31.7	-25.5	0	39.86	54	-14.14	-	-	90	159	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (MIMO / RU offset 37)

HORIZONTAL PEAK AND AVERAGE PLOT

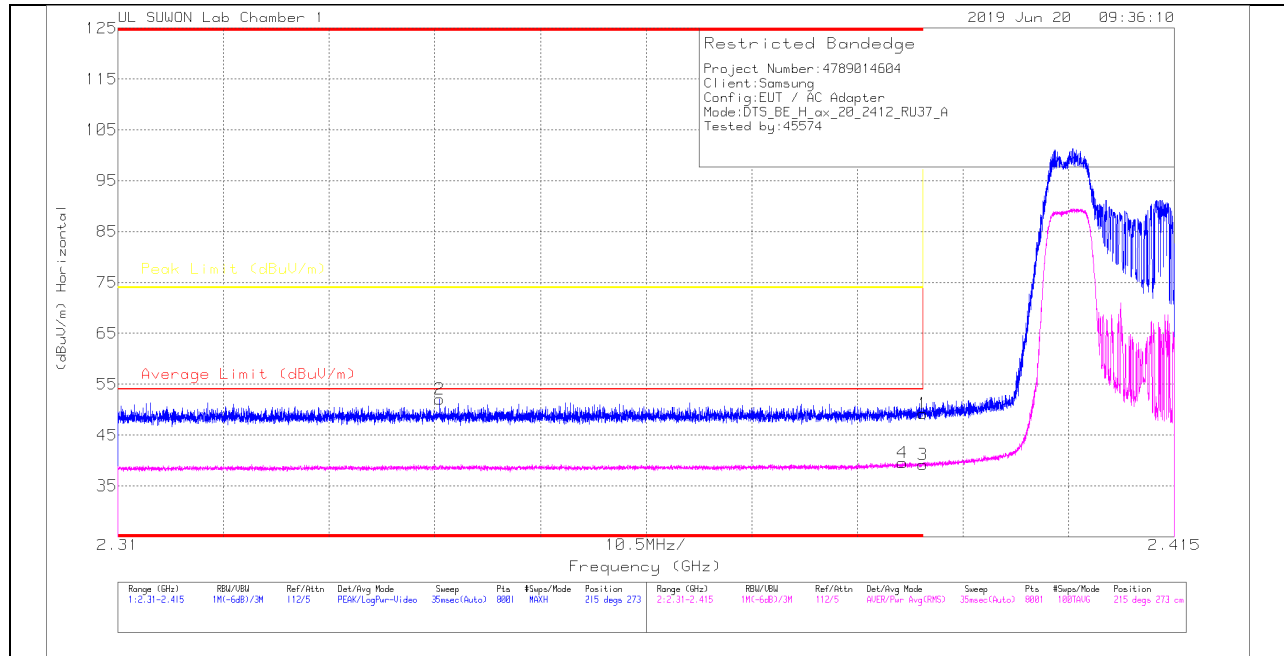

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.05	Pk	31.7	-25.5	0	49.25	-	-	74	-24.75	215	273	H
2	* 2.342	46.15	Pk	31.6	-25.7	0	52.05	-	-	74	-21.95	215	273	H
3	* 2.39	32.94	RMS	31.7	-25.5	0	39.14	54	-14.86	-	-	215	273	H
4	* 2.38798	33.4	RMS	31.7	-25.5	0	39.6	54	-14.4	-	-	215	273	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

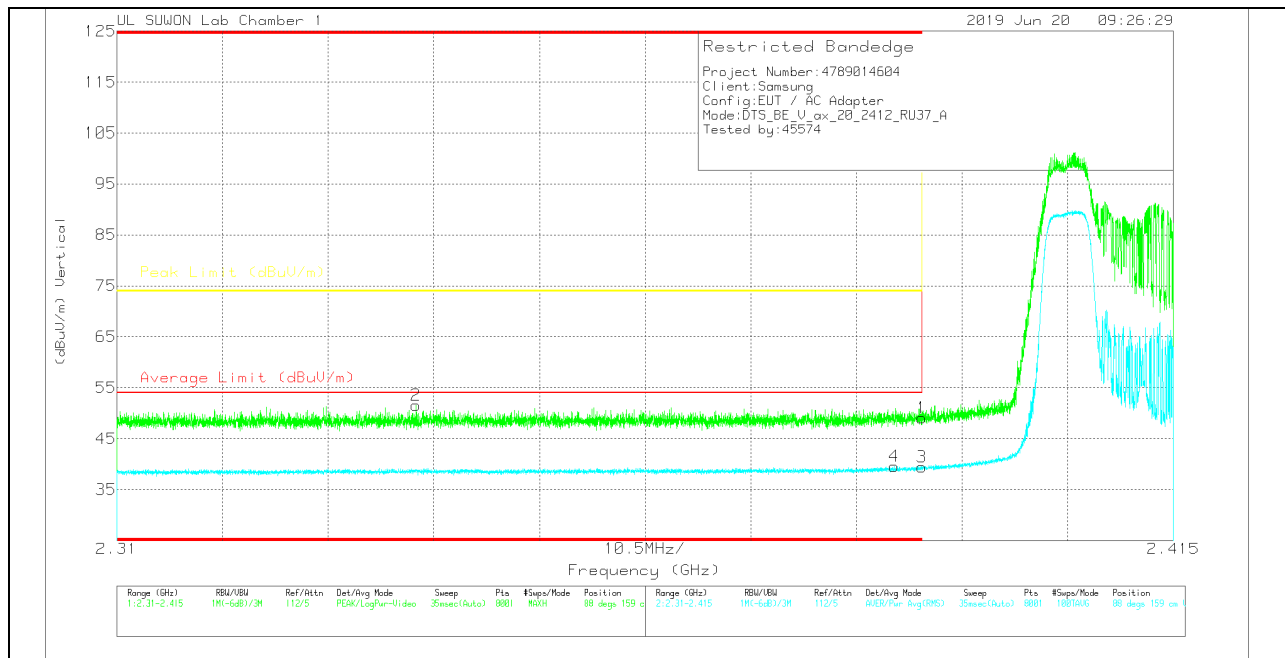

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	42.91	Pk	31.7	-25.5	0	49.11	-	-	74	-24.89	88	159	V
2	* 2.33975	45.76	Pk	31.5	-25.7	0	51.56	-	-	74	-22.44	88	159	V
3	* 2.39	33.23	RMS	31.7	-25.5	0	39.43	54	-14.57	-	-	88	159	V
4	* 2.38725	33.42	RMS	31.7	-25.5	0	39.62	54	-14.38	-	-	88	159	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (MIMO / RU offset 0)

HORIZONTAL PEAK AND AVERAGE PLOT

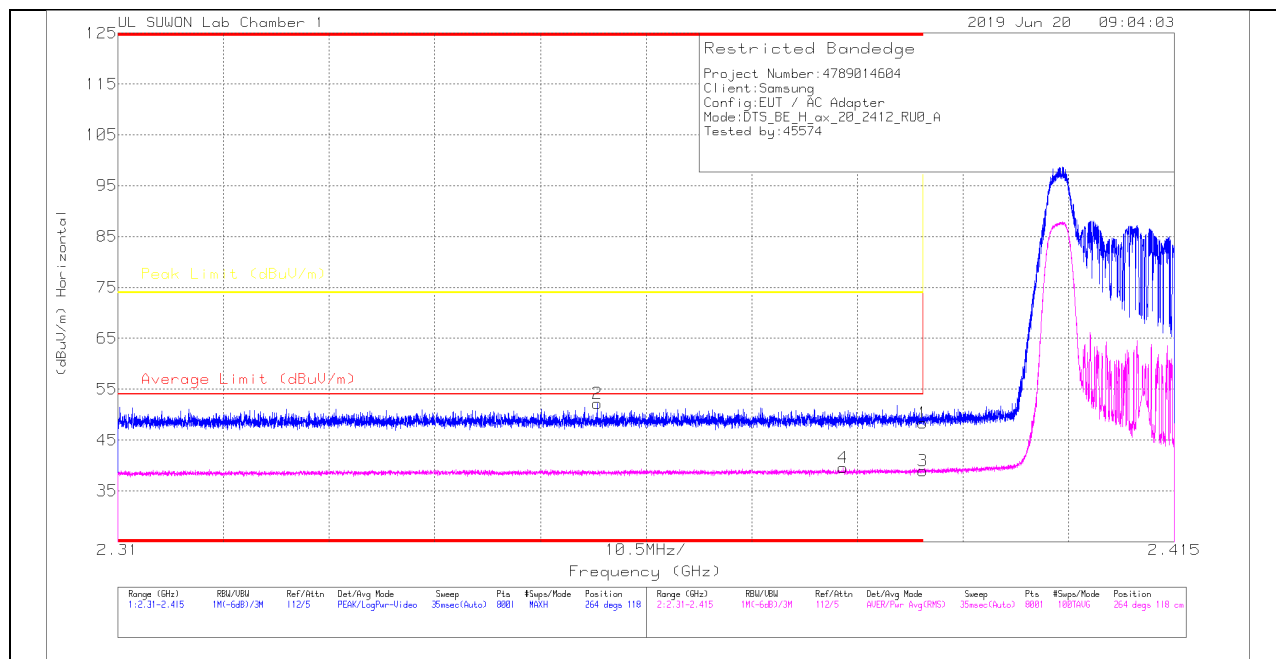

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.15	Pk	31.7	-25.5	0	48.35	-	-	74	-25.65	264	118	H
2	* 2.35763	46.28	Pk	31.6	-25.7	0	52.18	-	-	74	-21.82	264	118	H
3	* 2.39	32.77	RMS	31.7	-25.5	0	38.97	54	-15.03	-	-	264	118	H
4	* 2.38207	33.41	RMS	31.7	-25.5	0	39.61	54	-14.39	-	-	264	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

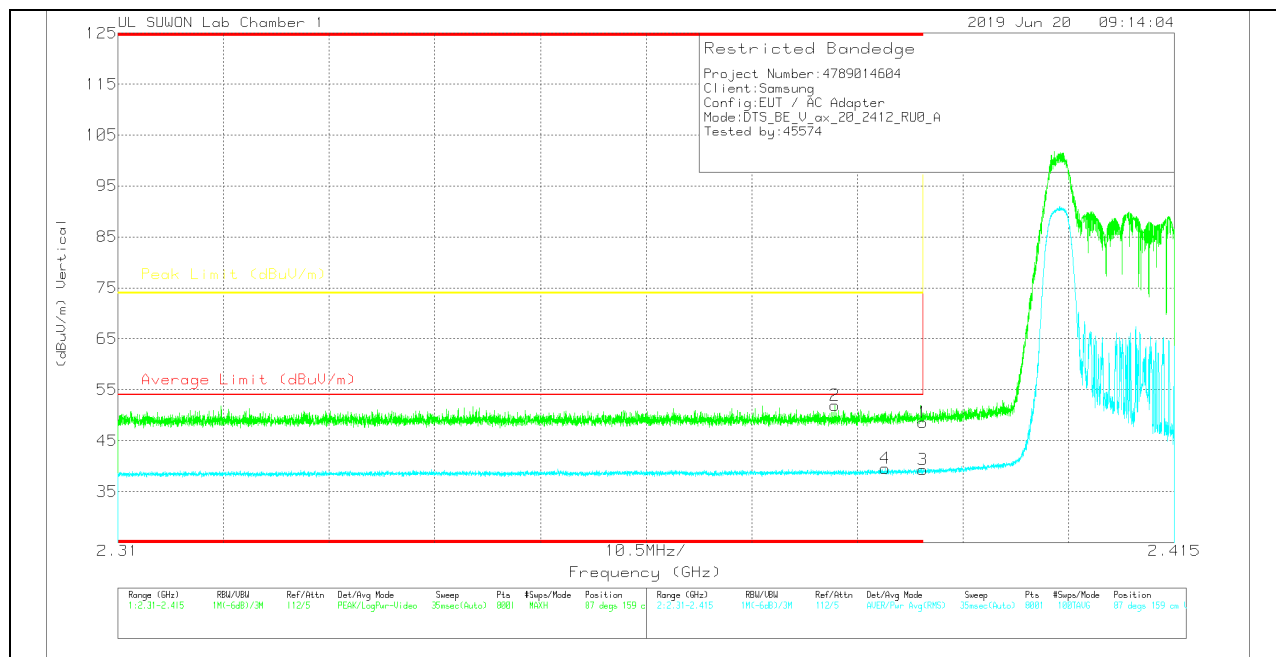

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.38	Pk	31.7	-25.5	0	48.58	-	-	74	-25.42	87	159	V
2	* 2.38126	45.82	Pk	31.7	-25.6	0	51.92	-	-	74	-22.08	87	159	V
3	* 2.39	33.13	RMS	31.7	-25.5	0	39.33	54	-14.67	-	-	87	159	V
4	* 2.38624	33.31	RMS	31.7	-25.5	0	39.51	54	-14.49	-	-	87	159	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (2 CHANNEL)

SU mode (MIMO)

HORIZONTAL PEAK AND AVERAGE PLOT

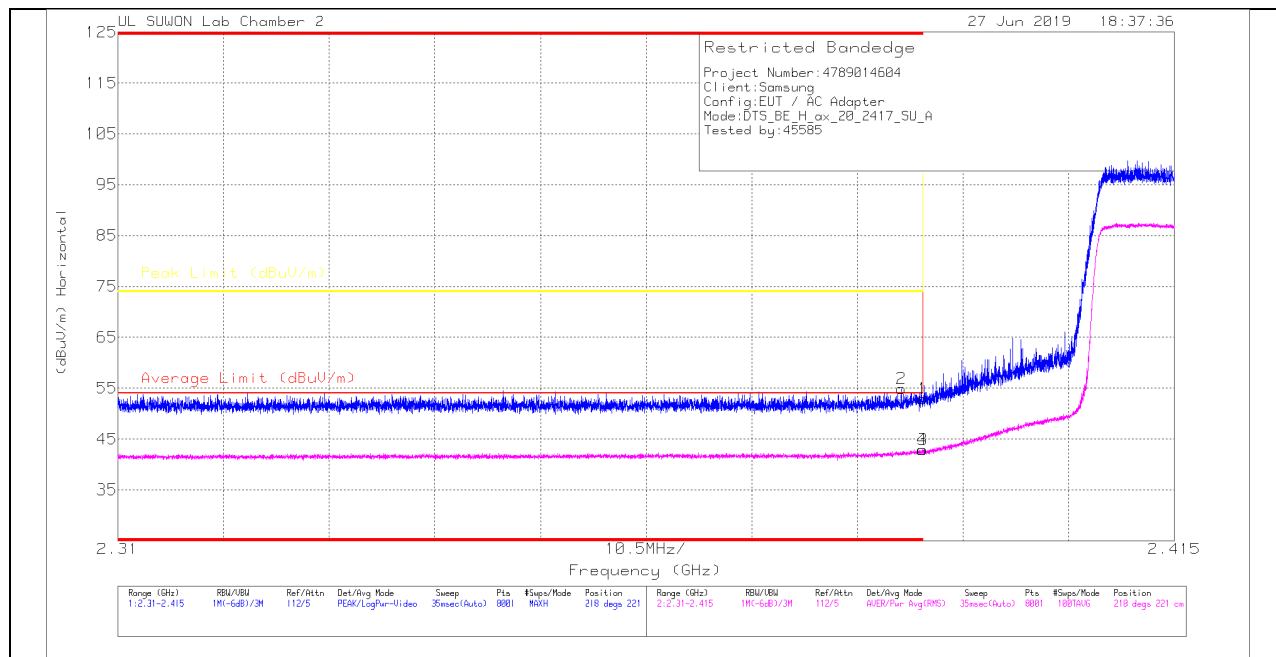

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_D0168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.18	Pk	31.6	-20.8	0	52.98	-	-	74	-21.02	218	221	H
2	* 2.388	44.07	Pk	31.6	-20.8	0	54.87	-	-	74	-19.13	218	221	H
3	* 2.39	32.14	RMS	31.6	-20.8	0	42.94	54	-11.06	-	-	218	221	H
4	* 2.39	32.1	RMS	31.6	-20.8	0	42.9	54	-11.1	-	-	218	221	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

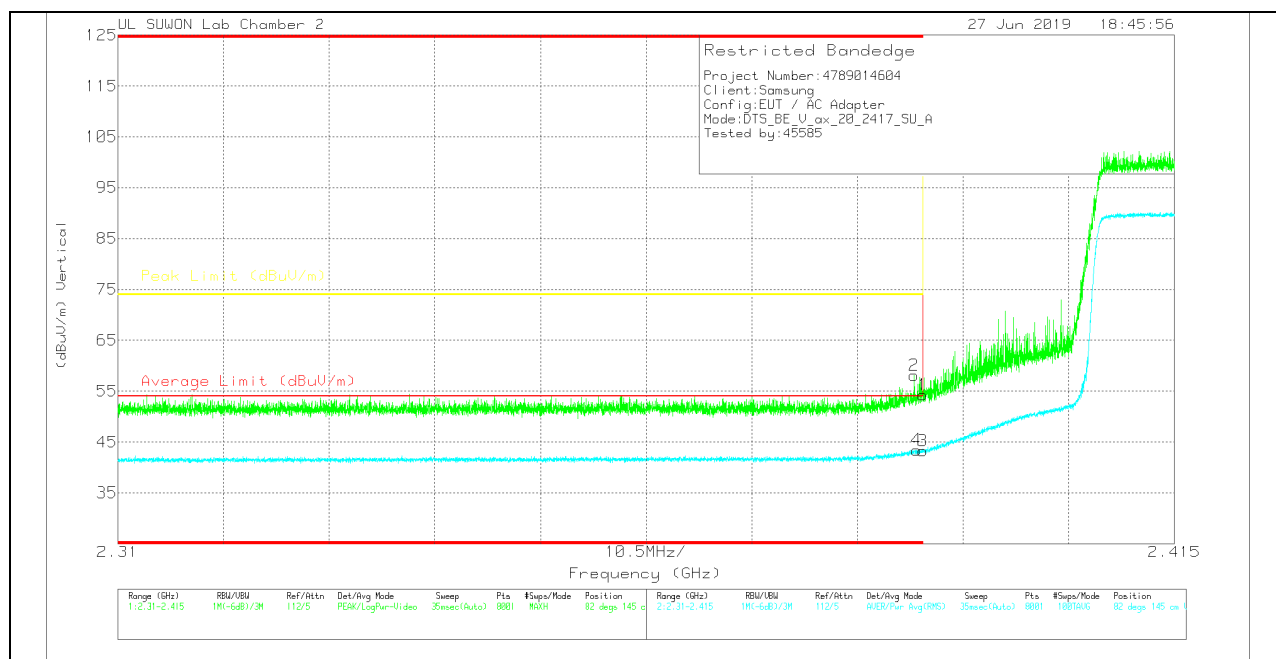

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.47	Pk	31.6	-20.8	0	54.27	-	-	74	-19.73	82	145	V
2	* 2.389	47.34	Pk	31.6	-20.8	0	58.14	-	-	74	-15.86	82	145	V
3	* 2.39	32.48	RMS	31.6	-20.8	0	43.28	54	-10.72	-	-	82	145	V
4	* 2.389	32.66	RMS	31.6	-20.8	0	43.46	54	-10.54	-	-	82	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (10 CHANNEL)

SU mode (MIMO)

HORIZONTAL PEAK AND AVERAGE PLOT

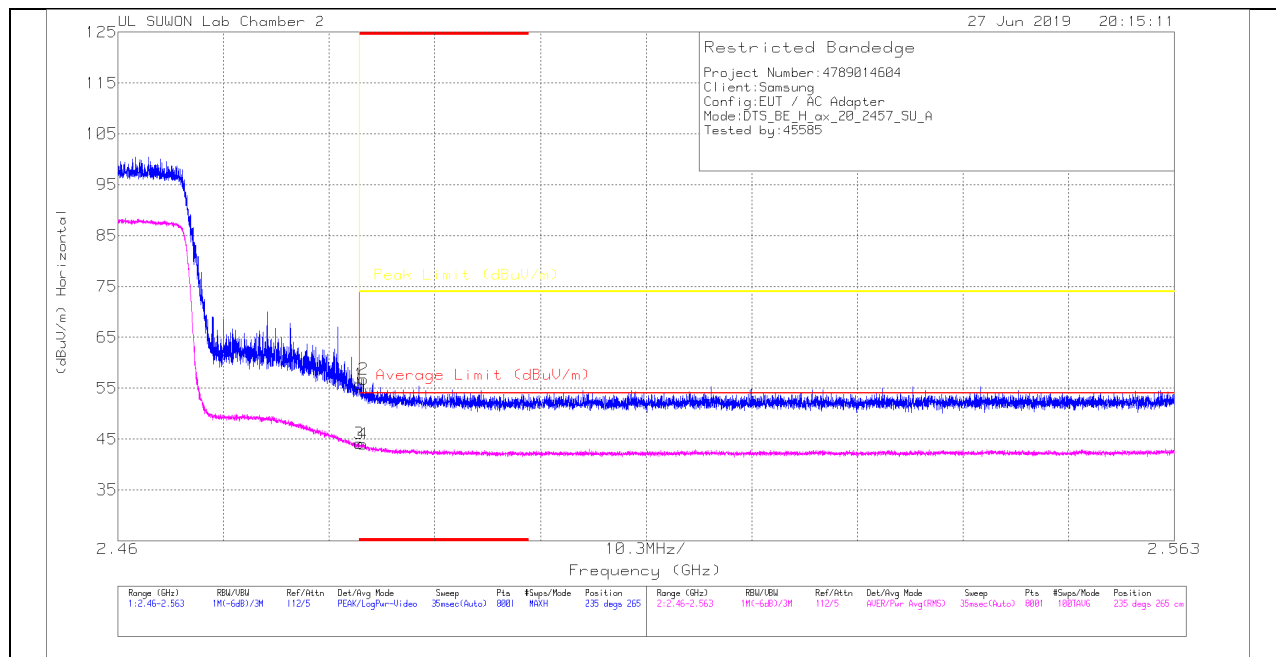

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_D0168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.5	Pk	31.9	-20.6	0	55.8	-	-	74	-18.2	235	265	H
2	* 2.484	45.5	Pk	31.9	-20.6	0	56.8	-	-	74	-17.2	235	265	H
3	* 2.484	32.87	RMS	31.9	-20.6	0	44.17	54	-9.83	-	-	235	265	H
4	* 2.484	32.71	RMS	31.9	-20.6	0	44.01	54	-9.99	-	-	235	265	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

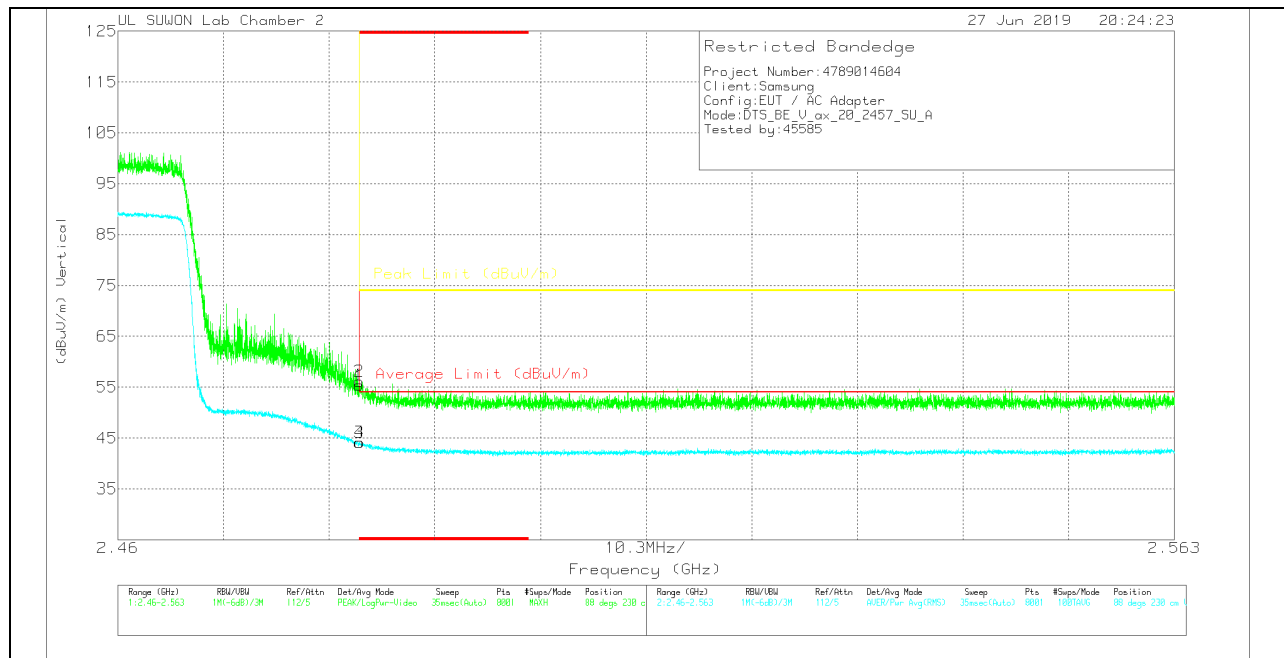

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	44.13	Pk	31.9	-20.6	0	55.43	-	-	74	-18.57	88	230	V
2	* 2.484	44.84	Pk	31.9	-20.6	0	56.14	-	-	74	-17.86	88	230	V
3	* 2.484	32.85	RMS	31.9	-20.6	0	44.15	54	-9.85	-	-	88	230	V
4	* 2.484	32.82	RMS	31.9	-20.6	0	44.12	54	-9.88	-	-	88	230	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (11 CHANNEL)

SU mode (MIMO)

HORIZONTAL PEAK AND AVERAGE PLOT

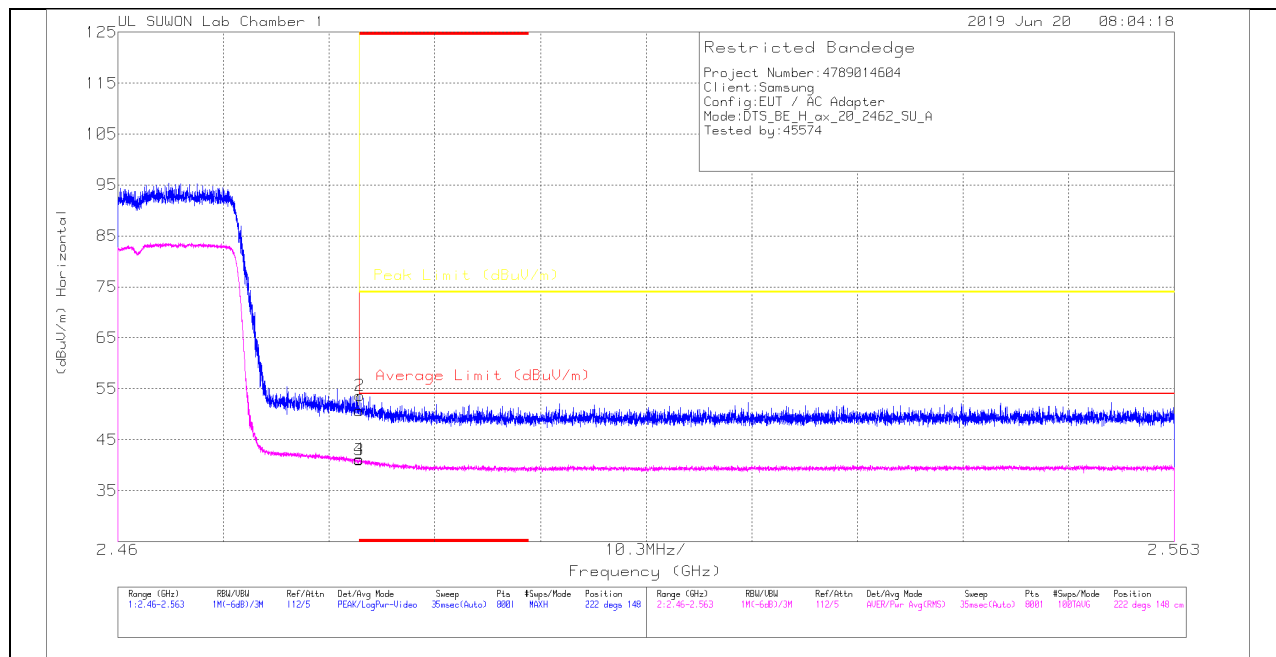

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	44.12	Pk	31.9	-25.3	0	50.72	-	-	74	-23.28	222	148	H
2	* 2.48359	47.01	Pk	31.9	-25.3	0	53.61	-	-	74	-20.39	222	148	H
3	* 2.48351	34.45	RMS	31.9	-25.3	0	41.05	54	-12.95	-	-	222	148	H
4	* 2.48352	34.6	RMS	31.9	-25.3	0	41.2	54	-12.8	-	-	222	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

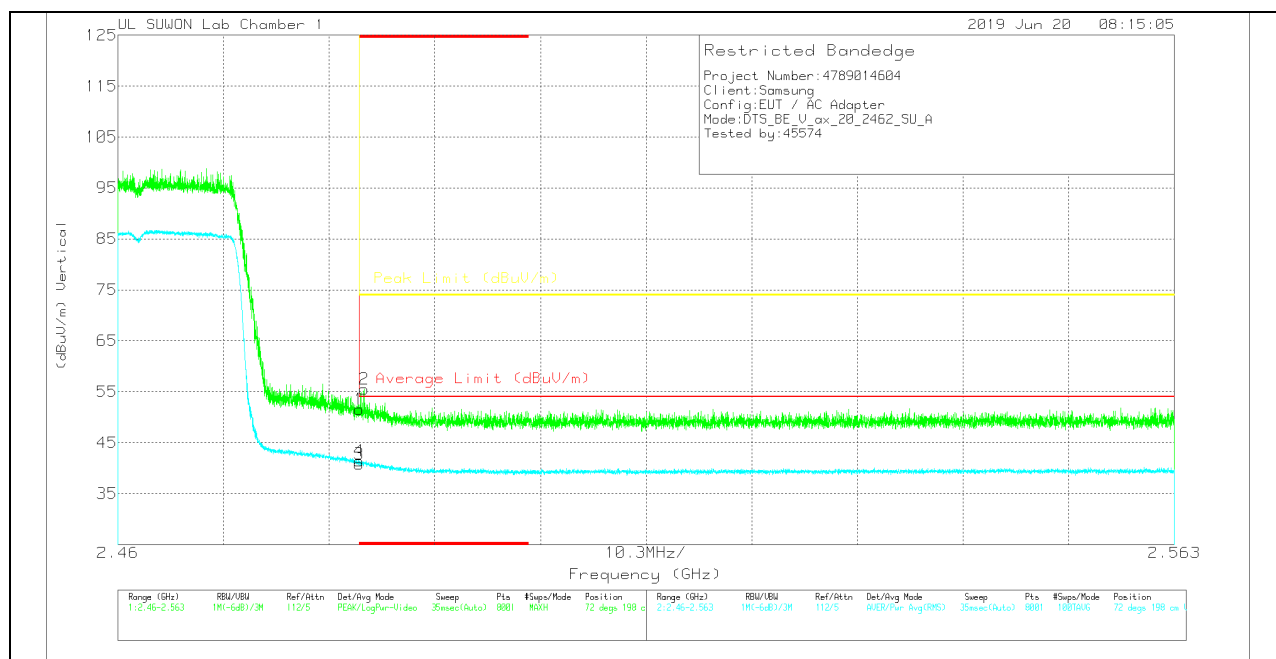

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	44.96	Pk	31.9	-25.3	0	51.56	-	-	74	-22.44	72	198	V
2	* 2.484	48.96	Pk	31.9	-25.3	0	55.56	-	-	74	-18.44	72	198	V
3	* 2.48351	34.21	RMS	31.9	-25.3	0	40.81	54	-13.19	-	-	72	198	V
4	* 2.48355	34.84	RMS	31.9	-25.3	0	41.44	54	-12.56	-	-	72	198	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (MIMO / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

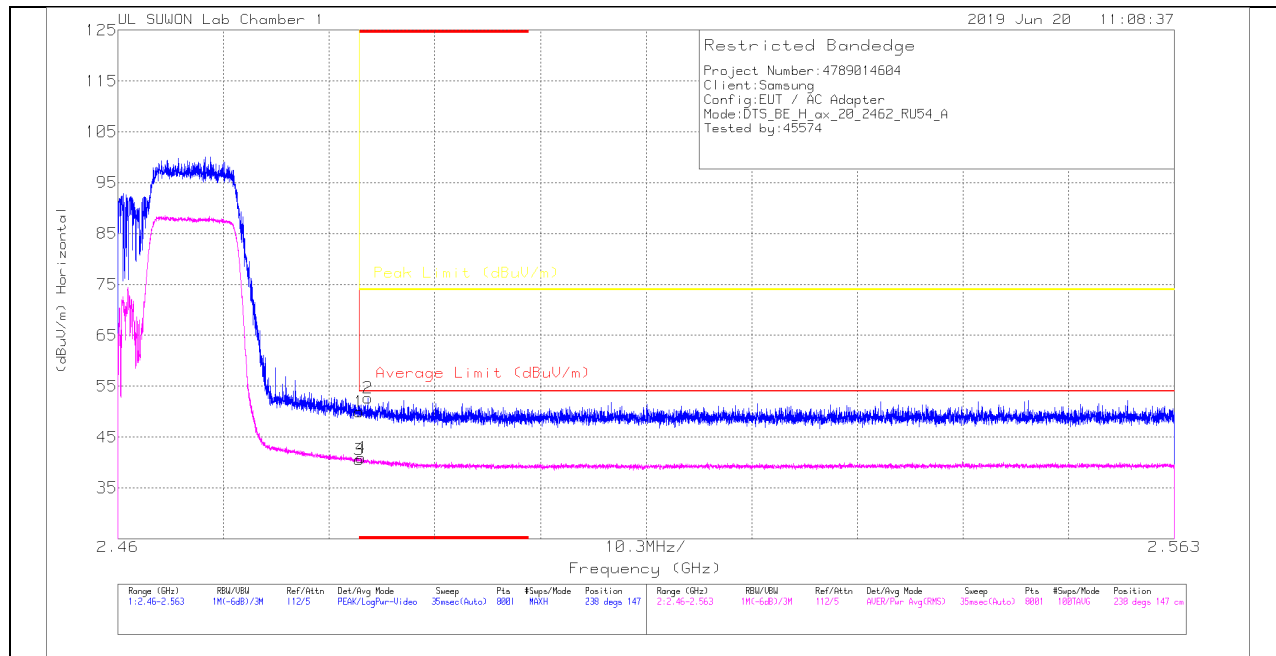

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.35	Pk	31.9	-25.3	0	49.95	-	-	74	-24.05	238	147	H
2	* 2.48436	46.09	Pk	31.9	-25.3	0	52.69	-	-	74	-21.31	238	147	H
3	* 2.48351	33.98	RMS	31.9	-25.3	0	40.58	54	-13.42	-	-	238	147	H
4	* 2.48369	34.27	RMS	31.9	-25.3	0	40.87	54	-13.13	-	-	238	147	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

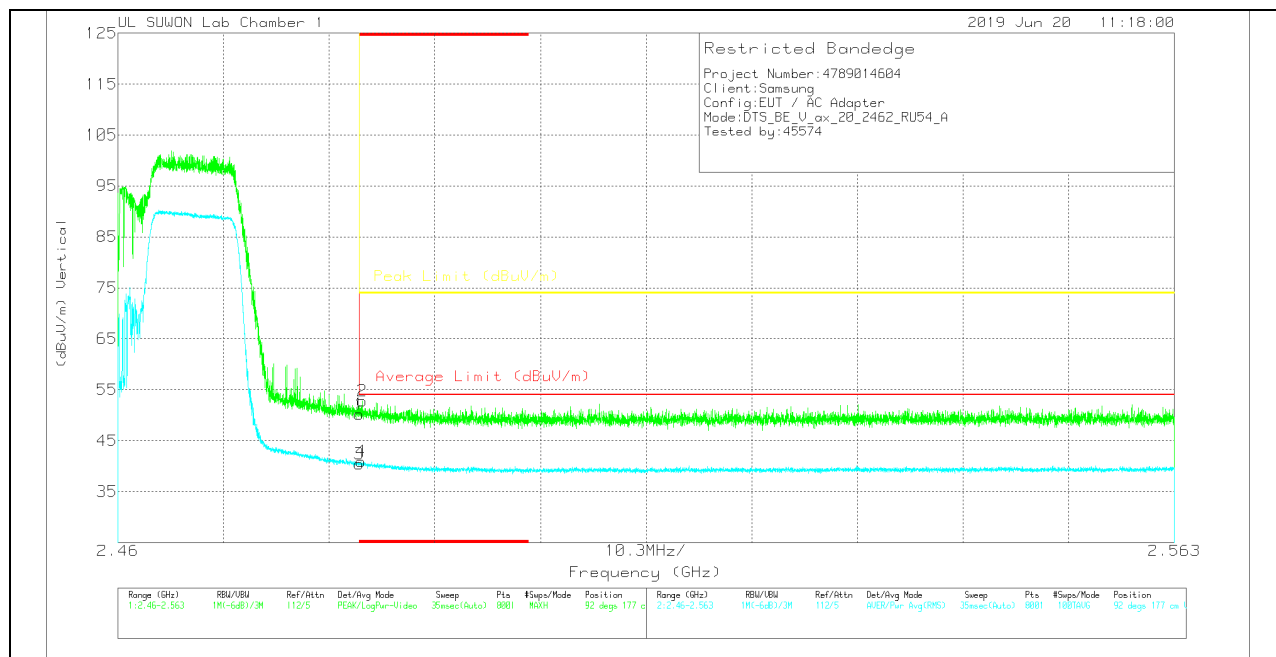

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	43.61	PK	31.9	-25.3	0	50.21	-	-	74	-23.79	92	177	V
2	* 2.48385	46.18	PK	31.9	-25.3	0	52.78	-	-	74	-21.22	92	177	V
3	* 2.48351	33.79	RMS	31.9	-25.3	0	40.39	54	-13.61	-	-	92	177	V
4	* 2.48373	34.38	RMS	31.9	-25.3	0	40.98	54	-13.02	-	-	92	177	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

52T RU mode (MIMO / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

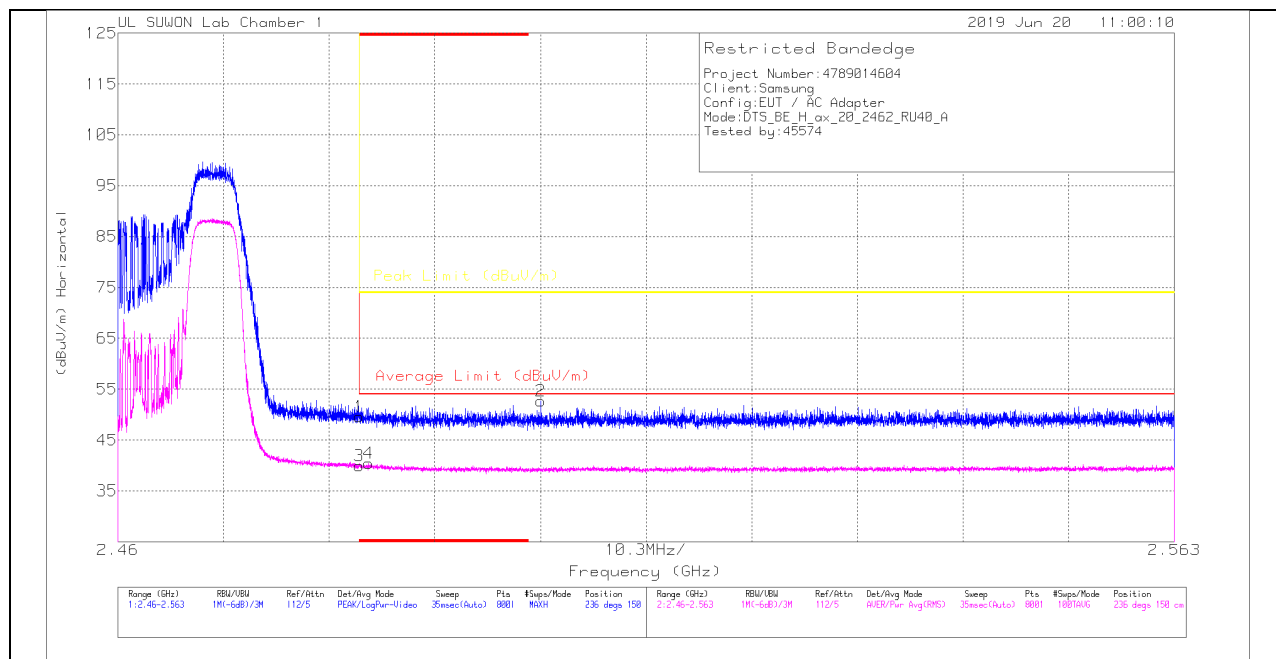

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.97	Pk	31.9	-25.3	0	49.57	-	-	74	-24.43	236	150	H
2	2.50121	45.84	Pk	32	-25.2	0	52.64	-	-	74	-21.36	236	150	H
3	* 2.48351	33.35	RMS	31.9	-25.3	0	39.95	54	-14.05	-	-	236	150	H
4	* 2.48442	33.79	RMS	31.9	-25.3	0	40.39	54	-13.61	-	-	236	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

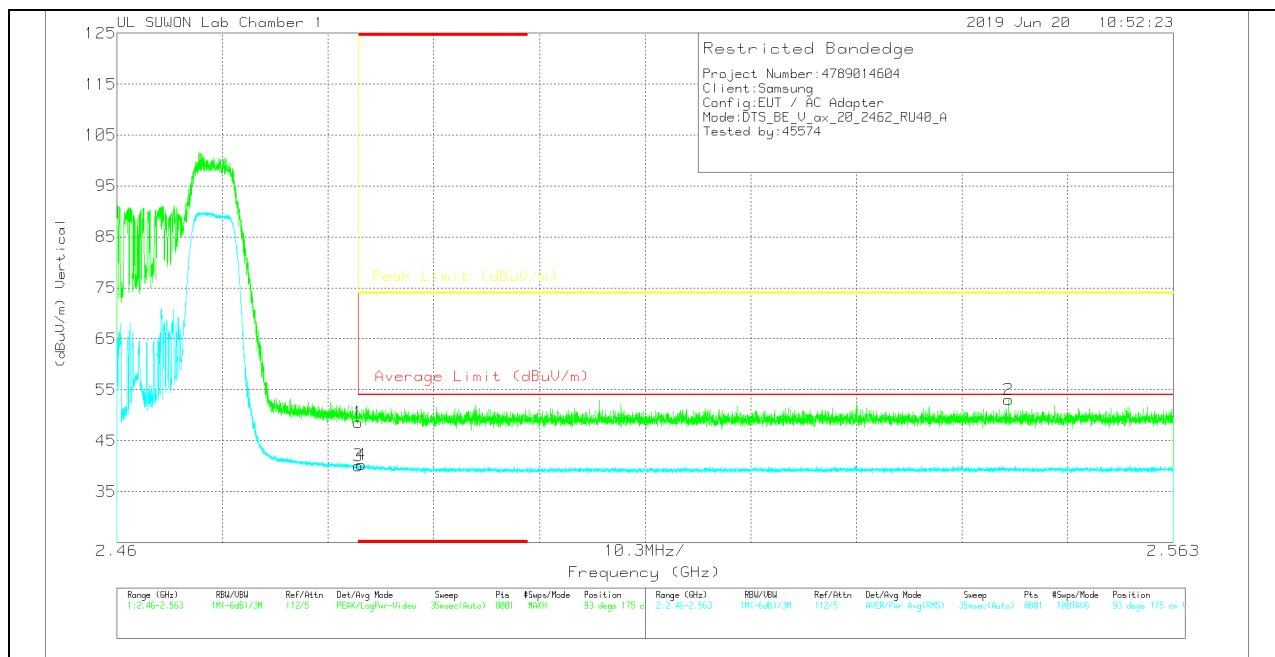

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.05	Pk	31.9	-25.3	0	48.65	-	-	74	-25.35	93	175	V
2	2.54693	46.2	Pk	32	-25.1	0	53.1	-	-	74	-20.9	93	175	V
3	* 2.48351	33.52	RMS	31.9	-25.3	0	40.12	54	-13.88	-	-	93	175	V
4	* 2.48382	33.72	RMS	31.9	-25.3	0	40.32	54	-13.68	-	-	93	175	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (MIMO / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

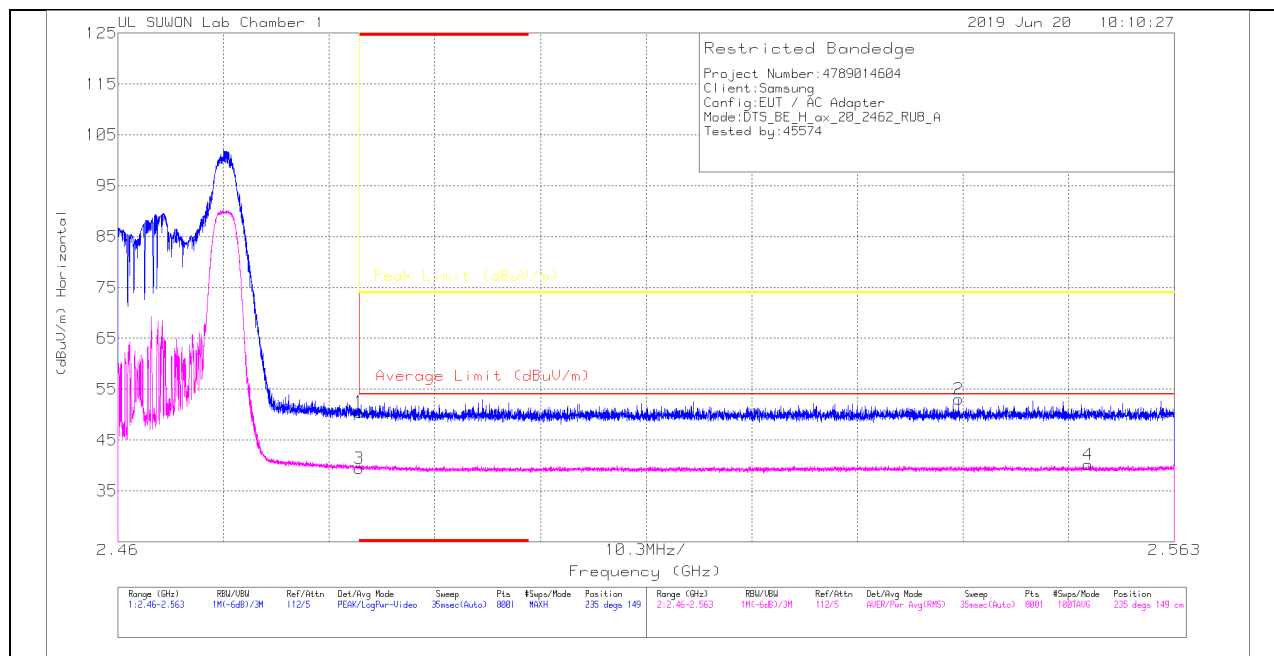

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.91	Pk	31.9	-25.3	0	50.51	-	-	74	-23.49	235	149	H
2	2.54199	46.12	Pk	32	-25.1	0	53.02	-	-	74	-20.98	235	149	H
3	* 2.48351	32.82	RMS	31.9	-25.3	0	39.42	54	-14.58	-	-	235	149	H
4	2.55462	33.29	RMS	32	-25.1	0	40.19	54	-13.81	-	-	235	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

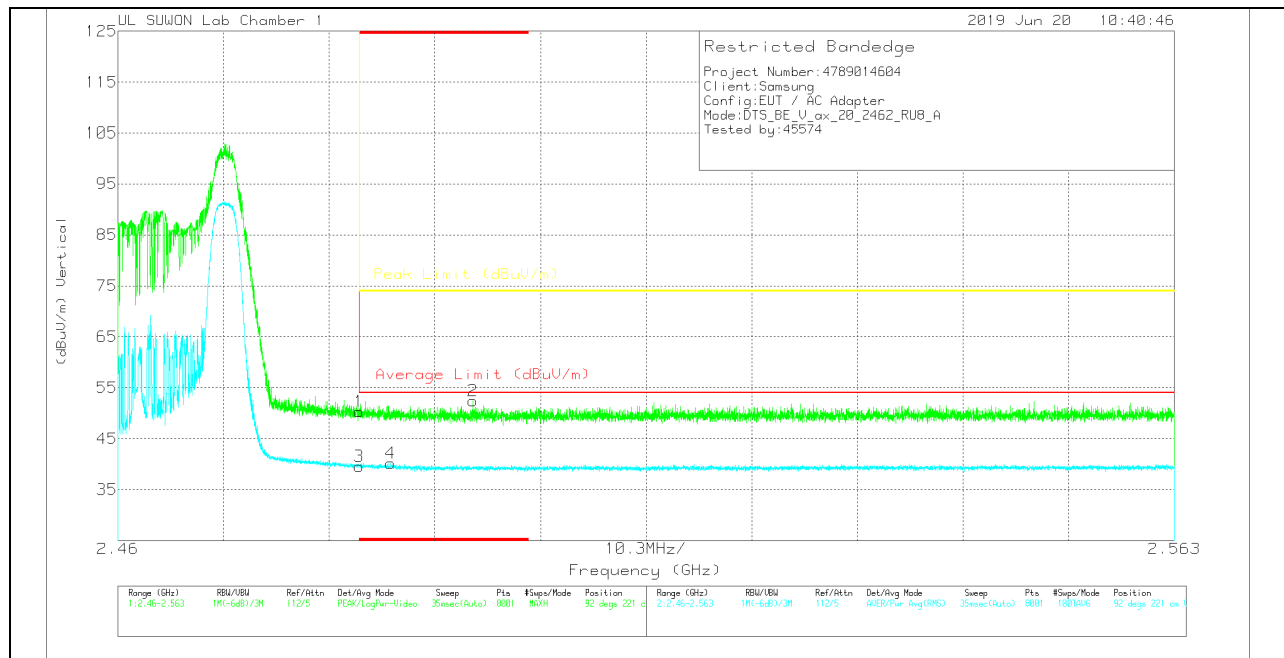

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	43.7	PK	31.9	-25.3	0	50.3	-	-	74	-23.7	92	221	V
2	* 2.49462	45.72	PK	31.9	-25.2	0	52.42	-	-	74	-21.58	92	221	V
3	* 2.48351	32.94	RMS	31.9	-25.3	0	39.54	54	-14.46	-	-	92	221	V
4	* 2.48661	33.45	RMS	31.9	-25.2	0	40.15	54	-13.85	-	-	92	221	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (12 CHANNEL)

SU mode (MIMO)

HORIZONTAL PEAK AND AVERAGE PLOT

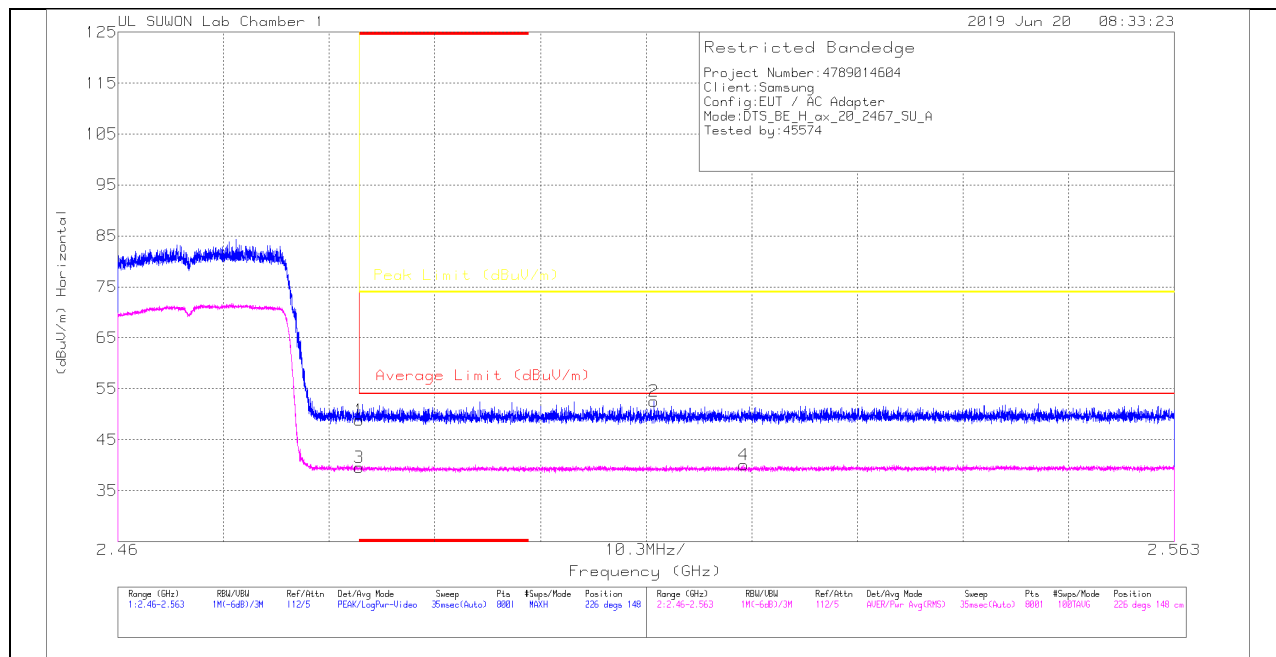

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.23	Pk	31.9	-25.3	0	48.83	-	-	74	-25.17	226	148	H
2	2.51226	45.72	Pk	32	-25.2	0	52.52	-	-	74	-21.48	226	148	H
3	* 2.48351	32.92	RMS	31.9	-25.3	0	39.52	54	-14.48	-	-	226	148	H
4	2.52102	33.31	RMS	32	-25.2	0	40.11	54	-13.89	-	-	226	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

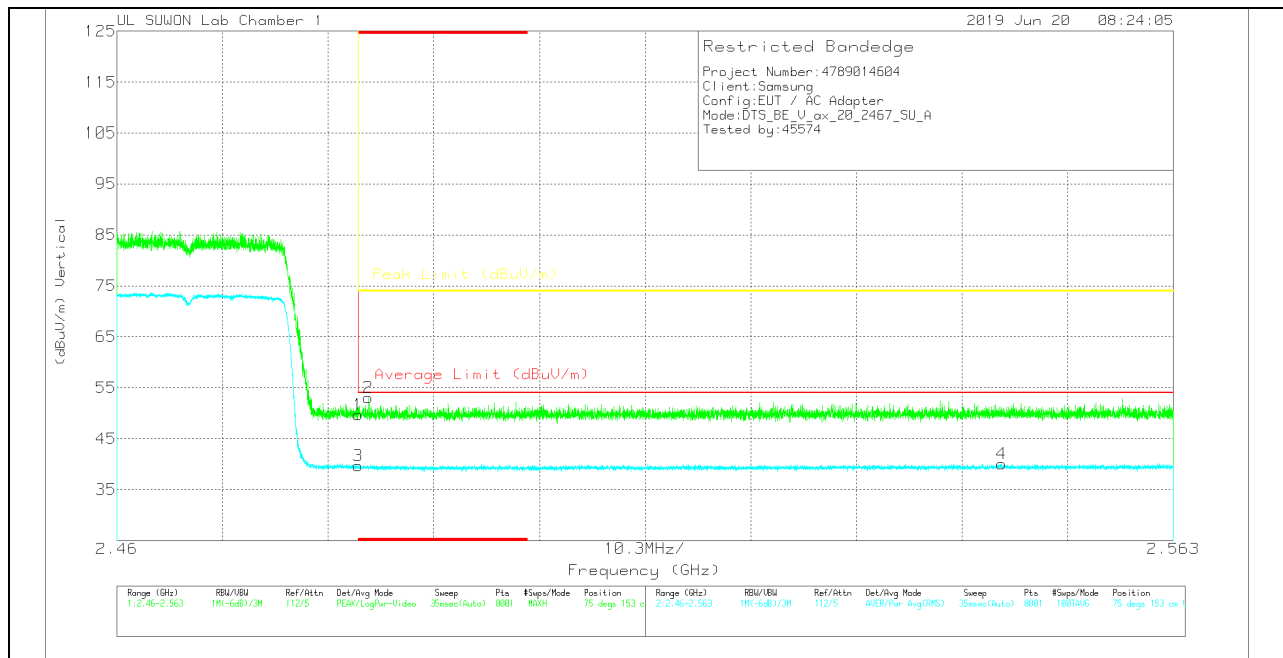

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	43.14	Pk	31.9	-25.3	0	49.74	-	-	74	-24.26	75	153	V
2	* 2.4845	46.46	Pk	31.9	-25.3	0	53.06	-	-	74	-20.94	75	153	V
3	* 2.48351	33.07	RMS	31.9	-25.3	0	39.67	54	-14.33	-	-	75	153	V
4	2.54628	33.15	RMS	32	-25.1	0	40.05	54	-13.95	-	-	75	153	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (MIMO / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

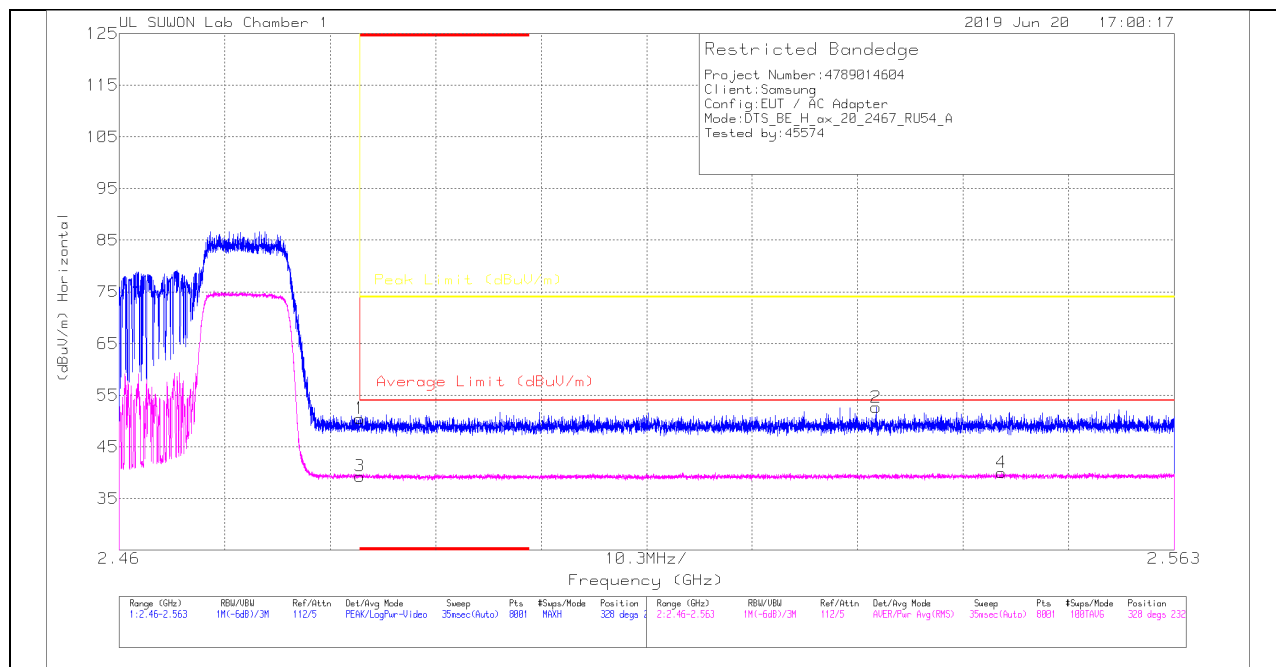

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.91	Pk	31.9	-25.3	0	50.51	-	-	74	-23.49	328	232	H
2	2.53389	45.76	PK	32	-25.1	0	52.66	-	-	74	-21.34	328	232	H
3	* 2.48351	32.74	RMS	31.9	-25.3	0	39.34	54	-14.66	-	-	328	232	H
4	2.54611	33.13	RMS	32	-25.1	0	40.03	54	-13.97	-	-	328	232	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

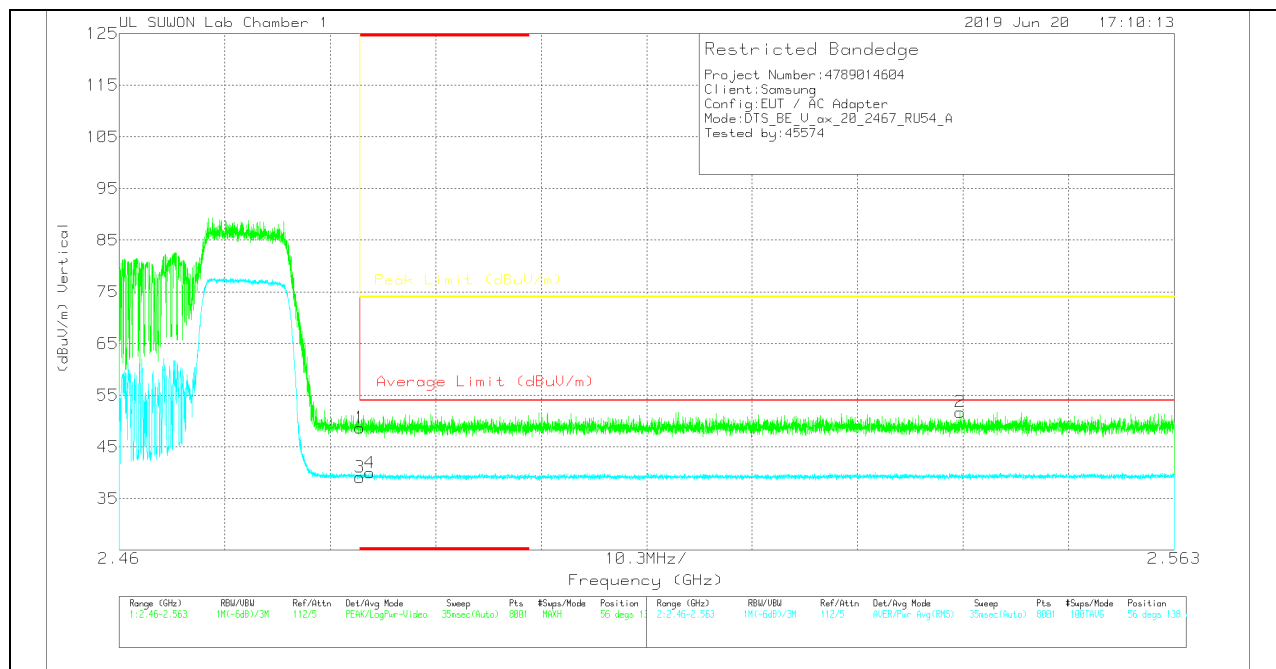

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.08	Pk	31.9	-25.3	0	48.68	-	-	74	-25.32	56	138	V
2	2.5421	44.86	Pk	32	-25.1	0	51.76	-	-	74	-22.24	56	138	V
3	* 2.48351	32.51	RMS	31.9	-25.3	0	39.11	54	-14.89	-	-	56	138	V
4	* 2.4845	33.42	RMS	31.9	-25.3	0	40.02	54	-13.98	-	-	56	138	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (MIMO / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

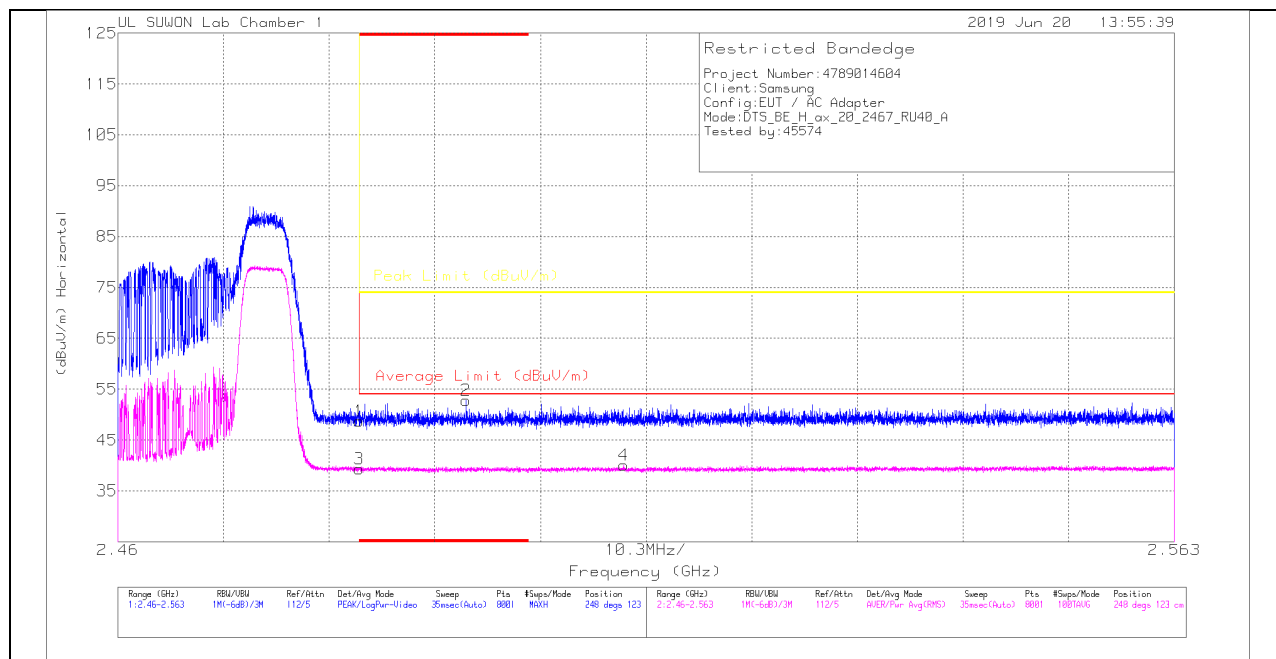

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.11	Pk	31.9	-25.3	0	48.71	-	-	74	-25.29	248	123	H
2	* 2.49394	46.2	Pk	31.9	-25.3	0	52.8	-	-	74	-21.2	248	123	H
3	* 2.48351	32.74	RMS	31.9	-25.3	0	39.34	54	-14.66	-	-	248	123	H
4	2.50934	33.22	RMS	32	-25.2	0	40.02	54	-13.98	-	-	248	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

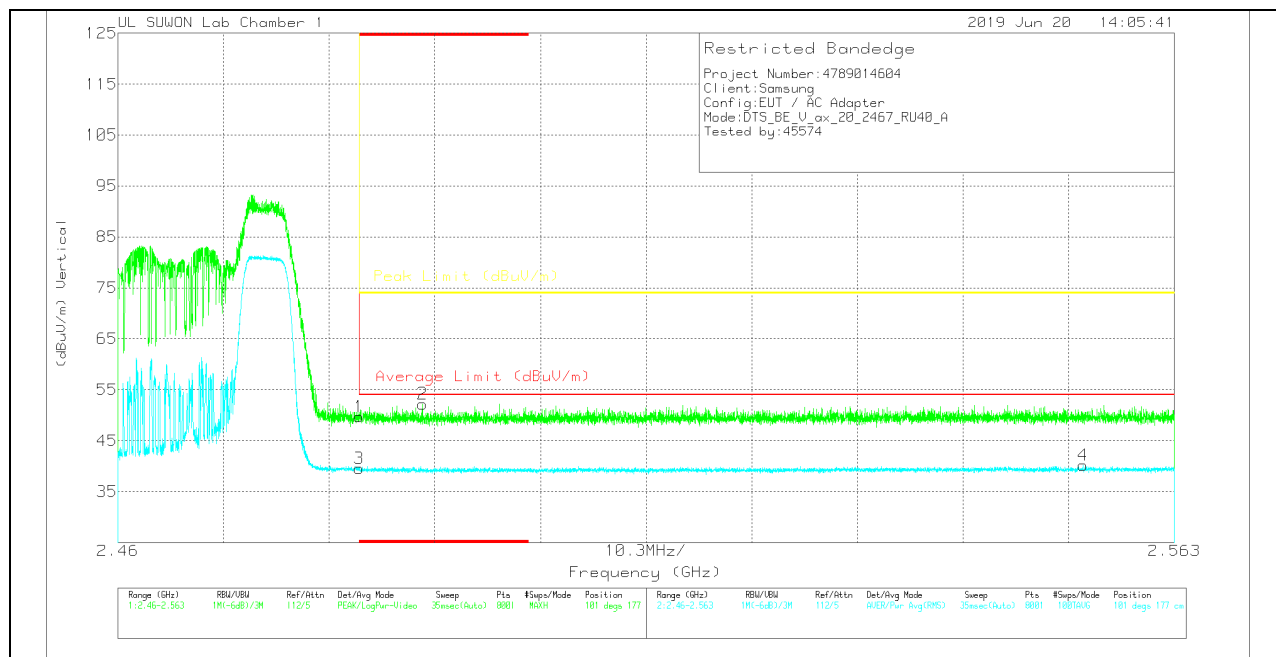

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.14	PK	31.9	-25.3	0	49.74	-	-	74	-24.26	101	177	V
2	* 2.48969	45.64	PK	31.9	-25.3	0	52.24	-	-	74	-21.76	101	177	V
3	* 2.48351	33.02	RMS	31.9	-25.3	0	39.62	54	-14.38	-	-	101	177	V
4	2.5541	33.27	RMS	32	-25.1	0	40.17	54	-13.83	-	-	101	177	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

26T RU mode (MIMO / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

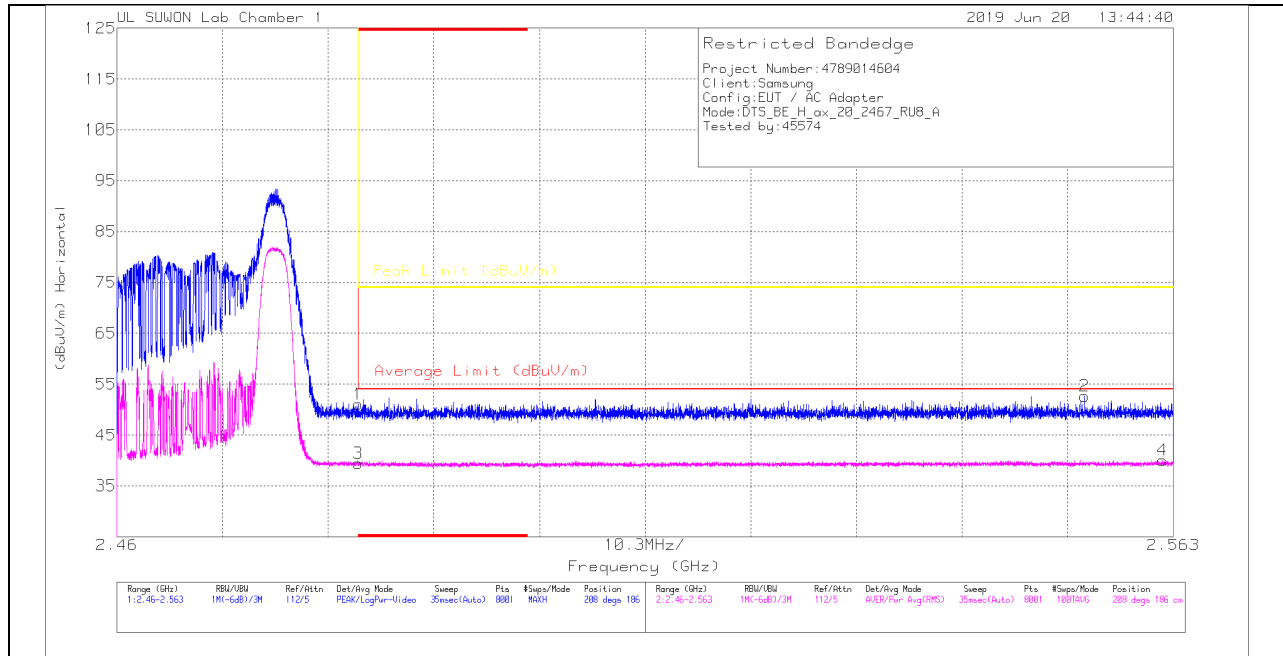

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	44.5	Pk	31.9	-25.3	0	51.1	-	-	74	-22.9	208	186	H
2	2.55436	45.72	Pk	32	-25.1	0	52.62	-	-	74	-21.38	208	186	H
3	* 2.48351	32.79	RMS	31.9	-25.3	0	39.39	54	-14.61	-	-	208	186	H
4	2.56192	33.17	RMS	32	-25.1	0	40.07	54	-13.93	-	-	208	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

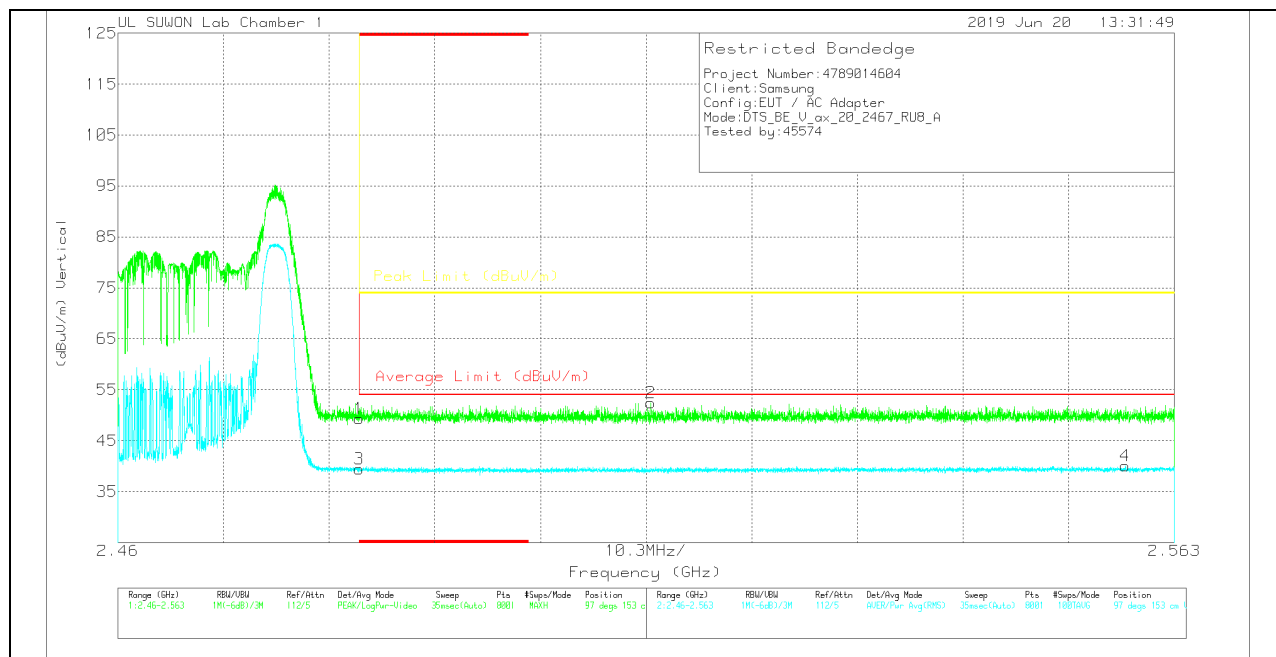

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.71	Pk	31.9	-25.3	0	49.31	-	-	74	-24.69	97	153	V
2	2.51198	45.63	Pk	32	-25.2	0	52.43	-	-	74	-21.57	97	153	V
3	* 2.48351	32.79	RMS	31.9	-25.3	0	39.39	54	-14.61	-	-	97	153	V
4	2.55822	33.12	RMS	32	-25.1	0	40.02	54	-13.98	-	-	97	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (13 CHANNEL)

SU mode (MIMO)

HORIZONTAL PEAK AND AVERAGE PLOT

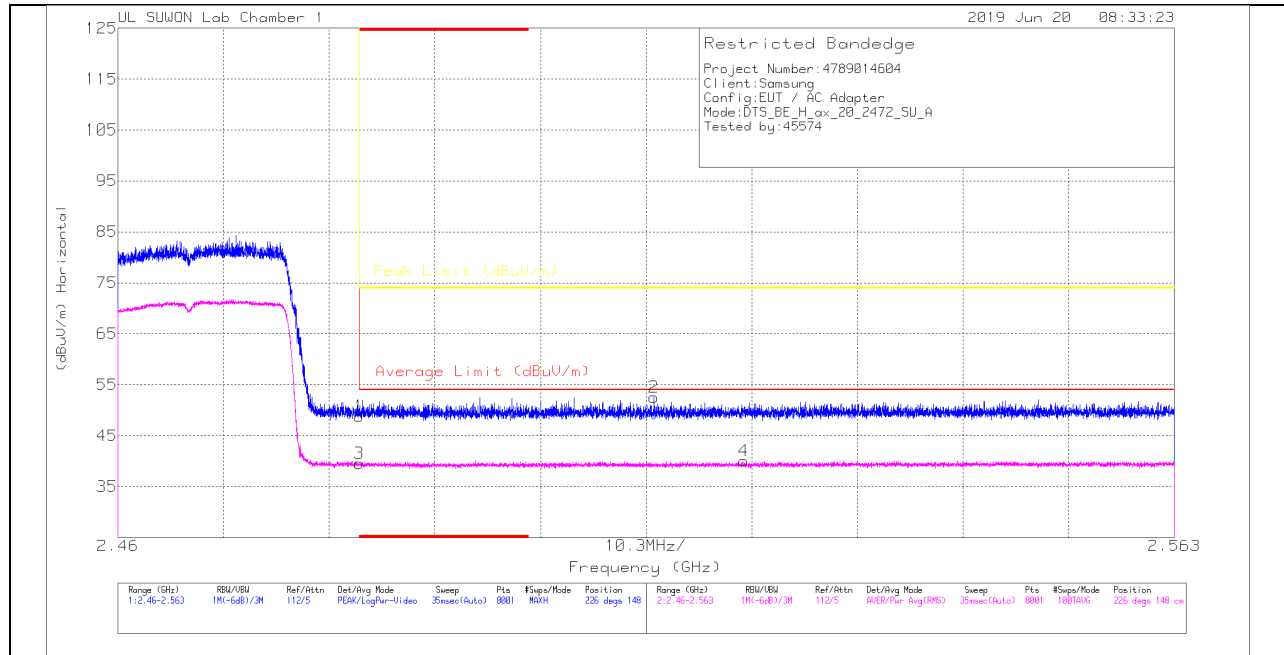

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	42.23	Pk	31.9	-25.3	0	48.83	-	-	74	-25.17	226	148	H
2	2.51226	45.72	Pk	32	-25.2	0	52.52	-	-	74	-21.48	226	148	H
3	* 2.48351	32.92	RMS	31.9	-25.3	0	39.52	54	-14.48	-	-	226	148	H
4	2.52102	33.31	RMS	32	-25.2	0	40.11	54	-13.89	-	-	226	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

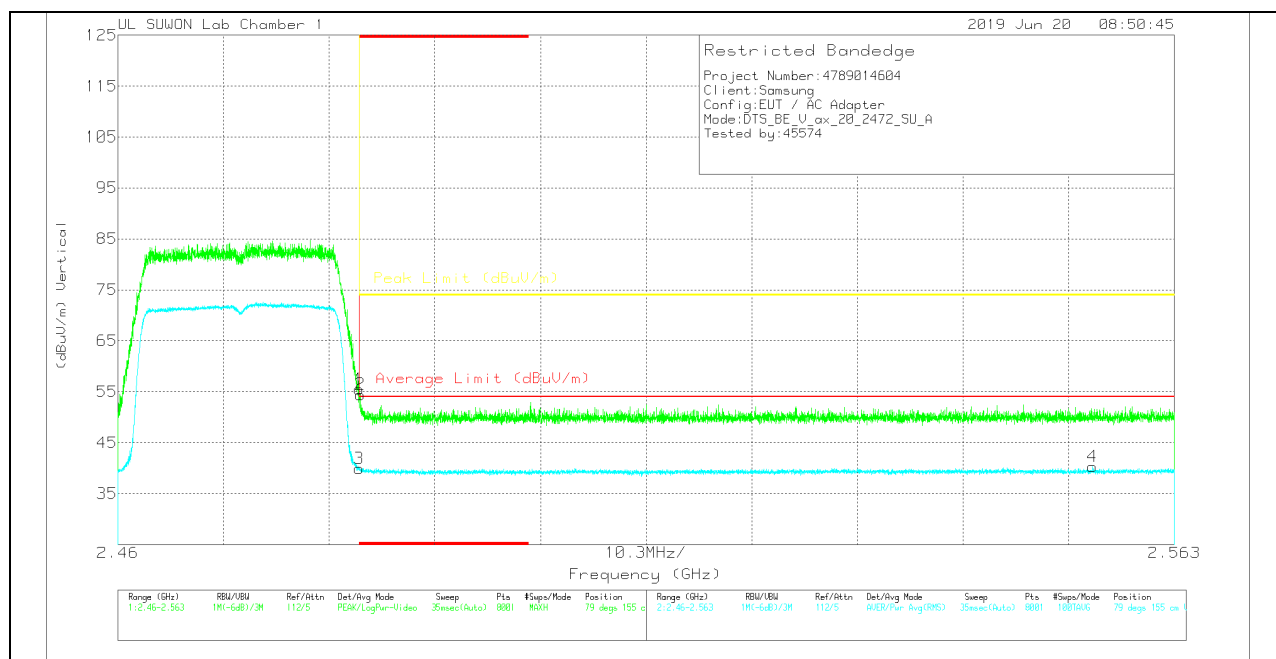

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	48.94	PK	31.9	-25.3	0	55.54	-	-	74	-18.46	79	155	V
2	* 2.48363	47.87	PK	31.9	-25.3	0	54.47	-	-	74	-19.53	79	155	V
3	* 2.48351	33.36	RMS	31.9	-25.3	0	39.96	54	-14.04	-	-	79	155	V
4	2.55504	33.42	RMS	32	-25.1	0	40.32	54	-13.68	-	-	79	155	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

106T RU mode (MIMO / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

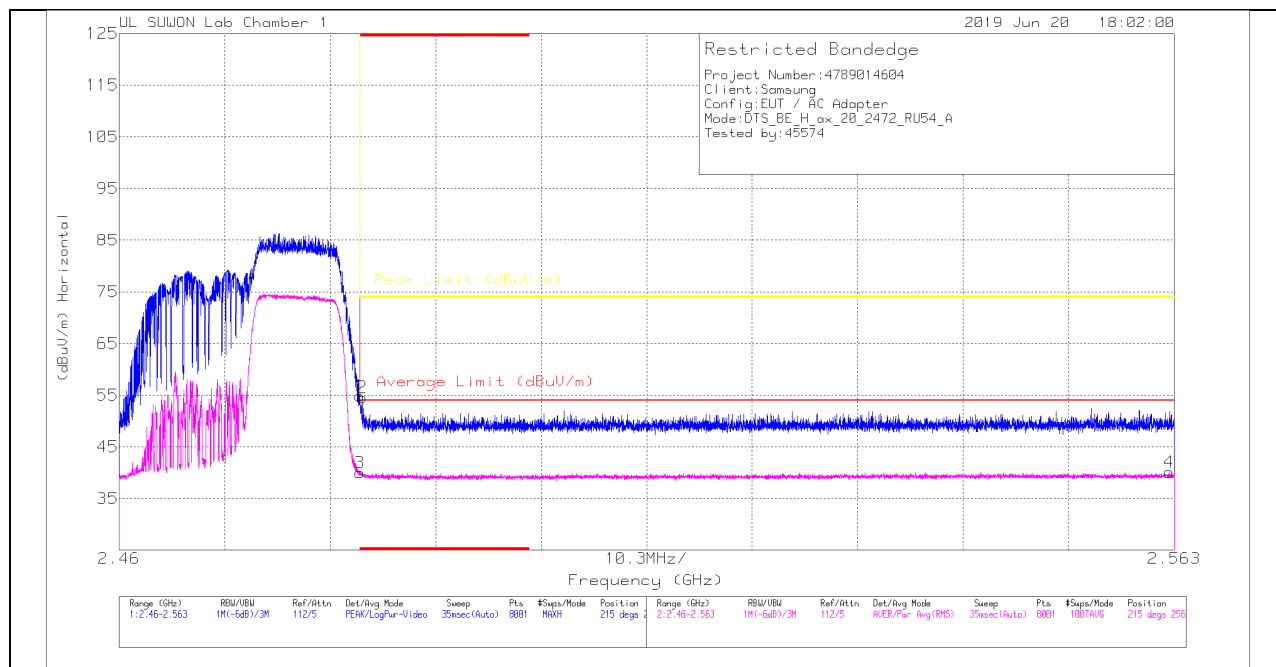

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	48.27	Pk	31.9	-25.3	0	54.87	-	-	74	-19.13	215	256	H
2	* 2.48375	47.92	Pk	31.9	-25.3	0	54.52	-	-	74	-19.48	215	256	H
3	* 2.48351	33.41	RMS	31.9	-25.3	0	40.01	54	-13.99	-	-	215	256	H
4	2.5625	33.19	RMS	32	-25.1	0	40.09	54	-13.91	-	-	215	256	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

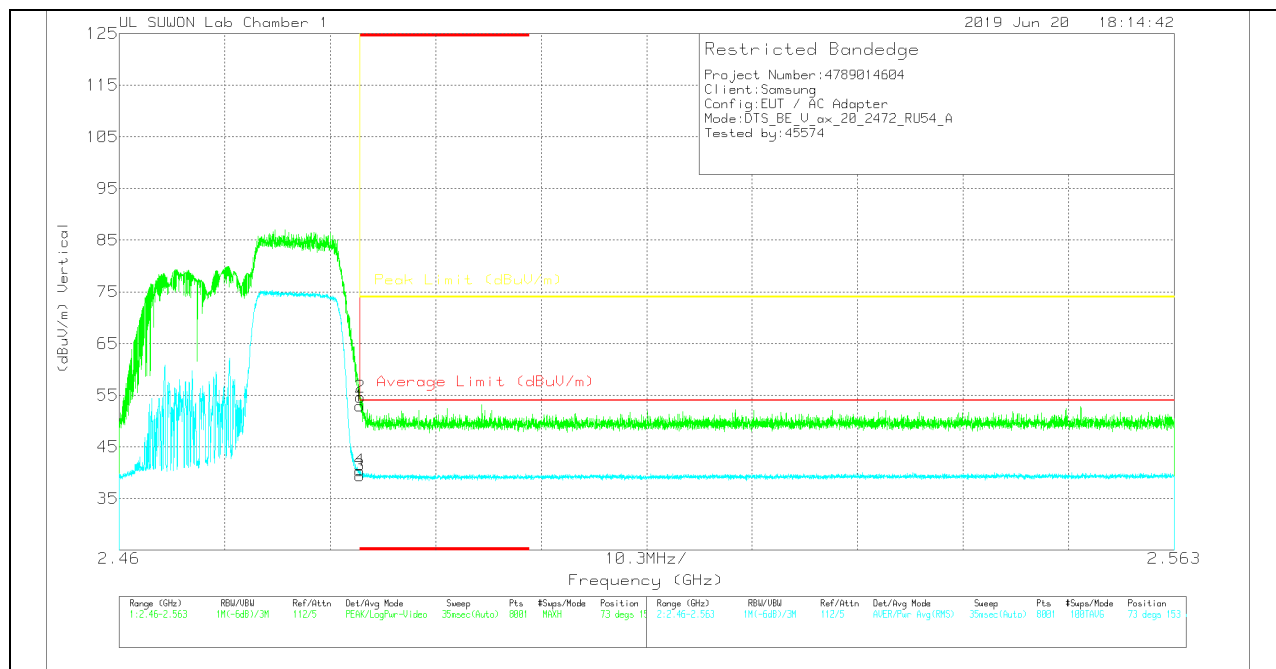

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	46.29	Pk	31.9	-25.3	0	52.89	-	-	74	-21.11	73	153	V
2	* 2.48357	48.06	Pk	31.9	-25.3	0	54.66	-	-	74	-19.34	73	153	V
3	* 2.48351	32.86	RMS	31.9	-25.3	0	39.46	54	-14.54	-	-	73	153	V
4	* 2.48352	33.82	RMS	31.9	-25.3	0	40.42	54	-13.58	-	-	73	153	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (MIMO / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

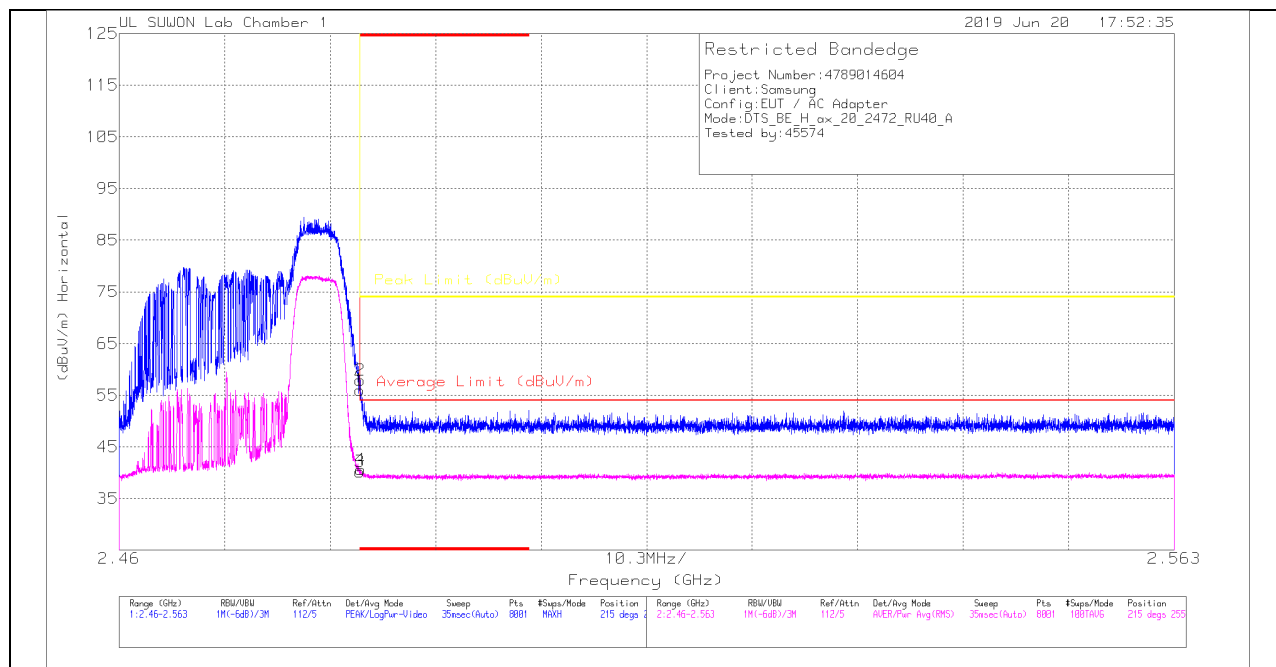

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	49.39	Pk	31.9	-25.3	0	55.99	-	-	74	-18.01	215	255	H
2	* 2.48354	51.29	Pk	31.9	-25.3	0	57.89	-	-	74	-16.11	215	255	H
3	* 2.48351	33.61	RMS	31.9	-25.3	0	40.21	54	-13.79	-	-	215	255	H
4	* 2.48359	34.01	RMS	31.9	-25.3	0	40.61	54	-13.39	-	-	215	255	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

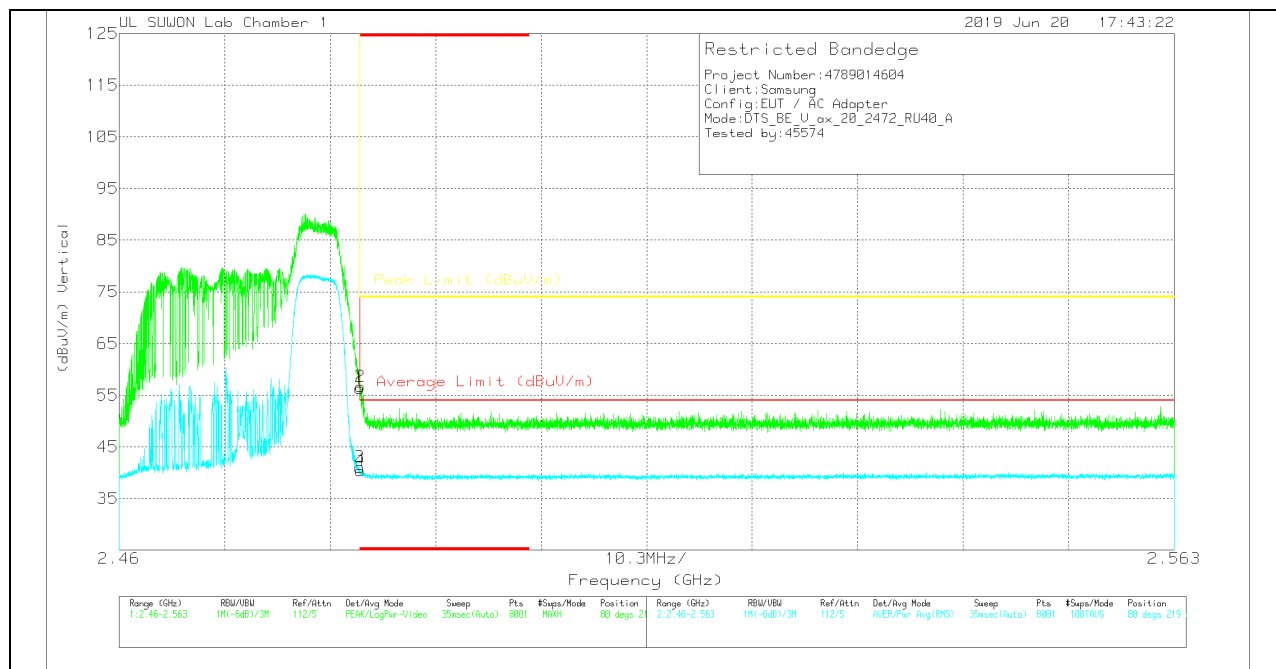

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.76	Pk	31.9	-25.3	0	56.36	-	-	74	-17.64	80	219	V
2	* 2.48355	50.09	Pk	31.9	-25.3	0	56.69	-	-	74	-17.31	80	219	V
3	* 2.48351	34.47	RMS	31.9	-25.3	0	41.07	54	-12.93	-	-	80	219	V
4	* 2.48355	33.83	RMS	31.9	-25.3	0	40.43	54	-13.57	-	-	80	219	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (MIMO / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

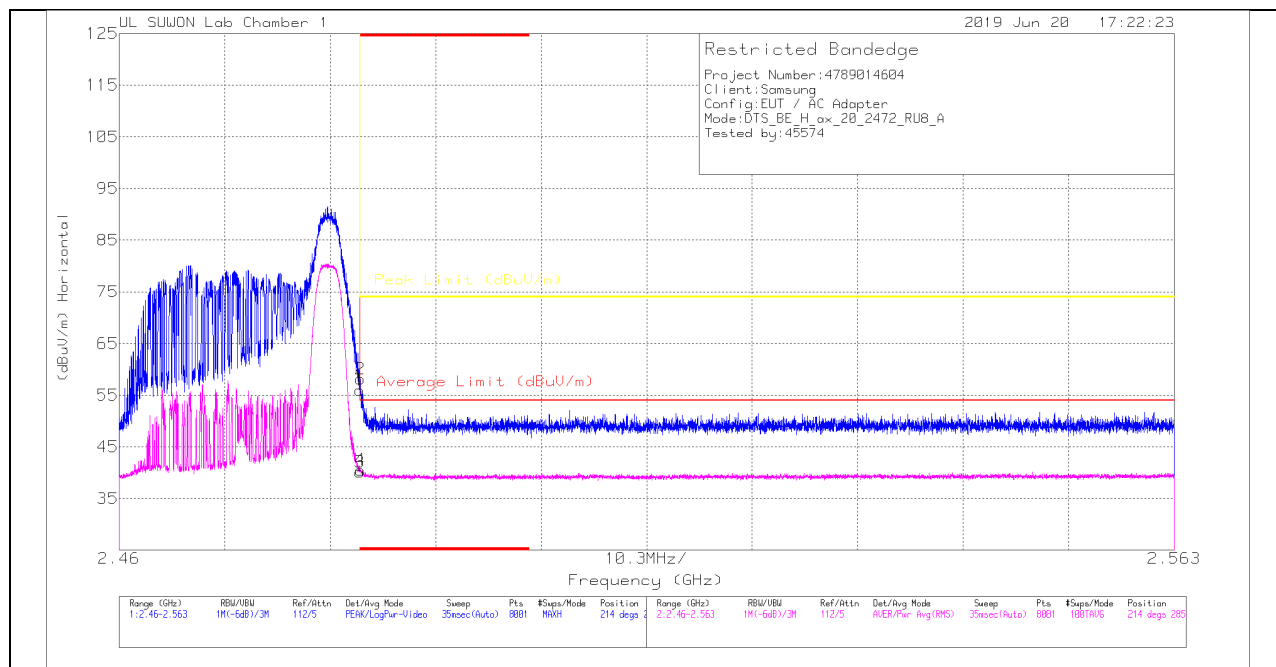

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.38	Pk	31.9	-25.3	0	55.98	-	-	74	-18.02	214	285	H
2	* 2.48355	51.53	Pk	31.9	-25.3	0	58.13	-	-	74	-15.87	214	285	H
3	* 2.48351	33.52	RMS	31.9	-25.3	0	40.12	54	-13.88	-	-	214	285	H
4	* 2.48356	33.92	RMS	31.9	-25.3	0	40.52	54	-13.48	-	-	214	285	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

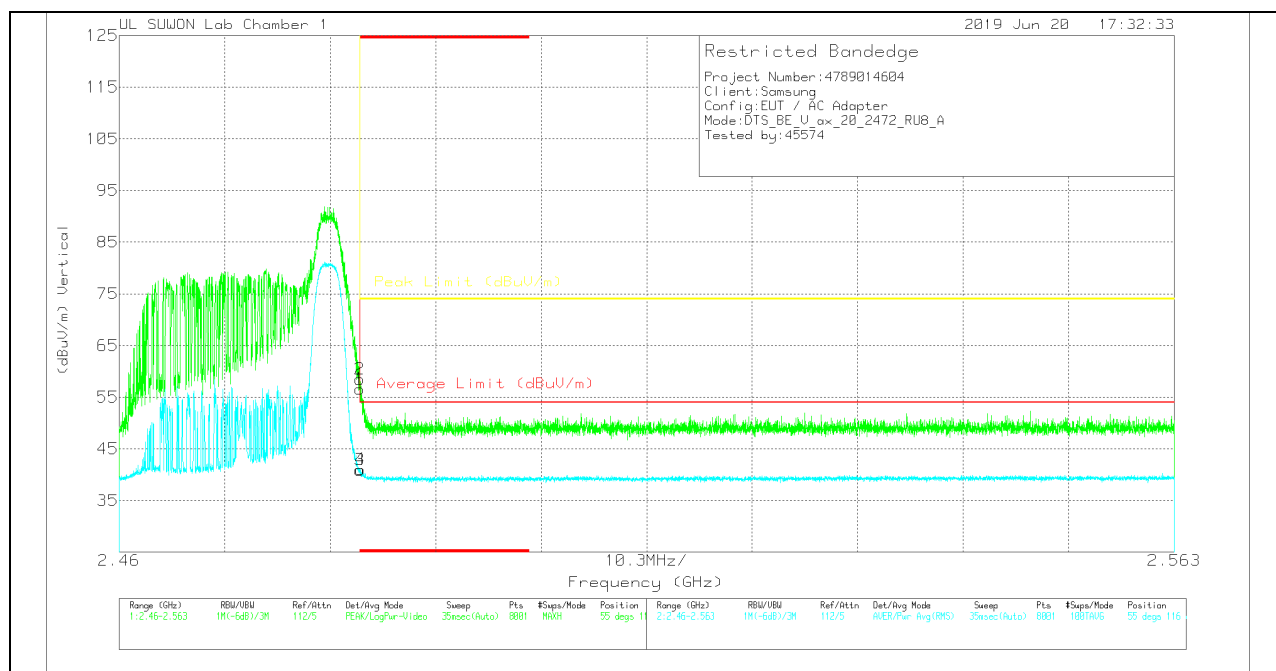

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.48351	50.03	Pk	31.9	-25.3	0	56.63	-	-	74	-17.37	55	116	V
2	* 2.48352	51.88	Pk	31.9	-25.3	0	58.48	-	-	74	-15.52	55	116	V
3	* 2.48351	34.34	RMS	31.9	-25.3	0	40.94	54	-13.06	-	-	55	116	V
4	* 2.48356	34.42	RMS	31.9	-25.3	0	41.02	54	-12.98	-	-	55	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

SU mode (MIMO)

2 CHANNEL HORIZONTAL

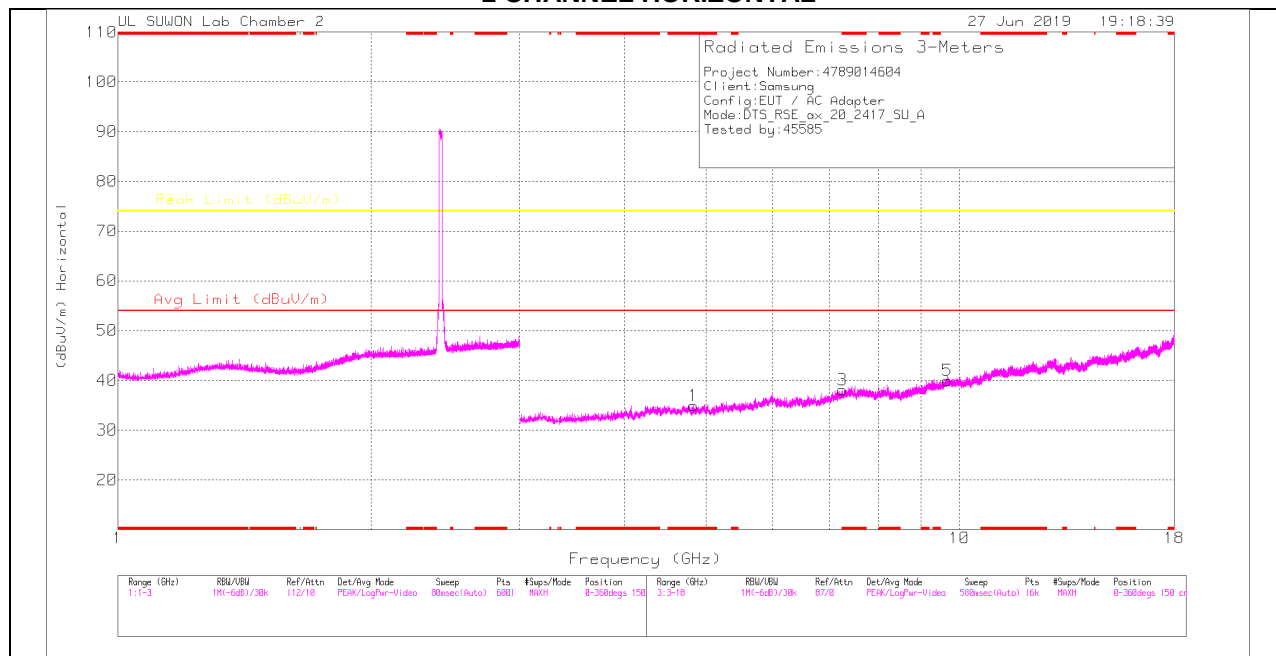

2 CHANNEL VERTICAL

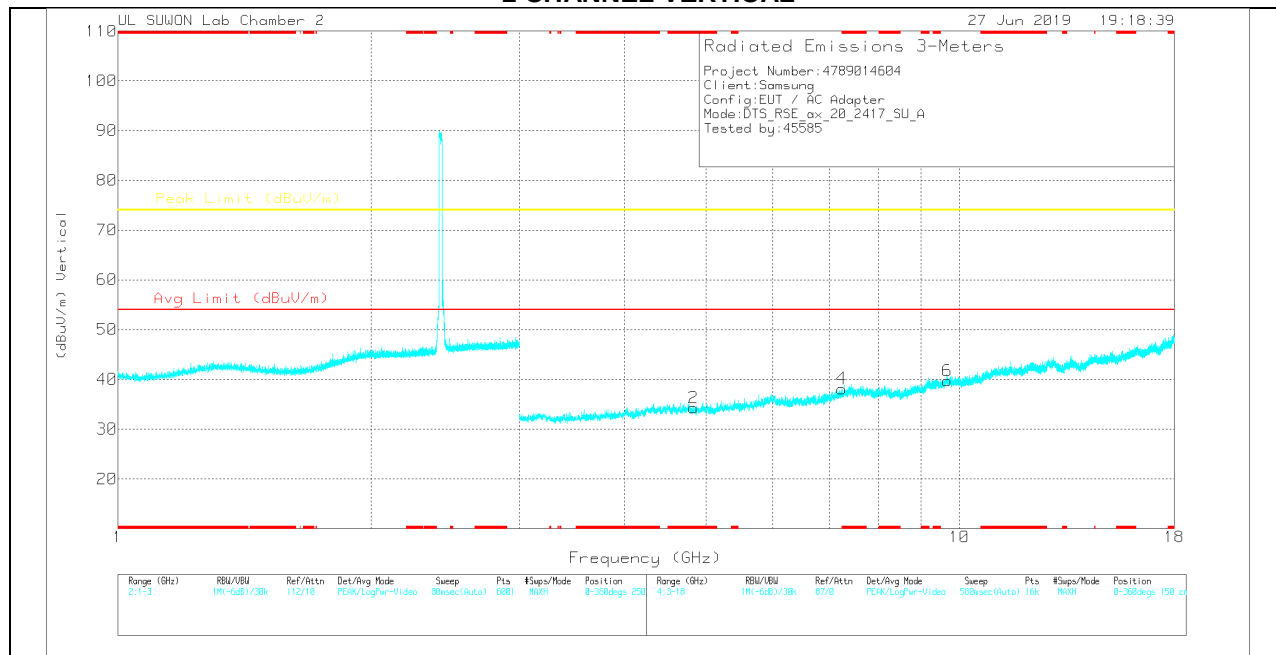

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

2 CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.831	29.09	PK	34	-28.2	0	34.89	-	-	74	-39.11	0-360	250	H
3	* 7.256	27.38	PK	36.2	-25.5	0	38.08	-	-	74	-35.92	0-360	250	H
5	9.667	24.28	PK	37.1	-21.4	0	39.98	-	-	74	-34.02	0-360	250	H
2	* 4.83	28.52	PK	34	-28.2	0	34.32	-	-	74	-39.68	0-360	150	V
4	* 7.25	27.45	PK	36.2	-25.5	0	38.15	-	-	74	-35.85	0-360	150	V
6	9.667	24.08	PK	37.1	-21.5	0	39.68	-	-	74	-34.32	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

6 CHANNEL HORIZONTAL

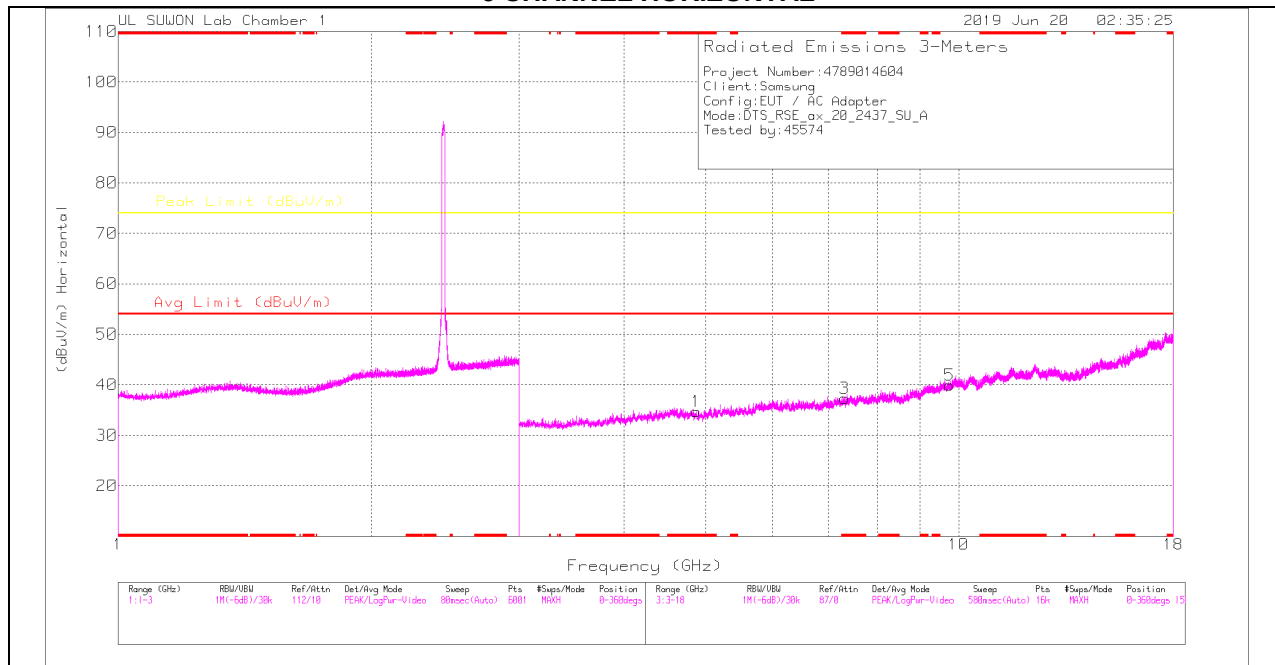

6 CHANNEL VERTICAL

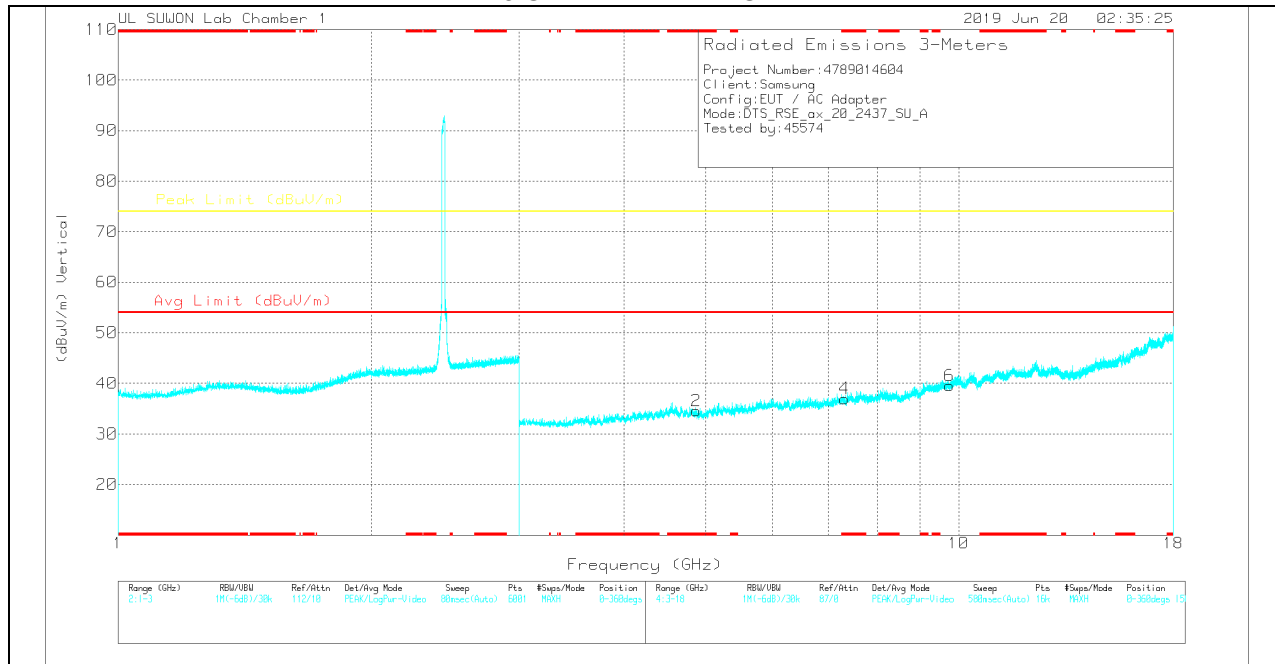

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

6 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87395	31.57	PK	34.2	-31.5	0	34.67	-	-	74	-39.33	0-360	150	H
3	* 7.31223	28.92	PK	35.8	-27.4	0	37.32	-	-	74	-36.68	0-360	250	H
5	9.74864	26.63	PK	37.2	-23.9	0	39.93	-	-	74	-34.07	0-360	150	H
2	* 4.87488	31.84	PK	34.2	-31.5	0	34.54	-	-	74	-39.46	0-360	250	V
4	* 7.31317	28.57	PK	35.8	-27.4	0	36.97	-	-	74	-37.03	0-360	250	V
6	9.74864	26.23	PK	37.2	-23.9	0	39.53	-	-	74	-34.47	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

10 CHANNEL HORIZONTAL

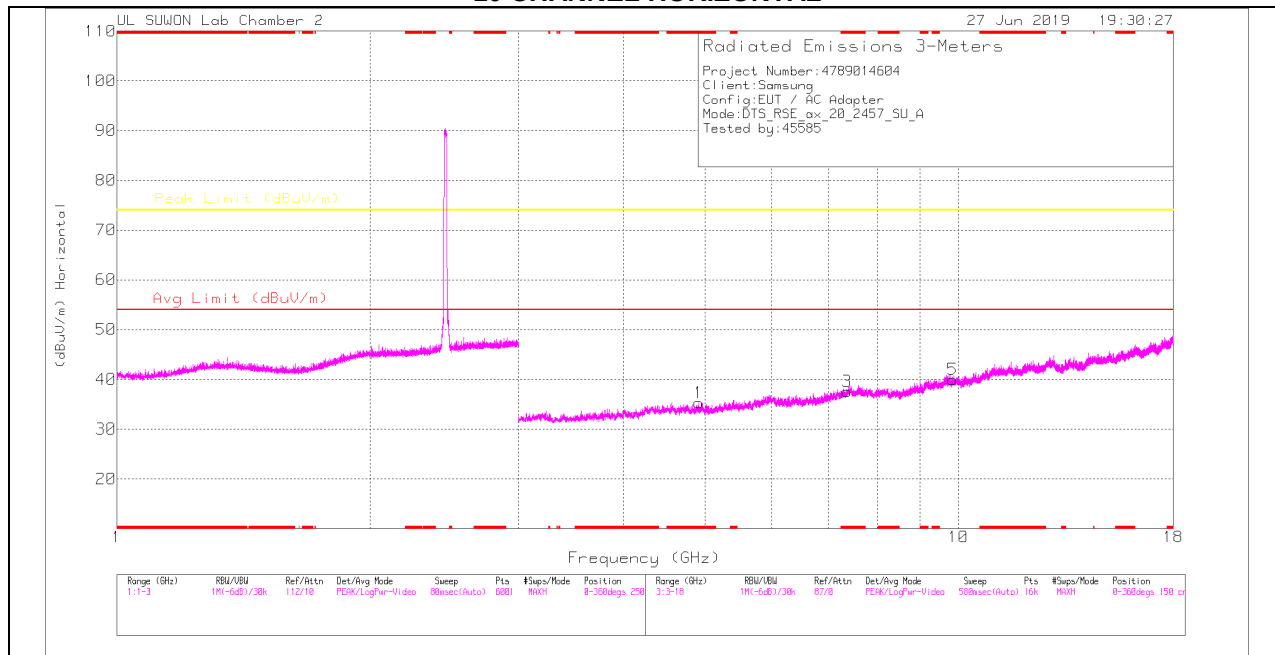

10 CHANNEL VERTICAL

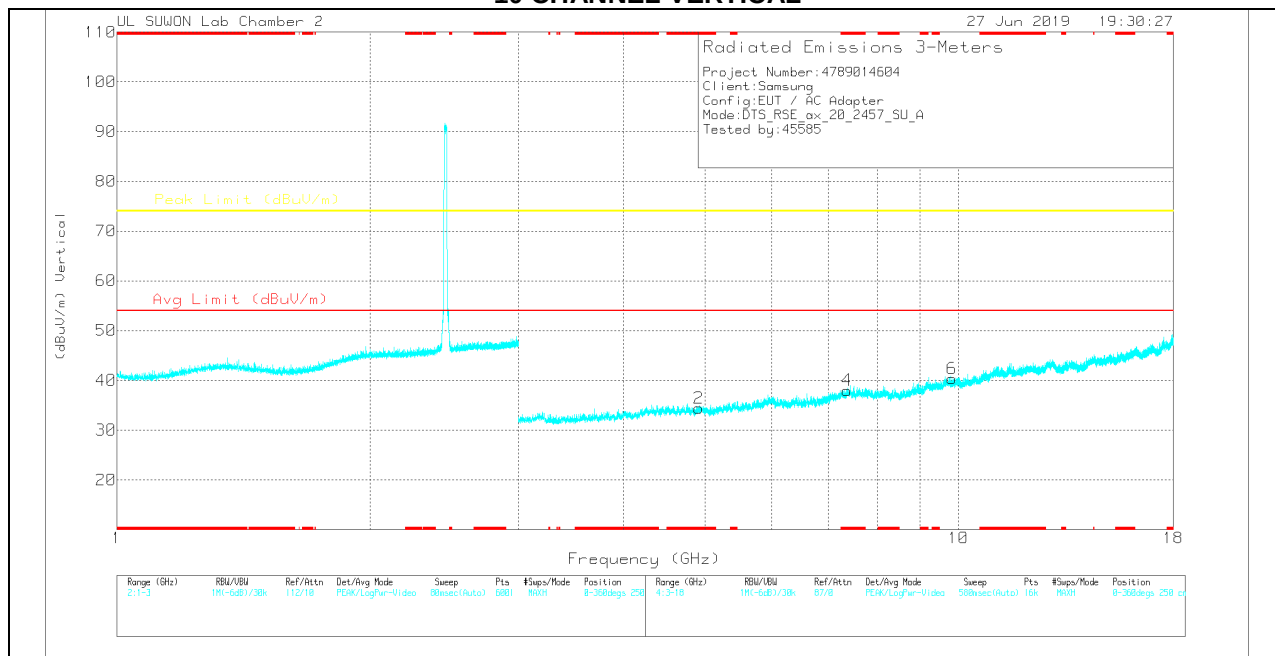

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

10 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.91	28.82	PK	34	-27.5	0	35.32	-	-	74	-38.68	0-360	250	H
3	* 7.37	25.83	PK	36.2	-24.4	0	37.63	-	-	74	-36.37	0-360	150	H
5	9.835	24.61	PK	37.3	-21.9	0	40.01	-	-	74	-33.99	0-360	250	H
2	* 4.914	27.78	PK	34	-27.4	0	34.38	-	-	74	-39.62	0-360	250	V
4	* 7.373	26.22	PK	36.2	-24.4	0	38.02	-	-	74	-35.98	0-360	150	V
6	9.825	25.02	PK	37.3	-21.9	0	40.42	-	-	74	-33.58	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

26T RU mode (MIMO / Low: 8, Mid: 0, High: 0)

1 CHANNEL HORIZONTAL

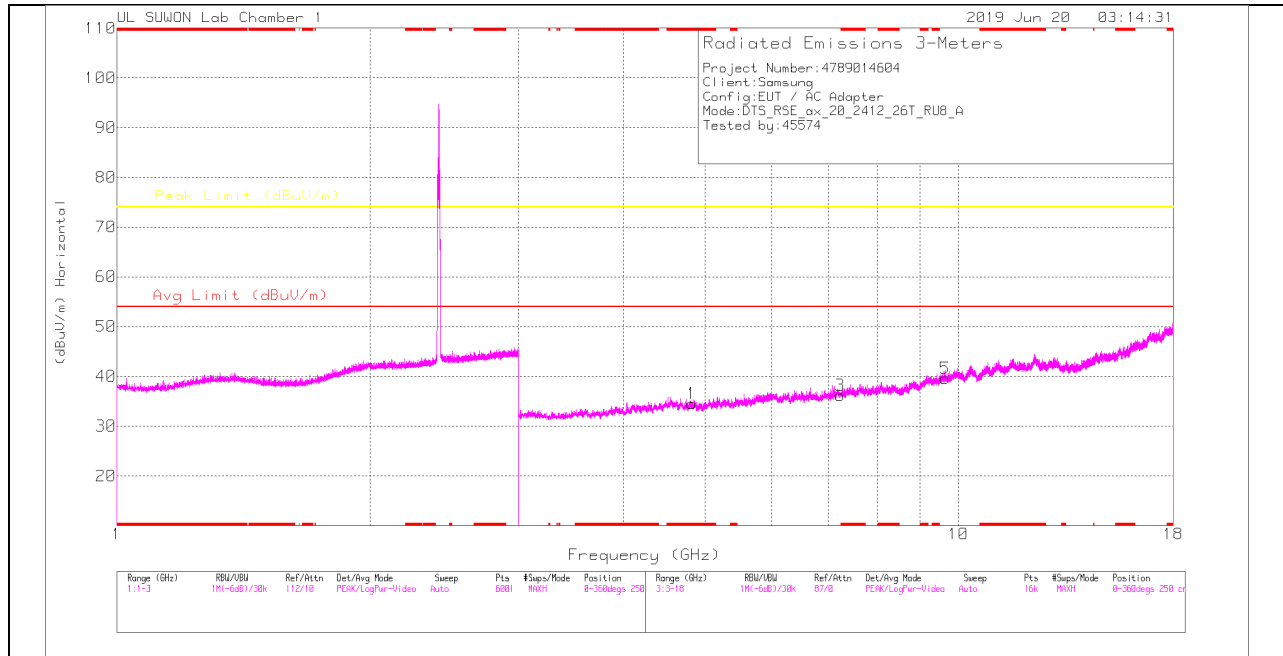

1 CHANNEL VERTICAL

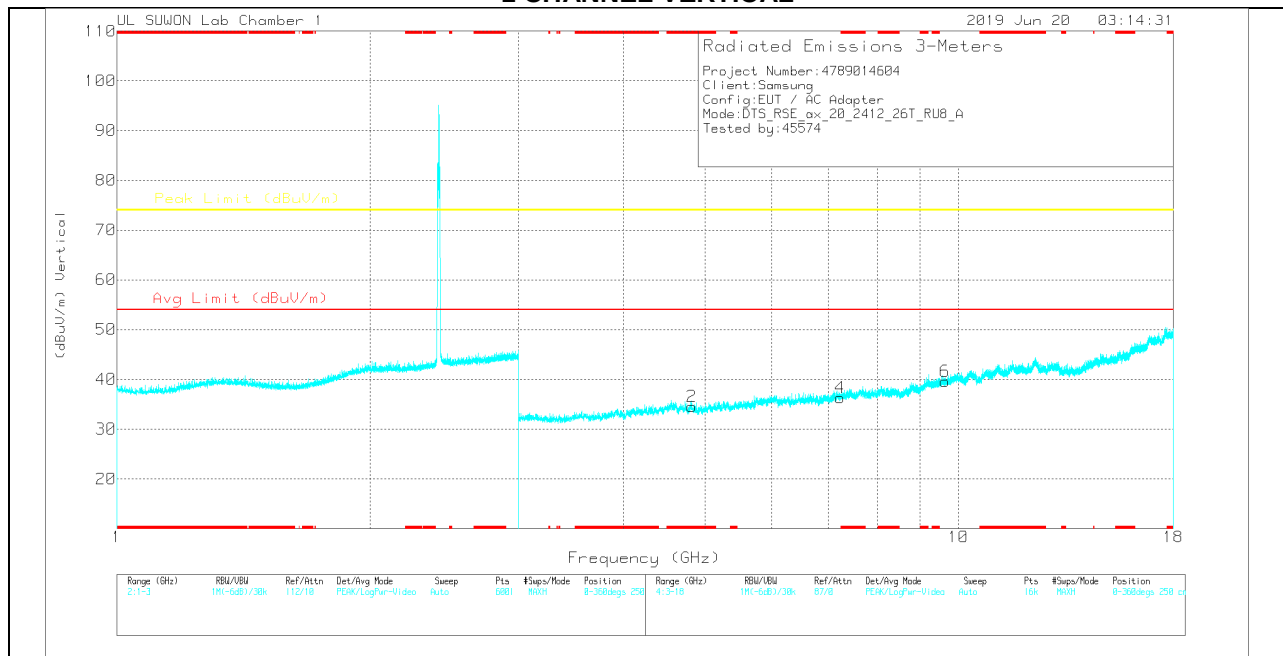

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

1 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.82239	31.79	PK	34.2	-31.4	0	34.59	-	-	74	-39.41	0-360	250	H
3	7.23723	28.26	PK	35.8	-27.9	0	36.16	-	-	74	-37.84	0-360	250	H
5	9.64833	25.8	PK	37.1	-23.3	0	39.6	-	-	74	-34.4	0-360	150	H
2	* 4.82426	31.77	PK	34.2	-31.4	0	34.57	-	-	74	-39.43	0-360	150	V
4	7.23723	28.39	PK	35.8	-27.9	0	36.29	-	-	74	-37.71	0-360	150	V
6	9.64833	25.75	PK	37.1	-23.3	0	39.55	-	-	74	-34.45	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

6 CHANNEL HORIZONTAL

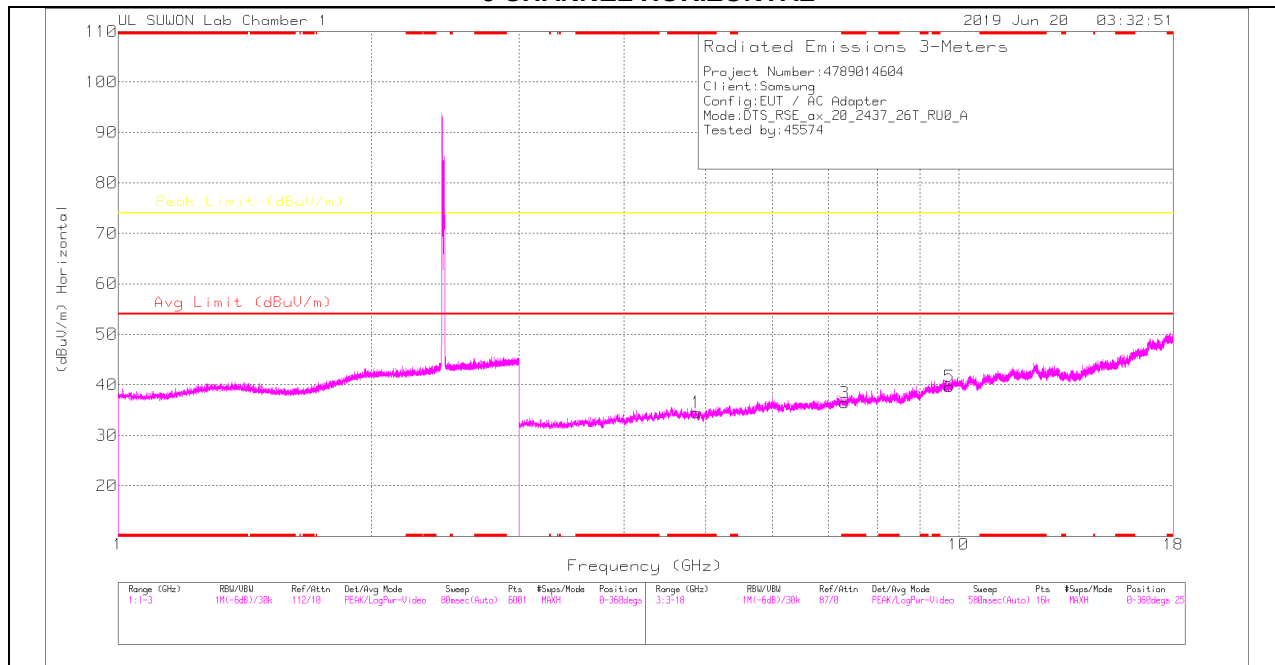

6 CHANNEL VERTICAL

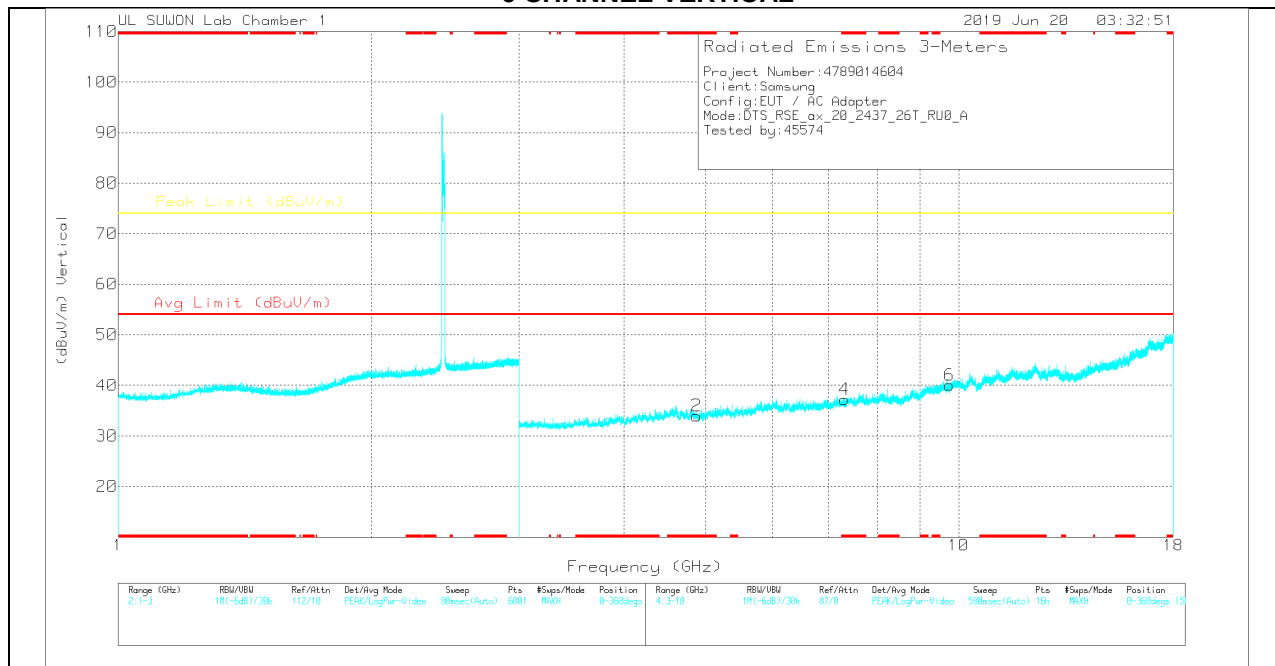

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

6 CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87582	31.76	PK	34.2	-31.5	0	34.46	-	-	74	-39.54	0-360	150	H
3	* 7.31223	28.01	PK	35.8	-27.4	0	36.41	-	-	74	-37.59	0-360	150	H
5	9.74864	26.37	PK	37.2	-23.9	0	39.67	-	-	74	-34.33	0-360	250	H
2	* 4.87676	31.27	PK	34.2	-31.5	0	33.97	-	-	74	-40.03	0-360	150	V
4	* 7.31129	28.8	PK	35.8	-27.4	0	37.2	-	-	74	-36.8	0-360	250	V
6	9.7477	26.73	PK	37.2	-23.9	0	40.03	-	-	74	-33.97	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11 CHANNEL HORIZONTAL

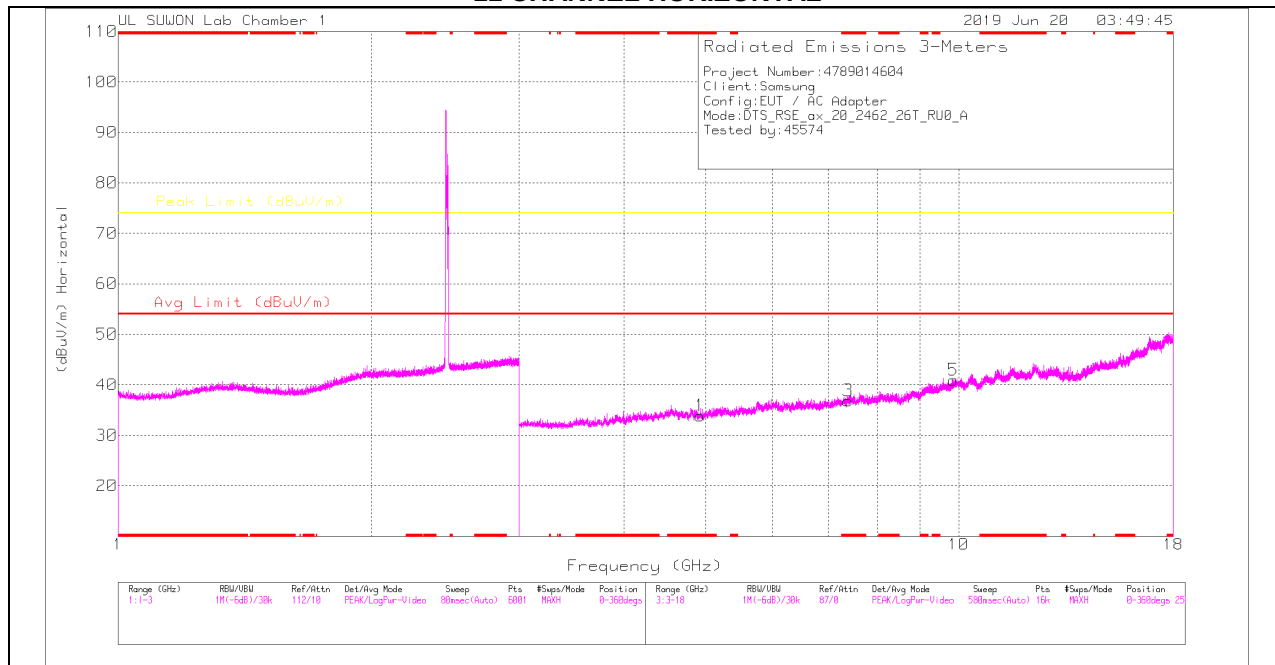

11 CHANNEL VERTICAL

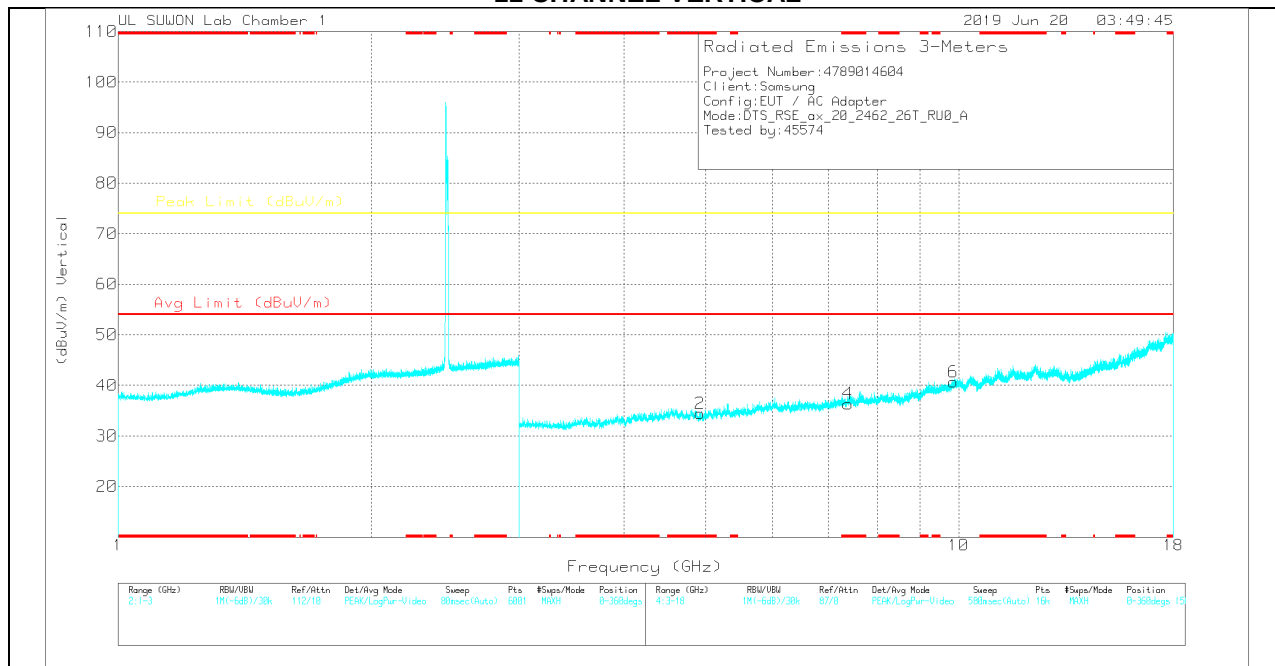

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

11 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.92457	31.25	PK	34.2	-31.6	0	33.85	-	-	74	-40.15	0-360	150	H
3	* 7.38629	28.05	PK	35.8	-27	0	36.85	-	-	74	-37.15	0-360	150	H
5	9.84988	26.74	PK	37.4	-23.2	0	40.94	-	-	74	-33.06	0-360	250	H
2	* 4.92457	31.82	PK	34.2	-31.6	0	34.42	-	-	74	-39.58	0-360	250	V
4	* 7.38629	27.56	PK	35.8	-27	0	36.36	-	-	74	-37.64	0-360	150	V
6	9.84894	26.47	PK	37.4	-23.2	0	40.67	-	-	74	-33.33	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz

Please refer to the FCC Report DTS 802.11b_g_n WLAN(Report No.: 4789014604-E5)

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS

Please refer to the FCC Report DTS 802.11b_g_n WLAN(Report No.: 4789014604-E5)