

GSM 850

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM850 E-Field measurement/Voice_ch 128/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 46.27 V/m; Power Drift = -0.07 dB


Applied MIF = 3.63 dB

RF audio interference level = 34.49 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 32.87 dBV/m	Grid 2 M4 33.99 dBV/m	Grid 3 M4 33.78 dBV/m
Grid 4 M4 33.36 dBV/m	Grid 5 M4 34.49 dBV/m	Grid 6 M4 34.29 dBV/m
Grid 7 M4 33.89 dBV/m	Grid 8 M4 34.8 dBV/m	Grid 9 M4 34.46 dBV/m

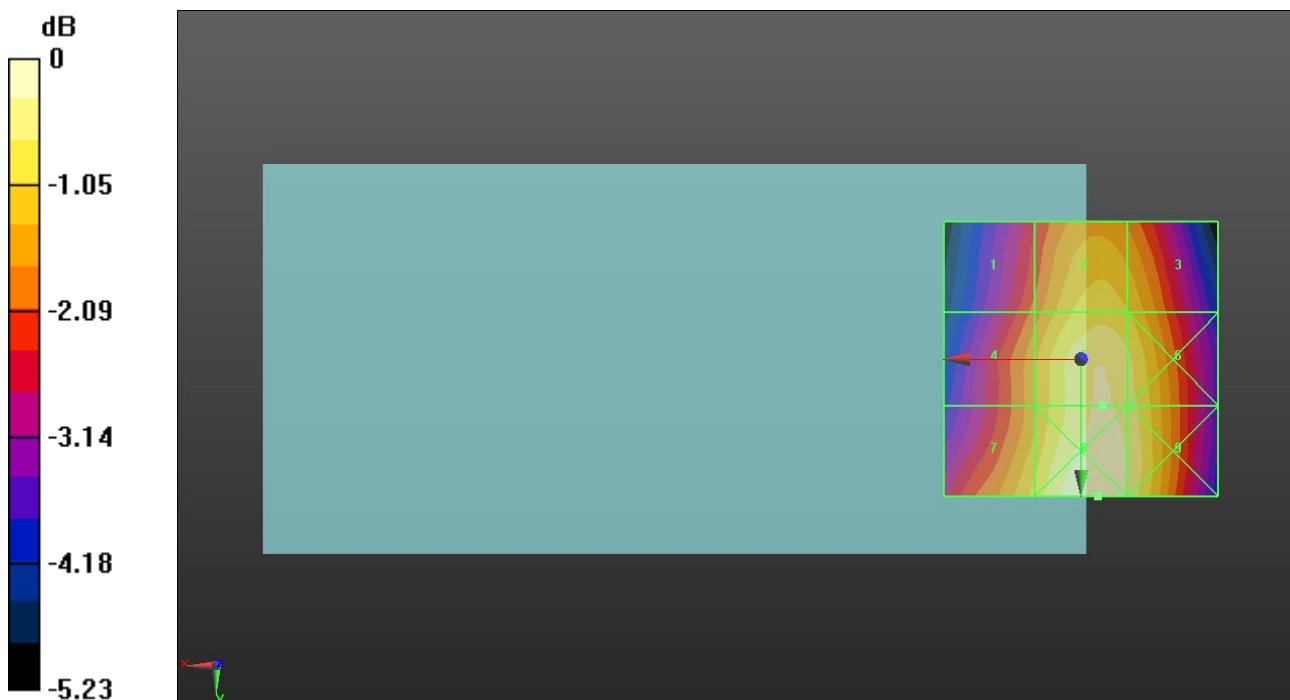

0 dB = 54.96 V/m = 34.80 dBV/m

GSM 850

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM850 E-Field measurement/Voice_ch 190/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 49.41 V/m; Power Drift = -0.00 dB


Applied MIF = 3.63 dB

RF audio interference level = 35.33 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 33.58 dBV/m	Grid 2 M4 34.85 dBV/m	Grid 3 M4 34.61 dBV/m
Grid 4 M4 34.3 dBV/m	Grid 5 M4 35.33 dBV/m	Grid 6 M4 35.11 dBV/m
Grid 7 M4 34.97 dBV/m	Grid 8 M4 35.66 dBV/m	Grid 9 M4 35.29 dBV/m

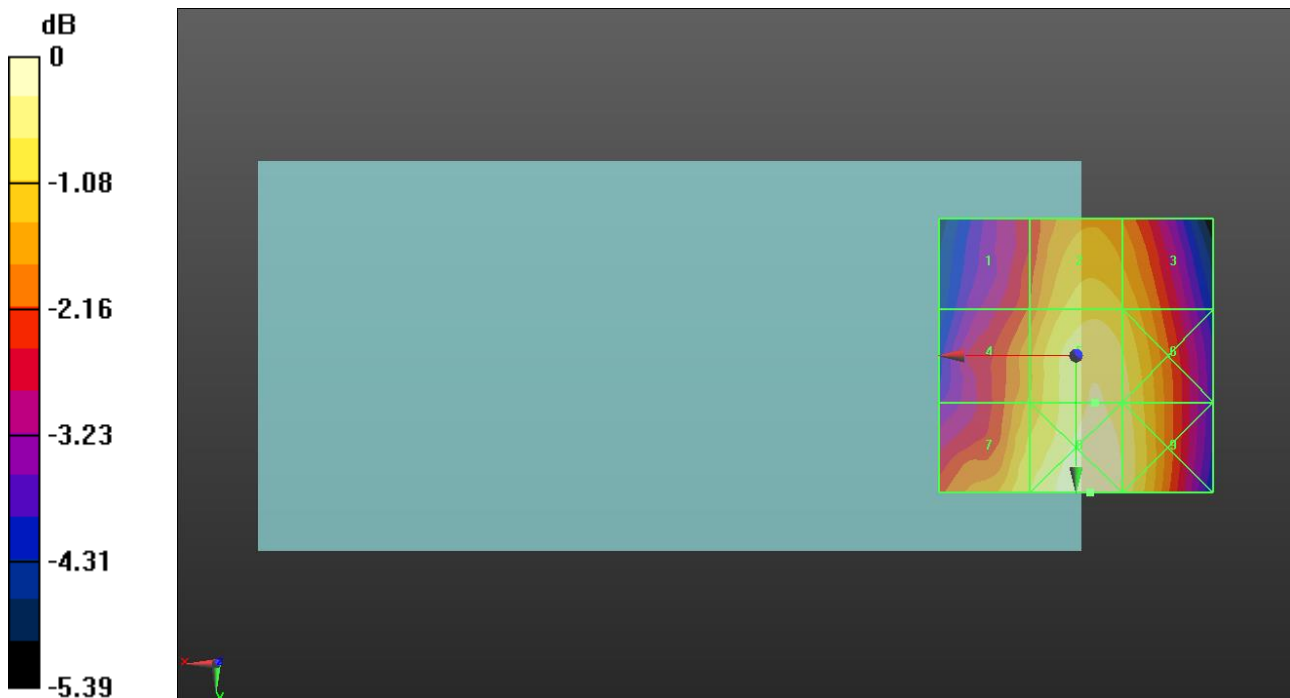

0 dB = 60.69 V/m = 35.66 dBV/m

GSM 850

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.6 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM850 E-Field measurement/Voice_ch 251/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 54.88 V/m; Power Drift = 0.09 dB


Applied MIF = 3.63 dB

RF audio interference level = 35.99 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 34.51 dBV/m	Grid 2 M4 35.62 dBV/m	Grid 3 M4 35.36 dBV/m
Grid 4 M4 34.87 dBV/m	Grid 5 M4 35.99 dBV/m	Grid 6 M4 35.75 dBV/m
Grid 7 M4 35.11 dBV/m	Grid 8 M4 36.19 dBV/m	Grid 9 M4 35.87 dBV/m

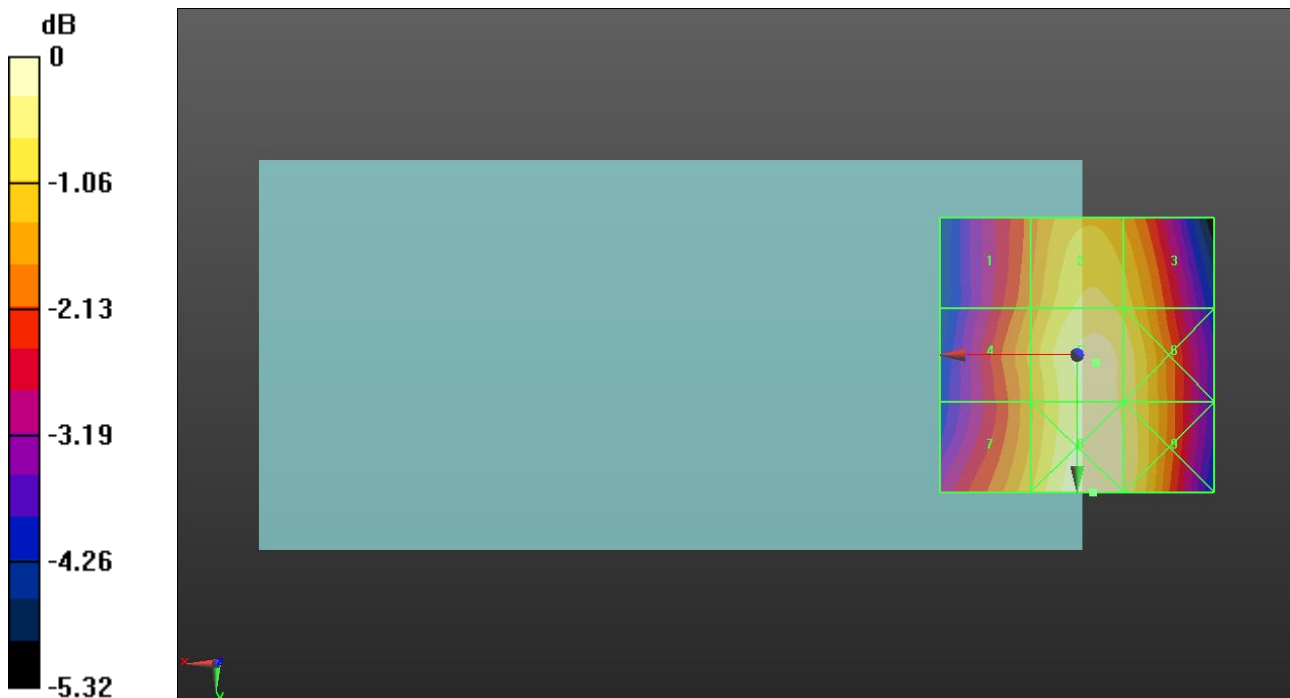

0 dB = 64.50 V/m = 36.19 dBV/m

GSM 1900

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896
Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM1900 E-Field measurement/Voice_ch 512/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.299 V/m; Power Drift = -0.03 dB


Applied MIF = 3.63 dB

RF audio interference level = 23.88 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 23.01 dBV/m	Grid 2 M4 24.76 dBV/m	Grid 3 M4 24.74 dBV/m
Grid 4 M4 19.4 dBV/m	Grid 5 M4 18.8 dBV/m	Grid 6 M4 18.25 dBV/m
Grid 7 M4 23.51 dBV/m	Grid 8 M4 23.88 dBV/m	Grid 9 M4 22.82 dBV/m

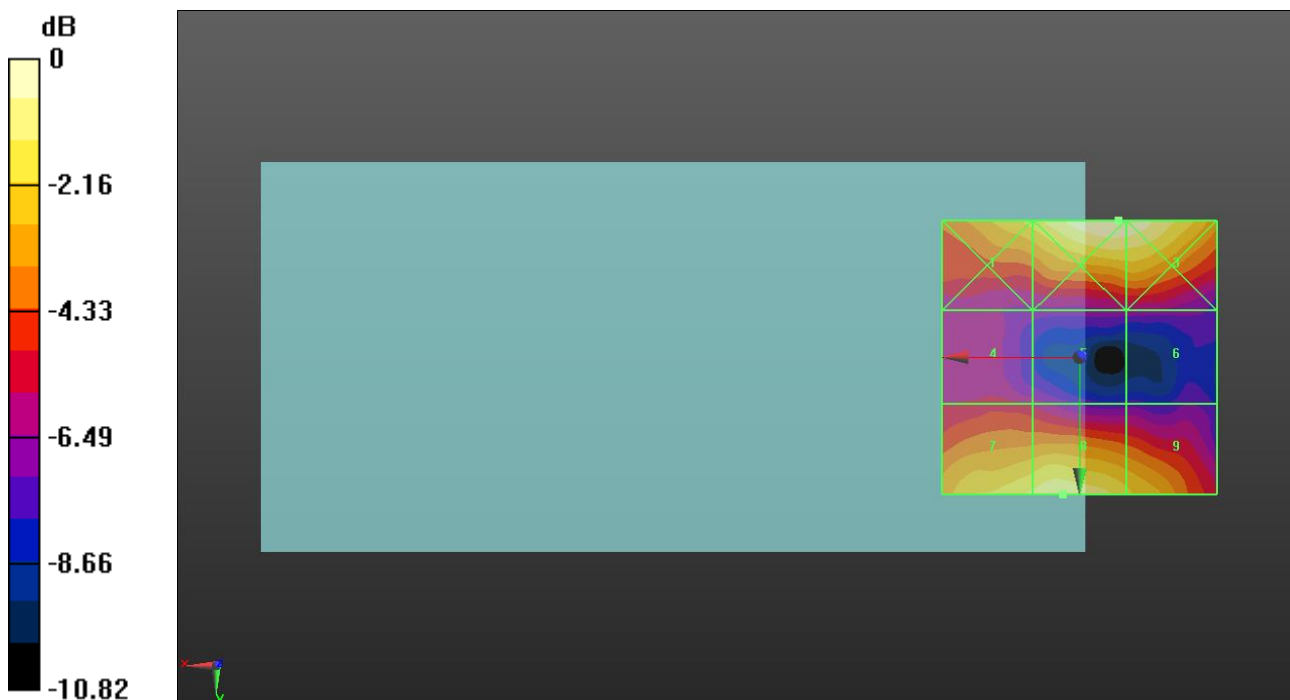

0 dB = 17.31 V/m = 24.77 dBV/m

GSM 1900

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM1900 E-Field measurement/Voice_ch 661/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.551 V/m; Power Drift = 0.05 dB


Applied MIF = 3.63 dB

RF audio interference level = 23.34 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 23.06 dBV/m	Grid 2 M4 24.38 dBV/m	Grid 3 M4 24.38 dBV/m
Grid 4 M4 19.15 dBV/m	Grid 5 M4 18.56 dBV/m	Grid 6 M4 19.44 dBV/m
Grid 7 M4 22.91 dBV/m	Grid 8 M4 23.34 dBV/m	Grid 9 M4 22.72 dBV/m

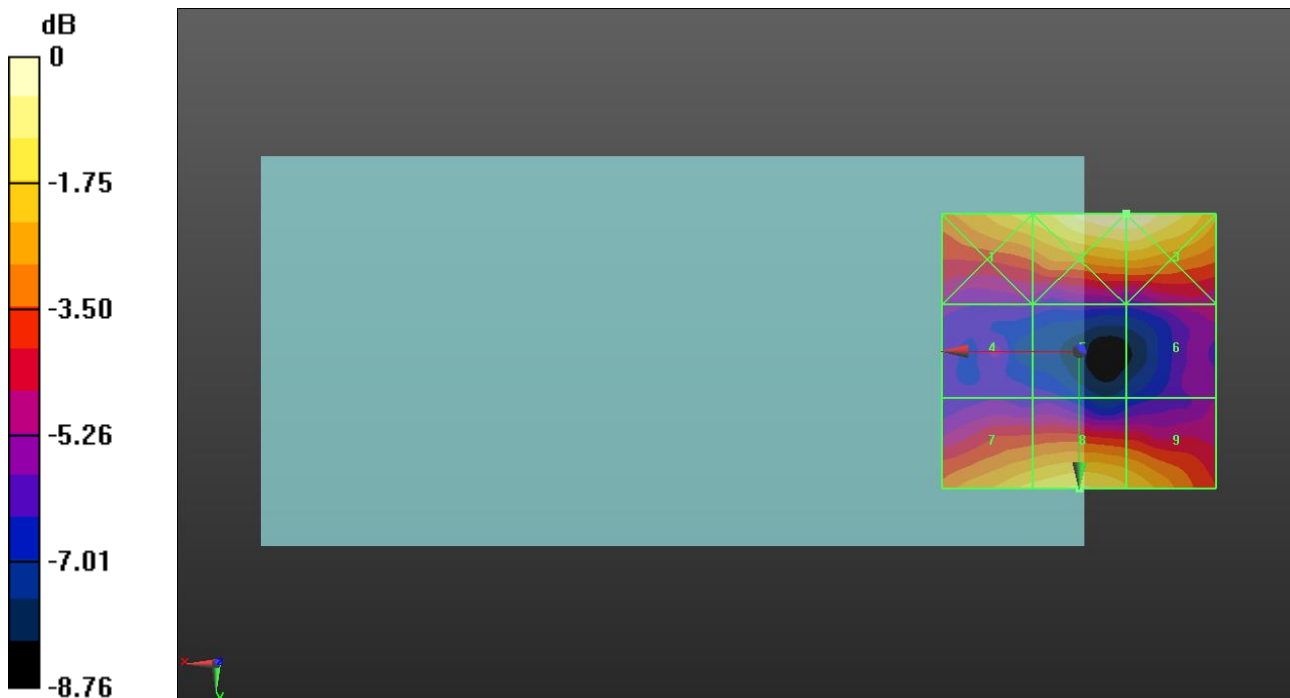

0 dB = 16.56 V/m = 24.38 dBV/m

GSM 1900

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.6896

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM1900 E-Field measurement/Voice_ch 810/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.869 V/m; Power Drift = -0.07 dB


Applied MIF = 3.63 dB

RF audio interference level = 22.77 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 22.3 dBV/m	Grid 2 M4 24.69 dBV/m	Grid 3 M4 24.69 dBV/m
Grid 4 M4 19.71 dBV/m	Grid 5 M4 18.79 dBV/m	Grid 6 M4 19.62 dBV/m
Grid 7 M4 22.74 dBV/m	Grid 8 M4 22.77 dBV/m	Grid 9 M4 21.92 dBV/m

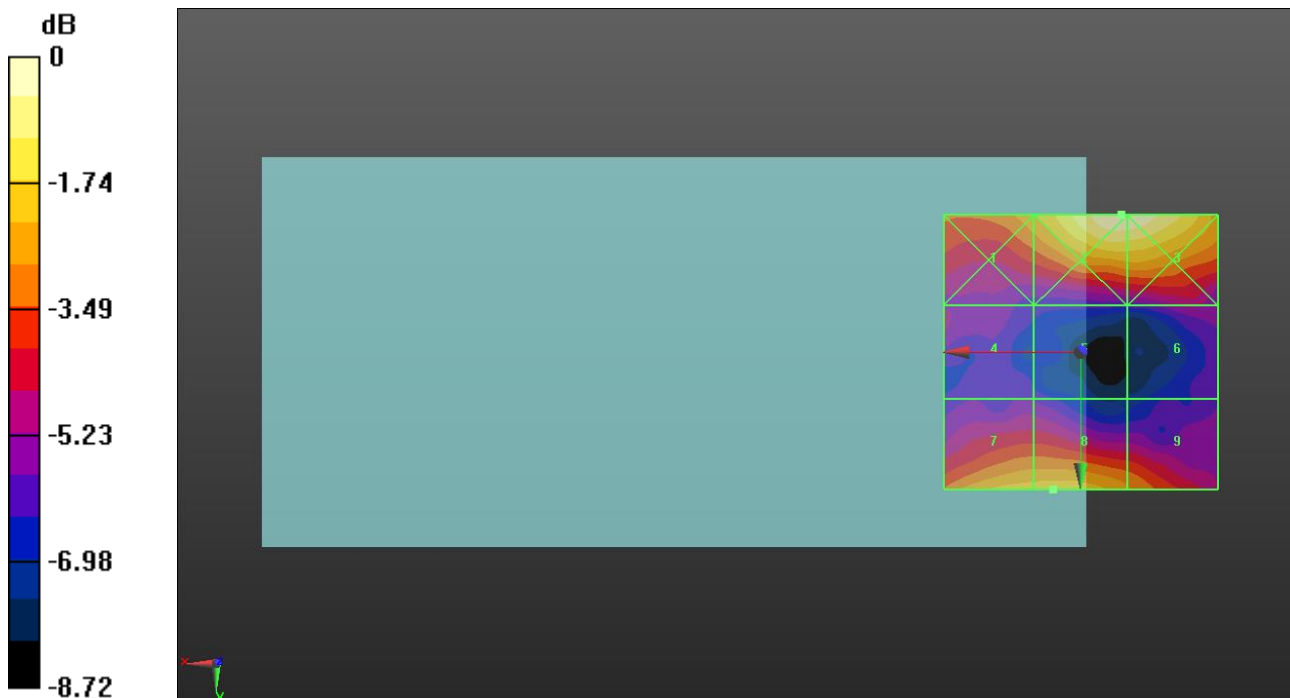

0 dB = 17.17 V/m = 24.70 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2506 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 E-Field measurement/Voice_ch 39750 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.130 V/m; Power Drift = 0.14 dB


Applied MIF = -1.44 dB

RF audio interference level = 16.55 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.64 dBV/m	Grid 2 M4 18.37 dBV/m	Grid 3 M4 18.07 dBV/m
Grid 4 M4 15.41 dBV/m	Grid 5 M4 16.55 dBV/m	Grid 6 M4 16.53 dBV/m
Grid 7 M4 14.51 dBV/m	Grid 8 M4 13.49 dBV/m	Grid 9 M4 14.19 dBV/m

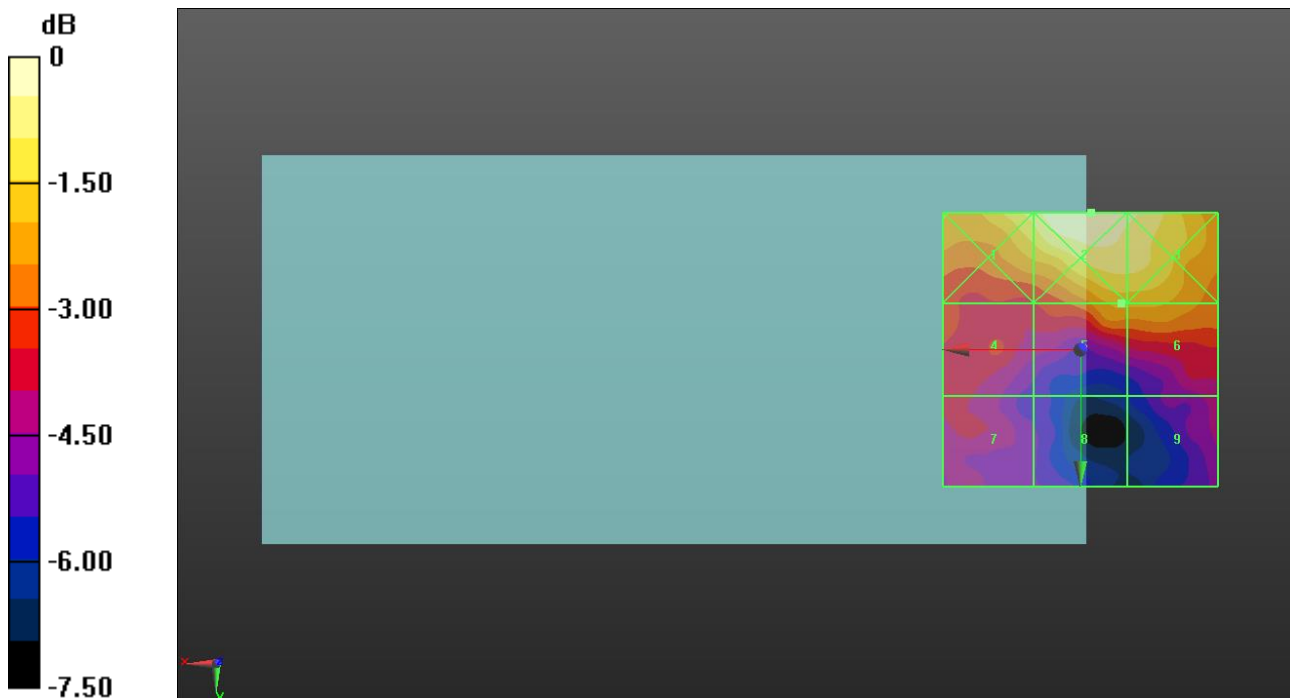

0 dB = 8.287 V/m = 18.37 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2549.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 E-Field measurement/Voice_ch 40185 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.035 V/m; Power Drift = 0.14 dB


Applied MIF = -1.44 dB

RF audio interference level = 15.13 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 16.02 dBV/m	Grid 2 M4 17.33 dBV/m	Grid 3 M4 17.24 dBV/m
Grid 4 M4 14.09 dBV/m	Grid 5 M4 15.13 dBV/m	Grid 6 M4 15.04 dBV/m
Grid 7 M4 12.96 dBV/m	Grid 8 M4 11.74 dBV/m	Grid 9 M4 11.03 dBV/m

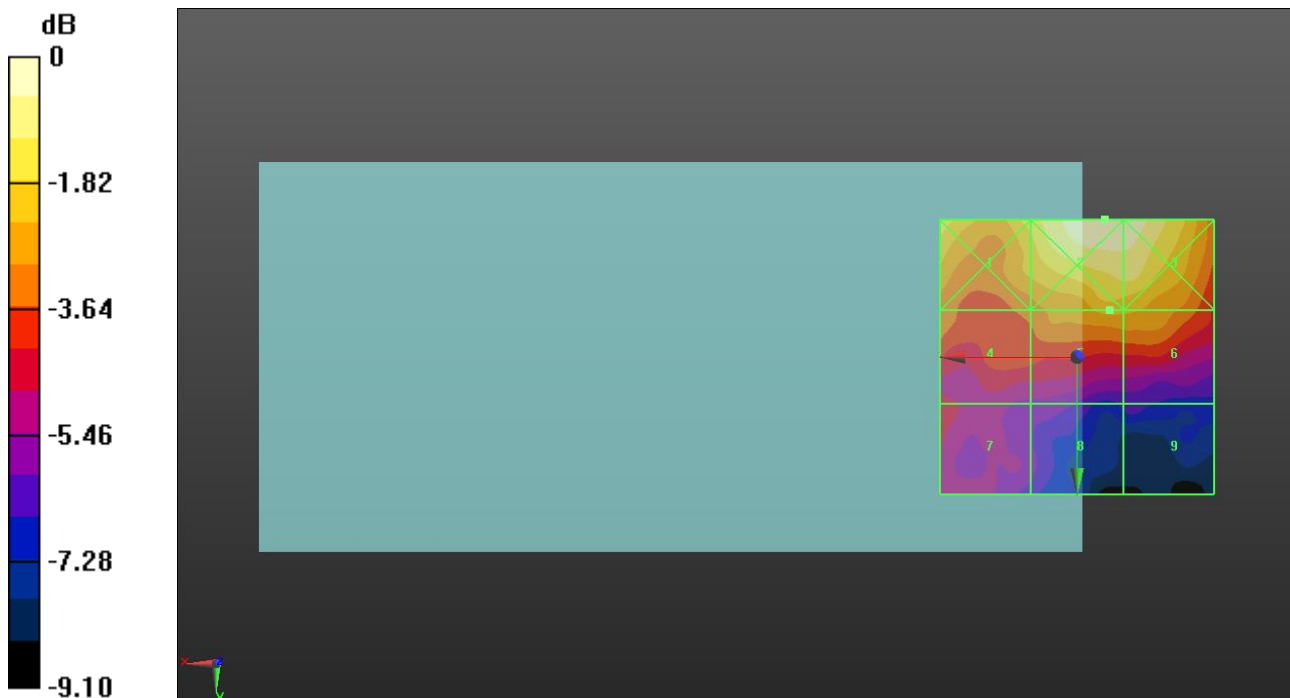

0 dB = 7.353 V/m = 17.33 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2593 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 E-Field measurement/Voice_ch 40620 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.220 V/m; Power Drift = -0.02 dB


Applied MIF = -1.44 dB

RF audio interference level = 14.53 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 15.85 dBV/m	Grid 2 M4 16.54 dBV/m	Grid 3 M4 16.44 dBV/m
Grid 4 M4 14.02 dBV/m	Grid 5 M4 14.53 dBV/m	Grid 6 M4 14.46 dBV/m
Grid 7 M4 13.42 dBV/m	Grid 8 M4 12.82 dBV/m	Grid 9 M4 11.57 dBV/m

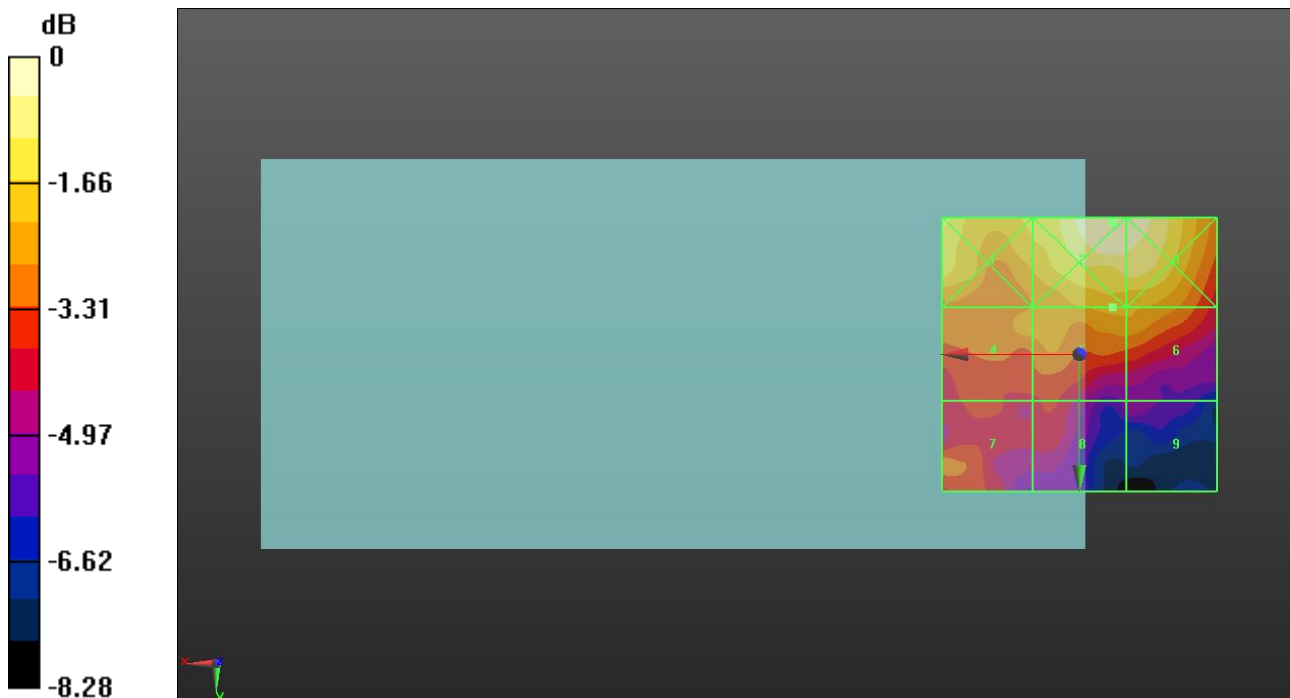

0 dB = 6.714 V/m = 16.54 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2636.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 E-Field measurement/Voice_ch 41055 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.252 V/m; Power Drift = 0.06 dB


Applied MIF = -1.44 dB

RF audio interference level = 15.91 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 16.4 dBV/m	Grid 2 M4 17.27 dBV/m	Grid 3 M4 17.26 dBV/m
Grid 4 M4 14.66 dBV/m	Grid 5 M4 15.91 dBV/m	Grid 6 M4 15.76 dBV/m
Grid 7 M4 13.73 dBV/m	Grid 8 M4 11.68 dBV/m	Grid 9 M4 12.02 dBV/m

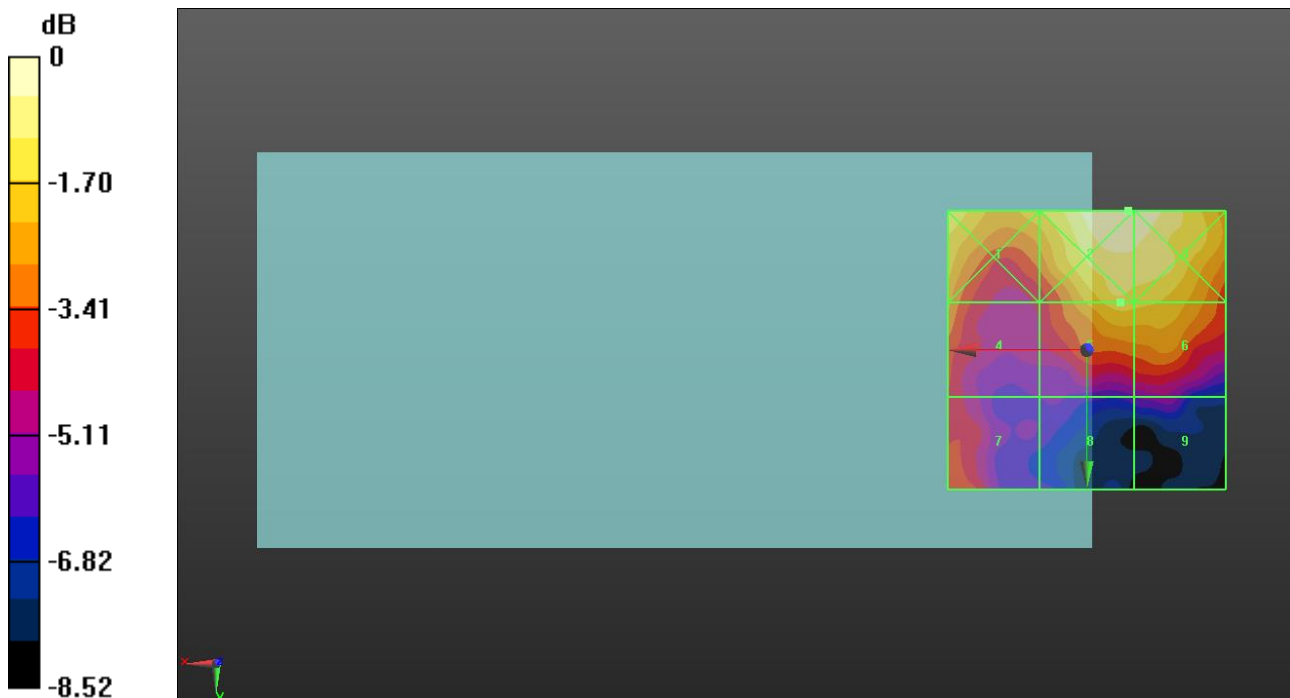

0 dB = 7.306 V/m = 17.27 dBV/m

LTE Band 41

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2680 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 E-Field measurement/Voice_ch 41490 RB 1/0/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.432 V/m; Power Drift = 0.10 dB


Applied MIF = -1.44 dB

RF audio interference level = 17.13 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.98 dBV/m	Grid 2 M4 18.09 dBV/m	Grid 3 M4 18.07 dBV/m
Grid 4 M4 15.38 dBV/m	Grid 5 M4 17.13 dBV/m	Grid 6 M4 17.01 dBV/m
Grid 7 M4 14.28 dBV/m	Grid 8 M4 12.84 dBV/m	Grid 9 M4 12.96 dBV/m

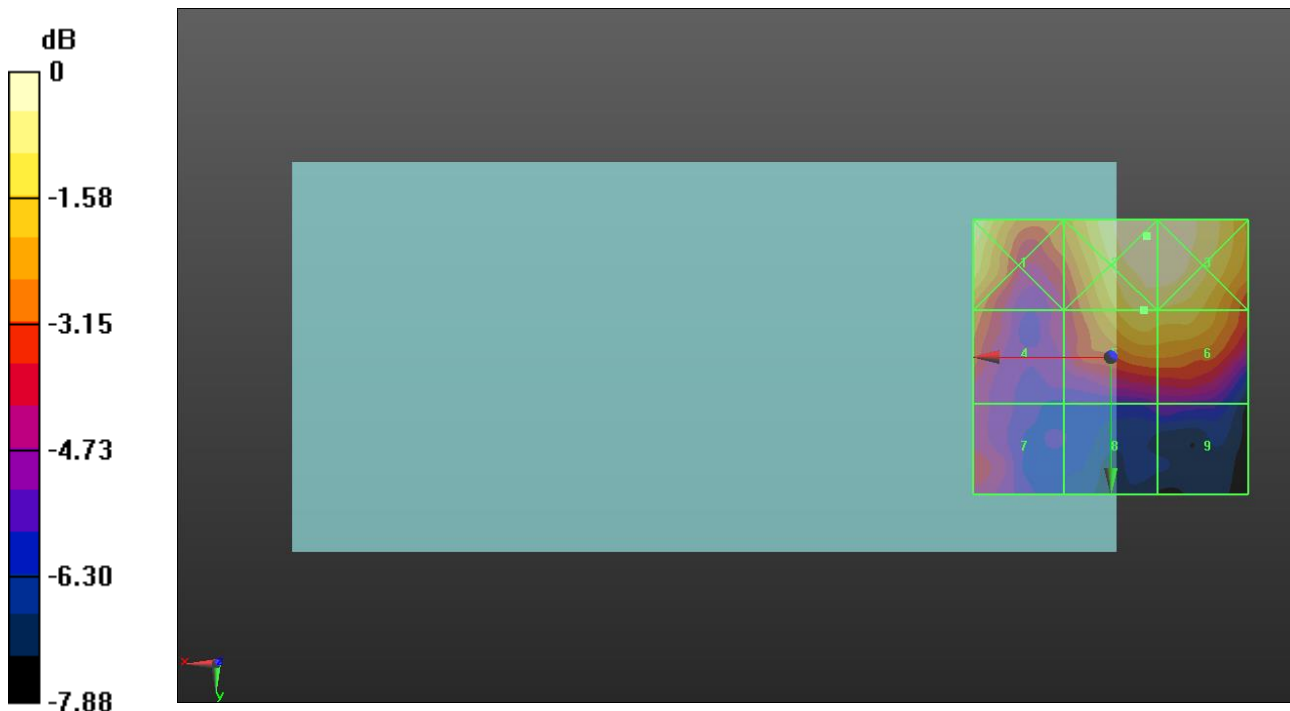

0 dB = 8.025 V/m = 18.09 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2506 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 PC2 E-Field measurement/Voice_ch 39750 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.241 V/m; Power Drift = 0.10 dB


Applied MIF = -1.44 dB

RF audio interference level = 18.44 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 19.57 dBV/m	Grid 2 M4 20.5 dBV/m	Grid 3 M4 20.13 dBV/m
Grid 4 M4 16.79 dBV/m	Grid 5 M4 18.42 dBV/m	Grid 6 M4 18.44 dBV/m
Grid 7 M4 15.88 dBV/m	Grid 8 M4 14.55 dBV/m	Grid 9 M4 16.02 dBV/m

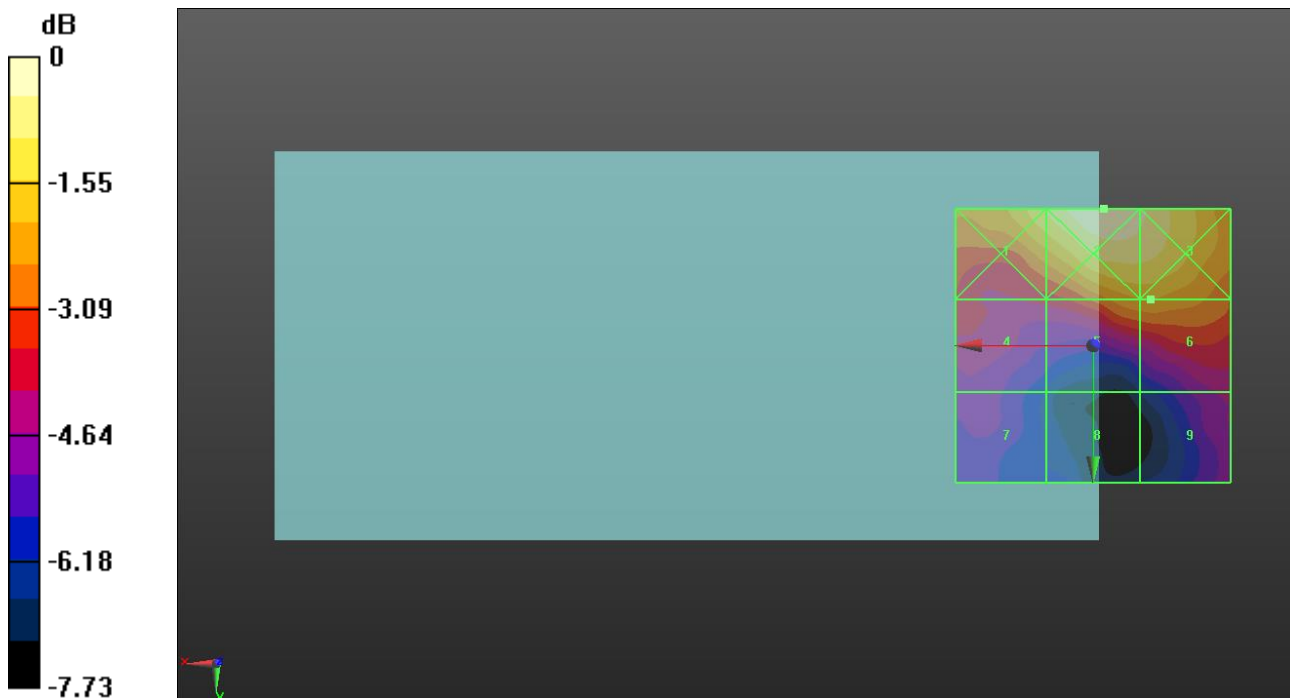

0 dB = 10.59 V/m = 20.50 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2549.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 PC2 E-Field measurement/Voice_ch 40185 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.351 V/m; Power Drift = 0.07 dB


Applied MIF = -1.44 dB

RF audio interference level = 17.25 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.65 dBV/m	Grid 2 M4 19.44 dBV/m	Grid 3 M4 19.33 dBV/m
Grid 4 M4 15.42 dBV/m	Grid 5 M4 17.25 dBV/m	Grid 6 M4 17.21 dBV/m
Grid 7 M4 13.44 dBV/m	Grid 8 M4 12.87 dBV/m	Grid 9 M4 13.33 dBV/m

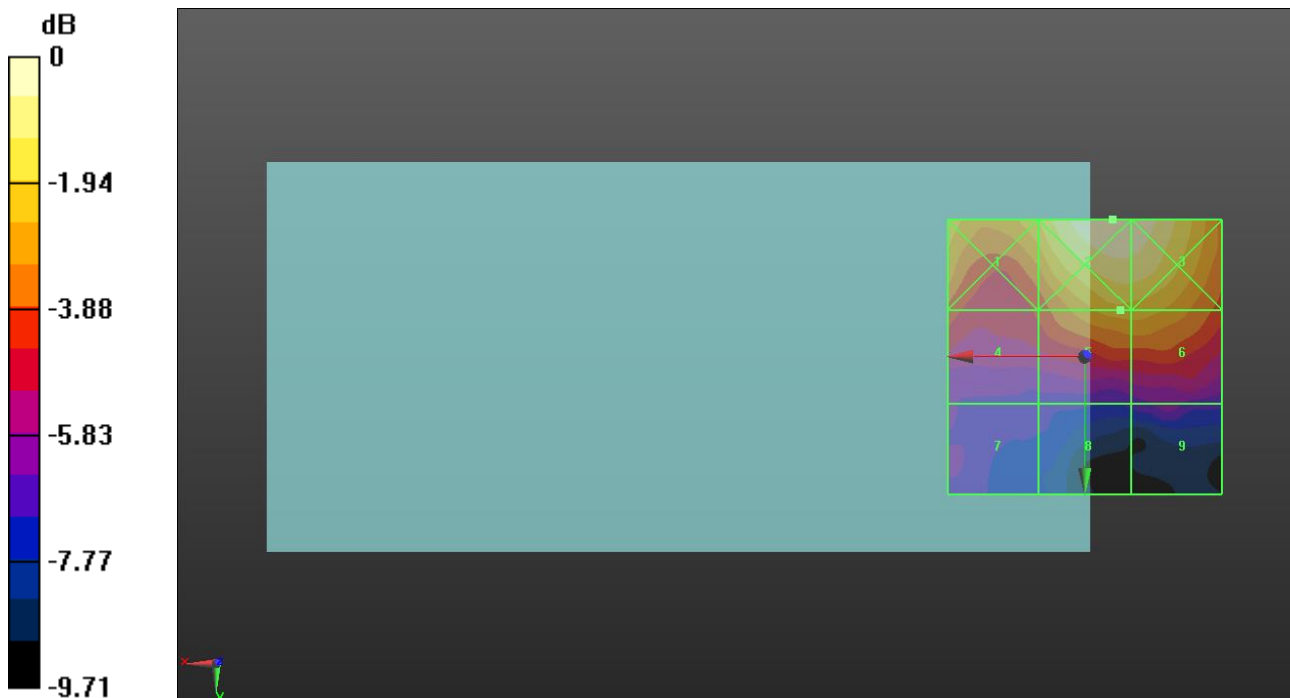

0 dB = 9.377 V/m = 19.44 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2593 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 PC2 E-Field measurement/Voice_ch 40620 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.931 V/m; Power Drift = 0.01 dB


Applied MIF = -1.44 dB

RF audio interference level = 16.79 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.79 dBV/m	Grid 2 M4 19.12 dBV/m	Grid 3 M4 19.11 dBV/m
Grid 4 M4 15.38 dBV/m	Grid 5 M4 16.79 dBV/m	Grid 6 M4 16.79 dBV/m
Grid 7 M4 13.76 dBV/m	Grid 8 M4 13.42 dBV/m	Grid 9 M4 12.9 dBV/m

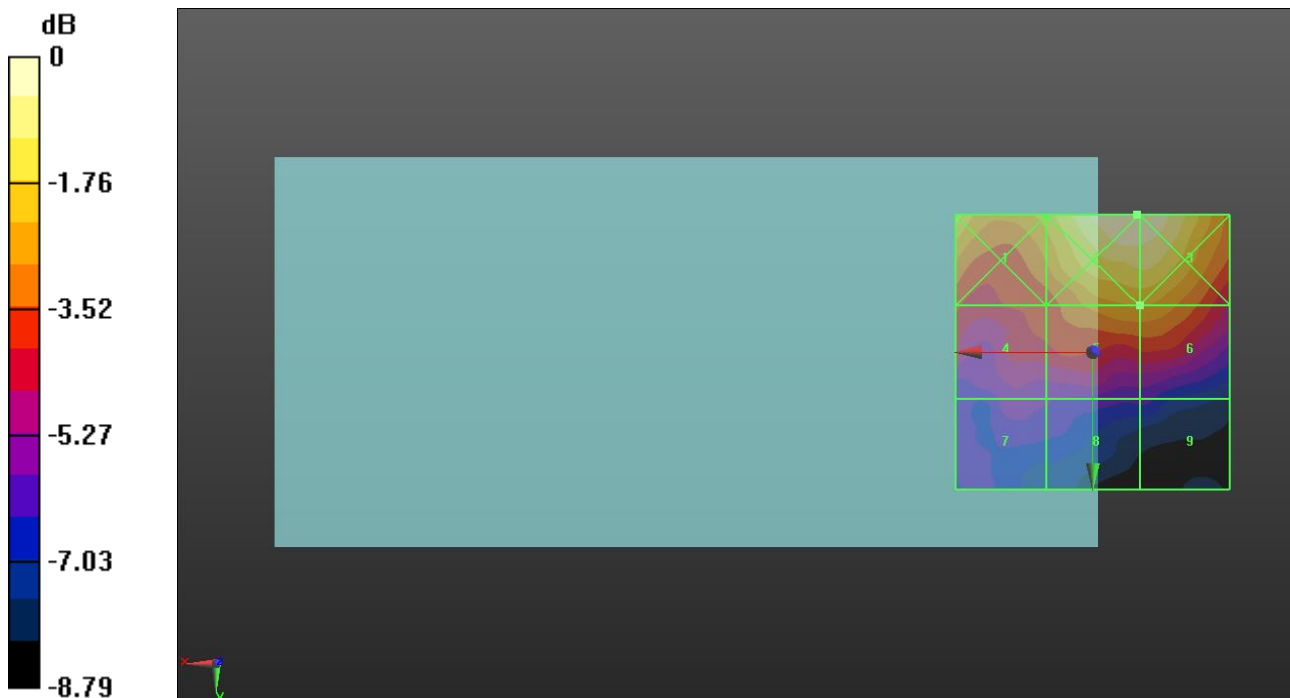

0 dB = 9.033 V/m = 19.12 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2636.5 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 PC2 E-Field measurement/Voice_ch 41055 RB 1/0/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.34 V/m; Power Drift = -0.05 dB


Applied MIF = -1.44 dB

RF audio interference level = 17.80 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 18.08 dBV/m	Grid 2 M4 19.19 dBV/m	Grid 3 M4 19.17 dBV/m
Grid 4 M4 15.63 dBV/m	Grid 5 M4 17.8 dBV/m	Grid 6 M4 17.77 dBV/m
Grid 7 M4 14.75 dBV/m	Grid 8 M4 13.36 dBV/m	Grid 9 M4 13.97 dBV/m

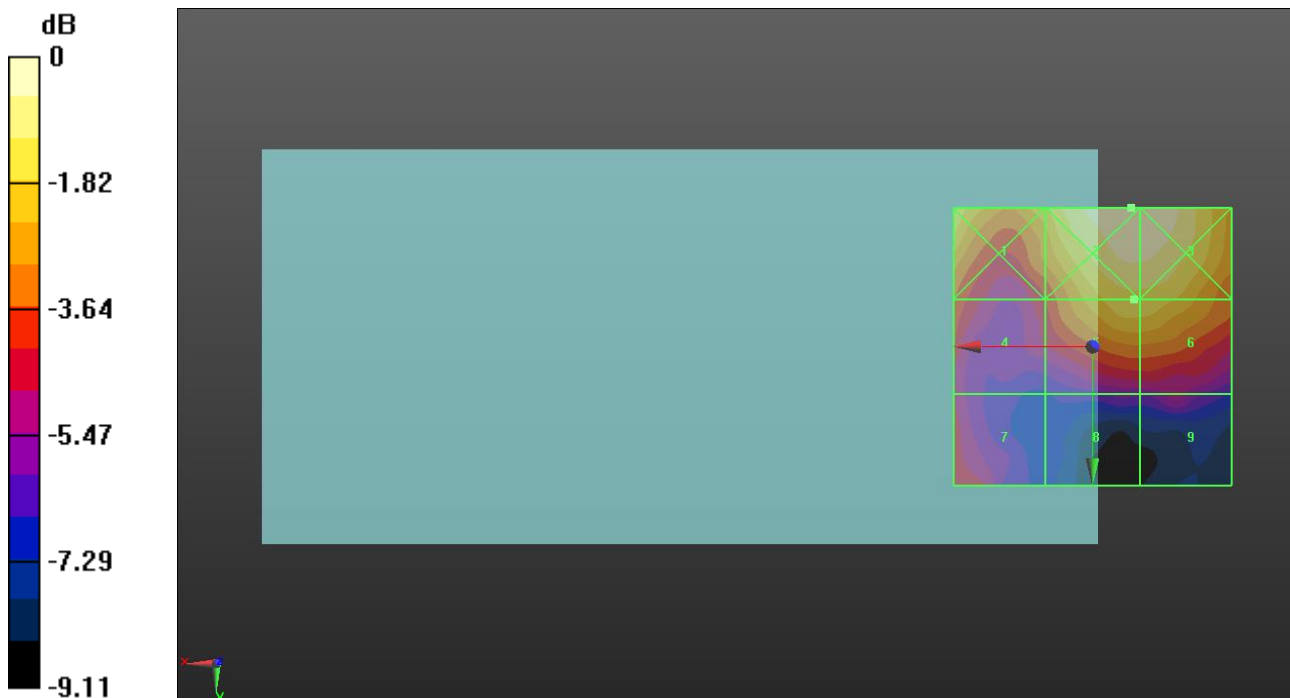

0 dB = 9.105 V/m = 19.19 dBV/m

LTE Band 41_PC2

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2680 MHz; Duty Cycle: 1:8.87156

Phantom section: RF Section

DASY5 Configuration:

- Probe: EF3DV3 - SN4064; ConvF(1, 1, 1); Calibrated: 2018-11-15;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1494; Calibrated: 2018-07-23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 PC2 E-Field measurement/Voice_ch 41490 RB 1/0/Hearing Aid Compatibility Test (101x101x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.55 V/m; Power Drift = 0.12 dB


Applied MIF = -1.44 dB

RF audio interference level = 19.19 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 19.77 dBV/m	Grid 2 M4 20.42 dBV/m	Grid 3 M4 20.38 dBV/m
Grid 4 M4 16.97 dBV/m	Grid 5 M4 19.19 dBV/m	Grid 6 M4 19.18 dBV/m
Grid 7 M4 15.26 dBV/m	Grid 8 M4 15.42 dBV/m	Grid 9 M4 15.45 dBV/m

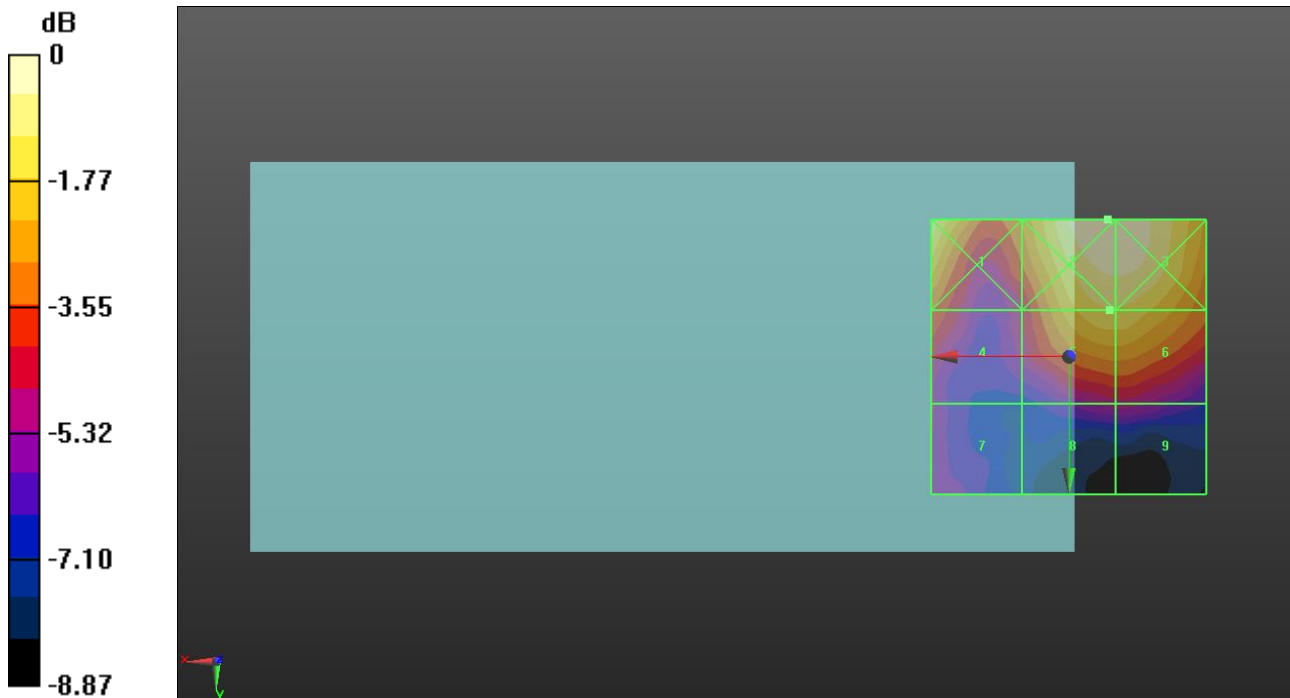

0 dB = 10.49 V/m = 20.42 dBV/m