



SISO Antenna-1 Conducted Spurious Emission

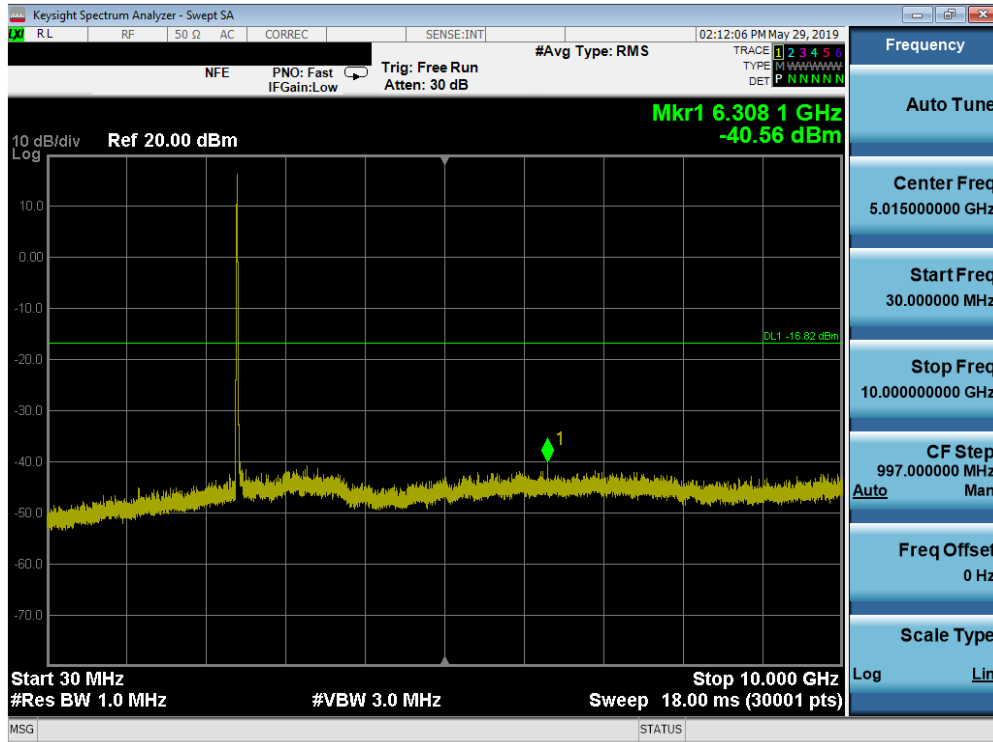


Plot 7-95. Conducted Spurious Plot SISO ANT1 (802.11b - Ch. 1)

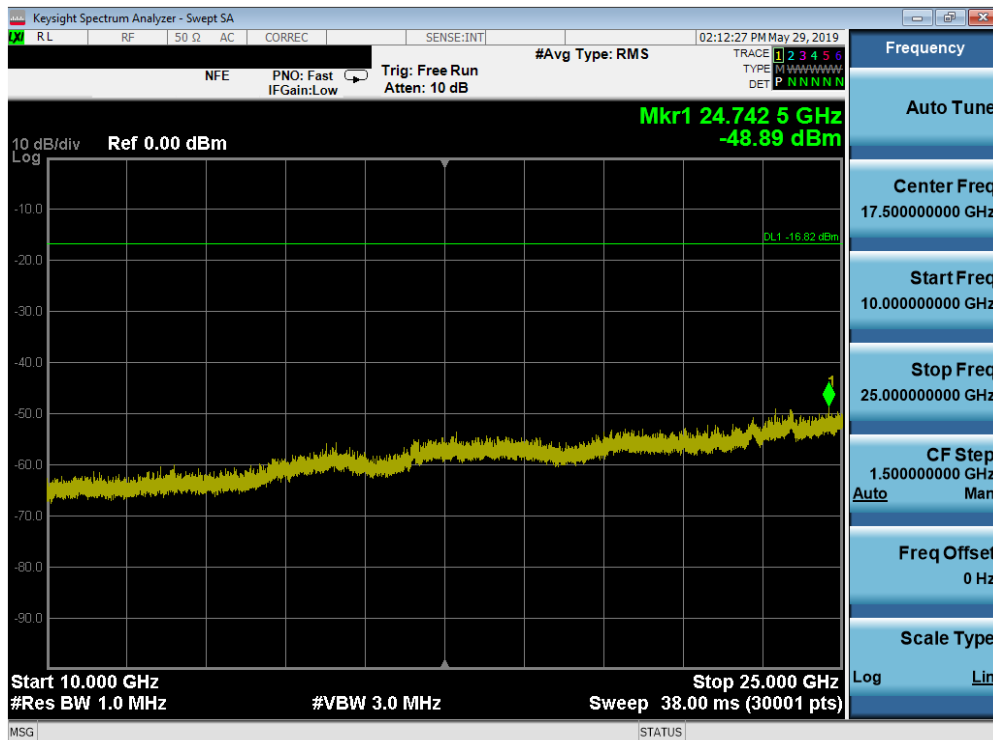


Plot 7-96. Conducted Spurious Plot SISO ANT1 (802.11b - Ch. 1)


FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 76 of 119

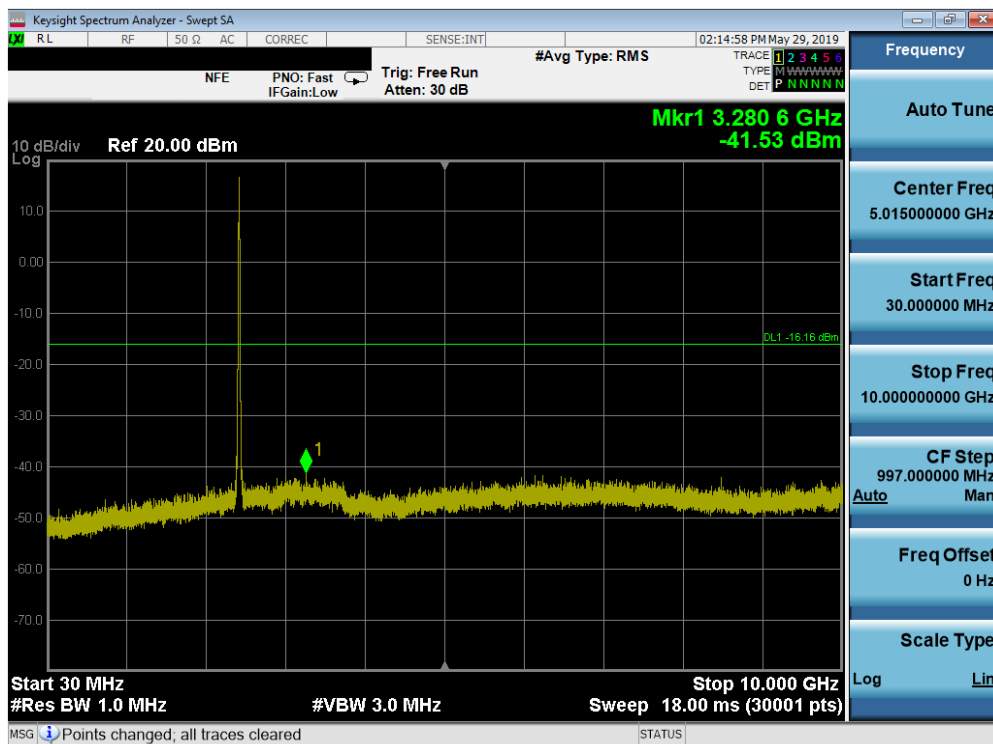


Plot 7-97. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

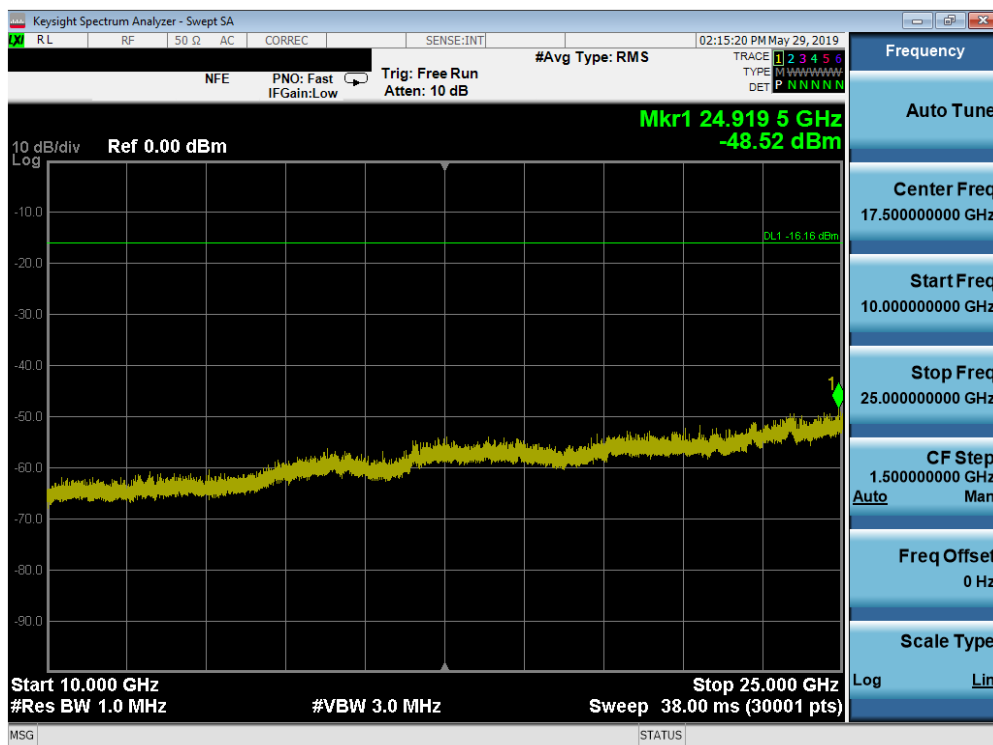

Plot 7-98. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

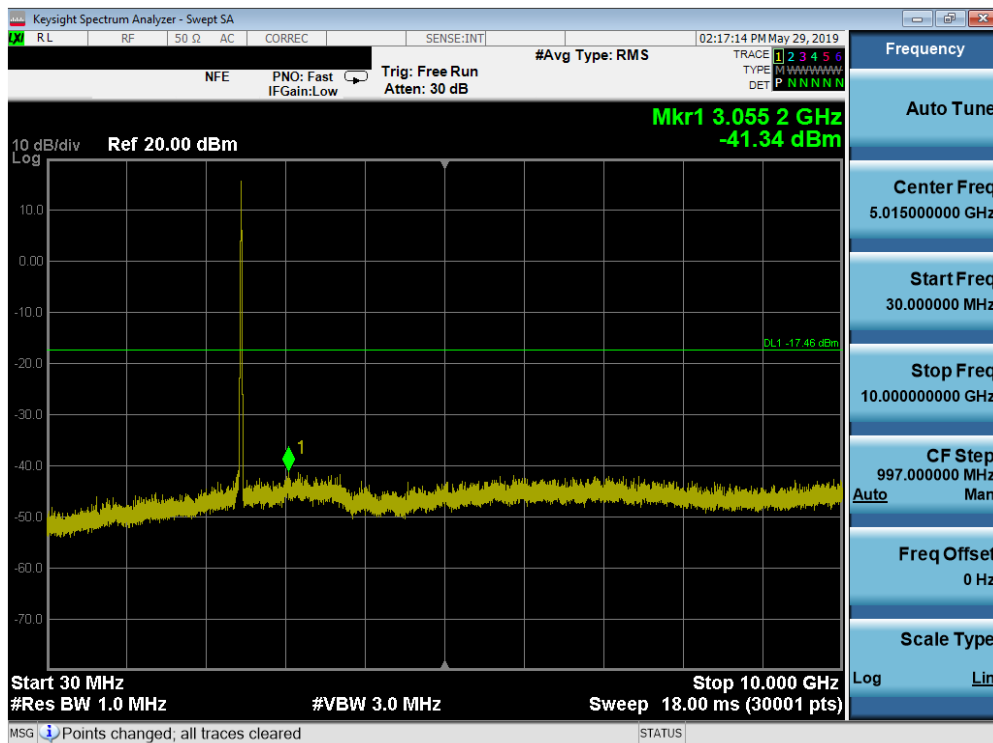


Plot 7-99. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

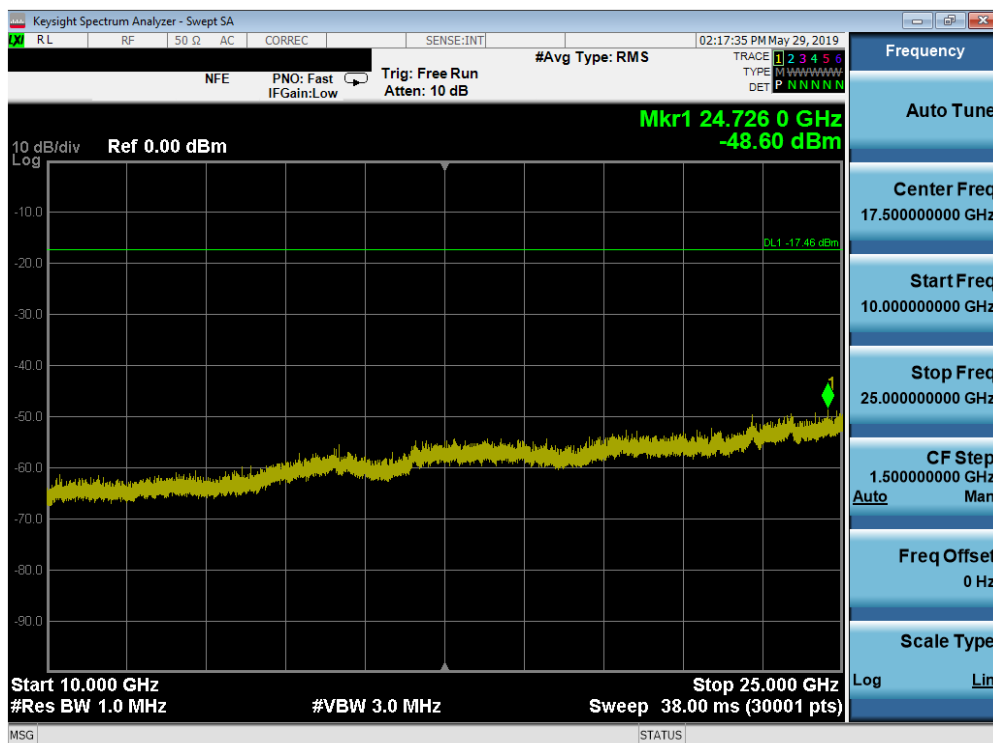


Plot 7-100. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 78 of 119

SISO Antenna-2 Conducted Spurious Emissions

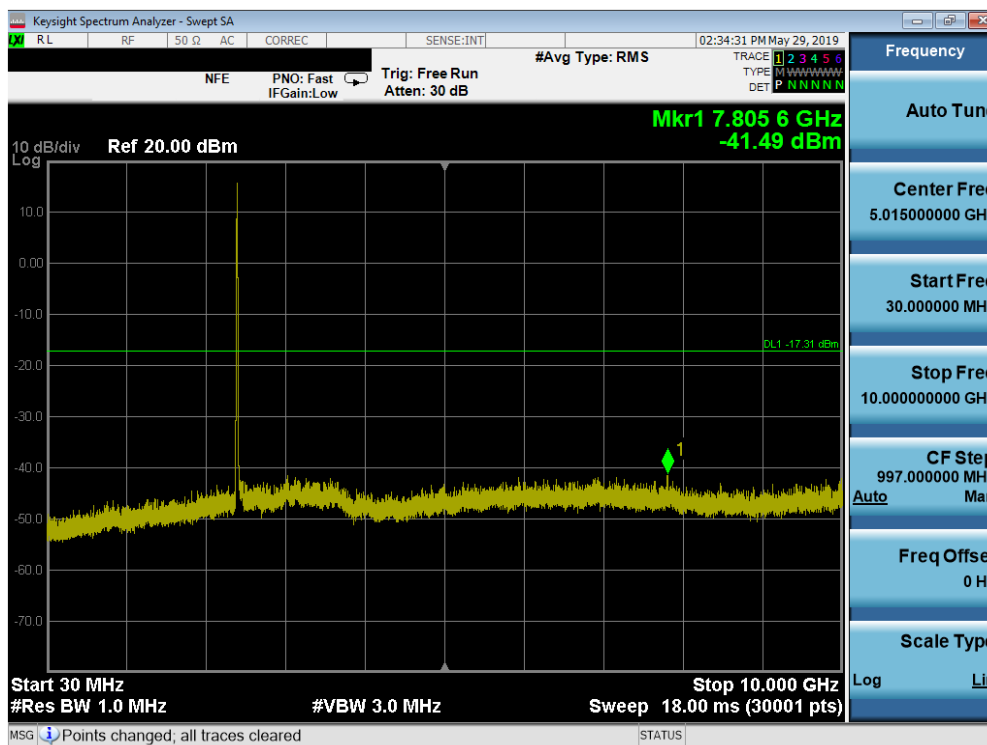


Plot 7-101. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

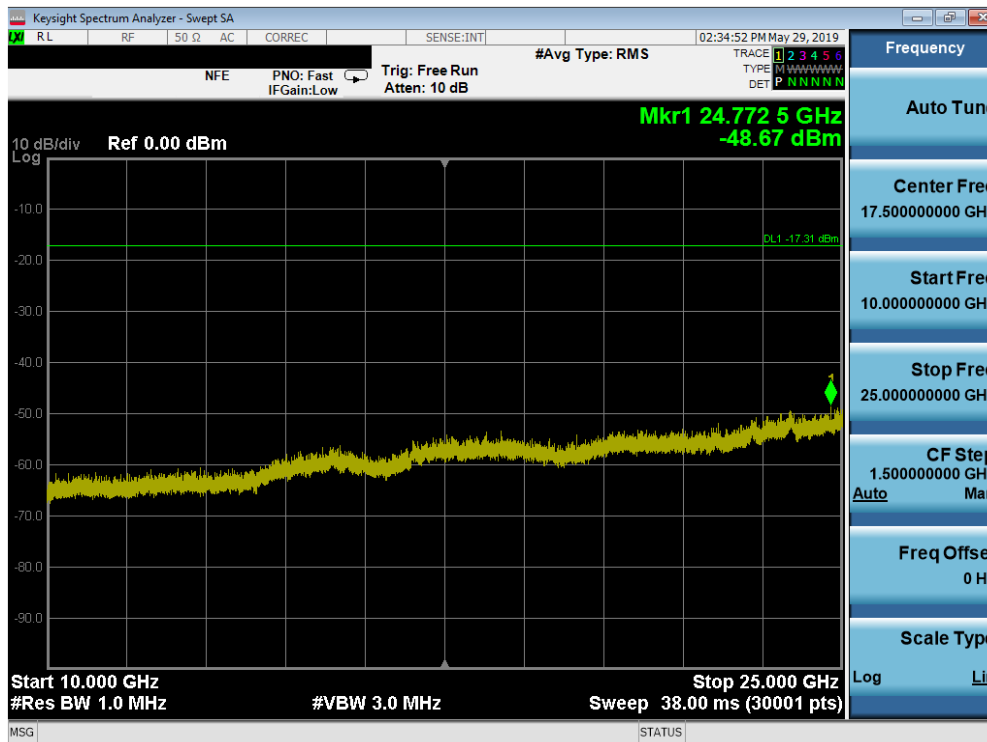


Plot 7-102. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMN975JPN	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 79 of 119

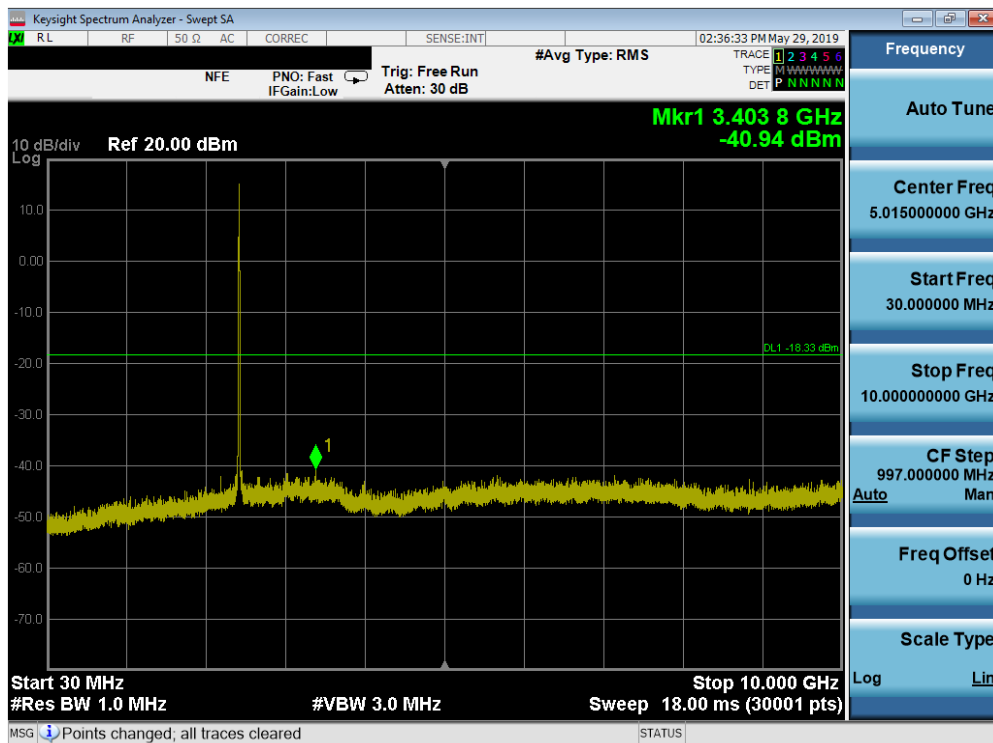


Plot 7-103. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)

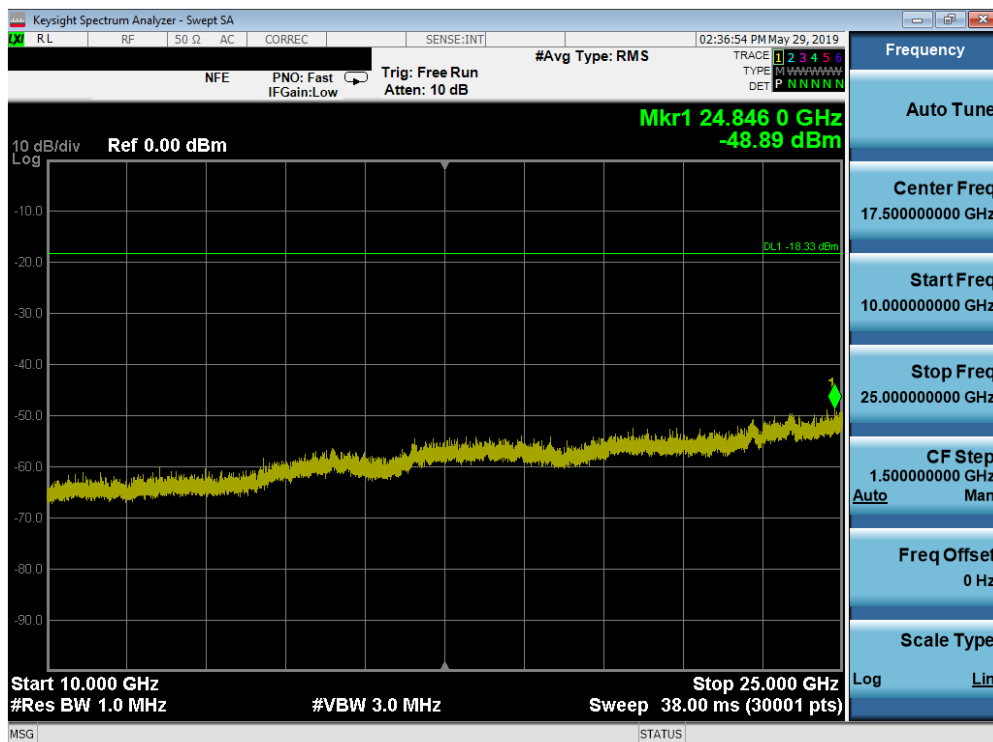


Plot 7-104. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 80 of 119

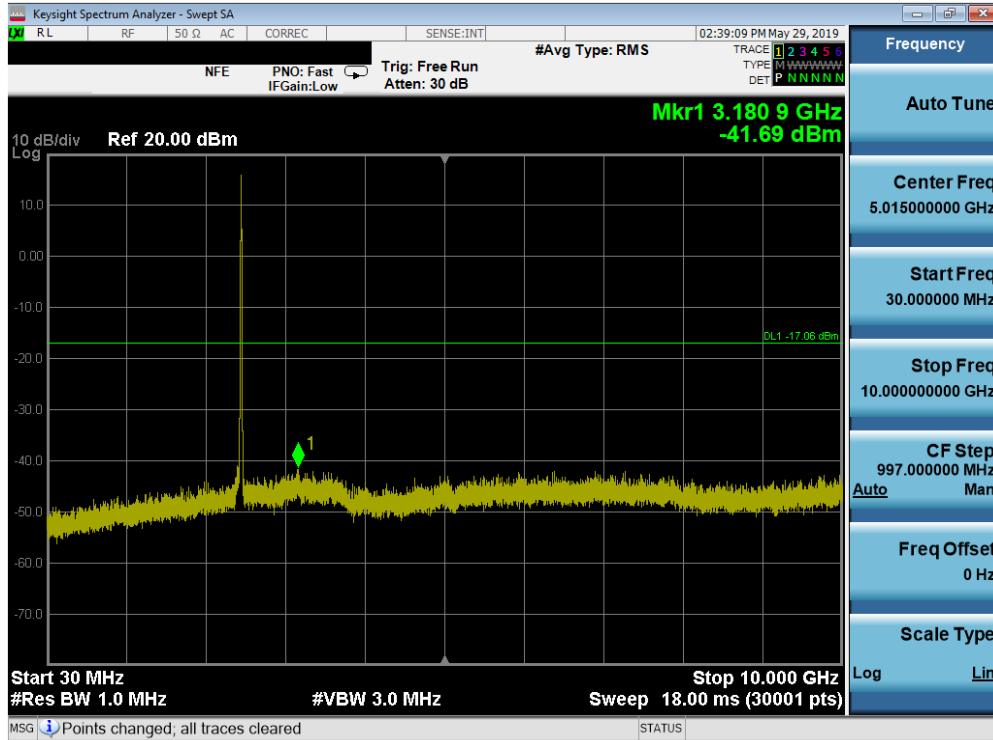

Plot 7-105. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

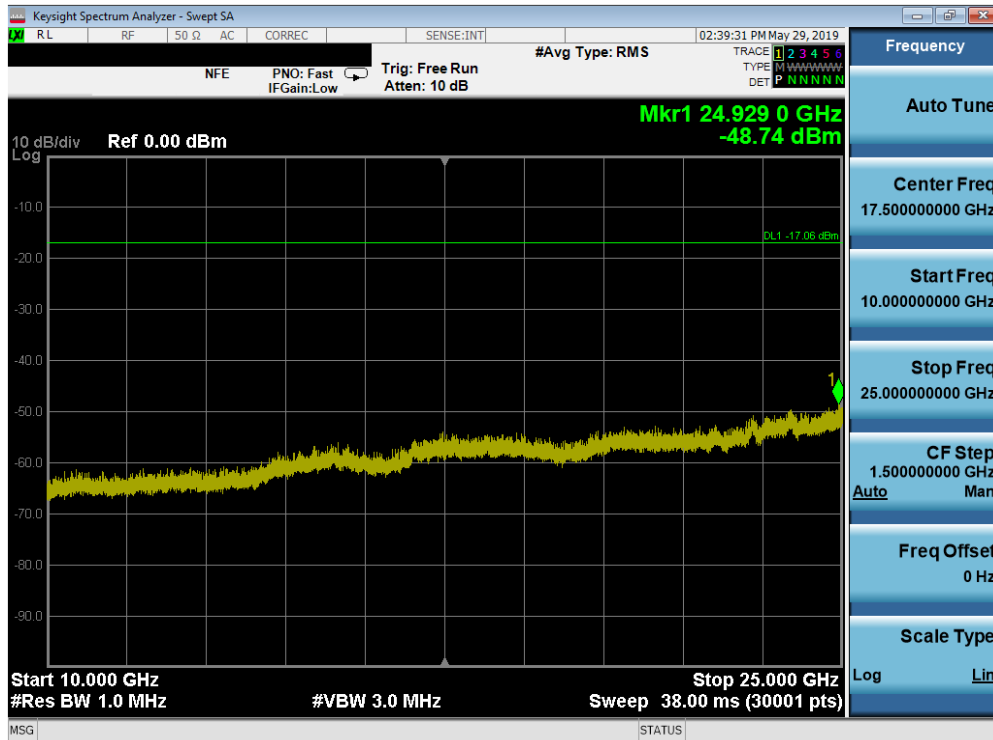

Plot 7-106. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 81 of 119

7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-12 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 82 of 119	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

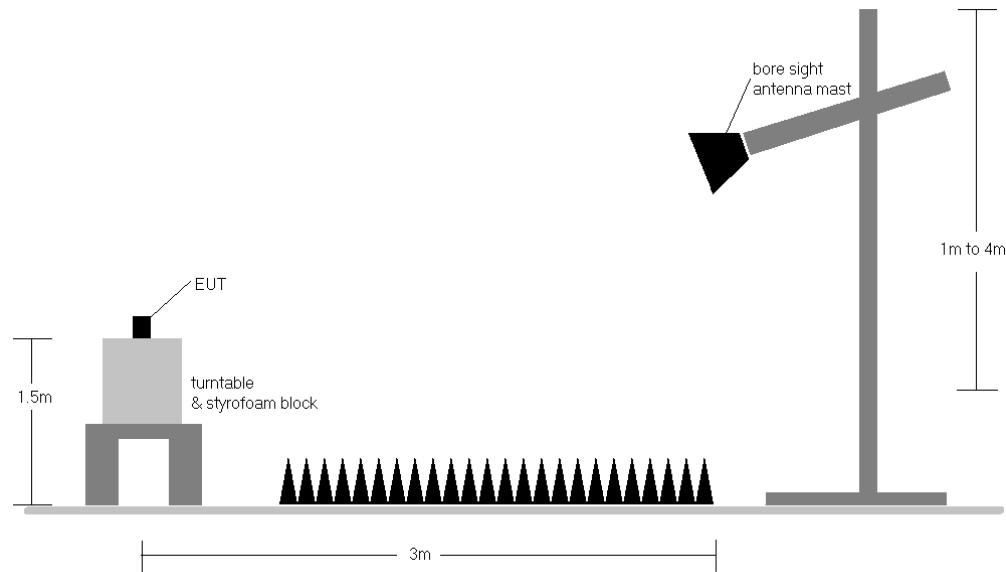


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-12.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 83 of 119

produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- o $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- o $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

Radiated Band Edge Measurement Offset


- o The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 84 of 119	

7.7.1 SISO Antenna-1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

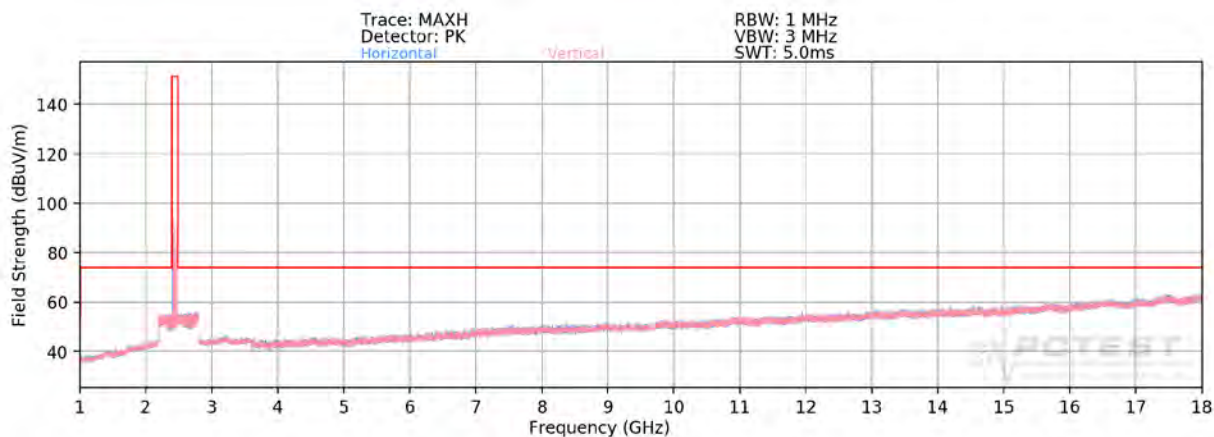

Plot 7-107. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 1)

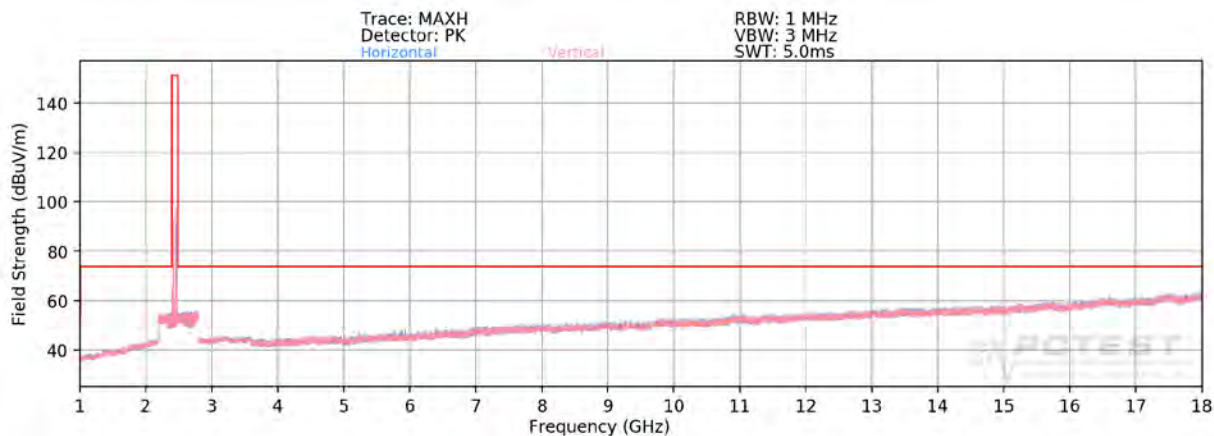

Plot 7-108. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 6)

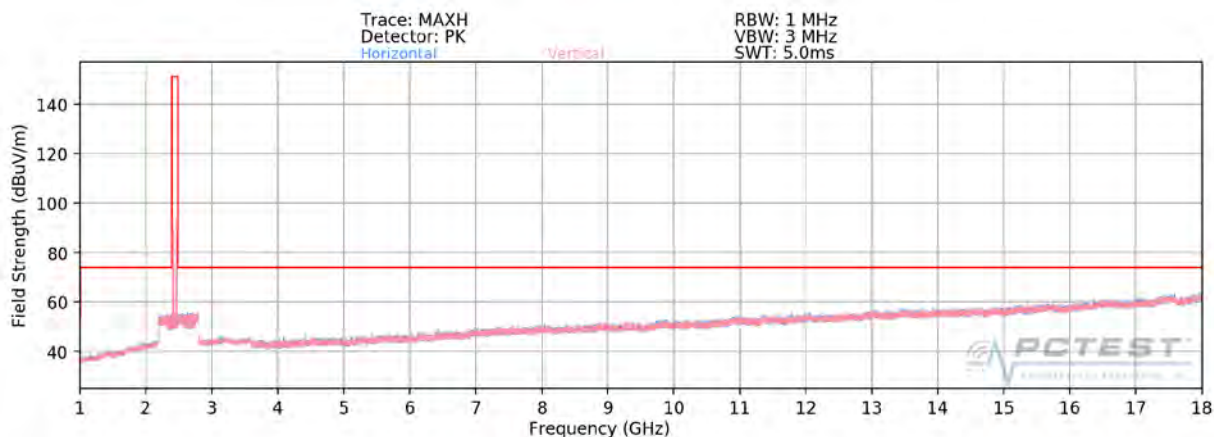


Plot 7-109. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 85 of 119

SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

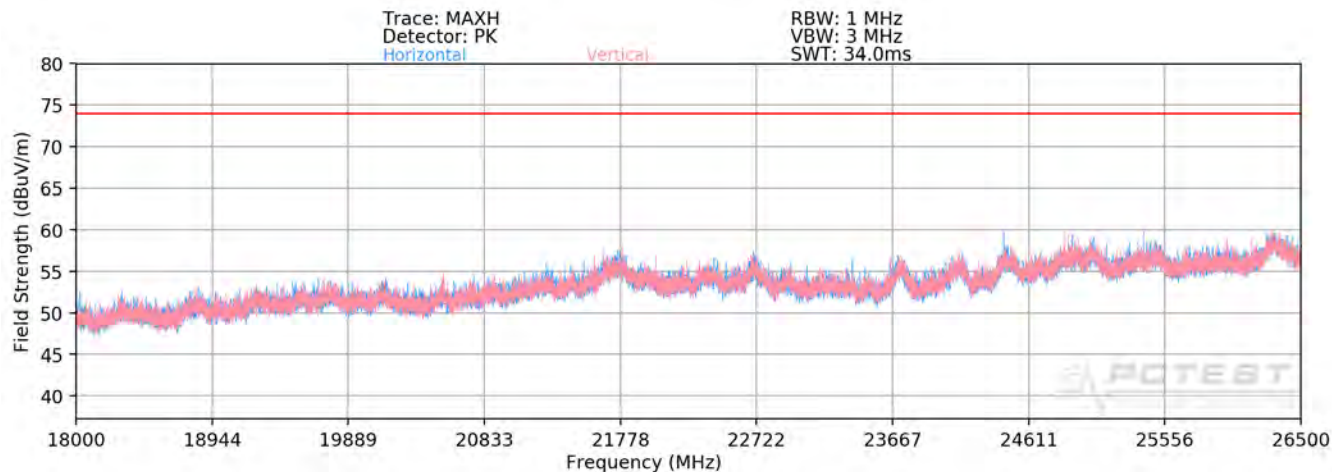

Plot 7-110. Radiated Spurious Plot above 18GHz SISO ANT1

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 86 of 119	

SISO Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	123	351	-67.47	3.65	43.18	53.98	-10.80
4824.00	Peak	H	123	351	-62.97	3.65	47.68	73.98	-26.30
12060.00	Avg	H	400	360	-73.92	15.69	48.77	53.98	-5.21
12060.00	Peak	H	400	360	-65.97	15.69	56.72	73.98	-17.26

Table 7-13. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	328	31	-66.12	3.89	44.77	53.98	-9.21
4874.00	Peak	H	328	31	-62.20	3.89	48.69	73.98	-25.29
7311.00	Avg	H	339	36	-65.84	9.06	50.22	53.98	-3.76
7311.00	Peak	H	339	36	-59.55	9.06	56.51	73.98	-17.47
12185.00	Avg	H	364	359	-73.57	15.18	48.61	53.98	-5.37
12185.00	Peak	H	364	359	-66.70	15.18	55.48	73.98	-18.50

Table 7-14. Radiated Measurements SISO ANT1

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 87 of 119

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	398	35	-68.25	3.85	42.60	53.98	-11.38
4924.00	Peak	H	398	35	-63.35	3.85	47.50	73.98	-26.48
7386.00	Avg	H	111	283	-65.67	9.30	50.63	53.98	-3.35
7386.00	Peak	H	111	283	-60.47	9.30	55.83	73.98	-18.15
12310.00	Avg	H	330	71	-75.12	15.56	47.44	53.98	-6.54
12310.00	Peak	H	330	71	-68.02	15.56	54.54	73.98	-19.44

Table 7-15. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-81.16	9.31	35.15	53.98	-18.83
4824.00	Peak	H	-	-	-69.70	9.31	46.61	73.98	-27.37
12060.00	Avg	H	-	-	-83.35	21.84	45.49	53.98	-8.49
12060.00	Peak	H	-	-	-72.69	21.84	56.15	73.98	-17.83

Table 7-16. Radiated Measurements SISO ANT1 with WCP


FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 88 of 119

7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

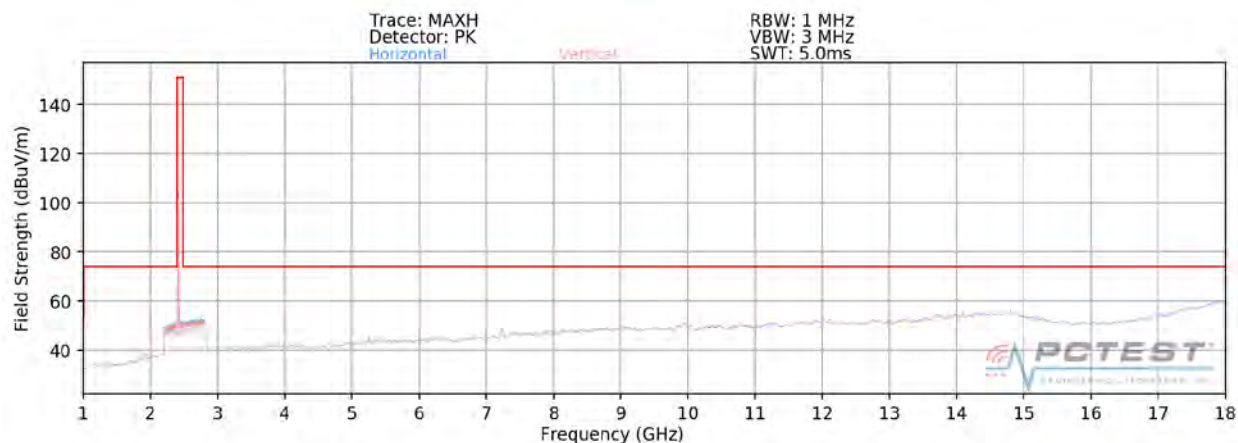

Plot 7-111. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)

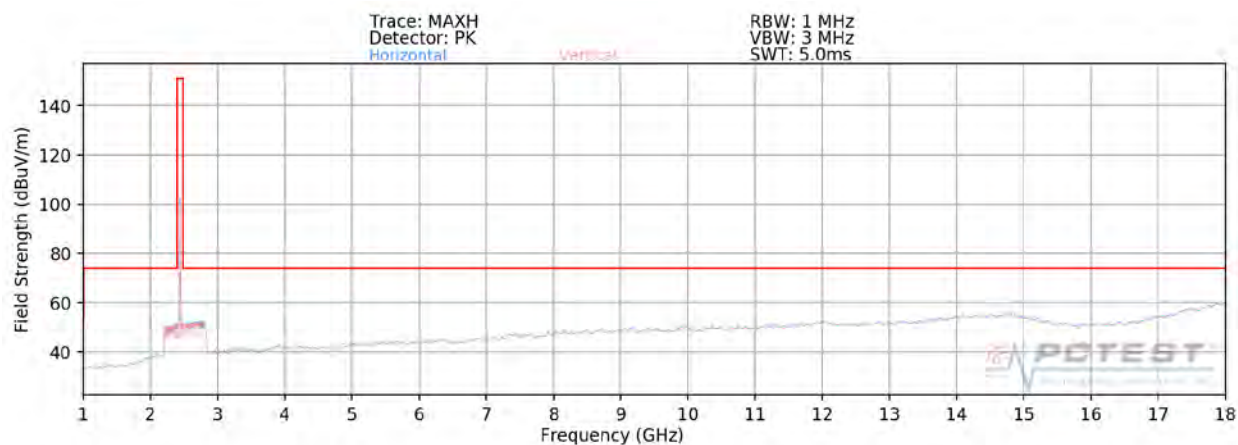

Plot 7-112. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)

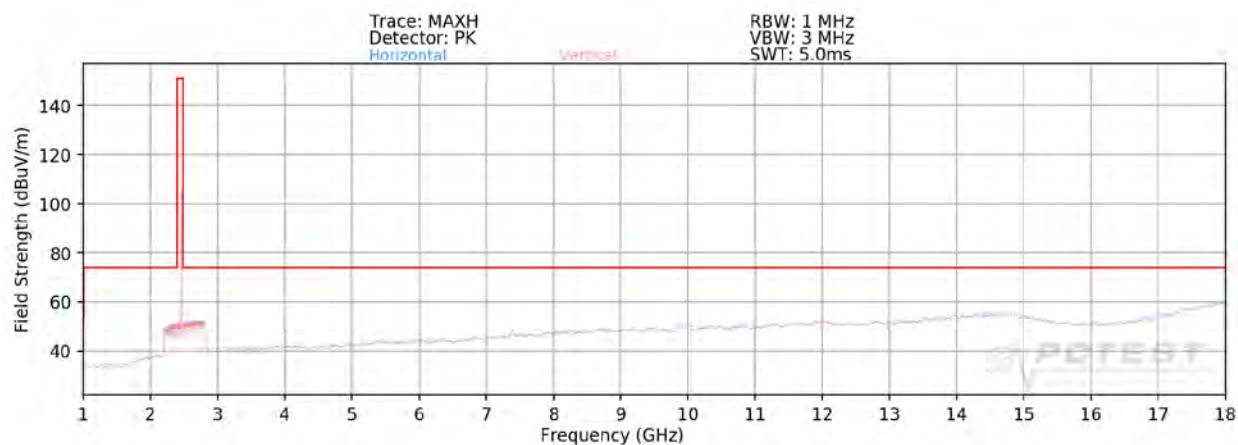


Plot 7-113. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 89 of 119

SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

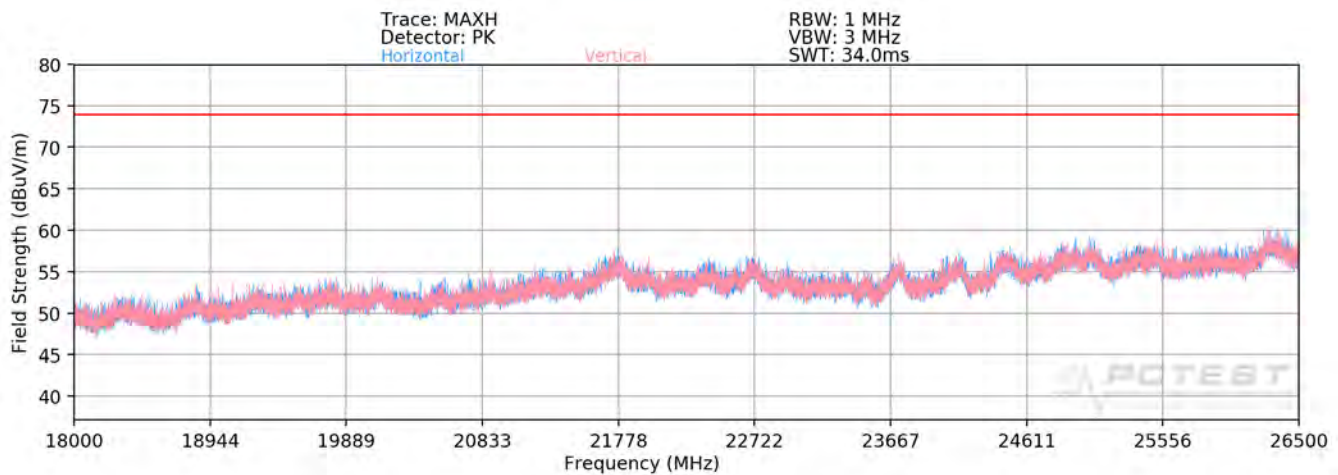

Plot 7-114. Radiated Spurious Plot above 18GHz SISO ANT2

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 90 of 119

SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	111	32	-64.73	3.65	45.92	53.98	-8.06
4824.00	Peak	H	111	32	-60.72	3.65	49.93	73.98	-24.05
12060.00	Avg	H	-	-	-75.36	15.69	47.33	53.98	-6.65
12060.00	Peak	H	-	-	-67.90	15.69	54.79	73.98	-19.19

Table 7-17. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	112	293	-64.96	3.89	45.93	53.98	-8.05
4874.00	Peak	H	112	293	-61.56	3.89	49.33	73.98	-24.65
7311.00	Avg	H	344	4	-70.96	9.06	45.10	53.98	-8.88
7311.00	Peak	H	344	4	-65.12	9.06	50.94	73.98	-23.04
12185.00	Avg	H	-	-	-75.36	15.18	46.82	53.98	-7.16
12185.00	Peak	H	-	-	-67.70	15.18	54.48	73.98	-19.50

Table 7-18. Radiated Measurements SISO ANT2

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05-A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 91 of 119

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	332	4	-67.81	3.85	43.04	53.98	-10.94
4924.00	Peak	H	332	4	-63.76	3.85	47.09	73.98	-26.89
7386.00	Avg	H	341	6	-72.35	9.30	43.95	53.98	-10.03
7386.00	Peak	H	341	6	-65.23	9.30	51.07	73.98	-22.91
12310.00	Avg	H	-	-	-75.27	15.56	47.29	53.98	-6.69
12310.00	Peak	H	-	-	-68.35	15.56	54.21	73.98	-19.77

Table 7-19. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-79.49	9.31	36.82	53.98	-17.16
4824.00	Peak	H	-	-	-69.74	9.31	46.57	73.98	-27.41
12060.00	Avg	H	-	-	-83.35	21.84	45.49	53.98	-8.49
12060.00	Peak	H	-	-	-71.71	21.84	57.13	73.98	-16.85

Table 7-20. Radiated Measurements SISO ANT2 with WCP


FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 92 of 119

7.7.3 MIMO/CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

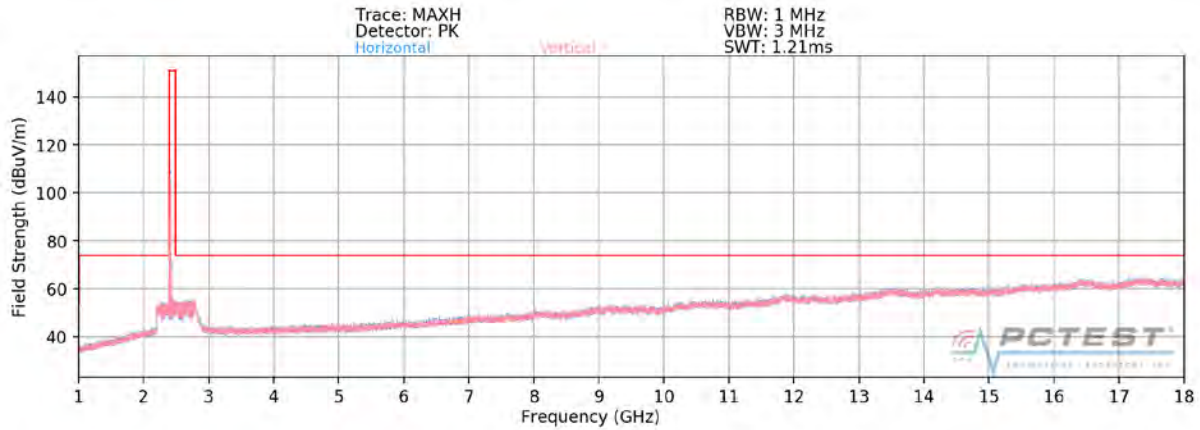

Plot 7-115. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 1)

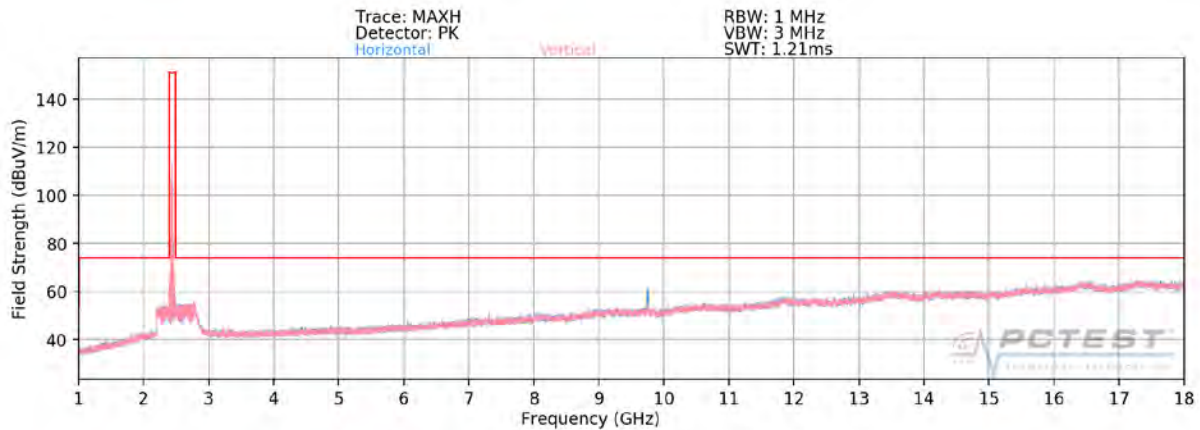

Plot 7-116. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 6)

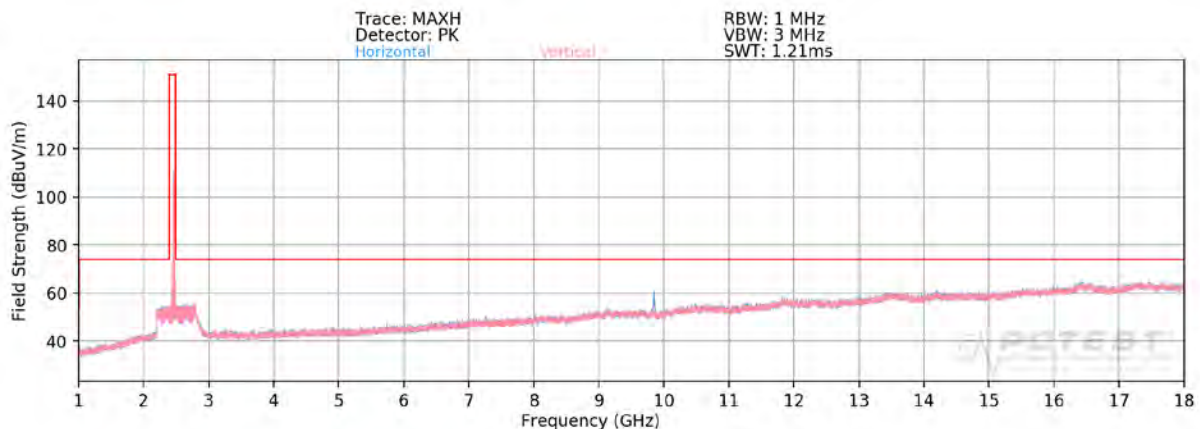


Plot 7-117. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 11)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 93 of 119

MIMO/CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

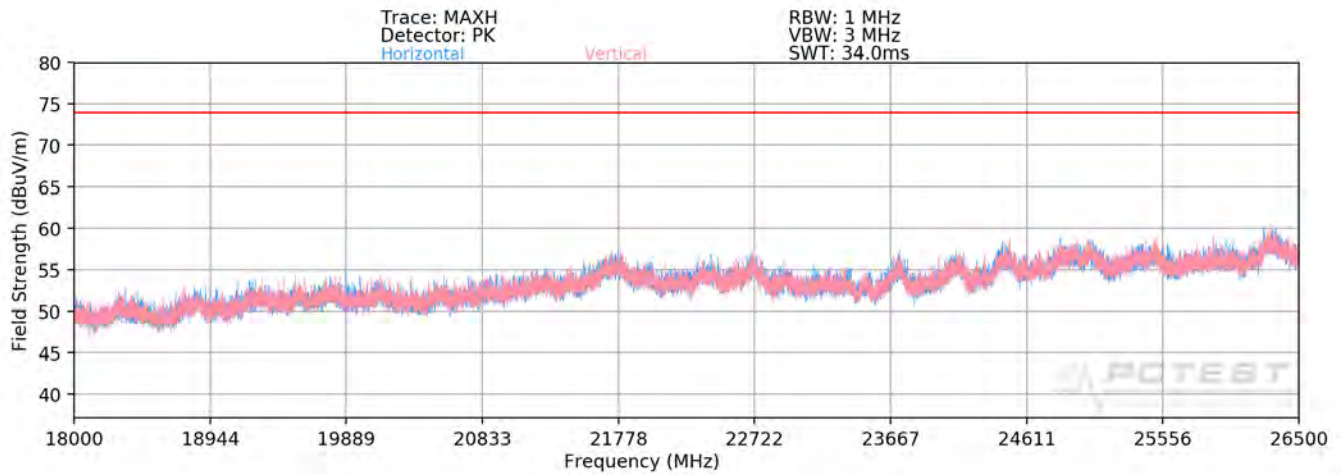

Plot 7-118. Radiated Spurious Plot above 18GHz MIMO/CDD

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 94 of 119

MIMO/CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	335	312	-67.60	3.65	43.05	53.98	-10.93
4824.00	Peak	H	335	312	-59.13	3.65	51.52	73.98	-22.46
12060.00	Avg	H	-	-	-75.59	15.69	47.10	53.98	-6.88
12060.00	Peak	H	-	-	-68.30	15.69	54.39	73.98	-19.59

Table 7-21. Radiated Measurements MIMO/CDD

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	355	325	-67.21	3.89	43.68	53.98	-10.30
4874.00	Peak	H	355	325	-63.26	3.89	47.63	73.98	-26.35
7311.00	Avg	H	264	315	-69.49	9.06	46.57	53.98	-7.41
7311.00	Peak	H	264	315	-60.75	9.06	55.31	73.98	-18.67
12185.00	Avg	H	-	-	-75.57	15.18	46.61	53.98	-7.37
12185.00	Peak	H	-	-	-66.89	15.18	55.29	73.98	-18.69

Table 7-22. Radiated Measurements MIMO/CDD

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 95 of 119

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	331	336	-68.53	3.85	42.32	53.98	-11.66
4924.00	Peak	H	331	336	-59.94	3.85	50.91	73.98	-23.07
7386.00	Avg	H	141	317	-71.61	9.30	44.69	53.98	-9.29
7386.00	Peak	H	141	317	-62.27	9.30	54.03	73.98	-19.95
12310.00	Avg	H	-	-	-75.54	15.56	47.02	53.98	-6.96
12310.00	Peak	H	-	-	-67.83	15.56	54.73	73.98	-19.25

Table 7-23. Radiated Measurements MIMO/CDD

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-81.16	9.31	0.00	35.15	53.98	-18.83
4824.00	Peak	H	-	-	-69.70	9.31	0.00	46.61	73.98	-27.37
12060.00	Avg	H	-	-	-83.35	21.84	0.00	45.49	53.98	-8.49
12060.00	Peak	H	-	-	-72.69	21.84	0.00	56.15	73.98	-17.83

Table 7-24. Radiated Measurements MIMO/CDD with WCP

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 96 of 119

7.7.4 SISO Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1




Plot 7-119. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)



Plot 7-120. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

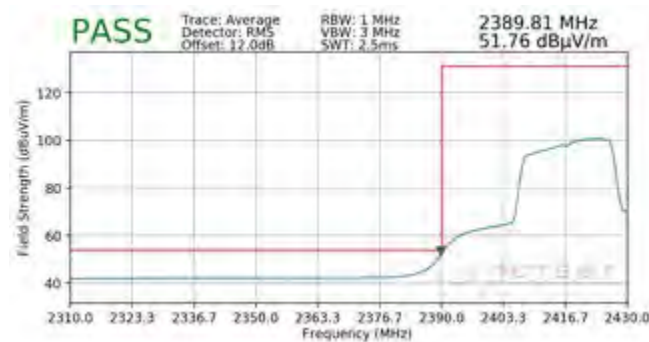


Plot 7-121. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)




Plot 7-122. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 97 of 119

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

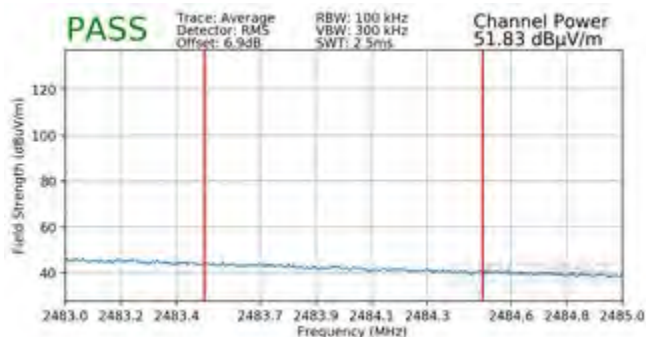


Plot 7-123. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

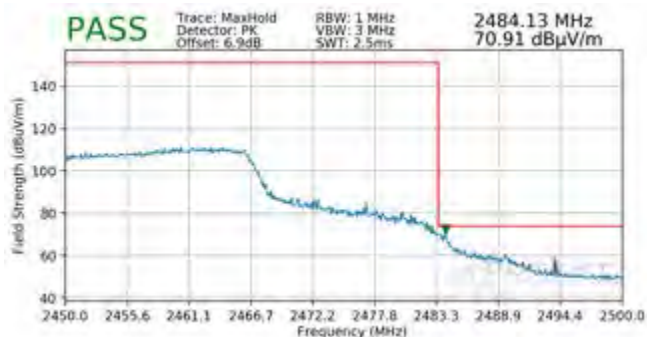


Plot 7-124. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

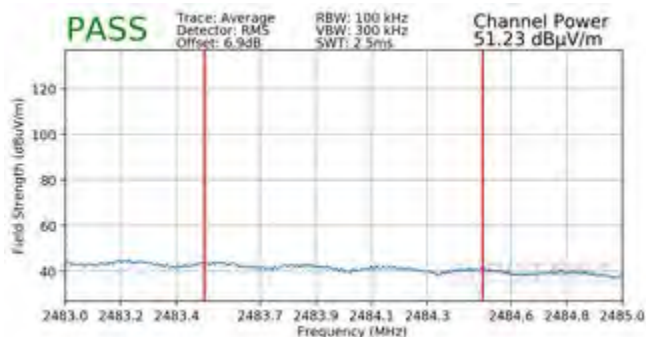

Plot 7-125. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

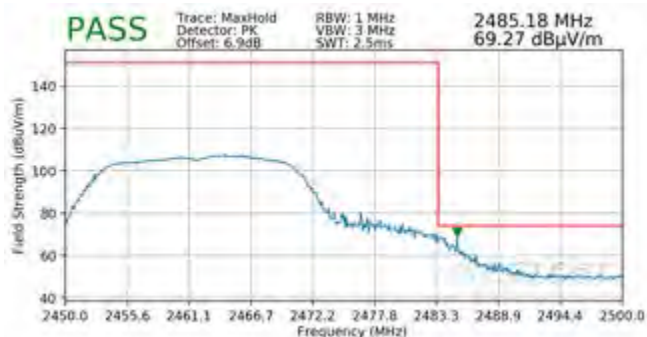


Plot 7-126. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 98 of 119

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12




Plot 7-127. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

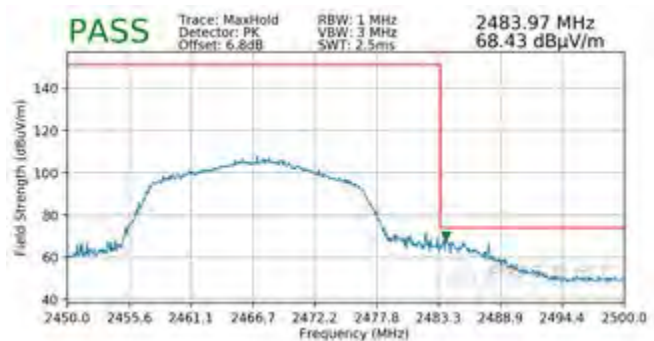


Plot 7-128. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

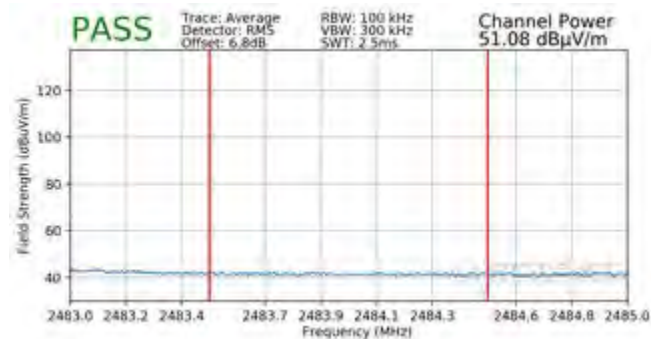

Plot 7-129. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)

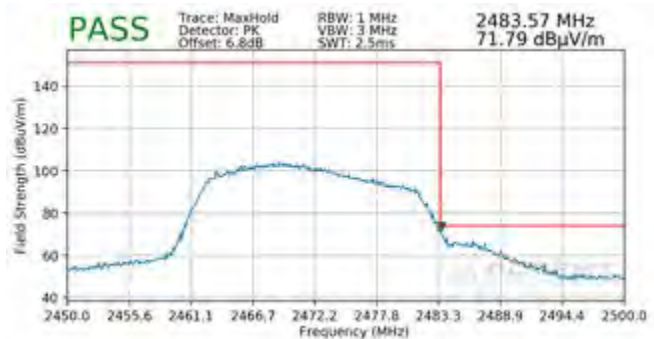

Plot 7-130. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)


FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 99 of 119

7.7.5 SISO Antenna-2 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

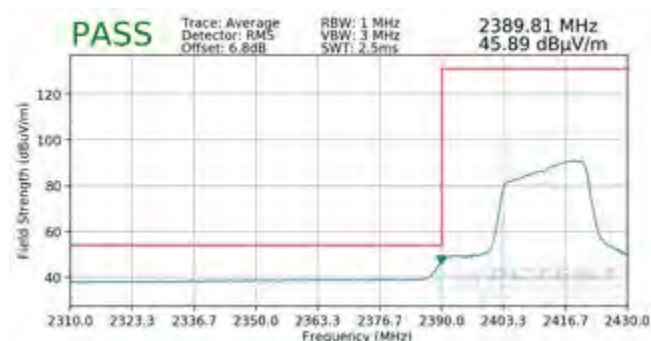


Plot 7-131. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)

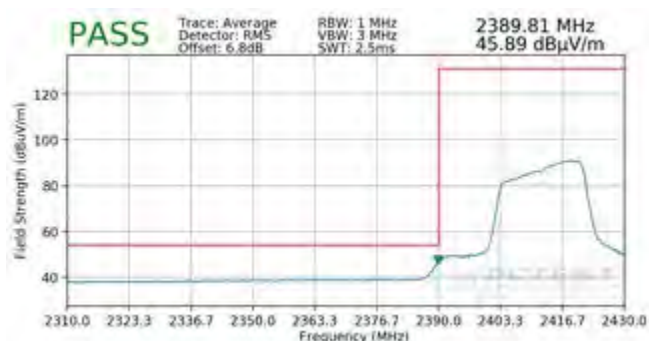


Plot 7-132. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

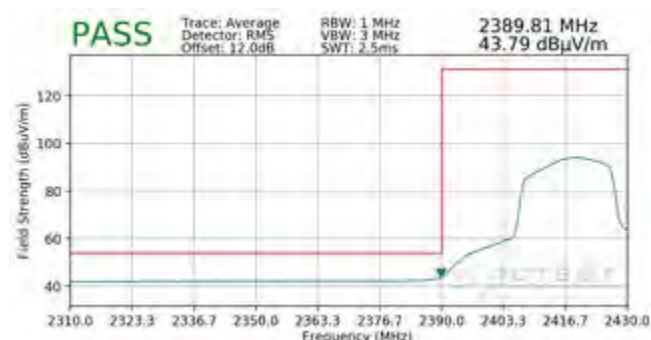


Plot 7-133. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)

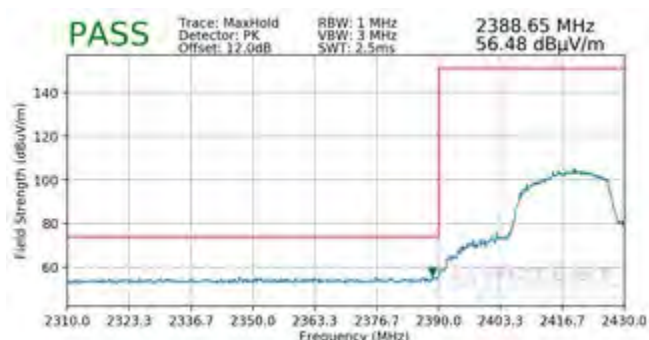


Plot 7-134. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 100 of 119

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10

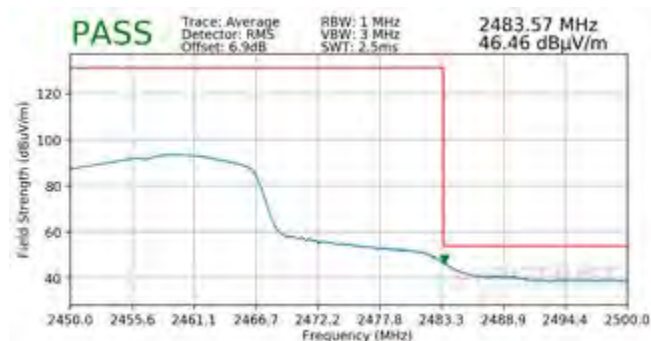


Plot 7-135. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

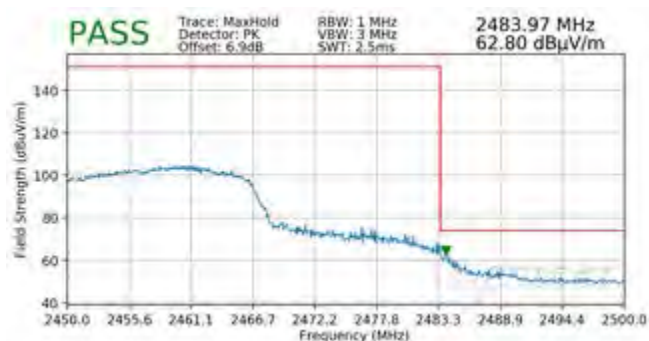


Plot 7-136. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

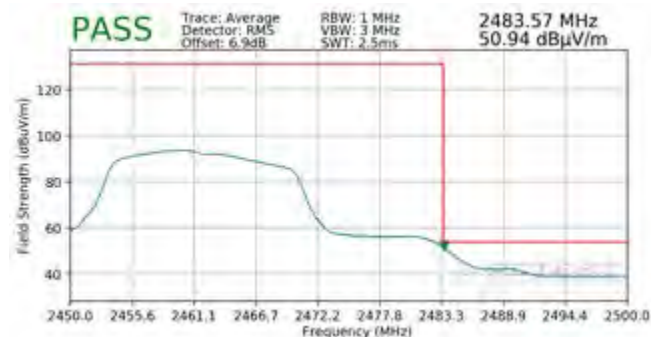

Plot 7-137. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

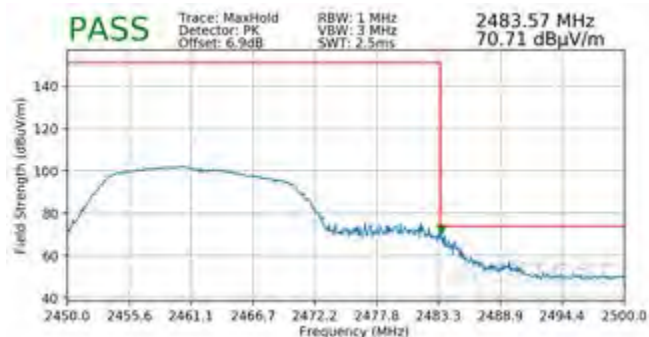

Plot 7-138. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 101 of 119

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12




Plot 7-139. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)




Plot 7-140. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

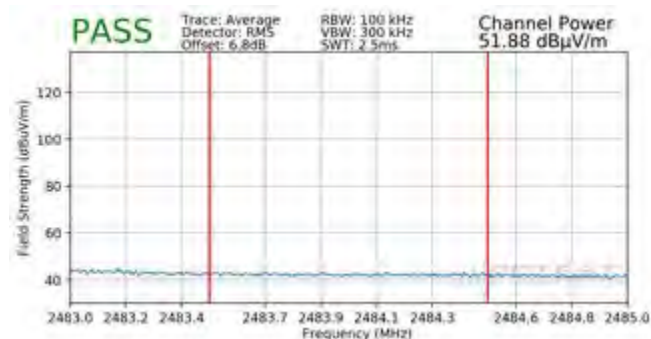

Plot 7-141. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

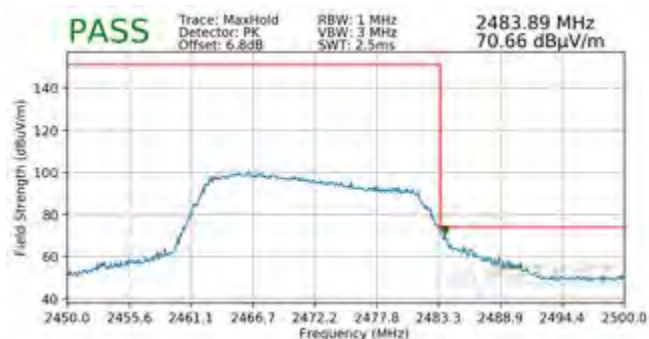

Plot 7-142. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)


FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 102 of 119

7.7.6 MIMO/CDD Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

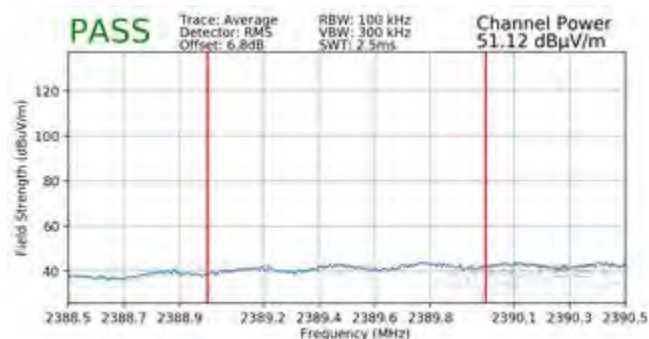


Plot 7-143. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

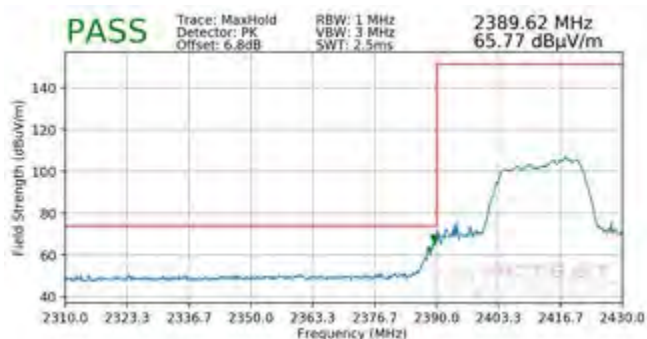


Plot 7-144. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

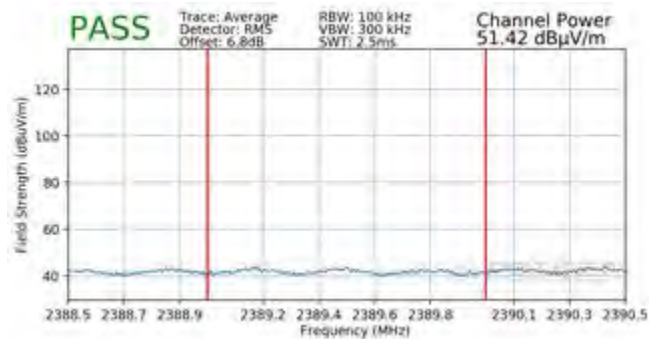

Plot 7-145. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

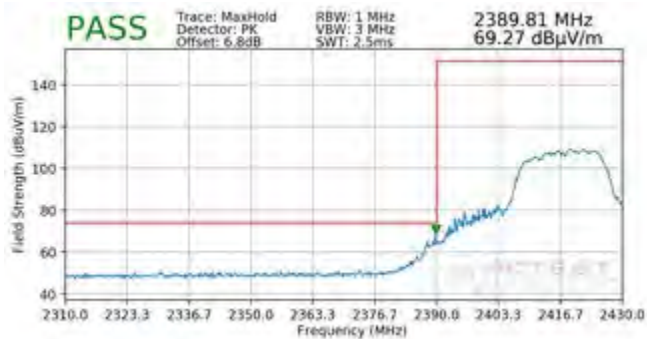


Plot 7-146. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 103 of 119

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2457MHz
Channel:	10




Plot 7-147. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

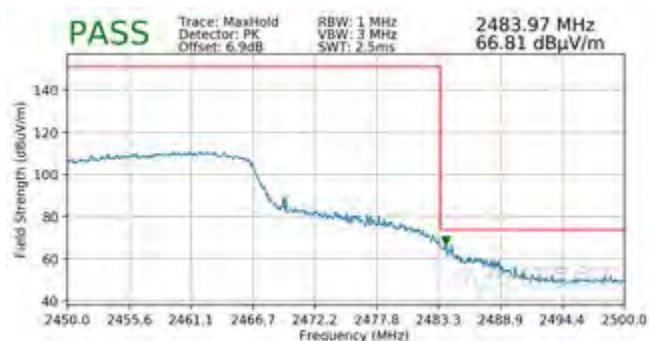


Plot 7-148. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

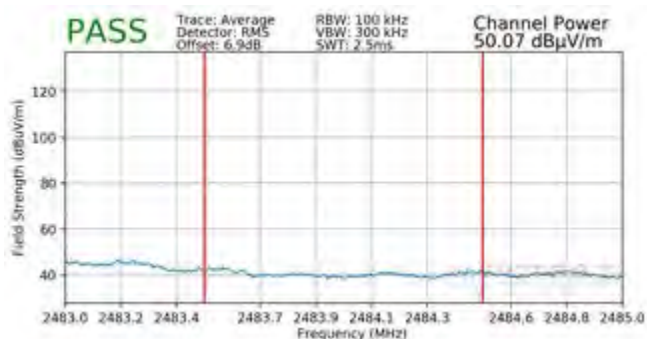


Plot 7-149. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

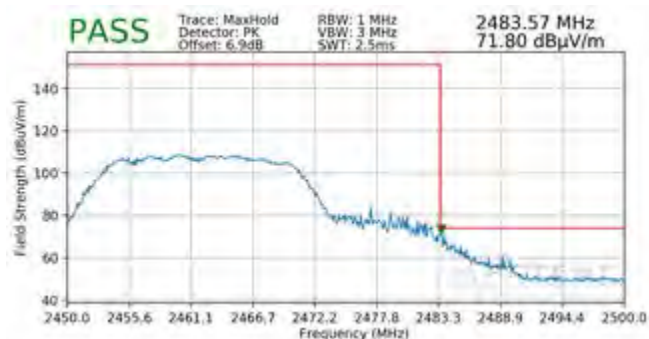


Plot 7-150. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 104 of 119

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

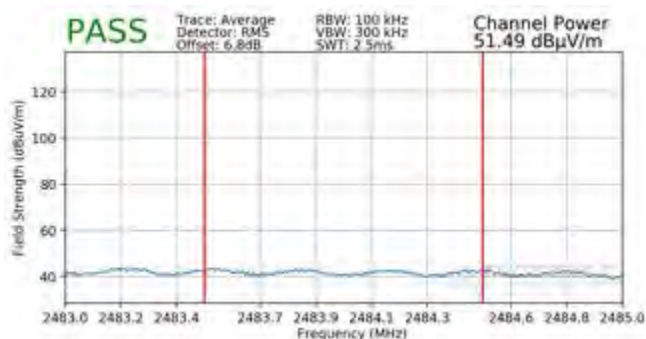


Plot 7-151. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

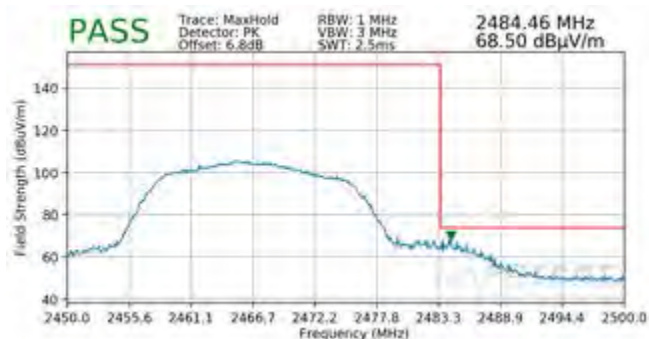


Plot 7-152. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

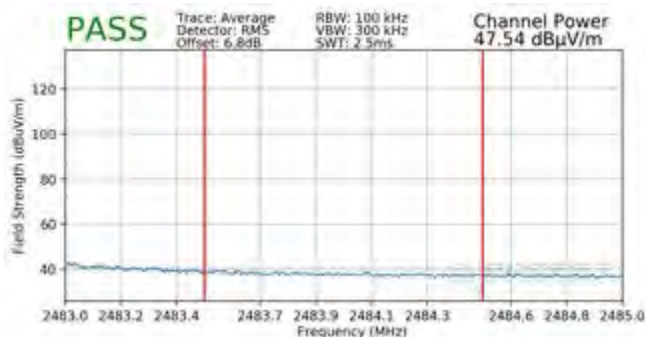

Plot 7-153. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

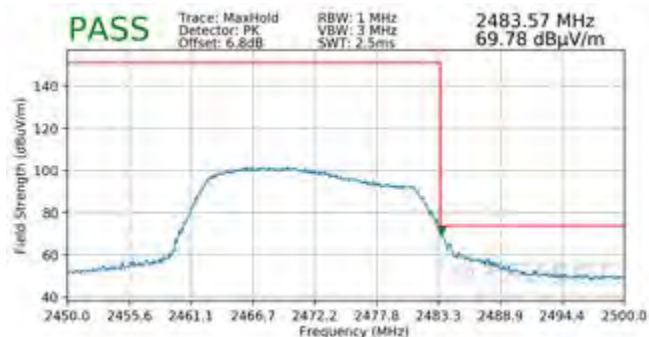


Plot 7-154. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 105 of 119

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1



Plot 7-155. Radiated Restricted Band Edge Measurement MIMO with WCP (Average)

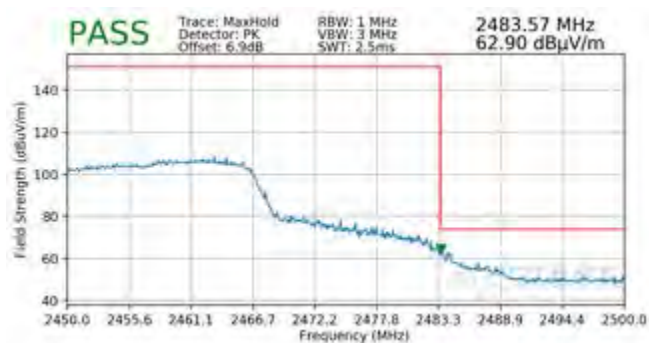

Plot 7-156. Radiated Restricted Band Edge Measurement MIMO with WCP (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 106 of 119

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1




Plot 7-157. Radiated Restricted Lower Band Edge Measurement CDD (Average)




Plot 7-158. Radiated Restricted Lower Band Edge Measurement CDD (Peak)

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2

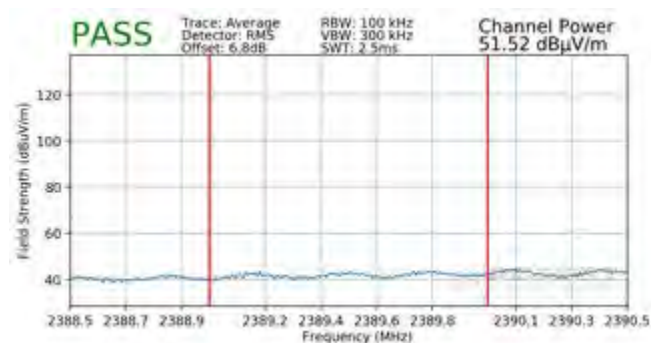


Plot 7-159. Radiated Restricted Lower Band Edge Measurement CDD (Average)

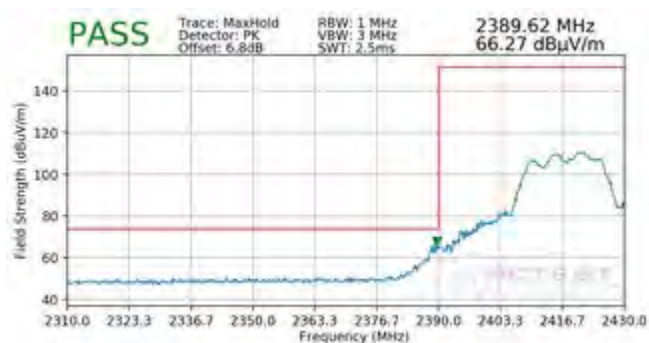

Plot 7-160. Radiated Restricted Lower Band Edge Measurement CDD (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 107 of 119

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

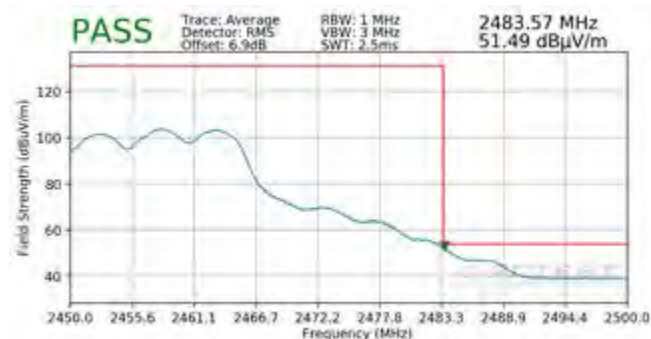


Plot 7-161. Radiated Restricted Upper Band Edge Measurement CDD (Average)




Plot 7-162. Radiated Restricted Upper Band Edge Measurement CDD (Peak)

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

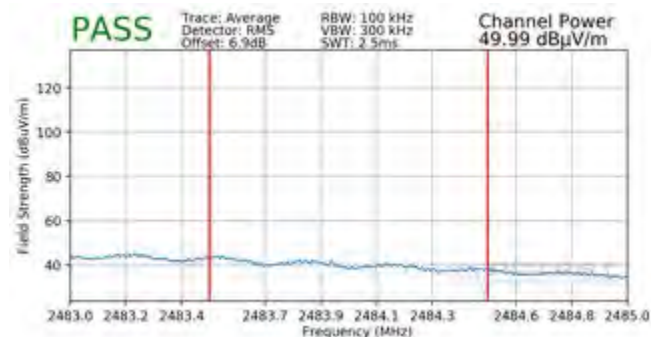

Plot 7-163. Radiated Restricted Upper Band Edge Measurement CDD (Average)

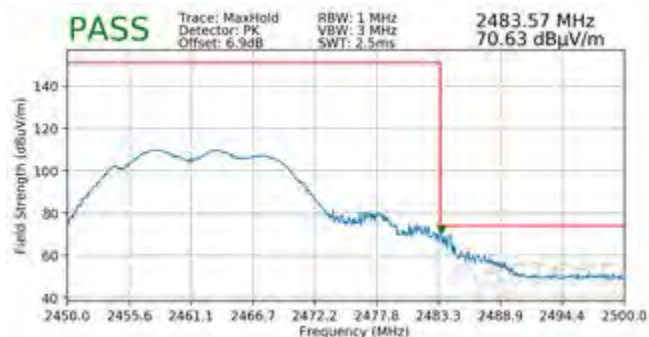

Plot 7-164. Radiated Restricted Upper Band Edge Measurement CDD (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 108 of 119

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12



Plot 7-165. Radiated Restricted Upper Band Edge Measurement CDD (Average)




Plot 7-166. Radiated Restricted Upper Band Edge Measurement CDD (Peak)

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13



Plot 7-167. Radiated Restricted Upper Band Edge Measurement CDD (Average)

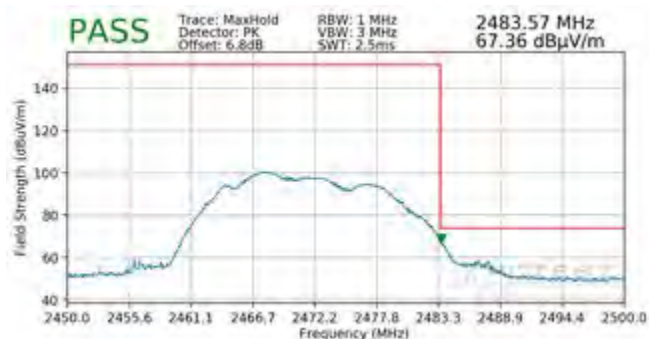


Plot 7-168. Radiated Restricted Upper Band Edge Measurement CDD (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 109 of 119

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2417MHz
Channel: 2



Plot 7-169. Radiated Restricted Band Edge Measurement CDD with WCP (Average)

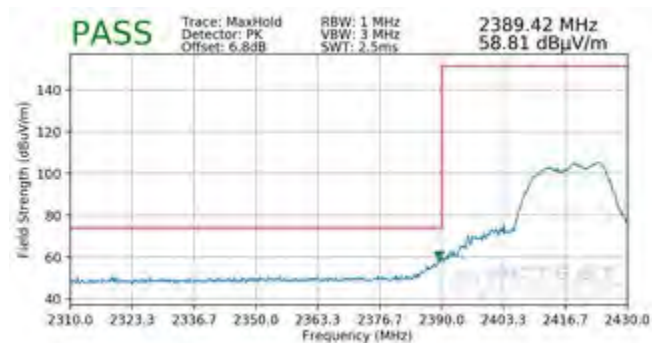

Plot 7-170. Radiated Restricted Band Edge Measurement CDD with WCP (Peak)

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 110 of 119

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 111 of 119	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

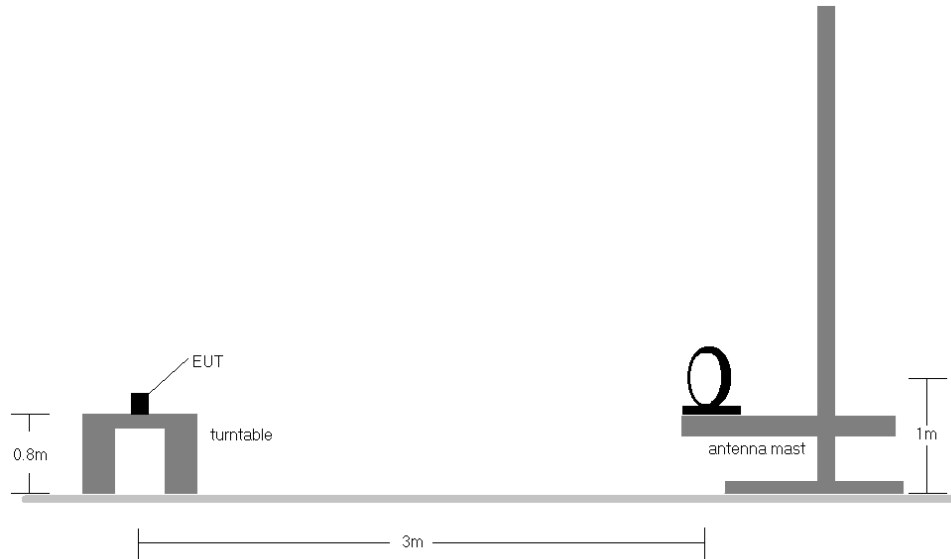


Figure 7-7. Radiated Test Setup < 30Mhz

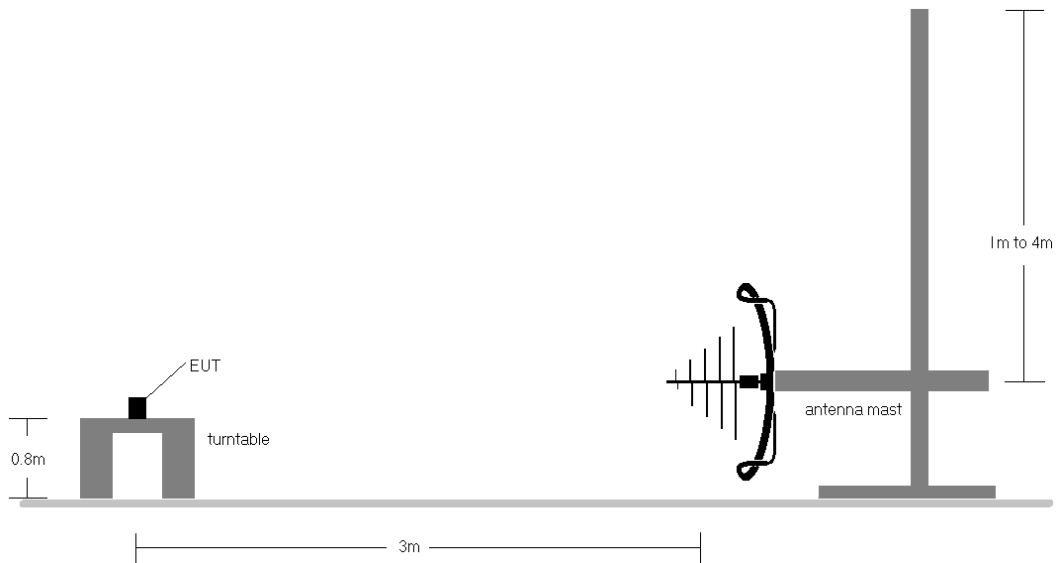


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 112 of 119


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 113 of 119	

MIMO Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

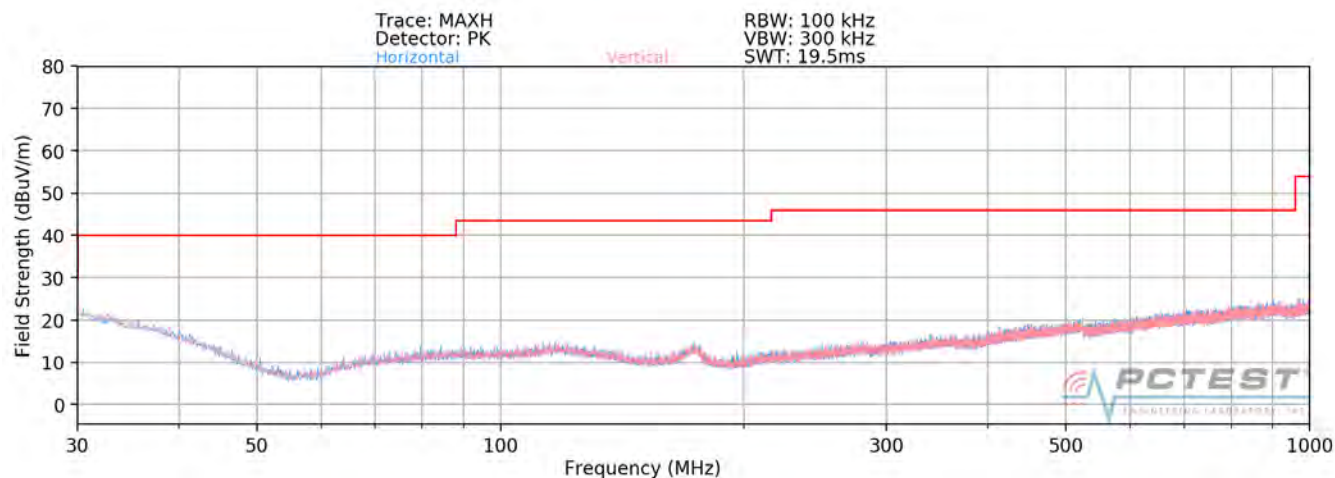

Plot 7-171. Radiated Spurious Plot below 1GHz MIMO

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 114 of 119

7.9 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-26. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 115 of 119	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


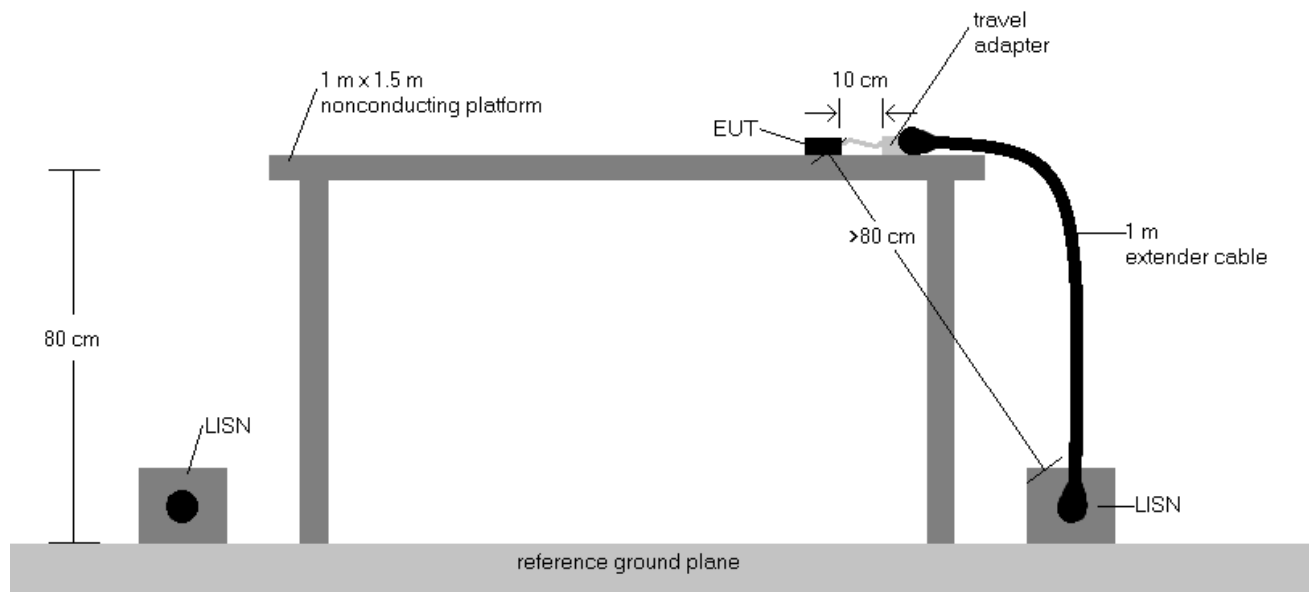


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 116 of 119

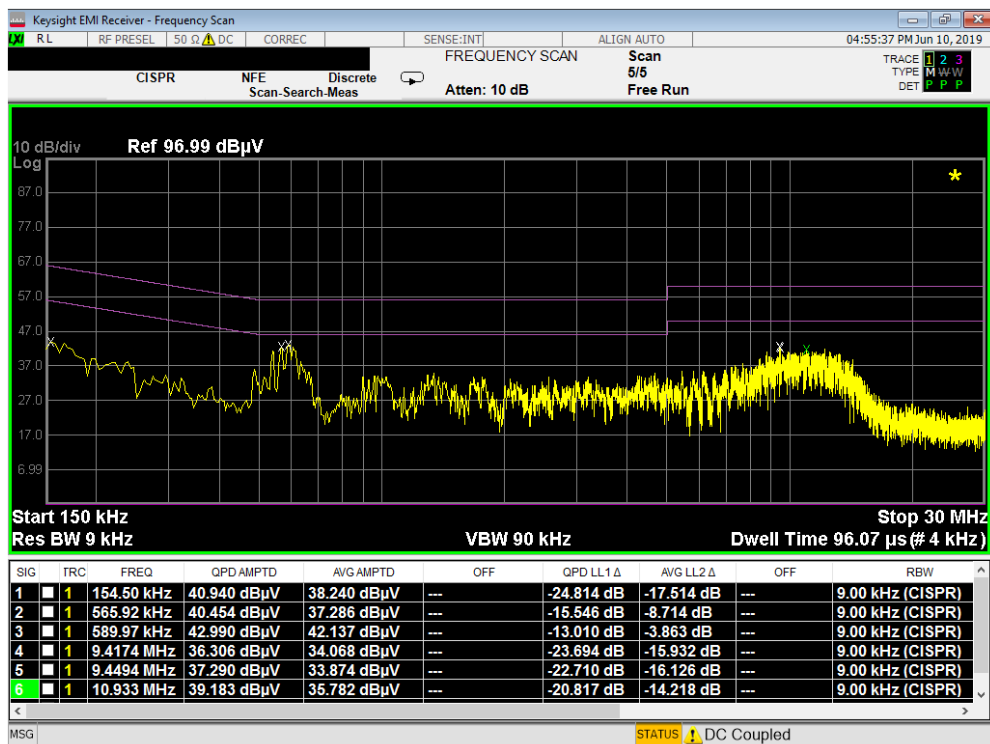


Plot 7-172. Line Conducted Plot with 802.11b (L1) with Travel Adapter

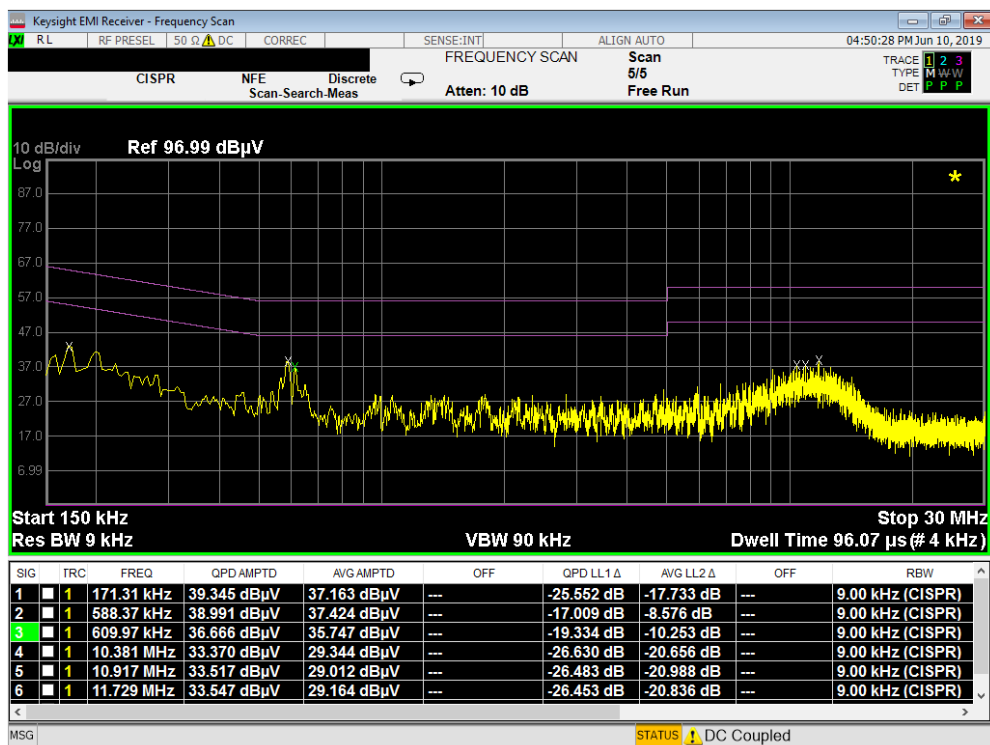


Plot 7-173. Line Conducted Plot with 802.11b (N) with Travel Adapter

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 117 of 119

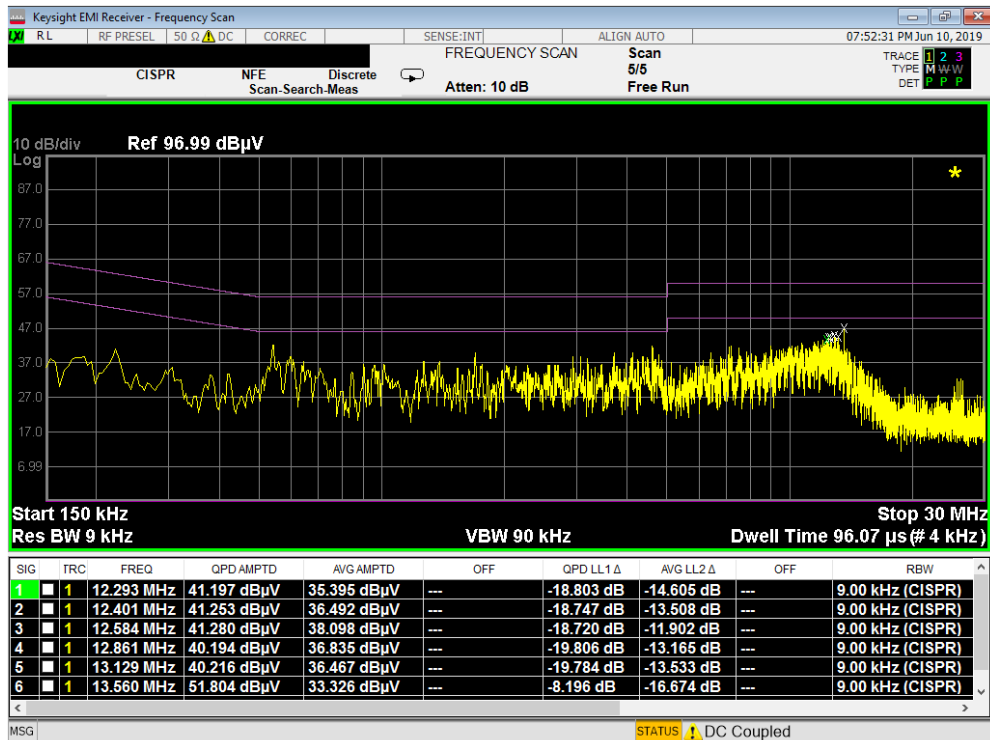

Plot 7-174. Line Conducted Plot with 802.11b (L1) with Wireless Charging Pad

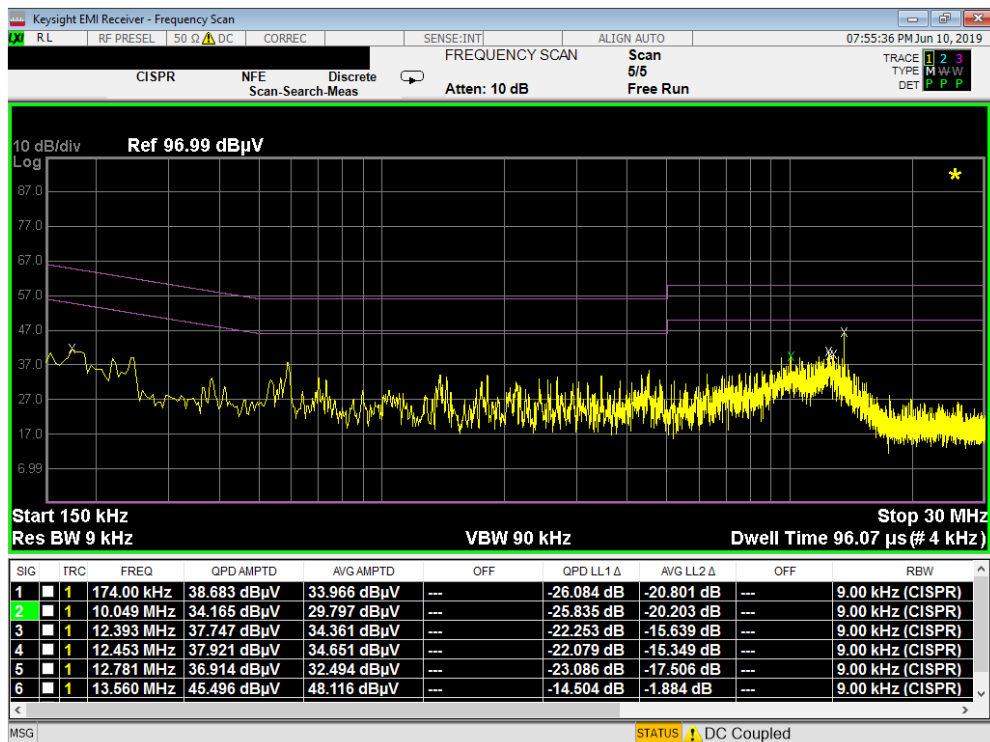

Plot 7-175. Line Conducted Plot with 802.11b (N) with Wireless Charging Pad

FCC ID: A3LSMN975JPN	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset		Page 118 of 119

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN975JPN** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMN975JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1907090122-05.A3L	Test Dates: 05/20 - 08/15/2019	EUT Type: Portable Handset	Page 119 of 119	