

MEASUREMENT REPORT
FCC PART 15.407 802.11ax (OFDMA)**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

1/29/2026 - 7/10/2026

Test Report Issue Date:

7/22/2026

Test Site/Location:

Element Lab., Columbia, MD, USA

Element Lab., Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2601220004-07-R1.A3L

FCC ID:

A3LSMO200J

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-O200J

Additional Model(s):

SM-O201J, SM-O202J, SM-O203J, SM-O204J, SM-O205J

EUT Type:

Extended Reality Glasses

Frequency Range:

5180 – 5885MHz

Modulation Type:

OFDMA

FCC Equipment Class:

Unlicensed National Information Infrastructure TX (NII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

FCC Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N:1M2601220004-07-R1.A3L) supersedes and replaces the previously issued test report (S/N: 1M2601220004-07.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 1 of 103

TEST REPORT REVISION HISTORY

Rev. No.	Description	Issue Date	Revised By
-	Initial Release	7/17/2026	WKR0000005883
1	Addressed comments made by TCB reviewer	7/22/2026	WKR0000005883

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 2 of 103

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description.....	8
2.4	Test Configuration.....	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s) / Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	Radiated Emissions.....	9
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS	15
7.1	Summary.....	15
7.2	26dB Bandwidth Measurement.....	17
7.2.1	Antenna-1 26dB Bandwidth Measurements.....	20
7.3	6dB Bandwidth Measurement	24
	Antenna-1 6dB Bandwidth Measurements.....	27
7.3.1	Antenna-1 OBW Measurements.....	34
7.4	UNII Output Power Measurement.....	41
7.5	Maximum Power Spectral Density	49
7.5.1	Antenna-1 Power Spectral Density Measurements.....	52
7.6	Radiated Emission Measurements	64
7.6.1	Radiated Spurious Emission Measurements (26 Tones)	70
7.6.2	Radiated Spurious Emission Measurements (242 Tones)	78
7.6.3	Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)	86
7.6.4	Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)	89
7.6.5	Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)	92
7.6.6	Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)	95
7.6.7	Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T).....	98
8.0	CONCLUSION.....	101
9.0	APPENDIX A – DATA REFERENCING SPOT-CHECKS	102

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 3 of 103

MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	Antenna-1	
			Max. Power [mW]	Max. Power [dBm]
20	1	5180 - 5240	18.79	12.74
	2A	5260 - 5320	18.63	12.70
	2C	5500 - 5720	19.19	12.83
	3	5745 - 5825	18.16	12.59
	4	5845 - 5885	2.85	4.56
40	1	5190 - 5230	17.52	12.44
	2A	5270 - 5310	17.31	12.38
	2C	5510 - 5710	17.71	12.48
	3	5755 - 5795	16.43	12.16
	4	5835 - 5875	2.69	4.29
80	1	5210	16.61	12.20
	2A	5290	16.71	12.23
	2C	5530 - 5690	17.83	12.51
	3	5775	17.53	12.44
	4	5855	2.69	4.29
160	1/2A	5250	16.35	12.14
	2C	5570	16.63	12.21
	3/4	5815	2.69	4.30

EUT Overview

Note: The UNII Band 4 max power values shown in the above table are e.i.r.p values.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 4 of 103		

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4:2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. ("MD")

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered test laboratory with the site description on file with ISSED (Wireless Test Lab number 2451B) and FCC (Designation Number US1113).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea. ("KR")

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 5 of 103

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Extended Reality Glasses FCC ID: A3LSMO200J**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

This device is a variant device that applies Data Referencing from a parent model approved under FCC ID: A3LSMO200P. A summary of the referenced data can be found in Section 7.0 and the corresponding data referencing spot-check data can be found in Section 9.0 of this test report.

Test Device Serial No.: 260302MD10, 260302MD11, 260302MD12, 260302MD13, 260302MD14, 260302MD15, 260302MD16, 260302MD17, 260608MD04, 260609MD03, 260518MD15, 260518MD16, 260518MD17, 260609MD01, 260609MD02, 260518MD18, 260612MD01, 260612MD02, 260624MD02, 260624MD03, 260624MD04, 260624MD05

2.2 Device Capabilities

This device contains the following capabilities:

BT (LE, BDR, EDR), 2.4GHz WLAN (802.11b/g/n/ac/ax), 5 and 6GHz UNII (a/n/ac/ax)

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825	177	5885

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755	167	5835
:	:	:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795	175	5875
				:	:				
				142	5710				

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775	167	5835
				:	:				
				122	5610				
				:	:				
				138	5690				

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 6 of 103

Band 1/2A		Band 2C		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570	163	5815

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10:2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Band	Bandwidth	Tone Type	Tone Size	ANT1	
				Duty Cycle [%]	Radiated DCCF [dB]
5GHz	20MHz	RU	26T	99.71	N/A
			52T	99.71	N/A
			106T	99.62	N/A
			242T	99.16	N/A
	40MHz	RU	26T	99.71	N/A
			52T	99.71	N/A
			106T	99.62	N/A
			242T	99.21	N/A
			484T	98.33	N/A
	80MHz	RU	26T	99.71	N/A
			52T	99.71	N/A
			106T	99.62	N/A
			242T	99.38	N/A
			484T	98.33	N/A
			996T	97.55	0.11
	160MHz	RU	26T	99.71	N/A
			52T	99.71	N/A
			106T	99.62	N/A
			242T	99.16	N/A
			484T	98.27	N/A
			996T	97.55	0.11
			2x996T	97.48	0.11

Table 2-5. Measured Duty Cycles

- The device supports the following data rates (shown in Mbps):

MCS Index	Spatial Stream	OFDMA (802.11ax)																							
		26T			52T			106T			242T			484T			996T			2x996T					
		0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI
0	0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3		
1	1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5		
2	2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8		
3	3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245		
4	4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5		
5	5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490		
6	6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3		
7	7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5		
8	8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735		
9	9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7		
10	10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8		
11	11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8		
12	12	1	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5		
13	13	1	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225		

Table 2-6. Supported Data Rates

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 7 of 103		

2.3 Antenna Description

The manufacturer provided the antenna gains which can affect the validity of test results used for determination of compliance. The following antenna gains are used in this device per the "Unlicensed Band Antenna Gain" document provided by the client. This document is also included in the filing as a public exhibit.

Frequency [MHz]	Antenna 1 Gain [dBi]
5180 – 5240	-6.20
5260 – 5320	-6.28
5500 – 5720	-5.77
5745 – 5825	-7.12
5835 – 5885	-8.03

Table 2-7. Antenna Peak Gain

2.4 Test Configuration

ANSI C63.10:2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See the 5GHz OFDM Test Report for AC line conducted emissions test setups, 7.6 for radiated emissions test setups, and 7), 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

The EUT has four configurations: one is with both ear arm fully open, one is with left ear arm closed/right ear arm open, one is with left ear arm open/right ear arm closed, and one is with both ear arm closed. All configurations are tested, and the worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with software/firmware version 020XXUEU0AZE3 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 8 of 103

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4:2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4:2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 9 of 103

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 10 of 103

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget – MD

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

Table 5-2. Measurement Uncertainty Budget – KR

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 11 of 103

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	MD 1M 40	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	MD 1M 40
-	AP1-002	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	AP1-002
-	AP2-001	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-001
-	AP2-002	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-002
-	ETS-001	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-001
-	ETS-002	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-002
-	WL25-1	Conducted Cable Set (25GHz)	1/30/2026	Annual	1/30/2027	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	1/30/2026	Annual	1/30/2027	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	1/30/2026	Annual	1/30/2027	WL40-1
-	WL40-2	Conducted Cable Set (40GHz)	1/30/2026	Annual	1/30/2027	WL40-2
Anritsu	MA24408A	POWER SENSOR	1/27/2026	Annual	1/27/2027	11676
Anritsu	MA24408A	POWER SENSOR	3/4/2026	Annual	3/4/2027	11675
Anritsu	MA24408A	POWER SENSOR	1/27/2026	Annual	1/27/2027	12798
Anritsu	MA24408A	POWER SENSOR	3/4/2026	Annual	3/4/2027	12776
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2026	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	1/26/2026	Biennial	1/26/2028	9203-2178
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	6/4/2025	Biennial	6/4/2027	125518
ETS-Lindgren	3116C	DRG Horn Antenna	4/22/2025	Biennial	4/22/2027	218893
Keysight Technologies	N9030A	PXA Signal Analyzer	11/3/2025	Annual	11/3/2026	MY54490576
Keysight Technologies	N9038A	MXE EMI Receiver	11/10/2025	Annual	11/10/2026	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer	11/3/2025	Annual	11/3/2026	MY54490576
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/30/2026	Annual	1/30/2027	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	12/19/2025	Annual	12/19/2026	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	1/16/2026	Annual	1/16/2027	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	12/19/2025	Annual	12/19/2026	100342
Rohde & Schwarz	ENV216	Two-Line V-Network	2/4/2026	Biennial	2/4/2028	101379
Rohde & Schwarz	180-422-KF	Horn (18 - 40GHz)	10/9/2024	Biennial	10/9/2026	U157403-01
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Sunol	JB6	Bi-Log Antenna (30M - 5GHz)	3/24/2025	Biennial	3/24/2027	A082816

Table 6-1. Test Equipment Calibration Table - MD

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Rohde & Schwarz	ESW	EMI Test Receiver	09/15/2025	Annual	09/14/2026	101955
schwarzbeck	VULB9162	Broadband TRILOG Antenna	06/05/2025	Biennial	06/04/2027	9162-217
Sunol Sciences	DRH-118	Horn Antenna	05/14/2026	Annual	05/13/2027	A102416-1
-	UEK1	EMC Cable and Switch System	01/28/2026	Annual	01/27/2027	UEK1

Table 6-2. Test Equipment Calibration Table - KR

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment listed with "N/A" under calibration information was not used to make calibrated measurements.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 12 of 103		

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable TM40-K1K1-30	20233002 004
Uniflex Micro Coax UFB 142A-Q-0984-200200	64639 232063 001
R&S TS-PR1840	9037.7670.02

Table 6-3. MD 1M 18-40 EMC Cable and Switch System Components

Component	Serial Number
Sucoflex 106A Cable	501992
MegaPhase Cable N29-N1N1-324	20335606 001
Rohde & Schwarz SF Unit	102133
MiniCircuits Cable CBL-2FT-SMSM+	77745
MegaPhase Cable 10511-1	15034701 001
MiniCircuits Switch RC 2SPDT-A18	11703270 041
Sucoflex 104 Cable	320259/4
Sucoflex 104 Cable	321999/4
Sucoflex 104 Cable	321995/4

Table 6-4. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
Flex Cable	P2A-0001
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Chamber Passthrough	CP4/X12
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 6463	232069-001
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181

Table 6-5. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 6-6. AP2-002 EMC Cable and Switch System Components

Component	Serial Number
Pasternack Cable RG214/U	111815
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001

Table 6-7. ETS-001 EMC Cable and Switch System Components

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 13 of 103

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20502201 001
Rohde & Schwarz SF Unit	102134
Minicircuits Cable CBL=0.5M-NMNM+	15440

Table 6-8. ETS-002 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable, Model: TM26-S1S1-30	20929201 004
Pasternack 6dB Attenuator, Model: PE7005-6	N/A

Table 6-9. WL25-1 Conducted Cable Set Components

Component	Serial Number
Mini-Circuits Cable, Model: CBL-2FT-SMSM+	77743
MCL 6dB Attenuator, Model: BW-S6W2+	1314

Table 6-10. WL25-2 Conducted Cable Set Components

Component	Serial Number
MegaPhase Cable, Model: TM40-K1K1-36	18160102 001
MCL 10dB Attenuator, Model: BW-K10 2W44+	1902

Table 6-11. WL40-1 Conducted Cable Set Components

Component	Serial Number
MegaPhase Cable, Model: TM40-K1K1-30	18165902 001
MCL 10dB Attenuator, Model: BW-K10 2W44+	2108

Table 6-12. WL40-2 Conducted Cable Set Components

Component	Serial Number
Rohde & Schwarz SF Unit	102151
ALPHA WIRE H1	6340
HUBER+SUHNER, Inc. SUCOFLEX_104_PE Cable	305916
HUBER+SUHNER, Inc. SUCOFLEX_100	803242-6

Table 6-13. UEK1 EMC Cable and Switch System Components

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 14 of 103

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMO200J
 FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference	Test Lab Location	Data Reference
N/A	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2	MD	Yes
15.407(e)	6dB Bandwidth	>500kHz (5725-5850MHz and 5850 – 5895MHz)		PASS	Section 7.3	MD	Yes
15.407 (a)(1)(iv), (a)(2), (a)(3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)		PASS	Section 7.4	MD	Yes
15.407(a)(3)(iii)	Maximum e.i.r.p. (UNII-4, 5.85 – 5.895GHz)	< 30dBm		PASS	Section 7.4	MD	Yes
15.407 (a)(1)(iv), (a)(2), (a)(3)(i)/(iii)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a)		PASS	Section 7.5	MD	Yes
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report	MD	No
15.407(b)(1) – (b)(5)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)	RADIATED	PASS	Section 7.6	MD & KR	No
15.205, 15.407(b)(1) – (b)(5)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.6	MD & KR	No
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Please see OFDM report	MD	No

Table 7-1. Summary of Test Results

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 15 of 103

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "EMC Software Tool," Version 2.3.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.7.1.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 7) Only one RU index could be selected at a time, so no contiguous or non-contiguous RUs were considered for testing.
- 8) Data was referenced from model SM-O200P for the certification of SM-O200J. See Section 9.0 for spotcheck results.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 16 of 103

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10:2020 – Section 12.5

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 17 of 103		

26dB Bandwidth Measurements

	Frequency [MHz]	802.11 MODE	Channel	Antenna-1 26dB Bandwidth [MHz]	Antenna-1 OBW [MHz]
Band 1	5180	ax (20MHz)	36	18.72	17.15
	5200	ax (20MHz)	40	19.05	17.14
	5240	ax (20MHz)	48	18.92	17.13
	5190	ax (40MHz)	38	23.73	21.79
	5230	ax (40MHz)	46	23.51	21.61
	5210	ax (80MHz)	42	27.39	26.17
Band 1/2A	5250	ax (160MHz)	50	33.75	35.82
Band 2A	5260	ax (20MHz)	52	18.68	17.02
	5280	ax (20MHz)	56	18.89	17.17
	5320	ax (20MHz)	64	18.78	17.17
	5270	ax (40MHz)	54	23.99	21.69
	5310	ax (40MHz)	62	23.73	21.78
	5290	ax (80MHz)	58	29.75	27.38
Band 2C	5500	ax (20MHz)	100	18.82	17.13
	5600	ax (20MHz)	120	18.77	17.09
	5720	ax (20MHz)	144	18.81	17.13
	5510	ax (40MHz)	102	23.85	21.80
	5590	ax (40MHz)	118	23.88	21.81
	5710	ax (40MHz)	142	23.73	21.56
	5530	ax (80MHz)	106	29.87	27.12
	5610	ax (80MHz)	122	27.81	26.35
	5690	ax (80MHz)	138	27.43	25.75
	5570	ax (160MHz)	114	32.45	36.26

Table 7-2. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements (26 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 18 of 103

	Frequency [MHz]	802.11 MODE	Channel	Antenna-1 26dB Bandwidth [MHz]	Antenna-1 OBW [MHz]
Band 1	5180	ax (20MHz)	36	21.73	19.18
	5200	ax (20MHz)	40	21.68	19.20
	5240	ax (20MHz)	48	21.84	19.17
	5190	ax (40MHz)	38	42.88	38.12
	5230	ax (40MHz)	46	42.93	38.12
	5210	ax (80MHz)	42	87.06	78.11
Band 1/2A	5250	ax (160MHz)	50	175.50	157.62
Band 2A	5260	ax (20MHz)	52	21.43	19.18
	5280	ax (20MHz)	56	21.70	19.17
	5320	ax (20MHz)	64	21.69	19.18
	5270	ax (40MHz)	54	42.82	38.14
	5310	ax (40MHz)	62	42.96	38.21
	5290	ax (80MHz)	58	87.91	78.24
Band 2C	5500	ax (20MHz)	100	21.77	19.16
	5600	ax (20MHz)	120	21.53	19.17
	5720	ax (20MHz)	144	21.65	19.20
	5510	ax (40MHz)	102	42.71	38.21
	5590	ax (40MHz)	118	42.36	38.21
	5710	ax (40MHz)	142	43.02	38.24
	5530	ax (80MHz)	106	85.92	78.28
	5610	ax (80MHz)	122	87.24	78.17
	5690	ax (80MHz)	138	86.87	78.17
	5570	ax (160MHz)	114	174.71	157.73


Table 7-3. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements (Full Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 19 of 103		

7.2.1 Antenna-1 26dB Bandwidth Measurements

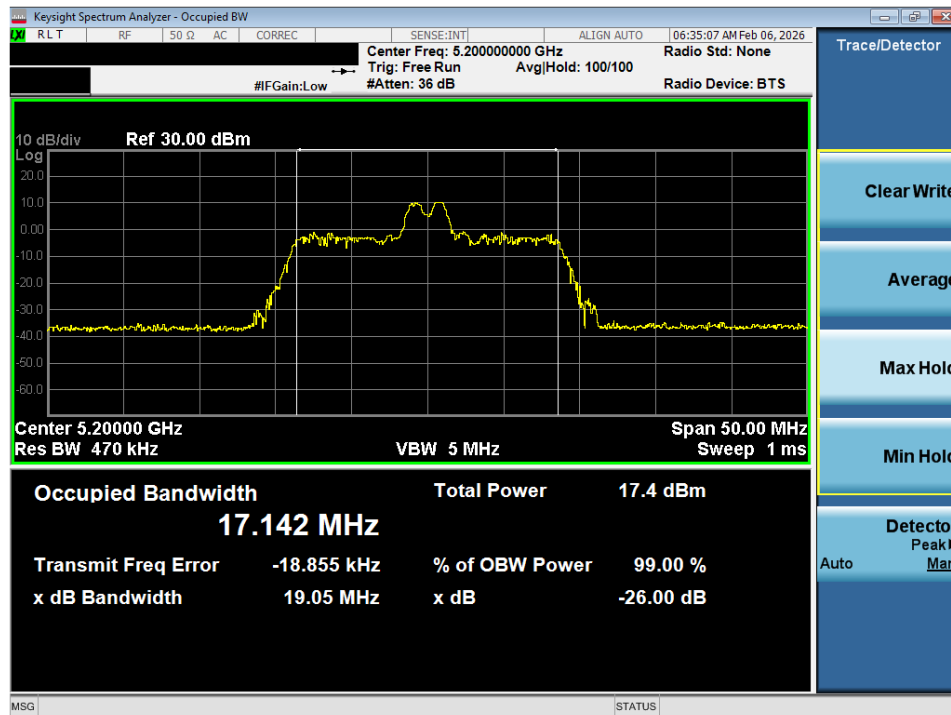


Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

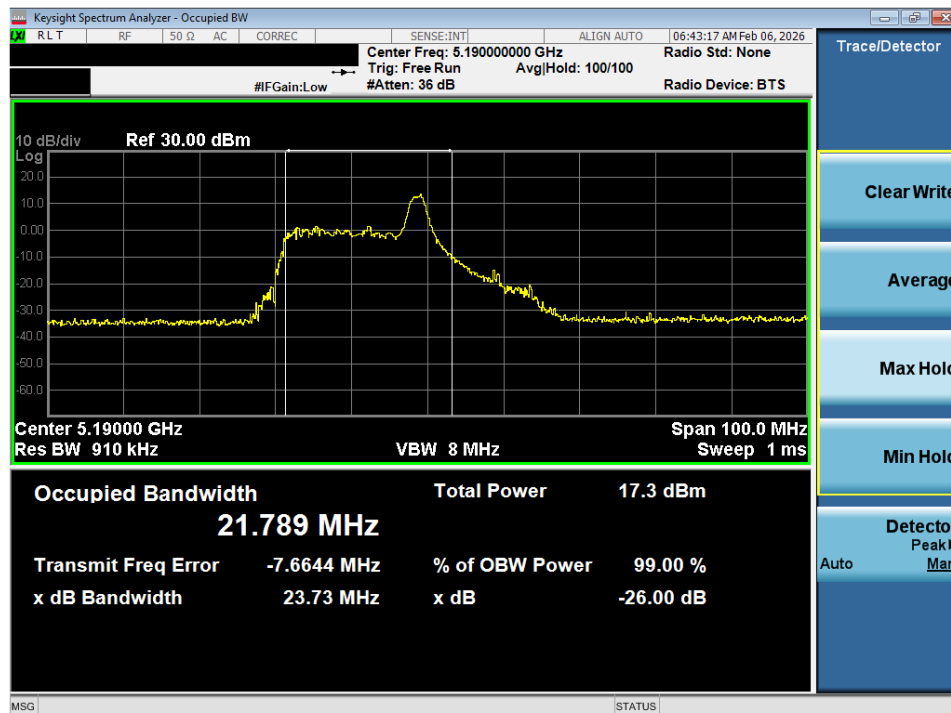


Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 20 of 103

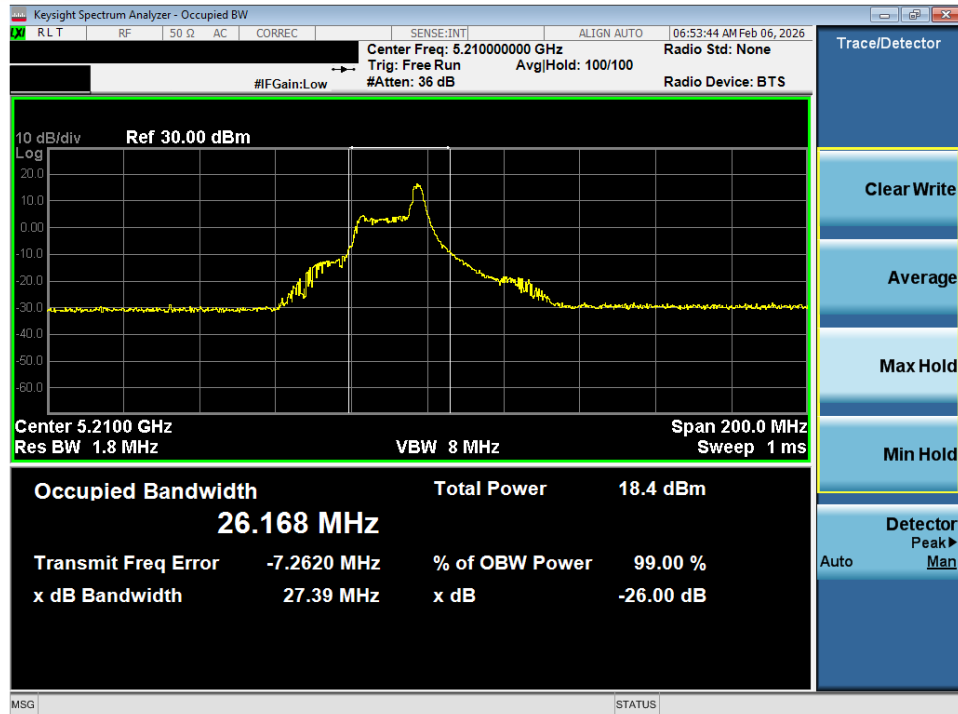


Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

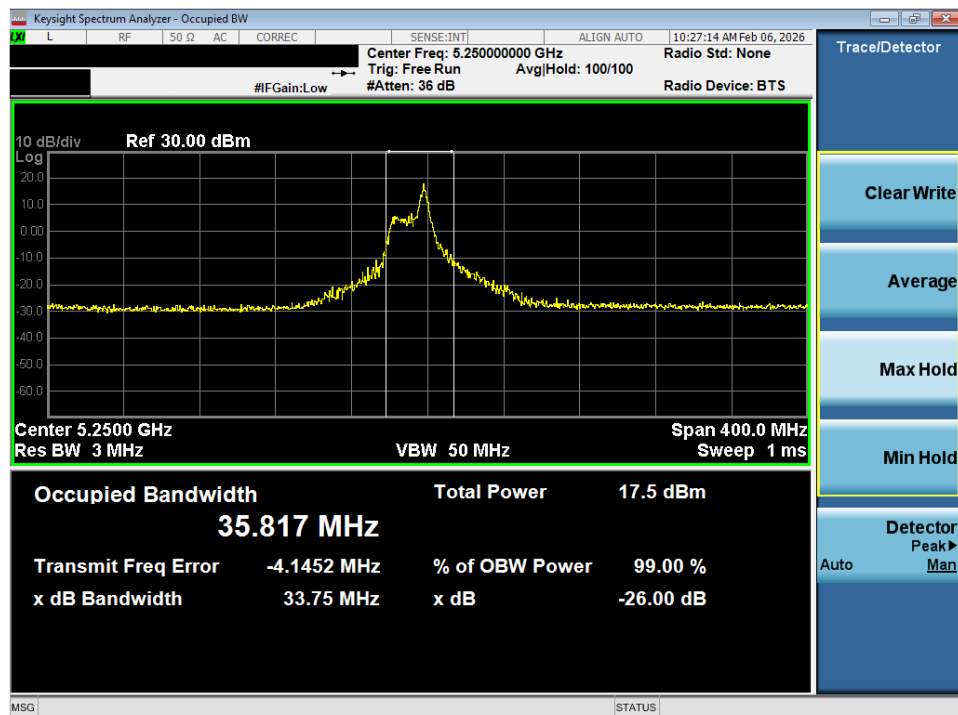


Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 21 of 103

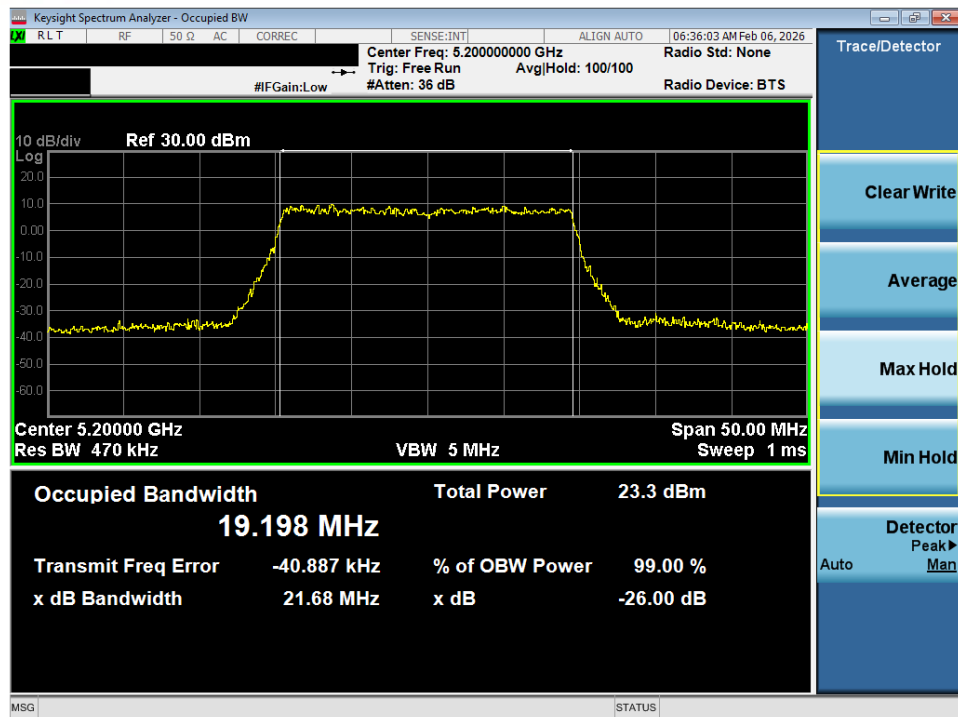


Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

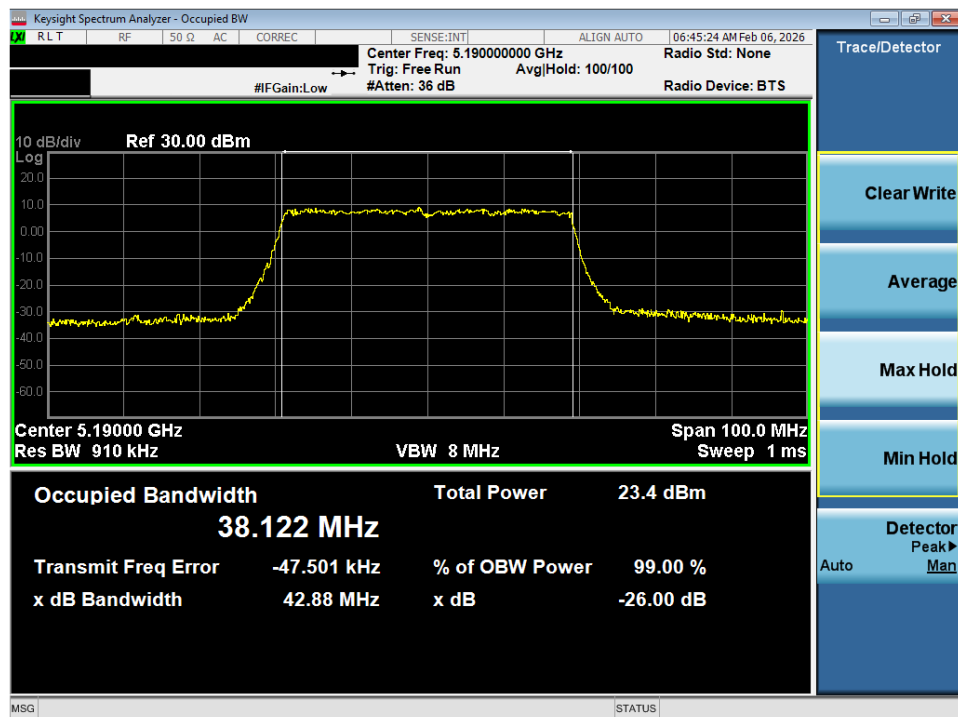


Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 22 of 103

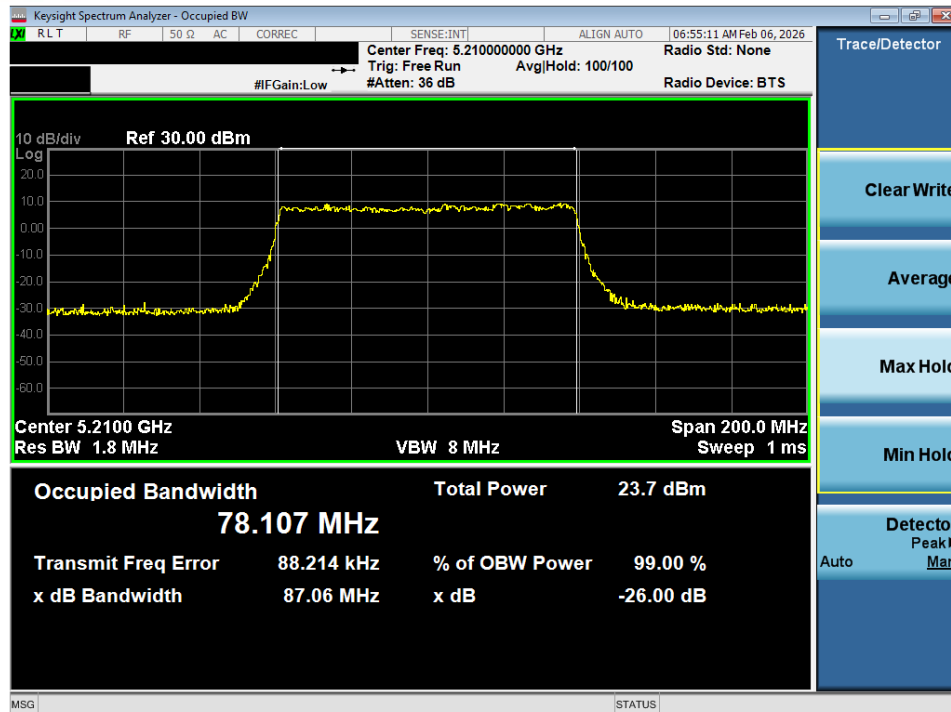

Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

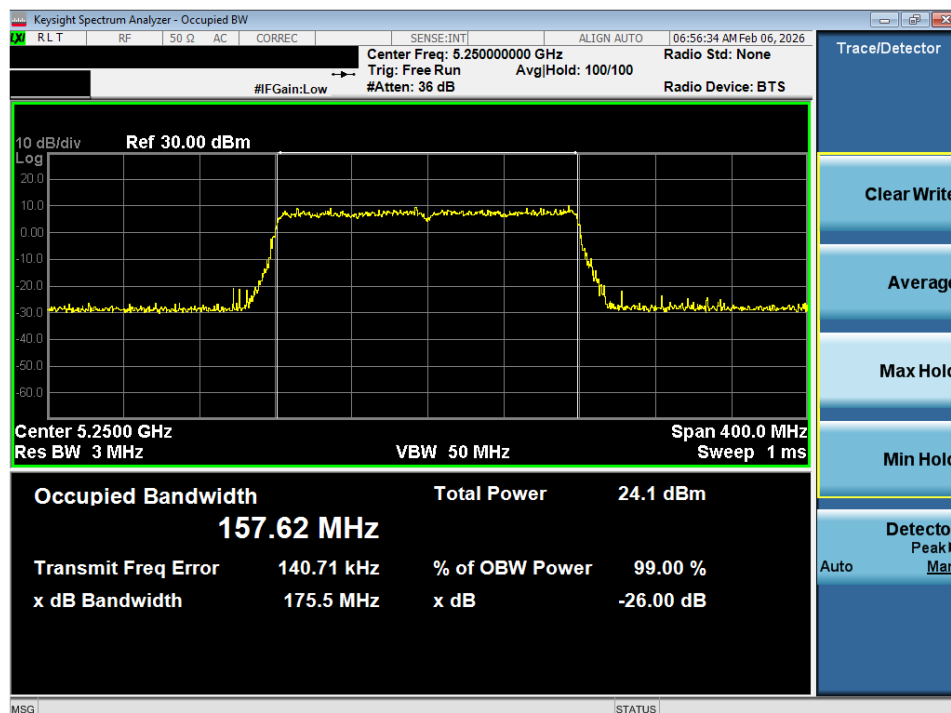

Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ax – 2x996 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 23 of 103

7.3 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz and 5.850-5.895GHz bands, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10:2020 – Section 6.9.2

Test Settings – 6dB Bandwidth

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Settings – OBW

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 24 of 103

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 25 of 103		

6dB Bandwidth Measurements

	Frequency [MHz]	802.11 MODE	Channel	Antenna-1 6dB Bandwidth [MHz]	Antenna-1 OBW [MHz]
Band 3	5745	ax (20MHz)	149	2.73	17.16
	5785	ax (20MHz)	157	2.72	17.05
	5825	ax (20MHz)	165	2.71	17.04
	5755	ax (40MHz)	151	2.15	21.68
	5795	ax (40MHz)	159	2.15	21.30
	5775	ax (80MHz)	155	2.23	25.28

Table 7-4. Band 3 Conducted 6dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna-1 6dB Bandwidth [MHz]	Antenna-1 OBW [MHz]
Band 3/4	5845	ax (20MHz)	169	2.70	17.07
Band 4	5865	ax (20MHz)	173	2.67	17.05
	5885	ax (20MHz)	177	2.73	17.10
Band 3/4	5835	ax (40MHz)	167	2.15	21.72
Band 4	5875	ax (40MHz)	175	2.15	21.68
Band 3/4	5855	ax (80MHz)	171	2.25	27.80
Band 4	5815	ax (160MHz)	163	2.45	33.09

Table 7-5. Bands 3/4 Conducted 6dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna-1 6dB Bandwidth [MHz]	Antenna-1 OBW [MHz]
Band 3	5745	ax (20MHz)	149	19.04	19.19
	5785	ax (20MHz)	157	19.04	19.16
	5825	ax (20MHz)	165	19.07	19.19
	5755	ax (40MHz)	151	38.30	38.21
	5795	ax (40MHz)	159	38.27	38.10
	5775	ax (80MHz)	155	78.19	78.27


Table 7-6. Band 3 Conducted 6dB Bandwidth Measurements (Full Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna-1 6dB Bandwidth [MHz]	Antenna-1 OBW [MHz]
Band 3/4	5845	ax (20MHz)	169	19.02	19.17
Band 4	5865	ax (20MHz)	173	19.06	19.20
	5885	ax (20MHz)	177	19.05	19.19
Band 3/4	5835	ax (40MHz)	167	38.26	38.19
Band 4	5875	ax (40MHz)	175	38.28	38.25
Band 3/4	5855	ax (80MHz)	171	78.08	78.20
	5815	ax (160MHz)	163	158.34	157.62


Table 7-7. Bands 3/4 Conducted 6dB Bandwidth Measurements (Full Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 26 of 103

Antenna-1 6dB Bandwidth Measurements

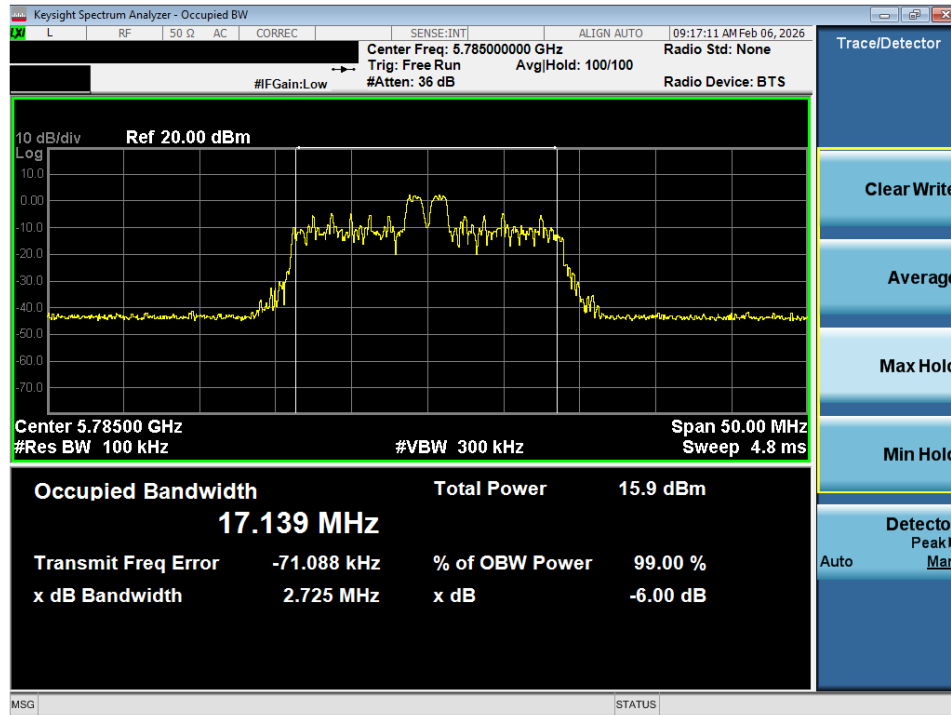


Plot 7-9. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

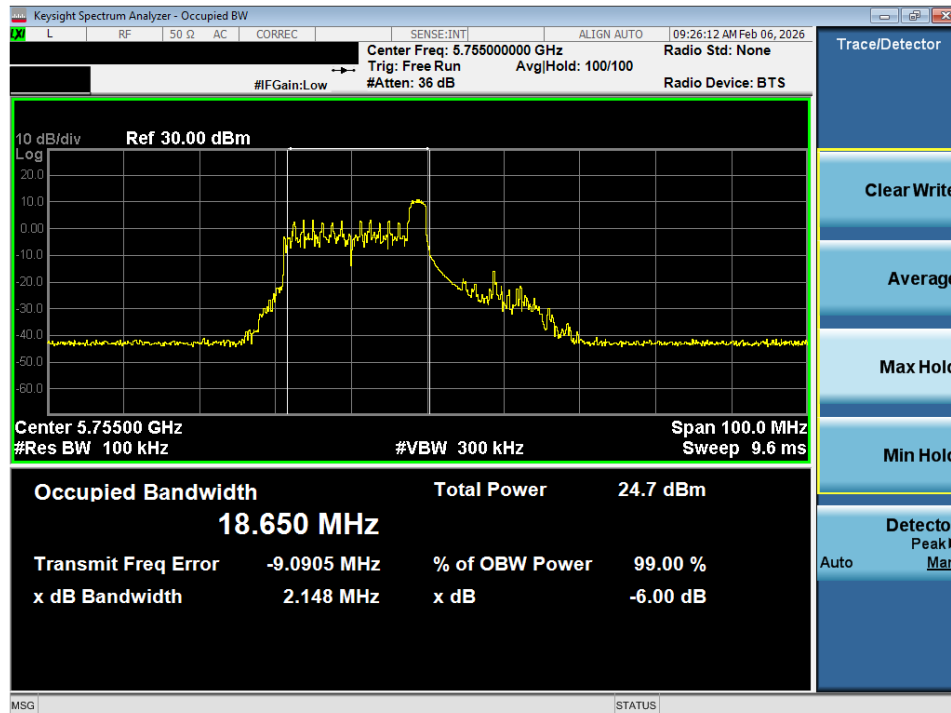


Plot 7-10. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 27 of 103

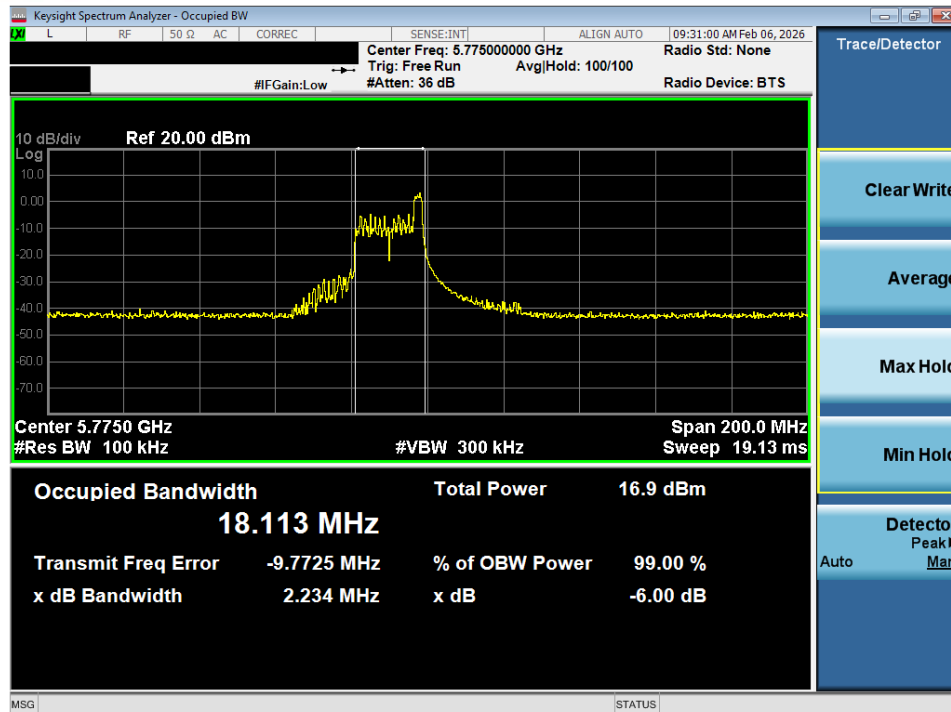


Plot 7-11. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

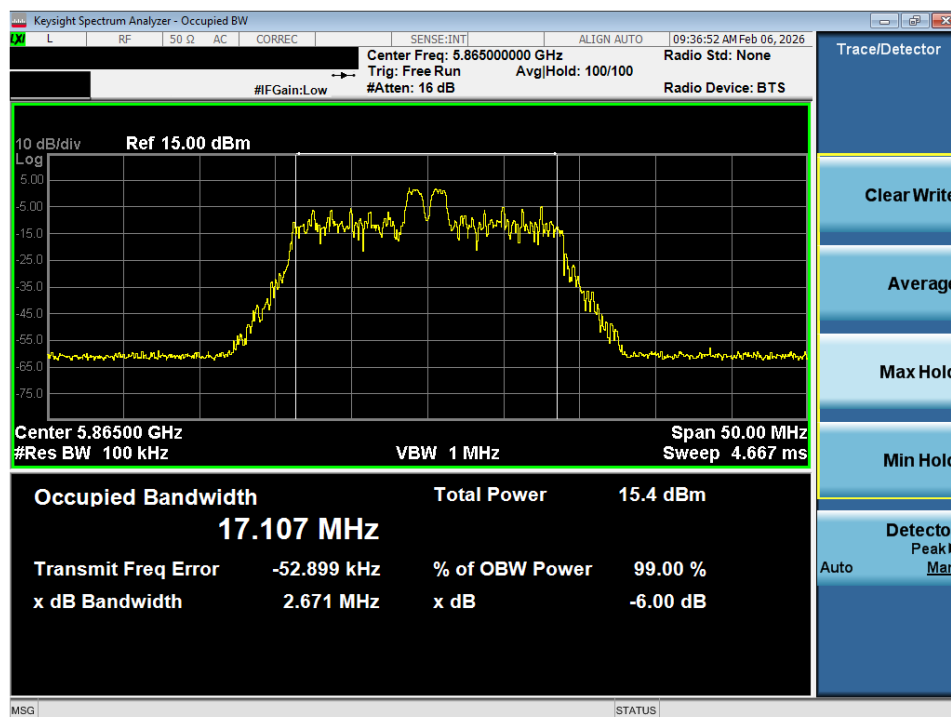


Plot 7-12. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 28 of 103

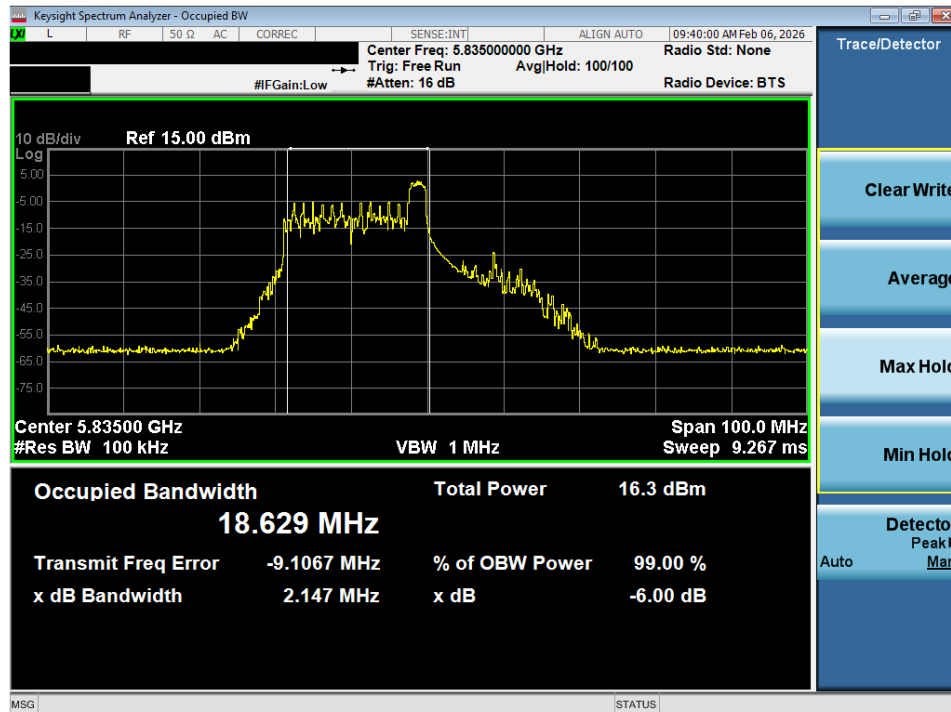


Plot 7-13. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

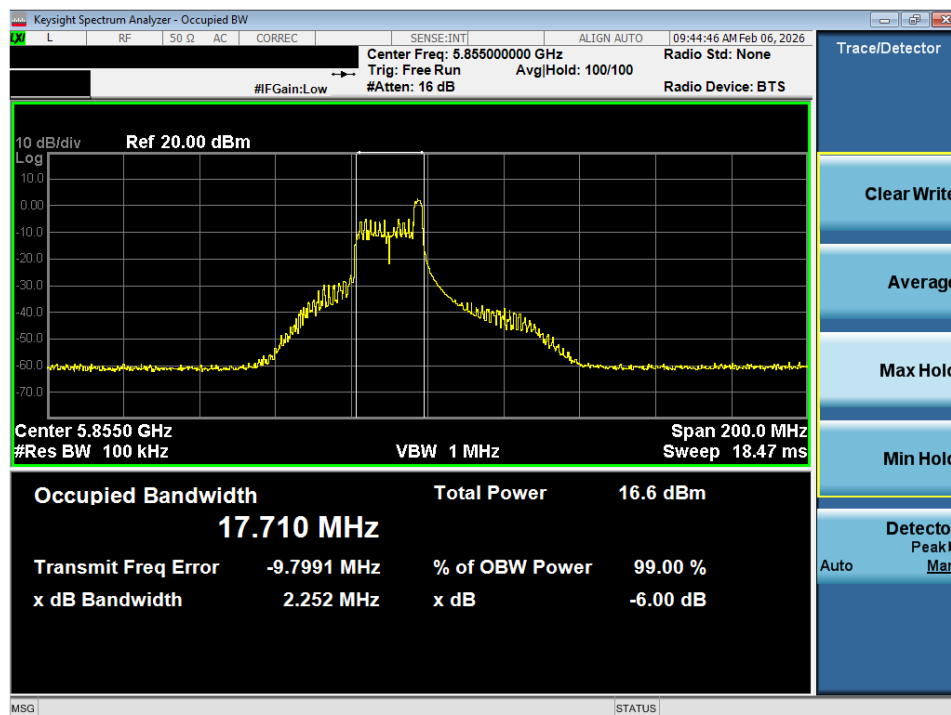


Plot 7-14. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 29 of 103

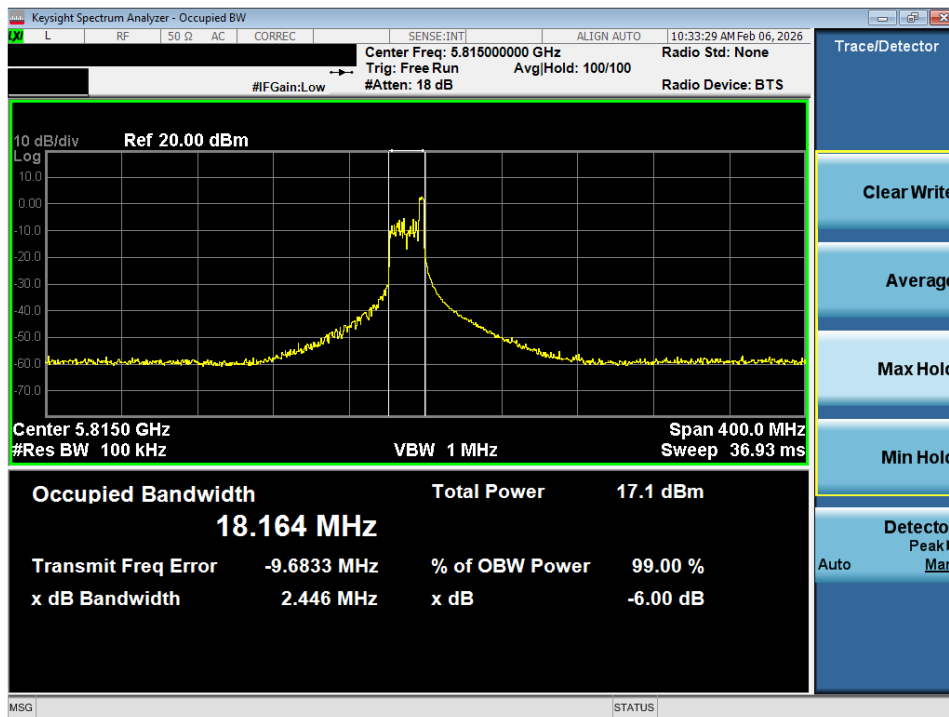


Plot 7-15. 6dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

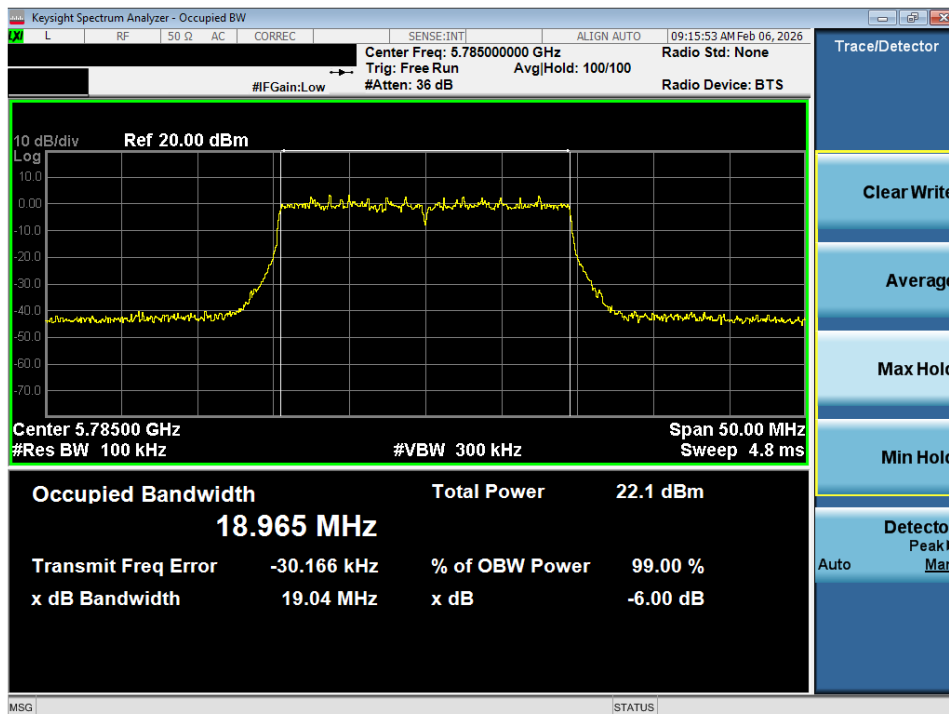


Plot 7-16. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 30 of 103

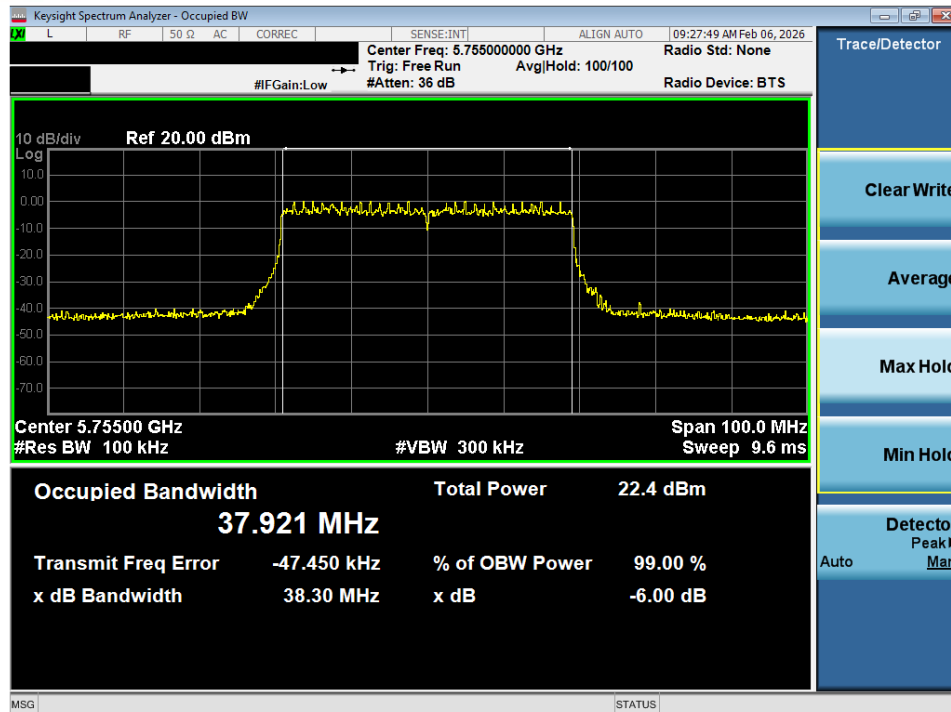


Plot 7-17. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

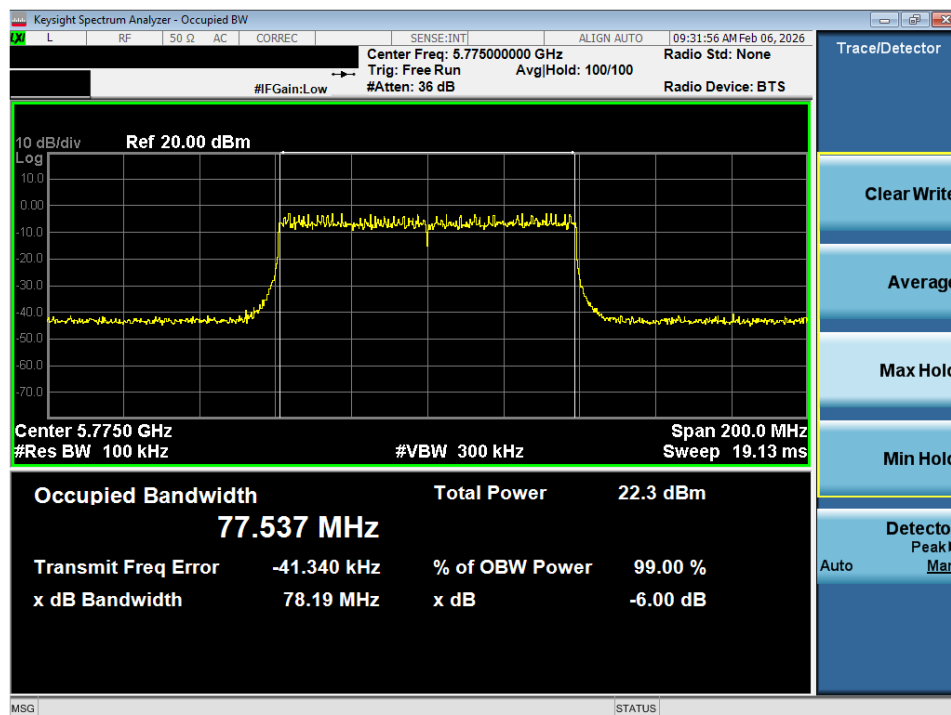


Plot 7-18. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 31 of 103

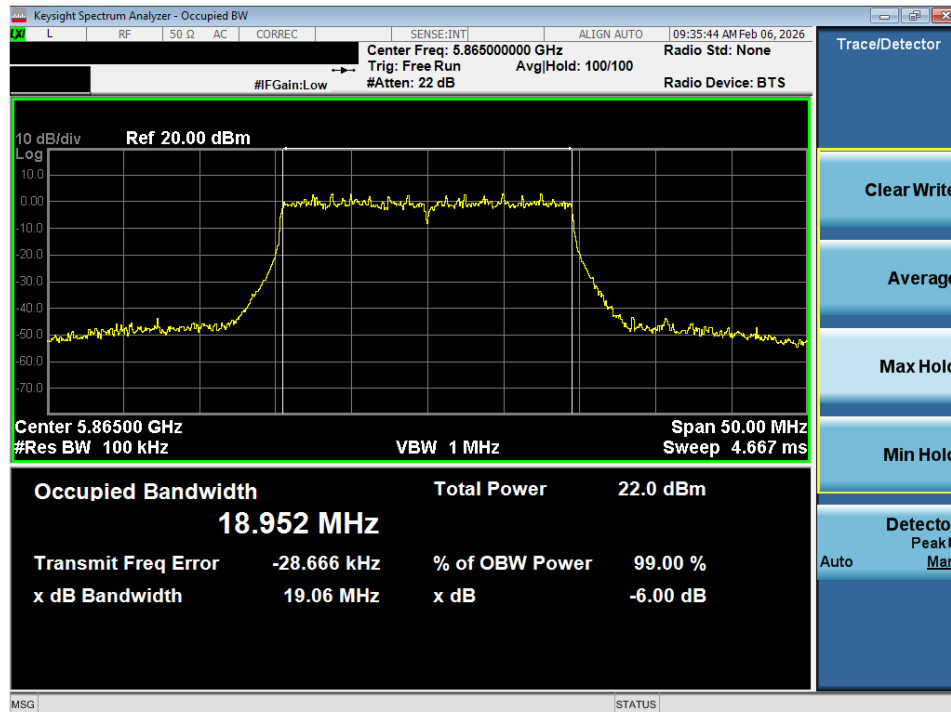


Plot 7-19. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

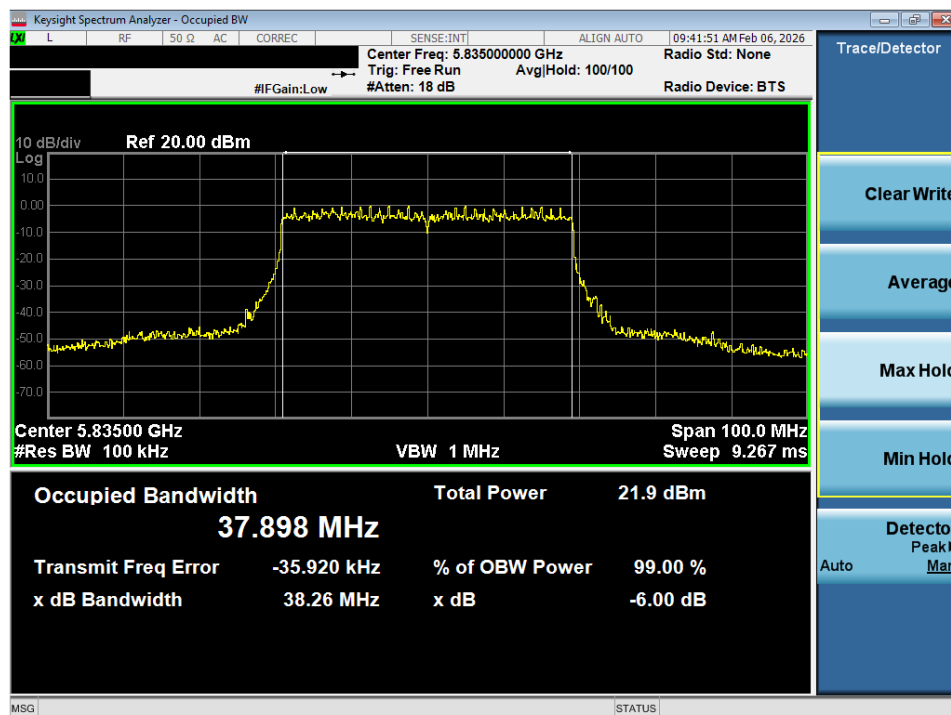


Plot 7-20. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 32 of 103

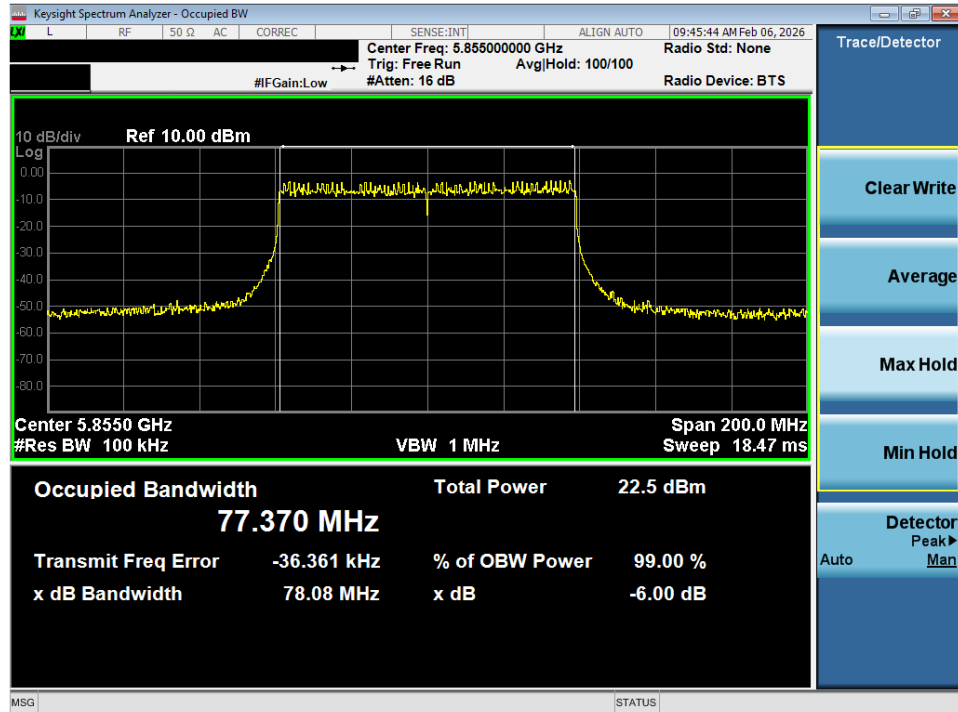


Plot 7-21. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

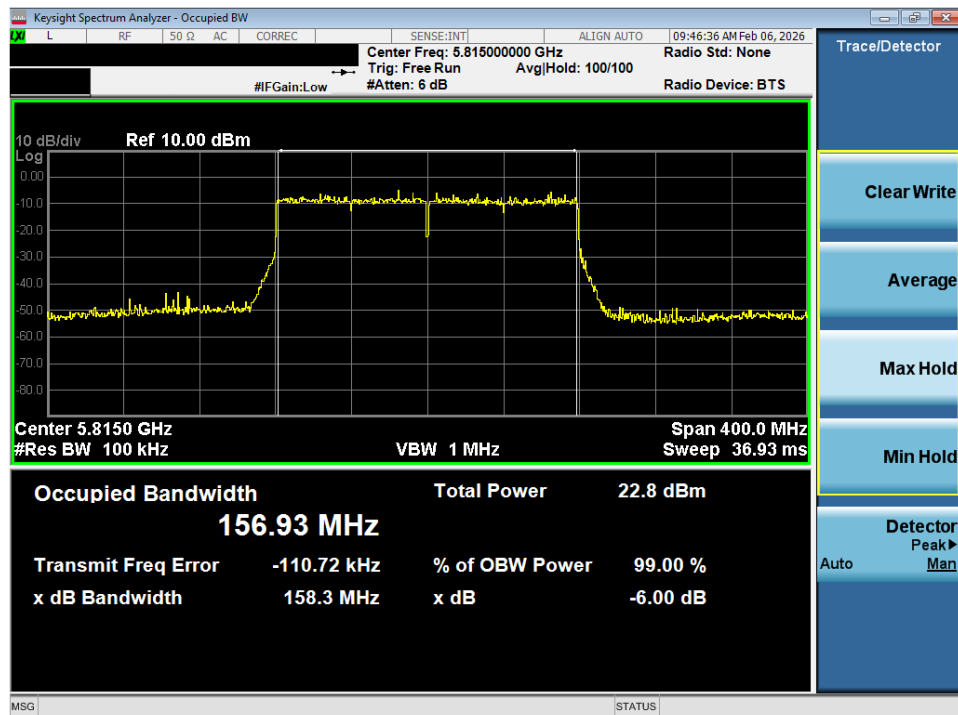


Plot 7-22. 6dB Bandwidth Plot SISO ANT1 (160MHz BW 802.11ax – 996*2 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 33 of 103

7.3.1 Antenna-1 OBW Measurements

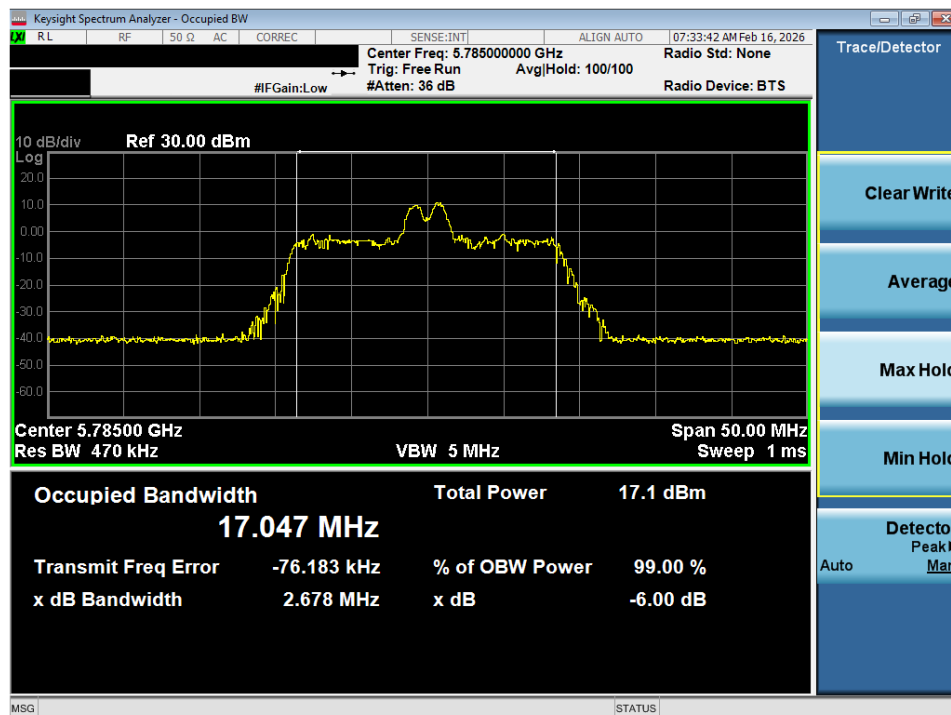


Plot 7-23. OBW Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

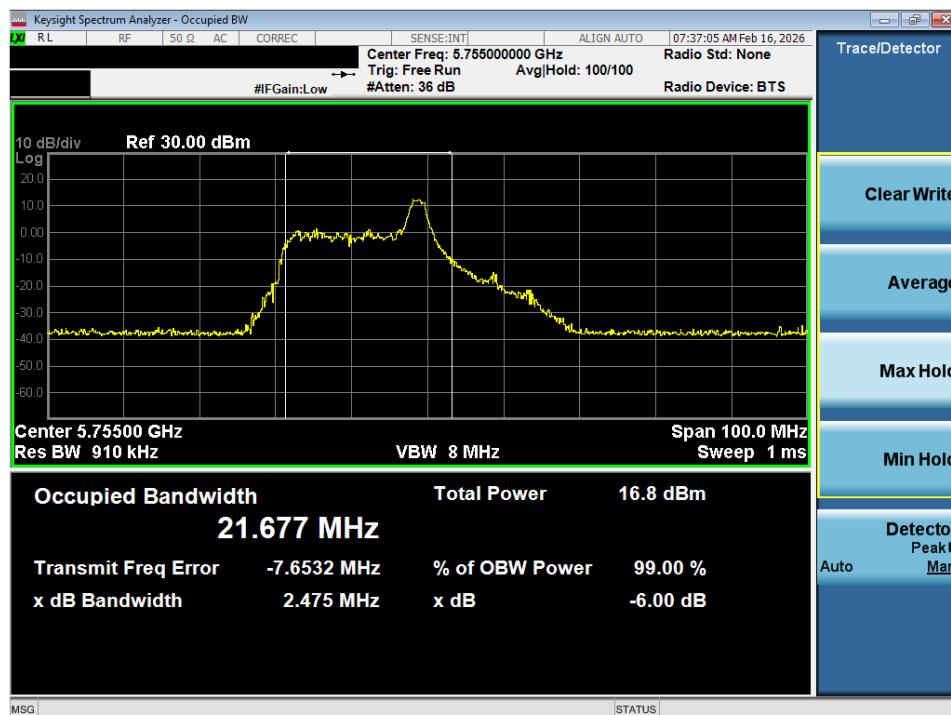


Plot 7-24. OBW Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 34 of 103

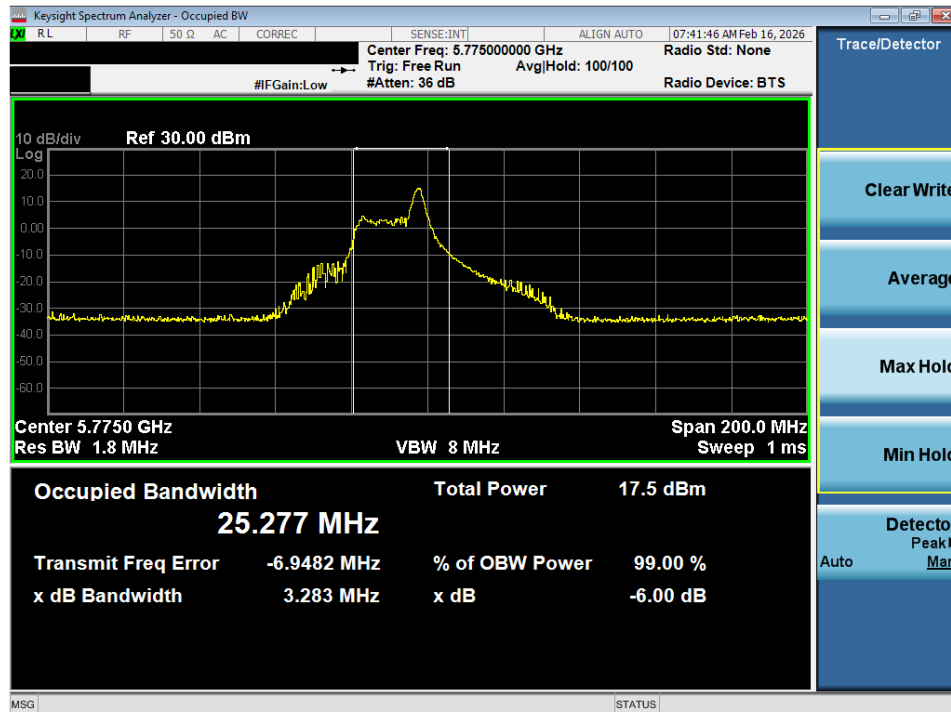


Plot 7-25. OBW Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

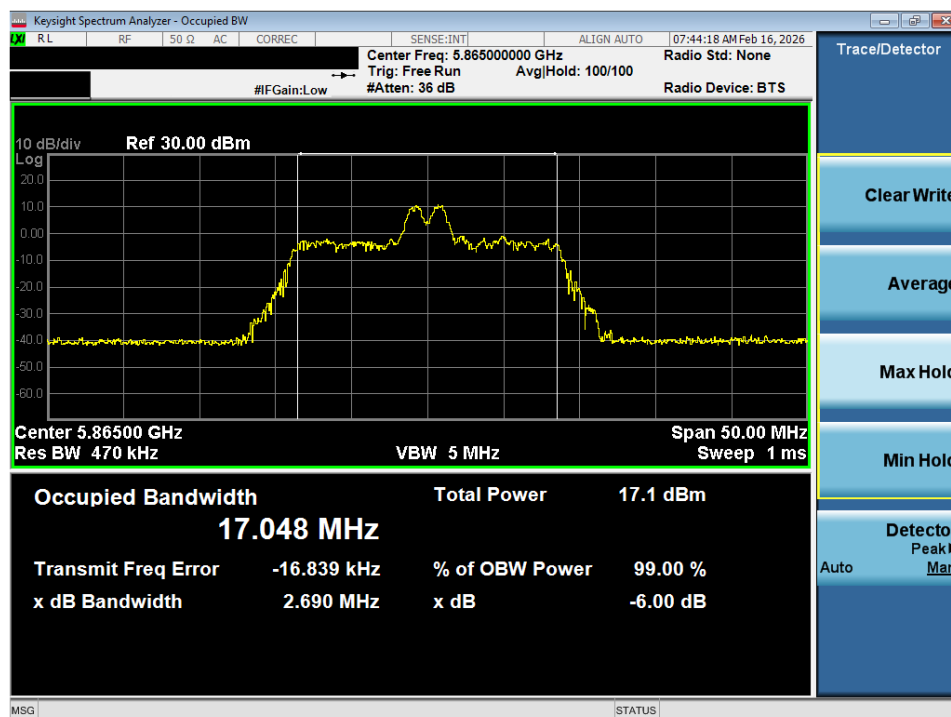


Plot 7-26. OBW Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 35 of 103

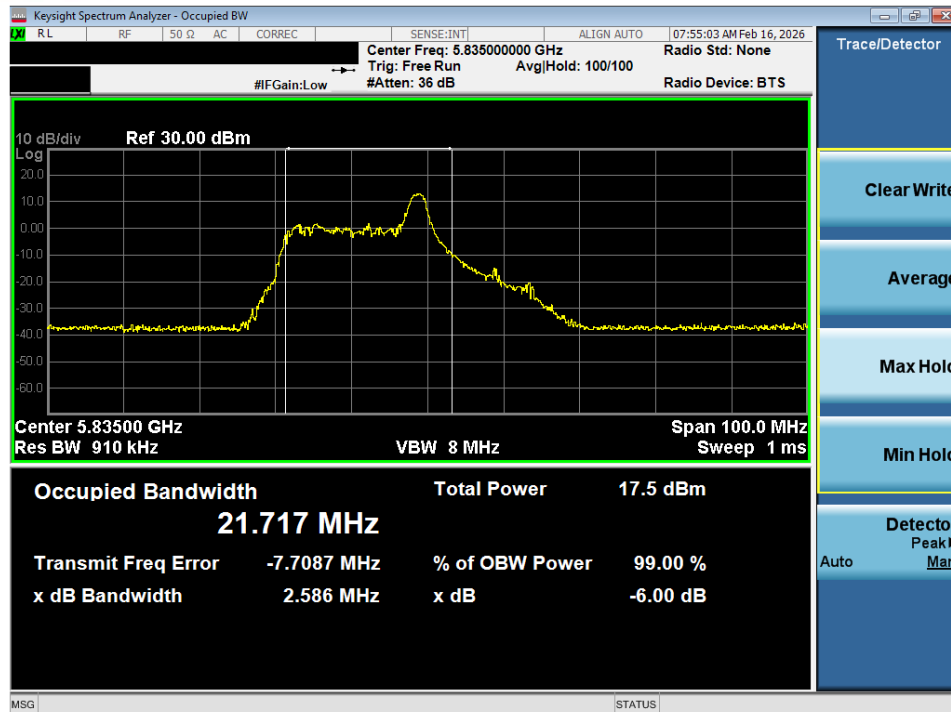


Plot 7-27. OBW Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

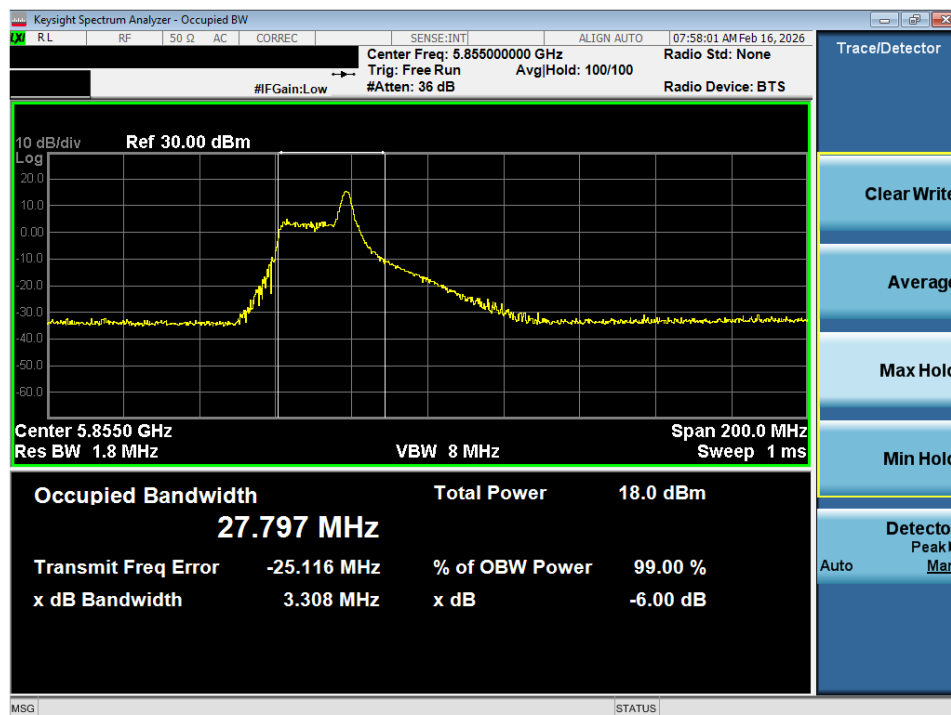


Plot 7-28. OBW Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 36 of 103

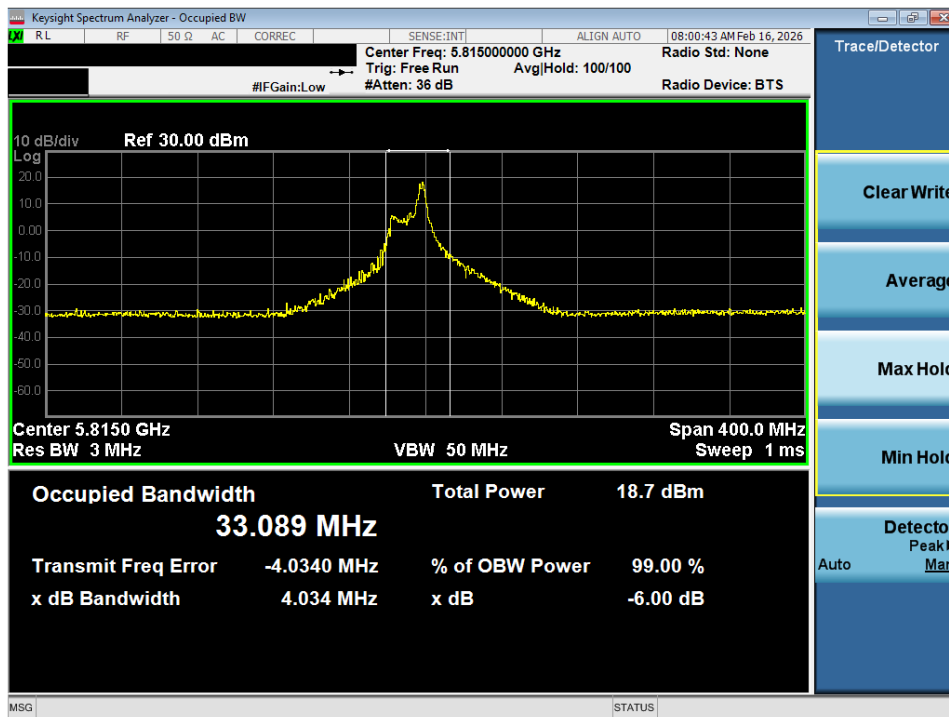


Plot 7-29. OBW Plot SISO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

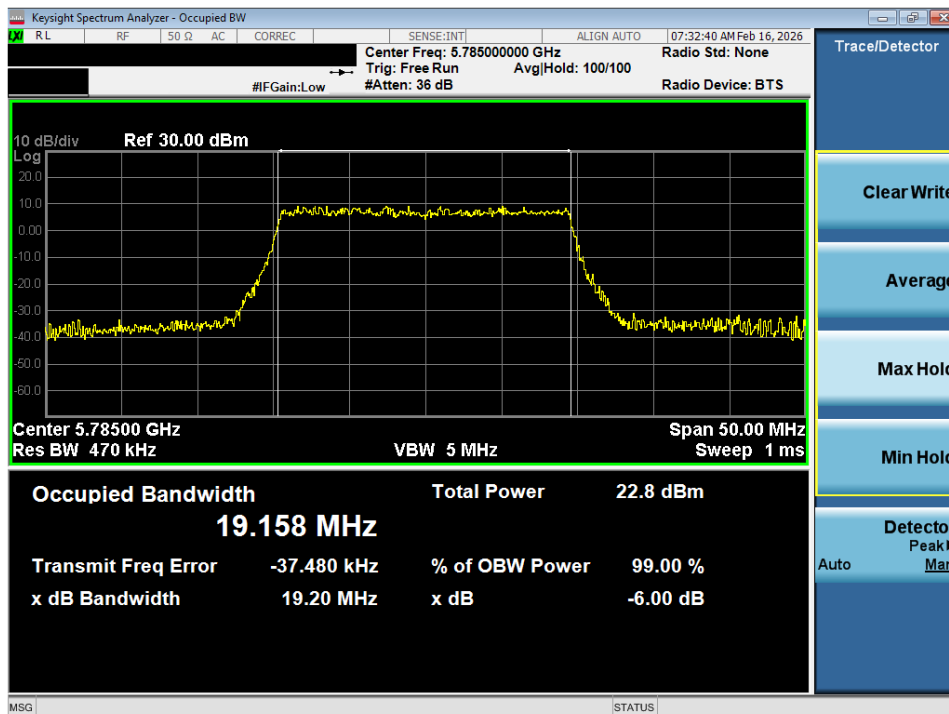


Plot 7-30. OBW Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 37 of 103

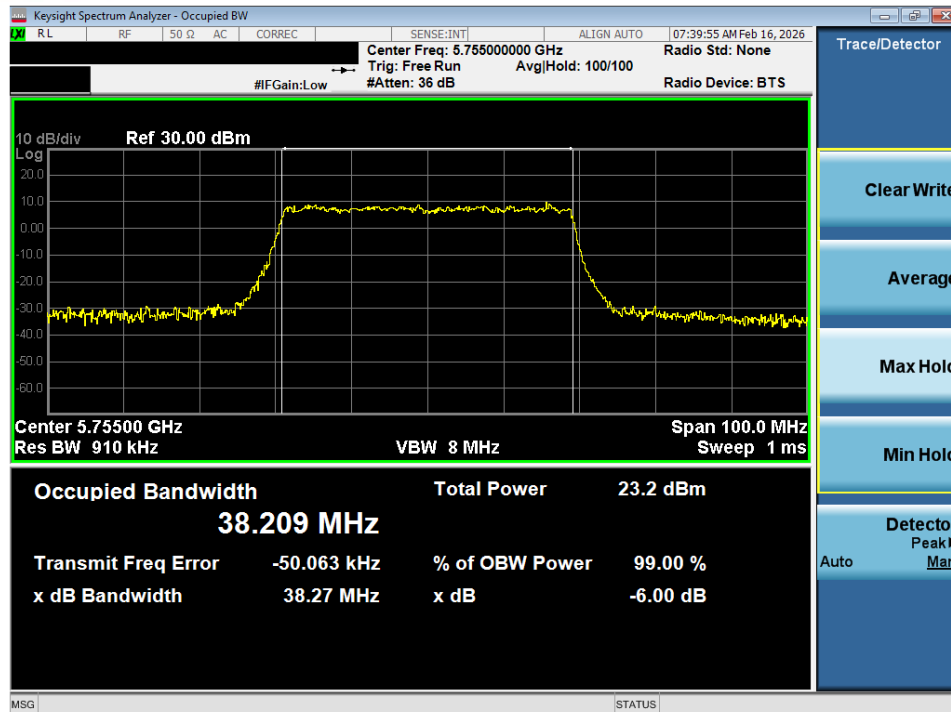


Plot 7-31. OBW Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

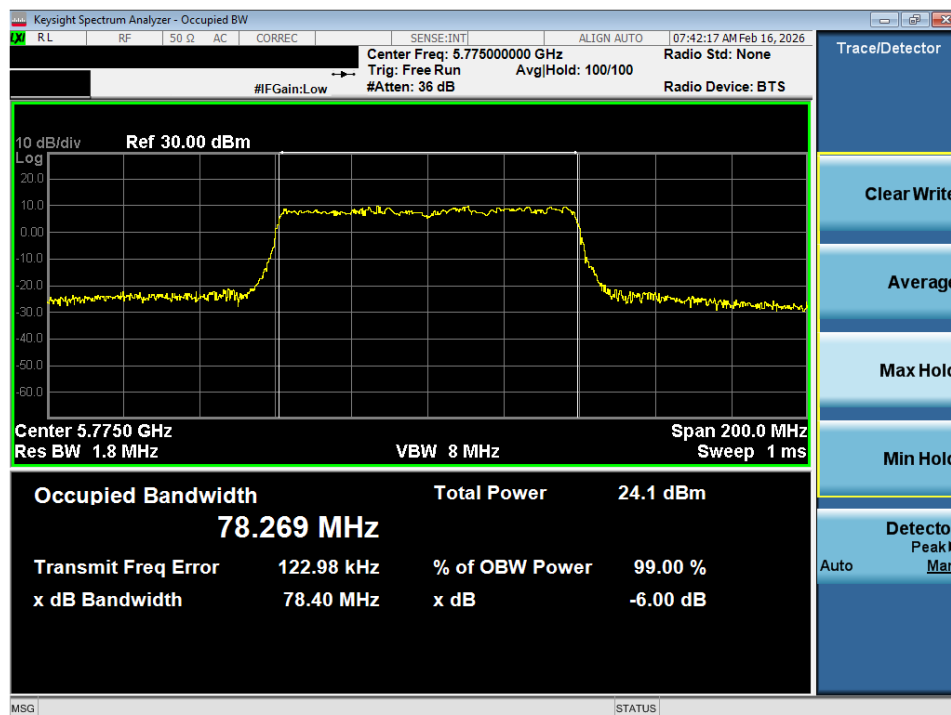


Plot 7-32. OBW Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 38 of 103

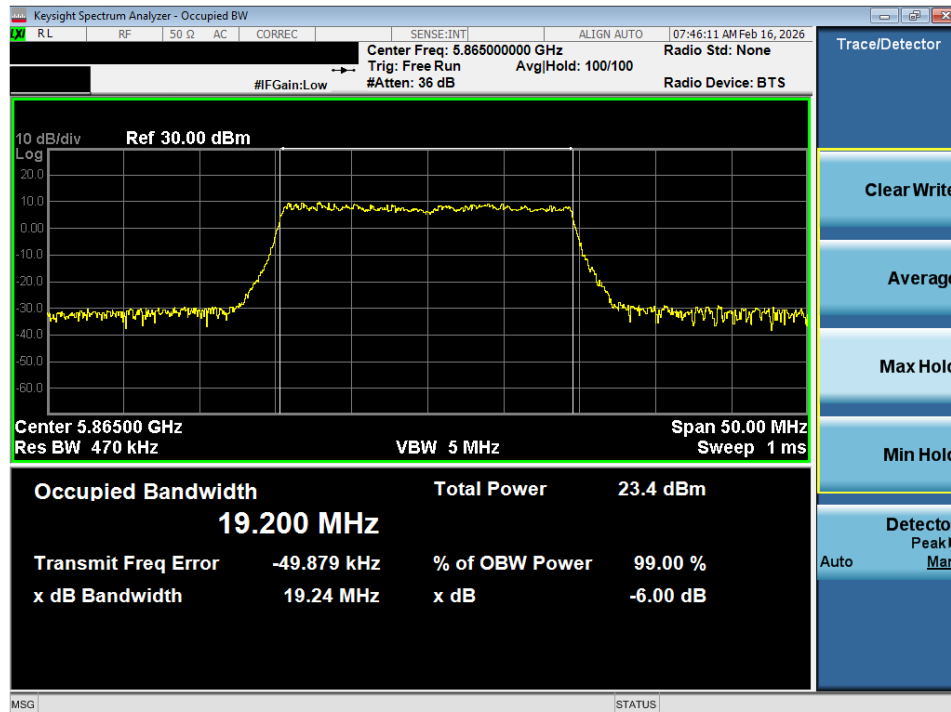


Plot 7-33. OBW Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

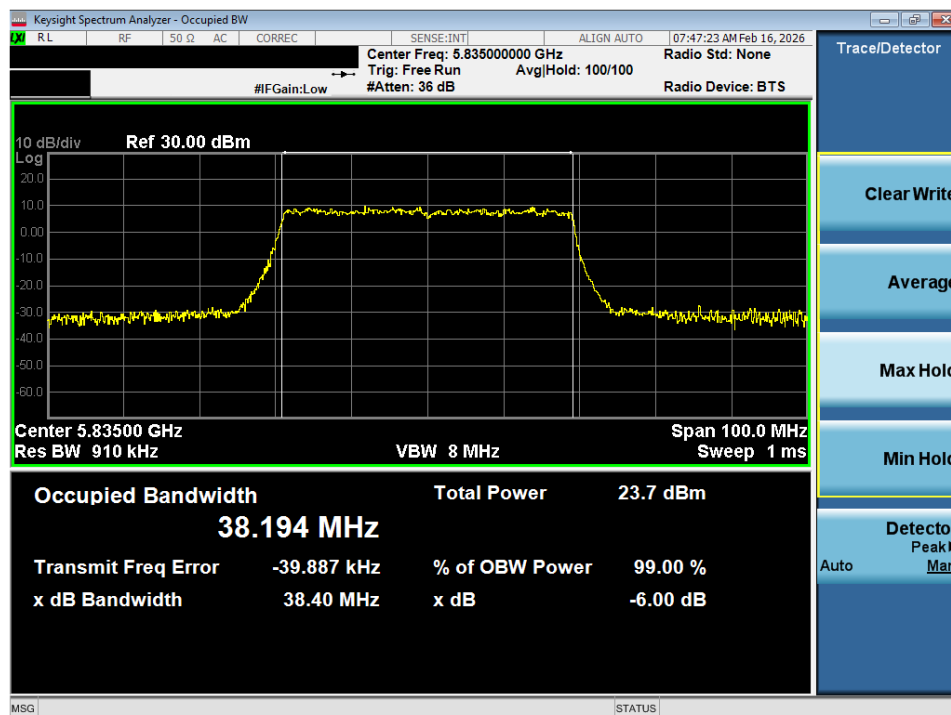


Plot 7-34. OBW Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 39 of 103

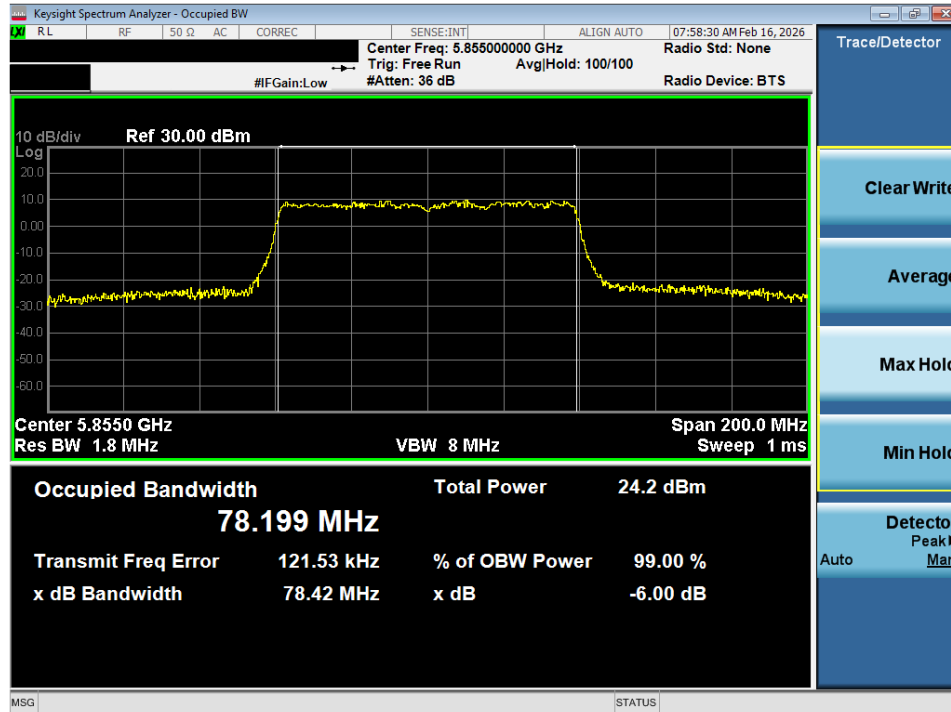

Plot 7-35. OBW Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

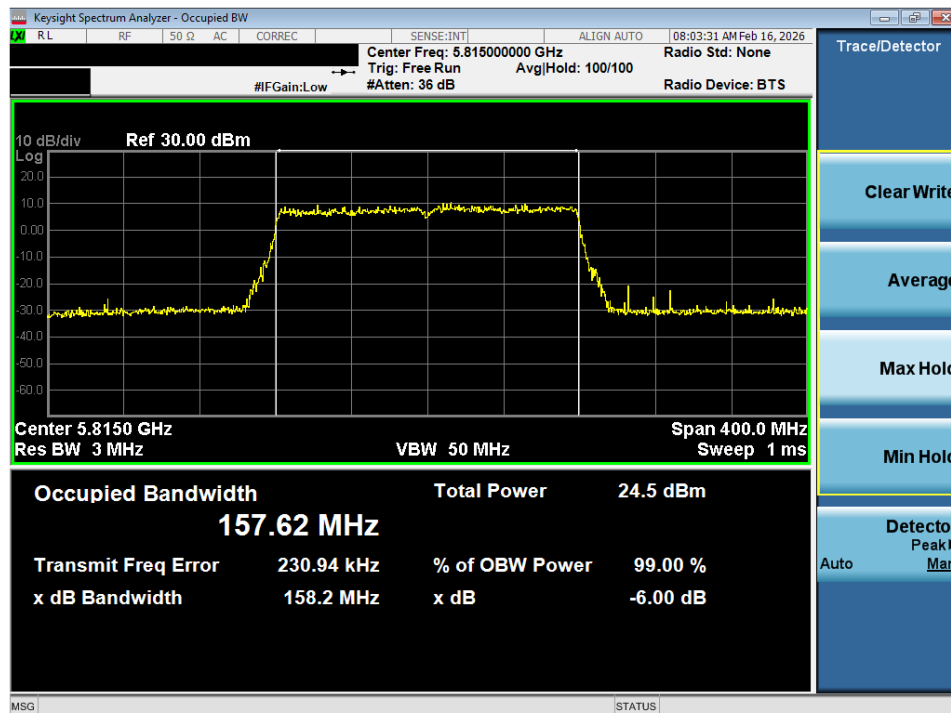

Plot 7-36. OBW Plot SISO ANT1 (160MHz BW 802.11ax – 996*2 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 40 of 103

7.4 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies.

The output power limits are as specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit	Maximum e.i.r.p
		FCC	FCC
UNII 1	5.15 – 5.25GHz	23.98dBm (250mW)	N/A
UNII 2A	5.25 – 5.35GHz	The lesser of 23.98dBm (250mW) or 11dBm + 10log ₁₀ B	N/A
UNII 2C	5.47 – 5.725GHz		
UNII 3	5.725 – 5.850GHz	30dBm (1W)	N/A
UNII 4	5.850 – 5.895GHz	N/A	30dBm (1W)

Test Procedure Used

ANSI C63.10:2020 – Section 12.4.3.2 Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 41 of 103		

Conducted Output Power Measurements (26 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index								
					0	4	8						
20MHz BW	1	5180	36	26T	6.72	6.38	6.75	23.98	-17.23	-6.20	0.55	30.00	-29.45
		5200	40	26T	6.80	6.44	6.75	23.98	-17.18	-6.20	0.60	30.00	-29.40
		5240	48	26T	6.82	6.42	6.79	23.98	-17.16	-6.20	0.62	30.00	-29.38
	2A	5260	52	26T	6.65	6.32	6.61	23.98	-17.33	-6.28	0.37	30.00	-29.63
		5280	56	26T	6.65	6.28	6.58	23.98	-17.33	-6.28	0.37	30.00	-29.63
		5320	64	26T	6.62	6.24	6.51	23.98	-17.36	-6.28	0.34	30.00	-29.66
	2C	5500	100	26T	6.76	6.30	6.53	23.98	-17.23	-5.77	0.99	30.00	-29.02
		5600	120	26T	6.28	6.41	6.09	23.98	-17.57	-5.77	0.64	30.00	-29.36
		5720	144	26T	6.53	6.08	6.35	23.98	-17.45	-5.77	0.76	30.00	-29.24
	3	5745	149	26T	6.55	6.13	6.46	30.00	-23.45	-7.12	-0.57	36.00	-36.57
		5785	157	26T	6.62	6.24	6.58	30.00	-23.39	-7.12	-0.51	36.00	-36.51
		5825	165	26T	6.65	6.27	6.59	30.00	-23.35	-7.12	-0.47	36.00	-36.47
	4	5845	169	26T	6.68	6.28	6.56	-	-	-8.03	-1.35	30.00	-31.35
		5865	173	26T	6.64	6.24	6.52	-	-	-8.03	-1.39	30.00	-31.39
		5885	177	26T	6.43	6.00	6.30	-	-	-8.03	-1.60	30.00	-31.60

Table 7-8. 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 42 of 103

Conducted Output Power Measurements (52 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index								
					37	39	40						
1	1	5180	36	52T	10.91	10.75	10.96	23.98	-13.02	-6.20	4.76	30.00	-25.24
		5200	40	52T	10.98	10.79	10.99	23.98	-12.99	-6.20	4.79	30.00	-25.21
		5240	48	52T	10.82	10.63	10.76	23.98	-13.16	-6.20	4.62	30.00	-25.38
	2A	5260	52	52T	10.76	10.55	10.71	23.98	-13.22	-6.28	4.48	30.00	-25.52
		5280	56	52T	10.72	10.50	10.70	23.98	-13.26	-6.28	4.44	30.00	-25.56
		5320	64	52T	10.66	10.42	10.61	23.98	-13.32	-6.28	4.38	30.00	-25.62
	2C	5500	100	52T	10.70	10.36	10.51	23.98	-13.28	-5.77	4.93	30.00	-25.07
		5600	120	52T	10.43	10.15	10.28	23.98	-13.55	-5.77	4.66	30.00	-25.34
		5720	144	52T	10.36	10.12	10.28	23.98	-13.62	-5.77	4.59	30.00	-25.41
	3	5745	149	52T	10.57	10.35	10.49	30.00	-19.44	-7.12	3.45	36.00	-32.56
		5785	157	52T	10.66	10.42	10.58	30.00	-19.34	-7.12	3.54	36.00	-32.46
		5825	165	52T	10.62	10.38	10.54	30.00	-19.38	-7.12	3.50	36.00	-32.50
	4	5845	169	52T	10.59	10.33	10.50	-	-	-8.03	2.56	30.00	-27.44
		5865	173	52T	10.55	10.30	10.49	-	-	-8.03	2.52	30.00	-27.48
		5885	177	52T	10.38	10.21	10.30	-	-	-8.03	2.35	30.00	-27.65

Table 7-9. 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 43 of 103

Conducted Output Power Measurements (106 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index							
					53	54						
	1	5180	36	106T	12.69	12.69	23.98	-11.29	-6.20	6.49	30.00	-23.51
		5200	40	106T	12.68	12.70	23.98	-11.28	-6.20	6.50	30.00	-23.50
		5240	48	106T	12.74	12.72	23.98	-11.24	-6.20	6.54	30.00	-23.46
	2A	5260	52	106T	12.57	12.55	23.98	-11.41	-6.28	6.29	30.00	-23.71
		5280	56	106T	12.57	12.56	23.98	-11.41	-6.28	6.29	30.00	-23.71
		5320	64	106T	12.41	12.43	23.98	-11.55	-6.28	6.15	30.00	-23.85
	2C	5500	100	106T	12.65	12.55	23.98	-11.33	-5.77	6.88	30.00	-23.12
		5600	120	106T	12.37	12.03	23.98	-11.62	-5.77	6.60	30.00	-23.41
		5720	144	106T	12.83	12.69	23.98	-11.15	-5.77	7.06	30.00	-22.94
	3	5745	149	106T	12.47	12.39	30.00	-17.53	-7.12	5.35	36.00	-30.65
		5785	157	106T	12.51	12.46	30.00	-17.49	-7.12	5.39	36.00	-30.61
		5825	165	106T	12.59	12.50	30.00	-17.41	-7.12	5.47	36.00	-30.53
	4	5845	169	106T	12.54	12.42	-	-	-8.03	4.51	30.00	-25.49
		5865	173	106T	12.59	12.42	-	-	-8.03	4.56	30.00	-25.45
		5885	177	106T	12.30	12.22	-	-	-8.03	4.27	30.00	-25.73

Table 7-10. 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 44 of 103

Conducted Output Power Measurements (242 Tones)

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index						
					61						
20MHz BW	1	5180	36	242T	12.46	23.98	-11.52	-6.20	6.26	30.00	-23.74
		5200	40	242T	12.55	23.98	-11.43	-6.20	6.35	30.00	-23.65
		5240	48	242T	12.61	23.98	-11.37	-6.20	6.41	30.00	-23.59
	2A	5260	52	242T	12.52	23.98	-11.46	-6.28	6.24	30.00	-23.76
		5280	56	242T	12.70	23.98	-11.28	-6.28	6.42	30.00	-23.58
		5320	64	242T	12.50	23.98	-11.48	-6.28	6.22	30.00	-23.78
	2C	5500	100	242T	12.48	23.98	-11.50	-5.77	6.71	30.00	-23.29
		5600	120	242T	12.36	23.98	-11.62	-5.77	6.59	30.00	-23.41
		5720	144	242T	12.63	23.98	-11.35	-5.77	6.86	30.00	-23.14
	3	5745	149	242T	12.24	30.00	-17.76	-7.12	5.12	36.00	-30.88
		5785	157	242T	12.28	30.00	-17.72	-7.12	5.16	36.00	-30.84
		5825	165	242T	12.25	30.00	-17.75	-7.12	5.13	36.00	-30.87
	4	5845	169	242T	12.21	-	-	-8.03	4.18	30.00	-25.82
		5865	173	242T	12.16	-	-	-8.03	4.13	30.00	-25.88
		5885	177	242T	12.42	-	-	-8.03	4.39	30.00	-25.61

Table 7-11. 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 45 of 103

Conducted Output Power Measurements (484 Tones)

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index						
					65						
40MHz BW	1	5190	38	484T	12.31	23.98	-11.67	-6.20	6.11	30.00	-23.89
		5230	46	484T	12.44	23.98	-11.55	-6.20	6.24	30.00	-23.77
	2A	5270	54	484T	12.38	23.98	-11.60	-6.28	6.10	30.00	-23.90
		5310	62	484T	12.38	23.98	-11.60	-6.28	6.10	30.00	-23.90
	2C	5510	102	484T	12.33	23.98	-11.65	-5.77	6.56	30.00	-23.44
		5590	118	484T	12.24	23.98	-11.74	-5.77	6.47	30.00	-23.53
		5710	142	484T	12.48	23.98	-11.50	-5.77	6.71	30.00	-23.29
	3	5755	151	484T	12.13	30.00	-17.87	-7.12	5.01	36.00	-30.99
		5795	159	484T	12.16	30.00	-17.84	-7.12	5.04	36.00	-30.96
	4	5835	167	484T	12.08	-	-	-8.03	4.05	30.00	-25.95
		5875	175	484T	12.32	-	-	-8.03	4.29	30.00	-25.71

Table 7-12. 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 46 of 103

Conducted Output Power Measurements (996 Tones)

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index						
					67						
80MHz BW	1	5210	42	996T	12.20	23.98	-11.78	-6.20	6.00	30.00	-24.00
	2A	5290	58	996T	12.23	23.98	-11.75	-6.28	5.95	30.00	-24.05
	2C	5530	106	996T	12.18	23.98	-11.80	-5.77	6.41	30.00	-23.59
		5610	122	996T	12.51	23.98	-11.47	-5.77	6.74	30.00	-23.26
		5690	138	996T	12.33	23.98	-11.65	-5.77	6.56	30.00	-23.44
	3	5775	155	996T	12.44	30.00	-17.56	-7.12	5.32	36.00	-30.68
	4	5855	171	996T	12.31	-	-	-8.03	4.28	30.00	-25.72

Table 7-13. 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 47 of 103

Conducted Output Power Measurements (2x996 Tones)

160MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
					RU Index						
					68						
	1/2A	5250	50	2x996T	12.14	23.98	-11.85	-6.20	5.94	30.00	-24.07
	2C	5570	114	2x996T	12.21	23.98	-11.77	-5.77	6.44	30.00	-23.56
	3/4	5815	163	2x996T	12.33	-	-	-8.03	4.30	30.00	-25.70

Table 7-14. 160MHz BW (UNII) Maximum Conducted Output Power (2x996 Tones)

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11ax (20MHz BW – 26 Tones) mode, the average conducted power was calculated to be 6.75 dBm with directional gain of -6.20 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$6.75 \text{ dBm} + -6.20 \text{ dBi} = 0.55 \text{ dBm}$$

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 48 of 103

7.5 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10:2020, was used to measure the power spectral density.

The output power density limits are as specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit
		FCC
UNII 1	5.15 – 5.25GHz	11dBm/MHz
UNII 2A	5.25 – 5.35GHz	
UNII 2C	5.47 – 5.725GHz	
UNII 3	5.725 – 5.850GHz	30dBm/500kHz
UNII 4	5.850 – 5.895GHz	14dBm/MHz e.i.r.p

Test Procedure Used

ANSI C63.10:2020 – Section 12.4.2.4 (Method SA-2)

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 49 of 103		

Power Spectral Density Measurements

	Frequency [MHz]	802.11 MODE	Channel	Antenna 1 PSD [dBm]	Conducted PSD Limit [dBm]	Margin [dB]
Band 1	5180	ax (20MHz)	36	3.35	11.00	-7.66
	5200	ax (20MHz)	40	3.17	11.00	-7.83
	5240	ax (20MHz)	48	3.43	11.00	-7.57
	5190	ax (40MHz)	38	4.38	11.00	-6.62
	5230	ax (40MHz)	46	4.17	11.00	-6.83
	5210	ax (80MHz)	42	4.61	11.00	-6.39
Band 2A	5260	ax (20MHz)	52	2.87	11.00	-8.13
	5280	ax (20MHz)	56	3.03	11.00	-7.98
	5320	ax (20MHz)	64	2.85	11.00	-8.15
	5270	ax (40MHz)	54	3.99	11.00	-7.01
	5310	ax (40MHz)	62	4.00	11.00	-7.00
	5290	ax (80MHz)	58	3.90	11.00	-7.10
Band 2C	5500	ax (20MHz)	100	3.53	11.00	-7.47
	5600	ax (20MHz)	120	3.08	11.00	-7.92
	5720	ax (20MHz)	144	3.17	11.00	-7.83
	5510	ax (40MHz)	102	4.59	11.00	-6.41
	5590	ax (40MHz)	118	4.10	11.00	-6.90
	5710	ax (40MHz)	142	4.24	11.00	-6.76
	5530	ax (80MHz)	106	4.56	11.00	-6.44
	5610	ax (80MHz)	122	4.48	11.00	-6.52
	5690	ax (80MHz)	138	4.36	11.00	-6.64
	5570	ax (160MHz)	114	4.22	11.00	-6.78

Table 7-15. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna 1 PSD [dBm]	Conducted PSD Limit [dBm]	Margin [dB]
Band 3	5745	ax (20MHz)	149	1.47	30.00	-28.53
	5785	ax (20MHz)	157	1.12	30.00	-28.88
	5825	ax (20MHz)	165	1.20	30.00	-28.80
	5755	ax (40MHz)	151	1.81	30.00	-28.19
	5795	ax (40MHz)	159	1.43	30.00	-28.57
	5775	ax (80MHz)	155	1.47	30.00	-28.54

Table 7-16. Band 3 Conducted Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna 1 PSD [dBm]	DCCF [dB]	Antenna Gain [dBi]	EIRP PSD [dBm]	EIRP PSD Limit [dBm]	Margin [dB]
Band 3/4	5845	ax (20MHz)	169	3.32	0.00	-8.03	-4.71	14.00	-18.71
Band 4	5865	ax (20MHz)	173	2.87	0.00	-8.03	-5.16	14.00	-19.16
	5885	ax (20MHz)	177	2.48	0.00	-8.03	-5.55	14.00	-19.55
Band 3/4	5835	ax (40MHz)	167	3.99	0.00	-8.03	-4.04	14.00	-18.04
Band 4	5875	ax (40MHz)	175	3.77	0.00	-8.03	-4.26	14.00	-18.26
Band 3/4	5855	ax (80MHz)	171	3.99	0.00	-8.03	-4.04	14.00	-18.04
	5815	ax (160MHz)	163	3.77	0.00	-8.03	-4.26	14.00	-18.26

Table 7-17. Bands 3/4 Conducted Power Spectral Density Measurements (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 50 of 103

	Frequency [MHz]	802.11 MODE	Channel	Antenna 1 PSD [dBm]	DCCF [dB]	Conducted PSD Limit [dBm]	Margin [dB]
Band 1	5180	ax (20MHz)	36	3.20	0.00	11.00	-7.80
	5200	ax (20MHz)	40	3.43	0.00	11.00	-7.57
	5240	ax (20MHz)	48	3.31	0.00	11.00	-7.70
	5190	ax (40MHz)	38	0.64	0.00	11.00	-10.36
	5230	ax (40MHz)	46	0.16	0.00	11.00	-10.84
Band 1/2A	5210	ax (80MHz)	42	-2.85	0.11	11.00	-13.74
	5250	ax (160MHz)	50	-5.56	0.11	11.00	-16.45
Band 2A	5260	ax (20MHz)	52	2.82	0.00	11.00	-8.18
	5280	ax (20MHz)	56	2.84	0.00	11.00	-8.16
	5320	ax (20MHz)	64	2.71	0.00	11.00	-8.29
Band 2C	5270	ax (40MHz)	54	-0.19	0.00	11.00	-11.19
	5310	ax (40MHz)	62	-0.36	0.00	11.00	-11.36
	5290	ax (80MHz)	58	-3.08	0.11	11.00	-13.97
	5500	ax (20MHz)	100	3.29	0.00	11.00	-7.71
	5600	ax (20MHz)	120	3.05	0.00	11.00	-7.95
	5720	ax (20MHz)	144	3.13	0.00	11.00	-7.87
	5510	ax (40MHz)	102	0.17	0.00	11.00	-10.83
	5590	ax (40MHz)	118	0.24	0.00	11.00	-10.76
	5710	ax (40MHz)	142	0.01	0.00	11.00	-10.99
	5530	ax (80MHz)	106	-2.31	0.11	11.00	-13.20
	5610	ax (80MHz)	122	-2.94	0.11	11.00	-13.83
	5690	ax (80MHz)	138	-2.67	0.11	11.00	-13.56
	5570	ax (160MHz)	114	-5.74	0.11	11.00	-16.63

Table 7-18. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements (Full Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna 1 PSD [dBm]	DCCF [dB]	Conducted PSD Limit [dBm]	Margin [dB]
Band 3	5745	ax (20MHz)	149	0.33	0.00	30.00	-29.67
	5785	ax (20MHz)	157	0.36	0.00	30.00	-29.64
	5825	ax (20MHz)	165	0.11	0.00	30.00	-29.89
	5755	ax (40MHz)	151	-2.98	0.00	30.00	-32.98
	5795	ax (40MHz)	159	-2.70	0.00	30.00	-32.70
	5775	ax (80MHz)	155	-6.05	0.11	30.00	-35.94


Table 7-19. Band 3 Conducted Power Spectral Density Measurements (Full Tones)

	Frequency [MHz]	802.11 MODE	Channel	Antenna 1 PSD [dBm]	DCCF [dB]	Antenna Gain [dBi]	EIRP PSD [dBm]	EIRP PSD Limit [dBm]	Margin [dB]
Band 3/4	5845	ax (20MHz)	169	2.63	0	-8.03	-5.40	14.00	-19.40
Band 4	5865	ax (20MHz)	173	2.59	0	-8.03	-5.44	14.00	-19.44
	5885	ax (20MHz)	177	2.33	0	-8.03	-5.70	14.00	-19.70
Band 3/4	5835	ax (40MHz)	167	-0.10	0	-8.03	-8.13	14.00	-22.13
Band 4	5875	ax (40MHz)	175	-0.46	0	-8.03	-8.49	14.00	-22.49
Band 3/4	5855	ax (80MHz)	171	-3.35	0.11	-8.03	-11.27	14.00	-25.27
	5815	ax (160MHz)	163	-5.79	0.11	-8.03	-13.71	14.00	-27.71


Table 7-20. Bands 3/4 Conducted Power Spectral Density Measurements (Full Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 51 of 103

7.5.1 Antenna-1 Power Spectral Density Measurements

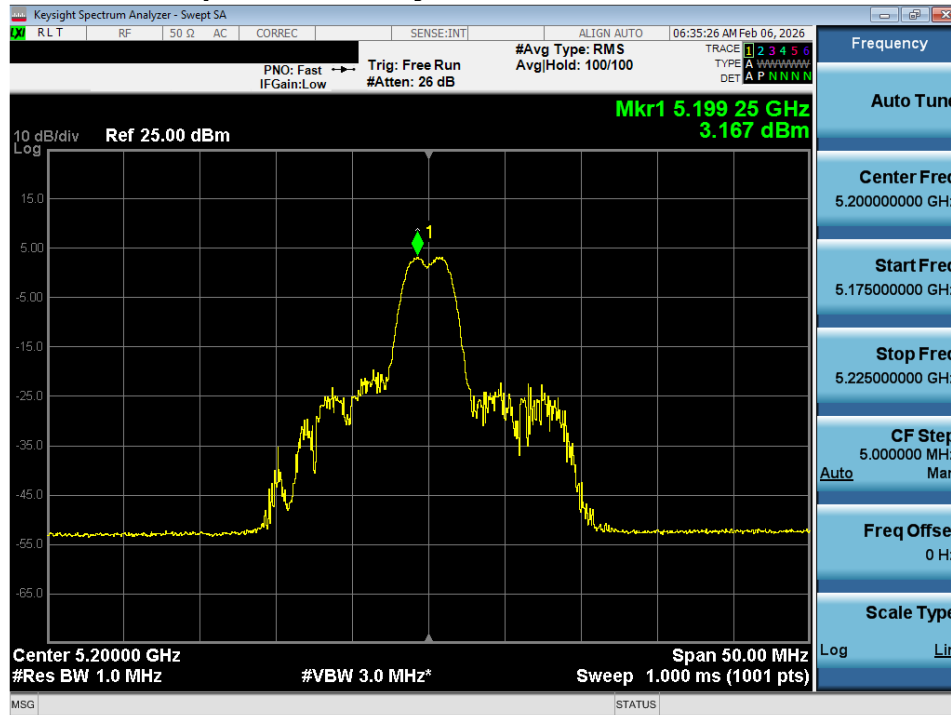


Plot 7-37. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

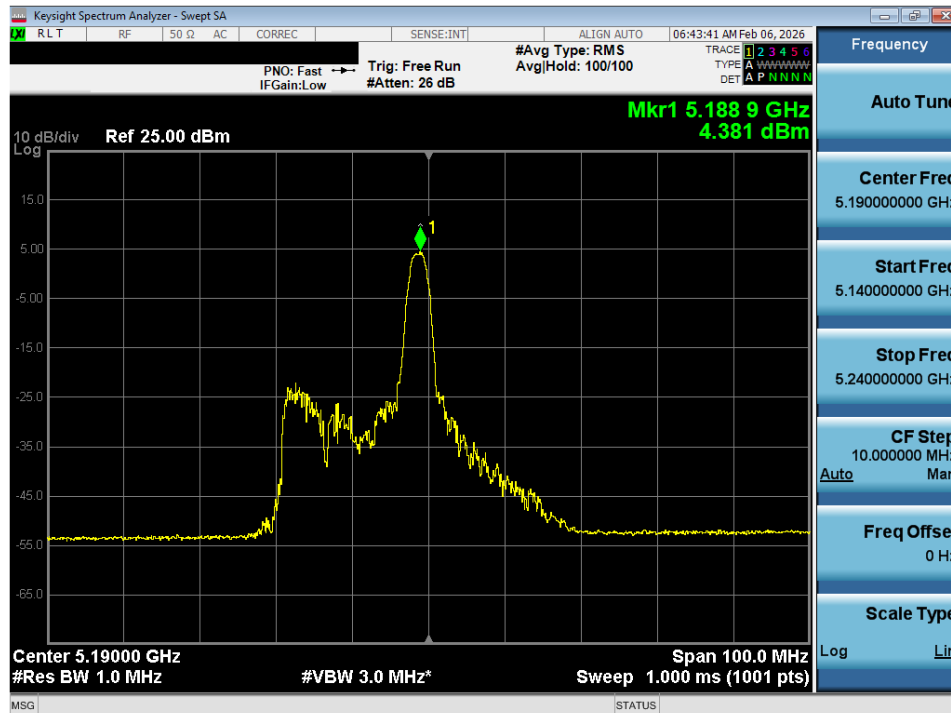


Plot 7-38. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 52 of 103

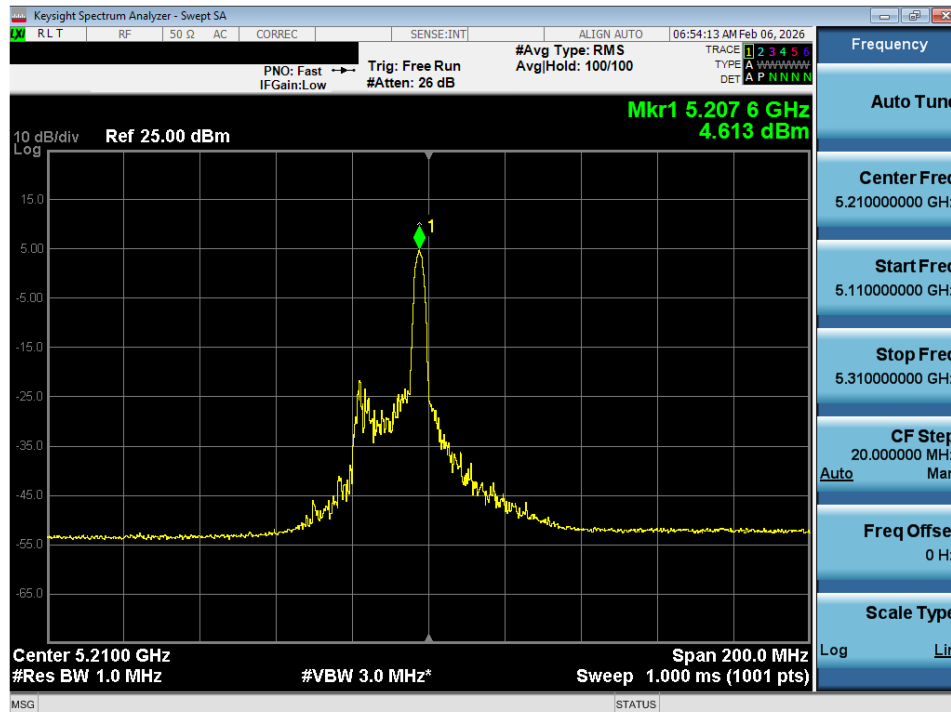


Plot 7-39. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

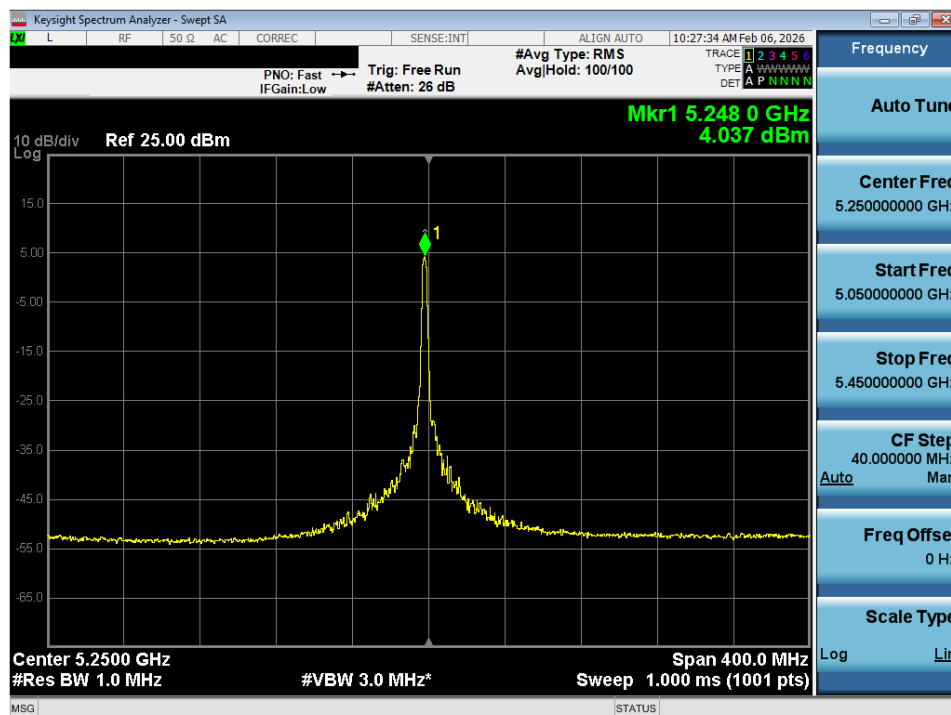


Plot 7-40. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 53 of 103

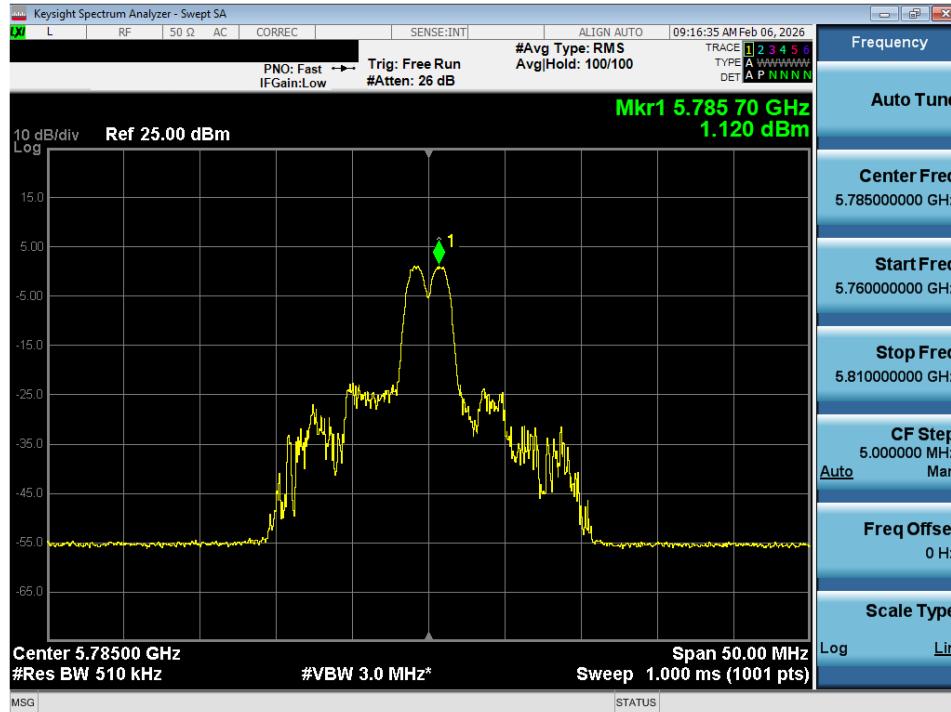


Plot 7-41. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

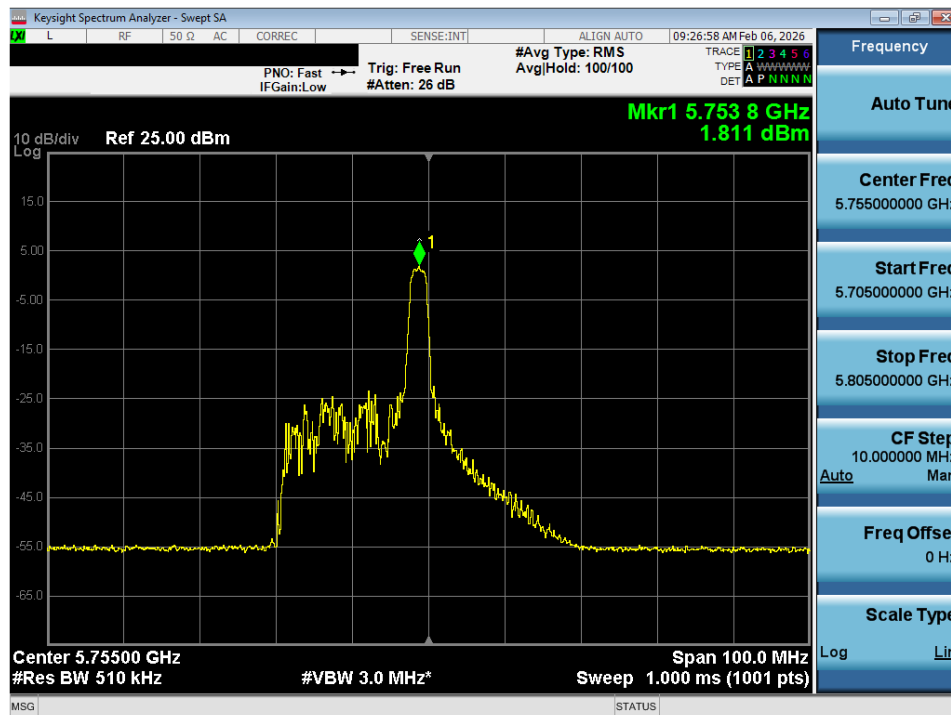


Plot 7-42. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 54 of 103

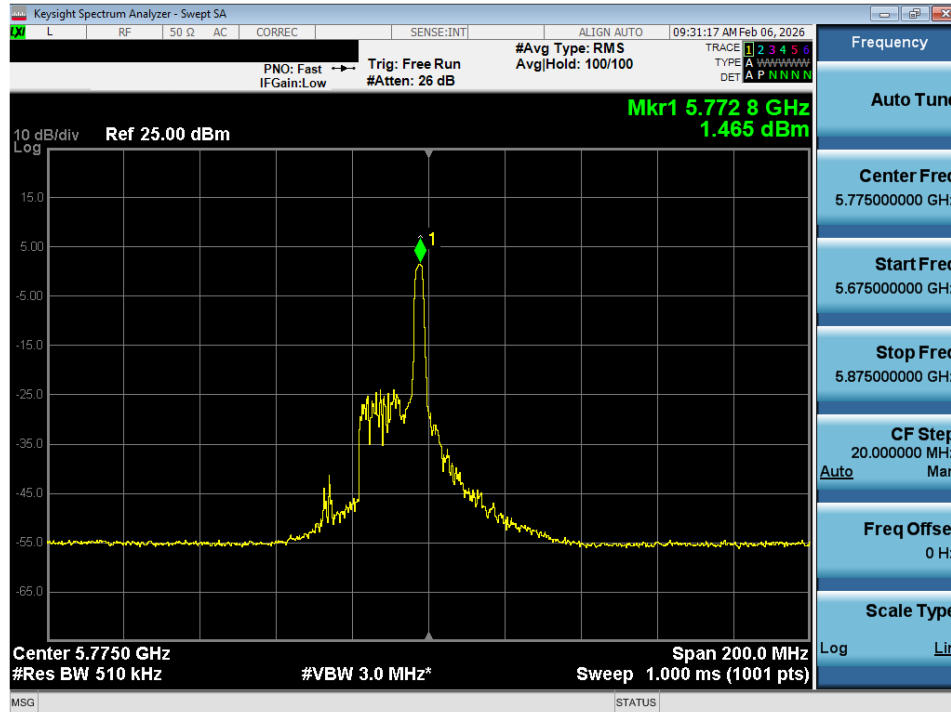


Plot 7-43. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

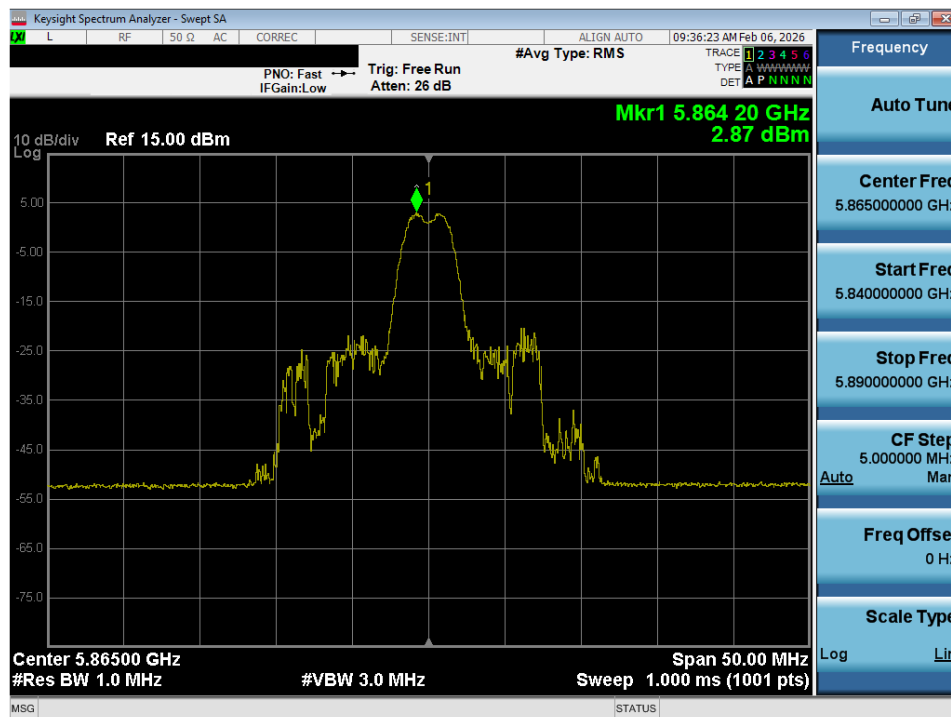


Plot 7-44. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 55 of 103

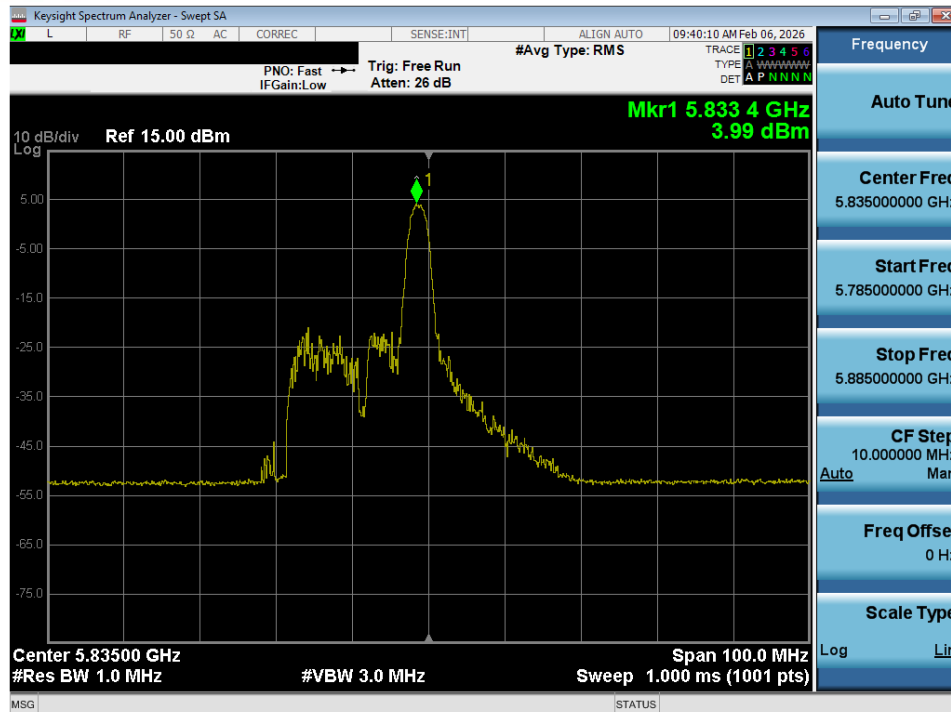


Plot 7-45. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

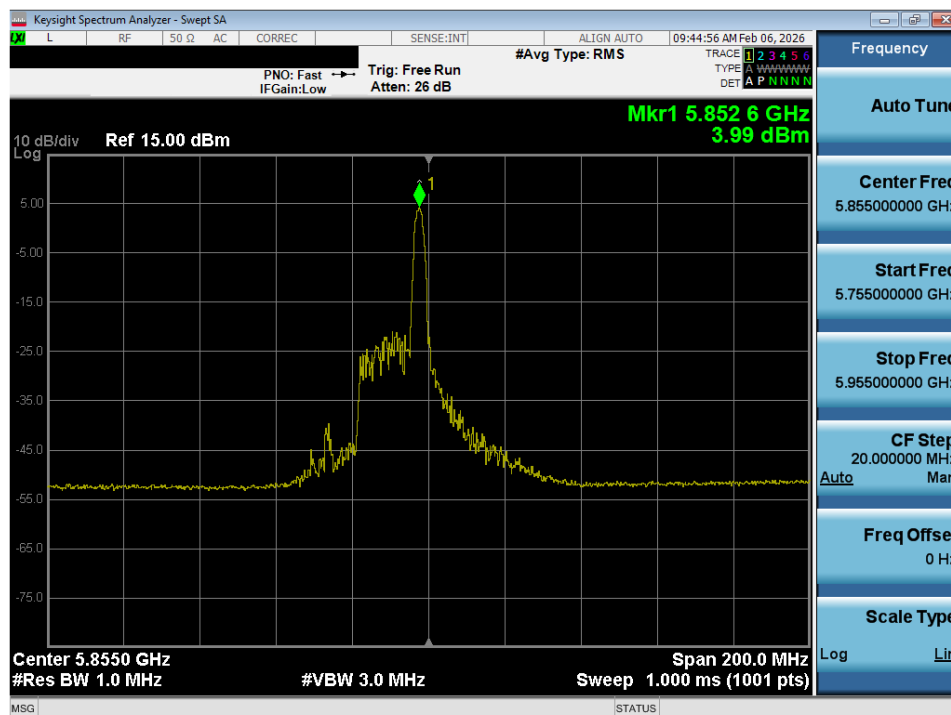


Plot 7-46. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 56 of 103

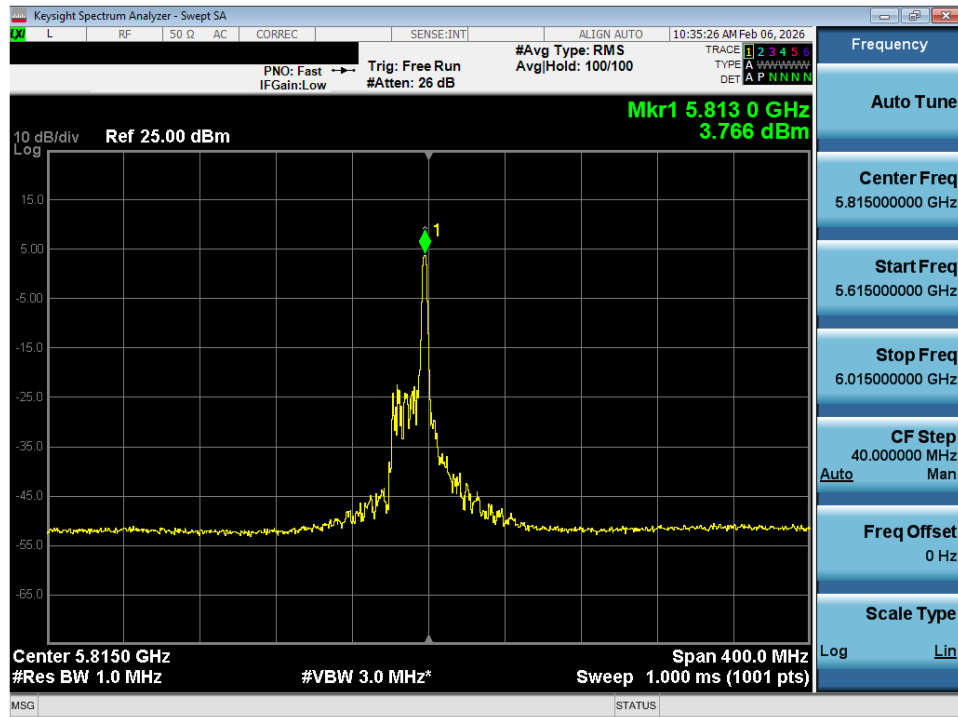


Plot 7-47. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

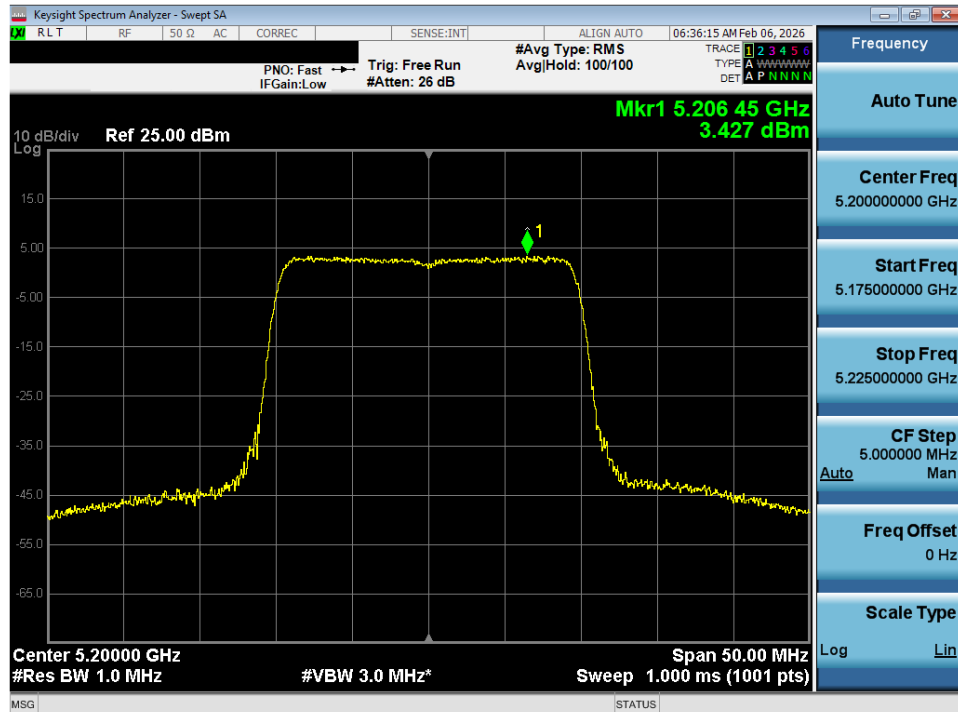


Plot 7-48. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 57 of 103

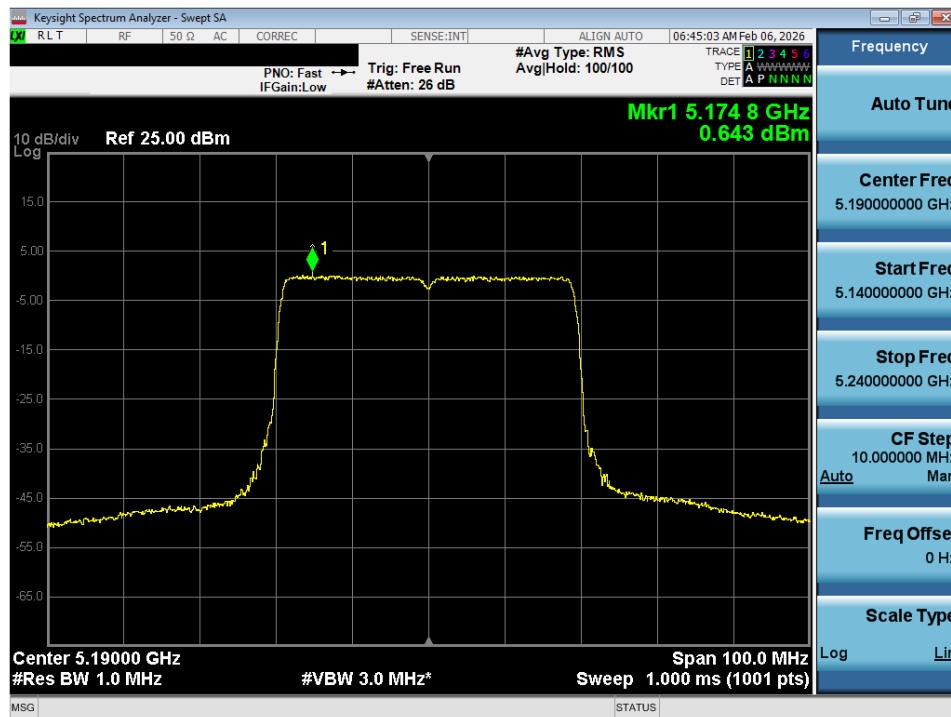


Plot 7-49. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

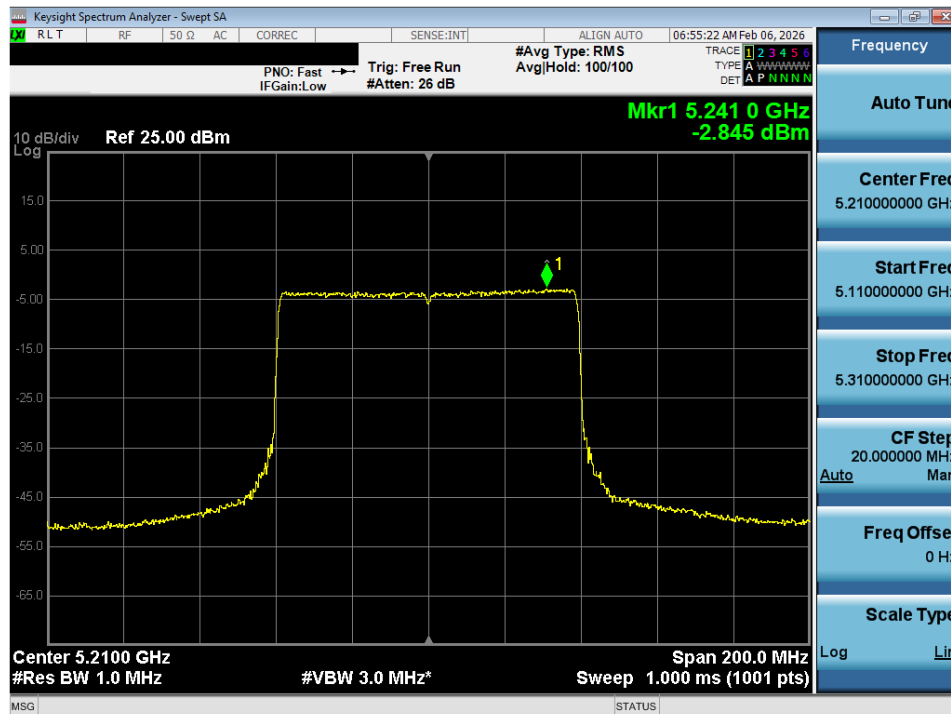


Plot 7-50. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 58 of 103

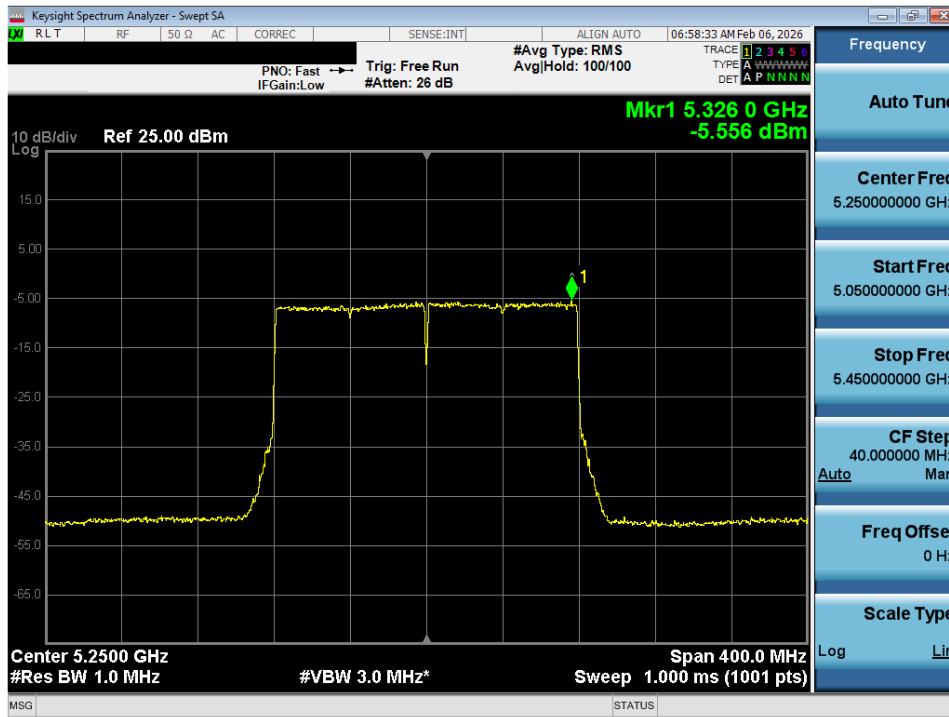


Plot 7-51. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax – 2x996 Tones (UNII Band 1/2A) – Ch. 50)

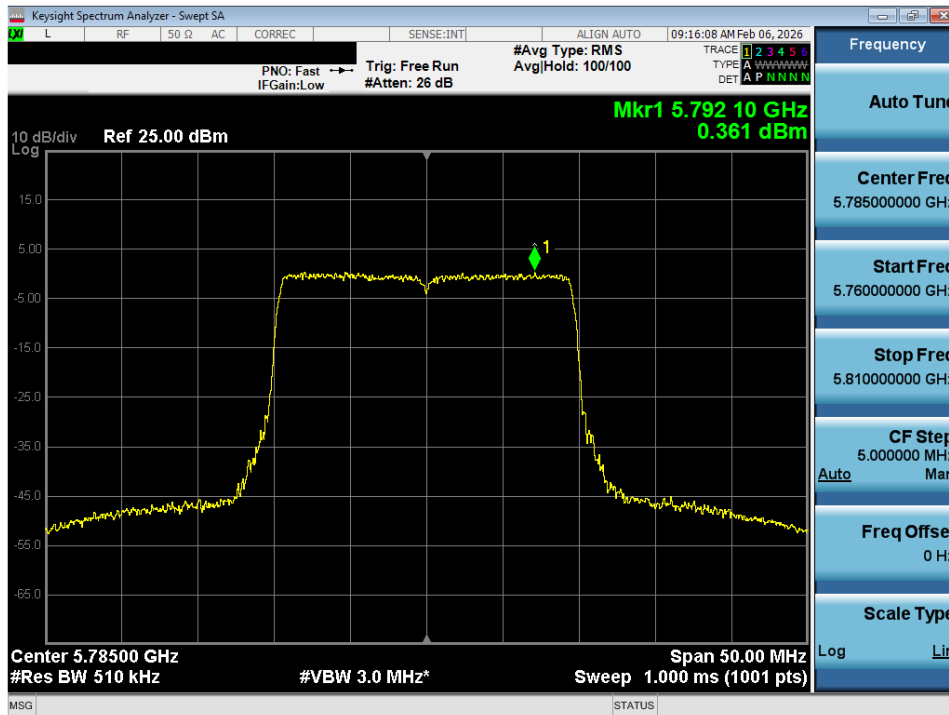


Plot 7-52. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 59 of 103

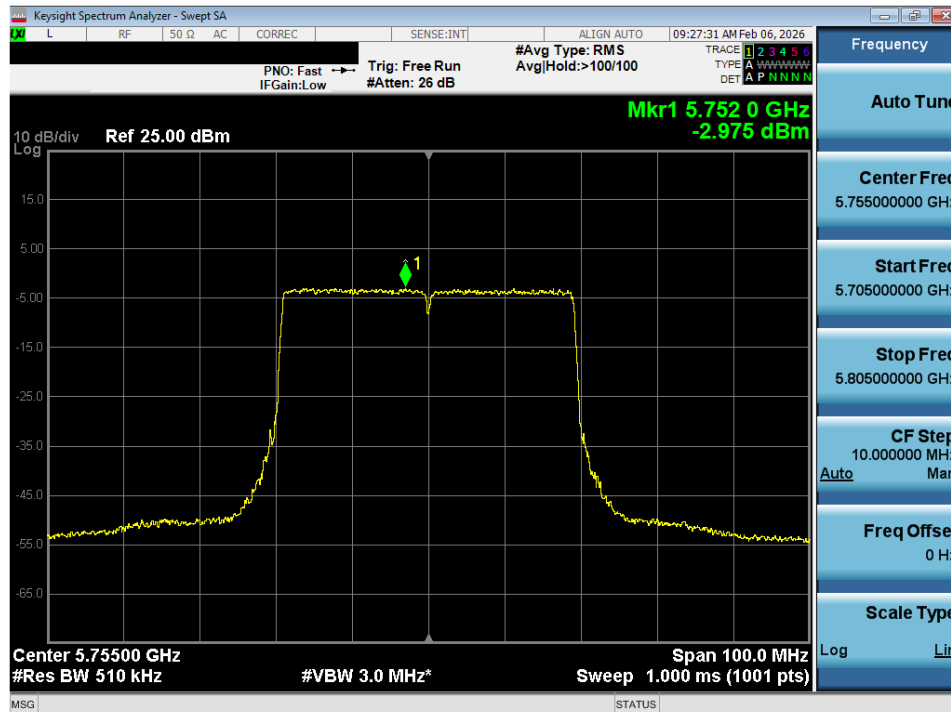


Plot 7-53. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

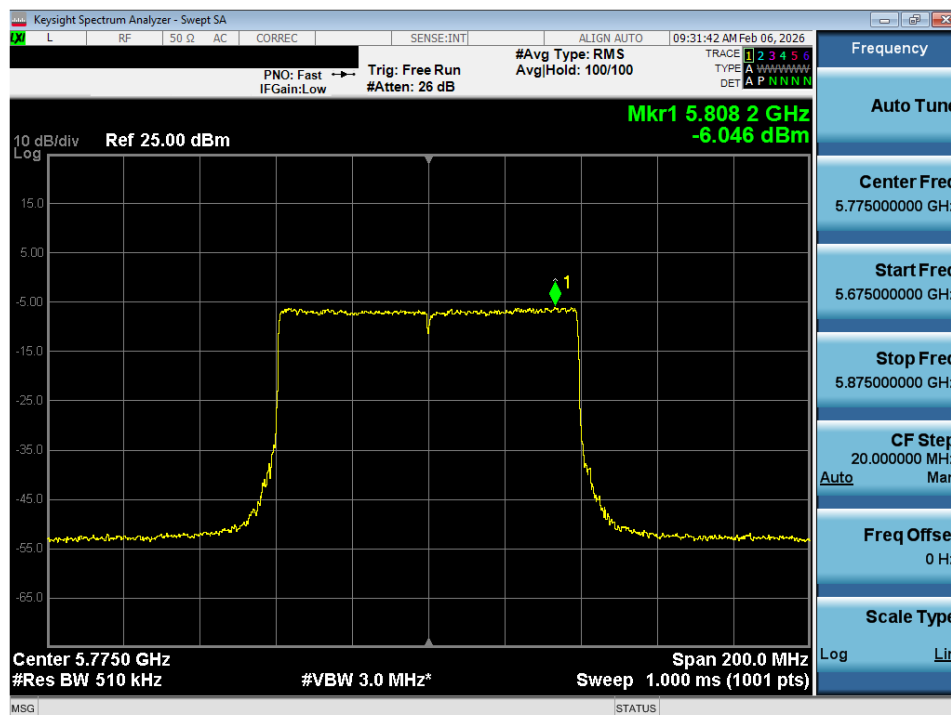


Plot 7-54. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 60 of 103

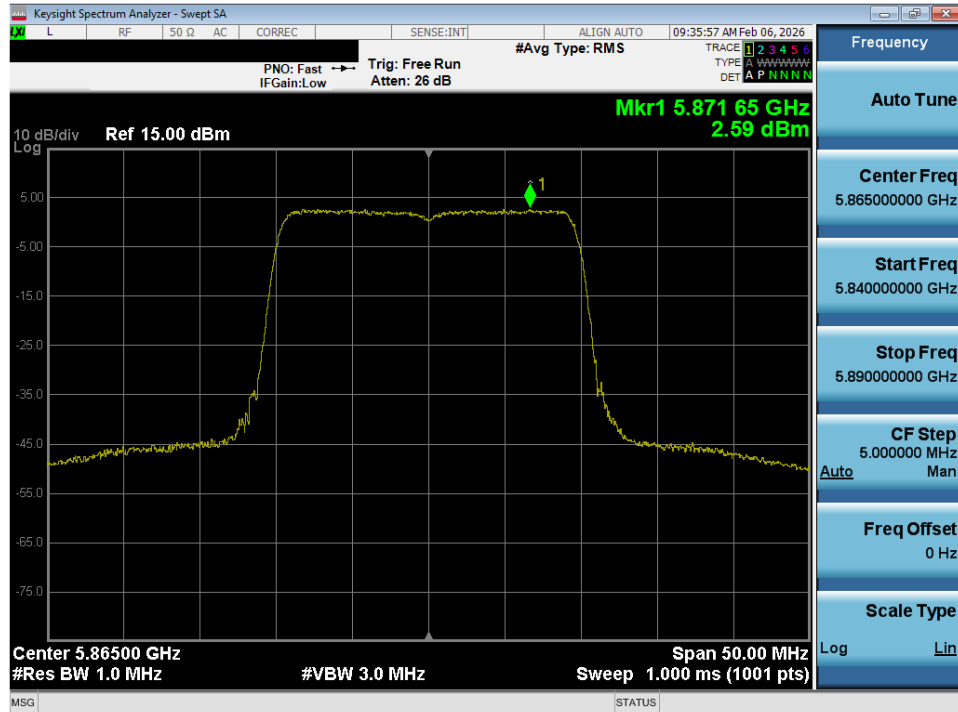


Plot 7-55. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

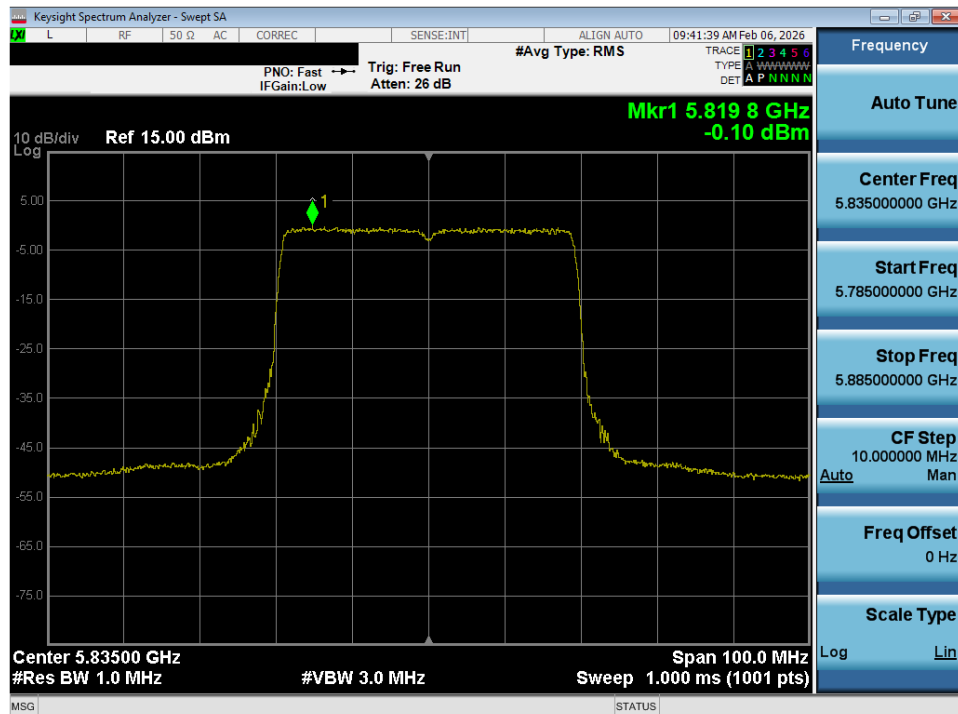


Plot 7-56. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 61 of 103

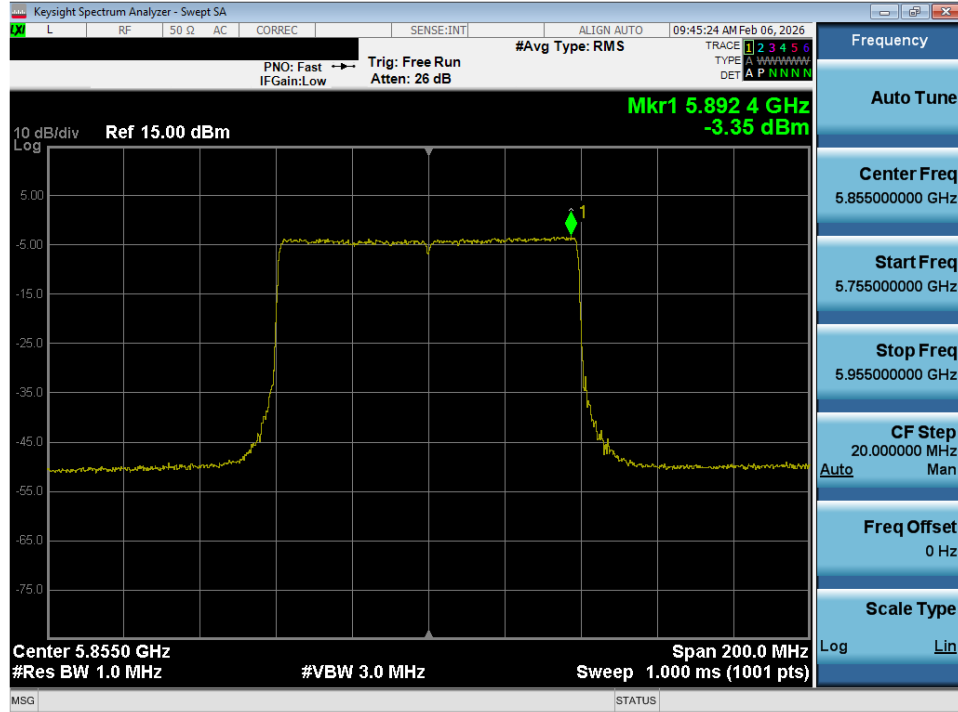

Plot 7-57. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

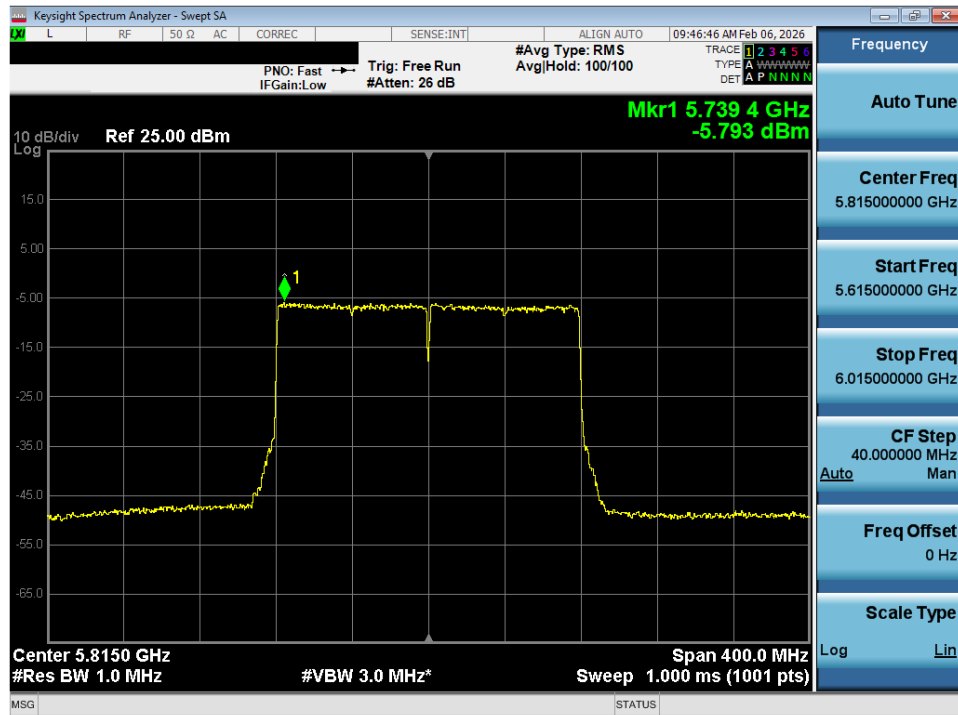

Plot 7-58. Power Spectral Density Plot SISO ANT1 (160MHz BW 802.11ax – 996*2 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 62 of 103



Sample e.i.r.p Power Spectral Density Calculation:

Assuming the average power density was calculated to be 2.63 dBm with directional gain of -8.03 dBi.

e.i.r.p. Power Spectral Density(dBm) = Power Spectral Density (dBm) + Antenna Gain (dBi)

$$2.63 \text{ dBm} + -8.03 \text{ dBi} = -5.40 \text{ dBm}$$

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 63 of 103

7.6 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400\F (kHz)	300
0.490 – 1.705 MHz	24000\F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-21. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10:2020 – Section 12.7.4.4 (Band Edge Measurements)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 64 of 103

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 65 of 103

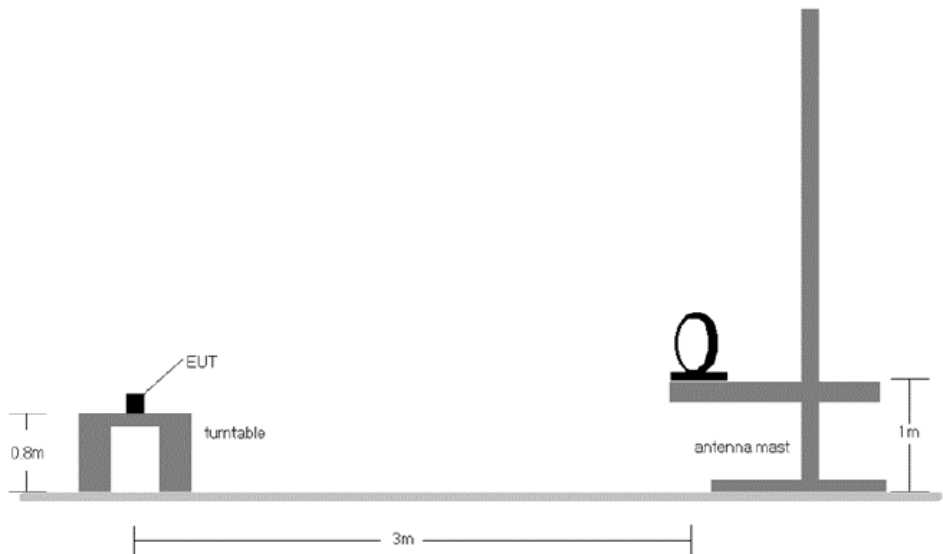


Figure 7-5. Radiated Test Setup < 30MHz

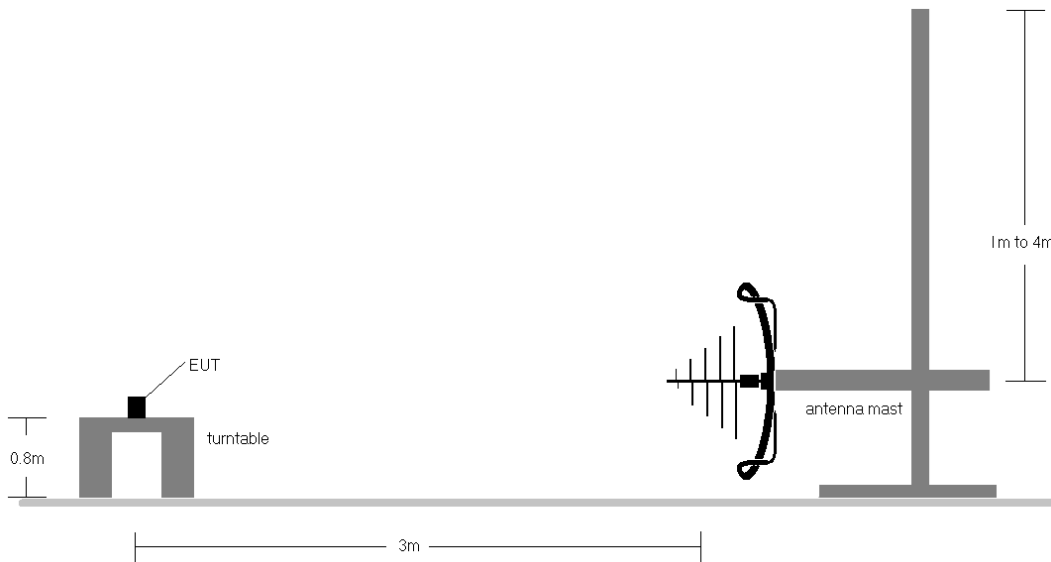


Figure 7-6. Radiated Test Setup < 1GHz

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 66 of 103

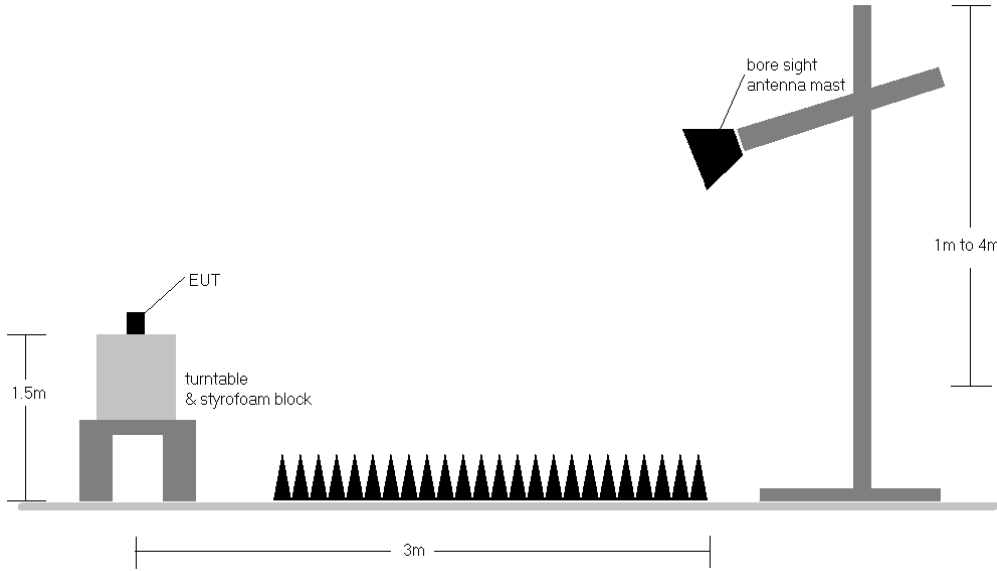


Figure 7-7. Radiated Test Setup > 1GHz

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 67 of 103		

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery and emissions were investigated with the unit powered by an extended battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. The worst case emissions below 1 GHz were identified in OFDM mode and are included in the test report.
7. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
10. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
13. In this section, plots showing measurements shown as "channel power" are recorded using the integration methods described in Section 11.12.3.2 of ANSI C63.10:2020 for average and peak measurements as allowed per Section 12.7.4.4.1. Also, the average measurements include the duty cycle correction factor shown in Section 2.2 of this report.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 68 of 103

Sample Calculations

Determining Spurious Emissions Levels


- o Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- o $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- o $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- o The amplitude offset shown in the radiated restricted band edge plots in Section Radiated Spurious Emission Measurements – Above 1GHz was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 69 of 103


7.6.1 Radiated Spurious Emission Measurements (26 Tones)

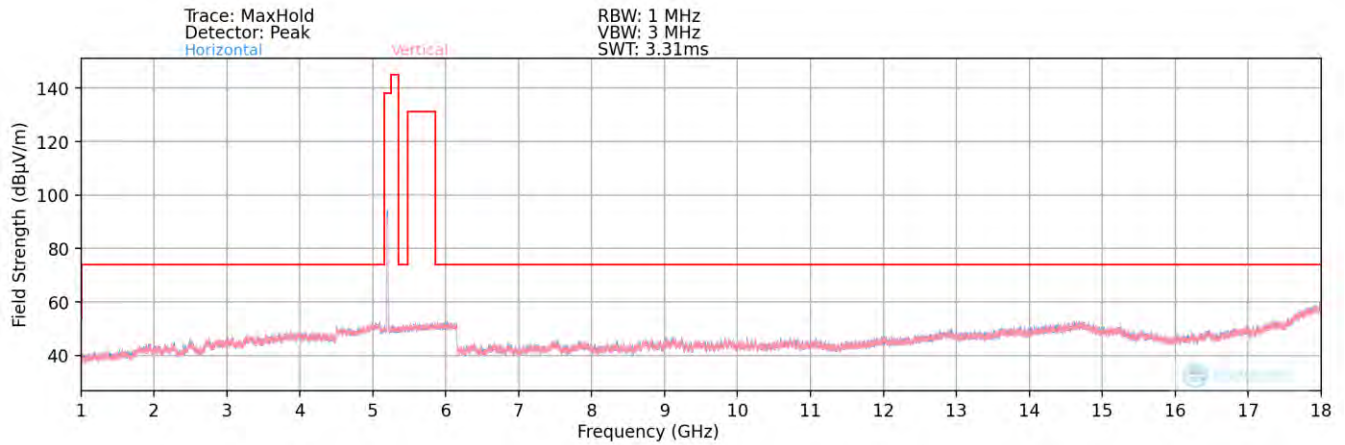

Plot 7-59. Radiated Spurious Plot above 1GHz (802.11ax – UNII 1 Ch. 40)

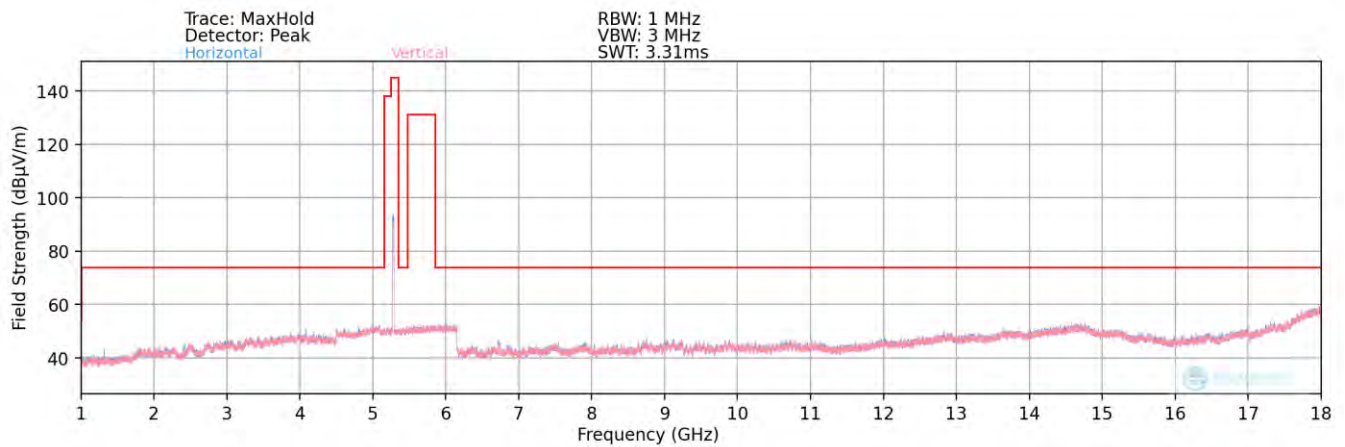


Plot 7-60. Radiated Spurious Plot above 1GHz (802.11ax – UNII 2A Ch. 56)

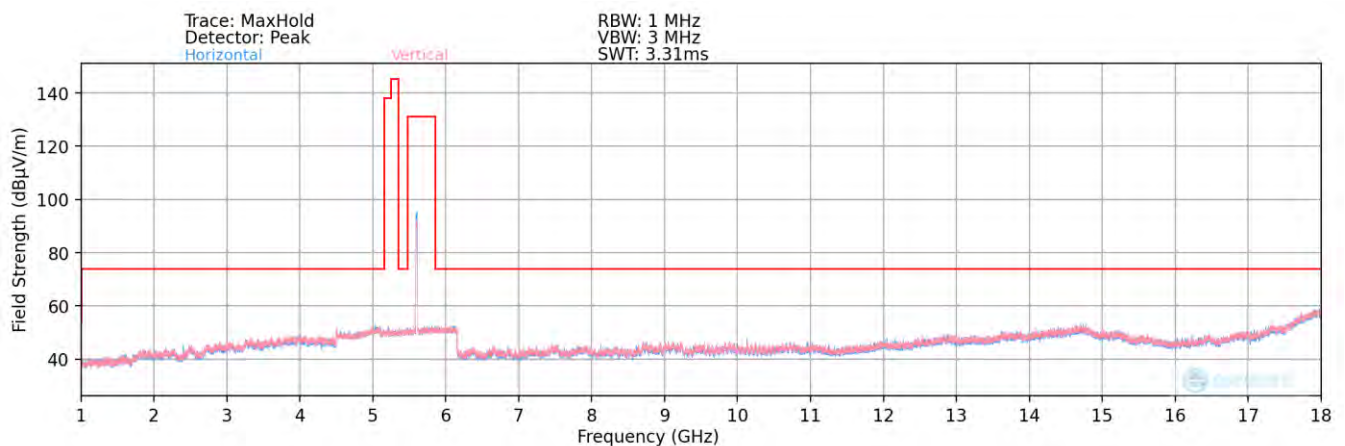


Plot 7-61. Radiated Spurious Plot above 1GHz (802.11ax – UNII 2C Ch. 120)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 70 of 103

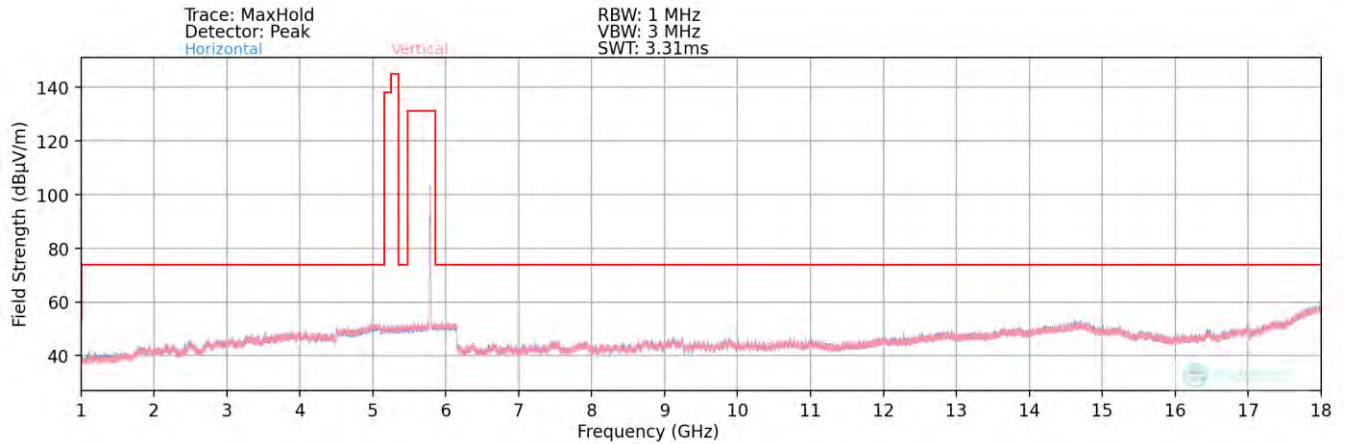

Plot 7-62. Radiated Spurious Plot above 1GHz (802.11ax – UNII 3 Ch. 157)

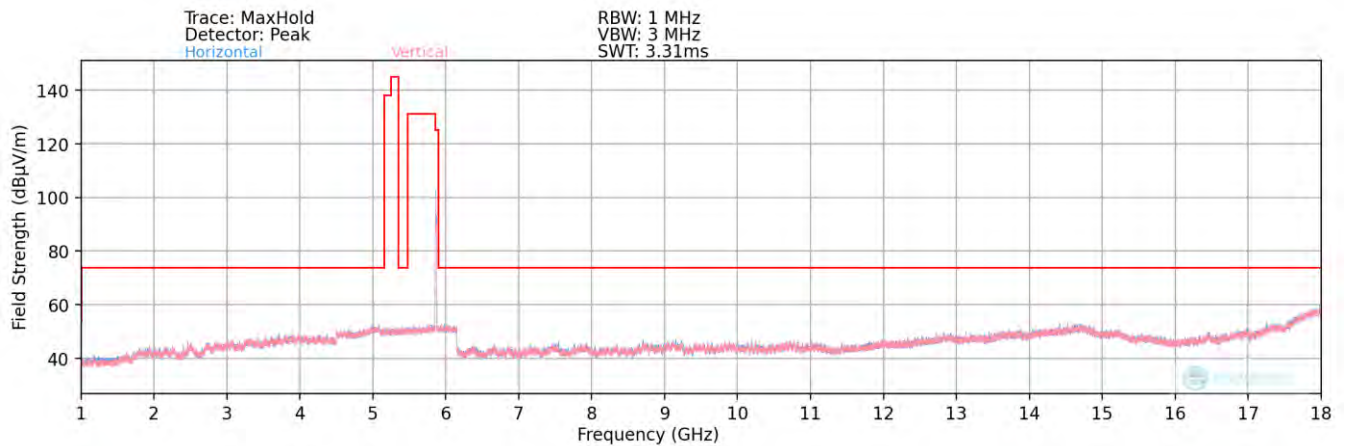


Plot 7-63. Radiated Spurious Plot above 1GHz (802.11ax – UNII 4 Ch. 173)

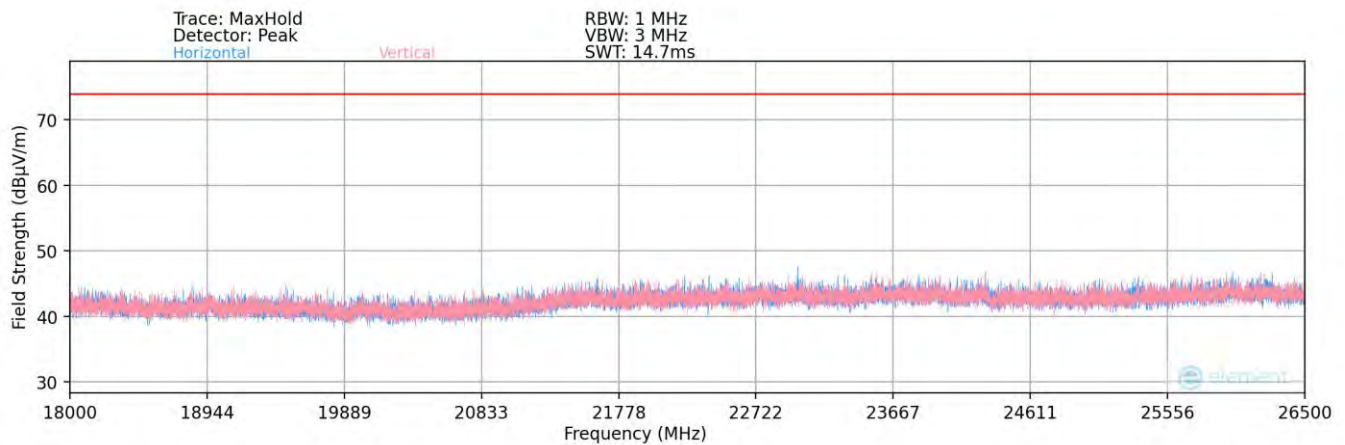

Plot 7-64. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 71 of 103		

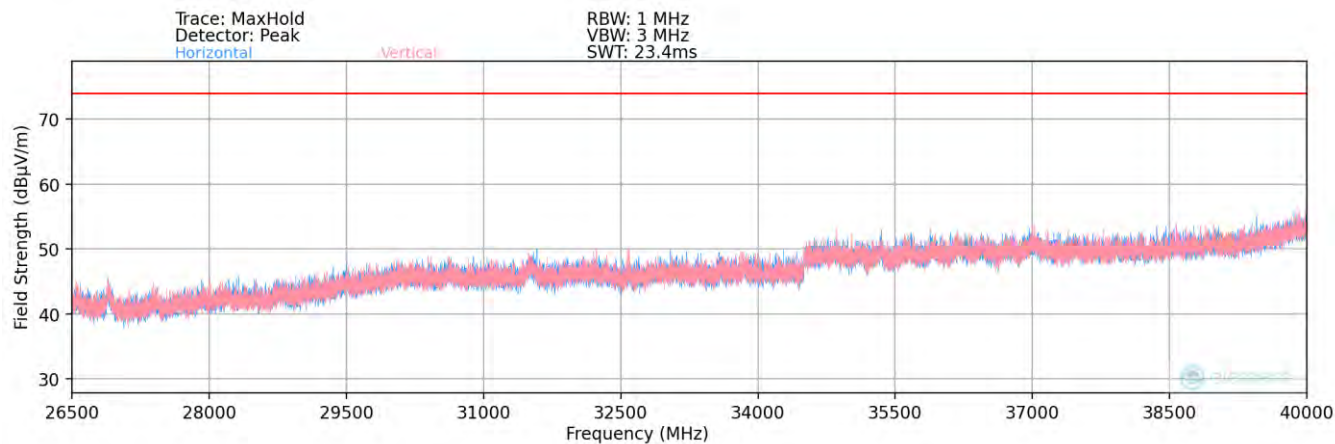

Plot 7-65. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 72 of 103		

Radiated Spurious Emission Measurements (26 Tones) – UNII 1

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	1	36	5180	4		10360.00	Peak	H	-	-	-68.76	10.87	0.00	49.11	68.20	-19.09
						*	15540.00	Average	H	-	-	-79.77	15.31	0.00	42.54	53.98	-11.44
						*	15540.00	Peak	H	-	-	-67.91	15.31	0.00	54.40	73.98	-19.58
						*	20720.00	Average	H	-	-	-62.63	3.17	-9.54	38.00	53.98	-15.98
						*	20720.00	Peak	H	-	-	-50.77	3.17	-9.54	49.86	73.98	-24.12
							25900.00	Peak	H	-	-	-51.47	3.93	-9.54	49.92	68.20	-18.28
			40	5200	4		10400.00	Peak	H	-	-	-68.97	10.23	0.00	48.26	68.20	-19.94
						*	15600.00	Average	H	-	-	-79.83	14.64	0.00	41.81	53.98	-12.17
						*	15600.00	Peak	H	-	-	-67.86	14.64	0.00	53.78	73.98	-20.20
						*	20800.00	Average	H	-	-	-62.43	3.23	-9.54	38.26	53.98	-15.72
						*	20800.00	Peak	H	-	-	-51.06	3.23	-9.54	49.63	73.98	-24.35
							26000.00	Peak	H	-	-	-51.52	4.07	-9.54	50.01	68.20	-18.19
			48	5240	4		10480.00	Peak	H	-	-	-69.03	12.00	0.00	49.97	68.20	-18.23
						*	15720.00	Average	H	-	-	-79.83	14.87	0.00	42.04	53.98	-11.94
						*	15720.00	Peak	H	-	-	-68.20	14.87	0.00	53.67	73.98	-20.31
						*	20960.00	Average	H	-	-	-62.95	3.40	-9.54	37.91	53.98	-16.07
						*	20960.00	Peak	H	-	-	-51.59	3.40	-9.54	49.27	73.98	-24.71
							26200.00	Peak	H	-	-	-51.04	3.84	-9.54	50.26	68.20	-17.94

Table 7-22. Radiated Measurements (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 73 of 103

Radiated Spurious Emission Measurements (26 Tones) – UNII 2A

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	2A	52	5260	4		10520.00	Peak	H	-	-	-68.32	10.78	0.00	49.46	68.20	-18.74
						*	15780.00	Average	H	-	-	-79.56	14.43	0.00	41.87	53.98	-12.11
						*	15780.00	Peak	H	-	-	-67.95	14.43	0.00	53.48	73.98	-20.50
						*	21040.00	Average	H	-	-	-62.79	3.53	-9.54	38.20	53.98	-15.78
						*	21040.00	Peak	H	-	-	-51.88	3.53	-9.54	49.11	73.98	-24.87
			56	5280	4		26300.00	Peak	H	-	-	-51.17	3.79	-9.54	50.08	68.20	-18.12
							10560.00	Peak	H	-	-	-68.07	10.84	0.00	49.77	68.20	-18.43
						*	15840.00	Average	H	-	-	-79.43	14.39	0.00	41.96	53.98	-12.02
						*	15840.00	Peak	H	-	-	-67.60	14.39	0.00	53.79	73.98	-20.19
						*	21120.00	Average	H	-	-	-62.67	3.60	-9.54	38.39	53.98	-15.59
						*	21120.00	Peak	H	-	-	-51.66	3.60	-9.54	49.40	73.98	-24.58
			64	5320	4		26400.00	Peak	H	-	-	-51.47	3.64	-9.54	49.63	68.20	-18.57
						*	10640.00	Average	H	-	-	-79.25	10.10	0.00	37.85	53.98	-16.13
						*	10640.00	Peak	H	-	-	-68.15	10.10	0.00	48.95	73.98	-25.03
						*	15960.00	Average	H	-	-	-80.11	14.07	0.00	40.96	53.98	-13.02
						*	15960.00	Peak	H	-	-	-68.01	14.07	0.00	53.06	73.98	-20.92
						*	21280.00	Average	H	-	-	-62.76	3.65	-9.54	38.35	53.98	-15.63
						*	21280.00	Peak	H	-	-	-52.24	3.65	-9.54	48.87	73.98	-25.11
							26600.00	Peak	H	-	-	-51.32	3.84	-9.54	49.98	68.20	-18.22

Table 7-23. Radiated Measurements (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 74 of 103		

Radiated Spurious Emission Measurements (26 Tones) – UNII 2C

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	2C	100	5500	4	*	11000.00	Average	H	-	-	-80.32	10.66	0.00	37.34	53.98	-16.64
						*	11000.00	Peak	H	-	-	-68.05	10.66	0.00	49.61	73.98	-24.37
							16500.00	Peak	H	-	-	-67.56	14.25	-9.54	44.15	68.20	-24.05
							22000.00	Peak	H	-	-	-51.64	3.57	-9.54	49.39	68.20	-18.81
							27500.00	Peak	H	-	-	-51.25	4.02	-9.54	50.23	68.20	-17.97
			120	5600	4	*	11200.00	Average	H	-	-	-80.14	11.35	0.00	38.21	53.98	-15.77
						*	11200.00	Peak	H	-	-	-67.92	11.35	0.00	50.43	73.98	-23.55
							16800.00	Peak	H	-	-	-67.25	15.80	0.00	55.55	68.20	-12.65
						*	22400.00	Average	H	-	-	-62.61	3.66	-9.54	38.51	53.98	-15.47
						*	22400.00	Peak	H	-	-	-51.31	3.66	-9.54	49.81	73.98	-24.17
							28000.00	Peak	H	-	-	-51.78	4.35	-9.54	50.03	68.20	-18.17
			144	5720	4	*	11440.00	Average	H	-	-	-79.98	11.74	0.00	38.76	53.98	-15.22
						*	11440.00	Peak	H	-	-	-67.85	11.74	0.00	50.89	73.98	-23.09
							17160.00	Peak	H	-	-	-67.23	18.31	0.00	58.08	68.20	-10.12
						*	22880.00	Average	H	-	-	-62.59	3.60	-9.54	38.47	53.98	-15.51
						*	22880.00	Peak	H	-	-	-51.87	3.60	-9.54	49.19	73.98	-24.79
							28600.00	Peak	H	-	-	-52.14	4.74	-9.54	50.06	68.20	-18.14

Table 7-24. Radiated Measurements (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 75 of 103

Radiated Spurious Emission Measurements (26 Tones) – UNII 3

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	3	149	5745	4	*	11490.00	Average	H	-	-	-80.68	11.33	0.00	37.65	53.98	-16.33
						*	11490.00	Peak	H	-	-	-68.35	11.33	0.00	49.98	73.98	-24.00
							17235.00	Peak	H	-	-	-67.92	19.05	0.00	58.13	68.20	-10.07
						*	22980.00	Average	H	-	-	-62.81	3.62	-9.54	38.27	53.98	-15.71
						*	22980.00	Peak	H	-	-	-52.28	3.62	-9.54	48.80	73.98	-25.18
							28725.00	Peak	H	-	-	-52.90	4.94	-9.54	49.50	68.20	-18.70
			157	5785	4	*	11570.00	Average	H	-	-	-80.53	11.13	0.00	37.60	53.98	-16.38
						*	11570.00	Peak	H	-	-	-68.14	11.13	0.00	49.99	73.98	-23.99
							17355.00	Peak	H	-	-	-67.50	20.63	0.00	60.13	68.20	-8.07
							23140.00	Peak	H	-	-	-51.47	3.59	-9.54	49.58	68.20	-18.62
							28925.00	Peak	H	-	-	-52.22	4.92	-9.54	50.16	68.20	-18.04
						*	11650.00	Average	H	-	-	-80.18	11.41	0.00	38.23	53.98	-15.75
			165	5825	4	*	11650.00	Peak	H	-	-	-68.39	11.41	0.00	50.02	73.98	-23.96
							17475.00	Peak	H	-	-	-67.64	20.55	0.00	59.91	68.20	-8.29
							23300.00	Peak	H	-	-	-51.49	3.39	-9.54	49.36	68.20	-18.84
							29125.00	Peak	H	-	-	-52.03	5.00	-9.54	50.43	68.20	-17.77

Table 7-25. Radiated Measurements (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 76 of 103		


Radiated Spurious Emission Measurements (26 Tones) – UNII 4

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	4	169	5845	4	*	11690.00	Average	H	-	-	-80.56	11.99	0.00	38.43	53.98	-15.55
						*	11690.00	Peak	H	-	-	-68.55	11.99	0.00	50.44	73.98	-23.54
							17535.00	Peak	H	-	-	-67.93	21.07	0.00	60.14	68.20	-8.06
							23380.00	Peak	H	-	-	-51.83	3.42	-9.54	49.05	68.20	-19.15
							29225.00	Peak	H	-	-	-52.55	5.06	-9.54	49.97	68.20	-18.23
			173	5865	4	*	11730.00	Average	H	-	-	-80.82	12.45	0.00	38.63	53.98	-15.35
						*	11730.00	Peak	H	-	-	-68.75	12.45	0.00	50.70	73.98	-23.28
							17595.00	Peak	H	-	-	-67.73	21.77	0.00	61.04	68.20	-7.16
							23460.00	Peak	H	-	-	-51.46	3.47	-9.54	49.47	68.20	-18.73
							29325.00	Peak	H	-	-	-52.09	5.24	-9.54	50.61	68.20	-17.59
			177	5885	4	*	11770.00	Average	H	-	-	-80.28	12.07	0.00	38.79	53.98	-15.19
						*	11770.00	Peak	H	-	-	-68.39	12.07	0.00	50.68	73.98	-23.30
							17655.00	Peak	H	-	-	-67.66	22.31	0.00	61.65	68.20	-6.55
							23540.00	Peak	H	-	-	-51.68	3.44	-9.54	49.22	68.20	-18.98
							29425.00	Peak	H	-	-	-52.30	5.39	-9.54	50.55	68.20	-17.65


Table 7-26. Radiated Measurements (26 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 77 of 103		


7.6.2 Radiated Spurious Emission Measurements (242 Tones)

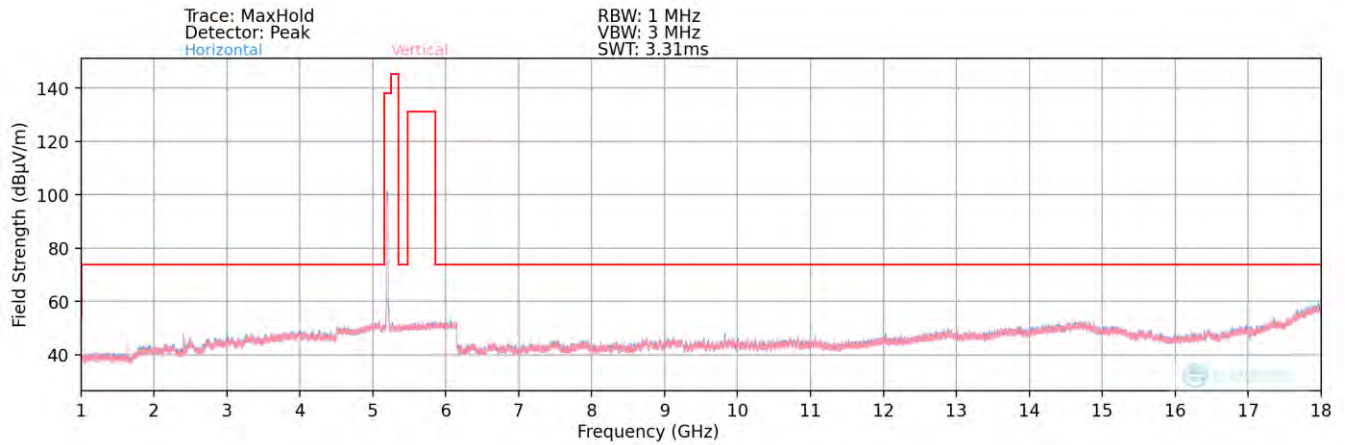

Plot 7-66. Radiated Spurious Plot above 1GHz (802.11ax – UNII 1 Ch. 40)

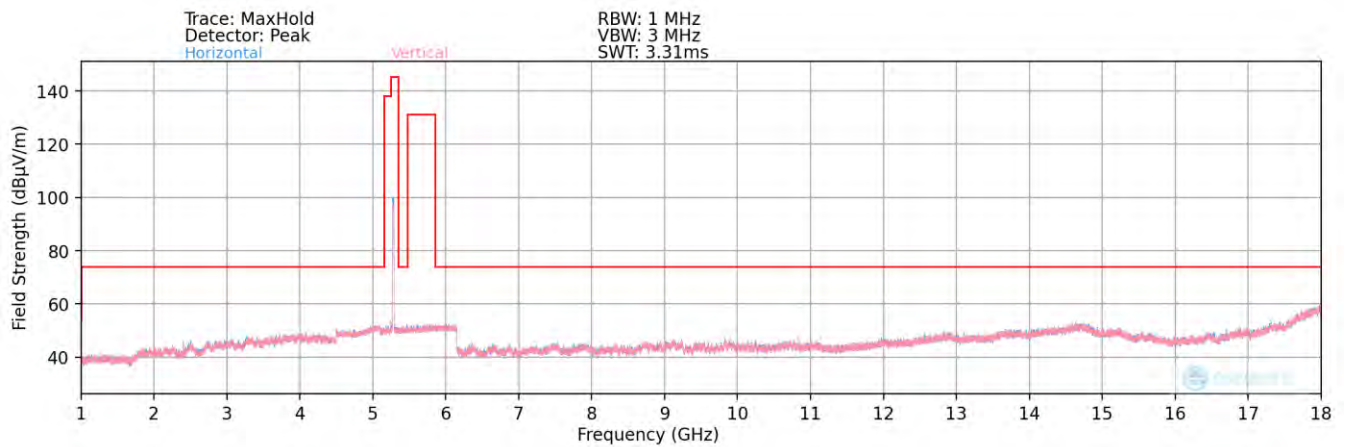


Plot 7-67. Radiated Spurious Plot above 1GHz (802.11ax – UNII 2A Ch. 56)

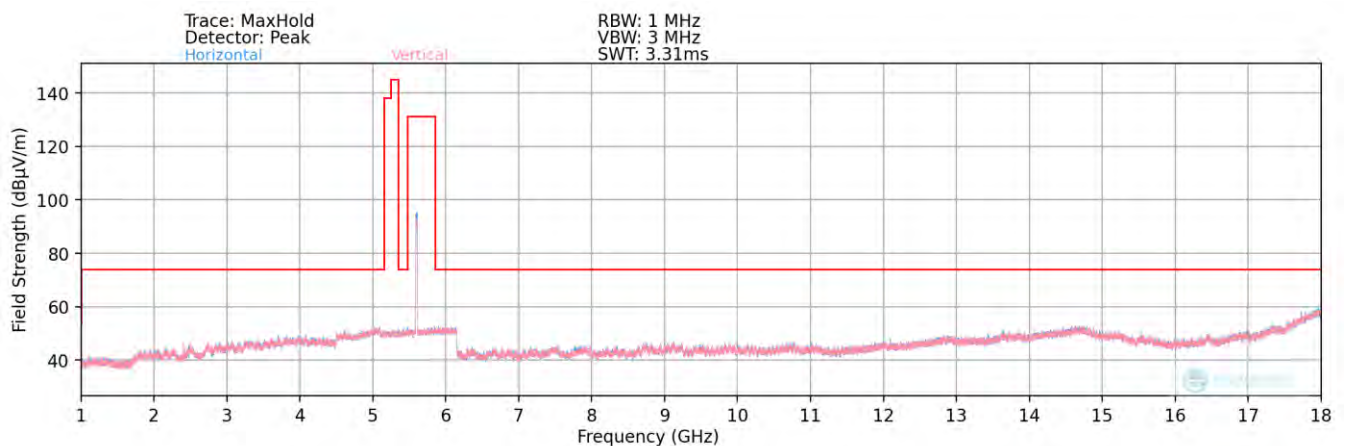


Plot 7-68. Radiated Spurious Plot above 1GHz (802.11ax – UNII 2C Ch. 120)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 78 of 103		

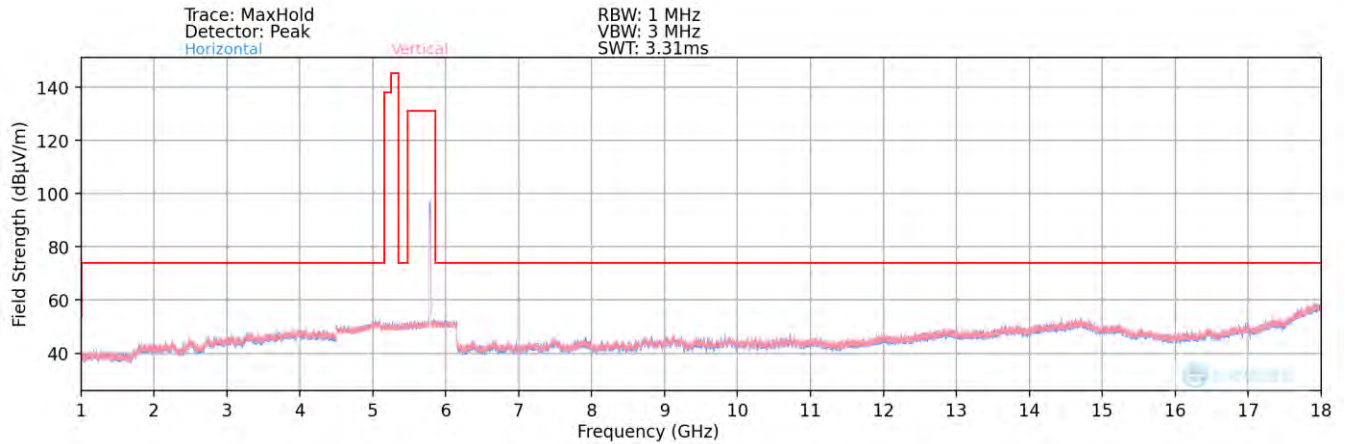

Plot 7-69. Radiated Spurious Plot above 1GHz (802.11ax – UNII 3 Ch. 157)

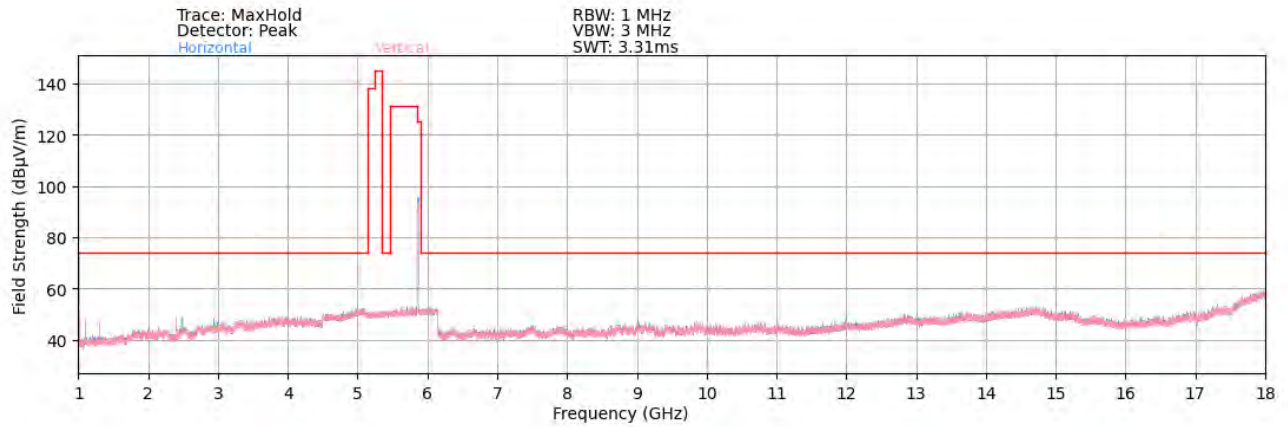


Plot 7-70. Radiated Spurious Plot above 1GHz (802.11ax – UNII 4 Ch. 173)

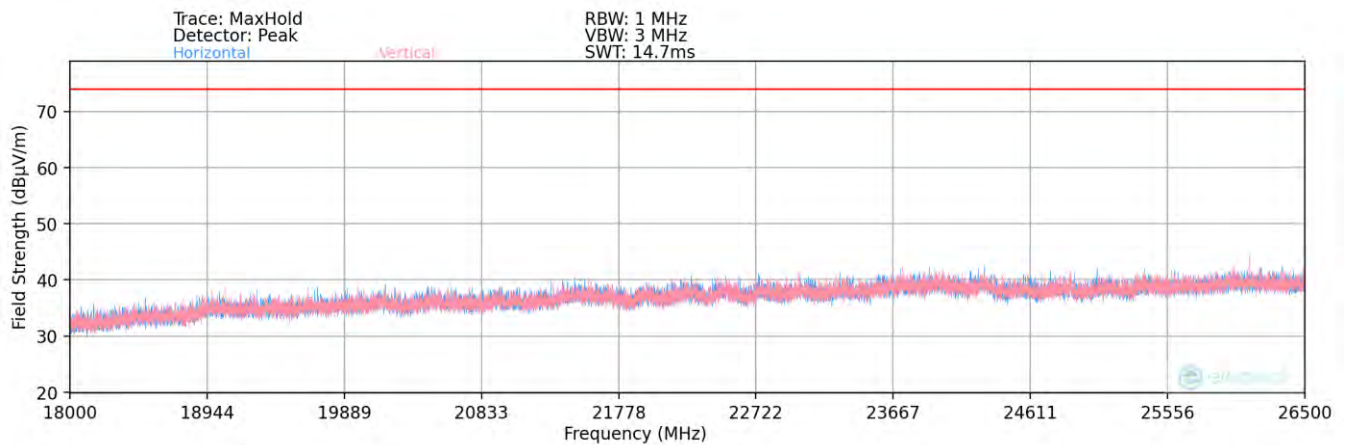

Plot 7-71. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 79 of 103		

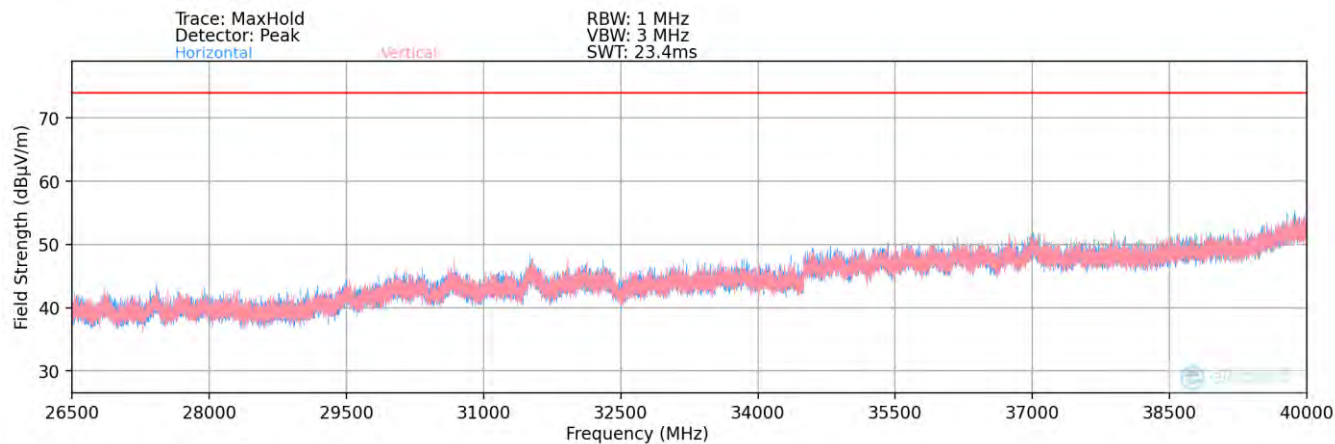

Plot 7-72. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 80 of 103		

Radiated Spurious Emission Measurements (242 Tones) – UNII 1

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	1	36	5180	61		10360.00	Peak	H	-	-	-68.45	10.87	0.00	49.42	68.20	-18.78
						*	15540.00	Average	H	-	-	-80.05	15.31	0.00	42.26	53.98	-11.72
						*	15540.00	Peak	H	-	-	-67.46	15.31	0.00	54.85	73.98	-19.13
						*	20720.00	Average	H	-	-	-62.42	3.17	-9.54	38.21	53.98	-15.77
						*	20720.00	Peak	H	-	-	-51.43	3.17	-9.54	49.20	73.98	-24.78
			40	5200	61		25900.00	Peak	H	-	-	-51.54	3.93	-9.54	49.85	68.20	-18.35
							10400.00	Peak	H	-	-	-68.20	10.23	0.00	49.03	68.20	-19.17
						*	15600.00	Average	H	-	-	-79.95	14.64	0.00	41.69	53.98	-12.29
						*	15600.00	Peak	H	-	-	-67.77	14.64	0.00	53.87	73.98	-20.11
						*	20800.00	Average	H	-	-	-62.42	3.23	-9.54	38.27	53.98	-15.71
						*	20800.00	Peak	H	-	-	-51.32	3.23	-9.54	49.37	73.98	-24.61
			48	5240	61		26000.00	Peak	H	-	-	-51.78	4.07	-9.54	49.75	68.20	-18.45
							10480.00	Peak	H	-	-	-68.67	12.00	0.00	50.33	68.20	-17.87
						*	15720.00	Average	H	-	-	-80.21	14.87	0.00	41.66	53.98	-12.32
						*	15720.00	Peak	H	-	-	-67.91	14.87	0.00	53.96	73.98	-20.02
						*	20960.00	Average	H	-	-	-62.86	3.40	-9.54	38.00	53.98	-15.98
						*	20960.00	Peak	H	-	-	-52.26	3.40	-9.54	48.60	73.98	-25.38
							26200.00	Peak	H	-	-	-51.70	3.84	-9.54	49.60	68.20	-18.60

Table 7-27. Radiated Measurements (242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 81 of 103

Radiated Spurious Emission Measurements (242 Tones) – UNII 2A

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	2A	52	5260	61		10520.00	Peak	H	-	-	-67.89	10.78	0.00	49.89	68.20	-18.31
						*	15780.00	Average	H	-	-	-79.82	14.43	0.00	41.61	53.98	-12.37
						*	15780.00	Peak	H	-	-	-67.33	14.43	0.00	54.10	73.98	-19.88
						*	21040.00	Average	H	-	-	-62.62	3.53	-9.54	38.37	53.98	-15.61
						*	21040.00	Peak	H	-	-	-51.95	3.53	-9.54	49.04	73.98	-24.94
			56	5280	61		26300.00	Peak	H	-	-	-51.81	3.79	-9.54	49.44	68.20	-18.76
							10560.00	Peak	H	-	-	-67.87	10.84	0.00	49.97	68.20	-18.23
						*	15840.00	Average	H	-	-	-79.53	14.39	0.00	41.86	53.98	-12.12
						*	15840.00	Peak	H	-	-	-67.27	14.39	0.00	54.12	73.98	-19.86
						*	21120.00	Average	H	-	-	-62.59	3.60	-9.54	38.47	53.98	-15.51
						*	21120.00	Peak	H	-	-	-51.32	3.60	-9.54	49.74	73.98	-24.24
							26400.00	Peak	H	-	-	-50.89	3.64	-9.54	50.21	68.20	-17.99
			64	5320	61	*	10640.00	Average	H	-	-	-79.82	10.10	0.00	37.28	53.98	-16.70
						*	10640.00	Peak	H	-	-	-68.10	10.10	0.00	49.00	73.98	-24.98
						*	15960.00	Average	H	-	-	-80.24	14.07	0.00	40.83	53.98	-13.15
						*	15960.00	Peak	H	-	-	-67.35	14.07	0.00	53.72	73.98	-20.26
						*	21280.00	Average	H	-	-	-62.77	3.65	-9.54	38.34	53.98	-15.64
						*	21280.00	Peak	H	-	-	-51.69	3.65	-9.54	49.42	73.98	-24.56
							26600.00	Peak	H	-	-	-51.58	3.84	-9.54	49.72	68.20	-18.48

Table 7-28. Radiated Measurements (242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 82 of 103		

Radiated Spurious Emission Measurements (242 Tones) – UNII 2C

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	2C	100	5500	61	*	11000.00	Average	H	-	-	-80.19	10.66	0.00	37.47	53.98	-16.51
						*	11000.00	Peak	H	-	-	-68.12	10.66	0.00	49.54	73.98	-24.44
							16500.00	Peak	H	-	-	-67.48	14.25	-9.54	44.23	68.20	-23.97
							22000.00	Peak	H	-	-	-51.38	3.57	-9.54	49.65	68.20	-18.55
							27500.00	Peak	H	-	-	-51.56	4.02	-9.54	49.92	68.20	-18.28
			120	5600	61	*	11200.00	Average	H	-	-	-80.34	11.35	0.00	38.01	53.98	-15.97
						*	11200.00	Peak	H	-	-	-67.77	11.35	0.00	50.58	73.98	-23.40
							16800.00	Peak	H	-	-	-67.33	15.80	0.00	55.47	68.20	-12.73
						*	22400.00	Average	H	-	-	-62.59	3.66	-9.54	38.53	53.98	-15.45
						*	22400.00	Peak	H	-	-	-51.56	3.66	-9.54	49.56	73.98	-24.42
			144	5720	61		28000.00	Peak	H	-	-	-51.87	4.35	-9.54	49.94	68.20	-18.26
						*	11440.00	Average	H	-	-	-80.42	11.74	0.00	38.32	53.98	-15.66
						*	11440.00	Peak	H	-	-	-68.32	11.74	0.00	50.42	73.98	-23.56
							17160.00	Peak	H	-	-	-67.73	18.31	0.00	57.58	68.20	-10.62
						*	22880.00	Average	H	-	-	-62.85	3.60	-9.54	38.21	53.98	-15.77
						*	22880.00	Peak	H	-	-	-52.11	3.60	-9.54	48.95	73.98	-25.03
							28600.00	Peak	H	-	-	-52.25	4.74	-9.54	49.95	68.20	-18.25

Table 7-29. Radiated Measurements (242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 83 of 103		

Radiated Spurious Emission Measurements (242 Tones) – UNII 3

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax	MIMO	3	149	5745	61	*	11490.00	Average	H	-	-	-80.67	11.33	0.00	37.66	53.98	-16.32
						*	11490.00	Peak	H	-	-	-68.55	11.33	0.00	49.78	73.98	-24.20
							17235.00	Peak	H	-	-	-67.86	19.05	0.00	58.19	68.20	-10.01
						*	22980.00	Average	H	-	-	-62.90	3.62	-9.54	38.18	53.98	-15.80
						*	22980.00	Peak	H	-	-	-52.10	3.62	-9.54	48.98	73.98	-25.00
							28725.00	Peak	H	-	-	-52.99	4.94	-9.54	49.41	68.20	-18.79
			157	5785	61	*	11570.00	Average	H	-	-	-80.42	11.13	0.00	37.71	53.98	-16.27
						*	11570.00	Peak	H	-	-	-68.86	11.13	0.00	49.27	73.98	-24.71
							17355.00	Peak	H	-	-	-67.04	20.63	0.00	60.59	68.20	-7.61
							23140.00	Peak	H	-	-	-51.24	3.59	-9.54	49.81	68.20	-18.39
							28925.00	Peak	H	-	-	-52.51	4.92	-9.54	49.87	68.20	-18.33
						*	11650.00	Average	H	-	-	-80.61	11.41	0.00	37.80	53.98	-16.18
			165	5825	61	*	11650.00	Peak	H	-	-	-68.39	11.41	0.00	50.02	73.98	-23.96
							17475.00	Peak	H	-	-	-67.58	20.55	0.00	59.97	68.20	-8.23
							23300.00	Peak	H	-	-	-51.75	3.39	-9.54	49.10	68.20	-19.10
							29125.00	Peak	H	-	-	-51.84	5.00	-9.54	50.62	68.20	-17.58

Table 7-30. Radiated Measurements (242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 84 of 103

Radiated Spurious Emission Measurements (242 Tones) – UNII 4


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11ax	MIMO	4	169	5845	61	*	11690.00	Average	H	-	-	-80.33	11.99	0.00	38.66	53.98	-15.32
						*	11690.00	Peak	H	-	-	-68.58	11.99	0.00	50.41	73.98	-23.57
							17535.00	Peak	H	-	-	-68.17	21.07	0.00	59.90	68.20	-8.30
							23380.00	Peak	H	-	-	-52.01	3.42	-9.54	48.87	68.20	-19.33
							29225.00	Peak	H	-	-	-52.64	5.06	-9.54	49.88	68.20	-18.32
			173	5865	61	*	11730.00	Average	H	-	-	-80.56	12.45	0.00	38.89	53.98	-15.09
						*	11730.00	Peak	H	-	-	-68.73	12.45	0.00	50.72	73.98	-23.26
							17595.00	Peak	H	-	-	-68.02	21.77	0.00	60.75	68.20	-7.45
							23460.00	Peak	H	-	-	-51.60	3.47	-9.54	49.33	68.20	-18.87
							29325.00	Peak	H	-	-	-52.22	5.24	-9.54	50.48	68.20	-17.72
			177	5885	61	*	11770.00	Average	H	-	-	-80.71	12.07	0.00	38.36	53.98	-15.62
						*	11770.00	Peak	H	-	-	-68.42	12.07	0.00	50.65	73.98	-23.33
							17655.00	Peak	H	-	-	-68.11	22.31	0.00	61.20	68.20	-7.00
							23540.00	Peak	H	-	-	-50.62	3.44	-9.54	50.28	68.20	-17.92
							29425.00	Peak	H	-	-	-52.62	5.39	-9.54	50.23	68.20	-17.97

Table 7-31. Radiated Measurements (242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 85 of 103		


7.6.3 Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

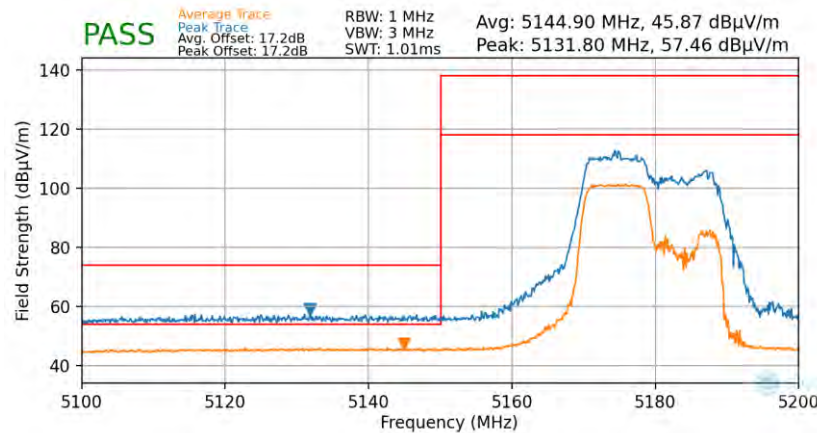

Plot 7-73. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 1 – 106 Tones)


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

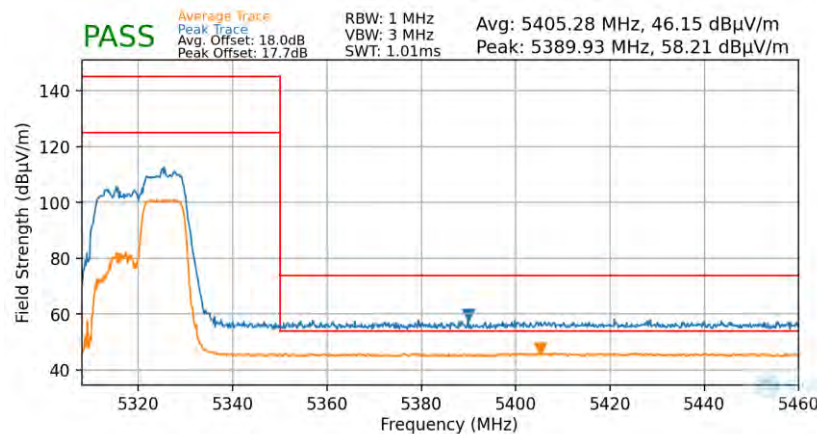

Plot 7-74. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 2A – 106 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 86 of 103		

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

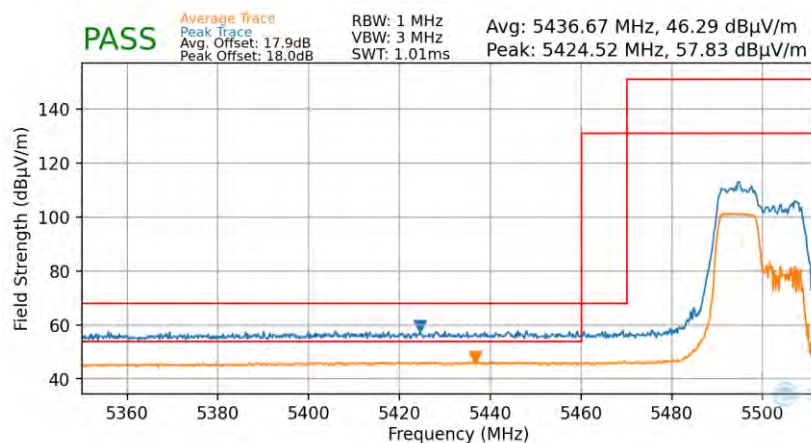

Plot 7-75. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 2C – 106 Tones)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

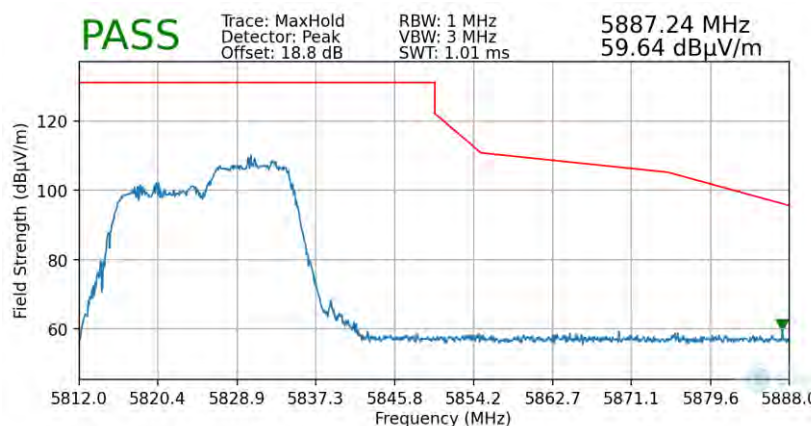

Plot 7-76. Radiated Upper Band Edge Plot (Peak – UNII Band 3 – 106 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 87 of 103		

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 53
 Distance of Measurements: 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

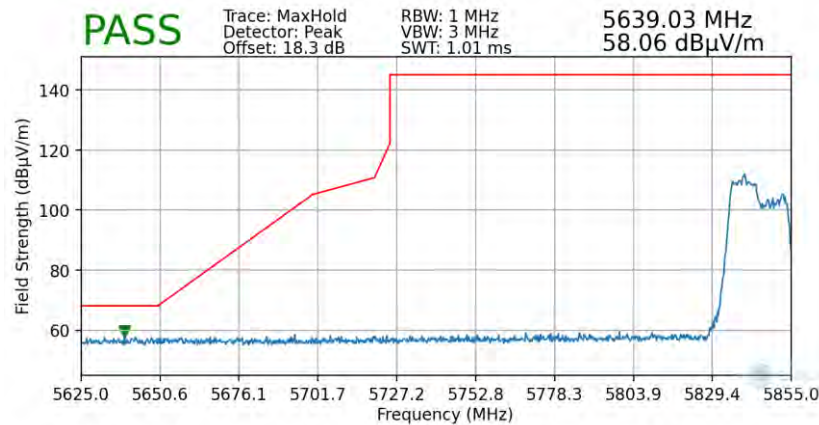

Plot 7-77. Radiated Lower Band Edge Plot (Peak - UNII Band 4 - 106 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177

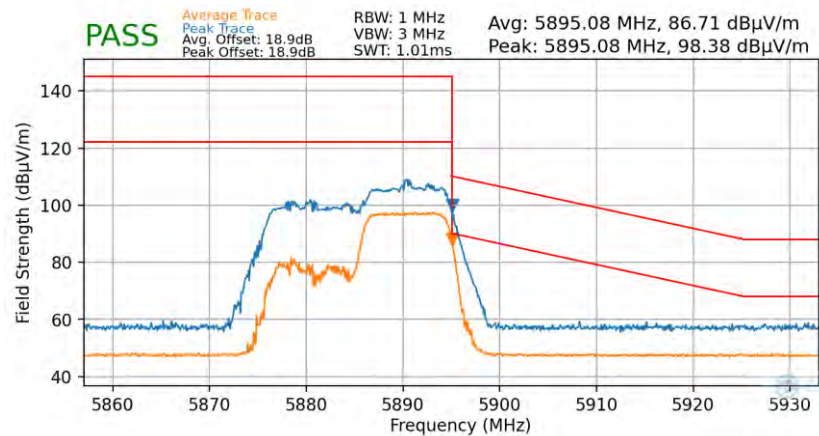


Plot 7-78. Radiated Upper Band Edge Plot (Average & Peak - UNII Band 4 - 106 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 88 of 103


7.6.4 Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

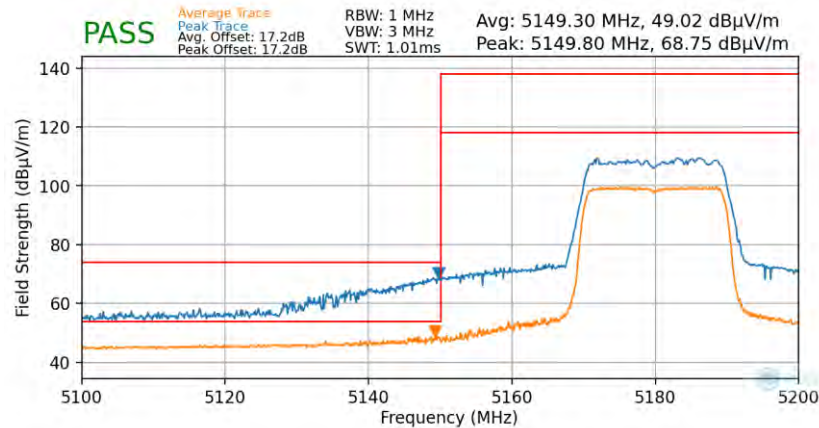

Plot 7-79. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 1 – 242 Tones)


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

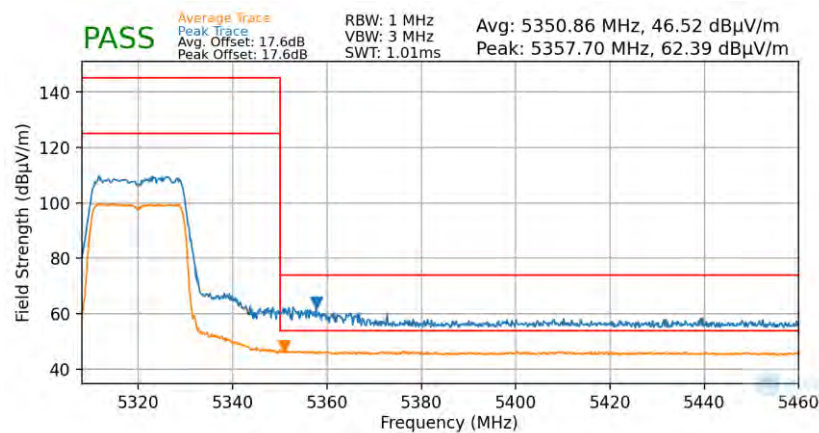

Plot 7-80. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 2A – 242 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 89 of 103

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

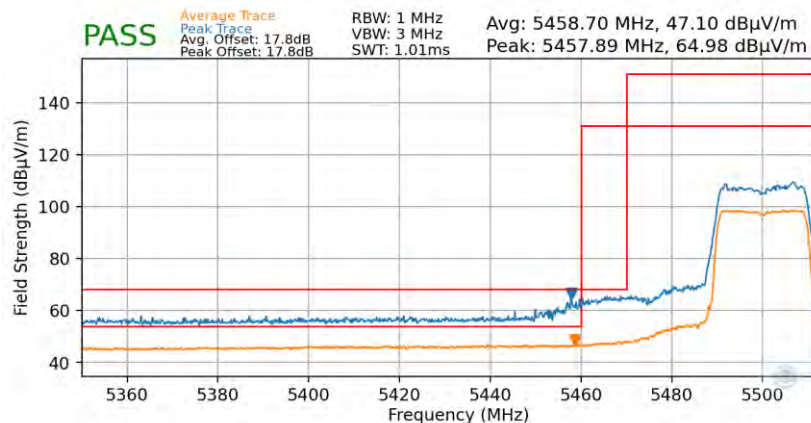

Plot 7-81. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 2C – 242 Tones)


Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

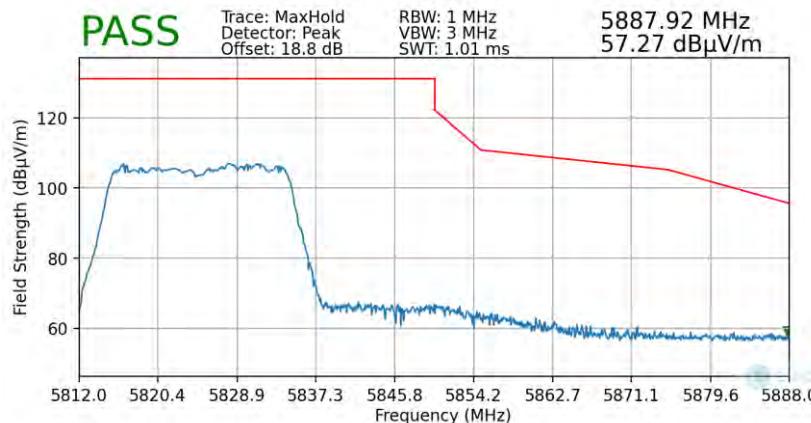

Plot 7-82. Radiated Upper Band Edge Plot (Peak – UNII Band 3 – 242 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 90 of 103

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

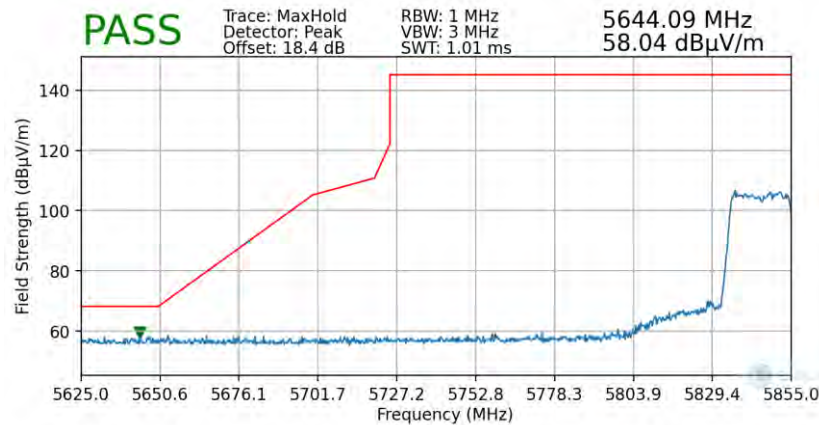

Plot 7-83. Radiated Lower Band Edge Plot (Peak – UNII Band 4 – 242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177

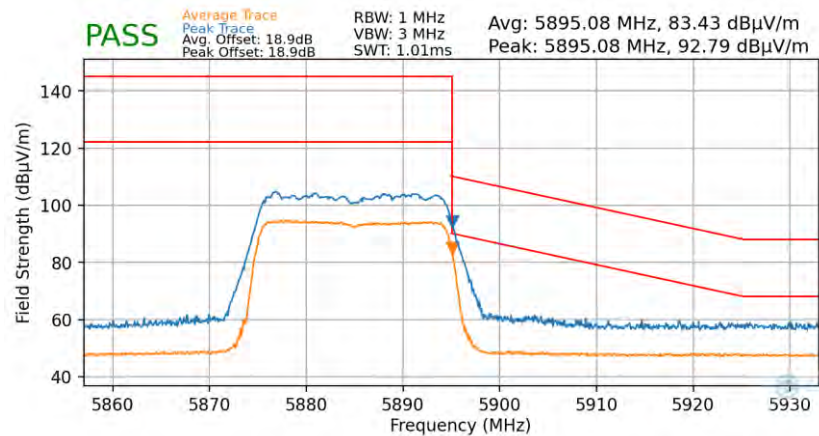


Plot 7-84. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 4 – 242 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 91 of 103		


7.6.5 Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 5190MHz
Channel: 38

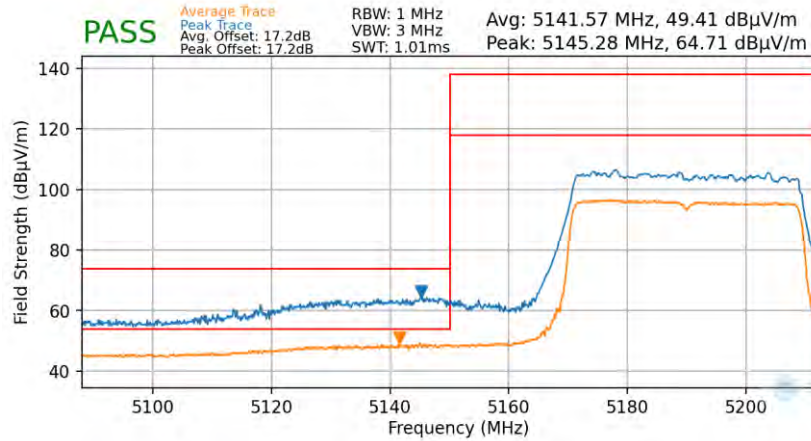

Plot 7-85. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 1 – 484 Tones)


Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 5310MHz
Channel: 62

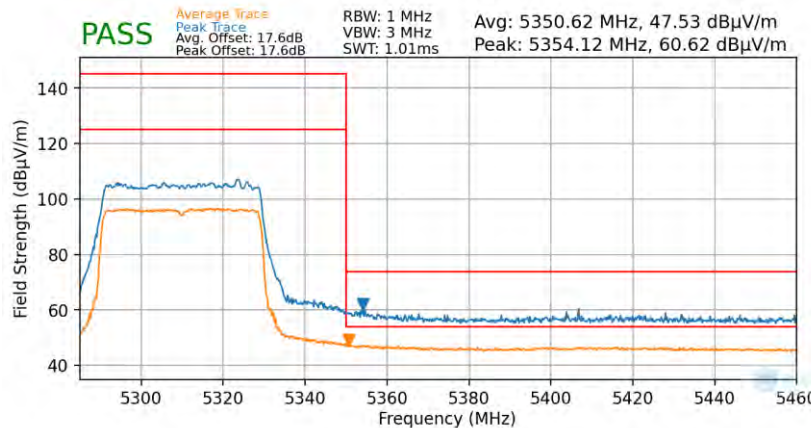

Plot 7-86. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 2A – 484 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 92 of 103

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

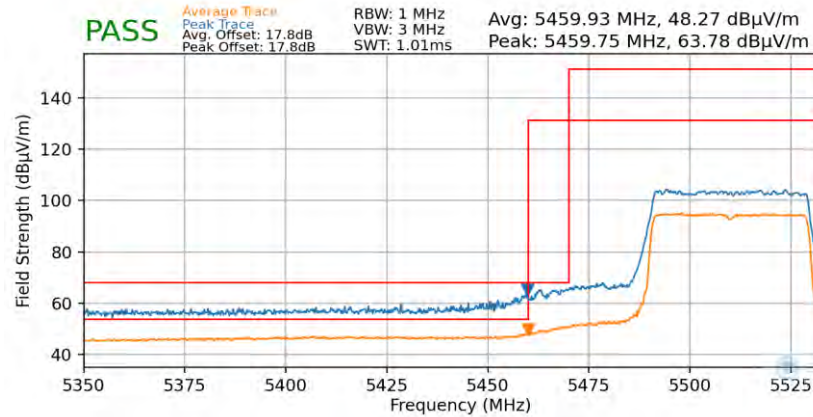

Plot 7-87. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 2C – 484 Tones)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

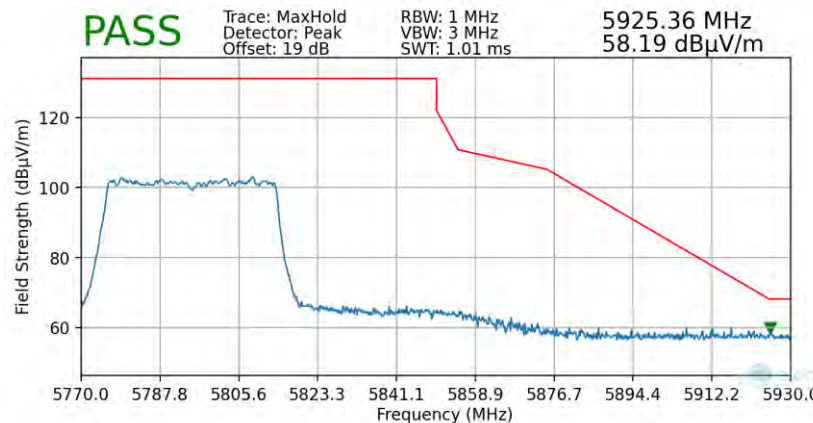

Plot 7-88. Radiated Upper Band Edge Plot (Peak – UNII Band 3 – 484 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 93 of 103		

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 5835MHz
 Channel: 167

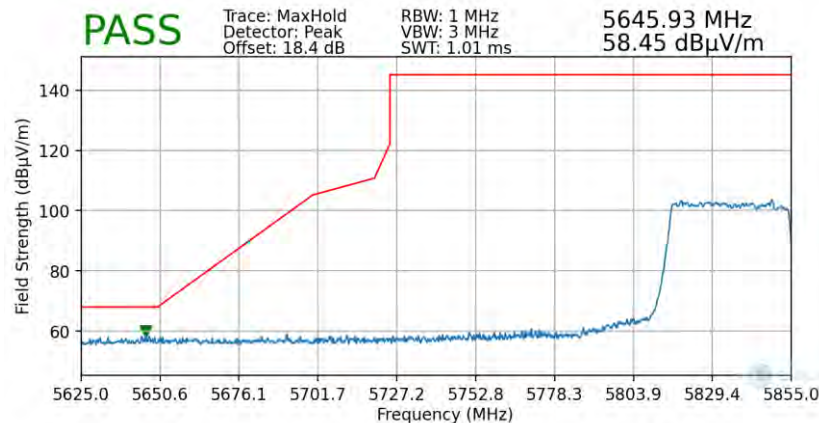

Plot 7-89. Radiated Lower Band Edge Plot (Peak – UNII Band 4 – 484 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 65
 Distance of Measurements: 3 Meters
 Operating Frequency: 5875MHz
 Channel: 175

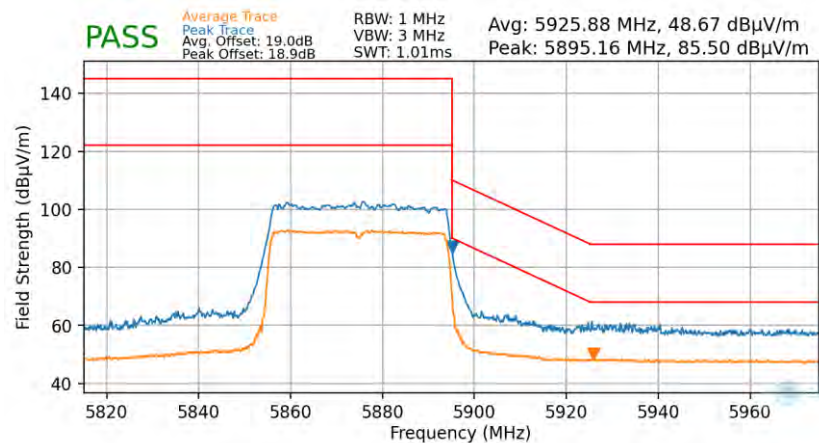


Plot 7-90. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 4 – 484 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 94 of 103		


7.6.6 Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 5210MHz
Channel: 42

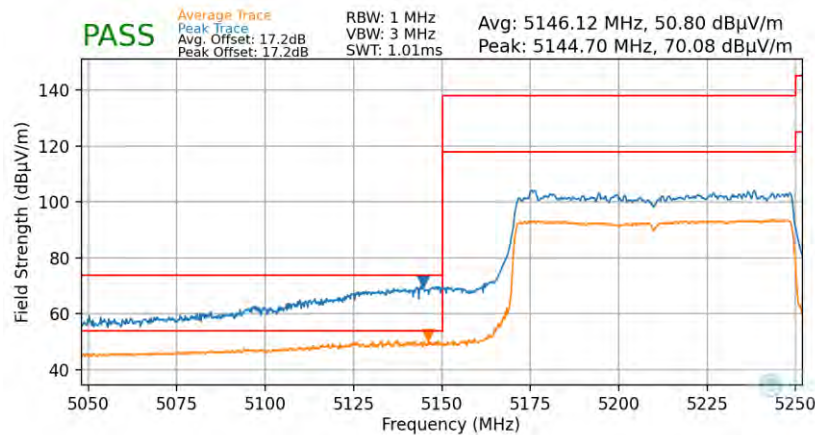

Plot 7-91. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 1 – 996 Tones)


Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 5290MHz
Channel: 58

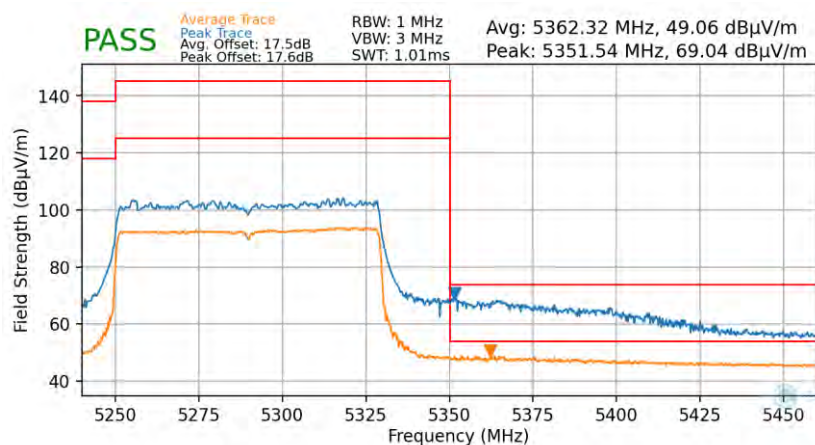

Plot 7-92. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 2A – 996 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 95 of 103

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

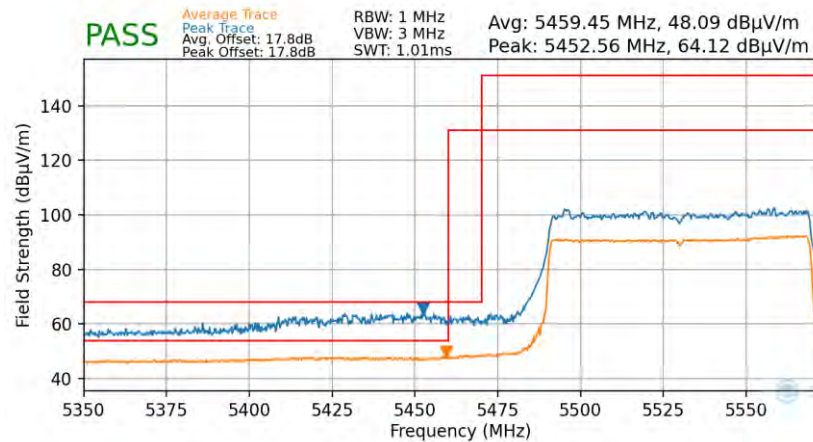

Plot 7-93. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 2C – 996 Tones)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

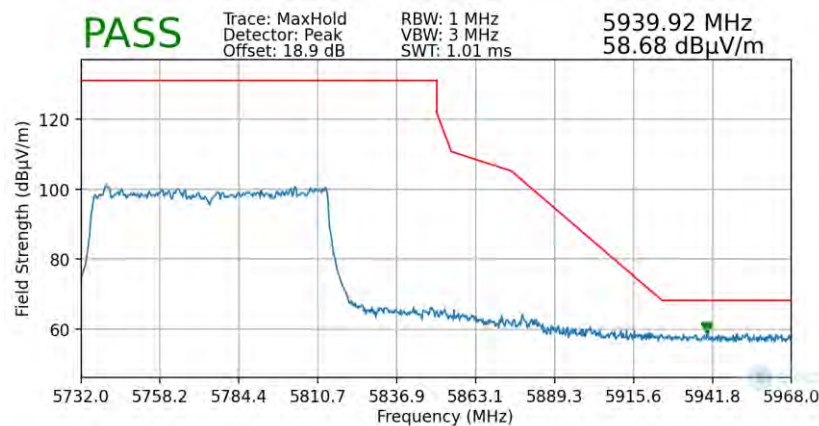

Plot 7-94. Radiated Upper Band Edge Plot (Peak – UNII Band 3 – 996 Tones)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 96 of 103		

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5855MHz
 Channel: 171

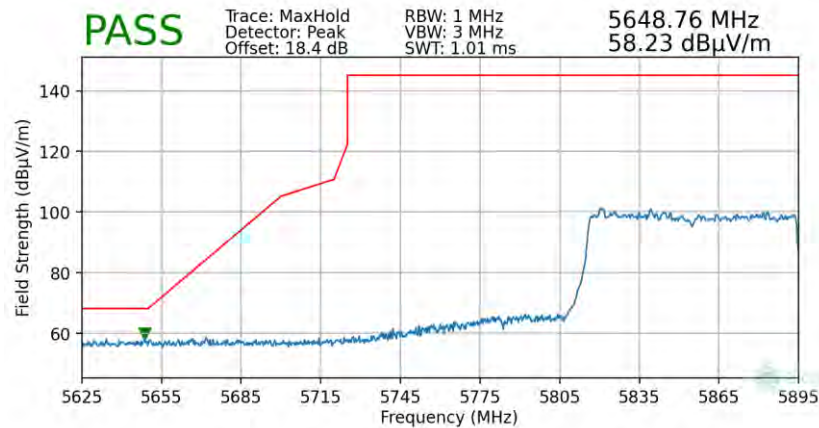

Plot 7-95. Radiated Lower Band Edge Plot (Peak – UNII Band 4 – 996 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5855MHz
 Channel: 171

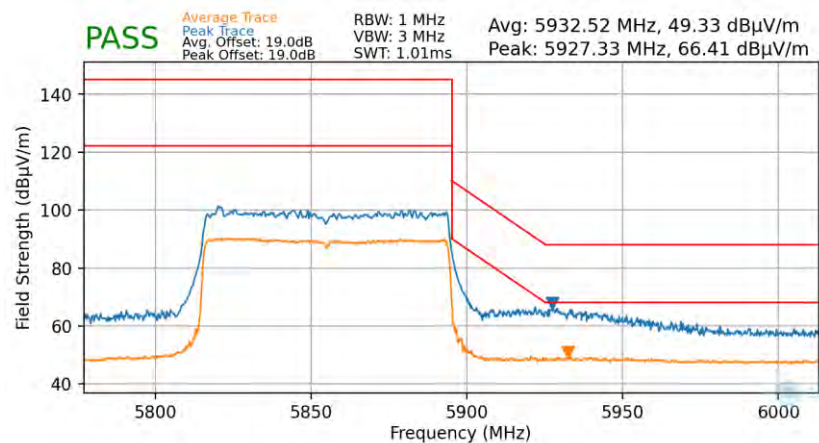


Plot 7-96. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 4 – 996 Tones)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 97 of 103		


7.6.7 Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 5250MHz
Channel: 50

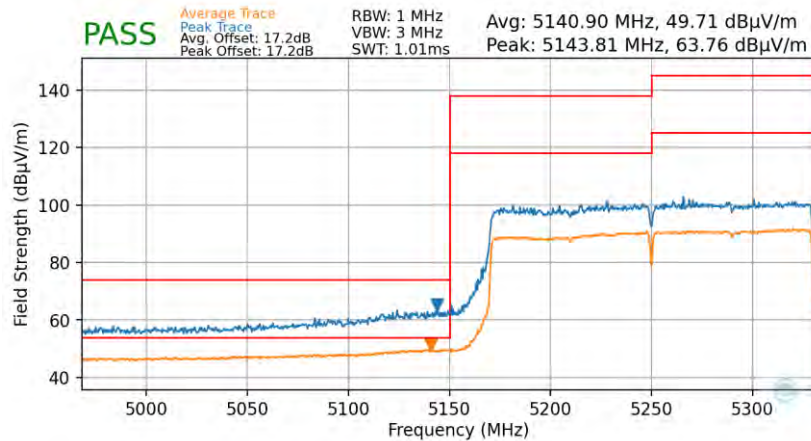

Plot 7-97. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 1 – 2x996T)


Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 5250MHz
Channel: 50

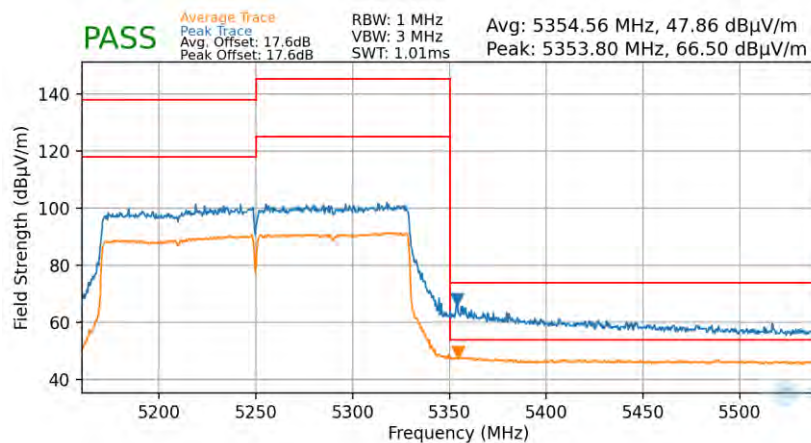

Plot 7-98. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 2A – 2x996T)


FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 98 of 103

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 5570MHz
 Channel: 114

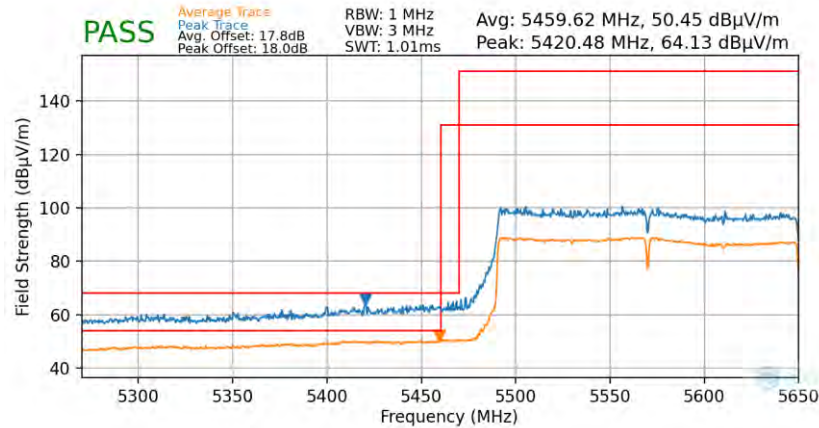

Plot 7-99. Radiated Lower Band Edge Plot (Average & Peak – UNII Band 2C – 2x996T)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 5815MHz
 Channel: 163

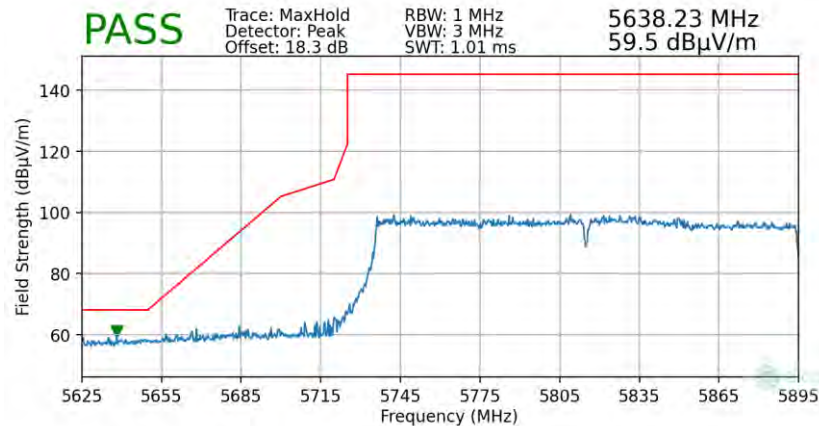

Plot 7-100. Radiated Lower Band Edge Plot (Peak – UNII Band 4 – 2x996T)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 99 of 103

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 68
 Distance of Measurements: 3 Meters
 Operating Frequency: 5815MHz
 Channel: 163

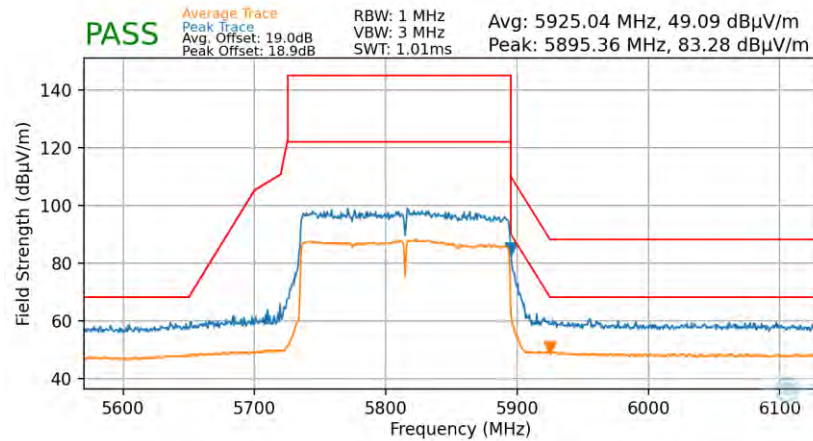

Plot 7-101. Radiated Upper Band Edge Plot (Average & Peak – UNII Band 4 – 2x996T)

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 100 of 103		

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Extended Reality Glasses FCC ID: A3LSMO200J** is in compliance with FCC Part Subpart E (15.407) of the FCC rules. The data referenced from **FCC ID: A3LSMO200P** (Model: **SM-O200P**) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMO200J**.

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 101 of 103

9.0 APPENDIX A – DATA REFERENCING SPOT-CHECKS


The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10-2020.

Notes

1. Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – SM-O200J

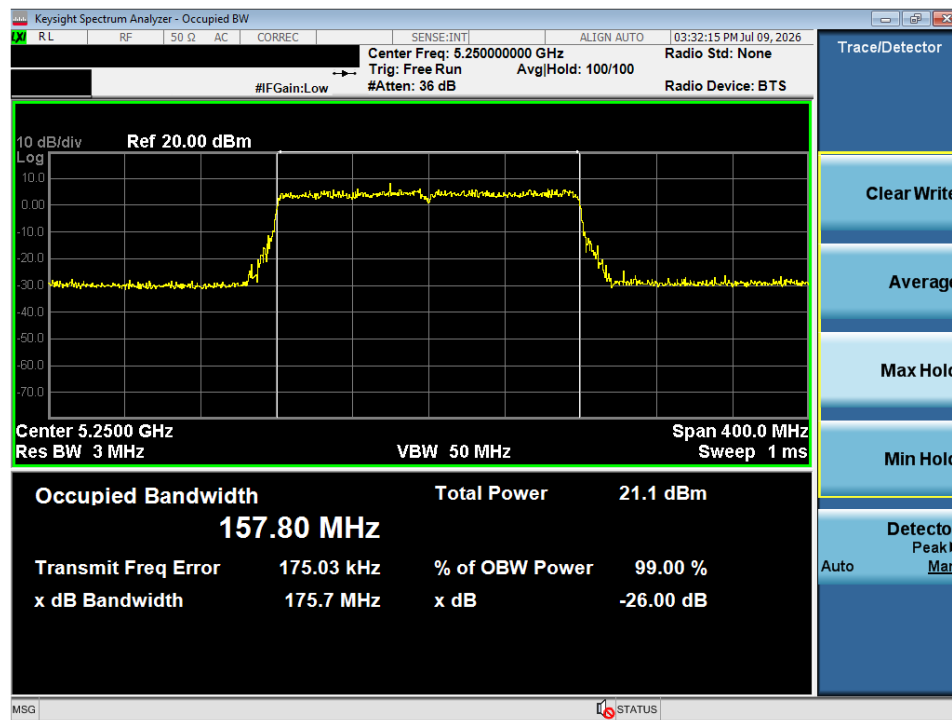

Plot 9-1. 26dB Bandwidth Plot (Spot-check)

Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				RU Index 61						
1	5200	40	242T	12.30	23.98	-11.68	-6.20	6.10	30.00	-23.90
2A	5280	56	242T	12.13	23.98	-11.85	-6.28	5.85	30.00	-24.15
2C	5600	120	242T	11.88	23.98	-12.10	-5.77	6.11	30.00	-23.89
3	5785	157	242T	11.81	30.00	-18.19	-7.12	4.69	36.00	-31.31
4	5865	173	242T	12.32	-	-	-8.03	4.29	30.00	-25.71

Table 9-1. Average Conducted Power(Spot-check)

Results

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 102 of 103

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: SM-O200P	Variant Model: SM-O200J	Deviation (dB)	Max Deviation (dB)	Pass/Fail
2.1046, 15.407(a)(8)	Conducted Output Power	Mid Channel Each UNII Band - 802.11ax 242T	dBm	23.98	12.55	12.30	-0.25	1	PASS
					12.70	12.13	-0.57	1	PASS
					12.36	11.88	-0.48	1	PASS
					12.28	11.81	-0.47	1	PASS
					12.16	12.32	0.17	1	PASS
2.1049	26dB Bandwidth/Occupied Bandwidth	802.11ax 2x996T 160MHz - CH 50	MHz	N/A	175.50	175.71	0.21MHz	N/A	PASS

Table 9-2. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: A3LSMO200J	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 1/29/2026 - 7/10/2026	EUT Type: Extended Reality Glasses	Approved by: Technical Manager
Test Report S/N: 1M2601220004-07-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 103 of 103		