


Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-1.45	8.000	-9.45	Pass
2437	6	b	1	-2.76	8.000	-10.76	Pass
2462	11	b	1	-4.17	8.000	-12.17	Pass
2412	1	g	6	-8.13	8.000	-16.13	Pass
2437	6	g	6	-8.84	8.000	-16.84	Pass
2462	11	g	6	-8.58	8.000	-16.58	Pass
2412	1	n	6.5/7.2 (MCS0)	-9.21	8.000	-17.21	Pass
2437	6	n	6.5/7.2 (MCS0)	-8.14	8.000	-16.14	Pass
2462	11	n	6.5/7.2 (MCS0)	-10.05	8.000	-18.05	Pass
5745	149	a	6	-12.75	8.000	-20.75	Pass
5785	157	a	6	-12.48	8.000	-20.48	Pass
5825	165	a	6	-11.70	8.000	-19.70	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-11.62	8.000	-19.62	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-11.42	8.000	-19.42	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-12.07	8.000	-20.07	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-14.74	8.000	-22.74	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-14.19	8.000	-22.19	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-17.52	8.000	-25.52	Pass

Table 6-23. Antenna-2 Conducted Power Density Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 51 of 116

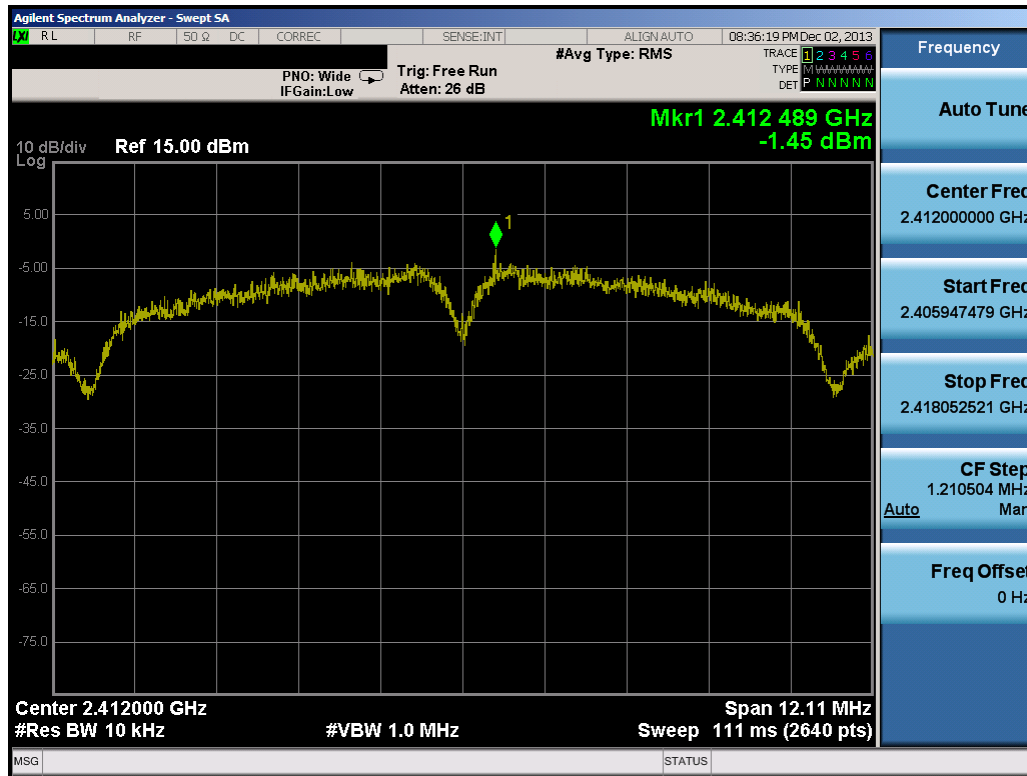



Plot 6-55. Power Spectral Density Plot (802.11b – Ch. 1)

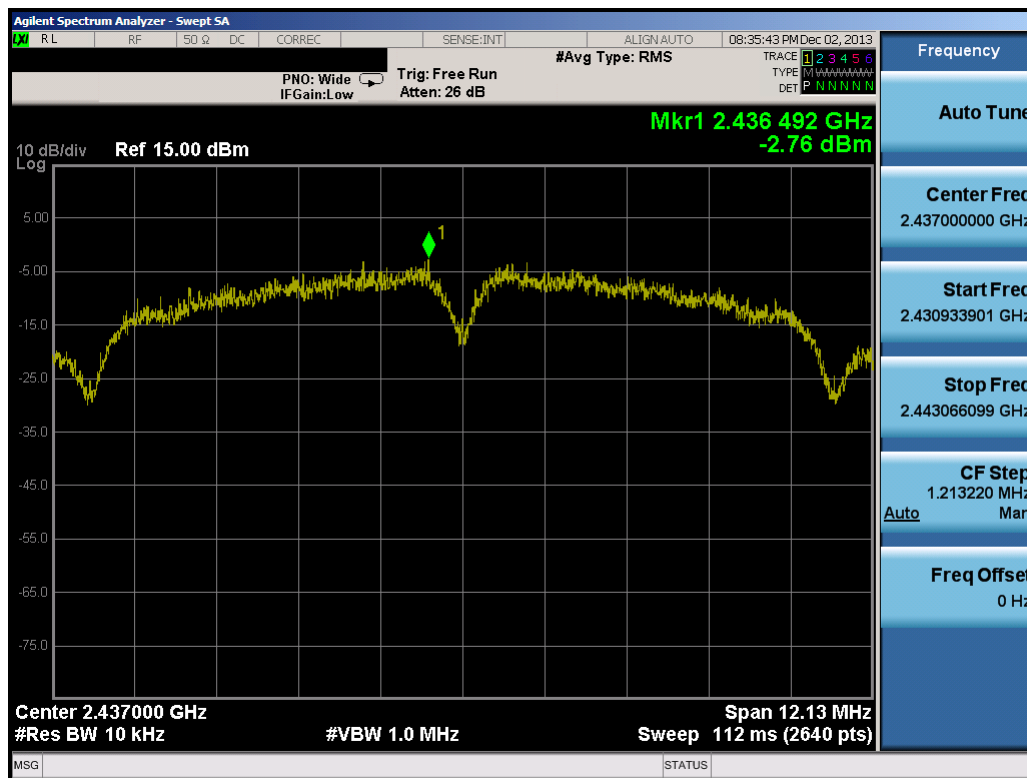


Plot 6-56. Power Spectral Density Plot (802.11b – Ch. 6)

FCC ID: A3LSMP900A	 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 52 of 116

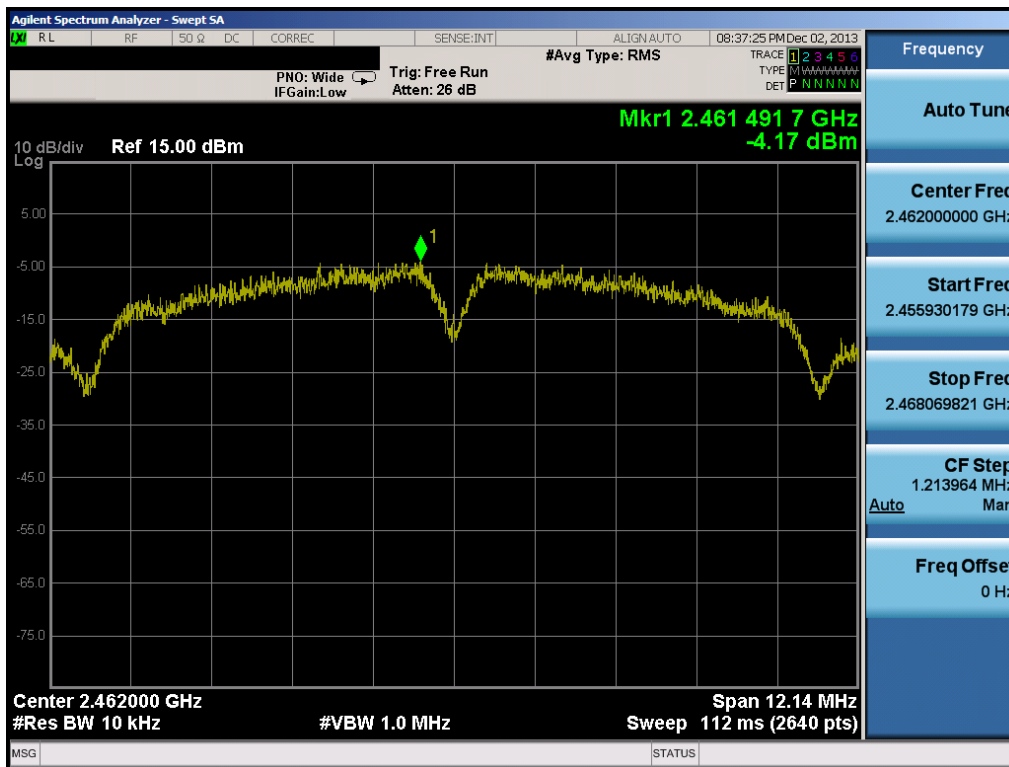

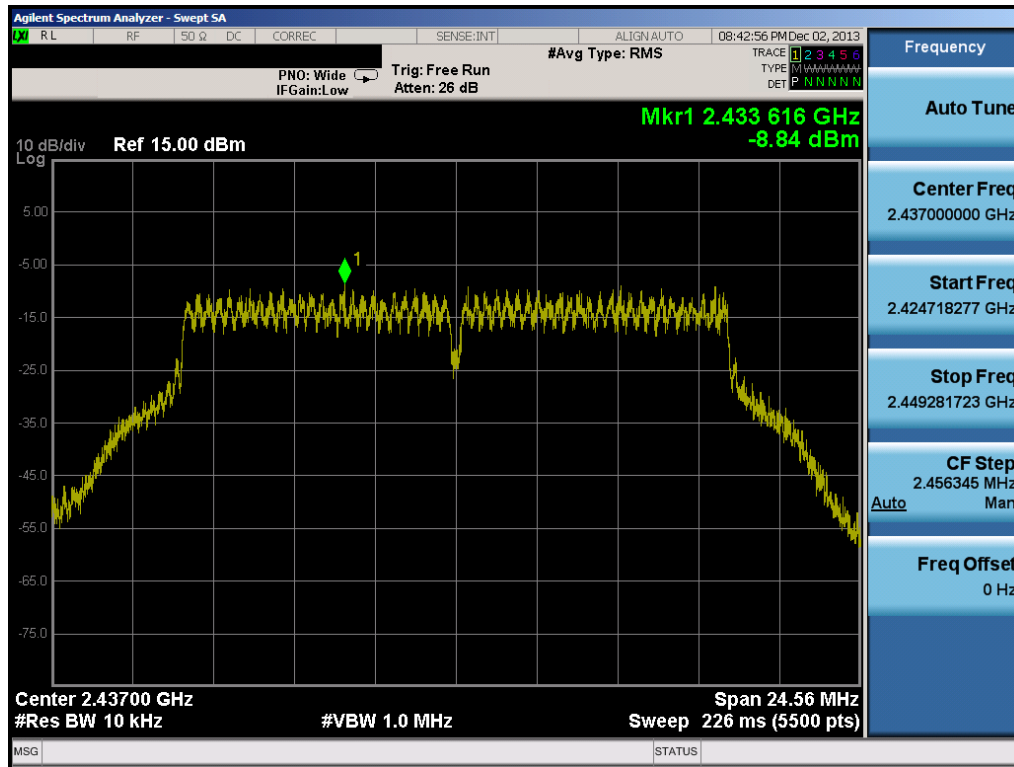


Plot 6-59. Power Spectral Density Plot (802.11g – Ch. 6)

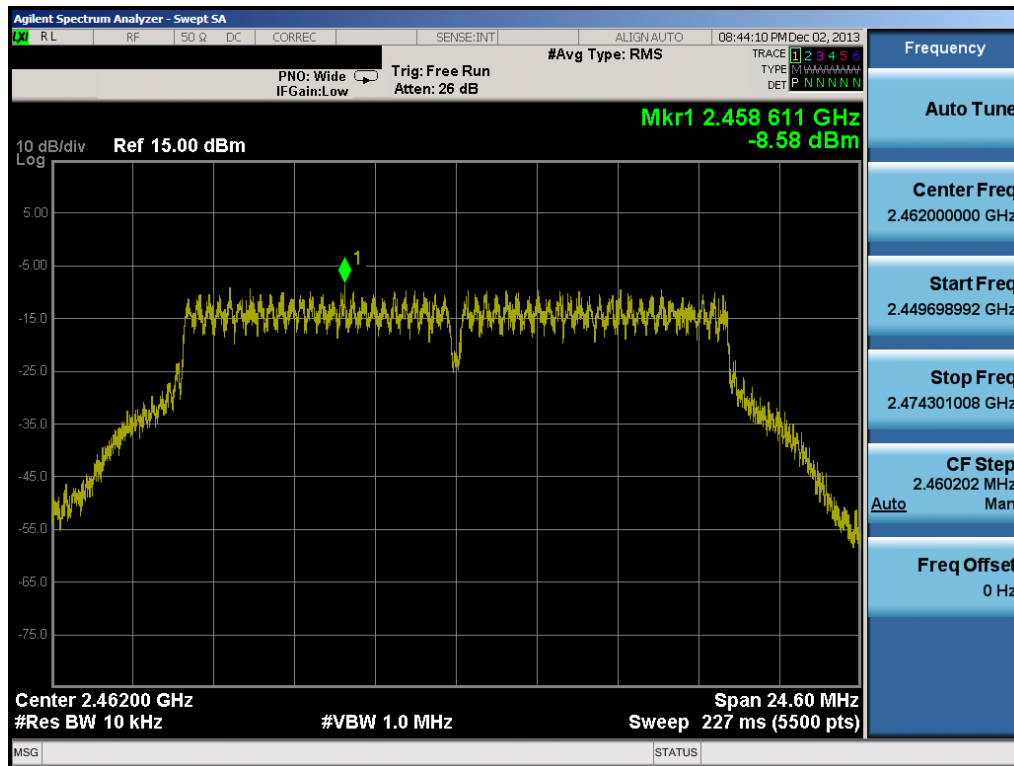


Plot 6-60. Power Spectral Density Plot (802.11g – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 54 of 116

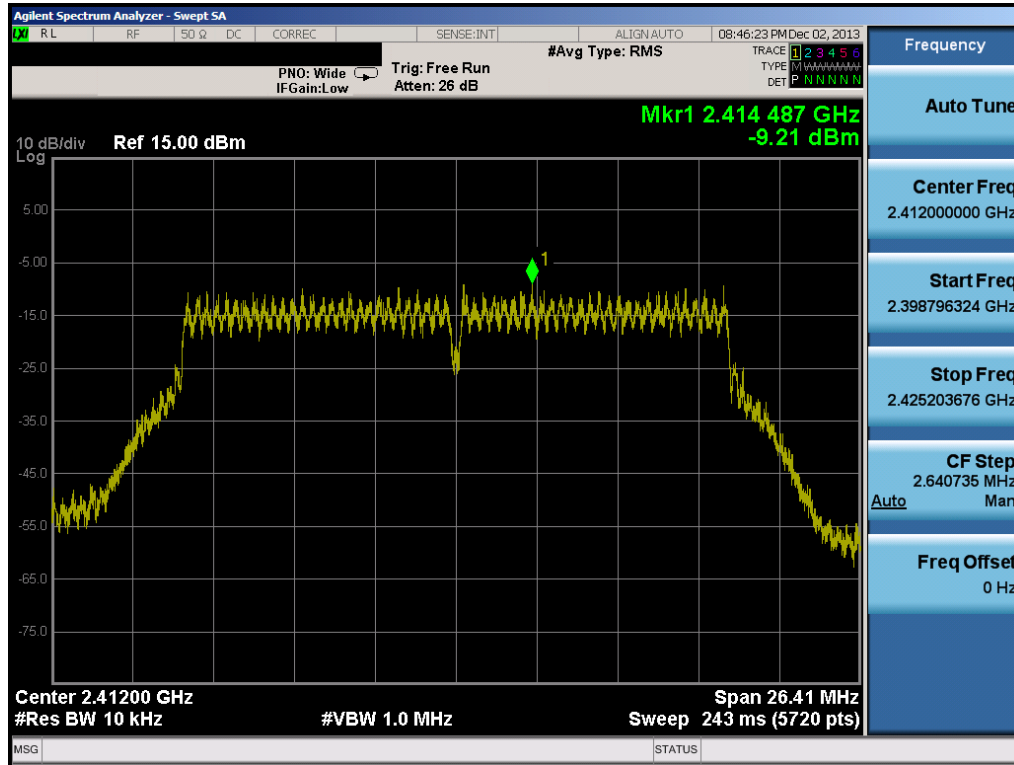


Plot 6-61. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

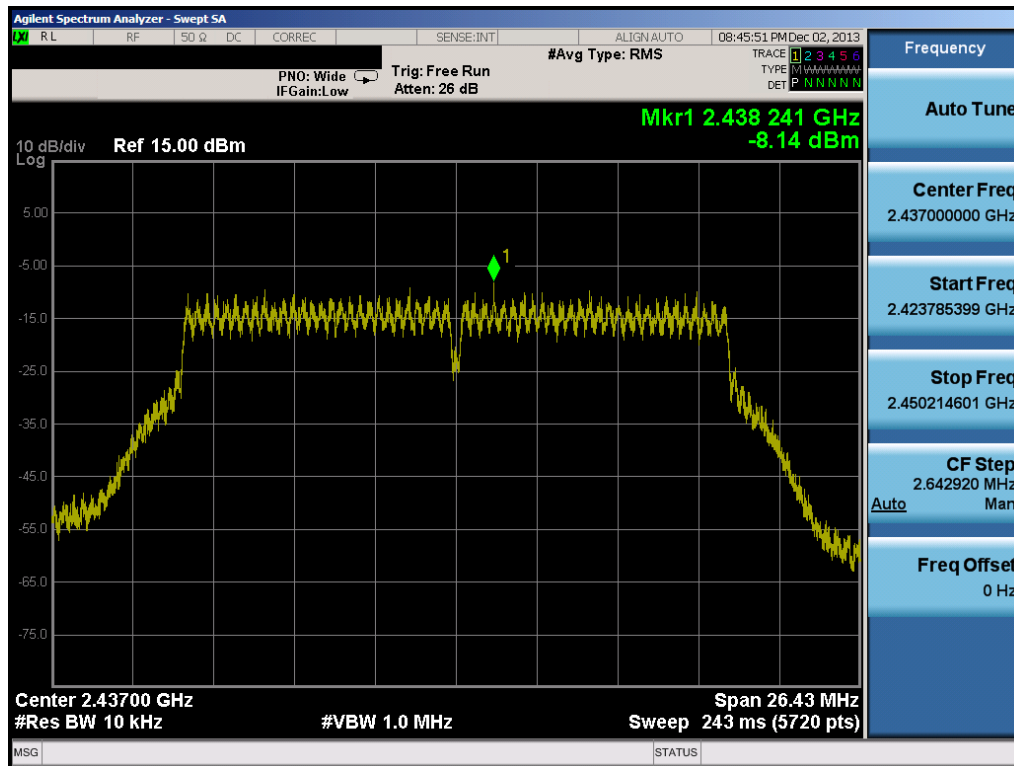


Plot 6-62. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 55 of 116		

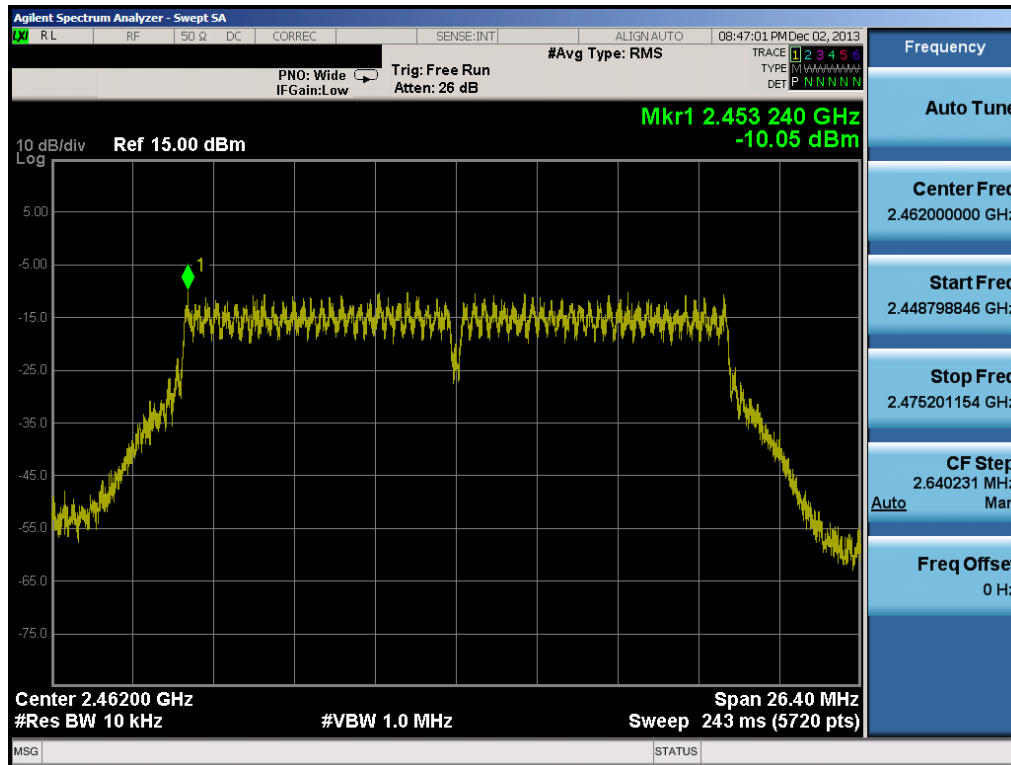


Plot 6-63. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

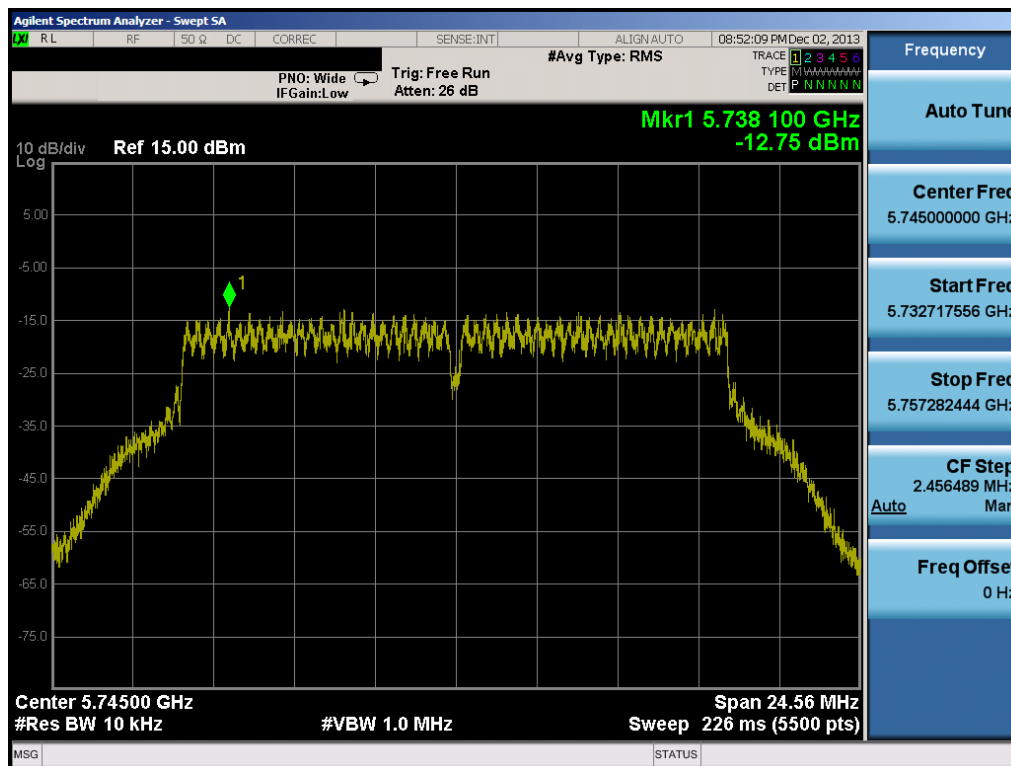


Plot 6-64. Power Spectral Density Plot (802.11a – Ch. 149)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 56 of 116		

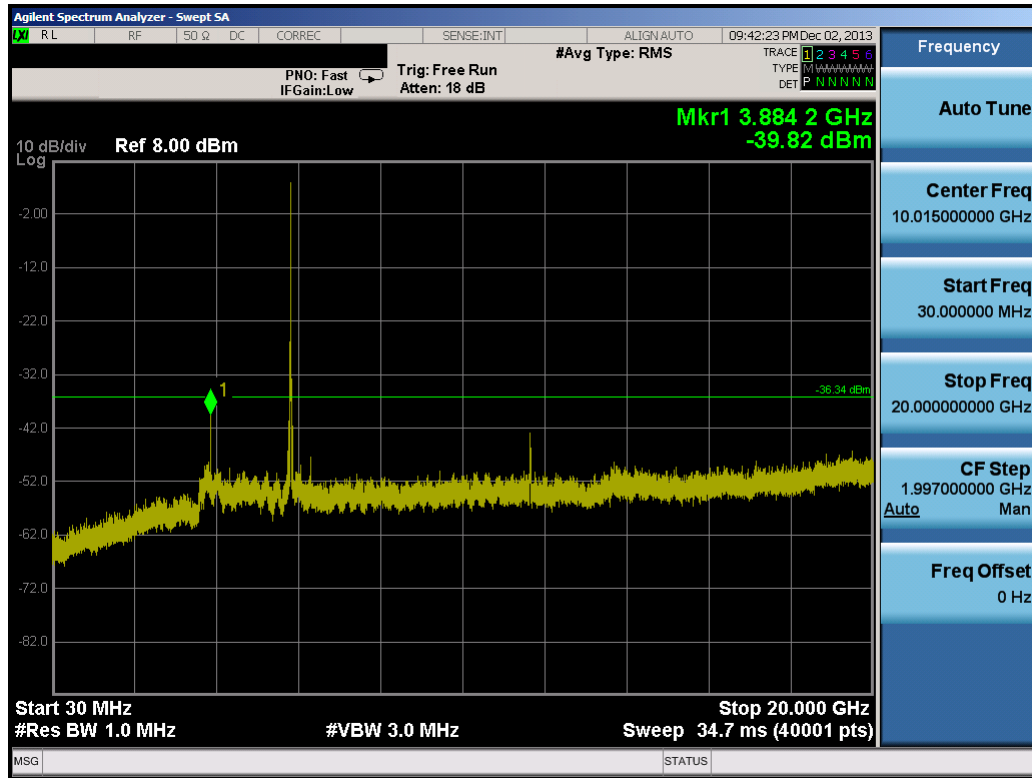


Plot 6-65. Power Spectral Density Plot (802.11a – Ch. 157)

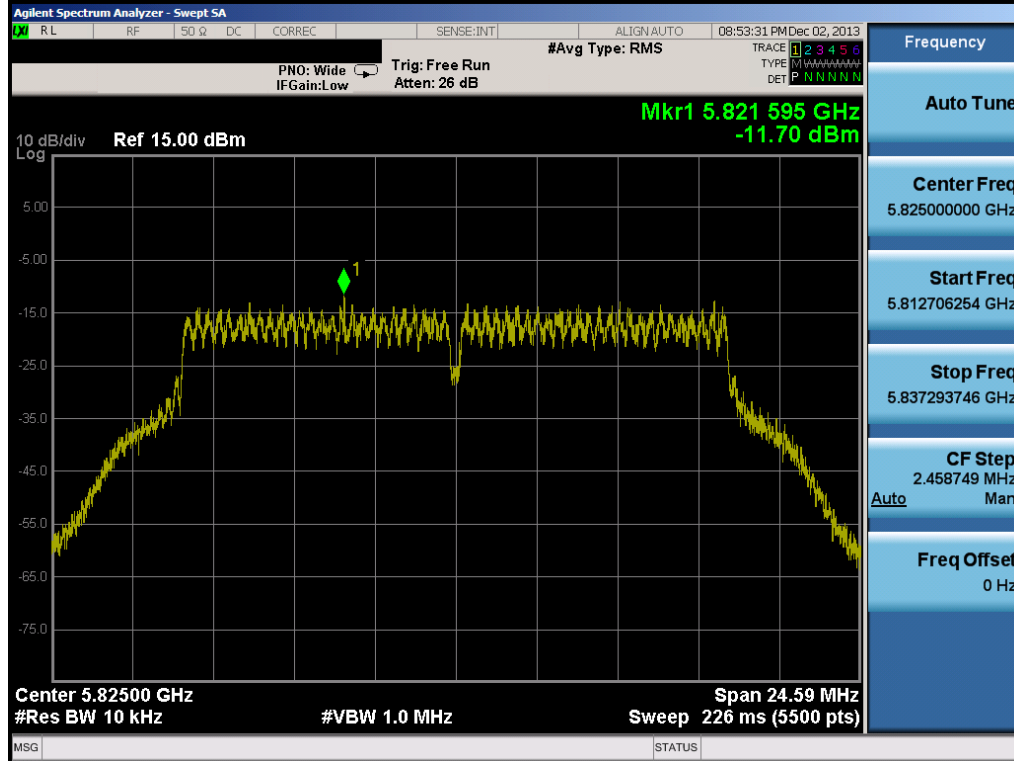


Plot 6-66. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 57 of 116		

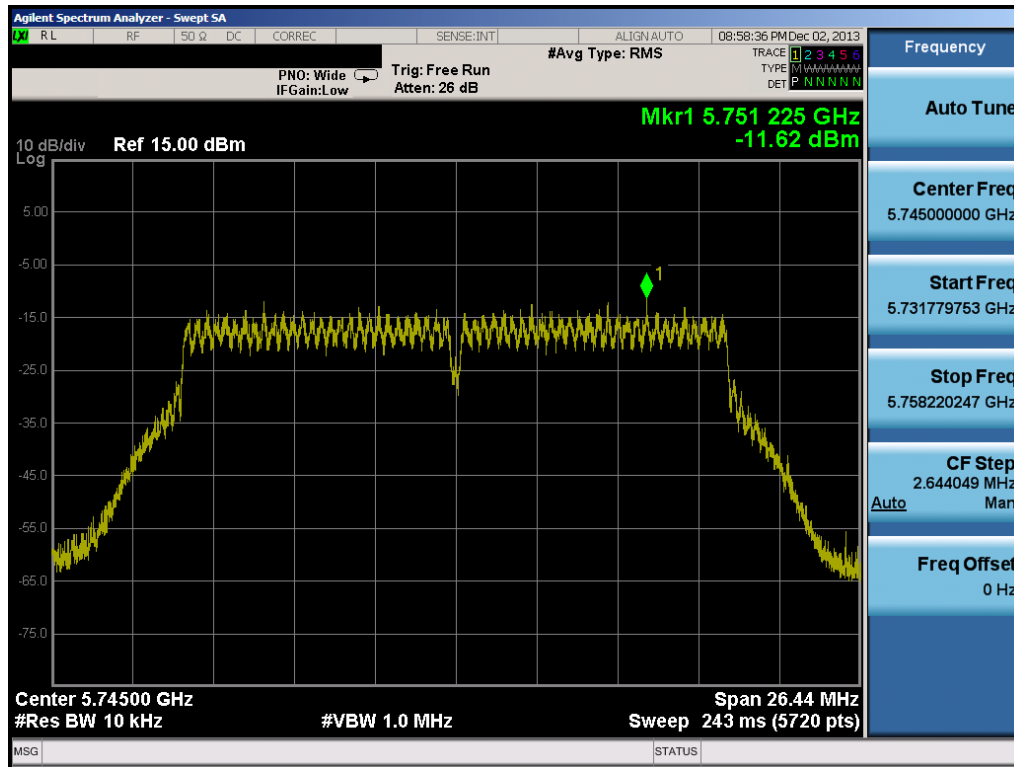


Plot 6-67. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

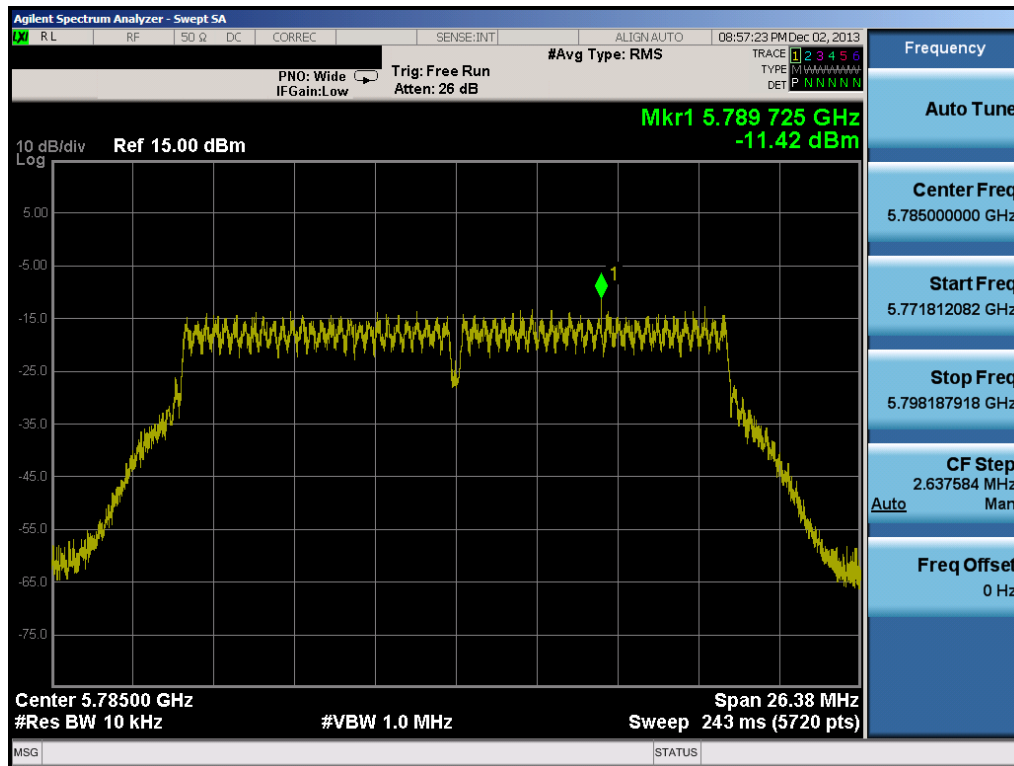


Plot 6-68. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 58 of 116		

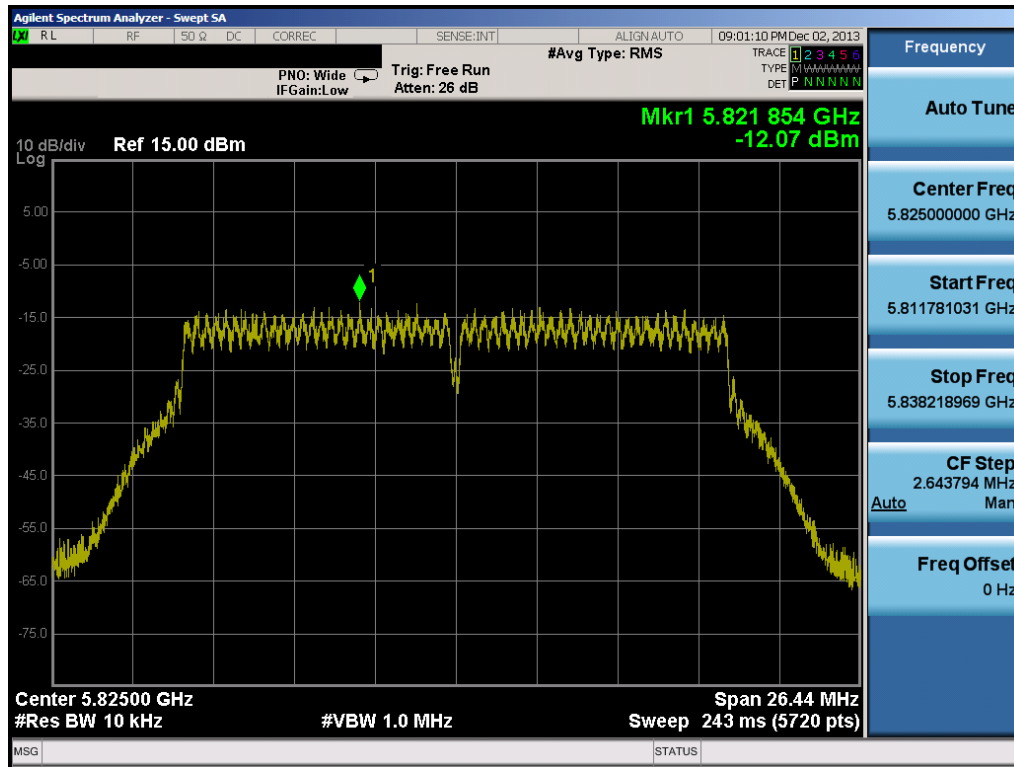


Plot 6-69. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

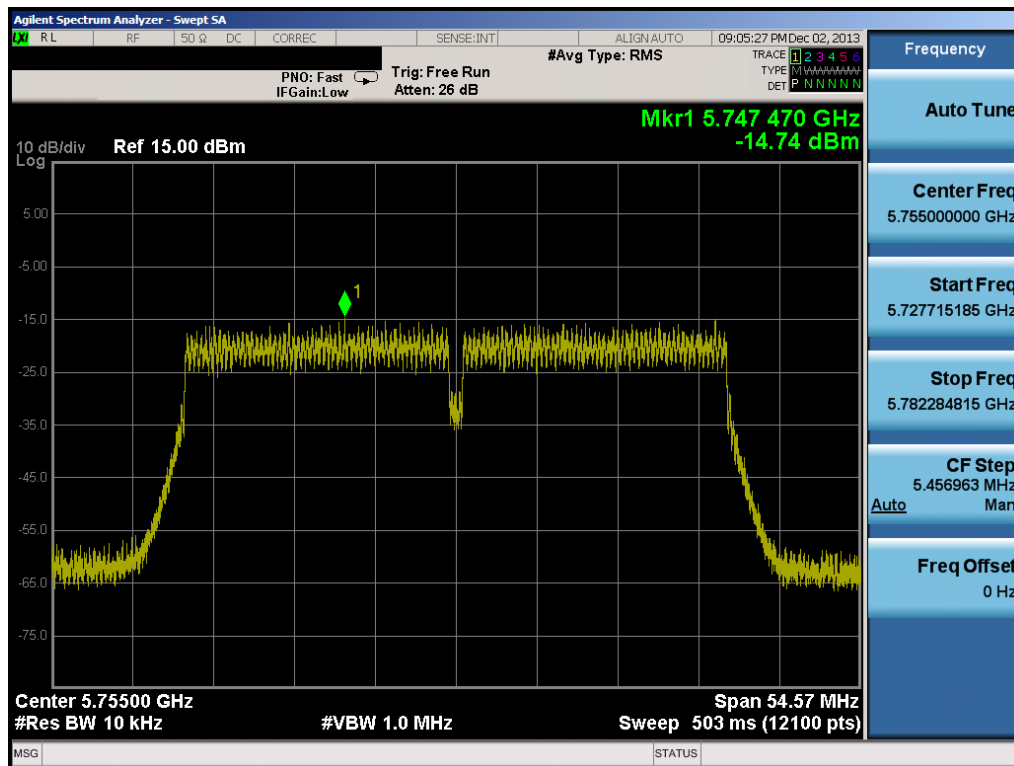


Plot 6-70. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 59 of 116

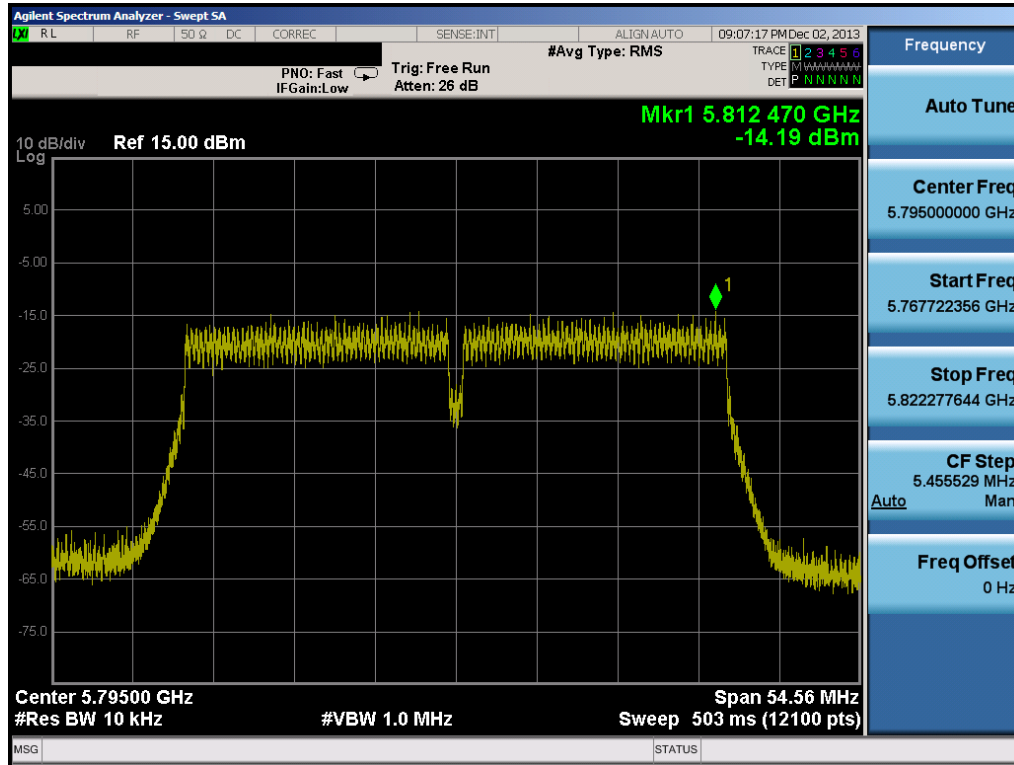

Plot 6-71. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

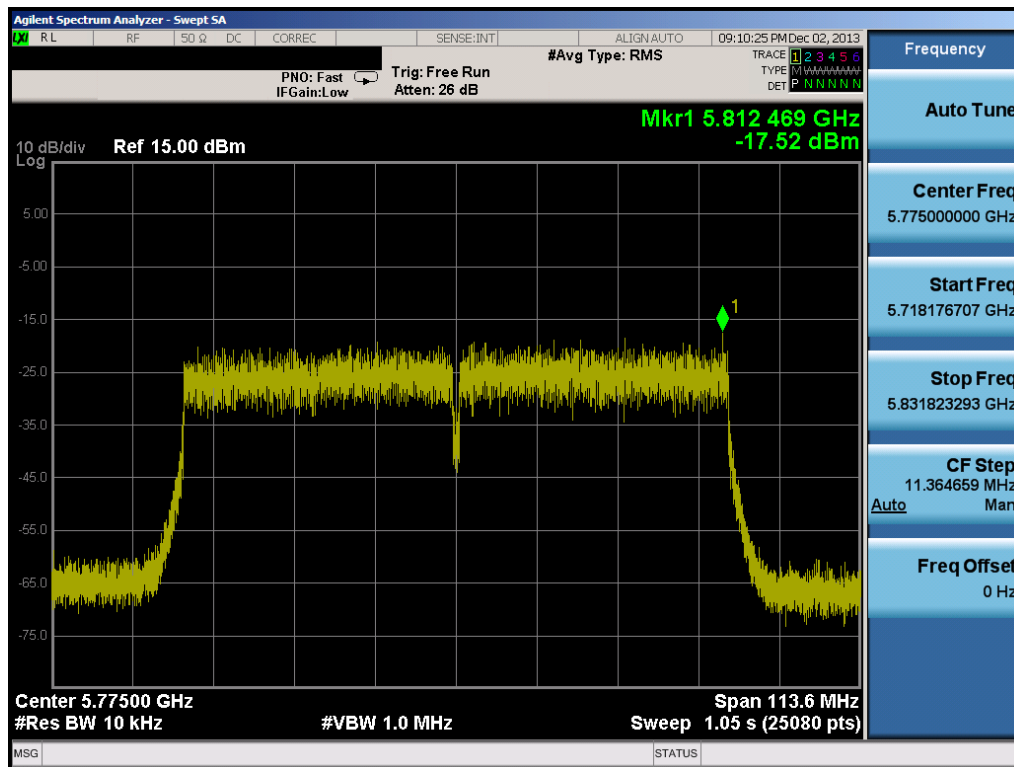

Plot 6-72. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 60 of 116		

MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	n	6.5/7.2 (MCS0)	-9.10	-9.21	-6.14	8.000	-14.14	Pass
2437	6	n	6.5/7.2 (MCS0)	-9.44	-8.14	-5.73	8.000	-13.73	Pass
2462	11	n	6.5/7.2 (MCS0)	-10.10	-10.05	-7.06	8.000	-15.06	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-12.48	-11.62	-9.02	8.000	-17.02	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-11.43	-11.42	-8.41	8.000	-16.41	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-12.76	-12.07	-9.39	8.000	-17.39	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-14.59	-14.74	-11.65	8.000	-19.65	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-14.83	-14.19	-11.49	8.000	-19.49	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-18.03	-17.52	-14.76	8.000	-22.76	Pass

Table 6-24. MIMO Conducted Power Density Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet			Page 61 of 116

6.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6 Mbps for “a” mode, 6.5/7.2Mbps for 20MHz BW “n” mode, and 13.5/15Mbps for 40MHz “n” mode and 29.3/32.5Mbps for 80MHz “ac” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).

Test Procedure Used

KDB 558074 v03r01 – Section 11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Trace mode = max hold
7. Sweep time = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-5. Test Instrument & Measurement Setup


Test Notes

None


FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 62 of 116

Antenna-1 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

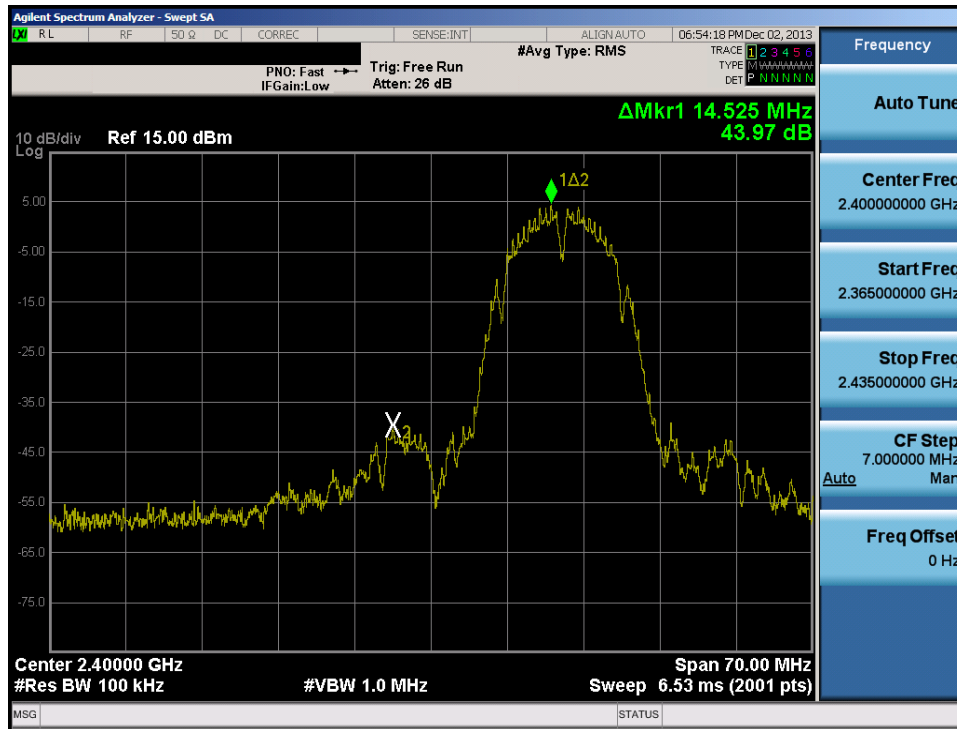


Plot 6-73. Band Edge Plot (802.11b – Ch. 1)

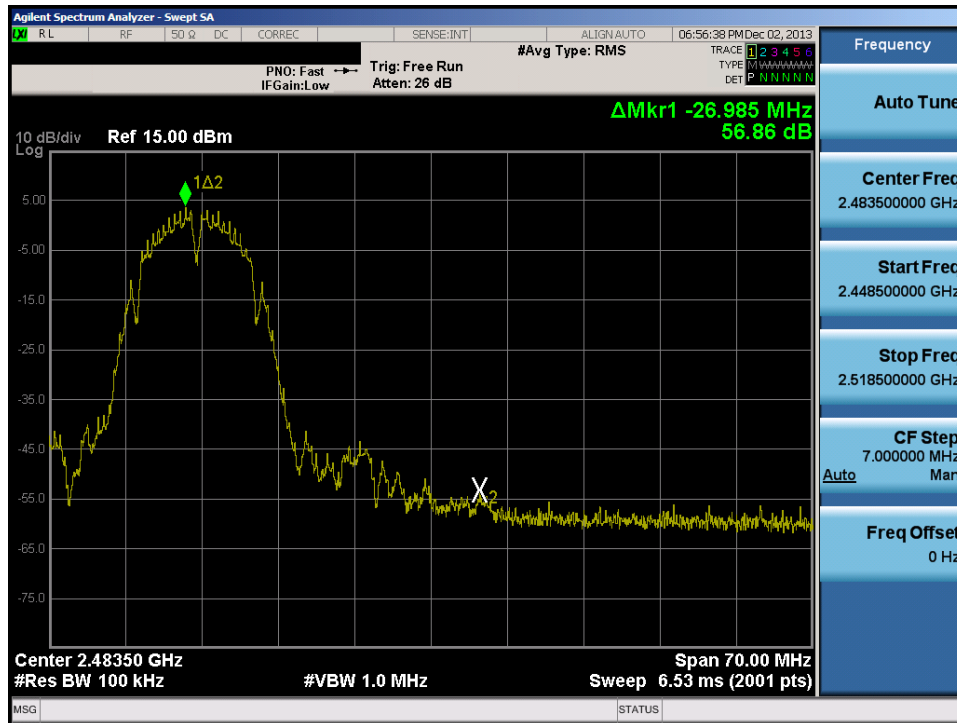


Plot 6-74. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 63 of 116		

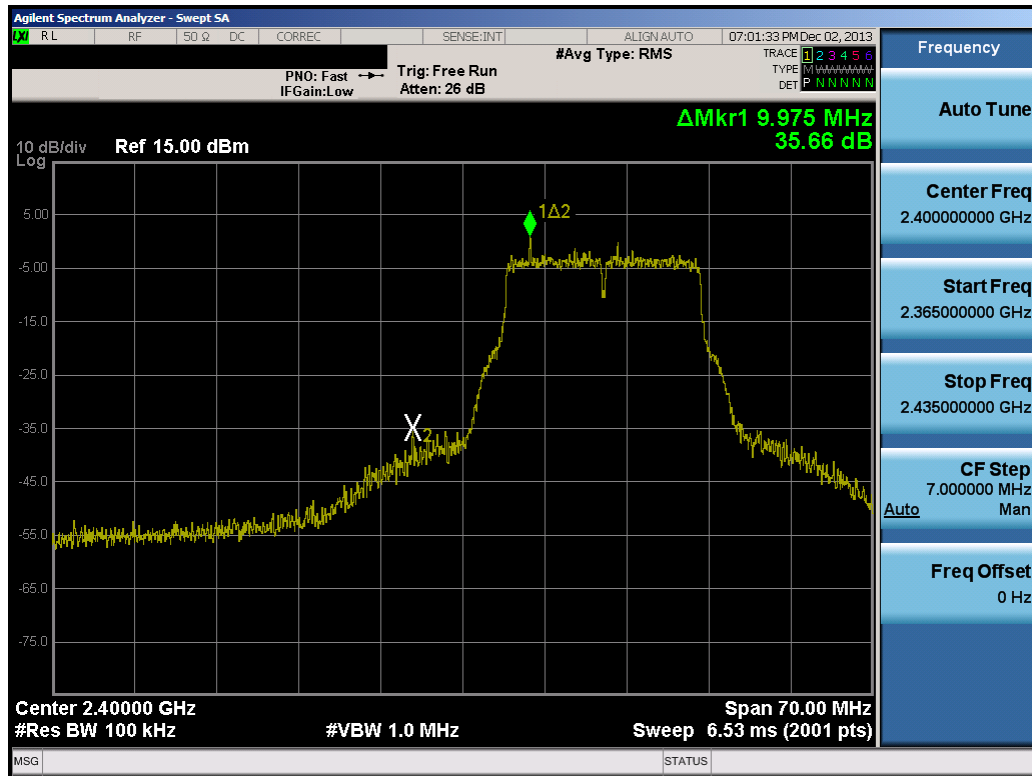


Plot 6-75. Band Edge Plot (802.11g– Ch. 1)

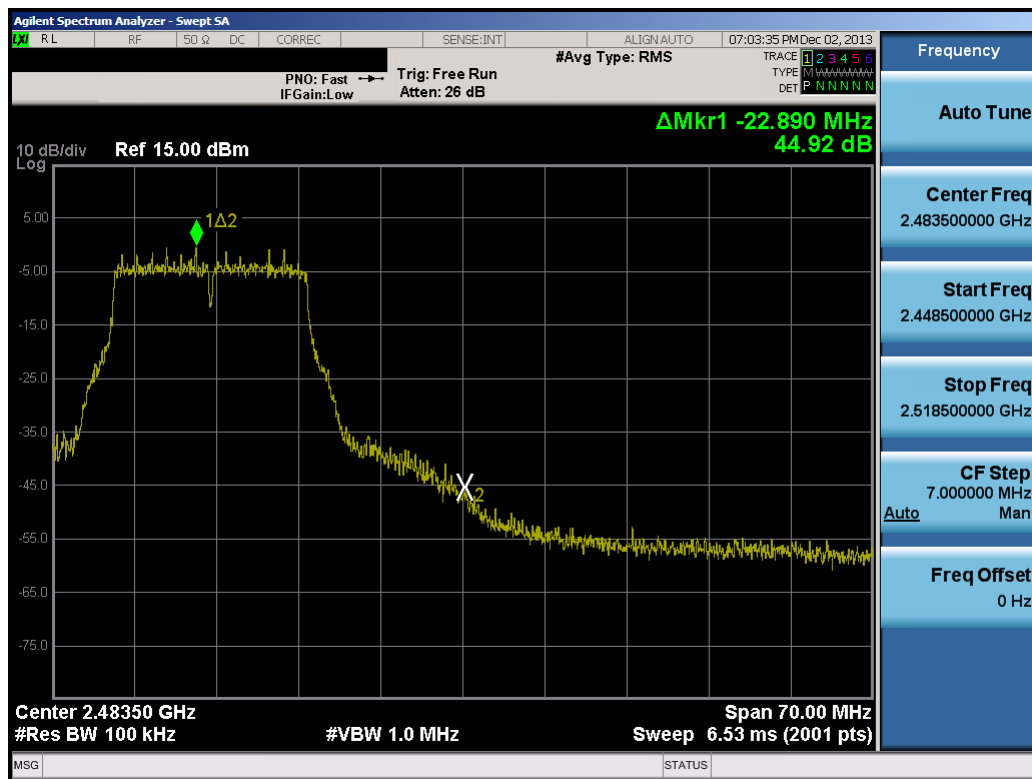


Plot 6-76. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 64 of 116		

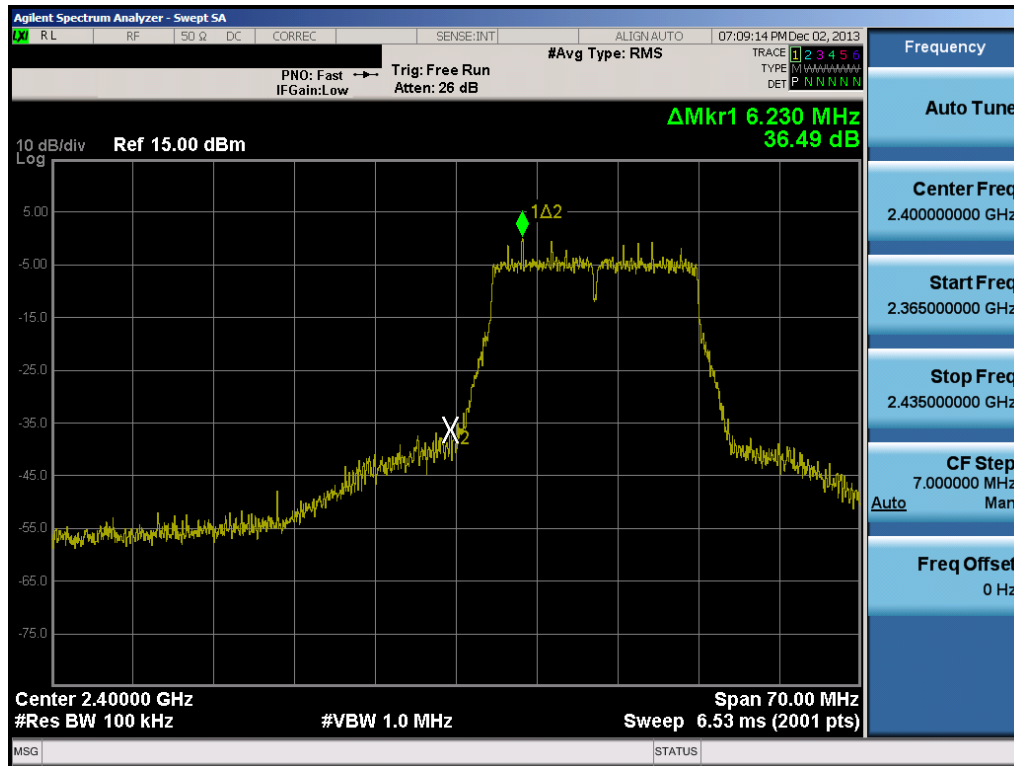


Plot 6-77. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

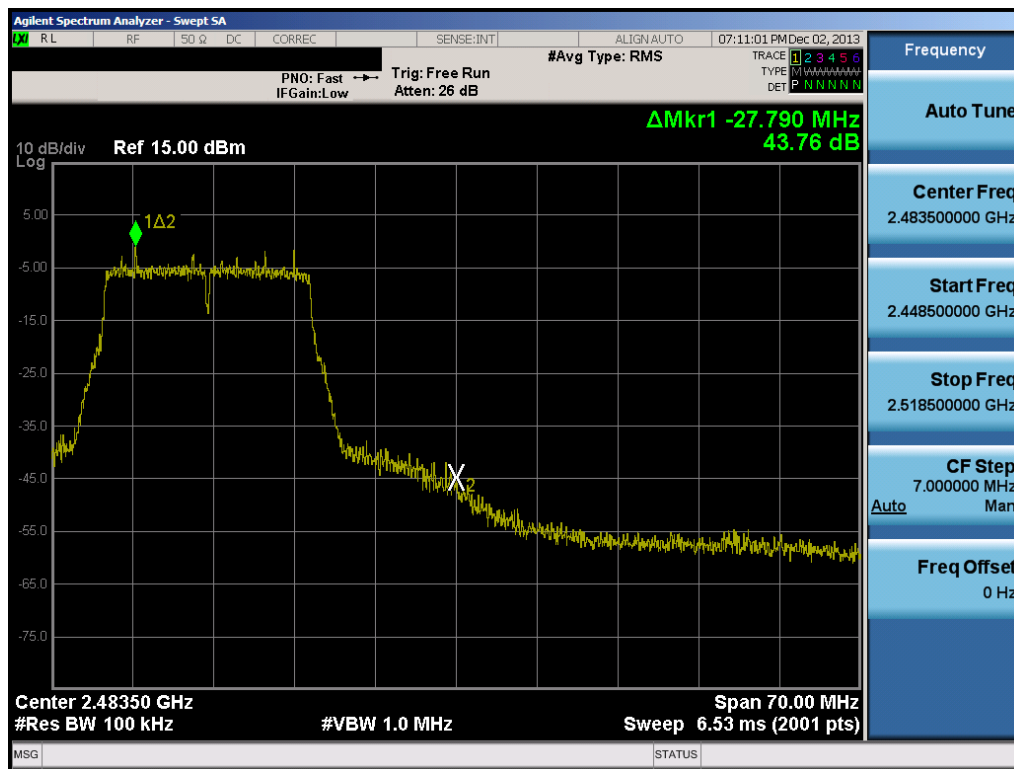


Plot 6-78. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 65 of 116

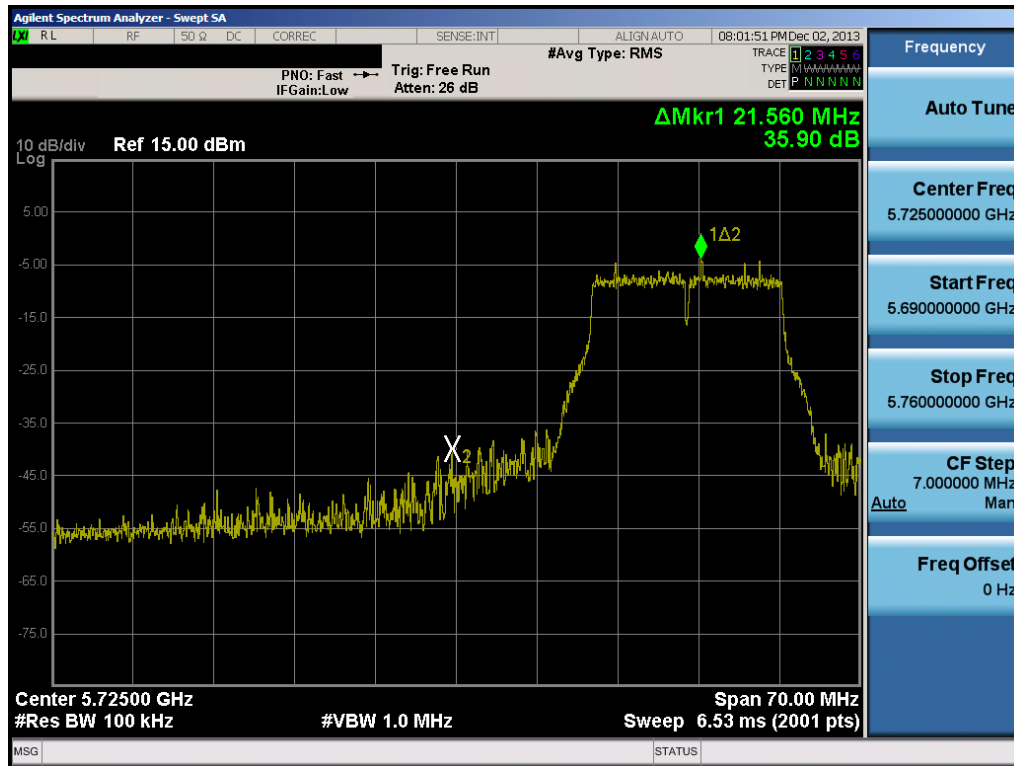


Plot 6-79. Band Edge Plot (802.11a – Ch. 149)

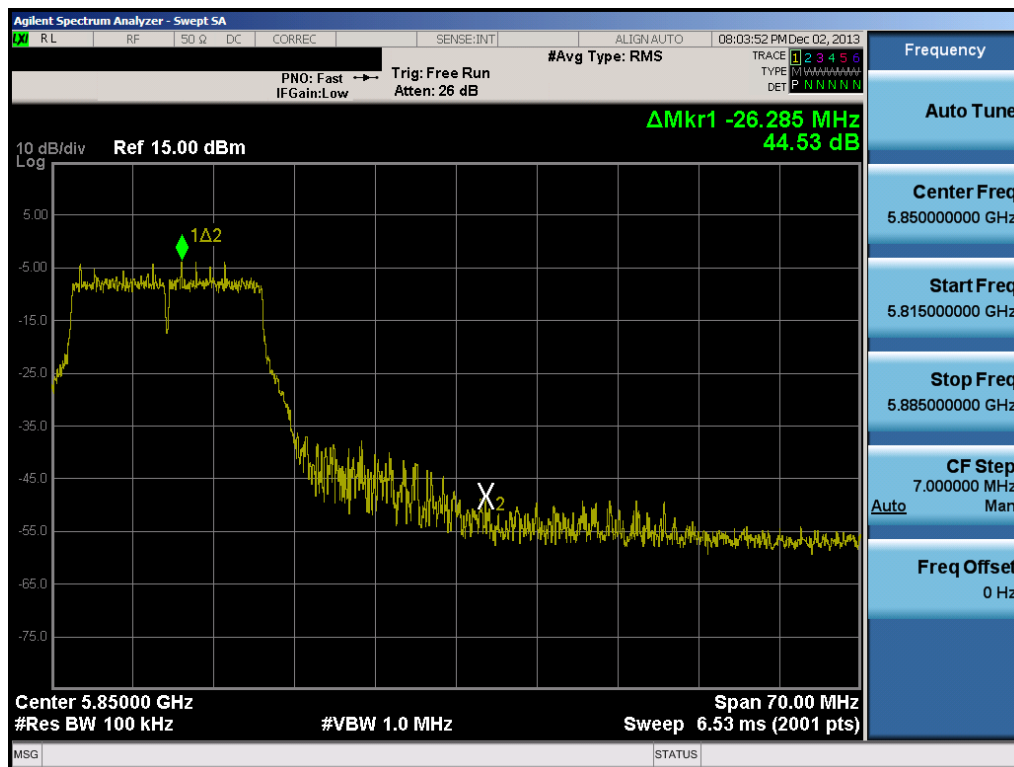


Plot 6-80. Band Edge Plot (802.11a – Ch. 165)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 66 of 116	

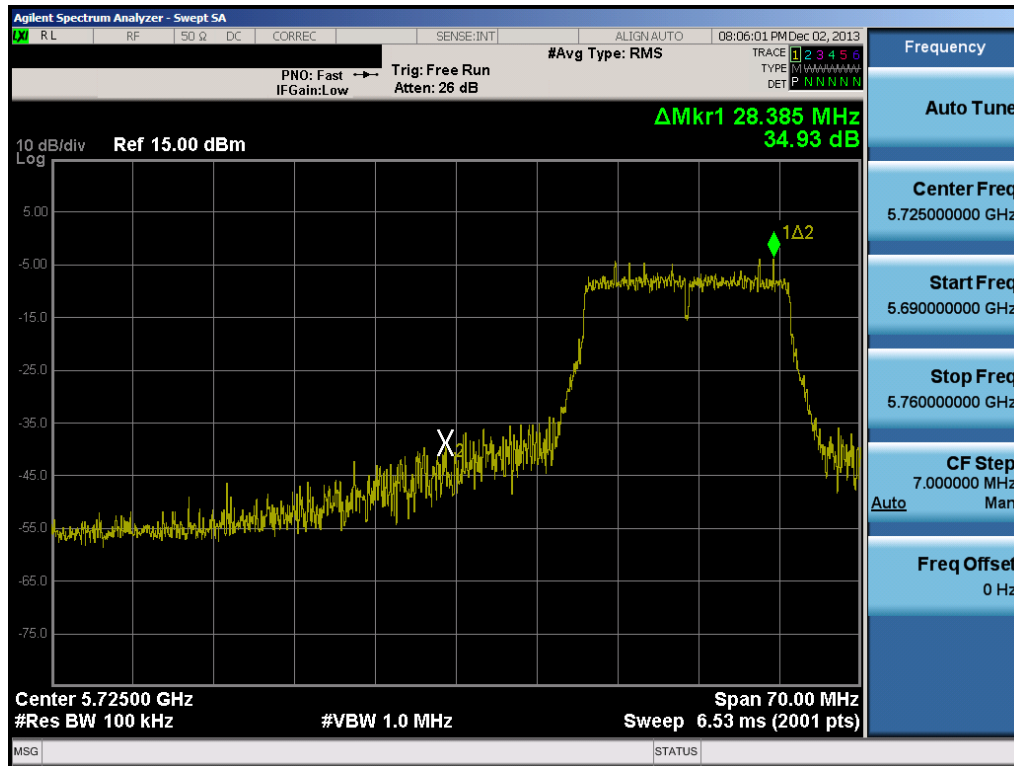


Plot 6-81. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

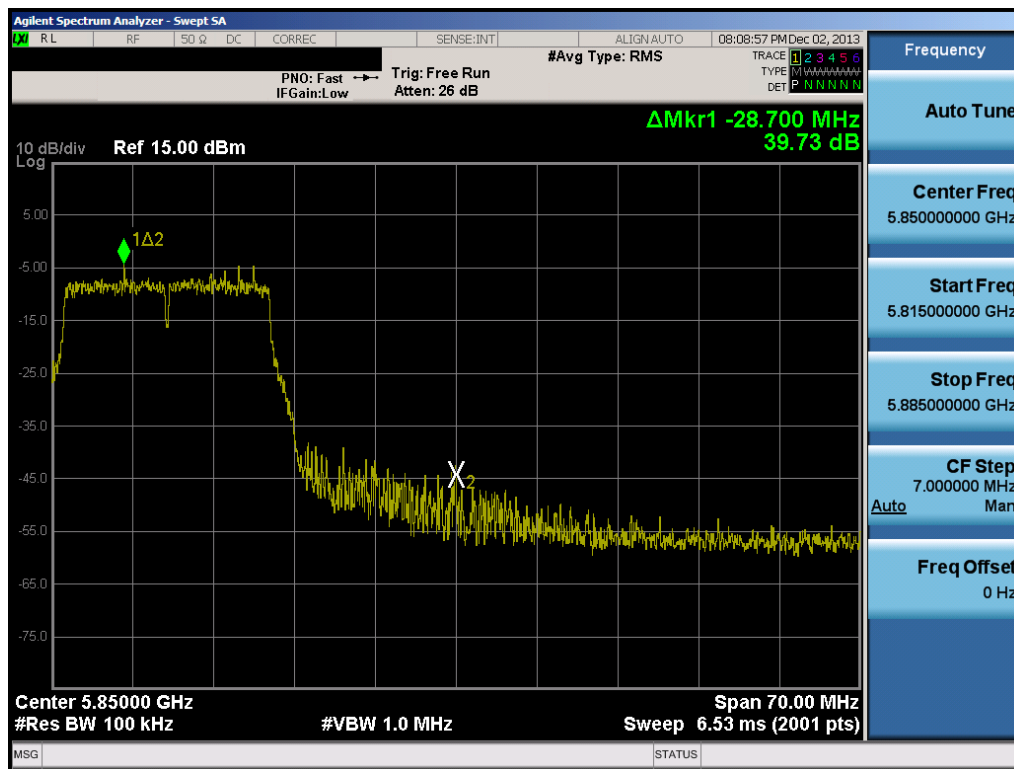


Plot 6-82. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 67 of 116

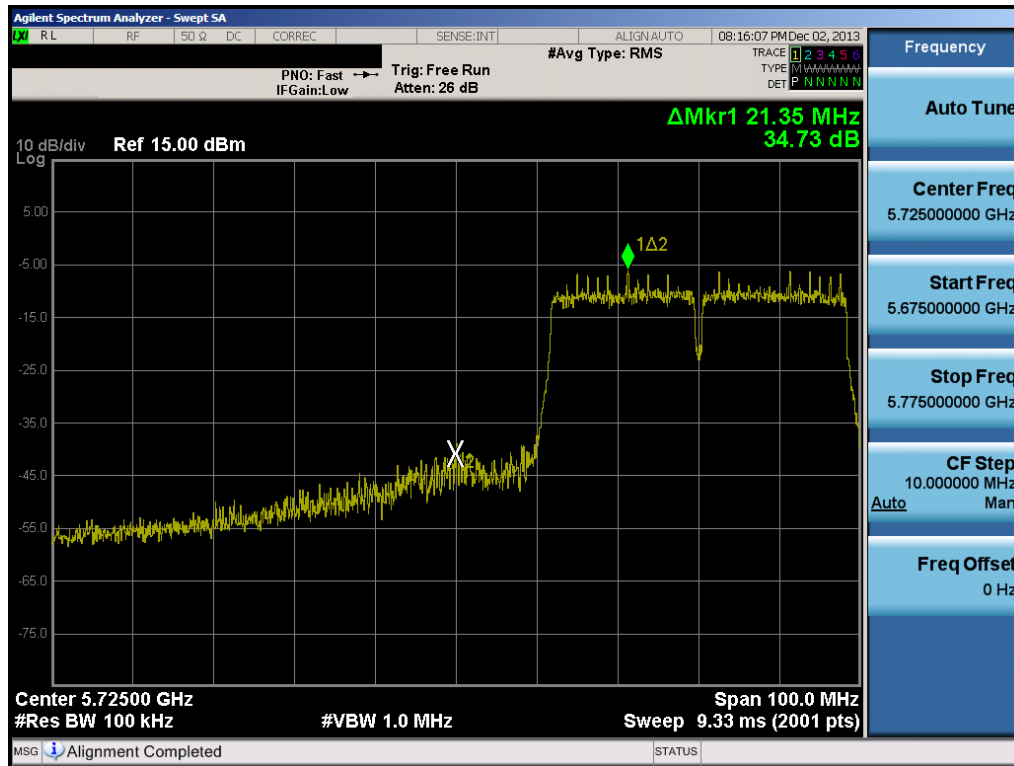


Plot 6-83. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

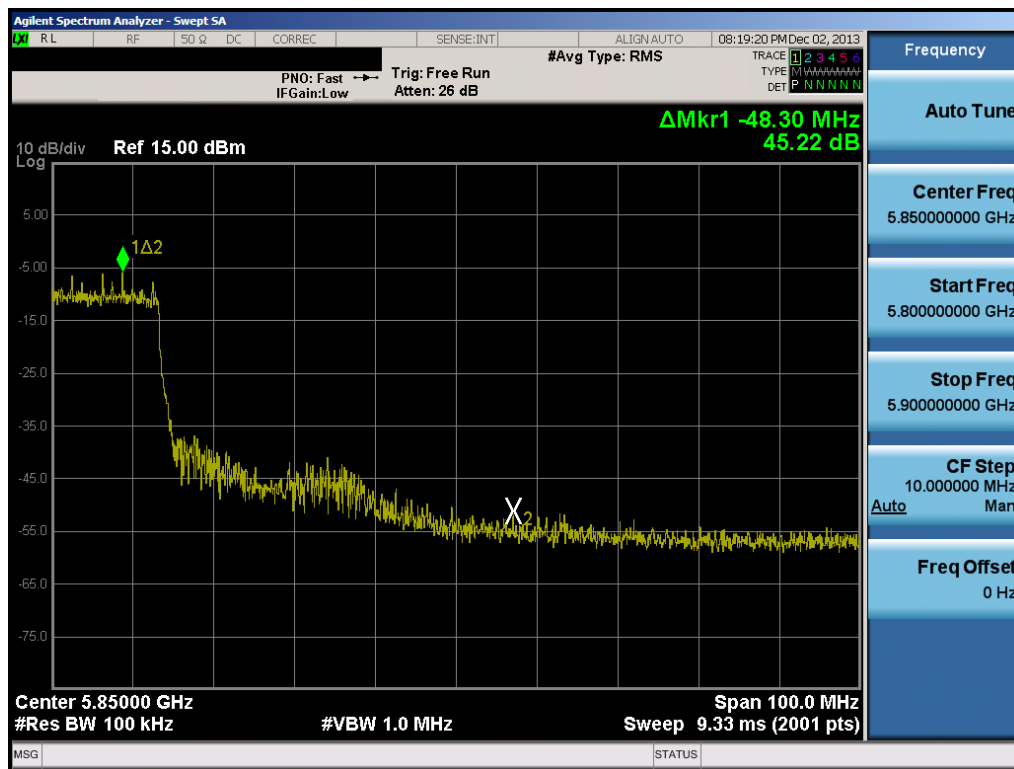


Plot 6-84. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 68 of 116

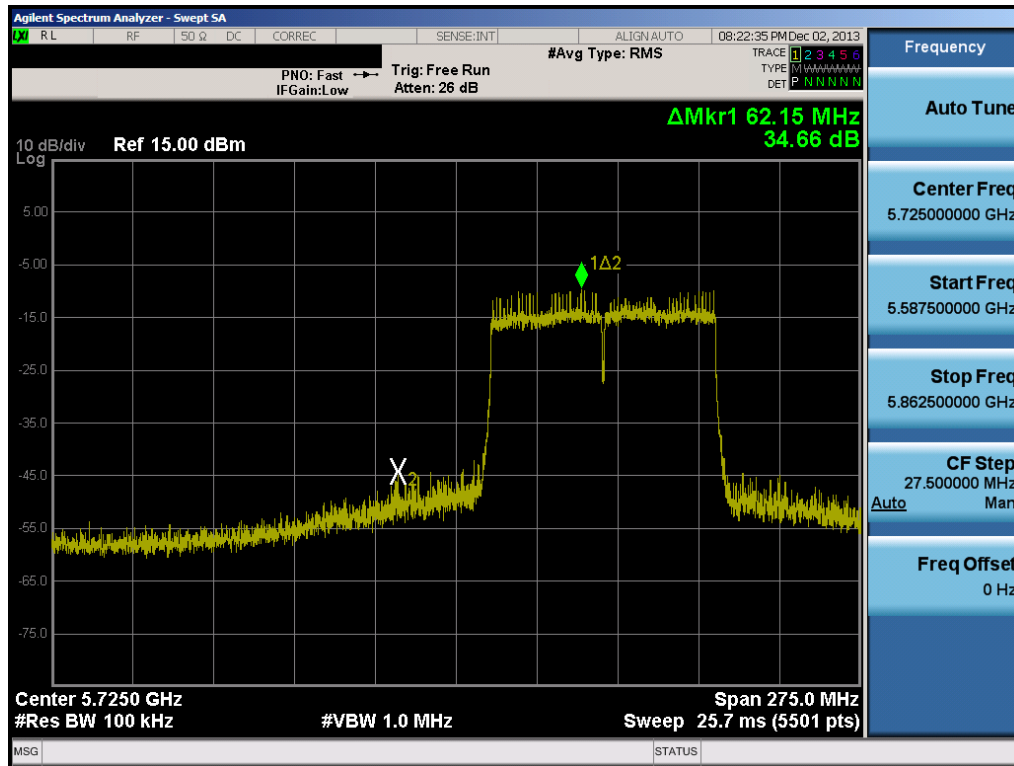

Plot 6-85. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

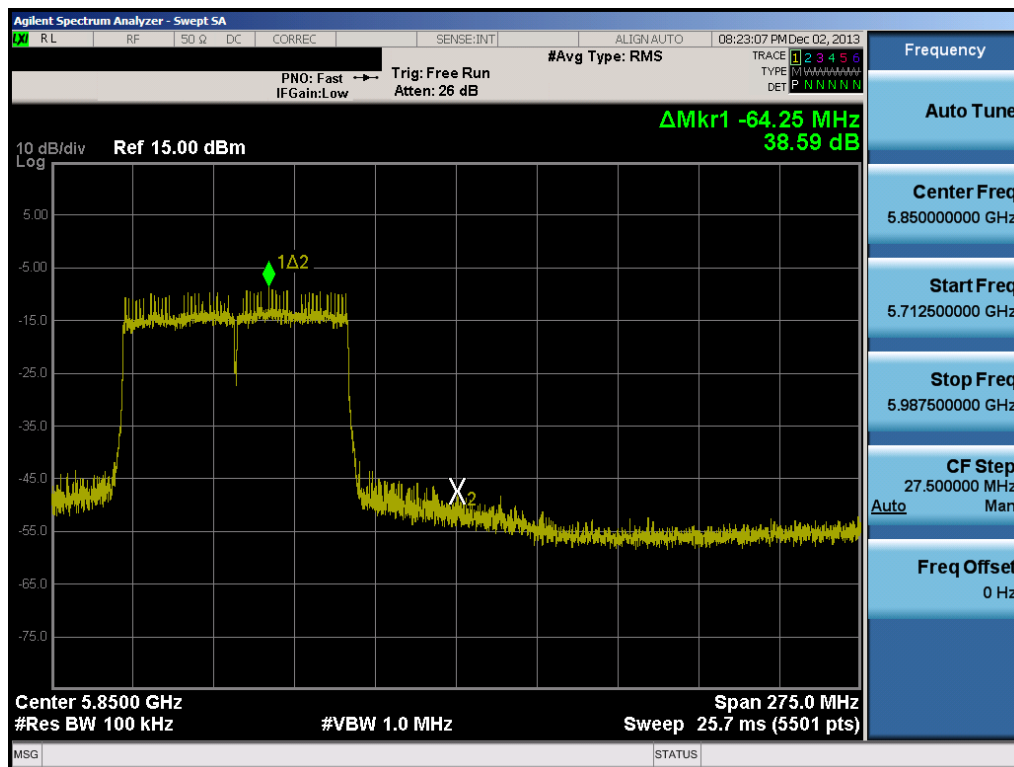


Plot 6-86. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)


FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 69 of 116

Antenna-2 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

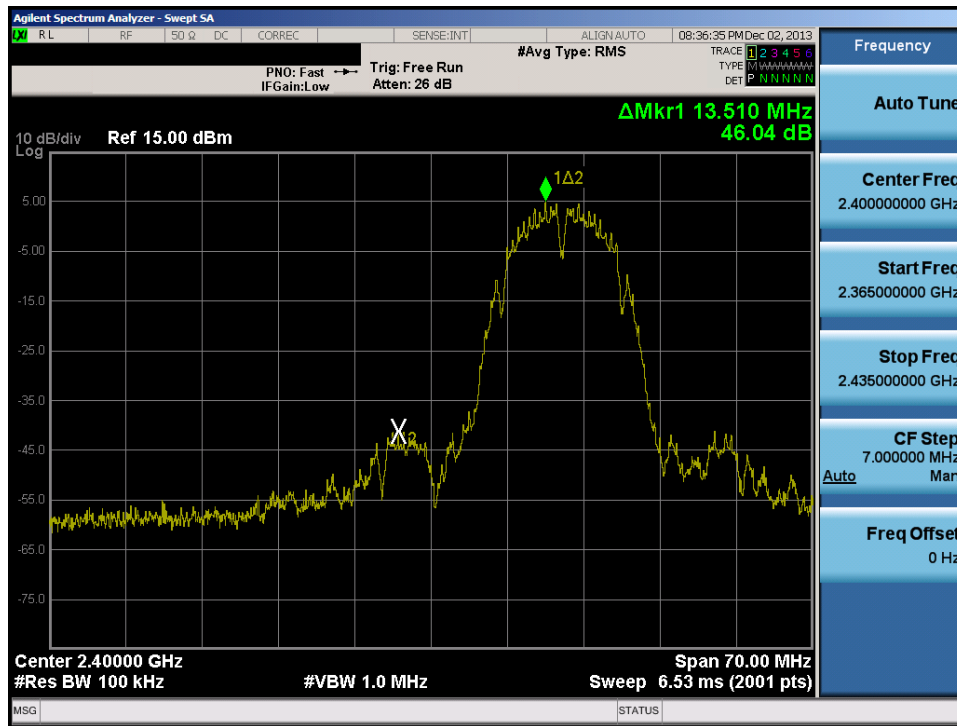


Plot 6-87. Band Edge Plot (802.11b – Ch. 1)

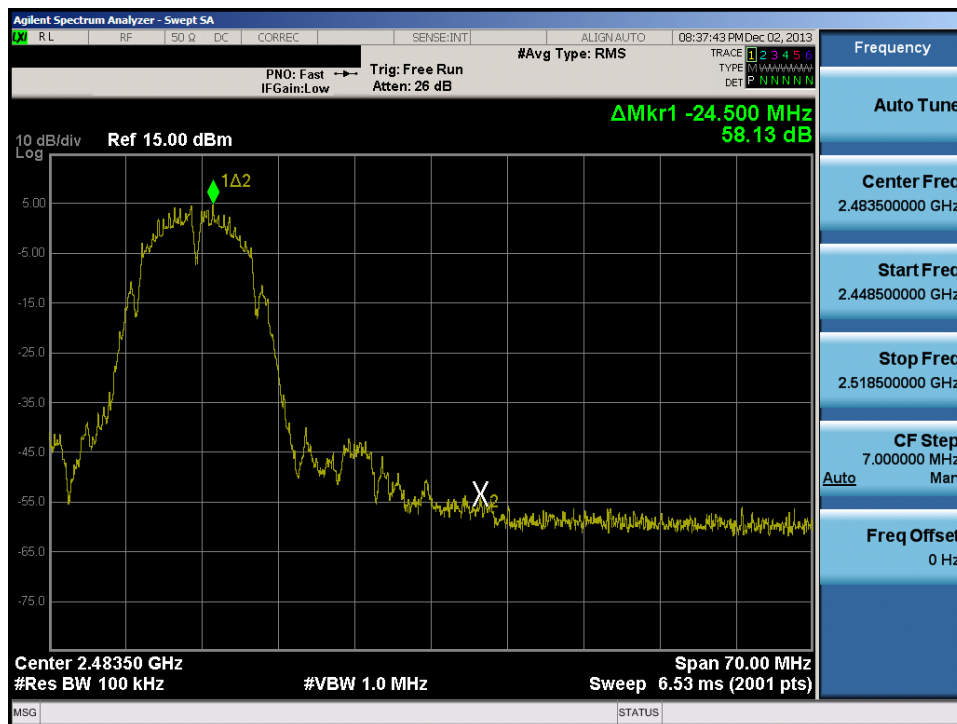


Plot 6-88. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 70 of 116		

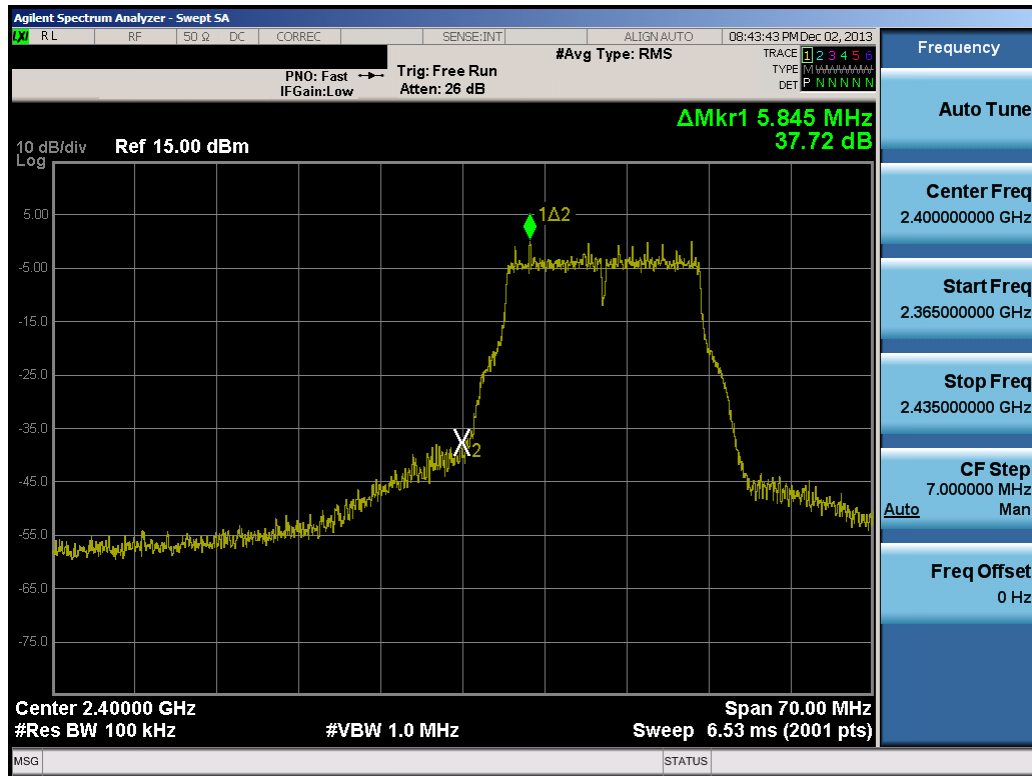


Plot 6-89. Band Edge Plot (802.11g– Ch. 1)

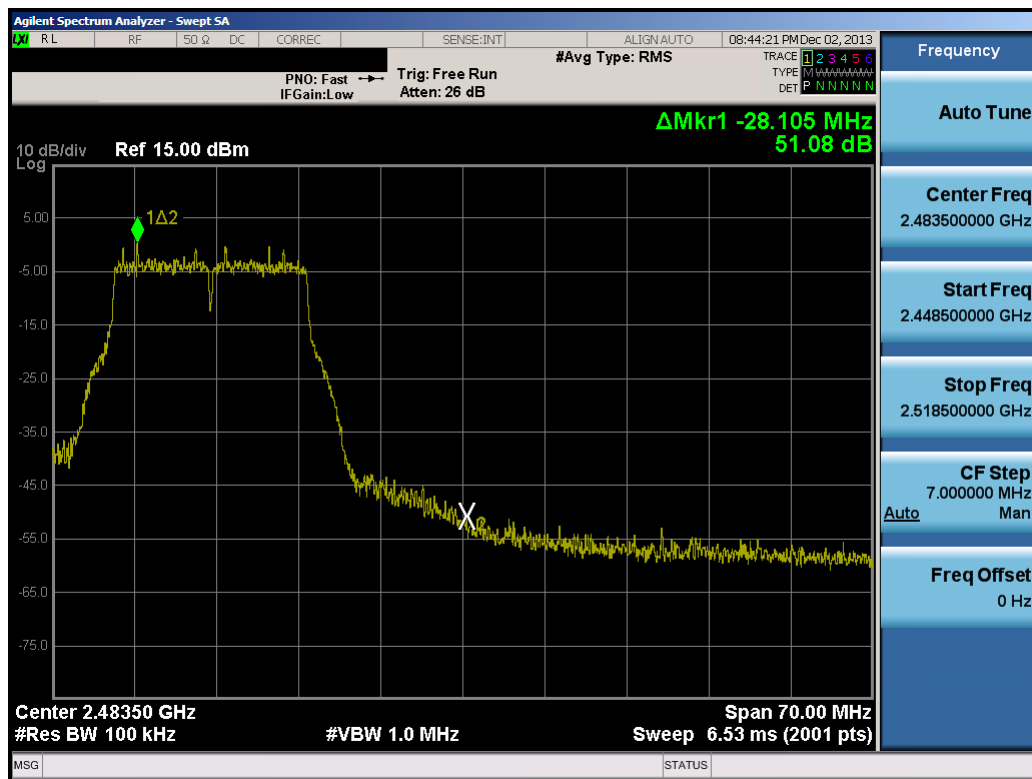


Plot 6-90. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 71 of 116

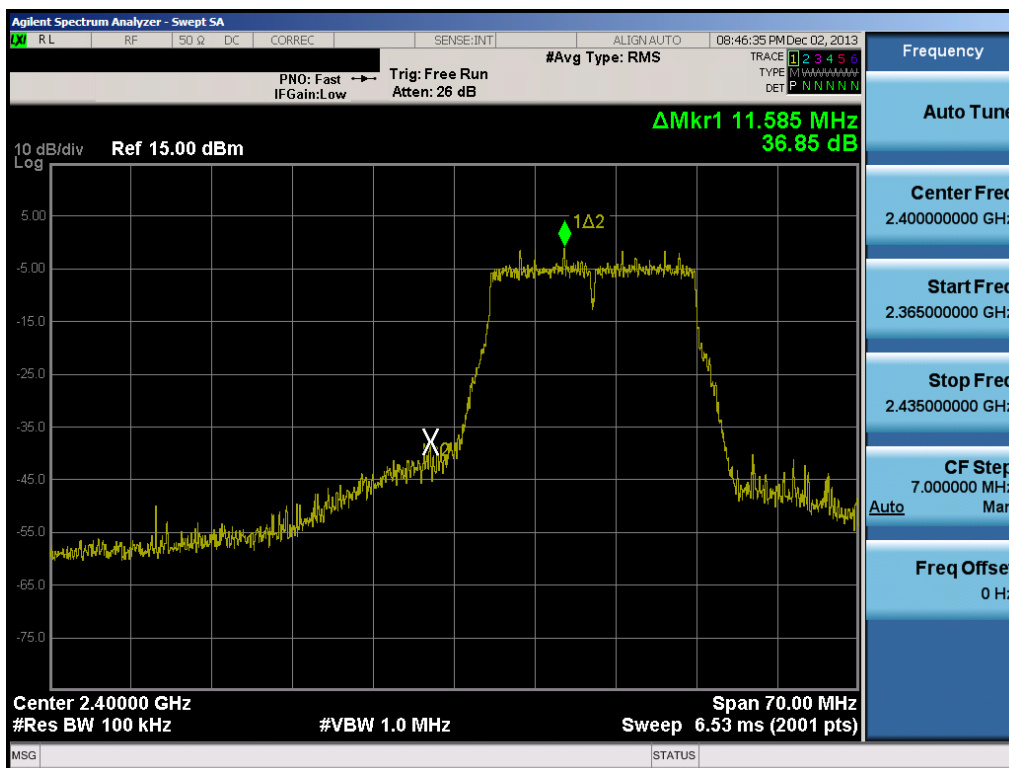


Plot 6-91. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

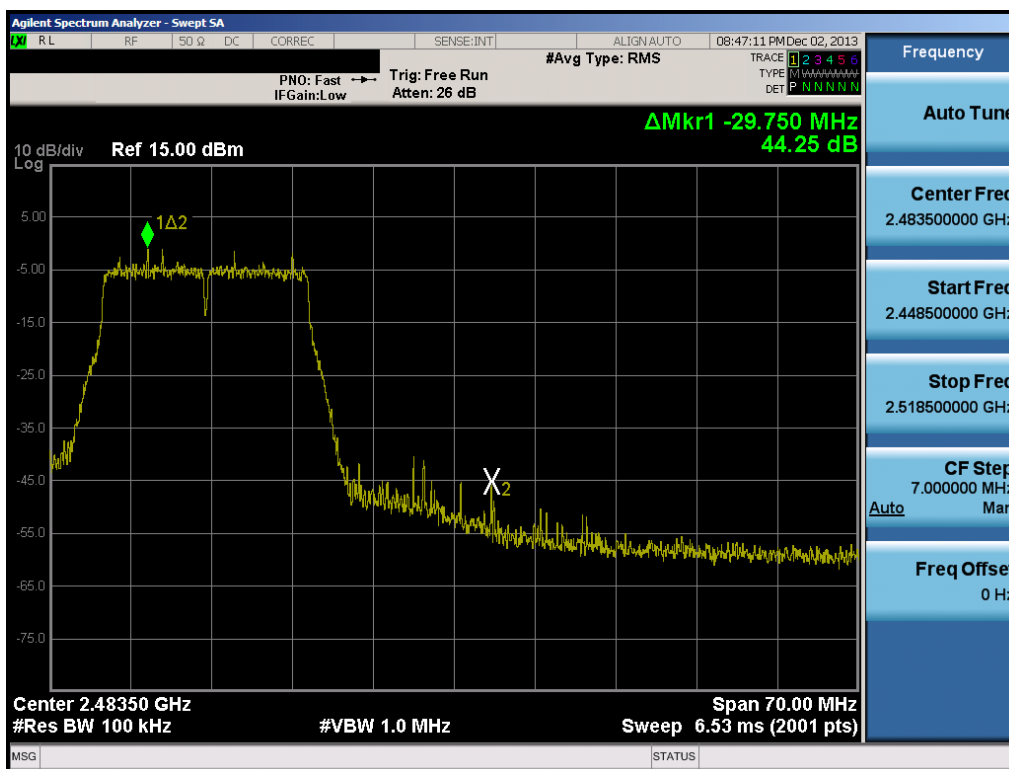


Plot 6-92. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 72 of 116

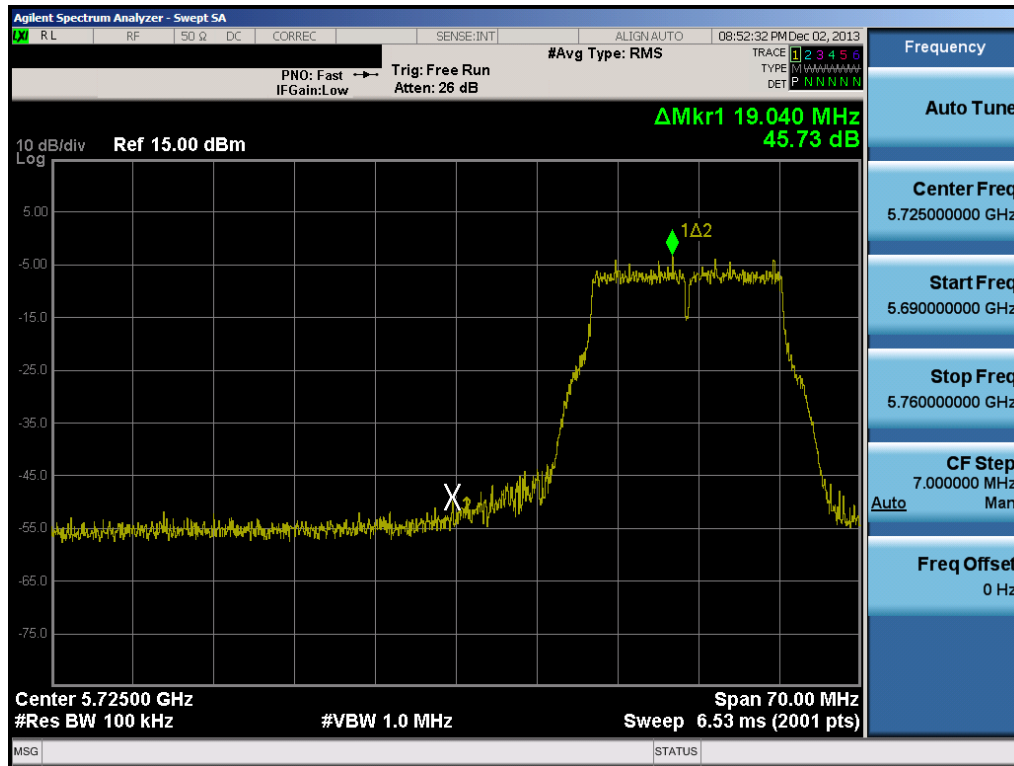


Plot 6-93. Band Edge Plot (802.11a – Ch. 149)

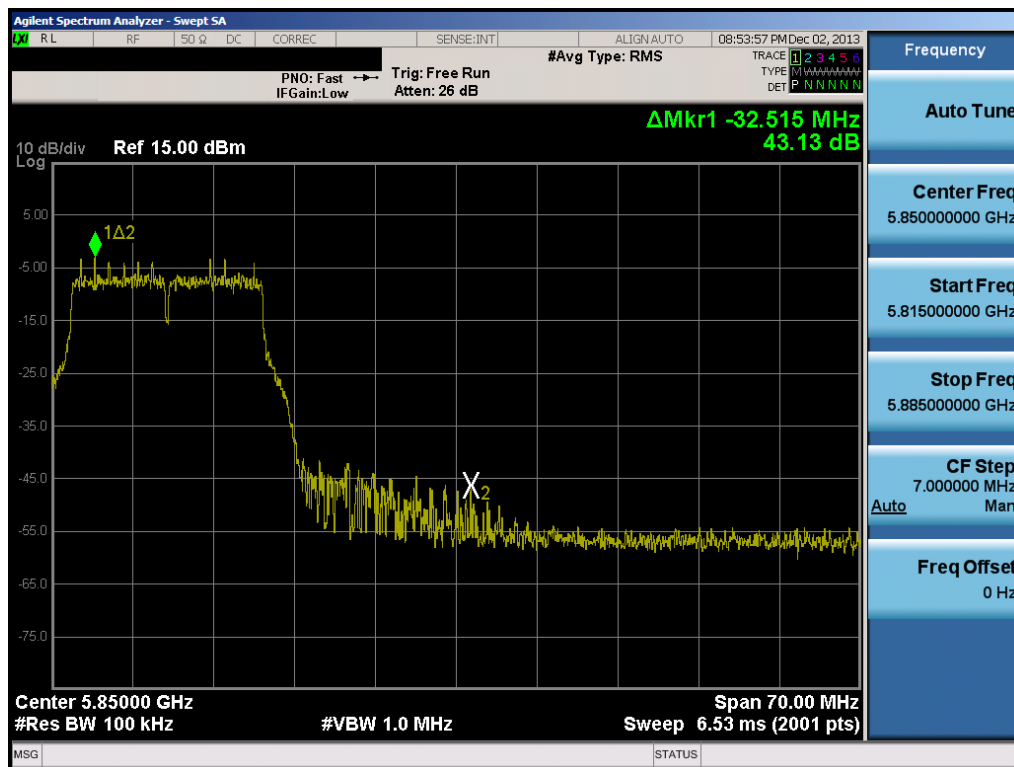


Plot 6-94. Band Edge Plot (802.11a – Ch. 165)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 73 of 116

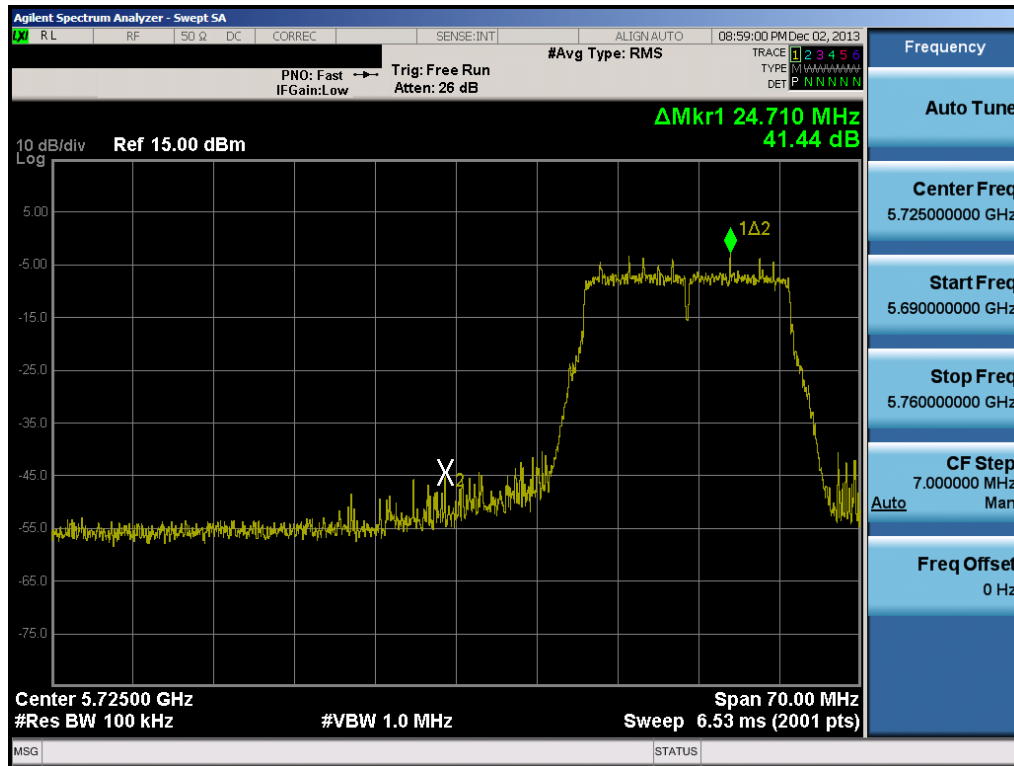


Plot 6-95. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

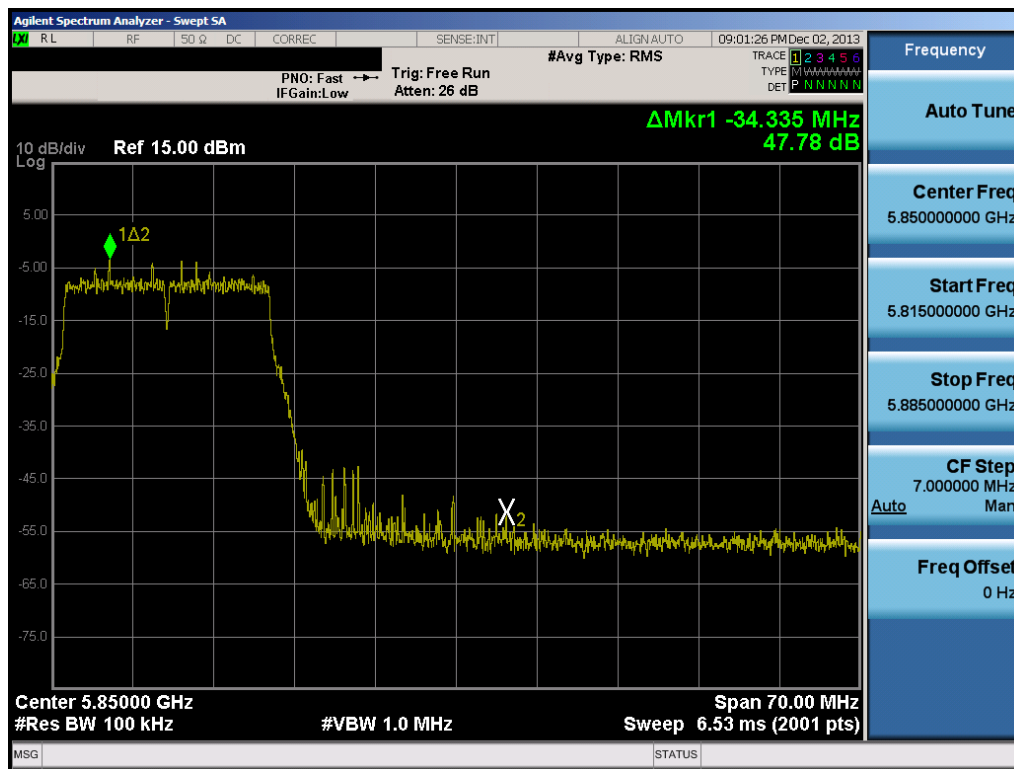


Plot 6-96. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 74 of 116

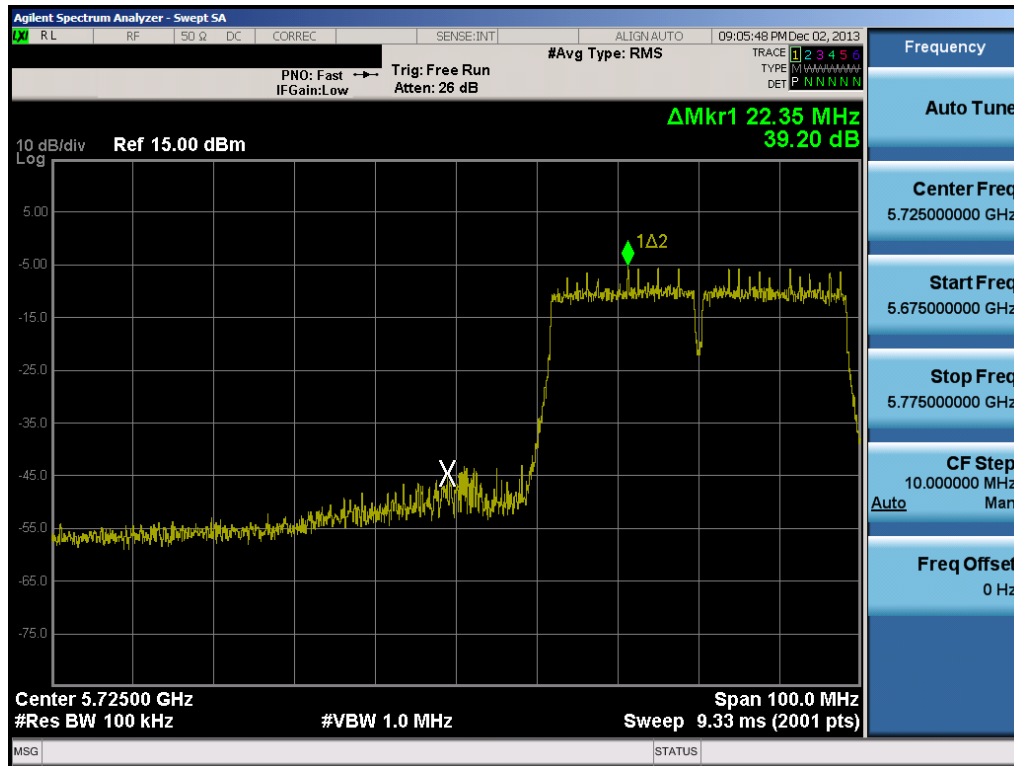


Plot 6-97. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

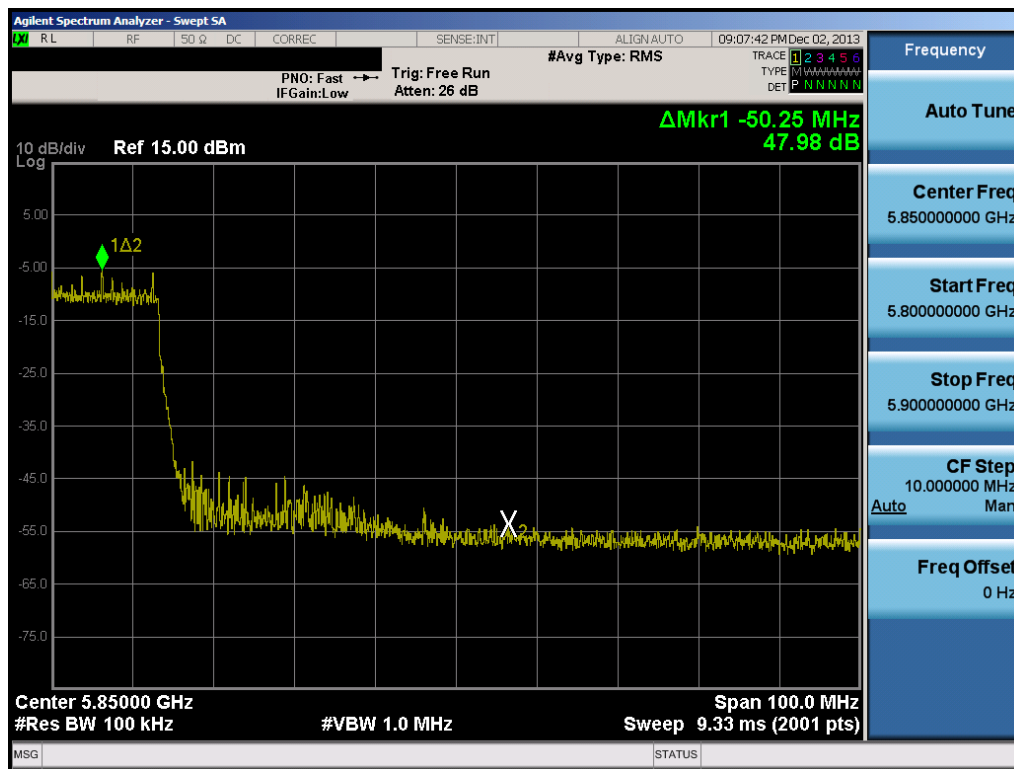


Plot 6-98. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 75 of 116

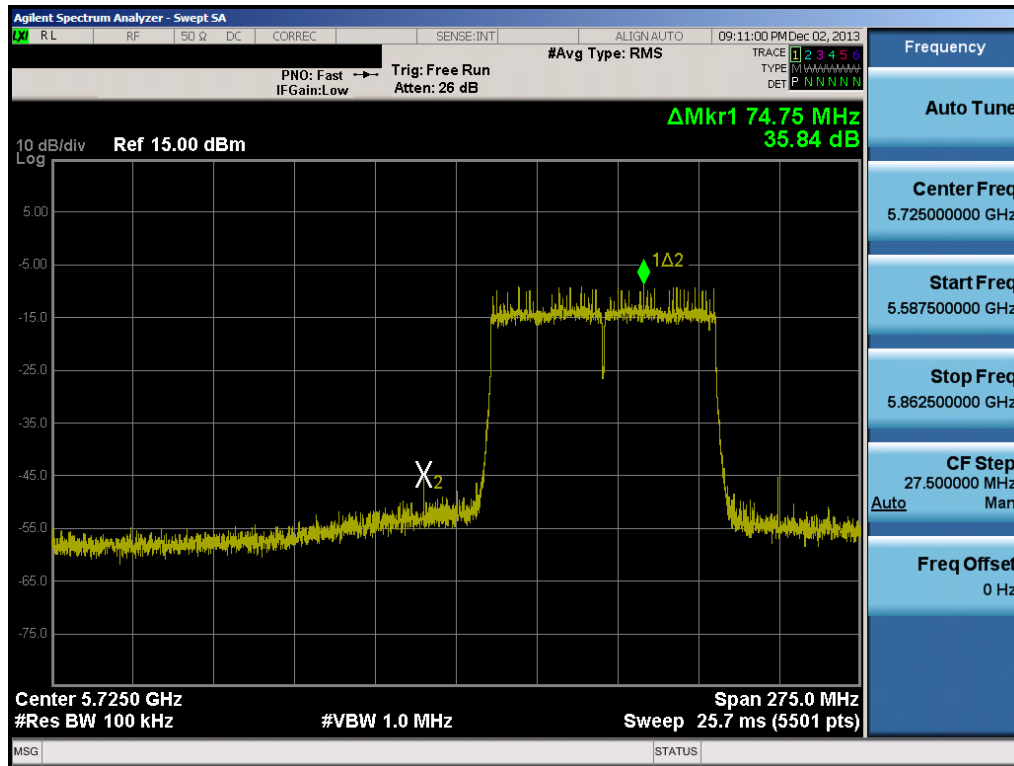

Plot 6-99. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

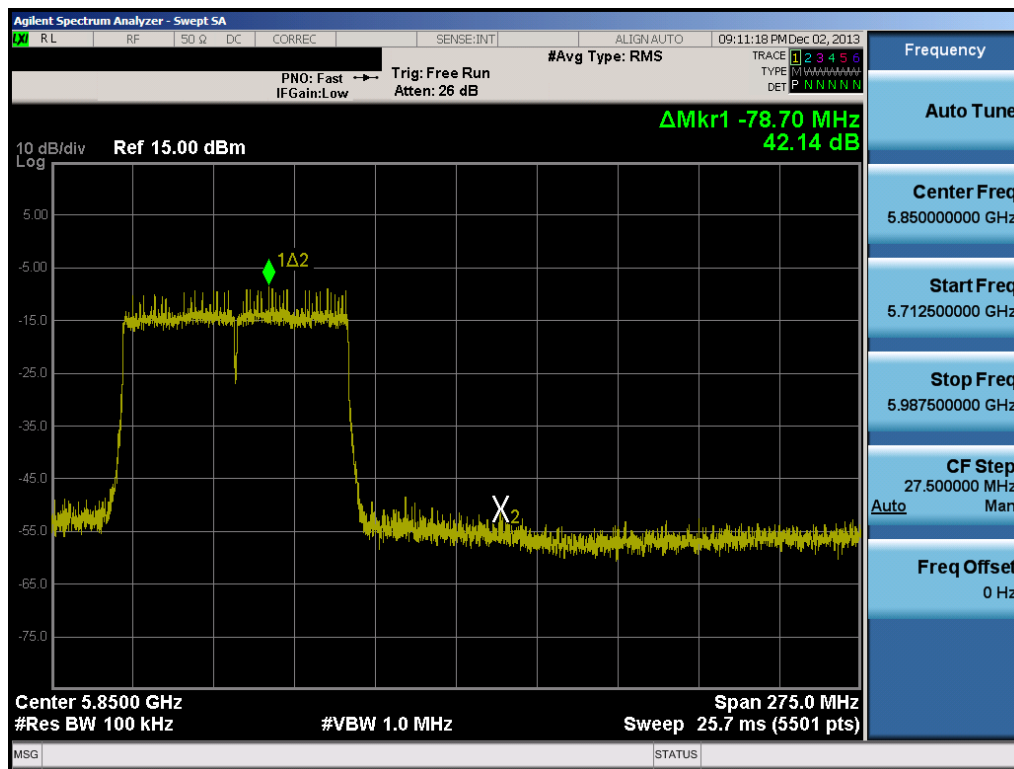

Plot 6-100. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 76 of 116

6.6 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “a”, “n” and “ac” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below. The worst case spurious emissions for the 5.8GHz band were found while transmitting in “a” mode at 6 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).

Test Procedure Used

KDB 558074 v03r01 – Section 11.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz for 2.4G emissions and 40GHz for 5G emissions, respectively (separated into two plots per channel).
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 6-6. Test Instrument & Measurement Setup

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 77 of 116


Test Notes

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, emissions were checked in a radiated setting and found to be compliant.


FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 78 of 116	

Antenna-1 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

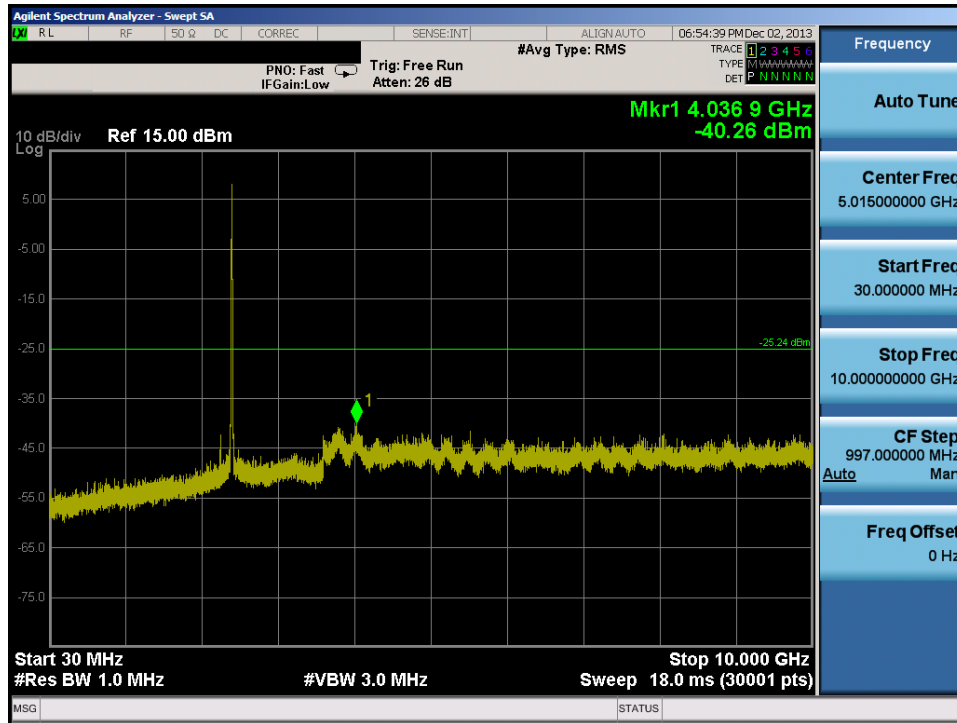


Plot 6-101. Conducted Spurious Plot (802.11b – Ch. 1)

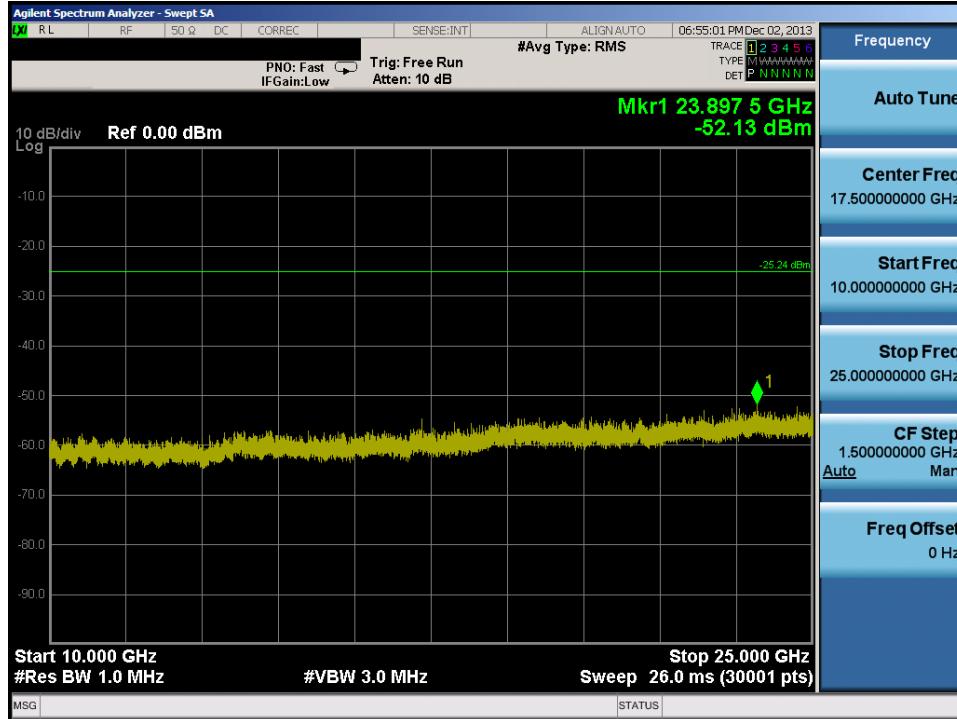


Plot 6-102. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 79 of 116

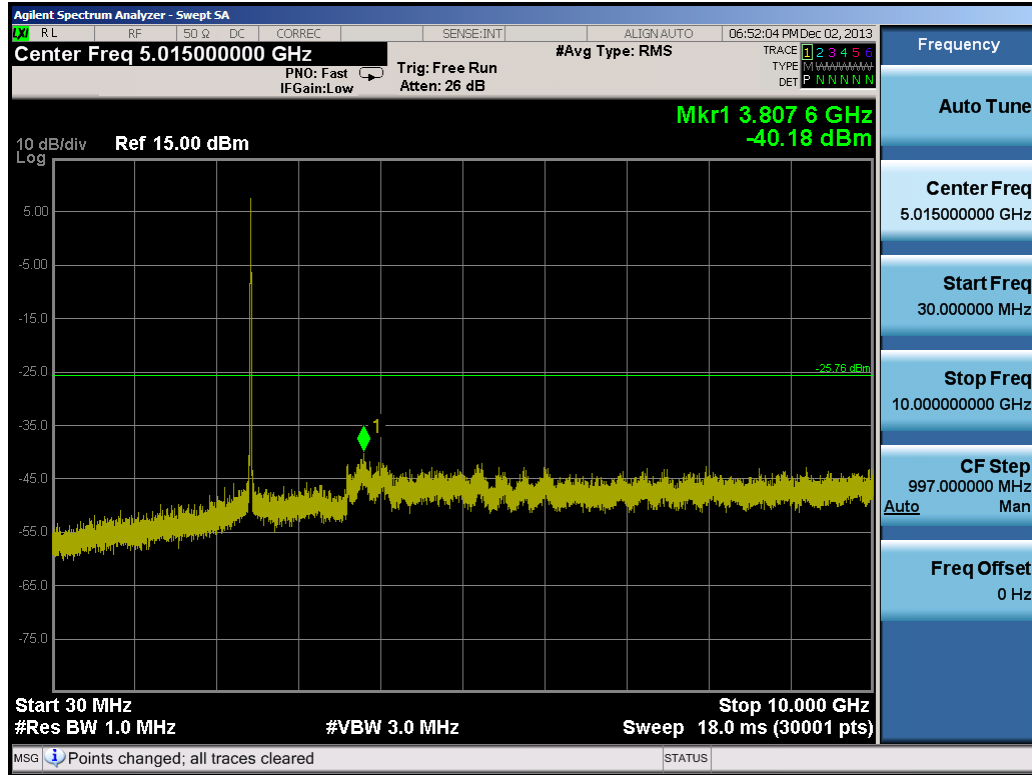


Plot 6-103. Conducted Spurious Plot (802.11b – Ch. 6)

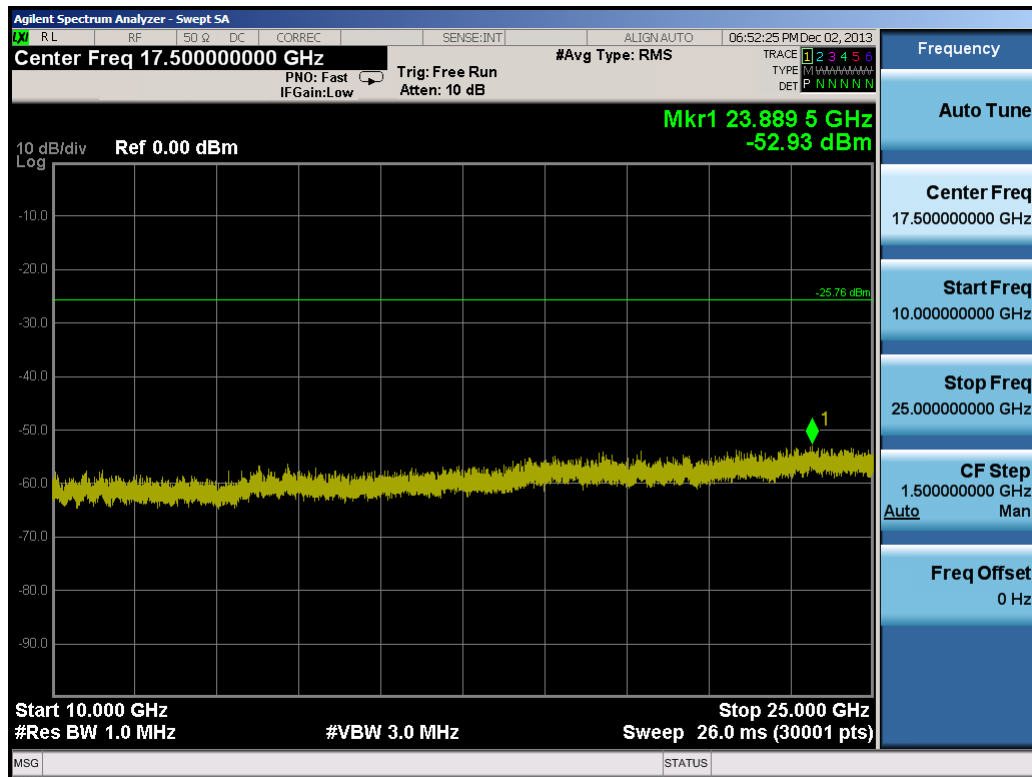


Plot 6-104. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 80 of 116

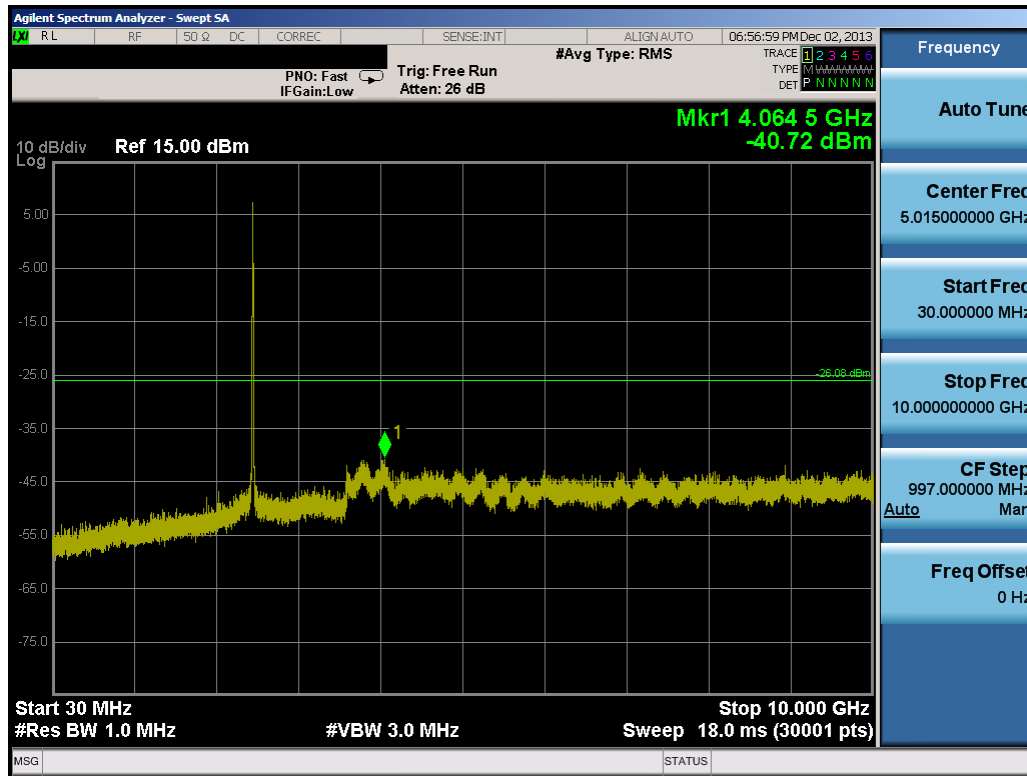


Plot 6-105. Conducted Spurious Plot (802.11b – Ch. 11)

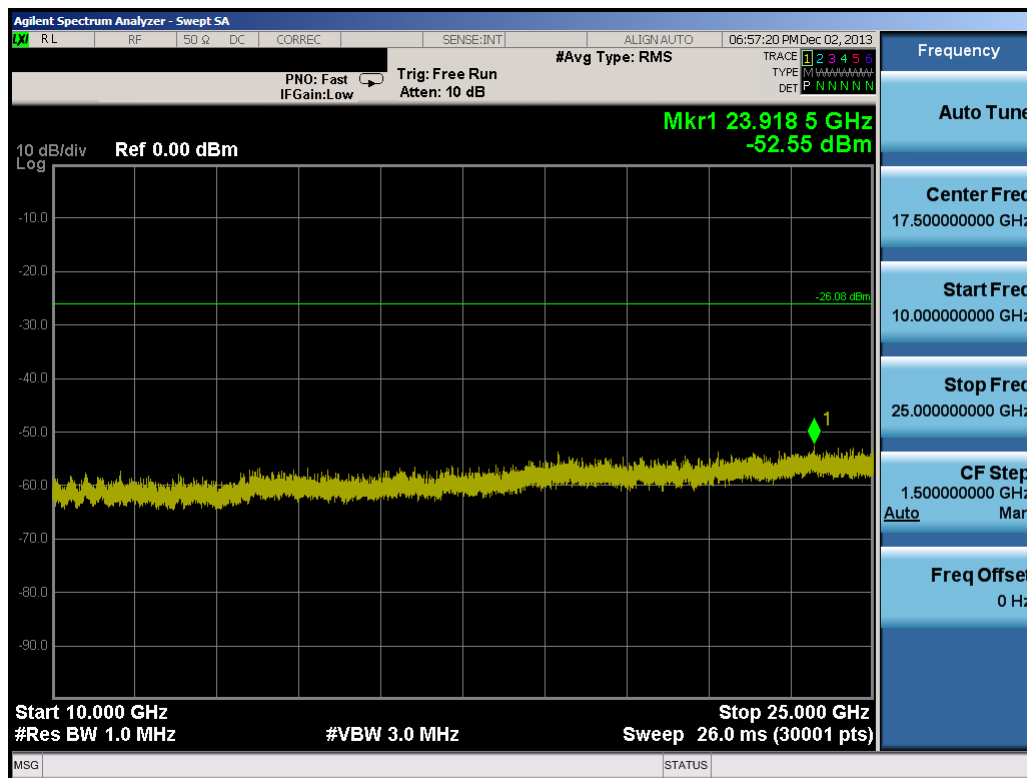


Plot 6-106. Conducted Spurious Plot (802.11b – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 81 of 116		

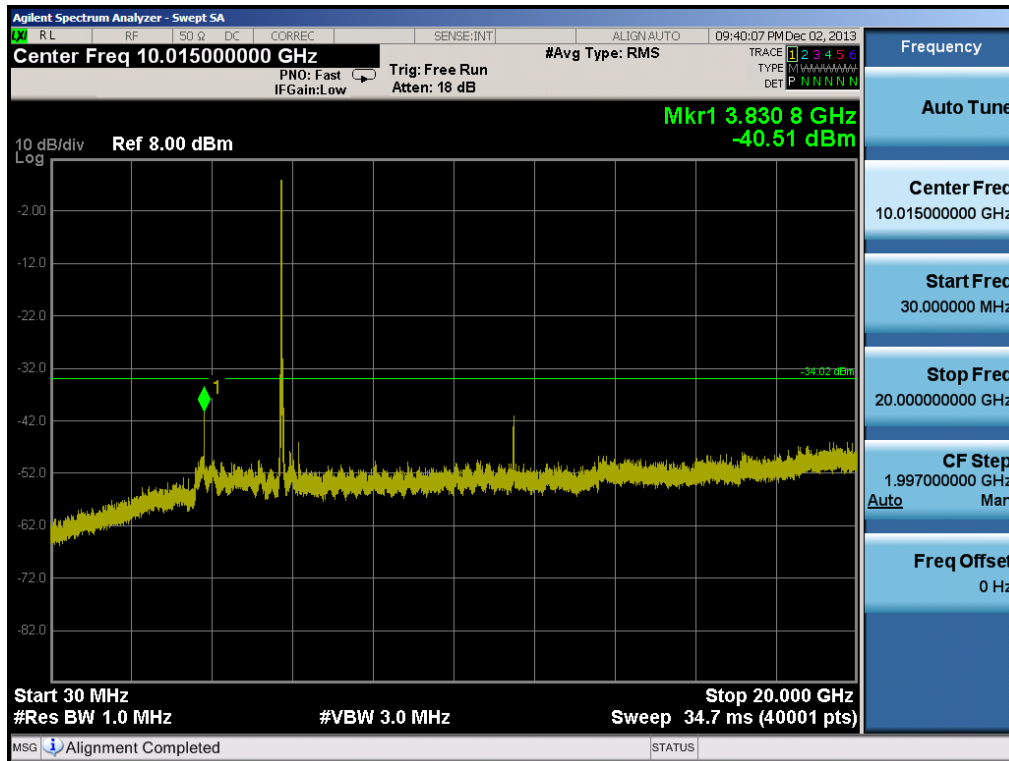


Plot 6-107. Conducted Spurious Plot (802.11a – Ch. 149)

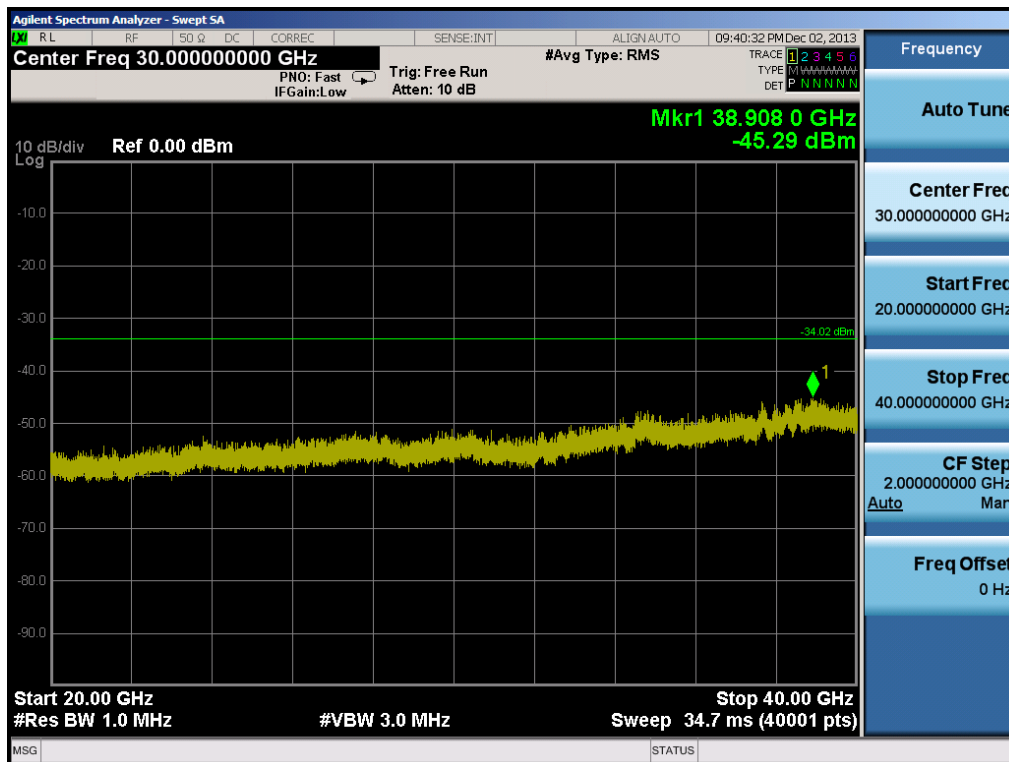


Plot 6-108. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 82 of 116

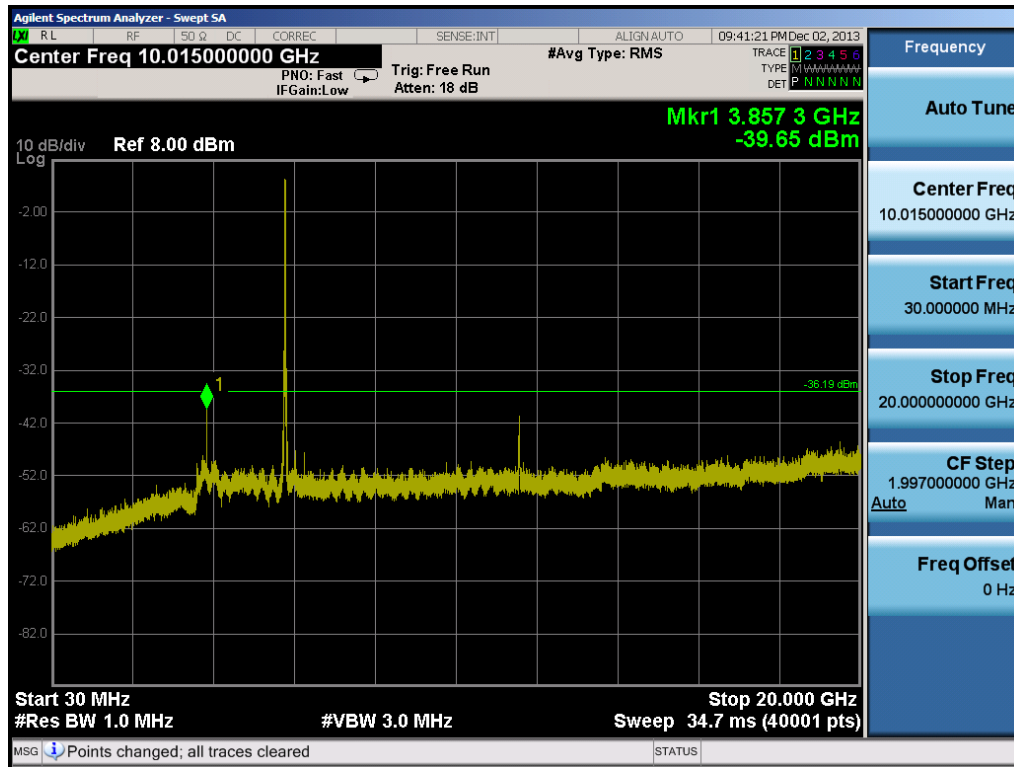


Plot 6-109. Conducted Spurious Plot (802.11a – Ch. 157)

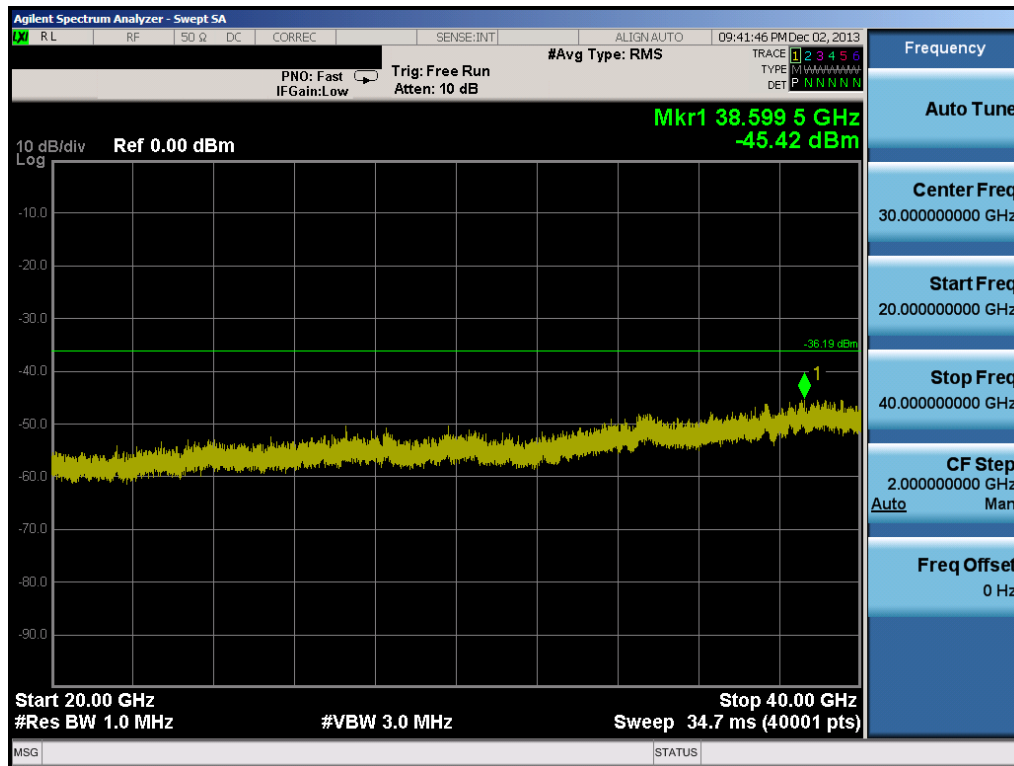


Plot 6-110. Conducted Spurious Plot (802.11a – Ch. 157)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet	Page 83 of 116		

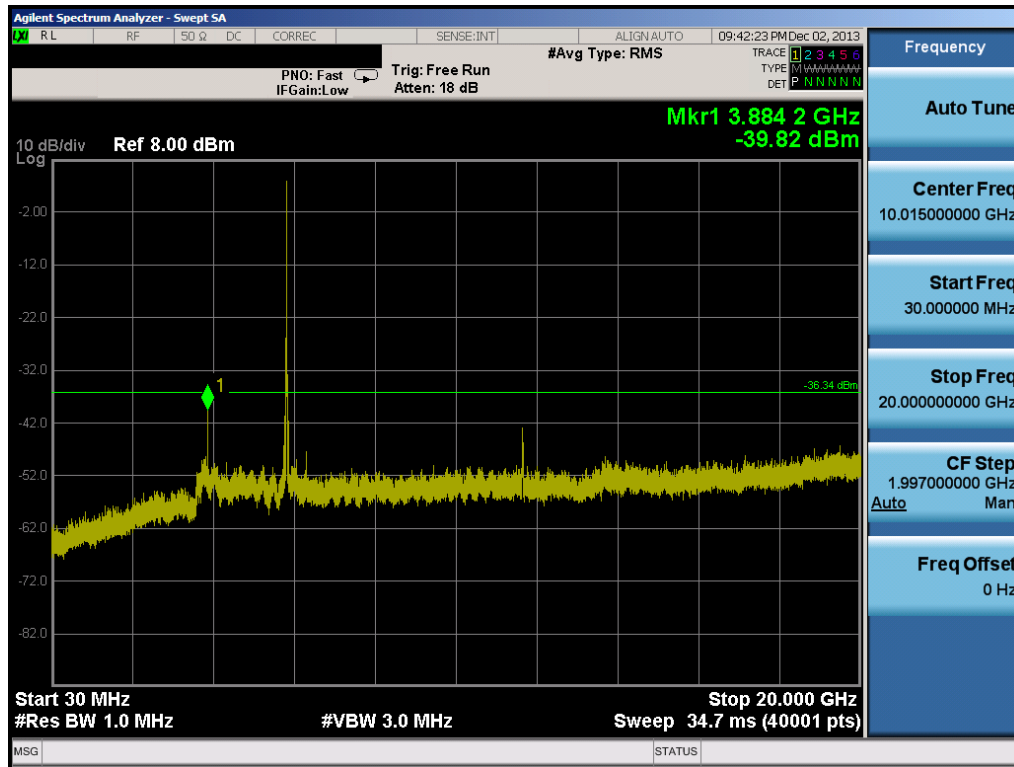

Plot 6-111. Conducted Spurious Plot (802.11a – Ch. 165)

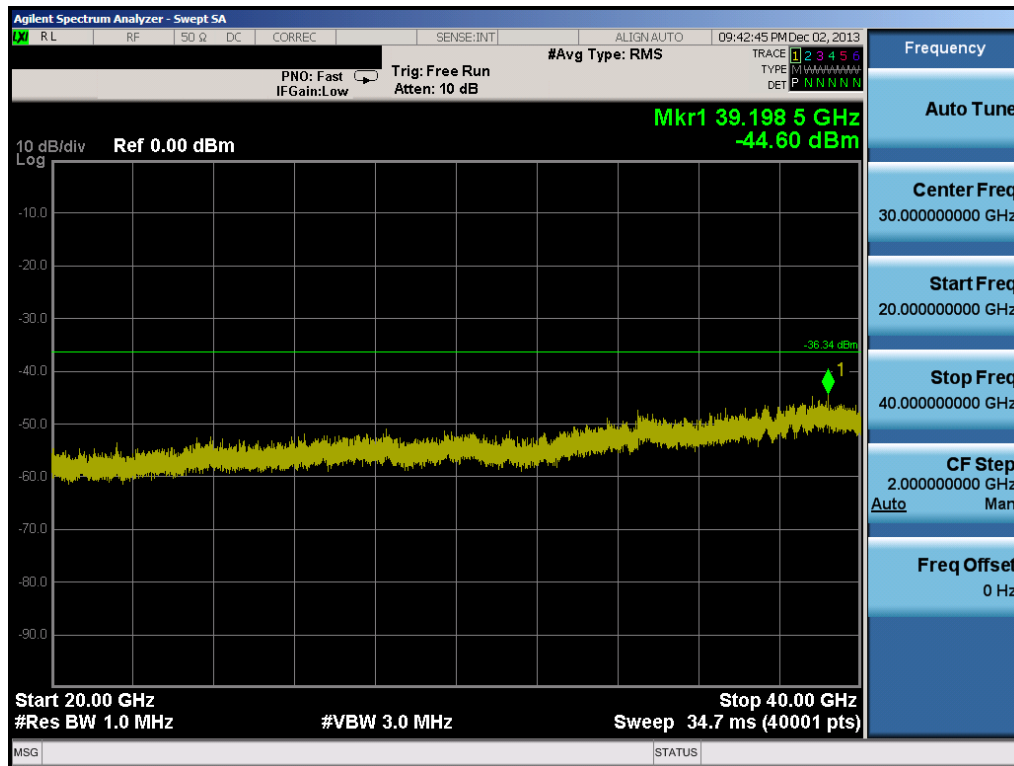


Plot 6-112. Conducted Spurious Plot (802.11a – Ch. 165)


FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 84 of 116	

Antenna-2 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

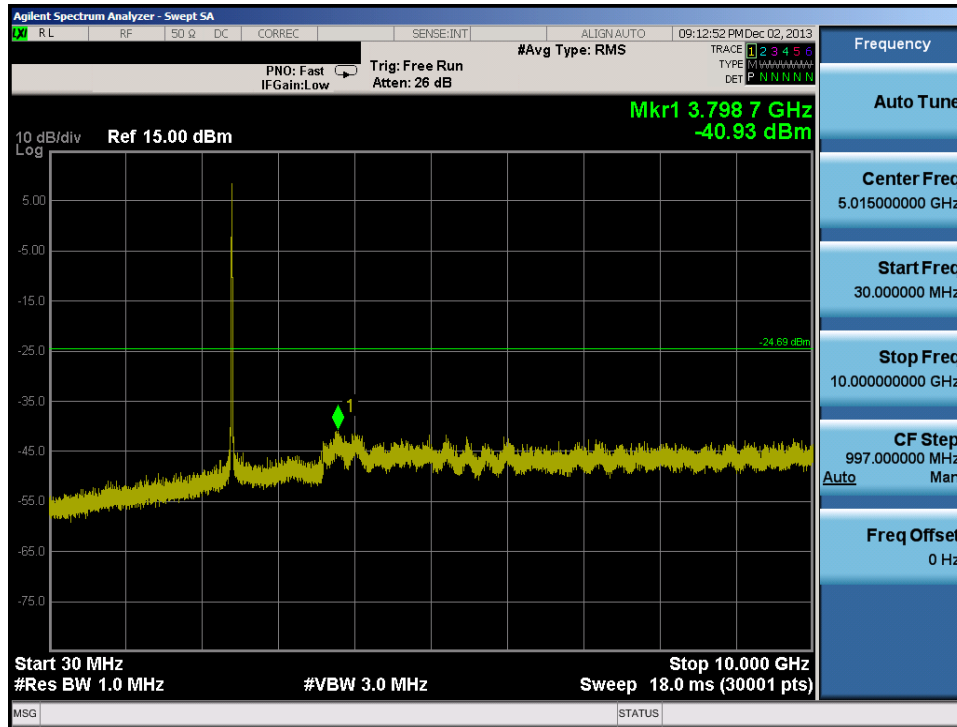


Plot 6-113. Conducted Spurious Plot (802.11b – Ch. 1)

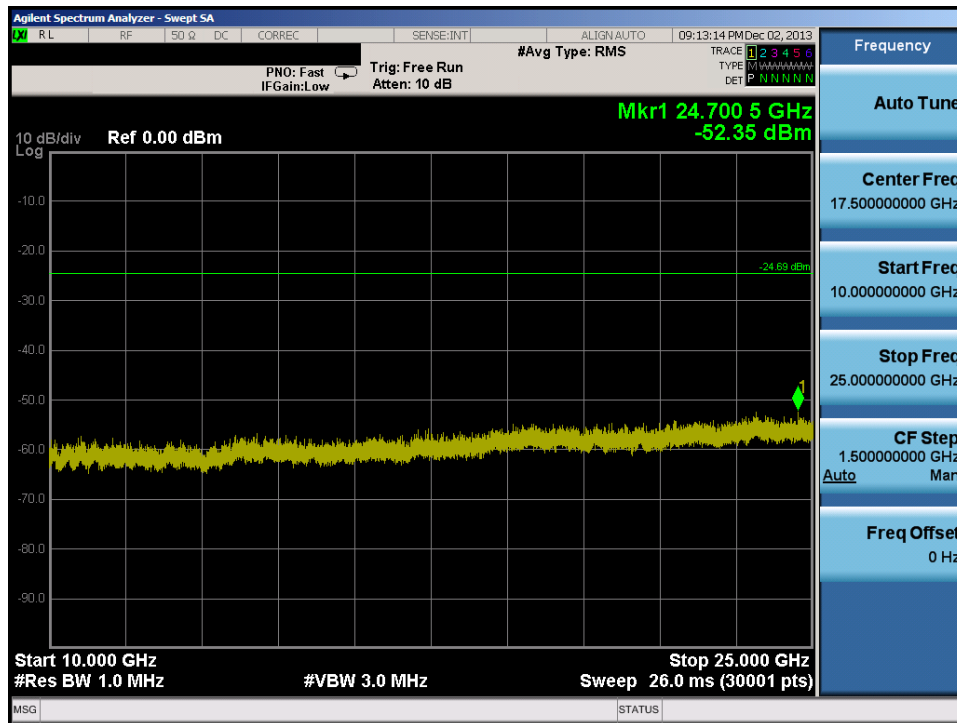


Plot 6-114. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 85 of 116

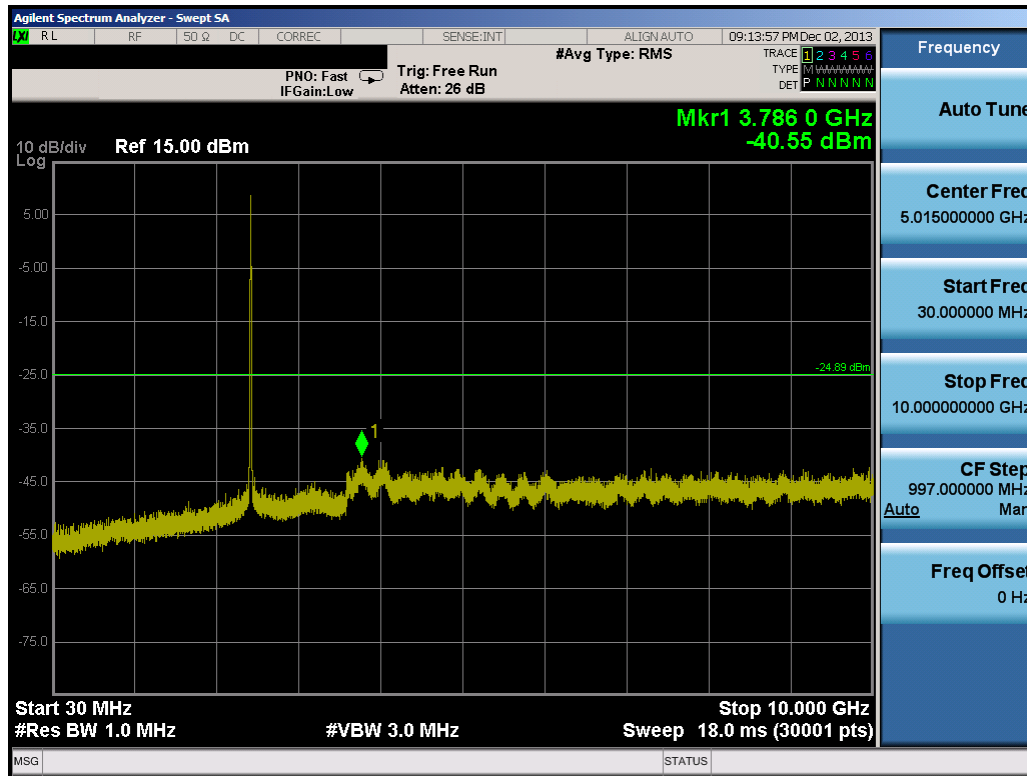


Plot 6-115. Conducted Spurious Plot (802.11b – Ch. 6)

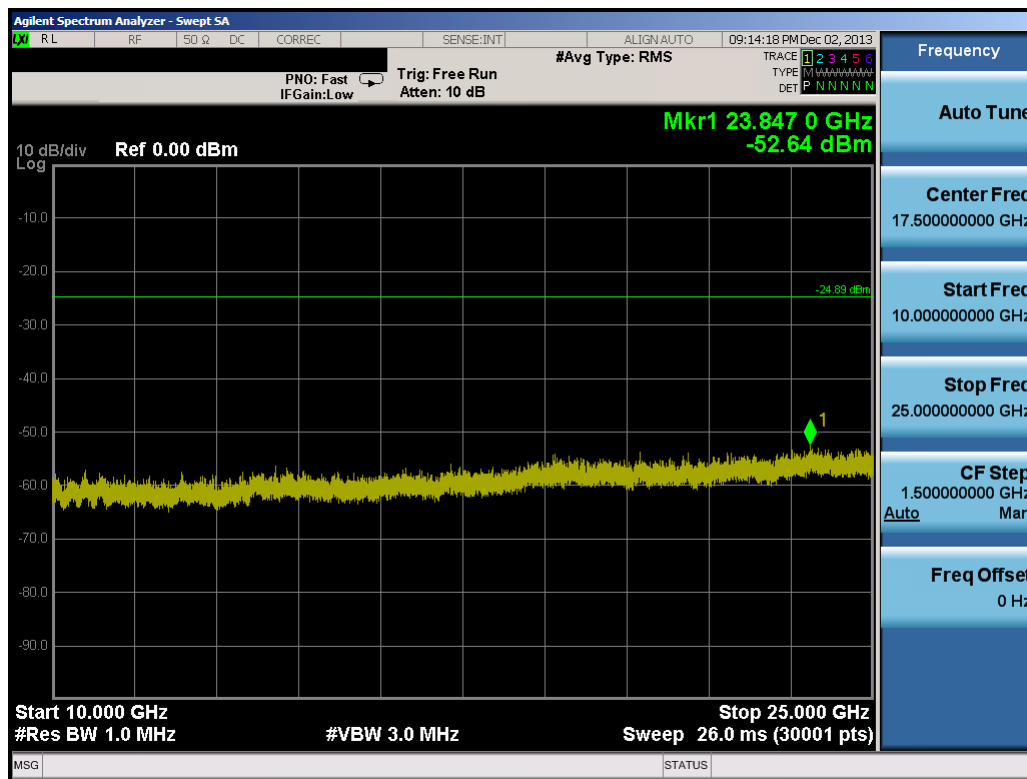


Plot 6-116. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 86 of 116

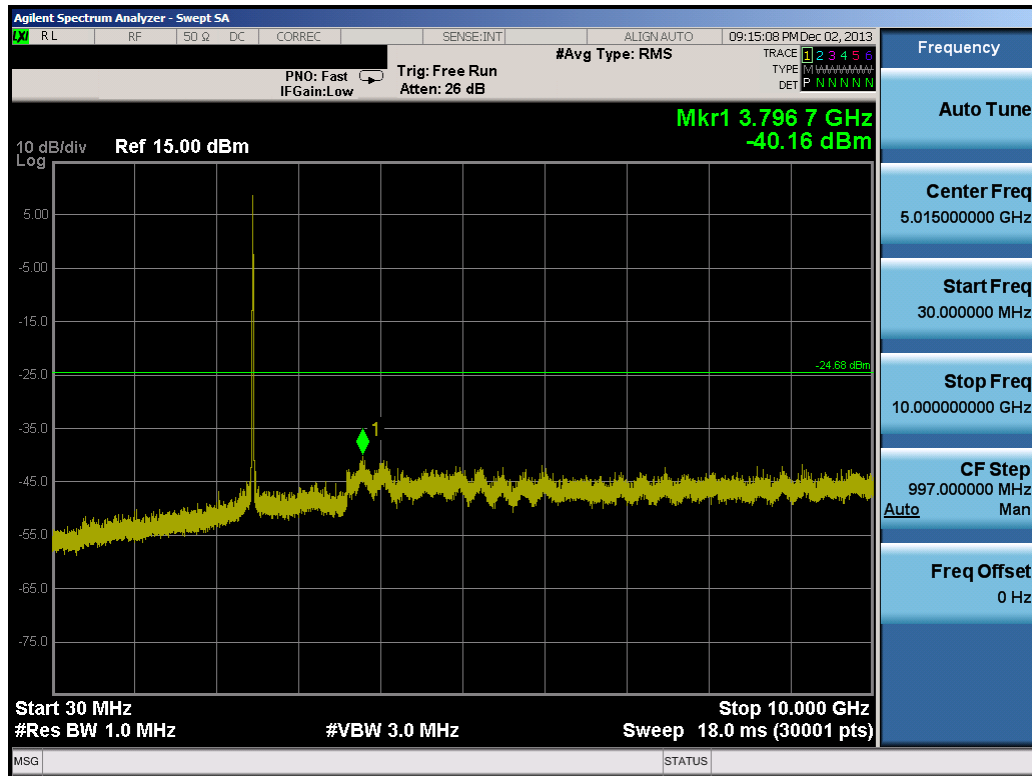


Plot 6-117. Conducted Spurious Plot (802.11b – Ch. 11)

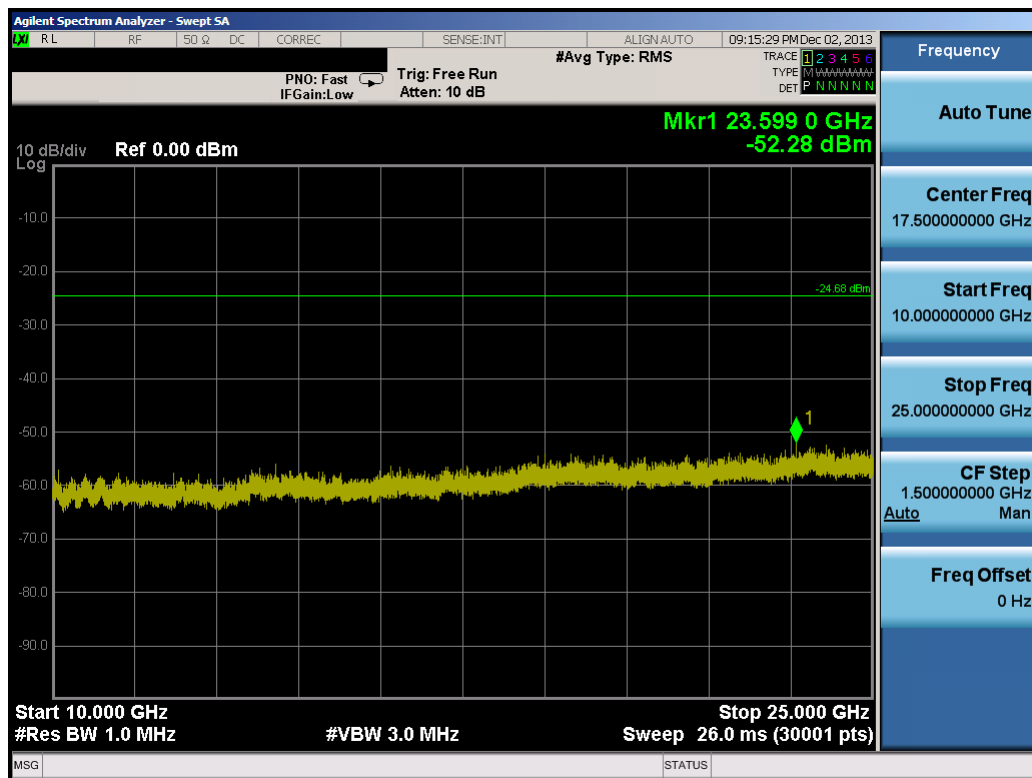


Plot 6-118. Conducted Spurious Plot (802.11b – Ch. 11)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 87 of 116

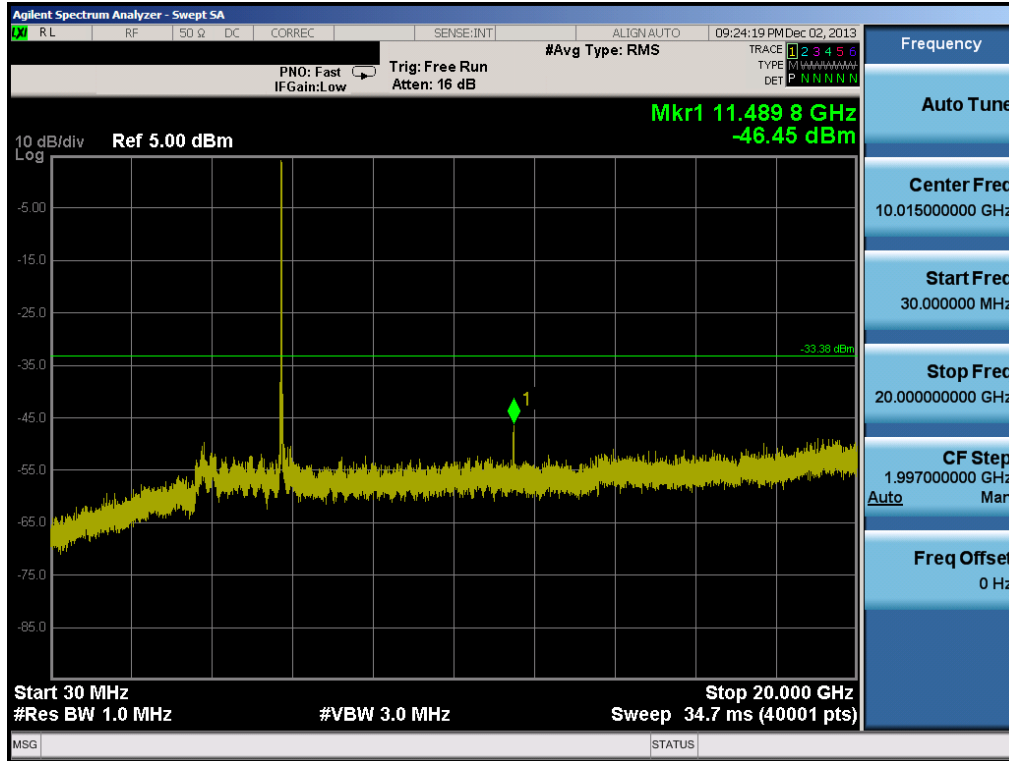


Plot 6-119. Conducted Spurious Plot (802.11a – Ch. 149)

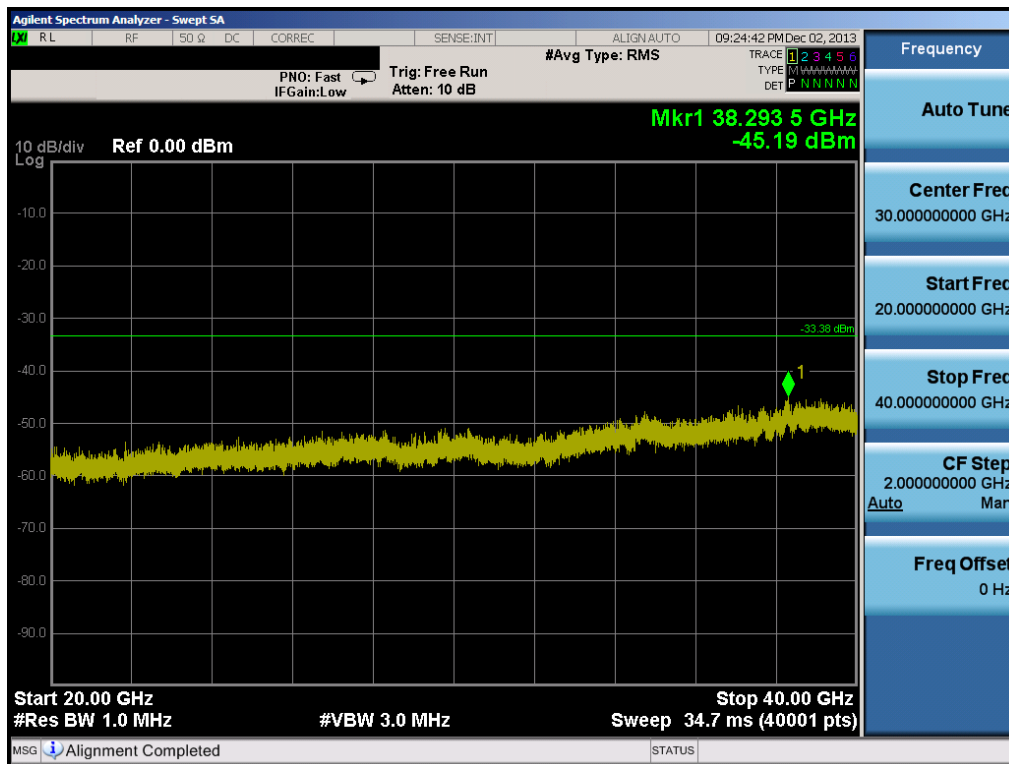


Plot 6-120. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 88 of 116

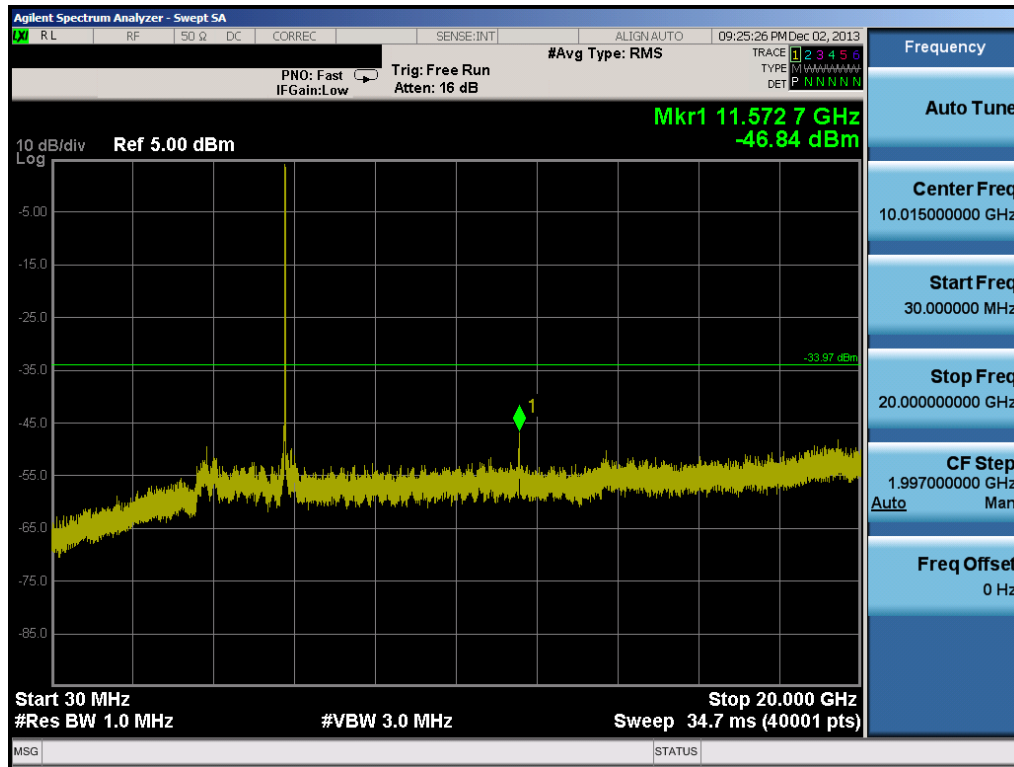


Plot 6-121. Conducted Spurious Plot (802.11a – Ch. 157)

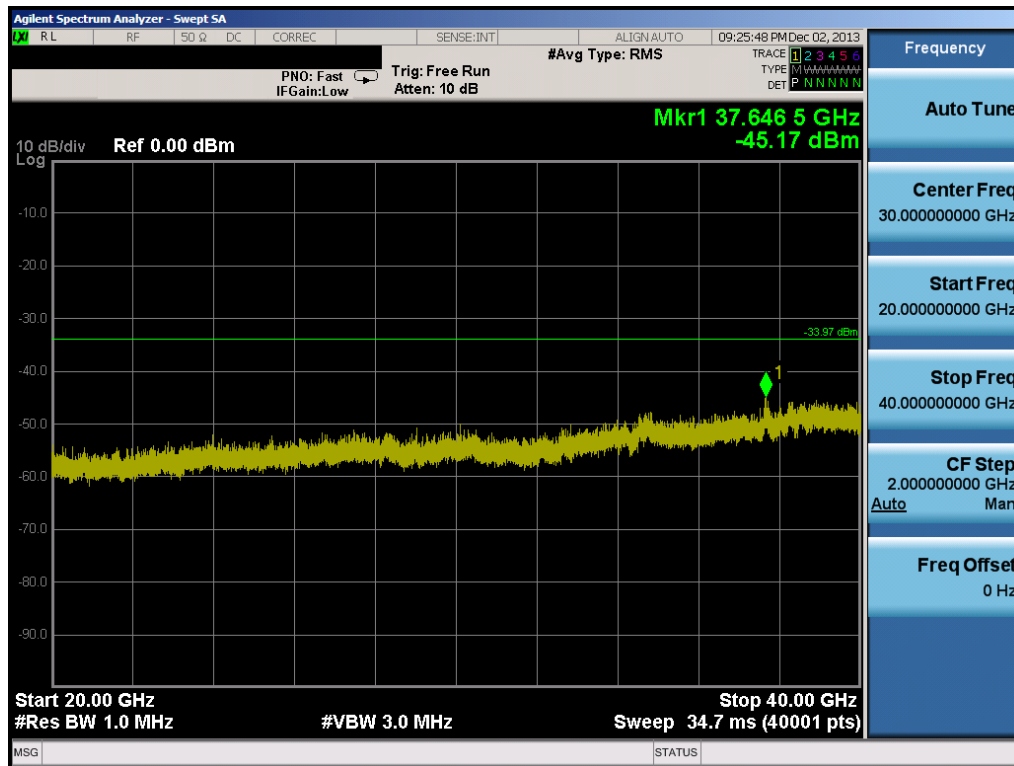


Plot 6-122. Conducted Spurious Plot (802.11a – Ch. 157)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 89 of 116	

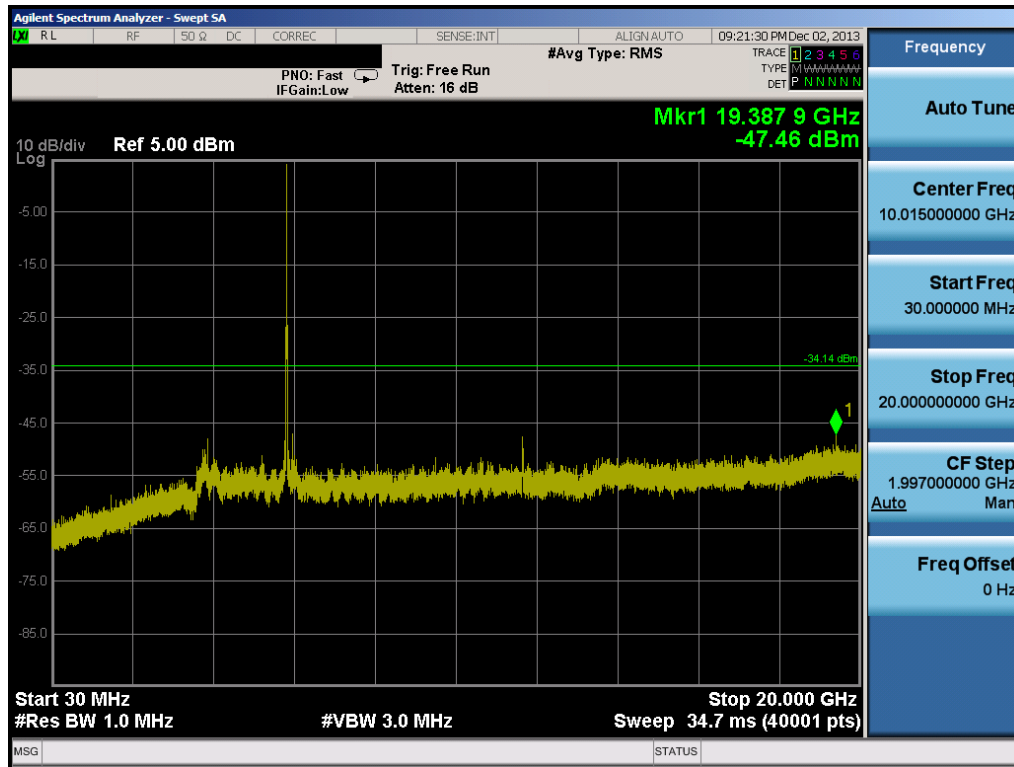

Plot 6-123. Conducted Spurious Plot (802.11a – Ch. 165)

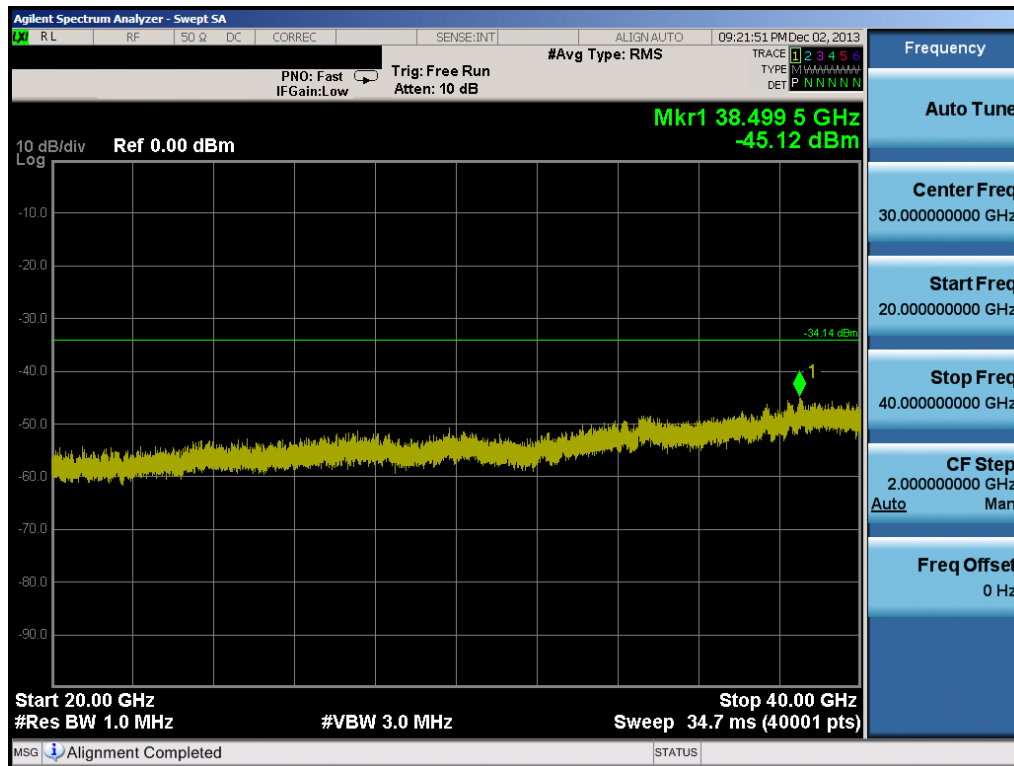

Plot 6-124. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 90 of 116	

6.7 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section. Worst case radiated emissions were found to be in 802.11b and 802.11a mode. MIMO (802.11n) radiated spurious emissions were found to be less than or equal to 802.11a emissions and thus are not reported.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-6 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-6. Radiated Limits

Test Procedures Used

KDB 558074 v03r01 – Section 12.2.5 (average power measurements)

KDB 558074 v03r01 – Section 12.2.4 (peak power measurements)

Test Settings

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 91 of 116

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

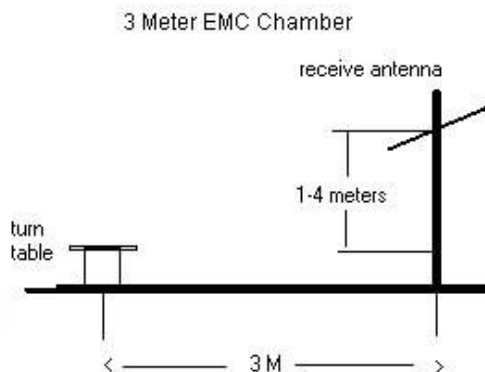


Figure 6-7. Test Instrument & Measurement Setup

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 92 of 116

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r01 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.
8. For 802.11n mode MIMO, radiated spurious emissions were investigated and no significant emissions detected.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + 10 dB Attenuator) – Preamplifier Gain

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 93 of 116

Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	-135.00	Avg	H	36.61	8.61	53.98	-45.37
4824.00	-125.00	Peak	H	36.61	18.61	73.98	-55.37
12060.00	-135.00	Avg	H	45.85	17.85	53.98	-36.13
12060.00	-125.00	Peak	H	45.85	27.85	73.98	-46.13

Table 6-7. Radiated Measurements

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	-135.00	Avg	H	36.60	8.60	53.98	-45.38
4874.00	-125.00	Peak	H	36.60	18.60	73.98	-55.38
7311.00	-135.00	Avg	H	41.27	13.27	53.98	-40.71
7311.00	-125.00	Peak	H	41.27	23.27	73.98	-50.71
12185.00	-135.00	Avg	H	45.74	17.74	53.98	-36.24
12185.00	-125.00	Peak	H	45.74	27.74	73.98	-46.24

Table 6-8. Radiated Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet				Page 94 of 116	

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	-135.00	Avg	H	36.69	8.69	53.98	-45.29
4924.00	-125.00	Peak	H	36.69	18.69	73.98	-55.29
7386.00	-135.00	Avg	H	41.45	13.45	53.98	-40.53
7386.00	-125.00	Peak	H	41.45	23.45	73.98	-50.53
12310.00	-135.00	Avg	H	45.67	17.67	53.98	-36.31
12310.00	-125.00	Peak	H	45.67	27.67	73.98	-46.31

Table 6-9. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11490.00	-135.00	Avg	H	43.14	15.14	53.98	-38.83
11490.00	-125.00	Peak	H	43.14	25.14	73.98	-48.83
22980.00	-135.00	Avg	H	44.53	16.53	53.98	-37.45
22980.00	-125.00	Peak	H	44.53	26.53	73.98	-47.45

Table 6-10. Radiated Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet				Page 95 of 116	

Antenna-1 Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11570.00	-135.00	Avg	H	43.29	15.29	53.98	-38.69
11570.00	-125.00	Peak	H	43.29	25.29	73.98	-48.69

Table 6-11. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11650.00	-135.00	Avg	H	43.44	15.44	53.98	-38.54
11650.00	-125.00	Peak	H	43.44	25.44	73.98	-48.54

Table 6-12. Radiated Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet				Page 96 of 116	

Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	-99.10	Avg	H	36.61	44.51	53.98	-9.47
4824.00	-93.76	Peak	H	36.61	49.85	73.98	-24.13
12060.00	-135.00	Avg	H	45.85	17.85	53.98	-36.13
12060.00	-125.00	Peak	H	45.85	27.85	73.98	-46.13

Table 6-13. Radiated Measurements

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	-99.54	Avg	H	36.60	44.07	53.98	-9.91
4874.00	-93.51	Peak	H	36.60	50.10	73.98	-23.88
7311.00	-135.00	Avg	H	41.27	13.27	53.98	-40.71
7311.00	-125.00	Peak	H	41.27	23.27	73.98	-50.71
12185.00	-135.00	Avg	H	45.74	17.74	53.98	-36.24
12185.00	-125.00	Peak	H	45.74	27.74	73.98	-46.24

Table 6-14. Radiated Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet				Page 97 of 116	

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	-98.45	Avg	H	36.69	45.24	53.98	-8.74
4924.00	-92.69	Peak	H	36.69	51.00	73.98	-22.98
7386.00	-135.00	Avg	H	41.45	13.45	53.98	-40.53
7386.00	-125.00	Peak	H	41.45	23.45	73.98	-50.53
12310.00	-135.00	Avg	H	45.67	17.67	53.98	-36.31
12310.00	-125.00	Peak	H	45.67	27.67	73.98	-46.31

Table 6-15. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11490.00	-135.00	Avg	H	44.98	16.98	53.98	-37.00
11490.00	-125.00	Peak	H	44.98	26.98	73.98	-47.00
22980.00	-135.00	Avg	H	44.53	16.53	53.98	-37.45
22980.00	-125.00	Peak	H	44.53	26.53	73.98	-47.45

Table 6-16. Radiated Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 98 of 116

Antenna-2 Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11570.00	-135.00	Avg	H	45.19	17.19	53.98	-36.79
11570.00	-125.00	Peak	H	45.19	27.19	73.98	-46.79

Table 6-17. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11650.00	-135.00	Avg	H	45.39	17.39	53.98	-36.59
11650.00	-125.00	Peak	H	45.39	27.39	73.98	-46.59

Table 6-18. Radiated Measurements

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet				Page 99 of 116	

6.8 Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

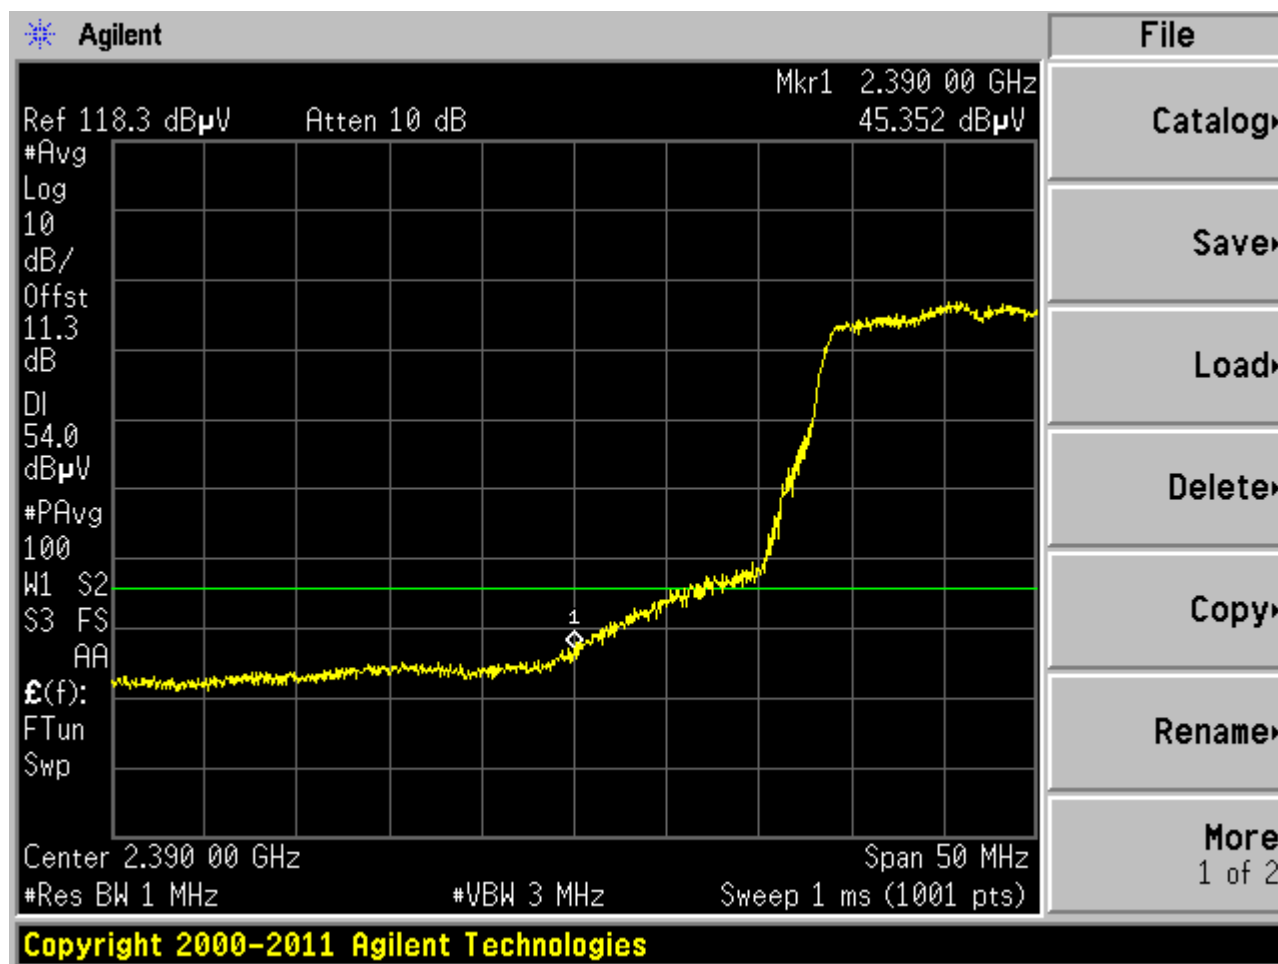


Plot 6-125. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 100 of 116

Antenna-1 Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

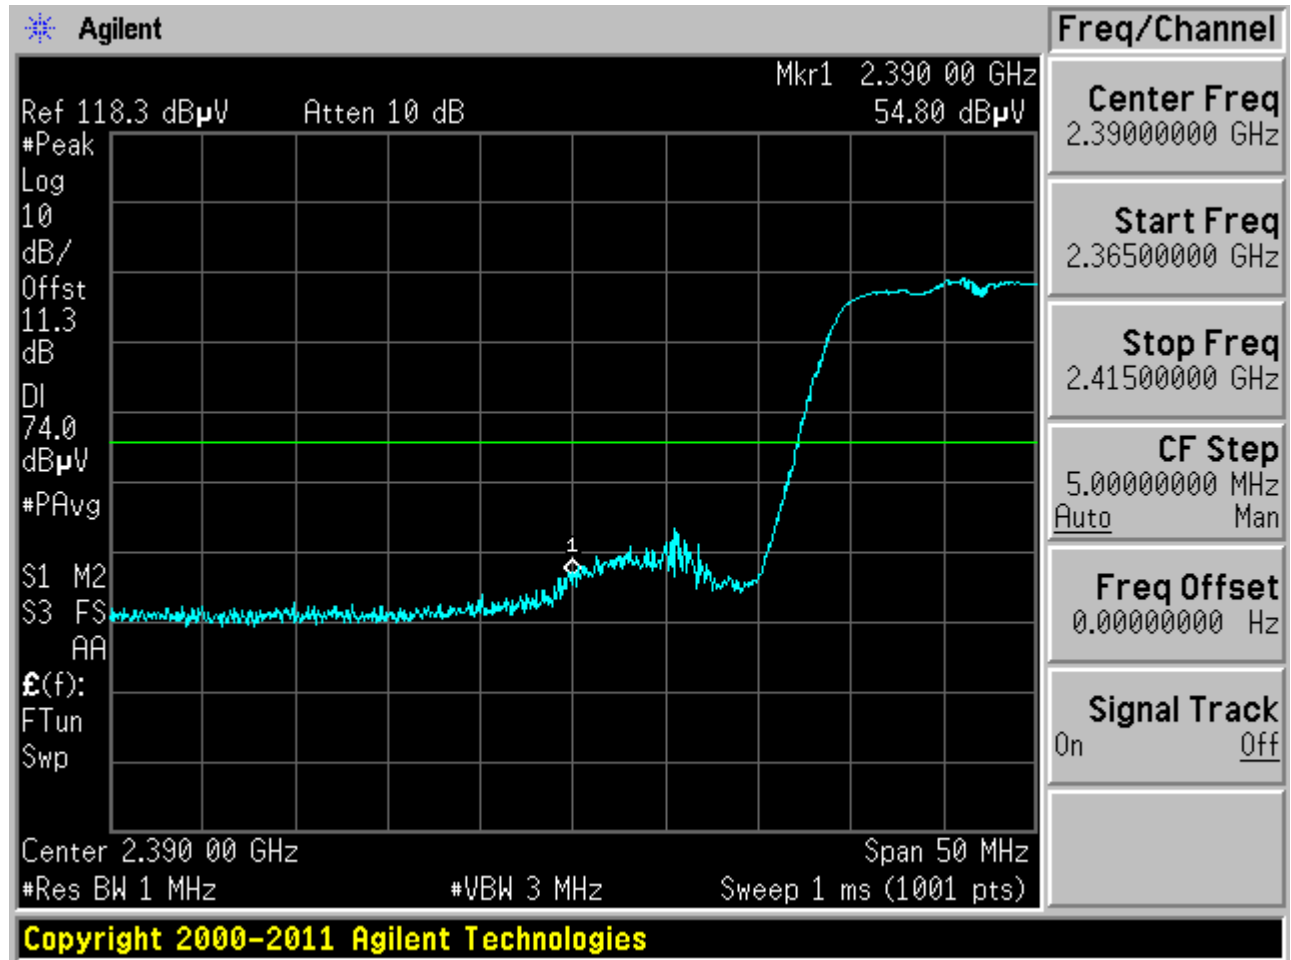

Plot 6-126. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 101 of 116

Antenna-1 Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

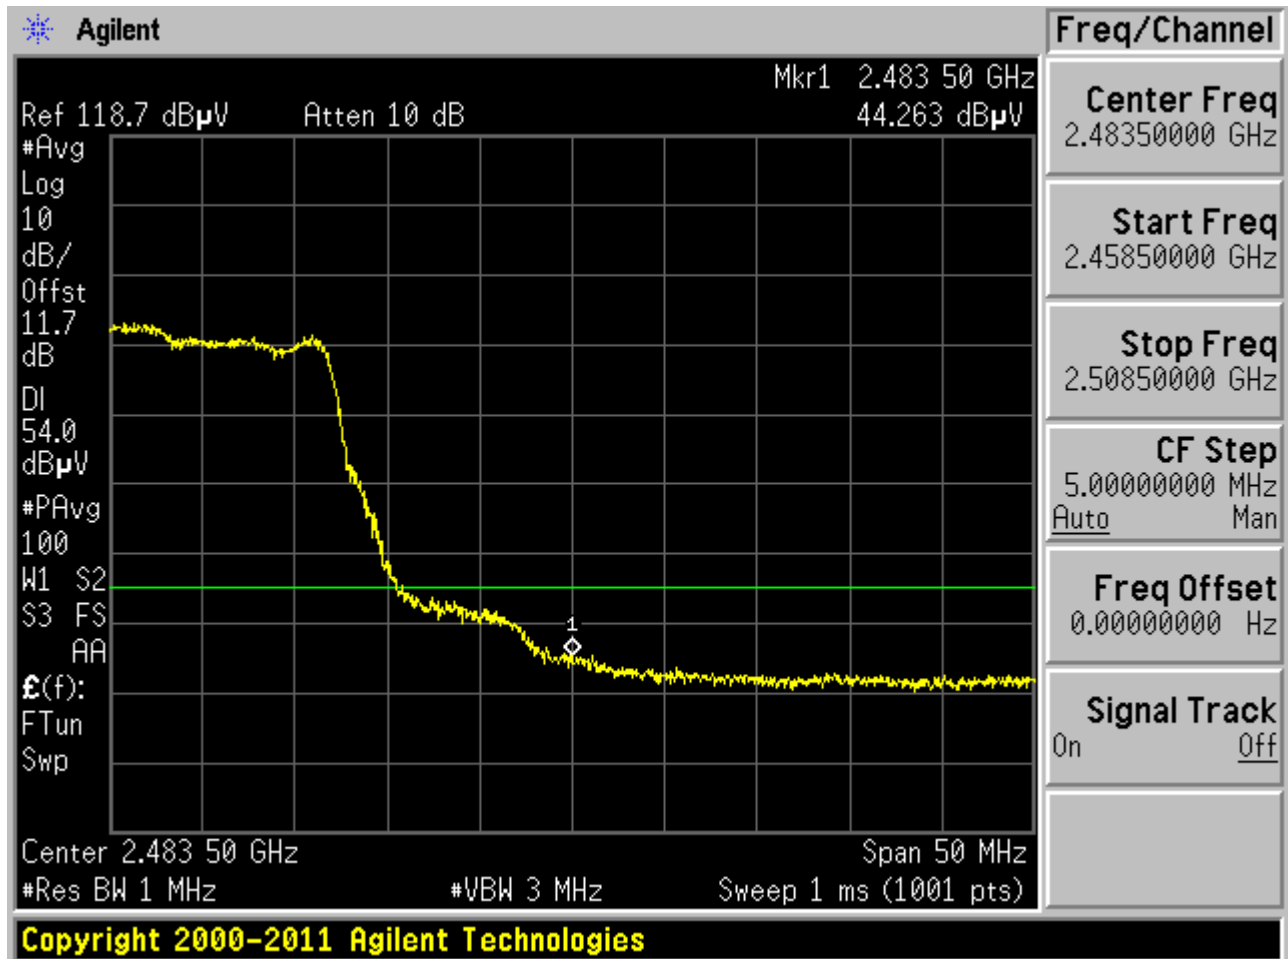


Plot 6-127. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 102 of 116

Antenna-1 Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

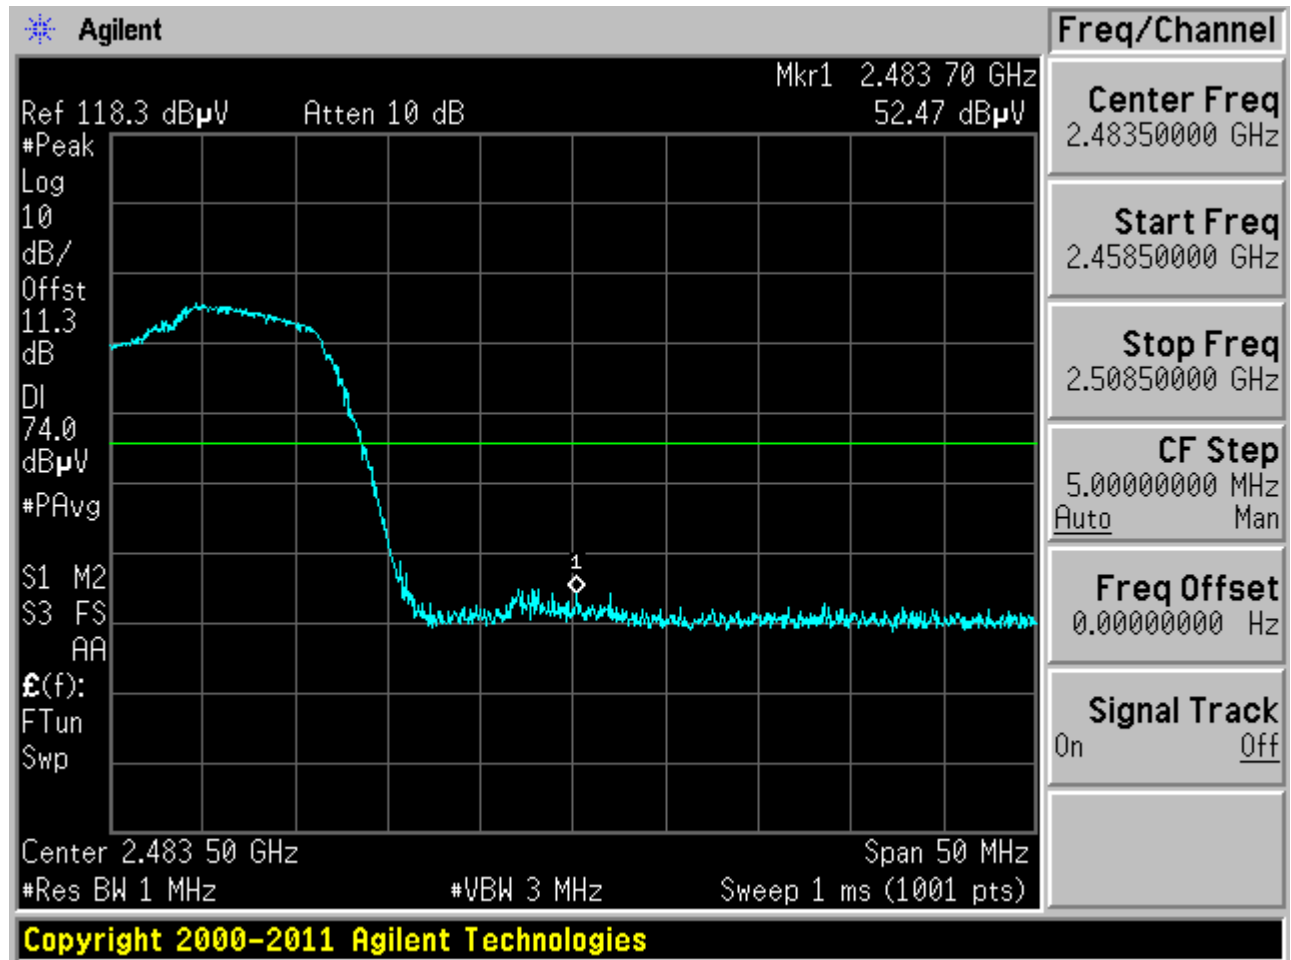

Plot 6-128. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 103 of 116

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

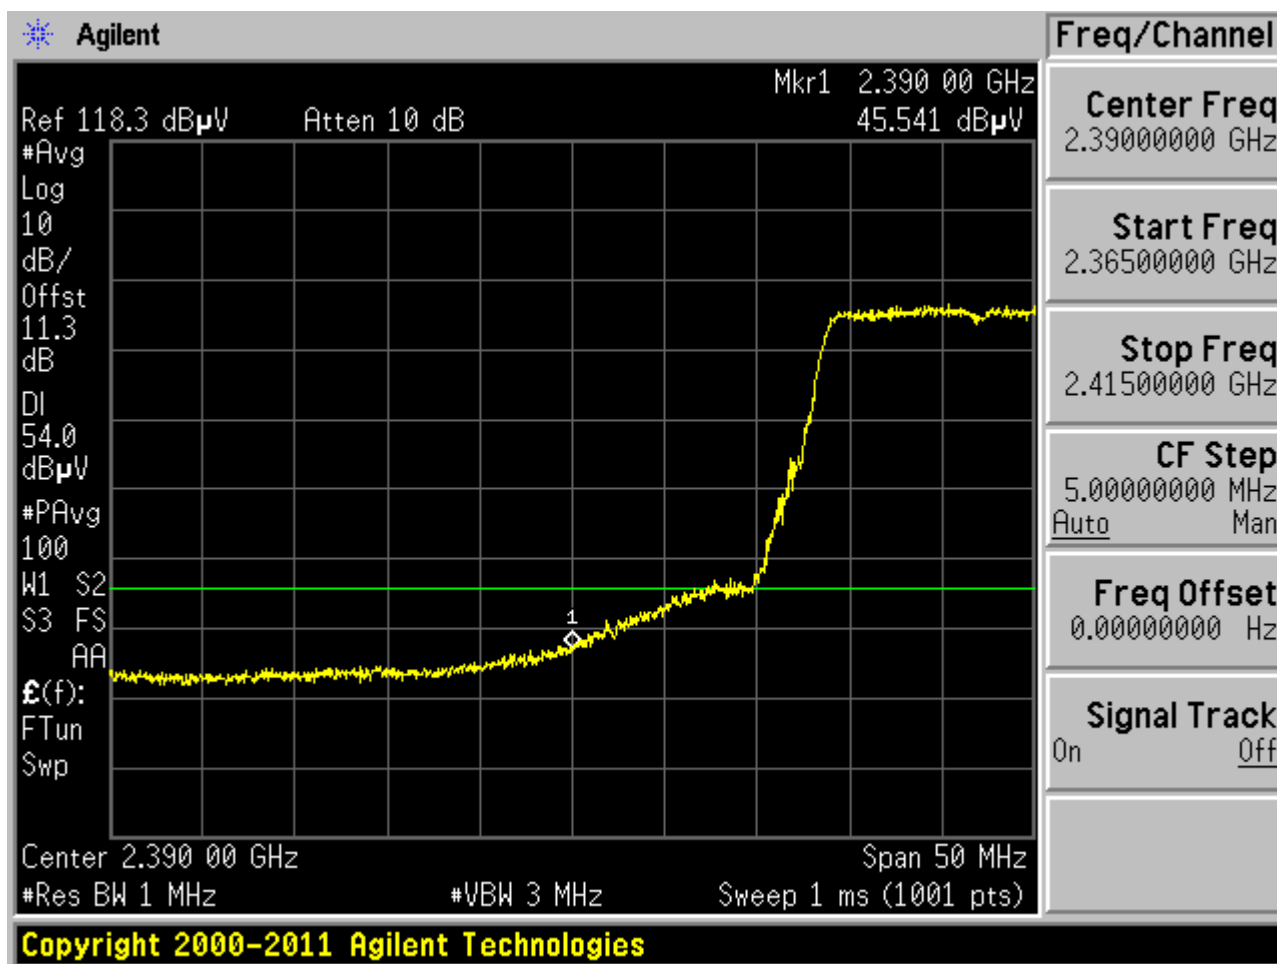


Plot 6-129. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 104 of 116

Antenna-2 Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

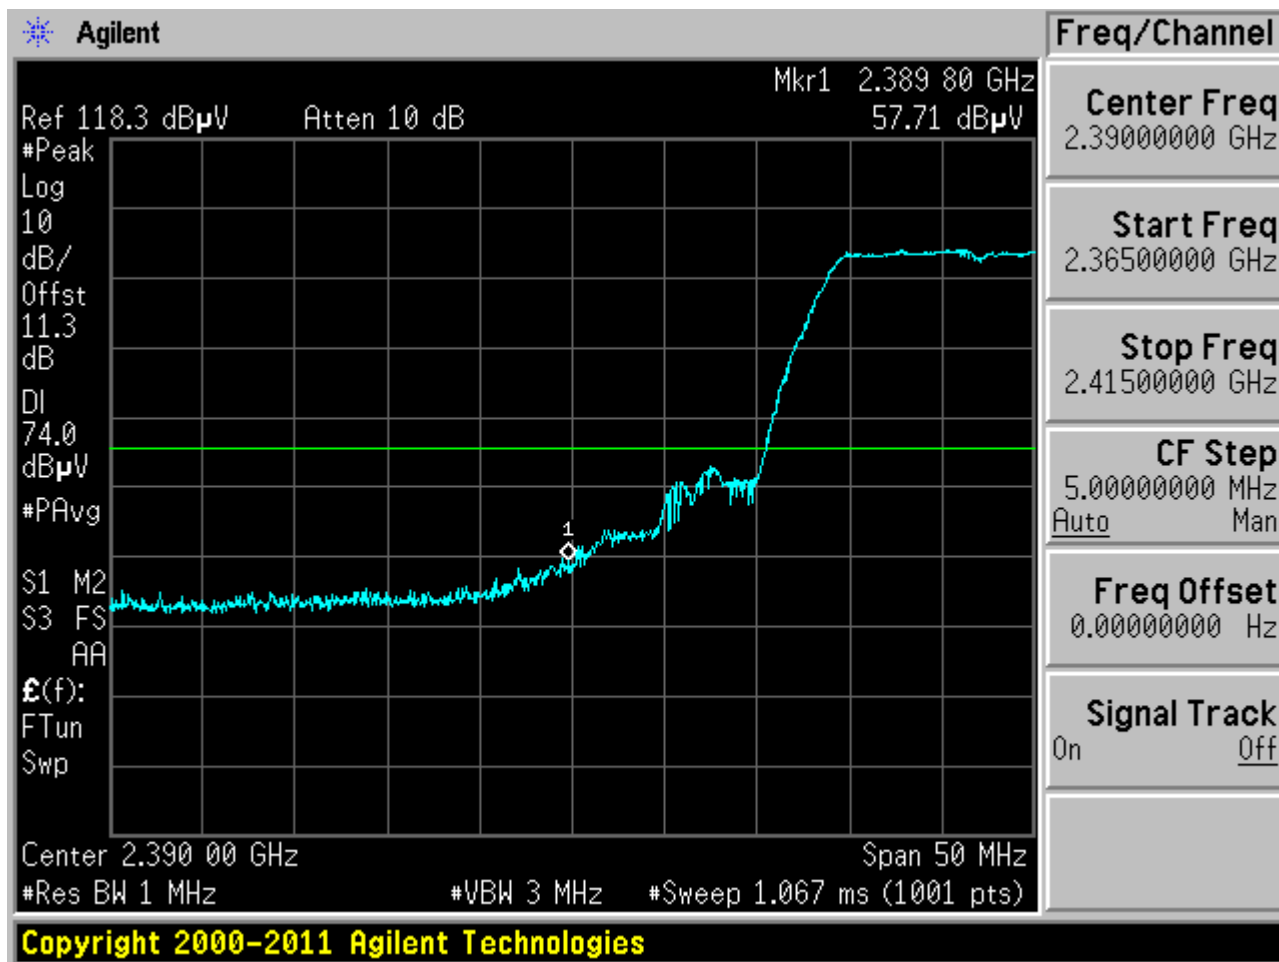

Plot 6-130. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 105 of 116

Antenna-2 Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

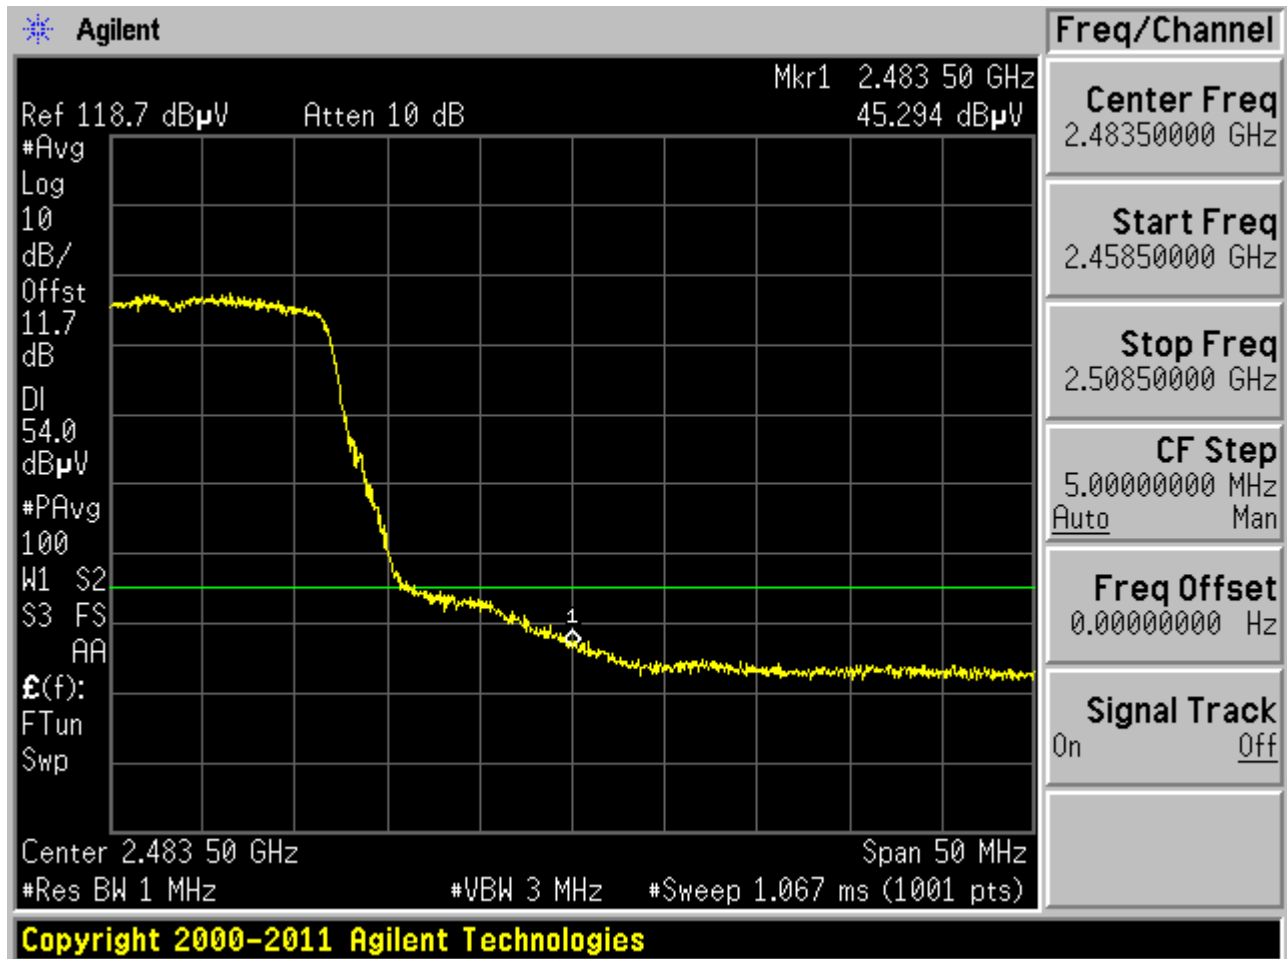


Plot 6-131. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 106 of 116

Antenna-2 Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

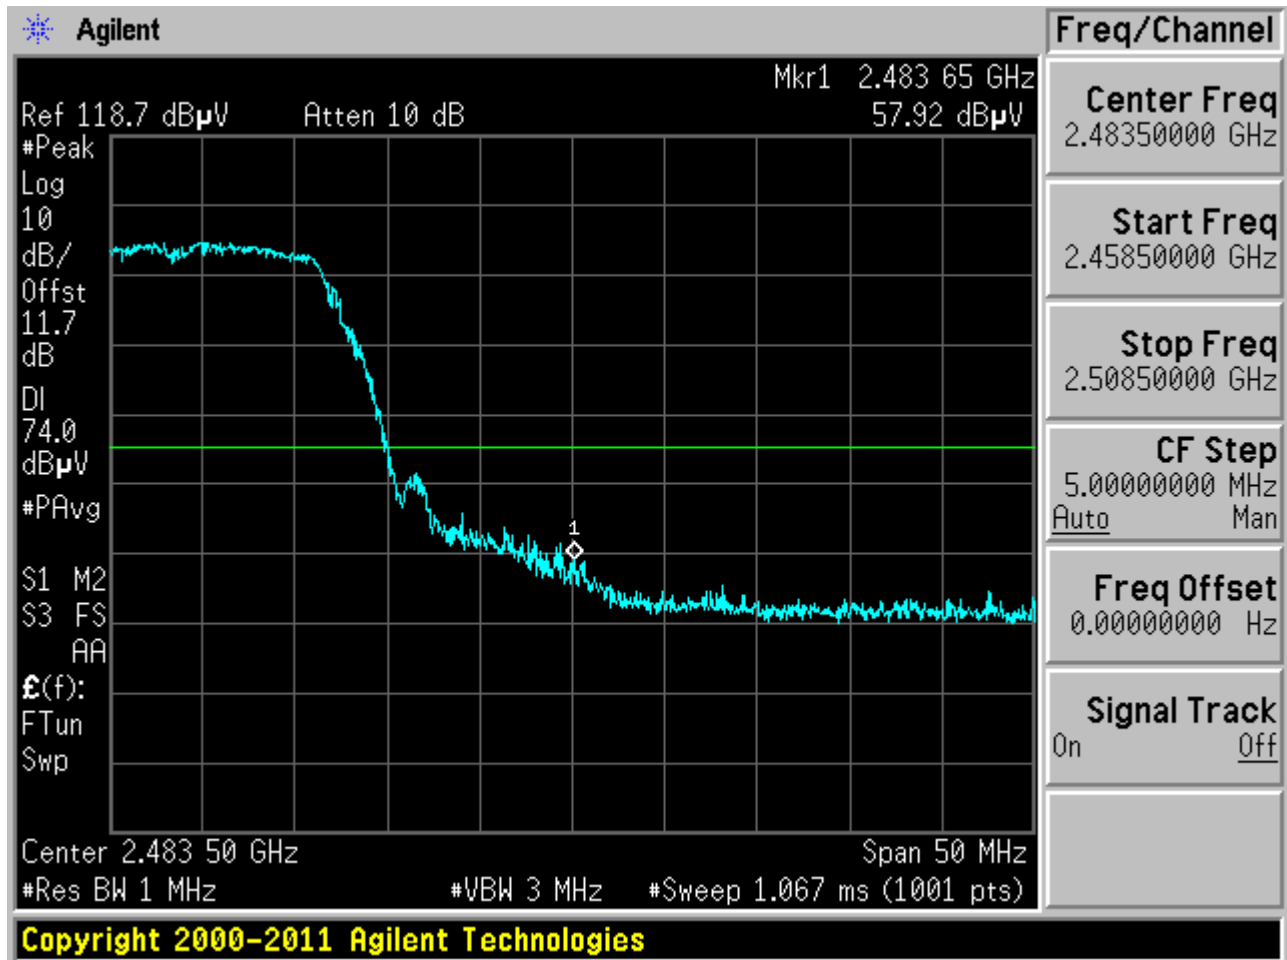

Plot 6-132. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 107 of 116

MIMO Radiated Restricted Band Edge Measurements

§15.205 / §15.209; RSS-210 [A8.5]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

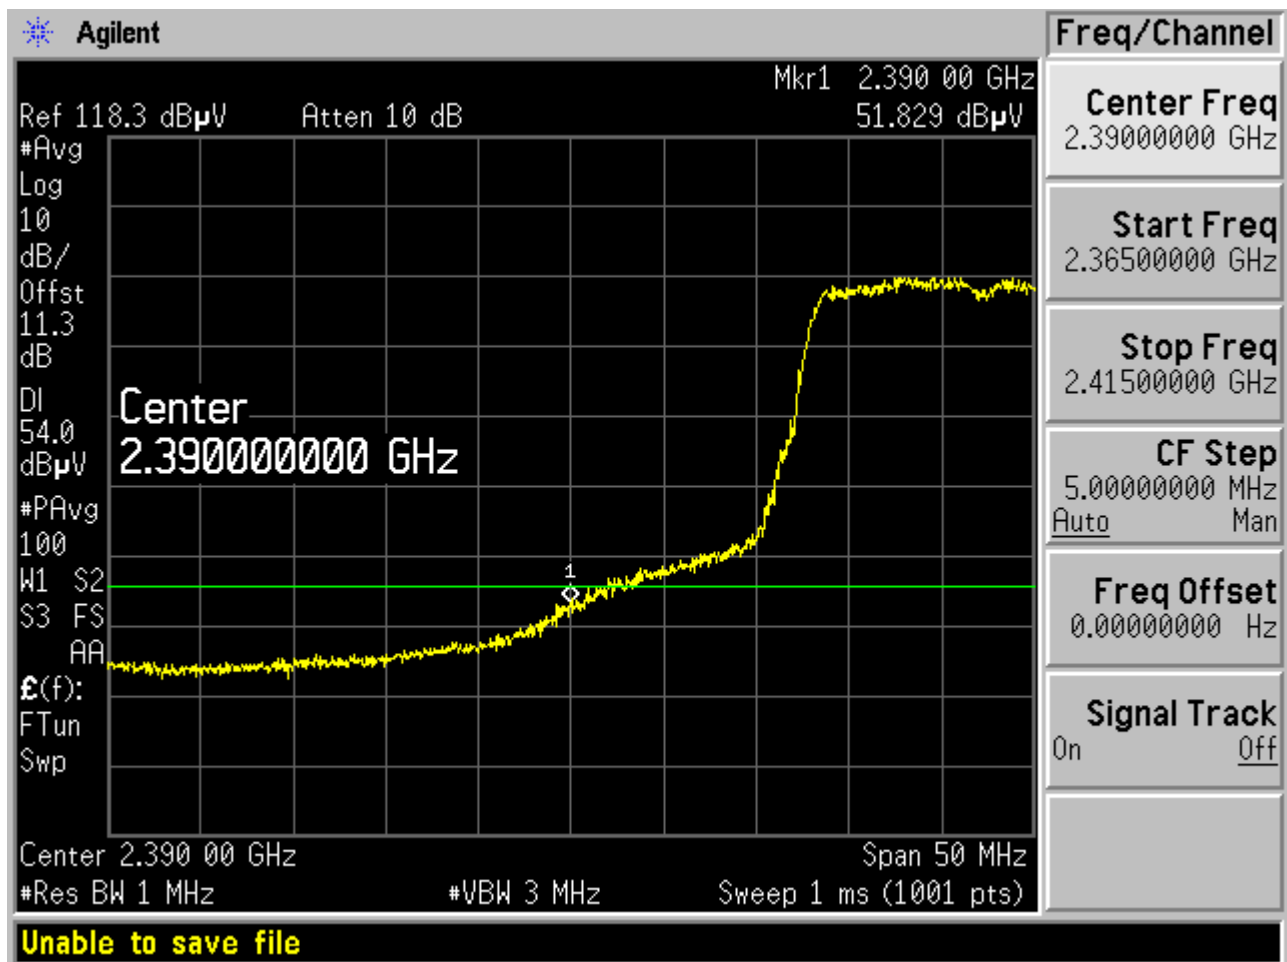


Plot 6-133. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 108 of 116

MIMO Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

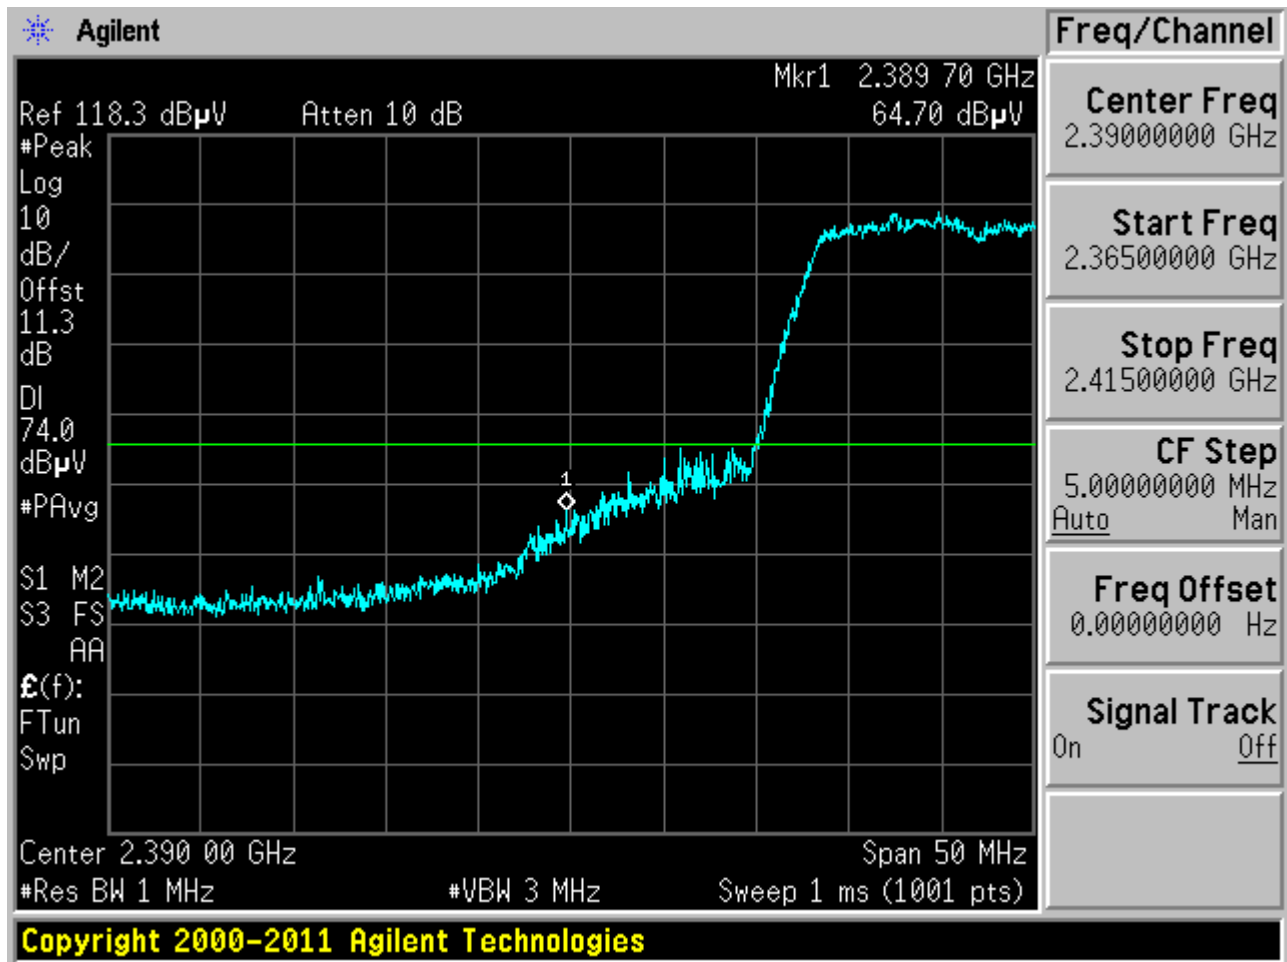

Plot 6-134. Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 109 of 116

MIMO Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

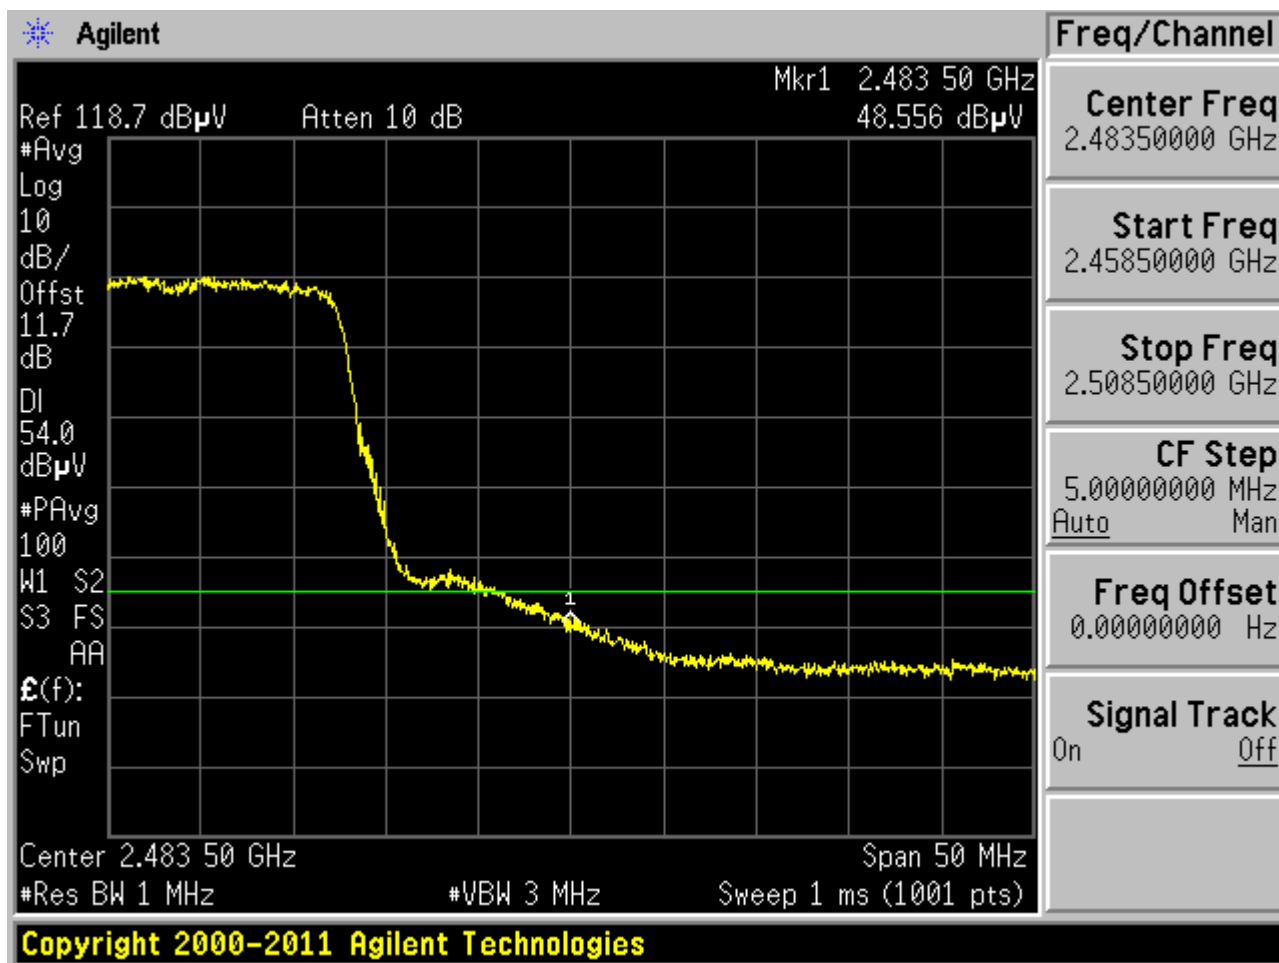


Plot 6-135. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 110 of 116

MIMO Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]

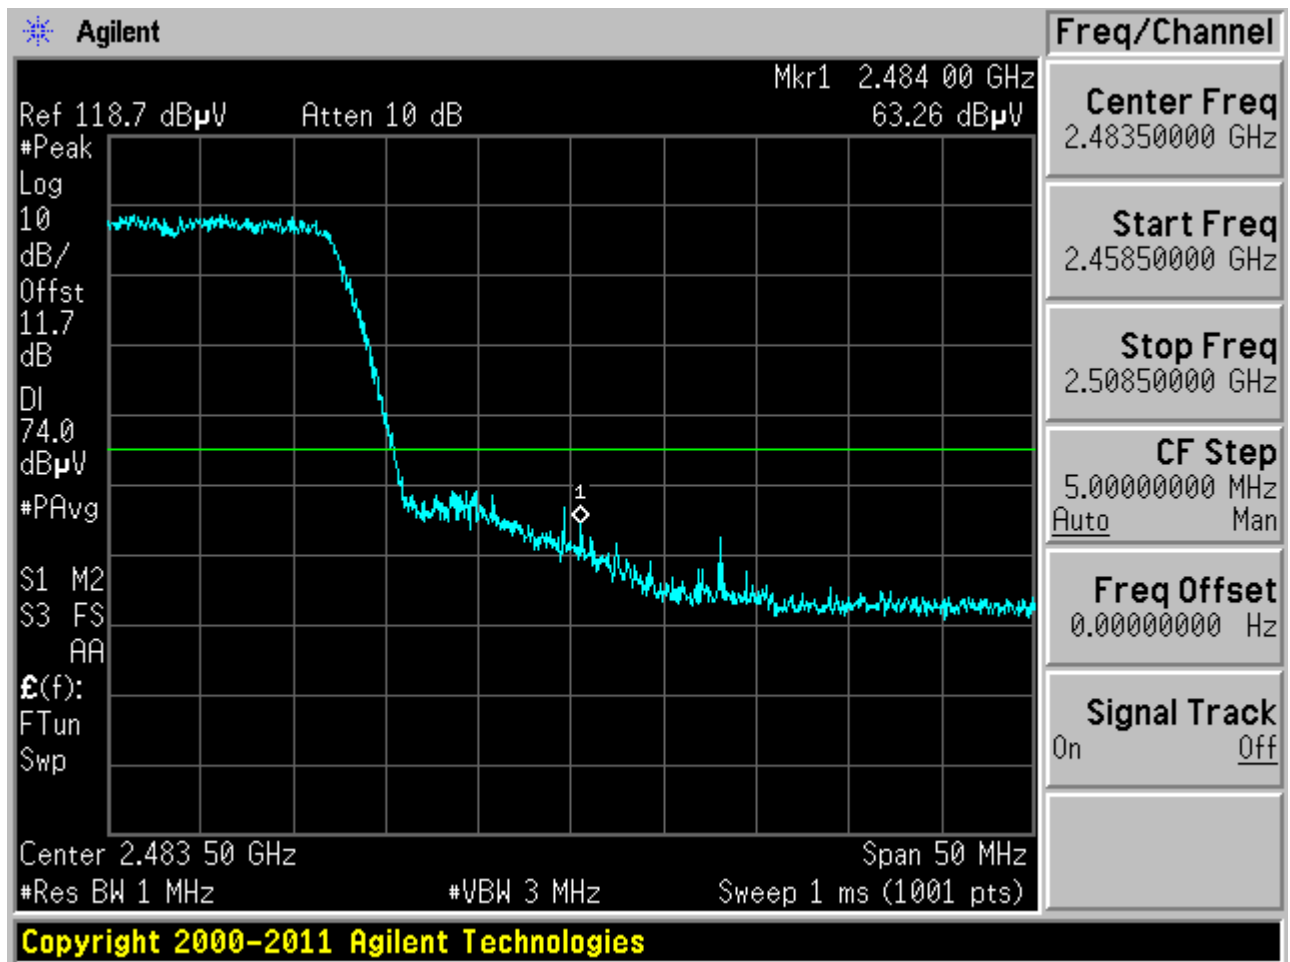


Plot 6-136. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 111 of 116

6.9 Antenna-1 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

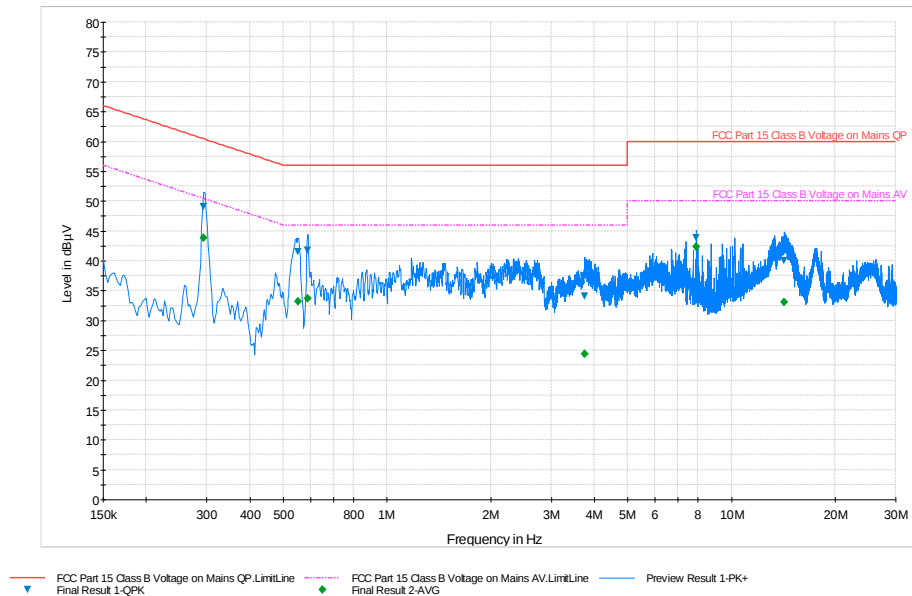

Plot 6-137. Line Conducted Plot with 802.11b (L1)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	L1	0.1	49.10	60.40	11.30	43.80	50.40	6.60
0.553	L1	0.0	41.50	56.00	14.50	33.20	46.00	12.80
0.589	L1	0.0	41.70	56.00	14.30	33.70	46.00	12.30
3.748	L1	0.3	34.10	56.00	21.90	24.40	46.00	21.60
7.924	L1	0.4	43.80	60.00	16.20	42.40	50.00	7.60
14.251	L1	0.8	40.00	60.00	20.00	33.10	50.00	16.90

Table 6-19. Line Conducted Data with 802.11b (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBμV) – QP/AV Level (dBμV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 112 of 116

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

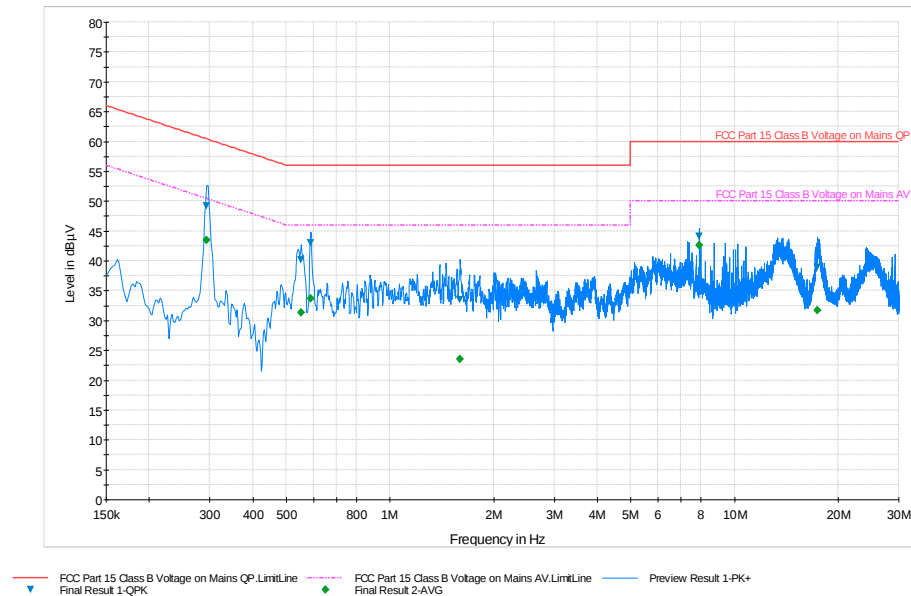

Plot 6-138. Line Conducted Plot with 802.11g (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBμV	Limit dBμV	Margin dB	Average dBμV	Limit dBμV	Margin dB
0.294	N	0.1	49.10	60.40	11.30	43.50	50.40	6.90
0.553	N	0.1	40.10	56.00	15.90	31.30	46.00	14.70
0.589	N	0.1	43.00	56.00	13.00	33.70	46.00	12.30
1.599	N	0.2	33.40	56.00	22.60	23.50	46.00	22.50
7.924	N	0.5	44.10	60.00	15.90	42.60	50.00	7.40
17.455	N	1.2	38.80	60.00	21.20	31.70	50.00	18.30

Table 6-20. Line Conducted Data with 802.11g (N)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBμV) – QP/AV Level (dBμV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 113 of 116

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

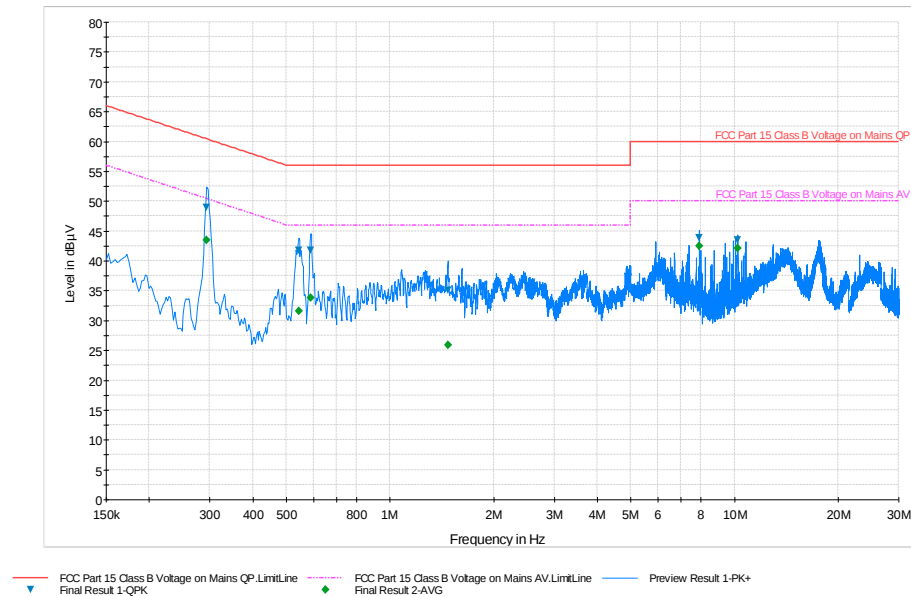

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	L1	0.1	49.00	60.40	11.40	43.50	50.40	6.90
0.544	L1	0.0	41.80	56.00	14.20	31.60	46.00	14.40
0.589	L1	0.0	41.70	56.00	14.30	33.80	46.00	12.20
1.473	L1	0.2	35.00	56.00	21.00	25.90	46.00	20.10
7.924	L1	0.4	43.80	60.00	16.20	42.40	50.00	7.60
10.244	L1	0.6	43.50	60.00	16.50	42.10	50.00	7.90

Table 6-21. Line Conducted Data with 802.11a (L1)


Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 114 of 116

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

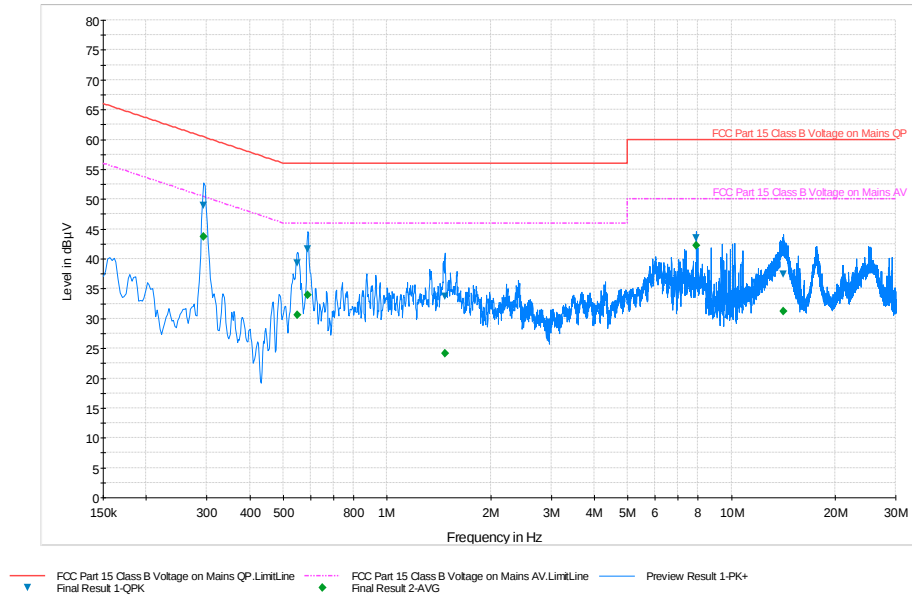

Plot 6-140. Line Conducted Plot with 802.11a (N)

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.294	N	0.1	48.90	60.40	11.50	43.70	50.40	6.70
0.551	N	0.1	39.20	56.00	16.80	30.60	46.00	15.40
0.589	N	0.1	41.60	56.00	14.40	33.90	46.00	12.10
1.473	N	0.2	33.70	56.00	22.30	24.10	46.00	21.90
7.924	N	0.5	43.50	60.00	16.50	42.20	50.00	7.80
14.156	N	0.9	37.40	60.00	22.60	31.20	50.00	18.80

Table 6-22. Line Conducted Data with 802.11a (N)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMP900A	PCTEST ENGINEERING LABORATORY, INC.	802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 115 of 116

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMP900A** is in compliance with Part 15C of the FCC Rules and RSS-210 of the Industry Canada Rules.

FCC ID: A3LSMP900A		802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1311272242.A3L	Test Dates: 12/02-12/16/2013	EUT Type: Portable Tablet		Page 116 of 116