

FCC SAR TEST REPORT

Test File No : F690501/RF-SAR002433

Equipment Under Test	Samsung Gear 360
Model Name	SM-R210
Applicant	SAMSUNG ELECTRONICS Co., Ltd.
Address of Applicant	129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 16677, Korea, Republic of
FCC ID	A3LSMR210
Exposure Category	General Population/Uncontrolled Exposure
Standards	FCC 47 CFR Part 2 (2.1093) IEEE 1528, 2013 ANSI/IEEE C95.1, C95.3
Date of Receipt	2016-12-15
Date of Test(s)	2017-03-10 ~ 2017-03-12
Date of Issue	2017-03-13
Test Result	Refer to the Page 05

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Korea Co., Ltd. or testing done by SGS Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Korea Co., Ltd. in writing.



Report prepared by /
Jamie Kim
Test Engineer



Approved by /
Jongwon Ma
Technical Manager

**SGS Korea Co., Ltd.**

10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 2 / 105

Revision history

Revision	Date of issue	Revisions	Revised By
-	March 13, 2017	Initial issue	-

Contents

1	Testing Laboratory_____	5
2	Details of Manufacturer_____	5
3	Description of EUT(s)_____	5
4	The Highest Reported SAR Values_____	5
5	Test Methodology_____	6
6	Test Environment_____	6
7	Specific Absorption Rate (SAR)_____	7
7.1	Introduction_____	7
7.2	SAR Definition_____	7
7.3	Test Standards and Limits_____	7
8	The SAR Measurement System_____	9
9	System Components_____	10
9.1	Probe_____	10
9.2	SAM Phantom_____	10
9.3	Device Holder_____	10
10	SAR Measurement Procedures_____	11
10.1	Normal SAR Measurement Procedure_____	11
11	SAR System Verification_____	13
12	Tissue Simulant Fluid for the Frequency Band_____	14
13	Instruments List_____	16
14	FCC Power Measurement Procedures_____	17
15	Measured and Reported SAR_____	17
16	Maximum Output Power Specifications_____	18
16.1	Maximum Output Power Specifications (Notebook) _____	18
16.2	Bluetooth Maximum Output Power Specifications_____	18
17	WLAN_____	19
17.1	General Device Setup _____	19
17.2	U-NII-1 and U-NII-2A _____	19
17.3	U-NII-2C and U-NII-3_____	19
17.4	2.4 GHz SAR Test Requirements_____	19
17.5	OFDM Transmission Mode and SAR Test Channel Selection_____	20
17.6	Initial Test Configuration Procedure _____	20
17.7	Subsequent Test Configuration Procedures_____	20
18	RF Conducted Power Measurement_____	21
19	Transmit Antenna Separation Distances_____	26
20	SAR Data Summary_____	26
21	SAR Measurement Variability_____	28
21.1	Measurement Variability_____	28
21.2	Measurement Uncertainty_____	28
	Appendixes List_____	29
	Appendixes A.1_____	30
	Appendixes A.2_____	31
	Appendixes A.3_____	32
	Appendixes A.4_____	33
	Appendixes A.5_____	34
	Appendixes A.6_____	35
	Appendixes A.7_____	36
	Appendixes A.8_____	37



SGS Korea Co., Ltd.

10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 4 / 105

Appendixes B.1	38
Appendixes C.1	39
Appendixes C.2	77
Appendixes C.3	88
THE END	105

1 Testing Laboratory

Company Name	SGS Korea Co., Ltd. (Gunpo 3 Laboratory)
Address	10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea
Telephone	+82 +31 - 428 - 5700
FAX	+82 +31 - 427 - 2371

2 Details of Manufacturer

Applicant	SAMSUNG ELECTRONICS Co., Ltd.
Address	129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 16677, Korea, Republic of
Email	wonik.do@samsung.com
Phone No.	+82-31-301-5063

3 Description of EUT(s)

EUT Type	Samsung Gear 360
Model Name	SM-R210
Serial Number	#1
Mode of Operation	WLAN, Bluetooth
Duty Cycle	1 (WLAN), 1.29 (Bluetooth)
Body worn Accessory	None
Tx Frequency Range	2412

5 Test Methodology

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

Test tests documented in this report were performed in accordance with IEEE Standard 1528-2013 and the following published KDB procedures.

In additions;

☒	KDB 865664 D01v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
☒	KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
☐	KDB 447498 D02v02r01	SAR Measurement Procedures for USB Dongle Transmitters
☒	KDB 248227 D01v02r02	SAR Guidance For IEEE 802.11 (Wi-Fi) Transmitters
☐	KDB 615223 D01v01r01	802.16e/WiMax SAR Measurement Guidance
☐	KDB 616217 D04v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
☐	KDB 643646 D01v01r03	SAR Test Reduction Considerations for Occupational PTT Radios
☐	KDB 648474 D03v01r04	Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
☐	KDB 648474 D04v01r03	SAR Evaluation Considerations for Wireless Handsets
☐	KDB 680106 D01v02	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications
☐	KDB 941225 D01v03r01	3G SAR Measurement Procedures
☐	KDB 941225 D05v02r05	SAR Evaluation Considerations for LTE Devices
☐	KDB 941225 D06v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
☐	KDB 941225 D07v01r02	SAR Evaluation Procedures for UMPC Mini-Tablet Devices

6 Testing Environment

Ambient temperature	: 18°C ~ 25°C
Relative humidity	: 30% ~ 70%
Liquid temperature of during the test	: <

7 Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7.3 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,

3

source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100

8 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. 1. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY6 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 6 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

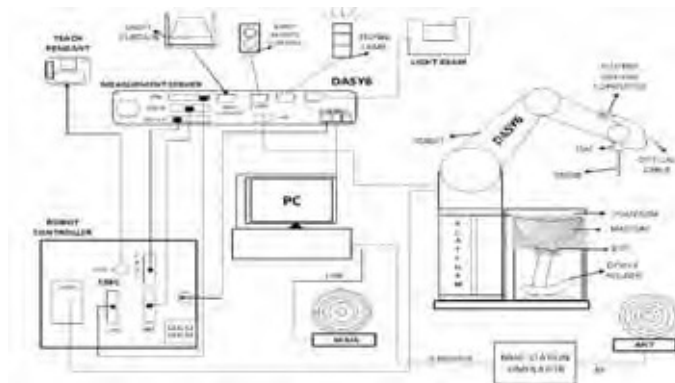


Fig 1. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 8.1 Pro.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Verification dipole kits allowing to validate the proper functioning of the system.

9 System Components

9.1 Probe

- Construction** : Symmetrical design with triangular core.
Built-in shielding against static charges.
PEEK enclosure material (resistant to organic solvents,
e.g., DGBE)
- Calibration** : Basic Broad Band Calibration in air Conversion Factors
(CF) for HSL 835 and HSL1900.
Additional CF-Calibration for other liquids and
frequencies upon request.
- Frequency** : 10

EX3DV4 E-Field Probe

10 SAR Measurement Procedures

10.1 Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4

< Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 >

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. 1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450

12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Speag Model DAK-3.5 Dielectric Probe in conjunction with Agilent E5071C Network Analyzer(300

The composition of the brain & muscle tissue simulating liquid

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (
------------------------------	-------------

13 Instruments List

Test Platform	SPEAG DASY6 Professional				
Location	10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807 Republic of Korea				
Manufacture	SPEAG				
Description	SAR Test System (Frequency range 300 MHz – 6 GHz)				
Software Reference	DASY52: 52.8.8(1258) SEMCAD X: 14.6.10(7373)				
Hardware Reference					
Equipment	Type	Serial Number	Cal Date	Cal Interval	Cal Due
Robot	TX60 L	F16/55FYA1/A/01	N/A	N/A	N/A
Phantom	SAM Phantom	TP-1910	N/A	N/A	N/A
Phantom	SAM Phantom	TP-1911	N/A	N/A	N/A
Verification Dipole	D2450V2	734	2016-05-24	Biennial	2018-05-24
Verification Dipole	D5GHzV2	1130	2016-05-23	Biennial	2018-05-23
Dielectric Assessment Kit	DAK-3.5	1228	2016-11-17	Annual	2017-11-17
DAE	DAE4	1507	2016-08-02	Annual	2017-08-02
E-Field Probe	EX3DV4	7412	2016-06-29	Annual	2017-06-29
Network Analyzer	E5071C	MY46111535	2016-05-24	Annual	2017-05-24
Power Meter	N1914A	MY56120017	2016-07-06	Annual	2017-07-06
Power Sensor	N8481A	MY56120026	2016-07-06	Annual	2017-07-06
Power Sensor	N8481A	MY56120030	2016-07-06	Annual	2017-07-06
Vector Signal Generator	SMBV100A	262093	2016-07-06	Annual	2017-07-06
RF Amplifier	AMP2027	10008	2016-07-12	Annual	2017-07-12
Dual Directional Coupler	772D	MY52180259	2016-07-06	Annual	2017-07-06
LP Filter	WLJ4-3000-5850-8000-60EF	1	2016-08-19	Annual	2017-08-19
LP Filter	WLJ8-6000-7440-8000-60EF	1	2016-08-19	Annual	2017-08-19
Attenuator	2	BY6201	2016-08-16	Annual	2017-08-16
Attenuator	2	CB6049	2016-08-16	Annual	2017-08-16
Attenuator	05AS102-K03	A2	2016-12-15	Annual	2017-12-15
Digital Hygro-Thermometer	TE-201	TE-201-2	2016-08-12	Annual	2017-08-12
Digital Thermometer	SDT25	16031500243	2016-08-12	Annual	2017-08-12
Signal Analyzer	FSV7	103082	2016-07-06	Annual	2017-07-06

14 FCC Power Measurement Procedures

The SAR measurement Software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5 % occurred, the tests were repeated.

15 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

16 Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

16.1 Maximum Output Power Specifications

Average power for Production (

17 WLAN

17.1 General Device Setup

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

17.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

17.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels.

When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

17.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

17.5 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

17.6 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements

17.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

18 RF Conducted Power Measurement

WLAN 2.4



SGS Korea Co., Ltd.

10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 22 / 105

WLAN 5.3

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)



SGS Korea Co., Ltd.

10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 23 / 105

WLAN 5.6

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)



SGS Korea Co., Ltd.

10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 24 / 105

WLAN 5.8

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)



19 Transmit Antenna Separation Distances

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50

20 SAR Data Summary

WLAN 2.45 GHz Body SAR

EUT Position	Mode	Traffic Channel Frequency (	Power(dBm)	Peak SAR of Area Scan(W/kg)	1-g SAR (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty cycle)	1-g Scaled SAR (W/kg)	Plot No
-----------------	------	-----------------------------------	------------	-----------------------------------	-------------------	---------------------------	--------------------------------------	-----------------------------	------------

characteristics and are within operational tolerances expected for production units.

6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg.
3. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
5. WLAN transmission was verified using a spectrum analyzer.
6. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
7. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is ≤ 1.2 W/kg, SAR is not required for UNII band1 > 1.2 W/kg, both bands should be tested independently for SAR. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

21 SAR Measurement Variability

21.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

21.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

Appendixes List

Appendix A	A.1 Verification Test Plots for 2450MHz A.2 Verification Test Plots for 5300 MHz A.3 Verification Test Plots for 5600 MHz A.4 Verification Test Plots for 5800 MHz A.5 SAR Test Plots for WLAN 2450 MHz A.6 SAR Test Plots for WLAN 5300 MHz A.7 SAR Test Plots for WLAN 5600 MHz A.8 SAR Test Plots for WLAN 5800 MHz
Appendix B	B.1 Uncertainty Analysis
Appendix C	C.1 Calibration certificate for Probe C.2 Calibration certificate for DAE C.3 Calibration certificate for Dipole

Appendix A.1 Verification Test Plots for 2450 MHz

Date: 2017-03-10

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [2450MHz Verification.da53.0](#)

Input Power : 100 mW

Ambient Temp : 23.3 °C Tissue Temp : 22.1 °C

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:734

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 53.097$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.4, 7.4, 7.4); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1910; Type: SN:1910; Serial: SN:1910
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Verification/2450MHz Verification/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 8.46 W/kg


Verification/2450MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 48.87 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.05 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 8.47 W/kg

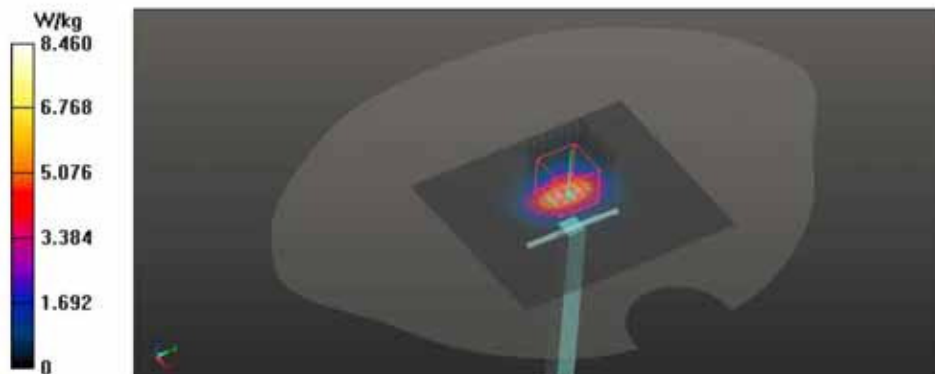

Appendix A.2 Verification Test Plots for 5300 MHz

Date: 2017-03-11

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5300MHz Verification.da53.0](#)

Input Power : 100 mW

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 47.469$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.36, 4.36, 4.36); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1911; Type: SN:1911; Serial: SN:1911
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Verification/5300MHz Verification/Area Scan (71x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 20.3 W/kg


Verification/5300MHz Verification/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 44.93 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

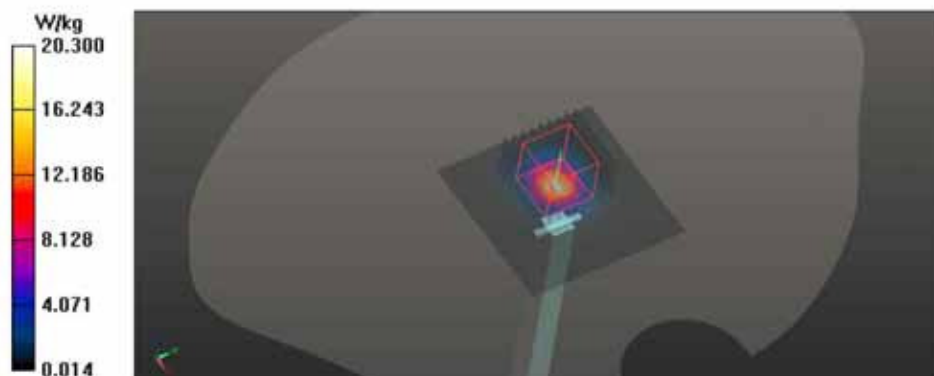

Appendix A.3 Verification Test Plots for 5600 MHz

Date: 2017-03-11

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [5600MHz Verification.da53.0](#)

Input Power : 100 mW

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.791$ S/m; $\epsilon_r = 46.421$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(3.67, 3.67, 3.67); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1911; Type: SN:1911; Serial: SN:1911
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Verification/5600MHz Verification/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 19.5 W/kg


Verification/5600MHz Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.36 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 21.4 W/kg

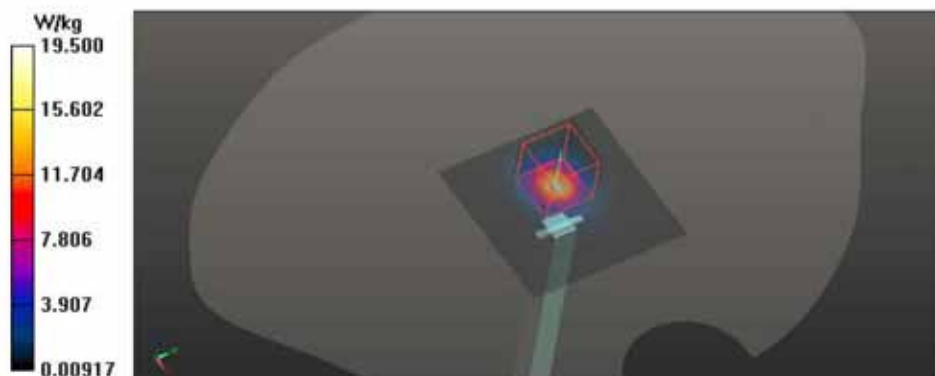

Appendix A.4 Verification Test Plots for 5800 MHz

Date: 2017-03-12

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [5800MHz Verification.da53.0](#)

Input Power : 100 mW

Ambient Temp : 23.2 °C Tissue Temp : 22.0 °C

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1130

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.16$ S/m; $\epsilon_r = 46.532$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(3.87, 3.87, 3.87); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1911; Type: SN:1911; Serial: SN:1911
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Verification/5800MHz Verification/Area Scan (71x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 17.9 W/kg


Verification/5800MHz Verification/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 41.38 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.7 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

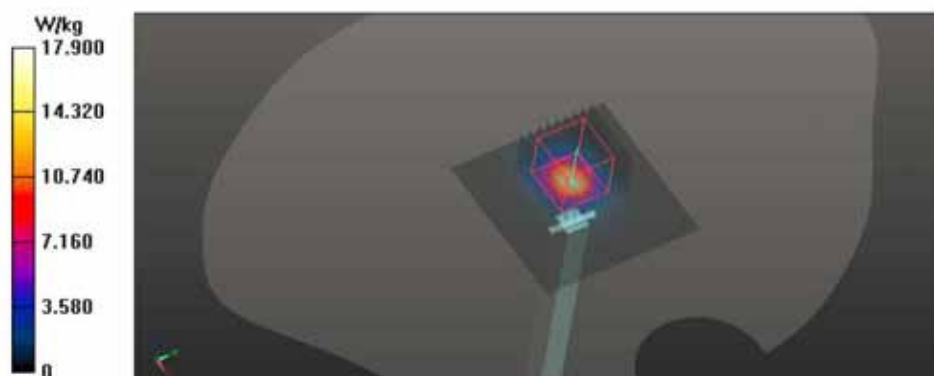

Appendix A.5 SAR Test Plots for WLAN 2450 MHz

Date: 2017-03-10

Test Laboratory : SGS Korea (Gunpo Laboratory)

File Name: [2.4GHz WLAN 802.11b Top_CH6.da53:0](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.1 °C

DUT: SM-R210; Type: SAMSUNG Gear 360; Serial: #1

Communication System: UID 0, WLAN 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.926$ S/m; $\epsilon_r = 53.112$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(7.4, 7.4, 7.4); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1910; Type: SN:1910; Serial: SN:1910
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Head/2.4GHz_WLAN_802.11b_Top_CH6/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.839 W/kg


Head/2.4GHz_WLAN_802.11b_Top_CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.42 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.961 W/kg

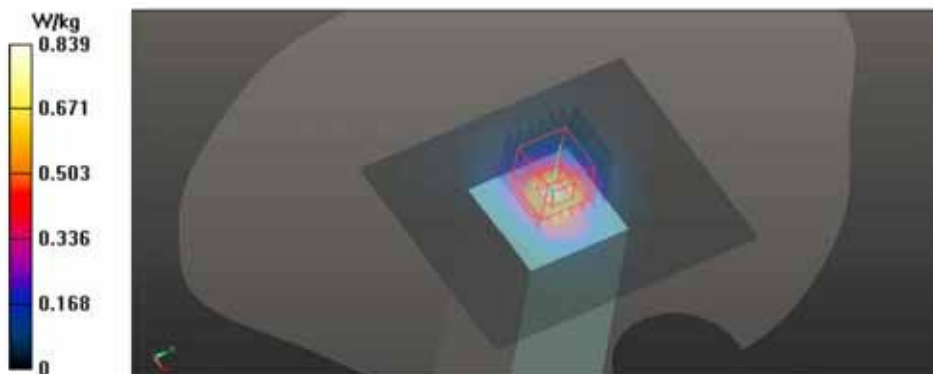

Appendix A.6 SAR Test Plots for WLAN 5300 MHz

Date: 2017-03-11

Test Laboratory : SGS Korea (Gunpo Laboratory)
 File Name: [5.3GHz WLAN 802.11a Top_CH52.da53:0](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C

DUT: SM-R210; Type: SAMSUNG Gear 360; Serial: #1


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5260 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.339 \text{ S/m}$; $\epsilon_r = 47.533$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(4.36, 4.36, 4.36); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1 507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1911; Type: SN:1911; Serial: SN:1911
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Head/5.3GHz_WLAN_802.11a_Top_CH52/Area Scan (81x101x1): Interpolated grid: $dx=1.000 \text{ mm}$,
 $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.631 W/kg

Head/5.3GHz_WLAN_802.11a_Top_CH52/Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 11.10 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.960 W/kg
SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.085 W/kg
 Maximum value of SAR (measured) = 0.599 W/kg

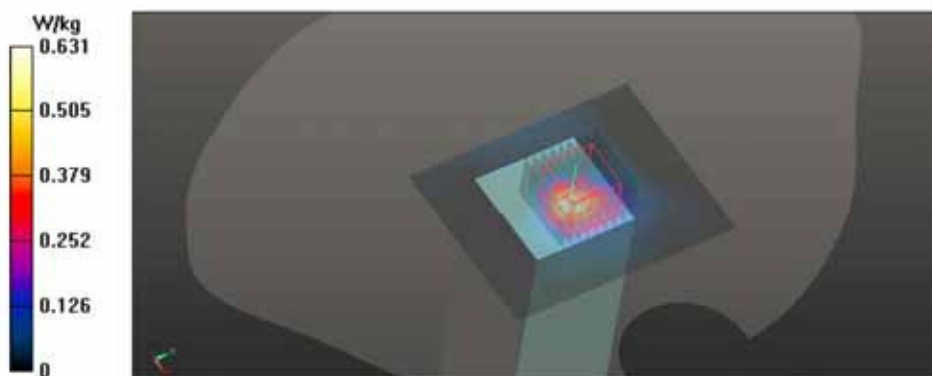

Appendix A.7 SAR Test Plots for WLAN 5600 MHz

Date: 2017-03-11

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: 5.6GHz WLAN 802.11a Top_CH116.da53.0

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C

DUT: SM-R210; Type: SAMSUNG Gear 360; Serial: #1


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.755$ S/m; $\epsilon_r = 46.449$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(3.67, 3.67, 3.67); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1911; Type: SN:1911; Serial: SN:1911
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Head/5.6GHz_WLAN_802.11a_Top_CH116/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.60 W/kg

Head/5.6GHz_WLAN_802.11a_Top_CH116/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 15.05 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 2.59 W/kg
SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.221 W/kg
Maximum value of SAR (measured) = 1.60 W/kg

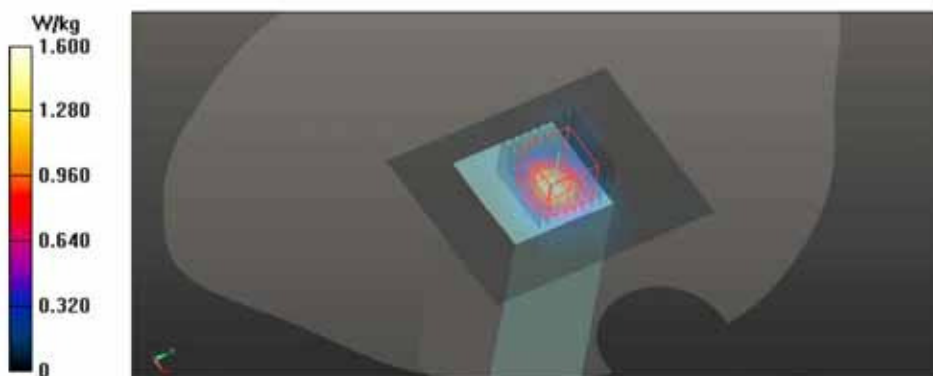

Appendix A.8 SAR Test Plots for WLAN 5800 MHz

Date: 2017-03-12

Test Laboratory : SGS Korea (Gunpo Laboratory)
File Name: 5.8GHz WLAN 802.11a Top_CH153.da53:0

Ambient Temp : 23.2 °C Tissue Temp : 22.0 °C

DUT: SM-R210; Type: Samsung Gear 360; Serial: #1


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5765 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5765$ MHz; $\sigma = 6.103$ S/m; $\epsilon_r = 46.626$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY52 Configuration:

- Probe: EX3DV4 - SN7412; ConvF(3.87, 3.87, 3.87); Calibrated: 6/29/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1507; Calibrated: 8/2/2016
- Phantom: Twin-SAM V5.0 SN:1911; Type: SN:1911; Serial: SN:1911
- DASY52 52.8.8(1258)SEMCAD X 14.6.10(7373)

Body/5.8GHz_WLAN_802.11a_Top_CH153/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.28 W/kg

Body/5.8GHz_WLAN_802.11a_Top_CH153/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.645 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.144 W/kg
Maximum value of SAR (measured) = 1.13 W/kg

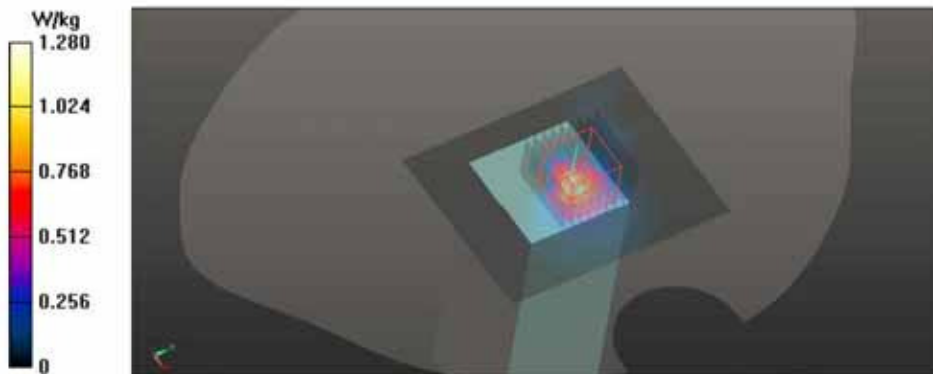

Appendix B.1 Uncertainty Analysis DASY56#1

Measurement uncertainty for 300 MHz to 6 GHz averaged over 1 gram

a	b	c	d	e = f(d,k)	f	g	h	i	k
							cx/f/e	cx/g/e	
Uncertainty Component	IEEE 1528	Tol	Prob .	Div.	Ci	Ci	lg	lg	Vi
	2013	(%)	Dist.		(1g)	(10g)	ui (%)	ui (%)	(Veff)
Probe calibration	E.2.1	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.71	0.71	1.92	1.92	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.71	0.71	3.92	3.92	∞
Boundary Effects	E.2.3	1	R	1.73	1	1	0.58	0.58	∞
Modulation Response	E.2.5	2.4	R	1.73	1	1	1.39	1.39	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	E.2.4	0.3	R	1.73	1	1	0.17	0.17	∞
Reabout Electronics	E.2.6	0.3	N	1	1	1	0.30	0.30	∞
Response Time	E.2.7	0.5	R	1.73	1	1	0.29	0.29	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.50	1.50	∞
RF Ambient Noise	E.6.1	3	R	1.73	1	1	1.73	1.73	∞
RF Ambient Reflections	E.6.1	3	R	1.73	1	1	1.73	1.73	∞
Probe Positiones	E.6.2	1.5	R	1.73	1	1	0.87	0.87	∞
Probe Positioning	E.6.3	2.9	R	1.73	1	1	1.67	1.67	∞
Max SAR evaluation	E.5	1	R	1.73	1	1	0.58	0.58	∞
Test sample positioning	E.4.2	0.33/0.36	N	1	1	1	0.33	0.36	9
Device holder uncertainty	E.4.1	3.28	N	1	1	1	3.28	3.28	4
Output power variation -	E.2.9	5	R	1.73	1	1	2.89	2.89	∞
SAR drift measurement									
Phantom uncertainty	E.3.1	4	R	1.73	1	1	2.31	2.31	∞
Correcting SAR for deviations in permittivity and conductivity	E.3.2	1.2	R	1.73	1	0.84	0.69	0.58	∞
Liquid conductivity-measurement	E.3.3	1.76	N	1	0.78	0.71	1.37	1.25	5
Liquid permittivity-measurement	E.3.3	1.72	N	1	0.23	0.26	0.40	0.45	9
Liquid conductivity-temperature	E.3.4	2.86	R	1.73	0.23	0.26	0.25	0.28	∞
Liquid permittivity – temperature	E.3.4	1.86	R	1.73	0.78	0.71	1.29	1.17	∞
Combined standard uncertainty				RSS			10.62	10.58	435/432
Expanded uncertainty				k=2			21.24	21.16	
(95% CONFIDENCE INTERVAL)									

Appendix C.1 Calibration certificate for Probe(S/N 7412)

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland




S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SGS Korea (Dymstec)**

Certificate No: **EX3-7412_Jun16**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:7412**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
 Calibration procedure for dosimetric E-field probes

Calibration date: **June 29, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (MPE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02268/02269)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02268)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02269)	Apr-17
Reference 20 dB Attenuator	SN: 55277 (20x)	05-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ES3DV2	SN: 3013	31-Dec-15 (No. ES3-3013_Dec15)	Dec-16
DAE4	SN: 660	23-Dec-15 (No. DAE4-660_Dec15)	Dec-16



Secondary Standards

ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874 06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41489087 06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210 06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700 04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585 18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Welter** Laboratory Technician 

Approved by: **Katja Pokovic** Technical Manager 

Issued: June 29, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8904 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices (used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB B65564, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell, $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:7412

June 29, 2016

Probe EX3DV4

SN:7412

Manufactured: November 24, 2015
Calibrated: June 29, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4—SN:7412

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7412

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.43	0.38	0.44	$\pm 10.1\%$
DCP (mV) ^B	99.1	97.9	97.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	129.3	$\pm 3.3\%$
		Y	0.0	0.0	1.0		139.2	
		Z	0.0	0.0	1.0		149.3	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $\text{ms} \cdot \text{V}^{-2}$	T2 $\text{ms} \cdot \text{V}^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	32.67	253.8	38.21	12.84	0.254	5.046	0	0	1.002
Y	35.09	265.7	36.63	7.922	0.786	4.971	0	0.204	1.004
Z	46.91	355.9	36.67	11.34	0.758	5.012	0.729	0.281	1.004

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4-SN:7412

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7412

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^e	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
750	41.9	0.89	10.31	10.31	10.31	0.47	0.80	± 12.0 %
835	41.5	0.90	9.84	9.84	9.84	0.45	0.80	± 12.0 %
900	41.5	0.97	9.59	9.59	9.59	0.27	1.06	± 12.0 %
1750	40.1	1.37	8.35	8.35	8.35	0.34	0.80	± 12.0 %
1900	40.0	1.40	8.08	8.08	8.08	0.33	0.80	± 12.0 %
2000	40.0	1.40	8.02	8.02	8.02	0.31	0.80	± 12.0 %
2300	39.5	1.67	7.58	7.58	7.58	0.34	0.80	± 12.0 %
2450	39.2	1.80	7.26	7.26	7.26	0.37	0.80	± 12.0 %
2600	39.0	1.96	7.04	7.04	7.04	0.28	0.99	± 12.0 %
5200	36.0	4.66	5.50	5.50	5.50	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.24	5.24	5.24	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.45	4.45	4.45	0.45	1.80	± 13.1 %
5800	35.3	5.27	4.52	4.52	4.52	0.45	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^e At frequencies below 3 GHz, the validity of tissue parameters (ϵ' and ϵ'') can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ' and ϵ'') is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7412

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7412

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	9.73	9.73	9.73	0.45	0.80	± 12.0 %
835	55.2	0.97	9.66	9.66	9.66	0.51	0.80	± 12.0 %
1750	53.4	1.49	8.08	8.08	8.08	0.37	0.89	± 12.0 %
1900	53.3	1.52	7.78	7.78	7.78	0.38	0.80	± 12.0 %
2450	52.7	1.95	7.40	7.40	7.40	0.29	0.80	± 12.0 %
2600	52.5	2.16	7.18	7.18	7.18	0.30	0.80	± 12.0 %
5200	49.0	5.30	4.88	4.88	4.88	0.35	1.90	± 13.1 %
5300	48.9	5.42	4.36	4.36	4.36	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.67	3.67	3.67	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.87	3.87	3.87	0.60	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 126, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN 7412

June 29, 2016

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

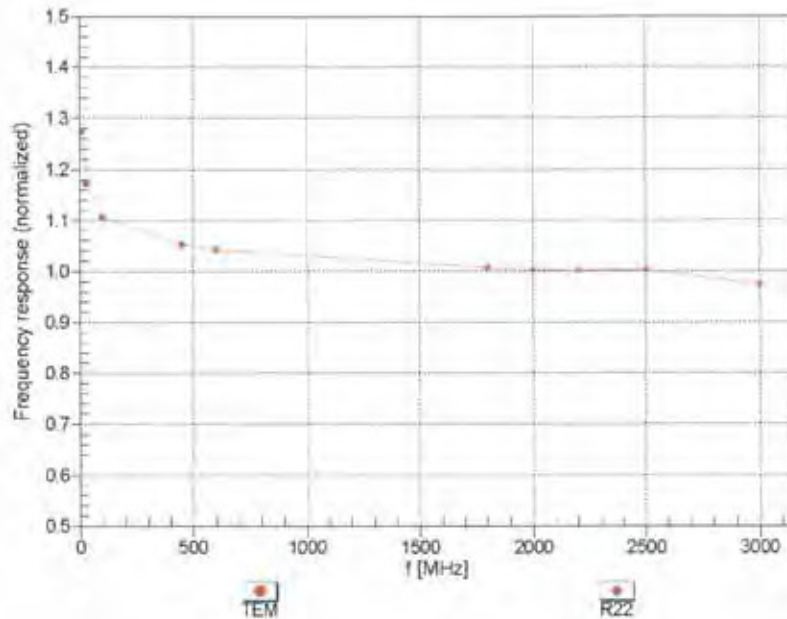


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4-SN:7412



June 29, 2016

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM

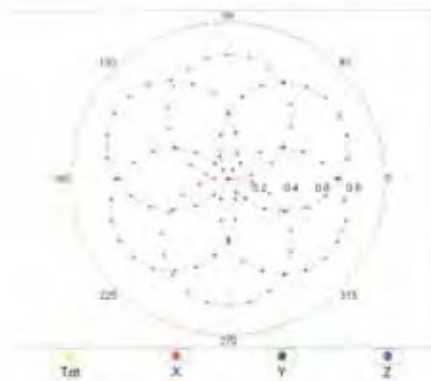

f=1800 MHz, R22

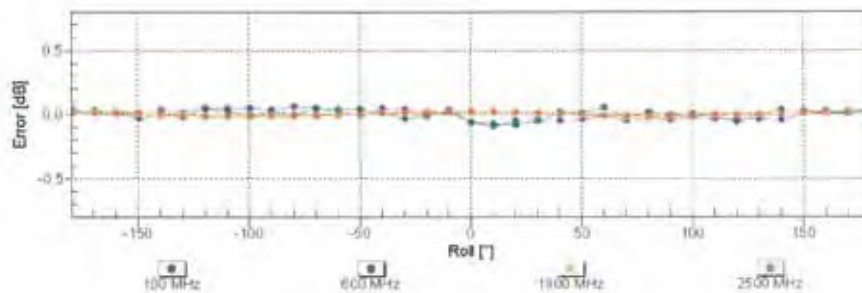
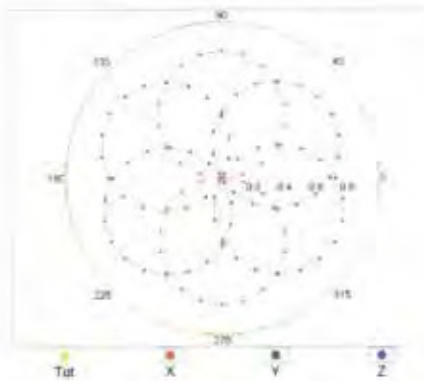


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:7412

June 29, 2016

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

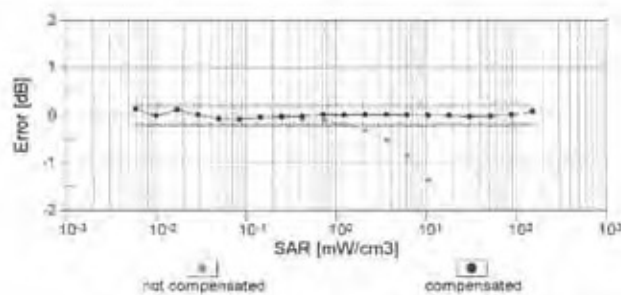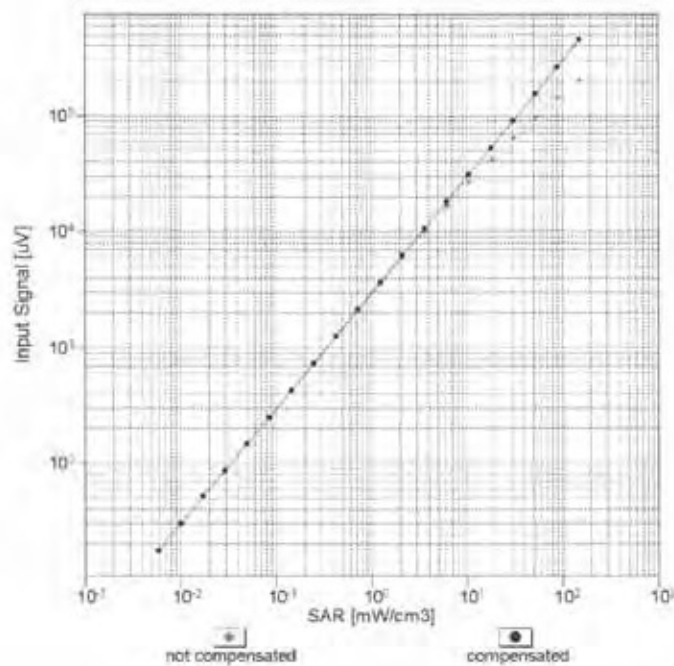

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


Certificate No: EX3-7412_Jun16

Page 9 of 38

EX3DV4- SN-7412


June 29, 2016

Conversion Factor Assessment

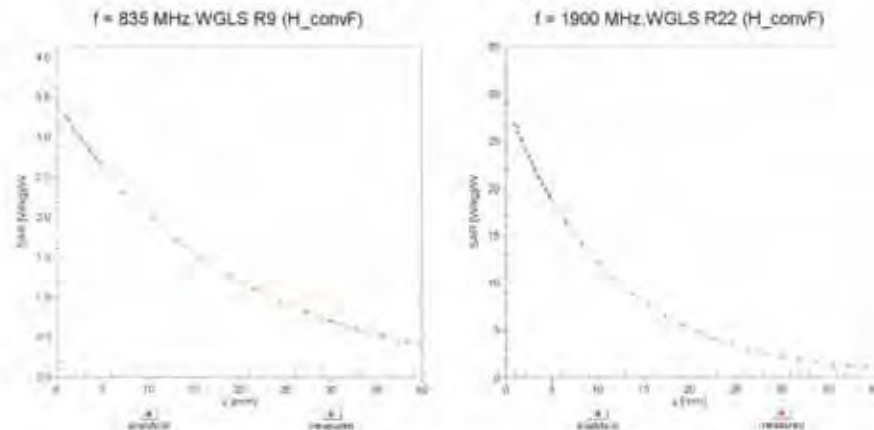

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900$ MHz

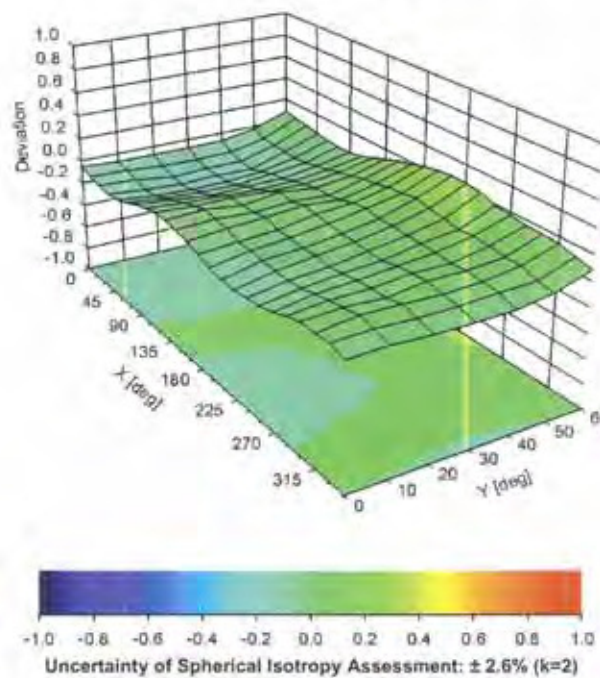

Certificate No: EX3-7412_Jun16

Page 10 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7412

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	120.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:7412

June 29, 2016

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB μ V	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	129.3	$\pm 3.3\%$
		Y	0.00	0.00	1.00		139.2	
		Z	0.00	0.00	1.00		149.3	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.90	69.13	11.77	10.00	20.0	$\pm 9.6\%$
		Y	2.42	65.52	10.24		20.0	
		Z	2.88	67.63	11.48		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	1.04	67.87	15.58	0.00	150.0	$\pm 9.6\%$
		Y	1.14	69.95	16.83		150.0	
		Z	1.08	68.03	15.80		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.19	64.01	15.47	0.41	150.0	$\pm 9.6\%$
		Y	1.18	64.27	15.67		150.0	
		Z	1.18	63.84	15.35		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.72	66.88	17.25	1.46	150.0	$\pm 9.6\%$
		Y	4.70	66.72	17.02		150.0	
		Z	4.86	66.56	17.05		150.0	
10021- DAB	GSM-FDD (TDMA, GMSK)	X	100.00	114.20	27.10	9.39	50.0	$\pm 9.6\%$
		Y	18.76	90.12	20.43		50.0	
		Z	100.00	112.33	26.76		50.0	
10023- DAB	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	113.34	26.75	9.57	50.0	$\pm 9.6\%$
		Y	10.97	83.44	18.40		50.0	
		Z	100.00	112.07	26.70		50.0	
10024- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	115.15	26.53	6.56	60.0	$\pm 9.6\%$
		Y	100.00	108.15	23.48		60.0	
		Z	100.00	111.31	25.15		60.0	
10025- DAB	EDGE-FDD (TDMA, 8PSK, TN 0)	X	5.00	77.44	30.78	12.57	50.0	$\pm 9.6\%$
		Y	3.74	65.71	22.64		50.0	
		Z	7.94	88.87	34.88		50.0	
10026- DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	7.20	88.56	32.36	9.56	60.0	$\pm 9.6\%$
		Y	6.36	82.78	28.60		60.0	
		Z	9.63	92.99	32.99		60.0	
10027- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	118.34	27.19	4.80	80.0	$\pm 9.6\%$
		Y	100.00	108.73	22.92		80.0	
		Z	100.00	112.02	24.67		80.0	
10028- DAB	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	123.44	28.70	3.55	100.0	$\pm 9.6\%$
		Y	100.00	111.05	23.23		100.0	
		Z	100.00	114.04	24.86		100.0	
10029- DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	4.80	78.61	26.94	7.80	80.0	$\pm 9.6\%$
		Y	4.39	75.26	24.47		80.0	
		Z	5.74	81.09	27.21		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	113.43	25.30	5.30	70.0	$\pm 9.6\%$
		Y	100.00	106.16	22.07		70.0	
		Z	100.00	109.93	24.05		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	124.54	27.73	1.88	100.0	$\pm 9.6\%$
		Y	100.00	110.85	21.86		100.0	
		Z	100.00	114.51	23.73		100.0	

Certificate No: EX3-7412_Jun16

Page 12 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	139.22	32.60	1.17	100.0	± 9.6 %
		Y	100.00	125.82	26.90		100.0	
		Z	100.00	124.25	26.72		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	29.67	107.00	27.86	5.30	70.0	± 9.6 %
		Y	4.20	77.10	18.00		70.0	
		Z	8.41	88.82	23.42		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	4.01	79.86	17.73	1.88	100.0	± 9.6 %
		Y	2.07	71.82	14.72		100.0	
		Z	2.76	76.00	17.77		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	2.28	73.97	15.30	1.17	100.0	± 9.6 %
		Y	1.70	70.82	14.19		100.0	
		Z	1.99	72.74	16.31		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	68.57	119.56	31.03	5.30	70.0	± 9.6 %
		Y	4.89	79.43	18.92		70.0	
		Z	11.04	93.24	24.88		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	3.30	77.62	16.95	1.88	100.0	± 9.6 %
		Y	1.88	70.79	14.29		100.0	
		Z	2.57	75.18	17.42		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	2.31	74.41	15.61	1.17	100.0	± 9.6 %
		Y	1.72	71.17	14.47		100.0	
		Z	2.00	73.09	16.56		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.27	68.58	12.65	0.00	150.0	± 9.6 %
		Y	2.54	77.22	16.62		150.0	
		Z	2.04	73.62	16.45		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	100.00	110.91	24.90	7.78	50.0	± 9.6 %
		Y	11.30	83.94	17.36		50.0	
		Z	100.00	109.02	24.42		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.01	94.30	1.85	0.00	150.0	± 9.6 %
		Y	0.00	98.93	1.36		150.0	
		Z	0.00	95.79	0.00		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	100.00	109.85	26.57	13.80	25.0	± 9.6 %
		Y	6.46	72.81	15.97		25.0	
		Z	12.43	82.77	20.00		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	100.00	111.30	26.13	10.79	40.0	± 9.6 %
		Y	6.73	76.16	16.11		40.0	
		Z	16.33	88.52	20.77		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	100.00	122.04	32.09	9.03	50.0	± 9.6 %
		Y	8.29	81.53	19.92		50.0	
		Z	16.76	93.91	25.08		50.0	
10058-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	3.90	74.32	24.19	6.55	100.0	± 9.6 %
		Y	3.59	71.86	22.30		100.0	
		Z	4.38	75.78	24.21		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.22	65.06	16.07	0.61	110.0	± 9.6 %
		Y	1.19	65.04	16.03		110.0	
		Z	1.21	64.81	15.87		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	19.67	116.87	31.91	1.30	110.0	± 9.6 %
		Y	4.88	94.39	25.26		110.0	
		Z	8.83	102.14	27.37		110.0	

Certificate No: EX3-7412_Jun16

Page 13 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	2.72	80.51	22.73	2.04	110.0	± 9.6 %
		Y	2.00	74.71	19.80		110.0	
		Z	2.52	77.97	21.27		110.0	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.51	66.80	16.64	0.49	100.0	± 9.6 %
		Y	4.52	66.83	16.59		100.0	
		Z	4.68	66.62	16.54		100.0	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.52	66.91	16.75	0.72	100.0	± 9.6 %
		Y	4.53	66.89	16.65		100.0	
		Z	4.69	66.69	16.62		100.0	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.75	67.10	16.94	0.86	100.0	± 9.6 %
		Y	4.76	67.06	16.82		100.0	
		Z	4.97	66.95	16.84		100.0	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.63	66.95	17.03	1.21	100.0	± 9.6 %
		Y	4.63	66.85	16.85		100.0	
		Z	4.84	66.82	16.91		100.0	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.64	66.95	17.18	1.46	100.0	± 9.6 %
		Y	4.63	66.81	16.95		100.0	
		Z	4.85	66.82	17.06		100.0	
10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.93	67.25	17.68	2.04	100.0	± 9.6 %
		Y	4.91	67.04	17.38		100.0	
		Z	5.13	66.96	17.47		100.0	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.96	67.17	17.86	2.55	100.0	± 9.6 %
		Y	4.93	66.90	17.48		100.0	
		Z	5.17	67.00	17.68		100.0	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.02	67.20	18.04	2.67	100.0	± 9.6 %
		Y	4.99	66.91	17.65		100.0	
		Z	5.26	67.01	17.87		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.81	66.96	17.56	1.99	100.0	± 9.6 %
		Y	4.78	66.73	17.25		100.0	
		Z	4.95	66.63	17.32		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.77	67.19	17.76	2.30	100.0	± 9.6 %
		Y	4.73	66.94	17.40		100.0	
		Z	4.92	66.92	17.51		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.83	67.40	18.12	2.83	100.0	± 9.6 %
		Y	4.78	67.07	17.68		100.0	
		Z	4.98	67.05	17.81		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.85	67.38	18.29	3.30	100.0	± 9.6 %
		Y	4.79	66.99	17.80		100.0	
		Z	4.96	66.93	17.94		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.87	67.38	18.54	3.82	90.0	± 9.6 %
		Y	4.81	66.98	18.01		90.0	
		Z	4.99	67.04	18.24		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.91	67.27	18.72	4.15	90.0	± 9.6 %
		Y	4.85	66.86	18.17		90.0	
		Z	5.01	66.84	18.36		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.94	67.37	18.85	4.30	90.0	± 9.6 %
		Y	4.88	66.95	18.27		90.0	
		Z	5.03	66.90	18.45		90.0	

Certificate No: EX3-7412_Jun16

Page 14 of 38

EX3DV4- SN:7412

June 29, 2016

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.66	64.36	10.29	0.00	150.0	± 9.6 %
		Y	0.89	68.06	12.59		150.0	
		Z	0.90	68.93	13.16		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	0.67	60.00	4.45	4.77	80.0	± 9.6 %
		Y	2.99	66.16	6.41		80.0	
		Z	0.74	60.00	4.67		80.0	
10090-DAB	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	115.13	26.54	6.56	60.0	± 9.6 %
		Y	100.00	108.15	23.49		60.0	
		Z	100.00	111.32	25.18		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.87	68.78	15.89	0.00	150.0	± 9.6 %
		Y	2.01	70.19	16.80		150.0	
		Z	1.88	68.08	16.00		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.83	68.73	15.88	0.00	150.0	± 9.6 %
		Y	1.96	70.14	16.78		150.0	
		Z	1.84	68.04	15.97		150.0	
10099-DAB	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	7.26	88.74	32.42	9.56	60.0	± 9.6 %
		Y	6.40	82.86	28.63		60.0	
		Z	9.70	93.11	33.03		60.0	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.97	69.97	16.89	0.00	150.0	± 9.6 %
		Y	3.15	71.14	17.44		150.0	
		Z	3.19	70.56	16.94		150.0	
10101-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.12	67.31	16.04	0.00	150.0	± 9.6 %
		Y	3.19	67.87	16.33		150.0	
		Z	3.27	67.61	16.09		150.0	
10102-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.22	67.33	16.14	0.00	150.0	± 9.6 %
		Y	3.30	67.88	16.43		150.0	
		Z	3.38	67.56	16.17		150.0	
10103-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.16	76.70	21.31	3.98	65.0	± 9.6 %
		Y	5.29	73.33	19.39		65.0	
		Z	5.95	74.61	19.98		65.0	
10104-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	5.79	73.39	20.57	3.98	65.0	± 9.6 %
		Y	5.42	71.64	19.35		65.0	
		Z	6.07	73.08	20.13		65.0	
10105-CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.67	72.74	20.57	3.98	65.0	± 9.6 %
		Y	5.17	70.52	19.13		65.0	
		Z	5.71	71.69	19.80		65.0	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.57	69.43	16.75	0.00	150.0	± 9.6 %
		Y	2.73	70.59	17.34		150.0	
		Z	2.78	69.81	16.78		150.0	
10109-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.76	67.37	15.90	0.00	150.0	± 9.6 %
		Y	2.85	68.02	16.29		150.0	
		Z	2.93	67.49	16.01		150.0	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.06	68.80	16.23	0.00	150.0	± 9.6 %
		Y	2.21	70.08	16.97		150.0	
		Z	2.26	68.98	16.42		150.0	
10111-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.50	68.73	16.11	0.00	150.0	± 9.6 %
		Y	2.67	69.93	16.88		150.0	
		Z	2.65	68.44	16.34		150.0	

Certificate No: EX3-7412_Jun16

Page 15 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10112-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.88	67.45	15.98	0.00	150.0	± 9.6 %
		Y	2.97	68.07	16.36		150.0	
		Z	3.05	67.48	16.06		150.0	
10113-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.64	68.90	16.23	0.00	150.0	± 9.6 %
		Y	2.82	70.09	17.00		150.0	
		Z	2.81	68.56	16.46		150.0	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.00	67.19	16.64	0.00	150.0	± 9.6 %
		Y	5.02	67.35	16.68		150.0	
		Z	5.16	67.24	16.56		150.0	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.23	67.26	16.67	0.00	150.0	± 9.6 %
		Y	5.26	67.40	16.71		150.0	
		Z	5.44	67.36	16.62		150.0	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.06	67.34	16.64	0.00	150.0	± 9.6 %
		Y	5.10	67.54	16.71		150.0	
		Z	5.25	67.43	16.58		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.97	67.06	16.59	0.00	150.0	± 9.6 %
		Y	5.01	67.28	16.67		150.0	
		Z	5.12	67.08	16.49		150.0	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.32	67.50	16.80	0.00	150.0	± 9.6 %
		Y	5.34	67.62	16.82		150.0	
		Z	5.53	67.58	16.74		150.0	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.08	67.38	16.67	0.00	150.0	± 9.6 %
		Y	5.10	67.55	16.72		150.0	
		Z	5.23	67.38	16.57		150.0	
10140-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.24	67.37	16.06	0.00	150.0	± 9.6 %
		Y	3.31	67.89	16.34		150.0	
		Z	3.41	67.57	16.09		150.0	
10141-CAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.36	67.54	16.25	0.00	150.0	± 9.6 %
		Y	3.45	68.07	16.54		150.0	
		Z	3.53	67.67	16.26		150.0	
10142-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.82	68.77	15.45	0.00	150.0	± 9.6 %
		Y	2.03	70.62	16.57		150.0	
		Z	2.05	69.08	16.12		150.0	
10143-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.27	68.97	15.04	0.00	150.0	± 9.6 %
		Y	2.60	71.18	16.39		150.0	
		Z	2.54	69.33	16.09		150.0	
10144-CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.91	65.75	12.88	0.00	150.0	± 9.6 %
		Y	2.09	67.00	13.81		150.0	
		Z	2.28	66.86	14.39		150.0	
10145-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.74	60.96	7.59	0.00	150.0	± 9.6 %
		Y	0.87	62.58	9.03		150.0	
		Z	1.26	65.53	12.06		150.0	
10146-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	0.69	59.03	5.24	0.00	150.0	± 9.6 %
		Y	0.92	60.44	6.82		150.0	
		Z	1.70	64.92	10.81		150.0	
10147-CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	0.78	60.00	5.94	0.00	150.0	± 9.6 %
		Y	0.96	60.83	7.15		150.0	
		Z	1.94	66.46	11.71		150.0	

Certificate No: EX3-7412_Jun16

Page 16 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN.7412

June 29, 2016

10149-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.77	67.43	15.95	0.00	150.0	± 9.6 %
		Y	2.86	68.10	16.35		150.0	
		Z	2.94	67.56	16.06		150.0	
10150-CAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.89	67.51	16.03	0.00	150.0	± 9.6 %
		Y	2.98	68.15	16.41		150.0	
		Z	3.06	67.54	16.10		150.0	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.51	79.63	22.48	3.98	65.0	± 9.6 %
		Y	5.47	75.67	20.35		65.0	
		Z	6.29	77.15	21.10		65.0	
10152-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.34	73.48	20.12	3.98	65.0	± 9.6 %
		Y	4.92	71.41	18.79		65.0	
		Z	5.60	72.97	19.78		65.0	
10153-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	5.76	74.72	21.04	3.98	65.0	± 9.6 %
		Y	5.31	72.61	19.72		65.0	
		Z	5.95	73.89	20.55		65.0	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.10	69.17	16.46	0.00	150.0	± 9.6 %
		Y	2.28	70.62	17.28		150.0	
		Z	2.31	69.40	16.68		150.0	
10155-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.51	68.78	16.14	0.00	150.0	± 9.6 %
		Y	2.68	69.98	16.91		150.0	
		Z	2.66	68.45	16.36		150.0	
10156-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.62	68.39	14.74	0.00	150.0	± 9.6 %
		Y	1.89	70.85	16.22		150.0	
		Z	1.90	69.26	15.94		150.0	
10157-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.70	65.76	12.41	0.00	150.0	± 9.6 %
		Y	1.94	67.60	13.70		150.0	
		Z	2.13	67.54	14.48		150.0	
10158-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.65	69.00	16.29	0.00	150.0	± 9.6 %
		Y	2.84	70.21	17.07		150.0	
		Z	2.81	68.63	16.51		150.0	
10159-CAC	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.77	65.99	12.56	0.00	150.0	± 9.6 %
		Y	2.04	68.07	13.96		150.0	
		Z	2.24	68.01	14.76		150.0	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.65	69.03	16.61	0.00	150.0	± 9.6 %
		Y	2.76	69.87	17.08		150.0	
		Z	2.79	68.91	16.56		150.0	
10161-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.78	67.50	15.88	0.00	150.0	± 9.6 %
		Y	2.88	68.19	16.32		150.0	
		Z	2.96	67.50	16.03		150.0	
10162-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.89	67.74	16.03	0.00	150.0	± 9.6 %
		Y	2.99	68.42	16.47		150.0	
		Z	3.07	67.65	16.14		150.0	
10166-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	2.70	66.66	18.04	3.01	150.0	± 9.6 %
		Y	2.99	68.10	18.74		150.0	
		Z	3.44	69.03	18.92		150.0	
10167-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	2.73	67.86	17.93	3.01	150.0	± 9.6 %
		Y	3.27	70.06	18.88		150.0	
		Z	4.13	71.89	19.39		150.0	

Certificate No: EX3-7412_Jun16

Page 17 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10168-CAC	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	2.98	69.94	19.37	3.01	150.0	± 9.6 %
		Y	3.70	72.93	20.65		150.0	
		Z	4.60	74.23	20.77		150.0	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	1.96	63.59	16.65	3.01	150.0	± 9.6 %
		Y	2.27	65.65	17.67		150.0	
		Z	2.75	68.11	18.57		150.0	
10170-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	1.91	65.54	17.80	3.01	150.0	± 9.6 %
		Y	2.57	69.70	19.68		150.0	
		Z	3.66	74.01	21.00		150.0	
10171-AAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	1.69	63.35	15.54	3.01	150.0	± 9.6 %
		Y	2.17	66.16	16.81		150.0	
		Z	3.01	69.93	18.18		150.0	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	3.04	76.44	24.06	6.02	65.0	± 9.6 %
		Y	3.21	74.87	22.19		65.0	
		Z	5.95	84.92	26.10		65.0	
10173-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.91	81.96	24.64	6.02	65.0	± 9.6 %
		Y	4.25	79.13	22.16		65.0	
		Z	11.42	93.48	27.00		65.0	
10174-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	3.54	79.53	23.06	6.02	65.0	± 9.6 %
		Y	2.89	72.29	18.95		65.0	
		Z	8.12	86.57	24.17		65.0	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	1.95	63.43	16.46	3.01	150.0	± 9.6 %
		Y	2.25	65.39	17.42		150.0	
		Z	2.72	67.83	18.33		150.0	
10176-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	1.91	65.55	17.81	3.01	150.0	± 9.6 %
		Y	2.58	69.72	19.69		150.0	
		Z	3.66	74.04	21.01		150.0	
10177-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	1.96	63.51	16.52	3.01	150.0	± 9.6 %
		Y	2.26	65.51	17.50		150.0	
		Z	2.74	67.97	18.42		150.0	
10178-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	1.90	65.48	17.76	3.01	150.0	± 9.6 %
		Y	2.56	69.57	19.59		150.0	
		Z	3.63	73.82	20.89		150.0	
10179-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	1.78	64.43	16.58	3.01	150.0	± 9.6 %
		Y	2.35	67.82	18.11		150.0	
		Z	3.30	71.86	19.45		150.0	
10180-CAC	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	1.69	63.34	15.52	3.01	150.0	± 9.6 %
		Y	2.17	66.13	16.77		150.0	
		Z	3.00	69.87	18.13		150.0	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	1.96	63.49	16.51	3.01	150.0	± 9.6 %
		Y	2.26	65.49	17.49		150.0	
		Z	2.74	67.95	18.41		150.0	
10182-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	1.90	65.46	17.74	3.01	150.0	± 9.6 %
		Y	2.56	69.55	19.58		150.0	
		Z	3.62	73.80	20.88		150.0	
10183-AAA	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	1.69	63.32	15.51	3.01	150.0	± 9.6 %
		Y	2.17	66.11	16.76		150.0	
		Z	2.99	69.84	18.12		150.0	

Certificate No. EX3-7412_Jun16

Page 18 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN.7412

June 29, 2016

10184-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	1.96	63.52	16.53	3.01	150.0	± 9.6 %
		Y	2.27	65.53	17.51		150.0	
		Z	2.75	67.99	18.43		150.0	
10185-CAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	1.91	65.51	17.78	3.01	150.0	± 9.6 %
		Y	2.57	69.62	19.62		150.0	
		Z	3.64	73.87	20.92		150.0	
10186-AAC	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	1.69	63.37	15.54	3.01	150.0	± 9.6 %
		Y	2.18	66.16	16.79		150.0	
		Z	3.01	69.91	18.15		150.0	
10187-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	1.97	63.57	16.60	3.01	150.0	± 9.6 %
		Y	2.27	65.59	17.59		150.0	
		Z	2.76	68.04	18.50		150.0	
10188-CAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	1.94	65.83	18.05	3.01	150.0	± 9.6 %
		Y	2.63	70.17	20.00		150.0	
		Z	3.75	74.53	21.30		150.0	
10189-AAC	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	1.72	63.58	15.75	3.01	150.0	± 9.6 %
		Y	2.21	66.49	17.06		150.0	
		Z	3.08	70.33	18.43		150.0	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.37	66.83	16.28	0.00	150.0	± 9.6 %
		Y	4.42	67.04	16.41		150.0	
		Z	4.54	66.65	16.25		150.0	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.51	67.04	16.42	0.00	150.0	± 9.6 %
		Y	4.56	67.27	16.54		150.0	
		Z	4.71	66.96	16.37		150.0	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.54	67.05	16.43	0.00	150.0	± 9.6 %
		Y	4.60	67.28	16.55		150.0	
		Z	4.75	66.99	16.39		150.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.35	66.81	16.26	0.00	150.0	± 9.6 %
		Y	4.41	67.04	16.39		150.0	
		Z	4.55	66.71	16.26		150.0	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.51	67.04	16.42	0.00	150.0	± 9.6 %
		Y	4.57	67.27	16.54		150.0	
		Z	4.73	66.98	16.38		150.0	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.53	67.04	16.43	0.00	150.0	± 9.6 %
		Y	4.59	67.28	16.55		150.0	
		Z	4.76	67.01	16.40		150.0	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.31	66.86	16.24	0.00	150.0	± 9.6 %
		Y	4.36	67.09	16.38		150.0	
		Z	4.50	66.73	16.23		150.0	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.50	67.00	16.41	0.00	150.0	± 9.6 %
		Y	4.56	67.23	16.53		150.0	
		Z	4.72	66.95	16.37		150.0	
10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.55	67.00	16.42	0.00	150.0	± 9.6 %
		Y	4.60	67.22	16.54		150.0	
		Z	4.76	66.94	16.39		150.0	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.95	67.07	16.59	0.00	150.0	± 9.6 %
		Y	4.98	67.27	16.65		150.0	
		Z	5.10	67.09	16.49		150.0	

Certificate No: EX3-7412_Jun16

Page 19 of 38

EX3DV4-SN-7412

June 29, 2016

10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.19	67.22	16.67	0.00	150.0	± 9.6 %
		Y	5.25	67.45	16.75		150.0	
		Z	5.40	67.32	16.62		150.0	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.99	67.20	16.58	0.00	150.0	± 9.6 %
		Y	5.02	67.39	16.64		150.0	
		Z	5.14	67.21	16.48		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.64	66.27	14.92	0.00	150.0	± 9.6 %
		Y	2.73	66.87	15.43		150.0	
		Z	2.82	66.25	15.45		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	4.12	83.05	25.15	6.02	65.0	± 9.6 %
		Y	4.47	80.09	22.63		65.0	
		Z	12.28	94.88	27.54		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	4.34	83.13	24.43	6.02	65.0	± 9.6 %
		Y	4.46	79.23	21.64		65.0	
		Z	11.43	92.11	25.99		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	3.43	78.80	25.03	6.02	65.0	± 9.6 %
		Y	3.68	77.60	23.37		65.0	
		Z	7.52	89.65	27.83		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.94	82.06	24.68	6.02	65.0	± 9.6 %
		Y	4.28	79.23	22.21		65.0	
		Z	11.51	93.59	27.04		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	4.07	81.94	23.92	6.02	65.0	± 9.6 %
		Y	4.24	78.32	21.23		65.0	
		Z	10.69	90.90	25.52		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.33	78.13	24.68	6.02	65.0	± 9.6 %
		Y	3.56	76.94	23.02		65.0	
		Z	7.21	88.75	27.44		65.0	
10232-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.93	82.03	24.67	6.02	65.0	± 9.6 %
		Y	4.27	79.20	22.20		65.0	
		Z	11.49	93.58	27.04		65.0	
10233-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	4.06	81.89	23.90	6.02	65.0	± 9.6 %
		Y	4.23	78.29	21.22		65.0	
		Z	10.66	90.88	25.52		65.0	
10234-CAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	3.26	77.64	24.36	6.02	65.0	± 9.6 %
		Y	3.48	76.40	22.68		65.0	
		Z	6.96	87.92	27.04		65.0	
10235-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.93	82.05	24.68	6.02	65.0	± 9.6 %
		Y	4.27	79.22	22.21		65.0	
		Z	11.50	93.61	27.05		65.0	
10236-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	4.11	82.09	23.96	6.02	65.0	± 9.6 %
		Y	4.26	78.41	21.25		65.0	
		Z	10.80	91.05	25.57		65.0	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	3.32	78.14	24.69	6.02	65.0	± 9.6 %
		Y	3.56	76.95	23.03		65.0	
		Z	7.22	88.81	27.47		65.0	
10238-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.92	82.00	24.66	6.02	65.0	± 9.6 %
		Y	4.26	79.18	22.19		65.0	
		Z	11.46	93.55	27.03		65.0	

EX3DV4- SN:7412

June 29, 2016

10239-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	4.04	81.83	23.88	6.02	65.0	± 9.6 %
		Y	4.21	78.25	21.20		65.0	
		Z	10.63	90.84	25.51		65.0	
10240-CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	3.32	78.12	24.68	6.02	65.0	± 9.6 %
		Y	3.55	76.93	23.01		65.0	
		Z	7.20	88.76	27.45		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.61	78.11	24.71	6.98	65.0	± 9.6 %
		Y	5.80	76.72	23.33		65.0	
		Z	7.40	79.70	24.71		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	5.35	77.18	24.24	6.98	65.0	± 9.6 %
		Y	5.32	74.98	22.49		65.0	
		Z	6.72	77.65	23.76		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.73	74.14	23.67	6.98	65.0	± 9.6 %
		Y	4.67	72.37	22.14		65.0	
		Z	5.52	74.33	23.19		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	3.13	67.67	13.17	3.98	65.0	± 9.6 %
		Y	3.16	67.12	13.00		65.0	
		Z	4.90	72.76	16.90		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	3.06	67.13	12.85	3.98	65.0	± 9.6 %
		Y	3.11	66.71	12.75		65.0	
		Z	4.81	72.23	16.62		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	4.12	74.47	17.03	3.98	65.0	± 9.6 %
		Y	3.19	70.28	15.06		65.0	
		Z	4.89	76.26	18.78		65.0	
10247-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	4.15	71.61	16.54	3.98	65.0	± 9.6 %
		Y	3.68	69.32	15.36		65.0	
		Z	4.69	72.61	17.93		65.0	
10248-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	4.03	70.73	16.12	3.98	65.0	± 9.6 %
		Y	3.66	68.82	15.11		65.0	
		Z	4.70	72.13	17.70		65.0	
10249-CAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	6.43	82.01	21.44	3.98	65.0	± 9.6 %
		Y	4.47	75.43	18.56		65.0	
		Z	6.02	79.68	21.07		65.0	
10250-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	5.52	76.37	21.02	3.98	65.0	± 9.6 %
		Y	4.88	73.51	19.47		65.0	
		Z	5.58	75.10	20.66		65.0	
10251-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	5.06	73.56	19.37	3.98	65.0	± 9.6 %
		Y	4.59	71.30	18.06		65.0	
		Z	5.37	73.21	19.49		65.0	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.95	83.20	23.55	3.98	65.0	± 9.6 %
		Y	5.31	77.46	20.83		65.0	
		Z	6.34	79.61	22.03		65.0	
10253-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.27	73.11	19.81	3.98	65.0	± 9.6 %
		Y	4.86	71.08	18.53		65.0	
		Z	5.49	72.47	19.55		65.0	
10254-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	5.63	74.16	20.58	3.98	65.0	± 9.6 %
		Y	5.20	72.11	19.32		65.0	
		Z	5.82	73.33	20.23		65.0	

Certificate No: EX3-7412_Jun16

Page 21 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4-SN:7412

June 29, 2016

10255-CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.19	78.89	22.30	3.98	65.0	± 9.6 %
		Y	5.26	75.11	20.26		65.0	
		Z	6.00	76.50	21.05		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	2.20	63.44	9.69	3.98	65.0	± 9.6 %
		Y	2.33	63.53	9.93		65.0	
		Z	3.73	68.77	14.03		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	2.17	63.04	9.36	3.98	65.0	± 9.6 %
		Y	2.31	63.19	9.65		65.0	
		Z	3.66	68.19	13.66		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.51	67.06	12.46	3.98	65.0	± 9.6 %
		Y	2.26	65.42	11.60		65.0	
		Z	3.64	71.51	15.90		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	4.72	73.64	18.28	3.98	65.0	± 9.6 %
		Y	4.14	70.98	16.90		65.0	
		Z	5.05	73.59	18.94		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	4.71	73.23	18.07	3.98	65.0	± 9.6 %
		Y	4.17	70.75	16.78		65.0	
		Z	5.08	73.34	18.83		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	6.32	81.65	21.95	3.98	65.0	± 9.6 %
		Y	4.65	75.70	19.23		65.0	
		Z	5.86	78.83	21.17		65.0	
10262-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	5.49	76.27	20.96	3.98	65.0	± 9.6 %
		Y	4.86	73.42	19.40		65.0	
		Z	5.57	75.05	20.62		65.0	
10263-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	5.05	73.53	19.36	3.98	65.0	± 9.6 %
		Y	4.59	71.28	18.05		65.0	
		Z	5.36	73.19	19.48		65.0	
10264-CAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	6.86	82.92	23.41	3.98	65.0	± 9.6 %
		Y	5.25	77.25	20.71		65.0	
		Z	6.29	79.43	21.94		65.0	
10265-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.34	73.48	20.12	3.98	65.0	± 9.6 %
		Y	4.92	71.41	18.80		65.0	
		Z	5.59	72.97	19.79		65.0	
10266-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	5.76	74.71	21.03	3.98	65.0	± 9.6 %
		Y	5.31	72.60	19.70		65.0	
		Z	5.95	73.88	20.54		65.0	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.50	79.57	22.45	3.98	65.0	± 9.6 %
		Y	5.46	75.62	20.33		65.0	
		Z	6.28	77.11	21.08		65.0	
10268-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	5.97	73.42	20.65	3.98	65.0	± 9.6 %
		Y	5.61	71.72	19.48		65.0	
		Z	6.23	72.94	20.19		65.0	
10269-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	5.98	73.05	20.50	3.98	65.0	± 9.6 %
		Y	5.63	71.42	19.38		65.0	
		Z	6.21	72.56	20.07		65.0	
10270-CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.23	76.25	21.30	3.98	65.0	± 9.6 %
		Y	5.59	73.64	19.72		65.0	
		Z	6.23	74.71	20.24		65.0	

EX3DV4-SN:7412

June 29, 2016

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.50	67.00	15.07	0.00	150.0	± 9.6 %
		Y	2.60	67.64	15.58		150.0	
		Z	2.62	66.68	15.41		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.58	68.40	15.70	0.00	150.0	± 9.6 %
		Y	1.71	69.97	16.65		150.0	
		Z	1.66	68.36	15.92		150.0	
10277-CAA	PHS (QPSK)	X	1.63	60.00	5.41	9.03	50.0	± 9.6 %
		Y	1.97	60.47	6.04		50.0	
		Z	2.33	61.88	7.50		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	3.03	66.50	11.50	9.03	50.0	± 9.6 %
		Y	3.08	65.38	10.99		50.0	
		Z	4.51	71.20	14.92		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	3.10	66.72	11.67	9.03	50.0	± 9.6 %
		Y	3.15	65.56	11.13		50.0	
		Z	4.64	71.50	15.10		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	0.95	65.17	10.74	0.00	150.0	± 9.6 %
		Y	1.35	69.33	13.17		150.0	
		Z	1.54	69.62	14.45		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.65	64.16	10.17	0.00	150.0	± 9.6 %
		Y	0.86	67.67	12.38		150.0	
		Z	0.88	66.66	13.01		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	1.01	69.98	13.30	0.00	150.0	± 9.6 %
		Y	2.99	83.78	18.94		150.0	
		Z	1.25	72.32	16.03		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	4.07	86.91	19.78	0.00	150.0	± 9.6 %
		Y	100.00	130.25	31.37		150.0	
		Z	2.35	81.62	20.13		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	94.86	119.53	31.97	9.03	50.0	± 9.6 %
		Y	10.57	83.78	21.38		50.0	
		Z	9.04	83.77	23.02		50.0	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.58	69.54	16.82	0.00	150.0	± 9.6 %
		Y	2.74	70.73	17.43		150.0	
		Z	2.80	69.91	16.85		150.0	
10298-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.12	64.77	11.27	0.00	150.0	± 9.6 %
		Y	1.39	67.61	13.14		150.0	
		Z	1.62	68.19	14.41		150.0	
10299-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.05	61.47	8.18	0.00	150.0	± 9.6 %
		Y	1.43	64.15	10.30		150.0	
		Z	2.35	68.41	13.56		150.0	
10300-AAB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	0.91	60.00	6.61	0.00	150.0	± 9.6 %
		Y	1.14	61.27	7.95		150.0	
		Z	1.79	64.30	10.82		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.38	65.32	17.21	4.17	50.0	± 9.6 %
		Y	4.45	65.51	17.37		50.0	
		Z	4.74	65.52	17.58		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	4.91	66.08	18.00	4.96	50.0	± 9.6 %
		Y	4.88	65.89	17.95		50.0	
		Z	5.19	65.98	18.21		50.0	

Certificate No: EX3-7412_Jun16

Page 23 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.68	65.75	17.79	4.96	50.0	± 9.6 %
		Y	4.67	65.84	17.96		50.0	
		Z	4.94	65.61	18.04		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.51	65.72	17.35	4.17	50.0	± 9.6 %
		Y	4.47	65.55	17.35		50.0	
		Z	4.74	65.47	17.52		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.10	67.38	18.71	6.02	35.0	± 9.6 %
		Y	4.17	67.51	18.93		35.0	
		Z	4.41	67.56	19.68		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.43	66.59	18.67	6.02	35.0	± 9.6 %
		Y	4.45	66.47	18.69		35.0	
		Z	4.71	66.47	19.21		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.31	66.59	18.55	6.02	35.0	± 9.6 %
		Y	4.34	66.54	18.62		35.0	
		Z	4.61	66.66	19.19		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.29	66.80	18.71	6.02	35.0	± 9.6 %
		Y	4.32	66.75	18.77		35.0	
		Z	4.59	66.87	19.34		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.44	66.63	18.75	6.02	35.0	± 9.6 %
		Y	4.47	66.53	18.77		35.0	
		Z	4.76	66.68	19.36		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.38	66.65	18.67	6.02	35.0	± 9.6 %
		Y	4.41	66.55	18.69		35.0	
		Z	4.66	66.54	19.19		35.0	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	2.94	68.70	16.45	0.00	150.0	± 9.6 %
		Y	3.11	69.82	16.99		150.0	
		Z	3.16	69.17	16.48		150.0	
10313-AAA	iDEN 1:3	X	5.09	80.16	19.48	6.99	70.0	± 9.6 %
		Y	2.66	70.19	14.97		70.0	
		Z	3.34	72.51	16.02		70.0	
10314-AAA	iDEN 1:6	X	8.64	92.75	26.98	10.00	30.0	± 9.6 %
		Y	4.59	78.86	21.11		30.0	
		Z	4.80	79.36	21.46		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.11	63.98	15.41	0.17	150.0	± 9.6 %
		Y	1.11	64.50	15.83		150.0	
		Z	1.10	63.81	15.33		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.40	66.77	16.39	0.17	150.0	± 9.6 %
		Y	4.43	66.86	16.40		150.0	
		Z	4.58	66.64	16.33		150.0	
10317-AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.40	66.77	16.39	0.17	150.0	± 9.6 %
		Y	4.43	66.86	16.40		150.0	
		Z	4.58	66.64	16.33		150.0	
10400-AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.46	67.02	16.39	0.00	150.0	± 9.6 %
		Y	4.52	67.25	16.50		150.0	
		Z	4.70	67.02	16.37		150.0	
10401-AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.13	66.76	16.40	0.00	150.0	± 9.6 %
		Y	5.18	66.98	16.46		150.0	
		Z	5.43	67.25	16.56		150.0	

Certificate No: EX3-7412_Jun16

Page 24 of 38

EX3DV4- SN:7412

June 29, 2016

10402-AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.51	67.38	16.61	0.00	150.0	± 9.6 %
		Y	5.53	67.57	16.66		150.0	
		Z	5.66	67.47	16.53		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	0.95	65.17	10.74	0.00	115.0	± 9.6 %
		Y	1.35	69.33	13.17		115.0	
		Z	1.54	69.62	14.45		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	0.95	65.17	10.74	0.00	115.0	± 9.6 %
		Y	1.35	69.33	13.17		115.0	
		Z	1.54	69.62	14.45		115.0	
10406-AAB	CDMA2000, RC3, SQ32, SCH0, Full Rate	X	100.00	128.12	30.45	0.00	100.0	± 9.6 %
		Y	100.00	128.55	31.94		100.0	
		Z	100.00	122.02	30.13		100.0	
10410-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.49	242.38	2.74	2.23	80.0	± 9.6 %
		Y	771.35	60.46	1.11		80.0	
		Z	0.67	60.00	3.11		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.04	63.28	14.90	0.00	150.0	± 9.6 %
		Y	1.05	64.01	15.52		150.0	
		Z	1.03	63.17	14.89		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.36	66.79	16.35	0.00	150.0	± 9.6 %
		Y	4.41	67.02	16.47		150.0	
		Z	4.55	66.69	16.32		150.0	
10417-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.36	66.79	16.35	0.00	150.0	± 9.6 %
		Y	4.41	67.02	16.47		150.0	
		Z	4.55	66.69	16.32		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.36	67.02	16.42	0.00	150.0	± 9.6 %
		Y	4.41	67.24	16.54		150.0	
		Z	4.54	66.86	16.34		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.37	66.94	16.40	0.00	150.0	± 9.6 %
		Y	4.43	67.16	16.52		150.0	
		Z	4.56	66.80	16.34		150.0	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.48	66.91	16.41	0.00	150.0	± 9.6 %
		Y	4.53	67.12	16.52		150.0	
		Z	4.67	66.80	16.35		150.0	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.59	67.15	16.49	0.00	150.0	± 9.6 %
		Y	4.66	67.38	16.61		150.0	
		Z	4.83	67.10	16.46		150.0	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.53	67.10	16.47	0.00	150.0	± 9.6 %
		Y	4.59	67.34	16.59		150.0	
		Z	4.76	67.06	16.44		150.0	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.19	67.32	16.70	0.00	150.0	± 9.6 %
		Y	5.22	67.49	16.75		150.0	
		Z	5.37	67.36	16.62		150.0	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.22	67.48	16.78	0.00	150.0	± 9.6 %
		Y	5.25	67.61	16.80		150.0	
		Z	5.38	67.42	16.65		150.0	

Certificate No: EX3-7412_Jun16

Page 25 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4-SN:7412

June 29, 2016

10427-AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.16	67.18	16.62	0.00	150.0	± 9.6 %
		Y	5.20	67.35	16.67		150.0	
		Z	5.39	67.37	16.62		150.0	
10430-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.23	72.45	18.39	0.00	150.0	± 9.6 %
		Y	4.69	74.38	19.54		150.0	
		Z	4.30	71.08	18.35		150.0	
10431-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	3.95	67.40	16.17	0.00	150.0	± 9.6 %
		Y	4.04	67.73	16.41		150.0	
		Z	4.22	67.27	16.31		150.0	
10432-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.29	67.22	16.38	0.00	150.0	± 9.6 %
		Y	4.36	67.48	16.54		150.0	
		Z	4.52	67.12	16.39		150.0	
10433-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.55	67.14	16.49	0.00	150.0	± 9.6 %
		Y	4.61	67.37	16.61		150.0	
		Z	4.77	67.09	16.46		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.30	73.13	18.03	0.00	150.0	± 9.6 %
		Y	5.00	75.85	19.54		150.0	
		Z	4.42	72.03	18.33		150.0	
10435-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.45	235.66	0.57	2.23	80.0	± 9.6 %
		Y	414.65	60.24	1.07		80.0	
		Z	0.68	60.00	3.09		80.0	
10447-AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.16	67.07	14.81	0.00	150.0	± 9.6 %
		Y	3.30	67.73	15.36		150.0	
		Z	3.51	67.31	15.61		150.0	
10448-AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.83	67.21	16.05	0.00	150.0	± 9.6 %
		Y	3.91	67.54	16.29		150.0	
		Z	4.06	67.05	16.18		150.0	
10449-AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.13	67.05	16.28	0.00	150.0	± 9.6 %
		Y	4.20	67.33	16.45		150.0	
		Z	4.34	66.95	16.29		150.0	
10450-AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.35	66.91	16.35	0.00	150.0	± 9.6 %
		Y	4.41	67.16	16.48		150.0	
		Z	4.54	66.86	16.31		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	2.92	66.62	13.91	0.00	150.0	± 9.6 %
		Y	3.11	67.53	14.62		150.0	
		Z	3.40	67.47	15.20		150.0	
10456-AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.16	67.88	16.88	0.00	150.0	± 9.6 %
		Y	6.15	67.96	16.86		150.0	
		Z	6.24	67.90	16.77		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.74	65.59	16.08	0.00	150.0	± 9.6 %
		Y	3.77	65.77	16.21		150.0	
		Z	3.81	65.33	16.02		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	2.55	64.90	12.37	0.00	150.0	± 9.6 %
		Y	2.76	65.96	13.27		150.0	
		Z	3.21	66.76	14.55		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	3.91	65.02	14.61	0.00	150.0	± 9.6 %
		Y	4.03	65.39	15.07		150.0	
		Z	4.47	65.77	15.90		150.0	

Certificate No: EX3-7412_Jun16

Page 26 of 38

EX3DV4- SN:7412

June 29, 2016

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	0.94	69.06	16.63	0.00	150.0	± 9.6 %
		Y	1.08	72.10	18.38		150.0	
		Z	0.95	68.92	16.71		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.05	84.59	22.22	3.29	80.0	± 9.6 %
		Y	1.99	75.08	17.92		80.0	
		Z	7.24	89.62	22.71		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.51	60.00	7.08	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.30		80.0	
		Z	1.01	61.48	8.84		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.27	55.87	4.02	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.61		80.0	
		Z	0.88	60.00	7.55		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.39	80.52	20.04	3.23	80.0	± 9.6 %
		Y	1.49	71.15	15.73		80.0	
		Z	5.40	84.75	20.55		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.51	60.00	6.99	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.23		80.0	
		Z	0.95	60.94	8.50		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.27	55.78	3.93	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.57		80.0	
		Z	0.88	60.00	7.50		80.0	
10467-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.61	81.94	20.58	3.23	80.0	± 9.6 %
		Y	1.57	71.91	16.08		80.0	
		Z	5.96	86.15	21.02		80.0	
10468-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.50	60.00	7.02	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.26		80.0	
		Z	0.97	61.08	8.59		80.0	
10469-AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.27	55.78	3.93	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.57		80.0	
		Z	0.88	60.00	7.50		80.0	
10470-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.62	82.03	20.61	3.23	80.0	± 9.6 %
		Y	1.57	71.92	16.08		80.0	
		Z	5.96	86.18	21.02		80.0	
10471-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.50	60.00	7.00	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.24		80.0	
		Z	0.96	61.03	8.55		80.0	
10472-AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.27	55.76	3.89	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.55		80.0	
		Z	0.88	60.00	7.48		80.0	
10473-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.61	81.95	20.58	3.23	80.0	± 9.6 %
		Y	1.56	71.87	16.05		80.0	
		Z	5.95	86.13	21.00		80.0	
10474-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.50	60.00	7.00	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.24		80.0	
		Z	0.96	61.01	8.54		80.0	
10475-AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.27	55.75	3.89	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.55		80.0	
		Z	0.88	60.00	7.49		80.0	

Certificate No: EX3-7412_Jun16

Page 27 of 38

EX3DV4- SN:7412

June 29, 2016

10477-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.50	60.00	6.96	3.23	80.0	± 9.6 %
		Y	0.65	60.00	7.21		80.0	
		Z	0.94	60.88	8.45		80.0	
10478-AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.27	55.74	3.87	3.23	80.0	± 9.6 %
		Y	0.67	60.00	6.53		80.0	
		Z	0.88	60.00	7.47		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	32.80	330.16	37.99	1.99	80.0	± 9.6 %
		Y	47.00	277.22	54.73		80.0	
		Z	0.91	60.00	5.90		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	11.15	343.64	19.07	1.99	80.0	± 9.6 %
		Y	76.57	376.93	18.54		80.0	
		Z	1.27	60.00	5.04		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	7.77	359.85	12.79	1.99	80.0	± 9.6 %
		Y	75.01	397.72	25.89		80.0	
		Z	1.38	60.00	4.77		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.23	62.57	10.17	1.99	80.0	± 9.6 %
		Y	1.13	61.46	9.63		80.0	
		Z	2.12	67.90	14.07		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.18	60.00	7.82	1.99	80.0	± 9.6 %
		Y	1.25	60.00	8.15		80.0	
		Z	2.35	65.68	12.50		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.21	60.00	7.83	1.99	80.0	± 9.6 %
		Y	1.27	60.00	8.16		80.0	
		Z	2.30	65.20	12.31		80.0	
10485-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.89	72.96	16.55	1.99	80.0	± 9.6 %
		Y	2.03	68.09	14.41		80.0	
		Z	2.87	71.88	16.93		80.0	
10486-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.96	64.54	12.06	1.99	80.0	± 9.6 %
		Y	1.81	63.41	11.54		80.0	
		Z	2.62	67.22	14.50		80.0	
10487-AAA	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.95	64.10	11.83	1.99	80.0	± 9.6 %
		Y	1.83	63.14	11.39		80.0	
		Z	2.63	66.87	14.34		80.0	
10488-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.47	74.51	19.04	1.99	80.0	± 9.6 %
		Y	2.77	70.61	17.10		80.0	
		Z	3.30	72.07	18.00		80.0	
10489-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.12	69.50	16.76	1.99	80.0	± 9.6 %
		Y	2.78	67.46	15.66		80.0	
		Z	3.15	68.31	16.52		80.0	
10490-AAA	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.17	69.21	16.63	1.99	80.0	± 9.6 %
		Y	2.86	67.32	15.61		80.0	
		Z	3.24	68.17	16.49		80.0	
10491-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.48	71.92	18.43	1.99	80.0	± 9.6 %
		Y	3.05	69.46	17.03		80.0	
		Z	3.51	70.52	17.61		80.0	
10492-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.42	68.58	17.04	1.99	80.0	± 9.6 %
		Y	3.18	67.16	16.16		80.0	
		Z	3.52	67.74	16.69		80.0	

Certificate No: EX3-7412_Jun16

Page 28 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10493-AAA	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.47	68.38	16.95	1.99	80.0	± 9.6 %
		Y	3.24	67.04	16.11		80.0	
		Z	3.59	67.62	16.66		80.0	
10494-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.83	73.51	18.99	1.99	80.0	± 9.6 %
		Y	3.28	70.70	17.45		80.0	
		Z	3.83	72.01	18.03		80.0	
10495-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.46	68.88	17.33	1.99	80.0	± 9.6 %
		Y	3.21	67.46	16.41		80.0	
		Z	3.55	68.12	16.89		80.0	
10496-AAA	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.53	68.60	17.24	1.99	80.0	± 9.6 %
		Y	3.30	67.28	16.38		80.0	
		Z	3.63	67.87	16.83		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	0.93	60.00	7.16	1.99	80.0	± 9.6 %
		Y	0.93	60.00	7.30		80.0	
		Z	1.27	62.01	10.14		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.14	60.00	6.03	1.99	80.0	± 9.6 %
		Y	1.14	60.00	6.27		80.0	
		Z	1.27	60.00	8.12		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.17	60.00	5.88	1.99	80.0	± 9.6 %
		Y	1.16	60.00	6.13		80.0	
		Z	1.29	60.00	7.99		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.22	74.10	17.76	1.99	80.0	± 9.6 %
		Y	2.36	69.39	15.63		80.0	
		Z	3.01	71.80	17.34		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.54	67.28	14.22	1.99	80.0	± 9.6 %
		Y	2.26	65.47	13.35		80.0	
		Z	2.89	67.89	15.39		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.54	66.87	13.95	1.99	80.0	± 9.6 %
		Y	2.28	65.23	13.17		80.0	
		Z	2.93	67.72	15.26		80.0	
10503-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.40	74.20	18.89	1.99	80.0	± 9.6 %
		Y	2.72	70.36	16.98		80.0	
		Z	3.25	71.85	17.89		80.0	
10504-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.09	69.35	16.67	1.99	80.0	± 9.6 %
		Y	2.76	67.33	15.58		80.0	
		Z	3.14	68.21	16.46		80.0	
10505-AAA	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.15	69.08	16.55	1.99	80.0	± 9.6 %
		Y	2.84	67.20	15.53		80.0	
		Z	3.23	68.07	16.43		80.0	
10506-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.79	73.32	18.90	1.99	80.0	± 9.6 %
		Y	3.25	70.53	17.36		80.0	
		Z	3.79	71.85	17.95		80.0	
10507-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.44	68.80	17.28	1.99	80.0	± 9.6 %
		Y	3.20	67.38	16.36		80.0	
		Z	3.54	68.06	16.85		80.0	

EX3DV4- SN:7412

June 29, 2016

10508-AAA	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.51	68.51	17.18	1.99	80.0	± 9.6 %
		Y	3.28	67.19	16.32		80.0	
		Z	3.62	67.80	16.79		80.0	
10509-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.03	71.41	18.24	1.99	80.0	± 9.6 %
		Y	3.64	69.55	17.09		80.0	
		Z	4.10	70.51	17.48		80.0	
10510-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.87	68.20	17.29	1.99	80.0	± 9.6 %
		Y	3.68	67.17	16.54		80.0	
		Z	4.02	67.83	16.91		80.0	
10511-AAA	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.94	68.00	17.23	1.99	80.0	± 9.6 %
		Y	3.75	67.02	16.51		80.0	
		Z	4.08	67.59	16.86		80.0	
10512-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.22	72.90	18.68	1.99	80.0	± 9.6 %
		Y	3.72	70.66	17.37		80.0	
		Z	4.29	72.02	17.90		80.0	
10513-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.77	68.37	17.38	1.99	80.0	± 9.6 %
		Y	3.57	67.30	16.59		80.0	
		Z	3.91	68.08	17.00		80.0	
10514-AAA	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.80	67.97	17.26	1.99	80.0	± 9.6 %
		Y	3.62	66.99	16.52		80.0	
		Z	3.94	67.68	16.89		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.00	63.47	14.97	0.00	150.0	± 9.6 %
		Y	1.02	64.27	15.63		150.0	
		Z	0.99	63.37	14.97		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.67	71.40	18.16	0.00	150.0	± 9.6 %
		Y	0.85	77.03	21.14		150.0	
		Z	0.66	71.67	18.23		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.85	65.40	15.68	0.00	150.0	± 9.6 %
		Y	0.89	66.90	16.75		150.0	
		Z	0.85	65.44	15.72		150.0	
10518-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.35	66.91	16.35	0.00	150.0	± 9.6 %
		Y	4.41	67.14	16.47		150.0	
		Z	4.54	66.77	16.30		150.0	
10519-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.49	67.07	16.43	0.00	150.0	± 9.6 %
		Y	4.55	67.29	16.55		150.0	
		Z	4.72	66.99	16.41		150.0	
10520-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.35	66.99	16.34	0.00	150.0	± 9.6 %
		Y	4.41	67.24	16.48		150.0	
		Z	4.57	66.95	16.33		150.0	
10521-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.28	66.94	16.32	0.00	150.0	± 9.6 %
		Y	4.34	67.21	16.46		150.0	
		Z	4.50	66.94	16.32		150.0	
10522-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.32	67.04	16.39	0.00	150.0	± 9.6 %
		Y	4.39	67.32	16.55		150.0	
		Z	4.57	67.05	16.41		150.0	

Certificate No: EX3-7412_Jun16

Page 30 of 38

EX3DV4- SN:7412

June 29, 2016

10523-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.27	67.12	16.37	0.00	150.0	± 9.6 %
		Y	4.33	67.36	16.50		150.0	
		Z	4.45	66.93	16.27		150.0	
10524-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.28	67.04	16.42	0.00	150.0	± 9.6 %
		Y	4.34	67.30	16.55		150.0	
		Z	4.51	66.97	16.38		150.0	
10525-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.33	66.18	16.05	0.00	150.0	± 9.6 %
		Y	4.39	66.42	16.18		150.0	
		Z	4.50	66.02	15.97		150.0	
10526-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.44	66.42	16.15	0.00	150.0	± 9.6 %
		Y	4.50	66.69	16.29		150.0	
		Z	4.66	66.38	16.11		150.0	
10527-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.37	66.40	16.09	0.00	150.0	± 9.6 %
		Y	4.44	66.67	16.24		150.0	
		Z	4.59	66.34	16.06		150.0	
10528-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.39	66.41	16.12	0.00	150.0	± 9.6 %
		Y	4.45	66.69	16.27		150.0	
		Z	4.60	66.36	16.09		150.0	
10529-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.39	66.41	16.12	0.00	150.0	± 9.6 %
		Y	4.45	66.69	16.27		150.0	
		Z	4.60	66.36	16.09		150.0	
10531-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.34	66.41	16.09	0.00	150.0	± 9.6 %
		Y	4.42	66.71	16.25		150.0	
		Z	4.59	66.45	16.10		150.0	
10532-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.23	66.27	16.02	0.00	150.0	± 9.6 %
		Y	4.30	66.58	16.19		150.0	
		Z	4.45	66.30	16.03		150.0	
10533-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.39	66.50	16.13	0.00	150.0	± 9.6 %
		Y	4.46	66.78	16.28		150.0	
		Z	4.61	66.41	16.08		150.0	
10534-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.97	66.38	16.21	0.00	150.0	± 9.6 %
		Y	5.01	66.61	16.29		150.0	
		Z	5.14	66.43	16.14		150.0	
10535-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.00	66.49	16.27	0.00	150.0	± 9.6 %
		Y	5.05	66.73	16.35		150.0	
		Z	5.21	66.63	16.23		150.0	
10536-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.89	66.47	16.23	0.00	150.0	± 9.6 %
		Y	4.95	66.74	16.34		150.0	
		Z	5.08	66.57	16.18		150.0	
10537-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.98	66.56	16.28	0.00	150.0	± 9.6 %
		Y	5.02	66.75	16.35		150.0	
		Z	5.14	66.53	16.17		150.0	
10538-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.02	66.45	16.26	0.00	150.0	± 9.6 %
		Y	5.07	66.69	16.35		150.0	
		Z	5.22	66.54	16.21		150.0	
10540-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	4.95	66.40	16.26	0.00	150.0	± 9.6 %
		Y	5.00	66.64	16.35		150.0	
		Z	5.16	66.57	16.24		150.0	

Certificate No: EX3-7412_Jun16

Page 31 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10541-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.94	66.33	16.20	0.00	150.0	± 9.6 %
		Y	4.99	66.56	16.29		150.0	
		Z	5.13	66.43	16.16		150.0	
10542-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.09	66.44	16.27	0.00	150.0	± 9.6 %
		Y	5.14	66.66	16.35		150.0	
		Z	5.28	66.51	16.21		150.0	
10543-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.19	66.59	16.38	0.00	150.0	± 9.6 %
		Y	5.22	66.77	16.43		150.0	
		Z	5.35	66.53	16.25		150.0	
10544-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.33	66.41	16.19	0.00	150.0	± 9.6 %
		Y	5.36	66.64	16.26		150.0	
		Z	5.46	66.54	16.13		150.0	
10545-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.52	66.95	16.42	0.00	150.0	± 9.6 %
		Y	5.55	67.12	16.46		150.0	
		Z	5.65	66.98	16.30		150.0	
10546-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.35	66.53	16.22	0.00	150.0	± 9.6 %
		Y	5.39	66.76	16.29		150.0	
		Z	5.52	66.73	16.19		150.0	
10547-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.48	66.80	16.35	0.00	150.0	± 9.6 %
		Y	5.48	66.92	16.36		150.0	
		Z	5.59	66.78	16.21		150.0	
10548-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.59	67.32	16.59	0.00	150.0	± 9.6 %
		Y	5.63	67.54	16.65		150.0	
		Z	5.83	67.70	16.64		150.0	
10550-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.47	66.92	16.43	0.00	150.0	± 9.6 %
		Y	5.47	67.02	16.43		150.0	
		Z	5.55	66.78	16.23		150.0	
10551-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.33	66.45	16.16	0.00	150.0	± 9.6 %
		Y	5.38	66.72	16.25		150.0	
		Z	5.55	66.80	16.20		150.0	
10552-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.33	66.54	16.20	0.00	150.0	± 9.6 %
		Y	5.37	66.77	16.27		150.0	
		Z	5.47	66.61	16.11		150.0	
10553-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.38	66.46	16.19	0.00	150.0	± 9.6 %
		Y	5.42	66.70	16.27		150.0	
		Z	5.55	66.63	16.15		150.0	
10554-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.77	66.76	16.27	0.00	150.0	± 9.6 %
		Y	5.79	66.96	16.33		150.0	
		Z	5.87	66.90	16.22		150.0	
10555-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.86	66.98	16.37	0.00	150.0	± 9.6 %
		Y	5.88	67.19	16.43		150.0	
		Z	6.00	67.20	16.35		150.0	
10556-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.92	67.17	16.46	0.00	150.0	± 9.6 %
		Y	5.93	67.33	16.49		150.0	
		Z	6.02	67.25	16.37		150.0	
10557-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.84	66.94	16.36	0.00	150.0	± 9.6 %
		Y	5.87	67.16	16.42		150.0	
		Z	5.98	67.14	16.33		150.0	

Certificate No: EX3-7412_Jun16

Page 32 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10558-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.83	66.92	16.37	0.00	150.0	± 9.6 %
		Y	5.87	67.20	16.46		150.0	
		Z	6.03	67.30	16.42		150.0	
10560-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.86	66.90	16.39	0.00	150.0	± 9.6 %
		Y	5.89	67.14	16.46		150.0	
		Z	6.02	67.15	16.39		150.0	
10561-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.80	66.90	16.43	0.00	150.0	± 9.6 %
		Y	5.83	67.13	16.49		150.0	
		Z	5.95	67.13	16.41		150.0	
10562-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.84	67.01	16.48	0.00	150.0	± 9.6 %
		Y	5.88	67.27	16.56		150.0	
		Z	6.06	67.47	16.58		150.0	
10563-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	5.97	67.11	16.50	0.00	150.0	± 9.6 %
		Y	5.99	67.29	16.54		150.0	
		Z	6.21	67.55	16.58		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.67	66.92	16.48	0.46	150.0	± 9.6 %
		Y	4.71	67.06	16.54		150.0	
		Z	4.86	66.82	16.44		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.86	67.32	16.79	0.46	150.0	± 9.6 %
		Y	4.91	67.51	16.87		150.0	
		Z	5.08	67.26	16.75		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.69	67.13	16.60	0.46	150.0	± 9.6 %
		Y	4.74	67.30	16.67		150.0	
		Z	4.92	67.10	16.57		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.73	67.53	16.98	0.46	150.0	± 9.6 %
		Y	4.79	67.77	17.09		150.0	
		Z	4.94	67.48	16.92		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.58	66.81	16.30	0.46	150.0	± 9.6 %
		Y	4.62	66.95	16.35		150.0	
		Z	4.83	66.88	16.34		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.73	67.80	17.15	0.46	150.0	± 9.6 %
		Y	4.78	68.03	17.25		150.0	
		Z	4.90	67.59	16.99		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.71	67.54	17.00	0.46	150.0	± 9.6 %
		Y	4.78	67.79	17.12		150.0	
		Z	4.94	67.44	16.92		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.17	64.40	15.66	0.46	130.0	± 9.6 %
		Y	1.15	64.54	15.76		130.0	
		Z	1.16	64.19	15.51		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.18	64.97	16.03	0.46	130.0	± 9.6 %
		Y	1.17	65.16	16.16		130.0	
		Z	1.17	64.72	15.85		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	1.75	83.78	23.19	0.46	130.0	± 9.6 %
		Y	1.89	86.22	24.17		130.0	
		Z	1.65	82.49	22.41		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.27	70.49	18.97	0.46	130.0	± 9.6 %
		Y	1.30	71.67	19.62		130.0	
		Z	1.25	70.07	18.64		130.0	

Certificate No: EX3-7412_Jun16

Page 33 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.45	66.68	16.49	0.46	130.0	± 9.6 %
		Y	4.47	66.75	16.47		130.0	
		Z	4.63	66.55	16.43		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.48	66.91	16.59	0.46	130.0	± 9.6 %
		Y	4.50	66.98	16.58		130.0	
		Z	4.66	66.72	16.50		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.63	67.13	16.73	0.46	130.0	± 9.6 %
		Y	4.66	67.21	16.73		130.0	
		Z	4.85	67.00	16.66		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.54	67.27	16.84	0.46	130.0	± 9.6 %
		Y	4.58	67.40	16.87		130.0	
		Z	4.75	67.15	16.76		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.29	66.41	16.06	0.46	130.0	± 9.6 %
		Y	4.31	66.45	16.02		130.0	
		Z	4.51	66.42	16.06		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.31	66.44	16.07	0.46	130.0	± 9.6 %
		Y	4.34	66.49	16.03		130.0	
		Z	4.56	66.48	16.09		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.46	67.39	16.84	0.46	130.0	± 9.6 %
		Y	4.49	67.49	16.84		130.0	
		Z	4.65	67.18	16.70		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.21	66.18	15.84	0.46	130.0	± 9.6 %
		Y	4.23	66.18	15.77		130.0	
		Z	4.45	66.19	15.86		130.0	
10583-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.45	66.68	16.49	0.46	130.0	± 9.6 %
		Y	4.47	66.75	16.47		130.0	
		Z	4.63	66.55	16.43		130.0	
10584-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.48	66.91	16.59	0.46	130.0	± 9.6 %
		Y	4.50	66.98	16.58		130.0	
		Z	4.66	66.72	16.50		130.0	
10585-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.63	67.13	16.73	0.46	130.0	± 9.6 %
		Y	4.66	67.21	16.73		130.0	
		Z	4.85	67.00	16.66		130.0	
10586-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.54	67.27	16.84	0.46	130.0	± 9.6 %
		Y	4.58	67.40	16.87		130.0	
		Z	4.75	67.15	16.76		130.0	
10587-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.29	66.41	16.06	0.46	130.0	± 9.6 %
		Y	4.31	66.45	16.02		130.0	
		Z	4.51	66.42	16.06		130.0	
10588-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.31	66.44	16.07	0.46	130.0	± 9.6 %
		Y	4.34	66.49	16.03		130.0	
		Z	4.56	66.48	16.09		130.0	
10589-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.46	67.39	16.84	0.46	130.0	± 9.6 %
		Y	4.49	67.49	16.84		130.0	
		Z	4.65	67.18	16.70		130.0	
10590-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.21	66.18	15.84	0.46	130.0	± 9.6 %
		Y	4.23	66.18	15.77		130.0	
		Z	4.45	66.19	15.86		130.0	

Certificate No: EX3-7412_Jun16

Page 34 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10591-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.61	66.79	16.63	0.46	130.0	± 9.6 %
		Y	4.63	66.85	16.61		130.0	
		Z	4.78	66.61	16.53		130.0	
10592-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.72	67.05	16.74	0.46	130.0	± 9.6 %
		Y	4.75	67.14	16.73		130.0	
		Z	4.93	66.95	16.66		130.0	
10593-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.63	66.93	16.60	0.46	130.0	± 9.6 %
		Y	4.66	67.00	16.58		130.0	
		Z	4.85	66.84	16.54		130.0	
10594-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.69	67.11	16.77	0.46	130.0	± 9.6 %
		Y	4.72	67.19	16.76		130.0	
		Z	4.91	67.01	16.69		130.0	
10595-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.65	67.09	16.68	0.46	130.0	± 9.6 %
		Y	4.68	67.17	16.66		130.0	
		Z	4.87	66.97	16.59		130.0	
10596-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.58	67.04	16.67	0.46	130.0	± 9.6 %
		Y	4.61	67.11	16.64		130.0	
		Z	4.81	66.96	16.59		130.0	
10597-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.54	66.90	16.51	0.46	130.0	± 9.6 %
		Y	4.56	66.97	16.49		130.0	
		Z	4.76	66.85	16.47		130.0	
10598-AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.54	67.15	16.79	0.46	130.0	± 9.6 %
		Y	4.57	67.26	16.80		130.0	
		Z	4.74	67.08	16.73		130.0	
10599-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.33	67.31	16.95	0.46	130.0	± 9.6 %
		Y	5.33	67.32	16.87		130.0	
		Z	5.46	67.16	16.75		130.0	
10600-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.46	67.78	17.16	0.46	130.0	± 9.6 %
		Y	5.44	67.71	17.03		130.0	
		Z	5.60	67.81	16.95		130.0	
10601-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.35	67.53	17.05	0.46	130.0	± 9.6 %
		Y	5.33	67.47	16.93		130.0	
		Z	5.48	67.33	16.83		130.0	
10602-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.43	67.49	16.95	0.46	130.0	± 9.6 %
		Y	5.42	67.48	16.85		130.0	
		Z	5.59	67.40	16.78		130.0	
10603-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.47	67.70	17.20	0.46	130.0	± 9.6 %
		Y	5.49	67.78	17.15		130.0	
		Z	5.66	67.67	17.05		130.0	
10604-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.32	67.18	16.90	0.46	130.0	± 9.6 %
		Y	5.36	67.35	16.91		130.0	
		Z	5.49	67.22	16.81		130.0	
10605-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.40	67.49	17.06	0.46	130.0	± 9.6 %
		Y	5.41	67.51	16.98		130.0	
		Z	5.59	67.50	16.95		130.0	
10606-AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.22	67.03	16.69	0.46	130.0	± 9.6 %
		Y	5.20	66.95	16.55		130.0	
		Z	5.31	66.77	16.44		130.0	

Certificate No: EX3-7412_Jun16

Page 35 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10607-AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.46	66.14	16.28	0.46	130.0	± 9.6 %
		Y	4.48	66.22	16.27		130.0	
		Z	4.62	65.94	16.16		130.0	
10608-AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.58	66.44	16.41	0.46	130.0	± 9.6 %
		Y	4.62	66.54	16.41		130.0	
		Z	4.80	66.33	16.32		130.0	
10609-AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.48	66.27	16.23	0.46	130.0	± 9.6 %
		Y	4.51	66.36	16.22		130.0	
		Z	4.69	66.17	16.16		130.0	
10610-AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.53	66.45	16.41	0.46	130.0	± 9.6 %
		Y	4.57	66.55	16.41		130.0	
		Z	4.74	66.33	16.32		130.0	
10611-AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.45	66.23	16.24	0.46	130.0	± 9.6 %
		Y	4.48	66.33	16.24		130.0	
		Z	4.66	66.14	16.16		130.0	
10612-AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.43	66.34	16.28	0.46	130.0	± 9.6 %
		Y	4.46	66.43	16.26		130.0	
		Z	4.66	66.29	16.21		130.0	
10613-AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.42	66.15	16.11	0.46	130.0	± 9.6 %
		Y	4.45	66.24	16.10		130.0	
		Z	4.66	66.16	16.09		130.0	
10614-AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.40	66.40	16.38	0.46	130.0	± 9.6 %
		Y	4.44	66.54	16.40		130.0	
		Z	4.61	66.35	16.32		130.0	
10615-AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.44	66.07	16.01	0.46	130.0	± 9.6 %
		Y	4.46	66.11	15.97		130.0	
		Z	4.65	65.97	15.94		130.0	
10616-AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.11	66.40	16.48	0.46	130.0	± 9.6 %
		Y	5.13	66.49	16.44		130.0	
		Z	5.28	66.40	16.36		130.0	
10617-AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.15	66.52	16.51	0.46	130.0	± 9.6 %
		Y	5.16	66.60	16.47		130.0	
		Z	5.35	66.60	16.43		130.0	
10618-AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.05	66.54	16.54	0.46	130.0	± 9.6 %
		Y	5.08	66.69	16.53		130.0	
		Z	5.23	66.59	16.44		130.0	
10619-AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.11	66.52	16.46	0.46	130.0	± 9.6 %
		Y	5.10	66.52	16.38		130.0	
		Z	5.24	66.39	16.28		130.0	
10620-AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.15	66.41	16.45	0.46	130.0	± 9.6 %
		Y	5.17	66.49	16.41		130.0	
		Z	5.33	66.43	16.35		130.0	
10621-AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.15	66.49	16.62	0.46	130.0	± 9.6 %
		Y	5.18	66.63	16.61		130.0	
		Z	5.34	66.57	16.53		130.0	
10622-AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.14	66.59	16.66	0.46	130.0	± 9.6 %
		Y	5.17	66.72	16.65		130.0	
		Z	5.35	66.73	16.61		130.0	

Certificate No: EX3-7412_Jun16

Page 36 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN.7412

June 29, 2016

10623-AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.04	66.17	16.31	0.46	130.0	± 9.6 %
		Y	5.05	66.23	16.26		130.0	
		Z	5.23	66.26	16.24		130.0	
10624-AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.24	66.43	16.51	0.46	130.0	± 9.6 %
		Y	5.25	66.51	16.47		130.0	
		Z	5.42	66.46	16.41		130.0	
10625-AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.35	66.68	16.70	0.46	130.0	± 9.6 %
		Y	5.33	66.65	16.60		130.0	
		Z	5.75	67.34	16.90		130.0	
10626-AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.46	66.38	16.42	0.46	130.0	± 9.6 %
		Y	5.46	66.48	16.38		130.0	
		Z	5.58	66.46	16.32		130.0	
10627-AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.72	67.14	16.77	0.46	130.0	± 9.6 %
		Y	5.70	67.15	16.68		130.0	
		Z	5.82	67.05	16.58		130.0	
10628-AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.45	66.36	16.31	0.46	130.0	± 9.6 %
		Y	5.45	66.44	16.25		130.0	
		Z	5.61	66.54	16.25		130.0	
10629-AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.62	66.79	16.52	0.46	130.0	± 9.6 %
		Y	5.57	66.69	16.37		130.0	
		Z	5.68	66.59	16.27		130.0	
10630-AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.80	67.52	16.90	0.46	130.0	± 9.6 %
		Y	5.80	67.61	16.84		130.0	
		Z	6.11	68.07	17.02		130.0	
10631-AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.75	67.48	17.06	0.46	130.0	± 9.6 %
		Y	5.78	67.67	17.08		130.0	
		Z	6.00	67.84	17.09		130.0	
10632-AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.76	67.45	17.07	0.46	130.0	± 9.6 %
		Y	5.72	67.40	16.96		130.0	
		Z	5.79	67.11	16.74		130.0	
10633-AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.46	66.40	16.37	0.46	130.0	± 9.6 %
		Y	5.47	66.53	16.34		130.0	
		Z	5.67	66.70	16.36		130.0	
10634-AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.50	66.62	16.53	0.46	130.0	± 9.6 %
		Y	5.51	66.75	16.51		130.0	
		Z	5.65	66.73	16.44		130.0	
10635-AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.35	65.86	15.87	0.46	130.0	± 9.6 %
		Y	5.35	65.90	15.78		130.0	
		Z	5.53	66.06	15.83		130.0	
10636-AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.91	66.75	16.51	0.46	130.0	± 9.6 %
		Y	5.90	66.83	16.46		130.0	
		Z	6.00	66.83	16.41		130.0	
10637-AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.03	67.08	16.67	0.46	130.0	± 9.6 %
		Y	6.02	67.15	16.60		130.0	
		Z	6.16	67.22	16.59		130.0	
10638-AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.07	67.19	16.70	0.46	130.0	± 9.6 %
		Y	6.04	67.20	16.61		130.0	
		Z	6.15	67.19	16.55		130.0	

Certificate No: EX3-7412_Jun16

Page 37 of 38

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

EX3DV4- SN:7412

June 29, 2016

10639-AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	5.00	66.97	16.83	0.46	130.0	± 9.6 %
		Y	5.99	67.07	16.59		130.0	
		Z	6.13	67.12	16.56		130.0	
10640-AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.93	66.78	16.48	0.46	130.0	± 9.6 %
		Y	5.94	66.91	16.44		130.0	
		Z	6.13	67.13	16.51		130.0	
10641-AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.08	67.03	16.63	0.46	130.0	± 9.6 %
		Y	6.06	67.05	16.53		130.0	
		Z	6.18	67.07	16.50		130.0	
10642-AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.07	67.10	16.83	0.46	130.0	± 9.6 %
		Y	6.08	67.25	16.81		130.0	
		Z	6.21	67.29	16.77		130.0	
10643-AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.92	66.82	16.58	0.46	130.0	± 9.6 %
		Y	5.92	66.91	16.52		130.0	
		Z	6.06	67.00	16.52		130.0	
10644-AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.96	66.95	16.66	0.46	130.0	± 9.6 %
		Y	5.97	67.07	16.63		130.0	
		Z	6.20	67.43	16.76		130.0	
10645-AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.13	67.13	16.72	0.46	130.0	± 9.6 %
		Y	6.12	67.20	16.65		130.0	
		Z	6.42	67.72	16.87		130.0	

¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



SGS Korea Co., Ltd.

10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 77 / 105

Appendix C.2

Report File No : F690501/RF-SAR002433

Date of Issue : 2017-03-13

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

RTT5041-76(2015.10.01) (2)

A4 (210mm x 297mm)

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV, full range = -100...+300 mV
 Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.394 ± 0.02% (k=2)	404.370 ± 0.02% (k=2)	404.110 ± 0.02% (k=2)
Low Range	3.97993 ± 1.50% (k=2)	3.99531 ± 1.50% (k=2)	3.98679 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	104.5 ° ± 1 °
---	---------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μ V)	Difference (μ V)	Error (%)
Channel X + Input	200037.45	-0.08	-0.00
Channel X + Input	20005.15	-0.02	-0.00
Channel X - Input	-20004.09	1.36	-0.01
Channel Y + Input	200037.95	0.16	0.00
Channel Y + Input	20005.02	-0.18	-0.00
Channel Y - Input	-20005.65	-0.16	0.00
Channel Z + Input	200037.15	-1.64	-0.00
Channel Z + Input	20004.25	-0.91	-0.00
Channel Z - Input	-20004.00	1.52	-0.01

Low Range	Reading (μ V)	Difference (μ V)	Error (%)
Channel X + Input	2001.31	-0.02	-0.00
Channel X + Input	200.99	-0.24	-0.12
Channel X - Input	-198.70	-0.07	0.04
Channel Y + Input	2001.02	-0.23	-0.01
Channel Y + Input	201.01	-0.05	-0.02
Channel Y - Input	-199.89	-1.17	0.59
Channel Z + Input	2001.72	0.53	0.03
Channel Z + Input	201.01	-0.04	-0.02
Channel Z - Input	-199.35	-0.50	0.25

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μ V)	Low Range Average Reading (μ V)
Channel X	200	0.52	-0.91
	- 200	1.61	0.31
Channel Y	200	8.56	8.17
	- 200	-8.82	-9.22
Channel Z	200	-21.10	-20.79
	- 200	19.68	19.12

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μ V)	Channel Y (μ V)	Channel Z (μ V)
Channel X	200	-	-0.26	-4.39
Channel Y	200	7.40	-	1.66
Channel Z	200	10.61	5.46	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16220	16166
Channel Y	15633	17897
Channel Z	15510	16753

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-1.29	-2.50	-0.13	0.46
Channel Y	2.67	1.46	3.75	0.46
Channel Z	-0.86	-2.30	0.63	0.68

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (k Ω m)	Measuring (M Ω m)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Appendix C.3 Calibration certificate for Dipole


**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**



Client: **SGS Korea (Dymstec)**

Certificate No: **D2450V2-734_May16**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN:734**

Calibration procedure(s): **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 24, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	06-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	06-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8461A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8461A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390625	18-Oct-04 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature




Issued: May 25, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: **D2450V2-734_May16**

Page: 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.6 $\pm$ 6 %	1.87 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	50.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.92 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.6 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.90 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.4 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.6 Ω + 5.0 j Ω
Return Loss	- 23.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.7 Ω + 7.2 j Ω
Return Loss	- 22.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 07, 2003

DASY5 Validation Report for Head TSL

Date: 24.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 734

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.76, 7.76, 7.76); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.0 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.92 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

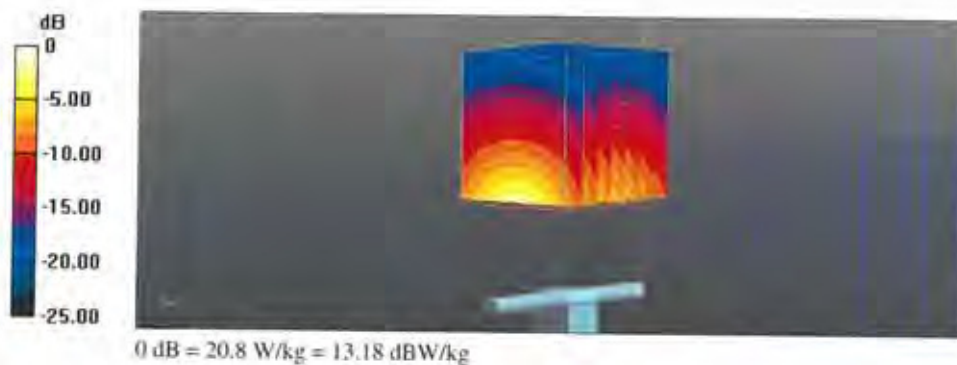

Impedance Measurement Plot for Head TSL

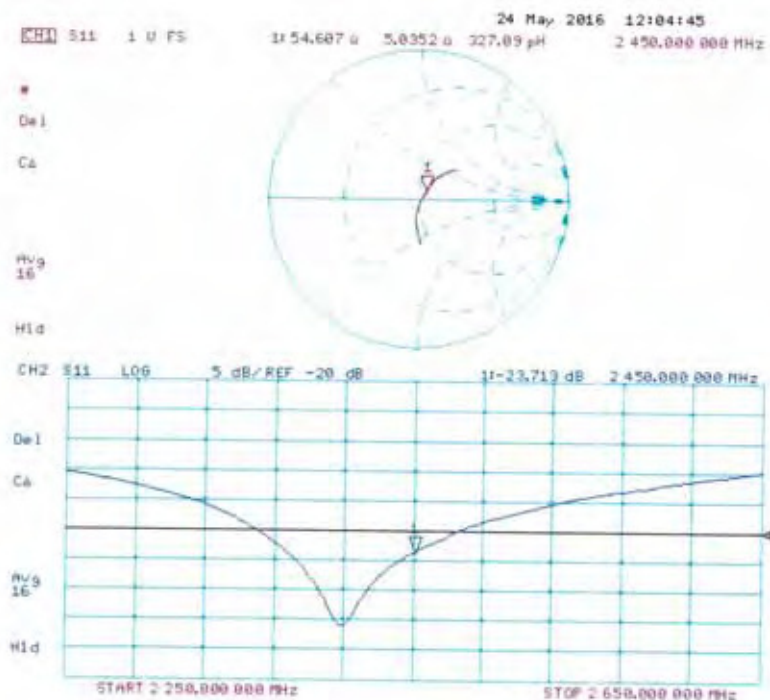

DASY5 Validation Report for Body TSL

Date: 24.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 734

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.2 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 25.2 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.9 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

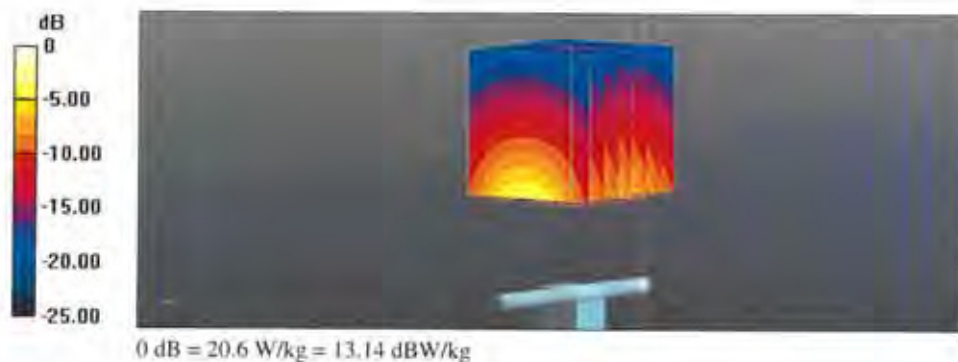

Impedance Measurement Plot for Body TSL

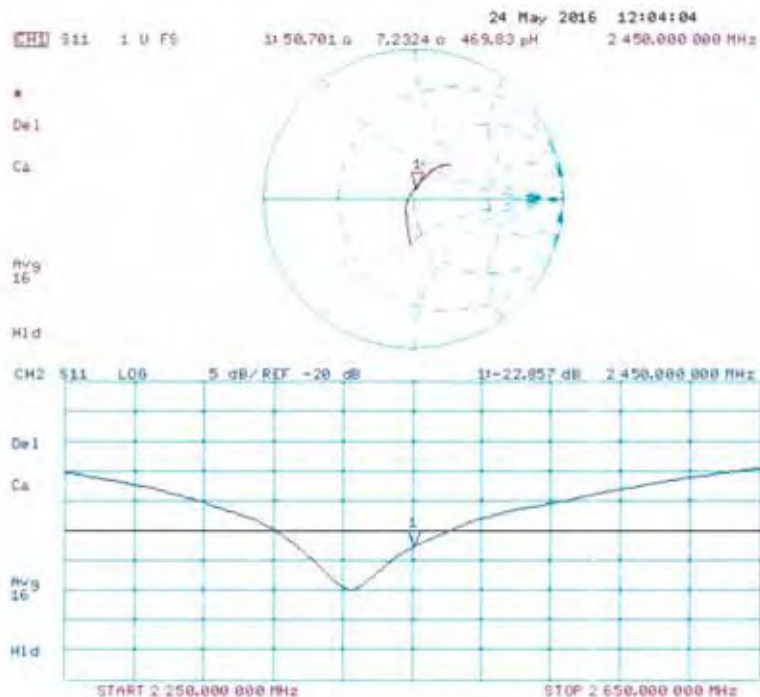


**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories in the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**



Client **SGS Korea (Dymstec)**

Certificate No: **D5GHzV2-1130_May16**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1130**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date **May 23, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 3503	31-Dec-15 (No. EX3-3503_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41062317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	19-Oct-15 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature
M. Weber

Katja Pokovic

Issued: May 25, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: **D5GHzV2-1130_May16**

Page 1 of 16

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1,4 mm	Graded Ratio = 1,4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.52 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.63 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	75.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.21 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.61 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.2 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.81 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.3 ± 6 %	4.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.2 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	5.12 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.74 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.8 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.43 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.40 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.1 ± 6 %	5.56 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.69 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.7 ± 6 %	5.83 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.97 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.95 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.2 ± 6 %	6.26 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.65 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	51.5 Ω - 10.0 $j\Omega$
Return Loss	- 20.0 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	52.1 Ω - 4.5 $j\Omega$
Return Loss	- 26.3 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	51.7 Ω - 5.6 $j\Omega$
Return Loss	- 24.8 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	56.2 Ω - 3.2 $j\Omega$
Return Loss	- 23.7 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	54.7 Ω - 2.6 $j\Omega$
Return Loss	- 25.8 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	51.4 Ω - 8.9 $j\Omega$
Return Loss	- 21.0 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	50.9 Ω - 3.1 $j\Omega$
Return Loss	- 29.9 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	52.5 Ω - 4.1 $j\Omega$
Return Loss	- 26.6 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	57.9 Ω - 1.4 j Ω
Return Loss	- 22.6 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	56.5 Ω - 1.1 j Ω
Return Loss	- 24.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.205 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 08, 2011

DASY5 Validation Report for Head TSL

Date: 23.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1130

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.52$ S/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.61$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.81$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.91$ S/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.59, 5.59, 5.59); Calibrated: 31.12.2015, ConvF(5.25, 5.25, 5.25); Calibrated: 31.12.2015, ConvF(5.18, 5.18, 5.18); Calibrated: 31.12.2015, ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.95, 4.95, 4.95); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.75 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.16 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.34 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.23 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.31 W/kg


Maximum value of SAR (measured) = 18.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 72.60 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 31.9 W/kg
SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.34 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 69.86 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 31.8 W/kg
SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.2 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

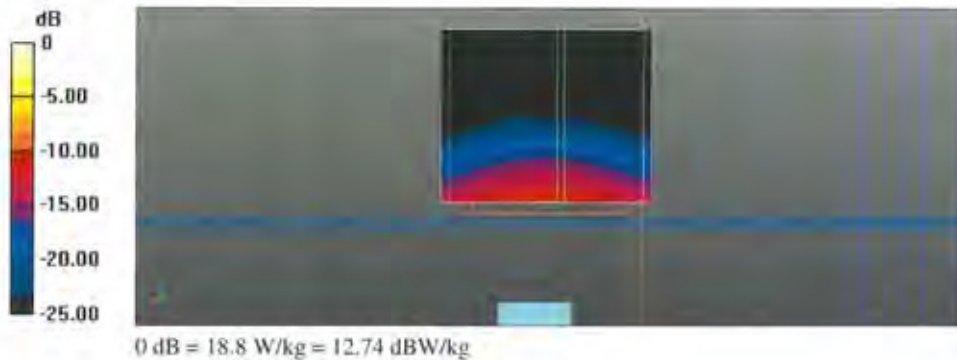

Impedance Measurement Plot for Head TSL

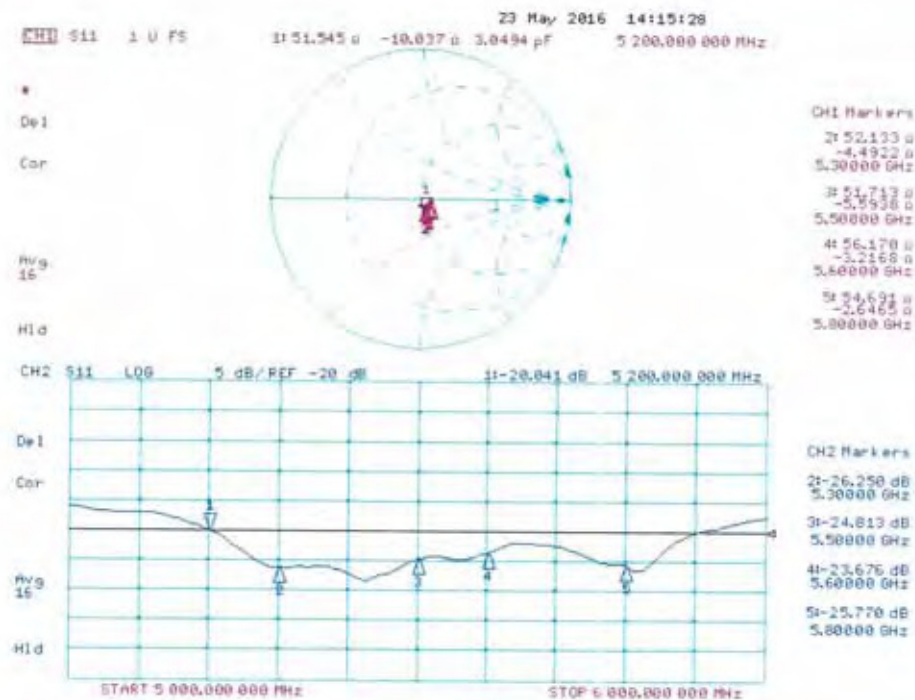

DASY5 Validation Report for Body TSL

Date: 20.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1130

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.43$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.56$ S/m; $\epsilon_r = 47.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 46.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.26$ S/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.99, 4.99, 4.99); Calibrated: 31.12.2015, ConvF(4.75, 4.75, 4.75); Calibrated: 31.12.2015, ConvF(4.4, 4.4, 4.4); Calibrated: 31.12.2015, ConvF(4.35, 4.35, 4.35); Calibrated: 31.12.2015, ConvF(4.27, 4.27, 4.27); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.3 W/kg

SAR(1 g) = 7.4 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.08 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.44 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.23 W/kg


Maximum value of SAR (measured) = 18.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 67.01 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 32.6 W/kg
SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.24 W/kg
 Maximum value of SAR (measured) = 18.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 64.61 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 33.2 W/kg
SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.14 W/kg
 Maximum value of SAR (measured) = 18.3 W/kg

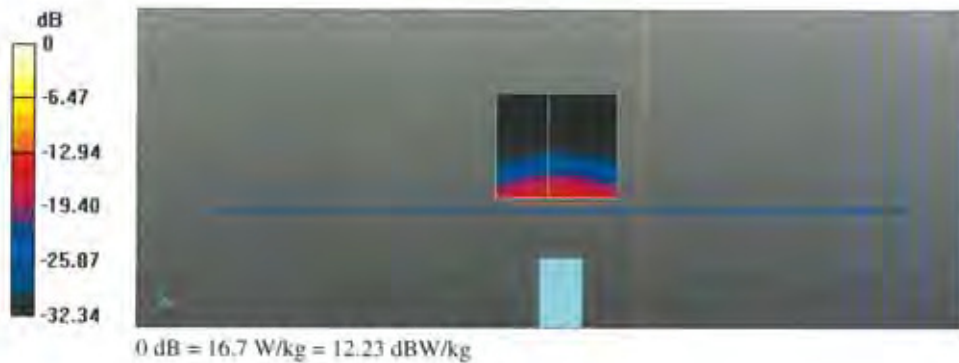

Impedance Measurement Plot for Body TSL

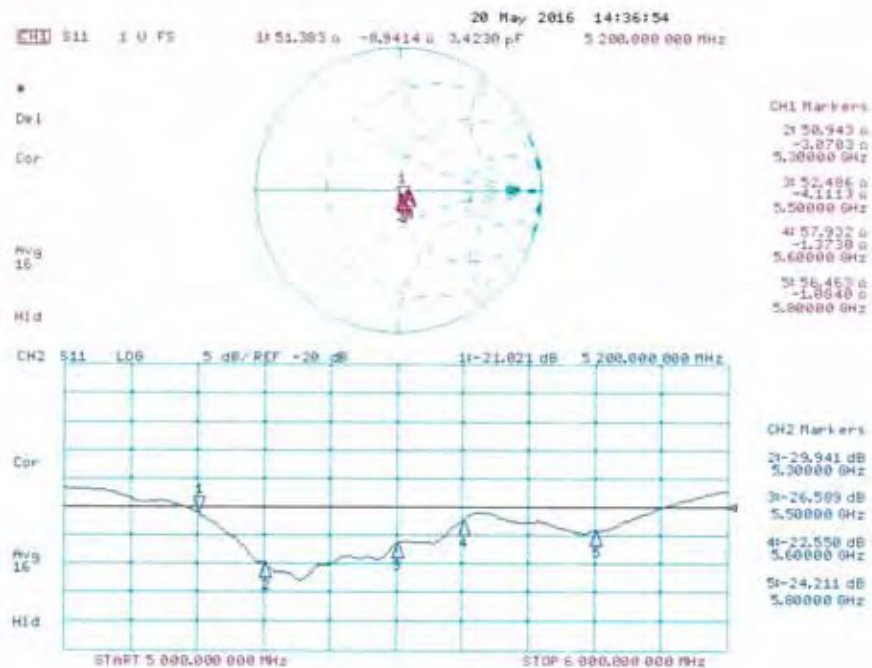

-THE END-